


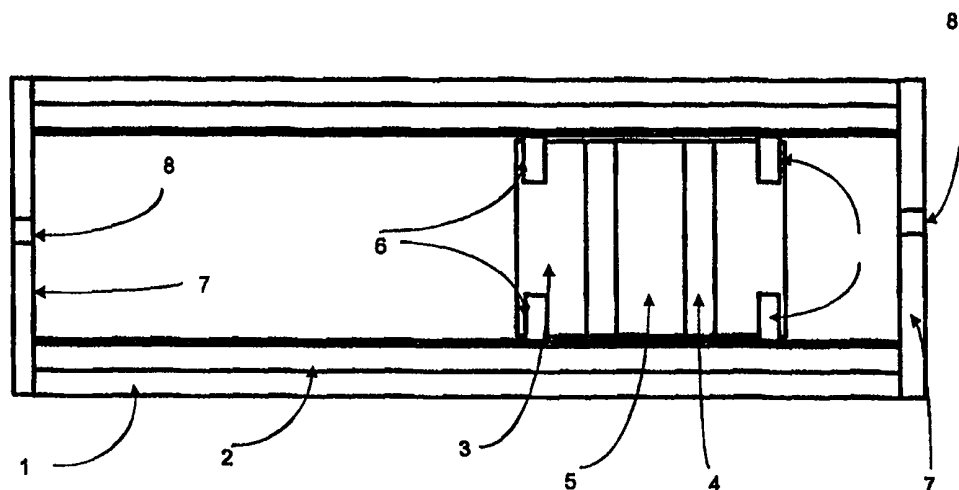

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H02K 41/02	A1	(11) International Publication Number: WO 99/19973 (43) International Publication Date: 22 April 1999 (22.04.99)
(21) International Application Number: PCT/GB98/03092 (22) International Filing Date: 15 October 1998 (15.10.98) (30) Priority Data: 9721747.5 15 October 1997 (15.10.97) GB (71) Applicant (for all designated States except US): LINEAR MOTION TECHNOLOGY LLC [US/US]; Suite 300, 11921 Rockville Pike, Rockville, MD 20852 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): DENNE, Phillip, Raymond, Michael [GB/GB]; 7 Lyndon Gate, Chine Crescent Road, Bourmemouth, Dorset BH2 5LW (GB). (74) Agent: BRYER, Kenneth, Robert; K. R. Bryer & Co., 7 Gay Street, Bath BA1 2PH (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: ELECTROMAGNETIC APPARATUS FOR PRODUCING LINEAR MOTION

**(57) Abstract**

Electromagnetic apparatus for producing an axially directed force comprising a stator (1) having a plurality of axially spaced coils (2) around a working volume within which an armature in the form of a free piston (3) is axially displaceable, the armature having means for producing a magnetic field a substantially radially directed part of which intersects at least some of the coils of the stator such that a resultant axially directed force is generated when a current flows in the coils.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

ELECTROMAGNETIC APPARATUS FOR PRODUCING LINEAR MOTION

The present invention relates to electromagnetic apparatus for producing linear motion. A number of designs of linear electromagnetic actuator, sometimes
5 termed a linear motor, have been produced. Various linear motor configurations are described in W093/01646. The devices to which this prior art relates have axial symmetry and are formed as piston-in-cylinder machines.
10 The principal advantage of axial symmetry lies in the fact that the strong attractive forces between the magnetic elements of the stator and the magnetic elements of the armature are balanced about a central axis, so that the bearings of the machine do not need to withstand
15 attractive forces.

A further advantage of the axially-symmetric construction is that the magnetic fields of the machine, whether generated as a result of electrical currents in
20 conductors or produced by permanent magnets, can be contained within an outer steel case of the actuator. However they are generated, the magnetic fields can intersect the electrical coils of the machine with a high degree of efficiency.

25

Yet another advantage of the axially-symmetric construction is that, by utilising a cylindrical stator it is possible to form a sliding seal between the stator

and the armature, which then allows of the possibility of creating a gas spring between the stator and armature by closing one end of the stator. Such an arrangement is described in more detail in the Applicant's international
5 application PCT/GB98/02823.

All these known linear actuators are constructed and designed to apply a force between machine components connected or mechanically linked to the stator and
10 armature, for which purpose these have a configuration which permits such connection. However, there are certain mechanical systems in which it is not required to connect a moving element physically to a drive element. In such circumstances the armature of the actuator does
15 not have to have a continuous direct connection to the external environment. For example, it may be required for an element to be repeatedly driven to reciprocate along a guide member so as to deliver energy at the ends of its stroke when it changes direction. A road breaker
20 or so-called "pneumatic hammer" works in this way by the alternate application of opposite forces by directing pressure fluid alternately into opposite chambers of a pneumatic cylinder with a flutter valve.

25 If the moving element has significant inertia, against which the external "stator" of the machine is designed to experience a reaction, a controlled vibration can be applied: this may be used for example in association with

earth-moving machinery. As a third example, the motion of the an unrestricted piston might be used to vary the total enclosed volume and/or pressure of a fluid system to which the piston chamber is connected. Such a machine
5 might be used as a fluid pump, to dispense metered fluid, to vary the pressure in a sensory pad or to form part of a sensitive and precise fluid pressure suspension system.

The present invention seeks to provide a linear actuator
10 comprising a stator and an armature in which the armature is not attached to an output member which protrudes from the stator, such as the actuator arm or piston rod of known such actuators. That is to say, the armature of this invention is a piston that is free (or substantially
15 free) to move within the stator volume. As used in this specification the term "free piston" will be understood to mean a member movable within a working volume without having a force-transmitting member such as a piston rod.

20 According to one aspect of the present invention, therefore, the present invention provides electromagnetic apparatus for producing an axially directed force comprising a stator having a plurality of axially spaced coils around a working volume within which an armature in
25 the form of a free piston is axially displaceable, the armature having means for producing a magnetic field a substantially radially directed part of which intersects at least some of the coils of the stator such that a

resultant axially directed force is generated when a current flows in the coils.

Preferably the physical parameters of the device are so
5 chosen that the electrical coils may be connected to an electronic drive unit for controlling the phase, frequency or amplitude of the current in the coils so as to cause the desired axially-directed electromagnetic force to be created between the armature and the stator.

10

In one embodiment the armature and the stator are of circular cross section. This makes it easy for the outer surface of the armature to be sealed with respect to the internal surface of the stator, so as to prevent or at
15 least restrict fluid flow between the volumes on either side of the piston.

Means may be provided for sensing the position of the piston so as to optimise the configuration of the
20 currents supplied to the coils by the electronic drive unit.

The electronic drive unit may also be arranged to produce a signal representative of the current supplied to the
25 actuator, the integral of such signal being used to control the pressure of a gas supply to at least to one side of a sealed armature.

Various embodiments of the present invention will now be more particularly described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic axial sectional view of a free piston actuator formed as a first embodiment of the present invention;

Figure 2 is an axial sectional view of an alternative embodiment having induction drive and a working tool;

Figure 3 is a schematic axial sectional view of an alternative embodiment utilised in a pressure pad drive system; and

Figure 4 is an axial sectional view of a further alternative embodiment employing ring magnets.

15

Figure 1 shows a particular form of the device in which the armature(piston) is required to be sealed to the inner surface of the armature tube. In this example the stator 1 carries an assembly of coils 2 extending circumferentially around the axis of the cylinder. The piston 3, moving on bearings 9 and seals 6, carries an arrangement of magnets 4 and polepieces 5 to produce a magnetic field alternating in polarity along the axis of the cylinder. The ends of the device include closures 7, in which, in this embodiment, there are provided fluid passages 8 so as to allow fluid to be moved by the action of the piston 3, if that motion is significant in relation to the enclosed volume.

Figure 2 shows an example of a free-piston actuator used to deliver repeated blows to a tool 10. The armature of this device consists of a hardened core 11 which may also contain lead to increase its mass. The core is keyed to
5 an outer magnetic steel cylinder 12 which carries a series of slots in which are copper rings 13.

The coil assembly 2 is energised to produce an alternating magnetic field that travels along the axis of
10 the piston. This induces currents in the armature rings 13 so as to produce a second alternating magnetic field, whose interaction with the first field accelerates the piston. It is necessary for the piston to be fitted with simple bearing rings (not shown, but similar to
15 those of 9 in Figure 1). Nevertheless, it should be noted that the inductive forces that accelerate the piston also act to hold it away from the sides of the cylinder when in motion; such bearings do not therefore need to be of high quality.

20

Arrangements (not shown) are made to allow air or other gas within the cylinder 12 to pass freely between the opposing ends of the device shown in Figure 2, so as not to impede the motion of the piston.

25

It will be understood that the electromagnetic configuration of the invention is not restricted to the use of permanent magnets and an ironless stator assembly,

as shown by way of example in Figure 1, or to the use of an induction technique as shown by way of example in Figure 2. The armature or piston may, with advantage in certain conditions, use a variable-reluctance drive technique and/or the stator may have slots housing the coils.

Figure 3 shows a particular form of the actuator in relation to a pressure pad 15 carrying a load 19. The principal parts of the actuator device are similar to those described in Figure 1.

In this example the piston is shown as being provided with bearings 9 but to be sealed to the pressure pad 15 and to the source of pressurising fluid by bellows 18.

Figure 4 shows a modified form of the device illustrated in Figure 3, in that the axially-alternate magnetic field of the piston is produced by plane rings of magnetic material instead of discs. This technique allows the device to be of lightweight construction whilst applying force to a diaphragm 20 having an area larger than that of the magnets.

As described in the Applicant's International Patent Application PCT/GB98/02823 the time integral of the current consumed by the device is continuously computed and the fluid pressure in the volume 17 beneath the

piston is frequently adjusted to bring this integral to zero. This control technique ensures that the mean values of the pressures above and below the piston are equalised.

5

Position-sensing means (not shown) are also utilised by the control system to ensure that the median position of the piston is in the central region of the actuator.

10 It will be understood that the use of a bellows to replace the piston seal removes the constraint that the piston and the internal surface of the armature should be of circular cross-section.

15 It will be further understood that the principles of this invention are not compromised by the use of springs or equivalent compliances to provide a mechanical bias to the position of the piston in the absence of electrical power and that such compliant biasing devices may utilise
20 permanent magnetic fields. In embodiments in which the armature is intended, in use, to reciprocate at high frequency the air trapped in the stator cylinder on either side of the pistons may act as a gas spring to cushion the impact at each end of its stroke. The
25 piston/cylinder seal does not have to be very airtight in that the periodic motion may have a sufficiently high frequency for leakage effect to be minimal.

CLAIMS

1. Electromagnetic apparatus for producing an axially directed force comprising a stator having a plurality of axially spaced coils around a working volume within which an armature in the form of a free piston is axially displaceable, the armature having means for producing a magnetic field a substantially radially directed part of which intersects at least some of the coils of the stator such that a resultant axially directed force is generated when a current flows in the coils.

2. Electromagnetic apparatus according to Claim 1, in which the stator has openings to allow the ingress and egress of fluid from the working volume of the stator upon displacement of the armature within it.

3. Electromagnetic apparatus according to Claim 1, in which the armature has openings to allow the transfer of fluid from one side thereof to the other upon displacement of the armature within the working volume of the stator.

4. Electromagnetic apparatus according to any of Claims 1 to 3, in which there are provided means for resiliently resisting the motion of the armature at or adjacent at least one end of the range of movement thereof within the stator.

5. Electromagnetic apparatus according to Claim 4, in

1/3

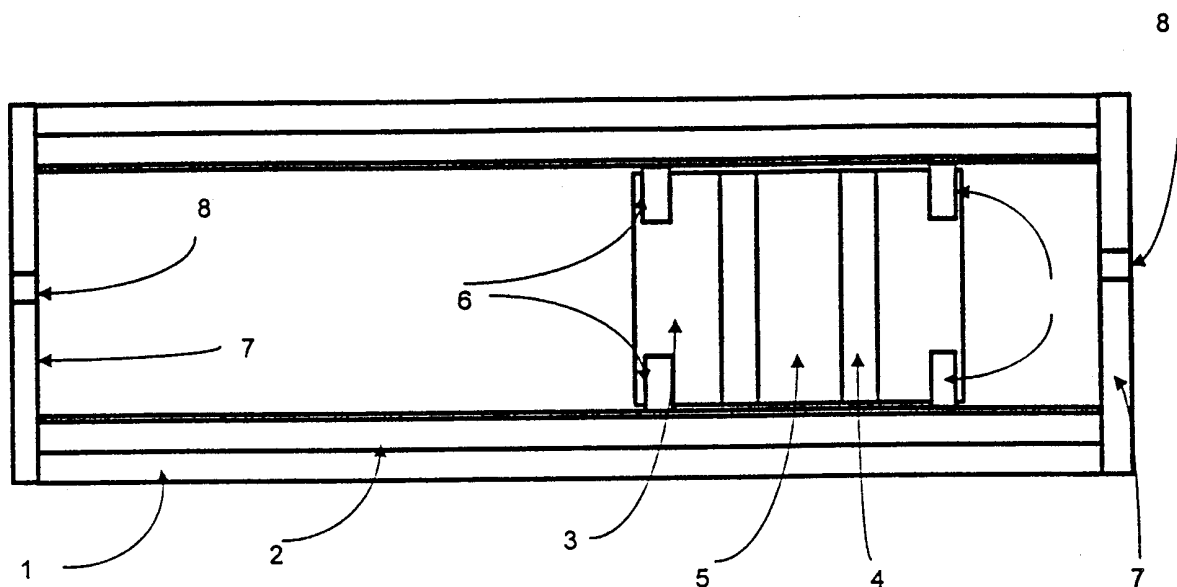


FIGURE 1


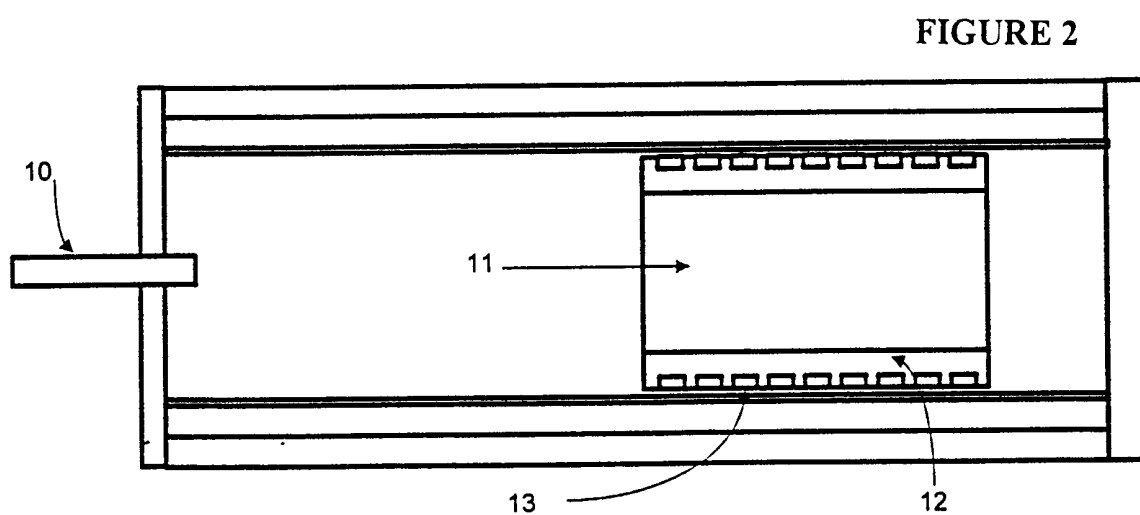


FIGURE 2

2/3

FIGURE 3

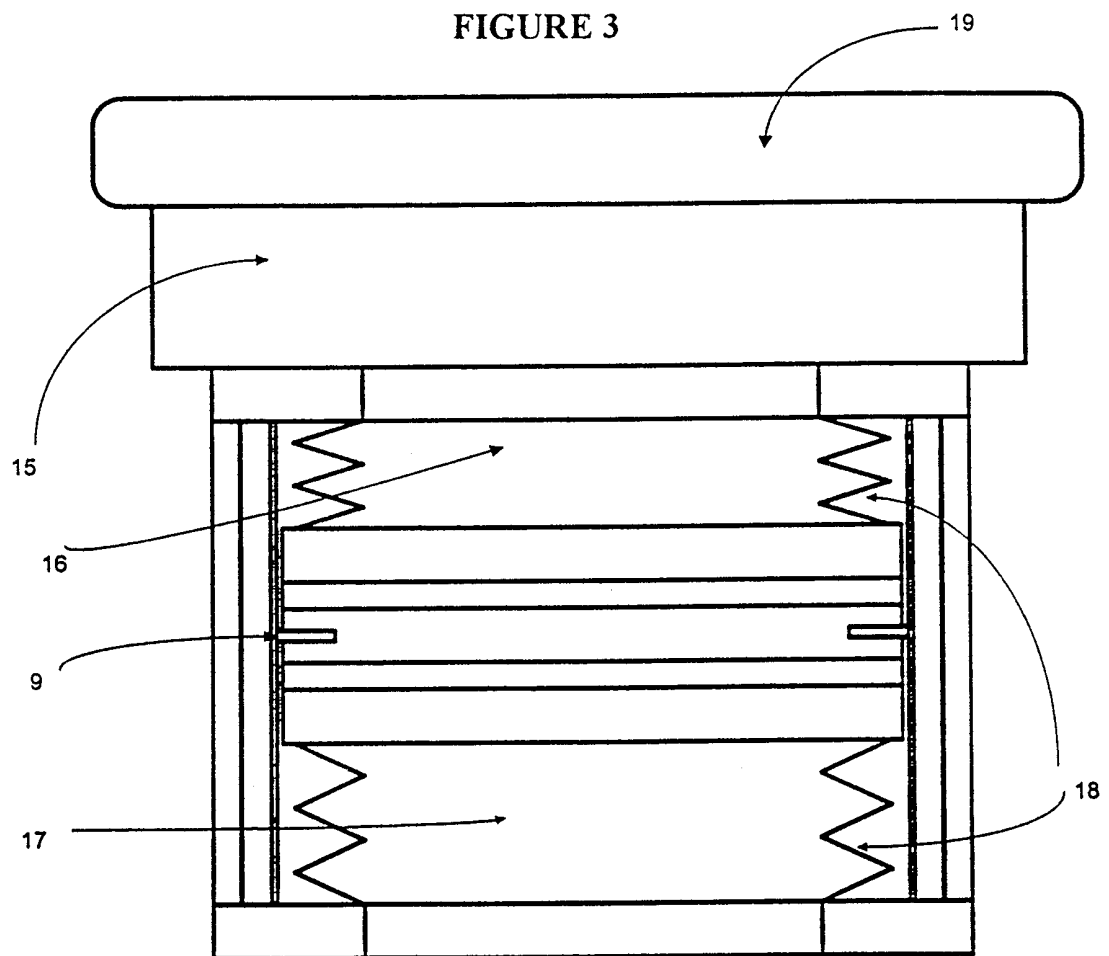

3/3

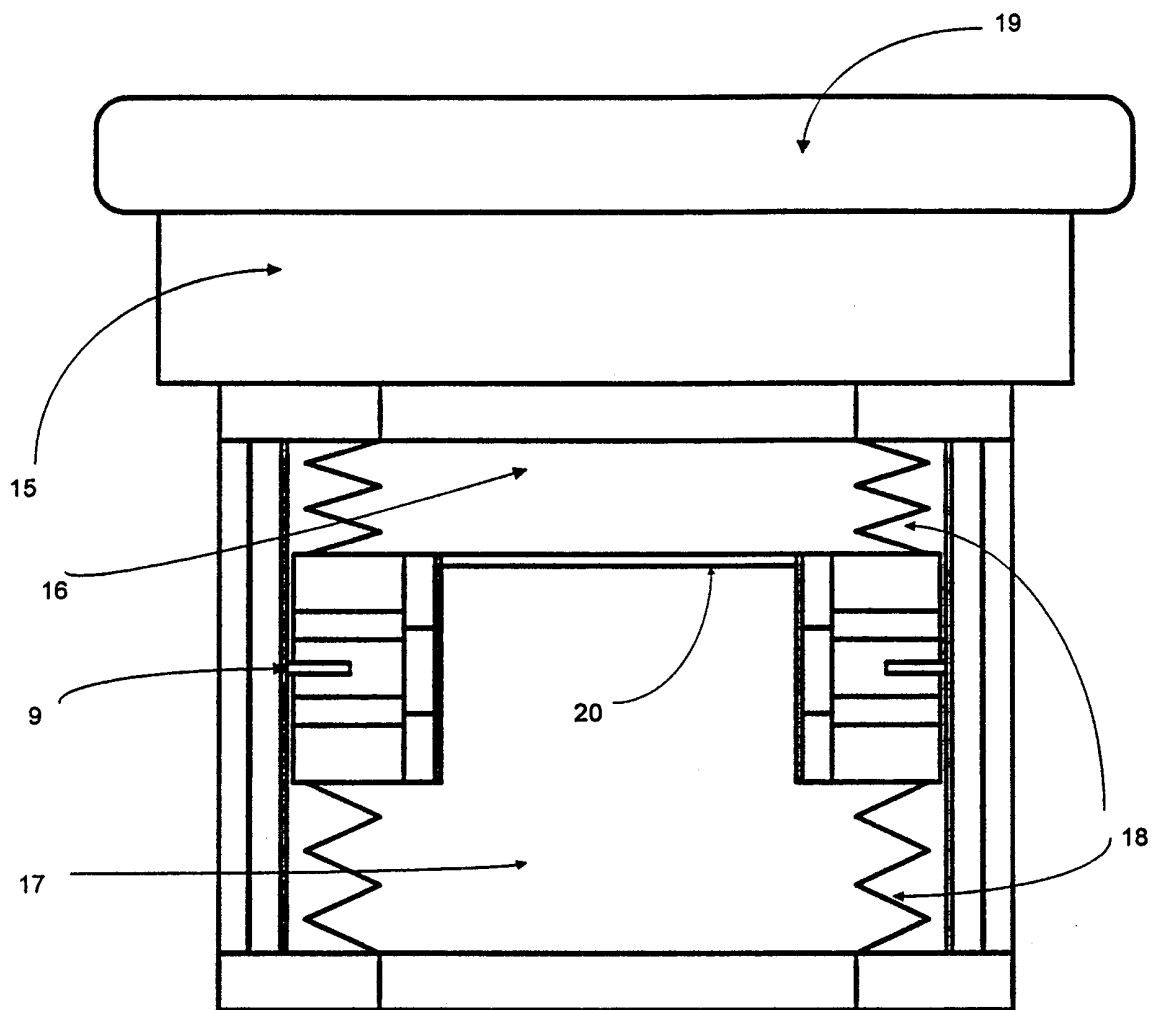


FIGURE 4

INTERNATIONAL SEARCH REPORT

national Application No

PCT/GB 98/03092

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H02K41/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 965 864 A (ROTH PAUL E ET AL) 23 October 1990 see column 3, line 30 - column 4, line 14 Claim 1 see column 6, line 3 - line 13; figures 1,8 ---	1-3,6,8, 9,11-14, 17,18
X A	GB 645 281 A (M. C. BRITAIN) 25 October 1950 see page 2, line 17 - line 85 Claims 7, 8 see page 3, line 102 - line 116; figure 1 ---	1-5,9, 14,17,18 15
X	US 5 166 563 A (BASSINE STUART) 24 November 1992 Abstract see figure 1 ---	1,2,6, 17,18
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

28 January 1999

Date of mailing of the international search report

04/02/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Zoukas, E

INTERNATIONAL SEARCH REPORT

national Application No
PCT/GB 98/03092

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 541 787 A (DELONG SANFORD D) 17 September 1985 Abstract see column 7, line 35 - line 39; figures 2,5 ---	1,2,6,18
X	GB 2 017 420 A (DRUM ENG CO LTD) 3 October 1979 see page 1, line 27 - line 40 see page 1, line 100 - line 107 see page 2, line 45 - line 50; figures 1,2 ---	1-4,9, 11,12, 17,18
X	EP 0 457 389 A (PHILIPS NV) 21 November 1991 see column 3, line 36 - column 4, line 19; figure 1A -----	1,6-8,18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/03092

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4965864 A	23-10-1990	NONE	
GB 645281 A		NONE	
US 5166563 A	24-11-1992	NONE	
US 4541787 A	17-09-1985	US 4692673 A	08-09-1987
GB 2017420 A	03-10-1979	NONE	
EP 0457389 A	21-11-1991	NL 9001126 A	02-12-1991
		DE 69111889 D	14-09-1995
		DE 69111889 T	18-04-1996
		JP 4229069 A	18-08-1992
		US 5399952 A	21-03-1995