



(51) International Patent Classification:

F16L 47/03 (2006.01) *F16L 13/00* (2006.01)
F16L 47/20 (2006.01)

(21) International Application Number:

PCT/IB2012/002385

(22) International Filing Date:

16 November 2012 (16.11.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/299,506 18 November 2011 (18.11.2011) US

(71) Applicant: **DH TECHNOLOGIES DEVELOPMENT PTE. LTD.** [SG/SG]; 80 Raffles Place #25-01 UOB Plaza, 048624 Singapore (SG).

(72) Inventor: **HOBBS, Steven, Edward**; 4348 Muirwood Drive, Pleasanton, California 94588 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: SEALED MICROFLUIDIC CONDUIT ASSEMBLIES AND METHODS FOR FABRICATING THEM

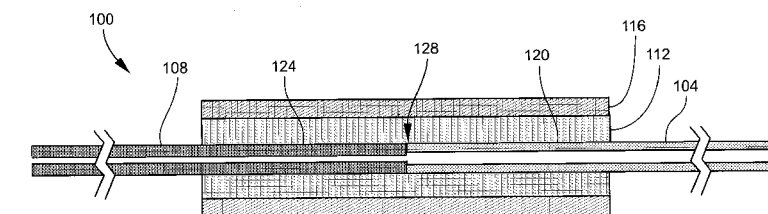


Fig. 1A

(57) Abstract: A sealed microfluidic conduit assembly is fabricated by forming a joint through which a first conduit fluidly communicates with a second conduit, by bringing the first conduit into contact with the second conduit. A layer of malleable material surrounding one or both conduits is compressed against the joint to fluidly seal the joint, by applying a radial force to an outer surface of a jacket surrounding the conduits and malleable layer. The respective compositions and/or sizes of the first conduit and second conduit may be different.



SEALED MICROFLUIDIC CONDUIT ASSEMBLIES AND METHODS FOR FABRICATING THEM

RELATED APPLICATIONS

[0001] This application claims priority to U.S. patent application no. 13/299,506, filed November 18, 2011, which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] This present invention generally relates to connecting fluid conduits together, particularly in microfluidic applications.

BACKGROUND

[0003] Microfluidic applications often require fluid-tight connections to be made between two initially separate conduits. Conventional techniques for connecting conduits include the use of ferrules and other types of machined fittings, and certain adhesives such as UV-curable adhesives. Many problems attend conventional fluid connections, particularly in microfluidic applications. Machined fittings such as ferrules tend to be bulky and thus are often not suitable for applications requiring installation in tight spaces. Machined fittings and adhesives typically do not provide an acceptably long enough service life in microfluidic applications involving very high fluid pressures, such as HPLC (high-performance liquid chromatography). Machined fittings and adhesives typically cannot provide robust connections between two conduits made from dissimilar materials or two conduits of different sizes.

[0004] Additionally, machined fittings and adhesives may not provide fluidic connections of acceptable sealing integrity in low-flow (micro-scale or nano-scale flow) applications, which require conduits having inside diameters on the order of tens of microns. Conduits on this scale are particularly desirable in low-flow analytical separation systems such as low-flow HPLC systems, and in low-flow ionization devices utilized in atmospheric pressure ionization (API) such as small-scale electrospray probes (which may be coupled to HPLC systems). Low-flow regimes require small cross-sectional flow areas to ensure that sharp, highly discernable (low dispersion) signal peaks will be produced from analytes carried in the fluid flow. Fluid connections employed in such applications should be configured to ensure high peak resolution.

[0005] Therefore, there is an ongoing need for improved fluid connections between conduits, particularly in microfluidic applications, and for devices and assemblies employing such connections.

SUMMARY

[0006] To address the foregoing problems, in whole or in part, and/or other problems that may have been observed by persons skilled in the art, the present disclosure provides methods, processes, systems, apparatus, instruments, and/or devices, as described by way of example in embodiments set forth below.

[0007] According to one embodiment, a method for fabricating a sealed microfluidic conduit assembly includes forming a joint through which a first conduit fluidly communicates with a second conduit by bringing a first axial end section of the first conduit into contact with a second axial end section of the second conduit, wherein a layer of malleable material coaxially surrounds the first axial end section, a jacket coaxially surrounds the layer of malleable material, the first axial end section and the second axial end section, and the layer of malleable material has a lower hardness than the first conduit, the second conduit and the jacket; and compressing the layer of malleable material against the joint to fluidly seal the joint, by applying a radial force to an outer surface of the jacket at an axial distance from the joint, wherein the layer of malleable material forms a fluidic seal.

[0008] According to another embodiment, forming the joint includes bringing the first axial end section into contact with a first side of a filter and bringing the second axial end section into contact with an opposing second side of the filter.

[0009] According to another embodiment, the joint formed between the first conduit and the second conduit is a first joint, and the method further includes forming a second joint between the first conduit and a third conduit axially opposite the second conduit, and compressing the layer of malleable material against the second joint by applying a radial force to the outer surface of the jacket at an axial distance from the second joint.

[0010] According to another embodiment, a flow module includes a sealed microfluidic conduit assembly fabricated according to any of the methods disclosed herein, and a pressure sensor fluidly communicating with the sealed microfluidic conduit assembly. The inside diameter of the first conduit is less than that of the second conduit and the third conduit.

[0011] According to other embodiments, a sealed microfluidic conduit assembly is provided. The sealed microfluidic conduit assembly may be fabricated according to any of the methods disclosed herein.

[0012] According to another embodiment, an electrospray probe includes a sealed microfluidic conduit assembly in which the first conduit is composed of an electrically conductive material. The sealed microfluidic conduit assembly may be fabricated according to any of the methods disclosed herein.

[0013] Other devices, apparatus, systems, methods, features and advantages of the invention will be or will become apparent to one with skill in the art upon examination of the following figures and detailed description. It is intended that all such additional systems, methods, features and advantages be included within this description, be within the scope of the invention, and be protected by the accompanying claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The invention can be better understood by referring to the following figures. The components in the figures are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention. In the figures, like reference numerals designate corresponding parts throughout the different views.

[0015] Figure 1A is a cross-sectional view of an example of a microfluidic conduit assembly according to one embodiment, prior to completion of the assembly.

[0016] Figure 1B is a cross-sectional view of the microfluidic conduit assembly after completion of the assembly.

[0017] Figure 2A is a cross-sectional view of an example of a microfluidic conduit assembly according to another embodiment, prior to completion of the assembly.

[0018] Figure 2B is a cross-sectional view of the microfluidic conduit assembly after completion of the assembly.

[0019] Figure 3 is a cross-sectional view of an example of a microfluidic conduit assembly according to another embodiment.

[0020] Figure 4 is a plot of signal peaks for four different electrospray probes, two of which were fabricated in a manner consistent with the embodiment illustrated in Figure 3.

[0021] Figure 5 is a schematic view of a flow module according to another embodiment.

DETAILED DESCRIPTION

[0022] As used herein, the term “microfluidic conduit” generally refers to a conduit (tube, capillary, etc.) having an inside diameter no greater than about 2 mm. In practice, the inside diameter of a microfluidic conduit may range from about 0.01 mm to about 2 mm. Microfluidic conduits are commercially available in different inside diameters such as, for example, 0.025 mm, 0.05 mm, 0.15 mm, 0.2 mm, 0.3 mm, etc. More generally, a microfluidic conduit is sized for effectively transferring a fluid at nano-scale flow rates (nL/min) and/or micro-scale flow rates (typically up to hundreds of $\mu\text{L}/\text{min}$). In applications entailing analytical separation, the microfluidic conduit should be sized to minimize the dispersion of sample peak data. Generally, no limitation is placed on the length of a microfluidic conduit, so long as the length is sufficient for its intended purpose in a given application. A microfluidic conduit of significant length may be initially provided and thereafter cut to a desired shorter length as needed. Generally, no limitation is placed on the outside diameter of a microfluidic conduit, so long as the outside diameter results in a wall thickness providing the level of structural robustness required for withstanding the fluid pressures contemplated in a given application. In some applications such as micro-scale (micro-column) HPLC, the fluid pressure may be on the order of tens of thousands of psi. For applications having a particular need for compactness, the outside diameter should not be excessively large or beyond what is needed for the fluid pressures contemplated. In some embodiments, the outside diameter of the microfluidic conduits may range from about 0.125 mm to about 2 mm. Microfluidic conduits are commercially available in different outside diameters such as, for example, 0.15, 0.36 mm, 1/32 inch (about 0.8 mm), 1/16 inch (about 1.6 mm), etc.

[0023] For convenience, the term “conduit” is used interchangeably with the term “microfluidic conduit” in the present disclosure.

[0024] For convenience, the term “diameter” (including “inside diameter” and “outside diameter”) as used herein generally refers to the characteristic dimension (or size) of any cross-sectional area of a component such as a conduit, tube, capillary, sleeve, jacket, layer, coating, or the like. In typical embodiments, such components are cylindrical with circular cross-sections, such that the term “diameter” is accurately descriptive of the characteristic dimension of such components. It will be understood, however, that such components may alternatively have elliptical or polygonal cross-sections. The characteristic dimension of an elliptical cross-section may be

considered as being a major axis. The characteristic dimension of a polygonal cross-section may be considered as being a dominant length or width of a side, or the distance between two opposing corners. The term “diameter” as used herein encompasses all such types of characteristic dimension, regardless of the actual shape of the cross-section, and thus is not intended to limit any given component to having a circular cross-section.

[0025] Figure 1A is a cross-sectional view of an example of a microfluidic conduit assembly **100** according to one embodiment, prior to completion of the assembly (particularly, before applying radial compression as described below). The microfluidic conduit assembly **100** generally includes a first conduit **104**, a second conduit **108**, a layer **112** of malleable material (or malleable layer **112**), and a jacket **116**. In a typical example, the foregoing components are each cylindrical.

[0026] The first conduit **104** and the second conduit **108** may be composed of an electrically conductive material (e.g., a metal such as stainless steel) or an electrically insulating material. In the context of the present disclosure, the term “electrically insulating material” encompasses dielectric materials. Non-limiting examples of electrically insulating materials include ceramics such as fused silica, composite materials such as fused silica sheathed or coated with a polymer such as PEEK (polyether ether ketone) (e.g., PEEKsil™ tubing), and certain polymers having a hardness capable of withstanding the assembly process described below. The first conduit **104** and the second conduit **108** may have the same or different compositions. The first conduit **104** and the second conduit **108** may be microfluidic conduits having dimensions such as described above. In the present embodiment, the outside diameters of the first conduit **104** and the second conduit **108** are the same or substantially the same (e.g., differ by 0.02 mm or less). In other embodiments such as described below, the outside diameters of the first conduit **104** and the second conduit **108** are different. The inside diameters of the first conduit **104** and the second conduit **108** may be the same or different.

[0027] The malleable layer **112** may be composed of any material that is sufficiently malleable when subjected to radial compression in accordance with the method described below, and which has a hardness that is less than the respective hardnesses of the first conduit **104**, the second conduit **108**, and the jacket **116**. In the present context, the term “radial” refers to a direction orthogonal to the longitudinal axis along which the first conduit **104** and the second conduit **108** are oriented. Also in the present context, the property of “hardness” may be quantified in accordance with any generally acceptable standard, for example Rockwell Hardness testing according to current

standards promulgated by ASTM International. As an example of malleability in the present context, the malleable layer **112** is capable of being dilated (or “squeezed”) between the jacket **116** and the first conduit **104** and/or second conduit **108** when subjected to radial compression. A few examples of the material utilized for the malleable layer **112** include, but are not limited to, polymers or engineering plastics such as PEEK and polyimide. In the present context, the term “polymer” encompasses co-polymers and polymer blends. Hence, a PEEK (or polyimide) polymer may encompass a polymer exclusively comprising PEEK (or polyimide), or a co-polymer or polymer blend that includes PEEK (or polyimide). In some embodiments, the initial thickness (in the radial direction) of the wall of the malleable layer **112** prior to radial compression ranges from 0.010 mm to 1 mm.

[0028] The jacket **116** may be composed of any hard material capable of withstanding the assembly process described below. In typical embodiments **116**, the jacket is a metal such as stainless steel. In some embodiments, the axial length of the jacket **116** ranges from 1 mm to 100 mm.

[0029] According to one embodiment, the microfluidic conduit assembly **100** is fabricated as follows. The first conduit **104** and the second conduit **108**, or more particularly a first axial end section **120** of the first conduit **104** and a second axial end section **124** of the second conduit **108**, are brought into contact with each other at their respective axial ends so as to form a joint (i.e., a butt joint) **128**. The first conduit **104** and the second conduit **108** are brought into contact in an aligned manner such that the interior of the first conduit **104** fluidly communicates with the interior of the second conduit **108** through the joint **128**. In the present context, the term “joint” generally refers the interface or boundary of the two axial ends after they are brought into contact with each other. In some embodiments, the malleable layer **112** is provided in the form of a sleeve which, upon forming the joint **128**, contacts the first conduit **104** and the second conduit **108**. The sleeve may coaxially surround the first axial end section **120** and/or the second axial end section **124**. In the present embodiment in which the first conduit **104** and the second conduit **108** have the same or substantially the same outside diameters, the sleeve coaxially surrounds both the first axial end section **120** and the second axial end section **124**. Thus, in the present embodiment the joint **128** may be formed by inserting the malleable layer **112** into the jacket **116**, and inserting the first axial end section **120** and the second axial end section **124** into the opposing axial ends of the malleable layer **112** until they come into contact with each other (i.e., abut each other). The joint **128** is then

fluidly sealed (sealed so as to form a fluid-tight joint) by implementing a radial compression technique, as will now be described.

[0030] Figure 1B is a cross-sectional view of the microfluidic conduit assembly **100** after completion of the assembly, i.e. after applying radial compression. Radial compression is applied by applying a radial force to an outer surface of the jacket **116** at an axial distance from the joint **128**. In the present embodiment in which the first conduit **104** and the second conduit **108** have the same or substantially the same outside diameters, a first radial force **136** may be applied at a first axial position located at an axial distance from the joint **128** (i.e., at a location of the outer surface that is radially aligned with the first axial end section **120**), and a second radial force **140** may be applied at a second axial position located at an axial distance from the joint **128** (i.e., at a location of the outer surface that is radially aligned with the second axial end section **124**, on the opposite side of the joint **128** relative to the first axial position). As schematically indicated by the arrows in Figure 1B, at the respective axial positions, the radial forces **136**, **140** may each be applied at a plurality of circumferential locations around the outer surface of the jacket **116**. For simplicity, Figure 1B illustrates the first radial force **136** being applied at two diametrically opposite locations on the jacket **116** at the first axial position, and the second radial force **140** being applied at two diametrically opposite locations on the jacket **116** at the second axial position. It will be understood, however, that the radial forces **136**, **140** may each be applied at more than two locations around the circumference at the respective axial positions. Moreover, the radial forces **136**, **140** need not be applied at localized points of contact on the outer surface of the jacket **116**. That is, the tool utilized to apply the radial force **136**, **140** (such as, for example, a segmented collet) may be structured to spread the radial force **136**, **140** over two or more contiguous sections of the outer surface with some degree of uniformity. Moreover, the radial forces **136**, **140** need not be applied symmetrically around the circumference of the jacket **116**. That is, the multiple locations on the outer surface to which the radial force **136**, **140** is applied need not be equally circumferentially spaced from each other.

[0031] In all such cases, the application of the radial forces **136**, **140** causes the jacket **116** to bear against the malleable layer **112**, as depicted in Figure 1B by deflected sections **144**, **146** of the jacket **116**, thereby radially compressing (or “squeezing”) the malleable material **112** between the jacket **116** and the first axial end section **120** and the second axial end section **124**. In response to this radial compression, the malleable material is extruded in all directions in which it is able to

“flow.” In particular, the malleable material is compressed against the joint **128**, thereby filling in any space existing between the interface of the respective axial ends of the two conduits **104** and **108**. The effect of this radial compression is to create a permanent, fluid-tight seal around the joint **128**. The resulting seal has been found to be very effective particularly in conduits of small-bore or capillary sizes. For example, in microfluidic conduit assemblies fabricated from millimeter-scale conduits, the sealed joint **128** has been found to be capable of withstanding fluid pressures of greater than 10,000 psi without failure. In some evaluations, the integrity of the fluid seal in these microfluidic conduit assemblies was maintained at pressures as high as about 60,000 psi.

[0032] As also shown in Figure 1B, the malleable material is extruded in an axial direction through the annular space between the jacket **116** and the conduits **104** and **108**. Depending on the amount of malleable material provided and the amount of force applied in a given embodiment, portions **150** and **152** of the malleable material may be extruded out from axial ends of the jacket **116**. The extruded portions **150** and **152** may, if desired, be removed from the microfluidic conduit assembly **100** by any suitable means (e.g., cutting). In typical embodiments, extrusion out from the axial ends of the jacket **116** is not necessary for ensuring that an adequate fluidic seal is formed.

[0033] In some embodiments, the axial length of the jacket **116** ranges from 1 mm to 100 mm. Generally, the initial or nominal axial length of the malleable layer **112** (i.e., before compression) may be the same as the axial length of the jacket **116** as illustrated in Figure 1A, or alternatively may be greater than or less than the axial length of the jacket **116**.

[0034] The application of radial compression illustrated in Figure 1B may be implemented in a variety of ways. In one example, a split collet (divided into two or more segments) may be placed around the jacket **116** and may be configured to apply radial force at several points on the jacket **116**. Radial force may be subsequently applied to additional points by rotating the jacket **116** relative to the collet and repeating the application of the radial force. In another example, a rotary swaging or tube swaging technique may be employed. In all such cases, it can be seen that conventional ferrules and compression fittings are not required in the fabrication of the sealed microfluidic conduit assembly **100** disclosed herein. Adhesives are also not required.

[0035] As noted above, in some embodiments one or both conduits **104**, **108** may be initially provided in a composite form in which the conduit **104**, **108** has an outer coating of a malleable material (e.g., PEEKsil™ tubing). The thickness of the malleable outer coating may range, for example, from 0.01 to 1 mm. Such composite conduits may be utilized in conjunction with the

malleable layer **112** in the fabrication of the sealed microfluidic conduit assembly **100** described above. The malleable outer coating will be radially compressed and extruded in generally the same manner as the malleable layer **112**. The respective malleable outer coatings of the first conduit **104** and the second conduit **108** will be axially extruded into each other in the vicinity of the joint **128**, and the respective malleable outer coatings each may contribute to sealing the joint **128**. Upon application of the radial compressive forces, the malleable layer **112** and the respective malleable outer coatings may to some degree merge into each other, in the sense that the initial boundaries between these materials may no longer be discernable or at least much less discernable.

[0036] In some embodiments, both conduits **104** and **108** may be initially provided in a composite form in which the conduits **104** and **108** each have an outer coating of a malleable material. The thickness and amount of malleable material so provided may be sufficient for use in fabricating the sealed microfluidic conduit assembly **100**, such that an additional layer of malleable material is not needed. Figures 1A and 1B may be considered as depicting these embodiments, with the malleable layer **112** representing the respective malleable outer coatings of the first conduit **104** and the second conduit **108**. In these embodiments, the first conduit **104** and the second conduit **108** may be brought into contact with each other by inserting them through the opposite ends of an appropriately sized jacket **116**.

[0037] In other embodiments, more than two conduits may be connected together in series by providing multiple sealed joints in accordance with any of the methods described herein.

[0038] A sealed microfluidic conduit assembly **100** such as illustrated in Figure 1B may be utilized in any microfluidic application requiring a sealed joint between two distinct conduits. Examples include, but are not limited to, microfluidic chips, labs-on-a-chip, micro-total analysis systems (μ -TAS), micro-electromechanical systems (MEMS), and micro-scale and nano-scale fluid mixers, dilutors, fluid introduction or dispensing devices, spectroscopic flow cells, and HPLC systems. The sealed microfluidic conduit assembly **100** may be particularly useful in applications requiring compact microfluidic connections for installation in tight spaces, applications requiring high-pressure microfluidic connections, and applications entailing analytical separation and thus requiring minimal signal/peak dispersion. The sealed microfluidic conduit assembly **100** generally may be deployed in substitution of the more expensive and bulky machined fittings typically associated with conventional fluid connections. Moreover, the methods of fabrication disclosed herein may be readily scaled up to produce sealed microfluidic conduit assemblies **100** at low cost.

For many applications, the low cost, reliability and disposability of the sealed microfluidic conduit assembly **100** may be considered advantageous over a more expensive fluidic connection that requires service to extend useful life and avoid replacement. Additionally, the sealed microfluidic conduit assembly **100** is useful in analytical systems in which liquid sample flow should be performed with minimal dead volume and dispersion.

[0039] Also, the method for fabricating the microfluidic conduit assembly **100** is highly compatible for connecting two conduits composed of different materials. For many applications, this allows the benefits of both types of materials to be realized. For example, fused silica tubing can provide very tight inside diameter tolerances, but can be fragile and is non-conductive. On the other hand, stainless steel is very robust and conductive, but can have very large inside diameter tolerances. A connection made between a fused silica conduit and a metal conduit may allow the microfluidic conduit assembly **100** to be made with precise diameter tolerances and strong ends. Precise diameter tolerances allow devices to be manufactured in with reproducible specifications such as dispersion and flow impedance.

[0040] Figure 2A is a cross-sectional view of an example of a microfluidic conduit assembly **200** according to another embodiment, prior to completion of the assembly (particularly, before applying radial compression). Figure 2B is a cross-sectional view of the microfluidic conduit assembly **200** after completion of the assembly, i.e., after applying radial compression. Some of the features or components of the microfluidic conduit assembly **200** may be the same as or similar to those of the microfluidic conduit assembly **100** described above and illustrated in Figures 1A and 1B, and accordingly are designated by the same or similar reference numerals in Figures 2A and 2B. The microfluidic conduit assembly **200** includes a filter **256** axially interposed between the first conduit **104** and the second conduit **108**. Hence, in this embodiment a joint **228** is defined by the interface between the first conduit **104** and the filter **256** and the interface between the second conduit **108** and the filter **256**. In typical embodiments, the filter **256** is disk-shaped as illustrated. The filter **256** may have any type of configuration, such as a mesh filter or a porous frit as appreciated by persons skilled in the art. In this embodiment, the joint **228** is formed by bringing the first conduit **104** into contact with the filter **256** on one side and the second conduit **108** into contact with the filter **256** on the opposite side. The malleable layer **112** may be provided as a sleeve, or alternatively as a coating or sheathing around one or both conduits **104**, **108**, as described above.

[0041] A sealed microfluidic conduit assembly **200** such as illustrated in Figure 2B may be utilized in any microfluidic application requiring a sealed joint between two distinct conduits such as the examples noted above in conjunction with the sealed microfluidic conduit assembly **100**, and additionally requiring particle filtration. As examples, the sealed microfluidic conduit assembly **200** may be employed in the input line to or output line from a fluid pump, or as a pre-column filter located upstream from an HPLC analytical column. In another example, the sealed microfluidic conduit assembly **200** may be adapted for use as the input end and/or output end (e.g., in the end cap) of an analytical column. In this case, the filter **256** may serve as the frit that retains the stationary phase in a sufficiently packed condition in the analytical column while allowing the mobile phase to pass through the analytical column. The sealed microfluidic conduit assembly **200** may also provide one or more of the advantages noted above in conjunction with the sealed microfluidic conduit assembly **100**.

[0042] Figure 3 is a cross-sectional view of an example of a microfluidic conduit assembly **300** according to another embodiment. Some of the features or components of the microfluidic conduit assembly **300** may be the same as or similar to those of the microfluidic conduit assembly **100** described above and illustrated in Figures 1A and 1B, and accordingly are designated by the same or similar reference numerals in Figure 3. In this embodiment, the first conduit **104** and the second conduit **108** have different outside diameters. In the example specifically illustrated, the outside diameter of the second conduit **108** is larger than that of the first conduit **104**. The inside diameters of the first conduit **104** and the second conduit **108** may be the same or different. The malleable layer **112** may be provided in the form of a sleeve. In this embodiment, the malleable layer **112** serves the dual purpose of providing a fluidic seal-forming material and a make-up material to compensate for the differing outside diameters of the first conduit **104** and the second conduit **108**. The jacket **116** is sized to closely fit around the larger-diameter second conduit **108**. A joint **328** is formed by inserting the first conduit **104** into the malleable layer **112**, inserting the first conduit **104** and malleable layer **112** through one axial end of the jacket **116**, and inserting the second conduit **108** through the opposing axial end of the jacket **116**. The respective axial ends of the first conduit **104** and the second conduit **108** are brought into abutting contact with each other within the interior of the jacket **116**. At this time, the malleable layer **112** may or may not be in contact with an end face **360** of the second conduit **108**.

[0043] The joint **328** is then sealed by applying a radial force **136** to the outer surface of the jacket **116** at an axial distance from the joint **328**, i.e., at a first axial position that is radially aligned with the malleable layer **112** and the first axial end section **120**, as schematically indicated by the arrows in Figure 3. The radial force **136** may be applied using the same or similar techniques as described above in conjunction with Figure 1B. Hence, the radial force **136** may be applied at a plurality of circumferential locations around the outer surface of the jacket **116**, and may be applied at localized points of contact on the outer surface of the jacket **116** or over contiguous areas of the outer surface. The application of the radial forces **136** causes the jacket **116** to bear against the malleable layer **112**, thereby radially compressing the malleable material between the jacket **116** and the first axial end section **120**. In response to this radial compression, the malleable material is extruded in all directions available for extrusion. As a result, the malleable material is compressed against the joint **328**, filling in any space existing between the interface of the respective axial ends of the two conduits **104** and **108**, thereby creating a permanent, fluid-tight seal around the joint **328**. Provided with sufficient radial force, a portion (not shown) of the malleable material could be extruded out from axial end of the jacket **116** surrounding the first conduit **104** and may, if desired, be removed from the sealed microfluidic conduit assembly **300**.

[0044] In some implementations, the malleable layer **112** may represent a coating or sheathing initially provided with the first conduit **104**.

[0045] In some implementations, a second malleable layer **364** sized to fit coaxially between the second conduit **108** and the outer jacket **116** may be provided, as schematically depicted by dashed lines in Figure 3. The second malleable layer **364** may be a sleeve that is initially provided as component separate from the second conduit **108**. Alternatively, the second conduit **108** may be provided as a composite structure that includes the second malleable layer **364** as an outer coating or sheathing. In either case, a second radial force **140** may be applied to the outer surface of the jacket **116** at a second axial position that is radially aligned with the second malleable layer **364** and the second axial end section **124**, on the opposite side of the joint **328** relative to the first axial position, as schematically indicated by the arrows in Figure 3. In this manner, radial compression of the second malleable layer **364** may contribute to sealing the joint **328**.

[0046] A sealed microfluidic conduit assembly **300** such as illustrated in Figure 3 may be utilized in any microfluidic application requiring a sealed joint between two distinct conduits such as the examples noted above in conjunction with the sealed microfluidic conduit assembly **100**. The

sealed microfluidic conduit assembly **300** is particularly useful in applications requiring microfluidic connections between two conduits having different outside diameters. The sealed microfluidic conduit assembly **300** may also provide one or more of the advantages noted above in conjunction with the sealed microfluidic conduit assembly **100**.

[0047] In one example, the sealed microfluidic conduit assembly **300** may be utilized as, or form a part of, an electrospray probe for ionizing liquid samples in an atmospheric pressure ionization (API) interface according to the known technique of electrospray ionization (ESI). In this example, the first conduit **104** is composed of an electrically conductive material and serves as the electrospray needle (or electrospray tip). The small, compact microfluidic connection provided by sealed microfluidic conduit assembly **300** enables the electrospray probe to provide a low-dispersion fluid path.

[0048] In one non-limiting example of the electrospray probe, the first conduit **104** is 316L stainless steel tubing and has an axial length of 0.625 inch, an inside diameter of 0.002 +/-0.001 inch, and an outside diameter of 0.012 +/-0.005 inch. The second conduit **108** is a PEEKsil™ composite, and has an axial length of 20.0 cm, an inside diameter of 50 µm, and an outside diameter of 1/32 inch. The malleable layer **112** is PEEK or polyimide, and has an axial length of 0.15 inch and an inside diameter of 0.013 inch. The jacket **116** is 316L stainless steel tubing, and has an axial length of 0.75 +/-0.02 inch, an inside diameter of 0.031 +/-0.001/-0.005 inch, and an outside diameter of 0.042 +/- 0.002 inch.

[0049] Figure 4 illustrates an example of the improved dispersion provided by an electrospray probe when fabricated as described above and illustrated in Figure 3. Specifically, Figure 4 is a plot of signal intensity (in counts) over time (in seconds) for four different electrospray probes. The needle (first conduit) of each probe was stainless steel and had a different inside diameter. Each probe was tested by flowing the same analyte sample at the same flow rate (10 µL/min). The four probes produced four peaks **402**, **404**, **406**, **408**, which are superposed on each other in Figure 4 for comparative purposes. The first probe was a commercially available probe equipped with a needle having an inside diameter of 100 µm. The peak **402** produced by the first probe is severely smeared. The second probe was a modified version of the first probe in which the needle had an inside diameter of 65 µm. The peak **404** produced by the second probe is much less dispersed than the peak **402** produced by the first probe. The third and fourth probes were fabricated as described above and illustrated in Figure 3, with needles having inside diameters of 50 µm and 25 µm,

respectively. The peak **406** produced by the third probe is improved in comparison to the peaks **402** and **404**. The peak **408** produced by the fourth is dramatically improved, exhibiting a peak width (FWHM, or full width at half maximum) of 0.3 second.

[0050] Figure 5 is a schematic view of a flow module **500** according to another embodiment. The flow module **500** generally includes a flow restrictor **570** and one or more pressure sensors **574** fluidly communicating with the flow restrictor **570**. The flow restrictor **570** is a sealed microfluidic conduit assembly that includes two sealed joints axially spaced from each other so as to connect three conduits in series. Specifically, the flow restrictor **570** is defined by a first conduit **104** connected to a second conduit **108** at one axial end and to a third conduit **508** at the other axial end. The first conduit **104** is connected to the second conduit **108** by a first sealed joint **528** and to the third conduit **508** by a second sealed joint **578**. The sealed joints **528** and **578** are fabricated in accordance with any of the methods described above and illustrated in Figures 1A-3. The malleable layer (not specifically shown) may be provided as one or more distinct components. As an example, the malleable layer may be provided as a single component having an initial axial length that spans a majority of the axial length of the first conduit **104**, or is about the same as the axial length of the first conduit **104**, or is longer than the first conduit **104** and overlaps with the second and third conduits **108** and **508**. As another example, a first malleable layer may be provided where the first joint **528** is to be formed, and a second malleable layer may be provided where the second joint **578** is to be formed. As another example, one or more of the conduits **104**, **108**, **508** may include a coating or sheathing of malleable material as described above.

[0051] The first conduit **104**, second conduit **108** and third conduit **508** of the flow module **570** respectively have a first inside diameter, a second inside diameter and a third inside diameter. The first inside diameter is less than the second and third inside diameters, and typically the second and third inside diameters are the same. The respective outside diameters of the first conduit **104**, second conduit **108** and third conduit **508** may be the same or different. Due to its smaller inside diameter, the first conduit **104** introduces a reduced flow area in the fluid flow path defined through the first conduit **104**, second conduit **108** and third conduit **508**. Hence, a pressure drop is observed across the axial length of the first conduit **104**, which can be correlated to the flow rate through the conduits **104**, **108**, **508** as appreciated by persons skilled in the art. For this purpose, fluid lines **582** and **584** from the pressure sensor(s) **574** respectively communicate with the fluid flow path near the axial ends of the first conduit **104**. The fluid lines **582** and **584** may be respectively tapped into the

second conduit **108** and third conduit **508** by any suitable means. The pressure sensor(s) **574** may have any suitable configuration for measuring the pressure drop. In one example, the pressure sensor **574** is a single pressure sensor is configured for measuring the pressure drop. In another example, the pressure sensor **574** includes one pressure sensor associated with one fluid line **582** for measuring the pressure at one axial end of the first conduit **104**, and another pressure sensor associated with the other fluid line **584** for measuring the pressure at the other axial end of the first conduit **104**. In the latter example, the two pressure readings may be compared (e.g., one reading subtracted from the other) to determine the pressure drop. An output signal **588** from the pressure sensor(s) **574** may be transmitted as a feedback signal to an electronic controller (not shown) to enable the electronic controller to control the flow rate (such as by controlling a micro-pump).

[0052] The flow module **500** may provide one or more of the advantages noted above in conjunction with the sealed microfluidic conduit assembly **100**. These may include, for instance, facilitating the connection between conduits of different sizes, the connection between conduits of different material compositions, and the provision of more precise and robust fluidic connections.

[0053] It will be understood that various aspects or details of the invention may be changed without departing from the scope of the invention. Furthermore, the foregoing description is for the purpose of illustration only, and not for the purpose of limitation—the invention being defined by the claims.

CLAIMS

What is claimed is:

1. A method for fabricating a sealed microfluidic conduit assembly, the method comprising:
forming a joint through which a first conduit fluidly communicates with a second conduit by bringing a first axial end section of the first conduit into contact with a second axial end section of the second conduit, wherein a layer of malleable material coaxially surrounds the first axial end section, a jacket coaxially surrounds the layer of malleable material, the first axial end section and the second axial end section, and the layer of malleable material has a lower hardness than the first conduit, the second conduit and the jacket; and
compressing the layer of malleable material against the joint to fluidly seal the joint, by applying a radial force to an outer surface of the jacket at an axial distance from the joint, wherein the layer of malleable material forms a fluidic seal.
2. The method of claim 1, wherein the first conduit and the second conduit are composed of different materials.
3. The method of claim 1, wherein one of the first conduit and the second conduit is composed of an electrically conductive material and the other is composed of an electrically insulating material.
4. The method of claim 1, wherein the jacket driver is composed of a metal and the layer of malleable material is composed of a polymer.
5. The method of claim 1, wherein the layer of malleable material comprises PEEK or polyimide.
6. The method of claim 1, wherein the first conduit and the second conduit each have an inside diameter ranging from 0.01 mm to 2 mm.

7. The method of claim 1, wherein compressing the layer of malleable material extrudes a portion of the malleable material out from an annular opening between the jacket and the first conduit, and further comprising removing the extruded portion.
8. The method of claim 1, wherein compressing the layer of malleable material comprises applying the radial force to a plurality of circumferential points around the outer surface at the axial distance.
9. The method of claim 1, wherein forming the joint comprises bringing the first axial end section into contact with a first side of a filter and bringing the second axial end section into contact with an opposing second side of the filter.
10. A sealed microfluidic conduit assembly fabricated according to the method of claim 9.
11. The method of claim 1, wherein the first conduit and the second conduit have substantially the same outer diameter, the layer of malleable material coaxially surrounds the second axial end section, and compressing the layer of malleable material extrudes the layer in a first axial direction toward a first end of the jacket and in an opposing second axial direction toward a second end of the jacket.
12. The method of claim 11, wherein applying the radial force comprises applying a first radial force to the outer surface at a first axial distance from the joint, and applying a second radial force to the outer surface at a second axial distance from the joint on an opposite side of the joint relative to the first axial distance.
13. The method of claim 11, wherein compressing the layer of malleable material extrudes respective portions of the malleable material out from the first end and the second end, and further comprising removing the extruded portions.

14. The method of claim 11, wherein the layer of malleable material is a sleeve, and forming the joint comprises inserting the first axial end section and the second axial end section into opposite ends of the sleeve.

15. The method of claim 11, wherein the layer of malleable material comprises a first portion coating the first axial end section and a second portion coating the second axial end section, and forming the joint comprises inserting the first axial end section coated with the first portion and the second axial end section coated with the second portion into opposite ends of the jacket, and compressing the layer of malleable material extrudes the first portion and the second portion into contact with each other.

16. The method of claim 11, wherein the first conduit has a smaller outer diameter than the second conduit, the layer of malleable material contacts an end face of the second conduit and is interposed between the first conduit and the jacket, and compressing the layer of malleable material comprises applying the radial force to the outer surface at a location in radial alignment with the first axial end section, wherein the layer of malleable material is compressed against the end face.

17. The method of claim 16, wherein the layer of malleable material is a sleeve, and forming the joint comprises inserting the first axial end section into the sleeve.

18. The method of claim 16, wherein the layer of malleable material comprises a coating on the first axial end section, and forming the joint comprises inserting the first axial end section with the coating into a first end of the jacket and inserting the second axial end section into an opposing second end of the jacket.

19. The method of claim 1, wherein the joint formed between the first conduit and the second conduit is a first joint, and further comprising forming a second joint between the first conduit and a third conduit axially opposite the second conduit, and compressing the layer of malleable material against the second joint by applying a radial force to the outer surface of the jacket at an axial distance from the second joint.

20. A flow module comprising a sealed microfluidic conduit assembly fabricated according to the method of claim 19, and a pressure sensor fluidly communicating with the sealed microfluidic conduit assembly, wherein an inside diameter of the first conduit is less than an inside diameter of the second conduit and the third conduit.
21. A sealed microfluidic conduit assembly fabricated according to the method of claim 1.
22. An electrospray probe comprising a sealed microfluidic conduit assembly fabricated according to the method of claim 1, wherein the first conduit is composed of an electrically conductive material.

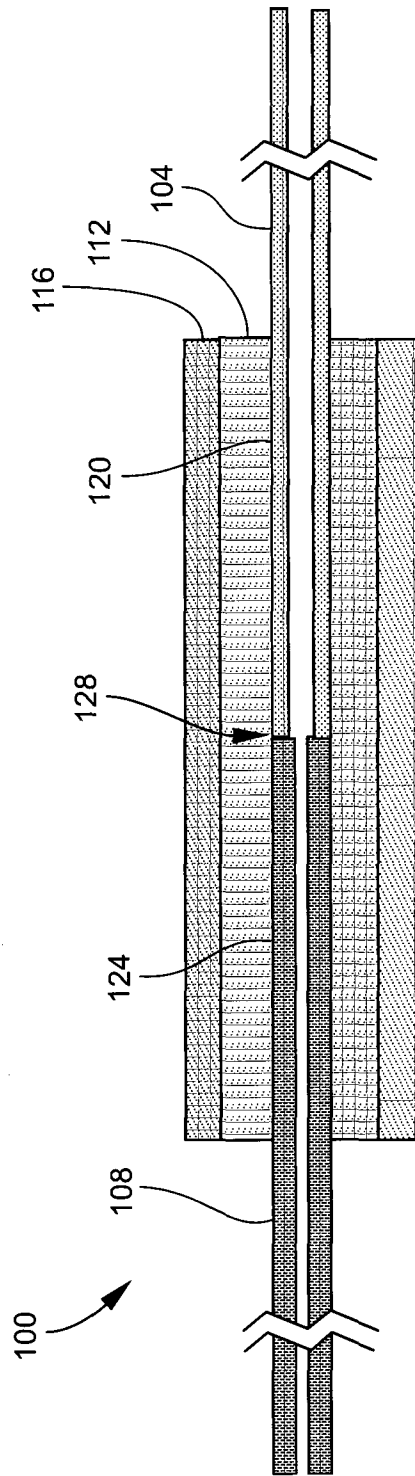


Fig. 1A

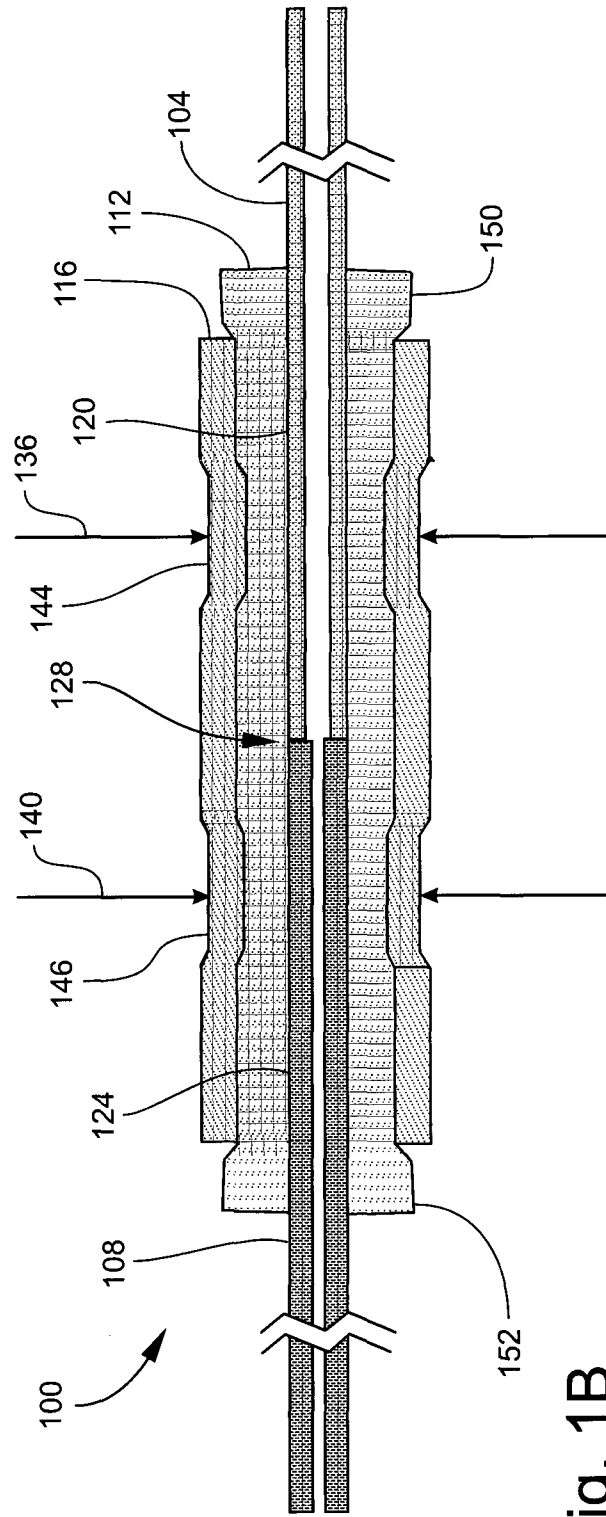


Fig. 1B

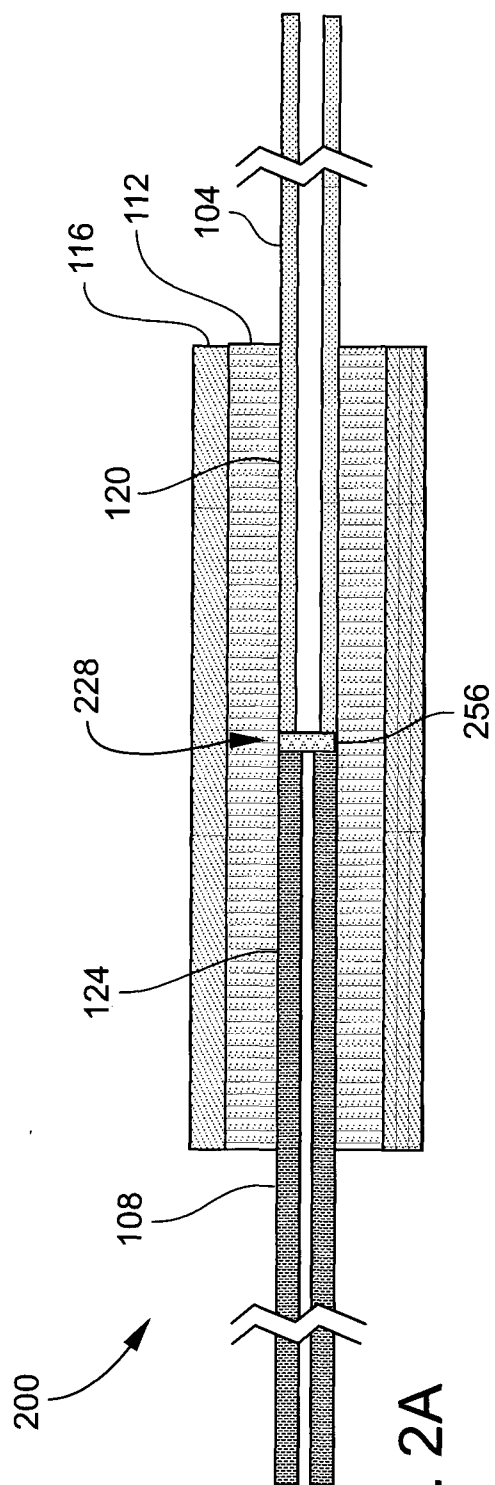


Fig. 2A

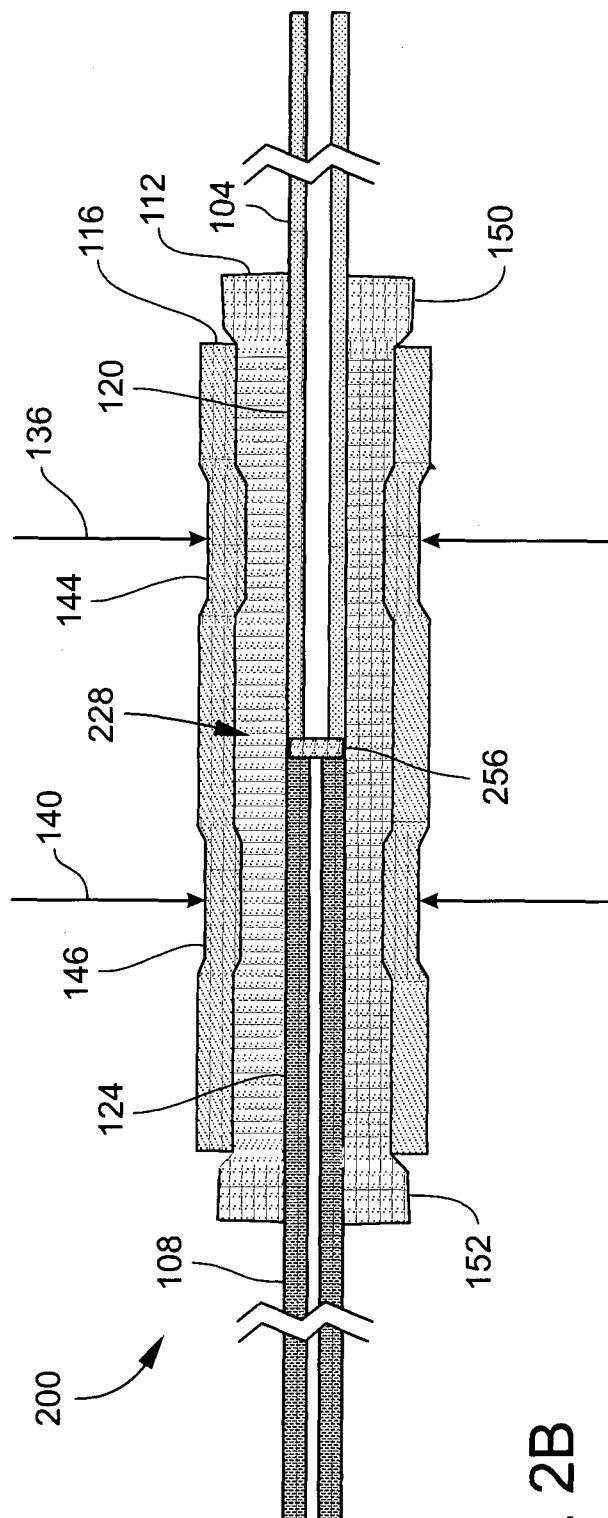


Fig. 2B

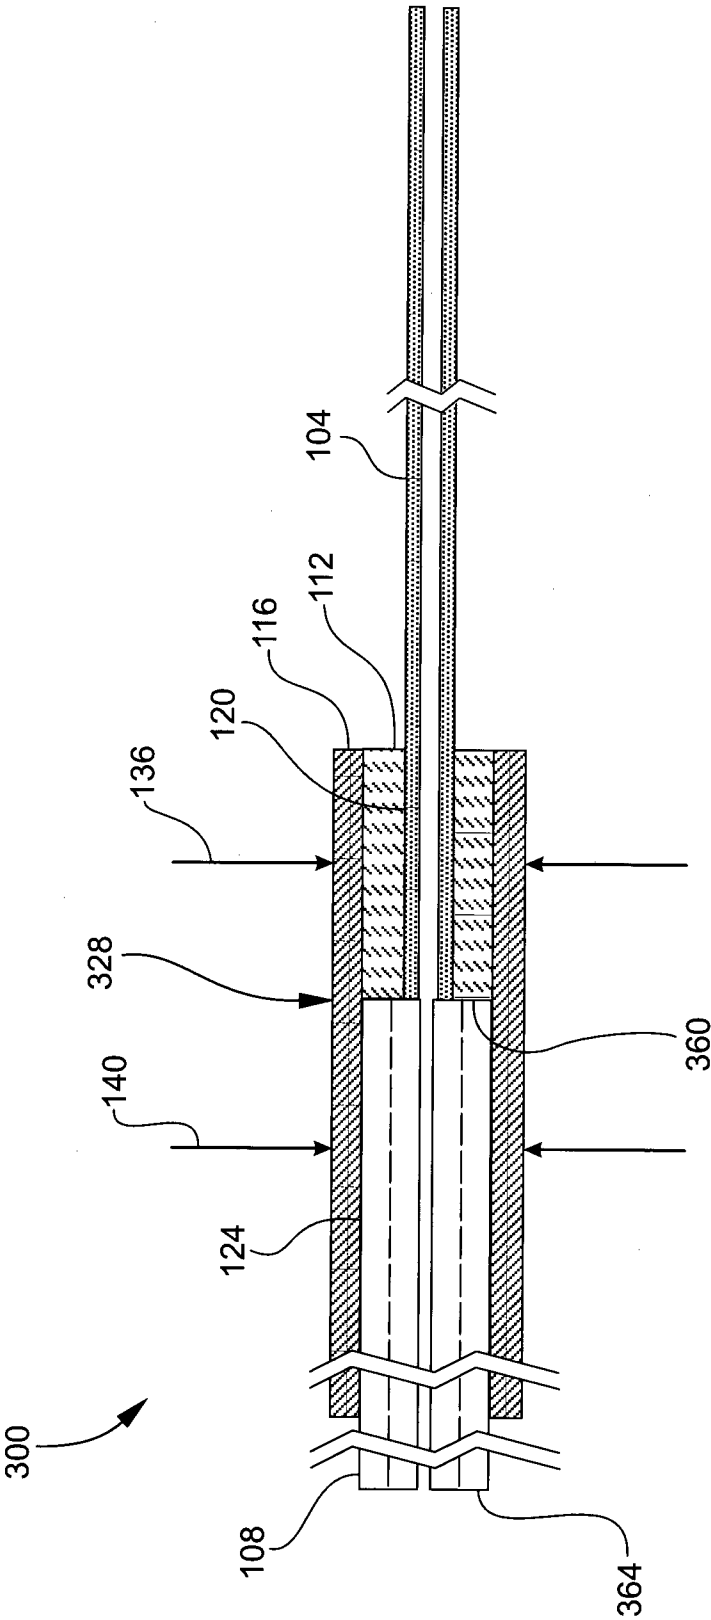


Fig. 3

4/5

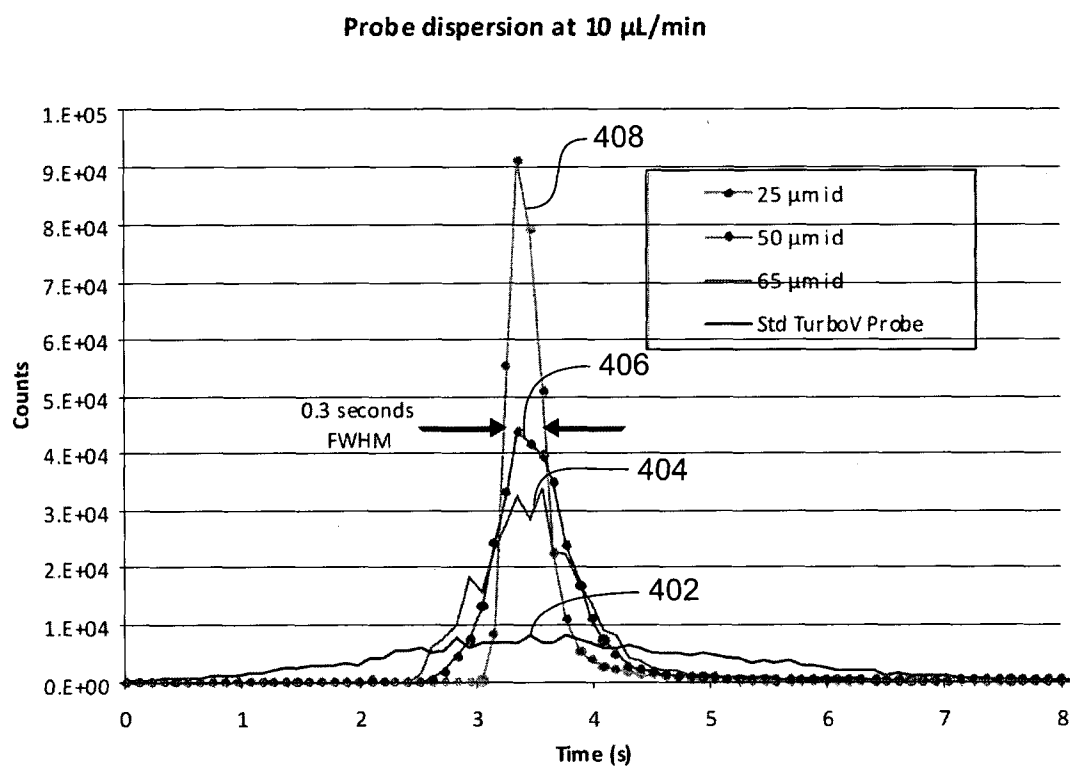


Fig. 4

5/5

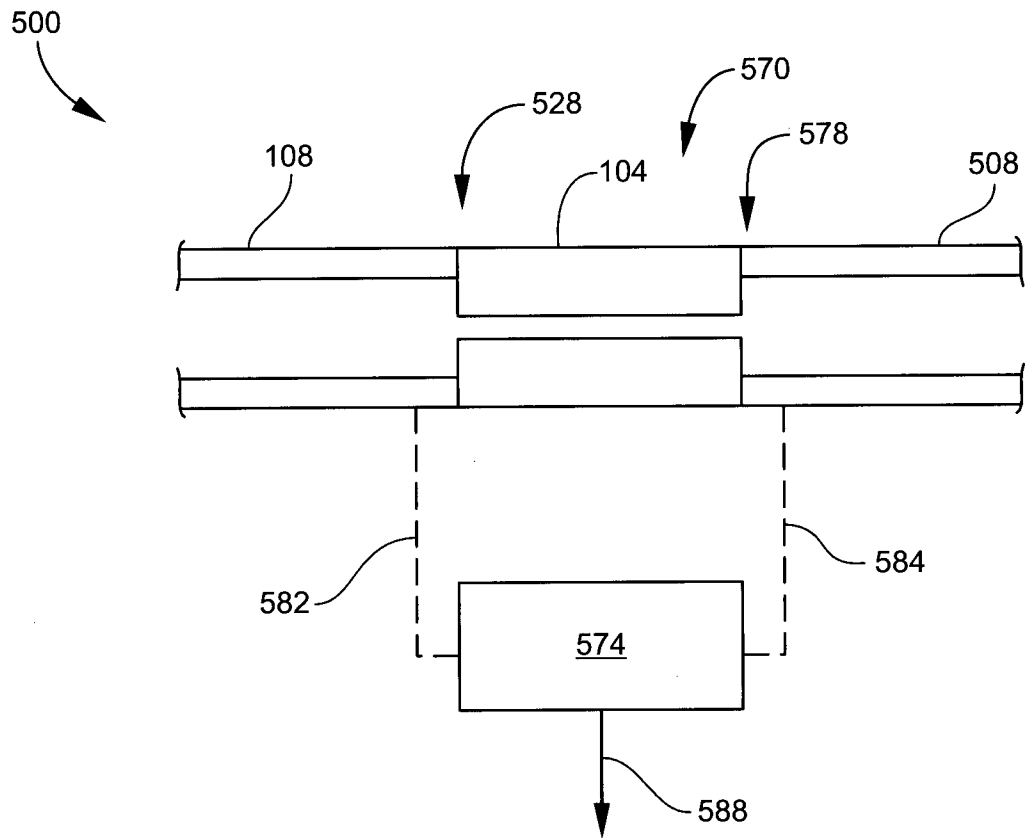


Fig. 5

A. CLASSIFICATION OF SUBJECT MATTER***F16L 47/03(2006.01)i, F16L 47/20(2006.01)i, F16L 13/00(2006.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: F16L 47/03; B01D 27/00; F16L 47/06; F16L 13/02; F16L 37/12; F16L 21/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: conduit, sleeve, jacket, layer, seal, connect, fluid, press

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 11-264489 A (ACTRONICS CO., LTD. et al.) 28 September 1999	1-8, 11-22
Y	See abstract, paragraphs [0007],[0008], claims 1,2, and figure 4.	9, 10
Y	US 4981586 A (BARTHOLOMEW, DONALD D.) 01 January 1991 See abstract, claim 1, and figure 1.	9, 10
A	US 6022054 A (HEMPHILL et al.) 08 February 2000 See abstract, column 4, line 55 - column 5, line 3, claim 1, and figures 5,6.	1-22
A	WO 90-02902 A1 (AB KINDSPRODUKTER) 22 March 1990 See abstract, page 2, lines 25-33, claim 1, and figures 1,2.	1-22
A	US 6012743 A (GODEAU et al.) 11 January 2000 See abstract, column 3, line 63 - column 4, line 7, claim 1, and figures 3,6.	1-22



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 March 2013 (27.03.2013)

Date of mailing of the international search report

28 March 2013 (28.03.2013)

Name and mailing address of the ISA/KR


Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan
City, 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

SONG, Ho Keun

Telephone No. 82-42-481-5580



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/IB2012/002385

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 11-264489 A	28.09.1999	JP 4193191 B2	10.12.2008
US 4981586 A	01.01.1991	EP 0742401 A2	13.11.1996
		EP 0742401 A3	27.05.1998
		JP 01010711 B	22.02.1989
		JP 02937860 B2	23.08.1999
		JP 06031668 B2	27.04.1994
		JP 08-338584 A	24.12.1996
		JP 11-132379 A	21.05.1999
		JP 11-132380 A	21.05.1999
		JP 1530937 C	15.11.1989
		JP 1918343 C	07.04.1995
		JP 57-107493 A	03.07.1982
		JP 58-225290 A	27.12.1983
		US 4423892 A	03.01.1984
		US 4524995 A	25.06.1985
		US 4526411 A	02.07.1985
		US 4541658 A	17.09.1985
		US 4601497 A	22.07.1986
		US 4681351 A	21.07.1987
		US 4778203 A	18.10.1988
		US 4915136 A	10.04.1990
		US 4936544 A	26.06.1990
		US 4944536 A	31.07.1990
		US 4948175 A	14.08.1990
		US 4979765 A	25.12.1990
		US 5009454 A	23.04.1991
		US 5033513 A	23.07.1991
		US 5063968 A	12.11.1991
		US 5067754 A	26.11.1991
		US 5069489 A	03.12.1991
		US 5413387 A	09.05.1995
		US 5732984 A	31.03.1998
		US 5782508 A	21.07.1998
		US 5964484 A	12.10.1999
		US 5992903 A	30.11.1999
US 6022054 A	08.02.2000	None	
WO 90-02902 A1	22.03.1990	AU 4193189 A	02.04.1990
		DE 68913980 D1	21.04.1994
		DE 68913980 T2	06.10.1994
		DE 68913980 T3	31.07.1997
		DK 171832B1	23.06.1997
		DK 40391 A	01.05.1991
		DK 40391 D0	07.03.1991
		EP 0433335 A1	26.06.1991
		EP 0433335 B1	16.03.1994
		EP 0433335 B2	05.03.1997

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/IB2012/002385

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6012743 A	11.01.2000	FI 911149 D0	07.03.1991
		FI 92245 B	30.06.1994
		FI 92245 C	10.10.1994
		NO 178477 B	27.12.1995
		NO 178477 C	03.04.1996
		NO 910897 A	06.05.1991
		NO 910897 D0	07.03.1991
		SE 464269 B	25.03.1991
		SE 464269 C	18.07.1991
		SE 8803135 A	08.03.1990
		SE 8803135 D0	07.09.1988
		SE 8803135 L	08.03.1990
		WO 90-02902 A1	22.03.1990
		CN 1194684 A0	30.09.1998
		EP 0843794 A1	27.05.1998
US 6012743 A	11.01.2000	EP 0843794 B1	25.09.2002
		JP 11-510885 A	21.09.1999
		WO 97-47908 A1	18.12.1997