



(11) **EP 3 040 486 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
13.03.2019 Bulletin 2019/11

(51) Int Cl.:
E03C 1/02 (2006.01) E03C 1/042 (2006.01)

(21) Application number: **15192906.4**

(22) Date of filing: **04.11.2015**

(54) **DEVICE FOR FASTENING AND LEVELLING SANITARY FITTINGS ONTO WALLS**

VORRICHTUNG ZUM BEFESTIGEN UND NIVELLIEREN VON SANITÄRARMATUREN AUF WÄNDEN

DISPOSITIF PERMETTANT DE FIXER ET DE NIVELER DES RACCORDS SANITAIRES SUR DES MURS

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **30.12.2014 ES 201431695 U**

(43) Date of publication of application:
06.07.2016 Bulletin 2016/27

(73) Proprietor: **Caspro, S.A.**
08759 Vallirana - Barcelona (ES)

(72) Inventor: **TRES CASAS, Daniel**
08759 Vallirana (Barcelona) (ES)

(74) Representative: **Ungria López, Javier**
Avda. Ramón y Cajal, 78
28043 Madrid (ES)

(56) References cited:
EP-A1- 0 609 973 DE-A1-102011 082 120
DE-B3-102007 055 565

EP 3 040 486 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**OBJECT OF THE INVENTION**

[0001] This invention refers to a device for fastening and levelling sanitary fittings onto walls with respect to the three coordinate axes.

BACKGROUND OF THE INVENTION AND TECHNICAL PROBLEM TO BE SOLVED

[0002] It is of utmost importance that upon fastening or installing sanitary fittings on walls they are arranged forming a desired angle with respect to each of the three coordinate axes (X, Y, Z). This is so because these sanitary fittings are joined or connected to additional fittings that provide continuity to the plumbing installation, etc.

[0003] In this way, if the sanitary fittings are not fastened in the desired angle, the installation of subsequent fittings is thus undesirably restricted. The final result may not be successful when tile lines (tile joints), both vertical and horizontal, do not match.

[0004] Usually, each wall onto which sanitary fittings are to be installed creates a different angle with respect to a vertical plane. In addition, walls usually comprise irregularities that make the fastening of said fittings with the desired arrangement even more complicated.

[0005] Nowadays supports for the appropriate levelling of the sanitary fittings with respect to the three coordinate axes (X, Y, Z) according to a desired angle are known. However, a problem with these supports is that they comprise complex levelling systems which, depending on the space available, sometimes complicate even more the correct fastening of the sanitary fittings. Another problem of said supports is that they also entail an additional cost due to their complex manufacturing, assembly and installation.

[0006] Document EP0609973A1 is known in the state of the art. It relates to a device for fastening installation elements on a wall, comprising two metal plates telescopically assembled with two profiles at the final edges of the assembly, displaced from the metal plates. The device comprises a central orifice in one of the profiles and two lateral orifices in each of both profiles. Therefore the device may be aligned according to both directions defining the surface of the wall.

[0007] Document DE102007055565B3 is also known. It discloses a device for flush mounting of sanitary elements on walls, formed from a mounting plate and several support plates provided for the assembly of sanitary element. The device comprises fastening areas in both longitudinal edges spaced from the mounting plate. The mounting plate comprises several orifices for the levelling of the device according to both directions defining the surface of the wall where it is fixed, so as several notches for the assembly of the support plates.

[0008] Document DE 10 2011 082 120 A1 (cf. in particular figure 7) provides a device (terminal block) with a

plate that is screwed to a base where additional screws are screwed. The plate leans against the heads of said screws and comprises openings to access to the screw heads. The axial extensions of the screws determine the alignment of the plate.

DESCRIPTION OF THE INVENTION

[0009] With the aim of attaining these goals and solving the different technical problems mentioned so far, apart from others described further on, the present invention describes a device for fastening and levelling sanitary fitting onto walls, comprising a laminar body, which in turn comprises a front side to be arranged facing the sanitary fittings fastened to the laminar body; and a rear side to be arranged facing the wall.

[0010] The device according to the invention comprises: two profiles, one in an upper edge and another one in a lower edge of the laminar body based on how the device is fastened to the wall, both profiles being arranged in a displaced plane relative to the laminar body towards the rear side; fastening orifices to fasten the device to the wall, which comprise a central orifice arranged in a middle point of the longitudinal extension of the profile of the upper edge and lateral orifices at least in the profile of the upper edge; and levelling means arranged in the laminar body, each of which being individually adjustable throughout its length with respect to the rear side and providing support against the wall.

[0011] In this way, it is possible to fasten and level the device with respect to the three coordinate axes by means of the combined adjustment of the fastening orifices and levelling means, the fastening orifices and the levelling means being handled independently from each other.

[0012] The invention consists in the particular design of the extension elements and their arrangement whereby each extension element has a head at one end and a support at the other end. The head provides a handling point for the user which is arranged in the front side of the body such that it is still accessible after mounting the device to the wall.

[0013] Each extension element is immobilized by means of a locknut.

DESCRIPTION OF THE DRAWINGS

[0014] For a better understanding of the present description, the invention is complemented with a set of drawings in which, for illustration purposes and without limitation, the following has been represented:

- Figure 1 shows a perspective view of the device for fastening and levelling sanitary fittings onto walls which is the object of the present invention, according to a preferred embodiment.
- Figure 2 shows a perspective view of the complete device for fastening and levelling sanitary fittings on-

to walls which is the object of the present invention, with sanitary fittings fastened thereto, according to another preferred embodiment.

- Figure 3 shows a lateral view of the device for fastening and levelling sanitary fittings onto walls which is the object of the present invention, with sanitary fittings fastened thereto, according to another preferred embodiment.
- Figure 4 shows a cross-sectional elevation view of the device for fastening and levelling sanitary fittings onto walls which is the object of the present invention, with sanitary fittings fastened thereto, according to another preferred embodiment.

[0015] Below is a list of the different components that have been represented in the drawings and which are comprised in the invention:

X = Horizontal coordinate axis

X = Vertical coordinate axis

Z = Depth coordinate axis

1 = Laminar body

1.1 = Front side

1.2 = Rear side

2 = Central orifice for planning or marking

3 = Lateral orifice

4 = Sanitary fitting

5 = Threaded body

6 = Extension element

6.1 = Support

6.2 = Head

6.3 = Locknut

7 = Profile

8 = Wall

9 = Housings

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT OF THE INVENTION

[0016] As previously mentioned, and as it appears in the figures, the present invention describes a device for fastening and levelling sanitary fittings onto walls (8), despite them being walls (8) with undesired inclination and/or superficial irregularities. The present device is simple and easy to use for obtaining a desired orientation with respect to a horizontal coordinate axis (X), a vertical coordinate axis (Y) and a depth coordinate axis (Z), that is to say with respect to each of the three coordinate axes (X, Y, Z).

[0017] The present device comprises a laminar body (1), which in turn comprises a front side (1.1) and a rear side (1.2). The front side (1.1) is configured to be arranged facing the fittings which are fastened to the device through housings (9). Said fastening is carried out by partially inserting the fittings in the housings (9) or through conventional fastening means in said housings (9). The rear side (1.2) whereas is configured to be arranged facing the surface or wall (8) onto which the device which

is the object of the present invention is fastened.

[0018] Preferably, the laminar body (1) comprises several lengths depending on the number of fittings to be housed. Should the number of fittings be higher than one, these are to be arranged with respect to the horizontal coordinate axis (X), as it is shown in Figures 2 and 4. Therefore, the dimensions, and especially the horizontal extension, are variable, depending on the number and size of fittings to be housed.

[0019] The device also comprises fastening orifices (2, 3) with the aim of fastening the device to the wall (8). In a preferred embodiment, the fastening orifices (2, 3) comprise a central orifice (2) and at least two lateral orifices (3), one at each side of the central orifice (2), with respect to the horizontal coordinate axis (X). Preferably, although not necessarily, the central orifice (2) is an elongated orifice such that it has a linear stretch in an upward direction according to the position for use of the present device. This linear stretch has smaller dimensions than the rest of the orifices used for its levelling. Said central orifice (2) is clearly seen in Figures 1 and 2.

[0020] Additionally, the present device according to a preferred embodiment comprises two profiles (7), arranged externally to the laminar body (1) in an upper edge and in a lower edge of the device, forming a step-shaped configuration with respect to the laminar body (1) towards the rear side (1.2), thus being located in a parallel plane with respect to the laminar body (1). The profiles (7) are configured to act as contact areas with the walls (8). Therefore, by means of the U-shaped transverse section, a cavity or hollow is created, which may attain the goal of solving irregularities on the walls (8) where the present device is fastened, thus facilitating both its fastening and levelling.

[0021] The fastening orifices (2, 3) are arranged in the profiles (7) and are configured to be crossed by elements such as nails and screws to fasten this device to the wall (8).

[0022] In the preferred embodiment shown in Figure 2, which comprises a smaller horizontal longitudinal extension than the preferred embodiment shown in Figure 1, the central orifice (2) is arranged in the middle point of the horizontal longitudinal extension of the profile (7) arranged on the upper edge of the device, and on each of side of said orifice (2) there is at least one of the lateral orifices (3) also in said profile (7) separated with respect to the central orifice (2) to provide a stable fastening. Both in the preferred embodiment shown in Figure 1 and in that shown in Figure 2, the device comprises one of the lateral orifices (3) in each of the corners of the device.

[0023] In the profile (7) arranged on the lower edge, no central orifice (2) is arranged, but two of the lateral orifices (3) separated from each other are included so as to provide the device with stable fastening. The greater the longitudinal extension with respect to the horizontal coordinate axis (X), the greater the number of lateral orifices (3) are located in the device, the lateral orifices (3) being separated from each other so that stable fastening

is provided.

[0024] The device which is the object of the present invention also comprises levelling means (5, 6). The number and the location of the levelling means (5, 6) vary based on aspects such as the dimensions of the device, number and weight of the fittings to be housed, status of the wall (8), etc. In the preferred embodiments shown in Figures 1 and 2, the device comprises one of the levelling means (5, 6) in each of the corners of the laminar body (1).

[0025] Each of the levelling means (5, 6) comprises an internally threaded body (5) and an externally threaded extension element (6) to be threadable through the threaded body (5) by a user manipulating the present device.

[0026] The threaded body (5) is arranged making up a unitary element together with the laminar body (1), although in another preferred embodiment they are independent elements joined to the laminar body (1), for example, by welding, now stapling. As it may be observed in the figures, each of the extension elements (6) is arranged threaded through the related threaded body (5), also passing through the laminar body (1).

[0027] The extension elements (6) comprise a head (6.2) at the end of each of the extension elements (6) arranged in the front side (1.1) with the aim of serving as handling point of said extension elements (6) to be then threaded to a greater or lesser extent. The heads (6.2) may be handled manually or by means of mechanical elements such as screwdrivers or the like.

[0028] Each extension element (6) is immobilized by means of a locknut (6.3) coupled to said extension element (5).

[0029] The opposite ends, that is, the ends of each of the extension elements (6) arranged in the rear side (1.2) serve as support against the wall (8) onto which the present devices are fastened. Due to this goal of the ends of the extension elements (6), said extension elements (6) additionally comprise a support (6.1) at each of said ends, being the supports (6.1) clearly appreciated in Figures 2 and 3.

[0030] Among other objects, the supports (6.1) are aimed to increasing the contact surface between the extension elements (6) and the wall (8), apart from providing a support that does not damage or alter the contact surface between the extension elements (6) and the wall (8). The supports (6.1), in its most retracted position, are housed in the hollow or cavity generated by the step existing between the laminar body (1) and the profiles (7), not preventing the present device from being fastened or levelled should it not be required its extension or protuberance with respect to the laminar body (1), and the profiles (7), to level said device.

[0031] The main goal of these extension elements (6) is having an adjustable extension from their rear side (1.2), individually, to solve or compensate irregularities and/or inclination on the wall (8) area onto which the present device is fastened. An example is shown in Figure 3 wherein an inclination is compensated with respect

to a vertical plane by means of a pair of extension elements (6) close to the profile (7) arranged on the upper edge. If the inclination is opposite to the one shown in Figure 3, the device comprises the extension elements (6) closest to the lower edge of the device.

[0032] In both cases, the device may comprise some of the extension elements (6) close to the upper edge and other extension elements (6) close to the lower edge, maintaining the related ones in the retracted position, the supports close to the laminar body (1), and the related ones extended, that is with the supports (6.1) as far from the laminar body (1) as it is required. An example similar to the above-mentioned situation is shown in Figure 4, where three out of the four supports (6.1) comprised in the device, are appreciated, each of them being extended at different extents according to the wall (8) requirements resulting from the irregularities thereon.

[0033] For the fastening and levelling of the present device, the first step is to place the device in such a way that a screw or nail arranged in the wall (8) is arranged through the central orifice (2). The device simply hangs from said screw or nail, its position not being fastened. It is thus horizontally levelled, that is, a horizontal longitudinal axis that goes through the device through its centre with respect to the horizontal coordinate axis (X) is levelled. A level may be employed to facilitate said horizontal levelling.

[0034] It is worth noting that, before inserting the screws, blind bores need to be carried out in the wall, using the lateral orifices (3) of the profile (7) to mark them on said wall.

[0035] Later, through at least some lateral orifices (3), nails or screws are inserted to pre-fasten the device onto the wall (8) by partially inserting it in said wall (8). Preferably, these nails or screws are not completely inserted, only insofar as it is necessary to maintain the device in horizontal position. Afterwards, with the individual adjustment of each of the levelling means (5, 6) by screwing or unscrewing the extension elements (6) through the threaded bodies (5), the position is finally defined with respect to the three coordinate axes (X, Y, Z).

[0036] Once it is positioned as desired, the nails or screws located through the lateral orifices (3) fasten in a definite manner the position of the device by being introduced to the greatest extent possible according to the levelling and positioning established by the extension elements (6), that is to say by the levelling means (5, 6). When there are some of the lateral orifices (3) where no nails or screws have been introduced to pre-fasten the device to the wall (8), the nails or screws may be inserted to the greatest extent possible according to the levelling and positioning established by the extension elements (6) for its definitive fastening.

[0037] Additional elements may be used such as the level to arrange the device with the inclination or angle desired at any time during the fastening and levelling of the present device.

[0038] Once the nature of the invention has been de-

scribed, it is thus stated, for the relevant purposes, that it is not limited to the exact details of this description, but on the contrary, whichever amendments are deemed appropriate may be introduced, insofar as the essential features thereon are not altered. In consequence, the scope of the invention is defined by the following claims.

Claims

1. Device for fastening and levelling sanitary fittings on to walls (8), comprising:

- a laminar body (1), which in turn comprises:

- a front side (1.1) to be arranged facing the sanitary fittings (4) fastened to the laminar body (1); and
- a rear side (1.2) to be arranged facing the wall (8);

- two profiles (7) integrated in the laminar body (1), one on an upper edge and another one on a lower edge of the laminar body (1) according to the position of the device being fastened to the wall (8), both profiles (7) being arranged in a displaced plane with respect to the laminar body (1) towards the rear side (1.2);

- fastening orifices (2, 3) to fasten the device to the wall (8), comprising:

- a central orifice (2) arranged in a middle point of the longitudinal extension of the profile (7) of the upper edge, and
- lateral orifices (3) at least in the profile (7) of the upper and lower edge;

- levelling means (5, 6) arranged in the laminar body (1) and each comprising a threaded body (5) and an extension element (6) externally threaded to be threadable through the threaded body (5),

the device being **characterized in that** the extension element (6) is immobilized by a locknut (6.3) coupled to it, the extension element (6), further comprising:

- a support (6.1) at one end to avoid damaging and provide support against the wall (8), and
- a head (6.2) at the other end serving as handling point of the extension element to be threaded by the user to a greater or lesser extent the head being arranged in the front side (1.1)

such that the device is to be fastened and levelled with respect to the three coordinate axes (X, Y, Z) by means of the combined adjustment of the fastening orifices (2, 3) and the levelling means (5, 6), the

fastening orifices (2, 3) and the levelling means (5, 6) being handled independently from each other, the extension of each extension element (6) being individually adjustable with respect to the rear side (1.2) and providing support with direct contact against the wall (8).

Patentansprüche

1. Vorrichtung zum Befestigen und Ausrichten von Sanitärarmaturen an Wänden (8), die umfasst:

einen aus Schichten bestehenden Körper (1), der seinerseits umfasst:

eine Vorderseite (1.1), die so angeordnet wird, dass sie den an dem aus Schichten bestehenden Körper (1) befestigten Sanitärarmaturen zugewandt ist; und
eine Rückseite (1.2), die so angeordnet wird, dass sie der Wand (8) zugewandt ist;

zwei Profile (7), die in den aus Schichten bestehenden Körper (1) integriert sind, d. h., entsprechend der Position der an der Wand (8) zu befestigenden Vorrichtung, eines an einer oberen Kante und ein anderes an einer unteren Kante des aus Schichten bestehenden Körpers (1), wobei beide Profile (7) an einer in Bezug auf den aus Schichten bestehenden Körper (1) zu der Rückseite (1.2) hin verschobenen Ebene angeordnet sind;

Befestigungs-Öffnungen (2, 3) zum Befestigen der Vorrichtung an der Wand (8), wobei sie umfassen:

eine mittige Öffnung (2), die an einem Mittelpunkt der Längsausdehnung des Profils (7) der oberen Kante angeordnet ist, sowie seitliche Öffnungen (3) wenigstens in dem Profil (7) der oberen und der unteren Kante;

Ausricht-Einrichtungen (5, 6), die in dem aus Schichten bestehenden Körper (1) angeordnet sind und jeweils umfassen:

einen mit Gewinde versehenen Körper (5) sowie ein Ausfahr-Element (6), das mit Außengewinde versehen ist und durch den mit Gewinde versehenen Körper (5) hindurch geschraubt werden kann, wobei die Vorrichtung **dadurch gekennzeichnet ist, dass** das Ausfahr-Element (6) durch eine damit verbundene Sicherungsmutter (6.3) fixiert wird, und das Ausfahr-Element (6) des Weiteren umfasst:

eine Stütze (6.1) an einem Ende, die Beschädigung der Wand (8) vermeidet und Halt daran bietet, sowie einen Kopf (6.2) an dem anderen Ende, der als ein Handhabungspunkt des Ausfahr-Elementes dient, das von dem Benutzer weiter oder weniger weit eingeschraubt wird, wobei der Kopf an der Vorderseite (1.1) angeordnet ist,

so dass die Vorrichtung in Bezug auf die drei Koordinaten-Achsen (X, Y, Z) mittels der kombinierten Einstellung der Befestigungs-Öffnungen (2, 3) und der Ausricht-Einrichtungen (5, 6) befestigt und ausgerichtet wird, wobei die Befestigungs-Öffnungen (2, 3) und die Ausricht-Einrichtungen (5, 6) unabhängig voneinander gehandhabt werden, das Ausfahren jedes Ausfahr-Elementes (6) in Bezug auf die Rückseite (1.2) individuell eingestellt werden kann und Halt mit direktem Kontakt an der Wand (8) bietet.

Revendications

1. Dispositif de fixation et de mise à niveau d'installations sanitaires sur des murs (8) comprenant :

- un corps laminaire (1) qui comprend à son tour :

- un côté avant (1.1) devant être disposé de façon à faire face à l'installation sanitaire (4) fixée au corps laminaire (1) ; et
- un côté arrière (1.2) devant être disposé de façon à faire face au mur (8) ;

- deux profils (7) intégrés au corps laminaire (1), l'un sur un bord supérieur et l'autre sur un bord inférieur du corps laminaire (1) selon la position du dispositif fixé au mur (8), les deux profils (7) étant disposés dans un plan déplacé par rapport au corps laminaire (1) vers le côté arrière (1.2) ;

- des orifices de fixation (2, 3) pour fixer le dispositif au mur (8), comprenant :

- un orifice central (2) disposé à un point intermédiaire du prolongement longitudinal du profil (7) du bord supérieur, et
- des orifices latéraux (3), au moins dans le profil (7) du bord supérieur et inférieur ;

- des moyens de mise à niveau (5, 6) disposés dans le corps laminaire (1) et comprenant chacun un corps fileté (5) et un élément d'extension (6) fileté de manière externe pour pouvoir être enfilé

à travers le corps fileté (5), le dispositif étant **caractérisé en ce que** l'élément d'extension (6) est immobilisé par un contre-écrou (6.3) couplé à celui-ci, l'élément d'extension (6) comprenant en outre :

- un support (6.1) à une extrémité pour éviter un endommagement et fournir un support contre le mur (8), et
- une tête (6.2) à l'autre extrémité servant de point de manipulation de l'élément d'extension pour être enfilé par l'utilisateur dans une plus grande ou une plus petite mesure, la tête étant disposée dans le côté avant (1.1) de telle sorte que le dispositif doit être fixé et mis à niveau par rapport aux trois axes de coordonnées (X, Y, Z) au moyen du réglage combiné des orifices de fixation (2, 3) et des moyens de mise à niveau (5, 6), les orifices de fixation (2, 3) et les moyens de mise à niveau (5, 6) étant gérés indépendamment les uns des autres, l'extension de chaque élément d'extension (6) pouvant être réglée individuellement par rapport au côté arrière (1.2) et fournissant un support avec un contact direct contre le mur (8).

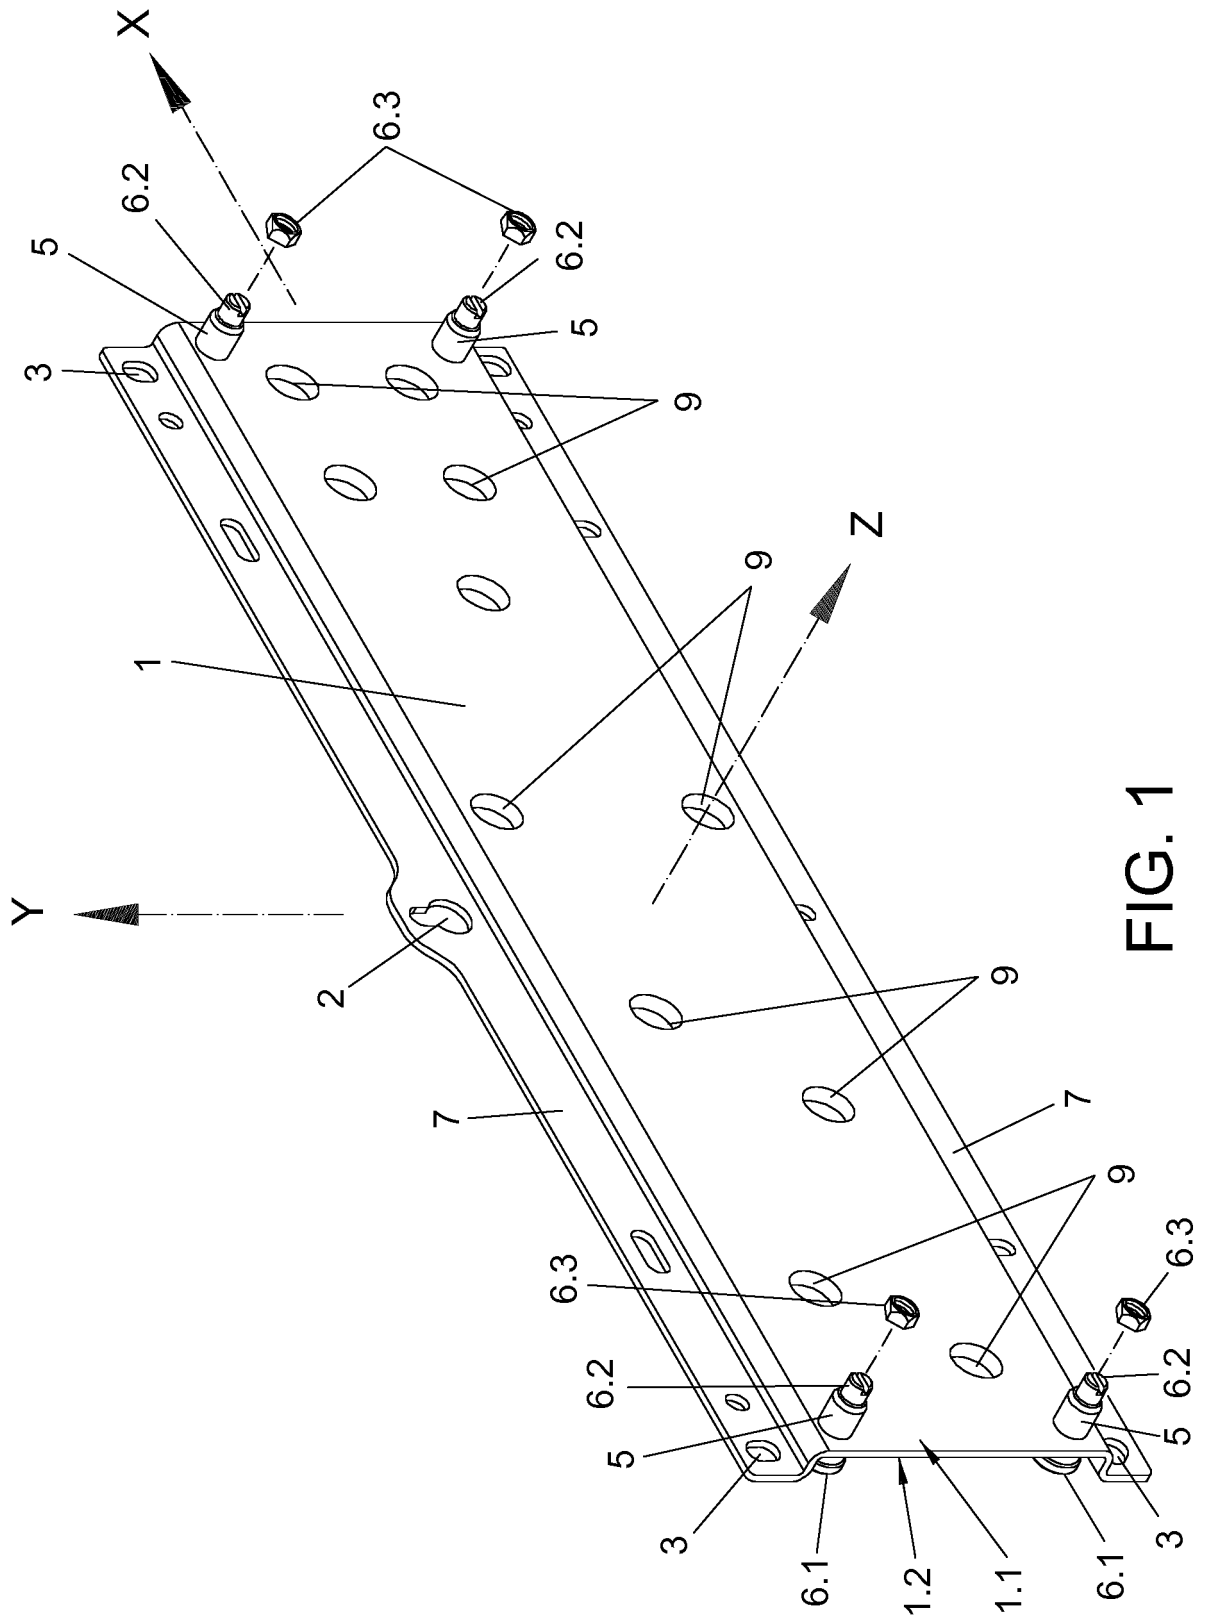


FIG. 1

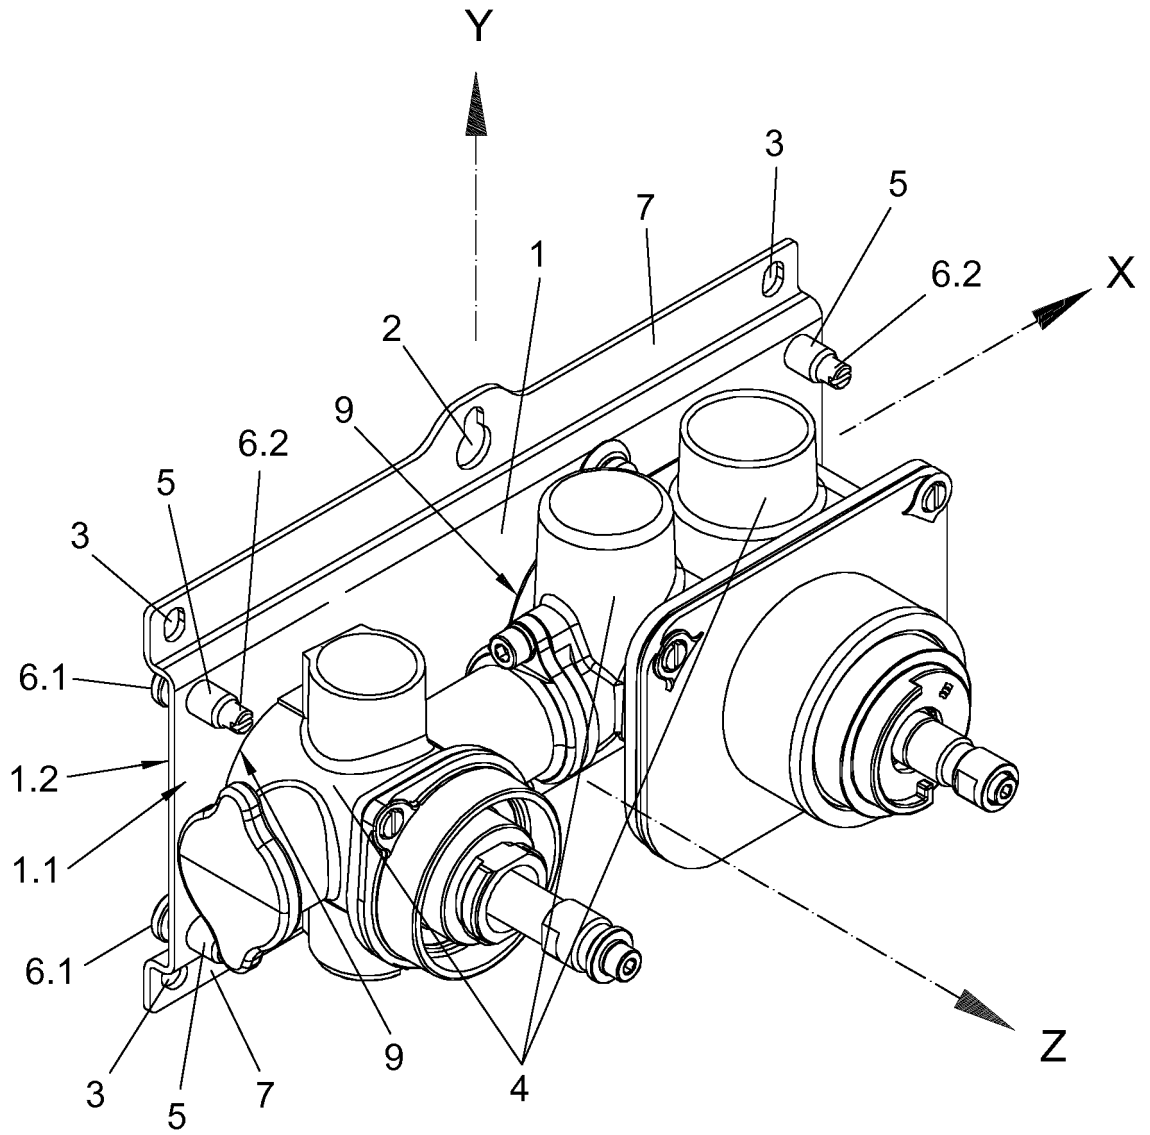


FIG. 2

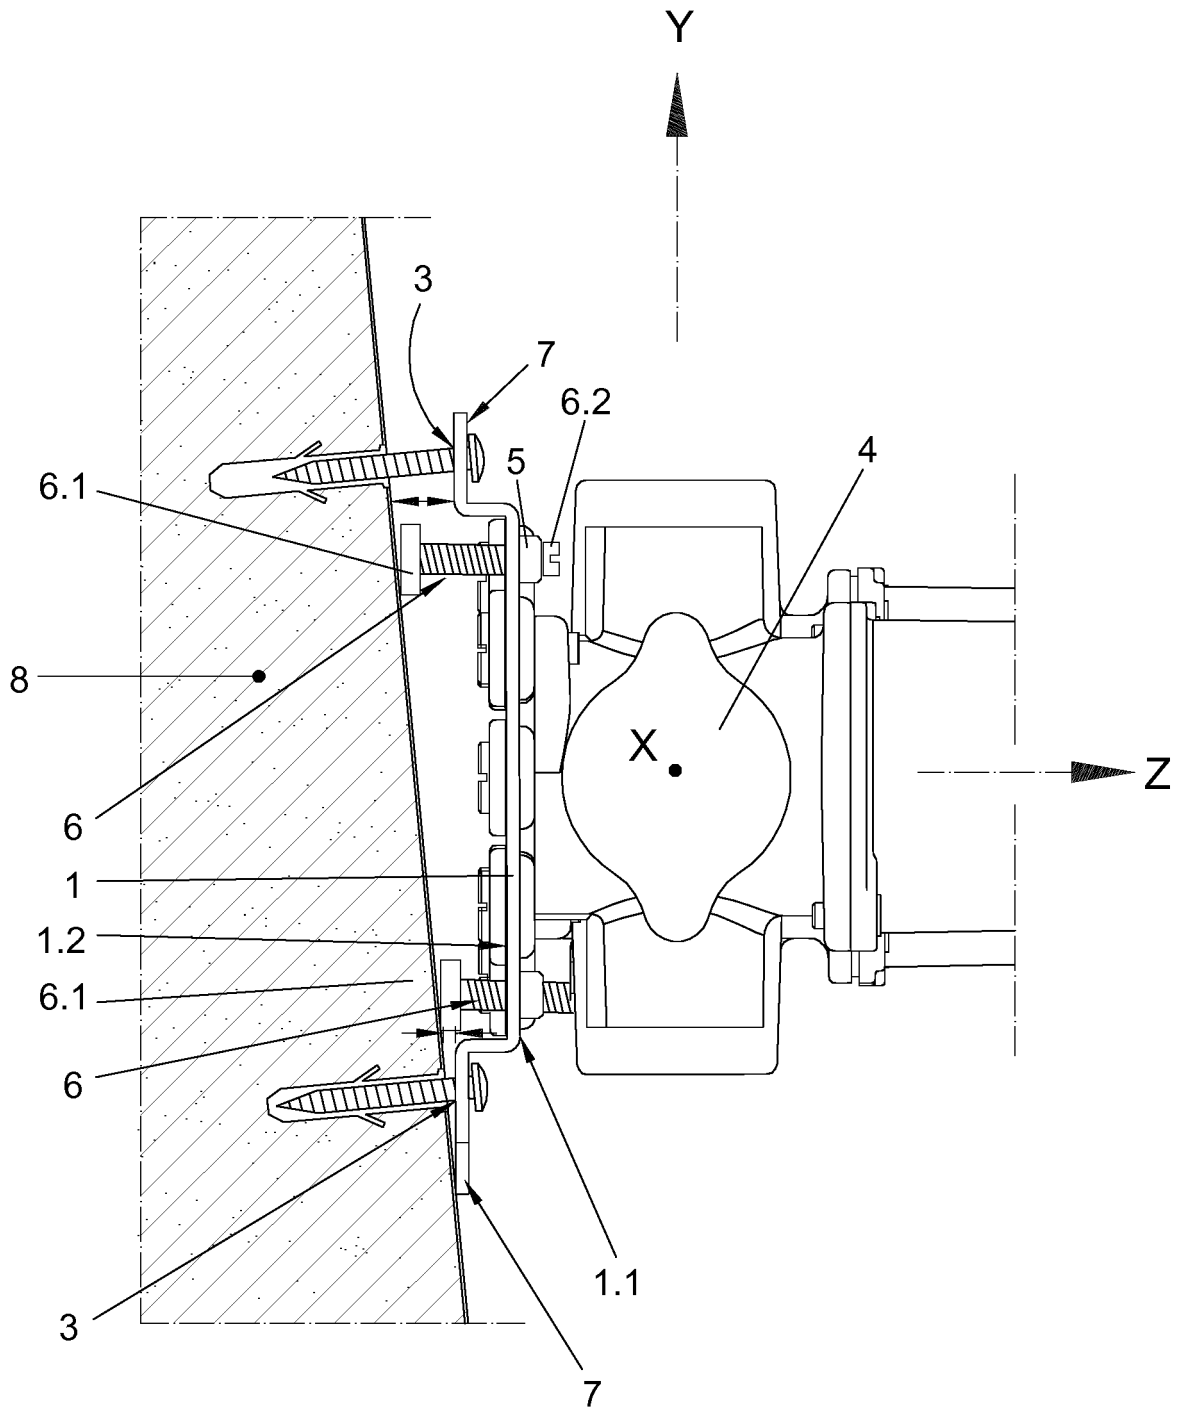


FIG. 3

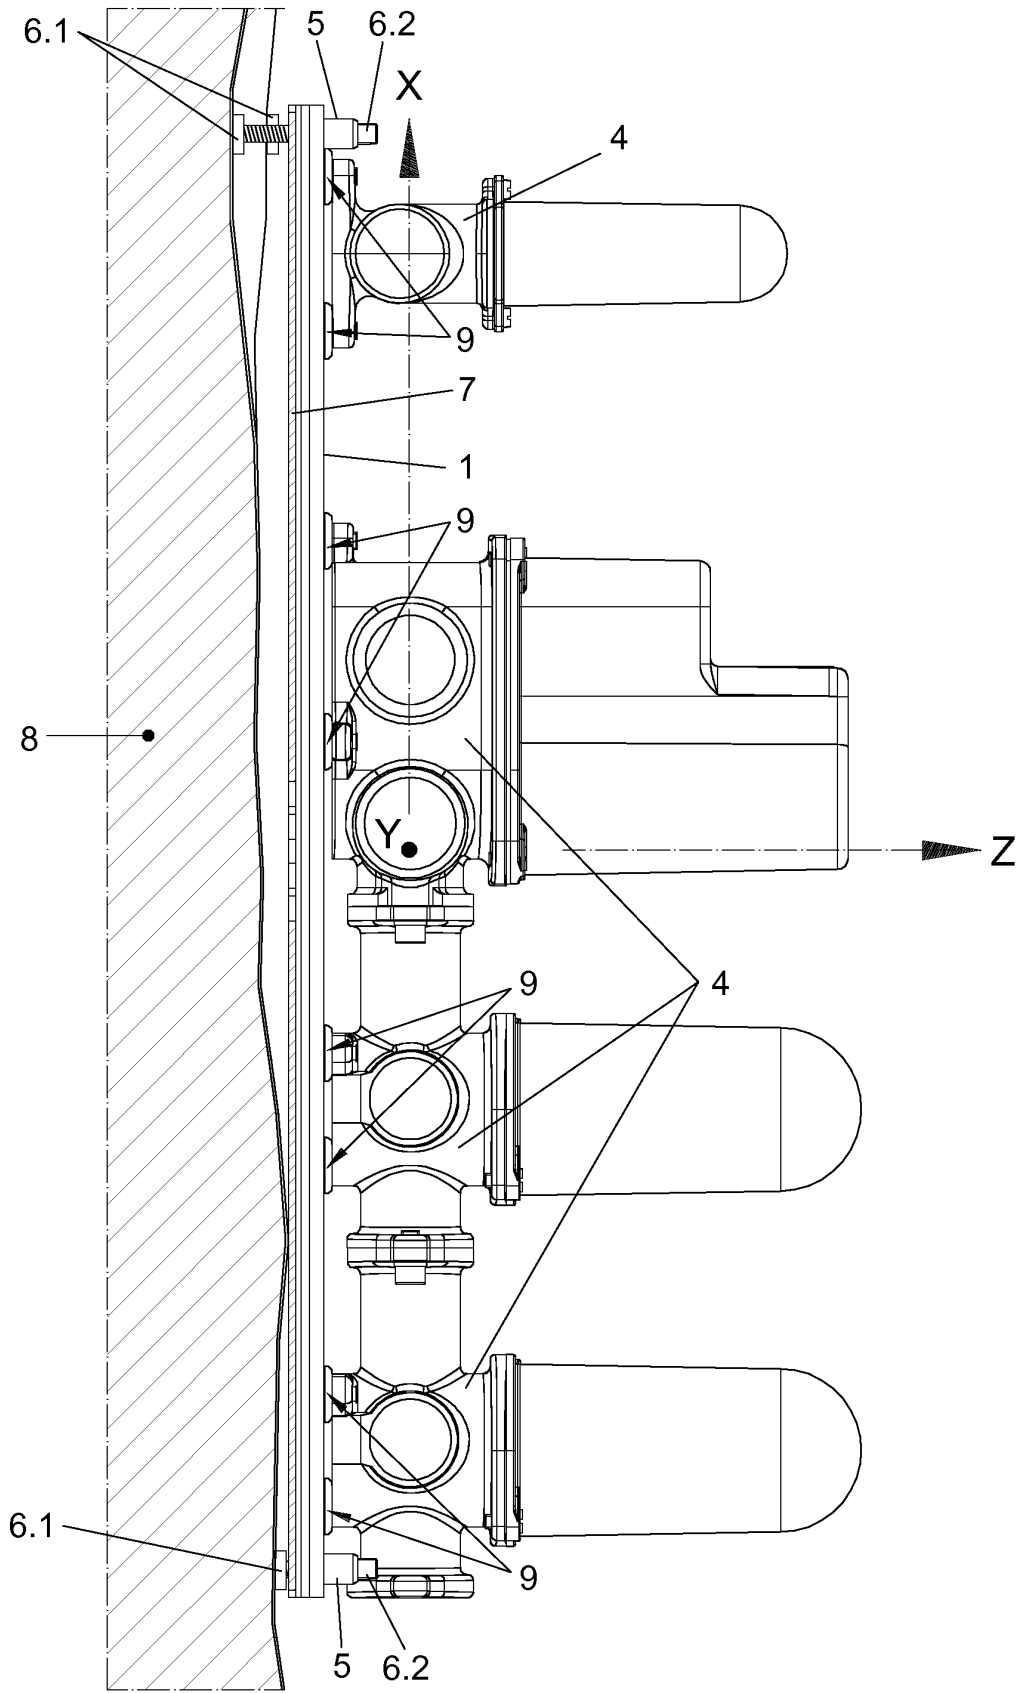


FIG. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0609973 A1 [0006]
- DE 102007055565 B3 [0007]
- DE 102011082120 A1 [0008]