

⑩



Europäisches Patentamt
European Patent Office
Office européen des brevets

⑪ Publication number:

0 253 387
B1

⑫

EUROPEAN PATENT SPECIFICATION

⑬ Date of publication of patent specification: **30.01.91**

⑭ Int. Cl.⁵: **A 41 H 37/00**

⑮ Application number: **87110273.7**

⑯ Date of filing: **16.07.87**

⑰ **Automatic fastener assembling apparatus.**

⑱ Priority: **16.07.86 JP 109028/86**

⑲ Date of publication of application:
20.01.88 Bulletin 88/03

⑳ Publication of the grant of the patent:
30.01.91 Bulletin 91/05

㉑ Designated Contracting States:
DE FR GB IT

㉒ References cited:
DE-A-3 049 603
GB-A-1 576 476
GB-A-2 151 968
US-A-3 292 837
US-A-4 312 471

㉓ Proprietor: **YOSHIDA KOGYO K.K.**
No. 1 Kanda Izumi-cho Chiyoda-ku
Tokyo (JP)

㉔ Inventor: **Toyota, Sumio**
189-4, Ishizaka
Toyama-shi Toyama-ken (JP)

㉕ Representative: **Casalonga, Axel et al**
BUREAU D.A. CASALONGA - JOSSE
Morassstrasse 8
D-8000 München 5 (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

EP 0 253 387 B1

Description

The present invention relates to an apparatus for automatically assembling a pair of fastener elements of a garment fastener, such as a snap button, a hook-and-eye fastener or an ornament, with a garment fabric disposed between the two fastener elements. More particularly, the invention relates to such an automatic fastener assembling apparatus of the type in which a drive for lowering a punch toward a die is actuated by stepping a foot pedal.

U. S. Pat. No. 3,292,837, issued Dec. 20, 1966, discloses an automatic fastener assembling apparatus of the type mentioned above. According to this prior apparatus, an actuating means for the drive to lower the punch generally includes a channel-shaped cover pivotally mounted on a frame by a pivot, and an inverted L-shaped lever pivotally connected at its rear end to the pivot and at its front end to a garment presser. The front end of the cover is normally urged upwardly by an extension spring. A compression spring is mounted between the cover and the lever so as to normally urge the lever away from the cover. The cover is operatively connected to a foot pedal via a pull rod. As the foot pedal is stepped to pull the front end of the cover downwardly against the bias of the extension spring, the front end of the lever is lowered under the bias of the compression spring to cause the garment presser to press the garment fabric against the die. As the foot pedal is further stepped, the front end of the cover is further lowered against the bias of the extension spring and also against the bias of the compression spring. As a result, the rear end of the cover is raised to depress a plunger of a microswitch, thus energizing the drive to lower the punch. However, this prior apparatus is disadvantageous in that the actuating means requires a relatively large number of components, thus making the apparatus complex in construction and hence expensive to manufacture.

The present invention seeks to provide an automatic fastener assembling apparatus in which an actuating means is composed of a reduced number of components, thus making the apparatus simple in construction and hence inexpensive to manufacture.

According to the present invention, there is provided an apparatus for automatically assembling a pair of fastener elements of a garment fastener with a garment fabric sandwiched therebetween, comprising: a frame; a pair of vertically aligned upper and lower units supported by said frame for receiving the respective fastener elements, said lower unit including a die, said upper unit including a ram reciprocally supported by said frame and having a punch movable, in response to reciprocating movement of said ram, toward and away from said die to join the two fastener elements together; an air cylinder operatively connected with said ram for moving the latter vertically; a switch operatively connected with air cylinder for energizing the

latter to initiate the lowering of said ram; an actuating lever pivotally mounted on said frame, said actuating lever having at its front end portion a lower sloping edge and at its rear end a projection engageable with an actuator of said switch; an extension spring normally urging said front end portion of said actuating lever upwardly; a leaf spring connected at its rear end to a lower level edge of said actuating lever and at its front end a safety cover, said leaf spring defining in a free form with said sloping edge a triangular space; and a pull rod connected at its upper end to said front end portion of said actuating lever and at its lower end to a foot pedal.

Many other advantages, features and additional objects of the present invention will become manifest to those versed in the art upon making reference to the detailed description and the accompanying sheets of drawings in which a preferred structural embodiment incorporating the principle of the present invention is shown by way of illustrative example.

Figure 1 is a fragmentary front elevational view of an automatic fastener assembling apparatus embodying the present invention;

Figure 2 is a side elevational view, partially in cross section, of Figure 1, showing a safety cover in lowered position;

Figure 3 is a front elevational view of a portion of Figure 1, showing the safety cover in lowered position;

Figure 4 is a plan view of a lower unit; and

Figure 5 is a front elevational view, partially in cross section, of Figure 4.

Figures 1 through 3 show an automatic fastener assembling apparatus for joining a pair of first and second fastener elements P1, P2 together in clenched condition with a garment fabric C sandwiched therebetween. In the illustrated embodiment, the first and second fastener elements P1, P2 comprise a hook and a hasp, respectively. The hasp has at least two apertures, and the hook has at least two spikes projecting from a hook body for piercing through the garment fabric C and also for being inserted through the apertures in the hasp and clenched at the underside of the hasp.

The apparatus comprises an upper or punch unit, a lower or die unit 30, a first chute 2 for feeding successive first fastener elements P1 from a first feeder 1 toward the upper unit, and successive second chute 4 for feeding a second fastener elements P2 from a second feeder 3 toward the lower unit 30.

The apparatus also has a pusher 21 for supplying the first fastener element P1 from an outlet (lower end) of the first chute 2 to the upper unit. The pusher 21 is connected to a distal end of a piston rod 23 of an air cylinder 22 horizontally slidably supported on a frame 6. An extension spring 24 is mounted between the frame 6 and the air cylinder 22 to normally urge the latter rightwardly to such a position that a front end of the pusher 21 is normally disposed below the upper unit as the air cylinder 22 is de-energized. When

the air cylinder 22 is energized upon actuation of a microswitch 13 (described below) located at a fixed position, the piston rod 23 is shrunk to retract leftwardly from the position of Figure 1 against the bias of the spring 24 so as not to obstruct the downward movement of the upper unit.

The upper unit includes a guide 19 fixed to the frame 6, a ram 17 vertically reciprocable on the guide 19, and a punch 18 supported on a lower end of the ram 17. The ram 17 is connected at an upper end thereof to a piston rod 16 of an air cylinder 15 fixed to the frame 6. When the air cylinder 15 is energized upon actuation of the microswitch 13 (described below), the piston rod 16 is extended to lower the ram 17 and hence the punch 18.

The apparatus also has a mechanism for actuating the switch 13. The mechanism includes an actuating lever 8 pivotally mounted on the frame 6 by a pivot 7, and a pull rod 5 connected at its lower end to a foot pedal (not shown) and at its upper end to the actuating lever 8. The connection of the pull rod 5 with the actuating lever 8 is such that when the foot pedal is stepped, the actuating lever 8 is pivotally moved clockwise (Figure 1) about the pivot 7 against the bias of an extension spring 9. The spring 9 is mounted between the frame 6 and a front or right end portion of the actuating lever 8 to normally urge the front end portion of the actuator lever 8 upwardly. The upward movement of the front end portion of the actuating lever 8 is restricted by a stop 20 mounted on an upper portion of the guide 19. At its rear or left end portion, the actuating lever 8 has a substantially upwardly directed projection 14 that is engageable with an actuator or plunger of the microswitch 13 to actuate the microswitch 13 when the actuating lever 8 is pivotally moved clockwise (Figure 1) by the action of the foot pedal (not shown) and hence the pull rod 5.

The front end portion of the actuating lever 8 is taper and has at its lower side a sloping edge 12. A leaf spring 10 is fixed at its rear or left end to a lower level edge 12a of the actuating lever 8 and extends in a free form as an extension of the level edge 12a, thus defining with the sloping edge 12 a triangular space S. The leaf spring 10 has a yield strength higher than that of the extension spring 9. A safety cover 11 is mounted on a front or right end of the leaf spring 10 perpendicularly thereto.

The lower unit 30 includes a support block 31 fixed to the frame 6, a die 32 slidably supported on the support block 31, a horizontal air cylinder 33 fixed to the support block 31, a guide member 36 fixed to a piston rod 34 of the air cylinder 33 through the medium of a generally L-shaped connector 35, and a die holder 37 fixed to the guide member 36 by a pair of threaded bolts 38, 38 (Figure 4). The die 32 is pivotally connected to the die holder 37 by a pin 39. A compression spring 40 acts between the die holder 37 and the die 32 so as to normally urge the latter to an inclined position (phantom lines in Figure 5) in which its distal end is raised. When the piston rod

34 of the air cylinder 33 is extended upon energization of the air cylinder 33, the guide member 36 with the die 32 slides on the support block 31 until a fastener supporting seat 42 in the die 32 arrives at a generally C-shaped (as viewed in plan) fastener holding member 41 which is disposed at the lower end of the second chute 4 for receiving the successive second fastener elements P2 one at a time. After a second fastener element P2 is transferred from the fastener holding member 41 to the fastener supporting seat 42, the die 32 is returned to a fastener joining position where the fastener supporting seat 42 with the second fastener element P2 is vertically aligned with the punch 18. Thus the successive second fastener elements P2 are automatically supplied to the die 32.

The operation of the apparatus will now be described with reference to Figures 1 through 3.

In Figure 1, as the non-illustrated foot pedal is stepped, the pull rod 5 is pulled downwardly to cause the actuating lever 8 to pivot clockwise about the pivot 7 against the spring 9 so that the inclined die 32 is depressed by the lower end of the safety cover 11 as shown in Figures 2 and 3, at which time the actuating lever 8 assumes a substantially horizontal posture with the projection 14 spaced from the plunger of the microswitch 13 and also with the triangular space S between the sloping edge 12 and the leaf spring 10. Then a garment fabric C is registered with a register mark M attached to the safety cover 11.

With the garment fabric C thus placed in correct position, as the foot pedal is further stepped to pull the pull rod 5 downwardly from the position of Figures 2 and 3, the actuating lever 8 is pivotally moved clockwise from the horizontal position against both the bias of the extension spring 9 and the bias of the leaf spring 10 to reduce the width of the space S as the leaf spring 10 yields upwardly. As a result, the projection 14 at the left end of the actuating lever 8 is raised to depress the plunger of the microswitch 13 to actuate the microswitch 13, energizing the air cylinder 15.

As the ram 17 is lowered upon energization of the air cylinder 15, the punch 18 is moved toward the die 32 to join the first and second fastener members P1, P2 together in clenched condition with the garment fabric C sandwiched between the two fastener elements. Thus safety during the assembling of the fastener members is guaranteed by two-stage stepping of the foot pedal.

According to the apparatus thus constructed, since two-step pivotal movement of the actuating lever 8 as pulled downwardly by the double-stage stepping of the foot pedal is accomplished simply by providing the sloping edge 12 at the underside of the front end of the actuating lever 8 and by using the extension spring 9 and the leaf spring 10, it is possible to minimize the number of parts of the actuating means without any risk of impairing safety so that the apparatus can be manufactured easily and inexpensively.

Claims

1. An apparatus for automatically assembling a pair of fastener elements (P1), (P2) of a garment fastener with a garment fabric (C) sandwiched therebetween, comprising: a frame (6); a pair of vertically aligned upper and lower units supported by said frame (6) for receiving the respective fastener elements (P1), (P2), said lower unit (30) including a die (32), said upper unit including a ram (17) reciprocally supported by said frame (6) and having a punch (18) movable, in response to reciprocating movement of said ram (17), toward and away from said die (32) to join the two fastener elements (P1), (P2) together; an air cylinder (15) operatively connected with said ram for moving the latter vertically; a switch (13) operatively connected with air cylinder (15) for energizing the latter to initiate the lowering of said ram (17); an actuating lever (8) pivotally mounted on said frame (6), said actuating lever (8) having at its front end portion a lower sloping edge (12) and at its rear end a projection (14) engageable with an actuator of said switch (13); an extension spring (9) normally urging said front end portion of said actuating lever (8) upwardly; a leaf spring (10) connected at its rear end to a lower level edge (12a) of said actuating lever (8) and at its front end a safety cover (11), said leaf spring (10) defining in a free form with said sloping edge (12) a triangular space (S); and a pull rod (5) connected at its upper end to said front end portion of said actuating lever (8) and at its lower end to a foot pedal.

2. An apparatus according to claim 1, wherein said leaf spring (10) has a yield strength higher than the yield strength of said extension spring (9).

Patentansprüche

1. Vorrichtung zum automatischen Zusammenfügen von zwei Verschlusselementen (P1, P2) eines Kleiderverschlusses mit einem dazwischen angeordneten Kleiderstoff (C), umfassend: einen Rahmen (6); zwei vertikal fluchtend angeordnete obere und untere Einheiten, die zur Aufnahme der betreffenden Verschlusselemente (P1, P2) durch den Rahmen (6) abgestützt sind, wobei die untere Einheit (30) ein Gesenk (32) und die obere Einheit einen Stößel (17) enthält, der durch den Rahmen (6) hin- und herbeweglich abgestützt ist und einen Stempel (18) aufweist, der infolge der hin- und hergehenden Bewegung des Stößels (17) zu dem Gesenk (32) hin und von diesem weg bewegbar ist, um die beiden Verschlusselemente (P1, P2) zu vereinigen; einen Pneumatikzylinder (15), der mit dem Stempel gekuppelt ist, um diesen vertikal zu bewegen; einen Schalter (13), der mit dem Pneumatikzylinder (15) gekuppelt ist, um diesen zur Einleitung der Abwärtsbewegung des Stößels (17) in Betrieb zu setzen; einen Betätigungshebel (8), der auf dem Rahmen (6) schwenkbar gelagert ist, wobei der Betätigungshebel (8) an seinem vorderen Endbereich eine geneigte Unterkante (12) und an seinem hinteren Ende einen Vor-

sprung (14) aufweist, der mit einem Betätiger des Schalters (13) in Eingriff bringbar ist; eine Zugfeder (9), die den vorderen Endbereich des Betätigungshebels (8) normalerweise nach oben belastet; eine Blattfeder (10), deren hinteres Ende mit einer Unterkante (12a) des Betätigungshebels (8) verbunden ist und deren vorderes Ende mit einer Sicherheitsabdeckung (11) verbunden ist, wobei die Blattfeder (10) im entlasteten Zustand mit der geneigten Kante (12) einen dreieckigen Zwischenraum (S) begrenzt; und eine Zugstange (5), deren oberes Ende mit dem vorderen Endbereich des Betätigungshebels (8) verbunden ist und deren unteres Ende mit dem Fußpedal verbunden ist.

2. Vorrichtung nach Anspruch 1, wobei die Blattfeder (10) eine größere Federkonstante hat als die Zugfeder (9).

Revendications

1. Appareil pour assembler automatiquement une paire d'éléments de fermeture (P1), (P2) d'un dispositif de fermeture de vêtement, le tissu (C) du vêtement étant pris en sandwich entre ces éléments de fermeture, comprenant: un bâti (6), une paire de blocs supérieur et inférieur alignés verticalement et supportés par ledit bâti (6) pour recevoir les éléments de fermeture respectifs (P1), (P2), ledit bloc inférieur (30) comprenant une matrice (32), ledit bloc supérieur comprenant un plongeur (17) supporté en vue d'un mouvement de va-et-vient par ledit bâti (6) et comportant un poinçon (18) pouvant, en réponse à un mouvement de va-et-vient du plongeur (17), se rapprocher et s'éloigner de la matrice (32) pour assembler les deux éléments de fermeture (P1), (P2); un vérin pneumatique (15) relié fonctionnellement audit plongeur pour déplacer ce dernier verticalement; un interrupteur (13) relié fonctionnellement au vérin pneumatique (15) pour mettre en fonction ce dernier de manière à déclencher l'abaissement du plongeur (17); un levier d'actionnement (8) monté de façon pivotement sur le bâti (6), ledit levier d'actionnement (8) comportant à sa partie terminale avant un bord inférieur incliné (12) et à son extrémité arrière une saillie (14) pouvant venir en contact avec un élément d'actionnement de l'interrupteur (13); un ressort (9) travaillant en extension et sollicitant normalement la partie terminale avant du levier d'actionnement (8) vers le haut; un ressort plat (10) relié à son extrémité arrière au bord inférieur (12a) du levier d'actionnement (8) et, à son extrémité avant, un couvercle de sécurité (11), ledit ressort plat définissant, à l'état non bandé, avec ledit bord plat (10) définissant, dans son état non contraint, avec le bord incliné (12) un espace triangulaire (S); et une tige de traction (5), reliée, à son extrémité supérieure, à ladite partie terminale avant du levier d'actionnement (8) et, à son extrémité inférieure, à une pédale.

2. Appareil selon la revendication 1, dans lequel le ressort plat (10) a une raideur supérieure à la raideur du ressort (9) travaillant à l'extension.

FIG. 1

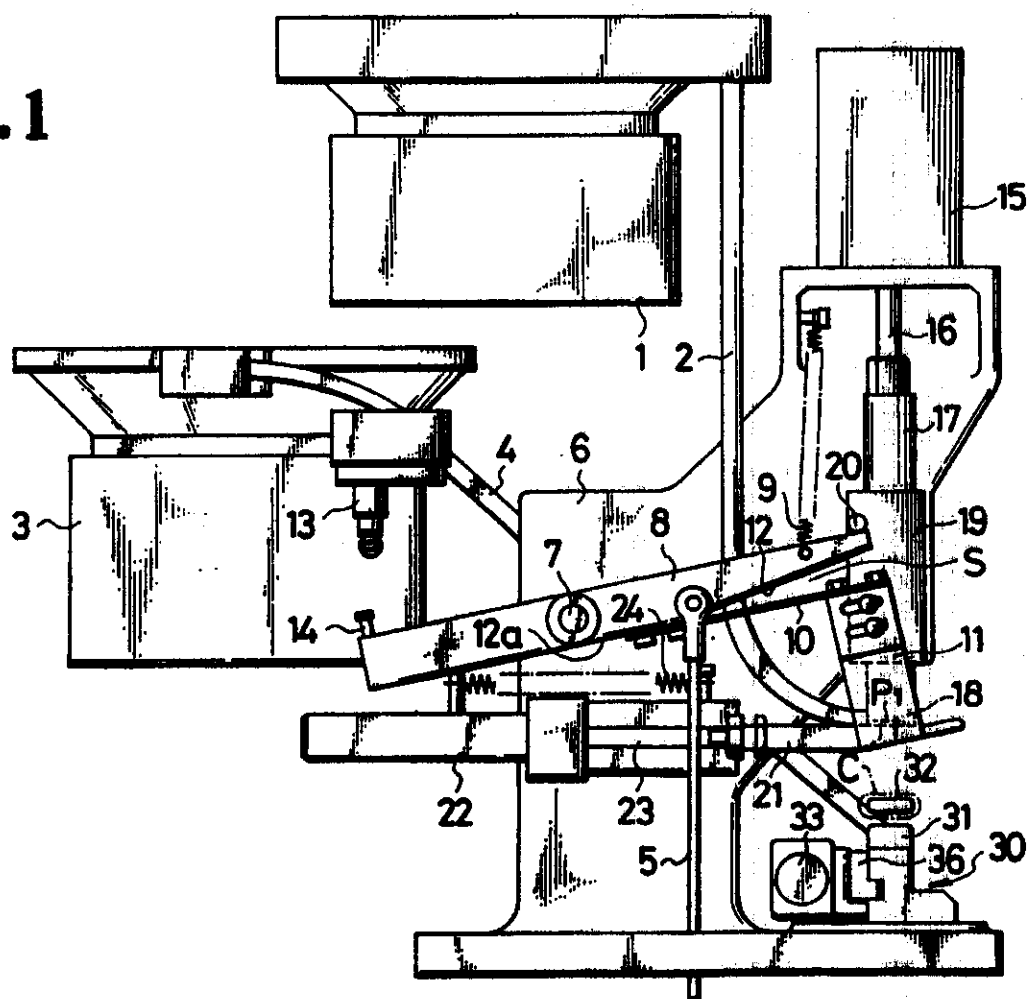


FIG. 2

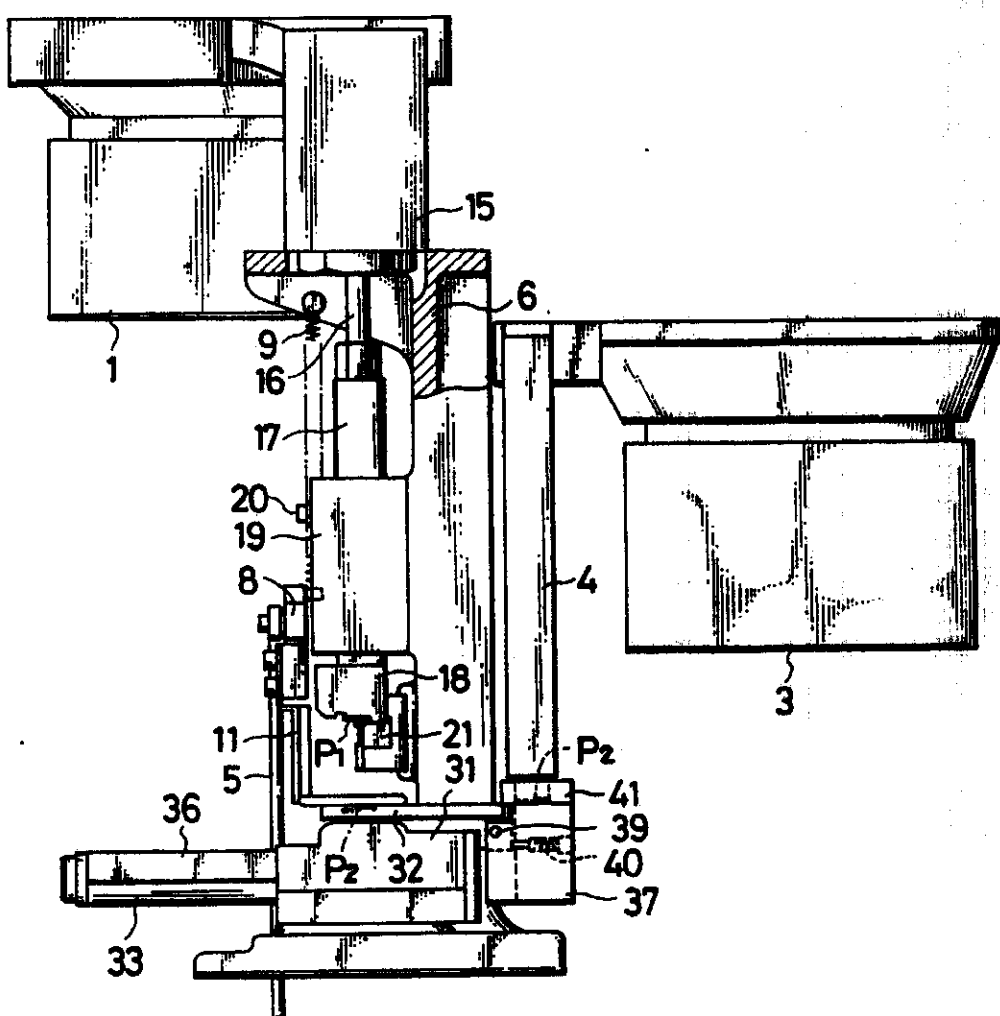


FIG. 4


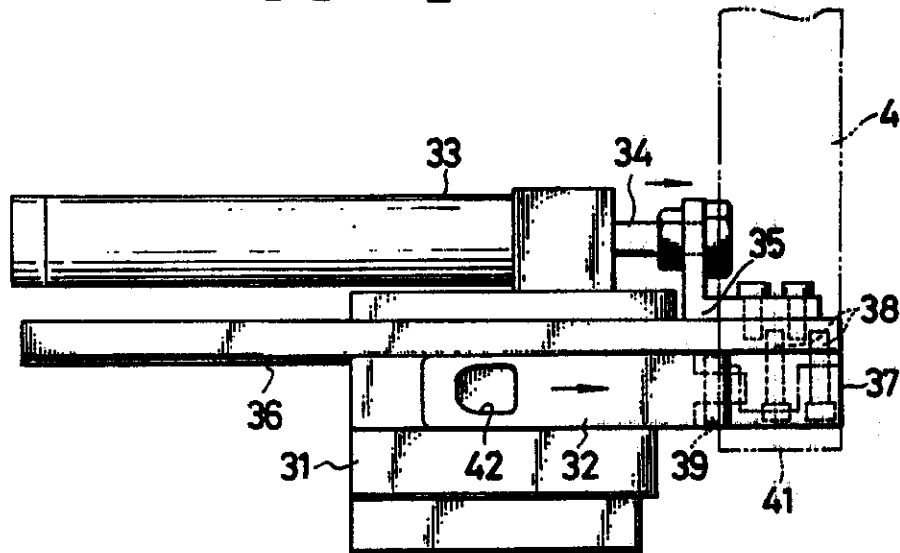


FIG. 5

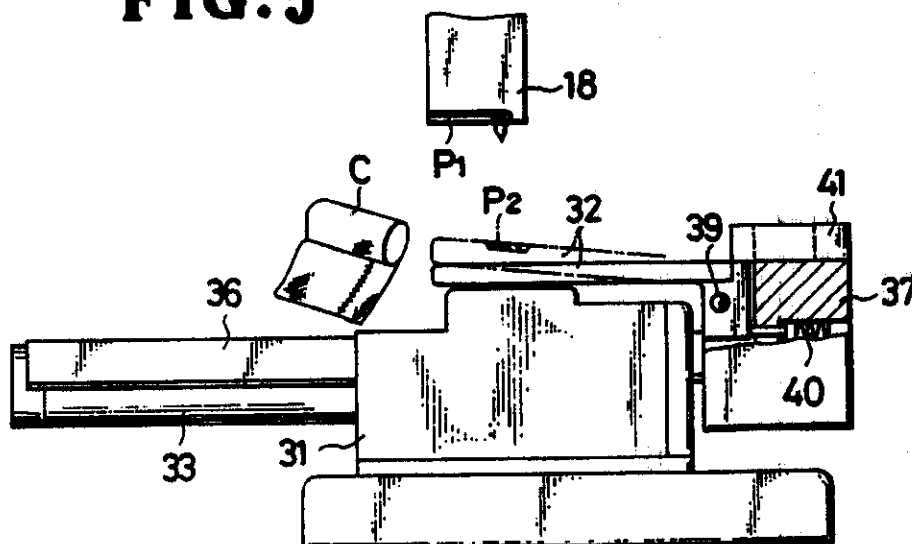

REGISTER ENTRY FOR EP0253387

European Application No EP87110273.7 filing date 16.07.1987

Priority claimed:

16.07.1986 in Japan - doc: 351090288

Designated States DE FR GB IT

Title AUTOMATIC FASTENER ASSEMBLING APPARATUS

Applicant/Proprietor

YOSHIDA KOGYO K.K., No. 1 Kanda Izumi-cho Chiyoda-ku, Tokyo, Japan
[ADP No. 50269133001]

Inventor

SUMIO TOYOTA, 189-4, Ishizaka, Toyama-shi Toyama-ken, Japan
[ADP No. 55397871001]

Classified to

B4C U1S

A41H

Address for Service

MARKS & CLERK, 57-60 Lincoln's Inn Fields, LONDON, WC2A 3LS, United
Kingdom [ADP No. 00000018001]

EPO Representative

AXEL CASALONGA, BUREAU D.A. CASALONGA - JOSSE Morassistrasse 8, D-8000
Munich 5, Federal Republic of Germany [ADP No. 50254002001]

Publication No EP0253387 dated 20.01.1988

Publication in English

Examination requested 16.07.1987

Patent Granted with effect from 30.01.1991 (Section 25(1)) with title
AUTOMATIC FASTENER ASSEMBLING APPARATUS.

22.11.1988 EPO: Search report published on
Entry Type 25.11 Staff ID. Auth ID. EPT

11.12.1989 Notification from EPO of change of EPO Representative details from
AXEL CASALONGA, BUREAU D.A. CASALONGA - JOSSE Morassistrasse 8,
D-8000 Munich 5, Federal Republic of Germany [ADP No. 50254002001]
to
AXEL CASALONGA, BUREAU D.A. CASALONGA - JOSSE Morassistrasse 8,
D-8000 München 5, Federal Republic of Germany [ADP No. 50687813001]
Entry Type 25.14 Staff ID. RD06 Auth ID. EPT

27.07.1990 MARKS & CLERK, 57-60 Lincoln's Inn Fields, LONDON, WC2A 3LS, United
Kingdom [ADP No. 00000018001]
registered as address for service
Entry Type 8.11 Staff ID. SLP1 Auth ID. AA

31.01.1991 EPO: Search report published on - entered in error by the EPO.
Should read EPO: Search report published on 23.11.1988.
Entry Type 10.1 Staff ID. TH1 Auth ID. EPT

REGISTER ENTRY FOR EP0253387 (Cont.)

TIMED: 25/02/93 08:45:47

PAGE: 2

**** END OF REGISTER ENTRY ****

OA80-01
EP

OPTICS - PATENTS

25/02/93 08:47:04
PAGE: 1

RENEWAL DETAILS

PUBLICATION NUMBER

EP0253387

PROPRIETOR(S)

YOSHIDA KOGYO K.K., No. 1 Kanda Izumi-cho Chiyoda-ku, Tokyo, Japan

DATE FILED

16.07.1987

DATE GRANTED

30.01.1991

DATE NEXT RENEWAL DUE

16.07.1993

DATE NOT IN FORCE

DATE OF LAST RENEWAL

06.07.1992

YEAR OF LAST RENEWAL

06

STATUS

PATENT IN FORCE