




(86) Date de dépôt PCT/PCT Filing Date: 1995/05/26
(87) Date publication PCT/PCT Publication Date: 1995/12/07
(45) Date de délivrance/Issue Date: 2004/09/07
(85) Entrée phase nationale/National Entry: 1996/11/01
(86) N° demande PCT/PCT Application No.: US 1995/006836
(87) N° publication PCT/PCT Publication No.: 1995/032656
(30) Priorité/Priority: 1994/05/31 (08/250,537) US

(51) Cl.Int.⁶/Int.Cl.⁶ B65D 77/24, A47J 36/28, B65D 81/32, F24J 1/00, F25D 5/00
(72) Inventeurs/Inventors:
SCUDDER, JAMES A., US;
BERNTSEN, JAMES L., US
(73) Propriétaire/Owner:
INSTA-HEAT, INC., US
(74) Agent: SMART & BIGGAR

(54) Titre : CONTENANT AVEC MODULE INCORPORE DESTINE AU CHAUFFAGE OU AU REFROIDISSEMENT DU
CONTENU

(54) Title: CONTAINER WITH INTEGRAL MODULE FOR HEATING OR COOLING THE CONTENTS

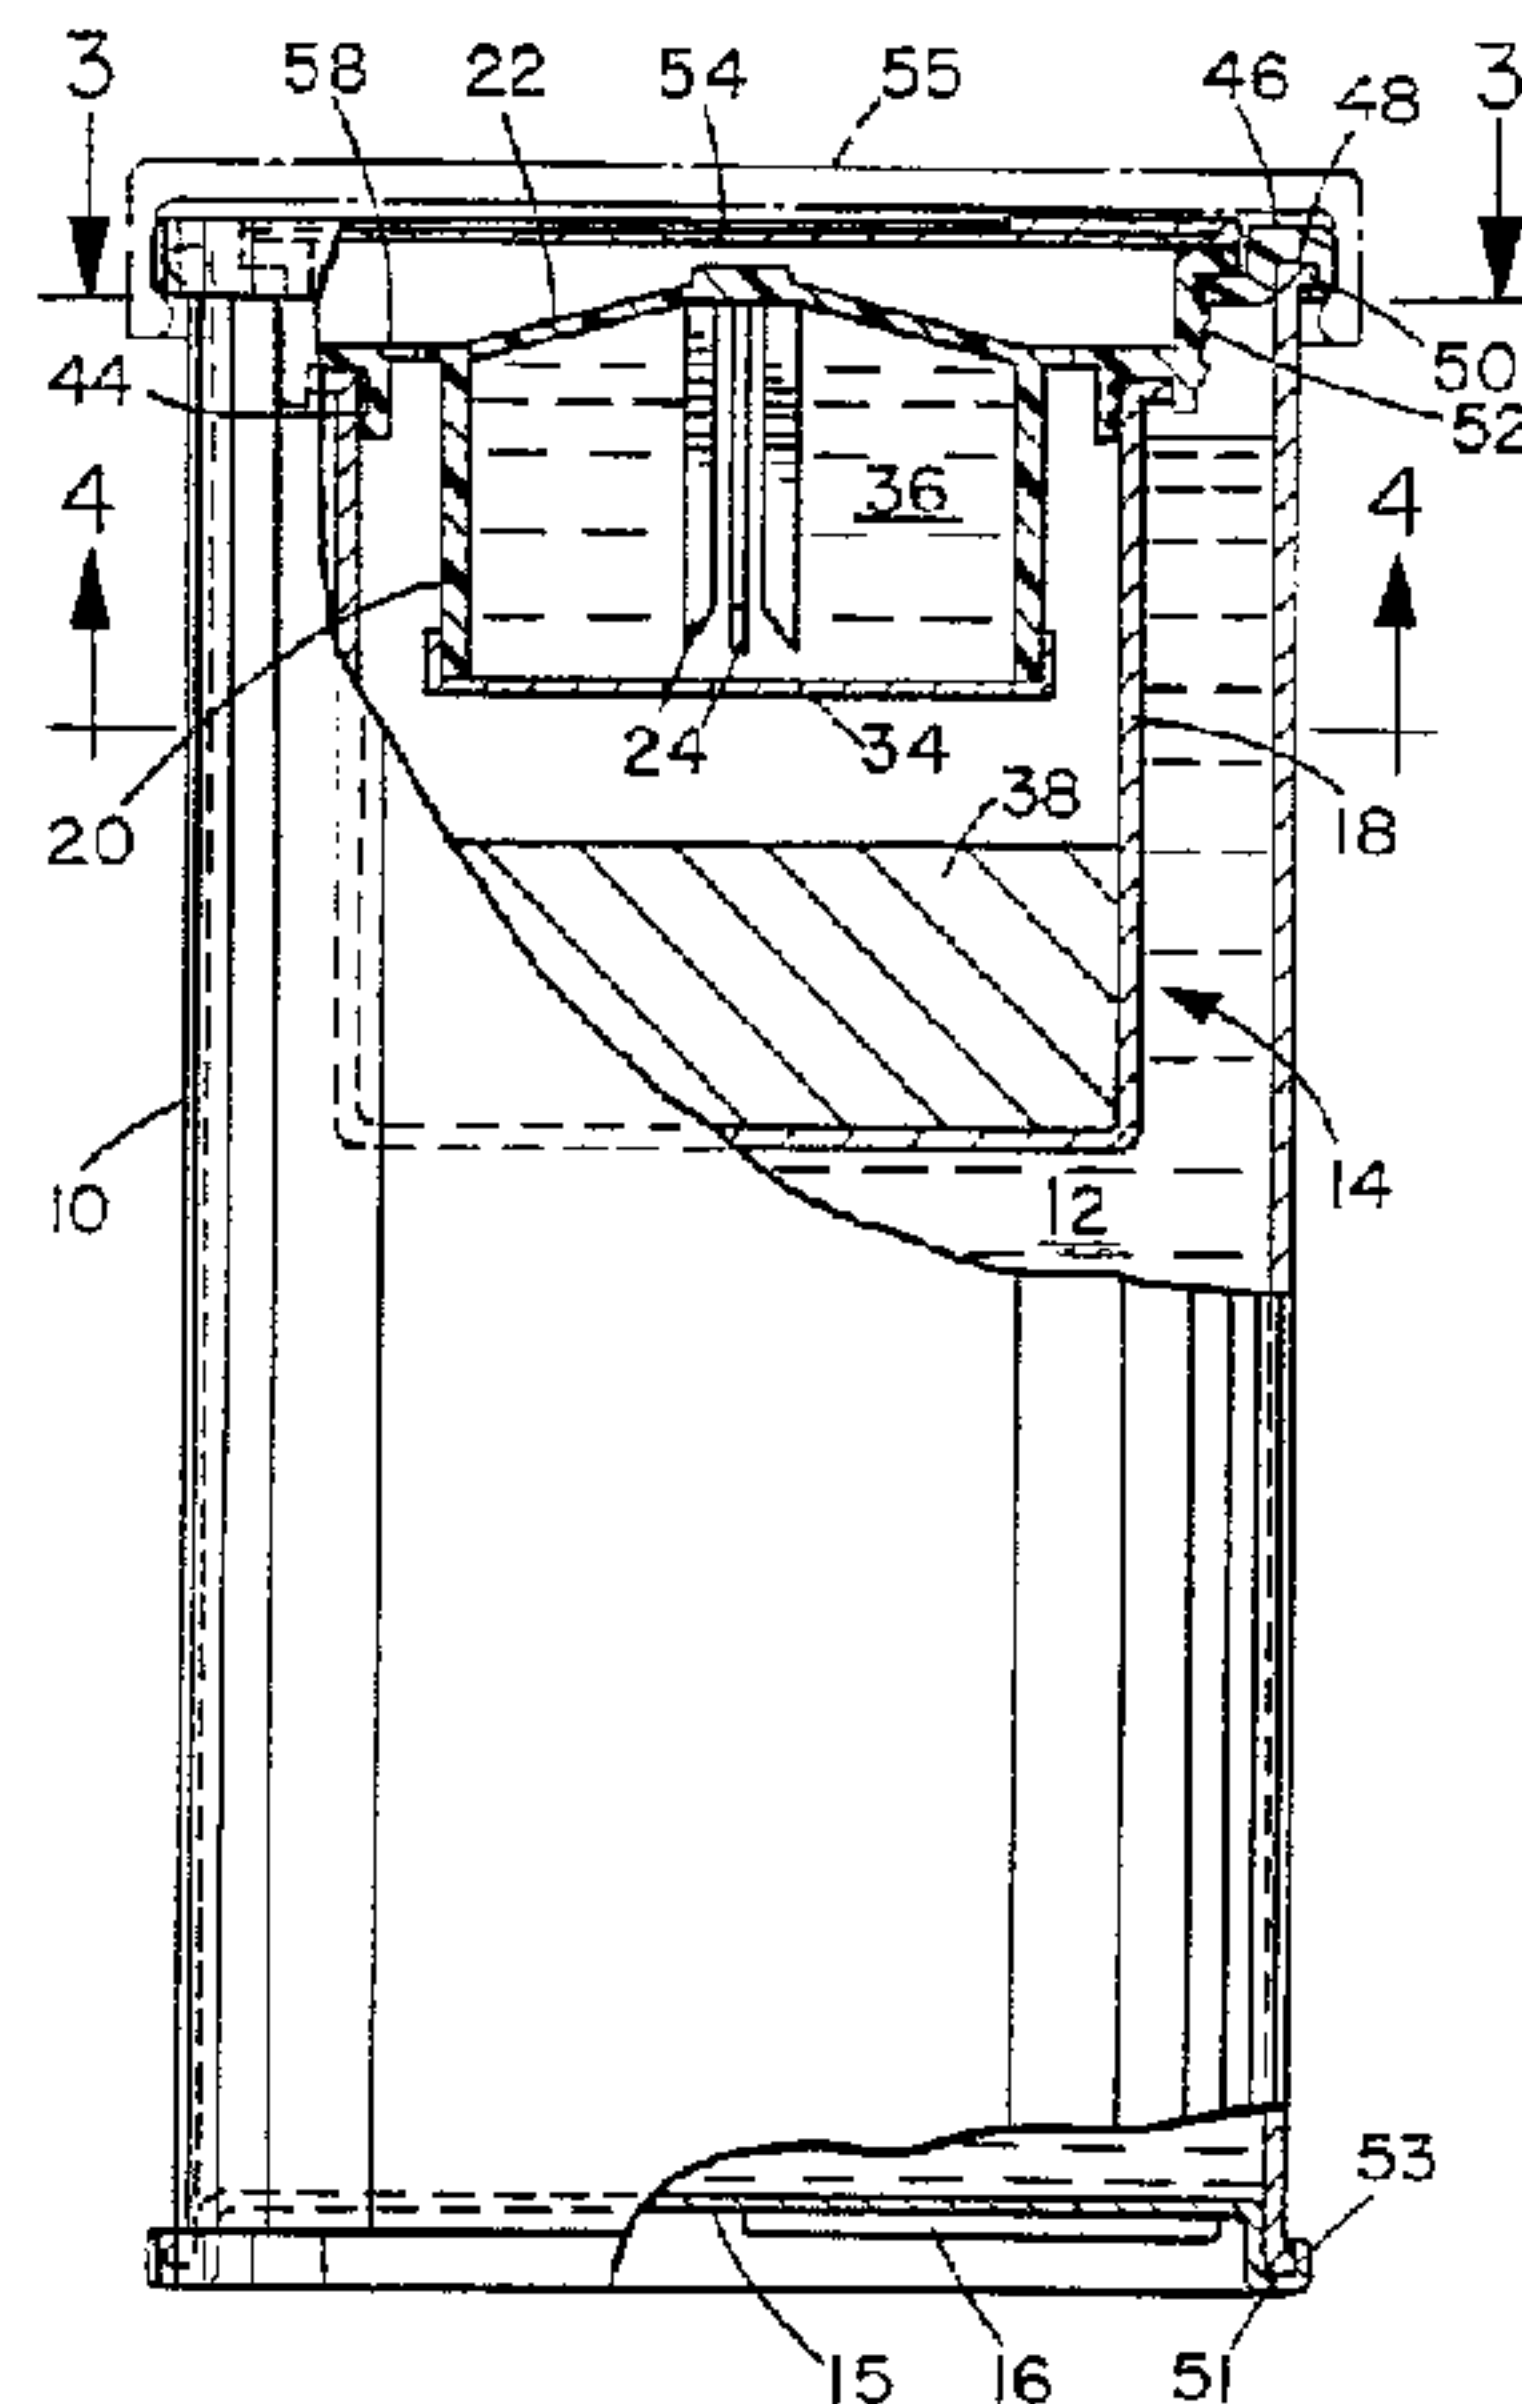

(57) **Abrégé/Abstract:**

An outer container for holding a material, such as a food, beverage or medicine with a sealed thermic module inside the container. The thermic module contains chemical reactants that mix upon actuation of the container by a user. Mixing of the reactants produces an exothermic or endothermic chemical reaction, depending upon the reactants selected. The contents of the outer container (10) surround a portion of the outside surface of the thermic module (14), thereby facilitating conducting of heat. The thermic module (14) has a hollow module body (18) that is closed at one end and a module cap (20) that seals the other end of the module body. The module body (18) contains the solid reactant, and the module cap (20) contains the liquid reactant. The module cap has a tubular section with a flexible member (22) closing one end and a breakable barrier (34) closing the other end. With the exception of the barrier, the cap is of unitary construction. The cap (20) has one or more integrally formed prongs (24) extending from the inner surface of the disc (22) toward the barrier (34). The prongs (24) move in an axial direction toward the barrier (34) and may also spread apart radially when the outer surface of the flexible member (22) or an actuator connected to it is depressed by the user's finger. The dual motion of the prongs (24) in both axial and radial directions promotes complete puncturing of the barrier (34) and thus fast mixing of the reactants.





INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶:

A47J 36/28

A1

(11) International Publication Number:

WO 95/32656

(43) International Publication Date:

7 December 1995 (07.12.95)

(21) International Application Number: PCT/US95/06836

(22) International Filing Date: 26 May 1995 (26.05.95)

(30) Priority Data:

08/250,537

31 May 1994 (31.05.94)

US

(71) Applicant: INSTA-HEAT, INC. [US/US]; 11944 Thomas Hayes Lane, San Diego, CA 92126 (US).

(72) Inventors: SCUDDER, James, A.; 11944 Thomas Hayes Lane, San Diego, CA 92126 (US). BERNTSEN, James, L.; 18369 Chablis Road, Ramona, CA 92065 (US).

(74) Agents: MAXWELL, Lawrence, D. et al.; Brown, Martin, Haller & McClain, 1660 Union Street, San Diego, CA 92101-2926 (US).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published

With international search report.


Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

2189460

(54) Title: CONTAINER WITH INTEGRAL MODULE FOR HEATING OR COOLING THE CONTENTS

(57) Abstract

An outer container for holding a material, such as a food, beverage or medicine with a sealed thermic module inside the container. The thermic module contains chemical reactants that mix upon actuation of the container by a user. Mixing of the reactants produces an exothermic or endothermic chemical reaction, depending upon the reactants selected. The contents of the outer container (10) surround a portion of the outside surface of the thermic module (14), thereby facilitating conducting of heat. The thermic module (14) has a hollow module body (18) that is closed at one end and a module cap (20) that seals the other end of the module body. The module body (18) contains the solid reactant, and the module cap (20) contains the liquid reactant. The module cap has a tubular section with a flexible member (22) closing one end and a breakable barrier (34) closing the other end. With the exception of the barrier, the cap is of unitary construction. The cap (20) has one or more integrally formed prongs (24) extending from the inner surface of the disc (22) toward the barrier (34). The prongs (24) move in an axial direction toward the barrier (34) and may also spread apart radially when the outer surface of the flexible member (22) or an actuator connected to it is depressed by the user's finger. The dual motion of the prongs (24) in both axial and radial directions promotes complete puncturing of the barrier (34) and thus fast mixing of the reactants.

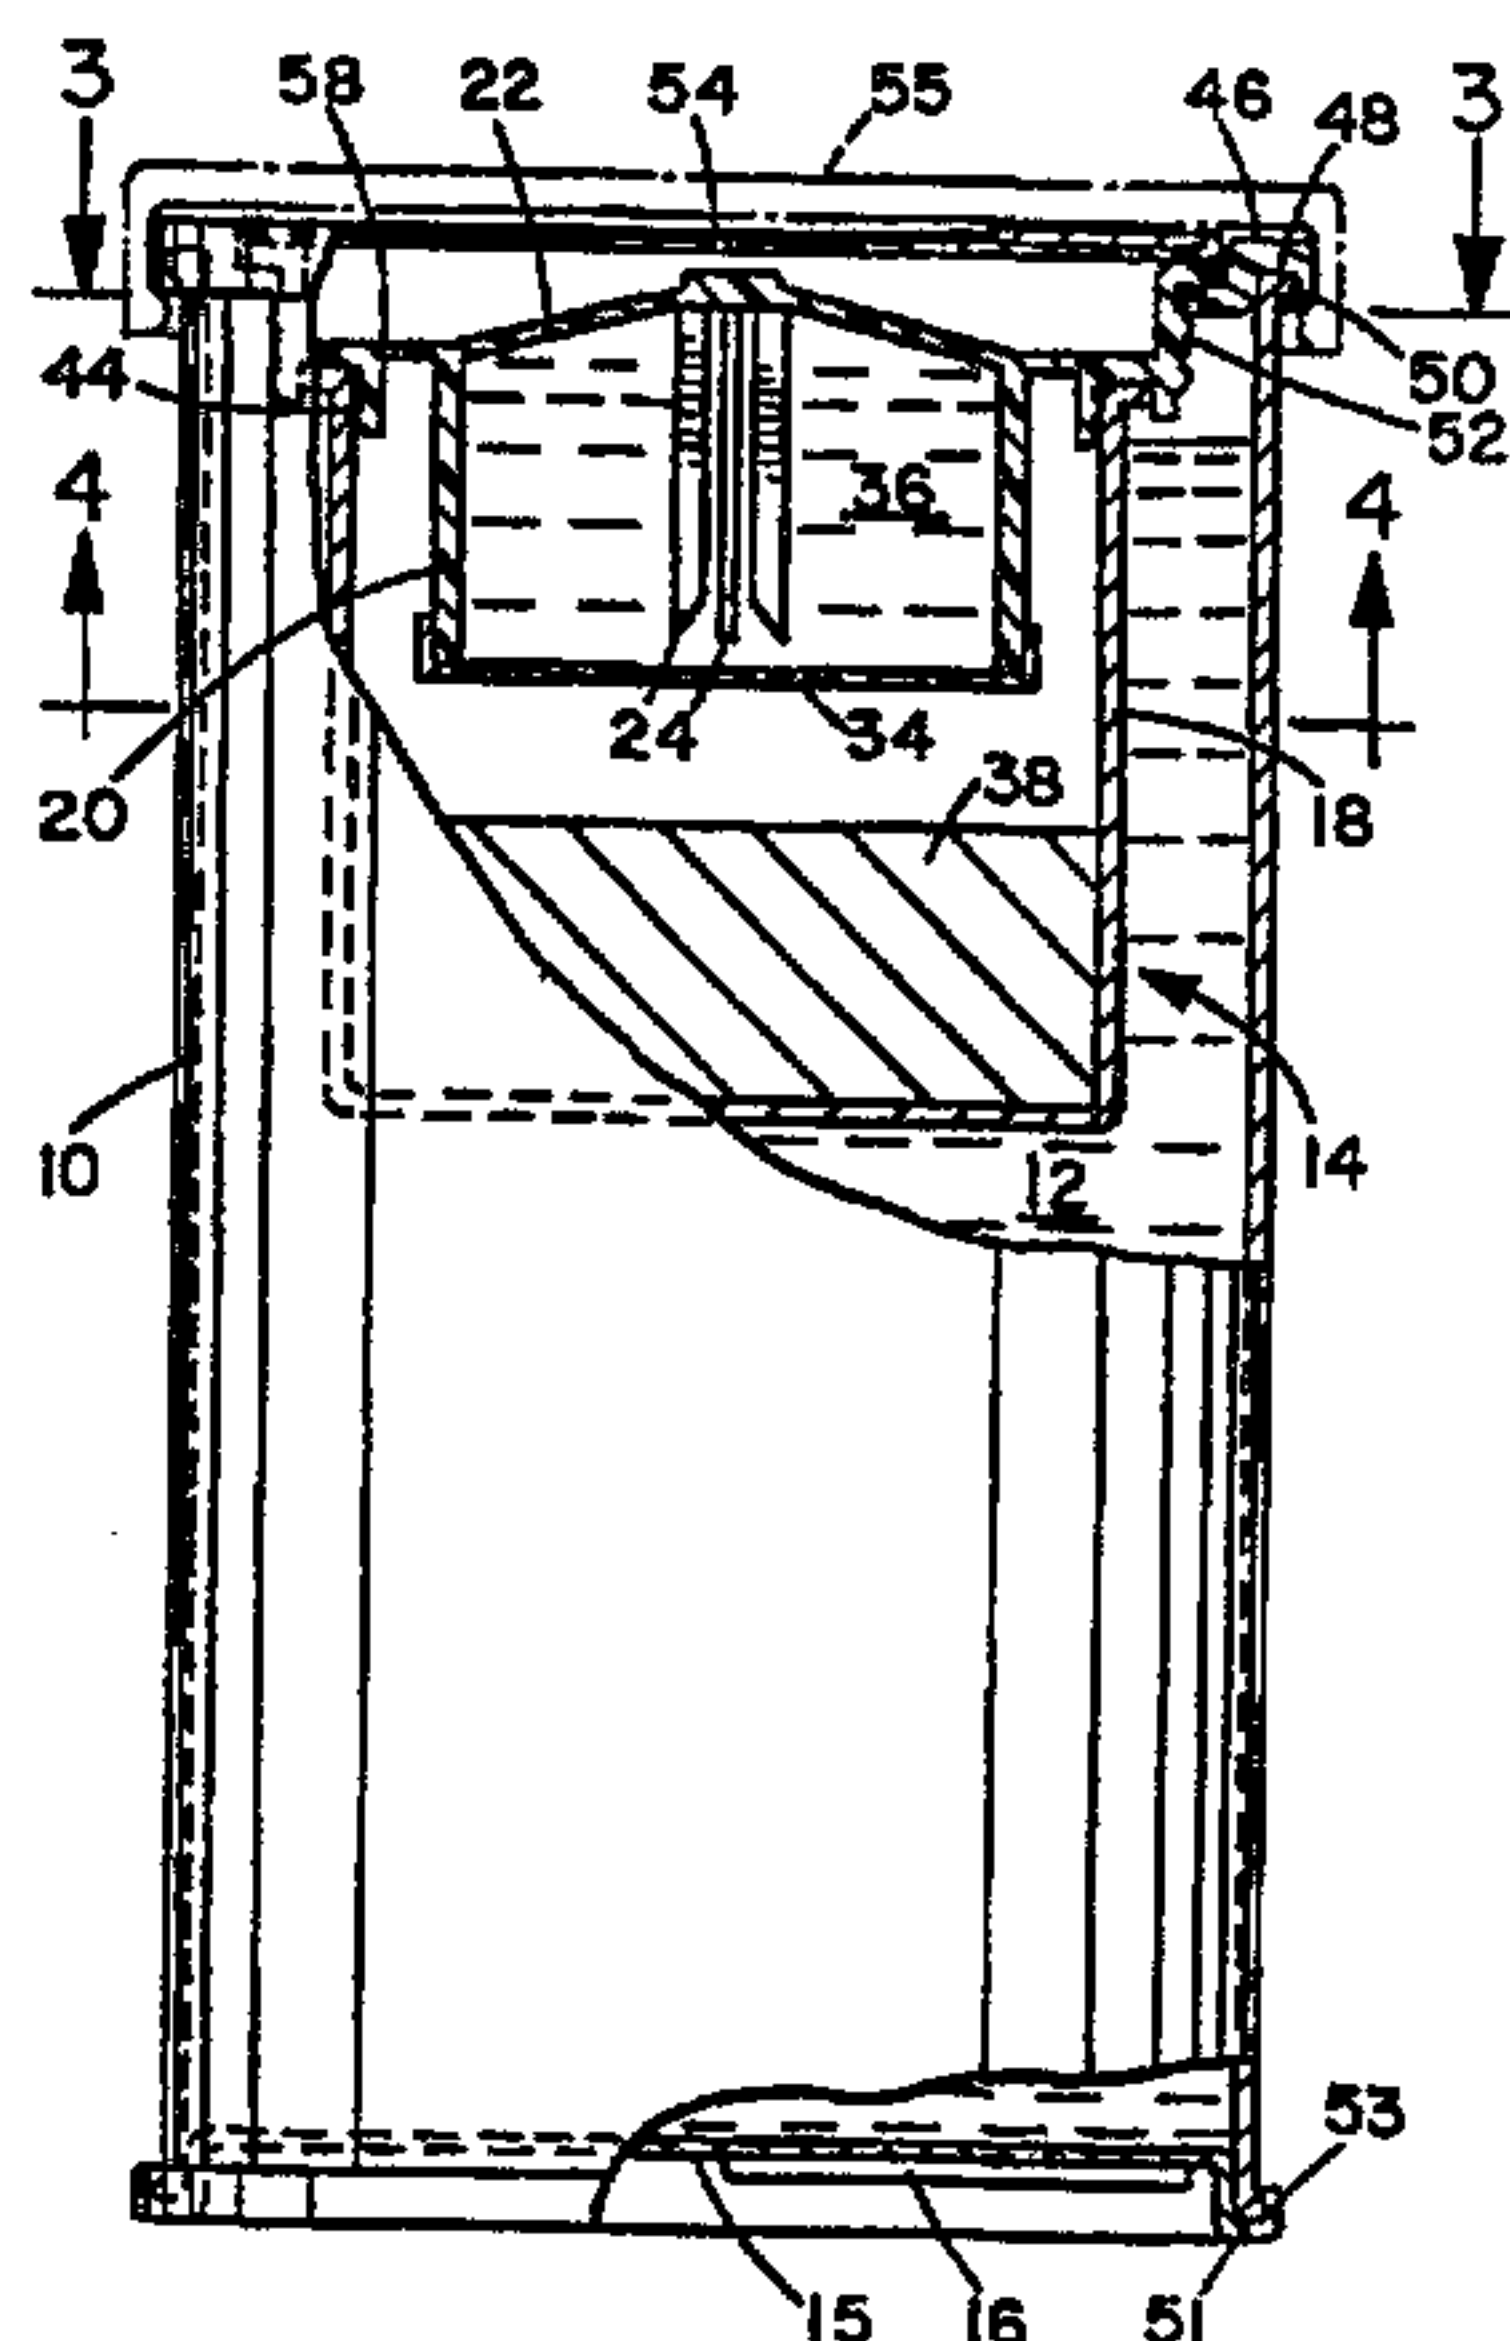

2189460

-1-

CONTAINER WITH INTEGRAL MODULE FOR HEATING OR COOLING THE CONTENTS

BACKGROUND OF THE INVENTION

5

The present invention relates generally to containers for heating or cooling materials such as food, beverages, medicines, and the like and, more specifically, to a container that includes an internal module that adds heat to or removes heat from the materials in the surrounding container.

10

Containers may have integral modules for warming materials in the container, such as Japanese sake, coffee, or soup. Examples of such self-heating containers are disclosed in U.S. Patent No. 4,640,264, issued to Yamaguchi et al., and U.S. Patent No. 4,784,113, issued to Nagai et al. Such containers typically include an outer can, in which the food or beverage is sealed, and a sealed module or inner can that contains two chemical reactants. The reactants are stable when separated from one another but, when mixed, produce an exothermic reaction. It is known that combinations of other reactants will produce endothermic reactions to cool the container contents. (Both types of reactions involve a change in enthalpy.)

15

20

The inner can is typically disposed adjacent one end of the outer can. The inner can has two chambers, each of which contains one of the chemical reactants, separated by a breakable barrier such as metal foil or a thin plastic film. Typically, one of the reactants is in solution and the other is in a solid powdered or granular form. A rod extends into the outer can at the end adjacent the inner can. One end of the rod is adjacent to the barrier, and the other end terminates in a button outside the outer can. To initiate the reaction that warms or cools the contents of the outer can, the can is disposed with that end upright. Depressing the button forces the rod downward, breaking the barrier and allowing the liquid reactant to drop into the solid reactant. The end of the rod may have a flared head to facilitate complete puncturing of the barrier. The heat produced by the resulting exothermic reaction or used by the resulting endothermic reaction is transferred between the inner can and the contents of the outer can by conduction. Exothermic reactions also typically generate a gas, which is allowed to escape through vents in the end of the container. When the

25

30

35

66128-375

2

reaction has stopped, the container is inverted. The second end of the outer can has a seal, such as pull-tab, that may be opened and through which the user may consume the heated contents.

5 Self-heating and self-cooling containers known in the art are uneconomical to manufacture because the mechanism for puncturing the foil barrier commonly has multiple components. The inner can contains the solid reactant and has a short, tubular cap sealing one end. The
10 cap contains the liquid reactant. One end of the cap is sealed with the foil barrier, and the rod extends through an opening in the other end of the cap. Depressing the button forces the rod to slide in the opening until it punctures the foil barrier. Practitioners in the art have found that
15 forcing a rod through the foil opens a large passage through which the liquid reactant can flow, thereby minimizing the time required for the liquid to drain from the cap into the remainder of the inner can. However, fabricating and assembling the multiple components increases the cost of the
20 container. Furthermore, liquid can leak between the rod and the opening in the cap through which the rod moves. Practitioners in the art have therefore disposed a ring of wax around the rod where it exits the inner can to improve sealing. The step of adding the wax, however, increases the
25 manufacturing complexity and, ultimately, cost of the container. Self-heating and self-cooling containers known in the art may also leak the powdery material that is the product of the completed reaction through the vents when the container is inverted. It would be desirable to provide an
30 inner can or module that has both a minimal number of separate parts and maximal resistance to leakage. It would also be desirable to provide such a container with improved

66128-375

3

sealing between the inner can or module and the outer can. These problems and deficiencies are clearly felt in the art and are solved by the present invention in the manner described below.

5

SUMMARY OF THE INVENTION

In one aspect, the present invention provides a container for selectably changing the temperature of a stored material, comprising: a tubular container body for holding said stored material, said container body having
10 first and second ends; a thermic module inside said container body, said thermic module comprising a tubular module body for containing a first reactant, an annular rim around said module body, and a module cap inside said module body, said module cap for containing a second reactant, said
15 module cap having an actuator end disposed in said first end of said container body for initiating mixing of said first and second reactants, said mixing of said reactants producing a reaction characterized by a change in enthalpy; said annular rim having a plurality of vents between said
20 cap and said module body for releasing pressure in said module body, and a removable closure in said second end of said container body for providing access to said stored material characterized in that said vents close when said pressure in said module body substantially equals
25 atmospheric pressure outside said container. Mixing of the reactants, which may comprise any suitable chemical compounds or mixtures, produces an exothermic or endothermic chemical reaction, depending upon the reactants selected. The contents of the outer container body surround a portion
30 of the outside surface of the thermic module, thereby facilitating conduction of heat.

3a

The invention also provides a container for selectably changing the temperature of a stored material, comprising: a tubular container body for holding said stored material, said container body having first and second ends;

5 a thermic module inside said container body, said thermic module comprising a tubular module body for containing a first reactant, an annular rim around said module body, and a module cap inside said module body, said module cap for containing a second reactant, said module cap having an

10 actuator end disposed in said first end of said container body for initiating mixing of said first and second reactants, said mixing of said reactants producing a reaction characterized by a change in enthalpy; said annular rim having a plurality of vents between said cap and said

15 module body for releasing pressure in said module body, said vents closing when said pressure in said module body substantially equals atmospheric pressure outside said container; wherein each said vent comprises at least one flexible flap having one or more portions in substantial

20 contact with at least one other of said flexible flaps when said pressure in said module body substantially equals air pressure outside said container, said flaps flexing in response to a differential between said pressure in said module body and said atmospheric pressure; and a removable

25 closure in said second end of said container body for providing access to said stored material.

In another aspect, the present invention provides a module for selectably mixing two materials, comprising: a container having an opening, said container for holding a

30 first one of said materials; a cap disposed in said opening of said container for selectably containing a second one of said materials, said cap having a hollow cap body with first and second ends and an axis, said cap having a breakable

3b

barrier attached to said second end of said cap body and a plurality of elongated members, each having a proximal end at said first end of said cap body and a distal end extending toward said second end of said cap body; said

5 distal ends of said elongated members moving in unison partially axially and partially radially between a retracted position and an extended position in response to an axial force experienced by a movable portion of said cap; and said distal ends of said elongated members extending beyond said

10 second end of said cap body in said extended position. The module body contains a first material, and the module cap contains a second material. Although these materials may comprise any compounds or mixtures known in the art, in an illustrative embodiment the first material is a solid

15 reactant, and the second material is a liquid reactant, which produce an exothermic or endothermic reaction upon mixing. The module cap has a tubular cap body with a flexible member closing one end and a breakable barrier closing the other end. The cap has one or more prongs

20 extending toward the barrier from one or more points on the inner surface of the flexible member. With the exception of the barrier, the cap is of unitary construction.

A user may depress the outer surface of the flexible member with a finger to actuate the container.

25 Prior to actuation, the flexible member is in a retracted position. In response to the force applied to the flexible member by the user, the prongs move in an axial direction, i.e., toward the barrier, and may also spread apart radially. The dual motion of the prongs in both axial and

30 radial directions promotes complete puncturing of the barrier and thus fast mixing of the first and second materials. After removing finger pressure from the flexible member, it may snap or lock into the depressed or extended

3c

position with the prongs extended or it may resiliently resume the retracted position.

The flexible member may have any suitable shape that allows multiple points on its inner surface to move in
5 an at least partially axial direction in response to a force having at least a component in that direction. For example, the inner surface of the flexible member may have a concave or dished shape (when viewed from the interior of the cap body) prior to actuation of the container and extend to a
10 convex shape upon actuation. Alternatively, it may have a generally flat shape prior to actuation of the container and extend to a convex or bulbous shape (when viewed from the

2189460

-4-

interior of the cap body) upon actuation. The shape of the inner surface of the flexible member may be described in terms of the locations of multiple points on it. In the former example, prior to actuation, different points on the inner surface of the flexible member are at different axial distances. If
5 the inner surface of such a flexible member has a shape that is symmetric about a central axis, such as a hemisphere or other symmetric dome, points at different radial distances from the axis are at different axial distances, and points at any given radial distance are at the same axial distance. In the
10 latter example, prior to actuation, all points on the inner surface of the flexible member are at the same axial distance. Still other shapes, such as an accordion-like, button-shape, may also be suitable. In response to the actuation force, the entire flexible member may flex or only portions of it may flex. The actuation force, however, may be applied to any movable or deflectable portion, flexible or non-flexible. The flexible member may be
15 made of a semi-rigid material such as plastic or an elastomeric material such as rubber.

The module body may have one or more vents disposed around the periphery of the cap that function as check valves to allow gaseous products of a reaction to escape while minimizing leakage of solids. Each
20 vent may have one or more resilient flaps. Each flap has at least one lip or edge that meets a lip of another flap or a (non-resilient) portion of the module body to form a seal. The flaps remain firmly closed prior to activating the module, thereby minimizing leakage of the solid reactant. When the module is activated, the flaps flex and open the seal in response
25 to the pressure of the gas inside the body of the module. The flaps close as the pressure decreases.

After the reaction in a self-heating or self-cooling container is started, the user may invert the container. After the reaction is completed, the user may remove a closure, such as a pull tab, to access the contents for
30 consumption. Despite the then-inverted orientation of the module, the closed vents minimize leakage of solid reaction products. (The liquid reactant does not leak because it is used up in the reaction or absorbed by the solids.)

The foregoing, together with other features and advantages of the
35 present invention, will become more apparent when referring to the following specification, claims, and accompanying drawings.

2189460

-5-

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, reference is now made to the following detailed description of the embodiments illustrated in the accompanying drawings, wherein:

- 5 Figure 1 is a side elevational view of the container, partially cut-away;
Figure 2 is a plan view of the container;
Figure 3 is a sectional view taken along line 3-3 of Fig. 1;
Figure 4 is a sectional view taken along line 4-4 of Fig. 1;
10 Figure 5 is an enlarged view similar to Fig. 1, showing actuation of the container;
Figure 6 is a partial perspective view of the container of Figs. 1-5; and
Figure 7 is an enlarged view similar to Fig. 5, showing an alternative construction of the module cap.

15

DESCRIPTION OF A PREFERRED EMBODIMENT

As illustrated in Figs. 1-4, a container comprises a cylindrical container body 10, which may contain a beverage 12, and a thermic module 14 for heating beverage 12. Thermic module 14 seals one end of container body 10, and an endcap 15 with a pull-tab closure 16 of the type commonly used to seal beverage cans seals the other end. An exterior view of the end of the container at which thermic module 14 is disposed is shown in Fig. 6. When the container is actuated, as described below, thermic module 14 generates heat, which is transferred by conduction to beverage 12. The container may then be inverted and pull-tab closure 16 opened to allow beverage 12 to be consumed.

Thermic module 14 comprises a cylindrical module body 18 and a cylindrical module cap 20. Module cap 20 is of unitary construction and is made of a semi-rigid plastic, such as high density polyethylene. Module cap 20 has an actuator disc 22 and four prongs 24. A breakable barrier 34 made of metal foil is adhesively attached to module cap 20. Barrier 34 seals water 36 inside module cap 20. Module body 18 contains a solid chemical 38 such as calcium oxide, commonly known as quicklime. An annular cap channel 40 receives the lip 42 of module body 18, thereby sealing solid chemical 38 inside. Cap channel 40 may have crushable dimples 44 that

2189460

-6-

improve sealing. Module body 18 is preferably made of a metal, such as aluminum.

As mentioned above, the container is sealed at both ends. Sealing ring 46 secures thermic module 14 in container body 10. Sealing ring 46 has a ring channel 48 that receives the hook-like lip 50 of container body 10. Sealing ring 46 is crimped over lip 50 to form a tight seal. At the opposite end of the container, endcap 15 has a similar endcap channel 51 that receives the opposite lip 53 of container body 10. Endcap 15 is crimped over the opposite lip 53 of container body 10 in a similar manner. A sealing compound (not shown) of the type commonly used in the can industry may be disposed in ring channel 48 to further improve sealing. Thermic module 14 is press-fit in the opening of sealing ring 46. The portion of thermic module 14 that contacts sealing ring 46 may have crushable dimples 52 to further improve sealing.

To actuate the container, a safety seal 54, which is adhesively attached to thermic module 14, must be removed or broken. Safety seal 54 minimizes the possibility of tampering or inadvertent actuation of the container. Although safety seal 54 may be plastic, foil, paper or other suitable films, it is preferably transparent to allow viewing of actuator disc 22. The container may also have an outer lid 55 made of plastic that snaps over the end of container body 10. Outer lid 55 not only further reduces the likelihood of inadvertent actuation, but can also be used to retain condiments such as a packet of sugar (not shown) or a promotional item such as a coupon (not shown) between it and safety seal 54. Lid 55 may be transparent.

As illustrated in Fig. 5, when an axially directed force is applied at or near the center of actuator disc 22, it flexes toward barrier 34. The distal ends of prongs 24 both move axially and spread apart radially to facilitate complete puncturing of barrier 34. Water 36 flows through the punctured barrier 34 and mixes with solid chemical 38. The resulting exothermic reaction produces heat, which is transferred to beverage 12 by conduction through module body 18, and carbon dioxide, which escapes through four vents 56 that are distributed around an annular lip 58 between module body 18 and module cap 20.

66128-375

7

As best illustrated in Figs. 3 and 4, vents 56 may comprise four flexible triangular flaps 60, which are in contact with one another when the pressures inside and outside module 14 are equal, but which spread apart to release the gas produced by the reaction. Alternatively, as illustrated in the embodiment shown in Fig. 7, a vent may be formed by a single flap 160.

In the retracted position of actuator disc 22, i.e., before the container is actuated, actuator disc 22 may appear convex or dome-shaped when viewed from the outside of the container, as shown in Figs. 1 and 6. In its extended position, i.e., after the container has been actuated, actuator disc 22 may appear concave or dished, as shown in Fig. 5. Actuator disc 22 is preferably stable in both the extended and retracted positions, and "snaps" into the extended position when the container is actuated. The snapping action provides a positive visual and tactile indication to the user that the container has been actuated. At least a portion of actuator disc 22 must flex during the transition between the retracted and extended positions. In the illustrative embodiments, four radial folds 62 facilitate this transition by reducing the amount of force required to flex actuator disc 22. However, in other embodiments, actuator disc 22 may have more, fewer, or no radial folds 62.

Prongs 24 are distributed around the center of actuator disc 22 at the same radial distance. Prongs 24 may be formed by cutting lengthwise a tubular cylinder that is integrally molded in module cap 20. The resulting prongs 24 have arcuate convex outer surfaces. Although in the illustrated embodiments, module cap 20 has prongs 24 distributed about the center of actuator disc 22, in other

66128-375

7a

embodiments module cap 20 may have only a single central prong.

Furthermore, the portions of actuator disc 22 that flex when the container is actuated may be at any radial distance from the central axis and may have any suitable shape. They may be concentrated at one or more substantially discrete radial distances or may be continuous over all radial distances. In the embodiment illustrated in Figs. 1-6, portions of actuator disc 22 that are between prongs 24 are flexible, thereby causing prongs 24 to spread apart radially when the container is actuated. In the alternative embodiment illustrated in Fig. 7, however, the portions of the alternative actuator disc 122 that flex are at greater radial distances than the prongs

-8-

124. The flat central portion of actuator disc 122 where prongs 124 are disposed does not flex. Therefore, prongs 124 do not spread apart radially when the container is actuated. Although prongs 124 preferably have a slight radial cant with respect to the central axis of the container, prongs
5 124 remain in that orientation regardless of whether actuator disc 122 is in the extended or retracted position. Such an embodiment facilitates injection molding because the areas of flexure are not adjacent to prongs 124.

Container body 10 may be made of any suitable material, such as cardboard, metal or plastic. A cardboard body 10 resists heat conduction
10 and will thus not be uncomfortable for a user to hold after actuating the container. However, it is known in the art that solid chemical 38 and water 36 can be replaced with suitable combinations of chemicals for producing an endothermic reaction, which would cool beverage 12. In embodiments that cool a carbonated beverage, container body 10 should be made of
15 metal or plastic because such materials would facilitate the formation of gas-tight seals.

Obviously, other embodiments and modifications of the present invention will occur readily to those of ordinary skill in the art in view of these teachings. Therefore, this invention is to be limited only by the
20 following claims, which include all such other embodiments and modifications when viewed in conjunction with the above specification and accompanying drawings.

66128-375

9

CLAIMS:

1. A container for selectably changing the temperature of a stored material, comprising:

5 a tubular container body for holding said stored material, said container body having first and second ends;

a thermic module inside said container body, said thermic module comprising a tubular module body for containing a first reactant, an annular rim around said module body, and a module cap inside said module body, said
10 module cap for containing a second reactant, said module cap having an actuator end disposed in said first end of said container body for initiating mixing of said first and second reactants, said mixing of said reactants producing a reaction characterized by a change in enthalpy;

15 said annular rim having a plurality of vents between said cap and said module body for releasing pressure in said module body, and a removable closure in said second end of said container body for providing access to said stored material characterized in that said vents close when
20 said pressure in said module body substantially equals atmospheric pressure outside said container.

2. The container recited in claim 1, wherein each said vent comprises at least one flexible flap having one or more portions in substantial contact with at least one other
25 of said flexible flaps when said pressure in said module body substantially equals air pressure outside said container, said flaps flexing in response to a differential between said pressure in said module body and said atmospheric pressure.

66128-375

10

3. The container recited in claim 2, wherein each said flexible flap has a portion in substantial contact with all other said flexible flaps.

4. The container recited in claim 3, wherein each
5 said vent comprises four flexible flaps, each having two sides, each said side in substantial contact with one said side of another one of said flexible flaps.

5. The container recited in any one of claims 1 to 4,
wherein said module cap has an annular cap channel for
10 receiving a portion of said module body.

6. The container recited in any one of claims 1 to 5,
wherein said rim has an annular rim channel for receiving a portion of said container body.

7. The container recited in claim 6, wherein said
15 container body has an annular flange for engaging a correspondingly shaped recess in said rim channel.

8. The container recited in any one of claims 1 to 7,
further comprising a removable cover for covering said actuator end of said module cap.

20 9. The container recited in claim 8, wherein said removable cover comprises a film.

10. The container recited in claim 8, wherein said removable cover comprises a plastic lid.

11. The container recited in any one of claims 1 to
25 10, wherein the module body has a container opening; the cap is disposed in said opening of said module body and has a hollow cap body having first and second ends and an axis; wherein a flexible member is integrally formed with said cap body, said flexible member having an inner surface, an outer

66128-375

11

surface, a plurality of points on said inner surface, moving in at least a partially axial direction with respect to said cap body between a retracted position and an extended position in response to an axial force experienced on said outer surface of said flexible member; wherein a plurality of elongated members is integrally formed with said cap body, said elongated members having a proximal end disposed at one of said points and a distal end projecting from one of said points; and, wherein a breakable barrier is attached to said second end of said cap body, said distal end of said elongated member extending beyond said second end of said cap body when said point on said inner surface is in said extended position,

wherein said plurality of elongated members have arcuate outer surfaces; and said outer surfaces of said elongated members define adjacent segments of a circle when said points at which proximal ends are disposed are in said retracted position.

12. The container recited in claim 11, wherein said flexible member snaps between a first position in which said point on said inner surface is in said retracted position and a second position in which said point on said inner surface is in said extended position.

13. The container recited in claim 11, wherein:

the plurality of points on said inner surface move in at least partially axial directions with respect to said cap body between a retracted position and an extended position in response to an axial force experienced by said outer surface of said flexible member; and, the plurality of elongated members are unitarily formed with said cap body, each said elongated member having a proximal end disposed at

66128-375

12

one said point and a distal end projecting from said point toward said cap body.

14. The container recited in claim 13, wherein said inner surface has a plurality of points at different axial
5 distances from said first end of said cap body when all said points are in said retracted position.

15. The container recited in claim 14, wherein said elongated members have proximal ends at points the same axial distance from said first end of said cap body.

10 16. The container recited in claim 15, wherein said inner surface of said flexible member is substantially concave when each said point at which a proximal end of one said elongated member is disposed is in said retracted position.

15 17. The container recited in claim 16, wherein said flexible member snaps between a first position in which each said point at which a proximal end of one said elongated member is disposed is in said retracted position and a second position in which each said point at which a proximal
20 end of one said elongated member is disposed is in said extended position.

18. The container recited in claim 16, wherein:

said flexible member is a disc having a central axis; and

25 said points at which said proximal ends of said elongated members are disposed at equal radial distances from said central axis and are separated by equal angles having a vertex at said central axis.

66128-375

13

19. The container recited in claim 18, wherein said elongated members are parallel to one another when said points at which said proximal ends are disposed are in said retracted position.

5 20. The container recited in claim 11, wherein the number of elongated members in said plurality of elongated members is four.

21. The container recited in claim 16, wherein:

10 said flexible member has a plurality of radial folds separated by equal angles for facilitating flexure of said flexible member, and

said proximal end of each said elongated member is disposed between two said folds.

22. The container recited in claim 21, wherein:

15 said flexible member is a disc having a central axis; and,

20 said points at which said proximal ends of said elongated members are disposed at equal radial distances from said central axis and are separated by equal angles having a vertex at said central axis.

23. The container recited in claim 22, wherein said elongated members are parallel to one another when said points at which said proximal ends are disposed are in said retracted position.

25 24. The container recited in claim 23, wherein:

said plurality of elongated members have arcuate outer surfaces; and,

66128-375

14

said outer surfaces of said elongated members define adjacent segments of a circle when said points at which said proximal ends are disposed are in said retracted position.

5 25. The container recited in claim 24, wherein:

the number of elongated members in said plurality of elongated members is four; and,

said radial folds are separated by angles of 90 degrees.

10 26. A container as claimed in claim 11, wherein said flexible member comprises:

a flexible disc integrally formed with said cap body and disposed at said first end of said cap body, said flexible disc having a central axis coaxial with said axis
15 of said cap body, an inner surface, an outer surface, and a plurality of radial folds, a plurality of points on said inner surface moving in a partially axial direction with respect to said cap body between a retracted position and an extended position in response to an axial force experienced
20 by said outer surfaces of said flexible disc.

27. The container recited in claim 26, wherein said flexible disc snaps between a first position in which each said point at which a proximal end of one said elongated member is disposed is in said retracted position and a
25 second position in which each said point at which a proximal end of one said elongated member is disposed is in said extended position.

28. The container recited in claim 27, wherein said points at which said proximal ends of said elongated members
30 are disposed at equal radial distances from said central

66128-375

15

axis and are separated by equal angles having a vertex at said central axis.

29. The container recited in claim 28, wherein said elongated members are parallel to one another when said
5 points at which said proximal ends are disposed are in said retracted position.

30. The container recited in claim 29, wherein:

said plurality of elongated members have arcuate outer surfaces; and,

10 said outer surfaces of said elongated members define adjacent segments of a circle when said points at which said proximal ends are disposed are in said retracted position.

31. The container recited in claim 30, wherein the
15 number of elongated members in said plurality of elongated members is four.

32. A container as recited in claim 11, wherein:

said distal ends of said elongated members move in unison partially axially and partially radially between said
20 retracted position and said extended position in response to an axial force experienced by a movable portion of said cap; and,

said distal ends of said elongated members extending beyond said second end of said cap body in said
25 extended position.

33. The container recited in claim 32, wherein said movable portion of said cap is a flexible disc.

66128-375

16

34. The container recited in claim 33, wherein said flexible disc snaps between a first position in which said each distal end of one said elongated member is disposed is in said retracted position and a second position in which
5 each said distal end of one said elongated member is disposed is in said extended position.

35. The container recited in claim 34, wherein said elongated members are parallel and coaxial with said axis of said cap body when said distal ends are in said retracted
10 position.

36. The container recited in claim 35, wherein:
said flexible disc has a plurality of radial folds separated from one another by equal angles; and
said proximal end of each said elongated member is
15 between two said folds.

37. The container recited in claim 36, wherein:
said elongated members have arcuate outer surfaces; and,
said outer surfaces of said elongated members
20 define adjacent segments of a circle when said distal ends are disposed in said retracted position.

38. The container recited in claim 37, wherein the number of elongated members in said plurality of elongated members is four.

25 39. A module for selectably mixing two materials, comprising:

a container having an opening, said container for holding a first one of said materials;

66128-375

17

a cap disposed in said opening of said container for selectably containing a second one of said materials, said cap having a hollow cap body with first and second ends and an axis, said cap having a breakable barrier attached to
5 said second end of said cap body and a plurality of elongated members, each having a proximal end at said first end of said cap body and a distal end extending toward said second end of said cap body;

said distal ends of said elongated members moving
10 in unison partially axially and partially radially between a retracted position and an extended position in response to an axial force experienced by a movable portion of said cap; and

said distal ends of said elongated members
15 extending beyond said second end of said cap body in said extended position.

40. The module recited in claim 39, wherein said movable portion of said cap is a flexible disc.

41. The module recited in claim 40, wherein said
20 flexible disc snaps between a first position in which each said distal end of one said elongated member is disposed is in said retracted position and a second position in which said distal end of one said elongated member is disposed is in said extended position.

25 42. The module recited in claim 41, wherein said elongated members are parallel and coaxial with said axis of said cap body when said distal ends are in said retracted position.

43. The module recited in claim 42, wherein:

66128-375

18

said flexible disc has a plurality of radial folds separated from one another by equal angles; and

said proximal end of each said elongated member is between two said folds.

5 44. The module recited in claim 43, wherein:

said elongated members have arcuate outer surfaces; and

said outer surfaces of said elongated members define adjacent segments of a circle when said distal ends
10 are disposed in said retracted position.

45. The module recited in claim 44, wherein the number of elongated members in said plurality of elongated members is four.

46. A container for selectably changing the
15 temperature of a stored material, comprising:

a tubular container body for holding said stored material, said container body having first and second ends;

a thermic module inside said container body, said thermic module comprising a tubular module body for
20 containing a first reactant, an annular rim around said module body, and a module cap inside said module body, said module cap for containing a second reactant, said module cap having an actuator end disposed in said first end of said container body for initiating mixing of said first and
25 second reactants, said mixing of said reactants producing a reaction characterized by a change in enthalpy;

said annular rim having a plurality of vents between said cap and said module body for releasing pressure in said module body, said vents closing when said pressure

66128-375

19

in said module body substantially equals atmospheric pressure outside said container;

wherein each said vent comprises at least one flexible flap having one or more portions in substantial
5 contact with at least one other of said flexible flaps when said pressure in said module body substantially equals air pressure outside said container, said flaps flexing in response to a differential between said pressure in said module body and said atmospheric pressure; and

10 a removable closure in said second end of said container body for providing access to said stored material.

47. The container recited in claim 46, wherein each said flexible lip has a portion in substantial contact with all other said flexible flaps.

15 48. The container recited in claim 47, wherein vent comprises four flexible flaps, each having two sides, each said side in substantial contact with one said side of another one of said flexible flaps.

49. The container recited in claim 31, wherein said
20 module cap has an annular cap channel for receiving a portion of said module body.

50. The container recited in claim 31, wherein said rim has an annular rim channel for receiving a portion of said container body.

25 51. The container recited in claim 50, wherein said container body has an annular flange for engaging a correspondingly shaped recess in said rim channel.

66128-375

20

52. The container recited in claim 31, further comprising a removable cover for covering said actuator end of said module cap.

53. The container recited in claim 52, wherein said
5 removable cover comprises a film.

54. The container recited in claim 52, wherein said removable cover comprises a plastic lid.

SMART & BIGGAR
OTTAWA, CANADA

PATENT AGENTS

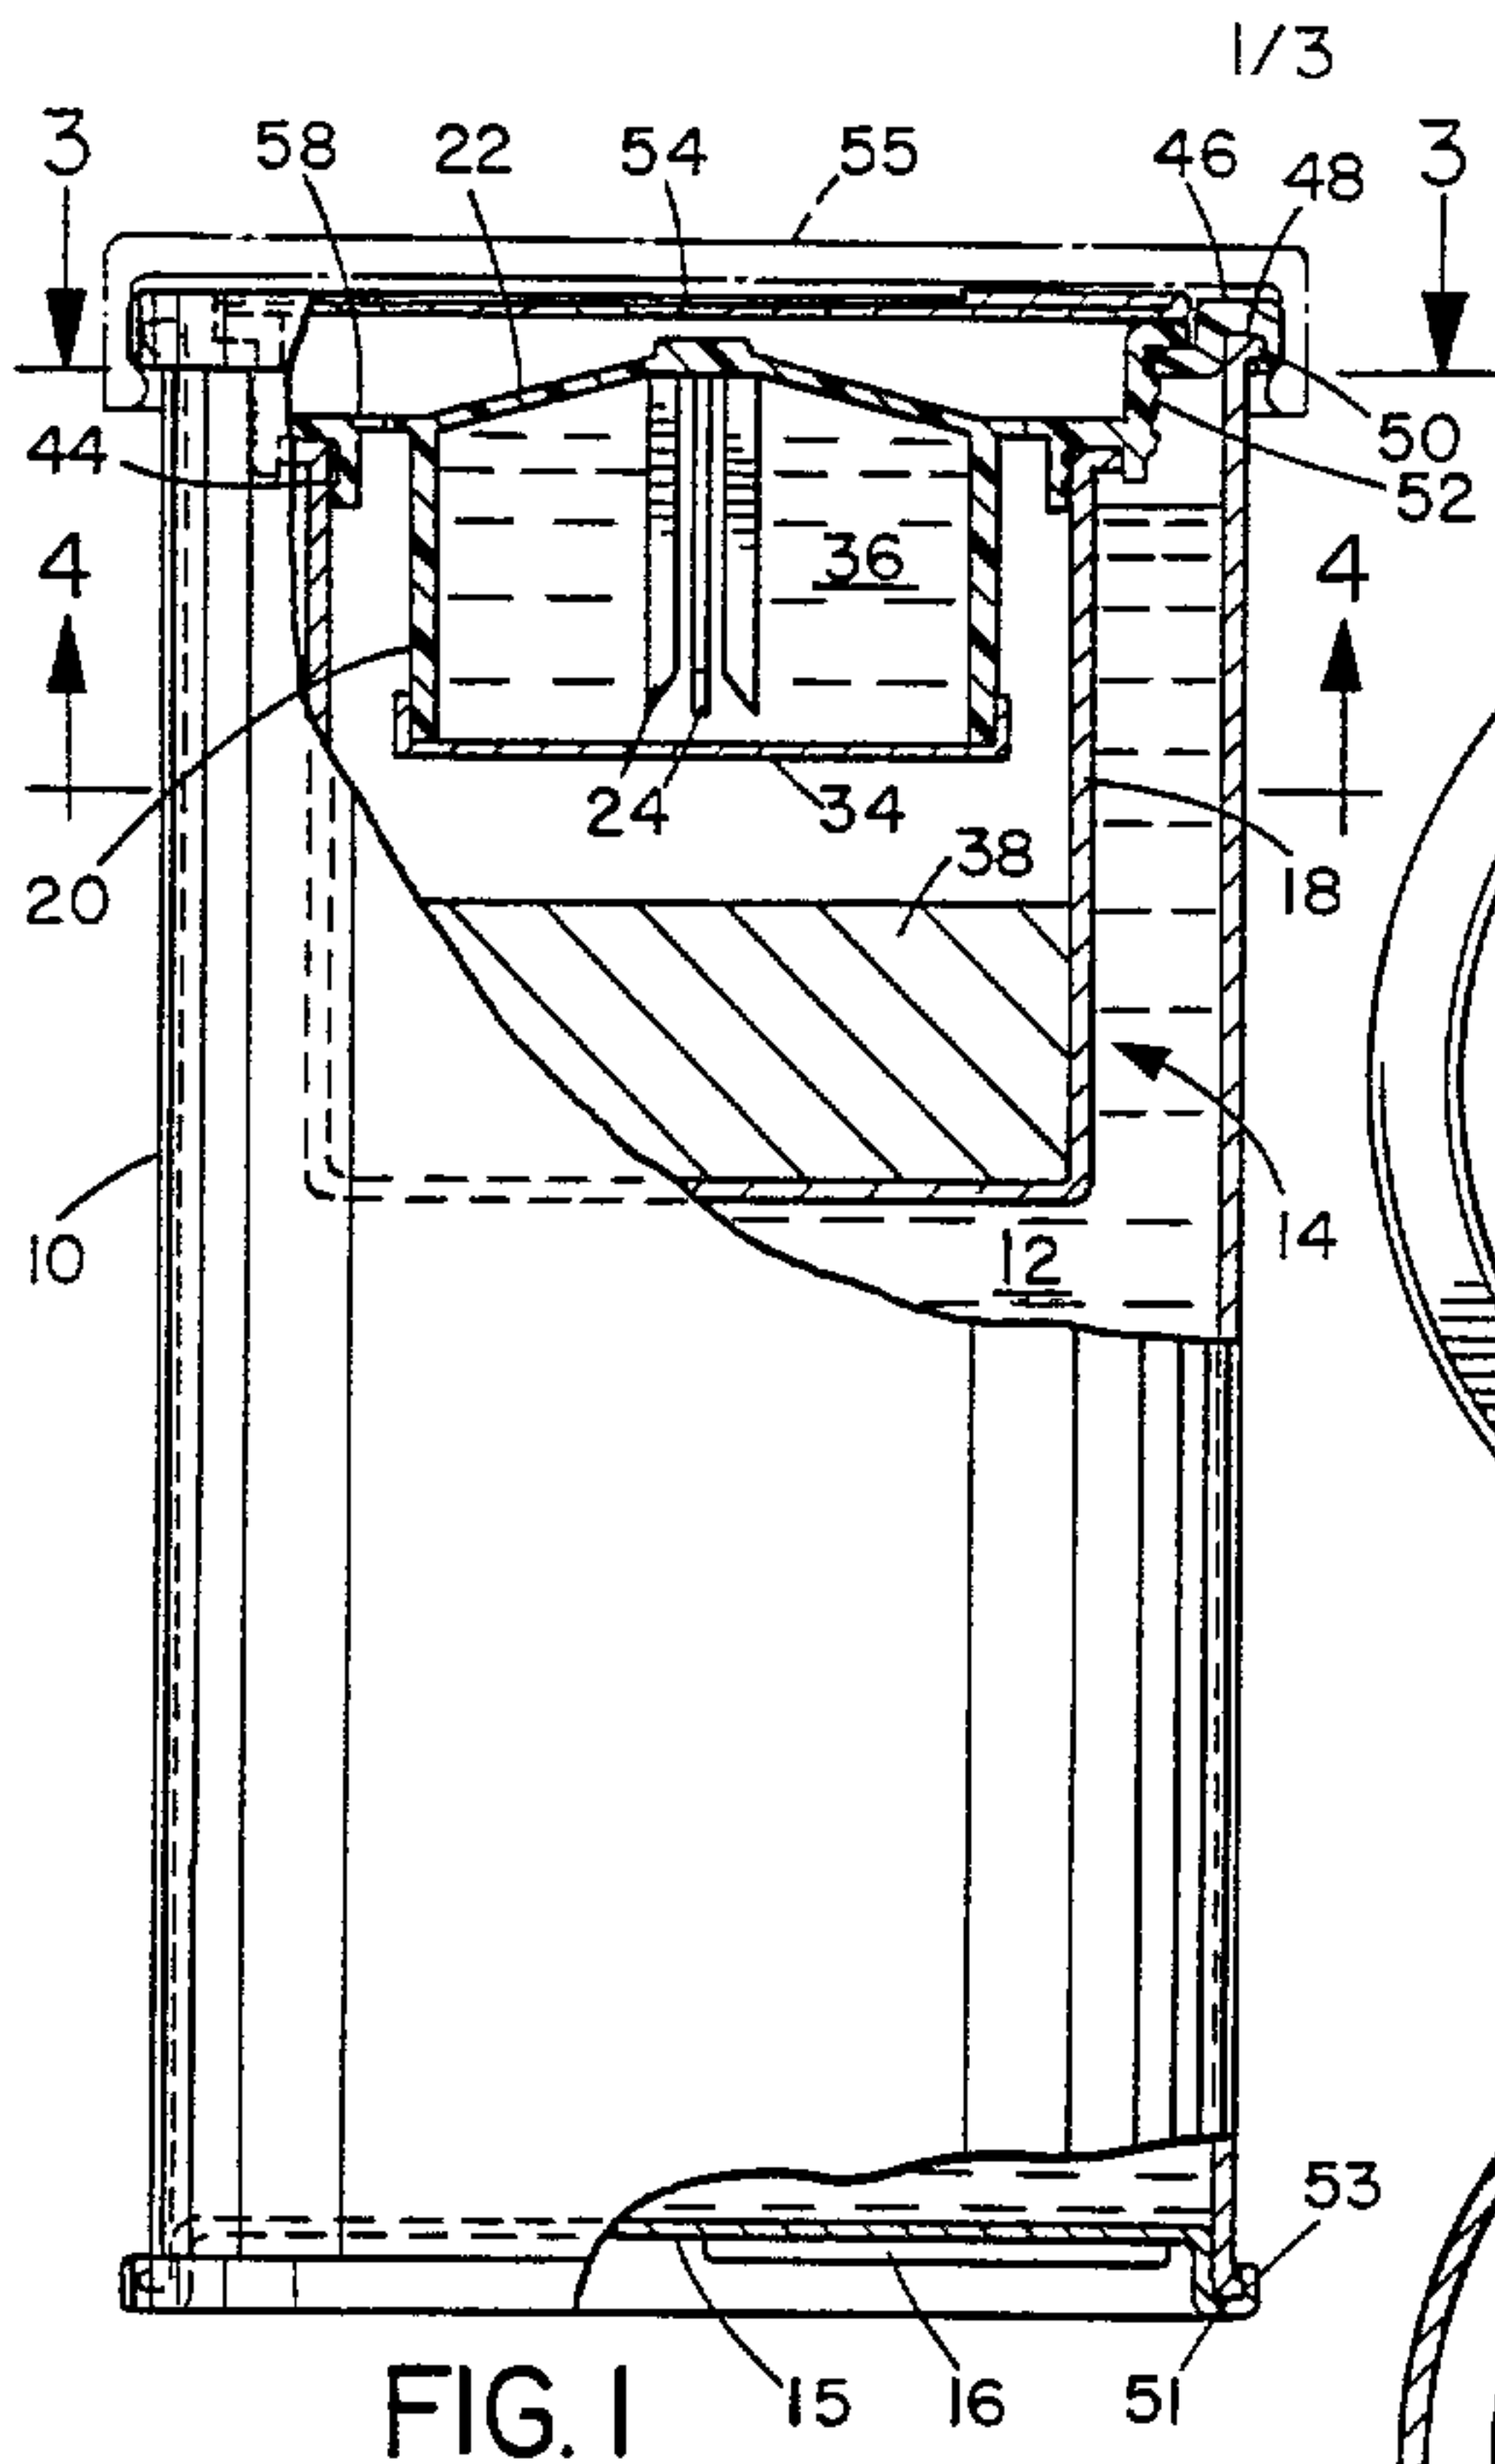


FIG. 1

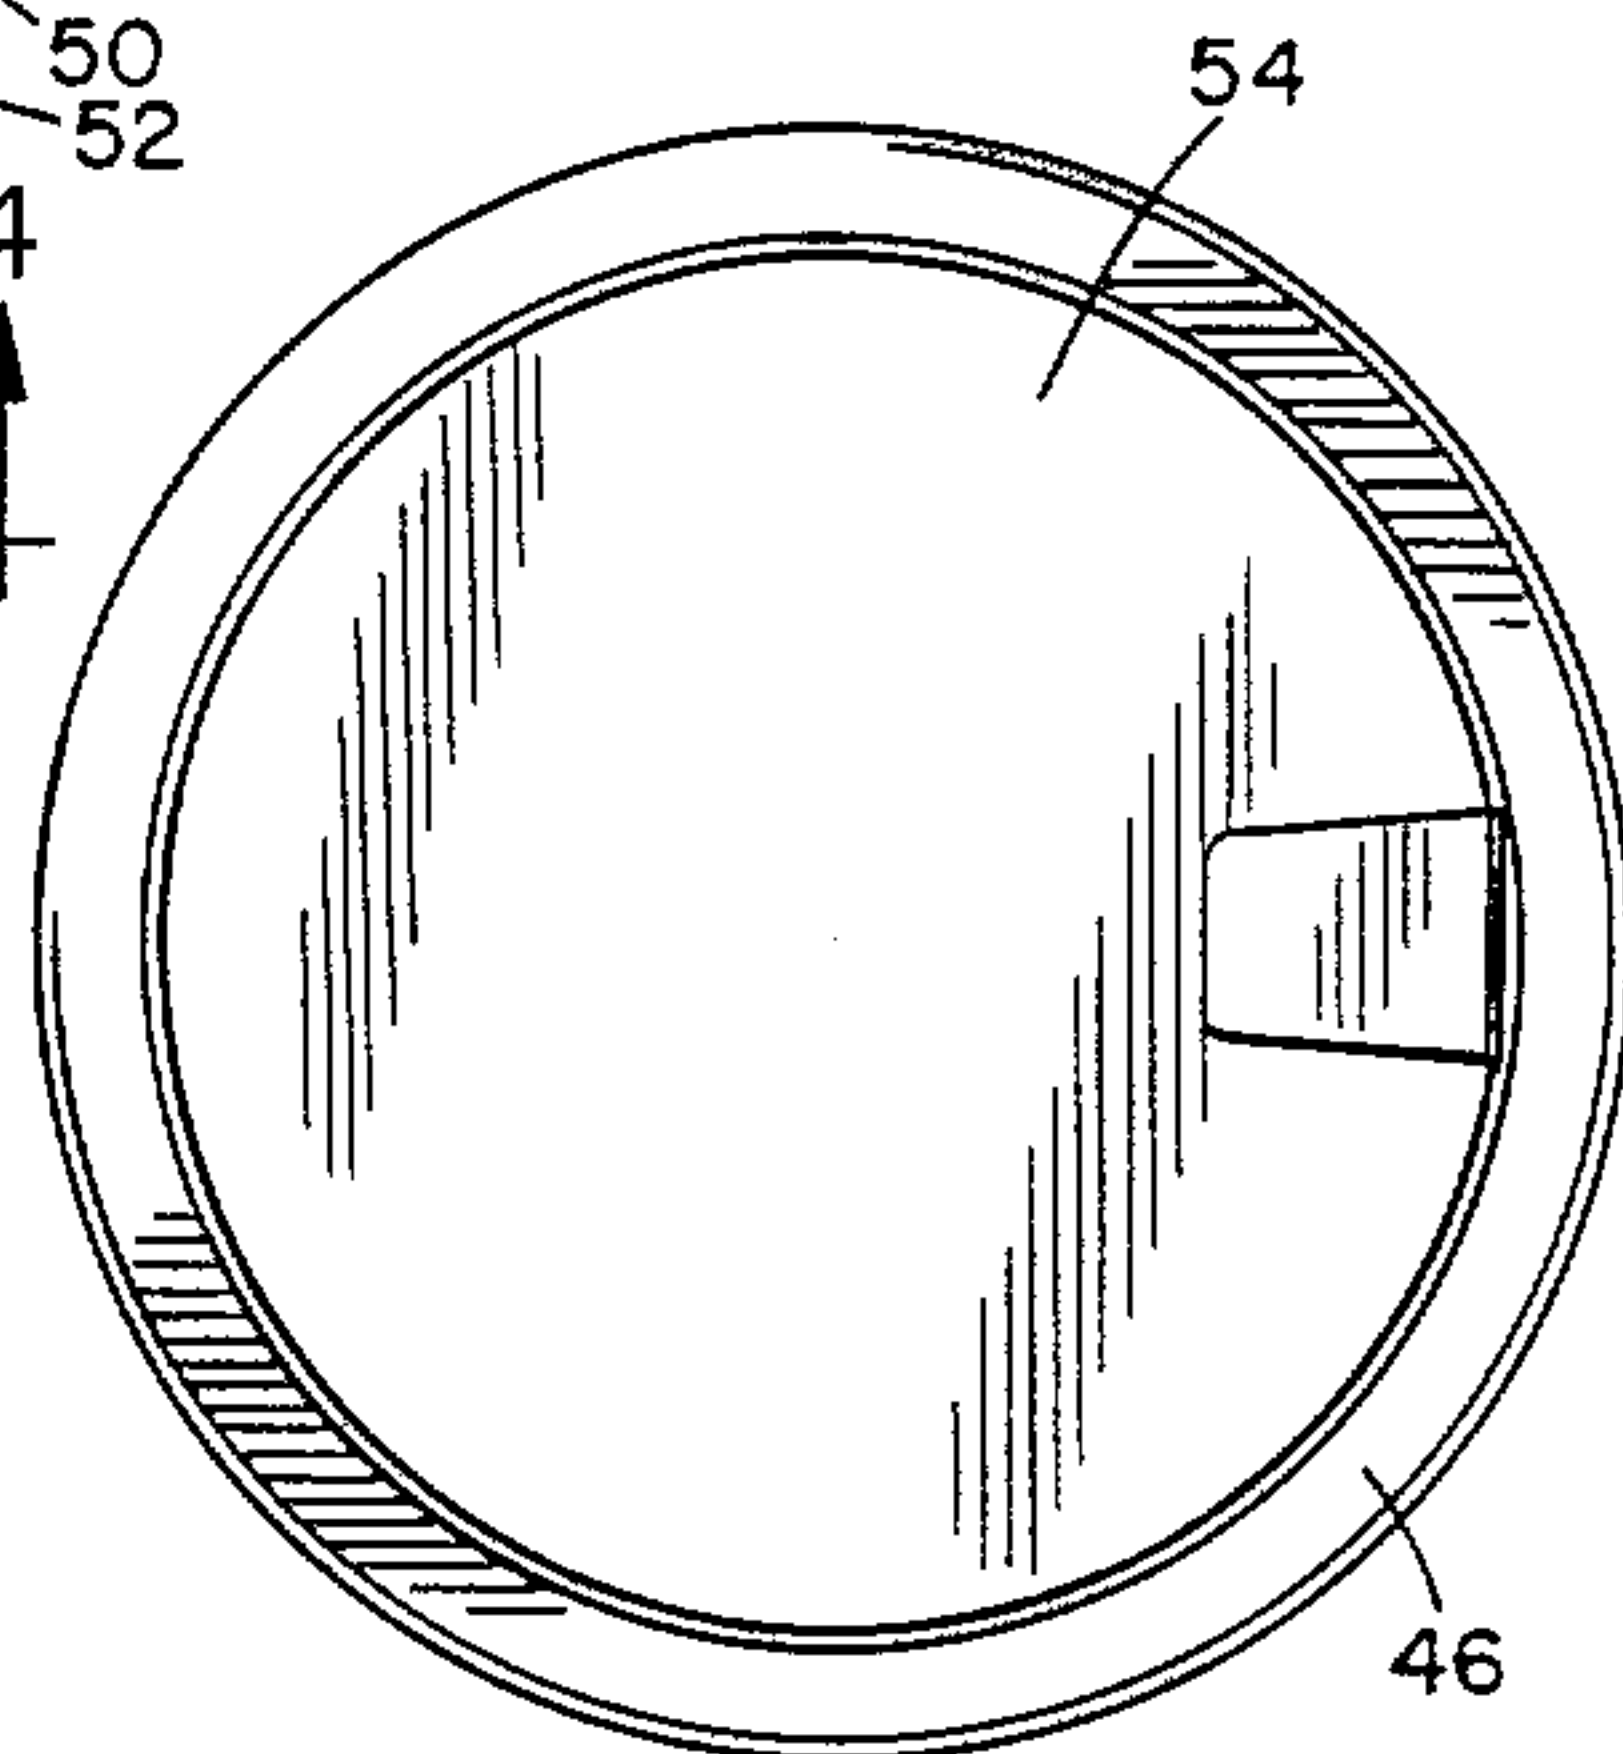


FIG. 2

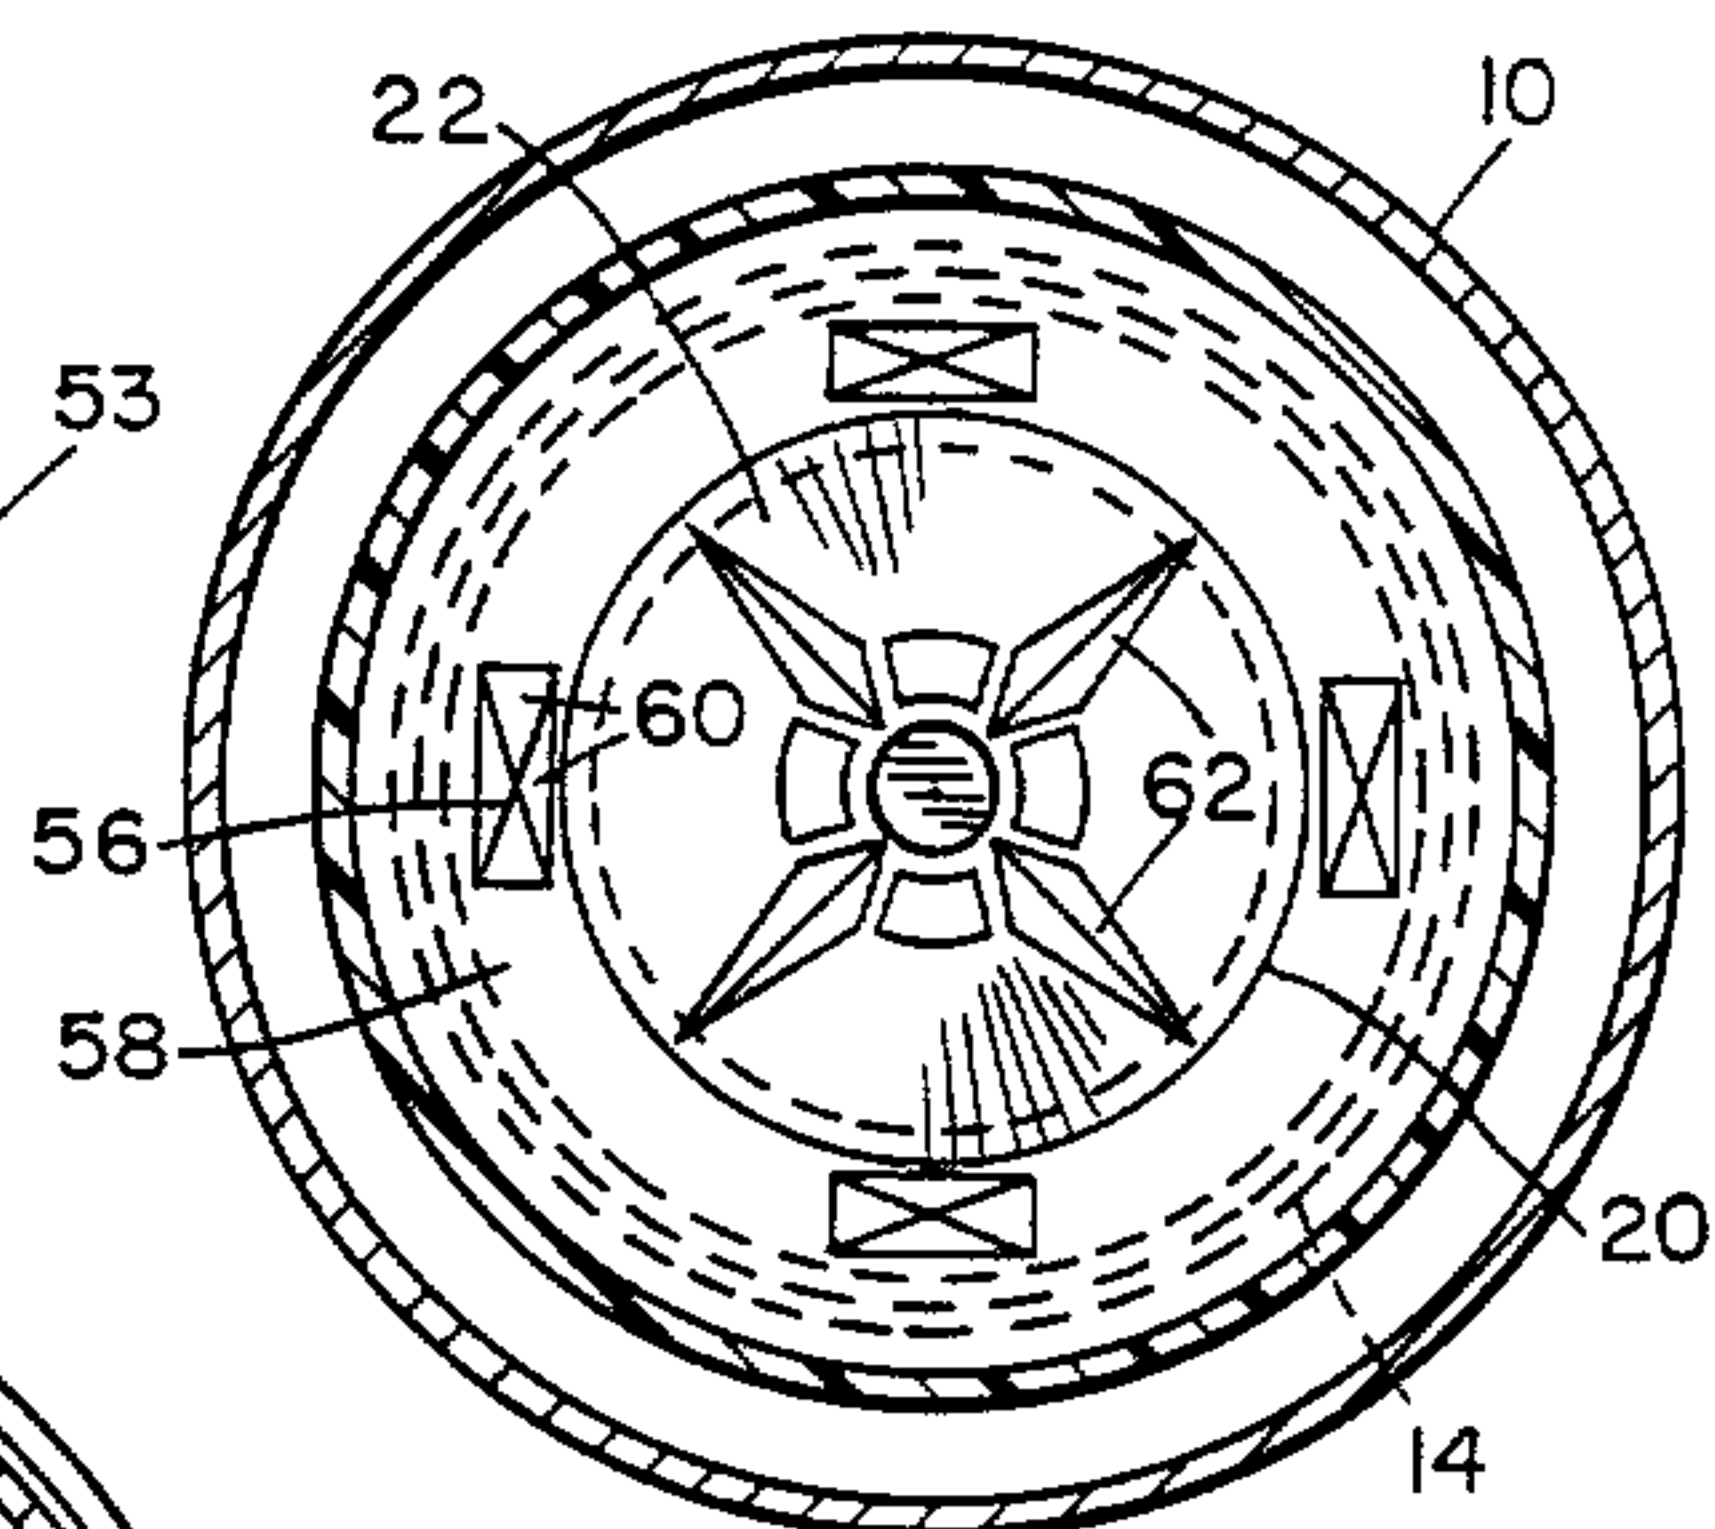


FIG. 3

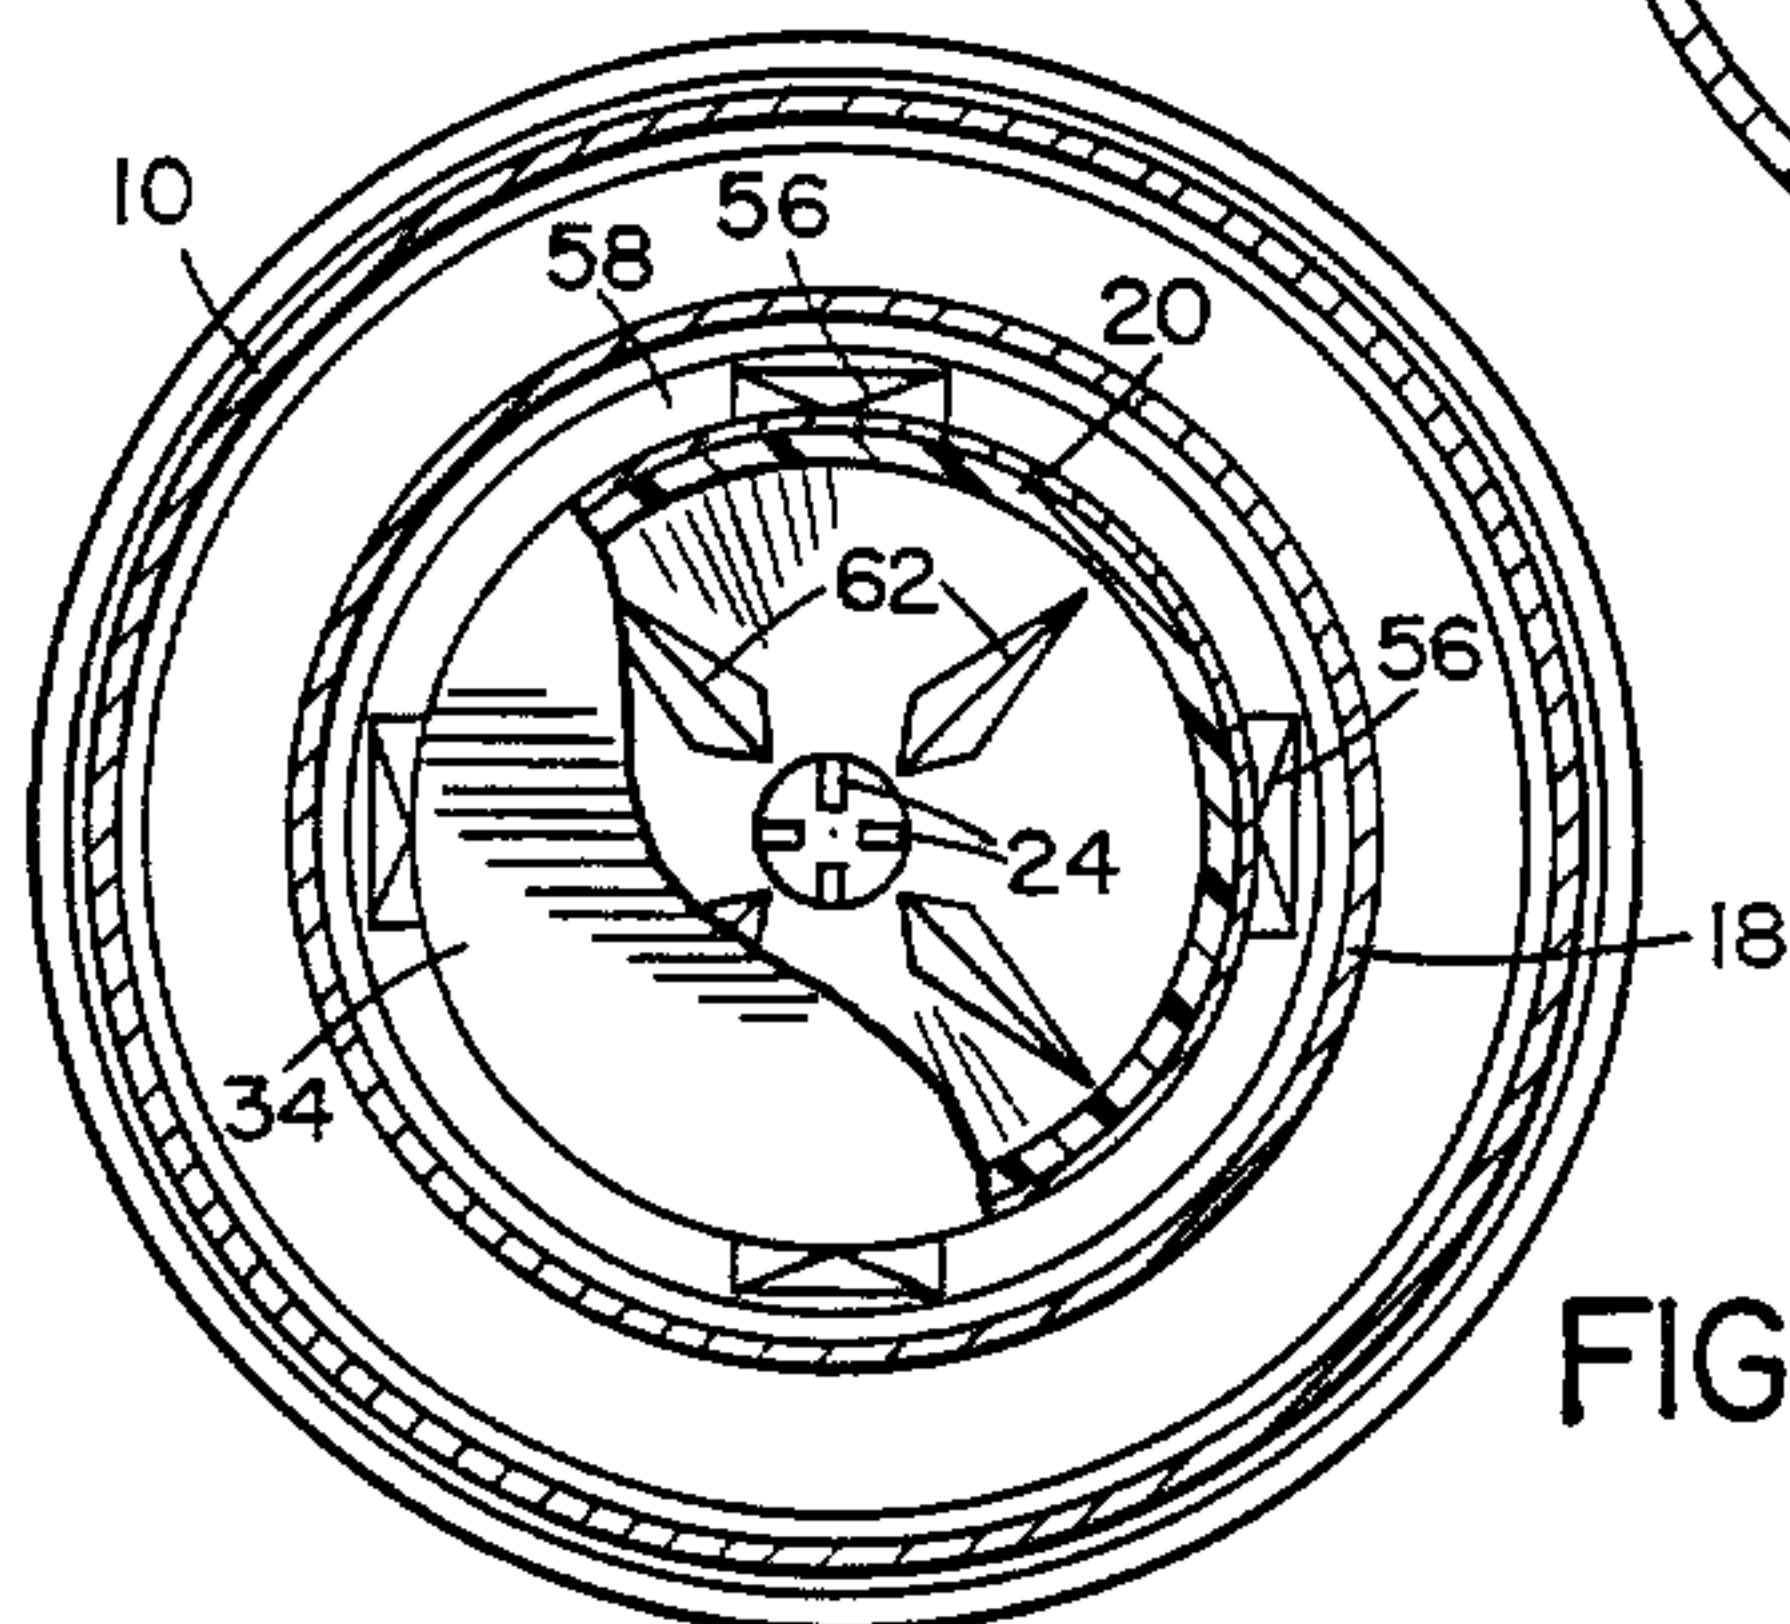


FIG. 4

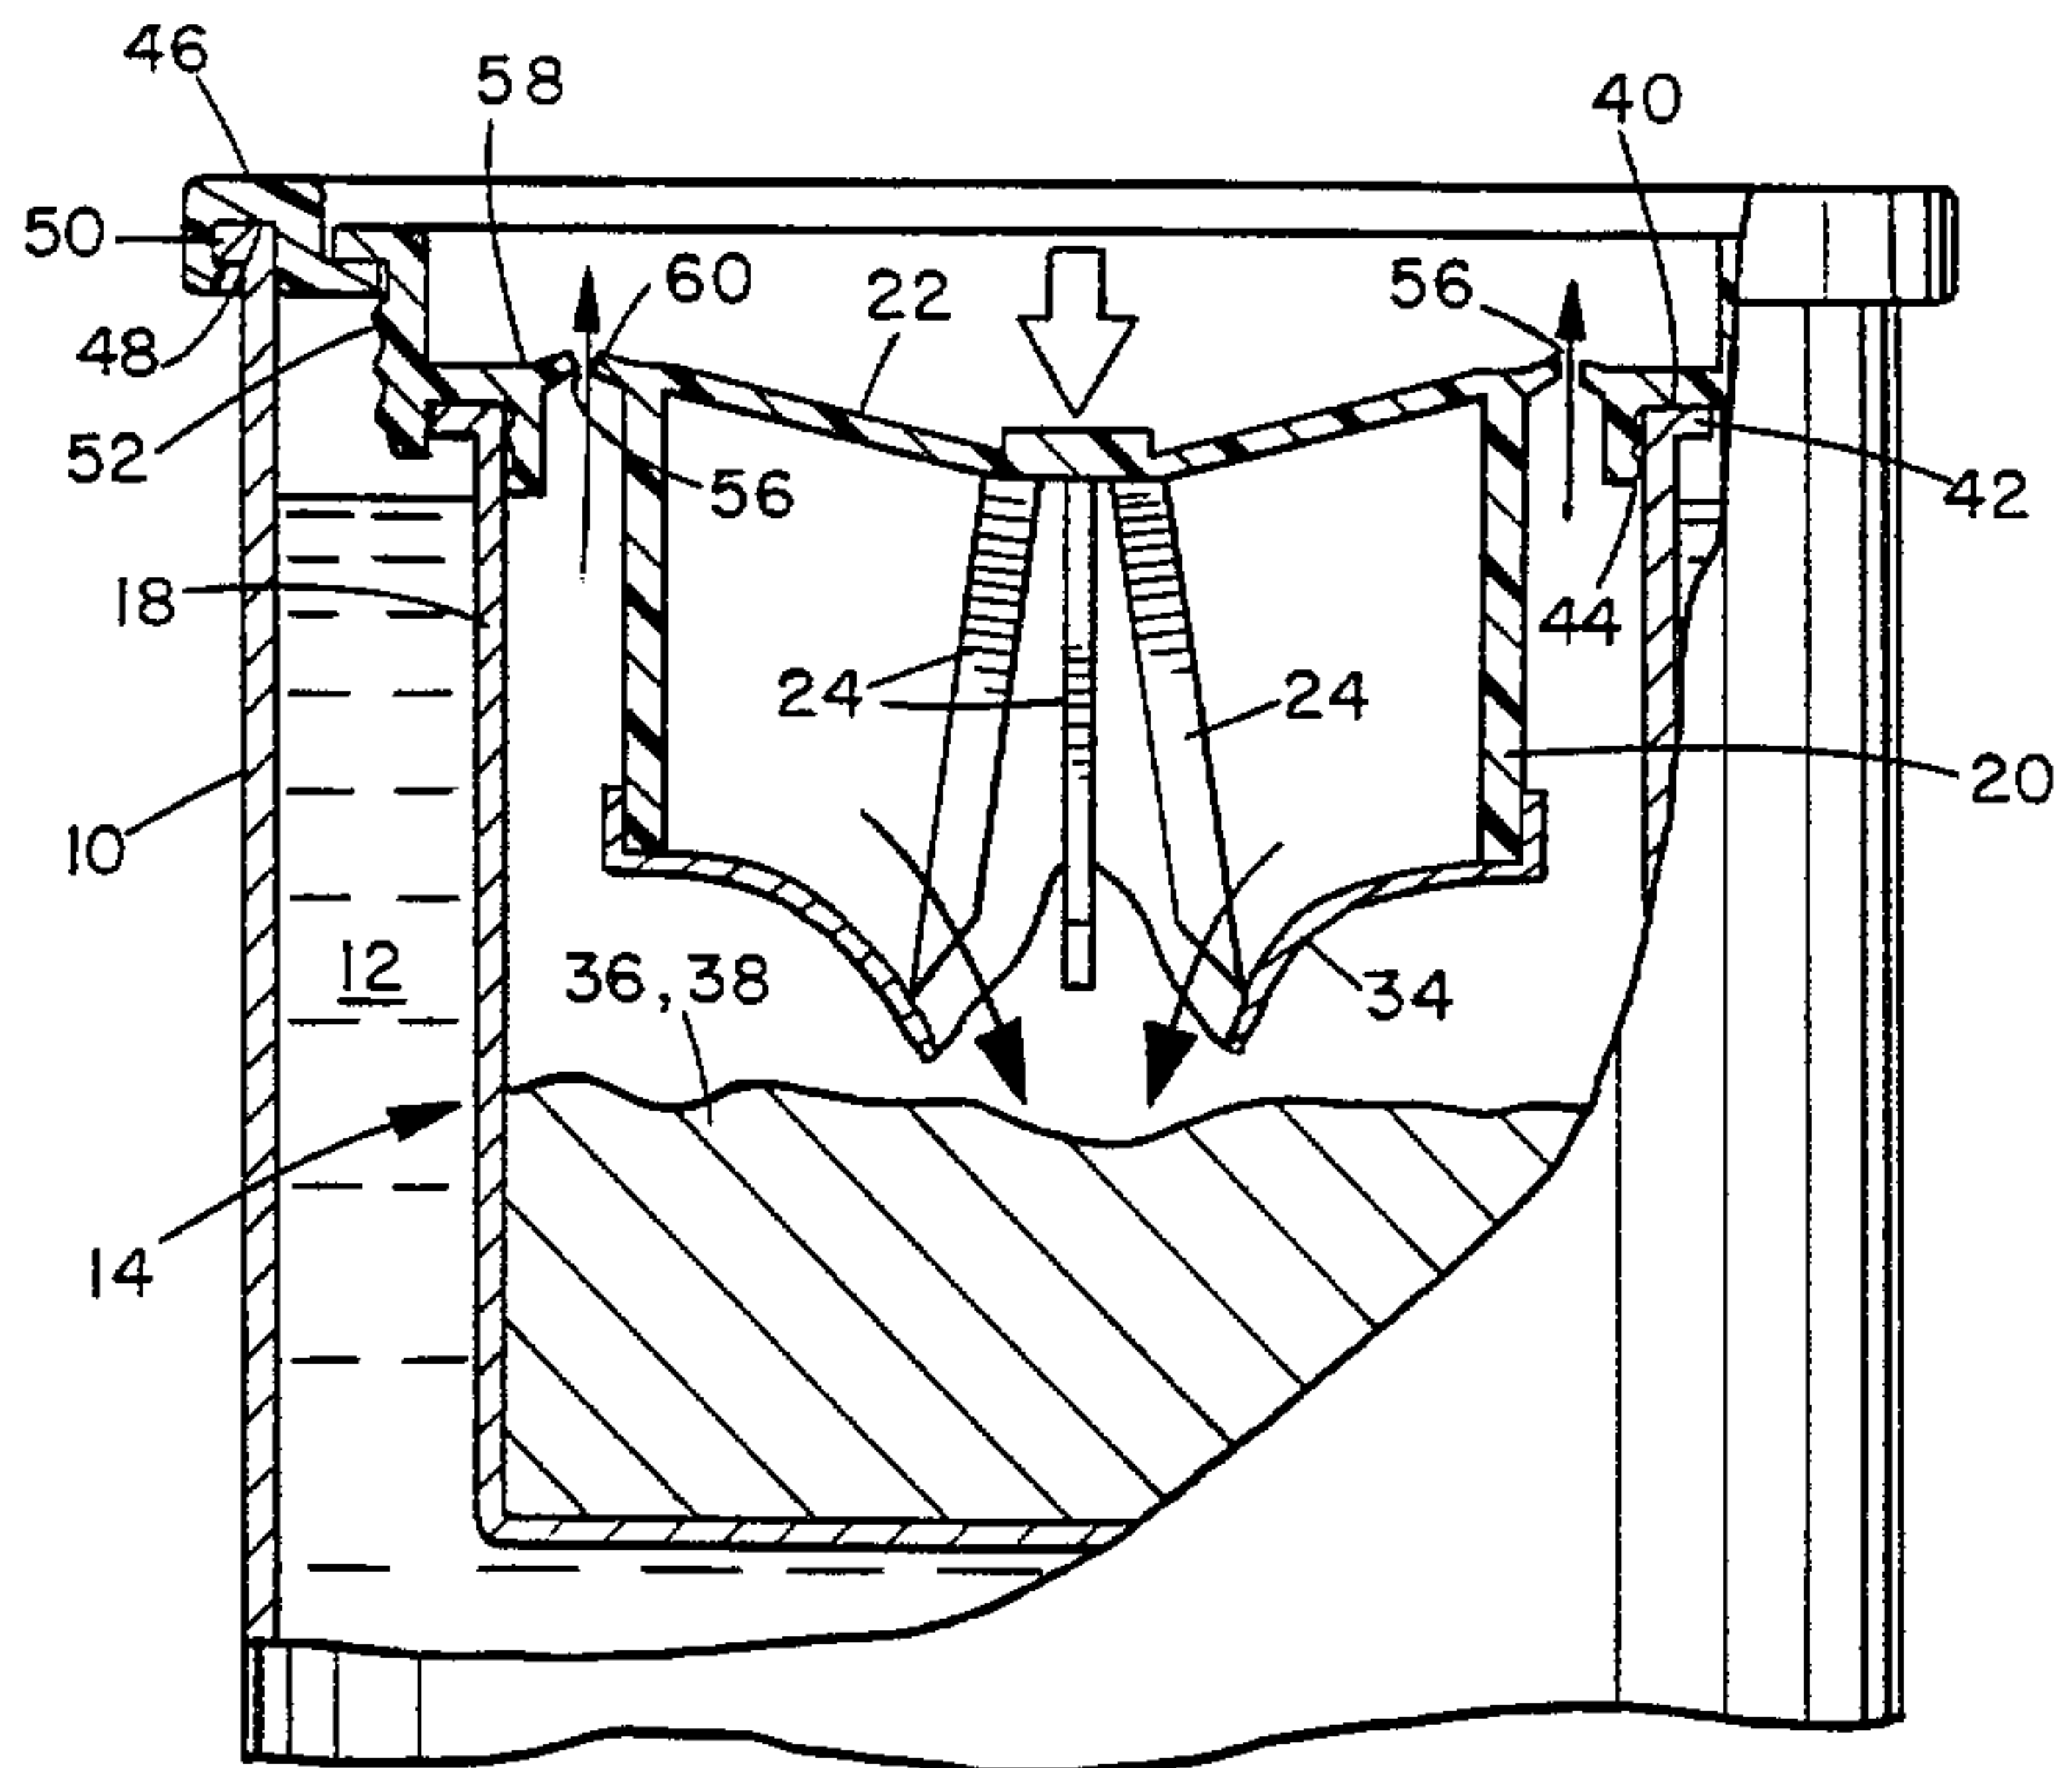


FIG. 5

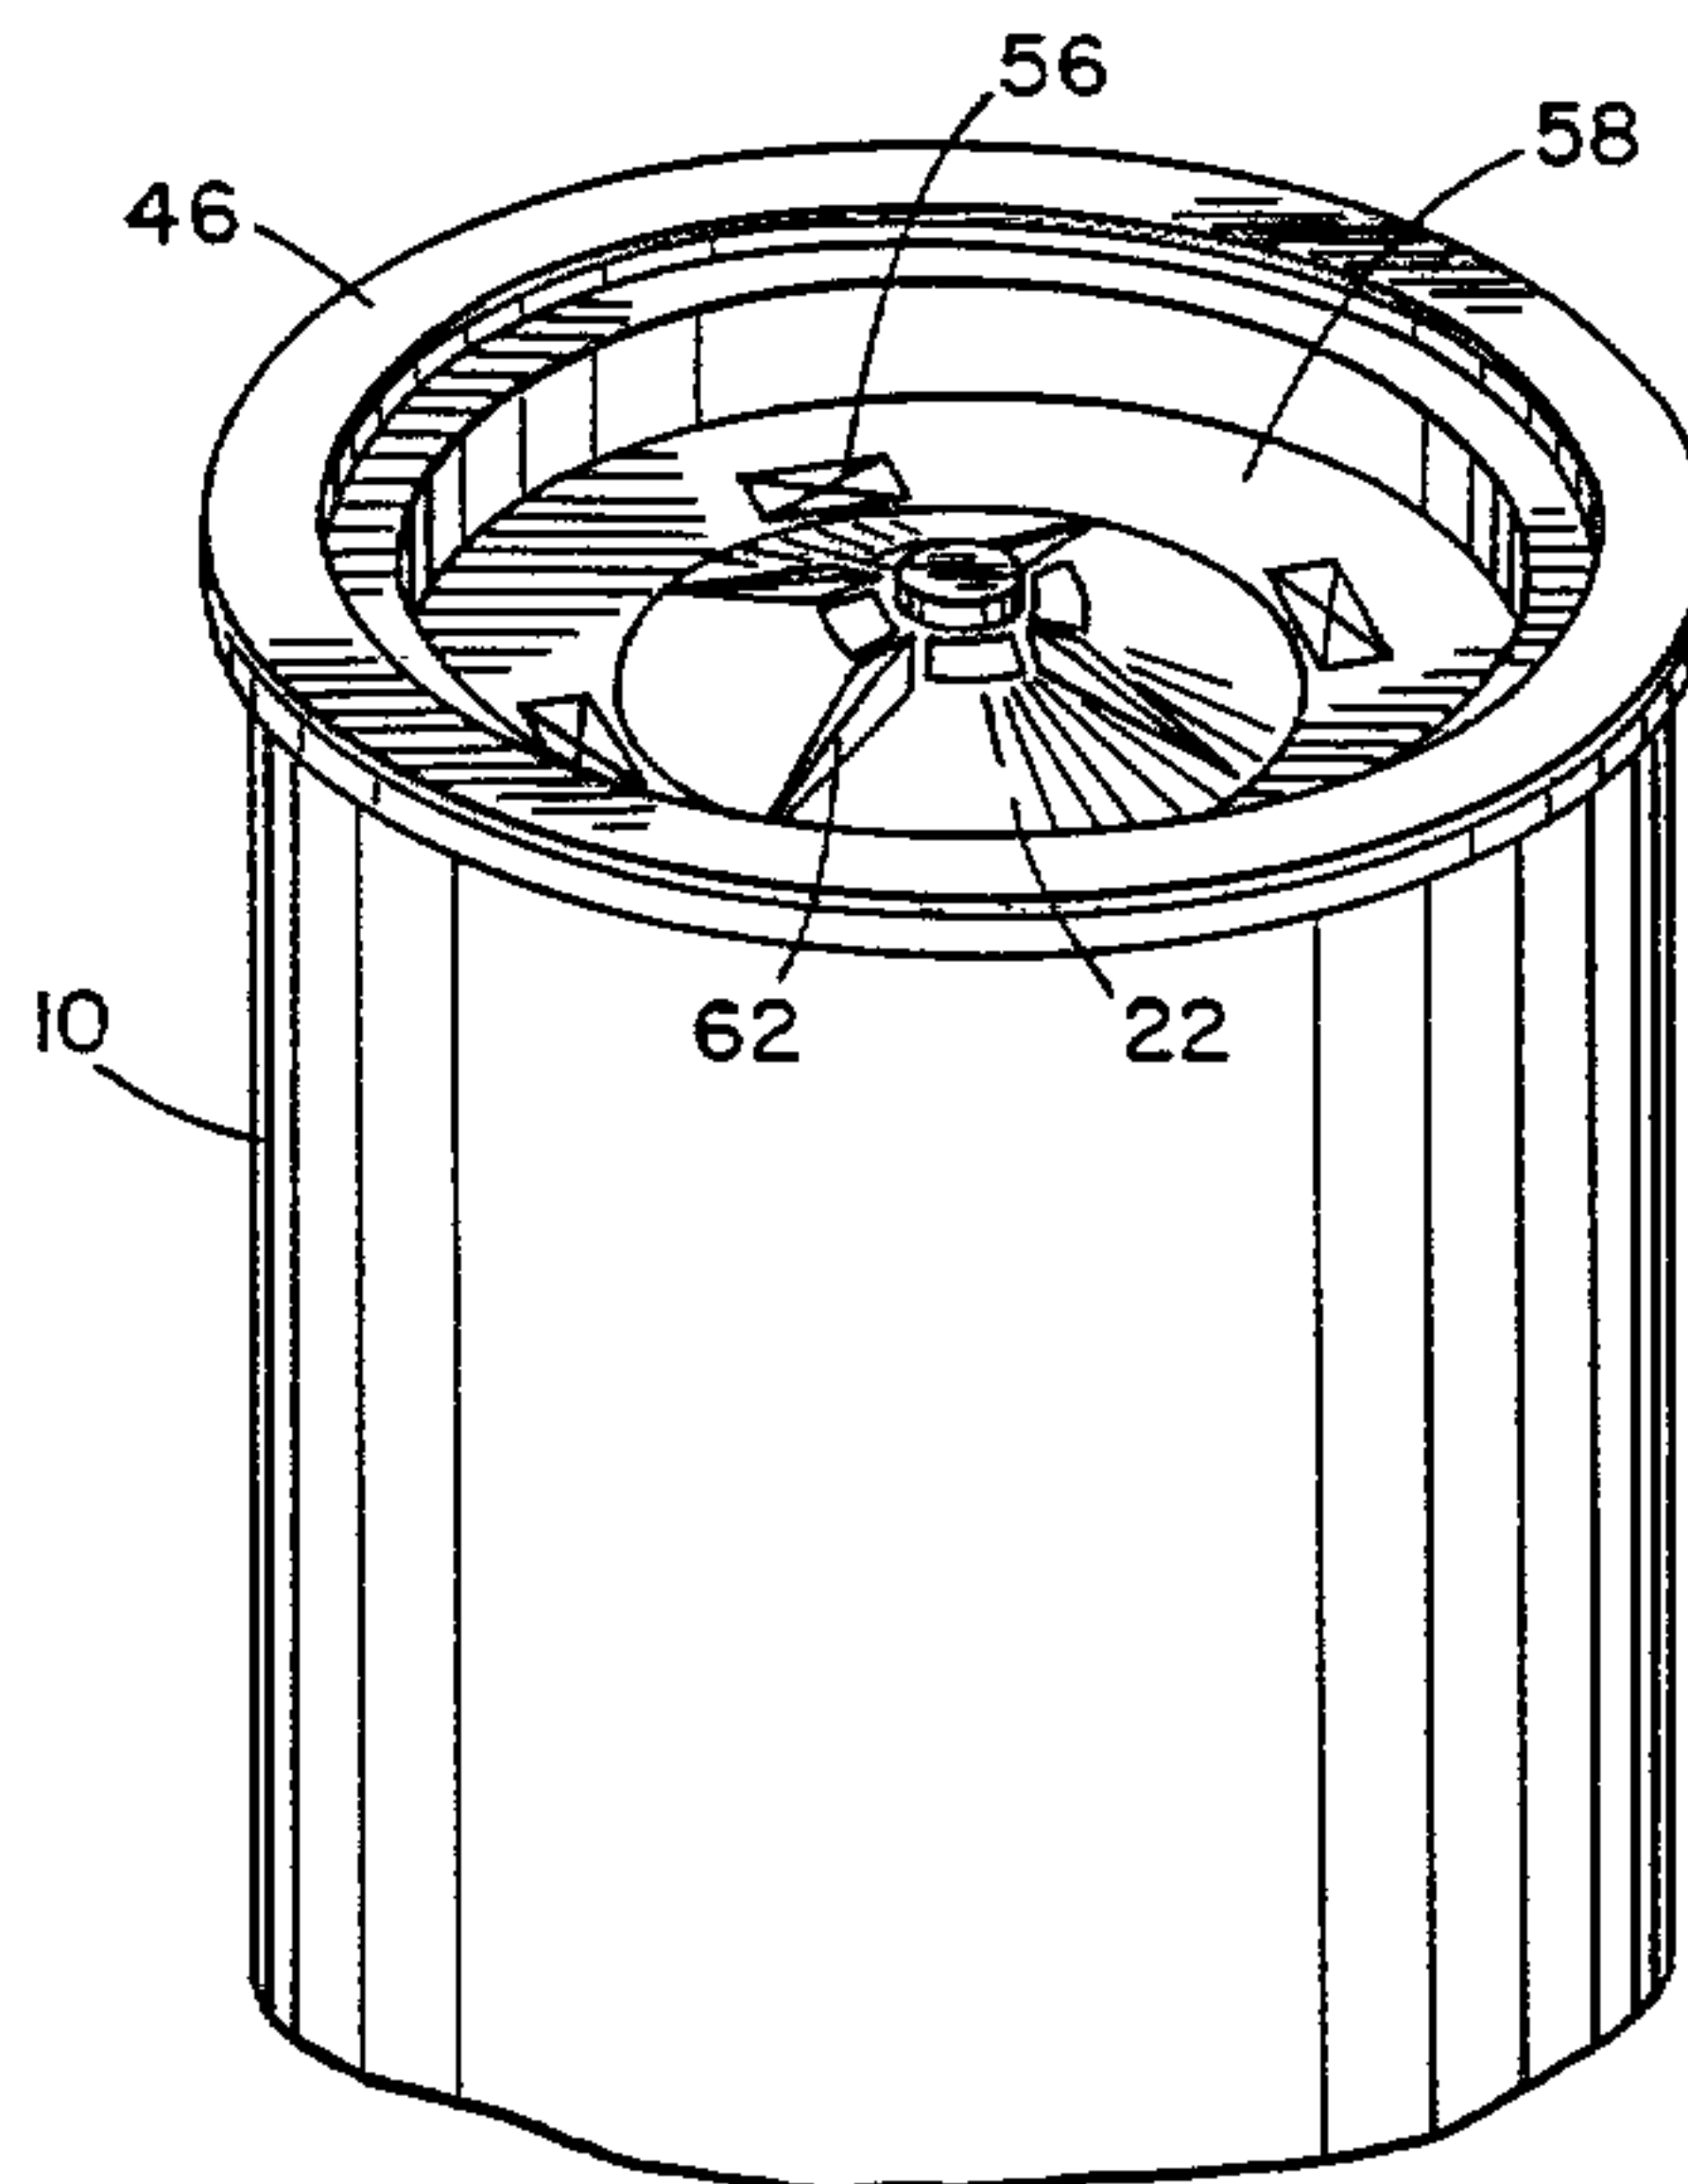


FIG. 6

3/3

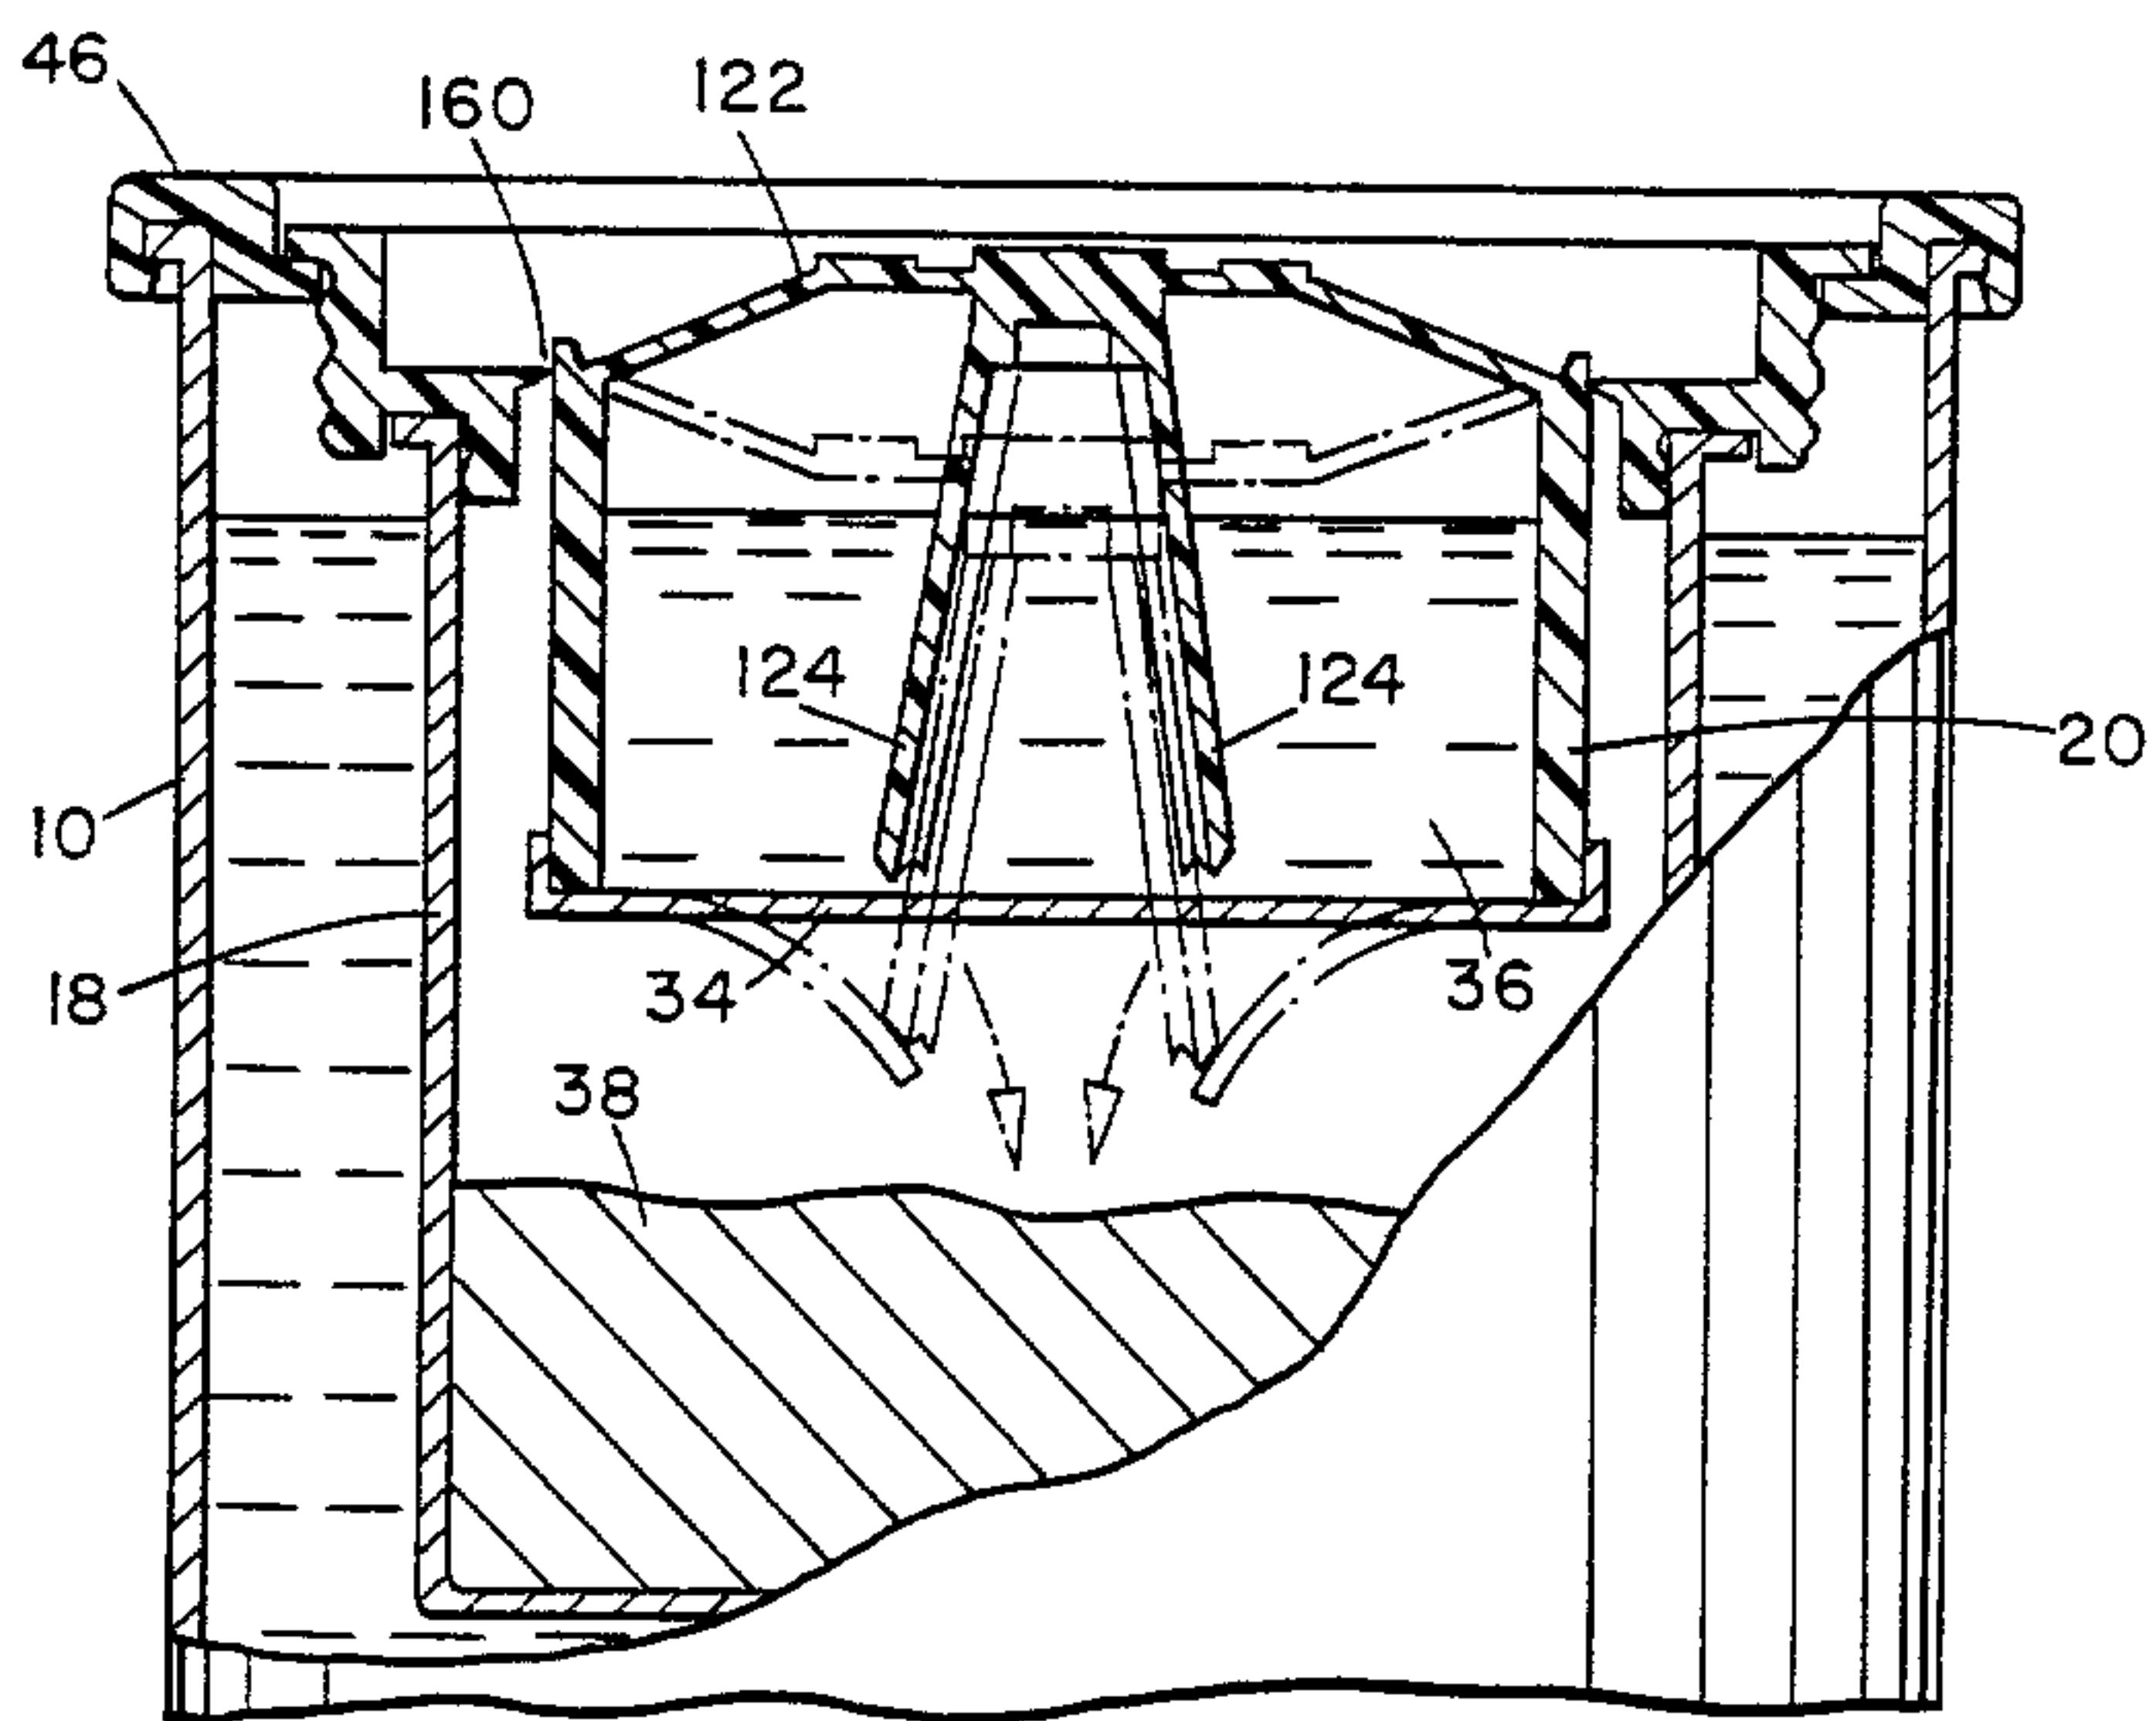


FIG. 7

