(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
11 December 2008 (11.12.2008)

PCT

(10) International Publication Number
WO 2008/148928 A1

(51) International Patent Classification:
*B02C 1/00* (2006.01) *B02C 25/00* (2006.01)
*B02C 7/08* (2006.01)

(21) International Application Number:
PCT/FI2007/050335

(22) International Filing Date: 7 June 2007 (07.06.2007)

(25) Filing Language: Finnish

(26) Publication Language: English

(71) Applicant *(for all designated States except US)*: **METSO MINERALS INC.** [FI/FI]; Fabianinkatu 9 A, FI-00101 Helsinki (FI).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **LEHTONEN, Harri** [FI/FI]; Riekontie 35, FI-33980 Pirkkala (FI). **VIILO, Keijo** [FI/FI]; Vesakonkatu 31, FI-33820 Tampere (FI).

(74) Agent: **TAMPEREEN PATENTTITOIMISTO OY**; Hermiankatu 1 B, FI-33720 Tampere (FI).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**
— *with international search report*

(54) **Title:** CRUSHER, METHOD FOR CRUSHING MATERIAL AND METHOD FOR CONTROLLING A CRUSHER

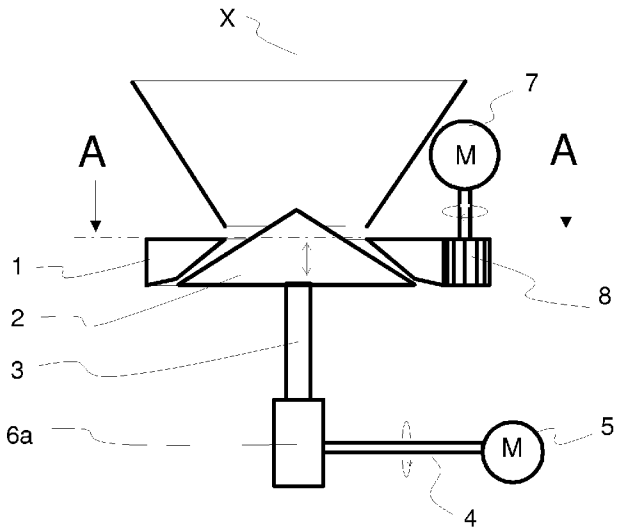



Fig. 1

(57) **Abstract:** A crusher comprising at least a first crushing blade (1) and a second crushing blade (2) which are arranged to be rotary, one of the crushing blades being also arranged to move back and forth along a substantially harmonic linear path, and the rotating axes (X) of the first crushing blade (1) and the second crushing blade (2) being parallel with the linear direction of movement of the second crushing blade (2). The second crushing blade (2) is adjusted to move substantially harmonically back and forth along a linear path.

WO 2008/148928 A1

# CRUSHER, METHOD FOR CRUSHING MATERIAL AND METHOD FOR CONTROLLING A CRUSHER

## Field of the invention

The invention relates to a crusher. The invention also relates to a method for crushing material and a method for controlling a crusher.

## Background of the invention

Crushers are used for crushing solid pieces to a smaller size. Typically, a piece to be crushed is introduced between two crushing blades moving in relation to each other, their movement crushing the piece. Patent document US 3,627,214 describes a crusher, in which a lower crushing blade moving linearly back and forth by means of hydraulics is used for crushing. Further, the upper and lower crushing blades of the crusher are brought into a rotary movement in the horizontal plane. In the presented solution, the material to be crushed is fed into the crusher from the top, from where the material is carried off between the crushing blades by the centrifugal force generated by the rotary crushing blades. By applying the centrifugal force, it is possible to increase the capacity of the crusher.

## Brief summary of the invention

Now, a solution has been invented for improving significantly the properties of the above-described crusher of prior art.

To achieve this aim, the crusher according to the invention is primarily characterized in what will be presented in the independent claim 1. The method according to the invention is, in turn, primarily characterized in what will be presented in the independent claim 9. The method for controlling a crusher according to the invention is, in turn, primarily characterized in what will be presented in the independent claim 14. The other, dependent claims will present some preferred embodiments of the invention.

The crusher according to the basic idea of the invention comprises first and second crushing blades fitted to rotate with respect to a rotation axis. Furthermore, the second crushing blade is fitted to move back and forth along a linear path which is parallel to the rotation axis. The linear movement of the second crushing blade is substantially harmonic; that is, when the direction of movement is changed, the speed of movement is accelerated under control to a maximum speed, after which the speed is decelerated under control before the change in the direction of movement.

The harmonic movement exerts considerably smaller loads on the structures than such a back-and-forth movement that is not decelerated before a change in the direction of movement. This has an advantageous effect on the durability and/or the dimensions of the crusher.

In an advantageous embodiment, the linear and substantially harmonic movement of the second crushing blade is effected by an eccentric. In one embodiment, the movement of the eccentric shaft is transmitted to the second crushing blade by means of a slide. In another embodiment, the movement of the eccentric shaft is transmitted to the second crushing blade by means of a connecting rod.

In one advantageous embodiment, the crushing blades are arranged so that the first crushing blade is up and the second crushing blade is down. Thus, the linear movement of the crusher changes the gap between the lower surface of the first crushing blade and the upper surface of the second crushing blade. The magnitude of the gap varies in a substantially harmonic way.

The different embodiments of the above-described arrangement, taken separately and in various combinations, provide several advantages. An advantage of one embodiment of the invention to a conventional crusher is the 4 to 5 times faster crushing function, which is effected by increasing the acceleration of the material to be crushed in the gap.

The chamber performance of conventional crushers is limited by the earth's gravity which dominates the movement of the material in the crushing space and thereby limits the crushing speed to 250 to 400 crushing functions per minute. With a crusher according to the invention, it is possible to achieve 1000 to 1500 crushing functions per minute, depending on the size of the application.

The solution according to the invention prepares the way for crushers with a high performance in relation to the weight. A crusher according to the invention which is slightly more efficient than a conventional cone crusher of 5,400 kg weighs about 3,100 kg. Furthermore, thanks to its smaller outer dimensions, it can be placed more easily in movable crushing plants. The small weight and dimensions of the crusher in relation to its performance also provides an obvious advantage of cost efficiency.

Also, the adjustability of the crusher is substantially improved by a new control parameter, *i.e.* the speed of rotation of the chamber. Changing the speed of rotation of the crushing chamber is a decisive and easy way to affect such variables important for the crushing as the stroke, the compression ratio, the chamber density, and the number of crushing zones, whereby the operation of the crusher can be easily optimized for different uses, if necessary. For example in mining crushers, the aim may be a crushing ratio that is clearly greater than at present.

Furthermore, in the solution according to the invention, the frame structures of the crusher are substantially subjected to a force in the direction of the linear movement. Thus, the provision of an adjusting/safety device for the setting of the crusher is decisively easier than in conventional cone crushers with a gyratory crushing force.

Providing the apparatus with mechanical power transmission will result in a good efficiency that is substantially higher than with hydraulic arrangements. It is thus more economical to use the apparatus, and

also the power input required by the crusher is smaller than in hydraulic apparatuses.

Description of the drawings

In the following, the invention will be described in more detail with reference to the appended principle drawings, in which

Fig. 1 shows a cross-sectional reduced view of the principle of a crusher according to the invention,

Fig. 2 shows a section along line A–A in Fig. 1,

Fig. 3 shows an embodiment of a crusher,

Fig. 4 shows an embodiment of an eccentric shaft and a slide,

Fig. 5 shows the slide according to Fig. 4 in the cross direction,

Fig. 6 shows an embodiment of an eccentric shaft and a connecting rod,

Fig. 7 shows the connecting rod according to Fig. 6 in the cross direction,

Fig. 8 shows another embodiment of the crusher,

Fig. 9 is a perspective view showing an embodiment of a crusher with the control cylinders visible.

For the sake of clarity, the drawings only show the details necessary for understanding the invention. The structures and details that are not necessary for understanding the invention but are obvious for anyone skilled in the art have been omitted from the figures in order to emphasize the characteristics of the invention.

Detailed description of the invention

The crusher according to the invention can be implemented in a variety of ways. An advantageous embodiment which can be varied in a number of ways is used as an example. The crusher according to the example is substantially vertical so that the material to be crushed is supplied from above via a funnel-shaped structure and the material flow proceeds downwards. The crusher may also be in another position, but the position according to the example is often advantageous with respect to the control of the material flow.

Figure 1 shows, in a very simplified side view, the structure of a crusher according to the invention, comprising at least a first crushing blade 1 and a second crushing blade 2 which are arranged to be rotary, one of the crushing blades being also arranged to move back and forth along a substantially harmonic linear path. The rotation axes X of the first crushing blade 1 and the second crushing blade 2 are parallel with the linear direction of movement of the second crushing blade 2. Figure 2 illustrates the rotation of the crushing blades 1, 2 seen from above, *i.e.* from the direction of supplying the material.

The crushing unit shown in Fig. 1 comprises a vertical main shaft 3. An element called the lower crushing blade 2 and used as a wearing part is connected to the main shaft 3. The lower crushing blade 2 is surrounded by the frame of the crusher. The frame consists of two parts: an upper frame and a lower frame, which are movable in relation to each other. The lower crushing blade 2 is connected to the lower frame. Another element, called the upper crushing blade 1 and used as a wearing part, is, in turn, connected to the upper frame. The upper crushing blade 1, or the outer crushing blade, corresponds in this example to the first crushing blade 1. The lower crushing blade 2, or the inner crushing blade, corresponds in this example to the second crushing blade 2.

Together, the lower crushing blade 2 and the upper crushing blade 1 constitute a crushing chamber in which the feed material, such as rock

or construction waste, is crushed. In the crusher according to the invention, the distance between the opposite surfaces of the crushing blades 1, 2 in the crushing chamber is first large and then becomes smaller, seen in the direction in which the material flow to be crushed proceeds. The angle between the crushing blades 1, 2 is preferably about 10 to 30°. Furthermore, the perpendicular distance of the central axis from the surfaces of the crushing chamber increases in the direction in which the material flow proceeds. As the distance increases, the surface area of the blades increases as well. Thus, in different crushing zones, it is possible to maintain the same volume or to have the change of the volume under control. In an advantageous embodiment, the volumes of the different crushing zones are substantially equal; that is, when the gap between the crushing blades 1, 2 decreases, the surface area of the crushing zone increases in relation to the reduction of the gap. This feature has an advantageous effect on crushing.

In one embodiment, the inner surface of the first crushing blade 1 and the outer surface of the second crushing blade 2 are advantageously substantially conical in shape, such as cones or truncated cones whose outer surface is provided with a suitable crushing embossing, such as grooves, teeth or other protrusions and/or recessions. In the example of Fig. 1, the second crushing blade 2 becomes wider in the direction in which the material flow proceeds; that is, in the example, the diameter of the lower part of the second crushing blade is larger than the diameter of the upper part. The crushing blades 1, 2 may also have other shapes, and they may comprise, for example, convex, concave and/or straight portions. The shape of the crushing blade 1, 2 is influenced by a number of factors, such as running speeds, material flows, and the properties of the material to be crushed. By the shapes of the crushing blades 1, 2 it is possible to affect the operation of the crushing chamber.

The main shaft 3 is arranged to move back and forth along a linear path. In the example, the movement is a movement up and down. Thus, the gap between the second or lower crushing blade 2 and the

first or upper crushing blade 1 varies during the cycle. The back and forth movement is continuous, and in one embodiment, the reciprocating movement takes place several times a second. For example, in one embodiment, the reciprocating movement takes place 15 to 25 times a second.

Herein, the harmonic movement of the crushing blade 2 means a movement in which, the crushing blade moving between the extreme positions, the movement of the crushing blade in relation to time can be illustrated by a graph which is substantially sinusoidal. When the direction of movement of the crushing blade 2 is changed, the speed of movement is accelerated under control to the maximum speed, after which the speed is decelerated under control before the direction of movement is changed. By the harmonic movement, the structures of the crusher are subjected to considerably smaller loads than by such a reciprocating movement whose speed is not changed in a controlled manner in connection with a change of direction.

The linear crushing movement can be effected in a variety of ways. In the advantageous embodiment shown in the example, the linear or vertical crushing movement is effected by means of a horizontal eccentric shaft 4. The power for the movement is generated by a suitable actuator 5, such as an electric or hydraulic motor. The eccentric shaft 4 is rotated by a suitable actuator 5, by means a power transmission structure, if necessary. For example, the eccentric shaft 4 can be driven by a motor 5 by means of belt transmission. It is also possible to use, for example, a shaft, a hydraulic line and/or a gear as the power transmission structure. In the examples shown in Figs. 3 and 8, the eccentric shaft 4 is coupled, by means of a slide 6a mounted on bearings, to a piston-like main shaft 3 performing a harmonic vertical motion. When the eccentric shaft 4 is rotated, the main shaft 3 and thereby the second crushing blade 2 are entrained in a harmonic linear vertical movement, wherein the gap between the first crushing blade 1 and the second crushing blade 2 varies during the cycle. The length of the linear movement is typically about 10 to 30 mm, but the length of the movement may also be different, depending on the application.

The eccentric shaft 4 and the slide 6a are shown in more detail in Figures 4 and 5. The slide 6a is connected to the main shaft 3 so that the slide cannot move with respect to the main shaft in the direction of the axis of the main shaft. Thus, when the slide 6a moves so that the movement comprises a component parallel to the axis of the main shaft 3, the main shaft also moves in the direction of its axis. Advantageously, the slide 6a may move with respect to the main shaft 3 in a direction perpendicular to the axial line of the main shaft.

In the structure according to the example, the slide 6a transmits both an upward movement and a downward movement to the main shaft 3. In the example, the slide 6a can move in the horizontal direction with respect to the main shaft 3. However, the slide 6a cannot move in the direction of the axis of the main shaft with respect to the main shaft 3. Thus, when the eccentric shaft 4 moves the slide 6a upwards, the main shaft 3 is moved upwards as well. In a corresponding manner, when the eccentric shaft 4 moves the slide 6a downwards, the main shaft 3 is moved downwards as well. The slide 6a does not cause movements of the main shaft 3 in a direction parallel to the axial line of the main shaft, that is, horizontal movements in the example.

In the embodiment shown in Fig. 6, the movement of the eccentric shaft 4 is transmitted to the second crushing blade 2 by means of a connecting rod 6b. In the structure according to the example, the connecting rod 6a transmits both an upward movement and a downward movement to the main shaft 3. The connecting rod 6a does not cause movements of the main shaft 3 in a direction perpendicular to the axial line of the main shaft, that is, horizontal movements in the example. Figure 7 shows an embodiment of the connecting rod 6b seen in the direction of the axis of the eccentric shaft 4.

The presented use of the eccentric shaft 4 and the slide 6a or the connecting rod 6b forces the crushing blade 2 connected to the slide or the connecting rod to move linearly from one extreme position to another according to the movement of the eccentric shaft. The

eccentric shaft 4 causes a constrained back-and-forth linear movement of the crushing blade 2 during a cycle. Such a structure does not require separate pullback structures for returning the crushing blade 2 from the other extreme position. The pullback structure could be, for example, a spring that would return the crushing blade 2 down. The tensioning of such a spring would require extra work which, in turn, would impair the efficiency, for which reason it is advantageous not to use a separate pullback structure when the aim is to achieve a high efficiency.

The first crushing blade 1 and the second crushing blade 2 of the crusher are rotary, and their rotation axes X are parallel with the direction of the linear movement of the second crushing blade 2. In the example, the first crushing blade 1 rotates in the horizontal direction around a vertical central axis X. In the example of Fig. 3, the first or upper crushing blade 1 of the crusher is mounted on bearings on the vertically movable upper frame of the crusher by means of grease-lubricated axial roller and ball bearings. The rotary movement is transmitted from an actuator 7 (for example a hydraulic motor) by means of power transmission 8 (for example a toothed rim or belt transmission) to the first crushing blade 1. The actuator 7 can also be another device, such as an electric motor. In view of the operation of the crusher, it is advantageous that the speed of rotation of the crushing blade 1 is easily adjustable. In one embodiment, the rotation speed of the crushing blade 1 is about 100 to 200 revolutions per minute.

The rotating power for the second crushing blade 2 can be generated by dedicated actuators and/or power transmission structures, or the rotating power can be generated by other actuators. For example, the rotating power for both of the crushing blades 1, 2 can be generated by single actuators 7, from which the rotating power is transmitted by suitable structures to both crushing blades. In an advantageous embodiment, the rotating power is generated by an actuator 7 for the first crushing blade 1, and the rotating power required for rotating the second crushing blade 2 is transmitted from the first crushing blade 1

to the second crushing blade 2 during the compressing movement of crushing. During the compressing movement, the first crushing blade 1 and the second crushing blade 2 are connected to each other by means of the material to be crushed between them. Thus, the material to be crushed and the second crushing blade 2 receive substantially the speed and the acceleration of the rotating movement effective on the first crushing blade 1.

In the application used as an example, the second crushing blade 2 is mounted on slide bearings to rotate freely with respect to the slide 6a or the connecting rod 6b and the main shaft 3, wherein the second crushing blade can rotate with the first crushing blade 1. In the example, the bearings of the second crushing blade 2 are lubricated via a lubricating channel extending through the eccentric shaft 4, and oil is discharged by gravity via an oil duct under the eccentric shaft to an oil tank. Preferably, the second crushing blade 2 is adapted to rotate so that its rotation axis X is parallel with the linear direction of movement. In the example, the second crushing blade 2 rotates in the horizontal plane around the vertical central axis X, as can be seen from Fig. 2. Preferably, the first crushing blade 1 and the second crushing blade 2 have the same rotation axis; that is, the crushing blades rotate concentrically. Preferably, the rotation axes are at the central axes X of the crushing blades 1, 2, wherein the first crushing blade 1 rotates around the central axis X of the first crushing blade, and the second crushing blade 2 rotates around the central axis X of the second crushing blade.

The rotary movement of the crushing blades 1, 2 generates a centrifugal force on the material to be crushed. Thus, the material is affected by the centrifugal force in addition to the earth's gravity. The centrifugal force has an advantageous effect on the crushing efficiency, because it accelerates the passage of the material away from the rotation axis/central axis X. The material flow passes between the crushing blades 1, 2 of the crusher outwards from the central axis X. Compared to conventional crushers, the material to be crushed in the crushing chamber is subjected to a 5 to 13 times greater acceleration.

The flow of the material to be crushed between the crushing blades 1, 2 is also affected by the angles of the crushing blades. Advantageously, the surface of the first crushing blade 1 is at a right angle to the rotation axis X and the linear crushing movement. The surface of the first crushing blade 1 may also be at another angle to the rotation axis X and the linear crushing movement. For example, it may be at an angle of about 75 to 90° to the rotation axis and the linear crushing movement so that the perpendicular distance of the rotation axis from the surface of the crushing blade increases, seen from the direction of supplying the material to be crushed.

The surface of the second crushing blade 2 may be at a right angle to the rotation axis X and the linear crushing movement, or the surface may be at different angles to the rotation axis X and the linear crushing movement. The suitable angle of the surface of the second crushing blade 2 is influenced, *inter alia*, by the angle of the surface of the first crushing blade 1 and the rotation speed of the crushing blades 1, 2, as well as the desired path and speed of propagation of the material to be crushed. It is advisable to select the angles of the crushing blades 1, 2 according to the material to be crushed and the crushing speed. Preferably, the angle between the opposite surfaces of the first crushing blade 1 and the second crushing blade 2 is about 10 to 30°.

In the example of Fig. 8, the conical surfaces of the crushing blades 1, 2 are at angles oblique in different directions with respect to the rotation axis X. The surface of the first crushing blade 1 is at an angle of about 75° to the rotation axis X and the linear crushing movement. The surface of the second crushing blade, in turn, is at an angle of about 75° to the rotation axis X and the linear crushing movement. The central line of the crushing chamber is, in the example, substantially perpendicular to the rotation axis X, and the angle between the first crushing blade 1 and the second crushing blade 2 is about 30°. The inclination of the crushing blades 1, 2 shown in Fig. 8 is suitable, for example, for stone crusher applications, in which the rotation speed of

the crushing blades is high, for example 100 to 200 revolutions per minute.

In the example of Fig. 3, the conical surfaces of the crushing blades 1, 2 are at angles oblique in the same direction with respect to the rotation axis X. The surface of the first crushing blade 1 is at an angle of about 45° to the rotation axis X and the linear crushing movement. The surface of the second crushing blade is, in turn, at an angle of about 70° to the rotation axis X and the linear crushing movement. The central line of the crushing chamber is, in the example, at an angle of about 50°, and the angle between the first crushing blade 1 and the second crushing blade 2 is about 20°. Advantageously, the first crushing blade 1 is at an angle of about 45 to 70° to the rotation axis X, and the second crushing blade 2 is at an angle of about 55 to 80° to the rotation axis. At smaller angles and smaller rotation speeds, it is possible to increase the effect of gravity on the passage of the material flow, and, correspondingly, at greater angles and greater rotation speeds, the effect of the centrifugal force on the passage of the material flow increases. The inclination of the crushing blades 1, 2 shown in Fig. 3 is suitable, for example, for stone crusher applications, in which the rotation speed of the crushing blades is low, for example 60 to 100 revolutions per minute.

In one embodiment, the surface of the first crushing blade 1 is at a perpendicular angle to the rotation axis. The surface of the second crushing blade 2 is, in turn, at an oblique angle to the rotation axis X. The surface of the second crushing blade 2 is at an angle of about 70° to the rotation axis X and the linear crushing movement. The distance of the first crushing blade 1, in the direction of the rotation axis X, from the surface of the second crushing blade 2 is greater in the vicinity of the material input than farther away from the material input. In other words, the distance of the first crushing blade 1, in the direction of the rotation axis X, from the surface of the second crushing blade 2 reduces, seen from the direction of feeding of the material to be crushed. The angle between the first crushing blade 1 and the second crushing blade 2 is about 20°.

The upper frame of the crusher is advantageously movable with respect to the lower frame. In the examples of Figs. 3 and 8, the upper frame is mounted to the lower frame by four hydraulic cylinders 9 (all the cylinders are not shown in the figure) which receive the crushing force. Figure 9 is a perspective view showing the placement of the control cylinders 9 in a crusher. In the example, the four control cylinders 9 connect the upper frame and the lower frame of the crusher. There may also be more or fewer control cylinders 9 than in the example. The number of cylinders is also influenced, *inter alia*, by the size of the application and the properties of the control cylinders 9 used. By the cylinders 9, it is possible to adjust the setting of the crusher steplessly upon crushing, and they can be provided with an overload protection device and a device for removing an uncrushable solid object, such as a piece of iron. In the crusher according to the example, the crushing force has vertical and horizontal components. The horizontal components of the crushing force effective on the frame structures substantially compensate for each other. The frame structures are thus essentially subjected to the force effective in the direction of the linear movement, that is, the vertical force in the example. Because the force is substantially parallel to the direction of movement of the cylinders, the typical control cylinders 9 stand said force, wherein no separate locking structures will be needed. Thus, it is decisively easier to provide a device for adjusting the setting and/or a safety device for the crusher than for conventional crushers with a rotary crushing force. Furthermore, it is possible to adjust the crusher by the control cylinders 9 during the operation, because the setting of the crusher does not need to be locked by separate locking structures for the time of the operation. The control cylinders 9 can also be provided with a safeguarding property, wherein the cylinders allow the crushing blades 1, 2 to draw away from each other, when there is material between them that cannot be crushed by the crushing blades.

The above-presented arrangement also makes it possible to control the crusher in a new way. The adjustability of the crusher is substantially improved because of a new control parameter, *i.e.* the speed of

rotation of the chamber. The smallest gap occurring during the cycle is called the setting of the crusher, and the difference between the maximum and the minimum of the gap is called the stroke of the crusher. Typically, the crusher is adjusted by changing the setting and the stroke. By changing the rotation speed of the crushing chamber, it is easy to affect the factors important for the crushing. For example, a variable affected by the rotation speed may be the stroke, the compression ratio, the chamber density and/or the number of crushing zones. By adjusting the variables, the operation of the crusher can be optimized, if necessary, for different uses. By the crusher setting and the crusher stroke, the operating speed of the crusher and the rotation speed of the crushing chamber, it is possible, among other things, to influence the grain size distribution of the crushed material and the production capacity of the crusher. The adjustment of the crusher can be based solely on the adjustment of the rotation speed of the crushing chamber, or it can be combined with other ways of adjustment.

In the above-presented embodiments, the crushing blade fitted to perform a harmonic back-and-forth linear movement is the one placed lower in the direction of the material flow. It is also possible to implement the crusher so that the first, upper crushing blade in the direction of the material flow is arranged to perform a linear movement.

By combining, in various ways, the modes and structures disclosed in connection with the different embodiments of the invention presented above, it is possible to produce various embodiments of the invention in accordance with the spirit of the invention. Therefore, the above-presented examples must not be interpreted as restrictive to the invention, but the embodiments of the invention may be freely varied within the scope of the inventive features presented in the claims hereinbelow.

Claims:

1. A crusher comprising at least a first crushing blade (1) and a second crushing blade (2) which are arranged to be rotary, one of the crushing blades being also arranged to move back and forth along a linear path, and the rotating axes (X) of the first crushing blade (1) and the second crushing blade (2) being parallel with the linear direction of movement of the second crushing blade (2), **characterized** in that the second crushing blade (2) is fitted to move substantially harmonically back and forth along a linear path.

2. The crusher according to claim 1, **characterized** in that the crusher also comprises an eccentric shaft (4) to generate the linear movement of the second crushing blade (2).

3. The crusher according to claim 1 or 2, **characterized** in that the crusher also comprises a slide (6a) fitted to transmit the movement of the eccentric shaft (4) to the second crushing blade (2).

4. The crusher according to claim 3, **characterized** in that the slide (6a) is fitted to remain stationary with respect to the eccentric shaft (4) in the direction of the linear movement.

5. The crusher according to any of the preceding claims 3 or 4, **characterized** in that the slide (6a) is fitted to allow the movement of the eccentric shaft (4) in a direction perpendicular to the direction of the linear movement.

6. The crusher according to any of the preceding claims, **characterized** in that the diameter of the lower part of the second crushing blade (2) is greater than the diameter of the upper part.

7. The crusher according to any of the preceding claims 1 to 5, **characterized** in that the diameter of the lower part of the second crushing blade (2) is smaller than the diameter of the upper part.

8. The crusher according to any of the preceding claims, **characterized** in that the crusher also comprises control cylinders (9) for adjusting the crusher during its operation.

9. A method for crushing material, in which method the material is introduced between a first rotary crushing blade (1) and a second rotary crushing blade (2), and the second crushing blade (2) moving linearly back and forth with respect to the first crushing blade (1), and the rotation axis (X) of the crushing blades being parallel to the linear direction of movement, **characterized** in that the back-and-forth movement is substantially harmonic.

10. The method according to claim 9, **characterized** in that the harmonic linear movement is generated by means of an eccentric shaft (4).

11. The method according to claim 10,**characterized** in that the movement of the eccentric shaft (4) is transmitted to the second crushing blade (2) by means of a slide (6a) which remains stationary with respect to the eccentric shaft (4) in the direction of the linear movement, and which allows the movement of the eccentric shaft (4) in relation to the slide (6a) in a direction perpendicular to the direction of the linear movement.

12. The method according to any of the preceding claims 9 to 11, **characterized** in that the mutual setting between the first crushing blade (1) and the second crushing blade (2) is adjusted during the operation by control cylinders (9).

13. The method according to any of the preceding claims 9 to 11, **characterized** in that at least the rotation speed of the first crushing blade (1) is adjusted.

14. A method for controlling a crusher, the crusher comprising at least a first crushing blade (1) and a second crushing blade (2) which are arranged to be rotary, one of the crushing blades being also arranged

to move back and forth along a linear path, and the rotating axes (X) of the first crushing blade (1) and the second crushing blade (2) being parallel with the linear direction of movement of the second crushing blade (2), **characterized** in that in the method, at least the rotation speed of the first crushing blade (1) is adjusted.

15. The method according to claim 14, **characterized** in that the setting of the crusher is also adjusted by control cylinders (9).

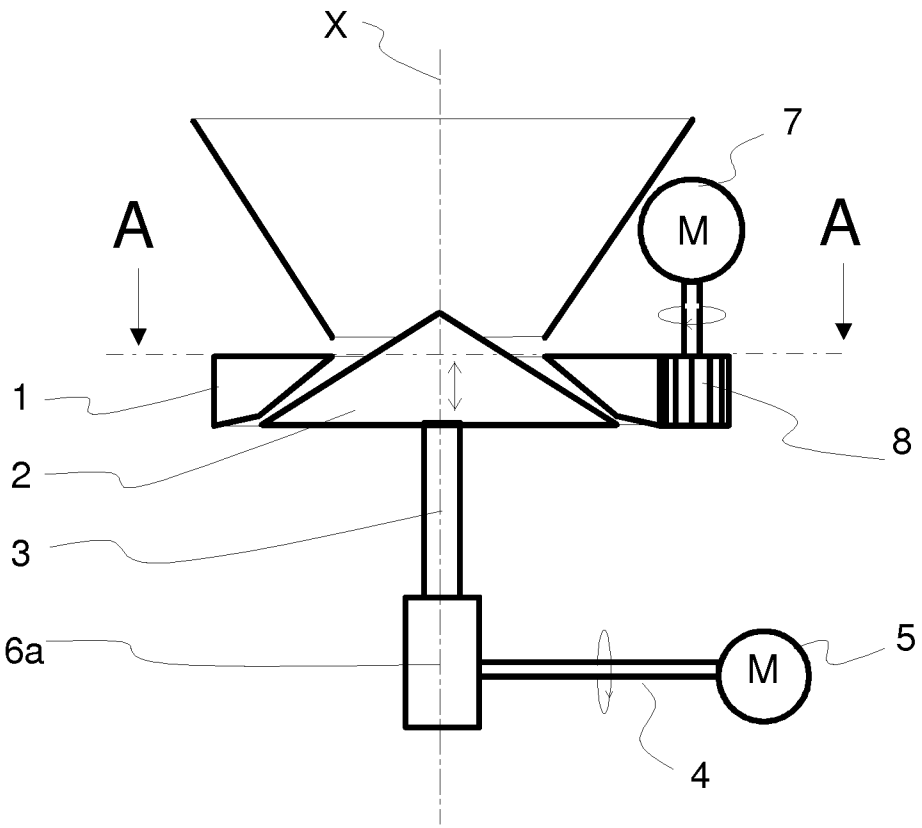



Fig. 1

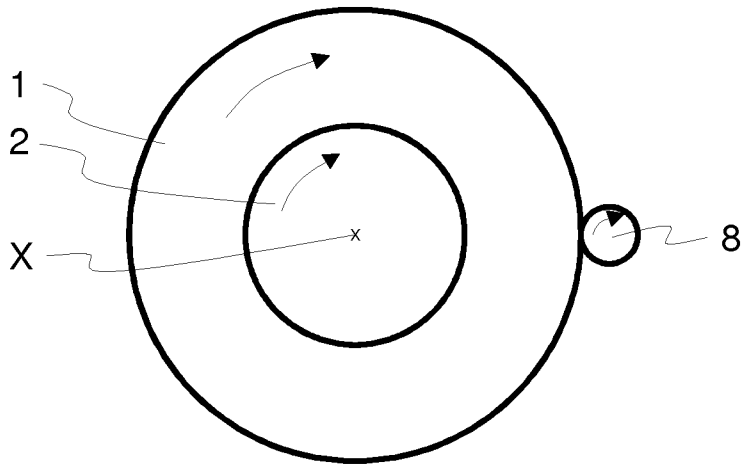



Fig. 2

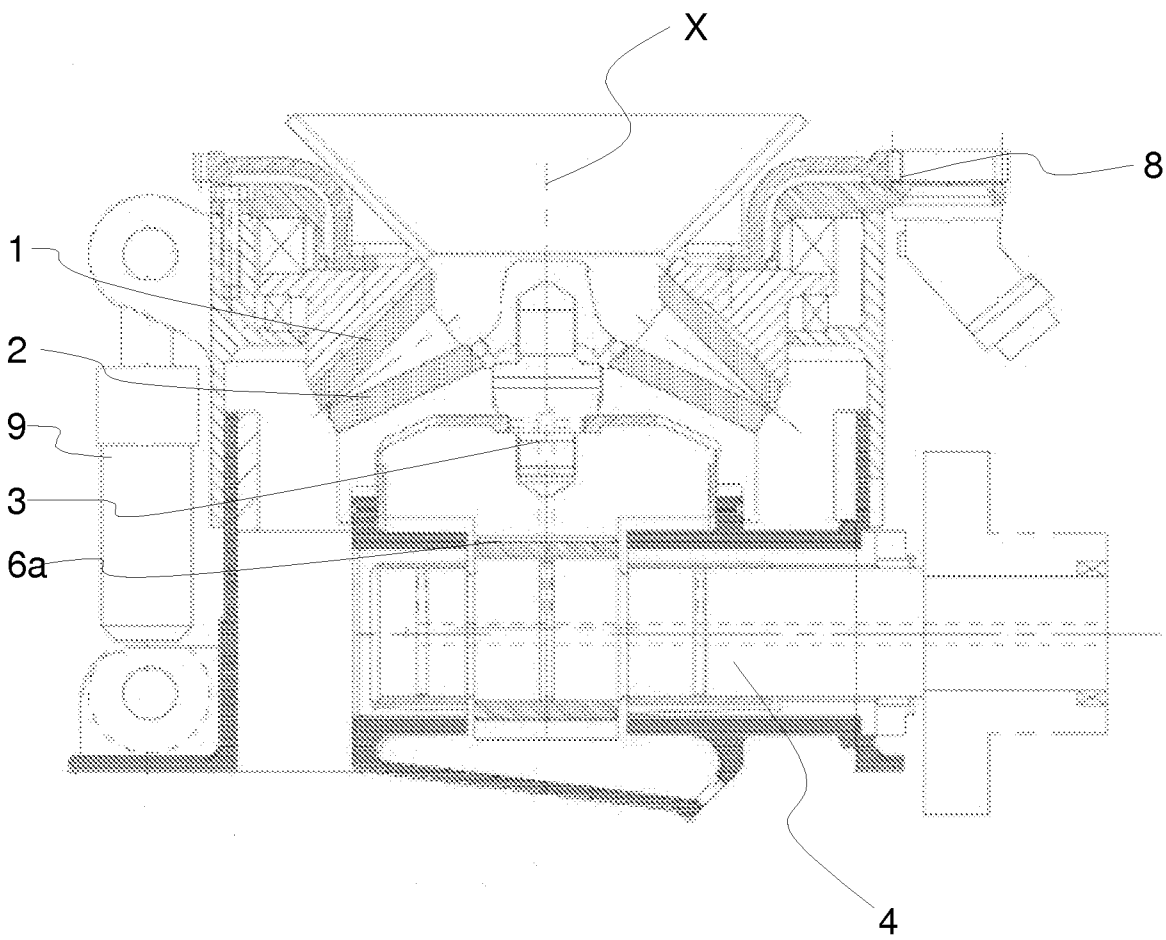



Fig. 3

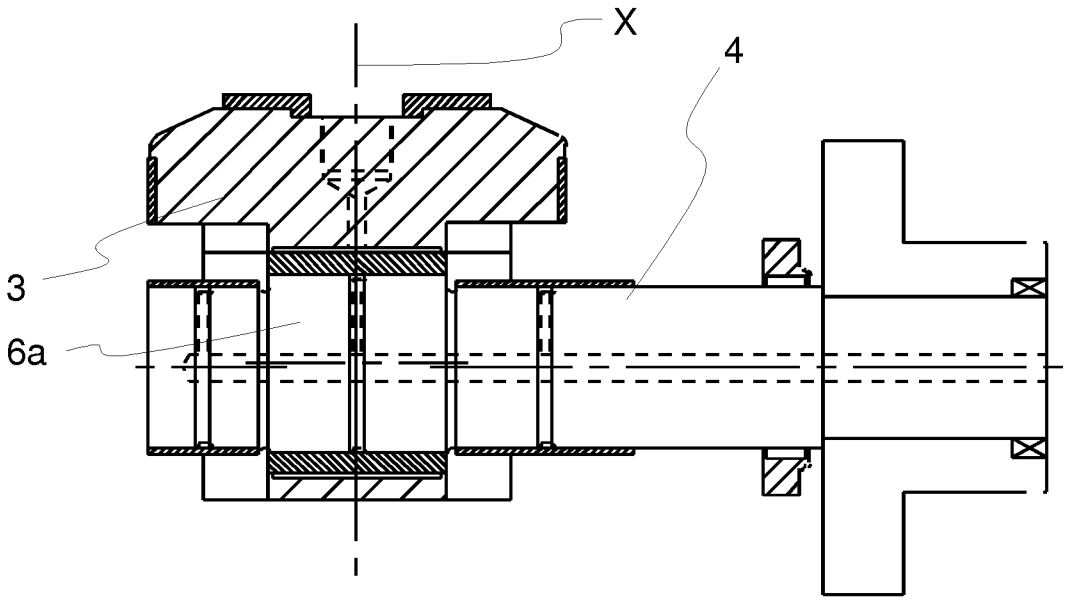



Fig. 4

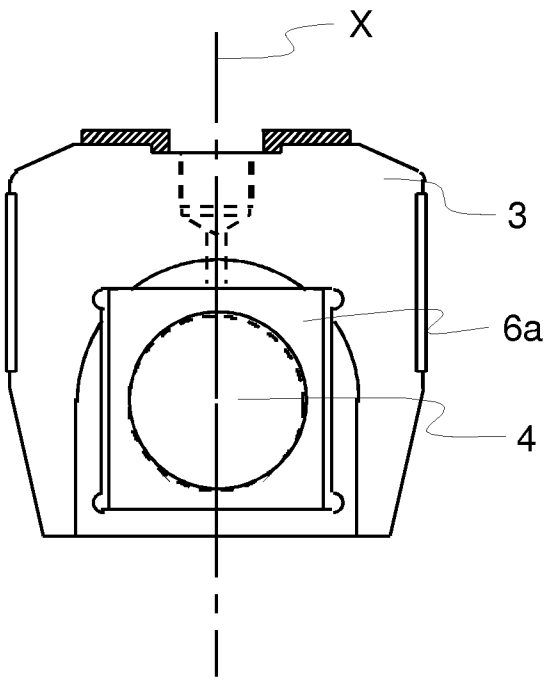



Fig. 5

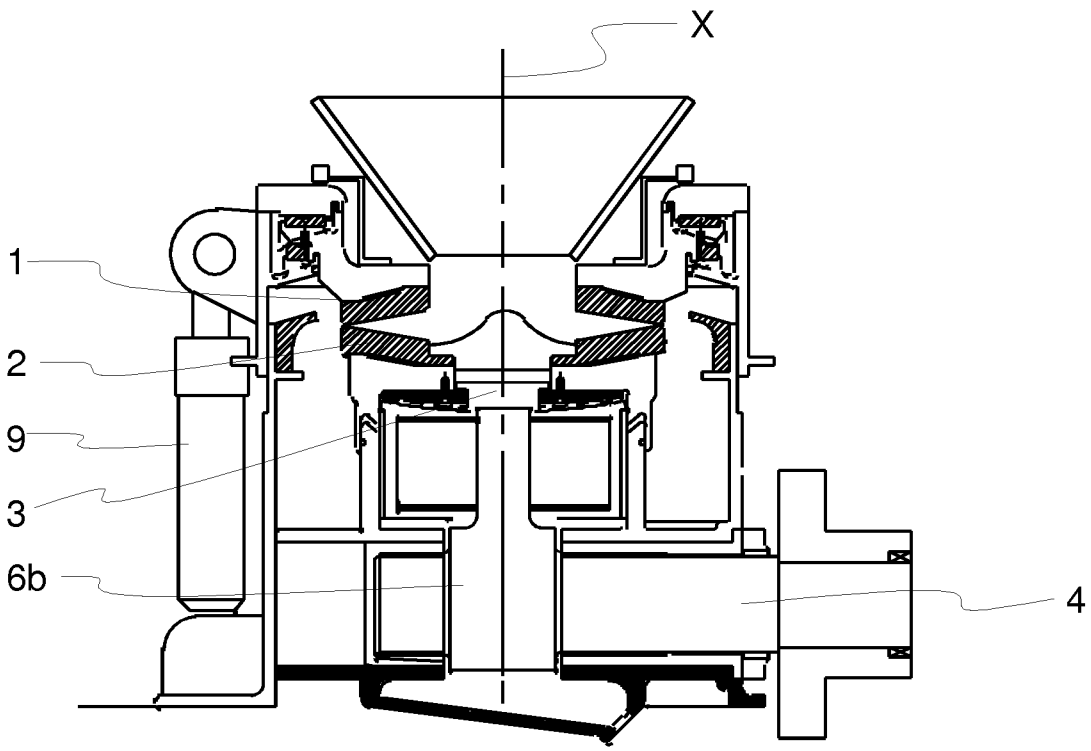



Fig. 6





Fig. 7

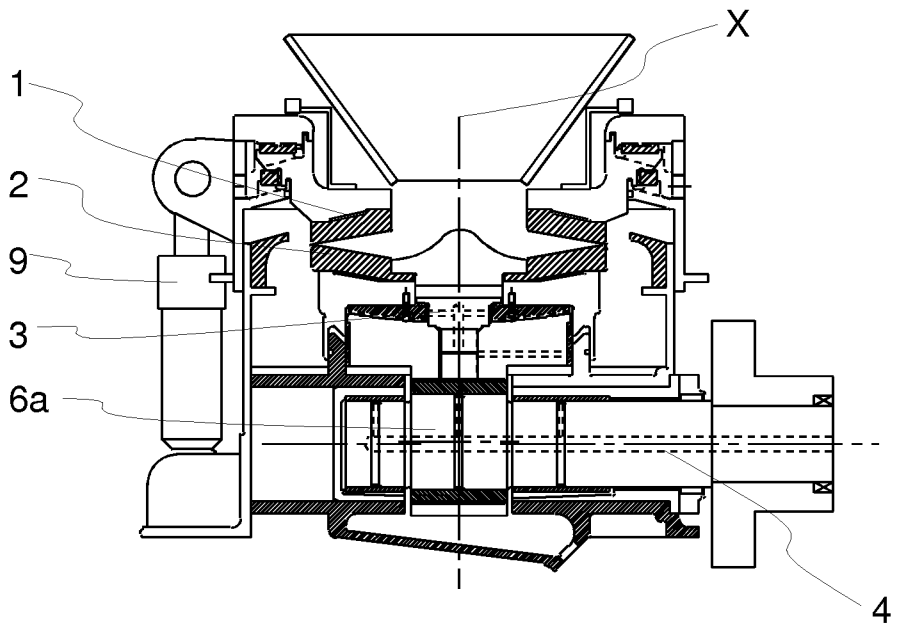



Fig. 8

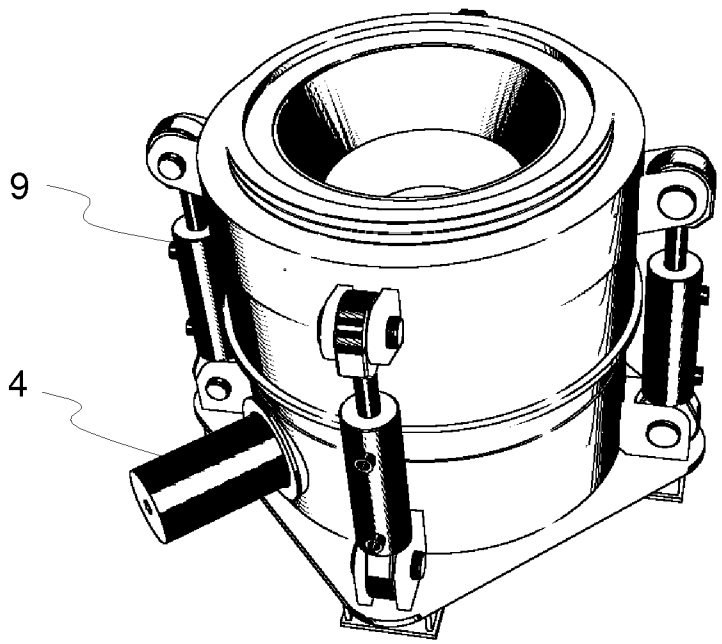



Fig. 9

**INTERNATIONAL SEARCH REPORT**

International application No.
PCT/FI2007/050335

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC8: B02C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

FI, SE, NO, DK

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|---|---|---|
| Y<br>A | US 3627214 A (HILBRANDS JAN WILLEM) 14 December 1971 (14.12.1971)<br>whole publication | 14-15<br>1-13 |
| Y | US 2006/0243833 A1 (NILSSON ANDERS) 02 November 2006 (02.11.2006), paragraphs 0022 and 0071 | 14 |
| Y | FI 117044B B (METSO MINERALS TAMPERE OY) 31 May 2006 (31.05.2006), page 5, lines 20-22 | 15 |
| A | RU 2145521 C1 (IVANOV ANATOLIJ MIKHAJLOVICH et al.) 20 February 2000 (20.02.2000), English abstract | 1-15 |
| A | SU 1477462 A1 (IVANOVSK ENERGET INST et al.) 07 May 1989 (07.05.1989), English abstract | 1-15 |
| A | GB 689453 A (VIBRO DYNAMIC ENGINEERING INC) 25 March 1953 (25.03.1953), figures, abstract and page 2, lines 17-20 and 92-116 | 1-15 |

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

| Date of the actual completion of the international search | Date of mailing of the international search report |
|---|---|
| 01 February 2008 (01.02.2008) | 26 February 2008 (26.02.2008) |

Name and mailing address of the ISA/FI
National Board of Patents and Registration of Finland
P.O. Box 1160, FI-00101 HELSINKI, Finland
Facsimile No. +358 9 6939 5328

Authorized officer
Juha Vuorela
Telephone No. +358 9 6939 500

**INTERNATIONAL SEARCH REPORT**

International application No.
PCT/FI2007/050335

**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

The application lacks unity within the meaning of Rule 13 PCT.

According to Rule 13.1 PCT, an application shall relate to one invention only or to group of inventions so linked as to form a single general inventive concept.

Further, according to Rule 13.2, the requirement of unity of invention is fulfilled only when there is a technical relationship among claimed inventions involving one or more of the same or corresponding special technical features. The expression "special technical features" means those technical features that define a contribution which each of the claimed inventions, considered as a whole, makes over the prior art.

Continued on extra sheet.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. ☒ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

**Remark on Protest**

☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

☐ No protest accompanied the payment of additional search fees.

International application No.
PCT/FI2007/050335

Continuation of Box III:
The International Searching Authority has found that this international application contains two groups of inventions that are not so linked as to form a single general inventive concept. The following inventions have been found.

Invention 1:
Claims 1-8 concern a crusher that has two rotating plates. The second crushing plate is arranged to move reciprocating linearly. The movement is essentially harmonic reciprocating motion. Claims 9-13 concern a method for crushing as defined in the claims 1-8.

Invention2:
Claims 14-15 concern a method for controlling a crusher. The controlling is done by adjusting the rotation speed of a crusher plate.

**INTERNATIONAL SEARCH REPORT**
**Information on patent family members**

International application No.
PCT/FI2007/050335

| Patent document cited in search report | Publication date | Patent family members(s) | Publication date |
|---|---|---|---|
| US 3627214 A | 14/12/1971 | GB 1169593 A | 05/11/1969 |
| | | FR 2065174 A5 | 23/07/1971 |
| | | DE 1296936 B | 04/06/1969 |
| US 2006/0243833 A1 | 02/11/2006 | BR PI0407263 A | 31/01/2006 |
| | | CN 1747786 A | 15/03/2006 |
| | | CA 2512160 A1 | 27/01/2005 |
| | | WO 2005007293 A1 | 27/01/2005 |
| | | EP 1592511 A1 | 09/11/2005 |
| | | AU 2004257562 A1 | 27/01/2005 |
| | | SE 0300327 A | 11/08/2004 |
| | | SE 524784 C2 | 05/10/2004 |
| FI 117044B B | 31/05/2006 | BR PI0510339 A | 30/10/2007 |
| | | CN 1946481 A | 11/04/2007 |
| | | EP 1771251 A1 | 11/04/2007 |
| | | AU 2005234961 A1 | 03/11/2005 |
| | | WO 2005102530 A1 | 03/11/2005 |
| RU 2145521 C1 | 20/02/2000 | None | |
| SU 1477462 A1 | 07/05/1989 | None | |
| GB 689453 A | 25/03/1953 | None | |

**INTERNATIONAL SEARCH REPORT**

International application No.
PCT/FI2007/050335

CLASSIFICATION OF SUBJECT MATTER

Int.Cl.
***B02C 1/00*** (2006.01)
***B02C 7/08*** (2006.01)
***B02C 25/00*** (2006.01)