

**(12) PATENT**  
**(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 200073151 B2**  
**(10) Patent No. 777622**

(54) Title  
Connector

(51) 6 International Patent Classification(s)  
F16L 029/00 F16L 037/28  
A61M 005/14

(21) Application No: 200073151 (22) Application Date: 2000.09.18

(87) WIPO No: W001/20218

(30) Priority Data

(31) Number (32) Date (33) Country  
11-262079 1999.09.16 JP

(43) Publication Date : 2001.04.17

(43) Publication Journal Date : 2001.06.14

(44) Accepted Journal Date : 2004.10.21

(71) Applicant(s)  
Terumo Kabushiki Kaisha

(72) Inventor(s)  
Yoshinori Hishikawa

(74) Agent/Attorney  
Freehills Carter Smith Beadle, Level 43, 101 Collins  
Street, MELBOURNE VIC 3000

AU 200073151

(12)特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関  
国際事務局



(43) 国際公開日  
2001年3月22日 (22.03.2001)

PCT


(10) 国際公開番号  
WO 01/20218 A1

(51) 国際特許分類: F16L 29/00, 37/28, A61M 5/14 (72) 発明者: および  
(52) 国際出願番号: PCT/JP00/06358 (73) 発明者/出願人(米国についてのみ): 斎川資文  
(53) 国際出願日: 2000年9月18日 (18.09.2000) (HISHIKAWA, Yoshinori) [JP/JP]; 〒259-0151 神奈川  
(54) 国際出願の言語: 日本語 (74) 代理人: 渡辺重徳, 外(WATANABE, Mochitoshi et al.);  
(55) 国際公開の言語: 日本語 〒101-0032 東京都千代田区岩本町2丁目12番5号 早  
(56) 優先権データ: 特願平11/262079 1999年9月16日 (16.09.1999) JP 川トナカイビル3階 Tokyo (JP).  
(57) 出願人(米国を除く全ての指定国について): テルモ (TERUMO KABUSHIKI KAISHA) [JP/JP];  
(58) 指定国(国内): AU, CN, ID, IN, KR, SG, US.  
(59) 指定国(広域): ヨーロッパ特許(AT, BE, CH, CY, DE,  
(60) 指定国(広域): DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  
(61) 指定国(広域):

/総葉有/

(54) Title: CONNECTOR

(54) 発明の名称: コネクタ



(57) Abstract: A connector (1) used for various medical instruments, infusion containers, and infusion devices to connect a tube (4). The connector (1) includes a cylindrical valve (3) made of elastic material with a closable slit (33) so that a tube (4) can be connected without passing through the valve (3).

(57) 契約:

WO 01/20218 A1

各種医療機関や輸液容器、輸液器具等に用いられ、管体(4)を接続するためのコネクタ(1)であって、開閉可能なスリット(33)を有する略筒状の弾性材料からなる弁体(3)を備えたコネクタ(1)であり、管体(4)は該弁体(3)を貫通することなく接続される。

ABSTRACT

A connector used for various medical instruments, infusion containers, and infusion devices to connect a tube. The connector includes a cylindrical valve made of elastic material with a closable slit so that a tube can be connected without passing through the valve.

## SPECIFICATION

## Connector

## TECHNICAL FIELD

This invention relates to a connector for connecting tubular bodies, which is adapted for use with various medical devices, infusion containers, fluid feeding device, and the like.

## BACKGROUND ART

This invention relates to a connector (an adapter) which is used for connecting tubular bodies, and which is adapted for use with various medical devices, infusion containers, fluid feeding device, and the like.

The connector of this type has been fabricated so that the connector comprises a housing formed with a fluid passage, and a valve of an elastic material which is mounted on the tube connection port of the housing. Such connector has been used to reliably communicate the fluid passages defined in the tube and in the connector once the valve has been opened by the valve-opening/closing mechanism so that the fluid (liquid and the like) flowing through the tube can be sent into the connector.

---

Among such connectors, the connectors used for medical applications suffer from the risk of bloodborne infection due to unintentional accidents, and it is highly desirable in such a connector to avoid the opening of the valve with a sharp needle. Use of a reclosable, "needleless" connector is seriously in demand.

Such connector of the first type has a valve provided with a slit or the like which remains closed when no tube or the like is engaged. This valve is opened by penetrating a tubular body such as a cannula, a male Luer, or the like through the valve to thereby communicate the fluid passages defined in the tubular body and in the connector. Typical examples of such connector are disclosed in JP 08-243092 A, JP 08-500983 A, JP 10-512946 A, and JP 10-118178 A.

Second type of such connector is disclosed, for example, in JP 09-108361 A. The connector of JP 09-108361 A comprises a valve comprising an elliptical piston head formed with an opening (marquise-shaped bore) therethrough, and a housing provided with a connection port having a diameter smaller than said head. When no tube is connected, the elliptical head is constrained in the reduced diameter housing by the piston to shut the bore. Once the tube is connected, the piston retreats into the enlarged diameter

housing by being pushed with the distal surface of the tube, and the head regains its natural elliptic shape and the marquise-shaped bore similarly regains its open shape to provide a fluid passage therethrough. Another example of the connector wherein the tube does not penetrate through the valve is a connector of the constitution including a drive means such as tapered female threads for compressing the valve. JP 07-502420 A discloses a connector wherein the valve is compressed and deformed to open the valve slit by means of the tapered female threads. JP 07-502421 A discloses a connector comprising a valve having a bias means of pleated shape and a cap, and an urging portion (a female fastener) for opening/closing the valve, wherein the fluid passage is closed by the blocking of the artificial opening defined in the valve-retaining member by the valve cap and the adjacent shoulder of the biasing portion which are pushed by the urging means. On the other hand, when the cap is compressed from the exterior by a syringe to open the artificial opening, a fluid passage is defined by the notch (guide slots) extending in the direction of the fluid passage formed on the biasing portion and the bypass openings.

However, the connectors of the first type wherein the valve is forced open by the tube penetration through the

valve suffers from the problem of excessive increase of the diameter of the opening. In the case of the connector having an opening that has been preliminarily formed, the connector suffers from the problem of fluid leakage due to the reverse flow of the fluid from the proximal end of the connector upon disengagement of the tube from the connector.

Furthermore, the connectors of the type wherein the distal end of the tube enters the interior of the connector by the penetration of the tube through the valve suffer from the problem of contamination of the fluid passage of the connector by the bacteria which had been attached on the distal end of the tube.

The connectors of the second type do not suffer from the problems of the first type connectors since the tube does not penetrate through the valve. These connectors, however, needs further improvements in their sealing capability and engagement reliability. To be more specific, the connectors of the second type has a structure wherein the distal end surface of the tube is pushed against the proximal surface of the valve, and the liquid tightness is predominantly dependent on the contact pressure between the distal end surface of the tube and the proximal surface of the valve. As a consequence, such connector is associated with the risk of fluid leakage upon increase in the inner

pressure. There is also a risk of disengagement between the tube and the valve unless they are pushed against each other with a very strong force.

#### Disclosure of the Invention

5        Throughout this specification unless stated otherwise, where a document, act or item of knowledge is referred to or discussed, this reference or discussion is not an admission that the document, act or item of knowledge, or any combination thereof was part of the common general knowledge  
10      at the priority date.

In view of the situation as described above, an object of the present invention is to provide a connector which has a simple structure comprising a small number of components, which is easy to use, which is free from fluid passage  
15      contamination upon engagement with the tube, which has enabled a reliable engagement between the tube and the connector with high liquid tightness (with high sealing capability), and which has avoided fluid leakage from the connector during the engagement and after the disengagement  
20      of the tube with the connector.

Such an object of the present invention is achieved by the present invention as described below in the following (2) and (4) to (17).

##### (a) A connector comprising

25        a housing provided with a fluid passage in its interior and a connection port for engagement with a tube; and

a valve of an elastic material accommodated in said housing; wherein

    said valve has a cylindrical base; a valve portion on one axial end of said base which becomes in contact with said tube to be pushed inward by said tube; and a slit formed in said valve portion which opens when said valve portion is pushed inward; and

    said valve undergoes elastic deformation when said tube is engaged with said connection port of the housing by pushing said tube against said valve portion of the valve, and said slit opens as a result of said elastic deformation such that said valve portion becomes in close contact with distal end surface and distal peripheral surface of said tube.

(2) A connector comprising

    a housing provided with a fluid passage in its interior and a connection port for engagement with a tube; and

    a valve of an elastic material accommodated in said housing; wherein

    said valve has a cylindrical base; a valve portion on one axial end of said base which becomes in contact with said tube to be pushed inward by said tube; and a slit

formed in said valve portion which opens when said valve portion is pushed inward; and

    said valve undergoes elastic deformation when said tube is engaged with said connection port of the housing by pushing said tube against said valve portion of the valve, and said slit opens as a result of said elastic deformation and said base becomes folded such that said valve portion enters the interior of said vase and a new interior surface defined by the folded valve portion becomes in close contact with distal peripheral surface of said tube.

(3) A connector comprising

    a housing provided with a fluid passage in its interior and a connection port for engagement with a tube; and

    a valve of an elastic material accommodated in said housing; wherein

    said valve has a cylindrical base; a valve portion on one axial end of said base which becomes in contact with said tube to be pushed inward by said tube; and a slit formed in said valve portion which opens when said valve portion is pushed inward; and

    said valve undergoes elastic deformation when said tube is engaged with said connection port of the housing by pushing said tube against said valve portion of the valve,

and said slit opens as a result of said elastic deformation such that said base becomes compressed in the axial direction to become dilated.

(4) A connector comprising

    a housing provided with a fluid passage in its interior and a connection port for engagement with a tube; and

    a valve of an elastic material accommodated in said housing; wherein

        said valve has a cylindrical base; a valve portion on one axial end of said base which becomes in contact with said tube to be pushed inward by said tube; and a slit formed in said valve portion which opens when said valve portion is pushed inward; and

        said valve undergoes elastic deformation when said tube is engaged with said connection port of the housing by pushing said tube against said valve portion of the valve, and said slit opens as a result of said elastic deformation such that said valve portion becomes in close contact with said tube and the area of contact enters the interior of said base.

(5) A connector comprising

a housing provided with a fluid passage in its interior and a connection port for engagement with a tube; and

a valve of an elastic material accommodated in said housing; wherein

said valve has a cylindrical base; a valve portion on one axial end of said base which becomes in contact with said tube to be pushed inward by said tube; and a slit formed in said valve portion which opens when said valve portion is pushed inward; and

said valve undergoes elastic deformation when said tube is engaged with said connection port of the housing by pushing said tube against said valve portion of the valve, and said slit opens as a result of said elastic deformation with the base being dilated; and a space is defined between said base and said housing to allow said dilatation of the base.

(6) A connector comprising

a housing provided with a fluid passage in its interior and a connection port for engagement with a tube; and

a valve of an elastic material accommodated in said housing; wherein

said valve has a cylindrical base; a valve portion on one axial end of said base which becomes in contact with said tube to be pushed inward by said tube; a slit formed in said valve portion which opens when said valve portion is pushed inward; and a fixture portion on the other axial end of said base, said fixture portion securing said valve against said housing; and

    said housing has a relief space defined in its interior to thereby allow moving of fixture side of said base into said relief space;

    said valve undergoes elastic deformation when said tube is engaged with said connection port of the housing by pushing said tube against said valve portion of the valve, and said slit opens as a result of said elastic deformation with the fixture side of said base being pushed into said relief space.

(7) A connector according to the above (6) wherein said base becomes compressed in the axial direction to become dilated when said tube is pushed against said valve portion of the valve.

(8) A connector according to the above (6) or (7) wherein a space is defined between said base and said housing to allow said dilatation of said base.

---

- (9) A connector according to any one of the above (1) to (6) wherein said valve restores its original shape when said tube is disengaged from said connection port.
- (10) A connector according to any one of the above (1) to (6) wherein said slit has a size such that penetration of said tube through said slit upon opening of said slit is not allowed.
- (11) A connector according to the above (10) wherein said valve portion has a thick area in the central region, and said slit is formed in said thick area.
- (12) A connector according to any one of the above (1) to (6) wherein at least a part of said base is tapered such that outer diameter or inner diameter increases with increase in the distance from said valve portion.
- (13) A connector according to any one of the above (1) to (6) wherein said valve portion has a projection and/or a recess on the surface that becomes in contact with distal end surface of said tube.
- (14) A connector according to the above (13) wherein said valve portion has a first projection on the surface that becomes in contact with said distal end surface of the tube.
- (15) A connector according to the above (14) wherein said first projection has a shape resembling a dome.

(16) A connector according to any one of the above (1) to (15) wherein said valve portion has a projection on the surface that does not become in contact with said distal end surface of the tube.

5 (17) A connector according to the above (16) wherein said projection constitutes a part of a sphere.

**Brief Description of the Drawings**

Fig. 1 is a longitudinal cross section of the connector according to an embodiment of the present invention.

10 Fig. 2 is a plan view of the connector seen from proximal side.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
698  
699  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
798  
799  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
898  
899  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
989  
990  
991  
992  
993  
994  
995  
996  
997  
997  
998  
999  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1097  
1098  
1099  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1197  
1198  
1199  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1297  
1298  
1299  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1397  
1398  
1399  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1497  
1498  
1499  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1597  
1598  
1599  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1697  
1698  
1699  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1797  
1798  
1799  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1829  
1830  
1

FIG. 3 is a longitudinal cross section of the connector of FIG. 1 and the tube when the distal end surface of the tube has been positioned on the connector.

FIG. 4 is a longitudinal cross section of the connector of FIG. 1 and the tube when the distal end surface of the tube has proceeded to the level of the proximal end surface of the housing.

FIG. 5 is a longitudinal cross section of the connector of FIG. 1 and the tube when the distal end of the tube has been inserted into the connection port of the connector housing.

FIG. 6 is a longitudinal cross section of the connector of FIG. 1 and the tube after completing the engagement of the tube with the connector (when the distal end of the tube has entered into the intermediate diameter space of the connector housing).

FIG. 7 is a longitudinal cross section of a connector according to another embodiment of the present invention wherein the housing has a space defined in its interior to allow the dilatation of the valve.

FIG. 8 is a longitudinal cross section of a connector according to another embodiment of the present invention.

FIG. 9 is a plan view of the connector according to another embodiment of the present invention seen from the proximal side.

FIG. 10 is a longitudinal cross section of the connector of FIG. 9 taken along the line X-X.

FIG. 11 is a longitudinal cross section of the connector of FIG. 10 taken along the line XI-XI.

FIG. 12 is a longitudinal cross section of the connector according to the embodiment of FIG. 11 when the distal end surface of the tube was positioned on the connector.

FIG. 13 is a longitudinal cross section of the connector according to the embodiment of FIG. 11 when the distal end of the tube was inserted into the connection port of the cylinder.

FIG. 14 is a longitudinal cross section of the connector according to the embodiment of FIG. 11 after completing the engagement of the tube to the connector (when the distal end of the tube has entered into the intermediate diameter space of the connector housing).

FIG. 15 is a longitudinal cross section of the embodiment of FIG. 11 showing the shape of the valve support and the like.

FIG. 16 is a plan view showing another embodiments of the valve.

FIG. 17 is a longitudinal cross section showing embodiments of Y housing connector.

FIG. 18 is a longitudinal cross section showing an embodiment of T housing connector.

FIG. 19 is a longitudinal cross section showing an embodiment wherein a plurality of connectors are aligned in parallel.

#### BEST MODE FOR CARRYING OUT THE INVENTION

Next, various embodiments of the present invention are described in detail by referring to the attached drawings. In the following description, the upper side of the connector (the side engaged to the tube) in longitudinal cross sections (for example, in FIG. 1, FIGS. 3 to 6, and other drawings corresponding to these drawings) is referred "proximal" whereas the lower side is referred as "distal".

FIG. 1 is a longitudinal cross sectional view of the connector according to one embodiment of the present invention wherein an I-shaped connector used for connecting tubes is shown with some part of one tube. FIG. 2 is a

plan view of the connector of FIG. 1 seen from the proximal side.

FIGS. 1 and 2 are views showing a connector 1 which is used for engagement of a tube 4. The connector 1 comprises a housing 2 and a valve 3.

The housing 2 comprises a cylinder 21 on its proximal side and a cylindrical cap 22 on its distal side, and the housing 1 is formed substantially in cylindrical shape with a passage for fluid (hereinafter referred as a fluid passage) 24 defined in its interior. The terms "cylinder" and "cap" are used herein for convenience of describing the two housing components, and there would be no problem if these components were designated in the reverse.

In the embodiment shown in FIG. 1, the cylinder 21 has a constant outer diameter from its proximal end 216 to its distal end 217. The cylinder 21, however, is defined in its interior with an intermediate diameter space 212 for accommodating base 34 of the valve 3 and a cap-securing area 213 of a larger diameter. The cylinder 21 also has a connection port 211 for engagement of the tube on its proximal end 216. The connection port 211 has a diameter which is smaller than the intermediate diameter space 212 so that the base of the valve 3 can snugly fit in its interior. When the valve 3 is accommodated in the

---

intermediate diameter space 212, a space 214 remains in the intermediate diameter space 212, namely, between the housing and the base 34 to allow dilatation of the base 34.

The cap 22 has a proximal portion 221 with an outer diameter that enables securing of the cap 22 to the cap-securing area 213 of the cylinder 21. The cap 22 is formed with a valve-supporting area 226 on distal end 225 of the proximal portion 221. The cylinder 21 and the 22 may be engaged by any means as long as the cap-securing area 213 and the proximal portion 221 are reliably connected with each other. Typical means of the engagement include fitting (in particular, fitting with caulking and threading), bonding with an adhesive, and fusion such as heat fusion or ultrasonic fusion when both the cylinder 21 and the cap are made of resins.

Distal portion 222 of the cap 22 may have an outer diameter smaller than that of the proximal portion 221 in order to enable engagement with a flexible tube (not shown) or the like. The distal portion 222, however, may have a constant outer diameter, and alternatively, a Luer taper for facilitating smooth insertion into and liquid-tight engagement with the tube. One typical such tube (not shown) is the tube of an infusion set.

---

---

---

---

The distal portion 222 and the proximal portion 221 of the cap 22 are formed in their interior with a space 223 and a space 224, respectively, and these spaces 223 and 224 define a fluid passage 24 in the cap 22.

When the cylinder 21 and the cap 22 are connected, a groove 23 is defined all around the interior of the housing 2 as a space between shoulder 215 of the cylinder 21 and the distal end 225 of the cap 22.

The housing 2 as described above may comprise a resinous materials, and typical resinous materials include polyethylene, polypropylene, ethylene-propylene copolymer, ethylene-vinyl acetate copolymer (EVA), and other polyolefins, polyvinyl chloride, polyvinylidene chloride, polystyrene, polyamide, polyimide, polyamideimide, polycarbonate, poly-(4-methylpentene-1), ionomer, acrylic resin, polymethylmethacrylate, acrylonitrile-butadiene-styrene copolymer (ABS resin), acrylonitrile-styrene copolymer (AS resin), butadiene-styrene copolymer, polyethylene terephthalate (PET), polybutylene terephthalate (PBT), polycyclohexane terephthalate (PCT), and other polyesters, polyether, polyether ketone (PEK), polyether etherketone (PEEK), polyether imide, polyacetal (POM), polyphenyleneoxide, modified polyphenyleneoxide, polysulfone, polyether sulfone, polyphenylene sulfide,

polyallylate, aromatic polyester (liquid crystal polymer), polytetrafluoroethylene, polyvinylidene fluoride, and other fluororesins, a blend containig at least one of these, and a polymer alloy. The housing 2 may also comprise a glass material, ceramics, metal material, or a composite of such material with the resinous material as described above.

The cylinder 21 and the cap 22 may be formed either from the same material or from different materials.

The valve 3 in the connector of the present invention comprises the base 34 which is substantially cylindrical in shape and a valve portion 30 provided on the axially proximal side of the base 34, and the valve portion 30 is formed with a reclosable slit 33. When the slit 33 is closed (when no tubeis connected), this valve 3 blocks the fluid passage 24 of the housing 2 by shutting the inner cavity of the housing with the valve portion 30. When the tube 4 is engaged with the connector, the valve 3 is pushed by distal end surface 41 of the tube 4, and the slit 33 is opened to communicate fluid passage 43 of the valve 3 with the fluid passage 24 of the housing 2. When the slit 33 is open, distal end of the tube 4 is supported by the valve 3 itself which has undergone elastic deformation (which has been folded) by the pushing with the tube 4, and the tube 4 does not penetrate through the slit 33 (the valve portion

30). Therefore, the valve 3 can be opened without using a sharp needle, and the valve restores its original shape with the slit 33 being closed once the valve is liberated from the engagement with the tube 4.

The valve 3 having such unique reclosable mechanism is described in further detail.

The valve 3 is formed from an elastic material (flexible material) which may undergo an elastic deformation. Exemplary such elastic materials include rubber materials such as natural rubber, isoprene rubber, butadiene rubber, styrene-butadiene rubber, nitrile rubber, chloroprene rubber, butyl rubber, acrylic rubber, ethylene-propylene rubber, hydrin rubber, urethane rubber, silicone rubber, and fluororubber as well as thermoplastic elastomers such as styrene rubber, polyolefin rubber, polyvinyl chloride rubber, polyurethane rubber, polyester rubber, polyamide rubber, polybutadiene rubber, transpolyisoprene rubber, fluororubber, and chlorinated polyethylene rubber.

The valve 3 may comprise a single material, or alternatively, a combination of two or more elastic materials each having different composition and properties (flexibility, flexural modulus, rubber hardness, etc.) that have been appropriately selected to realize the desired

---

---

---

elasticity, abrasion properties, valve shape and size, and the like.

The valve 3 comprises the base 34 which has been formed in a hollow shape (and in particular, in a substantially cylindrical shape, hollow frustconical shape, or the like), and the valve portion 30 provided axially on one side (on the side of the proximal end 31) of the base 34 in order to shield the inner cavity of the base 34. The base 34 and the valve portion 30 are preferably formed as one integral member. The valve portion 30 may preferably have an outer diameter which is substantially the same or slightly larger than that of the distal end surface 41 of the tube 4 so that the valve portion 30 easily becomes folded inward with the slit 33 being opened when it is pushed by the distal end surface 41 of the tube 4.

In the present invention, the base 34 of the valve 3 is preferably tapered such that the wall thickness of the base 34 gradually increases toward the distal end of the base 34. The base 34 may be tapered either on the side of the inner cavity or on the outer surface, or on both sides, and either around the entire outer surface of the base 34 in on some part of the outer surface.

In the embodiment shown in FIG. 1, the base 34 is tapered on the outer surface. The inner diameter of the

valve 3 is substantially constant from the proximal end to the distal end, and also substantially consistent with the diameter of the cap space 224 (inner diameter of the proximal portion 221) of the housing 2. The outer surface of the valve 3 is tapered with the diameter increasing from the side of the proximal surface 31 to the side of the distal flange 35 with the wall thickness of the base 34 gradually increasing toward the distal end. As a result of such configuration, the base 34 exhibits a lower flexural strength on the side of the proximal end compared to the side of the distal end, and a folded portion can be readily and reliably (with high reproducibility) formed when the valve portion 30 is pushed inward by the tube 4 as will be described below in further detail.

The proximal end of the base 34 has an outer diameter which is substantially the same as the diameter of the connection port 211 of the cylinder 21 so that the proximal end of the base 34 snugly fits in the connection port 211 of the cylinder 21.

The valve portion 30 of the valve 3 is the area which receives force of pushing by the distal end surface 41 of the tube. In the present invention, the central region of the valve portion 30 provided with the slit 33 is formed to have a greater thickness compared to the peripheral region

of the valve portion 30 to thereby facilitate smooth opening of the slit 33 and bending of the base 34 into the intermediate diameter space 212, and also, reliable closure of the slit 33 in the connection port 211. In order to increase the thickness of the central region of the valve portion 30, a projection may be formed on at least one surface of the valve portion 31, either on the side of the proximal surface 31 that becomes in contact with the distal end surface 41 of the tube 4 or on the rear side. The projection is not limited for its shape. While the valve portion 30 may have either a projection and/or a recess on the side of the proximal surface 31, the valve portion 31 may preferably have a projection which protrudes beyond the proximal end 216 of the housing 2 at least at some part of the proximal surface 31.

In the embodiment shown in FIG. 1, first projection is formed on the proximal surface 31 of the valve portion 30. This first projection formed on the proximal surface 31 protrudes outward beyond the proximal end 216 of the housing 2, and resembles the shape of a dome (cone, lamp shade, or dish). The rear surface 32 of the valve portion 30 has second projection which protrudes in the direction opposite to that of the first projection formed on the

proximal surface 31. This second projection has a shape that constitutes a part of a sphere.

In the central region (thick region) of the valve portion 30, there is formed the slit 33 which extends through the valve portion 30. The slit 33 is closed in its natural state (under the condition when no external force is applied thereto) due to the elasticity of the valve portion 30, and a liquid tight (and gas tight) condition is thereby maintained.

In the present invention, the slit 33 is formed to a size such that, even when the valve portion 30 is pushed in and the slit 33 has reached its largest size, opening of the slit is not any larger than the outer diameter of the tube 4 and penetration of the tube 4 therethrough is prohibited.

In the embodiment shown in the drawings, the slit 33 comprises a straight cut (slit) that has been made to extend between the ridge of the first projection on the proximal surface 31 and the ridge of the second projection on the side of the rear side 32 (see FIG. 2).

The slit 33 is closed by the elasticity of the valve portion 30 when no load is placed (under the absence of the external force) with the liquid tight state (gas tight state) maintained. In the present invention, the slit is

formed in the thick region of the valve portion 30 to thereby realize excellent blockage (sealing) when the tube 4 is no longer engaged with the connector.

It is to be noted that the slit 33 does not necessarily extend in the direction shown in the drawings, and the shape of the slit 33 is also not limited to the straight slit.

The valve 3 is formed near the distal end of the base 34 with a flange 35 which has a larger outer diameter. The valve 3 which is supported by the valve-supporting area 226 of the housing 2 is secured to the housing 2 by the insertion or fitting of the flange 35 in the space (groove) 23 of the housing 2. In this embodiment, the valve 3 is secured to the housing 2 in a reliable (and in particular, in a liquid tight) manner by the sandwiching of the flange 35 between the shoulder 215 of the cylinder 21 and the valve-supporting area 226 of the cap 22.

The proximal surface 31 of the valve 3 secured to the housing as described above extends beyond the proximal end 216 of the housing 2, and such constitution is preferable since convenient disinfection is enabled.

Next, mechanism of engagement between the connector 1 of the present invention and the tube 4 is described in detail by referring to the drawings.

As described above, the connector 1 opens and closes the fluid passage 24 of the housing 2 by the opening and closing of the slit 33.

FIGS. 3 to 6 are longitudinal cross sectional views corresponding to FIG. 1, and they describe the action mechanism when the tube 4 is engaged with the connector 1 by showing various phases in sequence. In FIGS. 3 to 6, the numerals which are in common with FIGS. 1 and 2 designate the same member.

The tube 4 of this embodiment is a part of a device or the device itself which is to be connected to the connection port (small diameter area) 221 of the connector 1. Examples of such tube 4 are distal tip (the site to which needle is attached) of a syringe, and independent tubular device such as a hub or a sheath. Such tube 4 may typically comprise a material similar to those used for the cylinder 21 and the cap 22 as described above.

The tube 4 may preferably have a fluid passage in its interior and a Luer tapered outer surface. In other words, the distal end of the tube 4 may have an outer diameter which is slightly smaller than the diameter of the opening (the connection port diameter) of the connection port 211 of the cylinder 21, and the outer surface of the tube 4 may be tapered with the outer diameter gradually increasing

toward the proximal end such that the proximal end of the tube 4 has an outer diameter which is larger than the diameter of the connection port 211. As a result of such constitution, the distal end of the tube 4 can be inserted in the housing 2 from the connection port 211 and through the valve 3, and also, the distal end of the tube 4 can be fitted in the connection port 211 to any desired depth.

FIG. 3 is a longitudinal cross sectional view when the distal end surface 41 of the tube 4 has been positioned on the connector 1. As described above, the slit 33 of the valve 3 is closed when there is no load on (when no external force is applied to) the valve 3, and the liquid tight condition is thereby maintained.

In the housing 2 wherein the base 34 of the valve 3 is inserted through the connection port 211, there is formed the space 214. As will be described below, the space 214 functions as a space which allows dilatation of the base 34 when it is compressed in axial direction during the engagement of the tube 4, and it also functions as a space to allow the formation of the folded portion 36.

Next, the tube 4 is positioned as shown in FIG. 3 so that the central axis of the tube 4 is in alignment with the central axis of the housing 2, and the tube 4 is moved

in distal direction (in the direction shown by the arrow in the drawings) for insertion into the connector 1.

FIG. 4 shows the state when the distal end surface 41 of the tube 4 has substantially reached the level of the proximal end 216 of the housing 2 (the cylinder 21). When the tube 4 is at this position, it is mainly the valve portion 30 that has started the deformation by the pushing with the tube 4.

Referring to FIG. 4, when the first projection on the valve portion 30 (the proximal surface 31) of the valve 3 is pushed by the distal end surface 41 of the tube 4, the proximal surface 31 of the valve 3 mainly undergoes an elastic deformation since dilatation of the proximal surface 31 is restricted by the cylinder 21 of the connection port 211. To be more specific, the first projection on the proximal surface 31 gradually changes its shape from the dome shape to a flat surface, and the flat surface is then recurved to become recessed.

With the deformation of the proximal surface 31, the slit 33 that had been shut starts opening from the side of the second projection on the rear surface 32. The first projection of dome shape is turned into a flat surface, and then, recurved into a recess only by pushing the tube 4 against the proximal surface 31 with a slight force.

FIG. 5 shows the state when the tube 4 has moved further in the distal direction into the connector 1 and the distal end surface 41 of the tube 4 has entered the connection port 211 of the cylinder 21. When the tube is at this position, the base 34 has also been deformed by the pushing of the tube 4. As shown in FIG. 5, when the valve portion 30 of the valve 3 is further pushed by the distal end surface 41 of the tube 4, the valve portion 30 moves into the intermediate diameter space 212 and the base 34 of the valve 3 becomes compressed in its axial direction.

When the wall thickness (i.e. the flexural modulus) of the base 34 gradually decreases from the distal side to the proximal side of the base 34, it is the proximal side of the base 34 that mainly undergoes the deformation to become dilated in radially outward direction.

In the embodiment shown in FIG. 5, dilatation of the base 34 is restricted to a certain degree by the inner surface of the intermediate diameter space 212 of the cylinder 21, and the distal end of the base 34 can no longer dilate outward once it has dilated to the extent that the space 214 is barely left between the base 34 and the inner surface of the intermediate diameter space 212.

As described above, the base 34 becomes compressed in its axial direction and undergoes an elastic deformation to

become dilated until it is restricted by the inner diameter of the intermediate diameter space 212, and the proximal surface 31 of the valve 3 is pushed down to the proximal end of the intermediate diameter space 212 of the cylinder 21. As a consequence, the slit 33 opens to a further degree with the fluid passage 43 of the tube 4 and the fluid passage 24 of the connector 1 becoming communicated with each other.

When the tube 4 is further moved in distal direction for further insertion into the connector 1, there will occur the state of FIG. 6.

FIG. 6 shows the state when the tube 4 has finally engaged with the connector 1 with the distal end surface 41 of the tube 4 entering the intermediate diameter space 212 of the cylinder 21.

In this phase, when the tube 4 is further pushed inward in the distal direction from the state of FIG. 5 where the proximal surface 31 of the valve 3 had been located at the proximal end of the intermediate diameter space 212, the base 34 of the valve 3 becomes further compressed in the axial direction. The distal end portion of the base 34 having a lower flexural rigidity (namely, the part of the base 34 on the side of the valve portion 30) can no longer withstand the force of compression, and

---

---

---

at this point, this part becomes bent (folded) in the radially inward direction. The folded portion 36 is thereby formed on the proximal side of the base 34.

Furthermore, in this phase, inner diameter of the inner cavity of the valve 3 has become larger than the outer diameter of the tube 4, and accordingly, a space (space which allows dilatation) is formed between the tube 4 and the base 34 of the valve 3. It is this space that is utilized for insertion of the folded portion 36, and the part (region) of the proximal end portion of the valve 3 that is in close contact with the tube 4 increases as this part is further pushed downward by the tube 4.

As a consequence, the part (region) in the valve portion 30 of the valve 3 that is in close contact with the tube 4 sinks into the interior of the base 34 of the valve 3 with the distal end of the tube 4 being wrapped by the folded portion 36. The distal peripheral surface 42 of the tube 4 also becomes in close contact with the folded portion 36, and the tube 4 is consequently in close contact with the valve 3 on both the distal end surface 41 and the distal peripheral surface 42.

As described above, the tube 4 is in close contact with the valve 3 not only at the distal end surface 41 but also at the distal peripheral surface 42 which is wrapped

by the proximal surface 31 and the folded portion 36 of the valve 3. The contact area between the tube 4 and the valve 3 is thus increased with a remarkable improvement in the sealing capability (liquid tightness and gas tightness) between the tube 4 and the valve 3, and fluid leakage and other problems are reliably prevented.

In addition, unintentional disengagement of the tube 4 from the connector 1 is prevented since, as shown in FIG. 6, the tube 4 has fitted in the connection port 211 by the taper at the exact position where the outer diameter of the tube 4 coincides with the inner diameter (diameter of the opening) of the connection port 211, and at the same time, the distal end of the tube 4 has been wrapped around and reliably supported by the folded portion 36 of the valve 3 which has undergone the deformation.

As shown in FIG. 6, when the tube 4 is engaged with the connector 1 in the present invention, the distal end surface 41 and the distal peripheral surface 42 of the tube 4 do not penetrate through the valve 3 and intrude into the fluid passage of the housing 2, and therefore, there will not be the inconvenience that the slit 33 is forced open to an excessive degree to detract from the liquid tightness. In addition, even if the distal end surface 41 and the distal peripheral surface 42 of the tube 4 had some foreign

matter (dirt, dust, and the like), bacteria, and the like attached thereto, intrusion of such matter into the housing 2, namely, contamination of the housing 2 is prevented.

When the tube 4 that had been in the state of FIG. 6 is withdrawn from the connector 1 by moving the tube 4 in the proximal direction, the valve 3 is liberated from the force of pushing by the tube 4, and the base 34 restores its original shape and length by the resilient restoration force of the valve 3. In such process, the proximal end of the valve 3 moves back into the connection port 211 of the cylinder 21, and the valve portion 30 of the valve 3 also restores its original shape with its first projection 31 protruding beyond the connection port 211 as shown in FIG. 1.

In addition, the slit 33 becomes closed again to recover its liquid tightness once the valve 3 has restored its original shape, and even if the fluid flew, for example, in reverse direction toward the proximal end after the disengagement of the tube 4 with the connector 1, the fluid is prevented from flowing out of the connector 1 from its proximal end.

When the slit 33 is formed in the thick region of the valve portion 30 where both the proximal surface 31 and the rear surface 32 are formed with the projection as in the

case of the embodiment as described above, sealing capability of the slit 33 would be higher than the case where the slit is formed in a flat member of consistent thickness, and fluid leakage can be more reliably prevented against increase in the inner pressure of the housing 2 and the like.

In addition, since the connector 1 is not the type where the engagement of the tube 4 is accomplished by penetration of the tube 4 through the slit 33 of the valve 3 as described above, the slit 33 is not forced open to an excessive degree, and the sealing capability of the slit 33 of the valve 3 remains substantially undamaged even after frequent engagement and disengagement of the tube 4 with the connector 1.

In the foregoing, the connector of the present invention has been described by referring to one embodiment shown in the drawings. The present invention, however, is not limited to such embodiment, and the connector may comprise components having various constitutions. In particular, the valve and the housing may have various shapes and mechanisms, and they can be modified as long as equivalent functions are achieved. Examples of such modification for the embodiment as described above are given below.

---

---

---

---

1. In the embodiment as described above, the cylinder 21 of the housing has been described for the shape and the structure that enable engagement of the cylinder 21 with the tube 4. The cylinder 21, however, may also have the shape and the structure that enable engagement with Luer taper or Luer lock.

In the embodiment as described above, the connector has also been described for the case wherein a single tube was connected with another tube. The housing provided on the remote side to the connector, however, is not limited for its shape and number of Branches. Exemplary shapes include the shapes of branched (Y) connector, T connector, J loop, and PRN adapter.

2. In the embodiment as described above, the valve 3 and the housing 2 were formed from separate members. However, the valve 3 and the cylinder 21, or the valve 3 and the cap 22 may be formed as one integral part by coinjection molding, insert molding, or the like. The number of the parts can then be reduced.

3. The slit 33 is not limited to the straight shape as shown in the drawings, and it may be formed, for example, in the shape of cross, L, H, U, and the like. When adjustment of the flow rate is required in some

applications, two or more slits may be formed as the slit 33.

4. In the embodiment as described above, the base 34 of the valve 3 has been described for case wherein the base 34 has been formed in a cylindrical shape. The base 34 may also have a pleated section with the function of a spring to thereby facilitate restoration of its original shape.

5. Although it might be needless to say, the flange 35 is not limited to the shape shown in the drawings, and it may take different shapes as long as it enables reliable fixture of the valve 3 to the housing 2.

6. The inner cavity of the base 34 of the valve 3 can also be formed in a configuration other than the columnar, conical, or other shapes which are formed by rotating an unchanging region about the axis of revolution.

Next, several other embodiments of the present invention are described by referring to the drawings. With regard to these drawings, description has been partly omitted to avoid redundancy. However, the numerals which are the same as those of FIGS. 1 to 6 designate the same members as those of FIGS. 1 to 6. Some embodiments have been described by using simplified drawings where some numerals have been abbreviated.

---

For example, with regard to the housing 2 (the cylinder 21) of the connector 1, there is shown an embodiment wherein the space 214 remains in the intermediate diameter space 212 even after the engagement of the tube 4 and dilatation of the base 34 of the valve 3.

FIG. 7A is a view corresponding to FIG. 1 wherein the tube 4 is not yet engaged with the connector 1 having such structure, and FIG. 7B is a view corresponding to FIG. 6 showing the state when the tube 4 has been engaged with the connector 1. As shown in FIG. 7B, the space 214 has remained between the valve 3 and the inner surface of the housing even after the formation of the folded portion 36 in the valve 3 by the pushing of the valve 3 with the tube 4 and the dilatation of the base 34. Such elastic deformation of the valve 3 with the remaining space 214 is preferable since the base 34 does not receive the stress from the housing 2 (cylinder 21). The force of pushing by the tube 4 will then be equally distributed and the valve is better prepared for the fluctuation of the inner pressure.

FIG. 8 shows an embodiment wherein the valve portion 30 of the valve 3 has been formed to a different shape. In this embodiment, two projections 31a and 31a are formed on opposite sides of the slit 33, and a recess 31b is formed

in the central region of the proximal surface 31 between the two projections. A project is also formed on the rear surface 32 of the valve portion 30, and the slit 33 is located along the summit of this projection.

FIG. 8 is also an embodiment wherein the connector is formed with the space 214 similar to that of FIG. 7 while the space 224 formed in the distal portion 222 of the cap 22 has an inner diameter larger than that of the distal end portion of the inner cavity in the valve 3. In the embodiment of FIG. 8, the space 224 serves a relief space for the part of the valve 3 which sinks into this space upon engagement of the tube 4. When a part of the valve 3 sinks into the relief space as in the case of this embodiment, it is preferable to secure the valve 3 with a higher reliability, for example, by providing the flange 35 of the valve 3 with a leg 35a. In such a case, the valve-supporting area 226 of the housing 2 should also have the corresponding shape so that the leg 35a can be sandwiched within the valve-supporting area 226.

FIG. 8A is a view corresponding to FIG. 1 wherein the tube is not yet engaged with the connector 1 having such structure. FIG. 8B is a view corresponding to FIG. 6 wherein the tube 4 has been engaged with the connector 1.

When the valve portion 30 is provided on its proximal surface 31 with the projections 31a and 31a and the recess 31b, and the tube 4 presses the valve 3 into the intermediate diameter space 212 for engagement (FIG. 8B), the tube 4 will be supported by the projections 31a and 31a formed on the proximal surface 31 with no contact occurring between the distal end surface 41 (preferably the opening of the fluid passage 34) and the recess 31b formed on the proximal surface 31.

Reliable engagement and disengagement of the tube 4 is also enabled since the valve 3 pushed by the tube 4 becomes dilated in the intermediate diameter space 212 leaving the space 214, and some part of the valve 3 sinks into the relief space 224 as shown in FIG. 8B, and the valve 3 enjoys high freedom of disposition/deformation. In addition, the valve 3 does not experience a drastic change in the volume of the inner cavity, and pressure change in the valve 3 is limited to a small degree. As a consequence, the connector is avoided from experiencing the "leakage" upon disengagement of the tube 4 from the connector.

Next, another embodiment of the connector is described for its detailed structure by referring to FIGS. 9 to 14. This connector has an inner structure similar to that of FIG. 8, and this connector is also provided on the

proximal and distal ends of its housing with spiral screw threads (Luer lock threads) to enable screw engagement with the tubes. The numerals which are the same as those of FIGS. 1 to 8 designate the same parts as those of FIGS. 1 to 8, and redundant explanation has been omitted.

FIG. 9 is a plan view of the connector 1 seen from the proximal end. The valve 3 is formed with the two projections 31a and 31a and the recess 31b in the center as in the case of FIG. 8, and this valve is inserted in the connection port 211 on the proximal end 216 of the housing 2 (cylinder 21). A slit 33 is formed in the recess 31b of the valve 3. FIG. 10 is a longitudinal cross section of the connector 1 and the tube 4 taken along slit 33 (line X-X) of FIG. 9, and FIG. 11 is a longitudinal cross section of the connector and the tube taken along line XI-XI.

As shown in FIGS. 10 and 11, the cap 22 of the housing 2 has a double tube structure comprising an inner cylinder 26 and a sleeve 25 provided with Luer lock threads 251 on its inner surface. This inner cylinder 26 corresponds to the distal portion 222 of FIG. 1 wherein the cap has a single tube structure. A Luer taper is formed on the outer surface of the inner cylinder 26 to facilitate direct engagement with a tube (not shown) or engagement with the tube with an intervening connecting device (not

shown) so that the fluid passage 24 of the connector would be in liquid tight communication with the inner cavity of such tube or connecting device. Alternatively, the inner cylinder 26 may have a constant outer diameter. The distal end of the inner cylinder 26 generally extends beyond the distal end of the sleeve 25. This inner cylinder 26 has an interior structure which is substantially the same as that of the embodiment shown in FIG. 8, and the spaces 223 and 224 are provided in the interior. As described above, the space 224 on the proximal side serves the relief space for the valve 3 in the engagement of the tube 4.

In the embodiment shown in FIG. 10, the cap 22 and the cylinder 21 are engaged with each other by the fitting of an annular projection 219 provided on the cylinder 21 concentrically with said groove 226 in the groove 227 provided on the distal end 225 of the cap 22. As described above, the means of connecting the cap 22 and the cylinder 21 is not limited to any particular means.

The cylinder 21 also has a structure similar to that of the embodiment shown in FIG. 8 except that a guide taper 217 is formed in the interior of the proximal side of the cylinder 21 between the connection port 211 and the intermediate diameter space, and the cylinder is provided on its outer surface with Luer lock threads 218.

---

In the embodiment of FIGS. 10 to 11, when the base 34 of the valve 3 has an average outer diameter of  $D_1$ , and the relief space 224 has an average inner diameter of  $D_2$ , the ratio of the average inner diameter of  $D_2$  of the relief space 224 to the average outer diameter  $D_1$  of the base 34, namely,  $D_2/D_1$  is preferably in the range of 0.5 to 2, and more preferably in the range of 1 to 1.2 although the ratio is not particularly limited.

The relief space 224 is not particularly limited for its depth  $L_1$  (FIG. 11). The depth  $L_1$ , however, is preferably up to 5 mm, and more preferably in the range of 1 mm to 3 mm.

The base 34 of the valve 3 may have an outer diameter which is approximately the same or slightly larger the inner diameter of the cap-securing area 213 of the cylinder 21.

When the flange 35 (leg 35a) of the valve 3 has an average outer diameter of  $D_3$ , the ratio of the average outer diameter  $D_3$  of the flange 35 to the average outer diameter  $D_1$  of the base 34, namely,  $D_3/D_1$  is preferably in

the range of 1.2 to 2.5, and more preferably in the range of 1.8 to 2.2 although the ratio is not particularly limited. The valve 3 is reliably (and to be more specific, liquid tightly) secured to the housing 2 since the valve 3 has such flange 35 (leg 35a), and the leg 35a is sandwiched between the valve-supporting area 226 and the cap-securing area 213 of the housing 2.

As shown in FIG. 11, the base 34 of the valve 3 is tapered except for the part around the valve portion 30, and the wall thickness gradually increases toward the fixture portion 341. Such taper is not provided all around the inner peripheral surface of the base 34, and as shown in the cross section of FIG. 10, the base 34 is not tapered in this cross section. To be more specific, the base 34 has a constant wall thickness at the position where the wall is parallel to the slit 3 (FIG. 10) while the wall is tapered at the position where the wall is perpendicular to the slit 3 (FIG. 11). The base 34 is tapered around approximately half of the periphery, and sufficient strength and stability has been enabled by such constitution. Compared to the case wherein the base 34 is tapered all around its periphery, it is easier upon deformation of the valve 3 to maintain the fluid passage 24 (to be more specific, the area near the fixture portion

341) at a sufficient level, to reduce the fluctuation in the inner volume, and to maintain the inner pressure at a constant level. In addition, provision of the partially tapered area at the position as described above in relation to the slit 33 has enabled smooth opening and closure of the slit 33 as well as opening of the slit 33 by slight pushing force. The bending of the base 34 is also facilitated, and the base 34 reliably restores its original shape upon disengagement of the tube 4.

On the other hand, the base 34 of the valve 3 may preferably have a substantially constant outer diameter along its axis, and the taper is preferably provided on the inner surface. As a result of such configuration, increase in the outer diameter of the base 34 upon dilatation of the base 34 is limited to a certain extent, and increase in the diameter of the cylinder 21 can be avoided.

The tube 4 to be engaged with such connector 1 has a double tube structure comprising an inner tube 45 which is defined in its interior with the fluid passage 43, and a sleeve 44 which is provided on its interior with threads 441 to be screwed onto the Luer lock thread 218 of the connector 1. The inner tube 45 corresponds to the tube 4 in the single tube structure described by referring to FIGS. 1 to 8. The distal end of the inner tube 45 generally

extends beyond the distal end of the sleeve 44. The outer diameter of the inner tube 45 has Luer taper in the embodiment shown in the drawings. The inner tube 45, however, may also have a constant outer diameter.

FIGS. 12 to 14 are schematic views illustrating the mechanism of engagement between the tube 4 and the connector 1. In these drawings, the numerals which are the same as those of FIG. 11 designate the same parts, and some numerals have been omitted. The connector 1 shown in FIGS. 12 to 14 has an interior structure which can be described in a substantially same way as the connector 1 of FIGS. 8A and 8B except that the housing 2 and the tube 4 have double tube structure.

Referring to FIG. 12, when the projections 31a and 31a on the valve portion 30 (the proximal surface 31) of the valve 3 are pushed by the distal end surface 41 of the tube 4, the valve becomes compressed in axial direction and the area of the base 34 near the valve portion 30 becomes slightly dilated. The central region of the valve portion 30 also moves slightly in distal direction, and the angle between the valve portion 30 and the base 34 becomes reduced. As a result, the distal end of the slit 33 on the side of the rear surface 32 becomes slightly opened. In the course of such process, the valve portion 30 undergoes

deformation by the mechanism resembling that of the lever wherein the effort is applied to the projection 31a, the corner 37 serves the fulcrum, and the center of the recess 31b acts as the point of resistance. As a result of such action, displacement in the distal direction of the center of the recess 31b becomes larger than the displacement in distal direction of the projection 31a, and this results in the increase in the angle of opening of the slit 33 on the side of the rear surface 32. At this point, however, the slit 33 on the proximal surface 31 accommodated in the connection port 211 is not yet open.

FIG. 13 is a view when the tube 4 has been moved further in distal direction to be inserted in the connector 1, and the distal end of the sleeve 44 of the tube 4 has substantially reached the level of the proximal end 216 of the connector 1.

When the tube 4 is at this position, the valve portion 30 of the valve 3 has already been pushed into the intermediate diameter space 212 by the tube 4, and the valve portion 30 has been liberated from the constriction of the connection port 211 to become capable of being dilated in radially outward direction. The valve 3 has been compressed in axial direction, and the base 34 has been dilated into the "barrel shape". The thus deformed

base 34 has acted to pull the valve portion 30 in radially outward direction. By this action, the valve portion 30 has become dilated in radially outward direction, and the slit 33 has become open along its full depth so that the fluid passage 24 of the connector 1 has become in communication with the fluid passage 43 of the tube 4. At this stage, the fixture portion 341 of the valve 3 has sunk slightly into the relief space 224 with the space 214 maintained at a sufficient level.

FIG. 14 shows the state (state of engagement) wherein the Luer lock threads 441 have been screwed onto the Luer lock screw 218 by rotating the tube 4 from the state of FIG. 13. In the thus engaged state, the inner tube 45 of the tube 4 has been fitted in the connection port 211 of the connector 1 with the tube 4 being reliably engaged with the connector 1. In addition, the distal end surface 41 of the tube 4 has reached approximately to the middle of the intermediate diameter space 212. As a result, the valve 3 has undergone a substantial compression in axial direction to about half its length before the engagement.

The slit 33 is now fully open, and the fluid passage 24 is in full communication with the fluid passage 43 of the tube 4. The space 214 is maintained.

The fixture portion 341 of the valve 3 has sunk into the relief space 224 together with the part of the flange 35 near the fixture portion 341. Since such substantial deformation is enabled by the provision of the relief space 224, the tube 4 can be engaged even if the length (FIG. 14,  $L_2$ ) of the tube 4 (inner tube 45)

5 to be inserted in the connector were different, for example, even if the  $L_2$  were longer. Accordingly, the connector 1 has enabled engagement of the tubes 4 having different insertion length.

In particular, a longer insertion length  $L_2$  is required when the connector 1 and the tube 4 are engaged with each other by screwing with Luer lock threads as  
10 in the case of the present embodiment. The present invention, however, has enabled reliable action of the valve 3 and reliable opening and closure of the slit 33 upon engagement and disengagement of the tube 4.

The fixture portion 341 and some part of the flange 35 of the base 34 can sink into the relief space 224, and therefore, the base 34 and the valve portion 30  
15 enjoy high degree of deformation freedom, and it is the presence of the space 214 that has increased such degree of freedom. A reliable opening of the slit 33 to a large opening area is thereby enabled. Furthermore, the inner volume of the

valve 3 does not fluctuate to an excessive degree during the engagement and the disengagement, and fluid leakage due to the fluctuation in the inner pressure is unlikely to occur upon disengagement of the tube 4.

As described above, the present invention does not function by the connector engaging/disengaging mechanism wherein engagement of the tube 4 to the connector 1 is accomplished by the penetration of the distal end surface 41 and the distal peripheral surface 42 of the tube 4 through the valve 3 and their intrusion into the fluid passage 24 in the housing 2. Therefore, the present invention is free from the inconvenience that the slit 33 is forced open to an excessive degree to detract from the liquid tightness. In addition, even if the distal end surface 41 and the distal peripheral surface 42 of the tube 4 had some foreign matter (dirt, dust, and the like), bacteria, or the like attached thereto, intrusion of such matter into the housing 2, namely, contamination of the housing 2 is prevented.

When the tube 4 is unlocked by rotating the tube 4 in the direction opposite to the one used in the engagement and withdrawn from the connector 1 from the engaged state shown in FIG. 14 by moving the tube 4 in the proximal direction, the valve 3 is liberated from the force of

pushing by the tube 4, and the base 34 restores its original shape and length by the resilient restoration force of the valve 3. In such process, the valve portion 30 of the valve 3 restores its original shape and enters the connection port 211 as it is guided by the guide taper 217, and the projection 31a protrudes beyond the proximal end 216 of the housing 2 as shown in FIG. 11.

In addition, the slit 33 becomes closed again to recover its liquid tightness once the valve 3 has restored its original shape, and even if the fluid flew, for example, in reverse direction toward the proximal end after the disengagement of the tube 4 with the connector 1, the fluid is prevented from flowing out (fluid leakage) of the connector 1 from its proximal end. When the slit 33 is formed in the thickened valve portion 30 of the valve 3 as in the case of the embodiment as described above, sealing capability of the slit 33 would be higher than the case where the slit is formed in a flat area, and fluid leakage can be more reliably prevented against increase in the inner pressure of the housing 2 and the like.

In addition, since the connector 1 is not the type wherein the tube 4 is engaged by penetration of the tube 4 through the slit 33 of the valve 3 as described above, the slit 33 is not forced open to an excessive degree, and the

sealing capability of the slit 33 of the valve 3 remains substantially undamaged even after frequent engagement and disengagement of the tube 4 with the connector 1.

The embodiments as described above may be modified in various ways. In one typical such modification, the valve-supporting area 226 of the cap 22 is formed to extend substantially to the level of the distal end 225 so that it does not extend as far as FIG. 11.

FIG. 16 shows embodiments wherein the slit 33 has been formed in different directions. The slit 33 has been described in FIG. 9 for the embodiment wherein a straight slit has been formed in the ellipsoidal recess 31b in its longitudinal direction. The slit 33, however, may be formed in the direction crossing such longitudinal direction (FIG. 16A) or in the direction diagonal to the axial direction (FIG. 16B). As described above, the slit is not limited to the straight shape.

FIG. 17 shows embodiments wherein the housing is branched. In FIGS. 17A and 17B, there are respectively depicted embodiments wherein the connector of FIG. 11 has a cap 22 in Y shape.

FIG. 18 shows a modification of FIG. 11 wherein the cap 22 has been modified such that the connector 1 is a T connector. The connector 1 has a structure similar to that

of FIG. 11 except that the tube (cap) 22 is provided on its side surface with an opening 230, and the space 224 of the cylinder 21 and the fluid passage 223 are arranged in the direction perpendicular to the axial direction of the cylinder 21 to define the fluid passage 24.

FIG. 19 shows an embodiment wherein a plurality of connectors 1 are arranged along one fluid passage 24. In this embodiment, the tube (cap) 22 is provided on its side surface with, for example, three openings 230, and the cylinders 21 which are similar to the one shown in FIG. 18 are arranged at each opening.

Next, the present invention is described in further detail by referring to the Examples which by no means limit the scope of the present invention.

Example 1

The connector 1 of FIGS. 1 and 2 as described above was applied for a part of the Y site serving the infusion inlet port of a medical infusion set.

The valve 3 having the shape as shown in FIGS. 1 and 2 was manufactured from a silicone rubber, and a straight slit 33 as shown in FIG. 2 was formed to penetrate through the central region of the valve portion 30 of the valve 3.

The slit 33 was formed to a length of 2 mm on the side

shown in Fig. 2 considering the inner diameter and the length of the syringe (tube 4). The central region (thick region) of the valve portion 30 in the valve 3 had a maximum thickness of 2.2 mm, and the valve 3 had a height (full length) of 7.6 mm. The base 34 had a thickness at the proximal end of 0.5 mm (minimum) and a thickness at the distal end of 2 mm (maximum) with the thickness gradually increasing toward the distal end.

The cylinder 21 and the cap 22 having the shapes as shown in FIGS. 1 and 2 were injection molded from polycarbonate, respectively. The inner diameters of the connection port 211, the intermediate diameter space 212, and the large diameter cap-securing area 213 of the housing 2 were 4 mm, 6.2 mm, and 8 mm, respectively.

The valve 3 was mounted in the cylinder 21, and the cap 22 was then fitted in the cylinder 21 with caulking. The cap 22 and the cylinder 21 were fixedly secured by ultrasonic fusion. The valve 3 became reliably secured to the housing 2 by the sandwiching of the flange 35 between the cap 22 and the cylinder 21.

When distal tip (Luer taper, needle unattached) of a syringe was inserted in the connection port 211 of the connector 1 which had been assembled as described above, the valve 3 underwent the elastic deformation as shown in

FIG. 6 as the distal end surface 41 pushed the valve portion 30 of the valve 3. The valve portion 30 sank into the connection port 211 of the connector 1, and the relatively thin part of the base 34 near the valve portion 30 became folded, and as a consequence, the distal end surface 41 and the distal peripheral surface 42 of the distal tip of the syringe became wrapped around by the folded portion 36.

Even if the distal peripheral surface 42 of the syringe distal tip and other parts were contaminated with bacteria or the like that had fallen on the surface, it was enabled by such structure to reduce the danger of direct intrusion of the bacteria into the infusion passage of the connector 1.

After introducing the infusion through the syringe, the syringe was withdrawn from the connector 1. The valve 3 then restored its original shape, and the slit 33 became reliably closed to regain its liquid tightness.

Next, the valve 3 was evaluated for air leakage by the test procedure as described below. The connector 1 was placed in water, and compressed air was gradually supplied to the housing 2 of the connector 1 with the slit 33 of the valve 3 closed to thereby increase the pressure in the

---

housing 2. The air leakage was not observed until the pressure in the housing 2 reached 0.38 MPa.

Next, the distal tip of the syringe was repeatedly engaged and disengaged with the connector 1 for 200 times as described above, and the connector 1 was evaluated for the air leakage by the test procedure similar to the one as described above. The air leakage occurred when the pressure reached 0.38 MPa, and it was then confirmed that the valve 3 experienced substantially no decrease in its the sealing capability (liquid and gas tightness).

Example 2

The connector 1 of FIGS. 9 to 11 as described above was applied for a part of the Y site serving the an infusion inlet port of a medical infusion set.

The valve 3 having the shape as shown in FIGS. 9 to 11 was manufactured from a silicone rubber, and a straight slit 33 as shown in FIG. 9 was formed to penetrate through the central region of the valve portion 30 of the valve 3. The slit 33 was formed to a length of 2 mm on the side shown in Fig. 9 considering the inner diameter and the length of the syringe (tube 4).

The thickness of the central region (thick region) of the valve portion 30 in the valve 3 was 1.2 mm at the

thinnest position, namely, at the site where the recess 31a was formed on the proximal end surface 31, and 1.8 mm at the thickest position, namely, at the site where the top of the projection on the rear side 32 was located. The valve 3 had a height (full length) of 9.4 mm. The base 34 had an outer diameter  $D_1$  of 4.0 mm, and the flange 35 (leg 35a) had an outer diameter  $D_3$  of 8.0 mm.

The base 34 had a thickness at the proximal end of 0.5 mm (minimum) and a thickness at the distal end of 1.0 mm (maximum) with the thickness gradually increasing toward the distal end. The base 34 in the cross section of FIG. 10 had a thickness of 0.6 mm which was constant in the axial direction.

The cylinder 21 and the cap 22 having the shapes as shown in FIGS. 10 and 11 were injection molded from polypropylene, respectively. The inner diameters of the connection port 211, the intermediate diameter space 212, and the cap-securing (large diameter) area 213 of the housing 2 were 4.0 mm, 6.2 mm, and 8 mm, respectively. The relief space 224 had an inner diameter  $D_2$  of 5.0 mm.

The valve 3 was mounted in the cylinder 21, and the cap 22 was then fitted in the cylinder 21 with caulking. The cap 22 and the cylinder 21 were fixedly secured by

ultrasonic fusion. The valve 3 became reliably secured to the housing 2 by the sandwiching of the flange 35 between the inner surface of the cylinder 21 and the valve-supporting area 226.

When distal tip (Luer taper, needle unattached) of a syringe was inserted in the connection port 211 of the connector 1 which had been assembled as described above, the valve 3 underwent the elastic deformation as shown in FIG. 14 as the distal end surface 41 pushed the valve portion 30 of the valve 3.

Even if the distal peripheral surface 42 of the syringe distal tip and other parts were contaminated with bacteria or the like that had fallen on the surface, it was enabled by such structure to reduce the danger of direct intrusion of the bacteria into the infusion passage of the connector 1.

After introducing the infusion through the syringe, the syringe was withdrawn from the connector 1. The valve 3 then restored its original shape, and the slit 33 became reliably closed to regain its liquid tightness.

Next, the valve 3 was evaluated for the air leakage by repeating the test procedure of Example 1.

The connector 1 was placed in water, and compressed air was gradually supplied to the housing 2 of the

connector 1 with the slit 33 of the valve 3 closed to thereby increase the pressure in the housing 2. The air leakage was not observed until the pressure in the housing 2 reached 0.38 MPa. Next, the distal tip of the syringe was repeatedly engaged and disengaged with the connector 1 for 200 times as described above, and the connector 1 was evaluated for the air leakage by the test procedure similar to the one as described above. The air leakage occurred when the pressure reached 0.38 MPa, and it was then confirmed that the valve 3 experienced substantially no decrease in its sealing capability (liquid and gas tightness).

#### INDUSTRIAL APPLICABILITY

As described above, the present invention has enabled to prevent intrusion of the foreign matters, bacteria, and the like attached on the distal end of the tube to the interior of the connector since the connector of the present invention is not the type wherein the engagement is attained by penetration of the tube through the connector valve.

A high sealing capability, and hence, a reliable prevention of the fluid leakage is also achieved since not only the distal end surface but also the distal peripheral

surface becomes in close contact with the valve once the tube is engaged with the connector. In particular, leakage from the interface between the tube and the valve upon increase in the connector inner pressure is prevented.

The tube is also in reliable engagement with the connector, and unintended disengagement of the tube from the connector is thereby prevented.

Furthermore, the slit is reliably closed after the disengagement of the tube from the connector, and leakage of the fluid from the connector through the valve is prevented even if the fluid flew in reverse direction.

---

## THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A connector comprising:

a housing provided with a fluid passage in its interior and a connection portion for engagement with a tube; and

5 a valve of an elastic material accommodated in said housing; wherein

10 said valve has a cylindrical base; a valve portion on one axial end of said base which becomes in contact with said tube to be pushed inward by said tube; and a slit formed in said valve portion which opens when said valve portion is pushed inward; and

15 said valve undergoes elastic deformation when said tube is engaged with said connection port of the housing by pushing said tube against said valve portion of the valve,

20 and said slit opens as a result of said elastic deformation and said base becomes folded such that said valve portion enters the interior of said base and a new interior surface defined by the folded valve portion becomes in close contact with distal peripheral surface of said tube.

25 2. A connector according to claim 1, wherein said valve restores its original shape when said tube is disengaged from said connection port.

3. A connector according to claim 1, wherein said slit has a size such that the penetration of said tube through said 30 slit upon opening of said slit is not allowed.

4. A connector according to claim 3, wherein said valve portion has a thick area in the central region, and said slit is formed in said thick area.

5. A connector according to claim 1, wherein at least a part of said base is tapered such that outer diameter or

inner diameter increases with increase in the distance from said valve portion.

6. A connector according to claim 1, wherein said valve portion has a projection and/or a recess on the surface that 5 becomes in contact with distal end surface of said tube.

7. A connector according to claim 6, wherein said valve portion has a first projection on the surface that becomes in contact with said distal end surface of the tube.

8. A connector according to claim 7, wherein said first 10 projection has a shape resembling a dome.

9. A connector according to any one of claims 1 to 8, wherein said valve portion has a projection on the surface that does not become in contact with said distal end surface of the tube.

15 10. A connector according to claim 9, wherein said projection constitutes a part of a sphere.

11. a connector substantially as hereinbefore described with reference to the drawings.

20 3 September 2004

By Freehills Carter Smith Beadle

Registered Patent Attorneys for the Applicant

Terumo Kabushiki Kaisha

FIG. 1

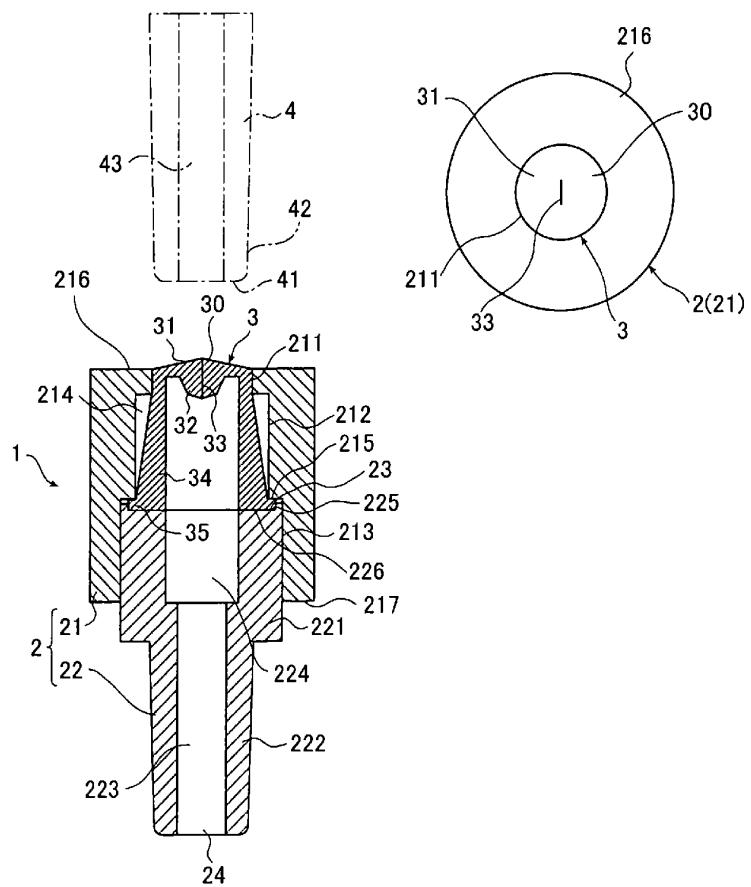


FIG. 2

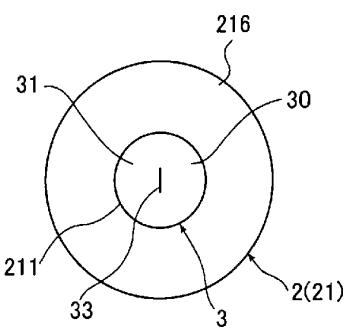


FIG. 3

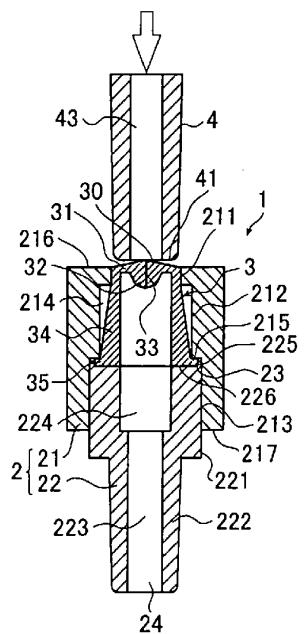


FIG. 4

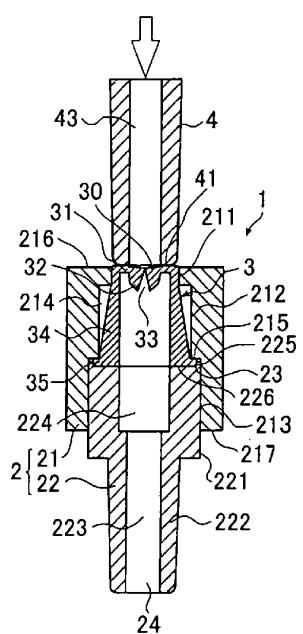


FIG. 5

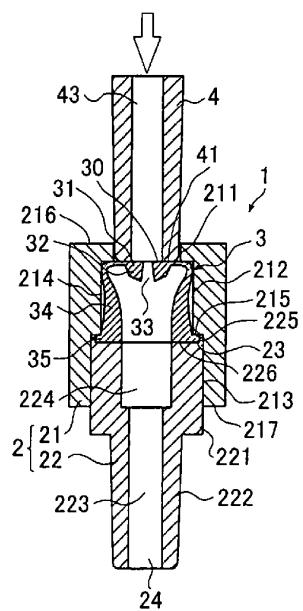


FIG. 6

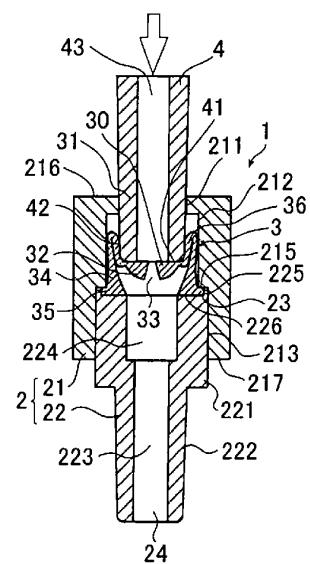


FIG. 7A

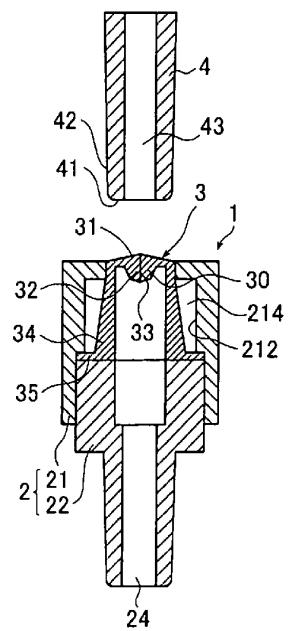


FIG. 7B

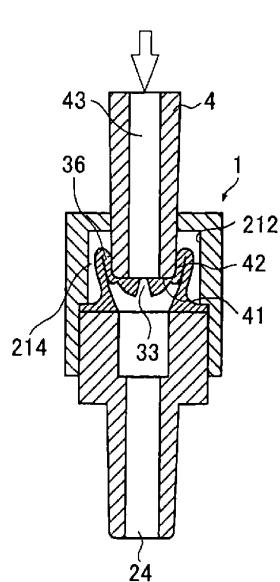


FIG. 8A

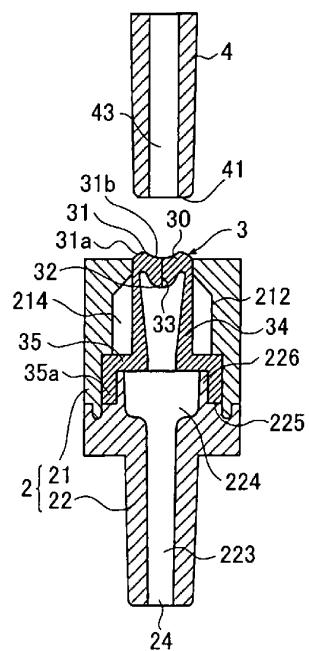


FIG. 8B

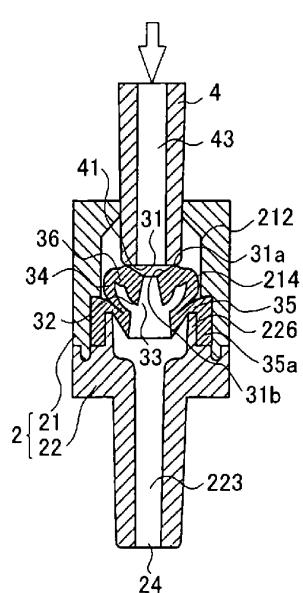


FIG. 9

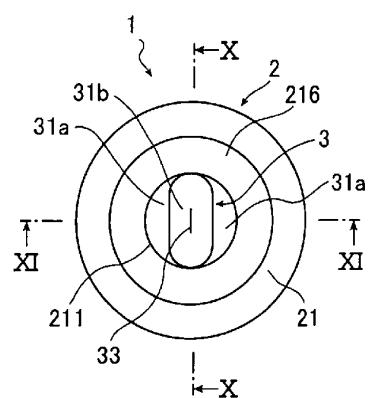


FIG. 10

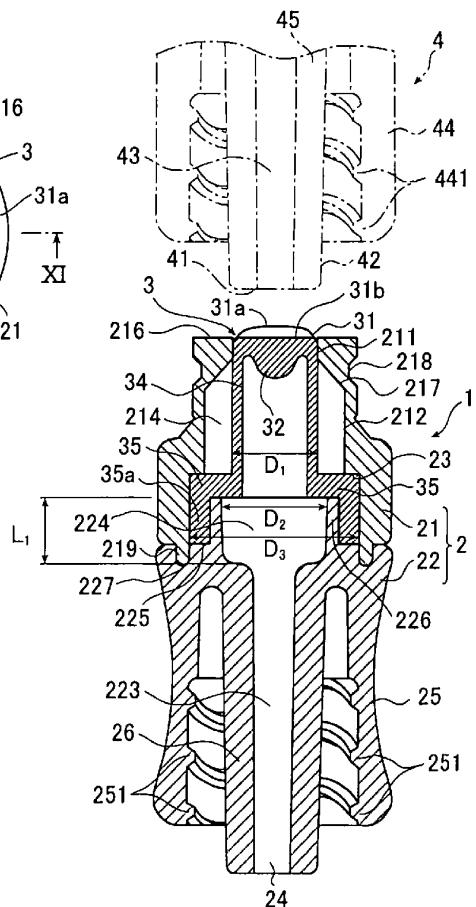


FIG. 11

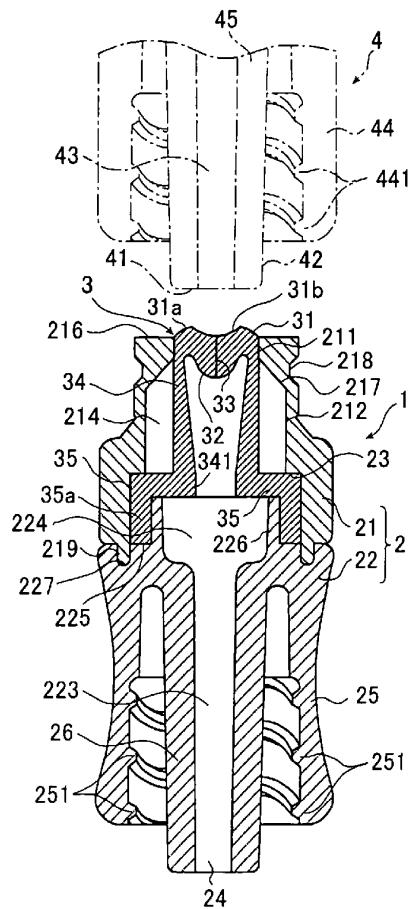


FIG.12

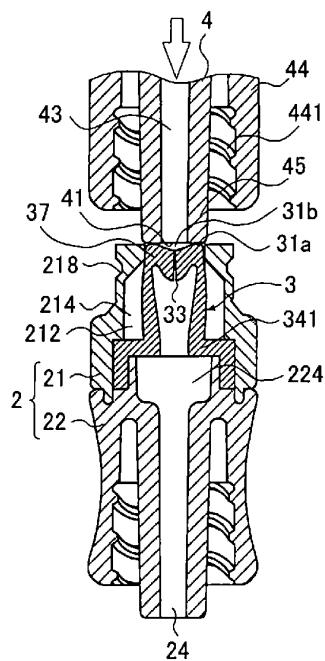


FIG.13

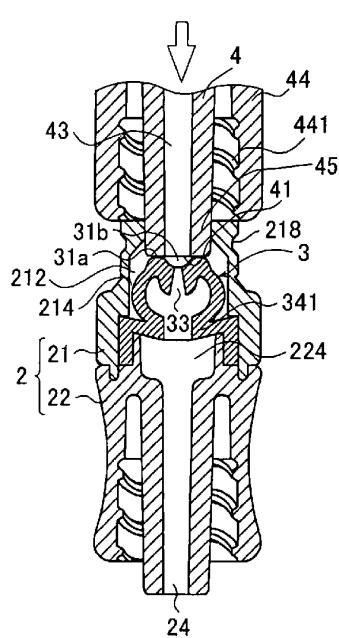


FIG. 14

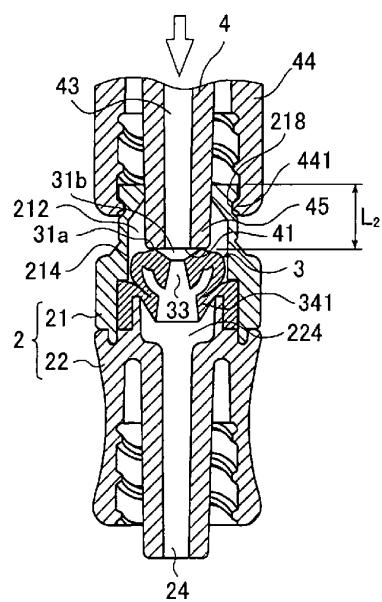


FIG. 15

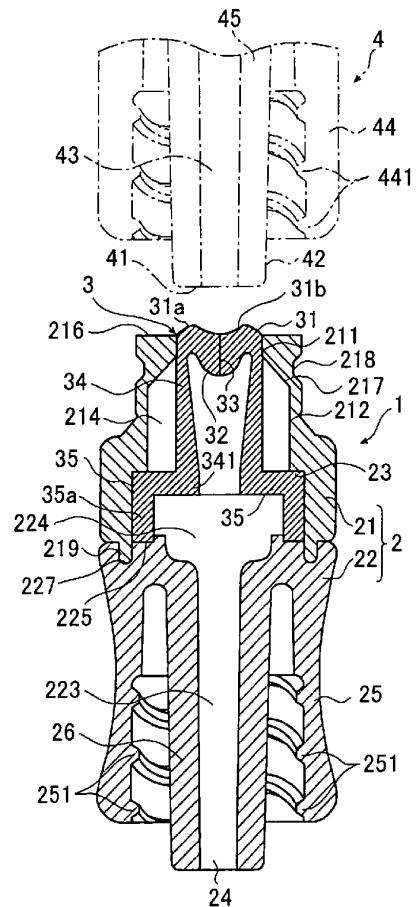


FIG.16A




FIG.16B




FIG.17A

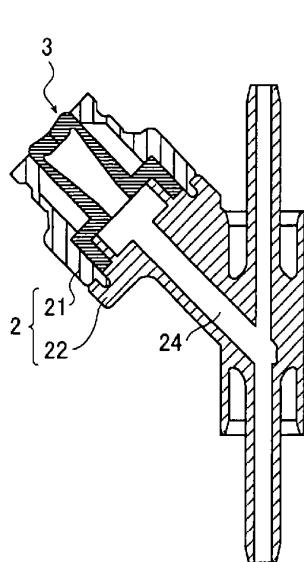


FIG.17B

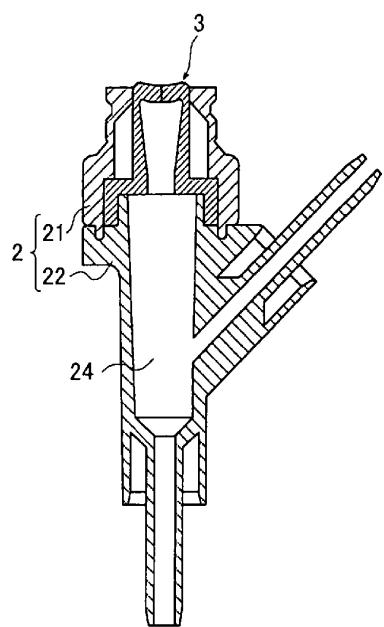


FIG. 18

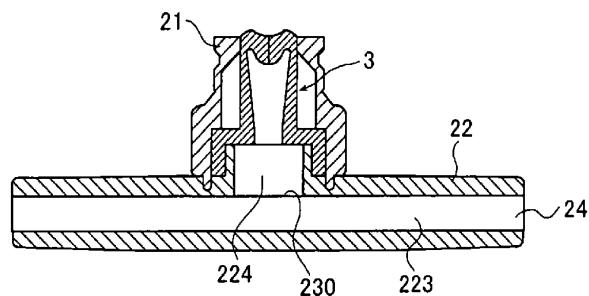


FIG. 19

