

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2014/053960 A1

(43) International Publication Date

10 April 2014 (10.04.2014)

(51) International Patent Classification:

H04L 1/18 (2006.01)

(21) International Application Number:

PCT/IB2013/058864

(22) International Filing Date:

25 September 2013 (25.09.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/633,226 2 October 2012 (02.10.2012) US

(71) Applicant: TELEFONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; S-164 83 Stockholm (SE).

(72) Inventors: KHAYRALLAH, Ali, S.; 1124 Boranda Avenue, Mountain View, California 94040 (US). CHENG, Jung-Fu; 1731 Mandan Place, Fremont, CA 94539 (US).

(74) Agents: GUPTA, Rishi et al.; 6300 Legacy, MS EVR 1-C 11, Plano, Texas 75024 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: EXTENSION CARRIER FOR ARQ

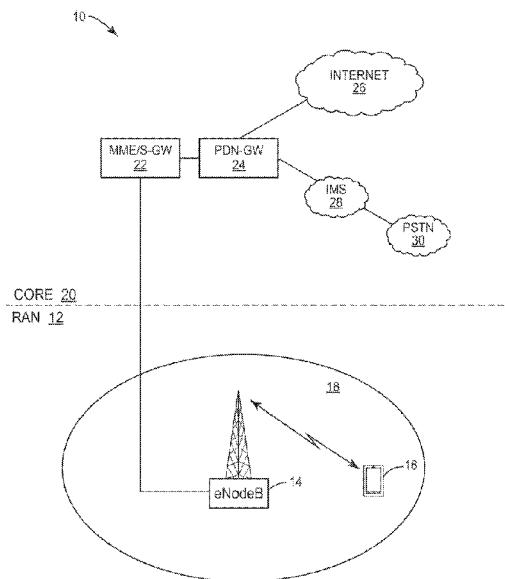


FIG. 1

(57) Abstract: In a wireless communication network (10), HARQ acknowledgements, re-transmissions, and related signaling (e.g., channel quality reports) are performed on a Re-transmission Extension Carrier, REC, separate from the primary downlink traffic carrier(s). In various embodiments, the REC may comprise an aggregated wireless communication network channel, which may be cross-channel scheduled or may have its own scheduler. The REC may be Frequency Domain Duplex, FDD, or Time Domain Duplex, TDD. The REC may be dedicated to a main downlink carrier, or may be shared across a plurality of aggregated component carriers. The REC may be transmitted from the same base station (14) as one or more associated main carriers, or from a different base station (14). A shared REC may be operated in cooperative or contention modes. The REC may be implemented in unlicensed spectrum.

WO 2014/053960 A1

EXTENSION CARRIER FOR ARQ

This application claims priority to U.S. Patent Application Serial No. 13/633,226, titled "Extension Carrier for ARQ," filed 2 October 2012, the disclosure of which is incorporated herein by reference in its entirety.

FIELD OF INVENTION

The present invention relates generally to wireless communication networks, and in particular to an extension carrier for ARQ re-transmission traffic.

10

BACKGROUND

A base station in a wireless communication network provides wireless communications services to a large plurality of User Equipment (UE) within its service area, or cell. Each base station generally includes a scheduling function, which 15 schedules downlink transmissions to numerous UE according to several criteria (e.g., amount of data for each UE, channel quality reported by each UE, UE bit rate capability, amount of data recently transmitted to a UE, and the like). Efficient scheduling improves overall throughput. For example, in proportionally fair scheduling, more data is transmitted to UE experiencing the best channel conditions, 20 with UE experiencing poor channel conditions being served just often enough to maintain an acceptable level of performance. A recent development in wireless communication network technology is the cooperative scheduling of traffic between multiple cells, which can reduce inter-cell interference.

Radio Frequency (RF) signals transmitted across an air interface experience 25 interference and noise, distorting the signal and introducing errors in the data extracted from the signal at a receiver. Accordingly, error detection and correction techniques are critical to digital wireless communications. Indeed, to maximize overall performance, system parameters are often adjusted to achieve a predetermined, non-zero error rate, e.g., 10% Block Error Rate (BLER).

30 A simple error detection scheme is to add a parity bit to a block of bits, the parity bit value set to ensure that the number of bits with the value 1 in the block is even or odd. The receiver performs a parity check by counting the number of 1's in the

block, and comparing the result to the parity bit. A more advanced system for error detection is the Cyclic Redundancy Check (CRC). A type of hash function is performed on a block of data, and the result is appended to and transmitted with the block. A receiver performs the same calculation, and compares its result to the received CRC value to detect errors. Numerous other error detection schemes are known in the art; for example, Forward Error Correction (FEC) coding encodes sufficient redundancy into a data block for the receiver to perform not only error detection, but also unassisted correction of some errors.

Automatic Repeat reQuest (ARQ) is simple error correction scheme in which a receiver, upon detecting an error, requests a retransmission of a block of data. The receiver may explicitly acknowledge each data block, by transmitting an acknowledgment (ACK) if no errors are detected or a negative acknowledgment (NAK) if the block was received with one or more errors. Alternatively, ACKs may be implicit, with the receiver only transmitting a NAK in the case of a detected error. The transmitter retains a copy of each transmitted data block until the receipt of an ACK/NAK, or in the case of implicit acknowledgment, until either a NAK is received or a timeout occurs.

Upon receiving a NAK, the transmitter re-transmits coded data based on the original data block. When the retransmission is based on repetition of previously sent coded bits, the transmitter is operating in a Chase combining HARQ protocol. When the retransmission contains coded bits unused in previous transmission attempts, it is operating in an incremental redundancy HARQ protocol. The receiver may replace the erroneously received data block with the re-transmitted one, or may combine the two, and additionally utilize FEC codes, to correct the errors. Since the re-transmission itself may be received with errors, it may be NAK'ed, prompting another re-transmission. Various wireless communication system protocols define a maximum number of retransmission attempts, after which higher-layer error recovery techniques are invoked. In the following, we will use re-transmission to mean both the case of repetition of previously sent coded bits, and the case of coded bits unused in previous transmission attempts, and the combination of the two.

An ARQ or HARQ scheme is simple to implement at both the transmitter and receiver, minimally degrades performance, adds little overhead to the transmitted

signals, and not only allows the system to recover from inevitable errors, but allows the system to be purposefully operated with a desired non-zero error rate. However, while the overall error rate may be tuned (e.g., 10% BLER), the timing of individual block errors, and hence the timing of NAKs and HARQ re-transmissions, is random. This 5 random injection of required transmissions prevents the scheduler from operating as efficiently as it could if all its transmissions in a given frame were deterministic. HARQ re-transmissions also impede the ability to coordinate schedulers across cells.

The Background section of this document is provided to place embodiments of the present invention in technological and operational context, to assist those of skill in 10 the art in understanding their scope and utility. Unless explicitly identified as such, no statement herein is admitted to be prior art merely by its inclusion in the Background section.

SUMMARY

15 The following presents a simplified summary of the disclosure in order to provide a basic understanding to those of skill in the art. This summary is not an extensive overview of the disclosure is not intended to identify key/critical elements of embodiments of the invention or delineate the scope of the invention. The sole purpose of this summary is to present some concepts disclosed herein in a simplified form as a 20 prelude to the more detailed description that is presented later.

According to one or more embodiments described and claimed herein, HARQ acknowledgements, re-transmissions, and related signaling (e.g., channel quality reports) are performed on a Re-transmission Extension Carrier (REC) separate from the primary downlink traffic carrier(s). In various embodiments, as explained herein, the 25 REC may comprise an aggregated wireless communication network channel, which may be cross-channel scheduled or may have its own scheduler. The REC may be Frequency Domain Duplex (FDD) or Time Domain Duplex (TDD). The REC may be dedicated to a downlink primary component carrier (PCC), or may be shared across a plurality of aggregated component carriers (CC). The REC may be transmitted from the 30 same base station as one or more associated CCs, or from a different base station. A shared REC may be operated in cooperative or contention modes. The REC may be implemented in licensed or unlicensed spectrum.

One embodiment relates to a method of operating a base station. Data to be transmitted to one or more UE is received. Transmission of a block of data to the UE is scheduled in a first scheduler. The block of data is transmitted to a UE on a first CC. A NAK is received from the UE indicating one or more errors in the received data block.

5 The block of data is re-transmitted to the UE on a REC separate from the first CC.

Another embodiment relates to a method of transmitting HARQ re-transmissions on a REC. A first block of data previously transmitted to a first UE on a first carrier other than the REC is received, the previous transmission having been NAK'ed by the first UE as containing one or more errors. The first block of data is

10 transmitted to the first UE on the REC.

Yet another embodiment relates to a base station operative in a wireless communication network. The base station includes a first transceiver operative to transmit data to UE on at least a first CC; a network interface operative to exchange data with one or more network nodes; memory; and a controller operatively connected

15 to the memory, the transceiver, and the network interface. The controller is operative to receive, via the network interface, data to be transmitted to one or more UE; schedule transmission of a block of data to the UE on the first CC; cause the first transceiver to transmit the block of data to a UE on the first CC; receive, from the transceiver, a NAK from the UE indicating one or more errors in the received data block; and cause the

20 block of data to be re-transmitted to the UE by means other than on the first CC.

Still another embodiment relates to a UE operative in a wireless communication network. The UE includes a transceiver operative to receive and transmit data from and to a base station on at least a first CC; memory; and a controller operatively connected to the memory and the transceiver. The controller is operative to receive, from the transceiver, data transmitted by the base station on the first CC; receive, from the decoder, error detection on the received data; in the case of a detected error, cause the transceiver to transmit a NAK to the base station on the first CC; and receive, from the transceiver, a re-transmission of the data by means other than the first CC.

If the base station is equipped with more than one antenna (or one antenna per

30 sector) and is capable of performing Multiple Input Multiple Output (MIMO) transmissions, more than one block of data may be transmitted or re-transmitted in the above disclosed schemes. In a normal feedback mode, the UE will send back a number

of ACK/NAK indicators corresponding to the more than one block of data transmitted from the base station. In a second bundled feedback mode, the UE will send back one ACK/NAK indicator with value ACK indicating whether all the received blocks of data are correct and with value NAK indicating at least one of the received data blocks is in error. In the case of a NAK, the base station shall retransmit the multiple blocks of data.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a functional block diagram of an LTE wireless communication network.

10 Figure 2 is a time-frequency diagram of an OFDM downlink signal.

 Figure 3 is a graph depicting LTE frames and subframes.

 Figure 4 is a time-frequency diagram depicting control and reference signaling.

 Figures 5A – 5C are time-frequency diagrams depicting FDD and TDD operation.

15 Figure 6 is a subframe diagram depicting FDD and TDD operation.

 Figure 7 depicts all LTE-defined TDD subframe configurations.

 Figure 8 is a frequency graph depicting carrier aggregation.

 Figure 9 is a diagram depicting data transmission and HARQ ACK/NAK timing.

20 Figure 10 is a flow diagram depicting PDSCH channel processing.

 Figure 11 is a frequency graph depicting a Re-transmission Extension Carrier.

 Figure 12 is a flow diagram of a method of operating a base station employing REC.

25 Figure 13 is a flow diagram of a method of operating a REC scheduler for a shared REC.

 Figure 14 depicts functional block diagrams of an eNodeB and a UE.

DETAILED DESCRIPTION

Figure 1 depicts a high-level, functional block diagram of a wireless communication network 10. The network 10 depicted in Figure 1 conforms to the 3GPP Long Term Evolution (LTE) protocol and its extensions, which is the context

in which embodiments of the present invention are explained. However, the present invention is not limited to networks 10 conforming to the LTE protocol.

A Radio Access Network (RAN) 12, e.g., E-UTRAN, comprises one or more base stations 14, known in LTE as eNodeBs. Each eNodeB 14 provides wireless communication service to a plurality of User Equipment (UE) 16 within a geographical area, or cell 18. A core network 20 comprises a plurality of communicatively-linked nodes, such as a Mobility Management Entity (MME) and Serving Gateway (S-GW) 22. The MME-S-GW 22 connects to numerous nodes (not all of which are depicted for simplicity), including a Packet Data Network Gateway (PDN-GW) 24. The PDN-GW 24 provides connectivity to packet data networks such as the Internet 26, and through an IP Multimedia Subsystem (IMS) 28 to the Public Switched Telephone Network (PSTN) 30.

LTE Channel Structure

15 LTE uses Orthogonal Frequency Division Multiplex (OFDM) modulation in the downlink (and DFT-spread OFDM in the uplink). The basic LTE downlink physical resource can thus be seen as a time-frequency grid as illustrated in Figure 2. Each resource element corresponds to one OFDM subcarrier (15 KHz) during one OFDM symbol interval.

20 In the time domain, LTE downlink transmissions are organized into radio frames of 10 ms, each radio frame consisting of ten equally-sized subframes of length $T_{\text{subframe}} = 1 \text{ ms}$, as illustrated in Figure 3.

25 Resource allocation in LTE is typically described in terms of resource blocks (RB), where a resource block corresponds to one slot (0.5 ms) in the time domain and 12 contiguous subcarriers in the frequency domain. A pair of two adjacent resource blocks in the time direction (1.0 ms) is known as a resource block pair. Resource blocks are numbered in the frequency domain, starting with 0 from one end of the system bandwidth.

30 Downlink transmissions are dynamically scheduled, *i.e.*, in each subframe the base station 14 transmits control information specifying to which UE 16 data is transmitted, and on which resource blocks, in the current downlink subframe. This control signaling is typically transmitted in the first 1, 2, 3 or 4 OFDM symbols in each

subframe, and the number $n=1,2,3$ or 4 is known as the Control Format Indicator (CFI). The CFI is transmitted as the first symbol in the control channel, and is assigned the logical channel Physical Control Format Indicator Channel (PCFICH). Figure 4 depicts a downlink transmission with three OFDM symbols dedicated to control (*i.e.*, CFI=3).

5 The downlink subframe also contains common reference symbols (CRS), which are known to the receiver and used for coherent demodulation of *e.g.* the control information.

Dynamic scheduling information is communicated to the UEs 16 via the Physical Downlink Control Channel (PDCCH) transmitted in the control region. After 10 successful decoding of a PDCCH, the UE 16 shall perform either reception of the Physical Downlink Shared Channel (PDSCH), using the CFI from the PCFICH to determine where the PDSCH begins, or transmission on the Physical Uplink Shared Channel (PUSCH), according to pre-determined timing specified in the LTE specifications.

15

Duplex Operation

Transmission and reception to and from a UE 16 can be multiplexed in the frequency domain or in the time domain, or combinations thereof. Figure 5A depicts 20 full-duplex Frequency Division Duplex (FDD), in which downlink and uplink transmission take place concurrently in different, sufficiently separated, frequency bands. Figure 5B depicts half-duplex FDD, which occurs in the UE 16, as discussed below. Figure 5C depicts Time Division Duplex (TDD), in which downlink and uplink transmissions take place in different, non-overlapping time slots in the same frequency band. Thus, TDD can operate in unpaired spectrum, whereas FDD (whether full- 25 or half-duplex) requires paired spectrum.

Signals transmitted in a wireless communication network are typically temporally organized in the form of a frame structure. For example, Figure 6 depicts the ten equally-sized subframes, each of 1 msec. duration, that make up an LTE frame.

In the case of FDD operation (depicted in the upper part of Figure 6), there are 30 two carrier frequencies, one for uplink transmission (f_{UL}) and one for downlink transmission (f_{DL}). At least with respect to the UE 16 in a wireless communication network, FDD can be either full duplex (Fig. 5A) or half duplex (Fig. 5B). In the full

duplex case, a UE 16 can transmit and receive simultaneously, while in half-duplex operation, the UE 16 alternates between transmit and receive operation. The base station 14 is always capable of simultaneous reception/transmission, e.g., receiving uplink signals from one UE 16 while simultaneously transmitting in the downlink to another UE 16. In LTE, a half-duplex UE 16 monitors (or receives data) on the downlink except when explicitly instructed to transmit in a certain subframe.

In the case of TDD operation (depicted in the lower part of Figure 6), only a single carrier frequency is used, and uplink and downlink transmissions are always separated in time (and also on a cell basis). Since the same carrier frequency is used for uplink and downlink transmission, both the base station 14 and the UE 16 must switch from transmission to reception and vice versa. An essential aspect of any TDD system is to provide the possibility for a sufficiently large guard time in which neither downlink nor uplink transmissions occur. This is required to avoid interference between uplink and downlink transmissions. For LTE, this guard time is provided by special subframes (subframe 1 and, in some cases, subframe 6), which are split into three parts: a downlink part (DwPTS), a guard period (GP), and an uplink part (UpPTS). The remaining subframes are either allocated to uplink or downlink transmission.

TDD allows for different asymmetries in terms of the amount of resources allocated for uplink and downlink transmission, by means of different configurations. Figure 7 depicts seven different TDD configurations defined for LTE. As used herein, a DL subframe may refer to either a dedicated DL subframe or the special subframe.

LTE Carrier Aggregation

Release 10 of the LTE specification defines carrier aggregation. In particular, Rel-10 supports Component Carrier (CC) bandwidths up to 20 MHz (which is the maximum LTE Rel-8 carrier bandwidth). Hence, an LTE Rel-10 operation wider than 20 MHz is possible, and appears as a plurality of LTE carriers to an LTE Rel-10 UE 16.

Particularly for early LTE Rel-10 deployments, it can be expected that there will be a smaller number of LTE Rel-10-capable terminals compared to many LTE legacy terminals. Therefore, it is necessary to ensure an efficient use of a wide carrier also for legacy terminals, *i.e.*, that it is possible to implement carriers where legacy terminals can be scheduled in all parts of the wideband LTE Rel-10 carrier. The

straightforward way to obtain this is by use of Carrier Aggregation (CA). CA implies that an LTE Rel-10 terminal can receive multiple CC, where the CC have, or at least the possibility to have, the same structure as a Rel-8 carrier. One example of CA is illustrated in Figure 8, depicting five contiguous 20 MHz CC aggregating to 100 MHz bandwidth. In general, CC need not be frequency-contiguous.

The Rel-10 standard supports up to five aggregated carriers where each carrier is limited in the RF specifications to have a one of six bandwidths, namely: 6, 15, 25, 50, 75, or 100 RB (corresponding to 1.4, 3, 5, 10, 15, and 20 MHz, respectively).

10 The number of aggregated CC, as well as the bandwidth of the individual CC, may be different for uplink and downlink. A symmetric configuration refers to the case where the number of CC in downlink and uplink is the same; an asymmetric configuration refers to the case where the number of CC is different. It is important to note that the number of CC configured in the network may be different from the 15 number of CC seen by a terminal: A terminal may for example support more downlink CC than uplink CC, even though the network offers the same number of uplink and downlink CC.

20 During initial access, an LTE Rel-10 terminal behaves similarly to a LTE Rel-8 terminal. Upon successful connection to the network a terminal may – depending on its own capabilities and the network – be configured with additional CC in the UL and DL. Configuration is based on Radio Resource Control (RRC).

Scheduling of a CC is done on the PDCCH via downlink assignments. Control 25 information on the PDCCH is formatted as a Downlink Control Information (DCI) message. In Rel-8 LTE, a terminal only operates with one DL and one UL CC; therefore, the association between DL assignment, UL grants and the corresponding DL and UL CCs is clear. In Rel-10, however, two modes of CA must be distinguished: The first case is very similar to the operation of multiple Rel-8 terminals – a DL assignment or UL grant contained in a DCI message transmitted on a CC is either valid for the DL CC itself or for associated UL CC. A second mode of operation augments a DCI message with the Carrier Indicator Field (CIF). A DCI containing a DL assignment with CIF is valid for the DL CC indicated with CIF, and a DCI containing an UL grant with CIF is valid for the indicated UL CC.

LTE ARQ

As discussed above, a wireless communication network 10 employing an ARQ scheme may be operated with a certain error level target. That is, given the channel quality, the base station 14 chooses a bit rate for each initial transmission that aims for 5 a predetermined target error rate. For example, the target may be 10% block error rate (BLER). In this case, on average, a first re-transmission will be necessary approximately 10% of the time. Further re-transmissions are less likely. Hence, even in system set to achieve a target error rate, the volume of re-transmissions is relatively small compared to that of first transmissions.

10 In Rel-10 LTE, a UE 16 is notified by the network of downlink data transmission by the physical downlink control channel (PDCCH). Upon reception of a PDCCH in a particular subframe n , a UE 16 is required to decode the corresponding physical downlink share channel (PDSCH) and to send ACK/NAK feedback in a subsequent subframe $n+k$. This is illustrated in Figure 9. The ACK/NAK feedback 15 informs the eNodeB whether the corresponding PDSCH data was decoded correctly. When the eNodeB detects an ACK feedback, it can discard the data from the associated buffer, and possibly proceed to send new data blocks to the UE 16. When a NAK is detected by the eNodeB, coded bits corresponding to the original data block will be retransmitted. In order for the UE 16 to determine whether the decoded data is correct, 20 a cyclic redundancy check (CRC) coding is applied to the data prior to its transmission. The processing of PDSCH data is depicted in flow diagram form in Figure 10.

In LTE, the ACK/NAK feedback is sent by the UE 16 using one of the two possible approaches, depending on whether the UE 16 is simultaneously transmitting on a physical uplink shared channel (PUSCH). If so, the ACK/NAK is sent on the 25 PUSCH. Otherwise, the ACK/NAK feedback is sent via a physical uplink control channel (PUCCH). In Rel-10 LTE, the transmission of PUCCH is mapped onto one specific uplink CC, the UL Primary CC (UL PCC).

The ARQ process introduces a random component to the scheduler of the main carrier, which could operate more efficiently if it were more predictable. The random 30 ARQ re-transmissions also prevent the most effective use of advanced scheduling techniques that cover multiple cells.

If the base station is equipped with more than one antenna (or one antenna per sector) and is capable of performing Multiple Input Multiple Output (MIMO) transmissions, more than one block of data may be transmitted or re-transmitted in the above disclosed schemes. In a normal feedback mode, the UE will send back a number 5 of ACK/NAK indicators corresponding to the more than one block of data transmitted from the base station. In a second bundled feedback mode, the UE will send back one ACK/NAK indicator with value ACK indicating whether all the received blocks of data are correct and with value NAK indicating at least one of the received data blocks is in error. In the case of a NAK, the base station shall retransmit the multiple blocks of data.

10

Re-transmission Extension Carrier

Release 11 of the LTE specification introduces extension carriers. According to one embodiment of the present invention, ARQ/HARQ re-transmissions are shifted from the carrier on which the first transmission occurs – referred to herein as the “main carrier,” although in a given implementation it may be the Primary CC or a Secondary CC – to an extension carrier. Figure 11 depicts a main carrier and a Re-transmission Extension Carrier (REC).

Figure 12 illustrates a method 100 of operating a base station 14 in a wireless communication network 10 implementing a REC. Data to be transmitted to one or more 20 UEs 16 are received at the base station 14 (block 102). Transmission of a block of data to a UE 16 is scheduled on a first carrier (*i.e.*, the main carrier) (block 104). The base station 14 then transmits the block of data to the UE 16 as scheduled (block 106). The UE 14 sends an ACK or NAK acknowledgement. If the base station receives an ACK 25 (block 108) – including if a timer expires without receiving a NAK, in a HARQ system using implicit acknowledgment – the base station 14 concludes the block was received correctly by the UE 16, and processing proceeds, *e.g.*, by receiving more data to transmit (block 102). On the other hand, if the base station 14 receives a NAK (block 106), indicating an error in the data decoded by the UE 16, then HARQ re-transmission of the relevant block of data to the UE 16 is performed on the REC, which 30 is separate from the first (main) carrier (block 110). If the UE responds to the re-transmission with another NAK (block 108), subsequent re-transmissions are also sent on the REC (block 110). Note that in the event of repeated NAKs, at some point the

HARQ re-transmission process terminates (not shown), and a transmission error is reported to higher-layer protocols for recovery. Note also that UE 16 conforming to LTE specification Rel-10 or earlier cannot connect to the REC.

In one embodiment, the REC comprises a pair of frequency bands (whether 5 located in the same band as the main carrier or not), and the REC is operated in FDD mode. In another embodiment, the REC comprises a single frequency band and it is operated in TDD mode. In one embodiment, the duplex mode of the REC is different than that of the main carrier.

In one embodiment, the REC is associated with one main carrier. In this 10 embodiment, the REC derives its generic CC signaling from that of the main carrier, instead of carrying that signaling itself. This allows more resources of the REC to be used for carrying re-transmission data. Technology enabling this result is disclosed in co-pending U.S. Patent Application Serial No. 13/307,835, filed November 30, 2011, 15 titled, "Synchronization and Reference Signals on Aggregated Carriers," and assigned to the assignee of the present application, the disclosure of which is incorporated by reference herein in its entirety.

In one embodiment, the capacity of the REC is much smaller than that of the main carrier. For example, in the case of the 10% BLER example, the minimum required REC capacity would be roughly 10% of that of the main carrier. Thus the 20 bandwidth of the REC may be scaled accordingly, as a baseline. The capacity scaling can be achieved in an FDD system by partitioning available frequency bandwidth into small carriers; in a TDD system it can be achieved by partitioning available time slots.

In one embodiment, the scheduler of the REC is derived from that of the main carrier. That is, the main carrier assigns the re-transmissions to the REC, which sends 25 them as they come. In one embodiment, the main carrier cross-schedules the re-transmission on the REC – that is, a UE 16 would read scheduling information on PDCCH on the main carrier, and then read the re-transmitted data on PDSCH on the REC.

In another embodiment, the scheduler is more independent, and orders the re- 30 transmissions according to REC channel quality measurements from the UEs 16 (among other factors). In this case, the re-transmission scheduling information is transmitted on the control channel of the REC. This embodiment is preferred if the

main carrier conforms to the LTE Rel-10 specification, since the main carrier has limited PDCCH capacity.

The REC uplink may be implemented in a variety of ways. In one embodiment, the REC uplink channel is a dedicated carrier (FDD) or time slot (TDD), carrying only ACK/NAK messages and “overhead” signaling such as channel quality measurements. In another embodiment, the REC uplink may be “piggy-backed” on the uplink carrier of the main carrier. In still another embodiment, the REC uplink is a shared carrier, along with the uplink channels of other re-transmission carriers. Those of skill in the art will realize that any of these mechanisms may be used, so long as the uplink messages are appropriately tagged to allow for processing at the base station 14.

Shared Re-transmission Extension Carrier

As discussed above, the capacity of a REC may be only a fraction of that of its corresponding main carrier, and hence the bandwidth of the REC may be configured to be much lower than that of the main carrier (e.g., 10%, in the case of a 10% BLER). In one embodiment, however, the REC has a relatively wide bandwidth, and its capacity is shared among a plurality of main carriers. The bandwidth may be shared in various ways. In one embodiment, the REC bandwidth is shared equally among a number of main carriers (e.g., eight). The fixed sharing may be implemented as time division multiplexing, or more generally by allocating resource blocks in a fixed periodic manner.

In one embodiment, multiple main carriers direct their re-transmissions to the same REC, where they are handled by a single REC scheduler. This makes the sharing more flexible and adjustable to the short-term needs of main carriers. A method 200 of operating a REC scheduler is depicted in Figure 13. The REC scheduler receives a first block of data previously transmitted to a first UE 16 on a first carrier other than the REC, the previous transmission having been NAK’ed by the first UE 16 as containing one or more errors (block 202). The REC scheduler also receives a second block of data previously transmitted to a second UE 16 on a second carrier other than the REC, the previous transmission having been NAK’ed by the second UE 16 as containing one or more errors (block 204). The REC scheduler then schedules both transmissions on the REC (block 206), in response to, e.g., channel quality feedback from served UEs 16,

the size of the respective blocks of re-transmission data, parameters associated with the re-transmission data such as QoS, and the like. The base station 14 then transmits the first block of data to the first UE 16 and the second block of data to the second UE 16, according to the REC scheduler.

5 The multiple main carriers and the REC are all transmitted from the same base station 14 in one embodiment. In another embodiment, the REC may be transmitted from a different base station 14 than one or more of the main carriers, if there exist suitably communication links between the base stations 14 to enable fast transmission coordination.

10

Shared Re-transmission Extension Carrier in Contention Mode

In one embodiment, re-transmissions from multiple main carriers are not scheduled or otherwise cooperatively managed on the REC, but rather the REC is operated in contention mode. In contention mode, main carriers at two or more base stations 14 share an REC channel (carrier bandwidth or time slot). Rather than coordinating re-transmissions in any way, prior to a re-transmission, each base station 14 monitors the REC for an ongoing transmission from another base station 14. If the REC is “quiet,” the base station 14 proceeds to transit its re-transmission data on the REC. On the other hand, if it senses an ongoing transmission on the REC, the base station 14 will back off from the transmission according to a pre-determined method (e.g., await the expiration of a timer, which may be initialized to a random number).

20 The embodiment described above works for separate base stations 14, and additionally for base stations 14 that are co-located. In another embodiment, wherein two main carriers on the same base station site use the same transmit antenna, the contention mode comprises sensing the transmit antenna for an ongoing transmission of the REC channel. The main carrier then transmits or backs off according to the detected level of activity.

25 Operating the REC in contention mode is much simpler from a coordination perspective, as compared to scheduling transmissions on the REC. However, it may result in a lower overall capacity.

Shared Re-transmission Extension Carrier in Unlicensed Spectrum

The contention modes described above are not limited to embodiments wherein the REC comprises a component carrier of the wireless communication network 10. In 5 one embodiment, the REC is implemented in unlicensed spectrum. For example, the REC may be in the Industrial, Scientific and Medical (ISM) radio bands. A characteristic of unlicensed spectrum is the lack of any exclusive regulatory protection from interference generated by other users of the spectrum, such as cordless (conventional) phones, Bluetooth® devices, microwave ovens, and the like. The above- 10 described contention technique (back-off if busy) may be applicable in such environments.

Passive Contention Measures for Shared Re-transmission Extension Carrier

In some embodiments, active contention techniques may not be feasible, such as 15 due to cost constraints or implementation difficulties, or may not be effective, such as when operating in unlicensed spectrum with near-continuous interference. In these embodiments, interference mitigation mechanisms are added to the signals carrying the REC transmission. Such interference mitigation mechanisms may include (but are not limited to): selection of lower coding rate, spreading the transmission over wider 20 frequency/time resources using spread spectrum techniques, and applying transmitter side beam-forming to the intended receivers. Concurrently or additionally, interference suppression techniques may be employed by receivers, such as using the spread frequency-time resources or multiple receive antennas.

25 Exemplary Apparatus Implementing REC Embodiments

Figure 14 depicts functional block diagrams of a base station, such as an LTE eNodeB 14, and UE 16. The eNodeB 14 includes a controller 40, memory 42, network interface 46, and a transceiver 46 coupled to one or more antenna 48. Additional components of the eNodeB 14 are omitted for clarity.

30 The controller 40 may comprise any sequential state machine operative to execute machine instructions stored as machine-readable computer programs in the memory 42, such as one or more hardware-implemented state machines (e.g., in

discrete logic, FPGA, ASIC, etc.); programmable logic together with appropriate firmware; one or more stored-program, general-purpose processors, such as a microprocessor or Digital Signal Processor (DSP), together with appropriate software; or any combination of the above.

5 The memory 42 may comprise any non-transient machine-readable media known in the art or that may be developed, including but not limited to magnetic media (e.g., floppy disc, hard disc drive, etc.), optical media (e.g., CD-ROM, DVD-ROM, etc.), solid state media (e.g., SRAM, DRAM, DDRAM, ROM, PROM, EPROM, Flash memory, etc.), or the like. The memory 42 is operative to store program code operative
10 to cause the controller to operate as described herein.

15 The network interface 44 is operative to communicatively couple the eNodeB 14 to other LTE core network nodes, such as the MME/S-GW 22. The eNodeB may additionally be coupled to other eNodeBs 14, or other network nodes. The network interface 44 is operative to implement a variety of communication protocols over physical channel such as, but not limited to, wired electrical or optical networks.

20 The transceiver 66 is operative to modulate and transmit data according to OFDMA techniques, and otherwise generate and process signals for transmission to UE 16 within its cell 18, according to the various 3GPP LTE specifications. The transceiver is operative to transmit data to UE 16 on a main carrier, and in some embodiments, is further operative to re-transmit data to the UE 16 on a REC. The transceiver 66 is further operative to receive and process signals from UE 16 in its cell 18, including, in some embodiments, uplink REC signals. The antenna 48 may comprise one antenna (or one antenna per sector), or may comprise multiple antennae in a Multiple Input Multiple Output (MIMO) configuration.

25 The UE 16 includes a controller 60, memory 62, user interface 64, and a transceiver 66 coupled to one or more antenna 68. Additional components of the UE 16 are omitted for clarity. The controller 60, memory 62, transceiver 66, and antenna 68 may be as describe above with respect to the eNodeB 14, with variations for low power and mobility, as known by those of skill in the art. The user interface 64 may include a
30 microphone, speaker, keypad, display, and/or touchscreen, operative to receive voice and control inputs from a user, and operative to display information and render sounds

to the user. UE 16 may include numerous additional components (e.g., camera) omitted from Figure 14 for clarity.

According to embodiments of the present invention, required ARQ/HARQ retransmissions are diverted from one or more main carriers to a REC, freeing the main 5 carrier scheduler(s) of the random interruption, and allowing it/them to perform more efficient, deterministic scheduling. Inter-cell scheduling and coordination are also improved.

The present invention may, of course, be carried out in other ways than those 10 specifically set forth herein without departing from essential characteristics of the invention. The present embodiments are to be considered in all respects as illustrative and not restrictive, and all changes coming within the meaning and equivalency range of the appended claims are intended to be embraced therein.

CLAIMS

What is claimed is:

1. A method (100) of operating a base station (14), comprising:
 - receiving (102) data to be transmitted to one or more User Equipment, UE (16);
 - 5 scheduling (104) transmission of at least one block of data to the UE (16) in a first scheduler;
 - transmitting (106) the at least one block of data to a UE (16) on at least a first component carrier, CC;
 - receiving (108) a negative acknowledgement, NAK, from the UE (16) indicating one or more errors in at least one received data block; and
 - 10 re-transmitting (110) at least one block of data to the UE (16) on a Re-transmission Extension Carrier, REC, separate from any CC on which a block of data was transmitted to the UE (16).
 - 15 2. The method (100) of claim 1 wherein the base station (14) implements carrier aggregation, and wherein the REC is a component carrier separate from any CC on which a block of data was transmitted to the UE (16).
 3. The method (100) of claim 1 wherein re-transmitting the block of data to the UE 20 (16) on REC comprises cross-carrier scheduling the re-transmission on the REC from the first CC.
 4. The method (100) of claim 1 further comprising, prior to re-transmitting the block of data:
 - 25 sending information about the re-transmission and the UE (16) to a second scheduler associated with the REC.
 5. The method (100) of claim 1 further comprising, prior to re-transmitting the block of data:
 - 30 monitoring the REC for an ongoing transmission; and
 - re-transmitting the block of data to the UE (16) on the REC only if there is no transmission ongoing on the REC.

6. The method (100) of claim 1 further comprising:
receiving a channel quality indicator from the UE (16) on the REC.
7. The method (100) of claim 6 wherein downlink and uplink transmissions on the REC are Frequency Division Duplexed, FDD.
5
8. The method (100) of claim 6 wherein downlink and uplink transmissions on the REC are Time Division Duplexed, TDD.
- 10 9. The method (100) of claim 1 wherein the REC is a carrier in unlicensed spectrum.
10. The method (100) of claim 9 further comprising, prior to re-transmitting the block of data:
15 monitoring the REC for an ongoing transmission; and
re-transmitting the block of data to the UE on the REC only if there is no transmission ongoing on the REC.
11. The method (100) of claim 9 further comprising, prior to re-transmitting the block of data:
20 adding interference mitigation to the signal to be transmitted.
12. The method (100) of claim 11 wherein the interference mitigation comprises
25 encoding the block of data at a lower coding rate.
13. The method (100) of claim 11 wherein the interference mitigation comprises
spreading the transmission over wider frequency/time resources using spread spectrum
techniques.
- 30 14. The method (100) of claim 11 wherein the interference mitigation comprises
applying transmitter side beam-forming to the intended receivers.

-20-

15. The method (100) of claim 1 wherein the base station (14) is capable of performing Multiple Input Multiple Output, MIMO, transmissions, and wherein receiving a NAK from the UE (16) comprises receiving a NAK associated with each block of data transmitted, and

5 wherein re-transmitting at least one block of data to the UE (16) on a REC comprises re-transmitting each block of data associated with a NAK.

16. The method (100) of claim 1 wherein the base station (14) is capable of performing Multiple Input Multiple Output, MIMO, transmissions, and

10 wherein receiving a NAK from the UE (16) comprises receiving a single NAK indicating an error in at least one block of data, and wherein re-transmitting at least one block of data to the UE (16) on a REC comprises retransmitting all blocks of data in response to the single NAK.

15 17. A method (200) of transmitting HARQ re-transmissions on a Re-transmission Extension Carrier, REC, comprising:

 receiving (202) a first block of data previously transmitted to a first User Equipment, UE (16) on a first carrier other than the REC, the previous transmission having been negatively acknowledged, NAK, by the first UE (16) as containing one or

20 more errors; and

 transmitting (208) the first block of data to the first UE (16) on the REC.

18. The method (200) of claim 17 further comprising:

 receiving (204) a second block of data previously transmitted to a second UE

25 (16) on a second carrier other than the REC, the previous transmission having been negatively acknowledged, NAK, by the second UE (16) as containing one or more errors;

 scheduling (206) the transmission of the first block of data to the first UE (16) and the second block of data on the second UE (16), both on the REC; and

30 transmitting (210) the block of data to the second UE (16) on the REC.

-21-

19. The method (200) of claim 18 wherein scheduling the transmission of the first block of data to the first UE (16) and the second block of data on the second UE (16) on the REC comprises sharing REC bandwidth equally between the first and second blocks of data.

5

20. The method (200) of claim 18 further comprising:

receiving a first channel quality indicator from the first UE (16); and

receiving a second channel quality indicator from the second UE (16);

wherein scheduling the transmission of the first block of data to the first UE

10 (16) and the second block of data on the second UE (16), both on the REC, comprises scheduling the transmissions in response to the received channel quality indicators.

21. A base station (14) operative in a wireless communication network (10), comprising:

15 a first transceiver (46) operative to transmit data to User Equipment, UE (16) on at least a first component carrier, CC;

a network interface (44) operative to exchange data with one or more network nodes (22, 24);

memory (42); and

20 a controller (40) operatively connected to the memory (42), the transceiver (46), and the network interface (44), and operative to

receive (102), via the network interface (44), data to be transmitted to one or more UE (16);

25 schedule (104) transmission of at least one block of data to the UE (16) on at least the first CC;

cause the first transceiver (46) to transmit (106) the at least one block of data to a UE (16) on at least the first CC;

30 receive (108), from the transceiver (46), a negative acknowledgement, NAK, from the UE (16) indicating one or more errors in the received data block; and

cause at least one block of data to be re-transmitted (110) to the UE (16) by means other than on any CC on which a block of data was transmitted to the UE (16).

5 22. The base station (14) of claim 21, further comprising:
a second transceiver (46) operative to transmit data to UE (16) on a Re-transmission Extension Carrier, REC, separate from any CC on which a block of data was transmitted to the UE (16); and
wherein the controller (40) is operative to cause the at least one block of data to be re-transmitted to the UE (16) by causing the second transceiver (46) to transmit at least 10 one block of data to the UE (16) on the REC.

23. The base station (14) of claim 22 wherein the controller (40) is further operative to schedule transmission of the at least one block of data to the UE (16) on the REC.

15 24. The base station (14) of claim 23 wherein the controller (40) is further operative to schedule on the REC the transmission of one or more blocks of data to be re-transmitted to other UE (16) as a result of the other UE (16) having NAK'ed a downlink transmission of data on other CCs.

20 25. The base station (14) of claim 22 wherein the controller (40) is further operative to
monitor the REC for an ongoing transmission; and
cause the second transceiver (46) to transmit the at least one block of data to the 25 UE (16) on the REC only if there is no transmission ongoing on the REC.

26. The base station (14) of claim 21 wherein
the controller (40) is operative to cause the at least one block of data to be re-transmitted to the UE (16) by sending the at least one block of data, via the network 30 interface (44), to a network node (22, 24) operative to transmit the at least one block of data to the UE (16) on a Re-transmission Extension Carrier, REC.

27. The base station (14) of claim 21 further comprising:

- a third transceiver (46) operative to transmit data to UE (16) in unlicensed spectrum; and
- wherein the controller (40) is operative to cause the at least one block of data to be re-transmitted to the UE (16) by causing the third transceiver (46) to transmit the at least one block of data to the UE (16) in unlicensed spectrum.

28. The base station (14) of claim 27 wherein the controller (40) is further operative to

- 10 monitor the unlicensed spectrum for an ongoing transmission; and
- cause the third transceiver (46) to transmit the at least one block of data to the UE (16) in unlicensed spectrum only if there is no transmission ongoing in the unlicensed spectrum.

15 29. The base station (14) of claim 27 wherein the controller (40) is further operative to

- add interference mitigation to the signal to be transmitted.


30. User Equipment, UE (16), operative in a wireless communication network (10),
20 comprising:

- a transceiver (66) operative to receive and transmit data from and to a base station (14) on at least a first component carrier, CC;
- memory (62); and
- a controller (60) operatively connected to the memory (62) and the transceiver (66), and operative to
- 25 receive, from the transceiver (66), data transmitted by the base station (14) on the first CC;
- perform error detection on the received data;
- in the case of a detected error, cause the transceiver (66) to transmit a negative acknowledgement, NAK, to the base station (14) on the first CC; and
- 30 receive, from the transceiver (46), a re-transmission of the erroneous data by means other than the first CC.

-24-

31. The UE (16) of claim 30 wherein the controller (60) is operative to receive the re-transmission on a Re-transmission Extension Carrier, REC, separate from any CC on which data was transmitted to it.

5 32. The UE (16) of claim 30 wherein the controller (60) is operative to receive the re-transmission in unlicensed spectrum.

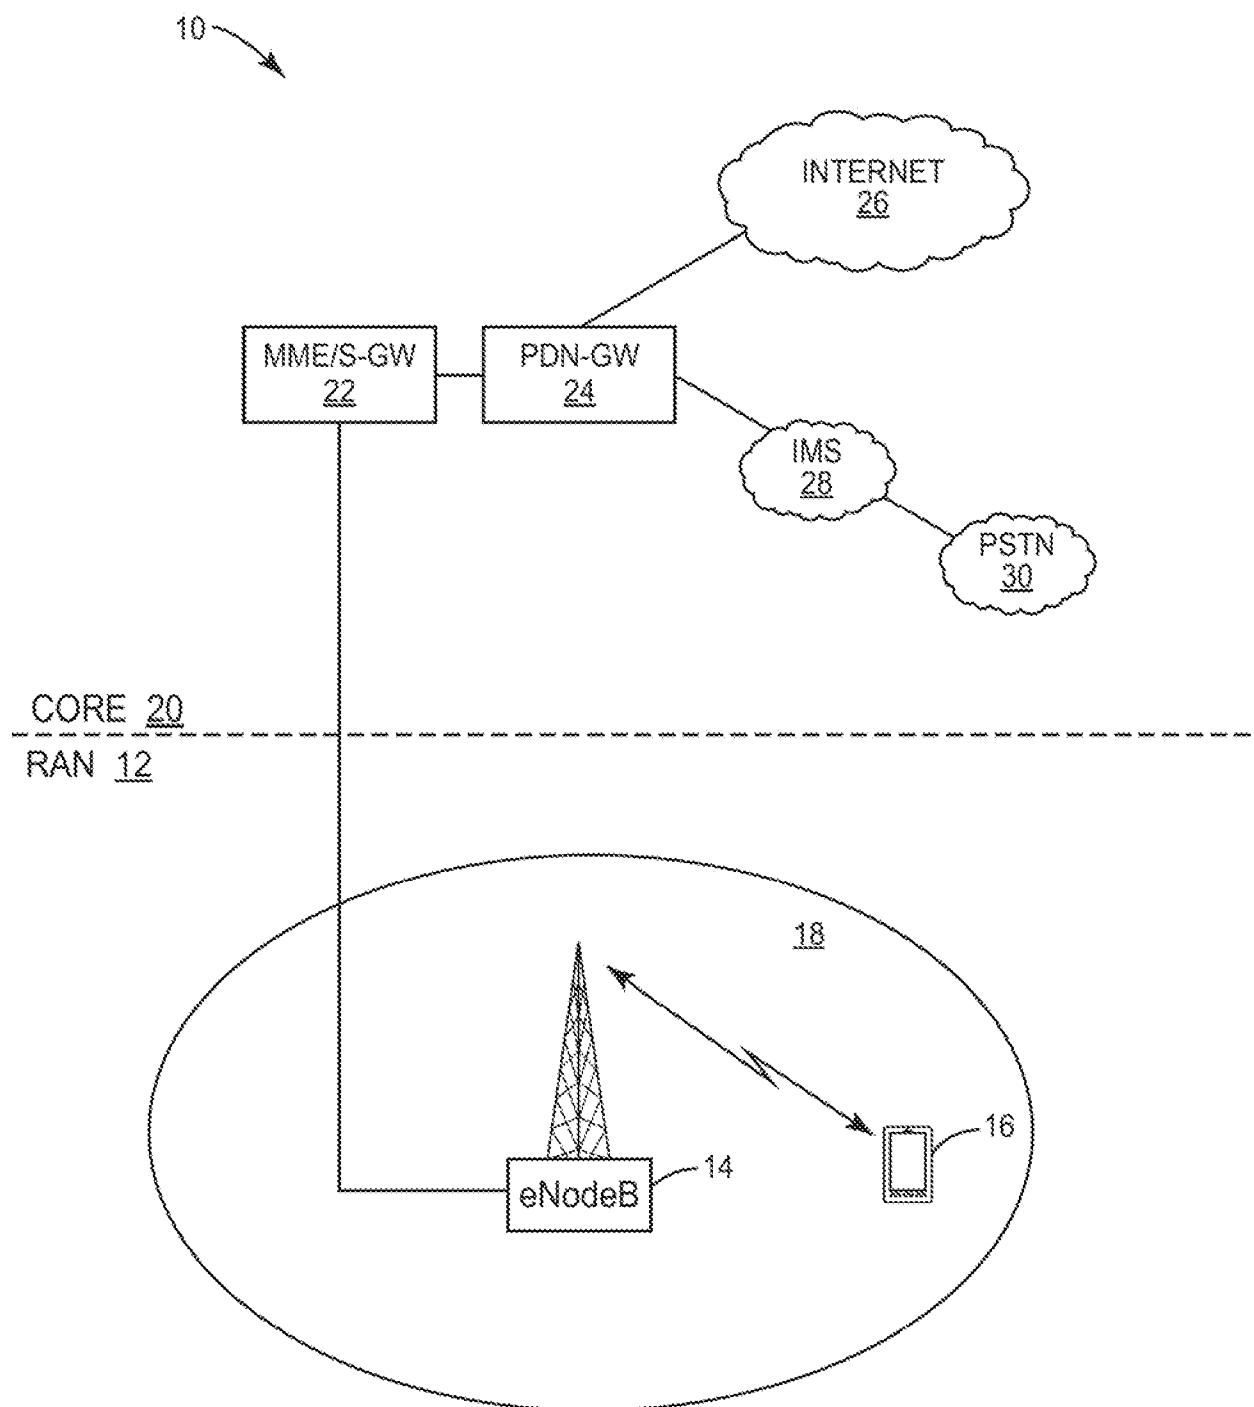**FIG. 1**

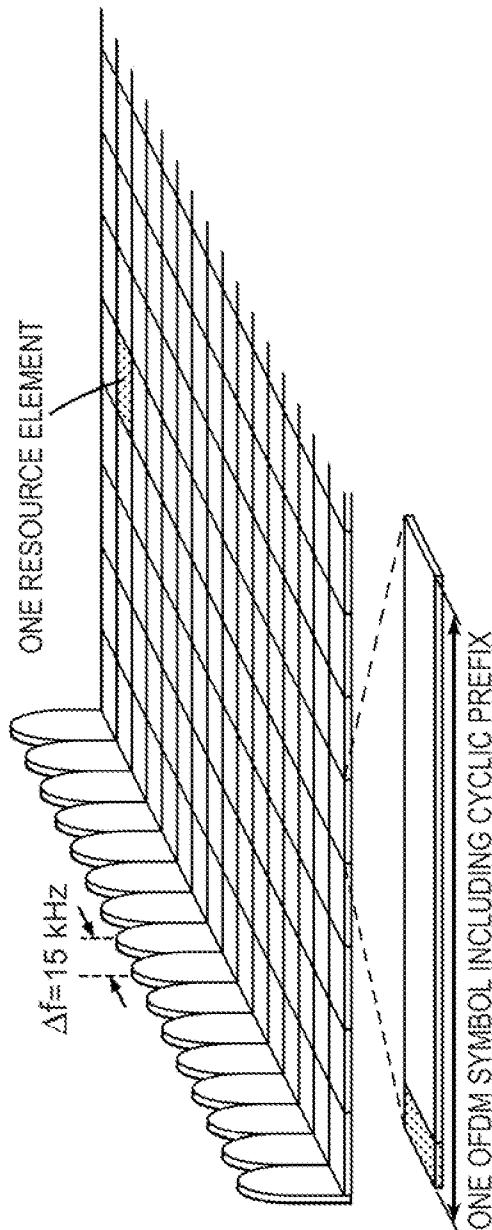


FIG. 2

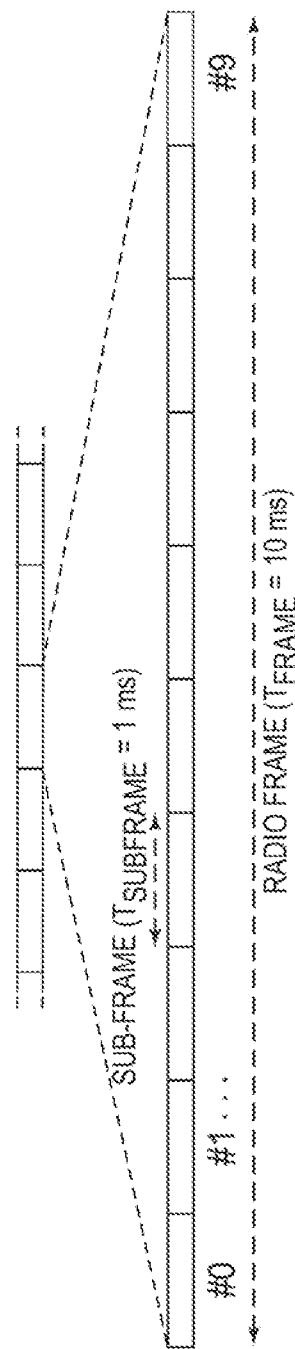


FIG. 3

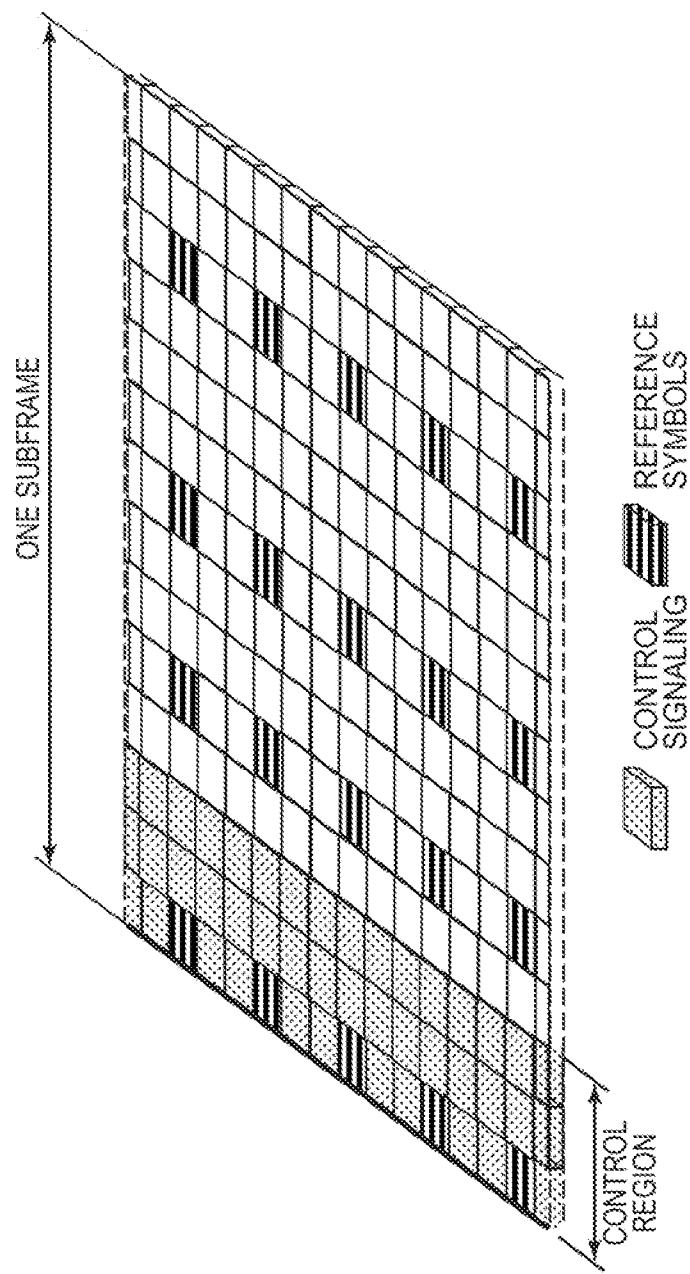


FIG. 4

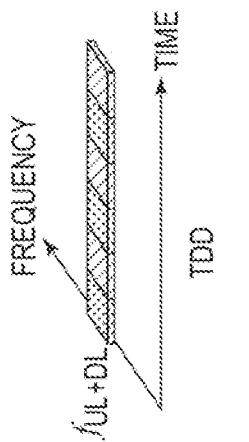


FIG. 5C

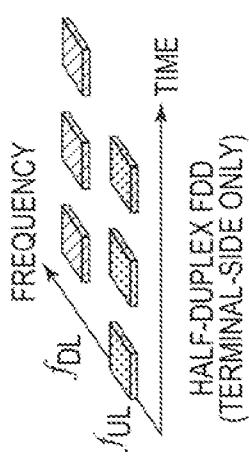


FIG. 5B

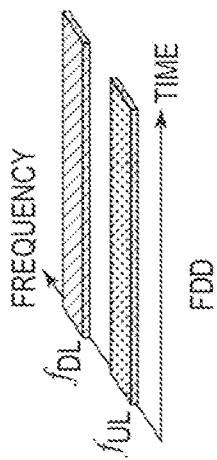


FIG. 5A

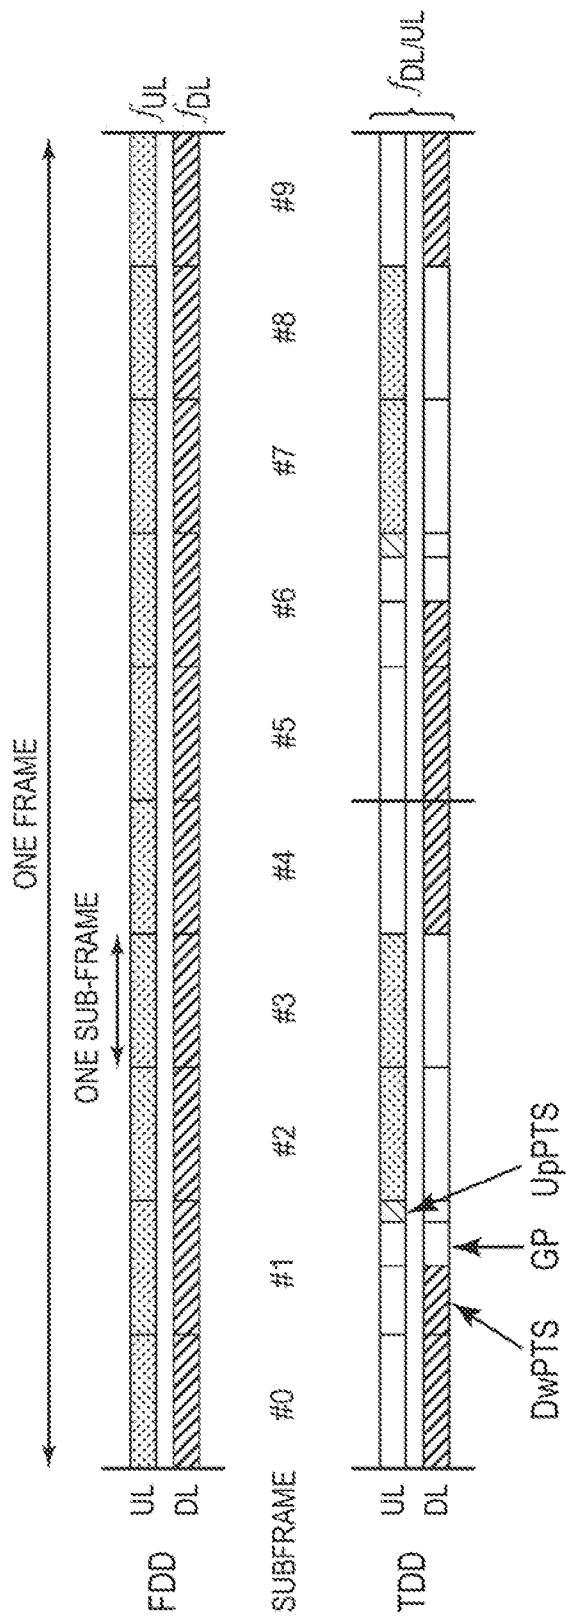


FIG. 6

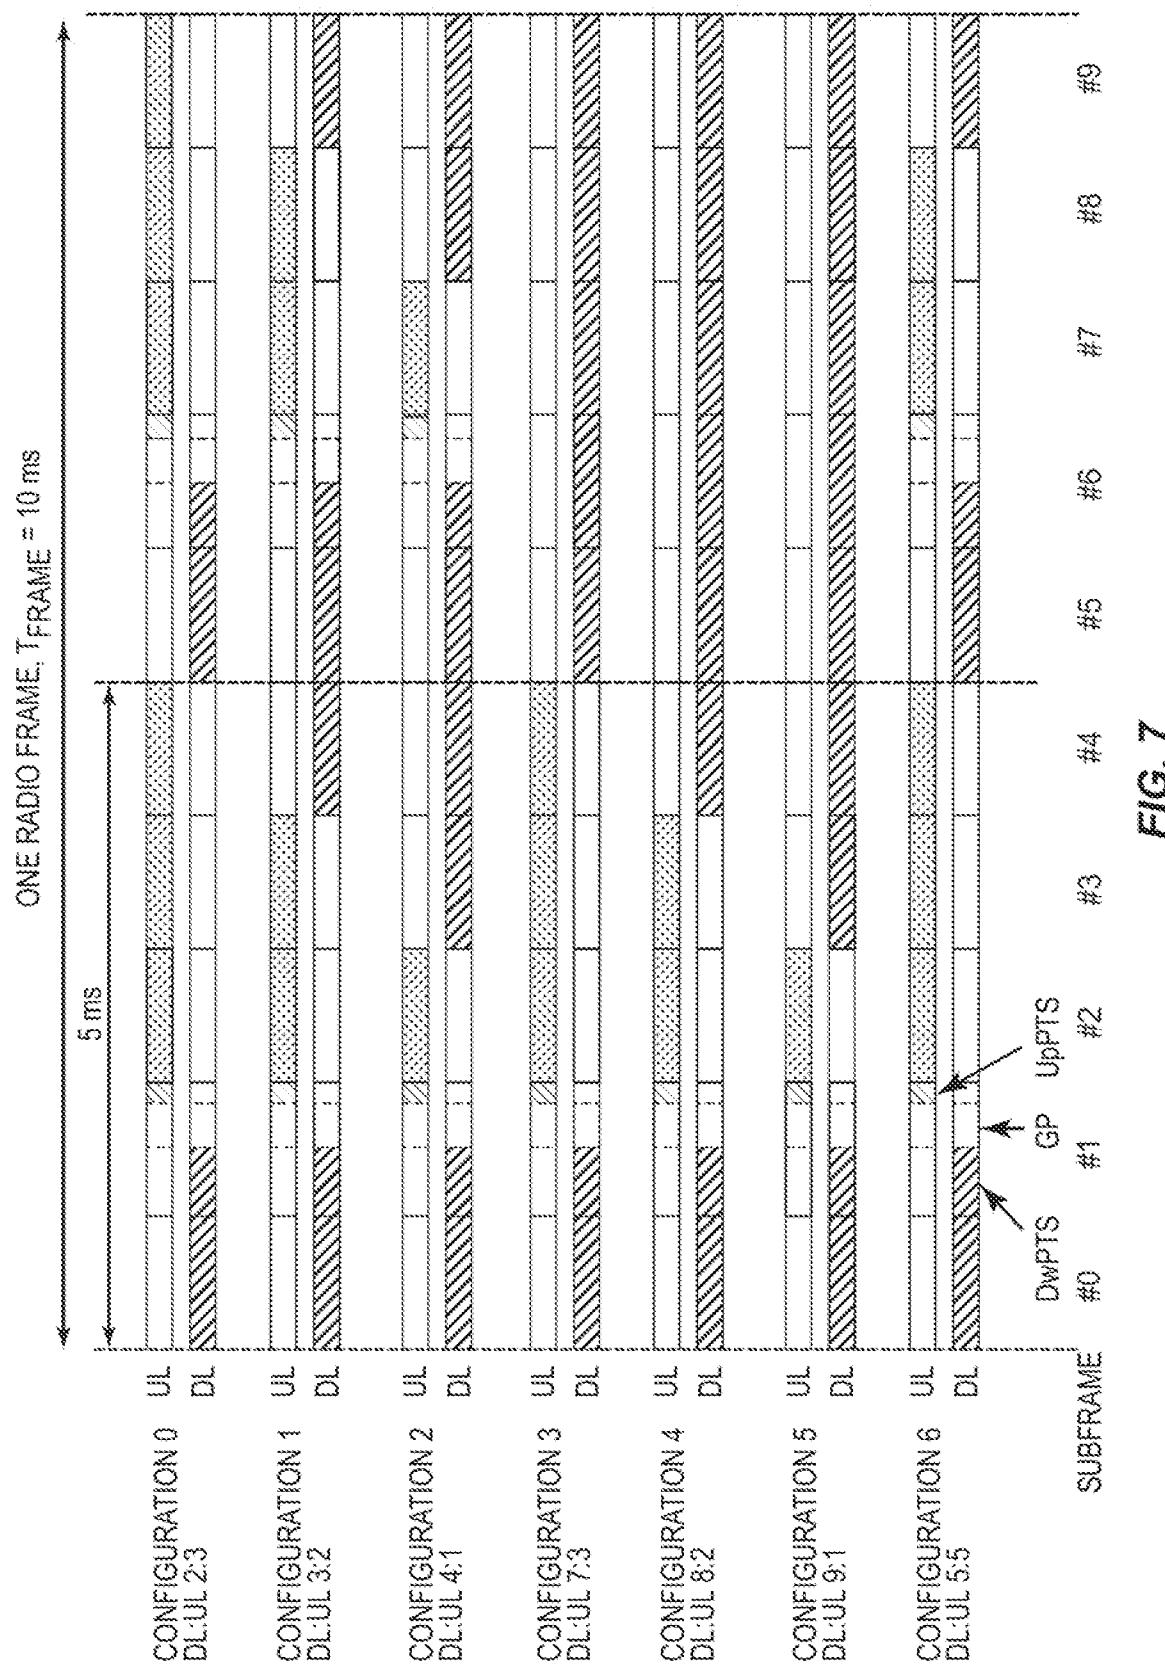


FIG. 7

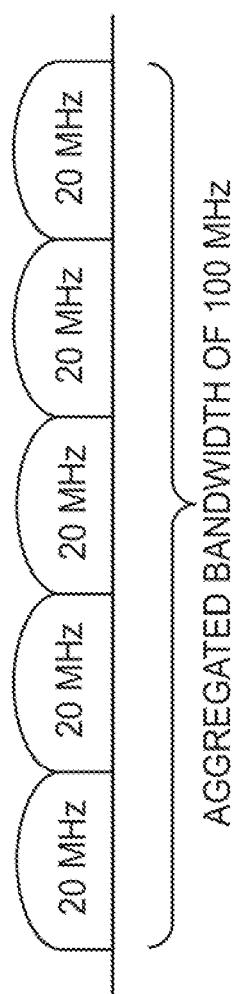


FIG. 8

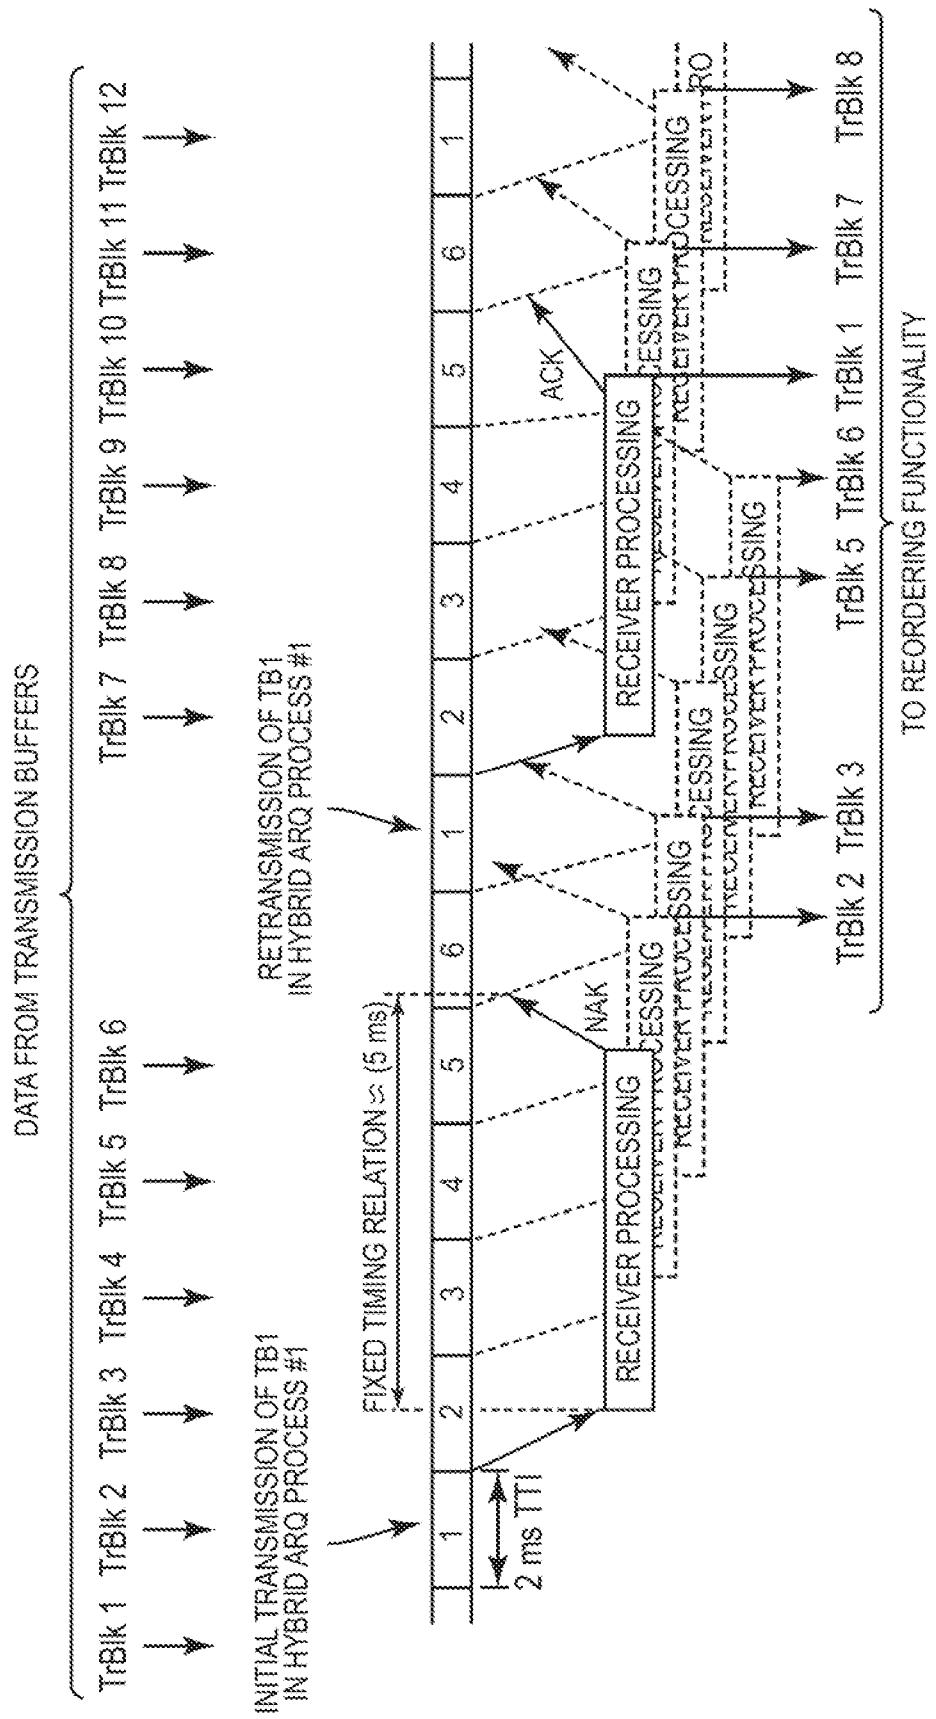


FIG. 9

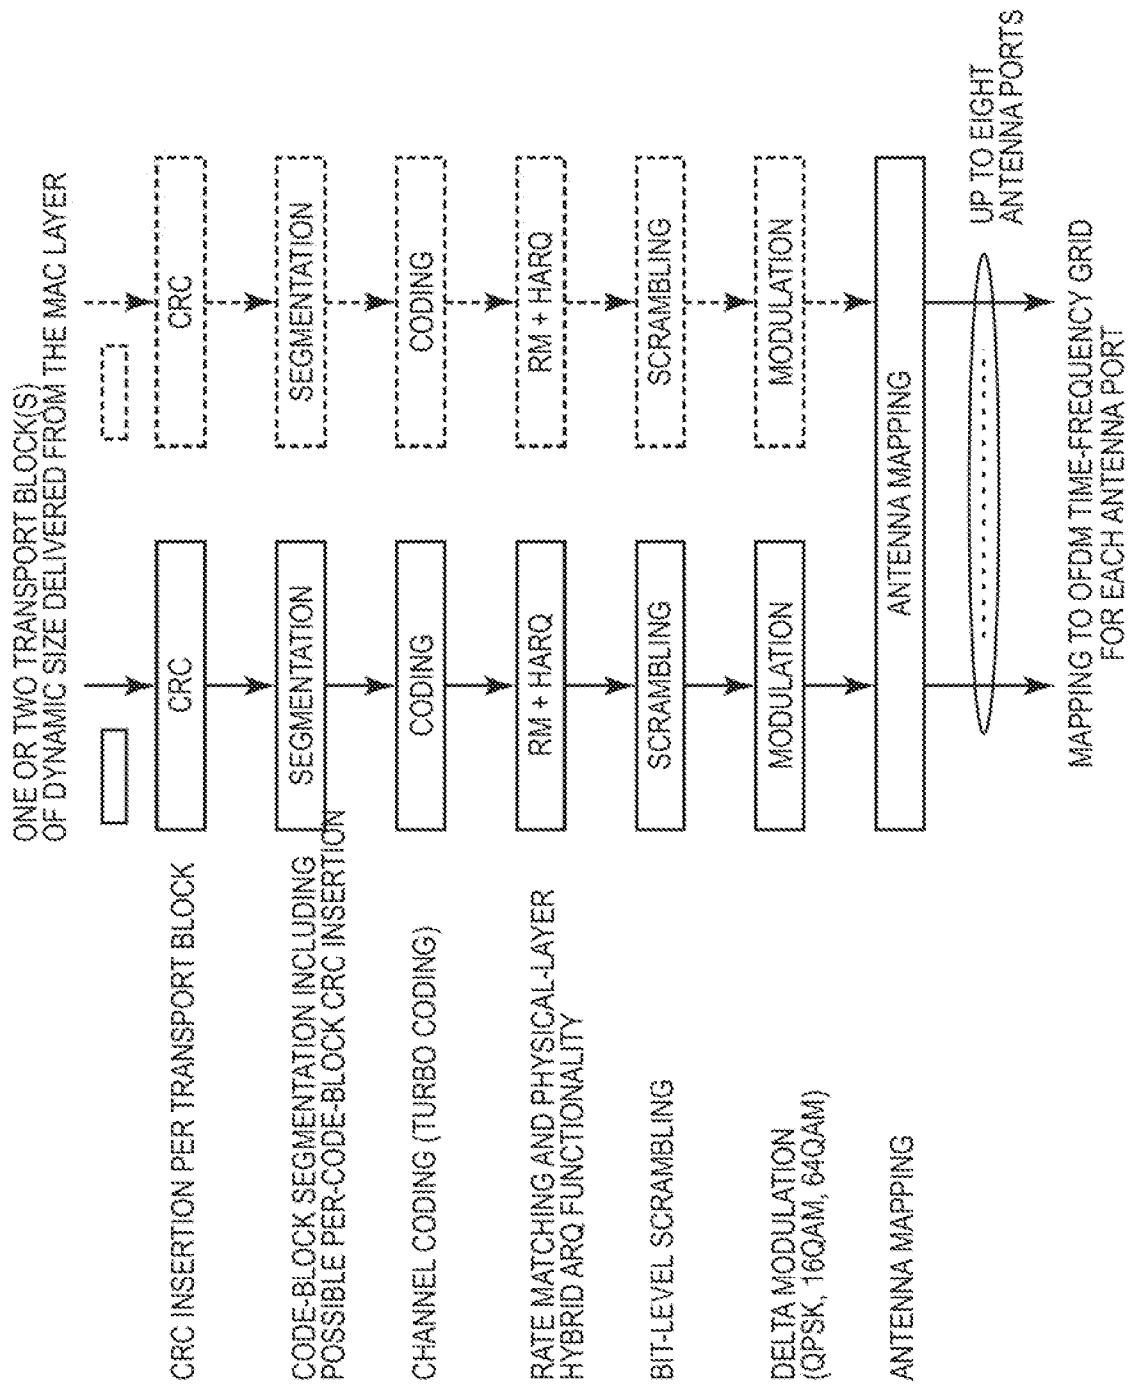


FIG. 10

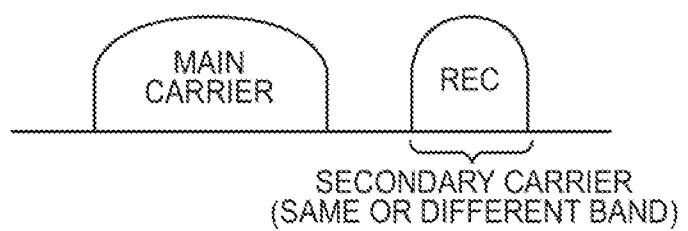


FIG. 11

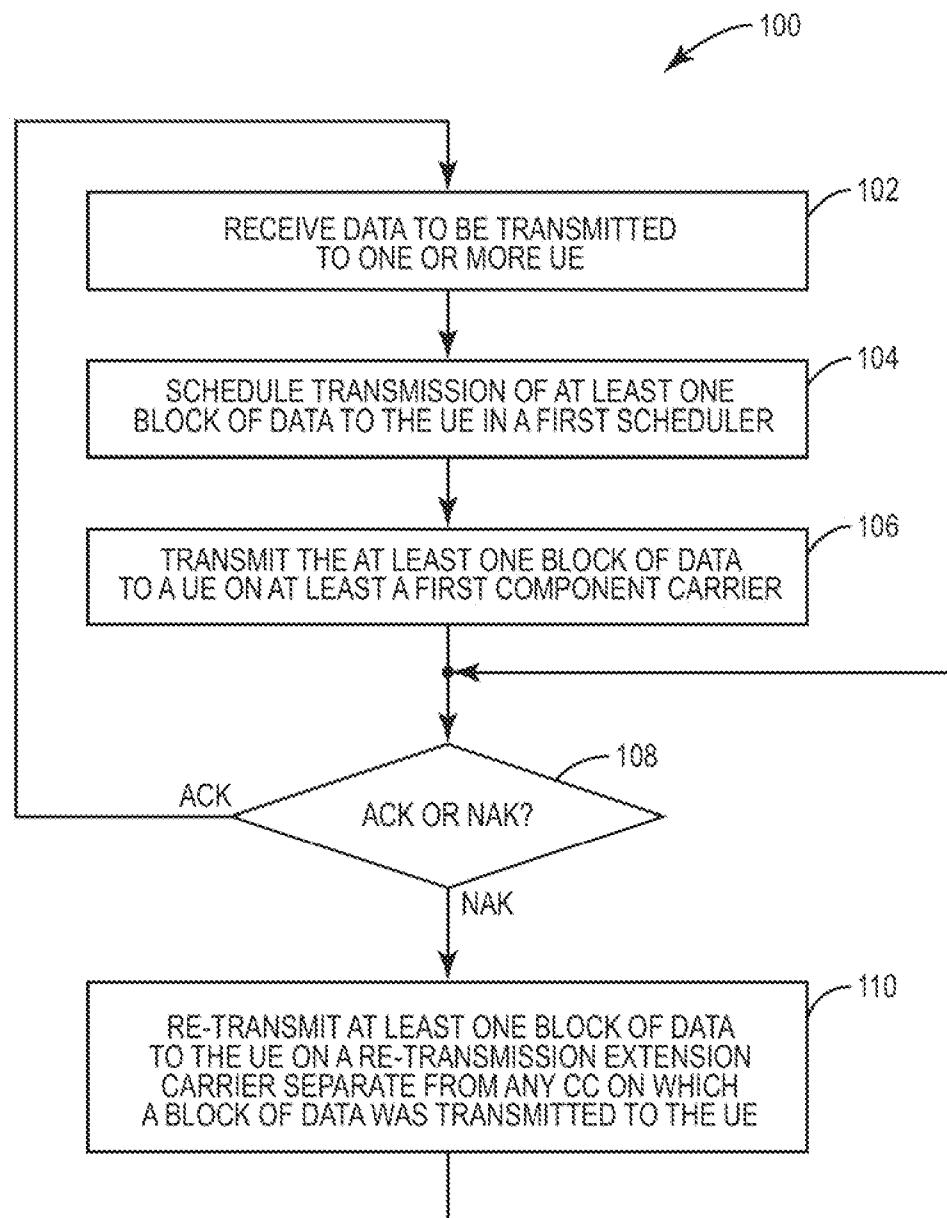
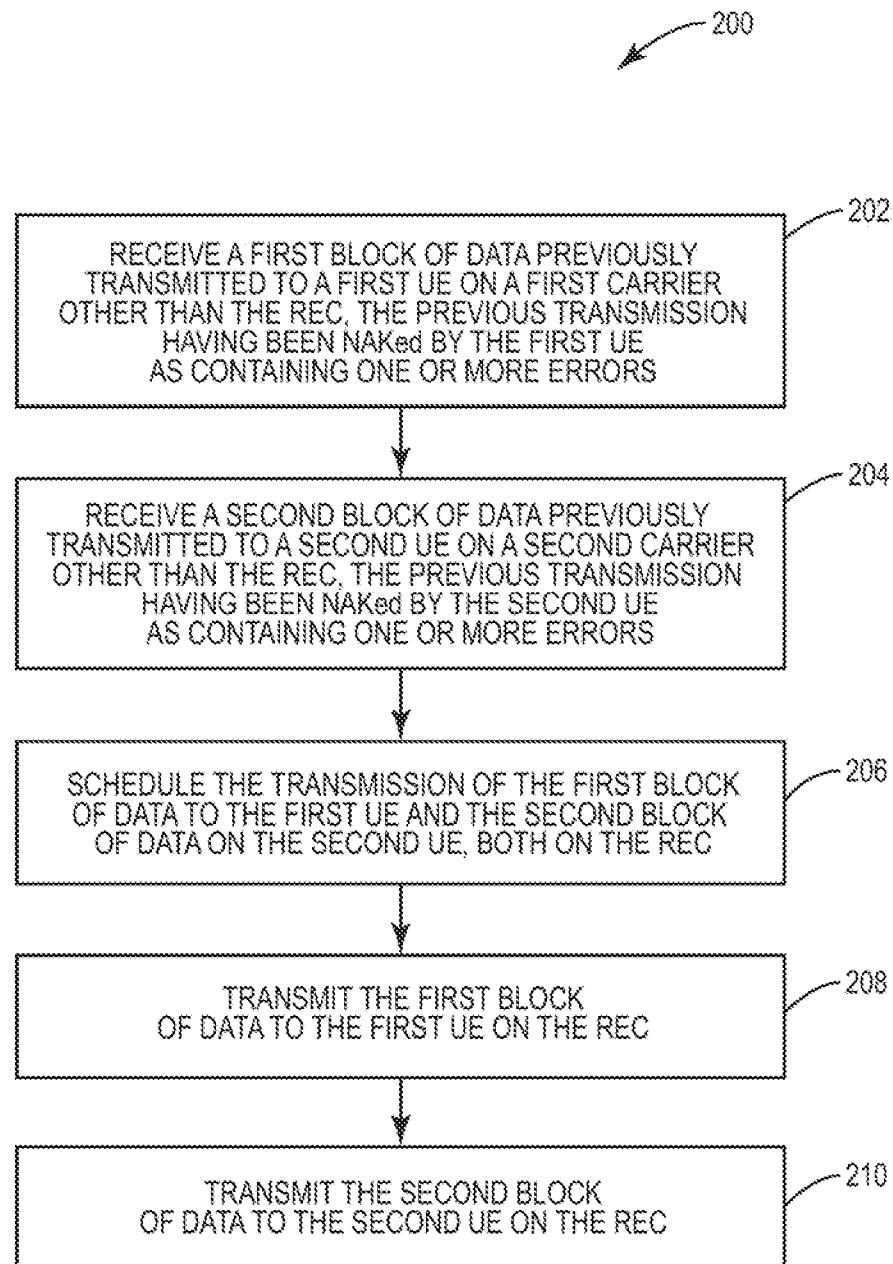


FIG. 12

**FIG. 13**

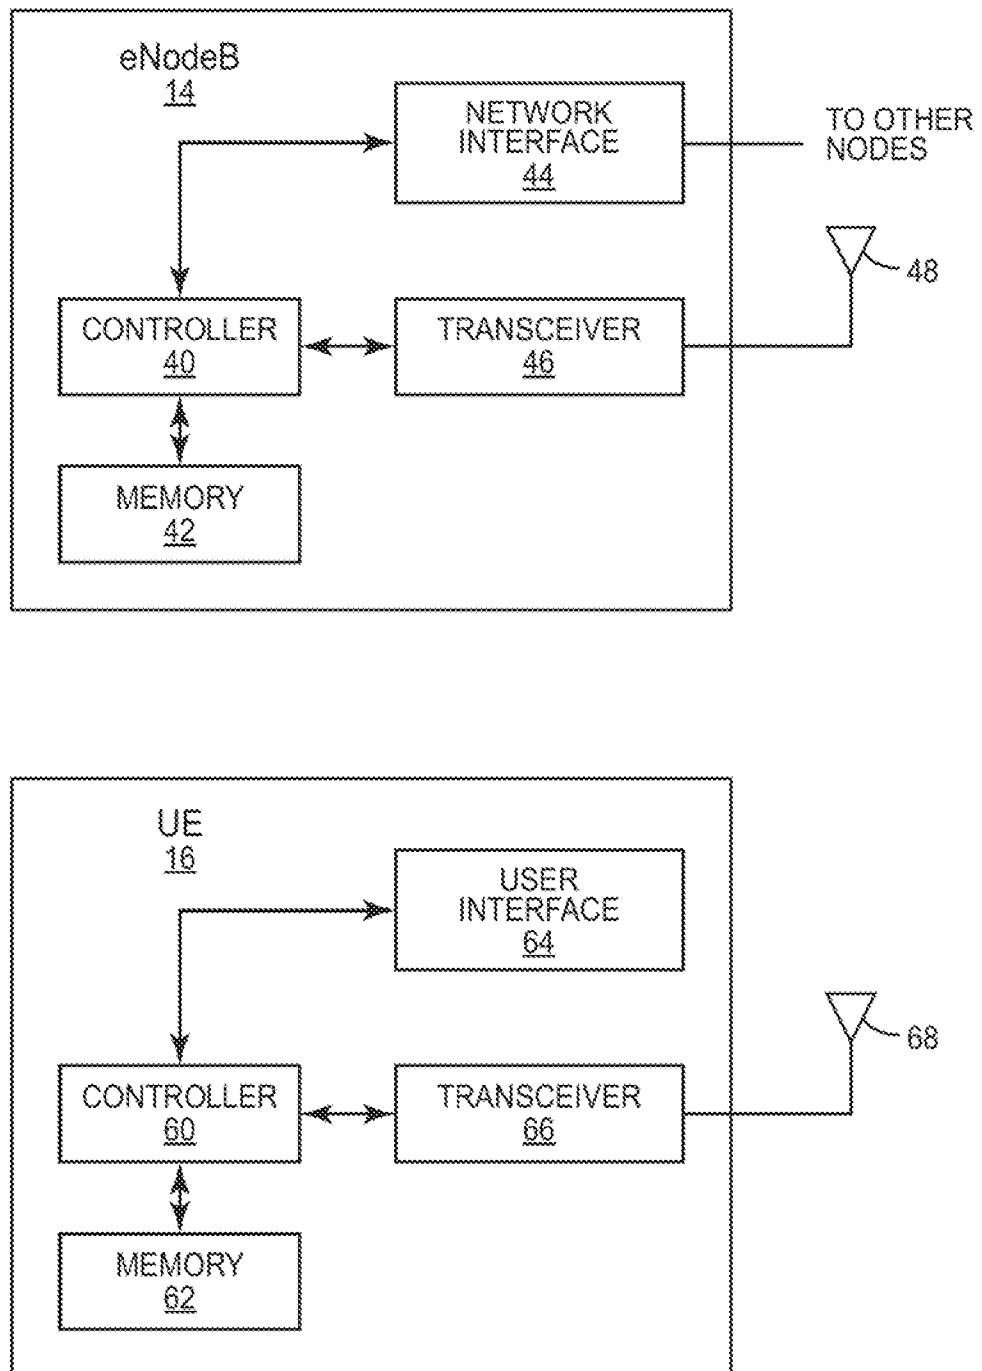


FIG. 14

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2013/058864

A. CLASSIFICATION OF SUBJECT MATTER
 INV. H04L1/18
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2011/096683 A2 (PANTECH CO LTD [KR]; KWON KI BUM [KR]; KIM KI TAE [KR]; YOON SUNG JUN) 11 August 2011 (2011-08-11) abstract	1-4,6-8, 15-24, 26,30,31
X,P	& US 2012/320853 A1 (KWON KI BUM [KR] ET AL) 20 December 2012 (2012-12-20) page 3, left-hand column, paragraph 48 - right-hand column, paragraph 55 page 4, left-hand column, paragraph 70 - right-hand column, paragraph 81 page 5, left-hand column, paragraph 88 ----- -/-	1-4,6-8, 15-24, 26,30,31



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier application or patent but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
7 February 2014	17/02/2014

Name and mailing address of the ISA/
 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Papantoniou, Antonis

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2013/058864

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010/296389 A1 (KHANDEKAR AAMOD DINKAR [US] ET AL) 25 November 2010 (2010-11-25)	1,2,4, 6-9, 11-17, 21-24, 26,27, 29-32
Y	page 3, right-hand column, paragraph 41 page 5, left-hand column, paragraph 51 - right-hand column, paragraph 55 page 6, left-hand column, paragraph 60 - right-hand column, paragraph 61 page 7, left-hand column, paragraph 69 - right-hand column, paragraph 70 page 11, right-hand column, paragraph 100 page 12, left-hand column, paragraph 113 -----	10,28
X	US 2005/207345 A1 (ONGGOSANUSI EKO N [US] ET AL) 22 September 2005 (2005-09-22)	1-5,17, 21-26, 30,31
Y	page 4, left-hand column, paragraph 41 - right-hand column, paragraph 44 page 5, left-hand column, paragraph 48 -----	10,28
A	US 2012/069795 A1 (CHUNG JAE HOON [KR] ET AL) 22 March 2012 (2012-03-22) page 3, left-hand column, paragraph 47 page 5, left-hand column, paragraph 58 page 13, left-hand column, paragraph 182 - right-hand column, paragraph 186 page 14, right-hand column, paragraph 201 - page 15, left-hand column, paragraph 203 -----	1,17,21, 30

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/IB2013/058864

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
WO 2011096683	A2	11-08-2011	KR	20110090521 A	10-08-2011
			US	2012320853 A1	20-12-2012
			WO	2011096683 A2	11-08-2011
<hr style="border-top: 1px dashed black;"/>					
US 2010296389	A1	25-11-2010	CN	102428671 A	25-04-2012
			EP	2433386 A2	28-03-2012
			JP	2012527851 A	08-11-2012
			KR	20120020182 A	07-03-2012
			TW	201136236 A	16-10-2011
			US	2010296389 A1	25-11-2010
			WO	2010135706 A2	25-11-2010
<hr style="border-top: 1px dashed black;"/>					
US 2005207345	A1	22-09-2005	NONE		
<hr style="border-top: 1px dashed black;"/>					
US 2012069795	A1	22-03-2012	KR	20120060940 A	12-06-2012
			US	2012069795 A1	22-03-2012
			WO	2010143867 A2	16-12-2010
<hr style="border-top: 1px dashed black;"/>					