



(86) Date de dépôt PCT/PCT Filing Date: 2003/08/25
(87) Date publication PCT/PCT Publication Date: 2004/04/22
(85) Entrée phase nationale/National Entry: 2004/05/14
(86) N° demande PCT/PCT Application No.: US 2003/026632
(87) N° publication PCT/PCT Publication No.: 2004/033019
(30) Priorité/Priority: 2002/10/08 (10/268,135) US

(51) Cl.Int.⁷/Int.Cl.⁷ A61M 29/02, A61M 25/01, A61M 25/00


(71) Demandeur/Applicant:
SCIMED LIFE SYSTEMS, INC., US

(72) Inventeurs/Inventors:
BOUTILLETTE, MICHAEL P., US;
WINDHEUSER, JAMES E., US;
CARRILLO, OSCAR, US

(74) Agent: BROUILLETTE KOSIE PRINCE

(54) Titre : CATHETER EQUIPE D'UNE RAMPE POUR FIL GUIDE CONFORMEE

(54) Title: CATHETER WITH FORMED GUIDE WIRE RAMP

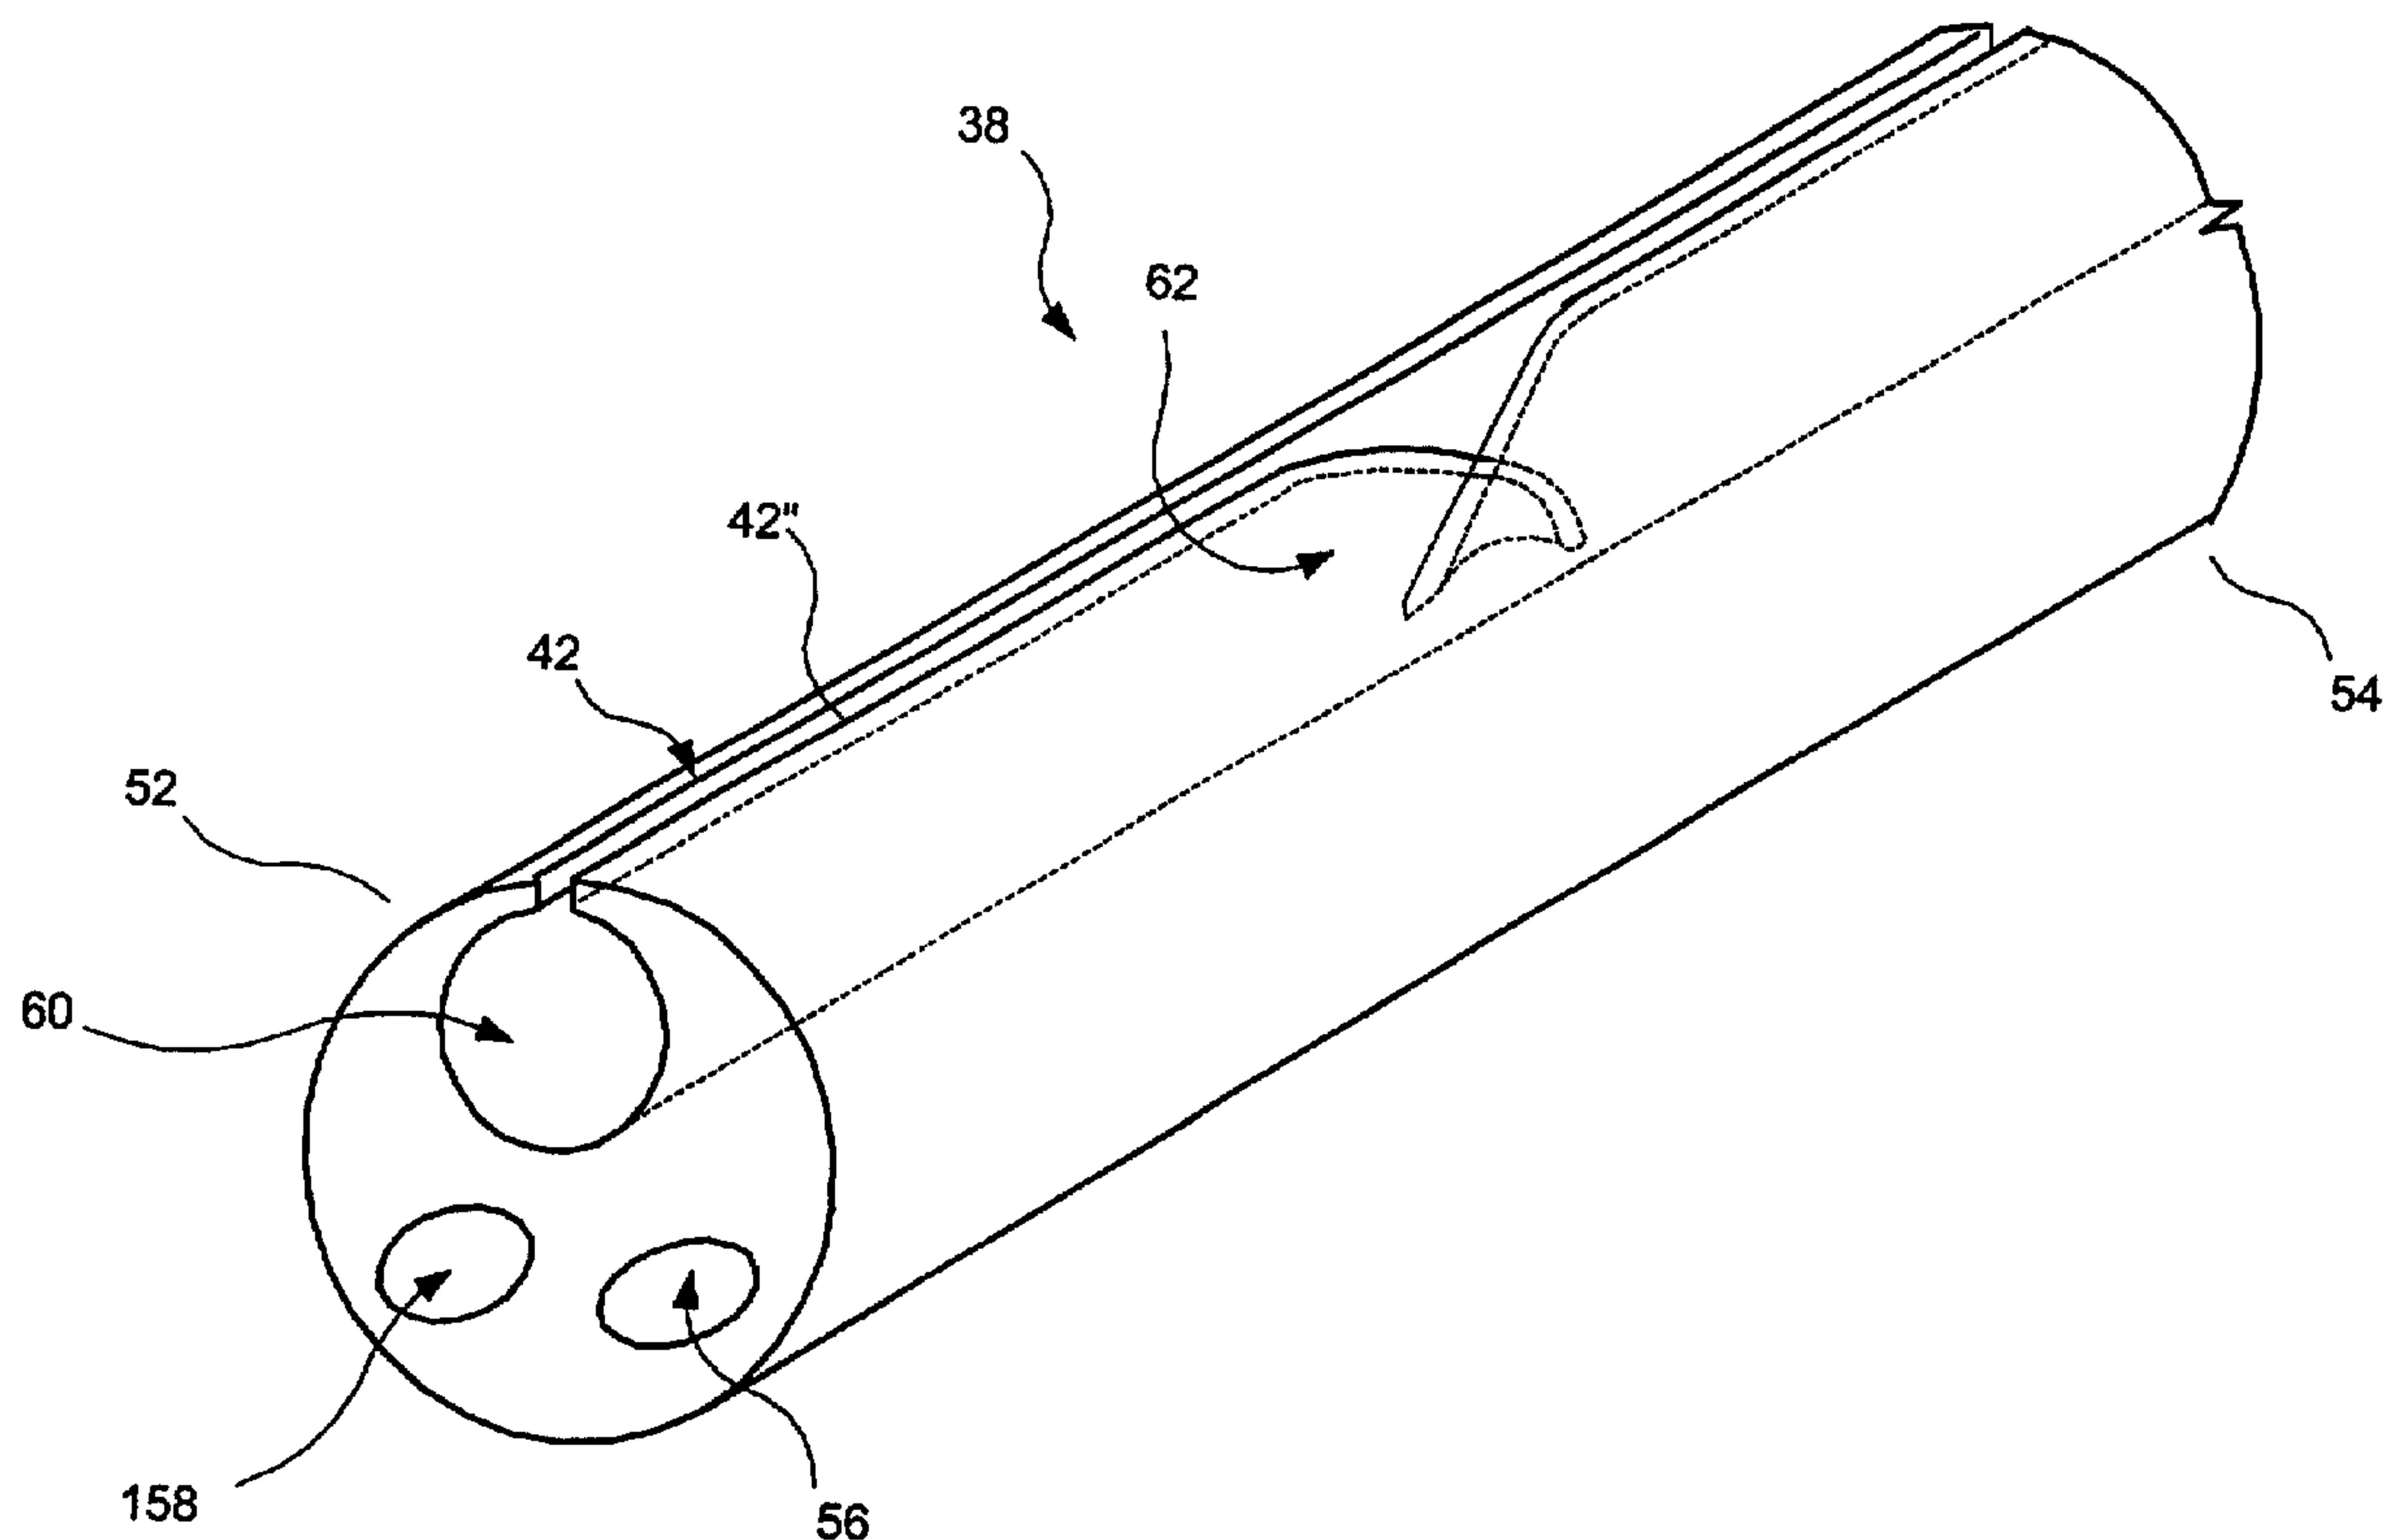

(57) Abrégé/Abstract:

A rapid exchange catheter (30) comprises a guide wire lumen (60) including a substantially sealed portion in which a lumen wall extends around an entire periphery thereof and a channel portion including a channel opening the lumen to an exterior of the catheter, wherein a width of the channel is less than a maximum width of the channel portion. A guide wire ramp (62) extends into the channel portion, with the ramp extending further into the lumen of the channel portion as a distal end of the ramp is approached.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 April 2004 (22.04.2004)


PCT

(10) International Publication Number
WO 2004/033019 A1

- (51) International Patent Classification⁷: **A61M 29/02**, 25/01, 25/00 (74) Agents: **FAY, Patrick, J.** et al.; Fay Kaplun & Marcin, LLP, 150 Broadway, Suite 702, New York, NY 10038 (US).
- (21) International Application Number: PCT/US2003/026632 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 25 August 2003 (25.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 10/268,135 8 October 2002 (08.10.2002) US (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant: **SCIMED LIFE SYSTEMS, INC.** [US/US]; One Scimed Place, Maple Grove, MN 55311-1566 (US).
- (72) Inventors: **BOUTILLETTE, Michael, P.**; 16 Palmer Street, Apt. 2, Waltham, MA 02451 (US). **WINDHEUSER, James, E.**; 20 Hidden Brick Road, Hopkinton, MA 01748 (US). **CARRILLO, Oscar**; P.O. Box 773, 393 Tiffany Street, Attleboro, MA 02703 (US).
- Published:
— with international search report

[Continued on next page]

(54) Title: CATHETER WITH FORMED GUIDE WIRE RAMP

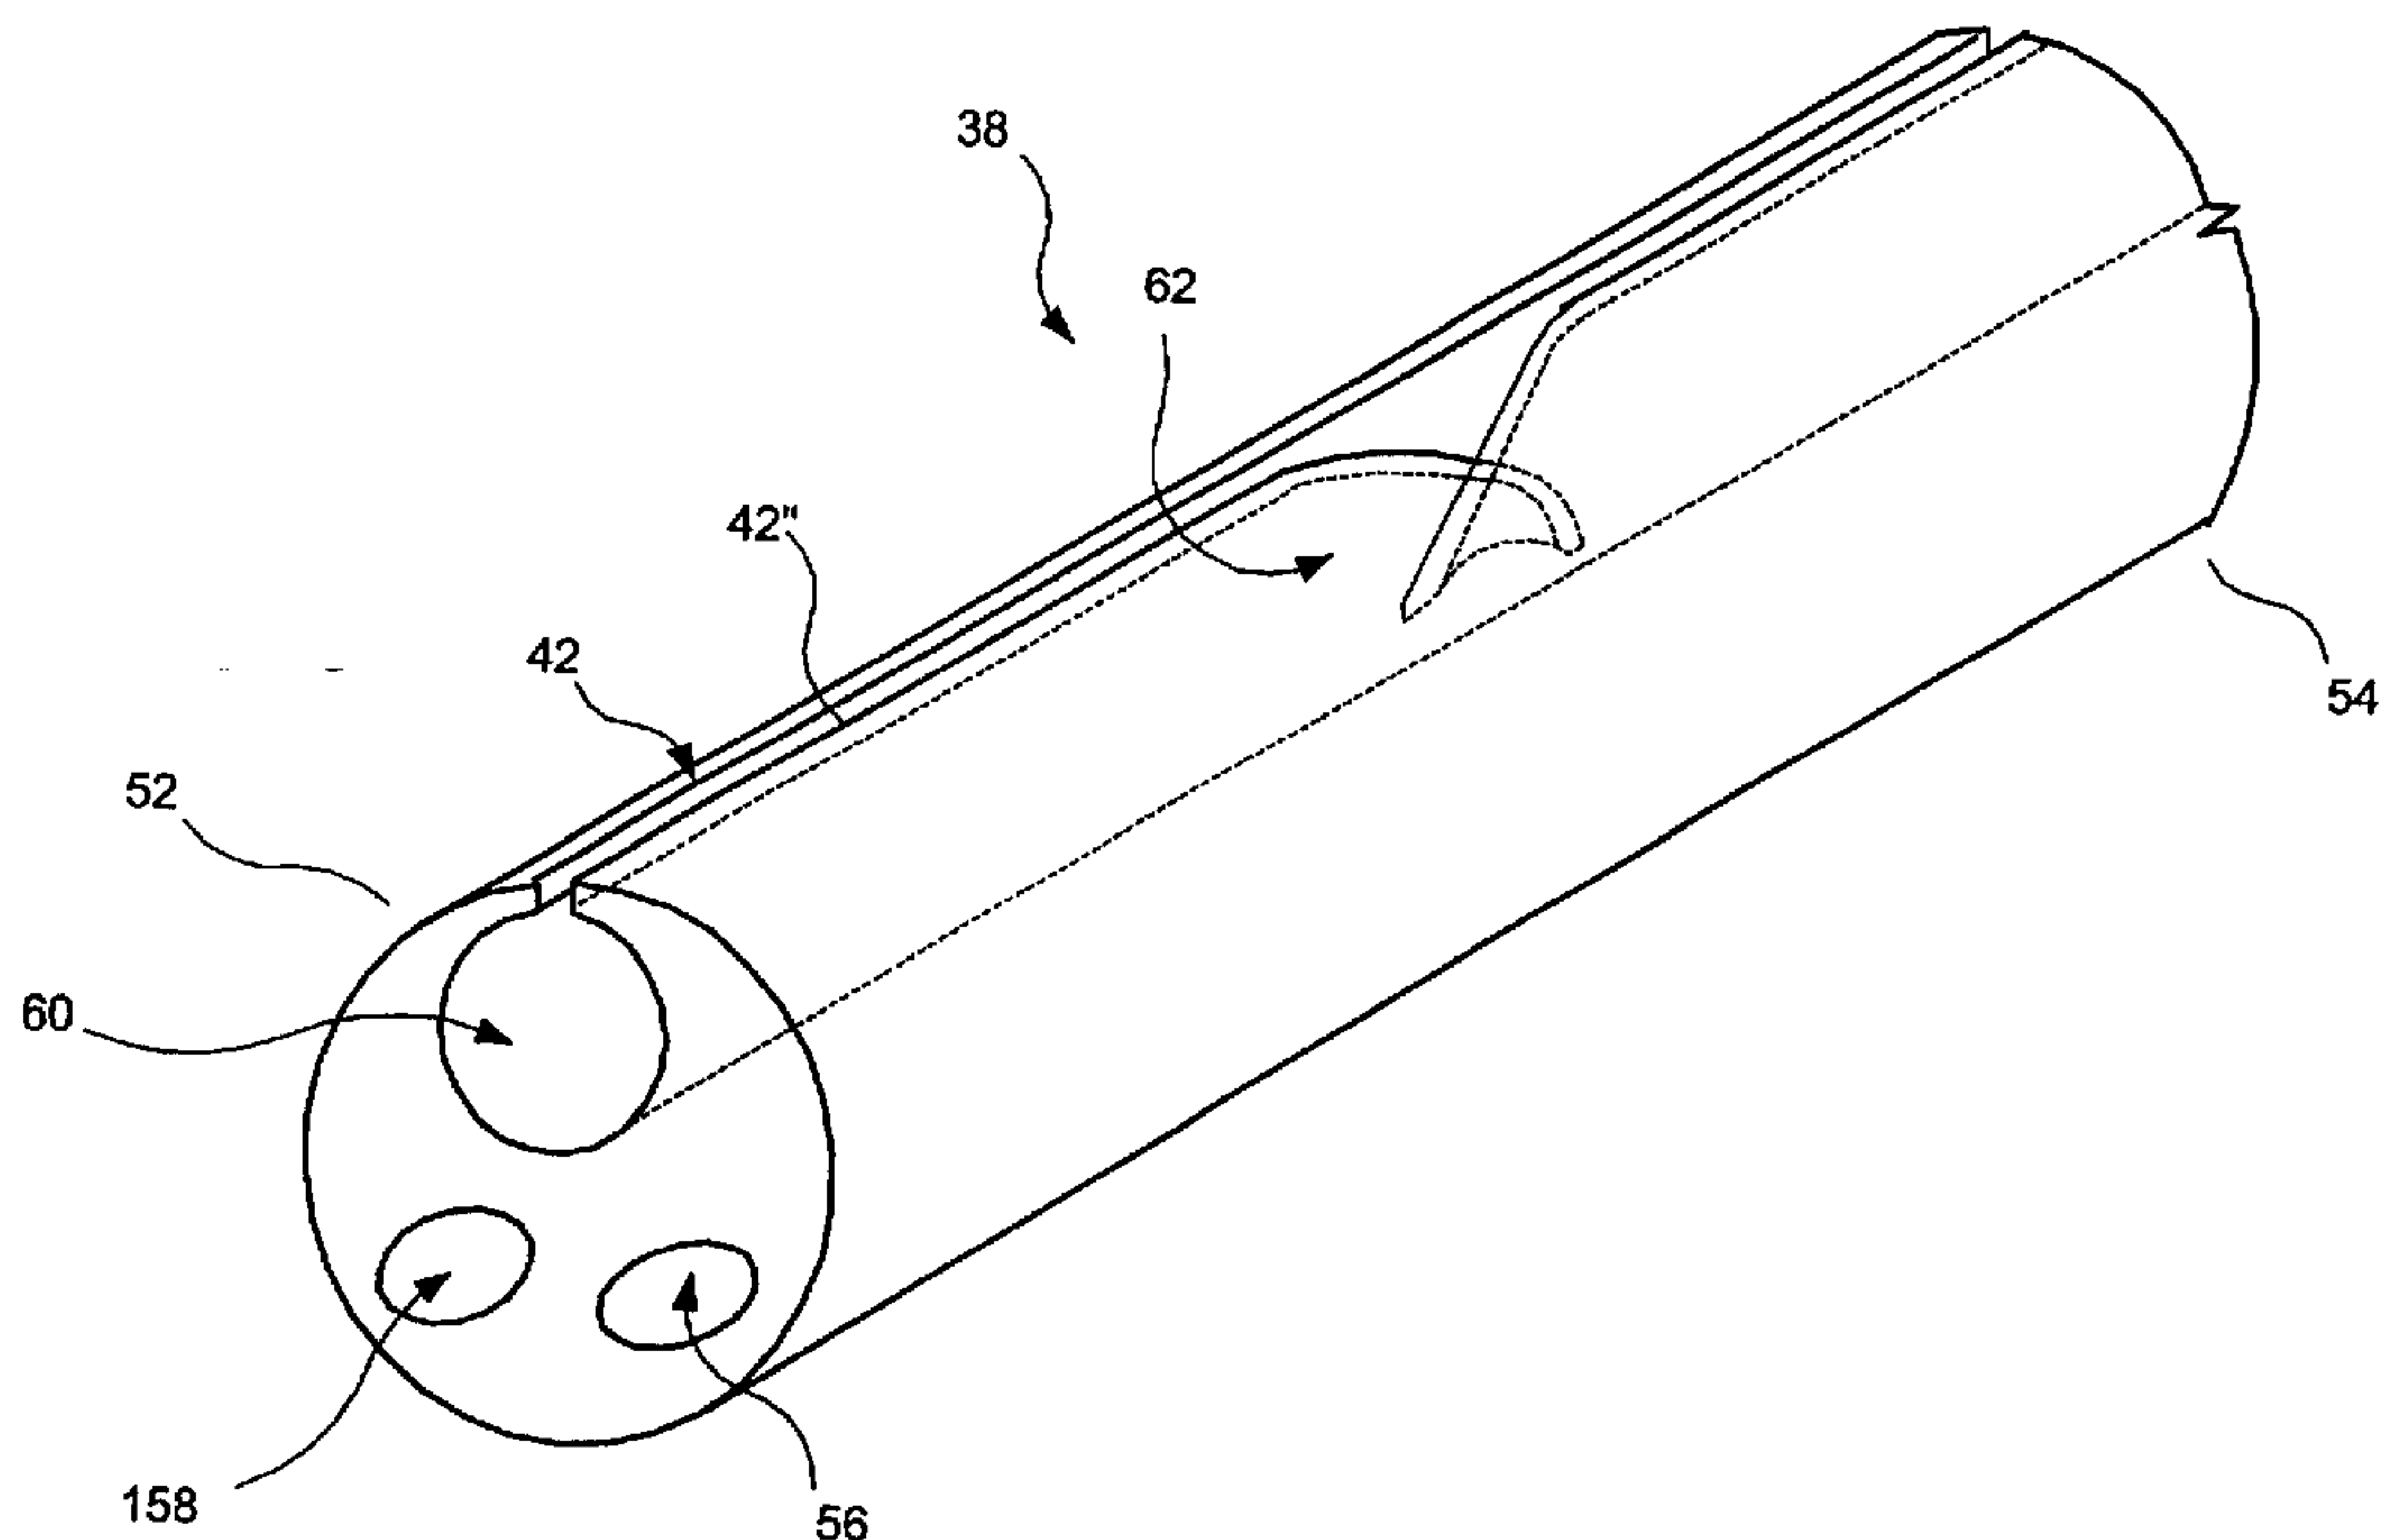

(57) Abstract: A rapid exchange catheter (30) comprises a guide wire lumen (60) including a substantially sealed portion in which a lumen wall extends around an entire periphery thereof and a channel portion including a channel opening the lumen to an exterior of the catheter, wherein a width of the channel is less than a maximum width of the channel portion. A guide wire ramp (62) extends into the channel portion, with the ramp extending further into the lumen of the channel portion as a distal end of the ramp is approached.

WO 2004/033019 A1

WO 2004/033019 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

CATHETER WITH FORMED GUIDE WIRE RAMPBackground Information

[0001] Endoscopic procedures for treating abnormal pathologies within the alimentary canal system and biliary tree (including the biliary, hepatic and pancreatic ducts) are increasing in number. The endoscope provides access to the general area of a desired duct using direct visualization. However, the duct itself must be navigated using a catheter in conjunction with fluoroscopy and guide wires.

[0002] If visualization of the common bile duct is desired, the guide wire is guided into the common bile duct and the catheter is advanced over the guide wire until the distal end thereof is positioned at a desired location for delivery of the contrast media for fluoroscopic visualization of the anatomical detail within the common bile duct.

[0003] Visualization may reveal selected areas within the common bile duct that require treatment. To treat the selected areas, a different catheter is typically required, necessitating a catheter exchange. A catheter exchange typically involves removing the first catheter from the endoscope, over the guide wire, and advancing a second catheter over the guide wire to the desired treatment site. Once the guide wire is in place relative to the targeted area, it is highly desirable to maintain the position of the guide wire during subsequent catheter procedures, including during a catheter exchange procedure. If the guide wire moves during such a procedure, the guide wire may need to be re-directed through the body ducts to the target site, which is often a difficult and time consuming task.

[0004] In addition to performing a catheter exchange procedure, it may be desirable at times to perform a guide wire exchange procedure, for example, when a first guide wire is too large to fit through a desired body duct, or otherwise lacks the characteristics desired for a particular application. Under these circumstances, a physician may leave the catheter in place and withdraw the first guide wire from the catheter. The physician then inserts a second guide wire through the catheter to the desired site. Thus, once the catheter has been properly positioned at a target site, it is highly desirable to maintain the position of the catheter during a guide wire exchange procedure so that the second guide wire may be guided directly to the desired site.

[0005] To maintain the position of the guide wire and/or catheter, a physician typically must grasp the proximal end of the guide wire and/or catheter with one hand and perform the corresponding exchange with the other. This is difficult, and often results in the movement of the guide wire and/or catheter. Alternatively, additional devices such as guide wire extenders may be used. However, utilizing such additional devices adds to the complexity of and the time required for the exchange.

Summary of the Invention

[0006] The present invention is directed to a rapid exchange catheter comprises a guide wire lumen including a substantially sealed portion in which a lumen wall extends around an entire periphery thereof and a channel portion including a channel opening the lumen to an exterior of the catheter, wherein a width of the channel is less than a maximum width of the channel portion. A guide wire ramp extends into the channel portion,

with the ramp extending further into the lumen of the channel portion as a distal end of the ramp is approached.

Brief Description of Drawings

[0007] Fig. 1 shows an exemplary embodiment of a catheter according to the present invention in a perspective view having a C-shaped channel and guide wire lumen for directing a guide wire along its shaft and for facilitating rapid catheter exchange;

Fig. 2 shows a cross-sectional view of the catheter of Fig. 1 taken along the line 2-2 thereof;

Fig. 3 shows a cross-sectional view of the catheter with the guide wire of Fig. 1 taken along the line 3-3 thereof;

Fig. 4 shows a cross-sectional view of the catheter with the guide wire of Fig. 1 taken along the line 4-4 thereof;

Fig. 5 shows a partially cross-sectional perspective view of the catheter of Fig. 1 showing the formed guide wire ramp thereof taken along the line 4-4 of Fig. 1; and

Fig. 6 shows a cross-sectional view of the catheter of Fig. 1 taken along a longitudinal axis thereof.

Detailed Description

[0008] Figs. 1 - 6 show an exemplary embodiment of a catheter assembly 30 according to the present invention. The catheter assembly 30 is used in catheter procedures for accessing targeted anatomical regions through the alimentary canal. The present invention incorporates features that allow rapid exchange of a catheter by a single operator. The catheter of the present

invention allows shorter length guide wires to be used, resulting in procedures which require less medical personnel, are less time consuming, and less costly. Additionally, the present invention is adaptable to a variety of catheter devices used for catheter procedures within the alimentary canal or any other body lumen.

[0009] The catheter assembly 30 includes a catheter hub assembly 32 and a catheter 34, having a guide wire 36 passing through a guidewire lumen 60, (shown in Figs. 2 and 3) extending therethrough. The catheter 34 includes a shaft 38 which has a proximal end 40, a C-channel 42, a distal tip region 44, a distal end 46 and various lumens described in greater detail below. The catheter hub assembly 32 is operably connected to a proximal end 40 of the shaft 38. The catheter hub assembly 32 is preferably configured to couple to ancillary devices allowing access to a lumen within the shaft 38.

[0010] The shaft 38 may preferably be a generally tubular member having a generally uniform outer shape at the proximal end 40. As would be understood by those of skill in the art, the shaft 38 may be sized for slidable passage through the lumen of an endoscope (not shown) or through a body lumen. The shaft 38 is preferably formed in an extrusion process, and may be formed of a polymeric material. In one embodiment, the preferred polymeric material is polytetrafluoroethylene, polyether block amide, nylon or a combination or blend of these. Catheters that are contemplated include, but are not limited to, cannulas, sphincterotomes, cytology devices, and devices for stone retrieval and stent placement.

[0011] In a preferred embodiment, the shaft 38 may further include a distal taper 48 that tapers to the distal tip region

44. Additionally, the distal tip region 44 may, for example, include high contrast, color-coded distal markers 50. Finally, the distal end 46 may be radiopaque for fluoroscopic visualization of the distal tip region 44 during a catheter procedure.

[0012] The guide wire lumen 60 extends through the catheter 34 from a proximal end to a distal end thereof. The C-channel 42 forms a portion of the guide wire lumen 60, extending between a channel proximal end 52 and a channel distal end 54. The C-channel 42 serves to contain, but not necessarily constrain, the guide wire 36 therein. In contrast to some catheters that include channels that are substantially "U" shaped, the C-channel 42 is shaped substantially like a letter "C". That is, sides of the C-channel extend inward from a maximum diameter to partially close the channel, as shown more clearly in Figs. 4 and 5. The "C" shape allows radial removal of the guide wire 36 from the C-channel 42 via a slot 42' extending between the walls of the C-channel 42 and opening an interior of the guide wire lumen 60 to an outside of the catheter 34. At the same time, the "C" shape of the C-channel, increases the overall strength of the shaft 38 compared with catheters that have a "U" shaped channel. The increased strength of the shaft allows for greater force to be used in pushing the catheter 34 into the body. The "C" shape of the C-channel also leaks less bodily fluid as compared to catheters that have a "U" shaped channel.

[0013] In a preferred embodiment, the C-channel 42 is sufficiently large to allow unhindered radial removal of the guide wire 36 from the C-channel 42 via the slot 42'. Further, the walls of the C-channel 42 and the slot 42' may be formed to be substantially equal in size to or slightly larger than a

diameter of a guide wire to be used with the catheter 34, as described in greater detail below. Although it is recognized that the channel proximal end 52 may be located at any location distal of the proximal end 40 of the shaft 38, the channel distal end 54 is preferably located between 10 and 40 cm from the distal end 46 of the catheter shaft 38. The channel distal end 54 may more preferably be located between 20 and 30cm and, most preferably, approximately 25cm from the distal end 46.

[0014] As shown in Fig. 2, proximal to the channel proximal end 52, the guide wire lumen 60 is completely sealed from an outside of the catheter 34. As shown in Figs. 4 and 5 and described more fully below, the portion of the guide wire lumen 60 between the channel proximal and distal ends 52, 54, respectively, (i.e., the C-channel 42) is open to the outside of the catheter 34 via the slot 42'. The catheter 34 according to this exemplary embodiment also includes ancillary lumens 56 and 58 which may be used for a variety of purposes as would be understood by those of skill in the art. Fig. 3 shows a guide wire 36 received in the distal portion of the guide wire lumen 60. This portion of the guide wire lumen 60 is also completely sealed from an outside of the catheter 34.

[0015] As would be understood by those of skill in the art, the ancillary lumens 56 and 58 may preferably extend longitudinally between the proximal end 40 and the distal end 46 of the shaft 38 so that they may be used, for example, as injection lumens, allowing for high contrast media flow capability for bubble-free opacification and for visualization of a desired anatomical region. Additionally or alternatively, the ancillary lumens 56 and 58 may, for example, be used for or serve

as part of another ancillary device, such as a cutting wire or a retrieval balloon, etc.

[0016] The guide wire lumen 60 preferably extends longitudinally between the proximal end 40 and the distal end 46 of the shaft 38 in the preferred embodiment and is sized to receive the guide wire 36 slidably therein. As would be understood, the guide wire lumen 60 may be formed integrally with the catheter shaft 38. Alternatively, the guide wire lumen 60 may be a separate tubular member coupled to the catheter shaft 38. In one preferred embodiment, the guide wire lumen 60 is a tubular member which is located proximate the distal end 46 of the shaft 38. It is recognized, though, that the guide wire lumen 60 may be formed anywhere along the shaft 38, and may comprise an extension of the shaft 38 coupled to the distal end 46 thereof. Alternatively, it may run the entire length of the shaft 38.

[0017] As shown in Figs. 5 and 6, a guide wire ramp 62 is formed by a portion of the wall above the guide wire lumen 60. As would be understood by those of skill in the art, the ramp 62 may, for example, be formed by a cut 62' in a portion of the wall of the guide wire lumen 62 extending at an angle from the slot 42' distally for a predetermined length. The substantially triangular portion of the wall which will form the ramp 62 may then be forced into the guide wire lumen 60 and formed as a ramp by, for example, application of a heated mandrel thereto. Those skilled in the art will understand that this same structure may also be created using, for example, a direct molding process, ultrasonic welding or other known techniques. Thus, a pointed end 62" of the ramp 62 will extend into the guide wire lumen 60

with the rest of the surface of the ramp 62 extending upward therefrom to the outer surface of the catheter 34.

[0018] In use, when a guide wire 36 has been previously positioned at a desired location within the body, the physician simply inserts the proximal end of the guide wire 36 into the guide wire lumen opening at the distal end of the catheter 34 and slides the catheter 34 distally along the guide wire 36 while gripping the portion of the guide wire 36 extending distally of the distal end of the catheter 34 to retain the guide wire 36 in the desired position. When the proximal end of the guide wire 36 contacts the end 62 of the ramp 62, the proximal end of the guide wire is deflected out of the guide wire lumen 62 through the slot 42'. The physician may then grasp the proximal end of the guide wire 36 and continue to slide the catheter 34 along the guide wire 36 until the desired location is reached. As the guide wire 36 is received within the guide wire lumen 60 only along a short portion of the length of the catheter 34, those skilled in the art will understand that the physician may at all times maintain his grasp on an exposed portion of the guide wire 36 to maintain it in position without the need for guide wire extenders.

[0019] If, thereafter, the catheter 34 is to be exchanged for another, the physician simply draws the catheter 34 proximally along the guide wire 36 while grasping the proximal end of the guide wire 36. When the distal end of the catheter 34 exits the body, the physician may grasp the portion of the guide wire 36 extending distally of the catheter 34 and remove the catheter 34 completely from the guide wire 36. The loading process described above may then be repeated for the new catheter 34 to be used. If, however, the physician wishes to exchange the guide wire 36

while maintaining the catheter 34 in a desired position within the body, the following steps are performed. First, while grasping the proximal end of the catheter 34, the physician draws the guide wire 36 proximally out of the guide wire lumen 60 and removes it from the body. Then, the new guide wire 36 is inserted into the channel proximal end 52 and is fed through the guide wire lumen 60 through the C-channel 42 so that it deflects the ramp 62 radially outward to allow the guide wire 36 to pass thereunder, past the channel distal end 54 and out of the distal end of the catheter 34.

[0020] If a guide wire 36 has been inserted into the catheter 34 from the proximal end 40, through the C-channel 42 to the distal end 46 and this catheter 34 later needs to be exchanged while maintaining the guide wire 36 in position, the physician grasps the proximal end of the guide wire 36 to maintain it in position and slides the catheter 34 proximally along the guide wire 36 until the channel proximal end 52 is located outside the body. The physician may then grasp the guide wire 36 via the channel proximal end 52 or the slot 42' and draw the proximal end of the guide wire 36 distally through the proximal portion of the guide wire lumen 60 while holding the distal portion of the guide wire 36 stationary to maintain the position of the distal end of the guide wire 36. When the proximal end of the guide wire 36 has been removed from the guide wire lumen 60, the catheter 34 may be drawn proximally from the body with the guide wire 36 sliding out of the C-channel 42 via the slot 42'. When the distal end of the catheter 34 is outside the body, the physician grasps the portion of the guide wire 36 extending distally of the distal end of the catheter 34 and withdraws the catheter 34 from the guide wire 36.

[0021] Furthermore, as described above in regard to the exemplary embodiment, the strength of the catheter 34 is improved by cutting into only one side of the slot 42' to form the guide wire ramp 62. The guide wire lumen 60 and the C-channel 42 allow rapid exchange of the catheter assembly 30 when an alternative catheter is necessary during a medical procedure and make it possible to use a shorter guide wire 36 when the guide wire 36 exits the catheter 34 at the channel distal end 54 rather than the proximal end 40.

[0022] The present invention may be used, for example, in the treatment of pathologies within a patient's biliary tree. Generally, for the treatment of pathologies within the patient's biliary tree an endoscopic biliary procedure is performed. Methods and devices for using biliary catheters to perform such catheter procedures are disclosed in Weaver et al., U.S. Patent No. 5,397,302 and Karpziel, U.S. Patent No. 5,320,602, the disclosures of which are expressly incorporated by reference herein. In an endoscopic biliary procedure, the endoscope is introduced into the mouth of a patient and guided down the patient's alimentary canal through the esophagus, the stomach, and past the pyloric sphincter of the stomach into the duodenum.

[0023] Prior to positioning the guide wire 36 within the patient, the catheter assembly 30 is fed into an endoscope and advanced to the opening of the bile duct under visual observation via the endoscope. The catheter 30 is then advanced through the sphincter to enter the bile duct. At this point, a distal end of the guide wire 36 is inserted into the guide wire lumen 60 via the channel proximal end 52 and passed therethrough to the catheter distal end 46. As the guide wire 36 passes through the C-channel 42, it encounters the ramp 62 and deflects the distal

end 62" of the ramp 62 radially outward while passing through the lumen 60 to the distal end 46 of the catheter 34. The distal end of the guide wire 36 is then located within the bile duct where it may be guided to the target location using known techniques. As would be understood by those of skill in the art, if desired, the distal end of the guide wire 36 may alternatively be fed into the guide wire lumen 60 through the catheter hub assembly 32 and into the proximal end 40 of the catheter 34 and from there to the distal end 46. However, this reduces the effectiveness of the rapid exchange features of the catheter 34 according to the present invention.

[0024] In one method, the guide wire 36 is advanced until its distal tip is positioned within the target area in the biliary tree. For example, the distal tip of the guide wire 36 may be guided through the orifice leading to the papilla of Vater for access to the biliary tree. The catheter shaft 38 may then be advanced over the guide wire 36, tracking the catheter assembly 30, until the catheter distal tip region 44 exits the distal end of the endoscope and is positioned within the desired duct. In another method, the guide wire 36 and the catheter assembly 30 are advanced together until the catheter distal end 44 is positioned at the target area. In a third possible method, the catheter assembly 30 is first advanced to near the target area. The guide wire 36 may then be inserted when needed to further advance the catheter 34.

[0025] Once the guide wire 36 has been positioned at the target area, catheter procedures may be performed. For example, contrast media, such as radiopaque dye, may be injected through the ancillary lumens 56 or 58 into the common bile duct for visualization of the duct. After the desired catheter procedure

has been completed, the catheter assembly 30 may be exchanged or removed from the endoscope, leaving the guide wire 36 in position for other guide wire procedures.

[0026] The present invention is described with reference to the embodiment shown in Figs. 1 to 6. One skilled in the art would understand that changes may be made in details, particularly in matters of shape, size, material and arrangement of parts. Accordingly, various modifications and changes may be made to the embodiments without departing from the broadest scope of the invention as set forth in the claims that follow. The specifications and drawings are, therefore, to be regarded in an illustrative rather than a restrictive sense.

CLAIMS

What is claimed is:

1. A rapid exchange catheter comprising:

a guide wire lumen extending through the catheter, a channel portion of the guide wire lumen including a channel opening the channel portion to an outside thereof, wherein a width of the channel is less than a maximum width of the channel portion; and

a guide wire ramp projecting into the channel portion and oriented to permit a guide wire to pass therethrough in a first direction and to force a guide wire traveling through the channel portion in a second direction opposite the first direction out of the channel.

2. The catheter of claim 1, wherein the guide wire lumen includes a substantially sealed proximal portion including no channel opening to an outside thereof and a substantially sealed distal portion including no channel opening to an outside thereof with the channel portion being located between a distal end of the proximal portion and a proximal end of the distal portion.

3. The catheter of claim 1, wherein the first direction is distal and the second direction is proximal.

4. The catheter of claim 2, the channel portion including proximal and distal openings formed at proximal and distal ends thereof, respectively, with a width of the proximal and distal openings being larger than a width of the channel.

5. The catheter of claim 1, wherein a width of the channel is less than a maximum width of the guide wire lumen.
6. The catheter of claim 5, wherein the guide wire lumen is substantially cylindrical and wherein the width of the channel is less than a diameter of the guide wire lumen.
7. The catheter of claim 6, wherein the ramp includes an angled slit extending through a wall of the catheter proximally from an edge of the channel to create a substantially angled tip at a point at which the angled slit meets the channel and wherein the angled tip extends downward into the channel.
8. The catheter of claim 1, wherein the guide wire ramp is between 10 and 40cm from the distal end of the catheter.
9. The catheter of claim 8, wherein the guide wire ramp is between 20 and 30cm from the distal end of the catheter.
10. The catheter of claim 9, wherein the guide wire ramp is approximately 25cm from the distal end of the catheter.
11. A rapid exchange catheter comprising:

a guide wire lumen including a substantially sealed portion in which a lumen wall extends around an entire periphery thereof and a channel portion including a channel opening the lumen to an exterior of the catheter, wherein a width of the channel is less than a maximum width of the channel portion;

a guide wire ramp extending into the channel portion, with the ramp extending further into the lumen of the channel portion as a distal end of the ramp is approached.

12. A catheter according to claim 11, wherein the ramp is a portion of an outer wall of the catheter separated from an adjacent portion thereof by a slit extending proximally from an intersection with the channel so that the distal end of the ramp forms an acute angle pointing distally into the guide wire lumen.

13. A method of forming a rapid exchange catheter comprising the steps of:

forming a catheter including a guide wire lumen extending through at least a portion thereof;

forming a channel opening a channel portion of the guide wire lumen to an outside of the catheter, wherein a width of the channel is less than a diameter of the lumen;

cutting a slit extending from the channel proximally at an acute angle thereto to form a partially detached portion of a wall of the catheter; and

moving a distal end of the partially detached portion radially into the lumen to form a ramp.

14. The method according to claim 13, wherein the guide wire lumen includes a sealed portion and wherein the sealed portion includes a distal section extending from a distal end of the catheter to a distal end of the channel portion, the sealed

portion including a lumen wall extending around an entire diameter thereof.

15. The method according to claim 14, wherein the sealed portion includes a proximal section extending from a proximal end of the catheter to a distal end of the channel portion.

16. The method according to claim 13, wherein the ramp is formed by applying a heated mandrel to the partially detached portion.

17. The method according to claim 13, wherein the ramp is formed by a direct molding process.

18. The method according to claim 13, wherein the ramp is formed by ultrasonic welding.

19. The method according to claim 13, wherein the sealed portion includes a proximal section extending from a proximal end of the catheter to a distal end of the channel portion.

20. A method of exchanging an elongate member positioned within a body lumen, comprising the steps of:

inserting a first elongate member to a target location within a body lumen, wherein the first elongate member includes:

a guide wire lumen extending therethrough between a distal end of the first elongate member and a guide wire access opening, a channel portion of the guide wire lumen including a channel opening the channel portion to an outside thereof, wherein a width of the

channel is less than a maximum width of the channel portion; and

a guide wire ramp projecting into the channel portion and being oriented to permit a guide wire to pass therethrough in a first direction and to force a guide wire traveling through the channel portion in a second direction opposite the first direction out of the channel;

withdrawing the first elongate member proximally along the second elongate member until the distal end of the first elongate member is accessible to a user;

grasping a portion of the second elongate member extending distally of the distal end of the first elongate member to maintain the second elongate member in a desired position within the body;

removing the first elongate member from the second elongate member; and

passing a third elongate member along the second elongate member to the target location within the body.

