



- (51) **International Patent Classification:**
H04M 3/42 (2006.01) *H04Q 3/00* (2006.01)
- (21) **International Application Number:**
PCT/IB2012/050887
- (22) **International Filing Date:**
27 February 2012 (27.02.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/036,448 28 February 2011 (28.02.2011) US
- (71) **Applicant (for all designated States except US):** **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FI-02150 Espoo (FI).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** **DAVIDSON, Brian** [GB/GB]; 96 Bishops Wood, Goldsworth Park, Woking Surrey GU21 3QD (GB).
- (74) **Agents:** **Anderson, Oliver et al.**; 200 Aldersgate, London EC1A 4HD (GB).

- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))



WO 2012/117329 A1

(54) **Title:** HANDLING A VOICE COMMUNICATION REQUEST

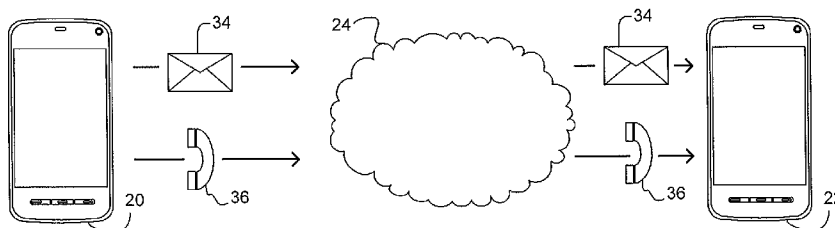


Figure 3B

(57) **Abstract:** Apparatus comprises at least one processor and at least one memory, the at least one memory having stored therein computer-readable instructions which, when 5 executed by the at least one processor, cause the at least one processor: to detect the presence of a first identifier in an audio data portion received from a microphone; to identify a remote device based on the first identifier; to cause an audio data item to be transmitted to the remote device, the audio data item being for use by the remote device to alert a user of the device to the presence of an 10 incoming voice communication request; and to cause a voice communication request to be transmitted to the remote device.

Handling a Voice Communication Request

Field of the Invention

The invention relates to the handling of a voice communication request.

5

Background to the Invention

Communication devices such as mobile telephones provide alerts, such as ringtones, to alert the user of the device to the arrival of an incoming communication. The user of the device is able to select which ringtone is provided upon receipt of an incoming communication.

10

Summary of the Invention

According to a first aspect, this specification describes apparatus comprising at least one processor and at least one memory, the at least one memory having stored therein computer-readable instructions which, when executed by the at least one processor, cause the apparatus: to detect the presence of a first identifier in an audio data portion received from a microphone; to identify a remote device based on the first identifier; to cause an audio data item to be transmitted to the remote device, the audio data item being for use by the remote device to alert a user of the device to the presence of an incoming voice communication request; and to cause a voice communication request to be transmitted to the remote device.

15

20

According to a second aspect, this specification describes apparatus comprising at least one processor and at least one memory, the at least one memory having stored therein computer-readable instructions which, when executed by the at least one processor, cause the apparatus: to receive an indication of receipt of an audio data item from a remote device; to receive an indication of receipt of a voice communication request from the remote device; to cause an audible representation of the audio data item to be provided to a user of the apparatus, via a loudspeaker associated with the apparatus, thereby to alert a user of the apparatus to the existence of the voice communication request.

25

30

According to a third aspect, this specification describes a method comprising:
detecting the presence of a first identifier in an audio data portion received from a
microphone; identifying a remote device based on the first identifier; causing an
audio data item to be transmitted to the remote device, the audio data item being
5 for use by the remote device to alert a user of the device to the presence of an
incoming voice communication request; and causing a voice communication request
to be transmitted to the remote device.

According to a fourth aspect, this specification describes a method comprising:
10 receiving an indication of receipt of an audio data item from a remote device;
receiving an indication of receipt of a voice communication request from the
remote device; and causing an audible representation of the audio data item to be
provided to a user, via a loudspeaker, thereby to alert the user to the existence of
the voice communication request.

15 According to a fifth aspect, this specification describes a non-transitory computer-
readable storage medium having stored therein computer-readable code, which,
when executed by computing apparatus, causes the computing apparatus: to detect
the presence of a first identifier in an audio data portion received from a
20 microphone; to identify a remote device based on the first identifier; to cause an
audio data item to be transmitted to the remote device, the audio data item being
for use by the remote device to alert a user of the device to the presence of an
incoming voice communication request; and to cause a voice communication
request to be transmitted to the remote device.

25 According to a sixth aspect, this specification describes a non-transitory computer-
readable storage medium having stored therein computer-readable code, which,
when executed by computing apparatus, causes the computing apparatus: to receive
an indication of receipt of an audio data item from a remote device; to receive an
30 indication of receipt of a voice communication request from the remote device; and
to cause an audible representation of the audio data item to be provided to a user of
the apparatus, via a loudspeaker associated with the apparatus, thereby to alert a
user of the apparatus to the existence of the voice communication request.

According to a seventh aspect, this specification describes apparatus configured to:
to detect the presence of a first identifier in an audio data portion received from a
microphone; to identify a remote device based on the first identifier; to cause an
5 audio data item to be transmitted to the remote device, the audio data item being
for use by the remote device to alert a user of the device to the presence of an
incoming voice communication request; and to cause a voice communication
request to be transmitted to the remote device.

10 According to an eighth aspect, this specification describes apparatus comprising:
means for receiving an indication of receipt of an audio data item from a remote
device; means for receiving an indication of receipt of a voice communication
request from the remote device; and means for causing an audible representation of
the audio data item to be provided to a user, via a loudspeaker, thereby to alert the
15 user to the existence of the voice communication request.

According to a ninth aspect, computer-readable instructions which, when executed
by computing apparatus, cause the computing apparatus to perform a method
according to either of the third and fourth aspects.

20

Brief Description of the Figures

For a more complete understanding of example embodiments of the present
invention, reference is now made to the following description taken in connection
with the accompanying drawings in which:

25

Figure 1 is a schematic illustration of apparatus according to example embodiments
of the invention;

Figure 2 is a schematic illustration of a system in which apparatus according to
example embodiments of the invention may reside; and

30 Figures 3A to 3E are simplified illustrations depicting, in general terms, methods
according to example embodiments of the invention.

Figures 4 to 6 are flow diagrams illustrating, in more specific terms, methods
according to example embodiments of the invention.

Detailed Description of the Embodiments

In the description and drawings, like reference numerals refer to like elements throughout.

5

Figure 1 is a schematic illustration of apparatus 1 according to example embodiments of the invention.

The apparatus 1 comprises a loudspeaker 10. The loudspeaker 10 is operable to
10 convert electrical data signals into audible sound for consumption by a user of the apparatus 1. The apparatus 1 also comprises a microphone 12. The microphone 12 is operable to convert audible sound into electrical data signals. The apparatus also comprises a transceiver 14. The transceiver 14 is operable to send and receive
15 signals from a network (not shown in Figure 1). The transceiver 14 may comprise any combination of different types of transceiver, transmitter or receiver. The transceiver 14 may be operable to communicate using any different type of communication protocol, for example GPRS, GSM, Bluetooth and infrared etc.

The apparatus 1 comprises a controller 16. The apparatus also comprises a memory
20 18. The controller is operable to cause data to be stored in the memory 18. The controller is operable also to retrieve stored data from the memory 18.

The controller 16 is operable to control each of the loudspeaker 10, the microphone
25 12 and the transceiver 14. As such, the controller 16 is operable to provide data in the form of electrical signals to the loudspeaker 10, thereby to cause the loudspeaker 10 to provide audible representations of the data for consumption by the user. The data may have been received from the transceiver 14 or retrieved from the memory 18. The controller 16 is operable also to cause the microphone
30 12 to convert incoming audible sound into data in the form of electric signals. The controller 16 is also operable to route the data to the transceiver 14 to be sent via the network, or to the memory 18 for storage.

The controller 16 may comprise one or more distinct entities. The controller 16 comprises at least one processor 16A. The term processor is intended to encompass any suitable type of processor or microprocessor. The controller may also comprise one or more application specific integrated circuits (not shown). The
5 controller 16 is operable to control the other components under the control of computer readable instructions 18A stored in the memory 18.

The memory 18 may comprise one or more distinct entities. The one or more entities may comprise non-transitory computer-readable media. The entities may be
10 any combination of volatile or non-volatile media, such as but not limited to ROM, RAM and EEPROM, PROM, EPROM, flash memory, DRAM etc.

The controller 16 is operable to perform actions in response to commands received via the microphone 12. As such, the controller 16 is operable to analyse the data
15 signals created by the microphone based on sounds received at the microphone 12, and is operable to perform actions based on the results of the analysis. In particular, the controller 16 is operable to recognise a data signal which results from a particular word or phrase when it is spoken by the user into the microphone 12. In other words, the controller 16 is operable to analyse a portion of an incoming
20 audio data stream received from the microphone 12 to detect the presence of a first identifier (e.g. a word or a phrase) therein.

According to some example embodiments, detection of the first identifier may be performed using known voice recognition techniques to identify words spoken by
25 the user. For example, the user may speak the name of a contact, the details of which are stored in the memory 18 of the apparatus 1. The controller 16 may use voice recognition techniques to identify the contact based on the data signal received from the microphone 12. The controller 16 is operable subsequently to perform an action in respect of that contact. In particular, the controller is operable
30 to cause a message to be sent to a device of the contact, based on a telephone number or other type of device identifier stored in the memory 18. The controller 16 is operable also to cause a voice communication request to be sent to the device

of the contact. Such a request includes the controller 16 attempting to initiate a telephone call with the device of the identified contact.

According to other example embodiments, a database of reference data samples may
5 be stored in the memory 18. Each reference data sample is associated with a
different contact, and may comprise the data resulting from a previous instance of
the user speaking the name of the contact into the microphone 12. Thus, when a
data signal is received from the microphone, the controller 16 is operable to
compare the signal with the reference data samples stored in the database to identify
10 a particular contact.

Identifiers identifying contacts may be known as contact identifiers. The controller
16 may also be operable to recognise types of identifier other than contact
identifiers. For example, in some example embodiments, the controller 16 is
15 operable to recognise identifiers related to various commands. In particular, the
controller 16 may be operable to recognise a particular word or phrase, as being a
command to begin analysing the incoming data signal for an identifier associated
with a contact. In this way, the user may speak a command, which is recognised by
the controller 16 as an indication that the user is about to speak the name of a
20 contact with whom they want to initiate a voice communication.

It will be appreciated that the apparatus 1 may comprise other components to those
that have been described above. It will be appreciated also that the apparatus 1 may
comprise one or more different physical entities. For example, the loudspeaker 10
25 and the microphone 12 may be provided in a different physical entity than the
transceiver 14, the controller 16 and the memory 18. In such an example, the
loudspeaker 10 and the microphone 12 may be provided in a personal headset,
which may be in wired or wireless communication with the remainder of the
apparatus, for example, via the transceiver 14.

30

Figure 2 is a schematic illustration of a system in which the apparatus 1 of Figure 1
may reside.

The system 2 of Figure 2 comprises a first device 20, a second device 22 and a network 24. Each of the first and second devices 20, 22 comprise an apparatus 1 as described with reference to Figure 1. In the example of Figure 2, the first and second devices 20, 22 comprise mobile terminals which are operable to
5 communicate with one another via the network 24. The network 24 may be operable to communicate with the devices 20, 22 using any suitable type of protocol, including but not limited to GPRS, GSM, EDGE, CDMA and Internet Protocol. The network 24 is operable to route signals received from the first device 20 to the second device 22 and vice versa, thereby allowing the first and second
10 devices 20, 22 to communicate with one another. The network 24 may include any number of base stations, servers etc.

Example embodiments of the invention will now be described in general terms with reference to Figures 3A to 3E.

15

In Figure 3A, the user 30 (in this example called Alan) of the first device 20 speaks into the microphone 12 of the first device 20. As mentioned above, the microphone 12 may be provided in the device or may be provided in a separate entity such as a hands-free headset. In this example, Alan 30 speaks the phrase
20 "Brian, are you there?". The controller 16 of the first device 20 recognises this phrase as indicating that Alan wishes to initiate communication with one of his contacts (in this example Brian). In other words, the controller 16 analyses the signal received from the microphone and detects the presence therein of an identifier which indicates that the Alan wishes to initiate a voice call with Brian 32.
25 In addition to analysing the audio data signal resulting from the spoken phrase, it is also stored in the memory 18.

In response to this determination, the controller 16 retrieves a device identifier from the memory 18. The device identifier associated with the second device 22,
30 which in this example is associated with Brian 32, allows the second device to be contacted. In addition to retrieving the device identifier, the controller 16 also prepares a data package containing the stored audio data signal. This data package may also be referred to as an audio data item.

Next, as can be seen in Figure 3B, the controller 16 causes the data package (or audio data item) 34 to be transmitted, via the transceiver 14, from the first device 20 to the network 24 which routes it second device 22. At substantially the same time, the controller 16 of the first device 20 attempts to initiate a voice communication with the second device 22. Put in other words, the controller 16 of the first device sends a voice communication request 36, which is routed via the network 24, to the second device 22. Both the audio data item 34 and the voice communication request 36 are sent using the device identifier associated with Brian 32. According to some example embodiments, the audio data item 34 and the voice communication request 36 may be sent as part of the same signal.

In Figure 3C, having received the audio data item 34 and the voice communication request 36, the controller 16 of the second device 22 causes an audible representation of the audio data signal contained in the audio data item 34 to be output by the loudspeaker 10 of the second device 22. This serves to alert Brian 32 (the user of the second device 22) to the existence of the incoming voice communication request 36. As such, the audio data signal, which is a recording of Alan 30 speaking the phrase “Brian, are you there?”, acts as a ringtone. As described above, the loudspeaker 10 and microphone 12 associated with the second device 22 may be embodied in a hands-free headset which is in wired or wireless communication with the second device 22.

In Figure 3D, Brian speaks a command into the microphone 12 of the second device 22, which indicates that would like to accept the voice communication request 36. The controller 16 recognises this command, and, in response, accepts the incoming voice communication request 36. As such, as can be seen in Figure 3E, a voice communication channel is established between the first and second devices 20, 22, thereby allowing Alan 30 and Brian 32 to speak to one another.

The above-described method provides a simple and intuitive system for beginning a voice communication session between two devices at locations which are remote from one another. The provision of the audio data signal (captured at the first

device 20) as the ringtone to alert the user of the second device to the existence of an incoming voice communication request gives the users the impression that there is a permanent communication link between the two devices. The method also allows the user 30 of the first device 20 to begin a conversation with the user 32 of the second device 22 as they would if the two users were in the close physical
5 proximity to one another and not at remote locations. Thus, Alan speaks a greeting, for example, "Brian, are you there?" or "Hello Brian" which is transmitted from Alan's device 20 to Brian's device 22 and is subsequently output by Brian's device 22. Brian 32 simply accepts the incoming voice communication at his device and a
10 conversation can be carried out. In this way, the above-described method provides an improved user experience for users of apparatuses and devices operating according to example embodiments of the invention. Moreover, where a voice command is used by Brian 32 to accept the request 36, a voice communication channel is established between the two devices 20, 22 without either user 30, 32
15 being required to provide inputs physically (such as by pressing buttons, keys etc) to their device.

Figures 4 to 6 are flow diagrams illustrating, in more specific terms, methods according to example embodiments of the invention.

20 Figure 4 is a flow diagram illustrating a method according to example embodiments of the invention. The method of Figure 4 may be carried out by the at least one processor 16A of the controller 16 of the first device 20 under the control of the computer-readable instructions 18A stored in the memory 18.

25 In step S4-1, the controller 16 causes an audio data stream, which is received from the microphone 12 to be stored in a buffer (not shown) which is part of the memory 18. The buffer is operable to store a finite amount of data, for example equivalent to five seconds worth of an audio data stream. Thus, the controller 16
30 causes the buffer to be continuously updated to include a portion of the audio data stream which was most recently received from the microphone 12.

In addition to causing the audio data stream to be buffered, the controller 16 is operable to scan or analyse the incoming data stream so as to detect the presence of one or more identifiers within the audio stream. The identifiers may comprise, for example, a word or phrase which is recognisable by the controller 16. An identifier
5 identifies at least a contact, details for whom are stored in the memory 18. The details may include a device identifier, which enables the first device 20 to communicate with a device associated with the contact. Examples of device identifiers include telephone numbers etc.

10 Next, in step S4-2, the controller determines if an identifier is present within the buffered audio data stream.

Identifiers may be recognised by the controller 16 using standard voice recognition techniques, such as voice to text techniques. In such example embodiments, the
15 controller 16 compares a text string (or data indicative of such) which is produced using voice to text techniques based on at least a portion of the buffered audio data stream. If the text string matches, or sufficiently matches, a text string associated with a contact (and, as will be understood from the below paragraphs, optionally also a command) stored in memory 18, the identifier is recognised.

20 In other example embodiments, identifiers may be recognised by comparing portions of the audio data stream, which are stored in the buffer, with reference audio data samples stored in memory 18. The reference audio data samples may be audio data signals from previous instances of the user speaking the name of a
25 contact (and, optionally, also a command). Reference audio data samples from previous instances of the user speaking the name of a contact may be stored in the memory 18 in association with the contact to which the reference audio data sample is associated. As such, the controller 16 detects that an identifier is present within an audio data stream when it is determined that a sufficient level of identity exists
30 between a portion of an audio data stream and a reference audio data sample.

In some example embodiments, detection of a single identifier, which only identifies a contact, may be sufficient for the controller to proceed to the next step (S4-3) in

the method. For example, it may be sufficient for a user to speak the name “Brian” into the loudspeaker.

In other example embodiments, two identifiers may be required to be detected in the audio data portion for the method to proceed. For example, a first identifier
5 may identify the contact and the second identifier, referred to above as the command, may indicate that the user wishes to initiate a voice communication session with that contact. Let us consider the example, “Brian, are you there?”. The controller 16 may recognise “Brian” as a first identifier which identifies a
10 contact named Brian. The controller 16 may also identify “are you there?” as a second identifier, which indicates that the user wishes to begin a communication session with the contact identified by the first identifier.

The requirement for two identifiers to be present in an audio data stream in order
15 for a voice communication to be initiated reduces the chance of proceeding to the next steps in the method, one of which is the initiation of a voice communication session, accidentally. This may be particularly useful when a hands-free headset is being used. This is because the user might say the name of a contact (for example when in conversation with a person in the same geographic location), e.g. when
20 referring to that contact, without actually wanting to speak to the contact. It is less likely however that the user will speak the combination of first and second identifier (e.g. “Brian, are you there?”) without wanting to initiate a voice communication session with that contact. It will be appreciated, that the same effect can be
25 achieved by using reference data samples which are phrases (e.g. “Brian, are you there?”) instead of just single words (e.g. “Brian”).

If in step S4-2, the controller 16 determines that an identifier is present in the audio data stream, the method proceeds to step S4-3. If, in step S4-2, a device identifier is not detected, step S4-2 is repeated until it is determined that an identifier is present
30 in the data stream.

In step S4-3, following detection of the identifier in the audio data stream, the controller 16 retrieves from memory the device identifier associated with the

identified contact (identified using the identifier present in the buffered audio stream).

5 In step S4-4, the controller 16 causes the portion of the data stream stored in the buffer which contains the identifier (or identifiers) to be packaged into an audio data item 34.

10 Next, in step S4-5, the controller 16 causes the audio data item 34 to be transmitted to a device (i.e. the second device 22) associated with identified contact. The audio data item is transmitted based on a retrieved device identifier associated with the identified contact. The audio data item 34 is transmitted to the second device 22 for use by the second device 22 to alert the user 32 of the second device 22 to the presence of an incoming voice communication request 36.

15 In step S4-6, the controller 16 causes a voice communication request 36 to be transmitted, based on the device identifier, to the device (the second device 22) associated with the identified contact. A voice communication request may be sent, for example, by the controller 20 causing a number associated with the remote device to be dialled.

20 Steps S4-5 and S4-6 are carried at substantially the same time. In some embodiments, the audio data item 34 is carried in the same signal as the voice communication request 36. The order and the exact relative timings of transmission of the audio data item 34 and the voice communication request 36 may not be
25 important as long as the audio data item 34 arrives at the remote device 22 such that it can be used in providing an audible alert for alerting the user 32 of the second device 22 to the existence of the incoming voice communication request 36.

30 Next, in step S4-7, the controller 16 of the first device 20 determines if the second device has accepted the voice communication request 36, thereby to allow a voice communication channel to be established between the first and second device 22.

Following a negative determination (i.e. a determination that the second device 22 has rejected the voice communication request), the method ends.

Following a determination that second device 22 has accepted the voice
5 communication request, the method proceeds to step S4-8. In step 4-8, the controller 16 of the first device 20 establishes and maintains a voice communication channel between the first device 20 and the second device 22.

Next in step S4-9, following an indication that the user of either device 20, 22
10 wishes to terminate the voice communication session, the controller 16 of the first device 20 ceases maintenance of the voice communication channel. Subsequent to this, the method ends.

Figure 5 is a flow diagram illustrating a method according to example embodiments
15 of the invention. The method of Figure 5 may be carried out by the at least one processor 16A of the controller 16 of the second device 22 under the control of the computer-readable instructions 18A stored in the memory 18.

In step S5-1, the controller 16 receives an indication from the transceiver 14 that
20 the audio data item 34 (transmitted in step S4-5 of Figure 4) has been received at the second device 22 from the first device 20.

In step S5-2, the controller 16 receives an indication that a voice communication
25 request 36 has been received from the first device 20 at the second device 22.

As will be understood from steps S4-5 and S4-6 of Figure 4 described above, the
order of steps S5-1 and S5-2 may not be important. In some embodiments, the
audio data item 34 and the voice communication request may be received at
substantially the same time. The audio data item 34 may be carried in the same
30 signal as the voice communication request 36. The exact relative timings of receipt of the audio data item 34 and the voice communication request may not be important as long as the audio data item arrives at the second device 22 such that it

can be used in providing an audible alert for alerting the user 32 of the second device 22 to the existence of the incoming voice communication request 36.

5 The audio data item 34 and/or the voice communication request 36 may include an indication that they relate to a single communication. For example, the audio data item may include an indication, such as a flag, that the controller 16 of the second device 22 should expect to receive a voice communication request 36 for which the audio data item 34 is to be used in providing the alert to the user. Similarly, the communication request 36 may include an indication, such as a flag, that an audio
10 data item 34, which is to be used in providing the alert to the user, should be expected to be received. In this way, the controller 16 of the second device knows that the audio data item 34 and the voice communication request 36 are linked and thus knows how they should be handled.

15 Next, in step S5-3, the controller 16 of the second device 22 determines if the originator (i.e. the first device 20) of the audio data item 34 and the voice communication request 36 is recognised. This may occur, for example, by comparing a calling number identification (CNID) element that is included in the signal or signals that transports the audio data item 34 and the voice communication
20 request 36 with CNID elements stored in the memory 18 of the second device 22. Alternatively, recognition of the originator of the audio data item 34 and the voice communication request 36 may be performed using any other suitable protocol.

If, in step S5-3, it is determined that the first device 20 is not recognised, the
25 method proceeds to step S5-4. In step S5-4, the controller 16 of the second device causes the user 32 to be alerted as to the receipt of the voice communication request, without using the received audio data item 34. This may be carried out, for example, using a standard ringtone that is pre-stored in the memory 18 of the second device 22. Following step S5-4, the method proceeds to step S5-6.

30

If, in step S5-3, it is determined that the first device 20 is recognised, the controller 16 proceeds to step S5-5. In step S5-5, the controller 16 of the second device 22 causes an audible representation of the audio data stored within the audio data item

32 to be provided to the user 32 via the loudspeaker 10. Thus, the user 32 of the second device 22 is alerted to the existence of an incoming voice communication request 36. As such, the user 32 may hear the phrase “Brian, are you there” as spoken by the user of the first device 20. Following step S5-5, the method proceeds
5 to step S5-6.

It will be appreciated that step S5-3 may be optional and that the method may instead proceed directly from step S5-2 to step S5-5. However, determination as to whether the originator of the audio data item 34 and voice communication request
10 36 is known may ensure that recordings of words and phrases spoken by strangers are not automatically output via the loudspeaker 10 of the device 22. In some example embodiments, the user 32 of the second device may have specified a list of contacts, which is stored in memory 18, from whom received audio data items 34 are to be used as the alert of an incoming voice communication request. In such
15 embodiments, in step S5-3, the controller determines whether the originator of the audio data item 34 and incoming voice communication request 36 is on the specified list of contacts.

In some embodiments, the controller 16 of the second device 22 may respond to a
20 user input by activating a mode in which a received audio data item 34 is never used as an alert, regardless of the originator device. When in this mode, the controller 16 may proceed directly from step S5-2 to step S5-4.

In step S5-6, the controller 16 receives an input from the user 32. The input may be
25 a voice input recognised using similar techniques to those described above with reference to step S4-2 of Figure 4. For example, the user 32 of the second device 22 may speak into the microphone “Yes” or “No”. It will be appreciated that any suitable phrase or word may be used as a voice input. According to alternative embodiments, the command may be provided to the device via another user
30 interface such as, but not limited to, a mechanical key, a touchpad or a touchscreen.

In step S5-7, the controller 16 determines based on the received command, whether or not the voice communication request 36 is to be accepted. Thus, the controller

16 determines whether the received input is indicative of the user 32 wishing to accept or decline the voice communication request. In embodiments in which voice inputs are used, the word “Yes” may indicate acceptance of the request 36 and “No” may indicate refusal of the request 36.

5

In some example embodiments, audio data equivalent to a recording of the voice command of the user of the second device 22 may be sent from the second device 22, under the control of the controller 16, to first device 20. Upon receiving this audio data, the controller 16 of the first device causes the audio data to be output, via the loudspeaker 10, to the user of the first device 20. As such, the user of the first device 20 would hear the user of the second device saying “Yes Alan, I am here”. This may occur immediately prior, or subsequent, to the voice channel being established between the two devices.

15 Following a positive determination in step S5-7, the method proceeds to step S5-8 in which the controller 16 opens and maintains a voice communication channel with the first device.

Next in step S5-9, following an indication that the user of either device 20, 22 wishes to terminate the voice communication session, the controller 16 of the second device 22 ceases maintenance of the voice communication channel. Subsequent to this, the method ends.

Following a negative determination in step S5-7, the method proceeds to step S5-10 in which the controller 16 rejects the voice communication request. Subsequent to this, the method ends.

According to some example embodiments, the method of Figure 5 may include a step wherein, subsequent to receiving the voice communication request and/or the audio data item, the controller 16 automatically sets the device 22 into voice recognition mode. In voice recognition mode, the controller 22 is operable to detect voice commands received via the microphone and to act accordingly. For example, the following activation of the voice recognition mode, the controller 16 is

30

responsive to receipt of the command from the user “Yes, I am here Alan” to cause the voice communication channel to be established between the two devices 20, 22. This optional step may occur, for example, immediately after any one of steps S5-1 to S5-5.

5

Figure 6 is a flow diagram illustrating a method according to example embodiments of the invention. The method of Figure 6 may be carried out by the at least one processor 16A of the controller 16 of the first device 20 under the control of the computer-readable instructions 18A stored in the memory 18.

10

In step S6-1, the controller 16 receives a user input indicating to the controller that the user 30 of the first device 20 is about to provide a voice command identifying a contact with whom they wish to hold a voice communication session. In some example embodiments, the user input may comprise a voice input. The voice input may comprise receipt, via the microphone 12, of a particular word or phrase, for example, “Enter voice dialling mode”. In such embodiments, the controller 16 continuously monitors audio data received from the microphone 12. In other example embodiments, the user input may comprise a physical user input such as a key press etc.

20

Next, in step S6-2, in response to receipt of the user input in step S6-1, the controller 16 begins to cause the audio data signal received from the microphone to be stored in the memory 18.

25

In step S6-3, the controller analyses the captured portion of audio data in order to detect the presence of at least one identifier. The at least one identifier comprises an identifier identifying a contact stored in the memory 18 of the device 20, and optionally an identifier indicating that the user wishes to establish a voice communication session with the identified contact. In some embodiments it may be sufficient for the audio data portion to include only one identifier identifying the contact. Detection of the at least one identifier is performed as described above with reference to step S4-2 of Figure 4.

30

Subsequent to step S6-3, the method proceeds to step S6-4. Steps S6-4 to S6-10 of the method of Figure 6 are the same as steps S4-3 to S4-9 respectively of the method of Figure 4. As such, further description of these steps is not included.

5 The method implemented by the controller 16 of the second device 22, such as the example embodiment described with reference to Figure 6, may be the same regardless of whether the methods of Figure 4 or Figure 6 are performed by the controller 16 of the first device 20.

10 In the above described methods, the audio data signal that is included in the audio data item 34 is the same as that used to initiate sending of the voice communication request 36. However, according to some alternative example embodiments, the audio data that is sent in the audio data item may be pre-stored in the memory in association with a particular contact. As such, when the controller 16 detects the
15 presence of an identifier in an audio data stream, the controller 16 may retrieve the pre-stored audio data associated with the identified contact and package it as an audio data item for use, as an alert by, the device of the identified contact. In example embodiments in which the identifier is detected by comparing the audio data portion with a reference audio data sample, the reference audio data sample
20 may be packaged into the audio data item and transmitted to the device of the identified contact.

It should be realized that the foregoing embodiments should not be construed as limiting. Other variations and modifications will be apparent to persons skilled in
25 the art upon reading the present application. Moreover, the disclosure of the present application should be understood to include any novel features or any novel combination of features either explicitly or implicitly disclosed herein or any generalization thereof and during the prosecution of the present application or of
any application derived therefrom, new claims may be formulated to cover any such
30 features and/or combination of such features.

Claims

1. Apparatus comprising at least one processor and at least one memory, the at least one memory having stored therein computer-readable instructions which,
5 when executed by the at least one processor, cause the apparatus:
to detect the presence of a first identifier in an audio data portion received from a microphone;
to identify a remote device based on the first identifier;
to cause an audio data item to be transmitted to the remote device, the audio
10 data item being for use by the remote device to alert a user of the device to the presence of an incoming voice communication request; and
to cause a voice communication request to be transmitted to the remote device.
- 15 2. The apparatus of claim 1, wherein the audio data item includes at least part of the audio data portion.
3. The apparatus of any preceding claim wherein the audio data portion is a portion of an audio data stream and wherein the computer-readable instructions,
20 when executed by the at least one processor, cause the apparatus:
to analyse the audio data portion to detect the presence of the first identifier in response receiving a signal indicative of a user input.
4. The apparatus of claim 3, wherein the user input is a voice input.
- 25 5. A system comprising:
the apparatus of any of claims 1 to 4; and
the remote device, the remote device comprising at least one processor and at least one memory, the at least one memory having stored therein computer-
30 readable instructions which, when executed by the at least one processor, cause the apparatus:
to cause an audible representation of the audio data item to be provided to a user of the remote device, via a loudspeaker associated with the remote device,

thereby to alert the user of the remote device to the existence of the voice communication request.

6. The system of claim 5, wherein the wherein the computer-readable
5 instructions stored in the at least one memory of the remote device, when executed by the at least one processor, cause the apparatus:
- to receive an indication of receipt of the audio data item at the remote device;
 - to receive an indication of receipt of the voice communication request at the
10 remote device;
 - to determine if the apparatus is known to the remote device;
 - to cause the audible representation of the audio data item to be provided to the user of the remote device if the apparatus is known to the remote device; and
 - to alert a user of the remote device to the existence of the voice
15 communication request using a pre-stored data item if the apparatus is not known to the remote device.

7. The system of claim 5 or claim 6, wherein the computer-readable
instructions stored in the at least one memory of the remote device, when executed
20 by the at least one processor, cause the apparatus:
- to be responsive to receipt, from the user of the remote device, of a voice command to allow a voice communication channel to be established between the remote device and the apparatus.

- 25 8. Apparatus comprising at least one processor and at least one memory, the at least one memory having stored therein computer-readable instructions which, when executed by the at least one processor, cause the apparatus:
- to receive an indication of receipt of an audio data item from a remote device;
 - 30 to receive an indication of receipt of a voice communication request from the remote device; and

to cause an audible representation of the audio data item to be provided to a user of the apparatus, via a loudspeaker associated with the apparatus, thereby to alert a user of the apparatus to the existence of the voice communication request.

5 9. The apparatus of claim 8, wherein the computer-readable instructions, when executed by the at least one processor, cause the apparatus:

to determine if the remote device is known to the apparatus;

to cause the audible representation of the audio data item to be provided to the user of the apparatus, if the remote device is known to the apparatus; and

10 to cause the user of the apparatus to be alerted to the existence of the voice communication request using a pre-stored data item if the remote device is not known to the apparatus.

10. The apparatus of claim 8 or claim 9, wherein the computer-readable
15 instructions, when executed by the at least one processor, cause the apparatus:

to be responsive to receipt, from the user, of a voice command to allow a voice communication channel to be established between the remote device and the apparatus.

20 11. A method comprising:

detecting the presence of a first identifier in an audio data portion received from a microphone;

identifying a remote device based on the first identifier;

25 causing an audio data item to be transmitted to the remote device, the audio data item being for use by the remote device to alert a user of the device to the presence of an incoming voice communication request; and

causing a voice communication request to be transmitted to the remote device.

30 12. The method of claim 11, wherein the audio data item includes at least part of the audio data portion.

13. The method of claim 11 or claim 12, wherein the audio data portion is a portion of an audio data stream and wherein the method comprises:

analysing the audio data portion to detect the presence of the first identifier in response receiving a signal indicative of a user input.

5

14. The method of claim 13, wherein the user input is a voice input.

15. The method of any of claims 11 to 14, further comprising:

receiving an indication of receipt of the audio data item at the remote device;

10 receiving an indication of receipt of the voice communication request at the remote device; and

causing an audible representation of the audio data item to be provided to a user of the remote device, via a loudspeaker associated with the remote device, thereby to alert the user of the remote device to the existence of the voice

15 communication request.

16. The method of claim 15 comprising:

determining if apparatus from which the audio data item and voice communication request were received is known to the remote device;

20 if the apparatus is known to the remote device, causing the audible representation of the audio data item to be provided to the user of the remote device; and

if the apparatus is not known to the remote device, causing a user of the remote device to be alerted to the existence of the voice communication request

25 using a pre-stored data item.

17. The method of claim 15 or claim 16, comprising:

responding to receipt, from the user of the remote device, of a voice command by allowing a voice communication channel to be established between the
30 remote device and the apparatus from which the audio data item and voice communication request were received.

18. A method comprising:

receiving an indication of receipt of an audio data item from a remote device;

receiving an indication of receipt of a voice communication request from the remote device; and

5 causing an audible representation of the audio data item to be provided to a user, via a loudspeaker, thereby to alert the user to the existence of the voice communication request.

19. The method of claim 18, comprising:

10 determining if the remote device is recognised;

if the remote device is recognised, causing the audible representation of the audio data item to be provided to the user; and

if the remote device is not recognised, causing the user to be alerted to the existence of the voice communication request using a pre-stored data item.

15

20. The method of claim 18 or claim 19 comprising:

responding to receipt from the user of a voice command to allow a voice communication channel to be established with the remote device.

20 21. A non-transitory computer-readable storage medium having stored therein computer-readable code, which, when executed by computing apparatus, causes the computing apparatus:

to detect the presence of a first identifier in an audio data portion received from a microphone;

25 to identify a remote device based on the first identifier;

to cause an audio data item to be transmitted to the remote device, the audio data item being for use by the remote device to alert a user of the device to the presence of an incoming voice communication request; and

30 to cause a voice communication request to be transmitted to the remote device.

22. A non-transitory computer-readable storage medium having stored therein computer-readable code, which, when executed by computing apparatus, causes the computing apparatus:

5 to receive an indication of receipt of an audio data item from a remote device;

to receive an indication of receipt of a voice communication request from the remote device; and

10 to cause an audible representation of the audio data item to be provided to a user of the apparatus, via a loudspeaker associated with the apparatus, thereby to alert a user of the apparatus to the existence of the voice communication request.

23. Apparatus configured to:

to detect the presence of a first identifier in an audio data portion received from a microphone;

15 to identify a remote device based on the first identifier;

to cause an audio data item to be transmitted to the remote device, the audio data item being for use by the remote device to alert a user of the device to the presence of an incoming voice communication request; and

20 to cause a voice communication request to be transmitted to the remote device.

24. Apparatus configured to:

to receive an indication of receipt of an audio data item from a remote device;

25 to receive an indication of receipt of a voice communication request from the remote device; and

to cause an audible representation of the audio data item to be provided to a user of the apparatus, via a loudspeaker associated with the apparatus, thereby to alert a user of the apparatus to the existence of the voice communication request.

30

25. Apparatus comprising:

means for detecting the presence of a first identifier in an audio data portion received from a microphone;

means for identifying a remote device based on the first identifier;

means for causing an audio data item to be transmitted to the remote device, the audio data item being for use by the remote device to alert a user of the device to the presence of an incoming voice communication request; and

5 means for causing a voice communication request to be transmitted to the remote device.

26. The apparatus of claim 25, wherein the audio data portion is a portion of an audio data stream and wherein the apparatus comprises:

10 means for analysing the audio data portion to detect the presence of the first identifier in response receiving a signal indicative of a user input.

27. Apparatus comprising:

15 means for receiving an indication of receipt of an audio data item from a remote device;

means for receiving an indication of receipt of a voice communication request from the remote device; and

20 means for causing an audible representation of the audio data item to be provided to a user, via a loudspeaker, thereby to alert the user to the existence of the voice communication request.

28. The apparatus of claim 27 comprising:

means for determining if the remote device is recognised;

25 means for causing the audible representation of the audio data item to be provided to the user if the remote device is recognised; and

means for causing the user to be alerted to the existence of the voice communication request using a pre-stored data item, if the remote device is not recognised.

30 29. Computer-readable instructions which, when executed by computing apparatus, cause the computing apparatus to perform a method according to any one of claims 11 to 20.

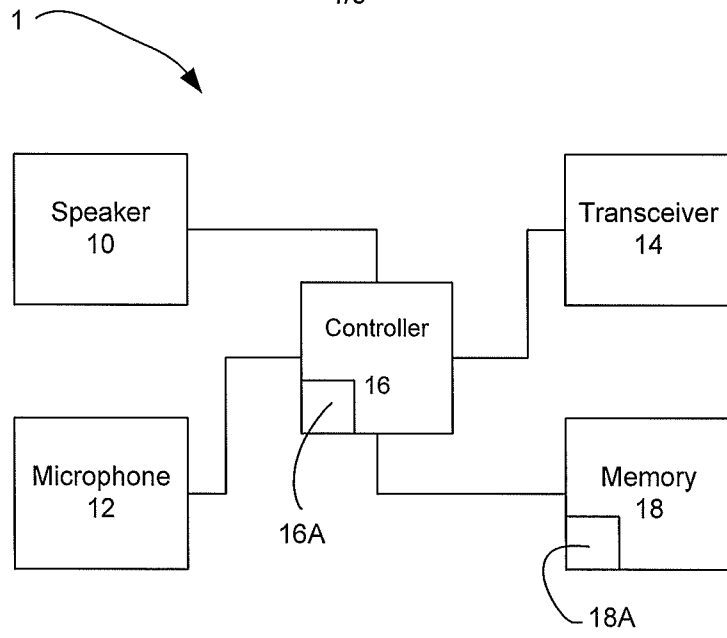


Figure 1

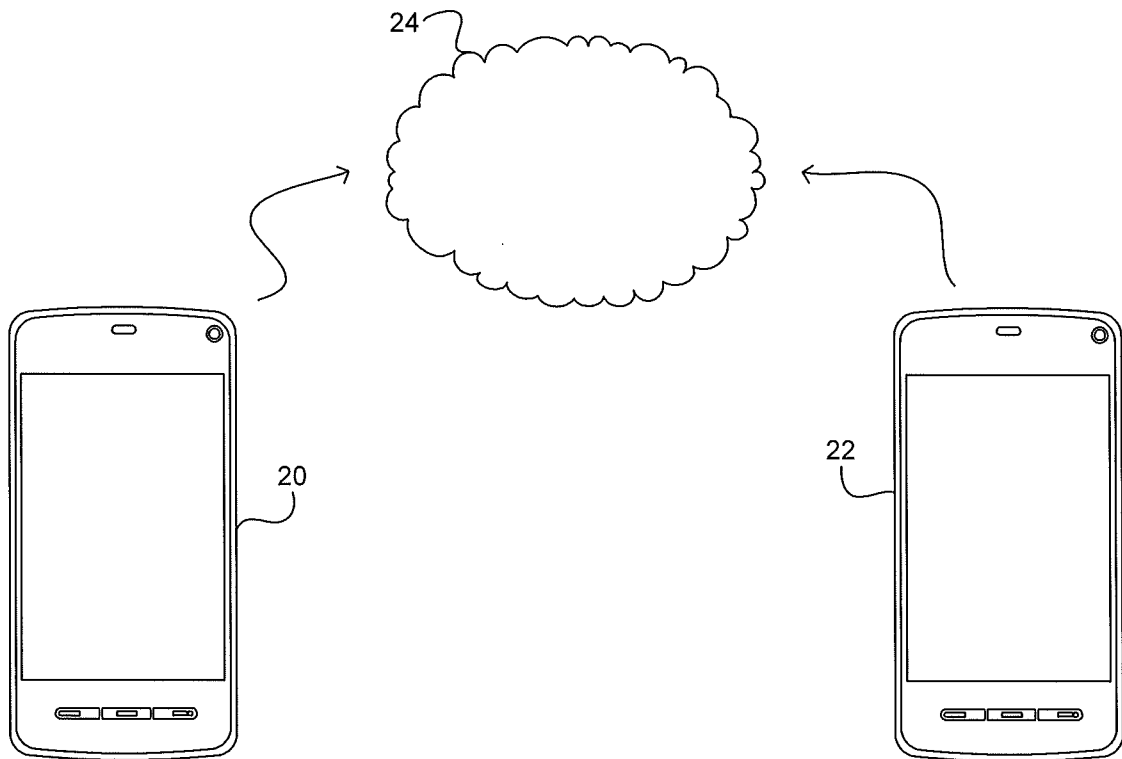
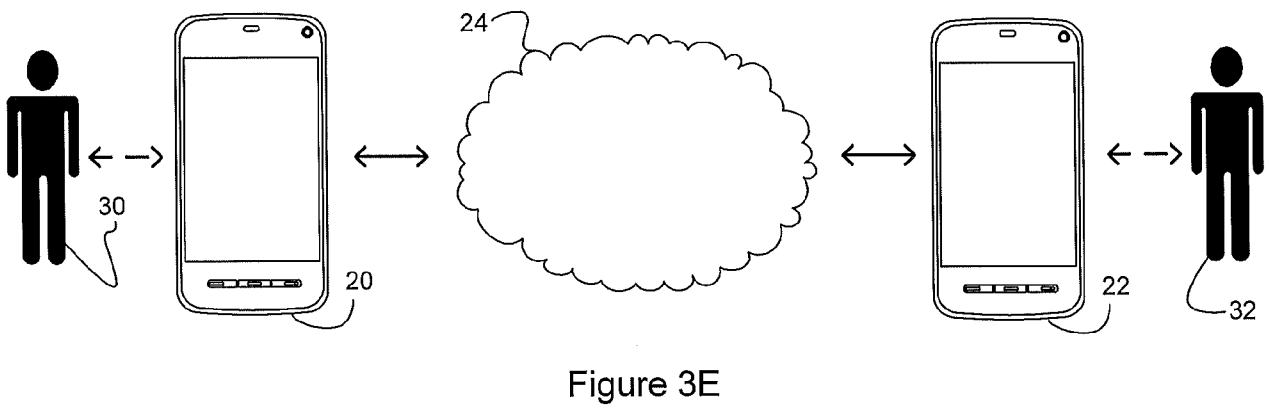
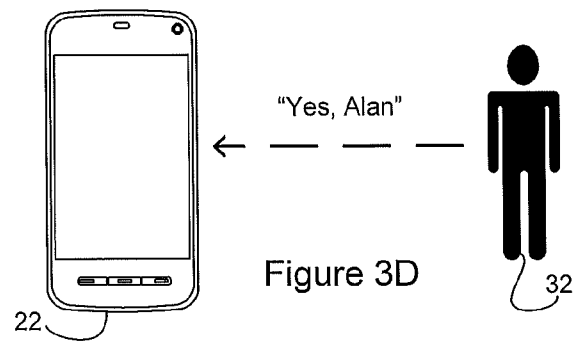
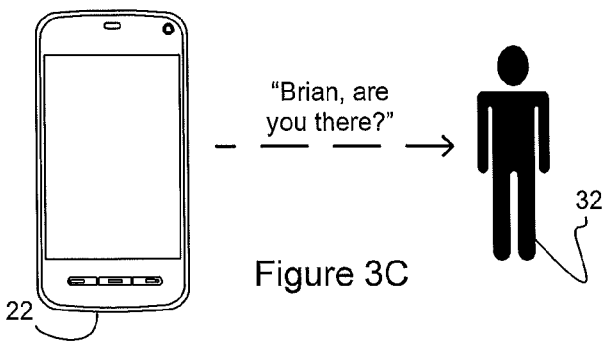
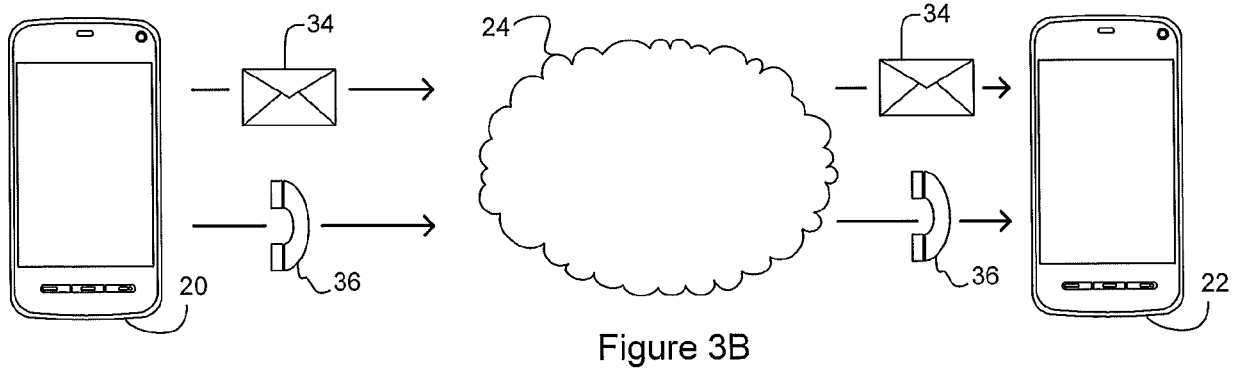
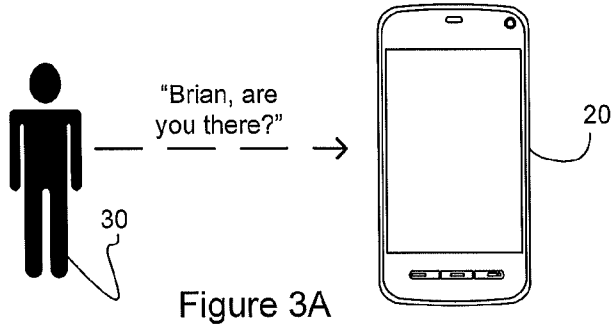


Figure 2



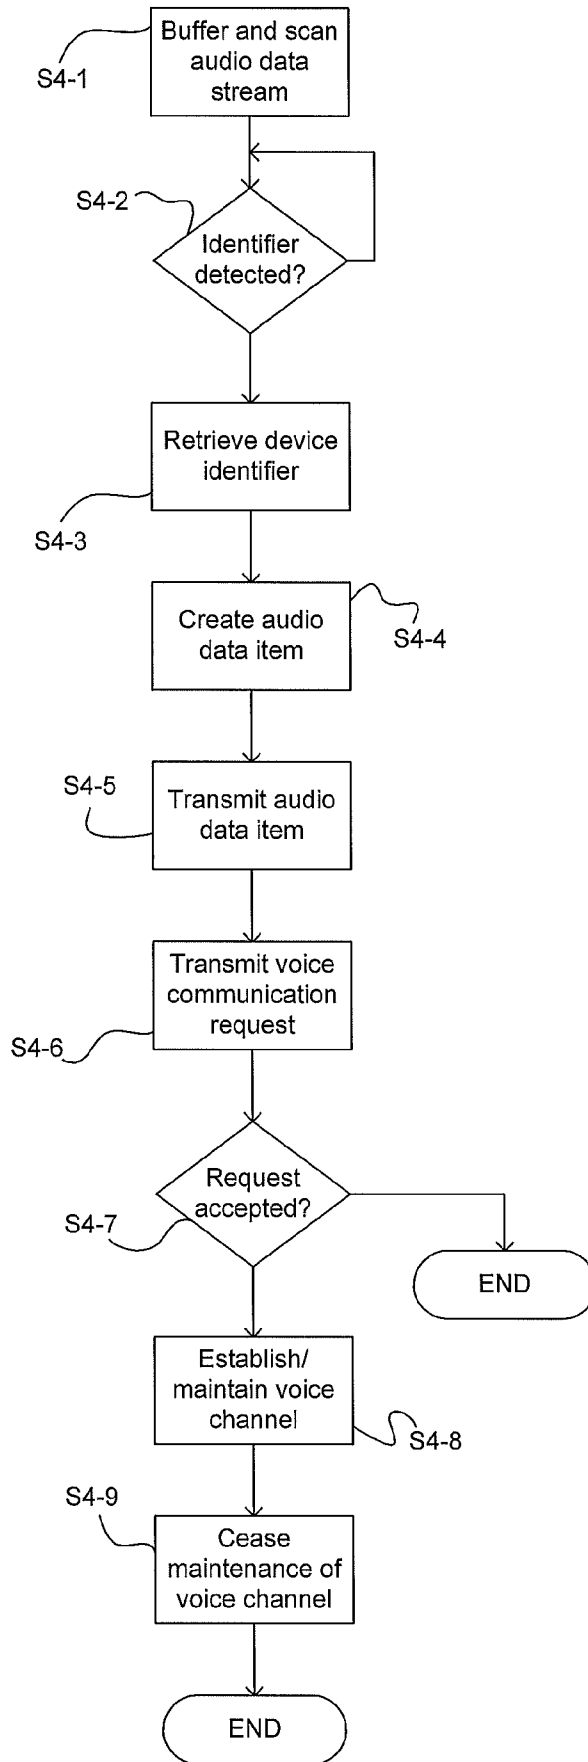


Figure 4

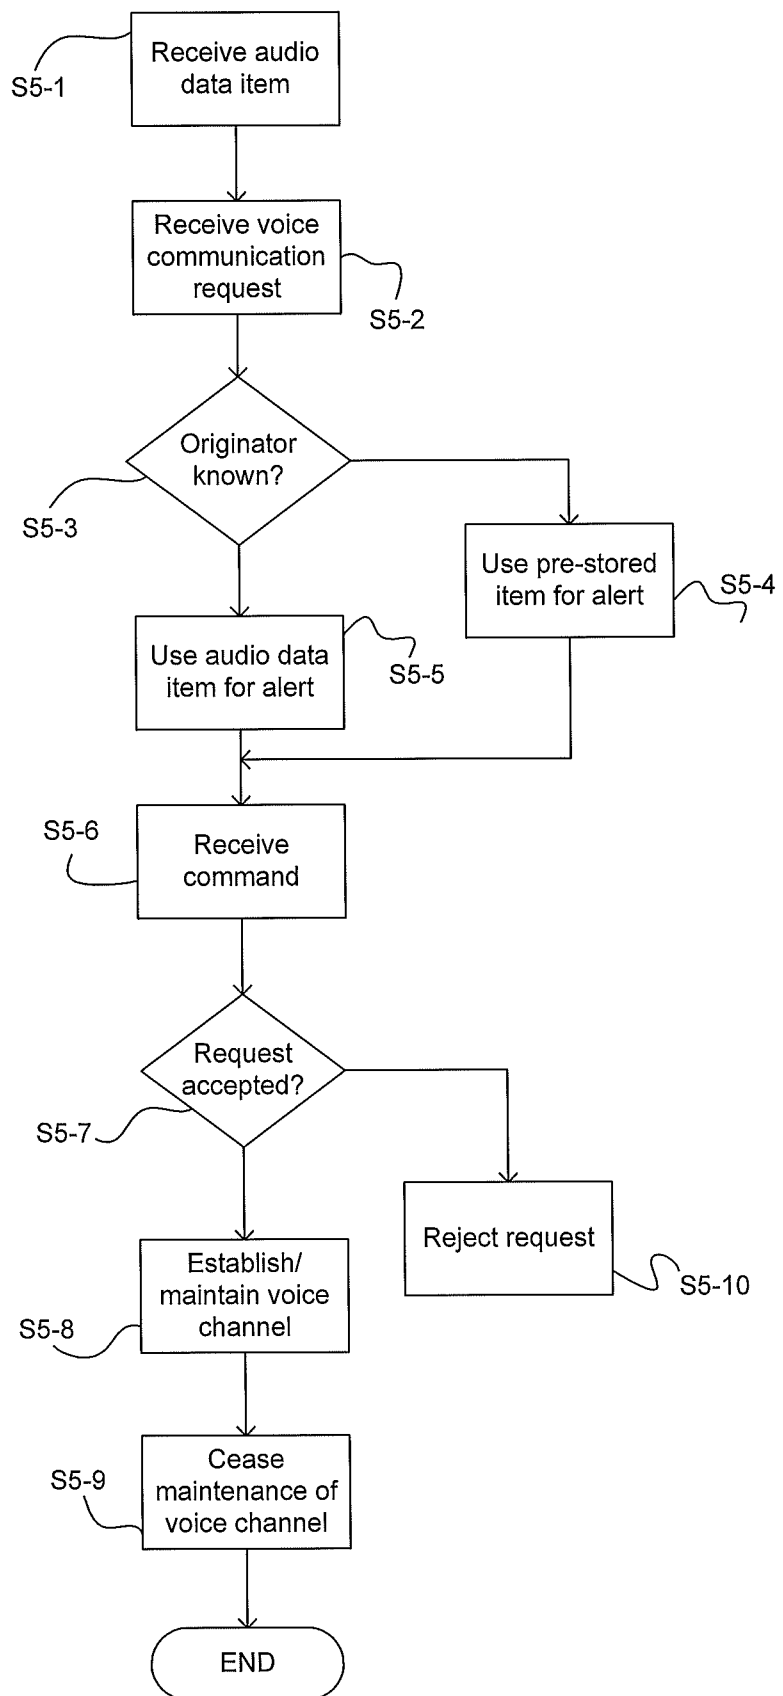


Figure 5

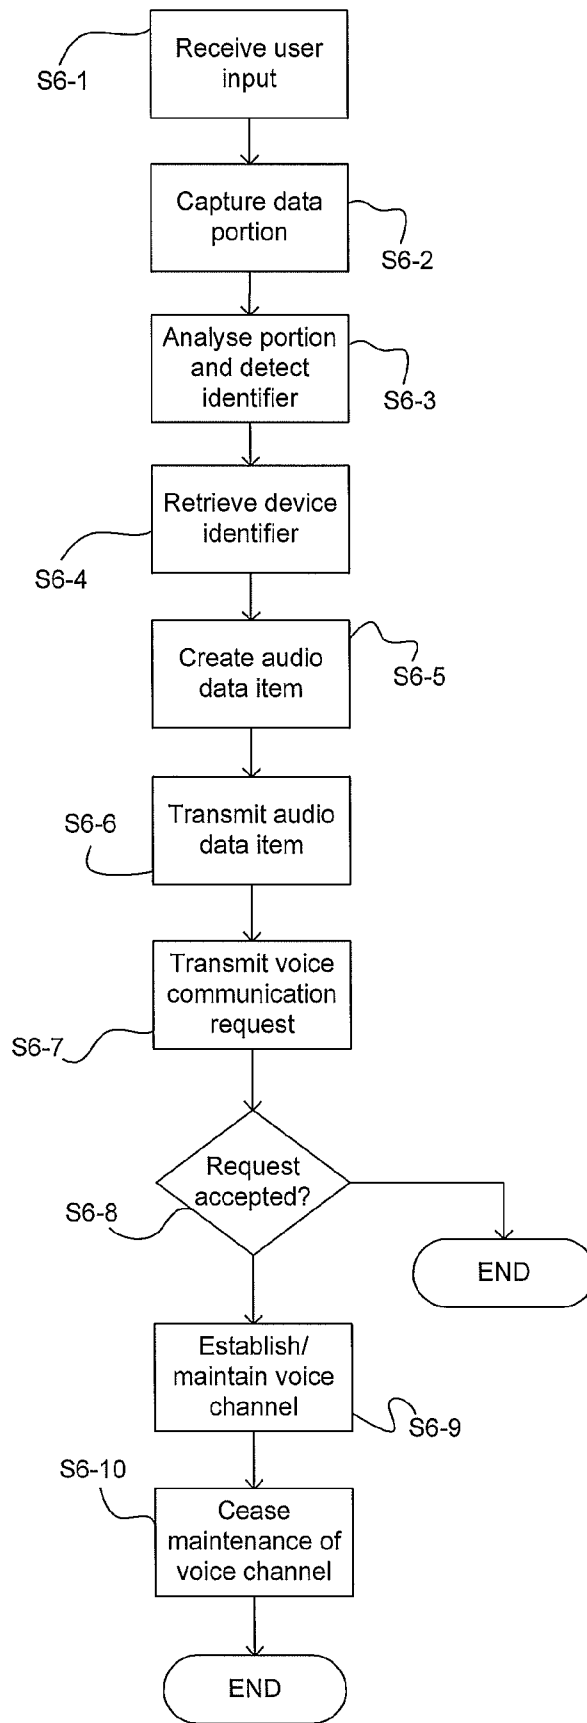


Figure 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2012/050887

A. CLASSIFICATION OF SUBJECT MATTER See extra sheet According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC: H04M, H04Q Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched FI, SE, NO, DK Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2009036602 A1 (LUCENT TECHNOLOGIES INC et al.) 26 March 2009 (26.03.2009) Abstract. Page 6, lines 29-33.	1-29
X	US 2010159913 A1 (TONG YONGHUI et al.) 24 June 2010 (24.06.2010) Abstract. Paragraph [0034].	1-29
A	JP 2002247144 A (MATSUSHITA ELECTRIC IND CO LTD) 30 August 2002 (30.08.2002) Abstract.	1-29
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
Date of the actual completion of the international search 24 May 2012 (24.05.2012)		Date of mailing of the international search report 30 May 2012 (30.05.2012)
Name and mailing address of the ISA/FI National Board of Patents and Registration of Finland P.O. Box 1160, FI-00101 HELSINKI, Finland Facsimile No. +358 9 6939 5328		Authorized officer Janne Nummela Telephone No. +358 9 6939 500

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB2012/050887

CLASSIFICATION OF SUBJECT MATTER

Int.Cl.

H04M 3/42 (2006.01)

H04Q 3/00 (2006.01)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB2012/050887

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
WO 2009036602 A1	26/03/2009	CN 101803317 A	11/08/2010
.....			
US 2010159913 A1	24/06/2010	None	
.....			
JP 2002247144 A	30/08/2002	None	
.....			