



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B60G 11/26	A1	(11) International Publication Number: WO 92/09446 (43) International Publication Date: 11 June 1992 (11.06.92)
---	----	--

(21) International Application Number: PCT/US91/08397

(22) International Filing Date: 12 November 1991 (12.11.91)

(30) Priority data:
617,677 26 November 1990 (26.11.90) US(71) Applicant: MONROE AUTO EQUIPMENT COMPANY
[US/US]; One International Drive, Monroe, MI 48161 (US).(72) Inventor: BRACKETTE, Daniel, Jr. ; 2643 Robinwood,
Toledo, OH 43610 (US).(74) Agents: MILLER, H., Keith et al.; Harness, Dickey &
Pierce, P.O. Box 828, Bloomfield Hills, MI 48303 (US).

(81) Designated States: DE, JP.


Published

With international search report.

(54) Title: METHOD AND APPARATUS FOR DETERMINING THE DISPLACEMENT OF A PISTON WITHIN A SHOCK ABSORBER

(57) Abstract

An apparatus for determining the displacement of a piston (46) within a shock absorber (10). The shock absorber (10) includes a pressure cylinder (48) forming a working chamber (50) having first and second portions operable to store damping fluid. A piston (46) is provided for controlling the flow of damping fluid between the first and second portions of the working chamber (50). Finally, a capacitance sensor (94) is used for determining the position of the piston (46) with respect to the pressure cylinder (48) so that the displacement of the piston (46) may be determined.

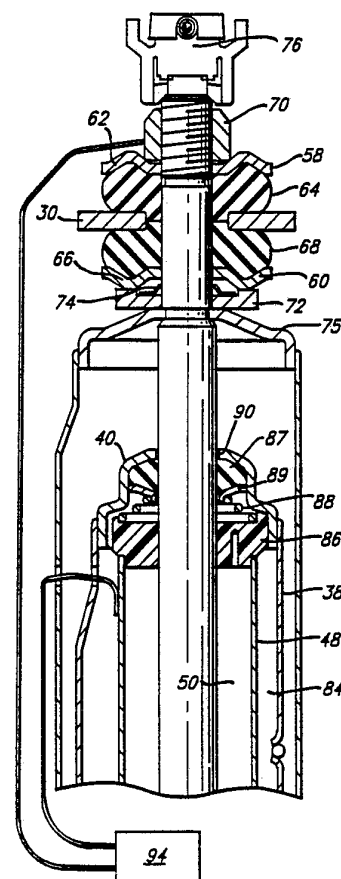

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU ⁺	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE*	Germany	MC	Monaco	US	United States of America
DK	Denmark				

⁺ Any designation of "SU" has effect in the Russian Federation. It is not yet known whether any such designation has effect in other States of the former Soviet Union.

METHOD AND APPARATUS FOR DETERMINING
THE DISPLACEMENT OF A PISTON WITHIN A SHOCK ABSORBER

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 This invention relates to suspension systems for automobiles and machines which receive mechanical shock, and more particularly to a method and apparatus for determining the displacement of a piston within a shock absorber.

2. Description of Related Art

Shock absorbers are used in connection with automotive suspension systems to
10 absorb unwanted vibrations which occur during driving. To dampen unwanted vibrations, shock absorbers are generally connected between the body and the suspension of the automobile. A piston assembly is located within the shock absorber and is connected to the body of the automobile through a piston rod. Because the
15 piston assembly is able to limit the flow of damping fluid within the working chamber of the shock absorber when the shock absorber is compressed or extended, the shock absorber is able to provide a damping force which "smooths" or "dampens" vibrations transmitted from the suspension to the body.

The greater the degree to which the flow of damping fluid within the working chamber is restricted by the piston assembly, the greater the damping forces which are
20 provided by the shock absorber. Accordingly, a "soft" compression and rebound stroke is produced when the flow of damping fluid in the working chamber is relatively unrestricted. In contrast, a "firm" compression and rebound stroke is produced when there is an increased restriction in the flow of damping fluid in the working chamber.

In selecting the amount of damping that a shock absorber is to provide, three
25 vehicle performance characteristics are often considered: ride comfort, vehicle handling and road holding ability. Ride comfort is often a function of the spring constant of the main springs of the vehicle, as well as the spring constant of the seat, tires, and the damping of the shock absorbers. Vehicle handling is related to the variation in the vehicle's attitude (i.e., roll, pitch and yaw). For optimum vehicle handling, relatively
30 large damping forces are required to avoid excessively rapid variation in the vehicle's attitude during cornering, acceleration, and deceleration. Road holding ability is generally a function of the amount of contact between the tires and the ground. To

optimize road holding ability, large damping forces are required when driving on irregular surfaces to prevent loss of contact between the wheels and the ground for an excessive period of time.

Because different driving characteristics depend on the amount of damping forces the shock absorber provides, it is often desirable to have a shock absorber in which the amount of damping forces generated by the shock absorber is adjustable. One method for selectively changing the damping characteristics of a shock absorber is disclosed in European Patent Application Publication No. 0 186 908 A2. In European Patent Application Publication No. 0 186 908 A2, a controller detects the distance between the body of the automobile and the front wheel so as to determine the contour of the surface. A rotary valve in each of the rear shock absorbers is then adjusted so that the rear shock absorbers are able to provide the desired amount of damping forces.

Another method for selectively changing the damping characteristics of a shock absorber is disclosed in PCT International Publication No. WO 88/06983. In PCT International Publication No. WO 88/06983, the shock absorber has a solenoid which controls the flow of damping fluid into pressure chambers which are located adjacent to valve disks which control the damping characteristics of the shock absorber. Upon movement of the plunger of the solenoid, the pressure in these pressure chambers changes so that the damping characteristics of the shock absorber may be varied.

Some of the methods which are used for selectively changing the damping characteristics of a shock absorber require that the displacement of the piston within the pressure cylinder be known. This information is used for determining the velocity and acceleration of the sprung portion of the automobile with respect to the unsprung portion so that the appropriate damping forces may be generated. One method for sensing the position of the piston in the pressure cylinder is disclosed in United States Patent No. 4,788,489. However, this reference requires that both the reserve tube and the piston rod be grounded while the pressure cylinder is electrically insulated from the piston rod and the reserve tube. Furthermore, this reference requires that the piston be made of an electrically insulating material, and that the pressure cylinder be electrically insulated from the reserve tube at a region near the base valve.

SUMMARY OF THE INVENTION

Accordingly, a primary object of the present invention is to provide a method and apparatus for determining the displacement of the piston within a shock absorber. In this regard, a related object of the present invention is to provide a method and apparatus for determining the velocity and acceleration of a piston within the pressure cylinder of a shock absorber.

Another object of the present invention is to provide a method and apparatus for determining the displacement of a piston within a shock absorber in which the position of the piston may be determined by measuring the capacitance between the pressure cylinder and the piston rod.

Another object of the present invention is to provide a method and apparatus for determining the displacement of a piston within a shock absorber in which the number of components within the shock absorber can be minimized. In this regard, a related object of the present invention is to provide method and apparatus for determining the displacement of a piston within a shock absorber which is low in cost.

Another object of the present invention is to provide a method and apparatus for determining the displacement of the piston within a shock absorber which is relatively simple and may be used in conjunction with dynamic adjustment of the damping characteristics of the shock absorber.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects of the present invention will become apparent to one skilled in the art upon reading the following specification and by reference to the following drawings in which:

FIG. 1 is an illustration of an automobile using the method and apparatus for determining the displacement of a piston within a shock absorber according to the teachings of the preferred embodiment of the present invention; and

FIGS. 2A and 2B is the schematic representation of the shock absorber using the method and apparatus for determining the displacement of a piston within a shock absorber according to the teachings of the preferred embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to FIG. 1, a plurality of four shock absorbers 10 according to the preferred embodiment of the present invention are shown. The shock absorbers 10 are depicted in operative association with a diagrammatic representation of a conventional automobile 12. The automobile 12 includes a rear suspension system 14 having a transversely extending rear axle assembly (not shown) adapted to operatively support the vehicle's rear wheels 18. The rear axle assembly is operatively connected to the automobile 12 by means of a pair of shock absorbers 10 as well as by the helical coil springs 20. Similarly, the automobile 12 has a front suspension system 22 including a transversely extending front axle assembly (not shown) to operatively support the front wheels 26. Front axle assembly is operatively connected to the automobile 12 by means of a second pair of shock absorbers 10 and by the helical coil springs 28. The shock absorbers 10 serve to damp the relative movement of the unsprung portion (i.e., the front and rear suspension systems 22 and 14) and the sprung portion (i.e., the body 30) of the automobile 12. While the automobile 12 has been depicted as a passenger car, the shock absorber 10 may be used with other types of automotive vehicles or in other types of applications. Further, the term "shock absorber" as used herein will refer to shock absorbers in the general sense of the phrase and will include MacPherson struts. In addition, the shock absorbers may be used with other types of suspension systems as well.

To allow the damping characteristics of the shock absorbers 10 to be controlled, a mode select switch 32 and an electronic control module 34 are provided. The mode select switch 32 is located within the passenger compartment 36 of the automobile 12 and is accessible by the occupants of the automobile 12. The mode select switch 32 is used for selecting which type of damping characteristics the shock absorbers 10 are to provide (i.e., firm, soft or automatic). The electronic control module 34 receives the output from the mode select switch 32 and is used for generating electronic control signals for controlling damping characteristics of the shock absorbers 10. By controlling the damping characteristics of the shock absorbers 10, the shock absorbers 10 are able to dampen relative movement between the body 30 and the suspension of the automobile 12 in such a manner as to optimize both ride comfort and road handling ability simultaneously.

The structure of the shock absorbers 10 will now be described with reference to FIGS. 2A and 2B. The shock absorber 10 comprises an elongated reserve tube 38 which engages a cup-shaped oil cap 40 at the upper end of the reserve tube 38. The reserve tube 38 also engages a base cup 42 at the lower end of the reserve tube 38 so as to form a chamber which is able to store damping fluid. Extending axially through the oil cap 40 is a piston rod 44 which is secured to a reciprocating piston assembly 46 at the lower end of the piston rod 44. The piston assembly 46 is axially displaceable within an elongated tubular pressure cylinder 48 which is disposed within the reserve tube 38. The pressure cylinder 48 defines a working chamber 50 in which the upper portion of the working chamber 50 is located above the piston assembly 46, while the lower portion of the working chamber 50 is located below the piston assembly 46. Disposed between the piston assembly 46 and the pressure cylinder 48 is a teflon sleeve 51 which is used to facilitate movement of the piston assembly 46 with respect to pressure cylinder 48. While the piston assembly 46 may be that which is disclosed in United States Serial No. 322,774 filed on March 13, 1989, which is hereby incorporated by reference, other suitable piston assemblies may be used.

To connect the shock absorber 10 to the rear axle assembly of the automobile 12, the shock absorber 10 comprises a circular end fitting 52. The circular end fitting 52 is secured to the base cup 42 of the shock absorber 10 by a suitable means such as welding. Within the circular end fitting 52 is disposed a mounting pin 54 disposed within a bushing 56 which is adapted to engage the axle assembly of the automobile 12. To connect the shock absorber 10 to the body 30 of the automobile 12, a first retainer 58 and a second retainer 60 are provided. The first retainer 58 and the second retainer 60 are disk shaped and have a central aperture operable to receive the piston rod 44. The first retainer 58 is disposed above the body 30, while the second retainer 60 is disposed below the body 30. The first retainer 58 has an upwardly facing annular indentation 62 which is able to accommodate a first disk-shaped cushion 64 which is disposed between the body 30 of the automobile 12 and the first retainer 58. Similarly, the second retainer 60 has a downwardly facing annular indentation 66 which is operable to receive a second disk-shaped cushion 68 which is disposed between the body 30 of the automobile 12 and the second retainer 60.

The shock absorber 10 further comprises a self-locking nut 70 which is disposed

on the piston rod 44 immediately above the first retainer 58. The self-locking nut 70 has an internally threaded bore which is able to threadably engage the threaded upper end portion of the piston rod 44. Accordingly, by rotating the self-locking nut 70 on the upper portion of the piston rod 44, both the first retainer 58 and the first cushion
5 64 are displaced in a direction toward the body 30 of the automobile 12.

The second retainer 60 is positionally secured in part by means of an annular spacer 72 which is disposed immediately above a dirt shield cap 73. The spacer 72 has a central bore which is able to receive the upper end portion of the piston rod 44. A pal nut 74 is disposed between the second retainer 60 and the spacer 72. The pal nut
10 74 is generally disk shaped and has a central bore which is able to receive the piston rod 44. The pal nut 74 is used to locate and secure the spacer 72.

To permit electrical communication between the electronic control module 34 and the shock absorber 10, the shock absorber 10 further comprises an electrical connector assembly 76. The electrical connector assembly 76 allows for rapid electrical
15 decoupling of the shock absorber 10 from the electronic control module 34 so that the shock absorber 10 may be replaced. The electrical connector assembly 76 may be of the type which is shown in United States Serial No. 377,236 filed on July 7, 1989, though other suitable electrical connectors may be used.

To support the piston assembly 46 on the piston rod 44, an axially extending
20 piston post 78 and a piston post rod nut 80 are provided. The piston post 78 is generally circular in cross-section and extends axially through the central bore (not shown) of the piston assembly 46. The piston post 78 is secured to the piston rod 44 by the piston post rod nut 80. The piston post rod nut 80 is annularly shaped and comprises an internally threaded bore which is able to mate with the externally threaded
25 lower portion of the piston rod 44.

To support the piston rod 44 within the working chamber 50, a rod guide 86 is provided. The rod guide 86 is disposed at the upper end of the pressure cylinder 48. The rod guide 86 has a centrally disposed bore which is able to receive and provide lateral support to the piston rod 44. The rod guide 86 should preferably be made from
30 an electrically insulating material such as ceramic, though other suitable materials may be used. To prevent damping fluid from leaking from the shock absorber 10 between the piston rod 44 and the oil cap 40, an annular oil seal 87 is provided. The annular

oil seal 87 is disposed adjacent to the oil cap 40 and the piston rod 44 so as to prevent damping fluid from leaking therebetween during movement of the piston rod 44. The oil seal 87 is upwardly secured against the oil cap 40 by means of an oil seal spring 88 which exerts an upwardly directed force on the oil seal 87 by means of an oil seal retainer 89 which is disposed between oil seal 87 and the oil seal spring 88. An anti-extrusion ring 90 is also disposed between the oil cap 40 and the piston rod 44 which is used to prevent the oil seal 87 from extrusion through the oil cap 40 upon upward movement of the piston rod 44. While the anti-extrusion ring 90 should preferably be made from an electrically insulating material such as ceramic, other suitable materials may be used. A base valve, generally designated by the numeral 91, is located in the lower end of the pressure cylinder 48 and is used to control the flow of damping fluid between the working chamber 50 and the reservoir 84. The base valve 91 comprises a generally cup-shaped pressure cylinder end portion 92 which is disposed coaxially with, and adjacent to, the lower portion of the pressure cylinder 48. The end portion 92 contains a peripherally upwardly disposed recess 93 which is operable to engage the lower portion of the pressure cylinder 48. The pressure cylinder 48 is secured to the recess 93 by a suitable means such as a press fit.

To provide means for determining the position of the piston assembly 46 with respect to the pressure cylinder 48, a capacitance sensor 94 is provided. The capacitance sensor 94 is used to determine the capacitance between the inner surface of the pressure cylinder 48 and the piston rod 44/piston assembly 46. The capacitance sensor 94 is therefore electrically connected to the piston rod 44 as well as the pressure cylinder 48. It has been determined that the capacitance between the piston rod 44/piston assembly 46 and the inner surface of the pressure cylinder 48 may be approximated as follows:

$$C = K \frac{2\pi\epsilon_0 l}{\ln(b/a)}$$

where:

- 30 K = Dielectric constant of the teflon sleeve 51 and the damping fluid
- ϵ_0 = permittivity of a vacuum
- l = length of the pressure cylinder 48 above the piston assembly 46
- a = radius of the piston rod 44

b = radius of the inner surface of the pressure cylinder 48.

Accordingly, the capacitance between the piston rod 44/piston assembly 46 and the inner surface of the pressure cylinder 48 will change in response to the change in the displacement of the piston assembly 46 within the pressure cylinder 48. For this reason, the displacement of the piston assembly 46 may be determined by measuring the capacitance between the piston rod 44/piston assembly 46 and the inner surface of the pressure cylinder 48. In addition, because the displacement may be differentiated, the velocity as well as acceleration of the piston assembly 46 may also be determined.

The manner in which the shock absorber 10 of the present invention is used will now be described. The electronic control module 34 first senses the capacitance between the piston rod 44/piston assembly 46 and the pressure cylinder 48. The electronic control module 34 uses this information to determine the degree of compression and rebound of the shock absorber 10. The electronic control module 34 then adjusts the flow of damping fluid through the piston assembly 46 in response to the changes in capacitance between the piston rod 44/piston assembly 46 and the pressure cylinder 48.

The capacitance sensor 94 may be disposed within the electronic control module 34, though it may be disposed in other regions of the automobile 12 which are accessible to the shock absorber 10. It will be noted that the shock absorber 10 does not require the use of an accelerometer for determining the displacement of the piston assembly 46 within the pressure cylinder 48. For this reason, the shock absorber 10 is simpler than that which would be required if the shock absorber 10 used an accelerometer for sensing piston displacement. Furthermore, there is no need for insulating the pressure cylinder 48 from the reserve tube 38, nor a need to fabricate the piston assembly 46 from electrically insulating material as required in other methods for capacitively sensing the displacement of the piston assembly 46.

It will be appreciated that only the preferred embodiment of the present invention was described above. For example, other embodiments may sense the capacitance between the reserve tube and the piston rod. It will also be appreciated that the present invention is susceptible to modification, variation and change without departing from the scope of the invention.

CLAIMSWhat is Claimed is:

1. A shock absorber comprising:
a pressure cylinder forming a working chamber having first and second portions
5 operable to store damping fluid;
valve means for controlling the flow of damping fluid between said first and said
second portions of said working chamber; and
means for determining the position of said valve means with respect to said
pressure cylinder by determining the capacitance between said pressure cylinder and said
10 valve means.
2. The shock absorber according to Claim 1, wherein said valve means
comprises a piston assembly disposed within said pressure cylinder.
3. The shock absorber of Claim 2, further comprising a teflon sleeve disposed
between said piston assembly and said pressure cylinder.
- 15 4. The shock absorber of Claim 3, wherein said pressure cylinder comprises an
interior surface forming a first conductor and said piston rod forming a second
conductor, said first and second conductors operable to form a capacitor.
5. The shock absorber of Claim 4, wherein said teflon sleeve forms a dielectric
between said first and second conductors.
- 20 6. The shock absorber of Claim 5, wherein said means for determining the
position of said valve means is operable to determine the position of said piston
assembly with respect to said pressure cylinder by measuring the capacitance between
said first and second conductors.
7. The shock absorber of Claim 6, wherein said capacitance approximately varies
25 according to the following equation:

$$C = K \frac{2\pi\epsilon_0 l}{\ln(b/a)}$$

where:

- 5 C = capacitance,
 K = dielectric constant of said teflon sleeve and said damping fluid,
 ϵ_0 = permittivity of a vacuum,
 l = length of said pressure cylinder above said piston assembly,
 a = radius of said piston rod, and
10 b = radius of said interior surface of said pressure cylinder.

8. A suspension system for controlling the movement between the sprung and unsprung portions of an automobile, said suspension system comprising:

a plurality of shock absorbers disposed between the sprung and unsprung portions of said automobile, each of said shock absorbers comprising:

- 15 a. a pressure cylinder forming a working chamber having first and second portions operable to store damping fluid,
 b. valve means for controlling the flow of damping fluid between said first and second portions of said working chamber during compression of said shock absorbers, and

20 means for changing the damping characteristics generated by at least one of said shock absorbers in response to the change in capacitance between said pressure cylinder and said valve means of said one shock absorber.

9. The suspension system of Claim 8, further comprising a teflon sleeve disposed between said valve means and said pressure cylinder of said one shock absorber.

25 10. The suspension system of Claim 9, wherein said pressure cylinder of said one shock absorber comprises an interior surface forming a first conductor and said piston rod forming a second conductor, said first and second conductors operable to form a capacitor.

11. The suspension system of Claim 10, wherein said teflon sleeve forms a dielectric between said first and second conductors.

12. The suspension system of Claim 11, wherein said means for changing the damping characteristics of at least one of said shock absorbers is operable to determine
5 the position of said valve means of said one shock absorber with respect to said pressure cylinder of said one shock absorber by measuring the capacitance between said first and second conductors.

13. The suspension system of Claim 12, wherein said capacitance approximately varies according to the following equation:

$$10 \quad C = K \frac{2\pi\epsilon_0 l}{\ln(b/a)}$$

where:

C = capacitance,
15 K = dielectric constant of said teflon sleeve and said damping fluid,
 ϵ_0 = permittivity of a vacuum,
 l = length of said pressure cylinder of said one shock absorber above said
valve means of said one shock absorber,
 a = radius of said piston rod, and
20 b = radius of said inner surface of said pressure cylinder of said one shock
absorber.

14. A method for adjusting the damping characteristics of a shock absorber during compression and rebound, said shock absorber having a piston assembly disposed within a pressure cylinder, said method comprising the steps of:
25 sensing the capacitance between said piston rod and said pressure cylinder; and
adjusting the flow of damping fluid through said piston assembly in response to the change in capacitance between said piston rod and said pressure cylinder.

15. The method of Claim 14, wherein said capacitance between said piston rod and said pressure cylinder changes in response to the position of said piston assembly within said pressure cylinder.

16. The method of Claim 14, wherein the change of the capacitance between said piston rod and said pressure cylinder is responsive to the degree of compression of said shock absorber.

17. The method of Claim 14, wherein the change of the capacitance between said piston rod and said pressure cylinder is responsive to the degree of rebound of said shock absorber.


18. The method of Claims 15, comprising the step of disposing a teflon sleeve between said piston assembly and said pressure cylinder, said teflon sleeve operable to form a dielectric between said pressure cylinder and said piston assembly.

19. The method of Claim 14, wherein said piston comprises a radially extended surface and said pressure cylinder comprises an inner surface, said capacitance approximately varies according to the following equation:


$$C = \frac{2\pi\epsilon_0 l}{\ln(b/a)}$$

where:

- 20 C = capacitance,
 ϵ_0 = permittivity of said teflon sleeve [confirm],
 l = length of said pressure cylinder above said piston,
 a = radius of said radially extended surface of said piston, and
 b = radius of said inner surface of said pressure cylinder.

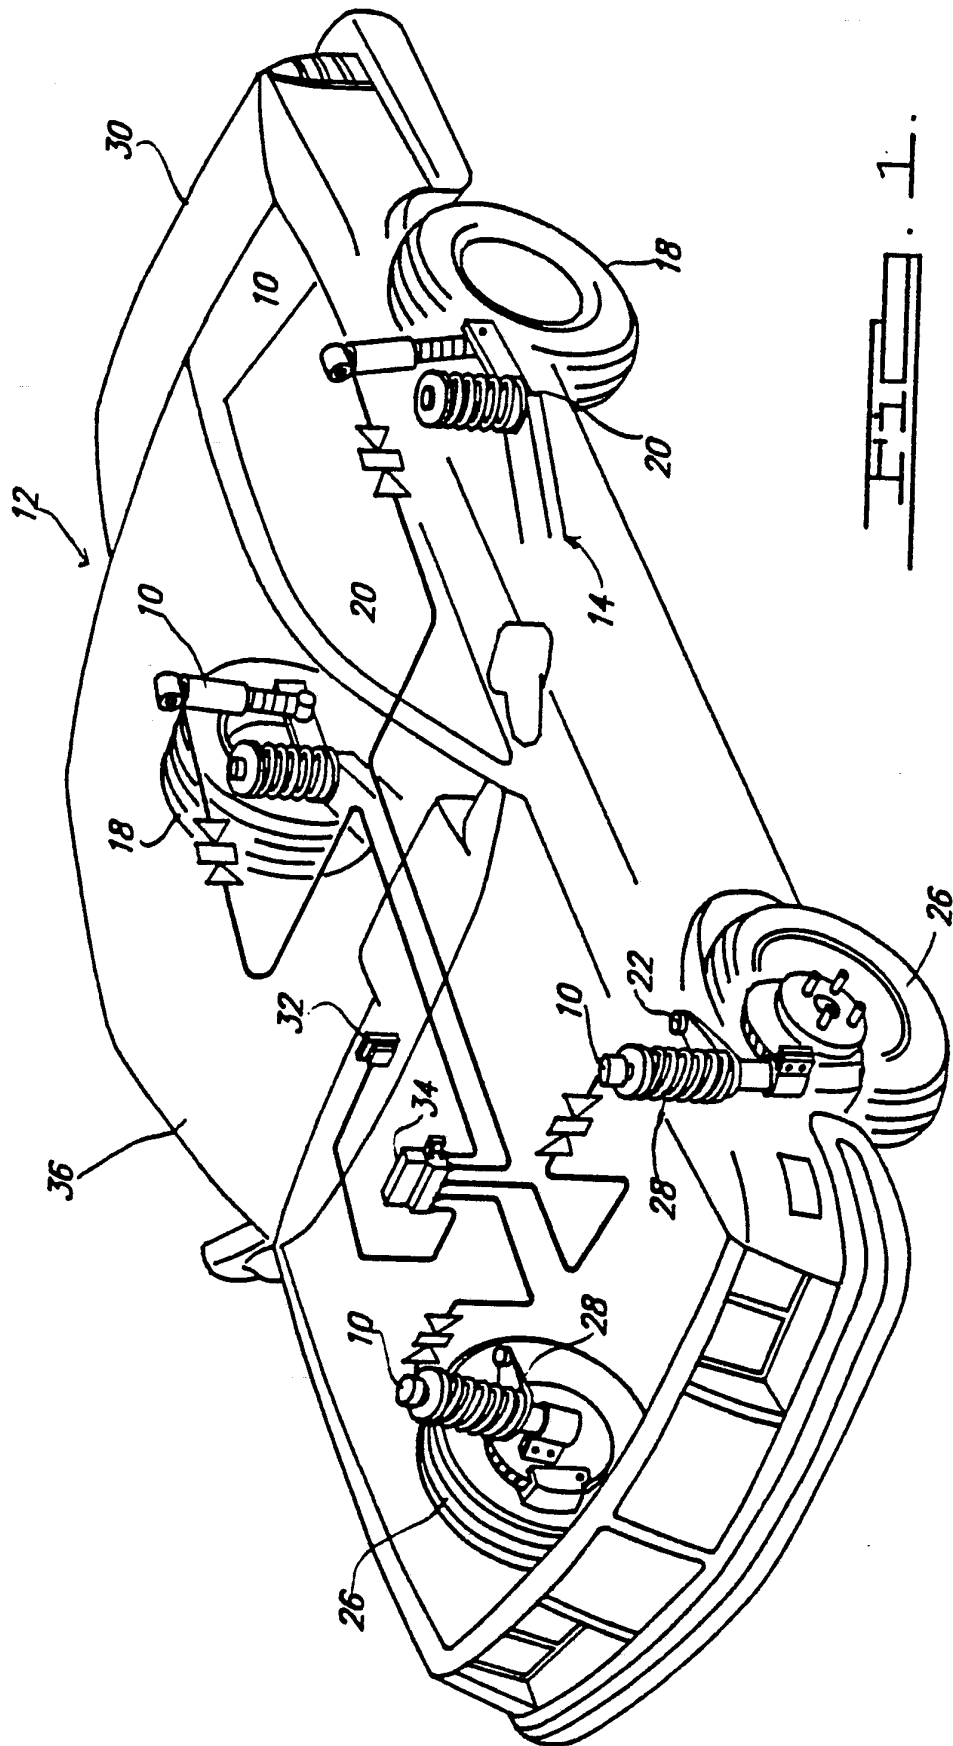

2/2

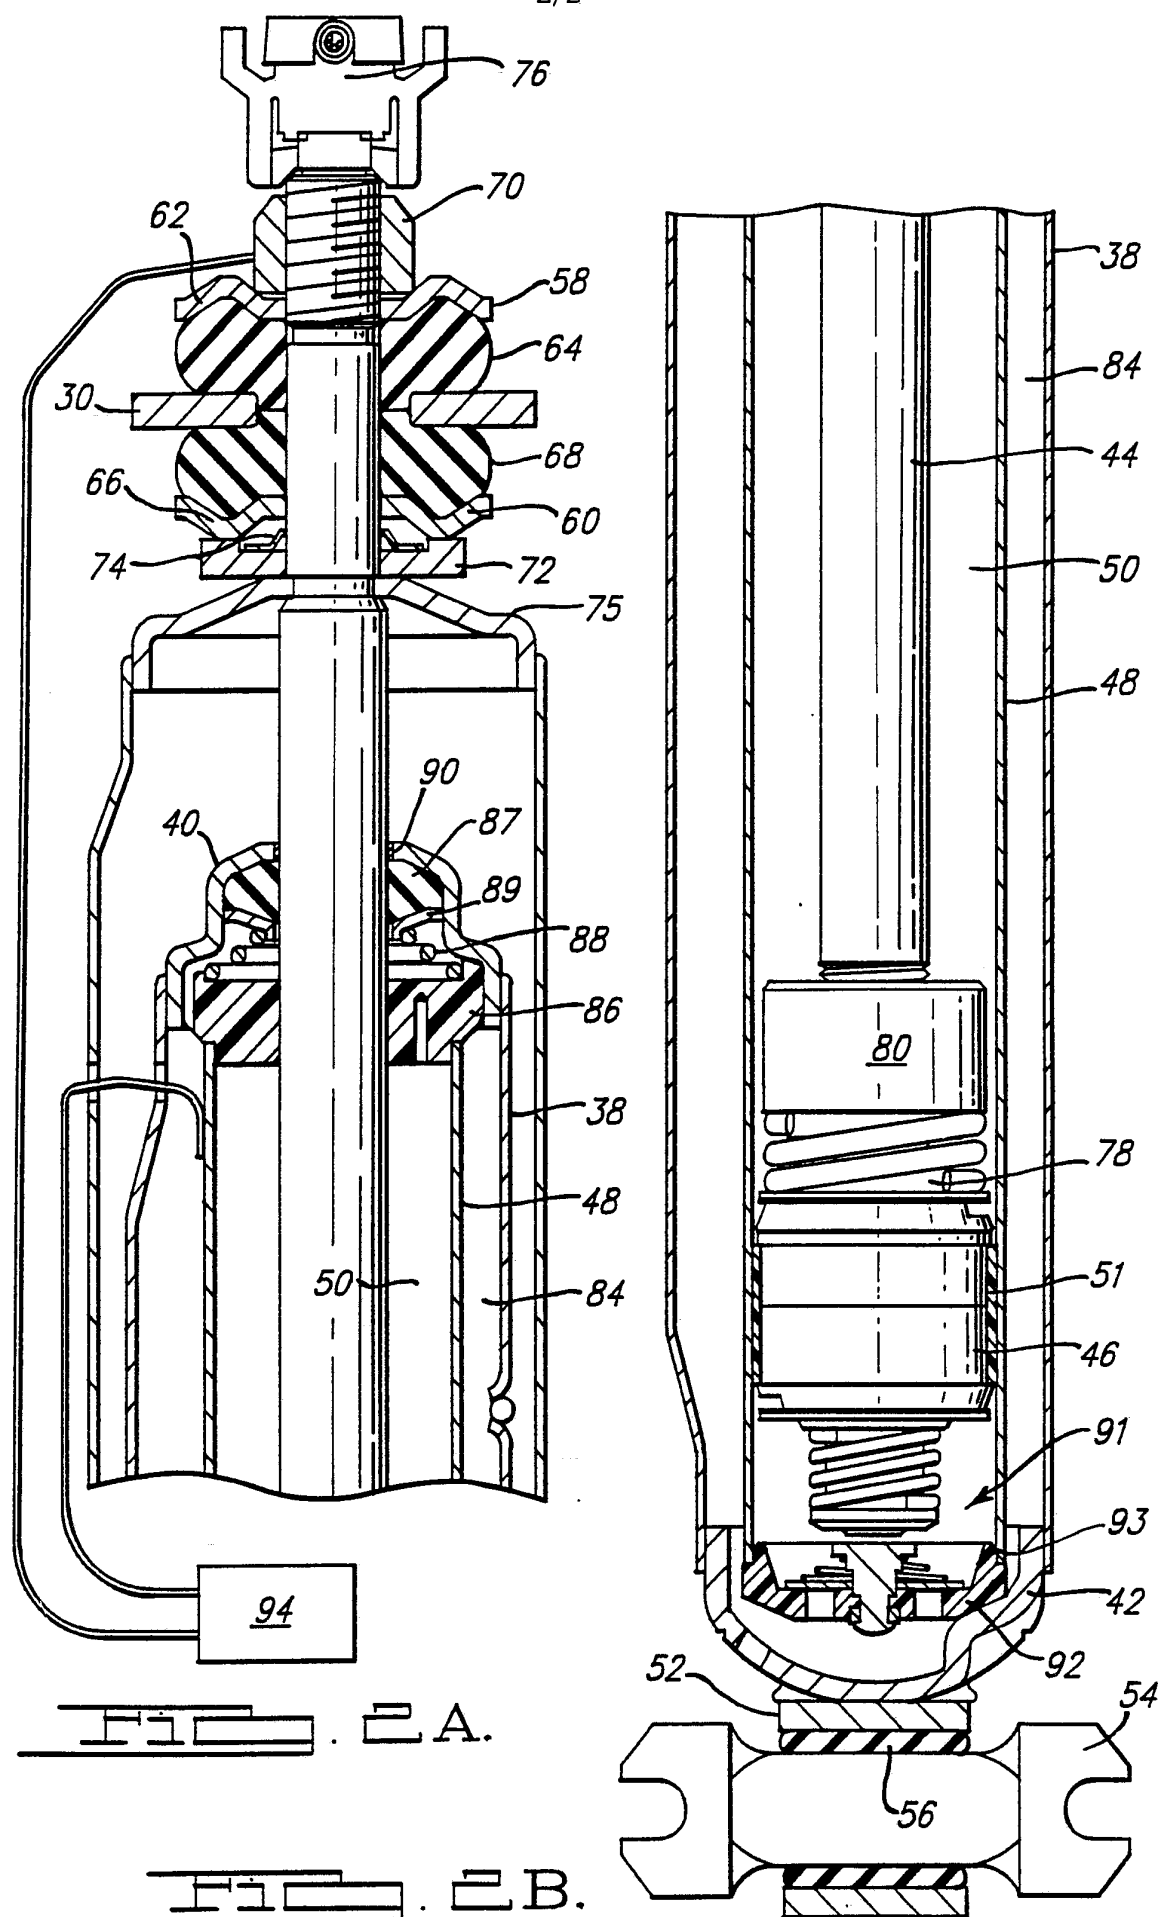

INTERNATIONAL SEARCH REPORT

International Application No. PCT/US91/08397

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC IPC B60G 11/26 U.S. CL: 280/707		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
U. S.	280/707, 840, Dig. 1 73/658 324/59, 71.1, 207, 208	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹		
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	US, A, 4,141,572 (SORENSEN) 27 FEBRUARY 1979	
A	US, A, 4,674,768 (MORRA) 23 JUNE 1987	
A	US, A, 4,726,453 (OBSTFELDER ET. AL.) 23 FEBRUARY 1988	
A,P	US, A, 4,995,635 (GUY) 26 FEBRUARY 1991	
A,P	US, A, 5,000,478 (KERASTAS) 19 MARCH 1991	
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents: ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search		Date of Mailing of this International Search Report
20 FEBRUARY 1992		11 MAR 1992
International Searching Authority		Signature of Authorized Officer
ISA/US		KENNETH R. RICE