



(43) International Publication Date
14 August 2014 (14.08.2014)

(51) International Patent Classification:

A47F 5/08 (2006.01) A47F 5/12 (2006.01)
A47H 1/00 (2006.01) A47B 57/44 (2006.01)

(21) International Application Number:

PCT/US2013/062297

(22) International Filing Date:

27 September 2013 (27.09.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/759,577 5 February 2013 (05.02.2013) US

(71) Applicant: **OPTO INTERNATIONAL, INC.** [US/US];
1325 North Mittel Blvd, Wood Dale, IL 60191 (US).

(72) Inventors: **WOOD, Graham, Robert**; 20 South Oak
Forest Drive, Callawase Island - Okatie, SC 29909 (US).
WOODLEY, Brett, A.; 2028 Highland Avenue, Wilmette,
IL 60091 (US). **HALLER, Erich**; 250 Old Aok Drive
#273, Buffalo Grove, IL 60089 (US).

(74) Agents: **SHEKLETON, Gerald, T.** et al.; Husch Black-
ewell LLP, 120 South Riverside Plaza, Suite 2200, Chica-
go, IL 60606 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

[Continued on next page]

(54) Title: POP-UP SHELVING SYSTEM

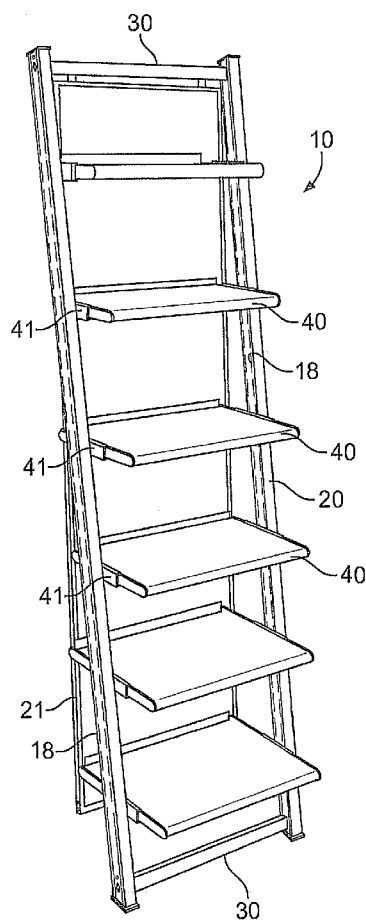


FIG. 1

(57) Abstract: The subject invention comprises a modular, pop-up shelf display system that includes vertical slotted shelf support posts, horizontal tie bars, and shelf or accessory members. Two slotted support posts are connected at the top and bottom ends by a pair of tie bars; the top of each slotted support post leans against a wall. Shelves or accessories, which include brackets that engage the slots in the vertical support posts are then attached to the support posts to form horizontal shelves or accessories between the support posts at desired heights and orientation. The system includes internal connectors positioned inside the post ends and the ends of the tie bars which secure the tie bars to the posts to secure the posts in an upright manner against the wall.



WO 2014/123588 A1



DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

— *with international search report (Art. 21(3))*

TITLE

POP-UP SHELVING SYSTEM

FIELD OF INVENTION

[0001] This application relates to a modular shelving system for use in retail sales, and more particularly to a shelving system which is easily assembled and disassembled while maintaining a high degree of stability and support.

BACKGROUND OF THE INVENTION

[0002] In recent years a new type of retail sales store has evolved. At different seasonal times of the year, or for other reasons, a "pop-up" store or other event driven opportunities may open for a limited period of time to sell holiday related items or other specific goods. It is important for such stores to quickly and easily set up and open, and then knock down and close. Traditional shelves and other display fixtures can be difficult and time-consuming to assemble and disassemble. Therefore, there is a need for shelving and display fixtures that can be easily set-up and quickly taken down without leaving holes or nail marks in the walls.

[0003] Accordingly, one of the benefits of the subject invention is a shelf assembly that may be easily and quickly assembled and disassembled by unskilled labor, with no tools.

[0004] A further benefit of the subject invention is a shelf assembly that has shelves with adjustable heights, and orientation.

[0005] A still further benefit of the subject invention is a shelf assembly that has interchangeable and common parts for easier assembly and less expensive manufacture.

SUMMARY OF THE INVENTION

[0006] The subject invention comprises a modular, pop-up shelf display system that includes vertical slotted shelf support posts, horizontal tie bars, and shelf or accessory members. Two slotted support posts are connected at the top and bottom ends by a pair of tie bars; the top of each slotted support post leans against a wall. Shelves or accessories, which include brackets that engage the slots in the vertical support posts are then attached to the support posts to form horizontal shelves or accessories between the support posts at desired heights and orientation. The system includes internal connectors positioned inside the posts ends and the ends of the tie bars to secure the posts in an upright manner against the wall. A free standing shelf system is also envisioned utilizing the slotted support posts, joined by a pair of tie bars.

CONCISE DESCRIPTION OF THE DRAWINGS

[0007] These and other benefits, features and advantages of the present invention will become apparent to those skilled in the art from the following description and the accompanying figures illustrating preferred embodiment of the invention.

[0008] FIG 1 is a perspective view of one embodiment of the shelf assembly of the subject invention.

[0009] FIG 2 is a side view of the shelf assembly of Fig 1.

[0010] FIG 3 is a perspective view of a shelf assembly of the subject invention, showing a multi section shelf assembly.

[0011] FIG 4 is a perspective view of the top portion of a support post with the post insert in an exploded view

[0012] FIG 5 is an exploded view of a support connector insert of the shelf assembly of Fig 1.

[0013] FIG 6 is an exploded view of a shelf bracket assembly of the subject

invention.

- [0014] FIG 7 is an exploded view of a connector assembly for a shelf of the subject invention.
- [0015] FIG 8 is an exploded view of a free standing assembly according to the subject invention.
- [0016] FIG 9 is a perspective view of a free-standing shelf assembly according to the subject invention.
- [0017] FIG 10(a) is a cross-sectional view along the lines A-A of Fig 10(b).
- [0018] FIG 10(b) is a plan view of the inner side of cam lock insert of the subject invention.
- [0019] FIG 11 is a cross-section of the shelf of Fig 6 of the subject invention, showing the pivoting shelf ledge.

DETAILED DESCRIPTION OF THE INVENTION

[0020] Referring now to Figs 1 and 2 there is shown shelf assembly 10 having vertical support posts 20. The supports 20 are secured together in spaced relation by tie rods 30 at an upper and lower location of the shelf assembly 10. Shelves 40 or other accessories, such as hanger rods 17 (Fig 3), are secured between the vertical supports 20 by brackets 41 on either side of the shelf. Back panel 21 may be a laminated board and serves as a decorative backdrop for the products displayed on the shelf. As such back panel 21 may have decorative designs, as desired. Back panel 21, as best seen in Fig 2, does not support the shelf assembly, nor does it touch the floor 19.

[0021] The vertical support posts 20 lean against the wall at approximately a 10° to 20° angle, and preferably 10°. Each vertical support may have a non-skid foot 22. Fig 3 shows another embodiment where the shelf assembly 50 is a multi-unit assembly, having interlinked upright supports 20 with tie rods 30 between and connected to adjacent vertical supports 20. Vertical support 20 has two opposing sides with channel

slots 18 along the length of the vertical support. These channel slots 18 support the shelves in a manner to be described.

[0022] Fig 3 shows a shelf assembly of the subject invention with multiple sections one of which may support hanger rods 17 or other accessories. As each support post 20 has identical slots and other openings on opposing sides, additional sections can be added without the need for different parts fasteners or tools, thereby contributing to the low cost of equipment and ease of assembly.

[0023] Fig 4 shows the manner of connection of a tie rod 30 to a support post 20. Tie rod insert 31 fits snugly inside the hollow end of the tie rod 30 and is secured there by pin or screw 36 which is inserted through opening 34 of the tie rod into the insert 31. On an outer end of insert 31 is a peg 32 having oppositely positioned pins 35 extending transverse to the longitudinal axis of peg 32 and tie rod 30.

[0024] As best seen Figs 10(a) and 10(b), cam lock insert 26 has a central opening 27 with opposing peripheral wing openings 48 on an outer side, and on an inner side cammed surfaces 28. The cammed surfaces comprise an inclined surface as shown in Fig 10(a). At the start of the inclined plane is a level surface 49 which leads to helical inclined plane 39 and afterwards depression 33 which holds or locks the pins 35 in position.

[0025] Situated inside hollow vertical support is support insert block 24, better seen in Fig 5. Support insert block 24 is sized to fit snugly inside the hollow end of support post 20 and secured there by a screw or other fastener 42. Insert 24 has a channel or recess 25 into which cam lock insert 26 is located on opposite sides of the insert block 24. Each cam lock 26 has a groove or channel 37 that lines up with a similar channel 38 on the insert, so as not to block openings 27 and 29. In use, the cam locks are placed into the channel and locked in place by the use of spring clip 16 in grooves 37 and 38. The insert 24, with cam locks secured, are then placed into the hollow ends of the support post 20. A tie rod 30 aligns the peg 32 and pins 35 for

insertion into and through the central opening 27 of cam lock 26. The tie rod 30 is rotated, causing the pins 35 to engage the cammed surfaces 28, go over the slight ridge 15, into the depression 33, pulling the tie rod into the support post and locking the tie rod into position.

[0026] The shelf assembly 40 is shown in Figs 6 and 7. Shelf assembly 40 comprises shelf panel 45, accessory support assembly 56 and shelf ledge 44. Accessory support assembly 56 includes shelf support brackets 43 and left and right accessory support brackets 41. Bracket 41, as shown in Fig 7 has openings 51 and 52. Opening 51 can be a straight slot, while opening 52 may be an L shaped slot having a vertical component and a lower horizontal component. The horizontal component has an enlarged region at the closed end. When the bracket is installed on the shelf sides as in Fig 6, the bracket angle relative to the shelf can be changed from about 15° to 0° selectively by placement of the fasteners 53 in either extremities of the respective slots. The fasteners 53 secure the bracket 43 to support bracket 41, which may be secured to support posts by insertion of hooks 61 into slots 18 on the support posts. The accessory support brackets 41 slide onto and hold the shelf panel 45 or at the desired angle. The shelf orientation may be reversed to position the shelf ledge at the front of the assembly as desired. Other means for securing the shelf to the support posts while allowing different angled attachments may be used, such as that shown in US. Pat. No. 5,749,480.

[0027] Shelf ledge 44 may also be hinged to allow movement from a first upward vertical position to a second downward vertical position. As shown in Fig 11, the shelf ledge 44 may pivot at one end to allow such movement. The shelf ledge would be pivoted to the upward vertical position when the shelf itself was in an angled position, so that objects placed on the shelf cannot roll or otherwise fall off. When the shelf was level or in a horizontal position, the shelf ledge would be pivoted to the downward vertical position and out of the way. In the embodiment of Fig 11, the shelf panel 45 is enclosed in a monolithic shell, preferably of sheet metal 47. An end panel 46 is secured to the shell 47 by a screw 54 or other fastener which may be self-tapping or engage an

embedded nut as shown. Shelf ledge 44 pivotally secured to an upper end of panel 46 so it can pivot from the raised position to the lowered position, as indicated by the arrow. The lowered position may include a recess 58 in the shelf to provide a substantially flat shelf surface, while allowing the shelf ledge to pivot from a substantially horizontal position to a substantially vertical position. Stop 59 may be formed in end panel to restrict the maximum pivotal movement of the shelf ledge 44 to a 90° position from horizontal, i.e., substantially vertical.

[0028] In the event a free standing unit was desired, a trapezoid shaped assembly may be used with mitered corners as shown in Fig 9. A connector assembly similar to that in Figs 4 and 5 may be used. As shown in Fig 8, lower support rail 55 is attached to support posts 20 at opposite ends by angled connector assemblies 60. Similar to insert 24 in Figs 4 and 5 both cam lock inserts 26 are seated in recess 25 so that the camming surface 28 is facing the interior. With the cam locks seated in the recess, the right angle connector assemblies are inserted into the hollow ends of both support posts 20 and support rail 55. Screws or pins (not shown) are inserted into holes 57 and 52 to secure the support post 20 and support rail 55 together. A spacer 62 may be used between the support post 20 and support rail 55. A similar construction may be used to attach the upper support rail to the top end of the support post. The same structure is then used to construct the opposite side. A tie rod 30 is then used to connect the two structures at the upper end and the lower end in the same manner as described above. Thus, the tie rod 30 is inserted into opening 23 in both left and right support posts, taking care the peg 32 and pins 35 (Fig 4) enter the central opening 27 of cam lock 26, with the pins inserted through wing openings 48. The tie rod 30 is then twisted to bring the pins 35 into contact with the camming surface 28 and then locked in position as the pins overcome ridge 15 and seats in the depression 33. Shelves are secured to support posts in a manner similar to the wall leaning shelf described above.

[0029] It will be understood that the foregoing description is of preferred exemplary embodiments of the invention and that the invention is not limited to the specific forms shown or described herein. Various modifications may be made in the

design, arrangement, and type of elements disclosed herein, as well as the steps of making and using the invention without departing from the scope of the invention as expressed in the appended claims.

CLAIMS

I claim:

1. An easy to assemble shelving system, comprising two support posts each having a bottom end for contact with a floor and an upper end for contact with a wall;
said support posts holding a plurality of shelves or accessories;
an upper tie rod and a lower tie rod;
each of said upper tie rod, lower tie rod and said support posts having opposing first hollow ends;
said two support posts being spaced from each other by said upper tie rod and said lower tie rod, and having a first connector block in each of said first hollow ends;
each of said upper tie rod and said lower tie rod having opposing second hollow ends and a second connector block within said second hollow ends;
each of said second connector blocks having a locking pin, said support posts each having an opening at opposite ends whereby each of said locking pins engage a respective one of said first and second connector block through the respective opening for locking said tie rod with said support post.
2. The shelving system of claim 1 wherein said first connector block includes an insert having a camming surface for engagement with said locking pins.
3. The shelving system of claim 2 wherein said camming surface has an inclined surface followed by a depression for locking said locking pins in place.
4. The shelving system of claim 1, further including a back panel that does not touch the floor.

5. The shelving system of claim 1, wherein said second connector block has a peg at an outer end thereof;

said locking pin comprises a first pin and a second pin;

said peg having said first pin and said second pin on opposite sides of said peg;

said openings comprising a first and a second opening through to a hollow interior of each support post respectively;

said first and second opening each having two opposing wing openings;

a locking insert secured within the hollow interior of each of the support posts;

said locking insert having a third opening for alignment with said opening;

a camming lock within the hollow interior of the support post having a fourth opening alignable with said first and second openings;

whereby the peg is inserted through said first, second and third openings and said first and second pins engage said camming lock to lock said tie rod to said support post.

6. The shelving system of claim 1 further including a shelf or accessory, each of said support posts having receiving structures, said shelf or accessory having holding devices for engagement with said receiving structures and retention of said shelf or accessory between said support posts, said holding devices permitting the retention of said shelf at a desired angle.

7. The shelving system of claim 6 wherein said receiving structures are slots in said support posts and said holding device comprises hooks engageable with said slots.

8. The shelving system of claim 5 wherein said holding devices comprise a bracket having two notches, a first notch being an oval and a second notch being an L-shaped notch, said L-shaped notch having an upper end and a lower end, whereby positioning of a fastener in said first notch and in either of said upper end or said lower end of said second notch determine an angle at which the shelf is retained between said support posts.

9. A shelf for use in the shelving system of claim 1;
said shelf having opposing sides;
said shelf having an end panel attached to a first opposing side;
said first opposing side having a ledge secured to said end panel and which is reciprocally pivotal from a substantially horizontal position to a substantially vertical position;
said end panel having a stop to limit the pivotal movement of said ledge to said substantially vertical position from said substantially horizontal position.
10. The shelf of claim 9 wherein said substantially horizontal position comprises a recessed area in said shelf.
11. The shelf of claim 9 wherein said shelf is encased in a monolithic shelf, and said end panel is attached to said shelf.
12. An easy to assemble shelving system comprising a shelf or accessory, at least two support posts, each of said support posts having receiving structures, said shelf or accessory having holding devices for engagement with said receiving structures and retention of said shelf or accessory between said support posts, said holding devices permitting the retention of said shelf at a desired angle.
13. The shelving system of claim 12 wherein said receiving structures are slots in said support posts and said holding device comprises hooks engageable with said slots.
14. The shelving system of claim 12 wherein said holding devices comprise a bracket having two notches, a first notch being an elongated oval and a second notch being an L-shaped notch, said L-shaped notch having an upper end and a lower end, whereby positioning of a fastener in said first notch and in either of said upper end or said lower end of said second notch determine an angle at which the shelf is retained between said support posts.

15. A connection system, comprising a connecting block for insertion into a hollow end of a lateral support element;
said connecting block having a peg at an outer end thereof;
said peg having said first pin and said second pin on opposite sides of said peg;
a vertical support element having a first opening through to a hollow interior of the vertical support element;
said first opening having two opposing wing openings;
a locking insert within the hollow interior of the vertical support element;
said locking insert having a second opening for alignment with said first opening;
a camming lock within the hollow interior of the vertical support element having a third opening aligned with said first and second opening;
whereby the peg is inserted through said first, second and third openings and said pins engage said camming lock to lock said lateral support element said vertical support element.
16. The connection system of claim 15 further including a shelf or accessory supported between two vertical support elements.
17. A shelf comprising a solid planar member having two opposing sides connected by opposing connecting sides, said planar member having a recess along a first said connecting sides, whereby the opposing sides are supported by spaced support posts; the first connecting side has a pivotal ledge, said pivotal ledge being reciprocally movable from an upright position to a horizontal position within the recess.
18. The shelf of claim 17 whereby a side panel is attached to said first connecting side and said ledge is pivotally connected to said side panel.
19. The shelf of claim 18 whereby said side panel prevents said ledge from movement beyond substantially vertically from substantially horizontal.

1/8

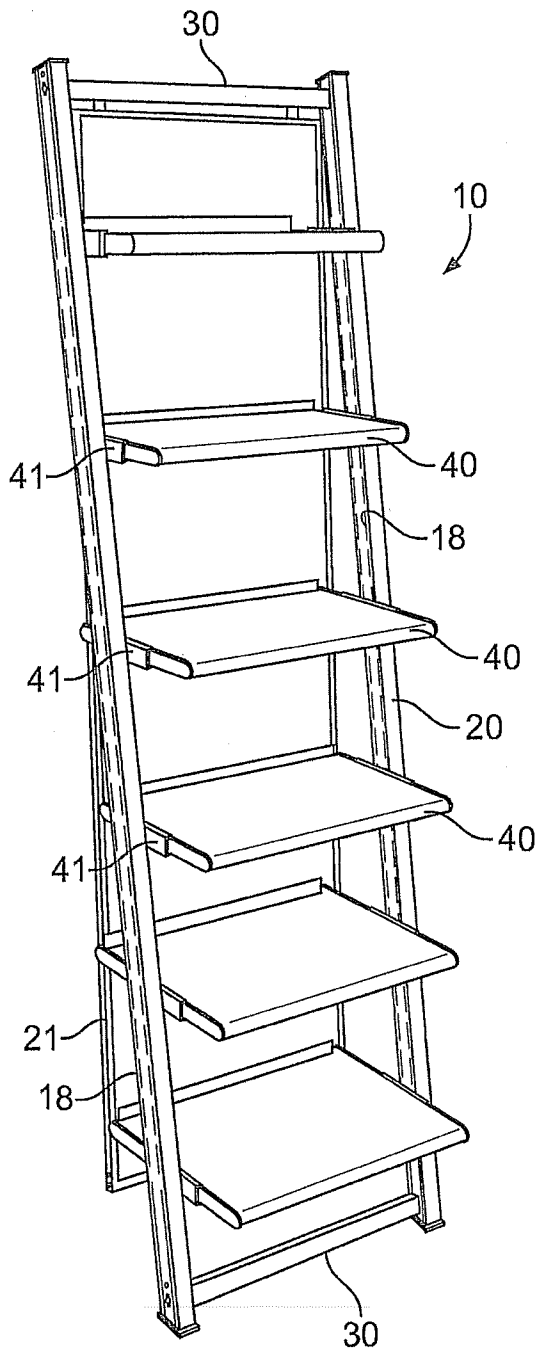


FIG. 1

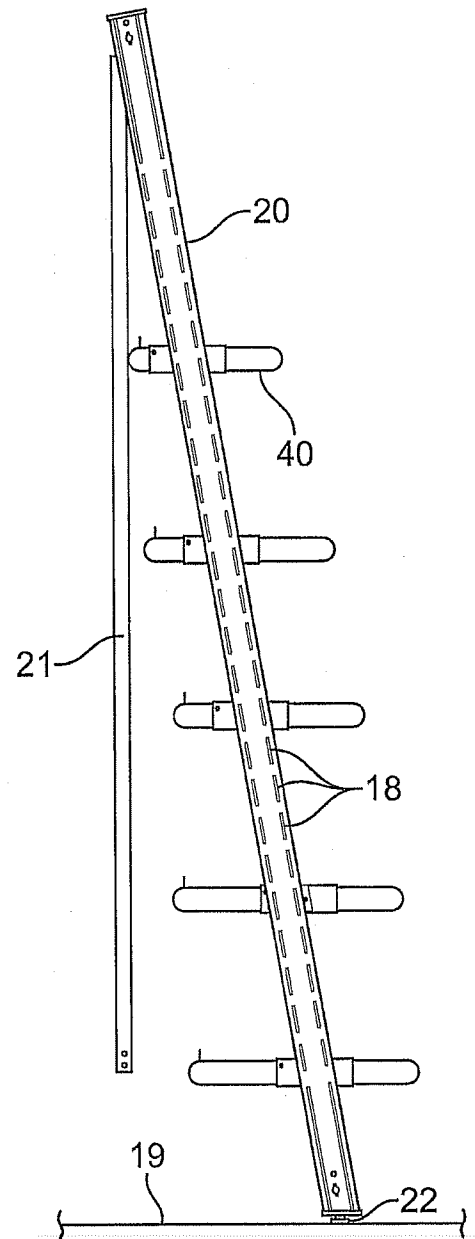


FIG. 2

2/8

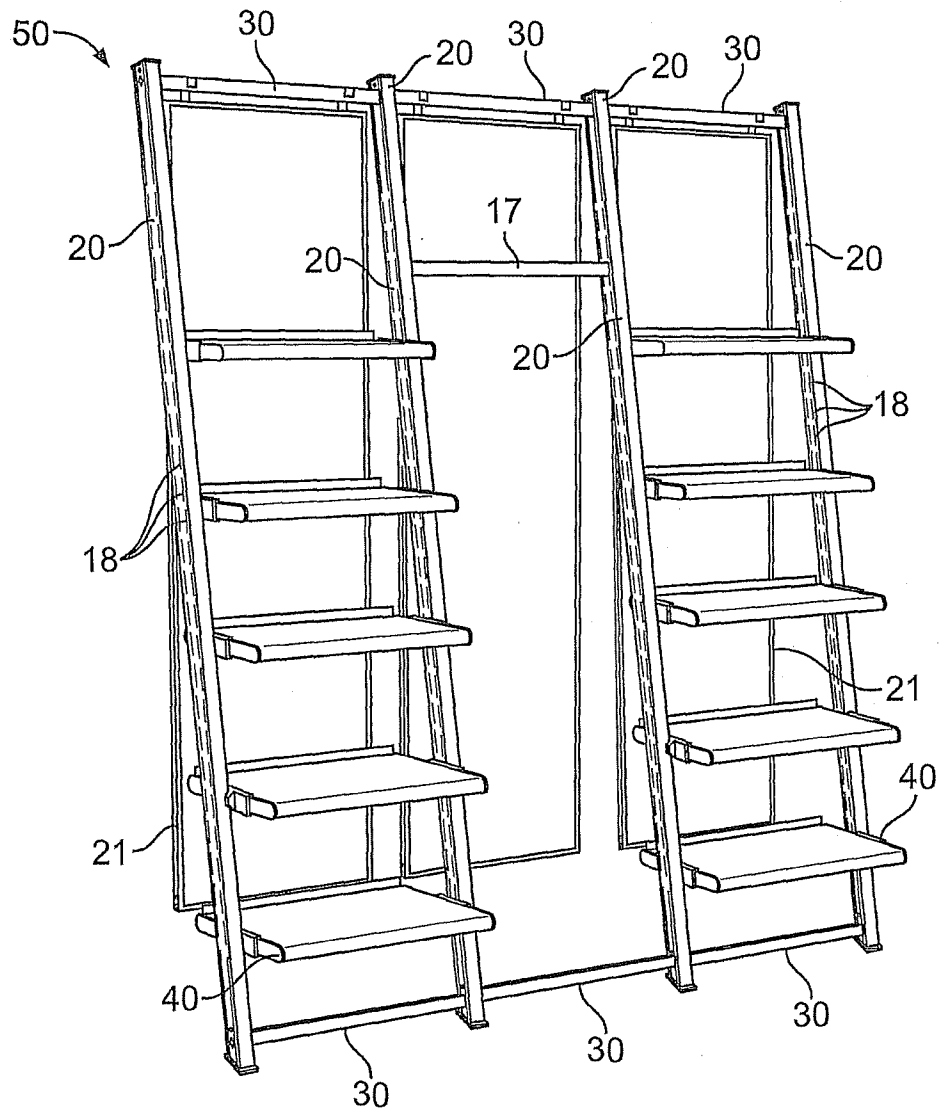


FIG. 3

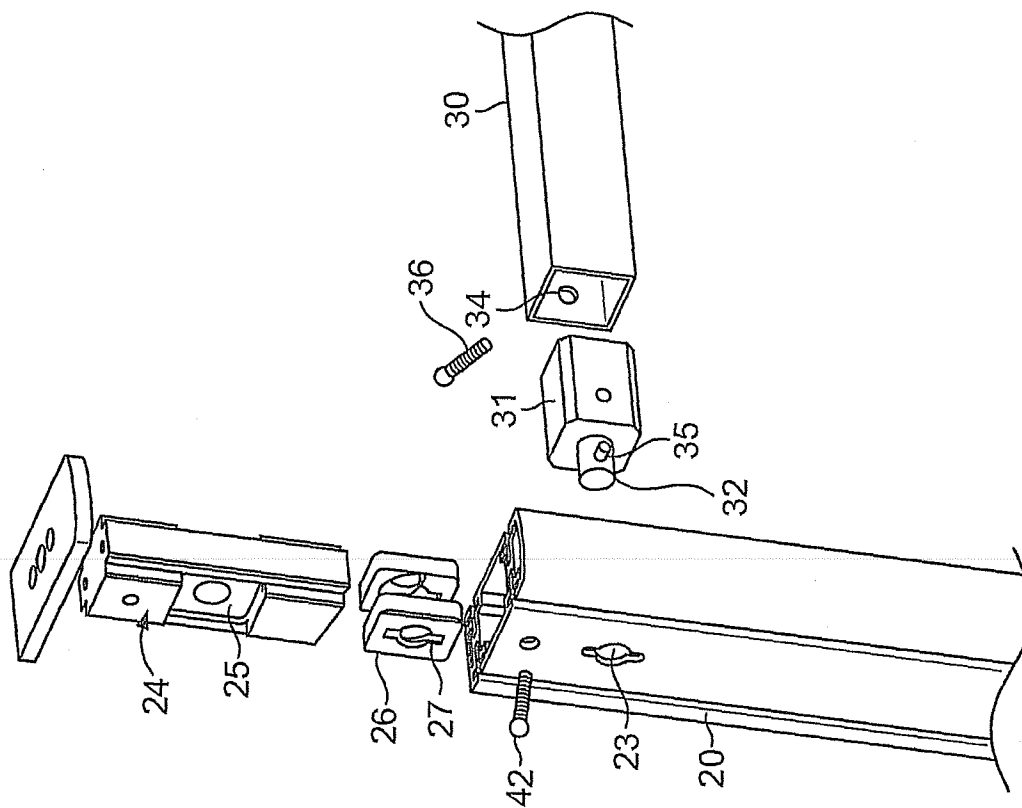


FIG. 4

3/8


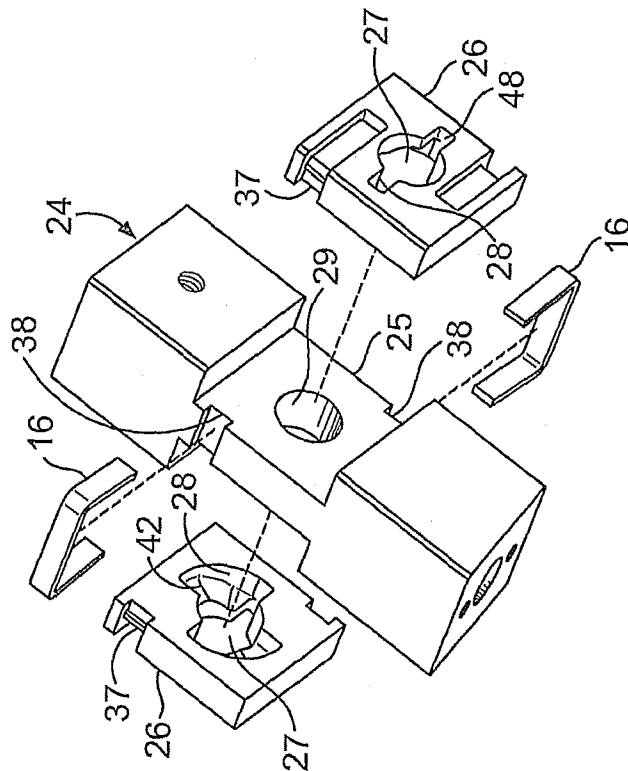


FIG. 5

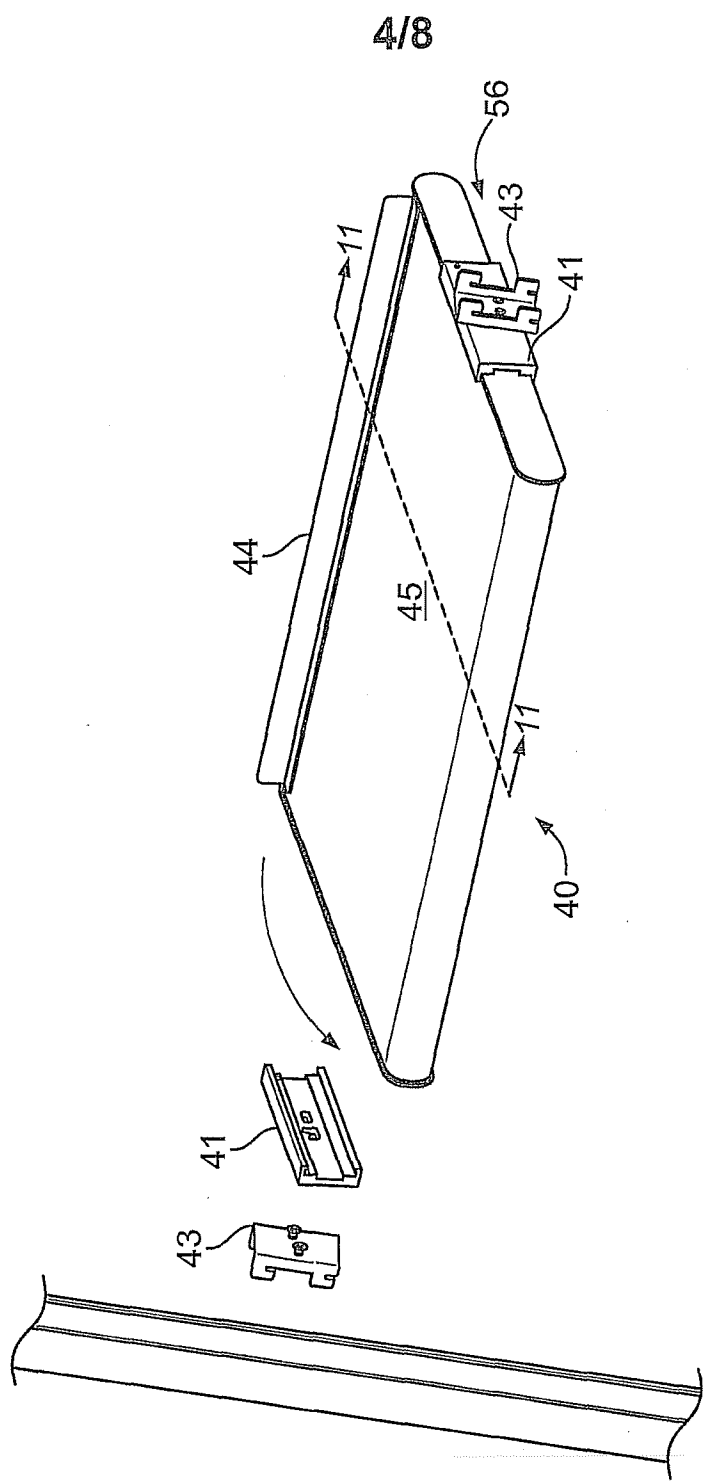

5/8

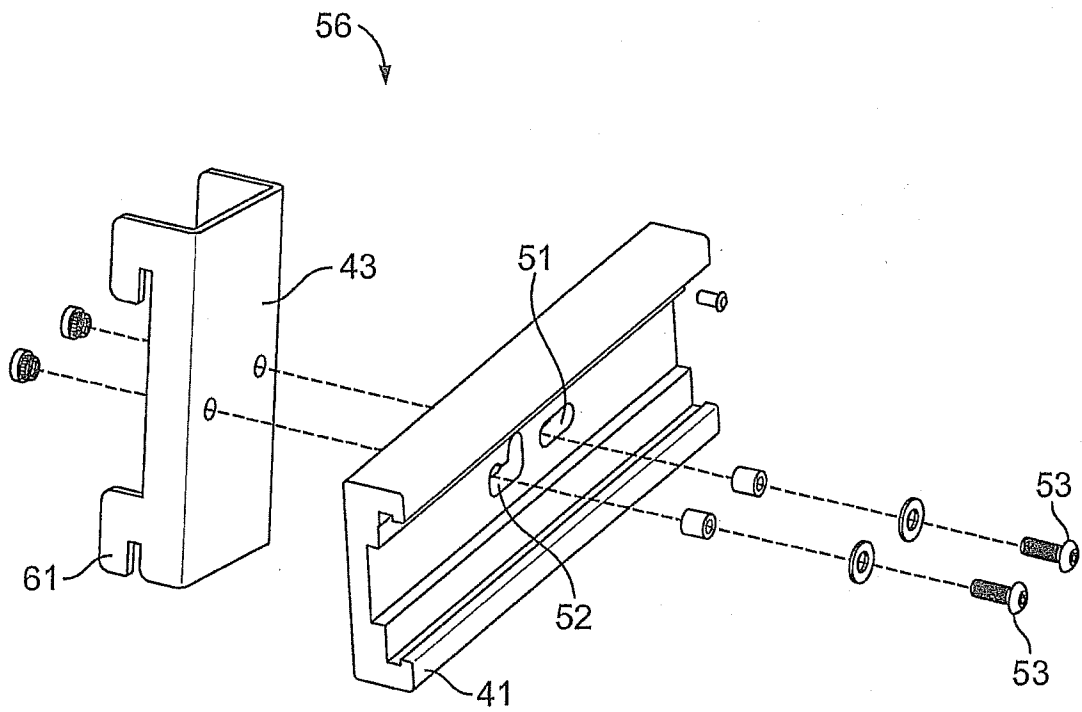


FIG. 7

6/8

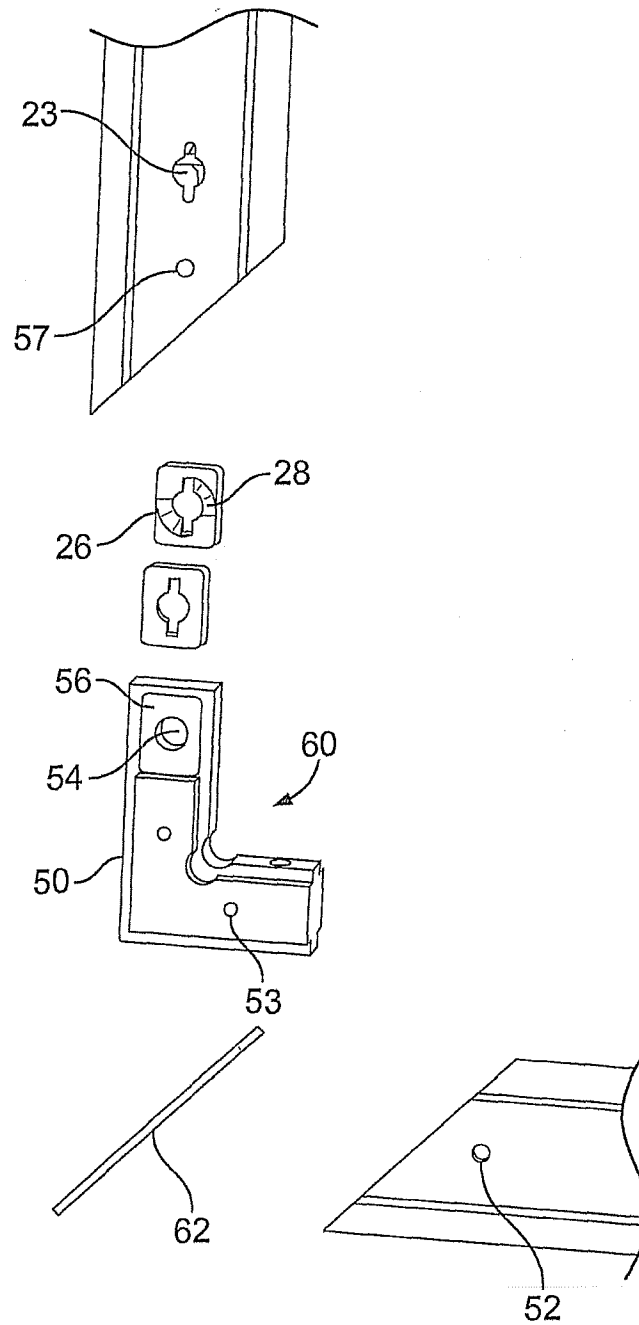


FIG. 8

7/8

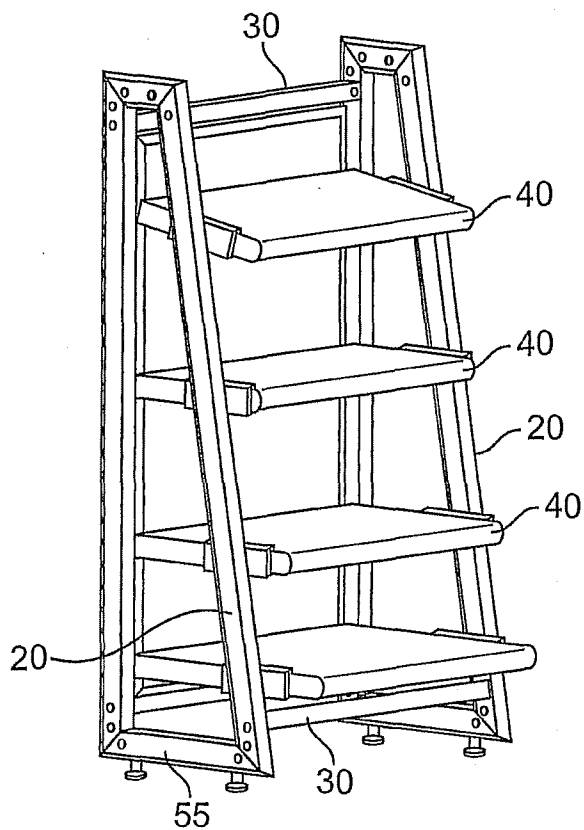


FIG. 9

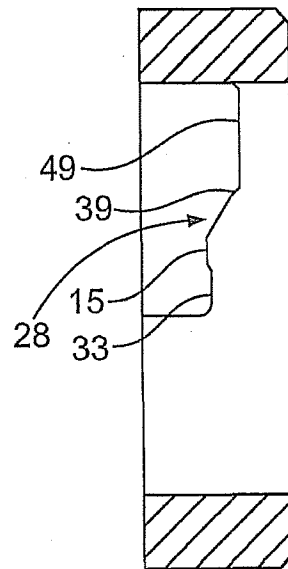


FIG. 10A

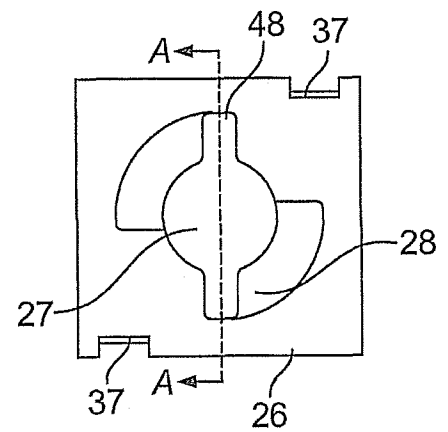


FIG. 10B

8/8

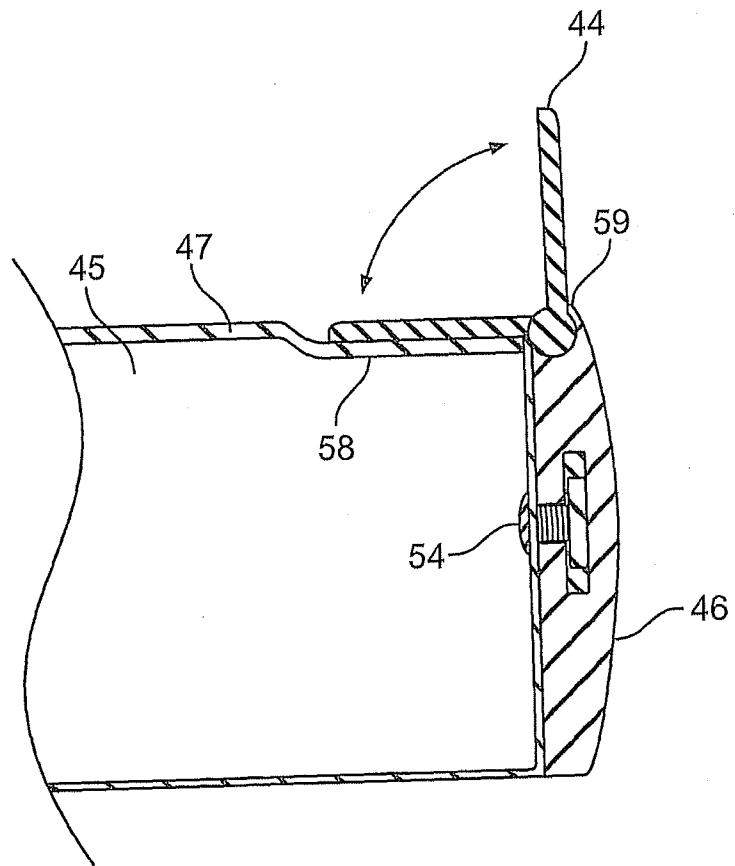


FIG. 11

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US13/62297

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A47F 5/08, A47H 1/00, A47F 5/12, and A47G 28/02 (2014.01)

USPC - 211/90.02, 99, 150, 169.1 and 248/242

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) Classification(s): A47F 5/08, A47H 1/00, A47F 5/12, and A47G 28/02 (2014.01)

USPC Classification(s): 211/90.02, 99, 150, 169.1 and 248/242

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

MicroPatent (US-G, US-A, EP-A, EP-B, WO, JP-bib, DE-C,B, DE-A, DE-T, DE-U, GB-A, FR-A); IP.com; Google/Google Scholar; DialogPRO; Searched Terms Used: hollow, post, connect, lock, cam, shelf, shelves, bracket, pivot, hinge, axis, tie, rod, system,

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ---	US 2011/0068071 A1 (SUMAN M et al.) March 24, 2011; figure 1; paragraph [0033]	12 and 13 ---
Y		14
Y	US 3,561,713 A (BERKOWITZ IL) February 9, 1971; figure 1; column 1, lines 60-70; column 3, lines 1-30	14
Y	US 2007/0023376 A1 (BLACK RE) February 01, 2007; figure 1; paragraph [0036]	17-19
Y	US 6,161,488 A (REDDICLIFFE EA) December 19, 2000; figure 1; column 2, lines 25-50	17-19
A	US 5,102,254 A (YEH KH) April 7, 1992; figure 4; column 2, lines 5-20	1-19
A	US 6,168,032 B1 (MERL MJ) January 2, 2001; figure 4; column 3, lines 30-40	1-19

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

06 February 2014 (06.02.2014)

Date of mailing of the international search report

24 FEB 2014

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450
Facsimile No. 571-273-3201

Authorized officer:

Shane Thomas

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774