



- (51) International Patent Classification:
B41J 2/045 (2006.01) *B41J 2/14* (2006.01)
- (21) International Application Number:
PCT/US2013/052505
- (22) International Filing Date:
29 July 2013 (29.07.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PCT/US2013/028207 28 February 2013 (28.02.2013) US
PCT/US2013/028216 28 February 2013 (28.02.2013) US
PCT/US2013/033046 20 March 2013 (20.03.2013) US
PCT/US2013/033865 26 March 2013 (26.03.2013) US
PCT/US2013/048214 27 June 2013 (27.06.2013) US

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

- (71) Applicant: HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P. [US/US]; 11445 Compaq Center Drive W., Houston, Texas 77070 (US).
- (72) Inventors: CHEN, Chien-Hua; 1070 NE Circle Blvd., Corvallis, Oregon 97330 (US). CUMBIE, Michael W.; 1070 NE Circle Blvd., Corvallis, Oregon 97330 (US).
- (74) Agents: RIETH, Nathan R. et al.; Intellectual Property Administration, 3404 E. Harmony Road, Mail Stop 35, Fort Collins, Colorado 80528 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: TRANSFER MOLDED FLUID FLOW STRUCTURE

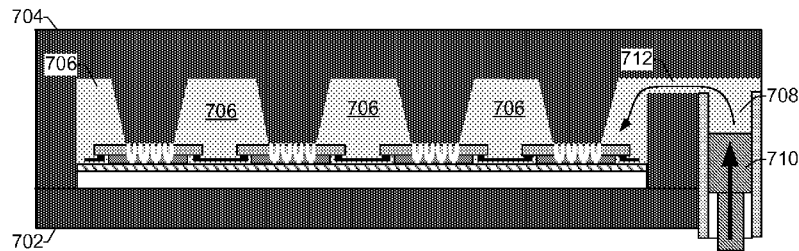


FIG. 7c

(57) Abstract: In an embodiment, a fluid flow structure includes a micro device embedded in a molding, a fluid feed hole formed through the micro device, and a transfer molded fluid channel in the molding that fluidically couples the fluid feed hole with the channel.

WO 2014/133577 A1

TRANSFER MOLDED FLUID FLOW STRUCTURE

BACKGROUND

[0001] A printhead die in an inkjet pen or print bar includes a plurality of fluid ejection elements on a surface of a silicon substrate. Fluid flows to the ejection elements through a fluid delivery slot formed in the substrate between opposing substrate surfaces. While fluid delivery slots adequately deliver fluid to fluid ejection elements, there are some disadvantages with such slots. From a cost perspective, for example, fluid delivery slots occupy valuable silicon real estate and add significant slot processing cost. In addition, lower printhead die cost is achieved in part through shrinking the die, which in turn results in a tightening of the slot pitch and/or slot width in the silicon substrate. However, shrinking the die and the slot pitch increases the inkjet pen costs associated with integrating the small die into the pen during assembly. From a structural perspective, removing material from the substrate to form an ink delivery slot weakens the printhead die. Thus, when a single printhead die has multiple slots (e.g., to provide different colors in a multicolor printhead die, or to improve print quality and speed in a single color printhead die), the printhead die becomes increasingly fragile with the addition of each slot.

BRIEF DESCRIPTION OF THE DRAWINGS

[0002] The present embodiments will now be described, by way of example, with reference to the accompanying drawings, in which:

[0003] FIG. 1 is an elevation section view illustrating one example of a molded fluid flow structure implemented as a printhead structure;

[0004] FIG. 2 is a block diagram illustrating an example system implementing a molded fluid flow structure such as the printhead structure of FIG. 1;

[0005] FIG. 3 is a block diagram illustrating an inkjet printer implementing one example of a fluid flow structure in a substrate wide print bar;

[0006] FIGs. 4-6 illustrate an inkjet print bar implementing one example of a molded fluid flow structure as a printhead structure suitable for use in printer;

[0007] FIGs. 7a-e illustrate an example transfer molding process for making a molded printhead fluid flow structure having a transfer molded fluid channel;

[0008] FIG. 8 illustrates is a flow diagram of an example transfer molding process corresponding with FIGs. 7a-e;

[0009] FIGs. 9-15 illustrate various examples of differently shaped, transfer molded fluid channels that can be formed into a molded body through a transfer mold process.

[0010] Throughout the drawings, identical reference numbers designate similar, but not necessarily identical, elements.

DETAILED DESCRIPTION

Overview

[0011] Reducing the cost of conventional inkjet printhead dies has been achieved in the past through shrinking the die size and reducing wafer costs. The die size depends significantly on the pitch of fluid delivery slots that deliver ink from a reservoir on one side of the die to fluid ejection elements on another

side of the die. Therefore, prior methods used to shrink the die size have mostly involved reducing the slot pitch and size through a silicon slotting process that can include, for example, laser machining, anisotropic wet etching, dry etching, combinations thereof, and so on. Unfortunately, the silicon slotting process itself adds considerable cost to the printhead die. In addition, successful reductions in slot pitch are increasingly met with diminishing returns, as the costs associated with integrating the shrinking die (resulting from the tighter slot pitch) with an inkjet pen have become excessive.

[0012] A transfer molded fluid flow structure enables the use of smaller printhead dies and a simplified method of forming fluid delivery channels to deliver ink from a reservoir on one side of a printhead die to fluid ejection elements on another side of the die. The fluid flow structure includes one or more printhead dies transfer molded into a monolithic body of plastic, epoxy mold compound, or other moldable material. For example, a print bar implementing the fluid flow structure includes multiple printhead dies transfer molded into an elongated, singular molded body. The molding enables the use of smaller dies by offloading the fluid delivery channels (i.e., the ink delivery slots) from the die to the molded body of the structure. Thus, the molded body effectively grows the size of each die which improves opportunities for making external fluid connections and for attaching the dies to other structures.

[0013] The fluid flow structure includes molded fluid delivery channels formed in the structure at the back of each die using a transfer molding process at the wafer or panel level. The transfer mold process provides an overall cost reduction when forming the fluid delivery channels/slots compared to traditional

silicon slotting processes. In addition, the transfer mold process enables added flexibility in the molded slot shape, its length, and its side-wall profile, through changes in the topography or design of the mold chase top.

[0014] The described fluid flow structure is not limited to print bars or other types of printhead structures for inkjet printing, but may be implemented in other devices and for other fluid flow applications. Thus, in one example, the new structure includes a micro device embedded in a molding having a channel or other path for fluid to flow directly into or onto the device. The micro device can be, for example, an electronic device, a mechanical device, or a microelectromechanical system (MEMS) device. The fluid flow, for example, could be a cooling fluid flow into or onto the micro device, or a fluid flow into a printhead die or other fluid dispensing micro device. These and other examples shown in the figures and described below illustrate but do not limit the invention, which is defined in the Claims following this Description.

[0015] As used in this document, a "micro device" means a device having one or more exterior dimensions less than or equal to 30mm; "thin" means a thickness less than or equal to 650 μ m; a "sliver" means a thin micro device having a ratio of length to width (L/W) of at least three; a "printhead structure" and a "printhead die" mean that part of an inkjet printer or other inkjet type dispenser that dispenses fluid from one or more openings. A printhead structure includes one or more printhead dies. "Printhead structure" and "printhead die" are not limited to printing with ink and other printing fluids but also include inkjet type dispensing of other fluids for uses other than or in addition to printing.

Illustrative Embodiments

[0016] FIG. 1 is an elevation section view illustrating one example of a transfer molded fluid flow structure 100 implemented as a printhead structure 100 that is suitable for use in a print bar of an inkjet printer. The printhead structure 100 includes a micro device 102 molded into a monolithic body 104 of plastic or other moldable material. A molded body 104 may also be referred to herein as a molding 104. In general, a micro device 102 could be, for example, an electronic device, a mechanical device, or a microelectromechanical system (MEMS) device. In the present printhead structure 100 of FIG. 1, micro device 102 is implemented as a printhead die 102. Printhead die 102 includes a silicon die substrate 106 comprising a thin silicon sliver on the order of 100 microns in thickness. The silicon substrate 106 includes fluid feed holes 108 dry etched or otherwise formed therein to enable fluid flow through the substrate 106 from a first exterior surface 110 to a second exterior surface 112.

[0017] Formed on the second exterior surface 112 of substrate 106 are one or more layers 116 that define a fluidic architecture that facilitates the ejection of fluid drops from the printhead structure 100. The fluidic architecture defined by layers 116 generally includes ejection chambers 118 having corresponding orifices 120, a manifold (not shown), and other fluidic channels and structures. The layer(s) 116 can include, for example, a chamber layer formed on the substrate 106 with a separately formed orifice layer over the chamber layer, or they can include a monolithic layer that combines the chamber and orifice layers. Layer(s) 116 are typically formed of an SU8 epoxy or some other polyimide material.

[0018] In addition to the fluidic architecture defined by layer(s) 116 on silicon substrate 106, the printhead die 102 includes integrated circuitry formed on the substrate 106. Integrated circuitry is formed using thin film layers and other elements not specifically shown in FIG. 1. For example, corresponding with each ejection chamber 118 is a thermal ejector element or a piezoelectric ejector element formed on the second exterior surface 112 of substrate 106. The ejection elements are actuated to eject drops or streams of ink or other printing fluid from chambers 118 through orifices 120.

[0019] The printhead structure 100 also includes signal traces or other conductors 122 connected to printhead die 102 through electrical terminals 124 formed on substrate 106. Conductors 122 can be formed on structure 100 in various ways. For example, conductors 122 can be formed in an insulating layer 126 as shown in FIG. 1, using a lamination or deposition process. Insulating layer 126 is typically a polymer material that provides physical support and insulation for conductors 122. In other examples, conductors 122 can be molded into the molded body 104 as shown below with regard to FIGs. 6-7 and 9-15.

[0020] A transfer molded fluid channel 128 is formed into the molded body 104, and connects with the printhead die substrate 106 at the exterior surface 110. The transfer molded fluid channel 128 provides a pathway through the molded body that enables fluid to flow directly onto the silicon substrate 106 at exterior surface 110, and into the silicon substrate 106 through the fluid feed holes 108, and then into chambers 118. As discussed in further detail below, the fluid channel 128 is formed into the molded body 104 using a transfer molding process that enables the formation of a variety of different channel shapes whose

profiles each reflect the inverse shape of whatever mold chase topography is used during the molding process.

[0021] FIG. 2 is a block diagram illustrating a system 200 implementing a transfer molded fluid flow structure 100 such as the printhead structure 100 shown in FIG. 1. System 200 includes a fluid source 202 operatively connected to a fluid mover 204 configured to move fluid to a transfer molded channel 128 formed in the fluid flow structure 100. A fluid source 202 might include, for example, the atmosphere as a source of air to cool an electronic micro device 102, or a printing fluid supply for a printhead die 102. Fluid mover 204 represents a pump, a fan, gravity or any other suitable mechanism for moving fluid from source 202 to flow structure 100.

[0022] FIG. 3 is a block diagram illustrating an inkjet printer 300 implementing one example of a fluid flow structure 100 in a substrate wide print bar 302. Printer 300 includes print bar 302 spanning the width of a print substrate 304, flow regulators 306 associated with print bar 302, a substrate transport mechanism 308, ink or other printing fluid supplies 310, and a printer controller 312. Controller 312 represents the programming, processor(s) and associated memories, along with other electronic circuitry and components needed to control the operative elements of a printer 300. Print bar 302 includes an arrangement of printhead dies 102 for dispensing printing fluid on to a sheet or continuous web of paper or other print substrate 304. Each printhead die 102 receives printing fluid through a flow path that extends from supplies 310 into and through flow regulators 306, and then through transfer molded fluid channels 128 in print bar 302.

[0023] FIGs. 4-6 illustrate an inkjet print bar 302 implementing one example of a transfer molded fluid flow structure 100 as a printhead structure 100 suitable for use in printer 300 of FIG. 3. Referring to the plan view of FIG. 4, printhead dies 102 are embedded in an elongated, monolithic molding 104 and arranged generally end to end in rows 400. The printhead dies 102 are arranged in a staggered configuration in which the dies in each row overlap another printhead die in that same row. In this configuration, each row 400 of printhead dies 102 receives printing fluid from a different transfer molded fluid channel 128 (illustrated with dashed lines in FIG. 4). Although four fluid channels 128 feeding four rows 400 of staggered printhead dies 102 is shown (e.g., for printing four different colors), other suitable configurations are possible. FIG. 5 illustrates a perspective section view of the inkjet print bar 302 taken along line 5-5 in FIG. 4, and FIG. 6 illustrates a section view of the inkjet print bar 302 taken along line 5-5 in FIG. 4. The section view of FIG. 6 shows various details of a printhead structure 100 as discussed above with respect to FIG. 1.

[0024] While a particular shape or configuration of a transfer molded fluid channel 128 has been generally illustrated and discussed with reference to FIGs. 1-6, a variety of differently shaped fluid channels 128 can be formed using a transfer mold process. As discussed below, FIGs. 9-15 illustrate examples of differently shaped, transfer molded fluid channels 128 that can be readily formed into a molded body 104 of a fluid flow structure 100 using mold chase tops that have varying topographical designs.

[0025] Referring now to FIGs. 7a-e, an example transfer molding process for making a molded printhead fluid flow structure 100 having a transfer molded

fluid channel 128 is illustrated. FIG. 8 is a corresponding flow diagram 800 of the process illustrated in FIGs. 7a-e. As shown in FIG. 7a, a printhead die 102 is attached to a carrier 160 using a thermal release tape 162 (step 802 in FIG. 8), forming a die carrier assembly 700. The printhead die 102 is placed with the orifice (120) side down onto the carrier 160, as indicated by the direction arrows. The printhead die 102 is in a pre-processed state such that it already includes layer(s) 116 defining fluidic architectures (e.g., ejection chambers 118, orifices 120), and electrical conductors and terminals 122/124, and ejection elements (not shown) formed on sliver substrate 106. Fluid feed holes 108 have also already been dry etched or otherwise formed in the thin sliver substrate 106.

[0026] In a next step, FIG. 7b shows a die carrier assembly 700 similar to the one prepared as shown in FIG. 7a, except that four printhead dies 102 have been attached to the carrier 160. As shown in FIG. 7b, once the dies are attached to the carrier 160, the die carrier assembly 700 is positioned onto the bottom transfer mold chase 702 (step 804 in FIG. 8). As shown in FIG. 7c, after the die carrier assembly 700 is positioned onto the bottom transfer mold chase 702, the top of the transfer mold chase 704 is brought down into position over the die carrier assembly 700 (step 806 in FIG. 8). While the top mold chase 704 can have varying topographies to form differently shaped transfer molded fluid channels 128 into the body 104 of a fluid flow structure 100 (e.g., see FIGs. 9-15), in any case, the topography of the top mold chase 704 is designed such that when positioned over and brought down on the die carrier assembly 700, the mold chase seals the ink feed holes 108 at the backside exterior surface 110 of the thin sliver silicon substrate 106. Positioning the top mold chase 704 over the

die carrier assembly 700 seals the ink feed holes 108 and creates cavities 706 between the top and bottom mold chase and around the printhead dies 102 on the die carrier assembly 700. An optional release film can be vacuum held down and conformed to the transfer mold chase to prevent contamination to the transfer mold chase 704 and to minimize the Epoxy mold flash during the transfer mold process.

[0027] Referring still to FIG. 7c, in a next step, the cavities 706 are filled with an epoxy molding compound 708 (EMC) or other suitable moldable material (step 808 in FIG. 8). Filling the cavities 706 with EMC forms the molded body 104 that encapsulates the printhead dies 102, and also forms the molded fluid channels 128 within the molded body 104. Typically, filling cavities 706 with EMC involves preheating the EMC until it reaches a melting temperature and becomes a liquid (step 810 in FIG. 8). A vacuum may be created within the cavities 706, and the liquid EMC is then injected using a plunger 710, for example, through runners 712 (i.e., channels) of the mold chase until it reaches and fills the cavities 706 (steps 812 and 814 in FIG. 8). The seals over the ink feed holes 108 created by the top mold chase 704 prevent the EMC from entering the ink feed holes as the cavities are being filled.

[0028] After the EMC cools and hardens to a solid, the die carrier assembly 700, which now includes the attached molded printhead fluid flow structure 100, can be removed from the mold chase, as shown in FIG. 7d (step 816 in FIG. 8). FIG. 7d shows the molded printhead fluid flow structure 100 attached to the carrier 160 by the thermal release tape 162. The molded printhead structure 100 is then released from the carrier 160 and the thermal

release tape 162 is removed, as shown in FIG. 7e (step 818 in FIG. 8). Thus, in this implementation the molded printhead structure 100 is formed in a transfer mold process. The position of the molded printhead structure 100 in FIG. 7e has been inverted to be consistent with the views of the molded printhead fluid flow structures 100 shown in FIGs. 6 and 9-15.

[0029] As mentioned above, the use of a mold chase top 704 in a transfer molding process enables the formation of many differently shaped fluid channels 128. This is achieved by providing mold chase tops 704 that have varying topographical designs. In general, the resulting shapes of the fluid channels 128 follow, inversely, the contours of the topography of the top mold chase 704 used in the transfer mold process. FIGs. 9-15 illustrate several examples of differently shaped, transfer molded fluid channels 128.

[0030] Referring to FIG. 9, transfer molded fluid channels 128 have been formed with first and second side walls, S_1 and S_2 , that are substantially straight and parallel to one another. FIG. 10 shows transfer molded fluid channels 128 whose side walls S_1 and S_2 , are straight and tapered with respect to one another. The tapered side walls taper inward toward one another as they get closer to the fluid feed holes 108 in substrate 106, and away from one another as they recede from substrate 106. In FIG. 11, the side walls S_1 and S_2 of the transfer molded fluid channels 128 are curved inward in a manner that narrows the channels as they approach the fluid feed holes 108 in substrate 106. The transfer molded fluid channels 128 of FIGs. 12 and 13 show examples of sidewalls that include straight wall portions that are parallel to one another, and curved wall portions that mirror one another. Thus, a single side wall of a transfer molded fluid

channel 128 can have multiple shape profiles such as straight, slanted, and curved profiles, in varying combinations and configurations. FIG. 14 shows transfer molded fluid channels 128 whose side walls S_1 and S_2 , each have two straight sections that are substantially parallel to the opposite sidewall sections. FIG. 15 shows an example of a monolithic transfer molded printhead structure 100 whose multiple molded fluid channels 128 are shaped differently among themselves. In this example, one channel includes side walls with tapered shapes while another channel includes side walls with straight shapes. In addition, the center fluid channel shown in FIG. 15 illustrates one example of how transfer molded fluid channels can be formed to be fluidically coupled with multiple thin silicon sliver substrates 106 for multiple printhead dies 102.

[0031] In general, the transfer molded fluid channels 128 shown in FIGs. 9-15 have channel side walls, S_1 and S_2 , formed in various straight and/or curved configurations that are parallel and/or tapered and/or mirrored to one another. In most cases, it is beneficial to have the channel side walls diverge or taper away from one another as they recede (i.e., move away) from the printhead sliver substrate 106. This divergence provides the benefit of assisting air bubbles move away from the orifices 120, ejection chambers 118, and fluid feed holes 108, where they may otherwise hinder or prevent the flow of fluid. Accordingly, the fluid channels 128 shown in FIGs. 9-15 comprise side walls that are typically divergent, but that are at least parallel, as they recede from the sliver substrate 106. However, the illustrated channel side wall shapes and configurations are not intended to be a limitation as to other shapes and configurations of side walls within fluid channels 128 that can be formed using a transfer molding process.

Rather, this disclosure contemplates that other transfer molded fluid channels are possible that have side walls shaped in various other configurations not specifically illustrated or discussed.

CLAIMS

What is claimed is:

1. A fluid flow structure, comprising:
a micro device embedded in a molding;
a fluid feed hole formed through the micro device; and
a transfer molded fluid channel in the molding that fluidically couples the fluid feed hole with the channel.
2. A structure as in claim 1, wherein the channel has a shape with contours that inversely follow a topography of a mold chase used to form the channel.
3. A structure as in claim 1, wherein the channel comprises first and second sidewalls that diverge from one another as they extend away from the micro device and converge toward one another as they near the micro device.
4. A structure as in claim 1, wherein the channel comprises first and second straight side walls that are substantially parallel to one another.
5. A structure as in claim 1, wherein the channel comprises first and second straight side walls that are tapered with respect to one another.

6. A structure as in claim 1, wherein the channel comprises first and second curved side walls that mirror one another.

7. A structure as in claim 1, wherein the channel comprises first and second side walls, each side wall having multiple contours selected from the group consisting of a straight contour, a tapered contour, and a curved contour.

8. A structure as in claim 7, wherein the multiple contours of the first side wall mirror the multiple contours of the second side wall.

9. A fluid flow structure comprising:
a monolithic body transfer molded around multiple printhead sliver substrates; and
multiple transfer molded fluid channels in the body through which fluid can flow directly to one or more of the substrates.

10. A structure as in claim 9, wherein the channels have different shapes.

11. A structure as in claim 9, wherein a single channel fluidically couples multiple substrates such that fluid can flow directly to the multiple substrates through the single channel.

12. A method of making a fluid channel in a fluid flow structure, comprising:

attaching a printhead die to a carrier, forming a die carrier assembly;

positioning the die carrier assembly onto a bottom mold chase;

positioning a top mold chase over the die carrier assembly, creating a cavity between the top and bottom mold chases;

filling the cavity with epoxy mold compound.

13. A method as in claim 12, wherein positioning a top mold chase over the die carrier assembly comprises sealing ink feed holes at a backside exterior surface of the printhead die.

14. A method as in claim 12, wherein filling the cavity with epoxy mold compound comprises:

forming a molded body that encapsulates the printhead die; and

forming a molded fluid channel within the molded body through which fluid can flow directly to the printhead die.

15. A method as in claim 12, wherein filling the cavity with epoxy mold compound comprises:

preheating the epoxy mold compound to a liquid phase;

creating a vacuum within the cavity; and

injecting the liquid epoxy mold compound into the cavity.

16. A method as in claim 14, further comprising:
- cooling the epoxy mold compound;
 - removing the die carrier assembly with the molded body from the top and bottom mold chase; and
 - releasing the molded body from the carrier.

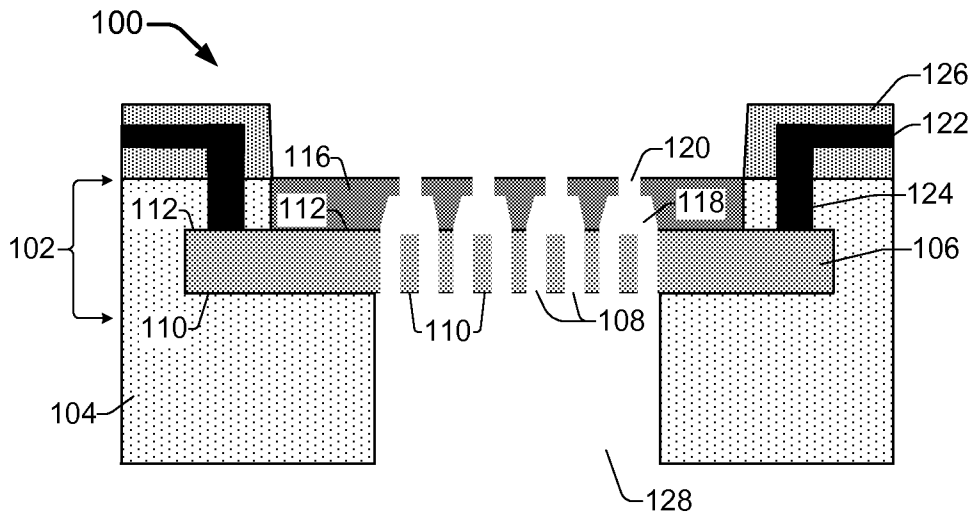


FIG. 1

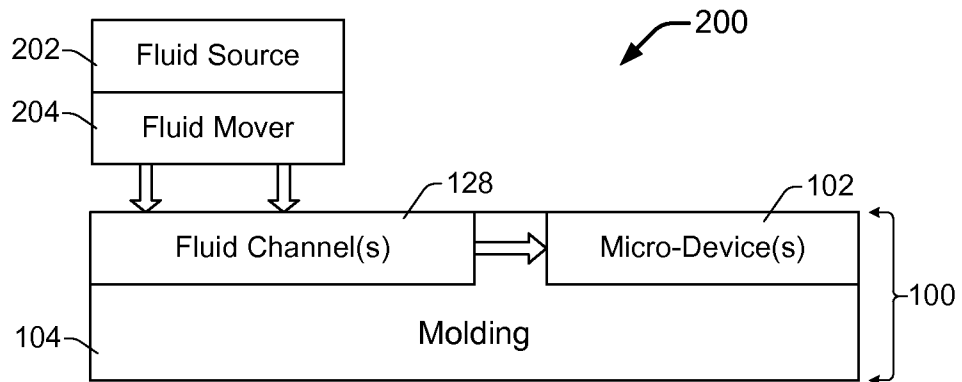


FIG. 2

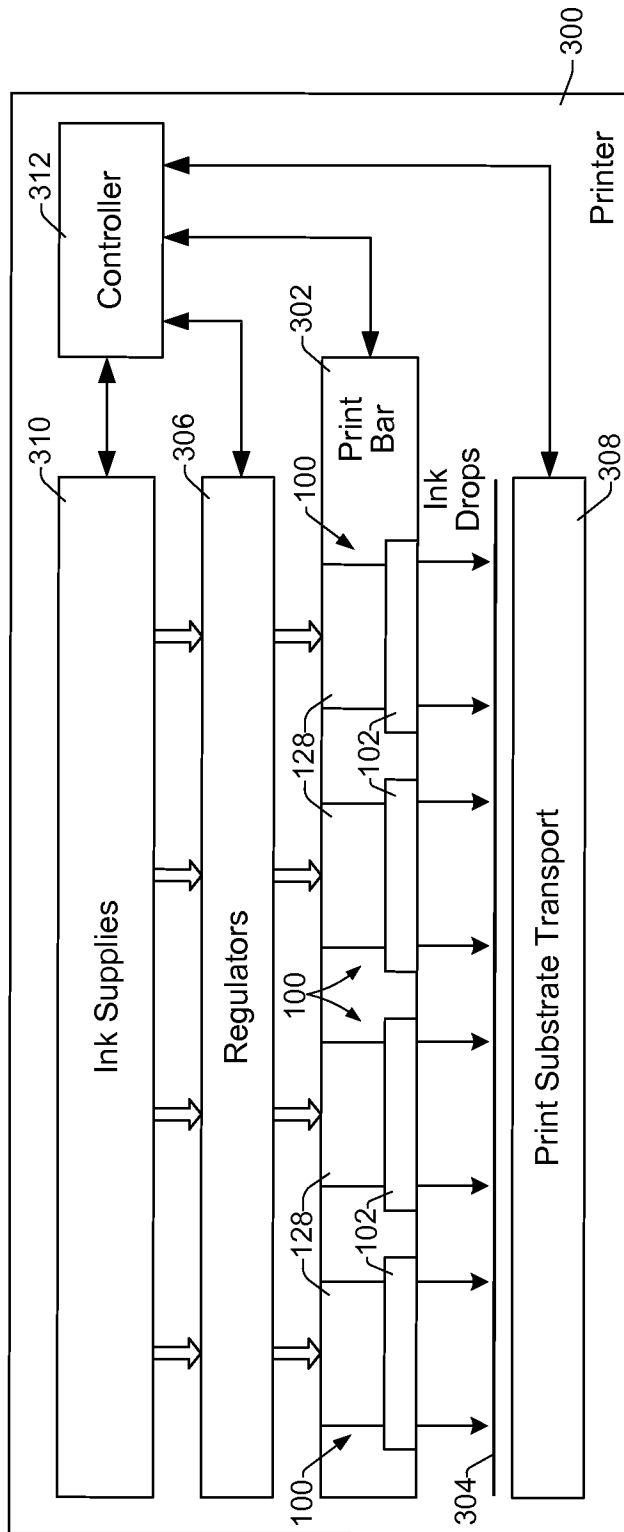


FIG. 3

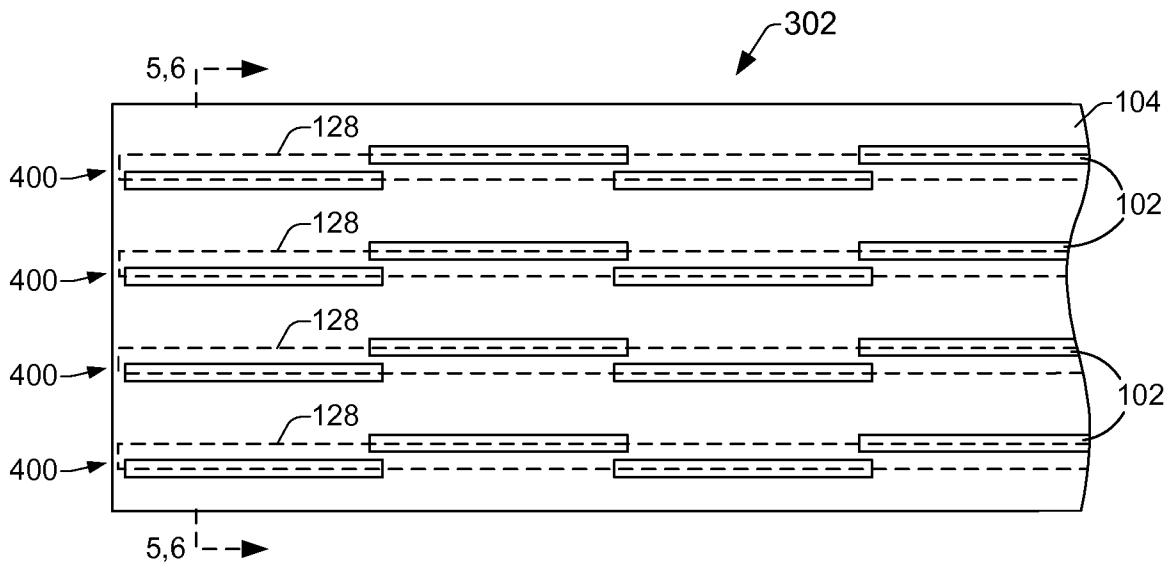


FIG. 4

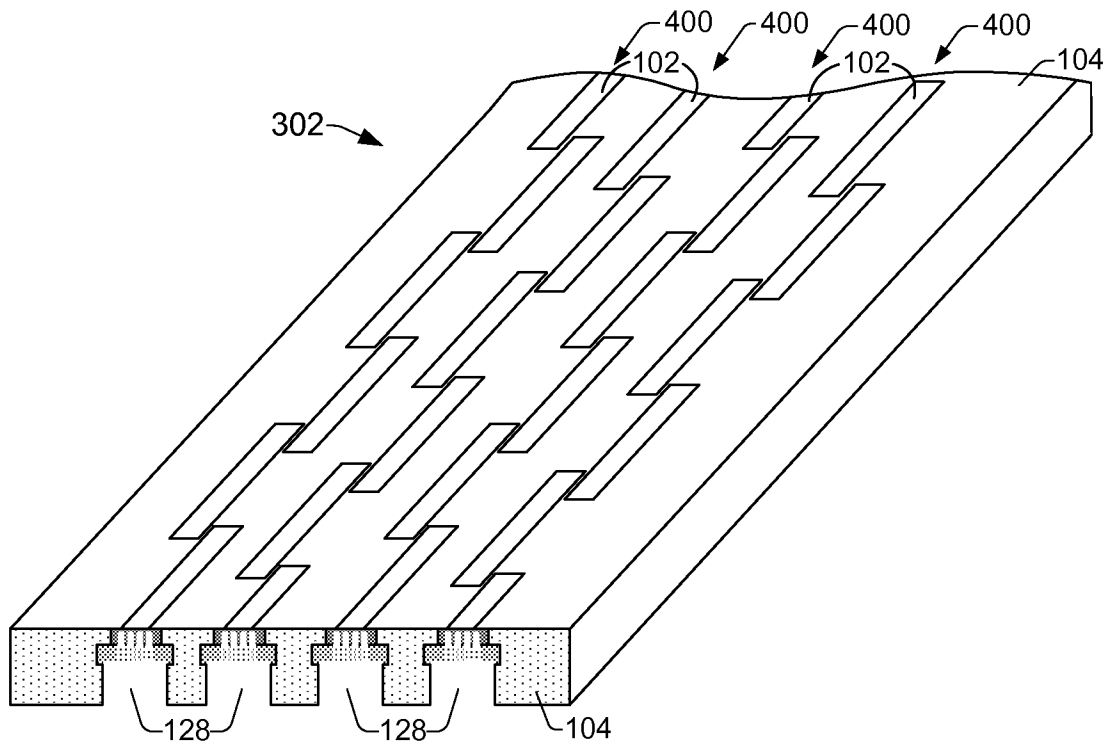


FIG. 5

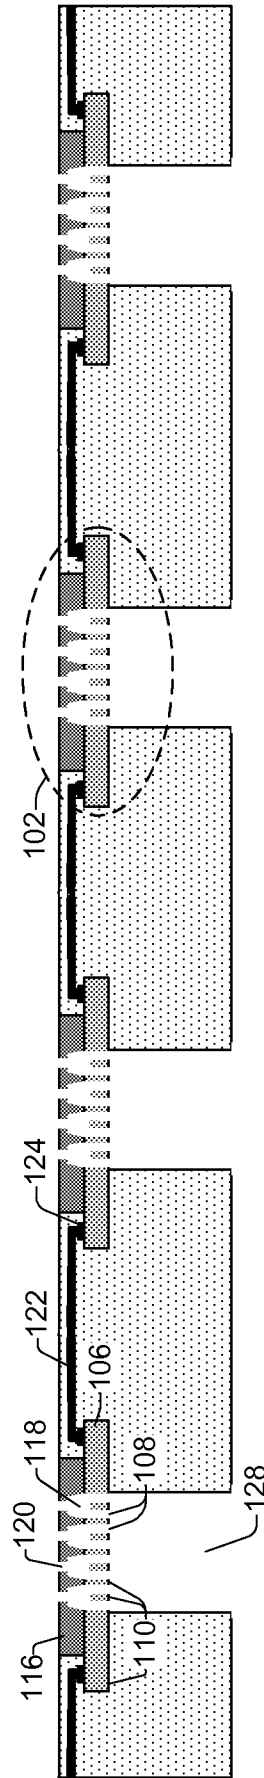


FIG. 6

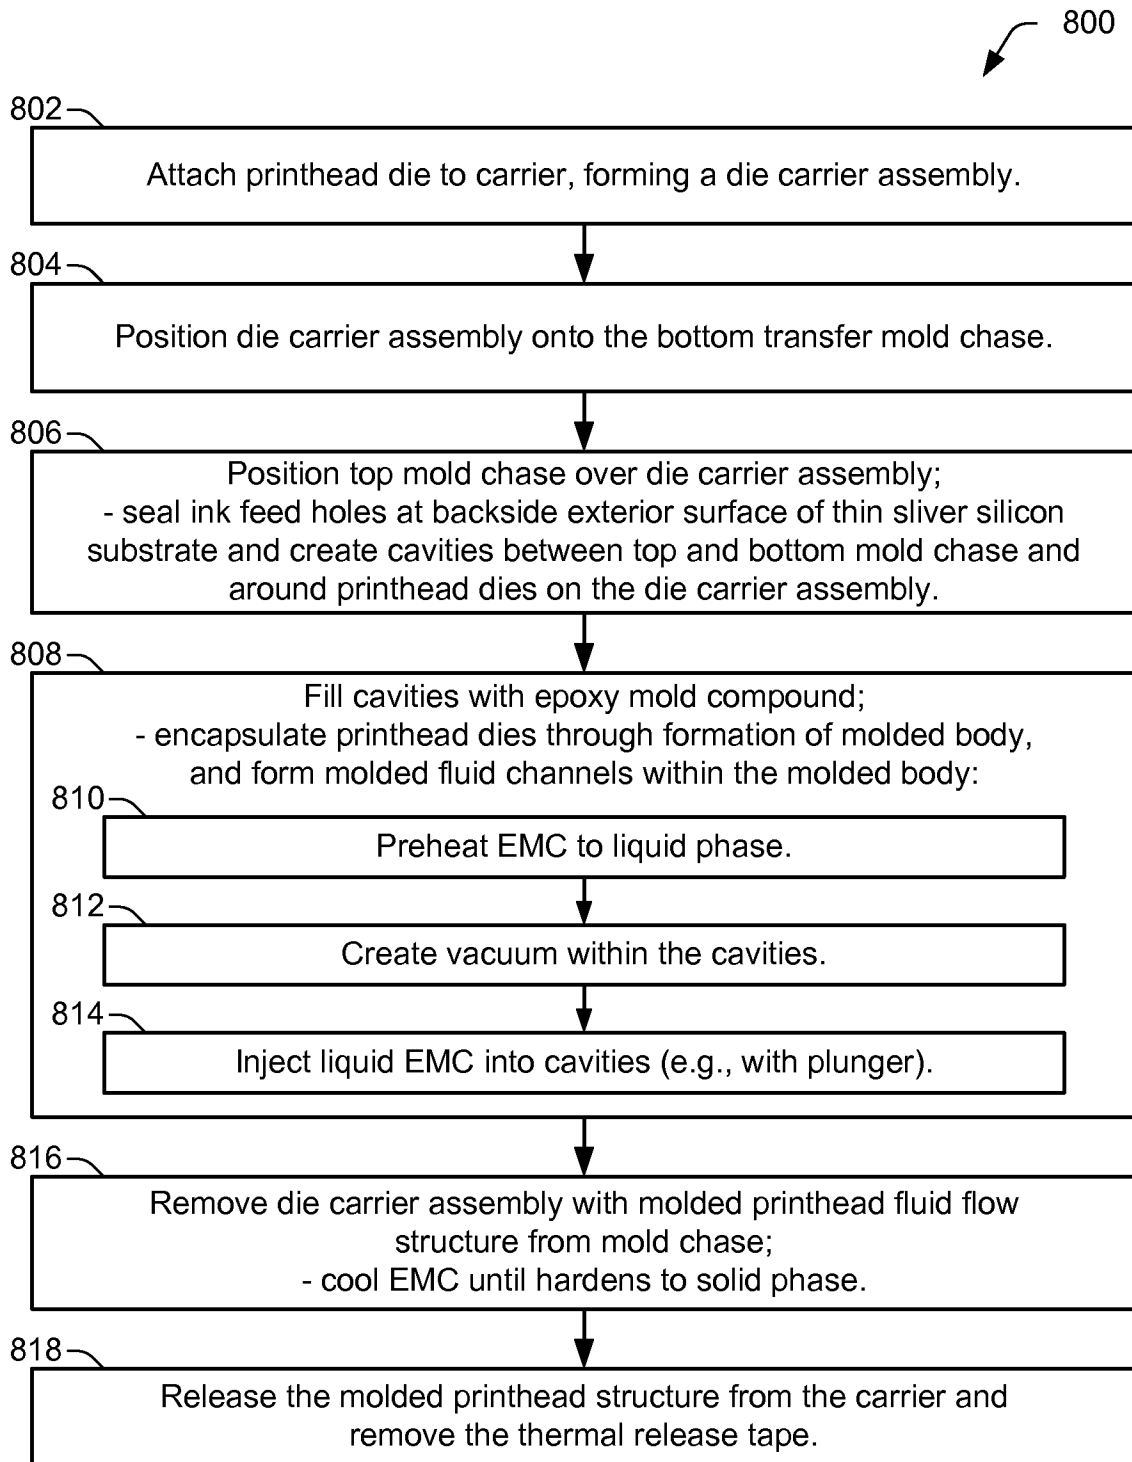


FIG. 8

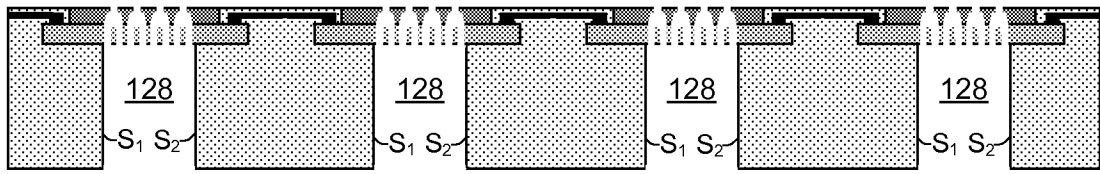


FIG. 9

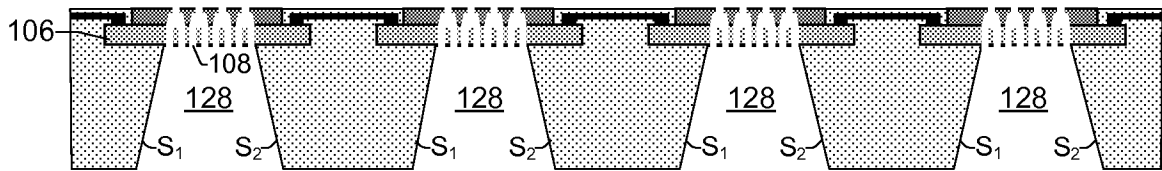


FIG. 10

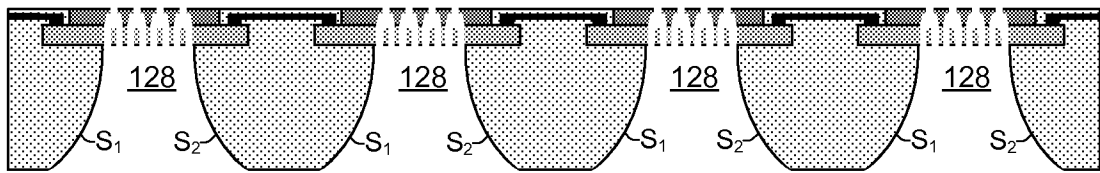


FIG. 11

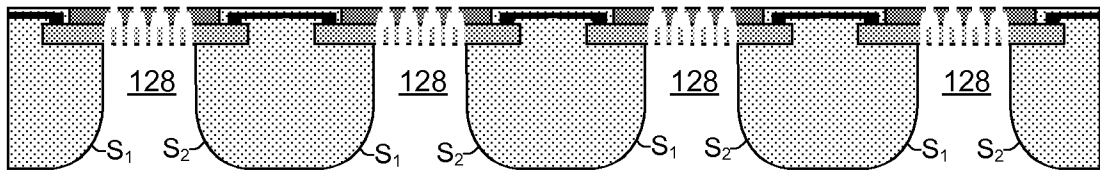


FIG. 12



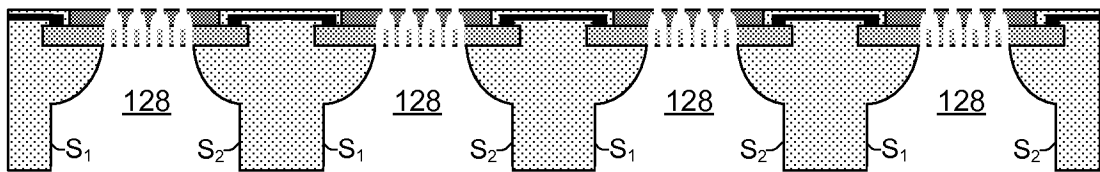


FIG. 13

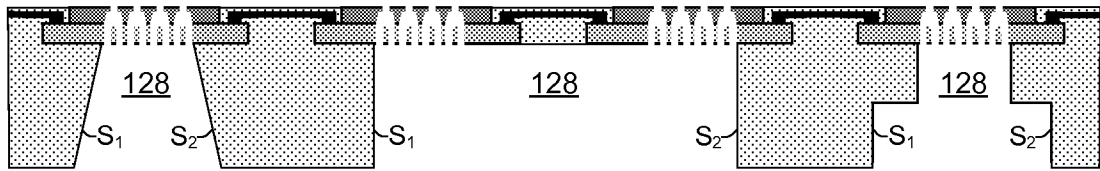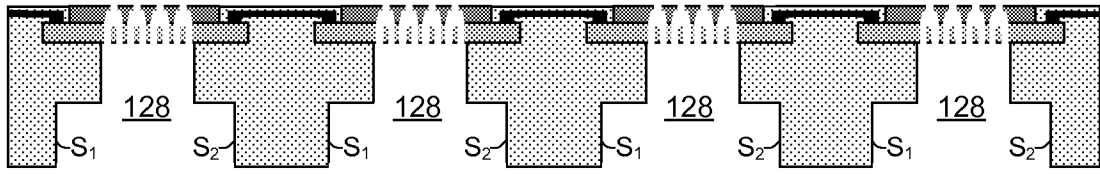

A. CLASSIFICATION OF SUBJECT MATTER**B41J 2/045(2006.01)i, B41J 2/14(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B41J 2/045; B41J 2/14; B41J 2/135; B21D 53/76; B41J 2/05; B41J 2/175; B41J 2/155

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords:printhead, mold, fluid, flow, hole, channel

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011-0037808 A1 (CIMINELLI et al.) 17 February 2011 See abstract, paragraphs [0043]-[0051], and figures 8A-15B.	1-11
A		12-16
A	US 6250738 B1 (WALLER et al.) 26 June 2001 See abstract, column 5 line 37-column 6 line 3, claim 1, and figures 2,3.	1-16
A	US 2011-0080450 A1 (CIMINELLI et al.) 07 April 2011 See abstract, paragraphs [0038]-[0043], claim 1, and figures 4,5.	1-16
A	US 7490924 B2 (HALUZAK et al.) 17 February 2009 See abstract, column 2 line 50-column 3 line 28, column 4 line 63-column 5 line 61, claim 1, and figures 1,6.	1-16
A	US 2011-0298868 A1 (FIELDER et al.) 08 December 2011 See abstract, paragraphs [0100]-[0105], and figures 4,5.	1-16

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family


Date of the actual completion of the international search

06 November 2013 (06.11.2013)

Date of mailing of the international search report

06 November 2013 (06.11.2013)

Name and mailing address of the ISA/KR


 Korean Intellectual Property Office
 189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City,
 302-701, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Chang Ho

Telephone No. +82-42-481-8398



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/US2013/052505

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011-0037808 A1	17/02/2011	CN 102470672 A	23/05/2012
		EP 2464519 A1	20/06/2012
		JP 2013-501655 A	17/01/2013
		US 8496317 B2	30/07/2013
		WO 2011-019529 A1	17/02/2011
US 6250738 B1	26/06/2001	CN 1297815 A0	06/06/2001
		EP 0913261 A2	06/05/1999
		EP 0913261 A3	22/03/2000
		EP 0913261 B1	26/01/2005
		EP 1095773 A1	02/05/2001
		EP 1095773 B1	09/07/2003
		EP 1182037 A1	27/02/2002
		EP 1186416 A2	13/03/2002
		EP 1186416 A3	26/06/2002
		EP 1186416 B1	03/03/2004
		EP 1186417 A2	13/03/2002
		EP 1186417 A3	17/07/2002
		EP 1186417 B1	11/01/2006
		JP 03432503 B2	04/08/2003
		JP 03437963 B2	18/08/2003
		JP 04202485 B2	24/12/2008
		JP 04355777 B2	04/11/2009
		JP 04533522 B2	01/09/2010
		JP 11-192705 A	21/07/1999
		JP 2001-130012 A	15/05/2001
		JP 2002-086695 A	26/03/2002
		JP 2002-086696 A	26/03/2002
		JP 2002-086735 A	26/03/2002
		JP 2008-221857 A	25/09/2008
		KR 10-0496095 B1	26/09/2005
		KR 10-0657108 B1	12/12/2006
		KR 10-0805540 B1	20/02/2008
		TW 393406 A	11/06/2000
		TW 393406 B	11/06/2000
		TW 501979 A	11/09/2002
		TW 501979 B	11/09/2002
		TW 503181 A	21/09/2002
		US 2002-0015073 A1	07/02/2002
		US 2002-0018101 A1	14/02/2002
		US 2002-0030720 A1	14/03/2002
		US 2002-0033861 A1	21/03/2002
US 2002-0051036 A1	02/05/2002		
US 2002-0122097 A1	05/09/2002		
US 2002-0180835 A1	05/12/2002		
US 2003-0007034 A1	09/01/2003		
US 2003-0048330 A1	13/03/2003		
US 2003-0052944 A1	20/03/2003		
US 2003-0122898 A1	03/07/2003		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/052505

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2004-0046824 A1	11/03/2004
		US 2004-0100522 A1	27/05/2004
		US 2004-0113996 A1	17/06/2004
		US 2004-0165027 A1	26/08/2004
		US 6123410 A	26/09/2000
		US 6188414 B1	13/02/2001
		US 6322206 B1	27/11/2001
		US 6325488 B1	04/12/2001
		US 6341845 B1	29/01/2002
		US 6350013 B1	26/02/2002
		US 6428145 B1	06/08/2002
		US 6435653 B1	20/08/2002
		US 6450614 B1	17/09/2002
		US 6454955 B1	24/09/2002
		US 6464333 B1	15/10/2002
		US 6508536 B1	21/01/2003
		US 6513907 B2	04/02/2003
		US 6523940 B2	25/02/2003
		US 6592205 B2	15/07/2003
		US 6648437 B2	18/11/2003
		US 6679596 B2	20/01/2004
		US 6692111 B2	17/02/2004
		US 6705705 B2	16/03/2004
		US 6733112 B2	11/05/2004
		US 6789878 B2	14/09/2004
		US 6935023 B2	30/08/2005
		US 6962406 B2	08/11/2005
		US 6997540 B2	14/02/2006
		US 7226156 B2	05/06/2007
US 2011-0080450 A1	07/04/2011	US 8118406 B2	21/02/2012
US 7490924 B2	17/02/2009	US 2003-0081072 A1	01/05/2003
		US 2003-0082841 A1	01/05/2003
		US 2003-0186474 A1	02/10/2003
		US 2006-0243387 A1	02/11/2006
		US 6627467 B2	30/09/2003
		US 6698868 B2	02/03/2004
		US 7125731 B2	24/10/2006
		WO 2004-091706 A1	28/10/2004
US 2011-0298868 A1	08/12/2011	None	