

(21) Application No 8503444

(22) Date of filing 11 Feb 1985

(30) Priority data

(31) 447761

(32) 17 Feb 1984

(33) CA

(51) INT CL<sup>4</sup>

F23J 3/00

(52) Domestic classification

F4B 105 CW NA

U1S 1977 F4B

(56) Documents cited

GB 0750092

GB 0721718

(71) Applicant

University of Waterloo (Canada),  
Ontario, Waterloo, Canada

(72) Inventors

John R Wynnyckyj

Edward Rhodes

Robert Marr

(74) Agent and/or Address for Service

Haseltine Lake & Co,



Hazlitt House, 28 Southampton Buildings, Chancery  
Lane, London WC2A 1AT

(58) Field of search

F4B

(54) Monitoring ash build-up in steam generators

(57) Fouling of heat exchange surfaces in the convection section (18) of a steam generator (10) by ash or other solid deposit from the combustion gas stream is monitored by using temperature sensors, e.g. radiation pyrometers (34), to determine the temperature drop of the gas stream in the flow direction across a bank (20, 22) or group (28) of heat exchanger tubes, the drop being related to the degree of fouling and enabling calculation of a fouling factor. Soot blowers are actuated, in manual or automatic response, to the fouling factor being above a given level, to effect cleaning of the heat exchanger tubes. Heat flux meters (36) also may be provided to determine variations in the degree of fouling in planes transverse to the flow of the gas stream and the determinations may be used to actuate selective cleaning of parts of the tube bank or group.

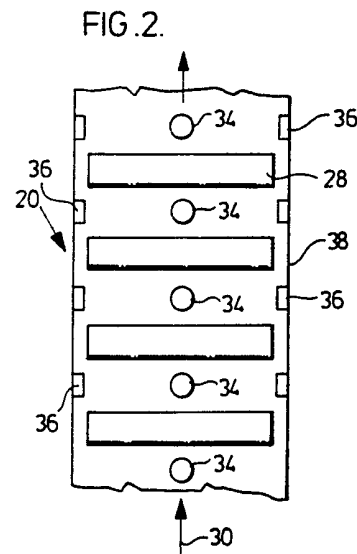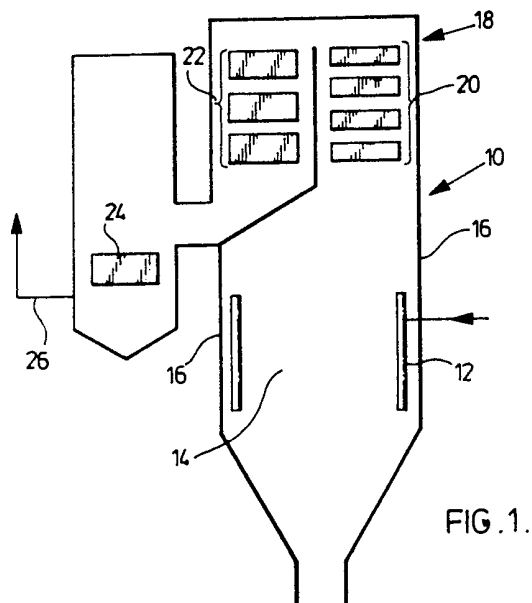

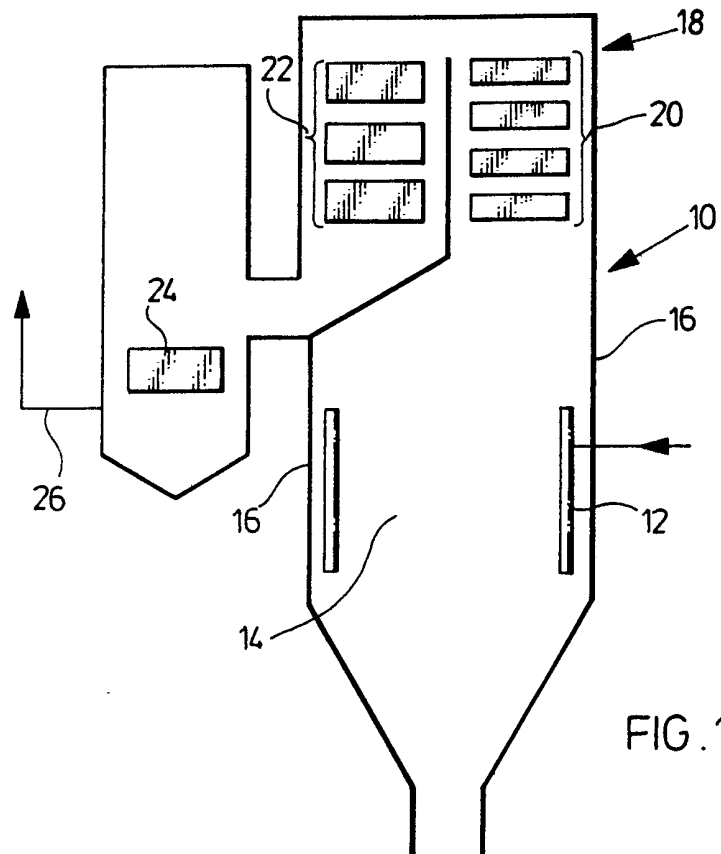


FIG. 1.

FIG. 2.


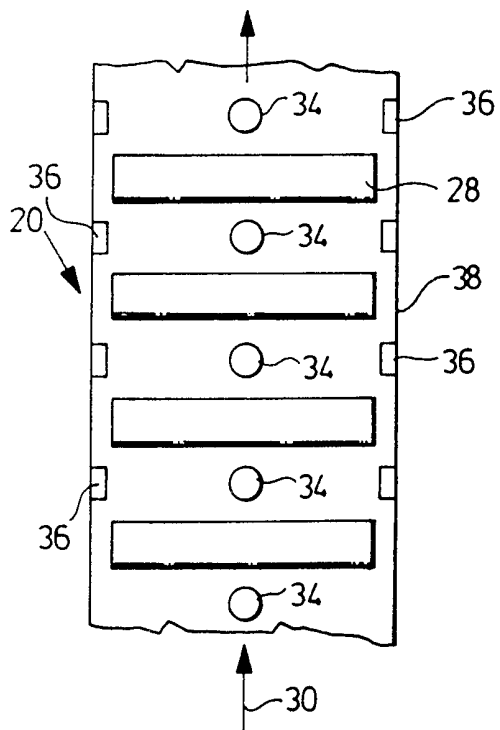


FIG. 3.

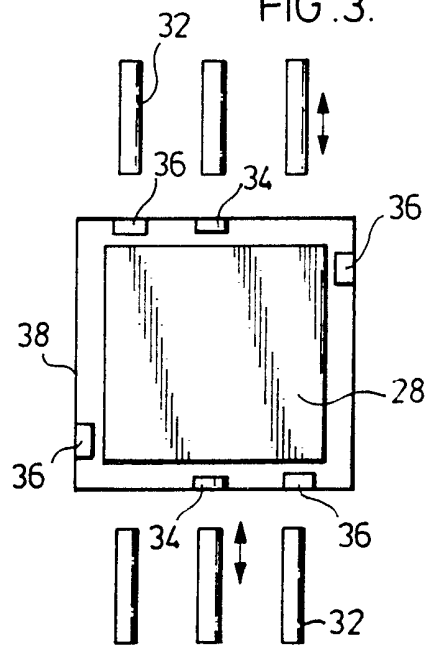

## SPECIFICATION

### Convection section ash monitoring

5 The present invention relates to the monitoring and control of ash build up in the convection section of a steam generator.

10 In the operation of a pulverized coal-fired boiler, a significant fraction of the ash contained in the coal is deposited on the water walls of the combustion chamber and on the heat exchange tubes of the convection section of the boiler. The ash deposits have a lower thermal conductivity, modify the radiative properties of the surfaces and insulate the tubes from the flame and from the combustion gases. These effects interfere with the efficient gas-to-tube heat transfer to both the furnace walls and the convection section tubes.

20 In our U.S. Patent No. 4,408,568, there is described a method of monitoring the build up of ash on the inside walls of a coal-fired boiler by simultaneously determining the actual heat flux present in the boiler and the heat flux reaching the walls of the boiler, and determining the difference in heat flux value as a measure of the build up of ash on the inside walls. The signal indicative of the degree of furnace fouling may be used by a furnace operator as a determination for initiation of soot blower operation and/or other furnace control action, or may be utilized for automatic initiation of soot blower operation or other boiler control.

35 In the convection section of the steam generator, heat is removed from the combustion gas stream by convection and conduction through the walls of tubes contacted by the gas stream and through which steam flows. Usually banks of heat transfer tubes are provided which are serially contacted by the flowing gas stream. The function of the convection section usually includes superheating pressurized steam prior to passage to a turbine driven by the steam to produce power, and re-heating of low-pressure steam returned from the high-pressure side of the turbine, prior to recycle to the low-pressure side of the turbine.

50 As noted above, ash deposition also can occur on the tubes in the convection section of the boiler. At present, no direct means is being provided for assessing the amount of ash being deposited in the convection section and the degree to which the deposit has decreased the ability of the heat exchange surfaces to transfer the heat from the gas phase to the steam.

60 Ash deposition, moreover, may occur unevenly. Across one particular horizontal plane of a tube bank, there may occur more fouling in one side or corner than in another, causing an uneven distribution of gas flow, usually called channelling. In the present manner of operating steam generators, there is provided

no means to identify the degree of unevenness of the fouling.

70 An operator relies on a number of indirect signals and the occasional visual inspection to determine when to operate soot blowers to remove accumulations of deposited ash from the tubes in the convection section. The lack of more direct information has led to inefficiencies, upsets in control leading to non-steady operation, and occasionally catastrophic fouling necessitating shutdown. In addition, there is considerable needless or excessive soot blowing of convection section tubes which are actually clean. Soot blowing erodes the heat-exchange tubes, so that much needless soot blowing is detrimental and costly.

80 There are diagnostic systems being marketed which are based on measuring the conditions at the exit of the boiler. These systems permit only an indirect measure of fouling and, since response times are long, the signals are generally inadequate to achieve satisfactory control.

85 There is a need, therefore, to provide a direct means of measuring ash build up in the convection section of steam generators, so that boiler operation can be improved.

90 In accordance with one aspect of the present invention, there is provided a method of controlling the build up of ash on the heat exchange surfaces of a convection section of a steam generator wherein a flowing hot gas stream contacts the heat exchange surfaces to heat steam flowing within the surfaces, which comprises directly measuring the temperature of the gas stream at two locations in the flowing gas stream spaced apart in the direction of flow and between which is located a selected number of the heat exchange surfaces, calculating the difference in temperature between the two locations as a measure of the build up of ash on the selected number of heat-exchange surfaces, and activating cleaning of the selected number of heat-exchange surfaces in response to a predetermined level of build up of ash.

100 In accordance with a further aspect of the present invention, there is provided a steam generating apparatus wherein fuel is burned in an air stream to generate heat and heat is recovered from the resulting gas stream by heat exchange tubes contacting the gas stream and through which steam of temperature lower than that of the gas stream is passed, which comprises two temperature detection means located one upstream and the other downstream of a selected bank of the heat exchange tubes to measure directly the temperature of the gas stream at the locations of the temperature detection means.

125 In the present invention, therefore, the temperature of a flowing hot gas stream passing over heat exchange surfaces removing heat from the gas stream at two longitudinally spaced-apart locations in the flowing gas

stream is directly measured. The temperature difference between the two locations is determined from these direct measurements and the temperature difference may be used as a measure of the build up of ash on heat exchange surfaces between the two locations.

The measure of the build up of the ash or the degree of fouling may be used to determine a fouling factor which, in turn, is used to effect cleaning of the heat exchange surfaces in response to predetermined values of the fouling factor, thereby to control the build up of ash on the heat exchange surfaces.

The direct determination of temperature may be effected in any convenient manner, preferably with radiation pyrometers, although clean heat flux meters sighting through openings in the wall confining the hot gas stream may be used.

In one embodiment of the present invention, there is provided a method of determining the amount and distribution of ash build up in the convection section of a steam generator by using a combination of radiation pyrometers or suitable substitutes and heat flux meters of suitable substitutes. The radiation pyrometers or suitable substitutes measure the difference in gas temperatures across a bank of heat exchanger tubes in the convection section while the heat flux meters or suitable substitutes monitor the channelling of the gases caused by uneven ash buildup.

The radiation pyrometer is focussed on the gas space between tube banks. The reading of the pyrometer is corrected for changes in the emissivity of the gas stream caused by varying concentrations of water vapour, carbon dioxide and coal ash particulates in the gas stream. The corrections are conveniently calculated continuously and on-line, using a dedicated mini- or micro-computer, which monitors the pyrometer reading as well as the coal and air throughput rates and ash contents. By using two pyrometers, located across one tube bank, the decrease in the gas temperature in the bank is measured. The steam flow rate and its temperature drop across the same tube bank, which routinely are measured in the operation of modern steam generators, also are fed to the computer. Using the latter information together with the gas temperature drop determined by the pyrometers, the computer continuously calculates a fouling factor ( $R_F$ ), as described in more detail below. The fouling factor is uniquely proportional to the degree of fouling of the tube bank, and its value may be displayed, either numerically or visually, such as, in the form of a colour-coded diagram, on a monitor screen. The value also may be recorded on any convenient medium.

As noted previously, uneven fouling causes the flow of the combustion gases to channel in the tube banks. In the preferred embodiment of the invention, heat flux meters are

located in critical positions on the water tube wall enclosing the convection section. In some instances, fouling in this area may be a problem and a suitable alternative to the heat flux meters located on water tube walls is to provide clean flux meters sighted through openings. In other cases, it may be convenient to use thermocouples protruding into the gas stream.

When the heat flux monitored by one of these meters reads significantly lower and/or higher than the average for a particular level in the bank, this indicates an unevenly-fouled tube bank and this information also may be displayed, either numerically or visually, on a monitor screen, and, if desired, recorded on any convenient medium.

The steam generator operator uses the fouling factor and gas channelling information to determine periodic and selective operation of soot blowers to remove accumulations of ash from selected convection section banks, for optimum operating results and minimum tube erosion. Alternatively, the signals may be used to effect automatic actuation of soot blowers when a particular  $R_F$  value is recorded for a particular bank of heat-exchange tubes. The channelling signal may be used to override the command or to actuate selective soot blower operation and thereby prevent needless blowing and the resulting tube erosion and steam loss.

The invention is described further, by way of illustration, with reference to the accompanying drawings, wherein:

Figure 1 is a schematic representation of a typical coal-fired steam generator to which the present invention is directed;

Figure 2 is an elevational view of a bank of convection section heat exchanger tubes modified in accordance with a preferred embodiment of the invention; and

Figure 3 is a plan view of the bank of convection section heat exchange tubes of Fig. 2.

Referring to the drawings, Fig. 1 illustrates schematically a coal-fired boiler 10. Pulverized coal and air are fed through burners 12 into the firing chamber 14 of the boiler 10. As is well known, the furnaces walls 16 are comprised of a plurality of parallel tubes wherein steam is generated for feed to a steam collection system (not shown).

Combustion gases pass upwardly into the convection section 18 of the boiler 10. The convection section 18 contains banks 20 and 22 of heat exchange tubes through which steam is passed to effect superheating and reheating in known manner. The combustion gases next pass over an economizer 24 and an air heater (not shown) before being exhausted to atmosphere by line 26.

During operation of the boiler 10, ash and slag deposit on the furnace walls 16 and also on heat exchanger banks 20 and 22, sticking

to the tubes and decreasing heat absorption across those surfaces and otherwise causing operating difficulties. Soot blowers (not shown in Fig. 1) are located throughout the boiler 10 for actuation to remove accumulations of deposits from heat exchanger tube surfaces, by directing jets of steam against the accumulations.

As noted previously, in U.S. Patent No. 4,408,568, there is described a method of monitoring the build up of ash and other deposits on the furnace walls 16 by utilizing a plurality of flux meters located in the walls 16 directly facing the flame.

The present invention is concerned with monitoring of the build up of deposits on the heat exchanger tubes forming the banks 20, 22 and 24 and specific reference now is made to Figs. 2 and 3, which are schematic elevational and plan views of a bank 20 of heat exchange tubes.

The structure of the individual banks 28 of heat exchange tubes is entirely conventional and includes a series of tubes which carry steam therethrough and which remove heat from the flowing gas stream 30 through the tube walls to heat the flowing steam. Horizontally-disposed, retractable soot blowers 32 are associated with the individual banks 28 to effect removal of accumulation of deposits from the tube surfaces.

In accordance with this invention, radiation pyrometers 34 are provided at both the upper and lower end of the bank 20 of heat exchanger tubes and also between vertically-adjacent pairs. It is possible to provide a pair of pyrometers 34 for a complete bank of convection section tubes 20 or 22 (or indeed for the economizer 24) or to provide a pair of pyrometers 34 with one individual bank 28 of heat exchange tubes or selected individual banks, depending on the demand of a local situation. Each pyrometer 34 measures the temperature of the gas stream 30 at its location. The pyrometers 34 are focussed on the gas stream, usually at the longitudinal centre line of the bank 20 or 22.

The pyrometers 34 may be of the type which is sensitive to the wavelength range where carbon dioxide and water absorb and emit radiation. To convert the pyrometer signal to a true temperature determination, a correction for the inherent emissivity of the gas space is needed. Emissivity is affected by the percent water, percent carbon dioxide, percent ash in the coal, total air flow, and gas temperature. The correction is accomplished by calculation from the gas phase composition. Alternatively, the pyrometers 34 may be of the type which is sensitive to the wavelength range where carbon dioxide and water do not emit and/or absorb radiation. In this case, the signal is usually due to the solid particles in the gas stream and the temperature determination usually is corrected using

data for total air flow, percent ash in the coal and feed rate of coal. Usually, the correcting calculations are effected on line by a dedicated computer. Both types of pyrometer may be used, if desired, depending on individual cases, as may pyrometers which are not sensitive to any particular wavelength, but measure total radiation. In still other specific cases, a clean heat flux meter, such as one of the type described in U.S. Patent No. 4,408,568. Suitable corrections to the signals are still applied.

The pyrometers 34 measure the vertical temperature drop across the bank 28 of heat exchange tubes along the approximate centre line of the bank. As fouling of the individual tubes in the bank 28 occurs, less heat is transferred across the tube surfaces to heat the steam, resulting in a lesser temperature drop between each pair of pyrometers 34. The determined temperature difference preferably is fed to an on-line computer to which also is fed determinations of steam temperature and flow, and data for correction of the pyrometer readings, as noted above.

The relationship which exists in the heat exchanger bank is provided by equation (1):

$$Q = UA\Delta T_{1m} \quad -(1)$$

where  $Q$  is the heat absorbed by the steam and is determined from measurements of temperature and flow rate on the steam side of the tubes,  $\Delta T_{1m}$  is the log mean temperature drop across the bank as determined by the radiation pyrometers and thermocouples in the steam lines,  $A$  is the area of the surface of the tubes and  $U$  is the effective heat transfer coefficient of the tubes, part of which is contributed by fouling.

The fouling factor ( $R_F$ ) may then be determined from the equation (2):

$$\frac{1}{U} = \frac{1}{(h_c)_t} + \frac{1}{(h_c)_s} + \frac{L}{k} + R_F \quad -(2)$$

where  $U$  is the effective heat transfer coefficient determined from equation (1),  $R_F$  is the fouling factor,  $(h_c)_t$  is the convective heat transfer coefficient on the gas stream side of the tubes,  $(h_c)_s$  is the convective heat transfer coefficient on the steam side of the tubes, and  $L$  and  $k$  respectively are the thickness and thermal conductivity of the convection section tubes.

The calculations required to be effected using equations (1) and (2) are most effectively done by a computer programmed to receive measured temperatures and flow rates and to calculate  $U$  and thence  $R_F$ . The fouling factor ( $R_F$ ) may be provided to the operator as a numerical value or may be displayed on a monitor screen as a part of a graphic representation of the fouling of the convection

section, which may be colour-keyed to indicate differing degrees of fouling, to assist the operator in controlling the combustion process.

- 5 When the fouling reaches a predetermined level for any particular bank 28, the soot blowers 32 for that bank are actuated, either as a result of operator intervention or by automatic computer-operated actuation, to remove accumulations of deposits from the surfaces of the heat exchange tubes in that bank.

- 10 In a preferred embodiment of the invention, provision is made to override actuation of certain soot blowers 32 in response to a determination of channelling. As previously noted, channelling of gases may occur in the bank 28 of heat exchange tubes as a result of different degrees of fouling in the horizontal plane. Heat flux meters 37 are located on the water tube walls 38 of the convection section 18 in the horizontal plane. Horizontally planar-aligned sets of four or more of such heat flux meters 36 may be provided at longitudinally-spaced locations in the banks 20 and 22.

- 25 The heat flux meters 36 each measure the heat flux reaching that meter. The heat flux meters 36 may be of any convenient construction. The flux meters may be affixed to the wall tubes and be the fouling or dirty type. Alternatively, should fouling of the walls occur, the clean heat flux meters of the type described above sighted through openings in the walls, may be used. In still other specific cases, it may be advantageous to use thermocouples whose protection walls protrude into the gas stream.

- 40 The heat flux reaching each meter 36 is determined by the flow of gas 30 through the particular heat exchanger tube bank 28. In the absence of channelling, the heat flux reaching each meter 36 is substantially the same. However, if fouling occurs preferentially in a certain area of the horizontal extremity of the heat exchanger tube bank 28, then the gas flow is channelled into the remainder of the tube bank 28 and is greater than in the preferentially-fouled area. Under these circumstances, the heat flux reaching the flux meters 36 differs. The radiation pyrometer 34 does not necessarily detect these variations, since the temperature determination made thereby is with respect to gas flow through the generally central region of the tube bank 28. The flux meters 36, therefore, are used to monitor the degree of channelling and the heat flux determinations effected thereby preferably are used to actuate, either manually or in automatic computer-controlled manner, selected ones of the soot blowers 32 to effect selective cleaning of the heat exchange tubes in the zone preferentially fouled. Such selected soot blower operation, therefore, prevents actuation of all the soot blowers 32 in response to a fouling condition detected by the radiation

pyrometers 34. Only those areas requiring cleaning are actually exposed to soot blowing. In this way, tube erosion, a considerable cost and operating problem, is minimized and steam savings maximized.

- 70 Fouling of the convection section 18 of the boiler 10 by solid deposits from the gas stream 30, therefore, is monitored by radiation pyrometers 34 and by heat flux meters 36. The measurements effected by these instruments are processed to generate operator information with respect to the condition of the convection section or may be employed in computer-controlled automatic actuation of the tube cleaning operations, using soot blowers, in response to a predetermined set of conditions indicated by the measurements.

- 80 Direct measurement of the temperature of the gas stream is effected using the radiation pyrometers and this measurement is used for accurate instantaneous determination of the build up of ash and other solid deposits in the convection section. By compensating for the emissive properties of the gas stream and also by taking into account the effects of channelling, a boiler operator, for the first time, is provided with information which enables precise boiler operation to be effected. Alternatively, automatic precise cleaning of the convection section may be effected using computer control based on the collected data. In this way, the problems of the prior art with respect to the fouling of the convection section and steam tube erosion in steam generators are overcome.

- 100 In summary of this disclosure, the present invention provides a convection section ash monitoring and control system which enables the fouling of heat exchanger tubes to be precisely monitored and controlled. Modifications are possible within the scope of this invention.

#### CLAIMS

- 110 1. A method of controlling the build up of ash on the heat exchange surfaces of a convection section of a steam generator wherein a flowing hot gas stream contacts the heat exchange surfaces to heat steam flowing within the surfaces, which comprises directly measuring the temperature of the gas stream at two locations in the flowing gas stream spaced apart in the direction of flow and between which is located a selected number of the heat exchange surfaces, calculating the difference in temperature between the two locations as a measure of the build up of ash on the selected number of heat-exchange surfaces, and activating cleaning of the selected number of heat-exchange surfaces in response to a predetermined level of build up of ash.
- 120 2. A method as claimed in claim 1, in which the direct temperature measurements are effected using radiation pyrometers.
- 125 3. A method as claimed in claim 1, in
- 130

which the direct temperature measurements are effected using clean heat flux meters.

4. A method as claimed in claim 1, in which the direct temperature measurements are effected using thermocouples.

5. A method as claimed in any one of claims 1 to 4, in which the build up of ash is calculated as a fouling factor ( $R_F$ ) from the calculated temperature difference.

6. A method as claimed in claim 5, in which the fouling factor is displayed on a monitor screen for use by a steam generator operator in controlling the steam generating process and/or to effect cleaning of fouled heat exchange surfaces.

7. A method as claimed in claim 6, in which the display is a representation of the convection section illustrating regions of fouling.

8. A method as claimed in claim 5, in which the fouling factor is used to activate the cleaning of fouled heat exchange surfaces automatically.

9. A method as claimed in claim 8, in which the automatic actuation is overridden by signals indicative of a fouling condition which does not necessitate cleaning of the whole of the selected number of heat exchange surfaces.

10. A method as claimed in claim 1, in which the heat exchange surfaces in the convection section comprises a series of banks of heat exchange tubes, the direct temperature measurement is effected using radiation pyrometers positioned on each longitudinal side of each tube bank as determined by the direction of flow to determine the temperature difference between each side of each bank as a measure of the build-up of ash on each of the heat-exchange banks.

11. A method as claimed in claim 10 further including measuring the heat flux received from the flowing hot gas stream at selected locations transverse to the flow path to monitor differences in the degree of fouling of the heat exchange surfaces, and selectively activating cleaning of selected portions of the heat exchange tubes in a bank in response to the measured heat flux values.

12. A method as claimed in claim 11 wherein at least four heat flux meters are provided in a plane extending transverse to the gas flow path at the periphery of a pipe confining the gas flow path.

13. A method as claimed in claim 10 further including measuring the heat flux received from the flowing hot gas stream at selected locations transverse to the flow path to monitor differences in the degree of fouling of the heat exchange surfaces, and using the measured heat flux values to override signals indicative of a fouling condition in a particular bank of heat exchange tubes determined by the difference in temperature measurements determined by the radiation pyrometers.

14. A method as claimed in any one of claims 2, 5 to 9, when dependent on claim 2, and claims 10 to 13, in which the radiation pyrometers are each sensitive in the wavelength range in which carbon dioxide and water absorb and emit radiation and the direct determinations effected by the radiation pyrometers are corrected for the emissive and absorptive properties of the gas stream.

15. A method as claimed in any one of claims 2, 5 to 9 when dependent on claim 2, and claims 10 to 13, in which the radiation pyrometers are each sensitive in the wavelength range in which carbon dioxide and water do not absorb and/or emit radiation and the direct determinations effected by the radiation pyrometers are corrected for the emissive and absorptive properties of the gas stream.

16. The method of claim 1, comprising the steps of continuously directly measuring the temperature of the gas stream at two locations in the flowing gas stream spaced apart in the direction of flow and between which is located a selected number of the heat exchange surfaces; adjusting the measured temperature to compensate for the emissivity of the flowing gas stream; continuously measuring the stream flow rate through the selected number of heat exchange surfaces and the temperature change in the steam across the heat exchange surfaces; determining a fouling factor ( $R_F$ ) from the measurements as a measure of the build up of ash on the selected number of heat exchange surfaces; and automatically actuating cleaning of fouled heat exchange surfaces when the fouling factor attains a predetermined value.

17. A method as claimed in claim 16, in which the fouling factor ( $R_F$ ) is determined automatically from the measured values by substitution in the equation:

$$R_F = \frac{1}{U} - \frac{1}{(h_c)_t} - \frac{1}{(h_c)_s} - \frac{L}{k}$$

where  $(h_c)_t$  is the convective heat transfer coefficient on the gas stream side of the heat exchange surfaces,  $(h_c)_s$  is the convective heat transfer coefficient on the steam side of the heat exchange surface,  $L$  and  $k$  respectively are the thickness and thermal conductivity of the heat exchange surfaces, and  $U$  is a heat transfer coefficient which is determined from the equation:

$$U = \frac{Q}{A \Delta T_{1m}}$$

wherein  $Q$  is the heat absorbed by the steam and determined from the measurements of temperature and flow rate on the steam side of the heat exchange surfaces,  $\Delta T_{1m}$  is the log

mean temperature drop across the selected number of heat-exchange surfaces as determined from the gas stream temperature measurements and steam temperature measurements, and A is the area of the heat-exchange surfaces.

18. A method as claimed in claim 17 including determining the heat flux reaching a plurality of peripheral locations of the heat-exchange surfaces, comparing the individual determinations to the average of the determinations, overriding the automatic cleaning actuation in response to a predetermined difference in the compared determinations, and actuating selective cleaning of portions only of the heat-exchange surfaces in response to detected channelling of the gas stream.

19. A method as claimed in claim 18, in which the heat flux determinations are effected using a heat flux meter.

20. A method of controlling the build up of ash on the heat exchange surfaces of a convection section of a steam generator, substantially as hereinbefore described with reference to, and as illustrated in, the accompanying drawings.

21. A steam generating apparatus wherein fuel is burned in an air stream to generate heat and heat is recovered from the resulting gas stream by heat exchange tubes contacting the gas stream and through which steam of temperature lower than that of the gas stream is passed, which comprises two temperature detection means located one upstream and the other downstream of a selected bank of the heat exchange tubes to measure directly the temperature of the gas stream at the locations of the temperature detection means.

22. An apparatus as claimed in claim 21, including means for on-line calculation of a fouling factor ( $R_f$ ) for the selected bank of heat exchange tubes from the difference in temperature determined by the temperature detection means.

23. An apparatus as claimed in claim 22 including means for activating soot blowers to effect cleaning of the selected bank in response to a predetermined value of the fouling factor.

24. An apparatus as claimed in claim 23, in which a plurality of banks of the heat exchange tubes is provided and a temperature detection means is provided upstream of each bank and downstream of the last bank to determine the fall in temperature across each bank.

25. An apparatus as claimed in any one of claims 21 to 24, in which each temperature detection means is a radiation pyrometer.

26. An apparatus as claimed in claim 25, in which the radiation pyrometers are each sensitive in the wavelength range in which carbon dioxide and water absorb and emit radiation and the direct determinations effected by the radiation pyrometers are cor-

rected for the emissive and absorptive properties of the gas stream.

27. An apparatus as claimed in claim 25, in which the radiation pyrometers are each sensitive in the wavelength range in which carbon dioxide and water do not absorb and/or emit radiation and the direct determinations effected by the radiation pyrometers are corrected for the emissive and absorptive properties of the gas stream.

28. An apparatus as claimed in any one of claims 21 to 24, in which each temperature detection means is a clean heat flux meter.

29. An apparatus as claimed in any one of claims 21 to 24, in which each temperature detection means is a thermocouple.

30. An apparatus as claimed in any one of claims 21 to 29, in which the temperature detection means are focussed on the gas space, and further including second temperature detection means positioned to determine the heat flux emanating from the gas stream in a plane transverse thereto thereby to determine variations in ash build up in the transverse dimension of each bank of tubes.

31. An apparatus as claimed in claim 30 in which each second temperature detection means is a heat flux meter.

32. An apparatus as claimed in claim 30 in which each second temperature detection means is a thermocouple.

33. An apparatus as claimed in any one of claims 28 to 32 including means to actuate selective ones of the soot blowers to effect cleaning of selective portions of the bank in response to predetermined heat flux values.

34. An apparatus as claimed in any one of claims 28 to 33 including means for overriding actuation of the soot blowers in response to a predetermined fouling factor value.

35. A steam generating apparatus substantially as hereinbefore described with reference to, and as illustrated in, the accompanying drawings.

Printed in the United Kingdom for  
Her Majesty's Stationery Office, Dd 8818935, 1985, 4235.  
Published at The Patent Office, 25 Southampton Buildings,  
London, WC2A 1AY, from which copies may be obtained.