



(51) International Patent Classification:
G06T 7/00 (2006.01)

(21) International Application Number:
PCT/BR2013/000376

(22) International Filing Date:
27 September 2013 (27.09.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/707,717 28 September 2012 (28.09.2012) US

(71) Applicants: VALE S.A. [BR/BR]; Av. Graça Aranha, Nº 26 Centro, CEP: 20030-000 Rio de Janeiro - RJ (BR).
FACULDADES CATÓLICAS [BR/BR]; Rua Marquês de São Vicente, 225, CEP: 22451-900 - Gávea - RJ (BR).

(72) Inventors; and

(71) Applicants : VIEIRA, Maria Beatriz [BR/BR]; Rua das Cores - P4 Apto 502, Vila Grimm - Vale dos Cristais, CEP: 34.000-000 Nova Lima - MG (BR). PACIORNIK, Sidnei [BR/BR]; Rua Lopes Quintas 390/408, Jardim Botânico, CEP: 22460-010 Rio de Janeiro - RJ (BR).
GOMES, Otavio da Fonseca Martins [BR/BR]; Rua Gerontia 5 - São Cristovão, CEP: 20940-120 Rio de Janeiro -

RJ (BR). AUGUSTO, Karen Soares [BR/BR]; Rua maria Tomásia 86 - Nilópolis, CEP: 26520-760 - RJ (BR).
BORGES, Aloísio Antônio Melo [BR/BR]; Rua Dr Benjamin Moss, 95/202 - Cidade Nova, Belo Horizonte - MG (BR).

(74) Agent: VEIRANO ADVOGADOS ASSOCIADOS; AV. Brigadeiro Faria Lima, 3477 - 16º andar, CEP: 04538-133 - São Paulo - SP (BR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

[Continued on next page]

(54) Title: AUTOMATIC CLASSIFICATION OF THE DEGREE OF MATURATION FOR IRON ORE PELLETS

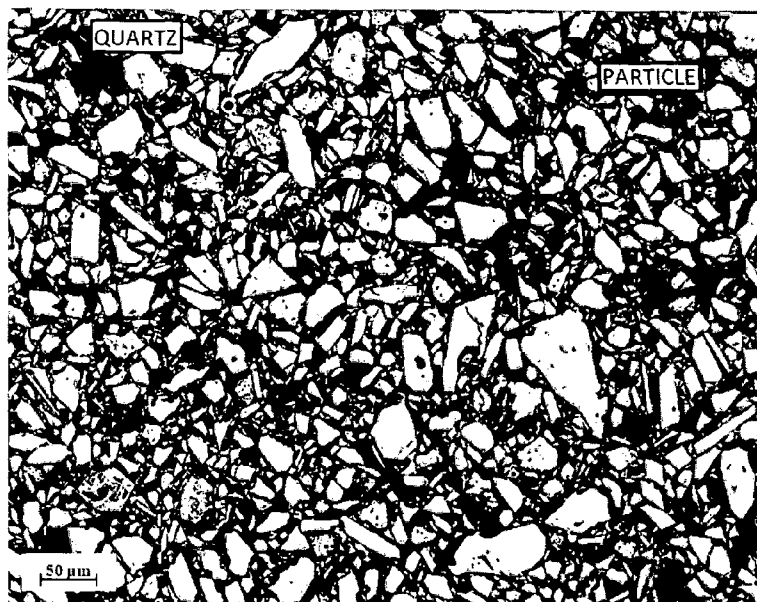


FIGURE 1

(57) Abstract: An automatic method for the classification of the Degrees of Maturation (DM) for fired iron ore pellets, independent of human intervention, based on the digital acquisition of microscopy images of polished cross sections, and their processing, analysis and classification by a suitable software procedure.



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, **Published:**

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

AUTOMATIC CLASSIFICATION OF THE DEGREE OF MATURATION FOR IRON ORE PELLETS

This application claims priority from U.S. Patent Application No. 61/707,717, titled "Automatic Classification of the Degree of Maturation of Iron Ore Pellets", filed on September 28, 2012, and which is incorporated herein by reference in its entirety.

Field of the invention

Aspects of the present invention refer to an automatic method for the classification of the Degrees of Maturation (DM) of fired iron ore pellets, independent of human intervention. An example method is based on the digital acquisition of microscopy images of polished cross sections, and their processing, analysis and classification by a suitable software procedure.

Background of the invention

Iron ore pellets are spherical agglomerates of iron ore super-fines (below 0.25 mm). Pellets undergo thermal processing to increase their compressive strength, which is important during handling and shipping, and during their use in reduction reactors. During thermal treatment several physico-chemical reactions occur, leading to strong changes in microstructure. These changes can be described by "degrees of maturation" (DM), and can be classified in classes in order to represent the microstructural characteristics. Typically DM is divided into four levels: A, B, C, and D, although intermediate types, such as AB, BC, and CD can also be obtained. The Degrees of Maturation increase from A to D, considering class A as the lowest Degree of Maturation and class D as the highest Degree of Maturation.

Usually, the DM is defined by observation of a cross section of the sample under the optical microscope. A trained human operator observes the images, either directly on the microscope eyepiece, or on a digital display, and decides the DM for that field of view. This decision is based on several parameters such as particle shape, porosity, presence of ferrite and slag formation. This represents a complex classification problem that has a strong

subjective component, leading to errors and lack of reproducibility. Figures 1 to 4 show typical images for classes A, B, C, and D.

Summary of the invention

5 This invention aims to overcome this scenario, characterized by the human intervention that has a strong subjective component, leading to errors and lack of reproducibility, by an automatic method for the classification of the DM of fired iron ore pellets independent of human intervention.

Brief description of the drawings

Figure 1 shows an image for class A of DM;

10 Figure 2 shows an image for class B of DM;

Figure 3 shows an image for class C of DM;

Figure 4 shows an image for class D of DM; and

Figure 5 is a flowchart of the automatic method provided by the present invention.

15 Figure 6 is a system, including a computer device having components configured to perform aspects of the automatic method provided by the present invention.

Description of preferred embodiments

20 The automatic method for the classification of the DM of fired iron ore pellets independent of human intervention is based on the digital acquisition of microscopy images of polished cross sections, and their processing, analysis and classification by a suitable software procedure, as described herein.

Referring to FIGS. 1-6, the image processing involves the steps of background correction, edge enhancement, segmentation, and morphological
25 post-processing.

The image analysis provides several measurement parameters as listed below:

1. Field parameters: particle and pore count, particle and pore area fraction, particle mean lineal intercept.

2. Size parameters: particle and pore area, perimeter, calipers, equivalent circular diameter.

3. Texture parameters: field mean intensity of pixel intensities in a field image, standard deviation of pixel intensities in a field image, and Haralick parameters (that are statistical measurements of co-occurrence of neighboring grayscale pixels) measured from the pixel intensities in a field image.

4. Shape parameters: particle aspect ratio, convexity based on convex area and perimeter, circular shape factors based on area, perimeter and maximum caliper, branching and modification ratios based on inscribed circle diameter and minimum or maximum calipers.

This set of parameters was measured for hundreds of image fields representative of the 4 degrees of maturation (A, B, C, and D), and used as inputs to a supervised classification procedure. After cross-validation of more than 10,000 subdivisions of the measurement set, comparing the current method (human analysis) and the automatic method (software analysis), the global classification rate for the 4 classes reached 91.21%.

The classification of the images comprises 4 classes of Degrees of Maturation: A, B, C, and D and the Degrees of Maturation increases from A to D, considering class A as the lowest Degree of Maturation and class D as the highest Degree of Maturation.

In particular, referring to FIGS. 5 and 6, a system 600 may be configured to perform aspects of the automatic method 500 for the classification of the DM of fired iron ore pellets independent of human intervention.

The system 600 includes digital image capture device 620, such as, for example, a digital camera, which captures an image. The system 600 also includes a computer device 610, which, at 510 of method 500, acquires the captured image e.g., via a digital image acquisition component 609 from the digital image capture device 620. The image includes a first set of image data of a cross-section of a sample of a fired iron ore pellet 630. Although the digital image capture device 620 and the digital image acquisition component 609 are

shown as separate components, they can be part of the same component. For example, digital image capture device 620 can be part of a computer device, such as the example of computer device 610, that also includes some or all of the other components shown in the example of computer device 610. In
5 another example, some or all of the components shown in the example of computer device 610 may be included as part of digital image capture device 620.

Then, the computer device 610, at 520 of method 500, processes the image, e.g., via an image processing component 608, which may be software
10 and/or hardware executing one or more of a background correction algorithm or function, an edge enhancement algorithm or function, a segmentation algorithm or function, and/or a morphological post-processing algorithm or function, to generate a revised image and/or a second or processed set of image data.

Next, the computer device 610, at 530 of method 500, analyzes the
15 revised image and/or a second or processed set of image data, e.g., via an image analysis component 607, which may be software and/or hardware executing one or more algorithm or function to generate one or more image measurement parameters (e.g., field parameters, size parameters, texture parameters, and/or shape parameters) for the image.

Then, the computer device 610, at 540 of method 500, classifies the
20 image, e.g., via an image classification component 606, which may be software and/or hardware executing one or more of an image classification algorithm or function by comparing the one or more image measurement parameters for the image to a set of one or more corresponding image classification parameter
25 rules, e.g., which may include values or ranges for one or more representative image measurement parameters corresponding to each of one or more DM classifications. For instance, the image classification parameter rules may be based on samples from a supervised classification procedure used to quantify each class of DM. Based on achieving a certain degree of matching of values
30 or ranges for one or more representative image measurement parameters, or otherwise meeting the image classification parameter rules for a certain DM

class, the system thereby generates an association between the DM class and the image.

As such, each image and hence each sample of a fired iron ore pellet may be automatically evaluated and provided with a DM classification.

5 The computer device 610 also may include a processor 601 for carrying out processing functions associated with one or more of the components and functions described herein. The processor 601 can include a single or multiple set of processors or multi-core processors. Moreover, the processor 601 can be implemented as an integrated processing system and/or a distributed
10 processing system.

 The computer device 610 also may include a memory 602, such as for storing data used herein and/or local versions of applications being executed by processor 601. The memory 602 can include any type of memory usable by a computer, such as random access memory (RAM), read only memory (ROM),
15 tapes, magnetic discs, optical discs, volatile memory, non-volatile memory, and any combination thereof.

 The computer device 610 also may include a communications component 603 that provides for establishing and maintaining communications with one or more entities utilizing hardware, software, and services as described
20 herein. The communications component 603 may carry communications between components within the computer device, as well as between the computer device and external devices, such as devices located across a communications network and/or devices serially or locally connected to the computer device. For example, the communications component 603 may
25 include one or more buses, and may further include transmit chain components and receive chain components associated with one or more transmitters and receivers, respectively, or one or more transceivers, operable for interfacing with external devices.

 The computer device 610 also may include a data store 604, which can
30 be any suitable combination of hardware and/or software, that provides for mass storage of information, databases, and programs employed in connection

with aspects described herein. For example, the data store 604 may be a data repository for applications not currently being executed by the processor 601.

The computer device 610 also may include a user interface component 605 operable to receive inputs from a user of the computer device 610, and
5 further operable to generate outputs for presentation to the user. The user interface component 605 may include one or more input devices, including but not limited to a keyboard, a number pad, a mouse, a touch-sensitive display, a navigation key, a function key, a microphone, a voice recognition component, any other mechanism capable of receiving an input from a user, or any
10 combination thereof. Further, the user interface component 605 may include one or more output devices, including but not limited to a display, a speaker, a haptic feedback mechanism, a printer, any other mechanism capable of presenting an output to a user, or any combination thereof.

The main differences between the current method and the proposed
15 Invention are summarized in the Table below:

Table 1: Main differences between the Current Method and the Automatic Classification

Current Method	Automatic Classification
Human operator decides the degree of maturation	Automatic system determines the degree of maturation
Subjective and non-reproducible method	Objective and reproducible method
Strongly operator dependent	Independent of operator
Manual microscopy system	Automated microscopy system

The examples set forth in the present application are for illustrative
20 purposes only and are not intended to limit, in any way, the scope of the present invention.

As used in this application, the terms "component," "module," "system" and the like are intended to include a computer-related entity, such as but not

limited to hardware, firmware, a combination of hardware and software, software, or software in execution. For example, a component may be, but is not limited to being, a process running on a processor, a processor, an object, an executable, a thread of execution, a program, and/or a computer. By way of
5 illustration, both an application running on a computing device and the computing device can be a component. One or more components can reside within a process and/or thread of execution and a component may be localized on one computer and/or distributed between two or more computers. In addition, these components can execute from various computer readable media
10 having various data structures stored thereon. The components may communicate by way of local and/or remote processes such as in accordance with a signal having one or more data packets, such as data from one component interacting with another component in a local system, distributed system, and/or across a network such as the Internet with other systems by way
15 of the signal.

The various illustrative logics, logical blocks, modules, and circuits described in connection with the embodiments disclosed herein may be implemented or performed with a general purpose processor, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field
20 programmable gate array (FPGA) or other programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described herein. A general-purpose processor may be a microprocessor, but, in the alternative, the processor may be any conventional processor, controller, microcontroller, or state machine. A
25 processor may also be implemented as a combination of computing devices, e.g., a combination of a DSP and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration. Additionally, at least one processor may comprise one or more modules operable to perform one or more of the steps
30 and/or actions described above.

Further, the steps and/or actions of a method or algorithm described in connection with the aspects disclosed herein may be embodied directly in

hardware, in a software module executed by a processor, or in a combination of the two. A software module may reside in RAM memory, flash memory, ROM memory, EPROM memory, EEPROM memory, registers, a hard disk, a removable disk, a CD-ROM, or any other form of storage medium known in the art. An exemplary storage medium may be coupled to the processor, such that the processor can read information from, and write information to, the storage medium. In the alternative, the storage medium may be integral to the processor. Further, in some aspects, the processor and the storage medium may reside in an ASIC. Additionally, the ASIC may reside in a user terminal. In the alternative, the processor and the storage medium may reside as discrete components in a user terminal. Additionally, in some aspects, the steps and/or actions of a method or algorithm may reside as one or any combination or set of codes and/or instructions on a machine readable medium and/or computer readable medium, which may be incorporated into a computer program product.

In one or more aspects, the functions described may be implemented in hardware, software, firmware, or any combination thereof. If implemented in software, the functions may be stored or transmitted as one or more instructions or code on a computer-readable medium. Computer-readable media includes both computer storage media and communication media including any medium that facilitates transfer of a computer program from one place to another. A storage medium may be any available media that can be accessed by a computer. By way of example, and not limitation, such computer-readable media can comprise RAM, ROM, EEPROM, CD-ROM or other optical disk storage, magnetic disk storage or other magnetic storage devices, or any other medium that can be used to carry or store desired program code in the form of instructions or data structures and that can be accessed by a computer. Also, any connection may be termed a computer-readable medium. For example, if software is transmitted from a website, server, or other remote source using a coaxial cable, fiber optic cable, twisted pair, digital subscriber line (DSL), or wireless technologies such as infrared, radio, and microwave, then the coaxial cable, fiber optic cable, twisted pair, DSL, or wireless technologies such as infrared, radio, and microwave are included in the definition of medium. Disk and disc, as used herein, includes compact disc (CD), laser disc, optical disc,

digital versatile disc (DVD), floppy disk and blu-ray disc where disks usually reproduce data magnetically, while discs usually reproduce data optically with lasers. Combinations of the above should also be included within the scope of computer-readable media.

CLAIMS

1. An automatic method for classification of Degrees of Maturation (DM) for fired iron ore pellets comprising the steps of:

5 (a) digital acquisition of microscopy images of polished cross sections;

(b) processing the images;

(c) analyzing the images; and

(d) classifying the images with a suitable software procedure.

10 2. The method of claim 1, wherein the step (b) involves the steps of background correction, edge enhancement, segmentation, and morphological post-processing.

15 3. The method of claim 1, wherein the step (c) comprises four types of measurement parameters: field parameters, size parameters, texture parameters and shape parameters.

20 4. The method of claim 3, wherein the field parameters comprise particle and pore count, particle and pore area fraction, and particle mean lineal intercept.

5. The method of claim 3, wherein the size parameters comprise particle and pore area, perimeter, calipers, and equivalent circular diameter.

25 6. The method of claim 3, wherein the texture parameters comprise a mean intensity of pixel intensities in a field image, a standard deviation of pixel intensities in a field image, and Haralick parameters measured from the pixel intensities in the field image.

7. The method of claim 3, wherein the shape parameters comprise particle aspect ratio, convexity based on convex area and perimeter, circular shape factors based on area, perimeter and maximum caliper, branching and modification ratios based on inscribed circle diameter and minimum or maximum calipers.

8. The method of claim 1, wherein the step (d) comprises 4 classes of the Degrees of Maturation named: A, B, C, and D and intermediate types AB, BC, and CD depending on a need.

9. The method of claim 8, wherein the Degrees of Maturation increase from A to D, considering class A as the lowest Degree of Maturation and class D as the highest Degree of Maturation.

10. The method of claim 1, wherein the Degree of Maturation is determined by the automatic system.

11. The method of claim 1, wherein the method is reproducible.

12. The method of claim 1, wherein the method is independent of an operator.

13. The method of claim 1, wherein the method employs an automated microscopy system.

1/4

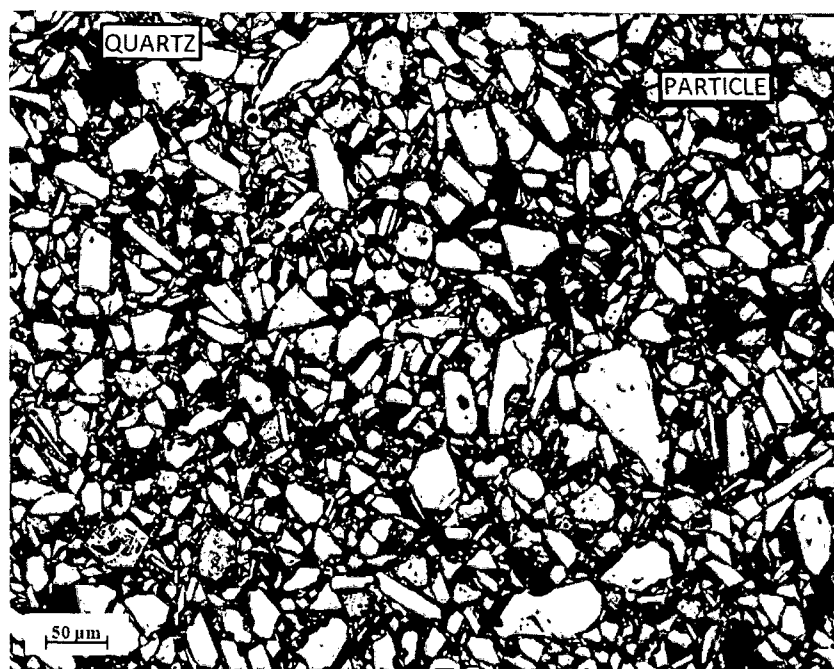


FIGURE 1

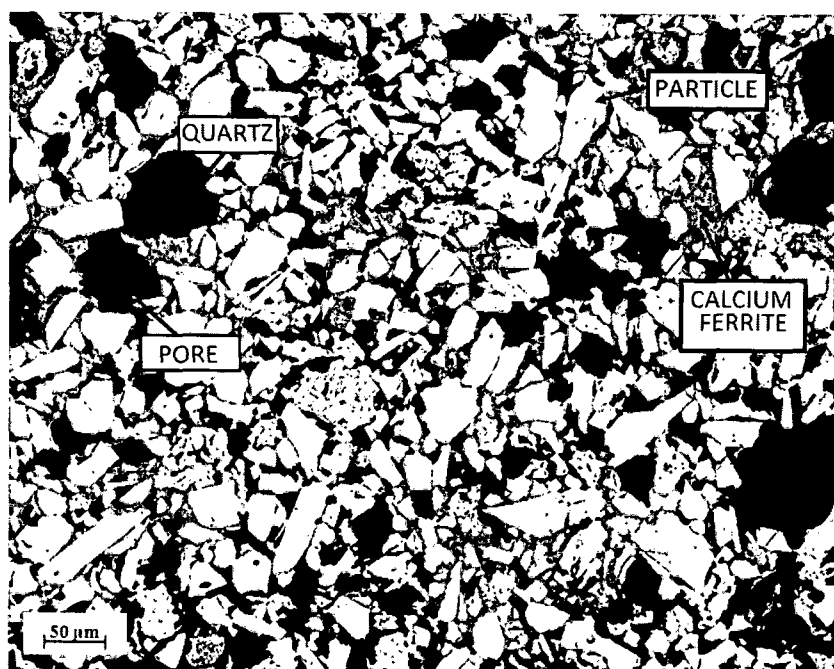


FIGURE 2

2/4

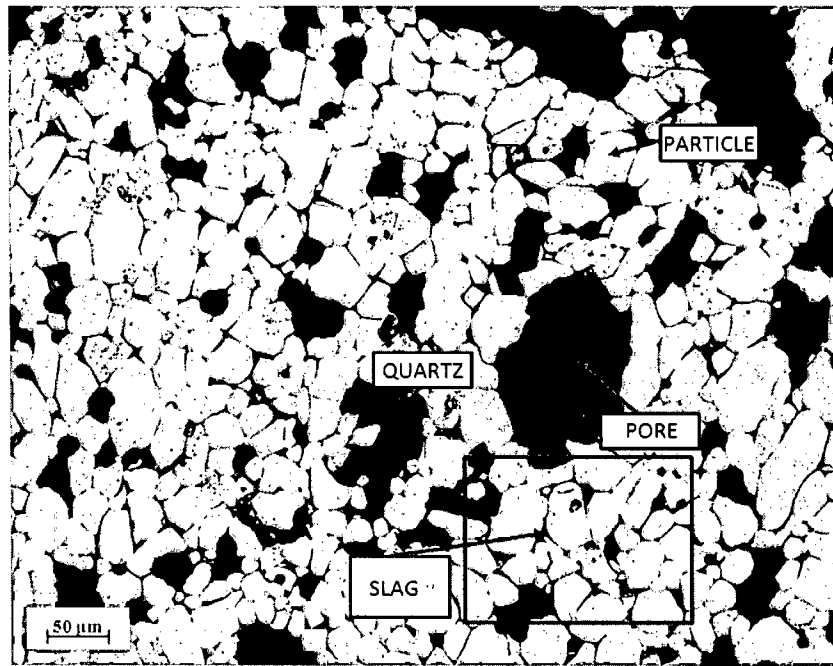


FIGURE 3

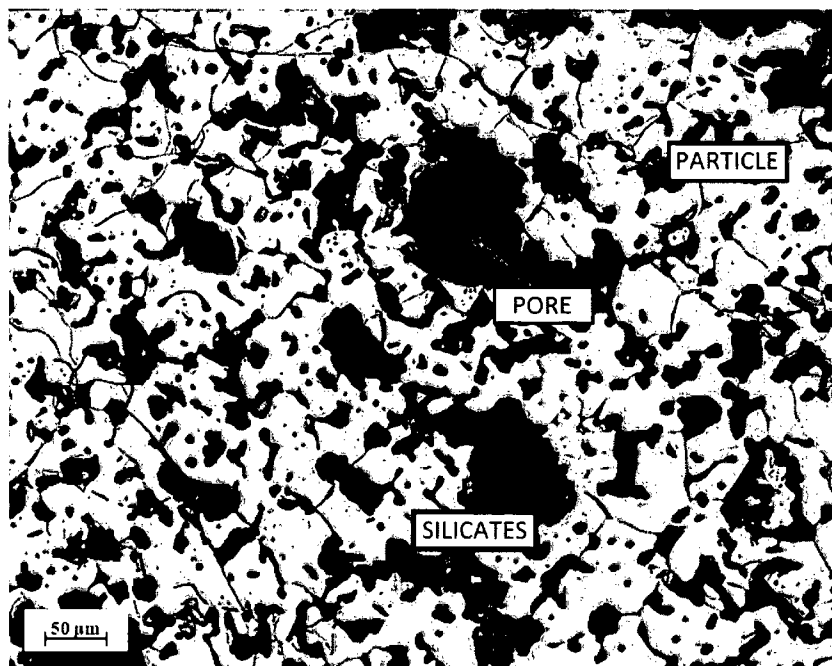


FIGURE 4

3/4

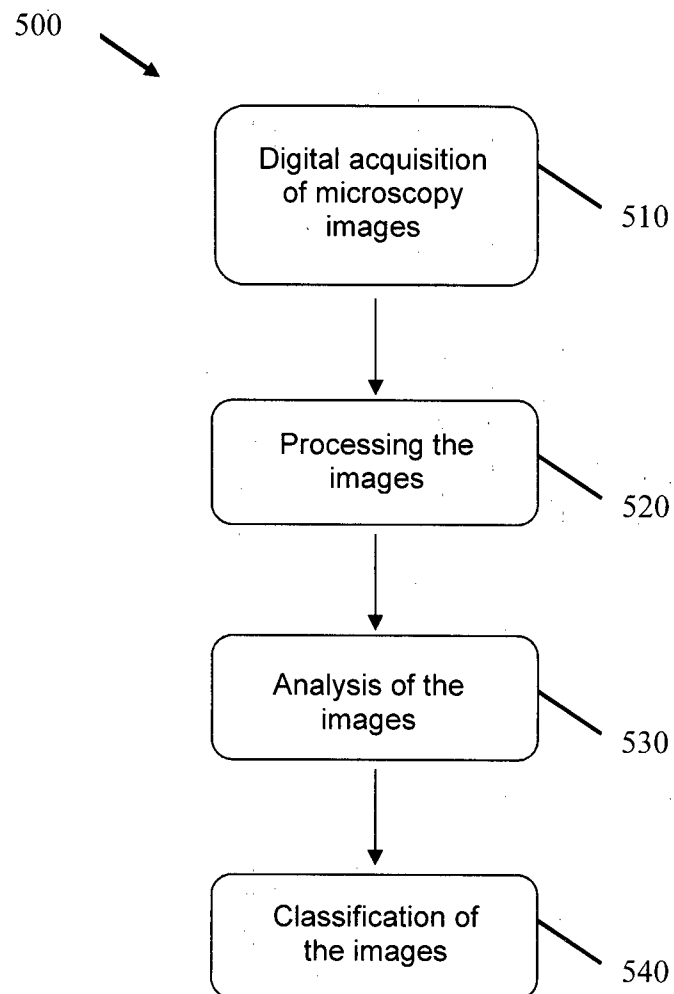


FIGURE 5

4/4

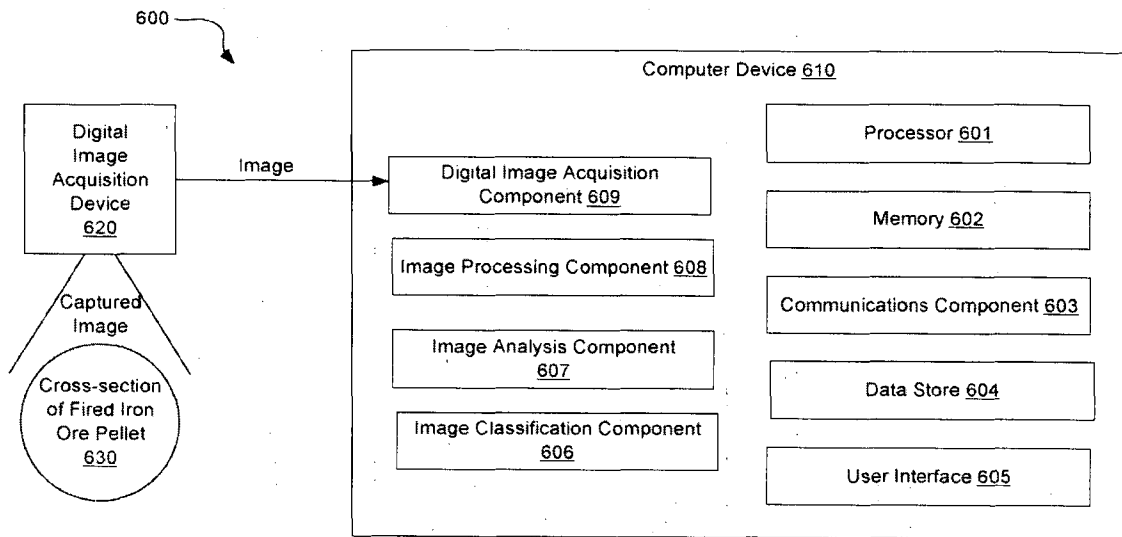


FIGURE 6

INTERNATIONAL SEARCH REPORT

International application No

PCT/BR2013/000376

A. CLASSIFICATION OF SUBJECT MATTER

INV. G06T7/00

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, COMPENDEX, INSPEC, IBM-TDB, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	LESSA ET AL: "Automatic classification of hematite types in pellet feed through digital image analysis", XXI CONGRESSO DA SOCIEDADE BRASILEIRA DE MICROSCOPIA E MICROANALISE,, 1 September 2007 (2007-09-01), XP009174774,	1,8-13
Y	the whole document	2-7
Y	PACIOMIK S ET AL: "Digital Imaging", 1 January 2004 (2004-01-01), ASM HANDBOOK, VOL.9, METALLOGRAPHY AND MICROSTRUCTURES, ASM INTERNATIONAL, MATERIALS PARK, USA, PAGE(S) 368 - 402, XP009174824, ISBN: 0-87170-706-3 section "Image Processing and Analysis" figure 1	2-7
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

5 December 2013

Date of mailing of the international search report

12/12/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Engels, Angela

INTERNATIONAL SEARCH REPORT

International application No

PCT/BR2013/000376

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	NELLROS F ET AL: "Automated image analysis of iron-ore pellet structure using optical microscopy", MINERALS ENGINEERING, PERGAMON PRESS , OXFORD, GB, vol. 24, no. 14, 1 August 2011 (2011-08-01), pages 1525-1531, XP028313841, ISSN: 0892-6875, DOI: 10.1016/J.MINENG.2011.08.001 [retrieved on 2011-08-08] abstract section 2.2 -----	1-13