

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
24 March 2005 (24.03.2005)

PCT

(10) International Publication Number
WO 2005/025837 A1

(51) International Patent Classification⁷: B29C 59/04,
B41F 13/12

(21) International Application Number:
PCT/US2004/023415

(22) International Filing Date: 20 July 2004 (20.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/657,859 9 September 2003 (09.09.2003) US

(71) Applicant: 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).


(72) Inventors: HUIZINGA, John S.; Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). DOWER,

William V.; Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). KUHNS, David W.; Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). KING, Gregory F.; Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). STRAND, John T.; Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). HUNTER, Thomas B.; Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). DOBBS, James N.; Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). CARLSON, Daniel H.; Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). HUMLICEK, Larry D.; Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR PRODUCING TWO-SIDED PATTERNED WEBS IN REGISTRATION

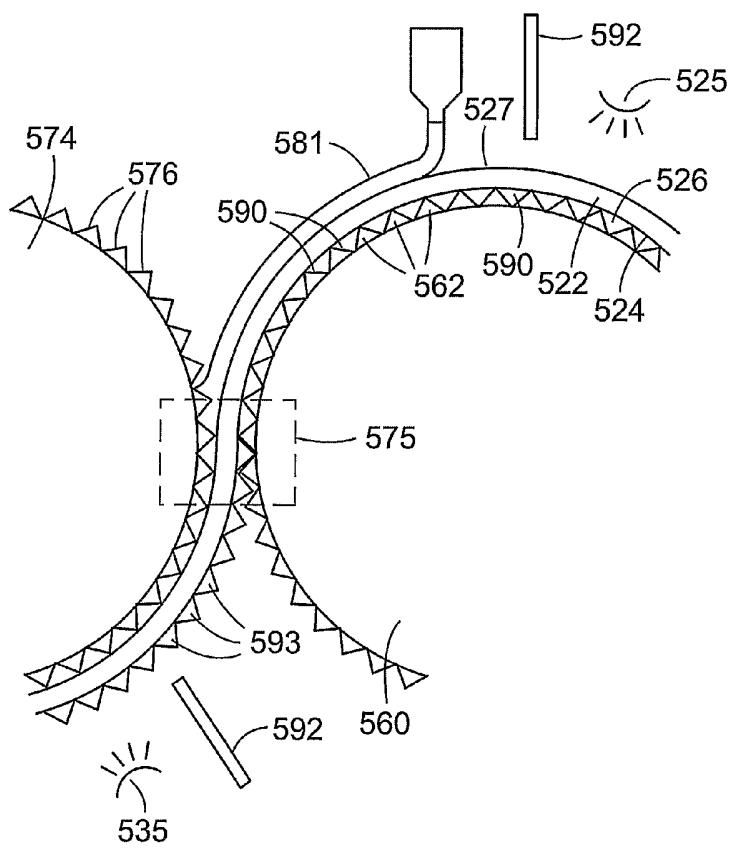

(57) Abstract: An apparatus for casting a patterned surface on both sides of a web. The apparatus includes a first patterned roll; a second patterned roll; and a means for rotating the first and second patterned rolls such that their patterns are transferred to opposite sides of the web while it is in continuous motion. During this process, their patterns are maintained in continuous registration to within at least 100 microns, and preferably at least 20 microns.

WO 2005/025837 A1



PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

APPARATUS AND METHOD FOR PRODUCING TWO-SIDED PATTERNED WEBS IN REGISTRATION

Field

The invention relates generally to the continuous casting of material onto a web, and more specifically to the casting of articles having a high degree of registration between the patterns cast on opposite sides of the web.

10

Background

In the fabrication of many articles, from the printing of newspapers to the fabrication of sophisticated electronic and optical devices, it is necessary to apply some material that is at least temporarily in liquid form to opposite sides of a substrate. It is often the case that the material applied to the substrate is applied in a predetermined pattern; in the case of e.g. printing, ink is applied in the pattern of letters and pictures. It is common in such cases for there to be at least a minimum requirement for registration between the patterns on opposite sides of the substrate.

When the substrate is a discrete article such as a circuit board, the applicators of a pattern may usually rely on an edge to assist in achieving registration. But when the substrate is a web and it is not possible to rely on an edge of the substrate to periodically refer to in maintaining registration, the problem becomes a bit more difficult. Still, even in the case of webs, when the requirement for registration is not severe, e.g. a drift out of perfect registration of greater than 100 microns is tolerable, mechanical expedients are known for controlling the material application to that extent. The printing art is replete with devices capable of meeting such a standard.

However, in some products having patterns on opposite sides of a substrate, a much more accurate registration between the patterns is required. In such a case, if the web is not in continuous motion, apparatuses are known that can apply material to such a standard. And if the web is in continuous motion, if it is tolerable, as in e.g. some types of flexible circuitry, to reset the patterning rolls to within 100 microns, or even 5 microns, of

perfect registration once per revolution of the patterning rolls, the art still gives guidelines about how to proceed.

However, in e.g. optical articles such as brightness enhancement films, it is required for the patterns in the optically transparent polymer applied to opposite sides of a substrate to be out of registration by no more than a very small tolerance at any point in the tool rotation. Thus far, the art is silent about how to cast a patterned surface on opposite sides of a web that is in continuous motion so that the patterns are kept continuously, rather than intermittently, in registration within 100 microns.

10

Summary

15

One aspect of the present disclosure is directed to an apparatus for casting a patterned surface on both sides of a web while keeping a much finer registration between the patterns that has been possible in the past. The apparatus includes a first patterned roll and a second patterned roll for applying the patterns to the web. Also included is a means for rotating the first and second patterned rolls such that their patterns are transferred to opposite sides of the web while it is in continuous motion, and their patterns are maintained in continuous registration to within 100 microns. In another embodiment, a registration accuracy of within 50 microns can be accomplished, and in yet another embodiment, a registration accuracy of within 10 microns is possible.

20

Definitions

In the context of this disclosure, "registration," means the positioning of structures in a set location in relation to the edge of a web and to other structures on the opposite side of the same web.

25

In the context of this disclosure, "web" means a sheet of material having a fixed dimension in one direction and either a predetermined or indeterminate length in the orthogonal direction.

In the context of this disclosure, "continuous registration," means that at all times during rotation of first and second patterned rolls the degree of registration between structures on the rolls is better than a specified limit.

In the context of this disclosure, "microreplicated" or "microreplication" means the production of a microstructured surface through a process where the structured surface features retain an individual feature fidelity during manufacture, from product-to-product, that varies no more than about 100 micrometers.

Brief Description Of The Drawing

10 In the several figures of the attached drawing, like parts bear like reference numerals, and:

FIG. 1 illustrates a perspective view of an example embodiment of a system including a system according to the present disclosure;

15 **FIG. 2** illustrates a close-up view of a portion of the system of **FIG. 1** according to the present disclosure;

FIG. 3 illustrates another perspective view of the system of **FIG. 1** according to the present disclosure;

FIG. 4 illustrates a schematic view of a an example embodiment of a casting apparatus according to the present disclosure;

20 **FIG. 5** illustrates a close-up view of a section of the casting apparatus of **FIG. 4** according to the present disclosure;

FIG. 6 illustrates a schematic view of an example embodiment of a roll mounting arrangement according to the present disclosure;

25 **FIG. 7** illustrates a schematic view of an example embodiment of a mounting arrangement for a pair of patterned rolls according to the present disclosure;

FIG. 8 illustrates a schematic view of an example embodiment of a motor and roll arrangement according to the present disclosure;

FIG. 9 illustrates a schematic view of an example embodiment of a means for controlling the registration between rolls according to the present disclosure;

30 **FIG. 10** illustrates a schematic view of an example embodiment of a roll controlling arrangement according to the present disclosure;

FIG. 11 illustrates a block diagram of an example embodiment of a method and apparatus for controlling registration according to the present disclosure.

Detailed Description

5 Generally, the invention of the present disclosure is a system and method for producing two-sided microreplicated structures with side-to-side registration of better than about 100 microns, and preferably better than 50 microns, and more preferably less than 25 microns, and most preferably less than 5 microns. The system generally includes a first patterning assembly and a second patterning assembly. Each respective assembly creates a
10 10 microreplicated pattern on a respective surface of a web having a first and a second surface. A first pattern is created on the first side of the web and a second pattern is created on the second surface of the web.

15 Each patterning assembly includes means for applying a coating, a patterning member, and a curing member. Typically, patterning assemblies include patterned rolls and a support structure for holding and driving each roll. Coating means of the first patterning assembly dispenses a first curable coating material on a first surface of the web. Coating means of the second patterning assembly dispenses a second curable coating material on a second surface of the web, wherein the second surface is opposite the first surface. Typically, first and second coating materials are of the same composition.

20 20 After the first coating material is placed on the web, the web passes over a first patterned member, wherein a pattern is created in the first coating material. The first coating material is then cured or cooled to form the first pattern. Subsequently, after the second coating material is placed on the web, the web passes over a second patterned member, wherein a pattern is created in the second coating material. The second coating material is then cured to form the second pattern. Typically, each patterned member is a microreplicated tool and each tool typically has a dedicated curing member for curing the material. However, it is possible to have a single curing member that cures both first and second patterned materials. Also, it is possible to place the coatings on the patterned tools.

25 30 The system also includes means for rotating the first and second patterned rolls such that their patterns are transferred to opposite sides of the web while it is in continuous

motion, and said patterns are maintained in continuous registration on said opposite sides of the web to better than about 100 microns.

An advantage of the present invention is that a web having a microreplicated structure on each opposing surface of the web can be manufactured by having the 5 microreplicated structure on each side of the web continuously formed while keeping the microreplicated structures on the opposing sides registered generally to within 100 microns of each other, and typically within 50 microns, and more typically within 20 microns, and most typically within 5 microns.

Referring now to FIGS. 1-2, an example embodiment of a system 110 including 10 casting apparatus 120 according to the present disclosure is illustrated. In the depicted casting apparatus 120, a web 122 is provided to the casting apparatus 120 from a main unwind spool (not shown). The exact nature of web 122 can vary widely, depending on the product being produced. However, when the casting apparatus 120 is used for the fabrication of optical articles it is usually convenient for the web 122 to be translucent or 15 transparent, to allow curing through the web 122. The web 122 is directed around various rollers 126 into the casting apparatus 120.

Accurate tension control of the web 122 is required to achieve the best results the 20 invention is capable of, so the web 122 is directed over a tension-sensing device (not shown). In situations where it is desirable to use a liner web to protect the web 122, the liner web is typically separated at the unwind spool and directed onto a liner web wind-up spool (not shown). The web 122 is typically directed via an idler roll to a dancer roller for precision tension control. Idler rollers direct the web 122 to a position between nip roller 154 and first coating head 156.

In the depicted embodiment, first coating head 156 is a die coating head. However, 25 other coating methods can be adapted to the apparatus, as one of ordinary skill in the art will appreciate. The web 122 then passes between the nip roll 154 and first patterned roll 160. The first patterned roll 160 has a patterned surface 162, and when the web 122 passes between the nip roller 154 and the first patterned roll 160 the material dispensed onto the web 122 by the first coating head 156 is shaped into a negative of patterned surface 162.

30 While the web 122 is in contact with the first patterned roll 160, material is dispensed from second coating head 164 onto the other surface of web 122. In parallel

with the discussion above with respect to the first coating head **156**, the second coating head **164** is also a die coating arrangement including a second extruder (not shown) and a second coating die (not shown). In some embodiments, the material dispensed by the first coating head **156** is a composition including a polymer precursor and intended to be cured to solid polymer with the application of ultraviolet radiation.

5 Material that has been dispensed onto web **122** by the second coating head **164** is then brought into contact with second patterned roll **174** with a second patterned surface **176**. In parallel with the discussion above, in some embodiments, the material dispensed by the second coating head **164** is a composition including a polymer precursor and intended to be cured to solid polymer with the application of ultraviolet radiation.

10 At this point, the web **122** has had a pattern applied to both sides. A peel roll **182** may be present to assist in removal of the web **122** from second patterned roll **174**. Typically, web tension into and out of the casting apparatus is nearly constant.

15 The web **122** having a two-sided microreplicated pattern is then directed to a wind-up spool (not shown) via various idler rolls. If an interleave film is desired to protect web **122**, it is typically provided from a secondary unwind spool (not shown) and the web and interleave film are wound together on the wind-up spool at an appropriate tension.

20 Referring to FIGS. 1-3, first and second patterned rolls are coupled to first and second motor assemblies **210, 220**, respectively. Support for the motor assemblies **210, 220** is accomplished by mounting assemblies to a frame **230**, either directly or indirectly. The motor assemblies **210, 220** are coupled to the frame using precision mounting arrangements. In the example embodiment shown, first motor assembly **210** is fixedly mounted to frame **230**. Second motor assembly **220**, which is placed into position when web **122** is threaded through the casting apparatus **120**, needs to be positioned repeatedly 25 and is therefore movable, both in the cross- and machine direction. Movable motor arrangement **220** is preferably coupled to linear slides **222** to assist in repeated accurate positioning, for example, when switching between patterns on the rolls. Second motor arrangement **220** also includes a second mounting arrangement **225** on the backside of the frame **230** for positioning the second patterned roll **174** side-to-side relative to the first patterned roll **160**. Second mounting arrangement **225** preferably includes linear slides 30 **223** allowing accurate positioning in the cross machine directions.

Referring to **FIG. 6**, a motor mounting arrangement is illustrated. A motor **633** for driving a tool or patterned roll **662** is mounted to the machine frame **650** and connected through a coupling **640** to a rotating shaft **601** of the patterned roller **662**. The motor **633** is coupled to a primary encoder **630**. A secondary encoder **651** is coupled to the tool to provide precise angular registration control of the patterned roll **662**. Primary **630** and secondary **651** encoders cooperate to provide control of the patterned roll **662** to keep it in registration with a second patterned roll, as will be described further hereinafter.

In the example embodiment shown, the tool roller **662** diameter is typically smaller than its motor **633** diameter. To accommodate this arrangement, the two tool roller assemblies **610, 710** are installed as mirror images in order to be able to bring the two tool rollers **662, 762** together as shown in **FIG. 7**. Referring also to **FIG. 1**, the first motor arrangement is typically fixedly attached to the frame and the second motor arrangement is positioned using movable optical quality linear slides.

Reduction or elimination of shaft resonance is important as this is a source of registration error allowing pattern position control within the specified limits. Using a coupling **640** between the motor **633** and shaft **650** that is larger than general sizing schedules specify will also reduce shaft resonance caused by more flexible couplings. Bearing assemblies **660** are located in various locations to provide rotational support for the motor arrangement.

Referring to **FIG. 4**, an example embodiment of a casting apparatus **420** for producing a two-sided web **422** with registered microreplicated structures on opposing surfaces is illustrated. Assembly includes first and second coating means **456, 464**, a nip roller **454**, and first and second patterned rolls **460, 474**. Web **422** is presented to the first coating means **456**, in this example a first extrusion die **456**. First die **456** dispenses a first curable liquid layer coating **470** onto the web **422**. First coating **470** is pressed into the first patterned roller **460** by means of a nip roller **454**, typically a rubber covered roller. While on the first patterned roll **460**, the coating is cured using an external curing source **480**, for example, a lamp, of suitable wavelength light, typically an ultraviolet light.

A second curable liquid layer **481** is coated on the opposite side of the web **422** using a second side extrusion die **464**. The second layer **481** is pressed into the second patterned tool roller **474** and the curing process repeated for the second coating layer **481**.

Registration of the two coating patterns is achieved by maintaining the tool rollers 460, 474 in a precise angular relationship with one another, as will be described hereinafter.

Referring to **FIG. 5**, a close-up view of a portion of first and second patterned rolls 560, 574 is illustrated. First patterned roll 560 has a first pattern 562 for forming a 5 microreplicated surface. Second pattern roll 574 has a second microreplicated pattern 576.

In the example embodiment shown, first and second patterns 562, 576 are the same pattern, though the patterns may be different. As a web 522 passes over the first roll 560, a first curable liquid (not shown) on a first surface 524 is cured by a curing light source 525 near a first region 526 on the first patterned roll 560. A first microreplicated patterned 10 structure 590 is formed on the first side 524 of the web 522 after the liquid is cured. The first patterned structure 590 is a negative of the pattern 562 on the first patterned roll 560. After the first patterned structure 590 is formed, a second curable liquid 581 is dispensed onto a second surface 527 of the web 522. To insure that the second liquid 581 is not 15 cured prematurely, the second liquid 581 is isolated from the first curing light 525, typically by a locating the first curing light 525 so that it does not fall on the second liquid 581. Alternatively, shielding means 592 can be placed between the first curing light 525 and the second liquid 581. Also, the curing sources can be located inside their respective patterned rolls where it is impractical or difficult to cure through the web.

After the first patterned structure 590 is formed, the web 522 continues along the 20 first roll 560 until it enters the gap region 575 between the first and second patterned rolls 560, 574. The second liquid 581 then engages the second pattern 576 on the second patterned roll and is shaped into a second microreplicated structure, which is then cured by a second curing light 535. As the web 522 passes into the gap 575 between first and 25 second patterned rolls 560, 574, the first patterned structure 590, which is by this time substantially cured and bonded to the web 522, restrains the web 522 from slipping while the web 522 begins moving into the gap 575 and around the second patterned roller 574. This removes web stretching and slippages as a source of registration error between the first and second patterned structures formed on the web.

By supporting the web 522 on the first patterned roll 560 while the second liquid 30 581 comes into contact with the second patterned roll 574, the degree of registration between the first and second microreplicated structures 590, 593 formed on opposite sides

5 **524, 527** of the web **522** becomes a function of controlling the positional relationship between the surfaces of the first and second patterned rolls **560, 574**. The S-wrap of the web around the first and second patterned rolls **560, 574** and between the gap **575** formed by the rolls minimizes effects of tension, web strain changes, temperature, microslip 10 caused by mechanics of nipping a web, and lateral position control. Typically, the S-wrap maintains the web **522** in contact with each roll over a wrap angle of 180 degrees, though the wrap angle can be more or less depending on the particular requirements.

10 To increase the degree of registration between the patterns formed on opposite surfaces of a web, it preferred to have a low-frequency pitch variation around the mean diameter of each roll. Typically, the patterned rolls are of the same mean diameter, though this is not required. It is within the skill and knowledge of one having ordinary skill in the art to select the proper roll for any particular application.

Example #1

15 Because the features sizes on the microreplicated structures on both surfaces of a web are desired to be within fine registration of one another, the patterned rolls need to be controlled with a high degree of precision. Cross-web registration within the limits described herein can be accomplished by applying the techniques used in controlling machine-direction registration, as described hereinafter. Control of registration in the machine direction is required, which heretofore has not been achieved in two-sided 20 microreplicated webs. For example, to achieve about 10 microns end-to-end feature placement on a 10-inch circumference patterned roller, each roller must be maintained within a rotational accuracy of ± 32 arc-seconds per revolution. Control of registration becomes more difficult as the speed the web travels through the system is increased.

25 Applicants have built and demonstrated a system having 10-inch circular patterned rolls that can create a web having patterned features on opposite surfaces of the web that are registered to within 2.5 microns. Upon reading this disclosure and applying the principles taught herein, one of ordinary skill in the art will appreciate how to accomplish the degree of registration for other microreplicated surfaces.

30 Referring to **FIG. 8**, a schematic of a motor arrangement **800** used in Applicants' system is illustrated. Motor arrangement includes a motor **810** including a primary

encoder **830** and a drive shaft **820**. Drive shaft **820** is coupled to a driven shaft **840** of patterned roll **860** through a coupling **825**. A secondary, or load, encoder **850** is coupled to the driven shaft **840**. Using two encoders in the motor arrangement described allows the position of the patterned roll to be measured more accurately by locating the measuring device (encoder) **850** near the patterned roll **860**, thus reducing or eliminating effects of torque disturbances when the motor arrangement **800** is operating.

Referring to **FIG. 9**, a schematic of the motor arrangement of **FIG. 8**, is illustrated as attached to control components. In the example apparatus shown in **FIGS. 1-3**, a similar set-up would control each motor arrangement **210** and **220**.

Motor arrangement **900** communicates with a control arrangement **965** to allow precision control of the patterned roll **960**. Control arrangement **965** includes a drive module **966** and a program module **975**. The program module **975** communicates with the drive module **966** via a line **977**, for example, a SERCOS fiber network. The program module **975** is used to input parameters, such as set points, to the drive module **966**. Drive module **966** receives input 480 volt, 3-phase power **915**, rectifies it to DC, and distributes it via a power connection **973** to control the motor **910**. Motor encoder **912** feeds a position signal to control module **966**. The secondary encoder **950** on the patterned roll **960** also feeds a position signal back to the drive module **966** via to line **971**. The drive module **966** uses the encoder signals to precisely position the patterned roll **960**. The control design to achieve the degree of registration is described in detail below.

In the example embodiments shown, each patterned roll is controlled by a dedicated control arrangement. Dedicated control arrangements cooperate to control the registration between first and second patterned rolls. Each drive module communicates with and controls its respective motor assembly.

Various options are available for co-coordinating the two axes such as master/slave-type and parallel configurations, which was used in Applicants' system.

The control arrangement in the system built and demonstrated by Applicants include the following. To drive each of the patterned rolls, a high performance, low cogging torque motor with a high-resolution sine encoder feedback (512 sine cycles x 4096 drive interpolation >> 2 million parts per revolution) was used, model MHD090B-035-NG0-UN, available from Bosch-Rexroth (Indramat). Also the system included

5 synchronous motors, model MHD090B-035-NG0-UN, available from Bosch-Rexroth (Indramat), but other types, such as induction motors could also be used. Each motor was directly coupled (without gearbox or mechanical reduction) through an extremely stiff bellows coupling, model BK5-300, available from R/W Corporation. Alternate coupling designs could be used, but bellows style generally combines stiffness while providing high rotational accuracy. Each coupling was sized so that a substantially larger coupling was selected than what the typical manufacturers specifications would recommend.

10 Additionally, zero backlash collets or compressive style locking hubs between coupling and shafts are preferred. Each roller shaft was attached to an encoder through a hollow shaft load side encoder, model RON255C, available from Heidenhain Corp., Schaumburg, IL. Encoder selection should have the highest accuracy and resolution possible, typically greater than 32 arc-sec accuracy. Applicants' design, 18000 sine cycles per revolution were employed, which in conjunction with the 4096 bit resolution drive interpolation resulted in excess of 50 million parts per revolution resolution giving a resolution 15 substantially higher than accuracy. The load side encoder had an accuracy of +/- 2 arc-sec; maximum deviation in the delivered units was less than +/- 1 arc-sec.

20 Preferably, each shaft is designed to be as large a diameter as possible and as short as possible to maximize stiffness, resulting in the highest possible resonant frequency. Precision alignment of all rotational components is desired to ensure minimum registration error due to this source of registration error. One of ordinary skill in the art will recognize that there are various ways to reduce registration error due to alignment of the rotational components.

The control strategy for each axis is implemented as follows:

25 Referring to FIG. 11, in Applicants' system identical position reference commands were presented to each axis simultaneously through a SERCOS fiber network at a 2 ms update rate. Each axis interpolates the position reference with a cubic spline, at the position loop update rate of 250 microsecond intervals. The interpolation method is not critical, as the constant velocity results in a simple constant times time interval path. The resolution is critical to eliminate any round off or numerical representation errors. Axis 30 rollover must also be addressed. It is critical that each axis' control cycle is synchronized at the current loop execution rate (62 microsecond intervals).

5 The top path **1151** is the feed forward section of control. The control strategy includes a position loop **1110**, a velocity loop **1120**, and a current loop **1130**. The position reference **1111** is differentiated, once to generate the velocity feed forward terms **1152** and a second time to generate the acceleration feed forward term **1155**. The feed forward path **1151** helps performance during line speed changes and dynamic correction.

10 The position command **1111** is subtracted from current position **1114**, generating an error signal **1116**. The error **1116** is applied to a proportional controller **1115**, generating the velocity command reference **1117**. The velocity feedback **1167** is subtracted from the command **1117** to generate the velocity error signal **1123**, which is then applied to a PID controller. The velocity feedback **1167** is generated by differentiating the motor encoder position signal **1126**. Due to differentiation and numerical resolution limits, a low pass Butterworth filter **1124** is applied to remove high frequency noise components from the error signal **1123**. A narrow stop band (notch) filter **1129** is applied at the center of the motor – roller resonant frequency. This allows 15 substantially higher gains to be applied to the velocity controller **1120**. Increased resolution of the motor encoder also would improve performance. The exact location of the filters in the control diagram is not critical; either the forward or reverse path are acceptable, although tuning parameters are dependent on the location.

20 A PID controller could also be used in the position loop, but the additional phase lag of the integrator makes stabilization more difficult. The current loop is a traditional PI controller; gains are established by the motor parameters. The highest bandwidth current loop possible will allow optimum performance. Also, minimum torque ripple is desired.

25 Minimization of external disturbances is important to obtaining maximum registration. This includes motor construction and current loop commutation as previously discussed, but minimizing mechanical disturbances is also important. Examples include extremely smooth tension control in entering and exiting web span, uniform bearing and seal drag, minimizing tension upsets from web peel off from the roller, uniform rubber nip roller. In the current design a third axis geared to the tool rolls is provided as a pull roll to assist in removing the cured structure from the tool.

30 The web material can be any suitable material on which a microreplicated patterned structure can be created. Examples of web materials are polyethylene

terephthalate, polymethyl methacrylate, or polycarbonate. The web can also be multi-layered. Since the liquid is typically cured by a curing source on the side opposite that on which the patterned structure is created, the web material must be at least partially translucent to the curing source used. Examples of curing energy sources are infrared 5 radiation, ultraviolet radiation, visible light radiation, microwave, or e-beam. One of ordinary skill in the art will appreciate that other curing sources can be used, and selection of a particular web material/curing source combination will depend on the particular article (having microreplicated structures in registration) to be created.

An alternative to curing the liquid through the web would be to use a two part 10 reactive cure, for example, an epoxy, which would be useful for webs that are difficult to cure through, such as metal web or webs having a metallic layer. Curing could be accomplished by in-line mixing of components or spraying catalyst on a portion of the patterned roll, which would cure the liquid to form the microreplicated structure when the coating and catalyst come into contact.

15 The liquid from which the microreplicated structures are created is typically a curable photopolymerizable material, such as acrylates curable by UV light. One of ordinary skill in the art will appreciate that other coating materials can be used, for example, polymerizable material, and selection of a material will depend on the particular characteristics desired for the microreplicated structures. Similarly, the particular curing 20 method employed is within the skill and knowledge of one of ordinary skill in the art. Examples of curing methods are reactive curing, thermal curing, or radiation curing.

25 Examples of coating means that useful for delivering and controlling liquid to the web are, for example, die or knife coating, coupled with any suitable pump such as a syringe or peristaltic pump. One of ordinary skill in the art will appreciate that other coating means can be used, and selection of a particular means will depend on the particular characteristics of the liquid to be delivered to the web.

30 Various modifications and alterations of the present invention will be apparent to those skilled in the art without departing from the scope and spirit of this invention, and it should be understood that this invention is not limited to the illustrative embodiments set forth herein.

What is claimed is:

1. An apparatus for casting a patterned surface on both sides of a web, the apparatus comprising:

5 a first patterned roll;

a second patterned roll;

means for rotating the first and second patterned rolls such that their patterns are transferred to opposite sides of the web while it is in continuous motion, and said patterns are maintained in continuous registration on said opposite sides of the web to within 100
10 microns.

2. The apparatus according to claim 1 wherein the patterns are transferred to opposite sides of the web in registration to within 50 microns.

15 3. The apparatus according to claim 2 wherein the patterns are transferred to opposite sides of the web in registration to within 20 microns.

4. The apparatus according to claim 3 wherein the patterns are transferred to opposite sides of the web in registration to within 5 microns.

20 5. The apparatus according to claim 1 further comprising a first dispenser for introducing material capable of being patterned onto the web before the web encounters the first patterned roll, and further comprising a second dispenser for introducing material capable of being patterned onto the web before the web encounters the second patterned
25 roll.

30 6. The apparatus according to claim 1 further comprising a first dispenser for introducing material capable of being patterned onto the first patterned roll, and further comprising a second dispenser for introducing material capable of being patterned onto the second patterned roll.

7. The apparatus according to claim 5 wherein the first and second dispensers are adapted to dispense a castable polymer precursor capable of being cured to solid polymer.

5 8. The apparatus according to claim 7 further comprising means for exposing material adjacent to the first and the second patterned rolls to heat.

9. The apparatus according to claim 7 further comprising means for exposing material adjacent to the first and the second patterned rolls to radiant energy.

10 10. The apparatus according to claim 9 wherein the means for exposing material adjacent to the first patterned roll to radiant energy is disposed within the first patterned roll, and wherein the first patterned roll has at least a portion that is essentially transparent to the radiant energy.

15 11. The apparatus according to claim 10 wherein the radiant energy is selected from the group consisting of infrared, visible, and ultraviolet radiation.

12. A method for imposing a pattern on both sides of a web comprising:
20 patterning a web between first and second patterned rolls, each roll having a pattern, such that the patterns are transferred to opposite sides of the web while it is in continuous motion, such that said patterns are maintained in continuous registration on said opposite sides of the web to within 100 microns.

13. The method according to claim 12 wherein the patterns are transferred to opposite 25 sides of the web in registration to within 50 microns.

14. The method according to claim 13 wherein the patterns are transferred to opposite sides of the web in registration to within 20 microns.

30 15. The method according to claim 14 wherein the patterns are transferred to opposite sides of the web in registration to within 5 microns.

16. The method according to claim 12 further comprising:
introducing material capable of being patterned onto one side the web before the
web encounters the first patterned roll, and
5 introducing material capable of being patterned onto the opposite side of the web
before the web encounters the second patterned roll.

17. The method according to claim 12 further comprising:
introducing material capable of being patterned onto the first patterned roll, and
10 introducing material capable of being patterned onto the second patterned roll.


18. The method according to claim 16 wherein the at least one of the materials is a
castable polymer precursor capable of being cured to solid polymer.

15 19. The method according to claim 18 further comprising the:
exposing at least one of the materials while in contact with at least one of the first
and the second patterned rolls to heat.


20 20. The method according to claim 18 further comprising:
exposing at least one of the materials while in contact with at least one of the first
and the second patterned rolls to radiant energy.

21. The method according to claim 20 wherein said exposing is performed using a
source disposed within at least one of first and the second patterned rolls, and wherein at
25 least one of first and the second patterned rolls has at least a portion that is transparent to
the radiant energy.

22. The method according to claim 21 wherein the radiant energy is selected from the
group consisting of infrared, visible, and ultraviolet radiation.

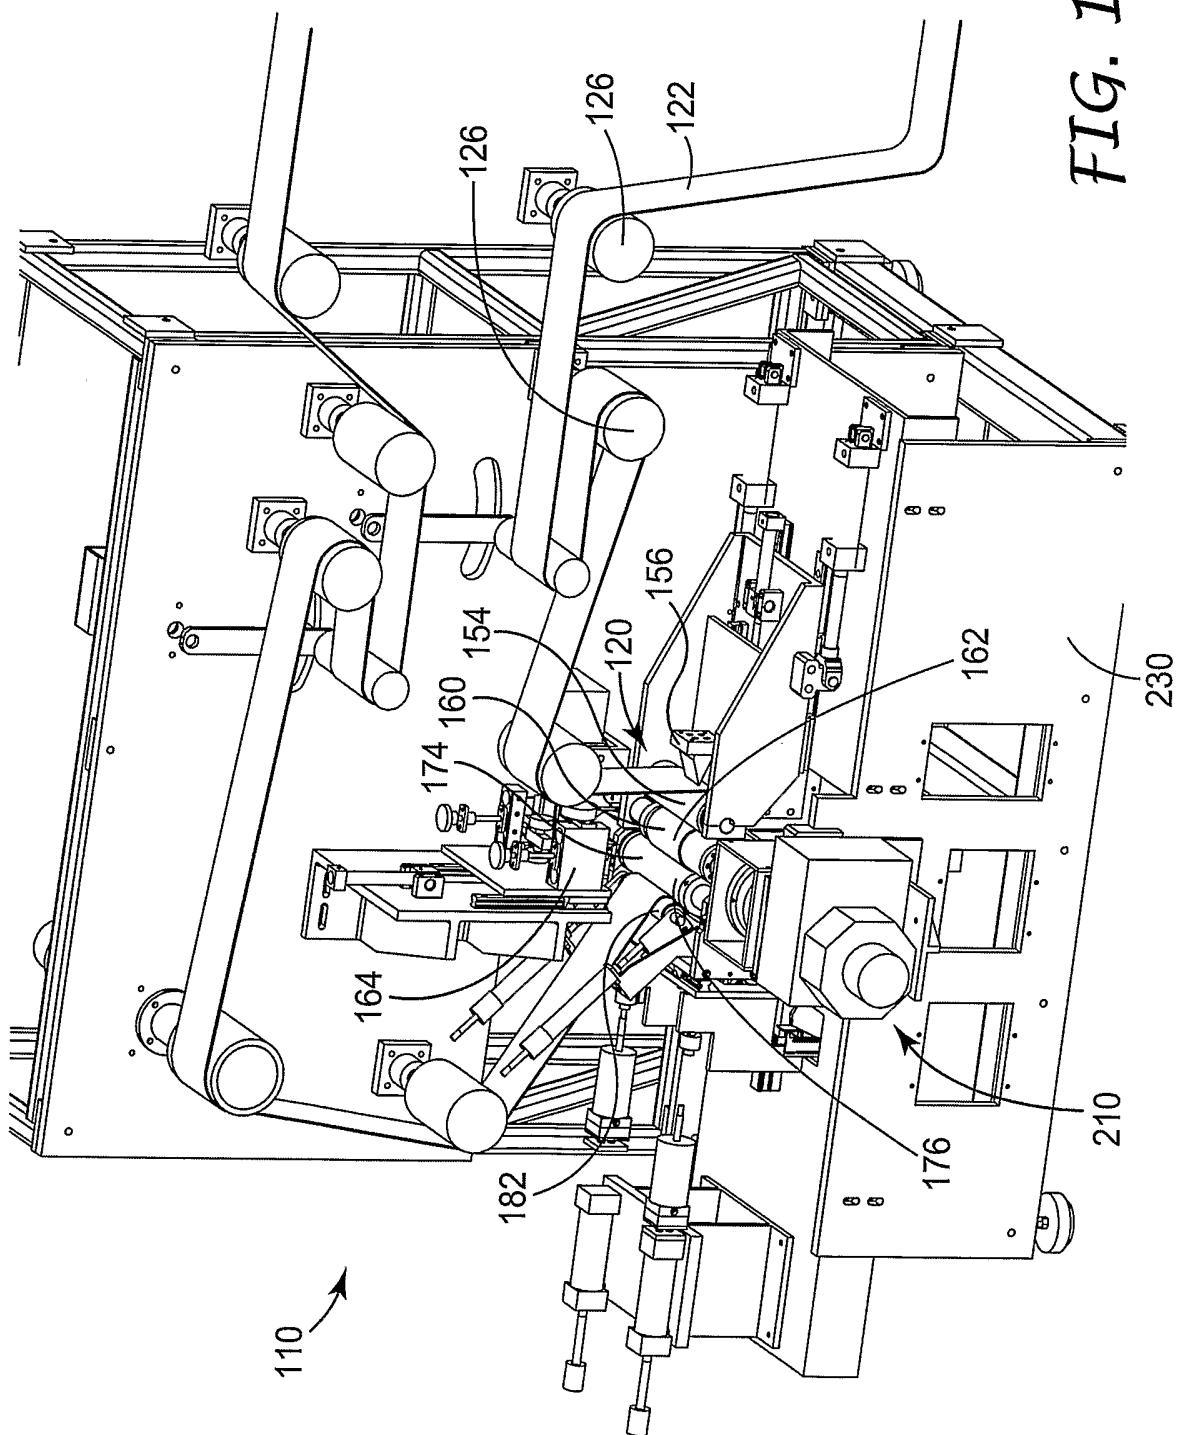

2/9

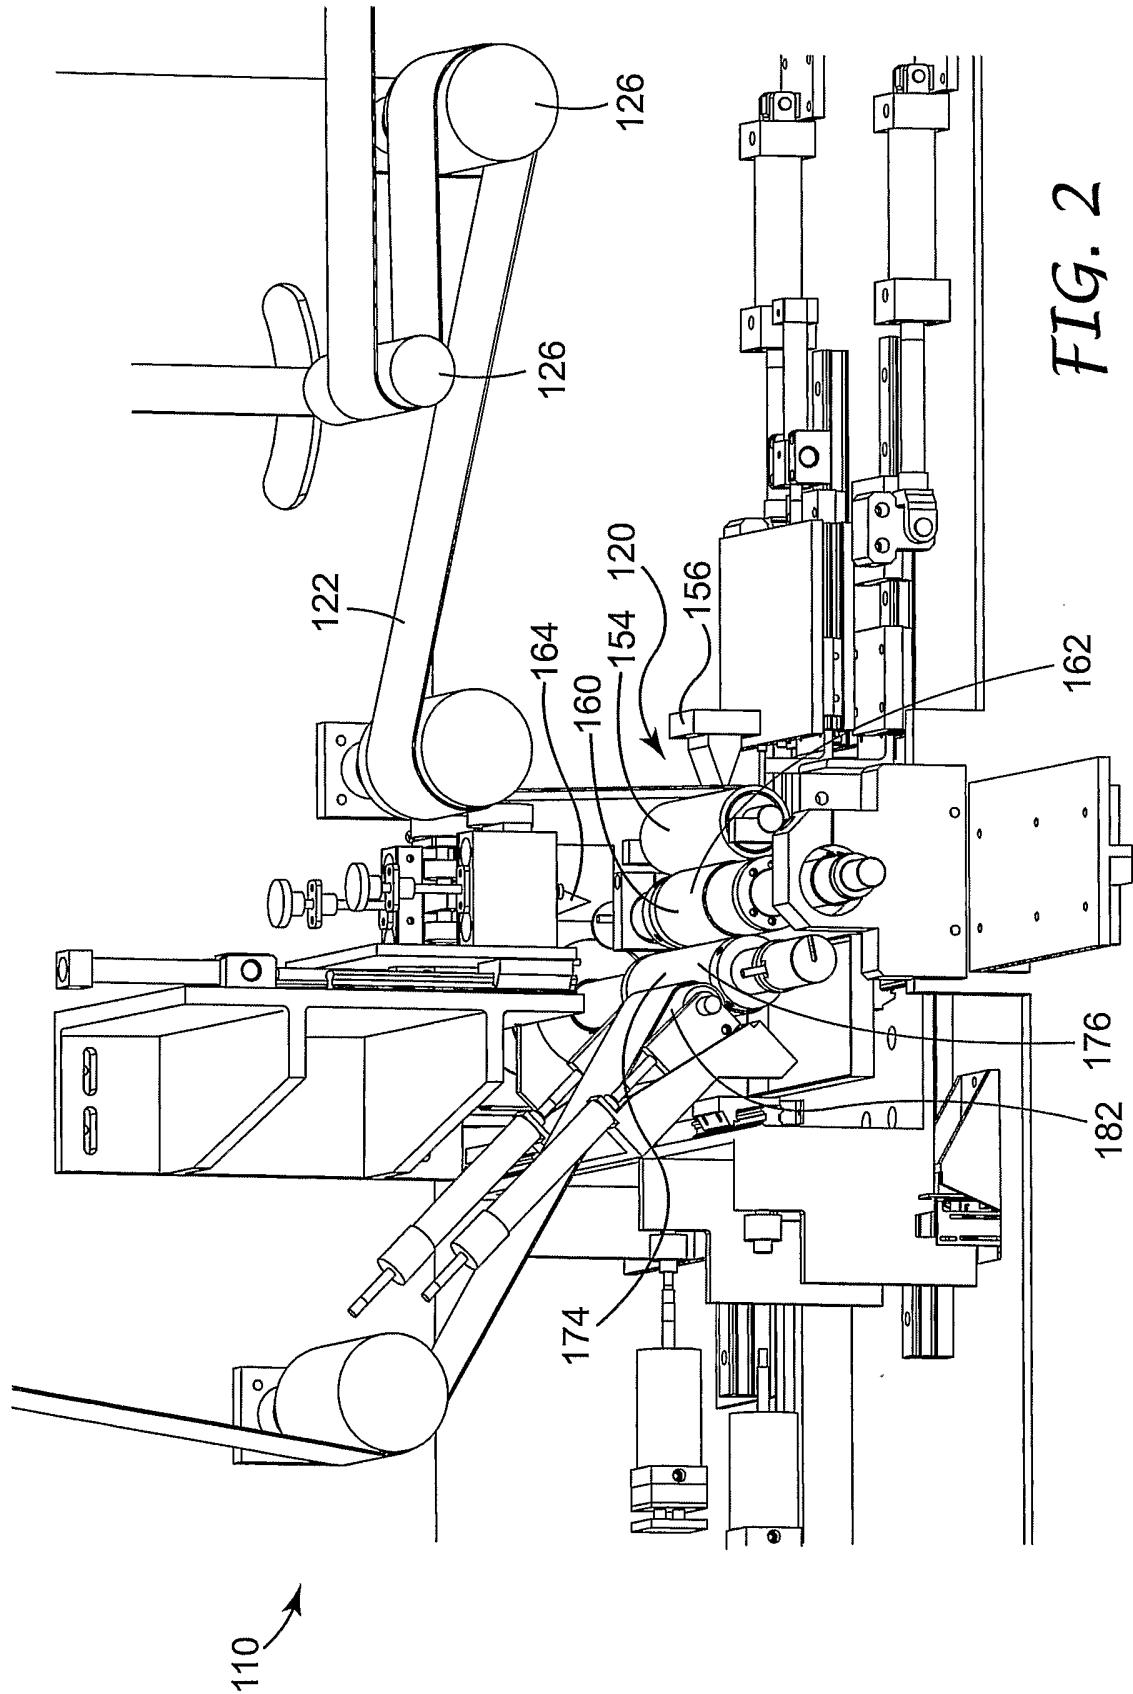

3/9

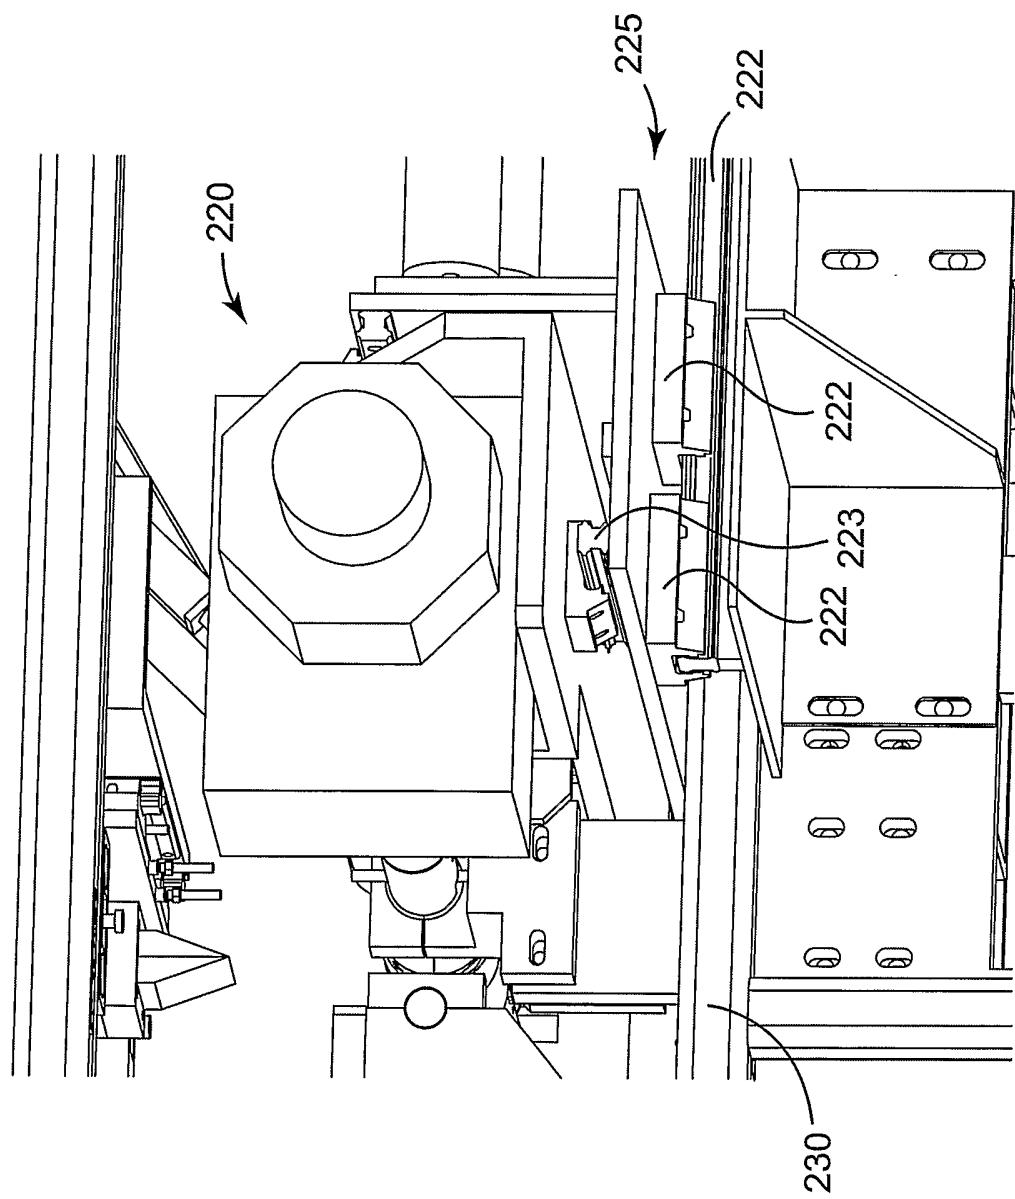


FIG. 3

4/9

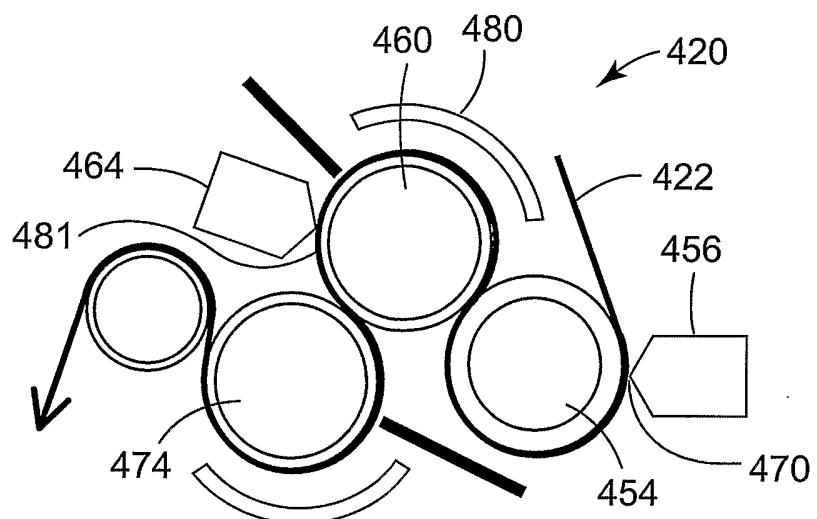


FIG. 4

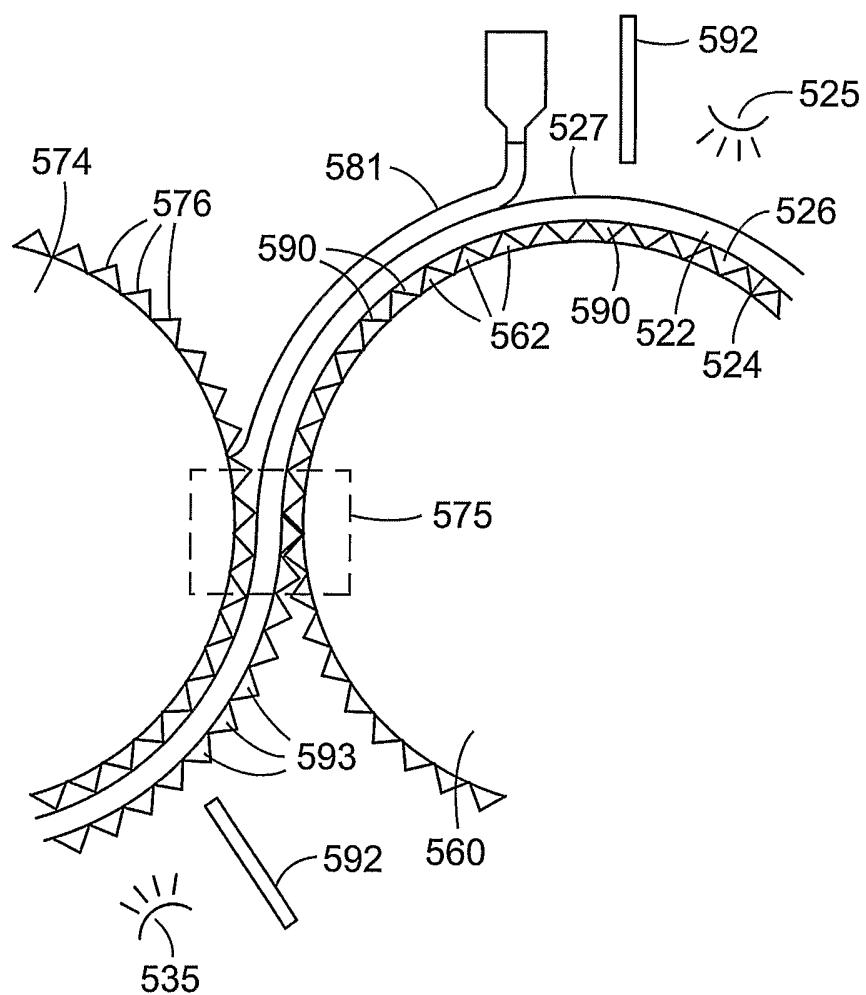


FIG. 5

5/9

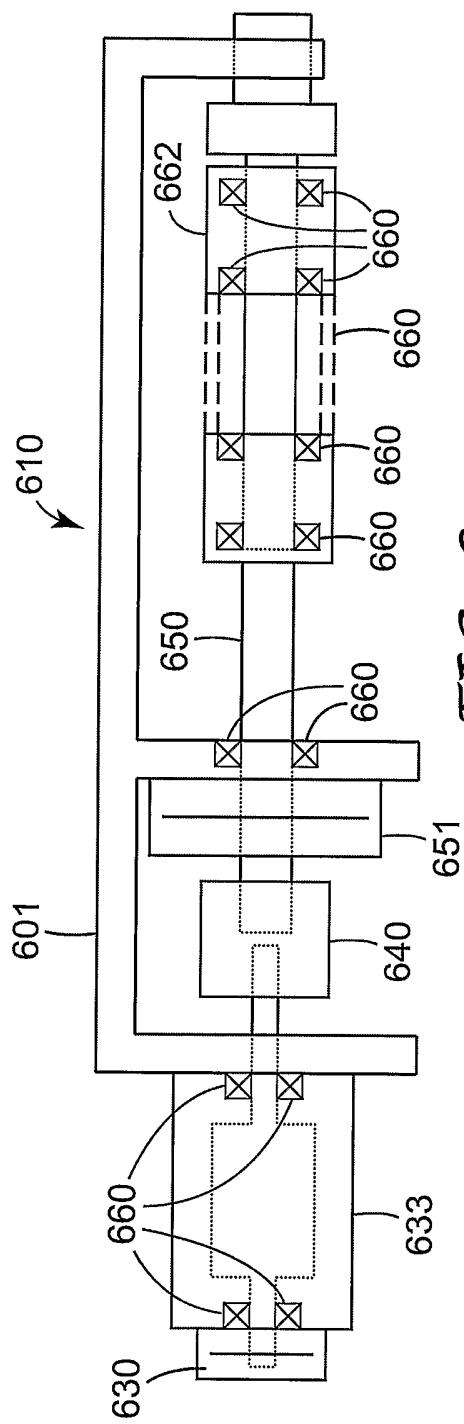


FIG. 6

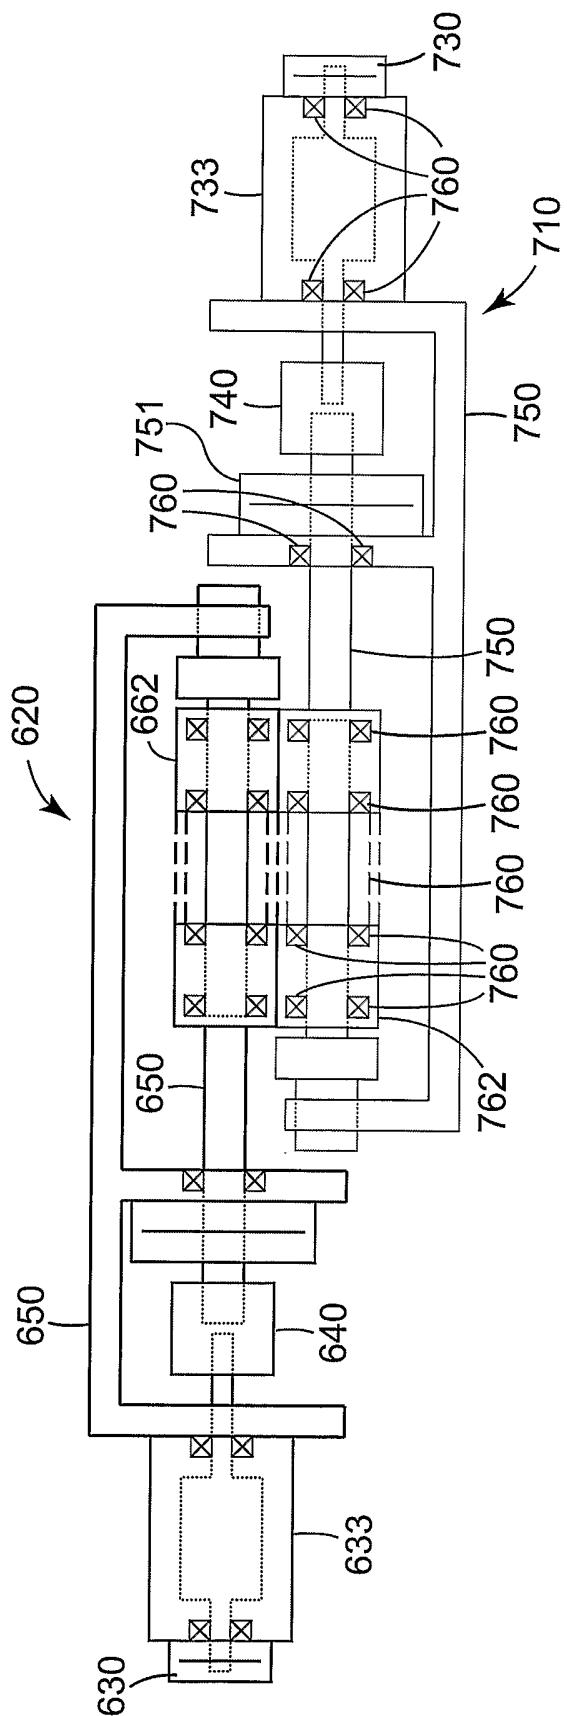


FIG. 7

6/9

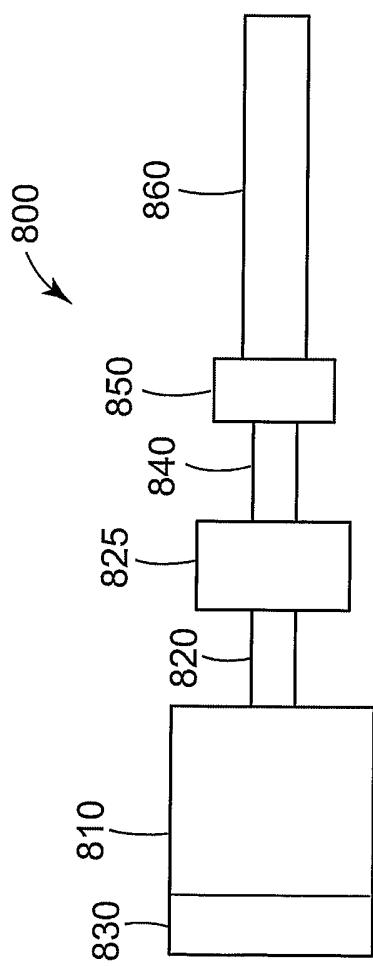


FIG. 8

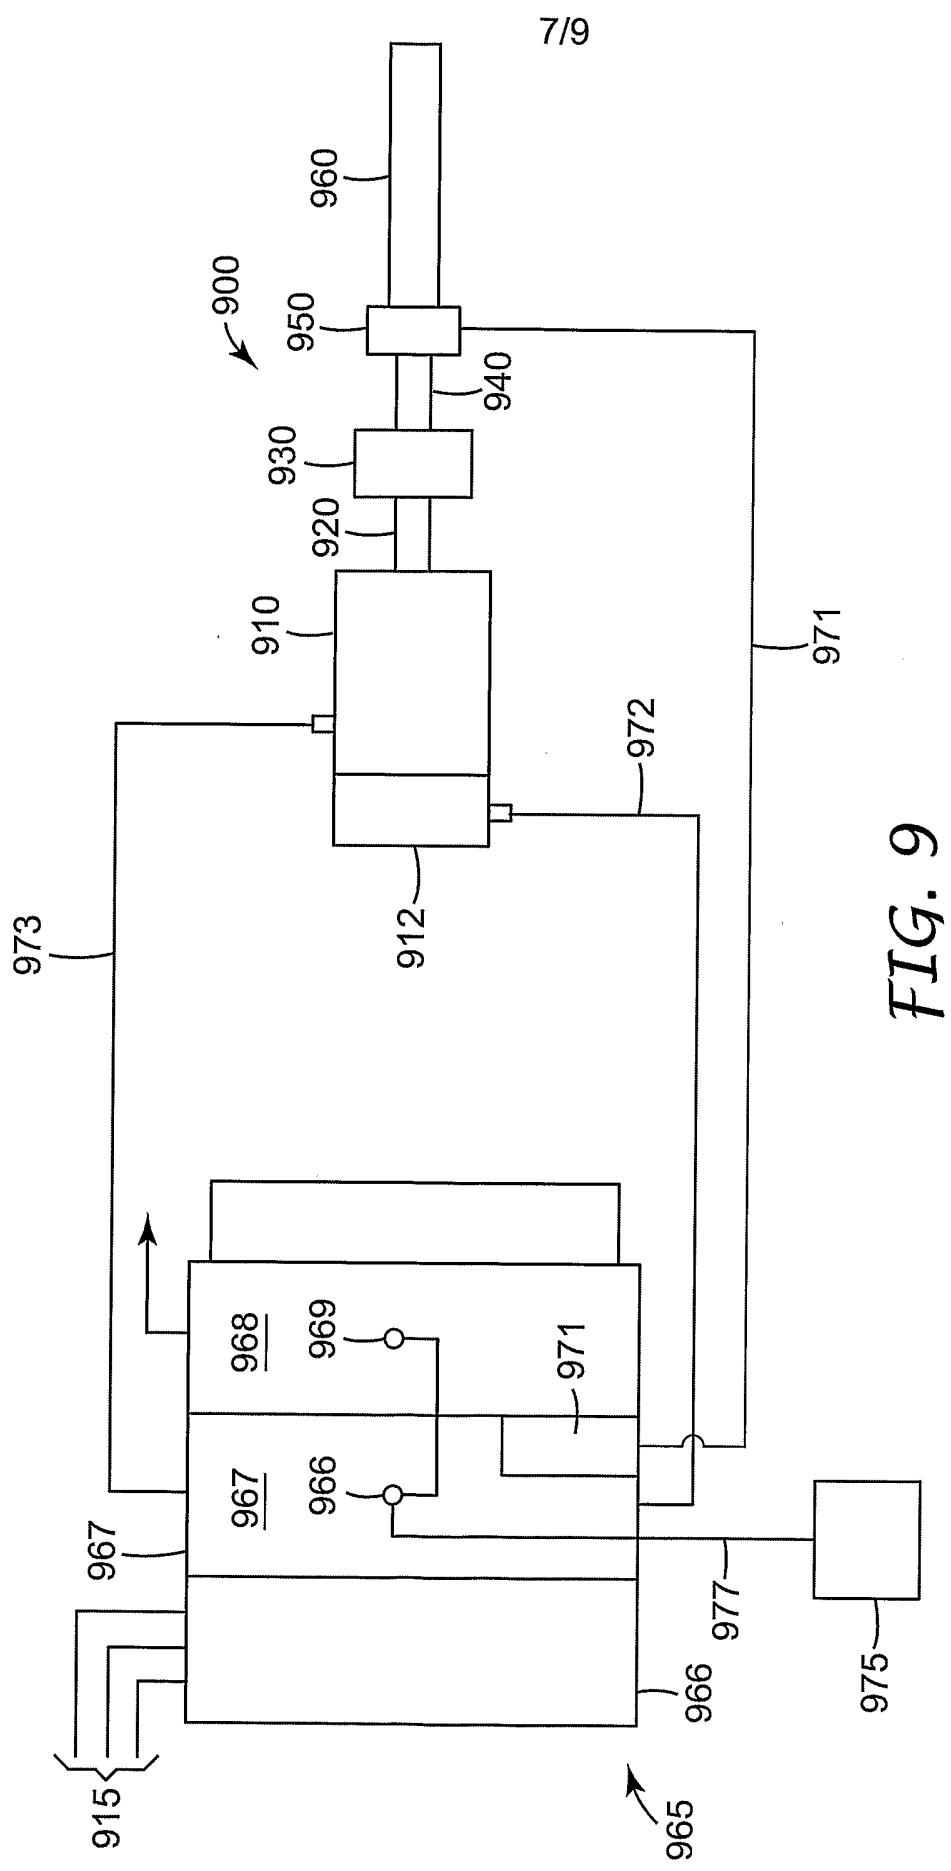


FIG. 9

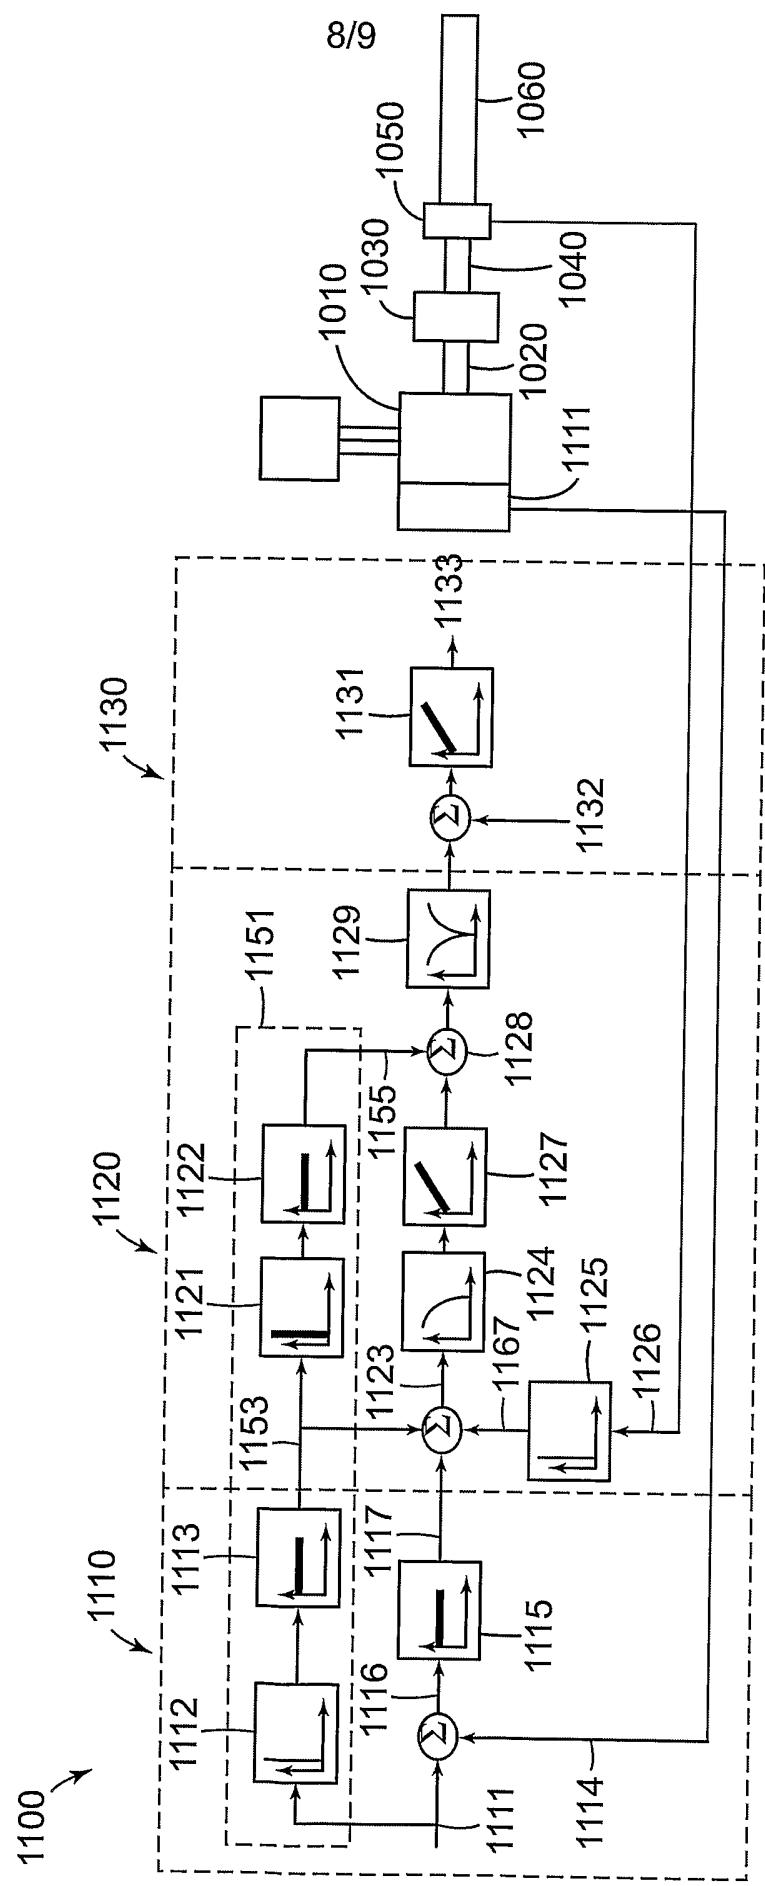


FIG. 10

9/9

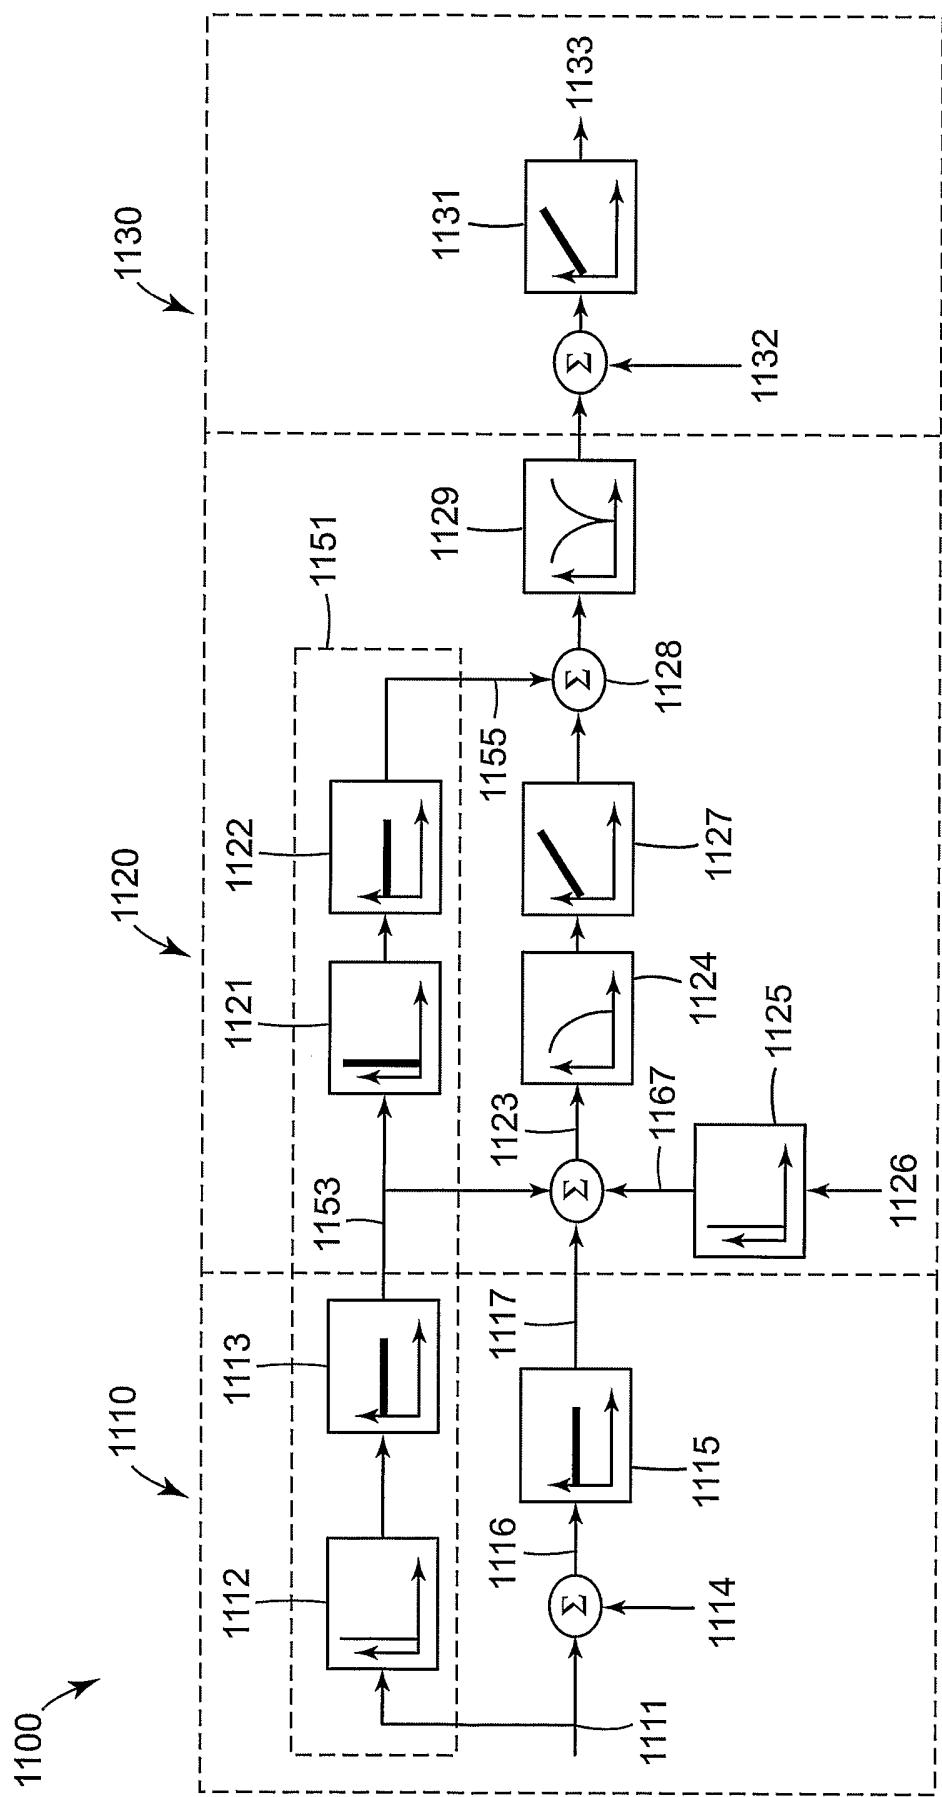


FIG. 11

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US2004/023415

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B29C59/04 B41F13/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
 IPC 7 B29C B32B B29D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	EP 1 352 732 A (HUECK FOLIEN GES M B H) 15 October 2003 (2003-10-15) paragraph '0008! - paragraph '0030! paragraph '0062! -----	1-22
A	US 4 892 336 A (KAULE WITTICH ET AL) 9 January 1990 (1990-01-09) column 2, line 42 - line 50 column 4, line 19 - line 33 column 5, line 51 - line 68 column 6, line 44 - column 721 column 7, line 52 - line 58; figure 9 -----	1-4, 12-15
A	DE 32 06 164 A (BAUS HEINZ GEORG) 23 September 1982 (1982-09-23) page 42 - page 43; figure 8 -----	1,5,6, 12,16,17



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

3 December 2004

Date of mailing of the international search report

09/12/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Fageot, P

INTERNATIONAL SEARCH REPORT

In	onal Application No
F	US2004/023415

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003/102591 A1 (PRICONE ROBERT M ET AL) 5 June 2003 (2003-06-05) paragraph '0106! - paragraph '0109! paragraph '0123! - paragraph '0124! -----	1-4, 12-15
A	US 6 272 982 B1 (STAUFFACHER JAMES H ET AL) 14 August 2001 (2001-08-14) column 6, line 56 - column 8, line 17 -----	1,12
A	US 3 893 795 A (NAUTA JAN P) 8 July 1975 (1975-07-08) column 9, line 1 - line 45 -----	1,12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

F00, JS2004/023415

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
EP 1352732	A	15-10-2003	EP	1352732 A2		15-10-2003
US 4892336	A	09-01-1990	DE	3609090 A1		24-09-1987
			AT	85992 T		15-03-1993
			AT	124377 T		15-07-1995
			DE	3751384 D1		03-08-1995
			DE	3784257 D1		01-04-1993
			EP	0238043 A2		23-09-1987
			EP	0490412 A2		17-06-1992
			ES	2037675 T3		01-07-1993
DE 3206164	A	23-09-1982	DE	3206164 A1		23-09-1982
			AT	38485 T		15-11-1988
			AU	544664 B2		06-06-1985
			AU	8151082 A		23-09-1982
			BR	8201344 A		25-01-1983
			CA	1176421 A1		23-10-1984
			CH	658624 A5		28-11-1986
			DE	3279203 D1		15-12-1988
			EP	0060500 A2		22-09-1982
			ES	270921 Y		01-04-1984
			ES	8306449 A1		01-09-1983
			FR	2501570 A1		17-09-1982
			IE	54746 B1		31-01-1990
			IT	1210676 B		20-09-1989
			US	4448739 A		15-05-1984
			US	4569092 A		11-02-1986
US 2003102591	A1	05-06-2003	EP	1463618 A1		06-10-2004
			WO	03049915 A1		19-06-2003
			AU	6680301 A		02-01-2002
			CA	2411926 A1		27-12-2001
			EP	1301334 A1		16-04-2003
			JP	2004501002 T		15-01-2004
			WO	0198066 A1		27-12-2001
US 6272982	B1	14-08-2001	US	6183671 B1		06-02-2001
			TW	430612 B		21-04-2001
			AU	2483699 A		16-08-1999
			CA	2282853 A1		05-08-1999
			WO	9938679 A1		05-08-1999
US 3893795	A	08-07-1975	DE	2141613 A1		16-03-1972
			DE	2166679 A1		15-05-1975
			FR	2103409 A5		14-04-1972
			GB	1327181 A		15-08-1973
			JP	51048175 B		18-12-1976
			JP	955051 C		31-05-1979
			JP	52017568 A		09-02-1977
			JP	53034217 B		19-09-1978
			US	3839514 A		01-10-1974
			US	3751550 A		07-08-1973