



(86) Date de dépôt PCT/PCT Filing Date: 2000/10/20
(87) Date publication PCT/PCT Publication Date: 2001/04/26
(45) Date de délivrance/Issue Date: 2011/03/29
(85) Entrée phase nationale/National Entry: 2002/03/26
(86) N° demande PCT/PCT Application No.: US 2000/029073
(87) N° publication PCT/PCT Publication No.: 2001/028432
(30) Priorités/Priorities: 1999/10/21 (US60/161,296);
2000/05/01 (US09/562,406)

(51) Cl.Int./Int.Cl. *A61B 17/068* (2006.01),
A61B 17/00 (2006.01), *A61B 17/04* (2006.01),
A61B 17/064 (2006.01), *A61B 17/122* (2006.01),
A61B 17/06 (2006.01), *A61B 17/30* (2006.01)


(72) Inventeurs/Inventors:
ALLEN, WILLIAM J., US;
BACHMAN, ALAN, US;
REED, SCOTT, US;
ADAMS, RAY, US;
STECKEL, ROBERT R., US

(73) Propriétaire/Owner:
EDWARDS LIFESCIENCES CORPORATION, US

(74) Agent: BCF LLP

(54) Titre : TECHNIQUE ET APPAREIL PERMETTANT DE REPARER UNE VALVULE MITRALE DE MANIERE TRES
PEU EFFRACTIVE

(54) Title: MINIMALLY INVASIVE MITRAL VALVE REPAIR METHOD AND APPARATUS

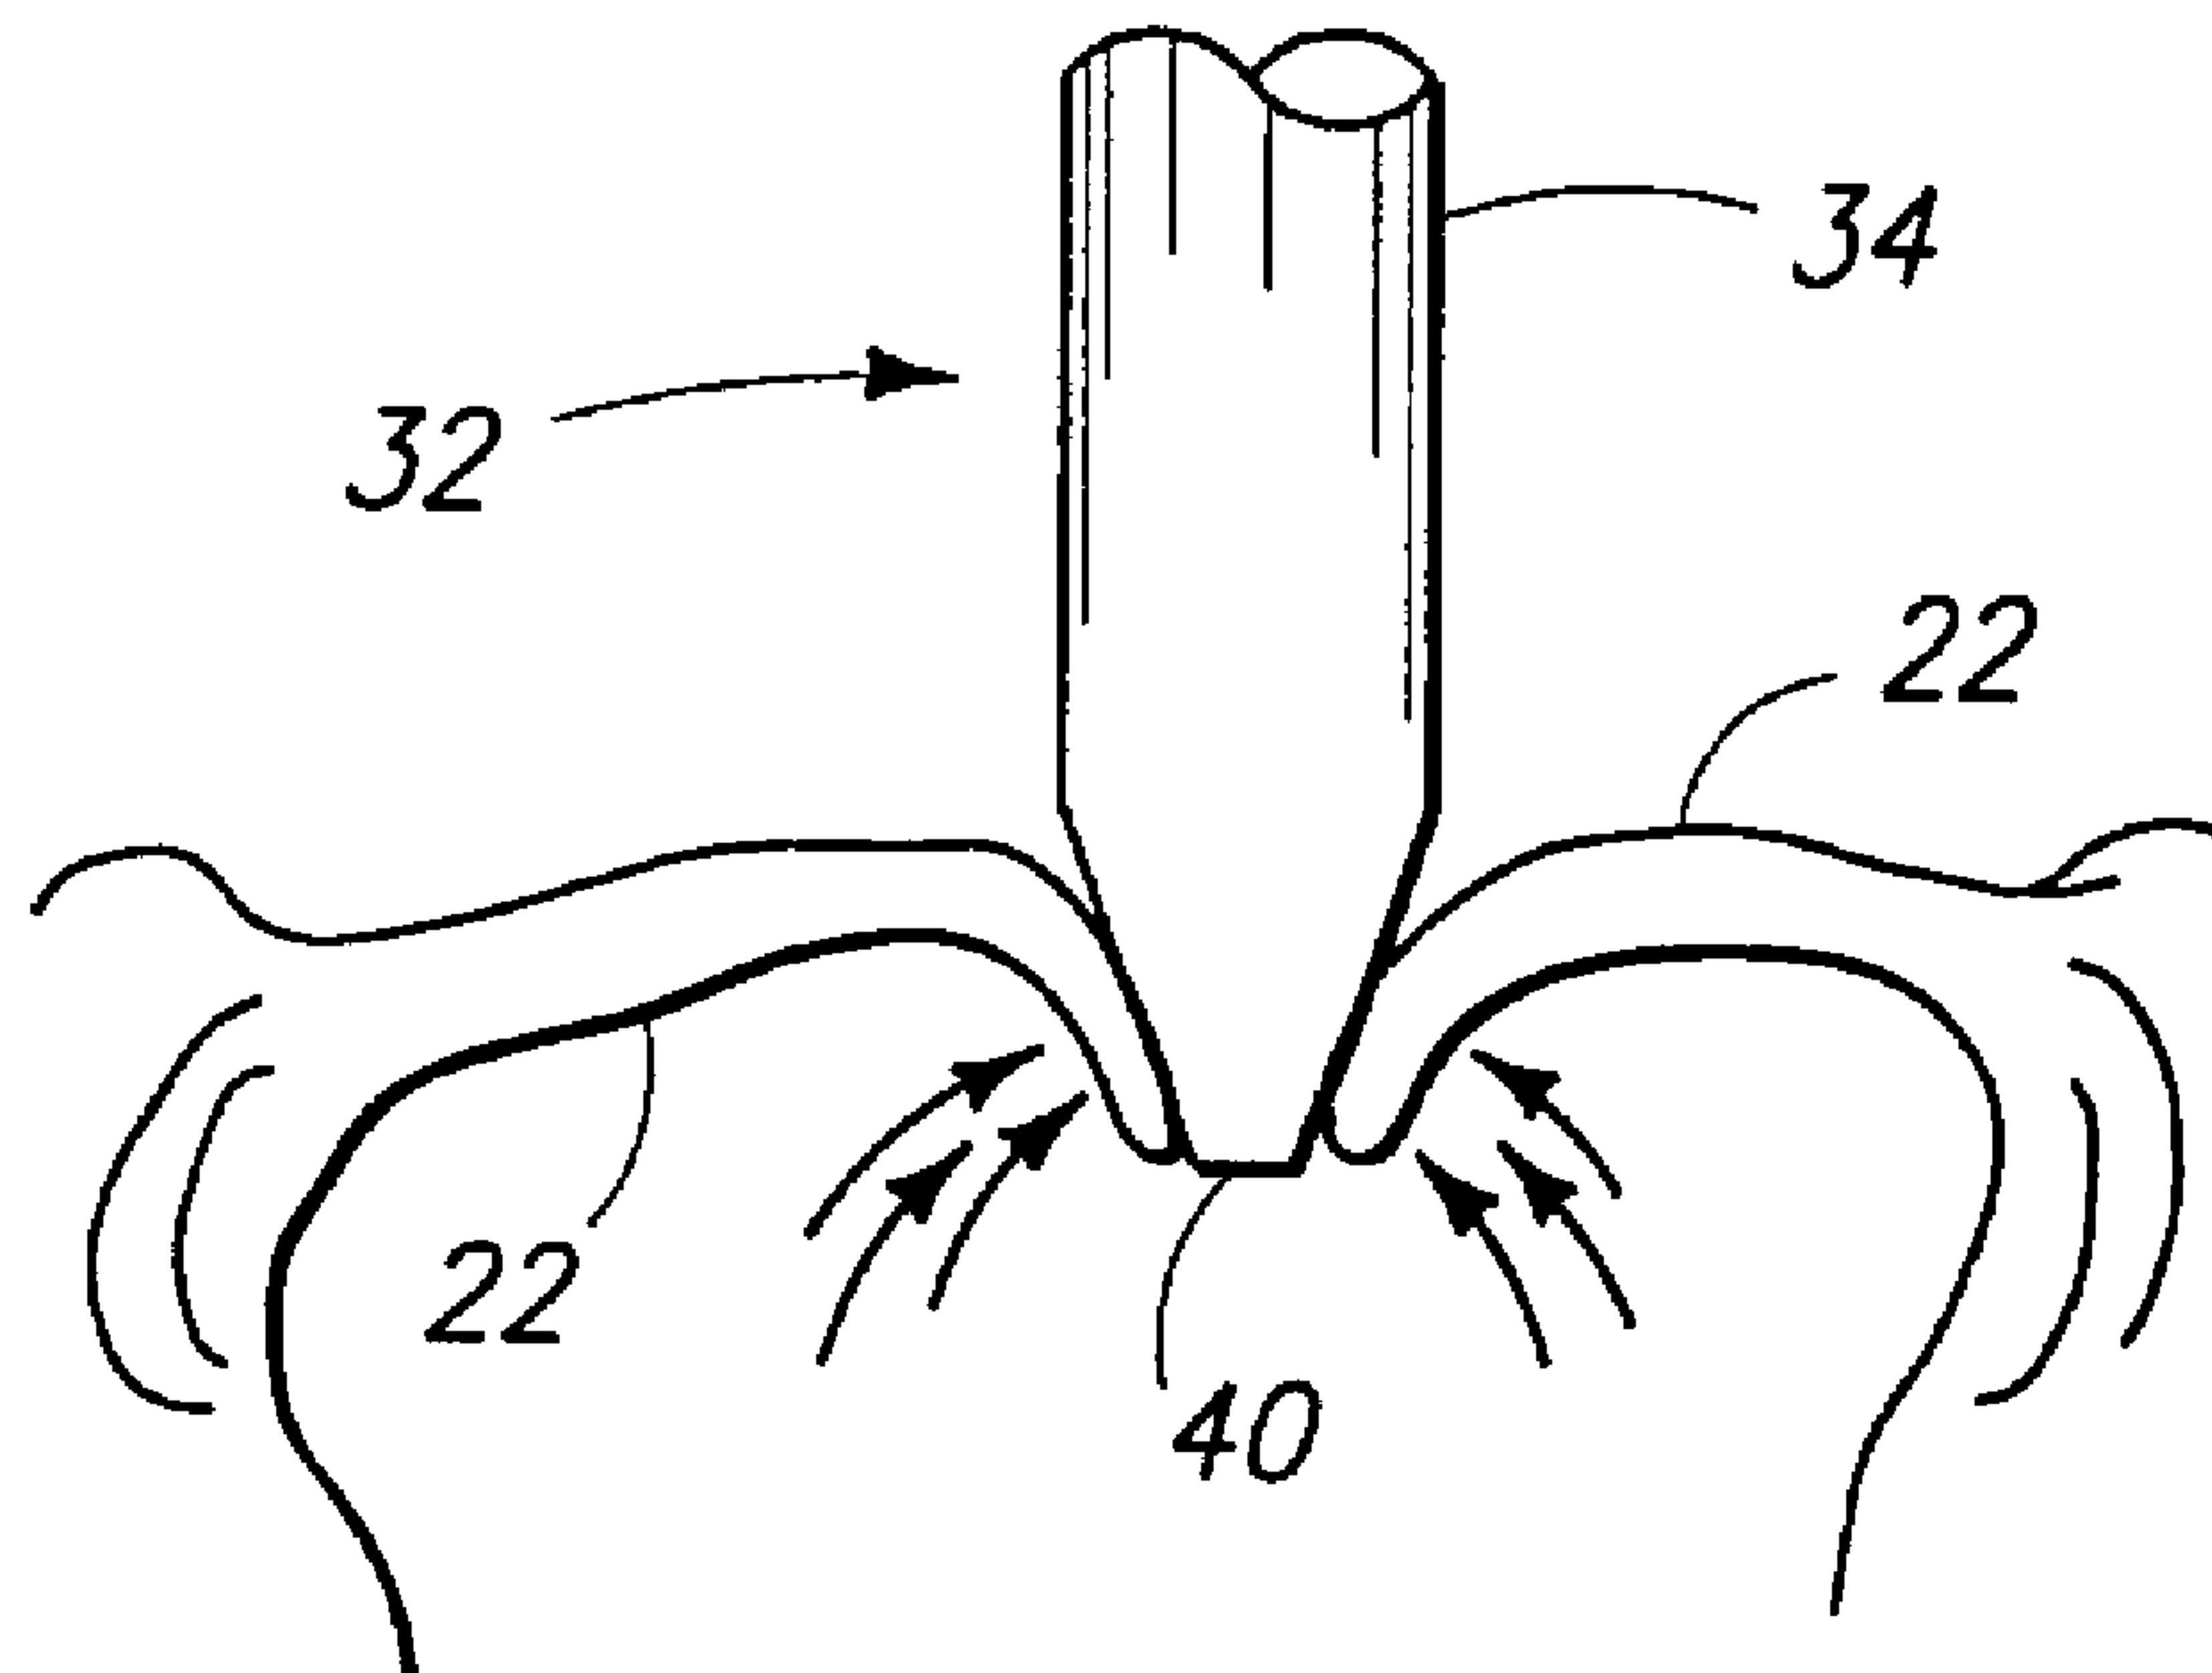

(57) Abrégé/Abstract:

The present invention is directed to an apparatus and method for the stabilization and fastening of two pieces of tissue. A single device may be used to both stabilize and fasten the two pieces of tissue, or a separate stabilizing device may be used in conjunction with a fastening device. The stabilizing device may comprise a probe with vacuum ports and/or mechanical clamps disposed at the distal end to approximate the two pieces of tissue. After the pieces of tissue are stabilized, they are fastened together using suture or clips. One exemplary embodiment of a suture-based fastener comprises a toggle and suture arrangement deployed by a needle, wherein the needle enters the front side of the tissue and exits the blind side. In a second exemplary embodiment, the suture-based fastener comprises a needle connected to a suture. The needle enters the blind side of the tissue and exits the front side. The suture is then tied in a knot to secure the pieces of tissue. One example of a clip-based fastener comprises a spring-loaded clip having two arms with tapered distal ends and barbs. The probe includes a deployment mechanism which causes the clip to pierce and lockingly secure the two pieces of tissue.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 April 2001 (26.04.2001)

PCT

(10) International Publication Number
WO 01/28432 A1

(51) International Patent Classification⁷: **A61B 17/068**,
17/00, 17/122, 17/064

(74) Agents: **CONDINO, Debra, D.** et al.; Edwards Lifesciences LLC, One Edwards Way, Irvine, CA 92614 (US).

(21) International Application Number: PCT/US00/29073

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(22) International Filing Date: 20 October 2000 (20.10.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/161,296 21 October 1999 (21.10.1999) US
09/562,406 1 May 2000 (01.05.2000) US

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: **EDWARDS LIFESCIENCES CORPORATION** [US/US]; One Edwards Way, Irvine, CA 92614 (US).


Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

(72) Inventors: **ALLEN, William, J.**; 4 Oxford Road, Milford, CT 06460 (US). **BACHMAN, Alan**; 4 Oxford Road, Milford, CT 06460 (US). **REED, Scott**; 4 Oxford Road, Milford, CT 06460 (US). **ADAMS, Ray**; 4 Oxford Road, Milford, CT 06460 (US). **STECKEL, Robert, R.**; 4 Oxford Road, Milford, CT 06460 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MINIMALLY INVASIVE MITRAL VALVE REPAIR METHOD AND APPARATUS

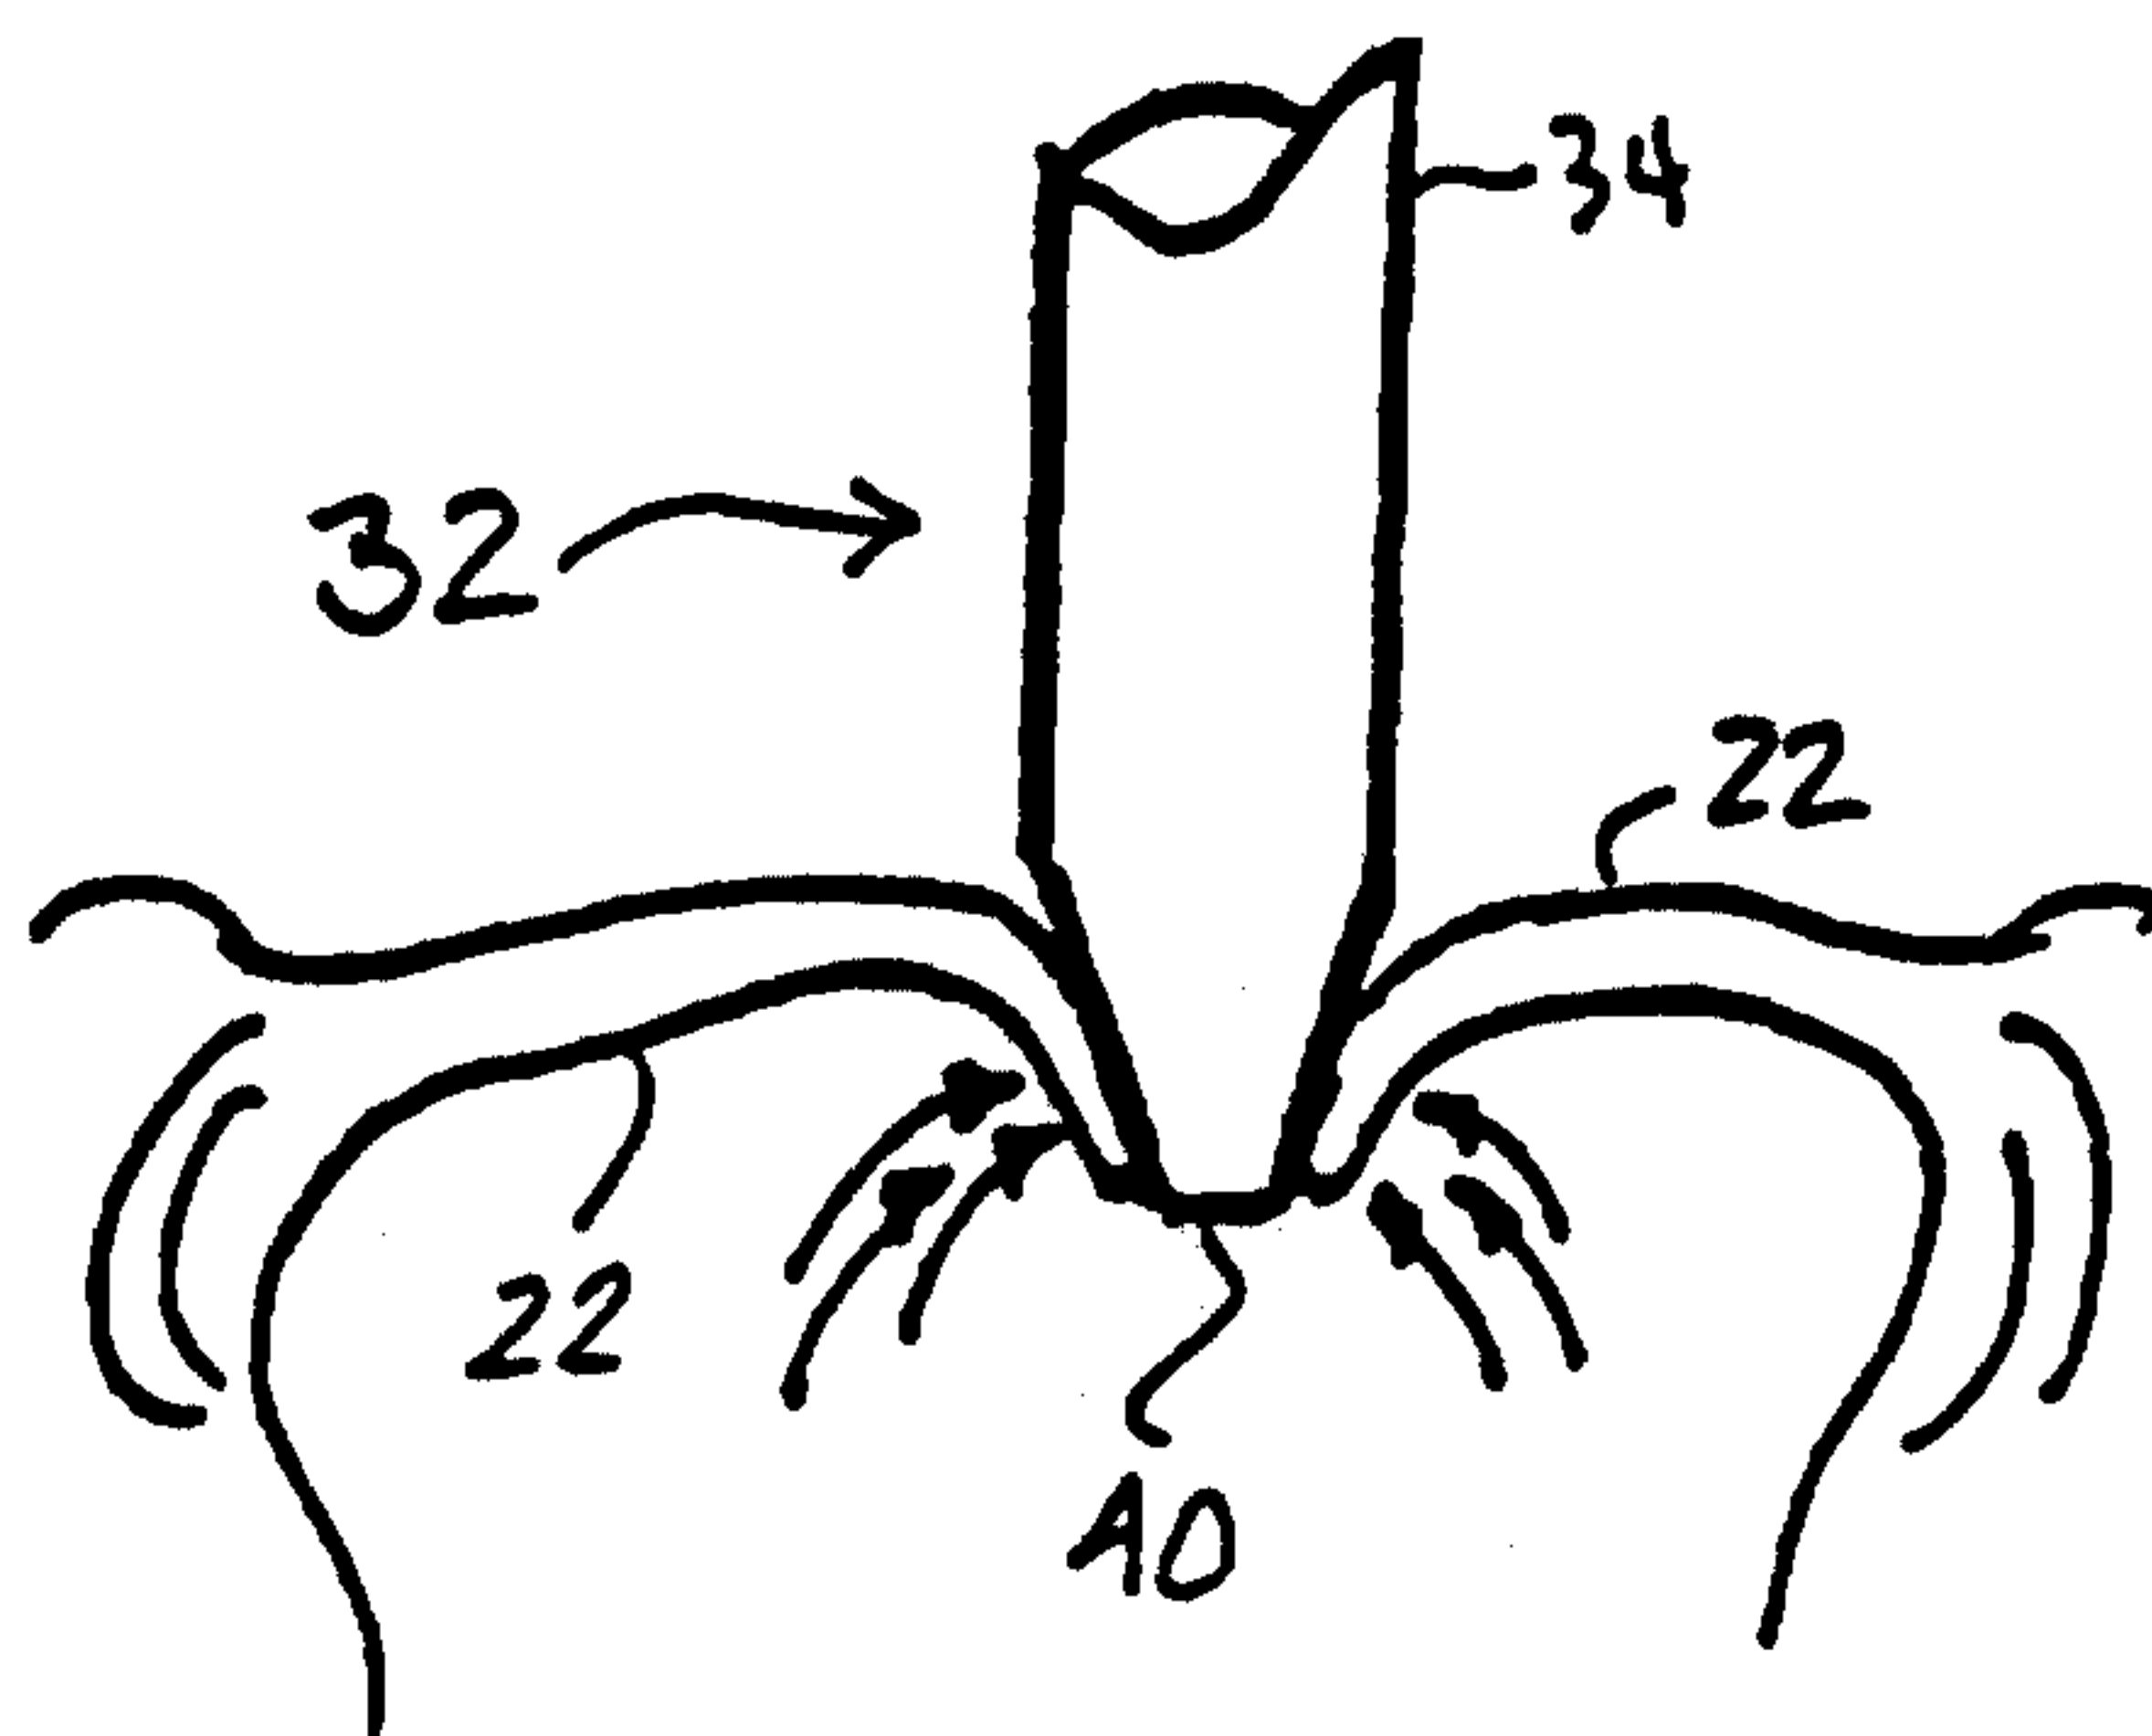

(57) Abstract: The present invention is directed to an apparatus and method for the stabilization and fastening of two pieces of tissue. A single device may be used to both stabilize and fasten the two pieces of tissue, or a separate stabilizing device may be used in conjunction with a fastening device. The stabilizing device may comprise a probe with vacuum ports and/or mechanical clamps disposed at the distal end to approximate the two pieces of tissue. After the pieces of tissue are stabilized, they are fastened together using suture or clips. One exemplary embodiment of a suture-based fastener comprises a toggle and suture arrangement deployed by a needle, wherein the needle enters the front side of the tissue and exits the blind side. In a second exemplary embodiment, the suture-based fastener comprises a needle connected to a suture. The needle enters the blind side of the tissue and exits the front side. The suture is then tied in a knot to secure the pieces of tissue. One example of a clip-based fastener comprises a spring-loaded clip having two arms with tapered distal

ends and barbs. The probe includes a deployment mechanism which causes the clip to pierce and lockingly secure the two pieces of tissue.



WO 01/28432 A1

MINIMALLY INVASIVE MITRAL VALVE REPAIR METHOD AND APPARATUS

FIELD OF THE INVENTION

The present invention relates to the repair of heart valves, and, more particularly, to methods and apparatuses for the repair of heart valves by fastening the valve leaflets together at their coapting edges.

BACKGROUND OF THE INVENTION

In vertebrate animals, the heart is a hollow muscular organ having four pumping chambers: the left and right atria and the left and right ventricles, each provided with its own one-way outflow valve. The natural heart valves are identified as the aortic, mitral (or bicuspid), tricuspid and pulmonary valves. The valves separate the chambers of the heart, and are each mounted in an annulus therebetween. The annuluses comprise dense fibrous rings attached either directly or indirectly to the atrial and ventricular muscle fibers. The leaflets are flexible collagenous structures that are attached to and extend inward from the annuluses to meet at coapting edges. The aortic and tricuspid valves have three leaflets, while the mitral and pulmonary valves have two.

Various problems can develop with heart valves, for a number of clinical reasons. Stenosis in heart valves is a condition in which the valves do not open properly. Insufficiency is a condition which a valve does not close properly. Repair or replacement of the aortic or mitral valves are most common because they reside in the left side of the heart where pressures and stresses are the greatest. In a valve replacement operation, the damaged leaflets are excised and the annulus sculpted to receive a replacement prosthetic valve.

In many patients who suffer from valve dysfunction, surgical repair (i.e., “valvuloplasty”) is a desirable alternative to valve replacement. Remodeling of the valve annulus (i.e., “annuloplasty”) is central to many reconstructive valvuloplasty procedures. Remodeling of the valve annulus is typically accomplished by
5 implantation of a prosthetic ring (i.e. “annuloplasty ring”) to stabilize the annulus and to correct or prevent valvular insufficiency that may result from a dysfunction of the valve annulus. Annuloplasty rings are typically constructed of a resilient core covered with a fabric sewing ring. Annuloplasty procedures are performed not only to repair damaged or diseased annuli, but also in conjunction with other
10 procedures, such as leaflet repair.

Mitral valve regurgitation is caused by dysfunction of the mitral valve structure, or direct injury to the mitral valve leaflets. A less than perfect understanding of the disease process leading to mitral valve regurgitation complicates selection of the appropriate repair technique. Though implantation of
15 an annuloplasty ring, typically around the posterior aspect of the mitral valve, has proven successful in a number of cases, shaping the surrounding annulus does not always lead to optimum coaptation of the leaflets.

More recently, a technique known as a “bow-tie” repair has been advocated. The bow-tie technique involves suturing the anterior and posterior
20 leaflets together in the middle, causing blood to flow through the two side openings thus formed. This process was originally developed by Dr. Ottavio Alfieri, and involved placing the patient on extracorporeal bypass in order to access and suture the mitral valve leaflets.

A method for performing the bow-tie technique without the need for bypass
25 has been proposed by Dr. Mehmet Oz, of Columbia University. The method and a device for performing the method are disclosed in PCT publication WO 99/00059, dated January 7, 1999. In one embodiment, the device consists of a forceps-like grasper device that can be passed through a sealed aperture in the apex of the left ventricle. The two mitral valve leaflets meet and curve into the left ventricular
30 cavity at their mating edges, and are thus easy to grasp from inside the ventricle. The mating leaflet edges are grasped from the ventricular side and held together, and various devices such as staples are utilized to fasten them together. The teeth of the grasper device are linearly slidable with respect to one another so as to align

the mitral valve leaflets prior to fastening. As the procedure is done on a beating heart, and the pressures and motions within the left ventricle are severe, the procedure is thus rendered fairly skill-intensive.

- 5 There is presently a need for an improved means for performing the bowtie technique of mitral valve repair.

SUMMARY OF THE INVENTION

- 10 The present invention provides a number of devices and methods for fastening or "approximating" tissue pieces or portions, together. The terms "tissue pieces", "tissue portions", or the like is to be understood to mean discrete pieces or portions that may be straight, curved, tubular, etc., so long as the pieces or portions are initially disconnected. For example, many of the embodiments of the invention disclosed
15 herein are especially useful for joining two leaflets of a heart valve. The coapting edges of the leaflets thus constitute the "tissue pieces" "tissue portions", or the like. In other contexts, the invention can be used to anastomose two vessels, either end-to-end, in a T-junction, or otherwise. In these cases, the two vessels define the "tissue pieces" "tissue portions", or the like. One specific application of using the invention
20 to perform an anastomosis is in a coronary artery bypass graft (CABG) procedure.

- Another example of an application of the present invention is in wound closure, wherein the facing edges of the wound are joined. In sum, the present invention in its broadest sense should not be construed to be limited to any particular tissue pieces or
25 portions, although particular examples may be shown and disclosed.

- The present invention includes a number of devices and method for both stabilizing the tissue pieces or portions to be joined, and fastening them together. Some embodiments disclose only the stabilizing function, others only the fastening function,
30 and still other show combination stabilizing and fastening devices. It should be understood that certain of the stabilizing devices can be used with certain of the fastening devices, even though they are not explicitly shown in joint operation. In other words, based on the explanation of the particular device, one of skill in the art should have little trouble combining the features of certain of two such devices.

3a

Therefore, it should be understood that many of the stabilizing and fastening devices are interchangeable, and the invention covers all permutations thereof.

Furthermore, many of the fastening devices disclosed herein can be deployed
5 separately from many of the stabilizing devices, and the two can
therefore be deployed in parallel. Alternatively, and desirably, however, the
fastening and stabilizing functions are performed with one device.

The stabilizing and fastening devices of the present invention can be
10 utilized in either standard open surgical procedures, endoscopic procedures, or
percutaneous procedures. In one embodiment the devices can be delivered through
an open chest either transapically or transatrially. In another embodiment, the
stabilizing and fastening devices can be introduced through an incision performed
over the roof of the left atrium. In yet another embodiment the devices can be
15 delivered into the left ventricle through the right chest via a thorascope.
devices can also be delivered percutaneously, via a catheter or catheters, into the
patient's arterial system (e. g. through the femoral or brachial arteries).

Thus, the present invention in accordance with an aspect provides a (vacuum based)
20 apparatus for the approximation of two pieces of tissue, comprising:

a probe with a distal tip having at least one lumen and adapted to approach
the tissue pieces to be joined;

at least one vacuum port adjacent the distal tip of the probe, the at least one
port being in fluid communication with a vacuum source via the at least one lumen so
25 as to enable the probe to stabilize at least one of the two pieces of tissue.

In accordance with the present invention a (vacuum based) apparatus may further
comprise a suture-based tissue fastener coupled to the probe for fastening the two
pieces of tissue. In accordance with the present invention there is provided a
30 (vacuum based) apparatus wherein the tissue fastener may comprise a toggle and a
suture thread attached to the toggle.

In accordance with the present invention a (vacuum based) apparatus may further
comprise a needle having a lumen and a pusher slidably disposed at a proximal end

3b

of the needle lumen, the tissue toggle and suture thread are housed within the distal end of the needle lumen to be urged from the distal end of the needle by the pusher.

5 In accordance with the present invention a (vacuum based) apparatus may further comprise a delivery lumen having an opening on a distal face of the probe, wherein the delivery lumen receives and deploys the needle, and the distal end of the needle pierces through the tissue to be fastened.

10 In accordance with the present invention there is provided a (vacuum based) apparatus wherein a suture-based tissue fastener may include a needle attached to a suture thread.

15 In accordance with the present invention a (vacuum based) apparatus may further comprise an extension member having a distally-directed frame coupled to a distal end of the probe, wherein the extension member is extendable and retractable and the frame defines a space, the needle being pivotally coupled to the frame and residing within the space.

20 In accordance with the present invention there is provided a (vacuum based) apparatus wherein the needle may be deployed on a blind side of the tissue such that the needle may pierce the blind side and exit through the front side of the tissue.

25 In accordance with the present invention there is provided a (vacuum based) apparatus wherein a probe may further include a needle receiver, wherein the needle is directed into the needle receiver.

In accordance with the present invention a (vacuum based) apparatus may further comprise a clip coupled to the probe for fastening the two pieces of tissue.

30 In accordance with the present invention there is provided a (vacuum based) apparatus wherein a clip may comprise an integral spring portion having two arms, each of the arms having one or more barbs. In accordance with the present invention the distal ends of the arms may be tapered to enable the clip to pierce the pieces of tissue and the arms are overlapping when in a closed position.

In accordance with the present invention there is provided a (vacuum based) apparatus wherein a clip may comprise an integral spring portion having two arms, wherein the arms may have tapered distal ends extending inwardly to pierce and lockingly secure the pieces of tissue, and wherein a gap may exist between midportions of the arms when the clip is in a closed position.

In accordance with the present invention there is provided a (vacuum based) apparatus wherein the probe may further comprise:

an internal lumen;

a pusher slidably received within the internal lumen; and

a sleeve disposed between the pusher and an internal wall of the internal lumen; wherein the clip is housed within the sleeve in an open position. In accordance with the present invention there is provided a (vacuum based) apparatus wherein movement of the pusher in the distal direction may cause the clip to pierce the pieces of tissue and wherein the clip may automatically spring to its closed position when the clip disengages from the probe causing the pieces of tissue to be compressed together.

In accordance with the present invention there is provided a (vacuum based) apparatus wherein the probe may comprise a catheter tube having at least one lumen connecting the at least one vacuum port to the vacuum source. In accordance with the present invention there is provided a (vacuum based) apparatus wherein the catheter may have sufficient length, steerability and maneuverability to reach the tissue pieces from a peripheral insertion site. In accordance with the present invention there is provided a (vacuum based) apparatus wherein the catheter may have sufficient length, steerability and maneuverability to reach the tissue pieces from an insertion site at the femoral artery. In accordance with the present invention there is provided a (vacuum based) apparatus wherein the catheter has sufficient length, steerability and maneuverability to reach the tissue pieces from an insertion site at the brachial artery.

30

In accordance with the present invention a (vacuum based) apparatus may further comprise a staple coupled to the probe for fastening the two pieces of tissue. In accordance with the present invention there is provided a (vacuum based) apparatus wherein the staple may comprise a bridge portion and at least gripping one arm on

either side of the bridge portion. In accordance with the present invention a (vacuum based) apparatus may further comprise two gripping arms on either side of the bridge portion. In accordance with the present invention there is provided a (vacuum based) apparatus wherein the gripping arms may be curled in a semi-circle upward
5 from the plane of the bridge portion and terminate in sharp points approximately in the plane of the bridge portion.

In accordance with the present invention a (vacuum based) apparatus may further comprise at least one echogenic member at or near the at least one vacuum ports to
10 enhance echo visualization.

In accordance with the present invention a (vacuum based) apparatus may further comprise a polymer coating which may be wholly or selectively applied at or near the at least one vacuum ports to enhance echo visualization.
15

The present invention in accordance with another aspect provides a (clip based) apparatus for the approximation of two pieces of tissue, comprising:
a probe with a distal tip having at least one lumen and adapted to approach the tissue pieces to be joined; and
20 a clip coupled to the probe for fastening the two pieces of tissue.

In accordance with the present invention there is provided a (clip based) apparatus wherein a clip may comprises an integral spring portion having two arms, each of the arms having one or more barbs. In accordance with the present invention there is
25 provided a (clip based) apparatus wherein distal ends of the arms may be tapered to enable the clip to pierce the pieces of tissue and the arms are overlapping when in a closed position.

In accordance with the present invention there is provided a (clip based) apparatus
30 wherein a clip may comprise an integral spring portion having two arms, wherein the arms may have tapered distal ends extending inwardly to pierce and lockingly secure the pieces of tissue, and wherein a gap may exist between midportions of the arms when the clip is in a closed position.

In accordance with the present invention a (clip based) apparatus is provided wherein a probe may further comprise:

an internal lumen;

a pusher slidably received within the internal lumen; and

5 a sleeve disposed between the pusher and an internal wall of the internal lumen;

wherein the clip is housed within the sleeve in an open position. In accordance with

the present invention there is provided a (clip based) apparatus wherein movement of

the pusher in the distal direction may cause the clip to pierce the pieces of tissue and

wherein the clip automatically may spring to its closed position when the clip

10 disengages from the probe causing the pieces of tissue to be compressed together.

The present invention in accordance with a further aspect provides an (mechanical stabilizer based) apparatus for the approximation of two pieces of tissue, comprising:

a probe with a distal tip having at least one lumen and adapted to approach the tissue

15 pieces to be joined; and

a mechanical tissue stabilizer coupled to a distal end of the probe, the mechanical tissue stabilizer comprising:

a distally-directed frame defining a space therein; and

rotatable and linearly extendable capture hooks disposed within the space, the hooks

20 being folded flat within the space and rotatably and slidably coupled to the probe

such that the hooks may be rotated and retracted to a capture position, and the pieces

of tissue are clamped between distal ends of the hooks and the shoulders of the probe.

In accordance with the present invention a (mechanical stabilizer based) apparatus

25 may further comprise a suture-based tissue fastener coupled to the probe for

fastening the pieces of tissue.

In accordance with the present invention there is provided a (mechanical stabilizer

based) apparatus wherein a tissue fastener may include a toggle and a suture thread

30 attached to the toggle.

In accordance with the present invention there is provided a (mechanical stabilizer

based) apparatus wherein a tissue toggle and suture thread may be housed in a lumen

of a needle, a pusher may be slidably disposed at a proximal end of the needle

lumen, and the tissue toggle and suture thread may be housed within the distal end of the needle lumen to be urged from the distal end of the needle by the pusher.

5 In accordance with the present invention a (mechanical stabilizer based) apparatus may further comprise a delivery lumen having an opening on a distal face of the probe, wherein the delivery lumen may receive and deploy the needle, and the distal end of the needle may pierce through the tissue to be fastened.

10 The present invention in accordance with a further aspect provides a (deployable means based) apparatus for the approximation of two pieces of tissue, comprising : a probe with a distal tip having at least one lumen and adapted to approach the tissue pieces to be joined; and means deployable from within the lumen for stabilizing adjacent pieces of tissue.

15 In accordance with the present invention a (deployable means based) apparatus may further comprise means deployable from within the lumen for fastening adjacent pieces of tissue that has been stabilized.

20 In accordance with the present invention a (deployable means based) apparatus may further comprise means separate from the probe for fastening adjacent pieces of tissue that has been stabilized.

The present invention in accordance with a further additional aspect provides an apparatus for joining two tissue pieces, comprising:
25 a probe adapted to be advanced through a body vessel into proximity with the tissue pieces, the probe having a distal tip; and a pair of vacuum ports adjacent the distal tip of the probe, each suitable for stabilizing one of the tissue pieces, the negative pressure generated at each port being separately controllable. In accordance with this further additional aspect the apparatus may
30 further include a device on the distal tip for fastening the tissue pieces together. In accordance with this further additional aspect the apparatus may further include a device separate from the probe for fastening the tissue pieces together.

3g

The present invention in accordance with another additional aspect provides an apparatus for the repair of a mitral valve from the atrial side, comprising :

a probe adapted to be advanced through a body vessel and through the left atrium into proximity with the mitral valve, the probe having a distal tip ; and

- 5 a pair of grippers adjacent the distal tip, each gripper adapted to grip one of the mitral valve leaflets from the atrial side.

The present invention in accordance with another aspect provides an apparatus for the repair of a mitral valve from the atrial side, comprising :

- 10 a probe adapted to be advanced through a body vessel and through the left atrium into proximity with the mitral valve, the probe having a distal tip; and

means on the probe for separately holding each of the mitral valve leaflets from the atrial side.

- 15 In accordance with a further aspect the present invention provides a method of repairing a mitral valve from the atrial side, comprising :
without arresting the heart, advancing a probe through a body vessel and through the left atrium into proximity with the mitral valve, the probe having a distal tip; and
separately holding each of the mitral valve leaflets from the atrial side with the probe.

- 20 In accordance with the present invention such method may further comprise manipulating one of the mitral valve leaflets with respect to the other to align them.
In accordance with the present invention such method may further comprise fastening the mitral valve leaflets together using a device mounted on the probe. In accordance with the present invention such method may further comprise fastening the mitral
25 valve leaflets together using a device separate from the probe.

In accordance with a further method aspect the present invention provides a method of repairing a mitral valve having adjacent leaflets comprising :

providing a catheter having a distal tip, the catheter comprising:

- 30 at least one lumen and at least one vacuum port adjacent the distal tip of the catheter, the at least one port being in fluid communication with the at least one lumen so as to enable the probe to stabilize adjacent leaflets ; and
a tissue fastener coupled to the catheter;
delivering the catheter percutaneously through a peripheral vessel to the mitral valve;

3h

stabilizing the adjacent leaflets ; and
fastening the adjacent leaflets.

5 In accordance with the further method aspect the present invention provides a method wherein the catheter may comprise at least two vacuum ports and wherein the stabilizing step includes the step of applying suction differentially to the adjacent leaflet.

10 In accordance with the further method aspect the present invention provides a method wherein the catheter may be delivered through a femoral artery or if desired through a brachial artery.

In accordance with another aspect the present invention provides a kit having devices for the approximation of two pieces of tissue, the kit comprising:
15 a catheter having sufficient length, steerability and maneuverability to reach the tissue pieces from a peripheral insertion site; and
a tissue fastener coupled to the catheter.

In accordance with the present invention a kit is provided wherein the catheter may
20 comprise a distal tip, at least one lumen, and at least one vacuum port adjacent the distal tip of the catheter;
the catheter vacuum port being in fluid communication with a vacuum source via the at least one lumen so as to enable the probe to stabilize adjacent pieces of tissue.

25 In accordance with an additional apparatus aspect the present invention provides an apparatus for the approximation of two pieces of tissue, comprising:
a probe with a distal tip having at least one lumen and adapted to approach the tissue pieces to be joined;
two or more vacuum ports adjacent the distal tip of the probe, the ports being in
30 separate fluid communication with a vacuum source via the at least one lumen so as to enable the probe to differentially stabilize adjacent pieces of tissue.

In accordance with the additional apparatus aspect the present invention provides an apparatus which may further comprise two or more vacuum ports and a tissue

fastening device wherein the tissue fastening device may comprise a carrier centrally disposed between the vacuum ports at the distal end of the probe.

5 In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the carrier may be configured to be extended from the distal tip and retracted back towards the distal tip so that the tissue fastening device can be placed on a first side of the tissue while the vacuum ports remain on a second side of the tissue.

10 In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the tissue fastening device may comprise needles which are pivotably mounted on the carrier.

15 In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the vacuum ports may further comprise needle catchers which are configured to retain and store the needles in the vacuum ports.

20 In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the tissue fastening device may be a suture based tissue fastening device.

25 In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the probe may have a longitudinal axis and the vacuum ports may have vacuum surfaces which are angled between zero and ninety degrees relative to a plane normal to the longitudinal axis.

30 In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the vacuum surfaces may be angled between fifteen and forty degrees relative to a plane normal to the longitudinal axis; and in particular wherein the vacuum surfaces may be angled at about twenty-five degrees relative to a plane normal to the longitudinal axis.

In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the probe may be cylindrical in shape and the vacuum ports are approximately D shaped.

- 5 In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the comers of the D shaped ports where the arc meets the straight portion at acute angles may have been filled in.

10 In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the vacuum ports may have barriers recessed below the perimeter of the D.

In accordance with the additional apparatus aspect the present invention provides an apparatus which may further comprise a proximal handpiece portion having
15 individual vacuum port controls.

In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the handpiece portion may connect the vacuum source to the vacuum ports via separate vacuum lines.
20

In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the handpiece portion may further comprise two pinch valves, each pinch valve capable of constricting one of the vacuum lines to permit differential control of access to the vacuum source.
25

In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the handpiece portion may be configured like a pistol having a shaft portion and a handle portion and the vacuum port controls are located at the back of shaft portion and at the top of handle portion like a pistol hammer.
30

In accordance with the additional apparatus aspect the present invention provides an apparatus wherein the handpiece portion may be configured like a pistol having a shaft portion and a handle portion and the vacuum port controls are located below the shaft portion and in front of the handle portion like a pistol trigger.

3k

The present invention in accordance with yet a further apparatus aspect provides an apparatus for the approximation of first and second portions of tissue, comprising:

5 a probe with a distal portion adapted to approach the first and second tissue portions, wherein the distal portion has a first side and a second side;

10 a tissue stabilizer comprising one or more vacuum ports adjacent the probe distal portion, wherein the tissue stabilizer is configured to provide vacuum to the first side of the probe distal portion via at least one of the one or more vacuum ports without simultaneously providing vacuum to the second side of the probe distal portion; and

15 a tissue fastening apparatus configured to be deployable into permanent contact with the first and second tissue portions, at least a portion of the tissue fastening apparatus releasably positioned on or in the probe distal portion, the tissue fastening apparatus comprising a first element and a second element, wherein the first element is configured to be deployable to contact the first tissue portion, and wherein the second element is configured to be deployable to contact the second tissue portion.

20 In accordance with the further apparatus aspect the present invention provides an apparatus wherein the tissue stabilizer may be configured to selectively provide vacuum to the second side of the probe distal portion via at least one of the one or more vacuum ports without simultaneously providing vacuum to the first side of the probe distal portion.

25 In accordance with the further apparatus aspect the present invention provides an apparatus wherein the leaflet fastening apparatus may be selected from the group comprising needles, sutures, staples, gripping arms, clips, and barbs.

30 In accordance with the further apparatus aspect the present invention provides an apparatus wherein the leaflet fastening apparatus may comprise a needle and suture assembly comprising a first suture portion, a second suture portion, a first needle, and a second needle, wherein the first needle and second needle are positioned

at the probe distal portion, the first portion of suture is secured to the first needle, and the second portion of suture is secured to the second needle.

5 In accordance with the further apparatus aspect the present invention provides an apparatus wherein at least a portion of the first line of suture may pass within a part of the probe distal portion, and the probe distal portion may be configured to trail at least a portion of the first line of suture out of the probe distal portion.

10 In accordance with the further apparatus aspect the present invention provides an apparatus wherein the first needle may be configured to be slidably advanced across at least a portion of the first vacuum port.

15 In accordance with the further apparatus aspect the present invention provides an apparatus wherein the second needle may be configured to be slidably advanced across at least a portion of the first vacuum port.

20 In accordance with the further apparatus aspect the present invention provides an apparatus wherein the leaflet stabilizer may comprise a second vacuum port on the second side of the distal portion, and wherein the second needle is configured to be slidably advanced across at least a portion of the second vacuum port.

In accordance with another aspect of the present invention there is provided a system for deploying suture in selected tissue in a patient's body, the system comprising:

25 a suture deploying catheter comprising a distal portion and a proximal portion, the suture deploying catheter distal portion further comprising a first side and a second side, with a first vacuum port on a first side of the catheter distal portion, and a vacuum port control configured to provide vacuum to the first side of the catheter distal portion via the first vacuum port without simultaneously providing vacuum to
30 the second side of the catheter distal portion, and a first needle and second needle slidably positioned on or in the catheter distal portion; and
at least one line of suture having a first end secured to the first needle.

3m

In accordance with the present invention a system is provided wherein the at least one line of suture may have a second end secured to the second needle, wherein the first end is opposite the second end.

5 In accordance with the present invention a system is provided which may further comprise a suture securing catheter configured to secure the suture adjacent the selected tissue.

10 In accordance with the present invention a system is provided wherein the suture securing catheter may comprise a knot run-down tool.

In accordance with the present invention a system is provided which may further comprise a suture cutting tool configured to remove excess suture.

15 In accordance with the present invention a system is provided wherein the suture securing catheter may further comprise an integrated suture cutter.

The present invention in accordance with yet a further (tissue stabilizer) apparatus aspect provides an apparatus for fastening heart tissue, comprising:

20 a tissue engaging tip;
a tissue stabilizer positioned on the tissue engaging tip;
a deployable fastener positioned on the tissue engaging tip, the fastener comprising first and second fastening elements; and
an actuation system in communication with the tissue stabilizer and the
25 fastener, the actuation system having first and second actuation modes; wherein the actuation system in the first actuation mode is capable of causing the tissue stabilizer to grasp a first tissue portion and causing the first fastening element to deploy into the first tissue portion; wherein the actuation system in the second actuation mode is
capable of causing the tissue stabilizer to grasp a second tissue portion and causing
30 the second fastening element to deploy into the second tissue portion; and, wherein the actuation system is capable of independently and sequentially operating in the first and second actuation modes.

The present invention in accordance with the further (tissue stabilizer) apparatus aspect provides an apparatus wherein the first fastening element may comprise a first suture portion, and the second fastening element comprises a second suture portion.

5

The present invention in accordance with the further (tissue stabilizer) apparatus aspect provides an apparatus wherein the first suture portion and second suture portion may be portions of a common suture line.

10

The present invention in accordance with the further (tissue stabilizer) apparatus aspect provides an apparatus wherein the first fastening element may comprise a first needle and the second fastening element comprises a second needle.

The present invention in accordance with the further (tissue stabilizer) apparatus aspect provides an apparatus wherein the first needle may be secured to a first suture end, and the second needle may be secured to a second suture end.

The present invention in accordance with the further (tissue stabilizer) apparatus aspect provides an apparatus wherein the first suture end and second suture end may be opposing ends of a common suture line.

The present invention in accordance with the further (tissue stabilizer) apparatus aspect provides an apparatus wherein the tissue stabilizer may comprise a first clamping device and a second clamping device.

25

The present invention in accordance with the further (tissue stabilizer) apparatus aspect provides an apparatus wherein the first fastening element may comprise a first needle positioned on or in the tissue stabilizer.

30

The present invention in accordance with the further (tissue stabilizer) apparatus aspect provides an apparatus wherein the tissue stabilizer may comprise a first clamping device, and the first needle may be positioned on or in the first clamping device.

The present invention in accordance with the further (tissue stabilizer) apparatus aspect provides an apparatus wherein the second fastening element may comprise a second needle positioned on or in the tissue stabilizer.

In accordance with the present invention there is in particular provided an apparatus
5 for the approximation of two pieces of tissue, comprising:

a probe with a distal tip having at least one lumen and adapted to approach the tissue pieces to be joined;

at least one vacuum port adjacent the distal tip of the probe, the at least one vacuum port being in fluid communication with a vacuum source via the at least one
10 lumen so as to enable the probe to stabilize at least one of the two pieces of tissue; and

a first suture-based tissue fastener coupled to the probe for fastening at least one of the two pieces of tissue, wherein the first suture-based tissue fastener comprises a first pair of needles and a first common suture thread, wherein the first pair of needles is configured to draw a portion of the first common suture thread
15 across and into the at least one vacuum port. This particular apparatus may further comprise

a second suture-based tissue fastener coupled to the probe for fastening at least one of the two pieces of tissue, wherein the second suture-based tissue fastener comprises a second pair of needles and a second common suture thread, wherein the
20 second pair of needles is configured to draw a portion of the second common suture thread across and into the at least one vacuum port. In accordance with the present invention this particular apparatus may be provided wherein the probe may further comprise a first pair of needle receivers, wherein the first pair of needle receivers are positioned within one of the at least one vacuum ports, wherein the first pair of
25 needles are directed into the first pair of needle receivers.

In accordance with the present invention there is further, in particular, provided an apparatus for the approximation of two pieces of tissue, comprising:

a probe with a distal tip having at least one lumen and adapted to approach the
30 tissue pieces to be joined;

two or more vacuum ports adjacent the distal tip of the probe, the two or more vacuum ports being in separate fluid communication with a common vacuum source via the at least one lumen so as to enable the probe to differentially stabilize adjacent
5 pieces of tissue;

a first suture-based tissue fastener coupled to the probe distal tip for fastening at least one of the two pieces of tissue, wherein the first suture-based tissue fastener comprises a first pair of needles and a first common suture thread, wherein the first pair of needles is configured to draw a portion of the first common suture thread
10 across and into one of the two or more vacuum ports; and

a second suture-based tissue fastener coupled to the probe for fastening at least one of the two pieces of tissue, wherein the second suture-based tissue fastener comprises a second pair of needles and a second common suture thread, wherein the second pair of needles is configured to draw a portion of the second common suture
15 thread across and into one of the two or more vacuum ports.

In accordance with the present invention there is additionally in particular provided an apparatus for the approximation of first and second pieces of tissue, comprising:

a probe with a distal portion adapted to approach the first and second tissue
20 portions, wherein the distal portion has a first side and a second side;

a tissue stabilizer comprising one or more vacuum ports adjacent the probe distal portion, wherein the tissue stabilizer is configured to selectively provide vacuum to the first side of the probe distal portion via at least one of the one or more vacuum ports without simultaneously providing vacuum to the second side of the
25 probe distal portion; and

a first tissue fastening apparatus configured to be deployable into permanent contact with at least one of the first and second tissue portions, at least a portion of the first tissue fastening apparatus releasably positioned on or in the probe distal portion, the first tissue fastening apparatus comprising a first pair of needles and a first
30 common suture thread, wherein the first pair of needles is configured to draw a portion of the first common suture thread across and into the one or more vacuum ports. This additional particular apparatus may further comprise

a second tissue fastening apparatus configured to be deployable into permanent contact with at least one of the first and second tissue portions, at least a

portion of the second tissue fastening apparatus releasably positioned on or in the probe distal portion, the second tissue fastening apparatus comprising a second pair of needles and a second common suture thread, wherein the second pair of needles is configured to draw a portion of the second common suture thread across and into the
5 one or more vacuum ports;

wherein the tissue stabilizer is configured to selectively provide vacuum to only the second side of the probe distal portion via at least one of the one or more vacuum ports.

Other objects, features, and advantages of the present invention will become apparent
10 from a consideration of the following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of an exemplary tissue stabilizer of the present invention that uses a vacuum;

15 Figure 1a is an elevational view of a first step in a valve repair procedure using the tissue stabilizer of Figure 1;

Figure 1b is an elevational view of a second step in a valve repair procedure using the tissue stabilizer of Figure 1;

20 Figure 2 is a perspective view of a further tissue stabilizer of the present invention that also uses a vacuum;

Figure 2a is an elevational view of a step in a valve repair procedure using the tissue stabilizer of Figure 2;

Figures 3a-3c are perspective views of several embodiments of vacuum based tissue stabilizers having tissue separating walls;

25 Figure 3d and 3e are sectional views of two different vacuum port configurations for the tissue stabilizers shown in Figures 3a-3c, the stabilizers shown in operation;

Figure 4a is an elevational view of a first step in a valve repair procedure using a mechanical tissue stabilizer with linearly displaceable tissue clamps;

30

Figure 4b is an elevational view of a second step in a valve repair procedure using the tissue stabilizer of Figure 4a;

Figure 4c is a detailed perspective view of a clamp of the tissue stabilizer of Figure 4a extended to grasp a valve leaflet from both sides;

5 Figure 5a is a perspective view of a suture-based tissue fastener of the present invention having toggles;

Figure 5b is a sectional view of the suture-based tissue fastener of Figure 5a loaded into a delivery needle;

10 Figure 6a-6c are elevational views of several steps in a valve repair procedure using a tissue stabilizer of the present invention and the suture-based tissue fastener shown in Figure 5a.

Figure 7a is a perspective view of an exemplary tissue stabilizing and fastening device of the present invention that uses a vacuum and needles to deliver suture-based fasteners having toggles through the tissue;

15 Figure 7b is an elevational view of a step in a valve repair procedure using the tissue stabilizing and fastening device of Figure 7a;

Figure 8 is an elevational view of an alternative tissue stabilizing and fastening device similar to that shown in Figure 7a;

20 Figure 9a is a perspective view of a further tissue stabilizing and fastening device of the present invention that uses a vacuum and needles to deliver suture-based fasteners having toggles through the tissue;

Figure 9b is a plan view of the distal tip of the device of Figure 9a;

Figures 10a-10c are several photographs of tissue being connected with suture-based fasteners having toggles;

25 Figures 11a-11c are elevational views of a tissue stabilizing and fastening device of the present invention having members deployable on a blind side of the tissue being connected;

30 Figures 12a-12e are elevational views of a tissue stabilizing and fastening device of the present invention having needles deployable on a blind side of the tissue being connected and a suture-based fastener;

Figure 13a is a perspective view of a further tissue stabilizing and fastening device of the present invention that uses a vacuum and deployable needles to deliver suture-based fasteners through the tissue;

Figure 13b is a plan view of the distal tip of the device of Figure 13a;

Figures 14a-14b are elevational view of a still further tissue stabilizing and fastening device of the present invention that uses vacuum and deployable needles to deliver suture-based fasteners through the tissue;

5 Figures 15a-15h are elevational and plan views of several steps in a valve repair procedure using the tissue stabilizing and fastening device of Figure 14;

Figures 16a-16c are sectional views of several steps in a tissue joining procedure using an exemplary tissue stabilizing and fastening device having needles for delivering a suture-based fastener;

10 Figure 16d is a detailed perspective view of a portion of the device seen in Figure 16b;

Figures 16e and 16f are isolated views of suture ties used with the suture-based fastener of Figure 16a;

15 Figures 17a-17c are elevational views of several steps in a valve repair procedure using an exemplary tissue stabilizing and fastening device for delivering a suture-based axial needle fastener;

Figure 18a is an elevational view of a first step in a valve repair procedure using an exemplary tissue fastening device of the present invention for delivering a spiral suture-based leaflet fastener;

20 Figure 18b is a detailed perspective view of a second step in a valve repair procedure using the spiral suture-based leaflet fastener of Figure 18a;

Figure 18c is an elevational view of a completed valve repair procedure utilizing the spiral suture-based leaflet fastener of Figure 18a;

25 Figure 18d is a detailed view of a pledget anchoring device used with the spiral suture-based leaflet fastener of Figure 18a;

Figures 19a-19d are elevational views of several steps in a valve repair procedure using an exemplary tissue stabilizing and fastening device of the present invention having vacuum stabilization and mechanical clamping;

30 Figure 20 is an elevational view of a mechanical tissue stabilizer with pivoting tissue clamps;

Figures 21a and 21b are elevational views of two steps in a valve repair procedure using the mechanical tissue stabilizer of Figure 21;

Figures 22a and 22b are elevational views of two steps in a valve repair

procedure using a mechanical tissue stabilizer of the present invention having preformed hooks;

Figure 22c is a detailed perspective view of a hook of the tissue stabilizer of Figure 22a extended to grasp a valve leaflet from the side opposite the tissue
5 stabilizer;

Figures 23a and 23b are elevational views of two steps in a valve repair procedure using a mechanical tissue stabilizer of the present invention having spring-biased hooks;

Figure 23c is a detailed perspective view of two hooks of the tissue
10 stabilizer of Figure 23a extended to grasp the valve leaflets from the side opposite the tissue stabilizer;

Figures 24a-24d are elevational views of several steps in a valve repair procedure using a mechanical tissue stabilizer of the present invention to deliver a non-suture-based fastener;

15 Figure 25a is a perspective view of an exemplary tissue staple useful with the methods and devices of the present invention and shown in an open configuration;

Figure 25b is a perspective view of the tissue staple of Figure 25a shown in a closed configuration;

20 Figures 26a-26c are elevational views of several steps in a valve repair procedure using an exemplary tissue fastening device of the present invention for delivering the tissue staple of Figure 25a;

Figure 27a is a perspective view of a further tissue stabilizing and fastening device of the present invention that uses a vacuum and delivers a staple to fasten
25 tissue pieces;

Figure 27b is a sectional view of a step in a valve repair procedure using the tissue stabilizing and fastening device of Figure 27a;

Figure 27c is a perspective view of a completed valve repair procedure utilizing the tissue stabilizing and fastening device of Figure 27a;

30 Figure 28a is an elevational view of a further tissue fastening device of the present invention for delivering an alternative "toggle-like" tissue clip, the clip shown open;

Figure 28b is an elevational view of the tissue fastening device of Figure

28a, the clip shown closed;

Figure 29a is a detailed perspective view of a first step in a valve repair procedure using the tissue fastening device of Figure 28a;

Figures 29b and 29c are elevational views of two steps in a valve repair procedure using the tissue fastening device of Figure 28a;

Figure 30a is a perspective view of an alternative "toggle-like" tissue fastening clip, the clip shown open;

Figure 30b is a perspective view of the tissue fastening clip of Figure 30a shown closed ;

Figures 31 a-31 d are elevational views of several steps in a valve repair procedure using an exemplary tissue fastening device of the present invention for delivering the tissue fastening clip of Figure 30a;

Figures 32a-32d are elevational views of various tissue fastening clips having barbed ends;

Figures 33a and 33b are sectional views of a two steps in a valve repair procedure using an exemplary tissue fastening device of the present invention for delivering a barbed tissue fastening clip of Figure 32a;

Figure 33c is an elevational view of a third step in a valve repair procedure using the tissue fastening device of Figure 33a;

Figure 34a-34f are elevational and perspective views of a tissue fastener of the present invention having spring-loaded jaws;

Figure 35a is a sectional view of a tissue fastening device for delivering the tissue fastener of Figure 34a;

Figures 35b and 35c are sectional views of the tissue fastener of Figure 34a in both closed and opened positions around the tissue being connected;

Figures 36a-36c are elevational views of a further tissue fastener of the present invention having spring-loaded jaws;

Figure 37a is a sectional view of a tissue fastening device for delivering the tissue fastener of Figure 36a;

Figure 37b is a sectional view of the tissue fastener of Figure 36a in a closed position around the tissue being connected;

Figure 38 is a perspective view of an exemplary integrated tissue stabilizer and fastening device of the present invention ;

Figure 39 is a perspective view of the device of Figure 38 wherein the needle carrier is extended;

Figure 40 is a perspective view of the device of Figure 38 showing the initial release of the needles;

5 Figure 41 is a perspective view of the device of Figure 38 showing the needles captured within the vacuum ports;

Figure 42 is an exploded view of various components of the device of Figure 38;

10 Figure 43 is a perspective view of the device of Figure 38 wherein the needle carrier has been removed to clearly show the vacuum ports;

Figure 44 is a perspective view of an exemplary embodiment of a handpiece that is utilized with the device of Figure 38;

Figures 45a and 45b illustrate perspective views of alternate suture configurations used to practice the invention; and

15 Figure 46 is a perspective view of another exemplary embodiment of a handpiece that is utilized with the device of Figure 38.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Exemplary Stabilizing Devices

Figure 1 shows a tissue stabilizer 20 of the present invention that uses a vacuum to hold two tissue pieces. In this case, the tissue pieces are heart valve leaflets 22 and a valve repair procedure using the stabilizer 20 is depicted in Figures 1a and 1b. The tissue stabilizer 20 comprises a cylindrical probe 24 with at least one internal lumen (not shown) and having a flat distal end 26, a pair of vacuum ports 28 being disposed in the distal end 26. The ports 28 may be in communication with a common vacuum source, may be separately communicable with the source with internal valves (not shown), or may be in communication with different vacuum sources. The size of the ports 28 and magnitude of suction applied may vary depending on the application, but the ports 28 are desirably spaced apart a minimum distance to create two distinct suctions. In this manner, one leaflet or the other may be stabilized with one of the ports 28 without unduly influencing the other. In one example, the ports 28 have a minimum diameter of about 1/8 inch, and are spaced apart with a wall of at least 0.020 inches

therebetween.

The probe 24 desirably has a size suitable for minimally invasive surgery. In one embodiment probe 24 is part of a catheter based percutaneous delivery system. In that case probe 24 is a catheter tube having a lumen or lumens
5 connecting vacuum ports 28 to the vacuum source or sources. The catheter would be long enough and have sufficient steerability and maneuverability to reach the heart valve from a peripheral insertion site, such as the femoral or brachial artery. One particular advantage of the present invention is the ability to perform valve repair surgery on a beating heart. The procedure shown in Figures 1a and 1b is a
10 mitral valve repair with an approach of the probe 24 from the left atrium 30. The atrium 30 has lower pressures than the ventricle 31, and thus there is less blood leakage and less turbulence imparted to the probe 24. First, the anatomical structures, including the location of the leaflets 22, can be visualized using echo technology, or other means. One leaflet 22 may be stabilized with one of the ports
15 28, and that leaflet 22 then manipulated toward the other leaflet 22, which is then also stabilized. Again, any of the fasteners disclosed herein may then be used to secure the leaflets 22 together.

Figure 2 illustrates another tissue stabilizer 32 similar to that shown in Figure 1 and that also uses a vacuum. The tissue stabilizer 32 includes a probe
20 body 34 having at least one internal lumen (not shown) and an angled or tapered nose 36 on a distal end. A vacuum port 38 is provided on each face of the tapered nose 36. Figure 2a shows a valve repair procedure using the tissue stabilizer 32 of Figure 2, wherein a distal tip 40 of the nose 36 is exposed to the ventricular 31 side of the leaflets 22. Because of this exposure, various leaflet fastening devices can
25 be delivered through the probe 34 to the ventricular side of the leaflets 22, as will be seen below.

Figures 3a-3c show three vacuum-based tissue stabilizers having tissue separating walls. In Figure 3a, a tissue stabilizer 40 includes a flat distal face 42 having a pair of distally-directed tissue separating walls 44 extending therefrom,
30 and defining a gap 46 therebetween. The stabilizer 40 contains one or more lumens in communication with vacuum ports 48 that open on both sides of the walls 44. There are four such ports 48 shown, one on each side of each wall 44. In addition, a fastener channel 50 opens at the distal face 42 between the walls 44,

and facing the gap 46 therebetween. The fastener channel 50 can be used to deliver tissue fasteners, as described below.

In Figure 3b, a tissue stabilizer 52 includes a flat distal face 54 having a single distally-directed tissue separating wall 56 extending therefrom. The stabilizer 52 contains one or more lumens in communication with circular vacuum ports 58 that open on both sides of the wall 56. There are two such ports 58 shown, one on each side of each wall 56.

In Figure 3c, a tissue stabilizer 60 includes a flat distal face 62 having a single distally-directed tissue separating wall 64 extending therefrom. The stabilizer 60 contains one or more lumens in communication with semi-circular vacuum ports 66 that open on both sides of the wall 64. There are two such ports 66 shown, one on each side of each wall 64.

Figure 3d and 3e show two different vacuum port configurations for the tissue stabilizers 40, 52, or 60 shown in Figures 3a-3c. As mentioned above, the stabilizers 40, 52, or 60 may have one or more lumens in communication with one or more ports. In Figure 3d, two lumens 68a and 68b provide separate suction control to the associated ports. Thus, one tissue piece 70a is seen stabilized by the right-hand vacuum port, while the left-hand port is not operated. Alternatively, a single lumen 72 in communication with two vacuum ports is seen in Figure 3e, and both tissue pieces 70a, 70b are stabilized simultaneously. In both these views, the tissue separating wall 74 is shown between the tissue pieces to be joined. Fastening devices can thus be delivered via the wall 74, or through a gap formed for that purpose, such as the gap 46 and fastener channel 50 seen in Figure 3a.

Figures 4a-4c show a mechanical tissue stabilizer 80 with a four-part, linearly displaceable tissue clamp 82. On each side, a lower clamp 84 is separated from an upper clamp 86 and inserted between two tissue pieces (in this case valve leaflets 22). As the lower and upper clamps 84, 86 are brought together, as seen in Figure 4b, they physically clamp and stabilize the leaflet 22. Small teeth 88 on the clamps 84, 86 may be provided for traction. The clamps 84 and 86 on each side are individually actuated to enable grasping of one leaflet 22 at a time.

Exemplary Suture-Based Tissue Fasteners

Figure 5a illustrates a suture-based tissue fastener 90 of the present

invention including toggles 92 secured to the end of suture threads 94. Figure 5b is a sectional view through a needle 96 used to deliver the tissue fastener 90. Specifically, the toggle 92 and suture thread 94 is seen loaded into the lumen of the needle 96, and a pusher 98 is provided to urge the tissue fastener 90 from the distal
5 end thereof.

Figure 6a-6c depict several steps in a valve repair procedure using the tissue fasteners 90 shown in Figure 5a. A probe, such as the probe 20 seen in Figure 1 having vacuum ports for tissue stabilization, provides lumens for two of the needles 96 of Figure 5b. The lumens with the vacuum parts 96 may receive the
10 needles 96 or additional lumens may be provided. The sharp ends of the needles 96 pierce the leaflets, and the pushers 98 are displaced (separately or in conjunction) to deploy the tissue fasteners 90. After the needles 96 are retracted, the toggles 92 anchor the tissue fasteners 90 on the ventricular 31 side of the leaflets 22. The suture threads 94 are then tied off on the atrial 30 side to secure
15 the leaflets 22 together, as seen in Figure 6c.

Figure 7a is a perspective view of an exemplary tissue stabilizing and fastening device 100 that uses the principles of vacuum stabilization and a suture-based toggle fastener, as seen in Figures 5a and 5b. The device 100 includes a probe 102 defining several lumens (not shown) therein that open on a distal face.
20 Two lumens 104 open at a proximal end and receive two of the needles 96 for delivering the fasteners. Two other lumens communicate through two side arms 106 with sources of vacuum. Figure 7b shows the device 100 in use in a valve repair procedure, with the two needles 96 having pierced the leaflets 22 and delivered the fasteners 90. The leaflets 22 are held to the probe 102 using the
25 vacuum ports.

Figure 8 illustrates an alternative tissue stabilizing and fastening device 108 similar to the device 100 of Figure 7a, but having a pointed nose with two concave faces 110 in which the vacuum ports are located. The device 108 functions as described above, with a fastener deliver needle shown in phantom having pierced
30 the left leaflet 22.

Figures 9a and 9b show a still further tissue stabilizing and fastening device 112 that uses a vacuum and needles to deliver suture-based fasteners having toggles through the tissue. The device 112 is quite similar in function to the device

102 of Figure 7a, but has a modified distal end, as best seen in the plan view of Figure 9b. Specifically, a central tissue separating wall 114 is provided with a pair of vacuum ports 116a on one side, and another pair 116b on the other. Again, the port 116 may be separately or commonly supplied with vacuum. Fastener delivery
5 lumens 118a and 118b are located on each side of the wall. The aforementioned needles 96 or other such device may be delivered through the lumens 118 to pierce and fasten the tissue pieces.

Figures 10a-10c are several photographs of tissue being connected with suture-based fasteners having toggles. Figure 10a illustrates the toggle 92 being
10 deployed. Figure 10b illustrates the needles 96 being retracted, and Figure 10c illustrates the sutures 94 being tied.

Figures 11a-11c show a tissue stabilizing and/or fastening device 120 having members deployable on a blind side of the tissue being connected. In this context, "blind side" means the side of the tissue pieces opposite the side to which
15 the device has direct access. The deployable members may be clamps to stabilize the tissue pieces, or fastening devices that contact the tissue pieces on the blind side.

The device 120 includes a probe 122 with lumens, and a distal tip 123 that is narrower than the probe 122 and defines concave transition faces 124. A
20 vacuum port 126 may be provided in each transition face 124 for tissue stabilization, or a clamping mechanism may be stowed in a space 128 in the distal tip 123. Figure 11c shows the clamp 129 (or fastener) in a deployed state.

Figures 12a-12e illustrate a tissue stabilizing and fastening device 130 having needles 132 deployable on a blind side of the tissue being connected. The
25 device 130 may be configured like the device 120 of Figure 11a, with the space 128 receiving needles 132. A common suture thread 134 connects the needles 132 and is used to secure the tissue pieces 70 together. Thus, as seen in the sequence of Figures 12a-12e, the needles 132 are first advanced to the blind side of the tissue pieces 70 and deployed outboard of the distal tip. The entire device 130 is
30 retracted, as in Figure 12c, to cause the needles 132 to pierce the tissue pieces 70. The two needles 132 are then disengaged from the device 130, and each other, as in Figure 12d, and the entire device 130 once again retracted to pull the needles 132 out from the pieces 70, leaving the connected suture joining the two pieces 70

(Figure 12e). The suture 132 can then be tied off, or otherwise secured on the upper side of the tissue pieces 70.

Figure 13a is a more detailed view of a tissue stabilizing and fastening device 140 similar to that shown in Figures 12a-12e. The device 140 features two
5 semi-circular vacuum ports 142 that stabilize the tissue pieces being joined. The distal tip includes a centered and distally-directed frame 144 defining a space 146 therein. The needles 148 are connected to the frame 144 and reside within the space 146. Although not shown, a deployment mechanism is also provided that causes the needles to pivot outward about their distal ends, and also disengages the
10 needles 148 from the frame 144.

Figures 14a-14b illustrate a tissue stabilizing and fastening device 150 having needles 152 deployable on a blind side of the tissue being connected. The device 150 includes a probe 154 having two vacuum ports 156a, 156b for stabilizing the tissue pieces 70 being joined. A distal tip includes an extension
15 member 158 having a centered and distally-directed frame 160 defining a space 162 therein. The extension member 158 may be configured relatively narrow in one direction such that it can enter the ventricle 31 between the leaflets 22 with minimum risk to the chordae (not shown). The frame 160 may be extended and retracted within the probe 154. The needles 152 are connected to the frame 160
20 and reside within the space 162. A deployment mechanism (not shown) is provided that causes the needles 152 to pivot outward about their distal end, and also disengages the needles 152 from the frame 160. A common suture thread 166, which is stored within the probe 154, connects the needles 152 and is used to secure the tissue pieces 70 together. In the embodiment shown in Figure 14, the
25 device 150 includes two needles 152 and a single suture 166. Other embodiments may include four needles with separate sutures. Additional needles may be provided if needed.

Figures 15a-15h illustrate several steps in a tissue joining procedure using the tissue stabilizing and fastening device 150. Referring to Figure 15a, the probe
30 154 is passed through the atrium 30 via an access cannula or catheter 164. During this stage, the frame 160 is in its retracted position. The probe 154 is secured to the atrium 30 with a purse string 166 or any other manner known to one skilled in the art. Figures 15b-15d illustrate stabilization of the leaflets 22 being joined.

Suction is provided to the first vacuum port 156a, and the probe 154 is manipulated to capture the first leaflet 22. With the first leaflet 22 captured, suction is provided to the second vacuum port 156b, and the second leaflet 22 is captured. Referring to Figure 15e, the frame 160 is advanced into the ventricle 31 by extending the frame 160, and the needles 152 pivot outward about their distal end. The frame 160 is returned to its retracted position, and the needles 152 pierce the leaflets 22 and are directed into needle receivers 168, as shown in Figure 15f. As shown in Figure 15g, suction to the vacuum ports 156a, 156b is terminated, and the leaflets 22 are released. The needle receivers 168 pull the needles 152 through the leaflets 22, and the suture 166 "pays-out" behind the needles 152. The suture 166 trails out as the probe 154, with the needles 152 stored within the probe 154, is withdrawn from the access cannula or catheter 144 (see Figure 15g). The two needles 152 are then disengaged from the probe 154, and the suture 166 can then be tied off, or otherwise secured on the upper side of the leaflets 22.

Figures 16a-16c are sectional views of several steps in a tissue joining procedure using a tissue stabilizing device 170 having a fastening device 172 with two needles 174 for delivering a suture-based fastener. The stabilizing device 170 includes a distal tip with oppositely-facing concave surfaces 176 for contacting and stabilizing the tissue pieces 70 (with, e.g., vacuum ports). Although not shown, the fastening device 172 is stowed in a channel within the stabilizing device 170 and may be linearly deployed through apertures formed in the concave surfaces 176.

The device 170 further includes a sliding plate 178 with two throughholes 180 in the distal end, as seen in Figure 16d. The fastening device 172 has a spring bias that causes the needles 174 to curve inward when permitted. Therefore, as seen in Figure 16b, the fastening device 172 has been freed from the channels past the concave surfaces 176 and the needles 174 have curved inward to be received in the plate holes throughholes 180. The needles 174 first pass twice through each respective tissue piece 70. The plate 178 is then retracted upward into the device 170, thus pulling the needles 174 through the tissue pieces 70. The fastening device 172 is desirably made of a highly pliable material, such as a superelastic like Nitinol, so that it can be pulled through sharp angles. Suture threads 182 are connected to each needle 174 and are also pulled through the tissue pieces 70. Figure 16c shows the result, with the suture thread 182 passed through both tissue

pieces 70. Figures 16e and 16f illustrate two suture ties to complete the procedure.

Figures 17a-17c illustrate several steps in a valve repair procedure using a tissue stabilizing and fastening device 190 for delivering a suture-based axial needle fastener 192. The device 190 includes a clamping mechanism 194, much
5 like the clamping device 82 seen in Figures 4a-4c. The two sides are independently controllable, so as to grasp and pierce one leaflet 22 and then the other. The fastener 192 includes a pair of needles 196 initially mounted in the lower portion of the clamping mechanism 194 and facing upward. The two needles 196 are connected with a suture thread 198. When the clamping
10 mechanism 194 actuates, the needles 198 pierce the respective leaflet 22. The upper portion of each side then pulls the needle 196 completely through the leaflet 22, and the lower portion is retracted from the blind side of the leaflets 22. The resulting suture loop is tied off, as seen in Figure 17c.

Figures 18a-18d illustrate a valve repair procedure using a tissue fastening
15 device 200 and a spiral suture-based leaflet fastener 202. The leaflets 22 are stabilized, using one of the means disclosed herein (such as suction from two angled faces 204), and the fastener 202 is deployed. The fastener 202 comprises a helical needle 206, a trailing suture thread 208, and a pair of pledget anchoring devices 210. Figure 18d is a detailed view of the pledget 210 used with the spiral
20 suture-based leaflet fastener 202.

Figures 19a-19d illustrate a tissue stabilizing and fastening device 220 that uses the principles of vacuum stabilization/mechanical clamping and a suture-based toggle fastener. The device 220 includes a probe 222 having two vacuum ports for initial tissue stabilization. In addition to the vacuum ports 224, the device
25 220 includes a mechanical tissue stabilizer 226 with a four-part, rotatable and linearly extendable capture hooks 228. The distal tip includes a centered and distally-directed frame 230 defining a space 232 therein. The capture hooks 228 are folded flat within the space 232 and are rotatably and slidingly coupled to the probe 222 so that the capture hooks 228 may be rotated about 90 degrees and
30 retracted to a capture position, wherein the leaflets 22 are "pinched" between distal ends of the capture hooks 228 and shoulders 234 of the probe 222. The two vacuum ports 224 also provide lumens for two of the needles 96 of Figure 5b. The sharp ends of the needles 96 pierce the leaflets 22, and the pushers 98 are displaced

(separately or in conjunction) to deploy the tissue fastener 90. After the needles 96 are retracted, the toggles 92 anchor the tissue fasteners 90 on the ventricular 31 side of the leaflets. The suture threads 94 are then tied off on the atrial 30 side to secure the leaflets 22 together, as seen in Figure 6c.

5 Figures 19a-19d illustrate several steps in a valve repair procedure using the tissue stabilizing and fastening device 220. The stabilizing and/or fastening elements of the device 220 is formed relatively narrow in one dimension to enable it to be slipped between the two leaflets 22, wherein the capture hooks 228 are stored in a folded and extended position. The two leaflets 22 are initially stabilized
10 by the vacuum ports 224. To further stabilize the leaflets 22, the capture hooks 228 are rotated 90 degrees and retracted, wherein the leaflets 22 are physically clamped against the shoulders 234 of the probe 222 and the distal ends of the capture hooks 228. It is noted that both vacuum stabilization and mechanical clamping do not have to be implemented to stabilize the leaflets 22. In certain
15 applications, implementing only one of the mechanisms may be desirable. With the leaflets 22 properly stabilized, the needles 96 are driven forward to pierce the leaflets 22. The capture hooks 228 reduce the likelihood of losing grasp of the leaflets 22 during the piercing process. As shown in Fig. 5b, the pushers 98 are displaced (separately or in conjunction) to deploy the tissue fastener 90. After the
20 needles 96 are retracted, the toggles 92 anchor the tissue fasteners 90 on the ventricular 31 side of the leaflets 22. The suture threads 94 are then tied off on the atrial 30 side to secure the leaflets 22 together, as shown in Figure 6c.

Exemplary Mechanical Stabilizers and Fasteners

Figure 20 shows a mechanical tissue stabilizer 240 that can be used to grasp
25 tissue pieces 70 to be joined. The stabilizer 240 includes a probe 242 having a pair of pivoting arms 244 on a distal end. The arms 244 each have teeth 246 for added purchase on the tissue. Figures 21a and 21b illustrate a valve repair procedure initiated in accordance with the present invention using the tissue stabilizer 240.

Figures 22a and 22b illustrate steps in a valve repair procedure using a
30 mechanical tissue stabilizer 250 having preformed hooks 252. The hooks 252 are curled into approximately a three-quarter circle and deployed on the blind side of the leaflets 22 to grasp and stabilize them. The linear displacement of each hook

252 is separately controllable.

Figures 23a-23c illustrate steps in a valve repair procedure using a mechanical tissue stabilizer 260 having spring-biased hooks 262. The hooks 262 curl into approximately a three-quarter circle when deployed, and are advanced on the blind side of the leaflets 22 to grasp and stabilize them. Again, the linear displacement of each hook 252 is separately controllable.

Figures 24a-24d illustrate a valve repair procedure using a mechanical tissue stabilizer 270 similar to both the stabilizers shown in Figures 22 and 23. After hooks 272 have stabilized the leaflets 22, a retainer 274 is slid down link rods 276 of each hook 272 (Figure 24c). Figure 24d shows the retainer 274 having reached the curvature of the hooks 272, at which point the link rods 276 are severed using conventional means. For example, the link rods 276 may be made of a polymer material, and a cutter deployed adjacent the device 270 to sever them. Again, the link rods 276 are separately displaceable as seen in Figure 24b.

15 Exemplary Staple and Clip-Type Fasteners

Figure 25a shows an exemplary tissue staple 280 for joining two tissue pieces in an open configuration. The staple 280 includes a bridge portion 282 and four gripping arms 284, two on each side. The gripping arms 284 are initially curled in a semi-circle upward from the plane of the bridge portion 282 and terminate in sharp points approximately in the plane of the bridge portion 282. Figure 25b shows the staple 280 when closed, with the gripping arms 284 curled underneath the plane of the bridge portion 282 toward each other.

Figures 26a-26c illustrate several steps in a valve repair procedure using an exemplary tissue fastening device 290 for delivering the tissue staple 280. The device 290 includes a probe 292 with an internal lumen 294 within which a pusher 296 is slidable. A stop member 298 is also provided underneath the bridge portion 282 of the staple 280 to prevent displacement of the bridge portion 282 toward the leaflets 22. After stabilizing the leaflets 22, the pusher 296 displaces downward which causes the staple 280 to undergo a plastic deformation from the configuration of Figure 25a to that of Figure 25b. The sharp points of the gripping arms 284 pass through the leaflets 22 and anchor the staple 280 therein. Finally, the stop member 298 is disengaged from under the bridge portion 282, and the

device 290 is retracted.

Figure 27a illustrate the use of a tissue stabilizing and fastening device 300 for deploying the staple 280 of Figure 25. The device 300 is quite similar to the device 290 of Figure 26, with an exemplary stabilizing means shown in the form of vacuum chamber(s) 302 on each side of the staple deployment mechanism.

Figures 28a and 28b illustrate a further tissue fastening device 310 of the present invention for delivering an alternative "toggle-like" tissue clip 312. In Figure 28a the clip 312 is shown open, while in Figure 28b the clip 312 is shown closed. The clip 312 is plastically deformed from open to close using a clamping mechanism 314 that flattens a ring-shaped head portion 316 of the clip 312. Two pincher arms 318 thus pivot toward each other and grasp and hold tissue therebetween.

Figures 29a-29c depict steps in a valve repair procedure using the tissue fastening device 310 of Figure 28. One method for inserting the device 310, as well as many other devices of the present invention, between the two leaflets 22 is detailed in Figure 29a. Specifically, the stabilizing and/or fastening elements of the devices of the present invention can be formed relatively narrow in one dimension to enable them to be slipped between two tissue pieces so that the pieces can then be fastened together from the blind side. Thus, for example, the tissue fastening device 310 is seen in Figure 29a rotated to orient the narrow dimension in line with the gap between the leaflets 22.

Figures 30a-30b and 31a-31d illustrate an alternative tissue fastening device 320 for delivering another "toggle-like" tissue fastening clip 322. In contrast to the clip 312 of Figure 28, the clip 322 pierces the tissue pieces 70 from the front side, and is then deformed to clamp the tissue pieces 70 together.

Figures 32a-32d illustrate various embodiments of barbed clips 330, 332, 334, 336 used to fasten tissue pieces together using the principles of the present invention. The barbed clips include a bridge portion 338, 340, 342, 344 and terminate in sharp points.

Figures 33a-33c illustrate several steps in a valve repair procedure using an exemplary barbed clip deployment device 350 for delivering the barbed clip 330. The device 350 includes a probe 352 with an internal lumen 354 within which an internal driver 356 is slidable. A stop member 358 is provided at the

distal end of the probe 352 to spread the two barbs away from each other as it is pushed forward. The tips of the barbed clip 330 are displaced towards the leaflets 22 by downwardly sliding the driver 356. After the clip 330 pierces the leaflets 22 from the front side, the clip 330 is disengaged from the device 350 as shown in
5 Figure 33c. When the clip 330 is disengaged from the device 350, it returns to its retracted position and compresses the leaflets 22 together. Again, any of the stabilizers of the present invention can be used in conjunction with the deployment device 350.

Figures 34a-34f illustrate a spring-loaded clip 360 used to fasten tissue
10 pieces 70 together. The clip 360 comprises a spring portion 362 and two arms 364, and the arms 364 include a plurality of barbs 366. The distal ends of the arms 364 are tapered to enable the clip 350 to pierce the leaflets 22, and the arms 364 are configured to overlap each other after closure (see Figure 34c). Figures 35a-35c illustrate a valve repair procedure using a clip deployment device 370 for
15 delivering the spring-loaded clip 360. The device 370 includes a probe 372 with an internal lumen 374, and a pusher 376 is slidably coupled to the internal lumen 374. A sleeve 378 is disposed between the pusher 376 and the internal wall of the lumen 374. The spring portion 362 of the clip 360 is housed within the sleeve 378 in its open position, wherein the spring portion 362 is compressed by the sleeve
20 378. As seen in the sequence of Figures 35a-35c, downward movement of the pusher 376 causes the clip 360 to move downward and pierce the leaflets 22 from the front side. The clip 360 is pushed downward at a velocity adequate to insure penetration without dislodging the leaflets 22 from the vacuum source. As the clip 360 is disengaged from the device 370, the clip 360 automatically springs to its
25 closed position and compresses the leaflets together.

Figures 36a-36c illustrate another embodiment of a spring-loaded clip 380 used to fasten tissue pieces together. The clip 380 comprises a spring portion 382 and two arms 384 having distal ends which are tapered and extend inwardly to pierce and lockingly secure the leaflets 22. A gap 386 exists between midportions
30 of the arms 384 when the clip 380 is in its closed position.

Figures 37a and 37b illustrate a clip deployment device 390 having a probe 392 with an internal lumen 394 and a pusher 396 slidably coupled to the internal lumen 394. The spring portion 382 is retained in a compressed state

within a housing member 398 such that the clip 380 is held in an open position. Downward movement of the pusher 396 causes the clip 380 to move downward and pierce the leaflets 22 from the front side. As the spring portion 384 exits the housing member 398, the clip 380 automatically springs into its closed position
5 and lockingly secures and compresses the leaflets 22.

Exemplary Integrated Stabilizing and Fastening Device

Figures 38-46 illustrate another exemplary embodiment of an integrated tissue stabilizing and fastening device 400 which captures tissue pieces, such as valve leaflets, with vacuum and fastens the tissue pieces with sutures. The device
10 400 is similar to the devices illustrated in Figures 11-15 in that it comprises a slender distal portion which accesses the heart valve trans-atrially. The device 400 is placed through a specialized cannula and it has a proximal handpiece portion which provides user controls. In an exemplary embodiment the distal portion is approximately 10 mm in diameter and it terminates in vacuum ports and a needle
15 array as depicted in Figures 38 through 41. The handpiece portion contains individual vacuum port controls and needle deployment controls as generally depicted in Figure 44. The device 400 is connected to a vacuum source via a flexible hose. The illustrated device 400 is utilized to grasp the tissue pieces and place the sutures correctly. Remote tying and cutting of the sutures can be
20 accomplished with a separate device. The following description of the use of the device 400 will be made with respect to the stabilizing and fastening of the leaflets of a mitral valve. However, those of skill in the art will appreciate that the device can also be used to stabilize and fasten other physiological tissues. A more detailed description of the device 400 follows.

25 Figures 38-41 illustrate device 400 in various modes of operation. Device 400 comprises vacuum ports 402 and 404 at the distal tip of device 400 which are connected to the vacuum source 418 (shown in Figure 44). Needle carrier 406 is centrally disposed at the distal end of device 400 and is configured to be extended from and retracted back into device 400. Needles 408 are mounted on mounting
30 blocks 410 within carrier 406 and mounting blocks 410 are pivotably attached to carrier 406 via pivot pin 412. Needle catchers 414 are retained in ports 402 and 404 to grip and retain needles 408 when needle carrier is retracted back into device

400 upon completion of the procedure.

Figure 44 illustrates an exemplary handpiece 416 which connects vacuum source 418 to device 400 and delivers vacuum to vacuum ports 402, 404 at the distal tip of the device. Pinch valves 420 mounted on the handpiece 416 of the device normally constrict the vacuum lines. By individually manipulating each valve, the operator can differentially control access to the vacuum source. By partially deflecting one valve, the operator permits momentary access by one of the vacuum ports to the vacuum source. By fully deflecting one of the valves, the operator permits continuous access to the vacuum source. The provision of separate, individually controlled valves permits the delivery of differential vacuum to one or the other of ports 402 and 404. This may be very helpful in certain cases of valve prolapse where it is necessary to capture one leaflet and move it laterally with respect to the second leaflet to facilitate final capture.

The vacuum system has, of necessity, two different operating modes. Initially, it is necessary to capture the leaflets. This requires relatively high flow rates to attract a leaflet to a vacuum port. In an exemplary embodiment the flow rate is approximately 10 cc per second. Since this flow rate is capable of exsanguinating and destabilizing the beating heart, the invention provides for quick and efficient leaflet capture. Efficient capture requires that the vacuum port be close to the leaflet when the vacuum is turned on. Proper placement of device 400 with respect to the leaflets is facilitated by placement of echogenic members at or near vacuum ports 402 and 404 to enhance visualization by echo.

Echogenicity is enhanced by the proper choice of materials. The device, being entirely of plastic except for small metal parts in the immediate vicinity of the ports, takes advantage of the relatively high visibility of metal while avoiding the shadowing properties of large masses of metal. The metal parts in question are needle catchers 414, needles 408 and pivot pin 412. Since these parts are located near the vacuum ports 402 and 404 in the long axis of the device, they serve to locate ports 402 and 404 axially relative to the valve leaflets prior to vacuum application. Since they are discontinuous and symmetrical about ports 402 and 404 in the short axes, they facilitate the correct radial orientation of the ports relative to the valve leaflets. Echogenicity is further enhanced by a polymer coating which can be wholly or selectively applied to the ports 402 and 404. This

coating creates a microscopic boundary layer which effectively separates the ports from the blood under echo visualization.

In an exemplary embodiment, the vacuum surfaces of the ports 402 and 404 are angled between zero and ninety degrees relative to a plane normal to the long axis of the device. This is intended to conform somewhat to the shape of the valve leaflets. In another exemplary embodiment the ports are angled between 15 to 40 degrees relative to a plane normal to the long axis of the device. In yet another embodiment the ports are angled at about 25 degrees relative to that plane.

Once the leaflets have been captured, the second operating mode of the vacuum system is to hold the leaflets in position for suture application without additional exsanguination. This implies high holding force and no flow. These properties are primarily a function of pressure differential, port area and port shape. In one embodiment, adequate holding force is obtained at a maximum differential pressure with port areas in the approximate range of 0.03-0.04 square inch per port. In the embodiment illustrated in Figure 43, a geometrically optimized cylindrical device is shown having two separate "D" shaped ports 402 and 404. The illustrated device 400 has about 10 mm in diameter. Since a vacuum port with the highest ratio of area to perimeter (i.e., a circle) will have the highest average peel away strength, some modification of the "D" shaped port is useful for functional optimization. This is accomplished in the device by filling in the corners of the "D" where the arc meets the straight portion at acute angles. This can be seen clearly on port 402 in Figure 38. The corners which have been eliminated represent the part of the "D" shape least resistant to peel away of the leaflet which is being held by vacuum.

Vacuum ports 402 and 404 further have barriers 422 which serve two distinct purposes. Barriers 422 support the valve leaflet to prevent it from being sucked deep into the ports 402 and 404, thereby minimizing tissue trauma. This has the further useful effect of controlling the position of the leaflet relative to the suture needles so that the latter penetrate the leaflet in a predictable way, placing sutures the correct distance from the edge of the leaflet for reliable repair. In the illustrated embodiment of Figure 43, the barriers are recessed below the perimeter of the "D" slot. In an exemplary embodiment the barriers are recessed about 0.02 inches. This slightly distorts the valve tissue and creates resistance to displacement

of tissue as it is moved laterally by the device to approximate the leaflets. If the barriers were not recessed, the only resistance to lateral drag would be the coefficient of friction between the port surface and the leaflet which is likely to be low in the bloody environment.

5 A pre-evacuated sterile bottle 418 serves as a passive vacuum source for capturing and holding the leaflets. In an exemplary embodiment, the system is designed to minimize total exsanguination to about 200 cc per procedure. A standard 2 liter bottle can provide that amount of flow with negligible increase in absolute pressure. This offers a significant advantage over utility vacuum sources
10 in hospital operating rooms and dedicated active pumps. Utility sources are not well controlled and active pumps present cost, convenience and sterility issues.

Once captured, leaflets will be fastened by remotely applied sutures. The mechanism by which this is accomplished is shown in Figures 39 through 42 as will be discussed below. Figures 45a and 45b illustrates two exemplary suture
15 configurations which the system can provide, depending on the way in which the sutures and needles are loaded into the device.

In one embodiment, two lengths of suture (not shown) are used with a straight needle 408 attached to each suture end. Sutures are inserted into a coaxial hole in the end of the needle opposite the point and the body of the needle is
20 crimped to retain the suture using conventional suture technology. A groove near the tip of the needle provides a means for grasping and pulling the needle through after it has pierced the valve leaflet. Sutures can be monofilament or braided or other types suitable for cardiovascular use. In an exemplary embodiment, a size 4-0 monofilament suture capable of gamma sterilization (e.g. Novafil) is used since
25 the internal configuration of the device favors radiation sterilization and it is desirable to be able to sterilize the entire system at one time. The needles will receive a lubricious coating (e.g. silicone) to reduce penetration force and friction.

In one embodiment, the needles and sutures are an integral part of a single use completely disposable device. In a second embodiment, the needles, sutures
30 and associated hardware may be packaged as a cartridge which plugs into a reusable device. This device can be limited to multiple use in a single procedure, or reusable for multiple procedures.

Needle carrier 406 further comprises needle driver assembly 424. Driver

assembly 424 includes blocks 410, axle 412, needle driver 426, and cams 428.

Needles 408 are slidably mounted in blocks 410 which pivot about axle 412.

Blocks 410 may be slotted in the area of the hole which receives the needle so that the needles can be held in place by controlled friction. Sutures (not shown)

5 protruding from the ends of the needles can be routed along the sides of the needle carrier 406 in grooves provided for that purpose. The needles are initially recessed into the body of the device 400 by virtue of the recessed position of carrier 406, as shown in Figure 38. The position of the needles in this state is shown in Figure 39. The needle mounting blocks 410 are pivoted so that needles 408 lie in a single row
10 within the confines of the needle carrier 406. One end of driver element 426 which drives the needle carrier 406 in and out of the distal device tip is positioned just above the needle points so that the needles 408 are retained in their holders 410 against any drag which might tend to dislodge them. The other end of the driver element 426 is connected to a control at the proximal end of the device by which
15 the operator manipulates the needles 408.

After the valve leaflets are captured as described above, needle carrier 406 is advanced from the position shown in Figure 38 to that of Figure 39. The needle mechanism at this stage is compactly configured to avoid entangling chordae tendineae or papillary muscles during capture of the leaflets and initial needle
20 deployment. Cams 428 are then advanced, pivoting the needle mounting blocks 410 and causing the needles 408 to deploy as shown in Figure 40. Protruding stops on blocks 410 limit the angular deployment of the needles to the proper position for penetrating the valve leaflets. These stops come to rest against the needle carrier 406. The individual parts can be seen clearly in Figure 42.

25 With the needles deployed, the needle carrier 406 is retracted proximally, causing the needle points to penetrate valve leaflets (not shown) and enter the vacuum ports 402 and 404. As the needles continue to move proximally, the points enter the needle catchers 414 which are essentially one way gripping devices. The needles advance until their grooves engage the jaws of the needle
30 catchers 414. Needle catchers 414 are retained in the ports 402 and 404 by a vacuum adapter 430, shown in Figure 42.

The needle carrier 406 advances distally pulling the needle mounting blocks 410 away from the needles which are retained by the needle catchers 414.

The vacuum is disconnected and the device is withdrawn from the heart along with the needles 408 which are firmly held by the catchers 414. As the needles move outward, the sutures, which are loosely deployed in the body of the device 400, are pulled through the leaflets 432 and 434 to one of the positions shown in Figures 5 45a and 45b. Once the device is free of the access cannula, sutures 436 and 438, or 440 and 442, are cut from the needles and tied remotely using a knot rundown tool with an integral cutter to remove excess suture material.

The proximal control handpieces 416 shown in Figures 44 and 46 are illustrative of alternate approaches to controlling the system. One objective is to 10 permit single handed control of the vacuum ports and suture needles without destabilizing the device. It is useful to locate and hold the device precisely in relation to the beating heart in order to accomplish the surgical procedure with minimal blood loss. In operation, the surgeon will use one hand to stabilize the distal end of the device via the cannula where it enters the atrium and the other 15 hand to operate the vacuum and suturing controls. Control functions are described below.

In the device shown in Figure 44, handpiece 416 has a pistol-like configuration which includes a shaft portion 446 and a handle portion 448. A pair of vacuum controls 420 are positioned akin to pistol hammers at the back of shaft 20 portion 446 and at the top of handle portion 448. In this embodiment vacuum controls 420 are thumb operated. Vacuum controls 420 are separately capable of being partially activated or fully activated by a toggle mechanism (not shown). When partially activated, the associated vacuum line is momentarily opened, allowing blood to flow into the vacuum source 418. If one of the controls 420 is 25 released it will return to its normally closed position and flow to the associated line will stop immediately. Once a leaflet has been captured the control 420 can be moved to its extreme position where it will remain due to an internal toggle action. In this case vacuum is applied to retain the leaflet which, in turn, blocks the port, preventing blood flow.

30 In another embodiment shown in Figure 46, the pair of vacuum controls 420 are located in the body 416 below the shaft portion 446 and in front of the handle portion 448. In this embodiment the vacuum controls 420 function like a pistol trigger, just above the needle control trigger 444, so that they can be

operated individually by the index finger. In the arrangement shown, it will be necessary to actuate the control nearest the index finger first. The first action momentarily opens the vacuum line as described above. When the leaflet is captured the control is depressed further, causing it to latch into place by an
5 internal toggle action. The second control 420 is now accessible to the index finger for capture of the second leaflet in similar manner.

In the embodiments shown in Figures 44 and 46 the trigger 444 is pivotably mounted in body 416 to control needle deployment after the leaflets are captured. The trigger is connected to needle driver 426 by a linkage internal to the body 416
10 which establishes the correct direction and stroke. The device is supplied with the trigger fully depressed to hold the needle array in the position shown in Figure 38 relative to the vacuum ports 402 and 404. An internal latch in 416 retains the trigger. Once the leaflets have been captured the trigger is released, allowing the needles to advance to the position shown in Figure 39. Near the end of the trigger
15 stroke, needle driver 426 bears on cams 428 which, in turn, bear on blocks 410 causing the needles to deploy outward as in Figure 40.

Squeezing the trigger 444 moves the needles proximally through the valve leaflets and into the vacuum ports 402 and 404 where they will be trapped as previously described. The trigger stroke will be internally limited so that it will not
20 achieve the latched condition in which the cycle began. Releasing the trigger moves the needle carrier 406 forward, separating the needles from blocks 410. The entire device can now be removed, drawing sutures through the leaflets as previously described. The distal tip of the device 400 is rotatable relative to the body 416 for precise angular positioning of the ports 402 while maintaining a
25 comfortable handle position for the user.

The present invention may be embodied in other specific forms without departing from its spirit, and the described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the claims and their equivalents rather than by the foregoing
30 description.

Claims:

1. An apparatus for the approximation of two pieces of tissue, comprising:
 - a probe with a distal tip having at least one lumen and adapted to approach the tissue pieces to be joined;
 - at least one vacuum port adjacent the distal tip of the probe, the at least one vacuum port being in fluid communication with a vacuum source via the at least one lumen so as to enable the probe to stabilize at least one of the two pieces of tissue; and
 - a first suture-based tissue fastener coupled to the probe for fastening at least one of the two pieces of tissue, wherein the first suture-based tissue fastener comprises a first pair of needles and a first common suture thread, wherein the first pair of needles is configured to draw a portion of the first common suture thread across and into the at least one vacuum port.
2. The apparatus of claim 1 further comprising:
 - a second suture-based tissue fastener coupled to the probe for fastening at least one of the two pieces of tissue, wherein the second suture-based tissue fastener comprises a second pair of needles and a second common suture thread, wherein the second pair of needles is configured to draw a portion of the second common suture thread across and into the at least one vacuum port.
3. The apparatus of claim 1, further comprising an extension member having a distally-directed frame coupled to a distal end of the probe, wherein the extension member is extendable and retractable and the distally-directed frame defines a space, the needle being pivotally coupled to the frame and residing within the space.
4. The apparatus of claim 3 wherein the needle is deployed on a blind side of the tissue such that the needle pierces the blind side and exits through the front side of the tissue.

5. The apparatus of claim 1 wherein the probe further comprises a first pair of needle receivers, wherein the first pair of needle receivers are positioned within one of the at least one vacuum ports, wherein the first pair of needles are directed into the first pair of needle receivers.

6. The apparatus of claim 1 further comprising at least one echogenic member at or near the at least one vacuum ports to enhance echo visualization.

7. The apparatus of claim 1 further comprising a polymer coating which can be wholly or selectively applied at or near the at least one vacuum ports.

8. An apparatus for the approximation of two pieces of tissue, comprising:
a probe with a distal tip having at least one lumen and adapted to approach the tissue pieces to be joined;

two or more vacuum ports adjacent the distal tip of the probe, the two or more vacuum ports being in separate fluid communication with a common vacuum source via the at least one lumen so as to enable the probe to differentially stabilize adjacent pieces of tissue;

a first suture-based tissue fastener coupled to the probe distal tip for fastening at least one of the two pieces of tissue, wherein the first suture-based tissue fastener comprises a first pair of needles and a first common suture thread, wherein the first pair of needles is configured to draw a portion of the first common suture thread across and into one of the two or more vacuum ports; and

a second suture-based tissue fastener coupled to the probe for fastening at least one of the two pieces of tissue, wherein the second suture-based tissue fastener comprises a second pair of needles and a second common suture thread, wherein the second pair of needles is configured to draw a portion of the second common suture thread across and into one of the two or more vacuum ports.

9. The apparatus of claim 8 further comprising a carrier centrally disposed between the vacuum ports at the distal end of the probe, wherein the first pair of needles and the second pair of needles are positioned on the carrier.
10. The apparatus of claim 9 wherein the carrier is configured to be extended from the distal tip and retracted back towards the distal tip so that the first and second pairs of needles can be placed on a first side of the tissue while the vacuum ports remain on a second side of the tissue.
11. The apparatus of claim 8 wherein first and second pairs of needles ~~which~~ are pivotally mounted on the carrier.
12. The apparatus of claim 9 wherein the vacuum ports further comprise needle catchers which are configured to retain and store the needles in the vacuum ports.
13. The apparatus of claim 8 wherein the probe has a longitudinal axis and the vacuum ports have vacuum surfaces which are angled between zero and ninety degrees relative to a plane normal to the longitudinal axis.
14. The apparatus of claim 13 wherein the vacuum surfaces are angled between fifteen and forty degrees relative to a plane normal to the longitudinal axis.
15. The apparatus of claim 14 wherein the vacuum surfaces are angled at about twenty-five degrees relative to a plane normal to the longitudinal axis.
16. The apparatus of claim 8 wherein the probe is cylindrical in shape and the vacuum ports are approximately D shaped.
17. The apparatus of claim 16 wherein the comers of the D shaped ports where the arc meets the straight portion at acute angles have been filled in.

18. The apparatus of claim 16 wherein the vacuum ports have barriers recessed below the perimeter of the D.
19. The apparatus of claim 8 further comprising a proximal handpiece portion having individual vacuum port controls.
20. The apparatus of claim 19 wherein the handpiece portion connects the vacuum source to the vacuum ports via separate vacuum lines.
21. The apparatus of claim 20 wherein the handpiece portion further comprises two pinch valves, each pinch valve capable of constricting one of the vacuum lines to permit differential control of access to the vacuum source.
22. The apparatus of claim 19 wherein the handpiece portion is configured like a pistol having a shaft portion and a handle portion and the vacuum port controls are located at the back of shaft portion and at the top of handle portion like a pistol hammer.
23. The apparatus of claim 19 wherein the handpiece portion is configured like a pistol having a shaft portion and a handle portion and the vacuum port controls are located below the shaft portion and in front of the handle portion like a pistol trigger.
24. An apparatus for the approximation of first and second pieces of tissue, comprising:
 - a probe with a distal portion adapted to approach the first and second tissue portions, wherein the distal portion has a first side and a second side;
 - a tissue stabilizer comprising one or more vacuum ports adjacent the probe distal portion, wherein the tissue stabilizer is configured to selectively provide vacuum to the first side of the probe distal portion via at least one of the one or more vacuum ports without simultaneously providing vacuum to the second side of the probe distal portion;
 - and

a first tissue fastening apparatus configured to be deployable into permanent contact with at least one of the first and second tissue portions, at least a portion of the first tissue fastening apparatus releasably positioned on or in the probe distal portion, the first tissue fastening apparatus comprising a first pair of needles and a first common suture thread, wherein the first pair of needles is configured to draw a portion of the first common suture thread across and into the one or more vacuum ports.

25. The apparatus of claim 24, further comprising:

a second tissue fastening apparatus configured to be deployable into permanent contact with at least one of the first and second tissue portions, at least a portion of the second tissue fastening apparatus releasably positioned on or in the probe distal portion, the second tissue fastening apparatus comprising a second pair of needles and a second common suture thread, wherein the second pair of needles is configured to draw a portion of the second common suture thread across and into the one or more vacuum ports;

wherein the tissue stabilizer is configured to selectively provide vacuum to only the second side of the probe distal portion via at least one of the one or more vacuum ports.

26. The apparatus of claim 24 wherein at least a portion of the first common suture thread passes within a part of the probe distal end, and the probe distal end is configured to trail at least a portion of the first common suture thread out of the probe distal portion.

27. The apparatus of claim 24 wherein the first pair of needles are configured to be slidably advanced across at least a portion of the one or more vacuum ports.

28. The apparatus of claim 25 wherein the second pair of needles are configured to be slidably advanced across at least a portion of the one or more vacuum ports.

1/45

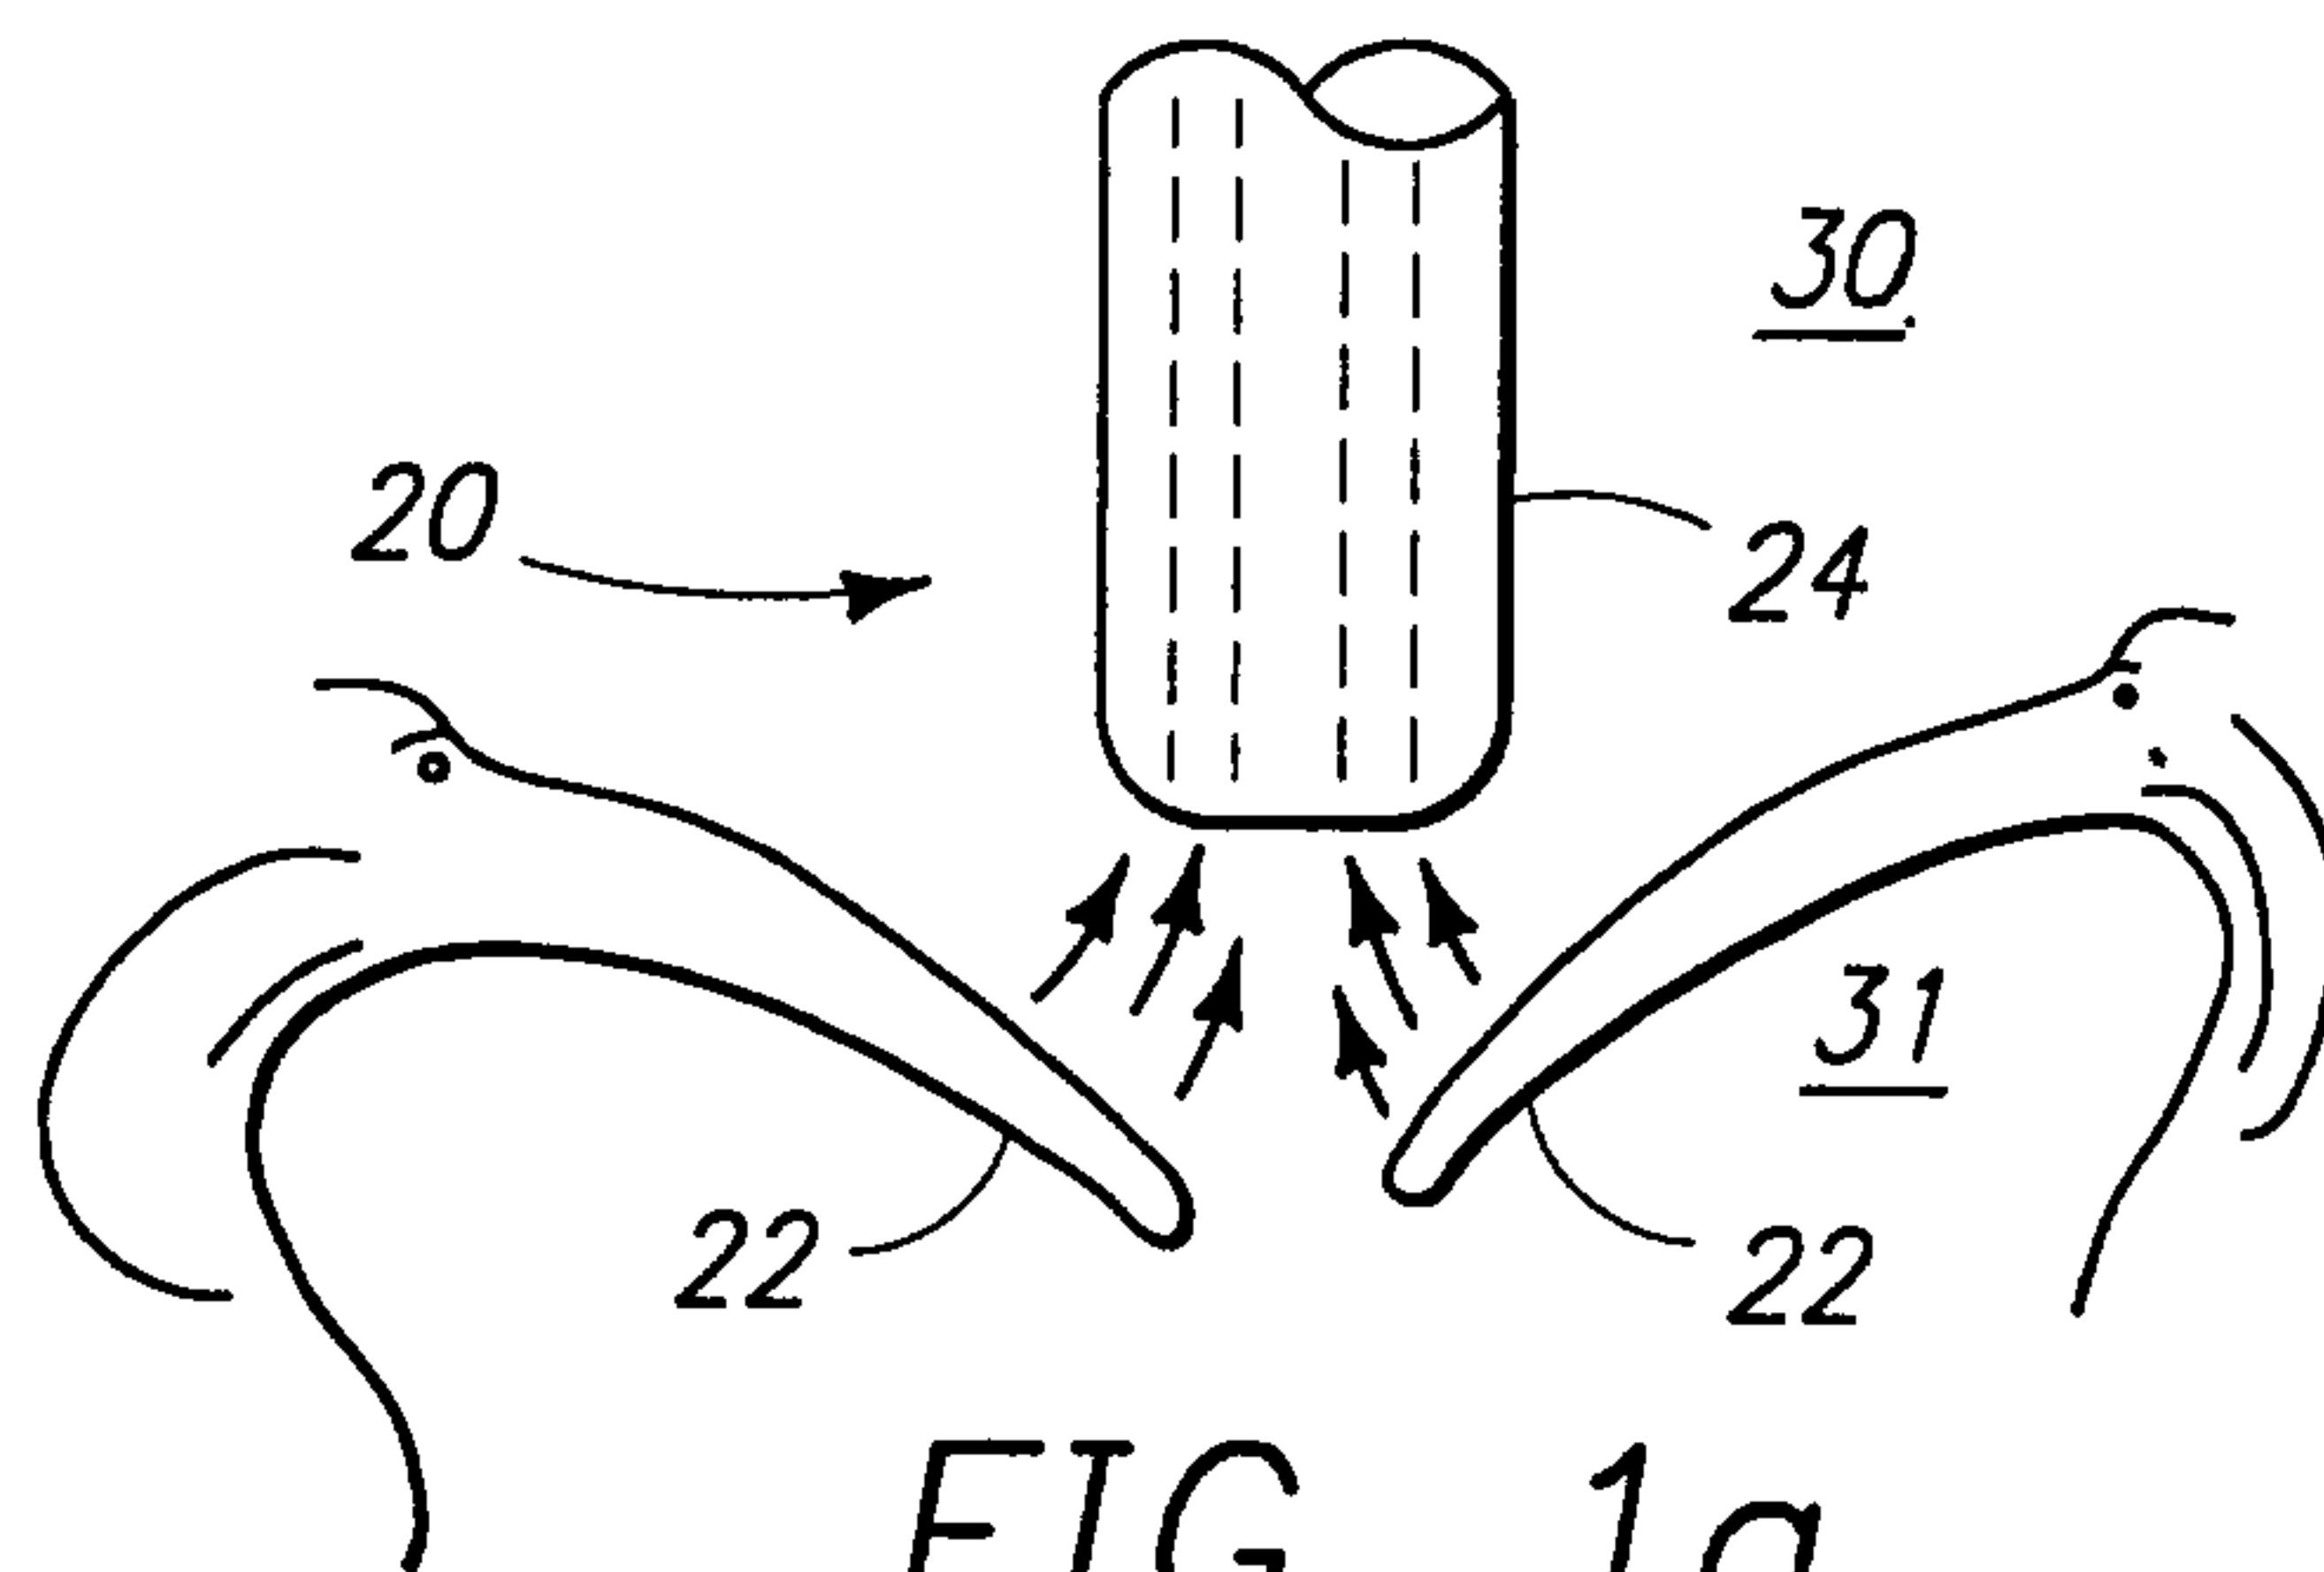


FIG. 1a

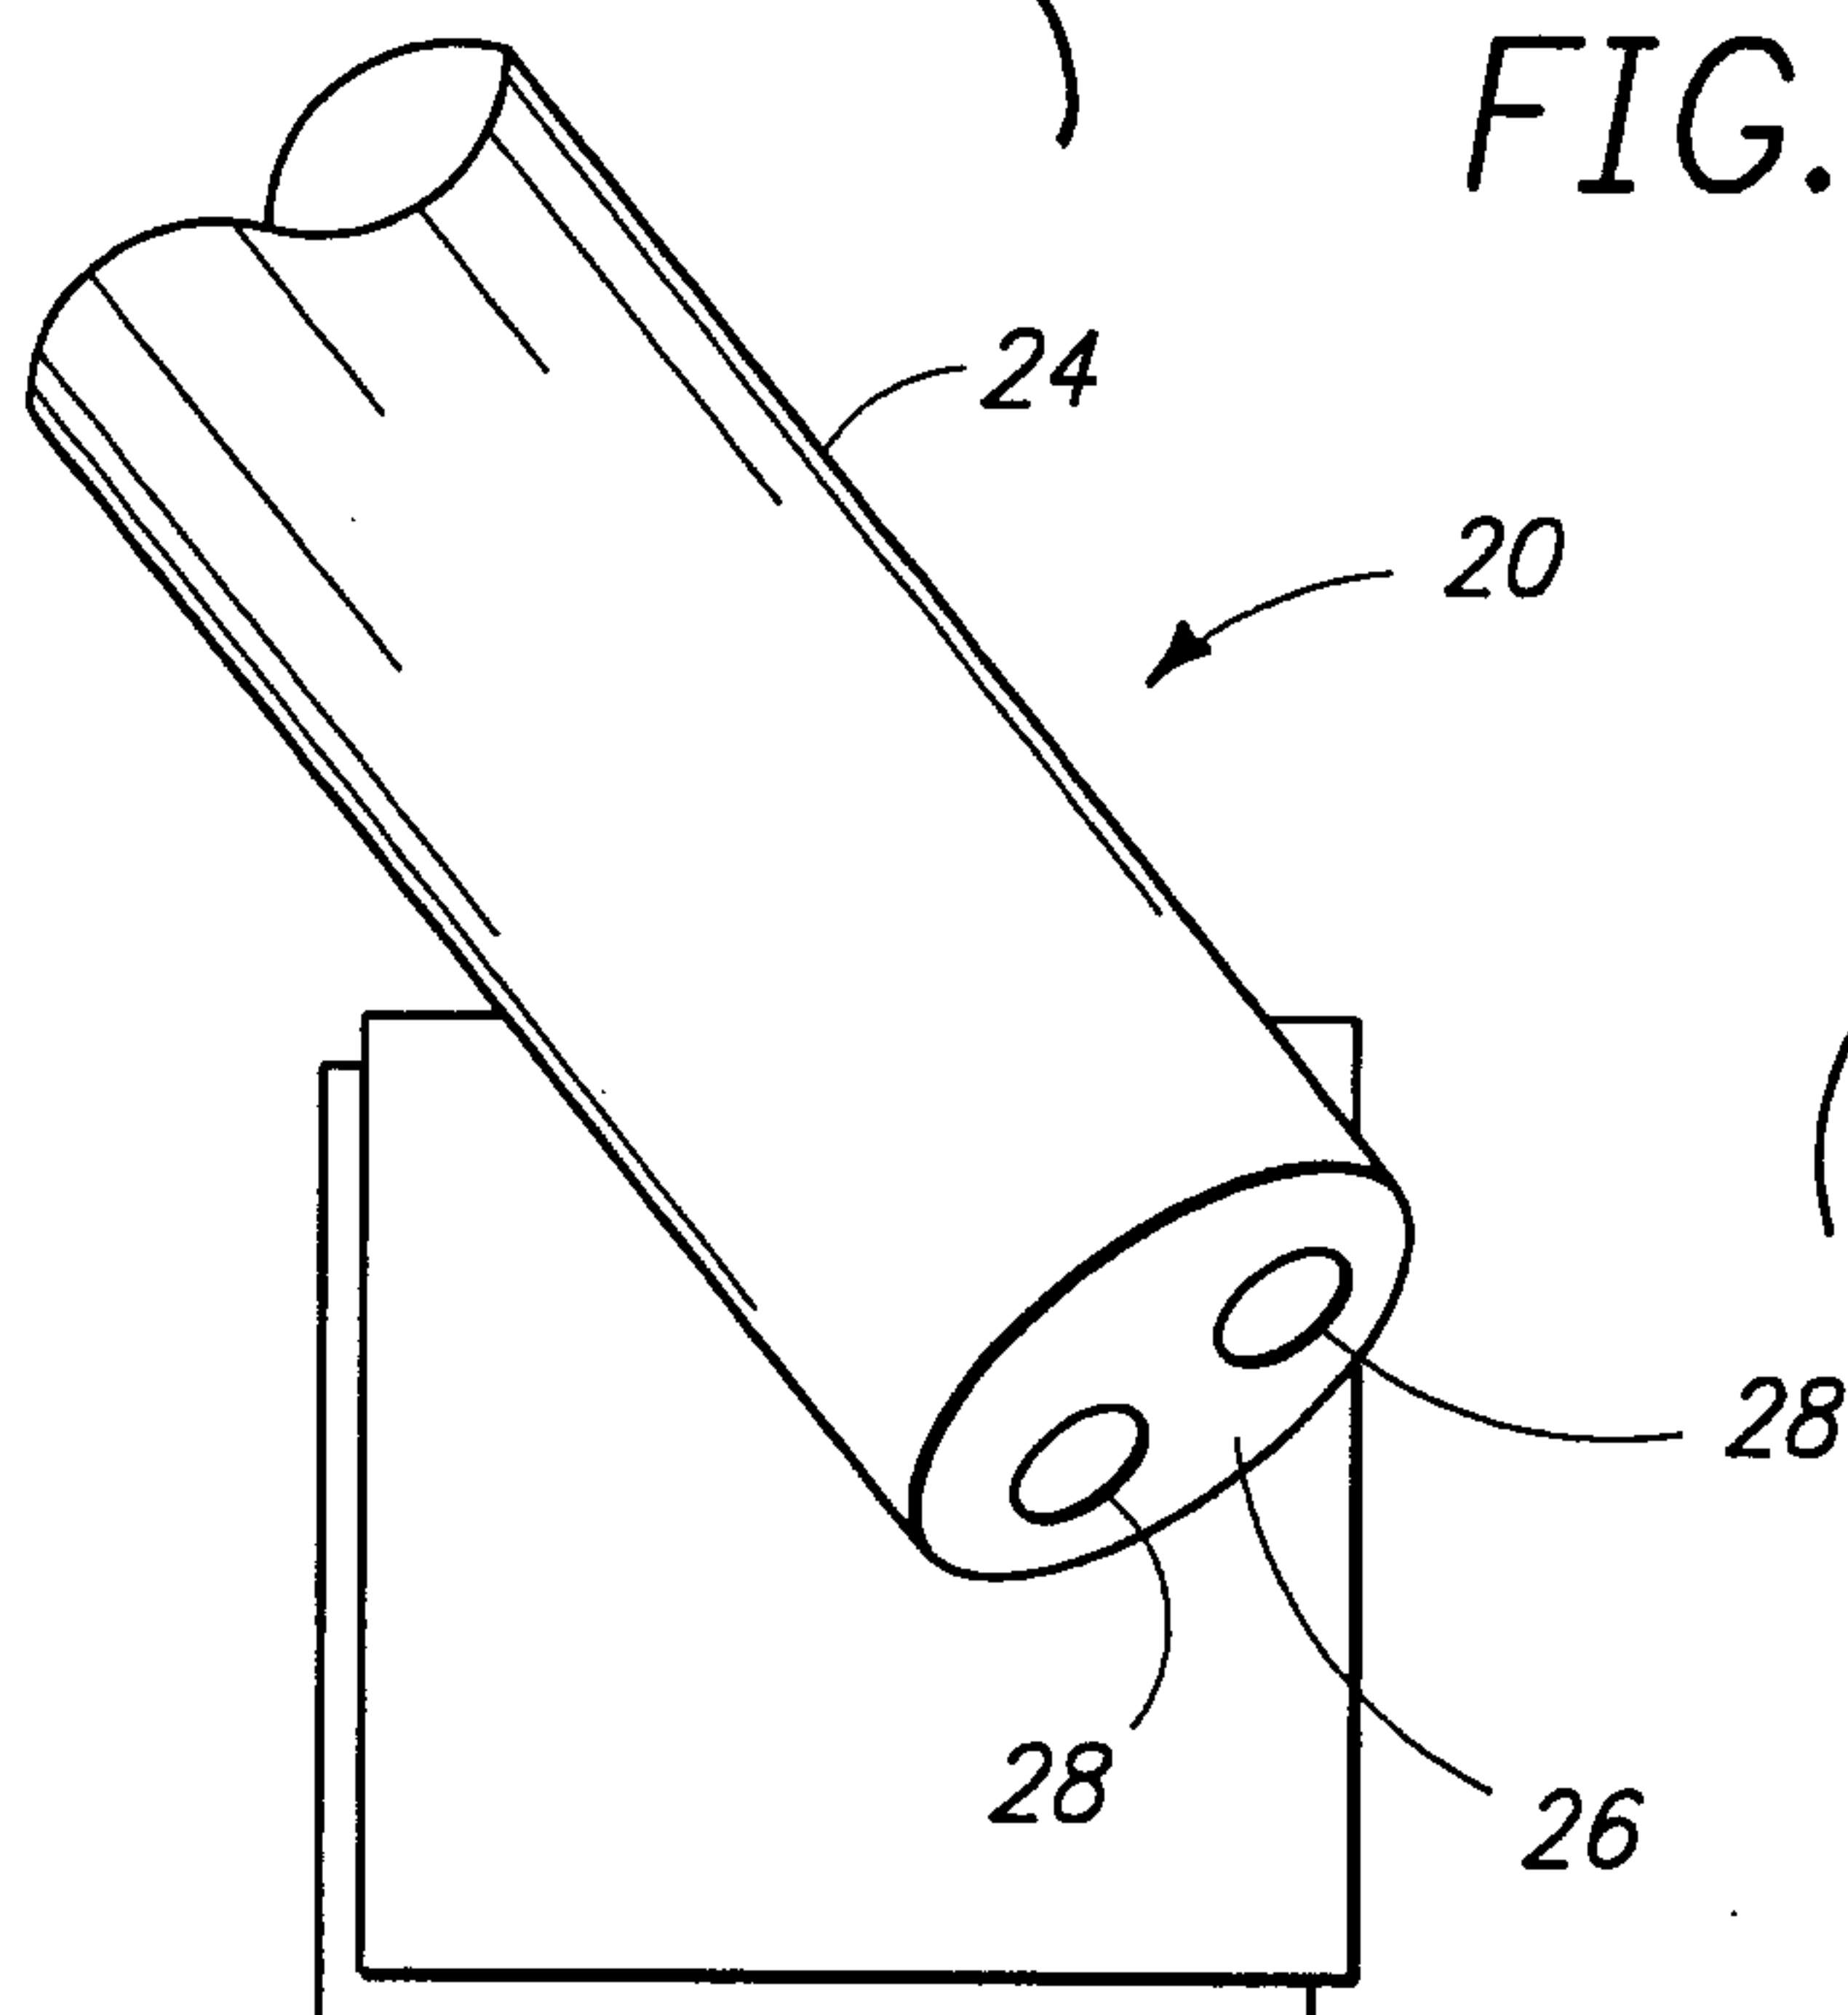


FIG. 1b

FIG. 1

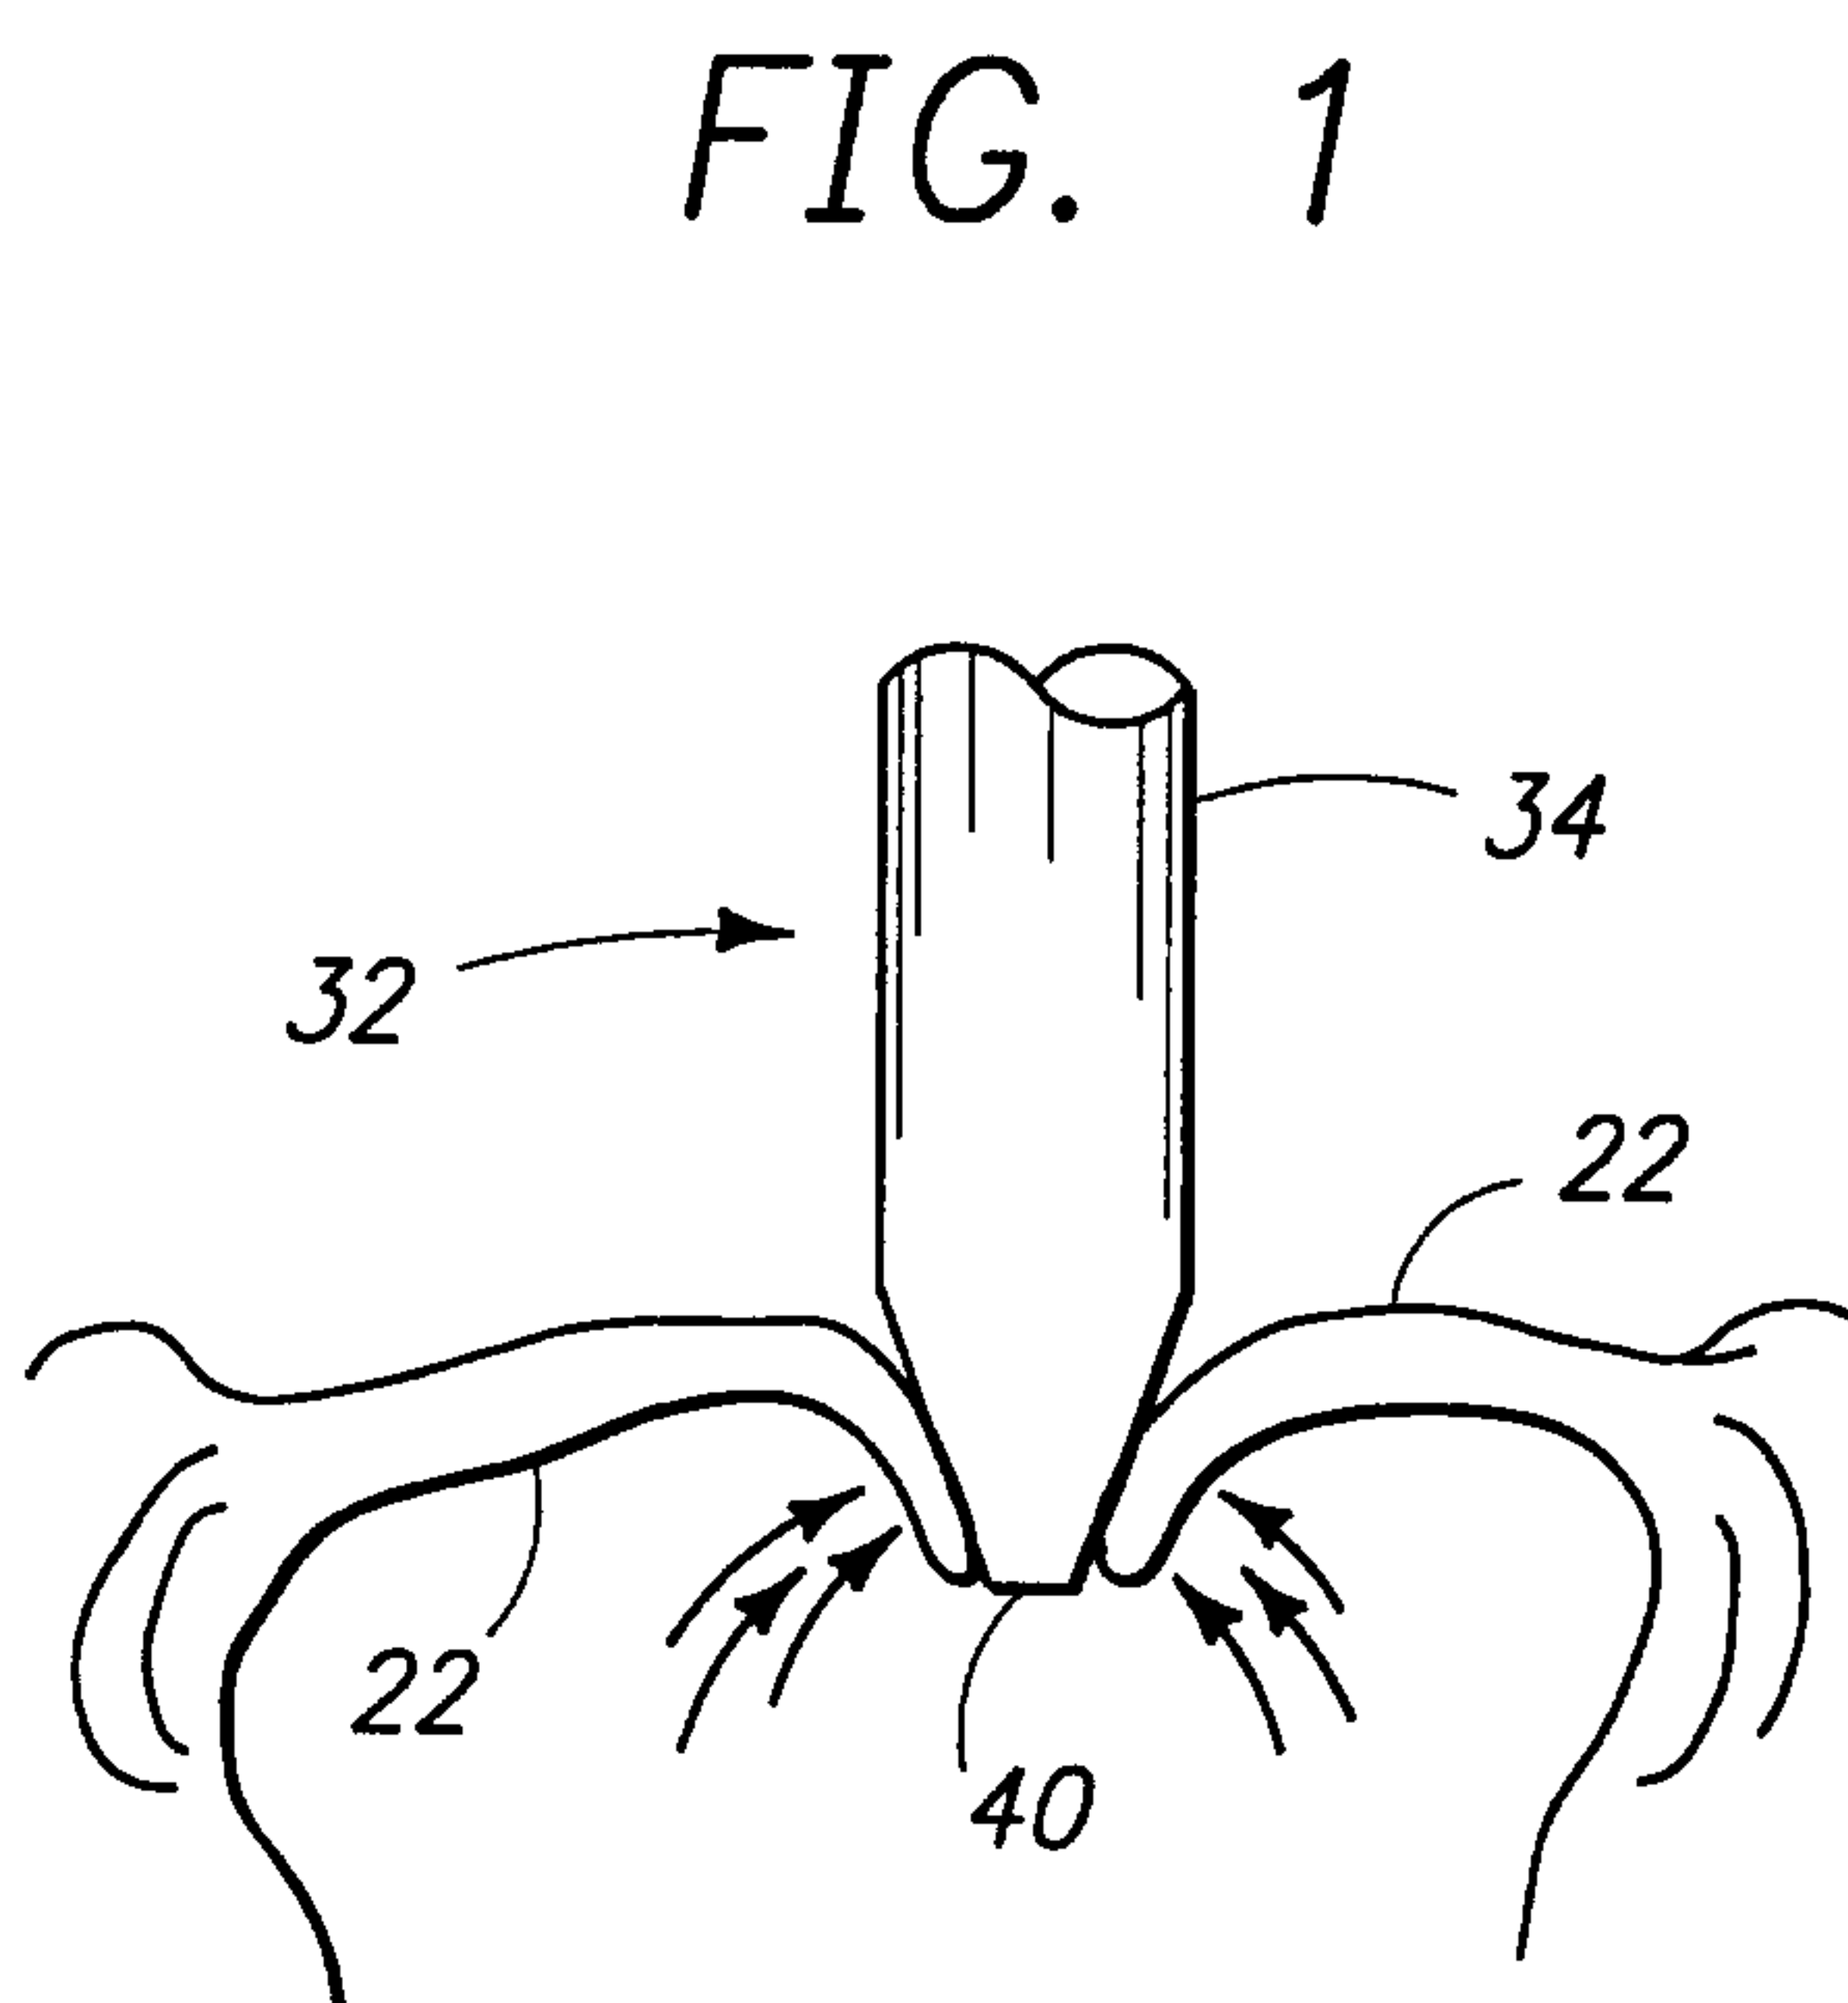


FIG. 2a

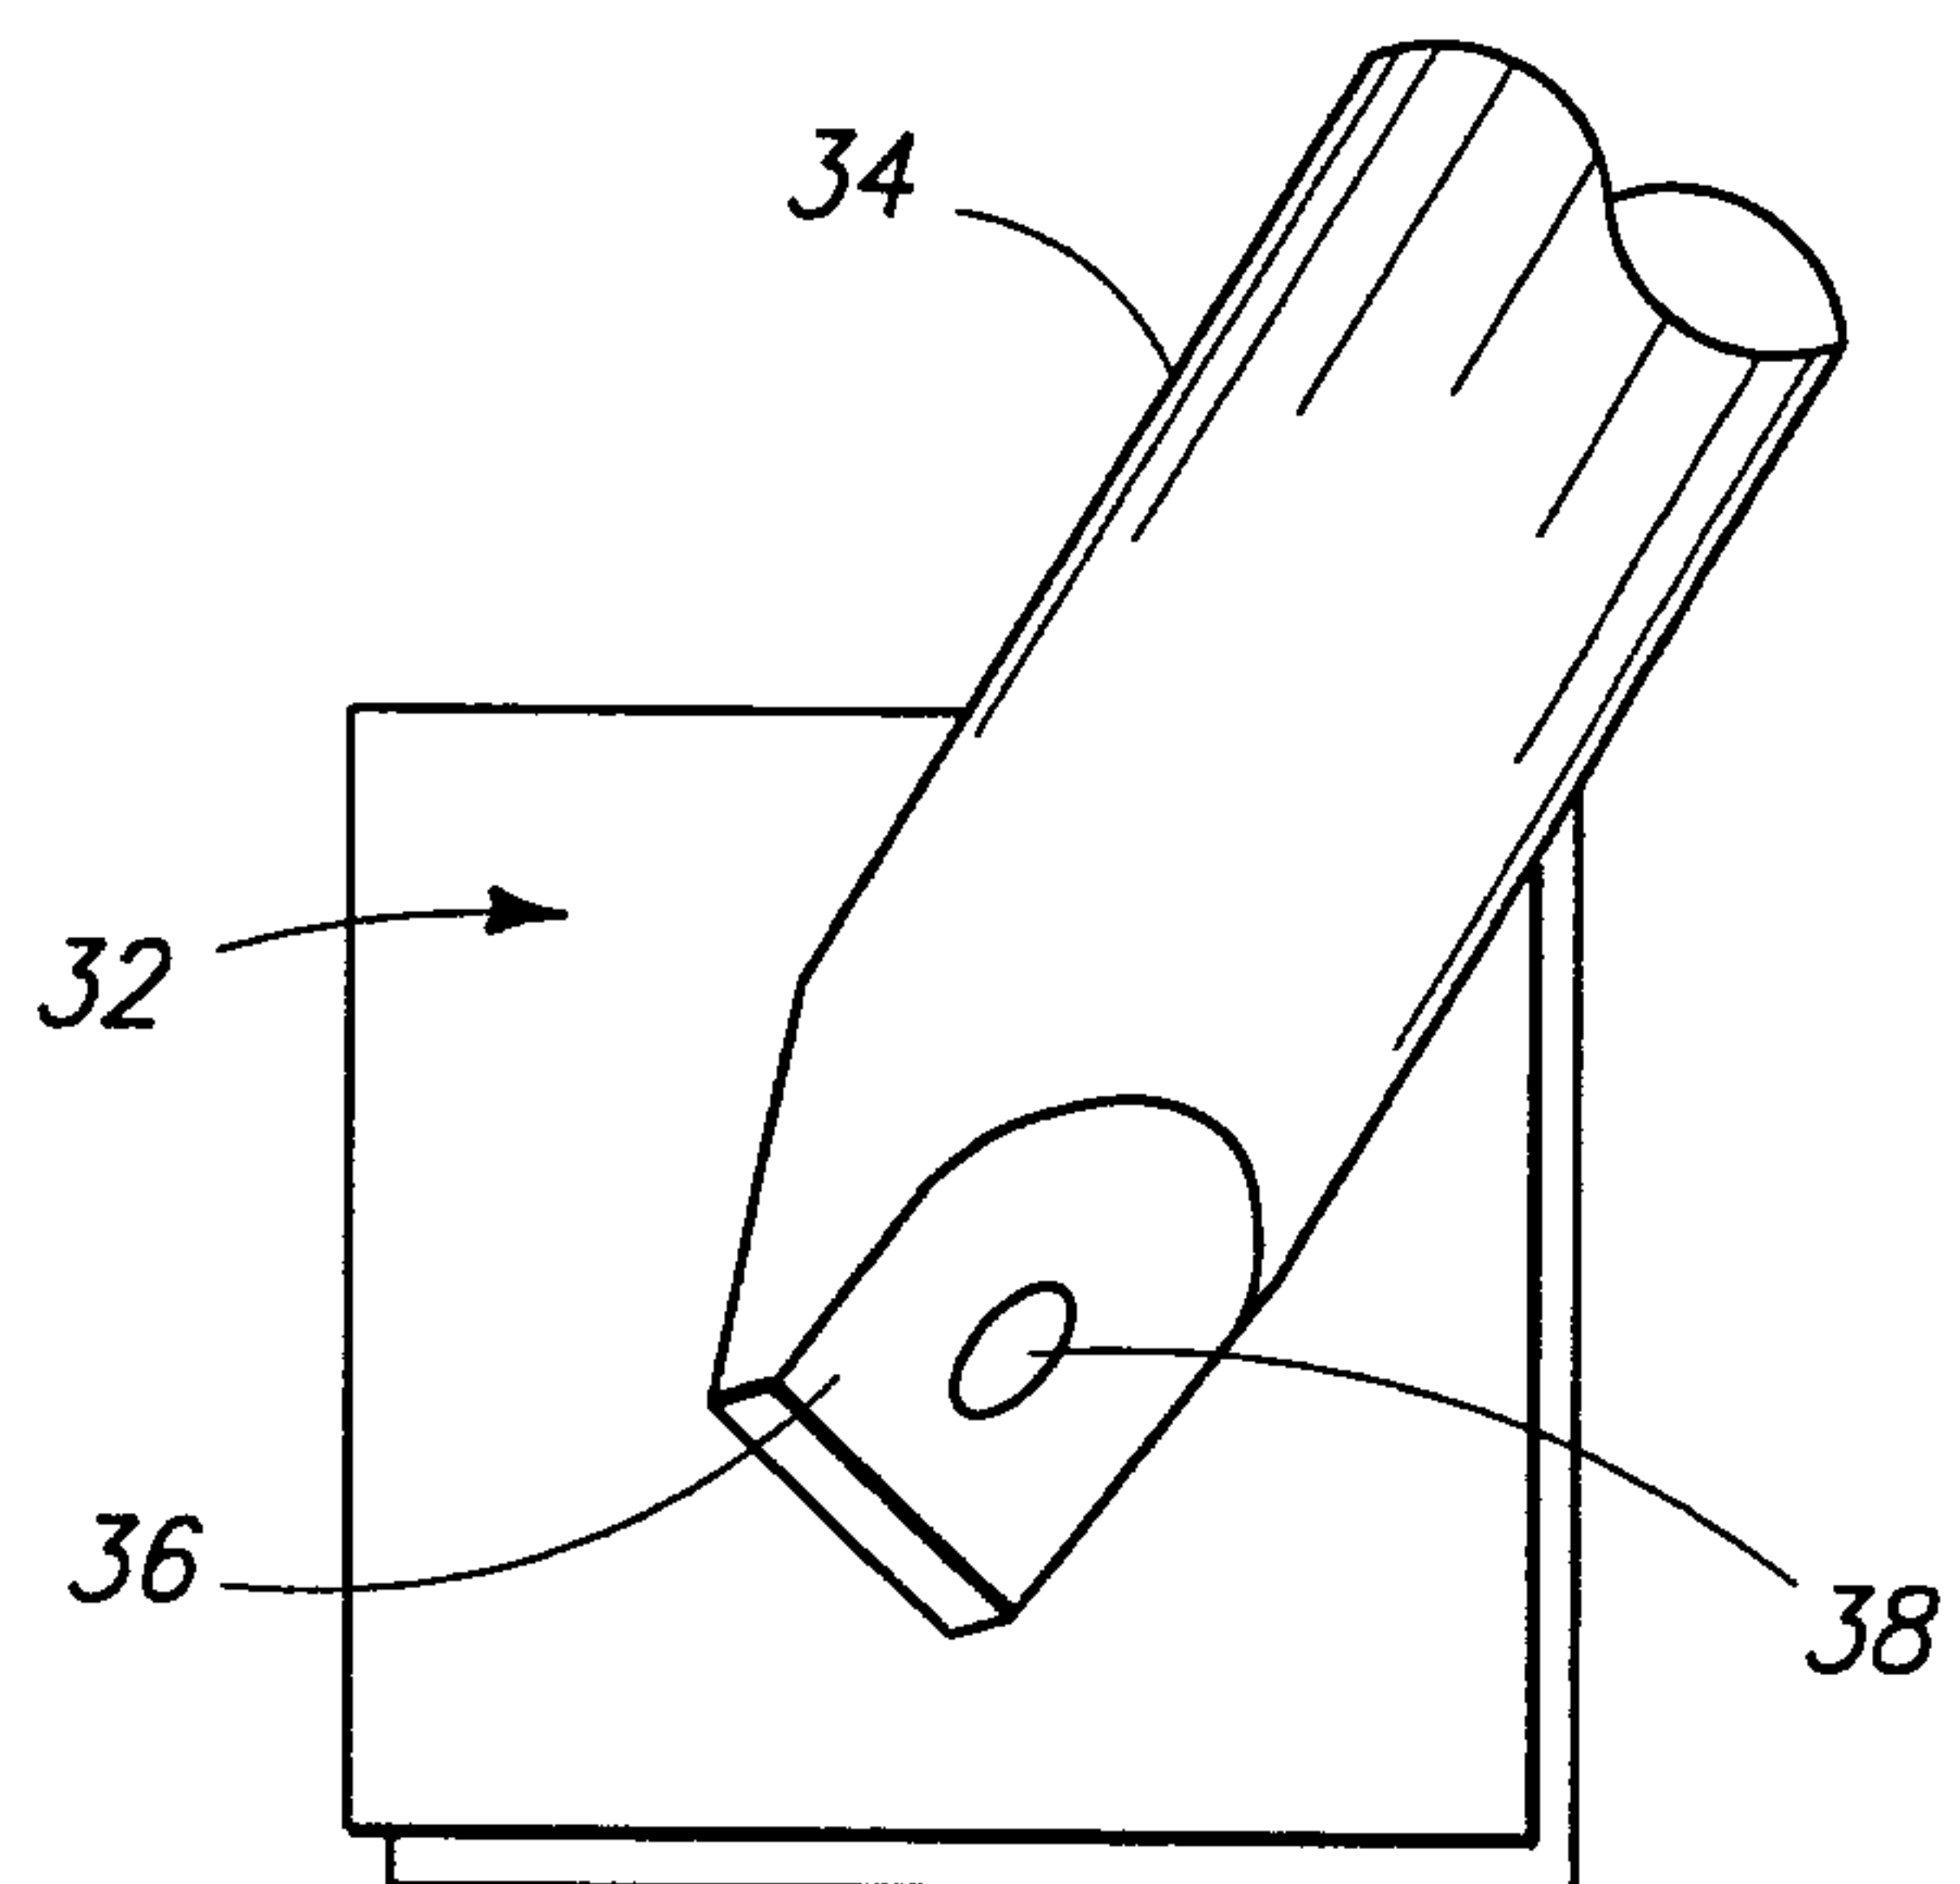


FIG. 2

2/45

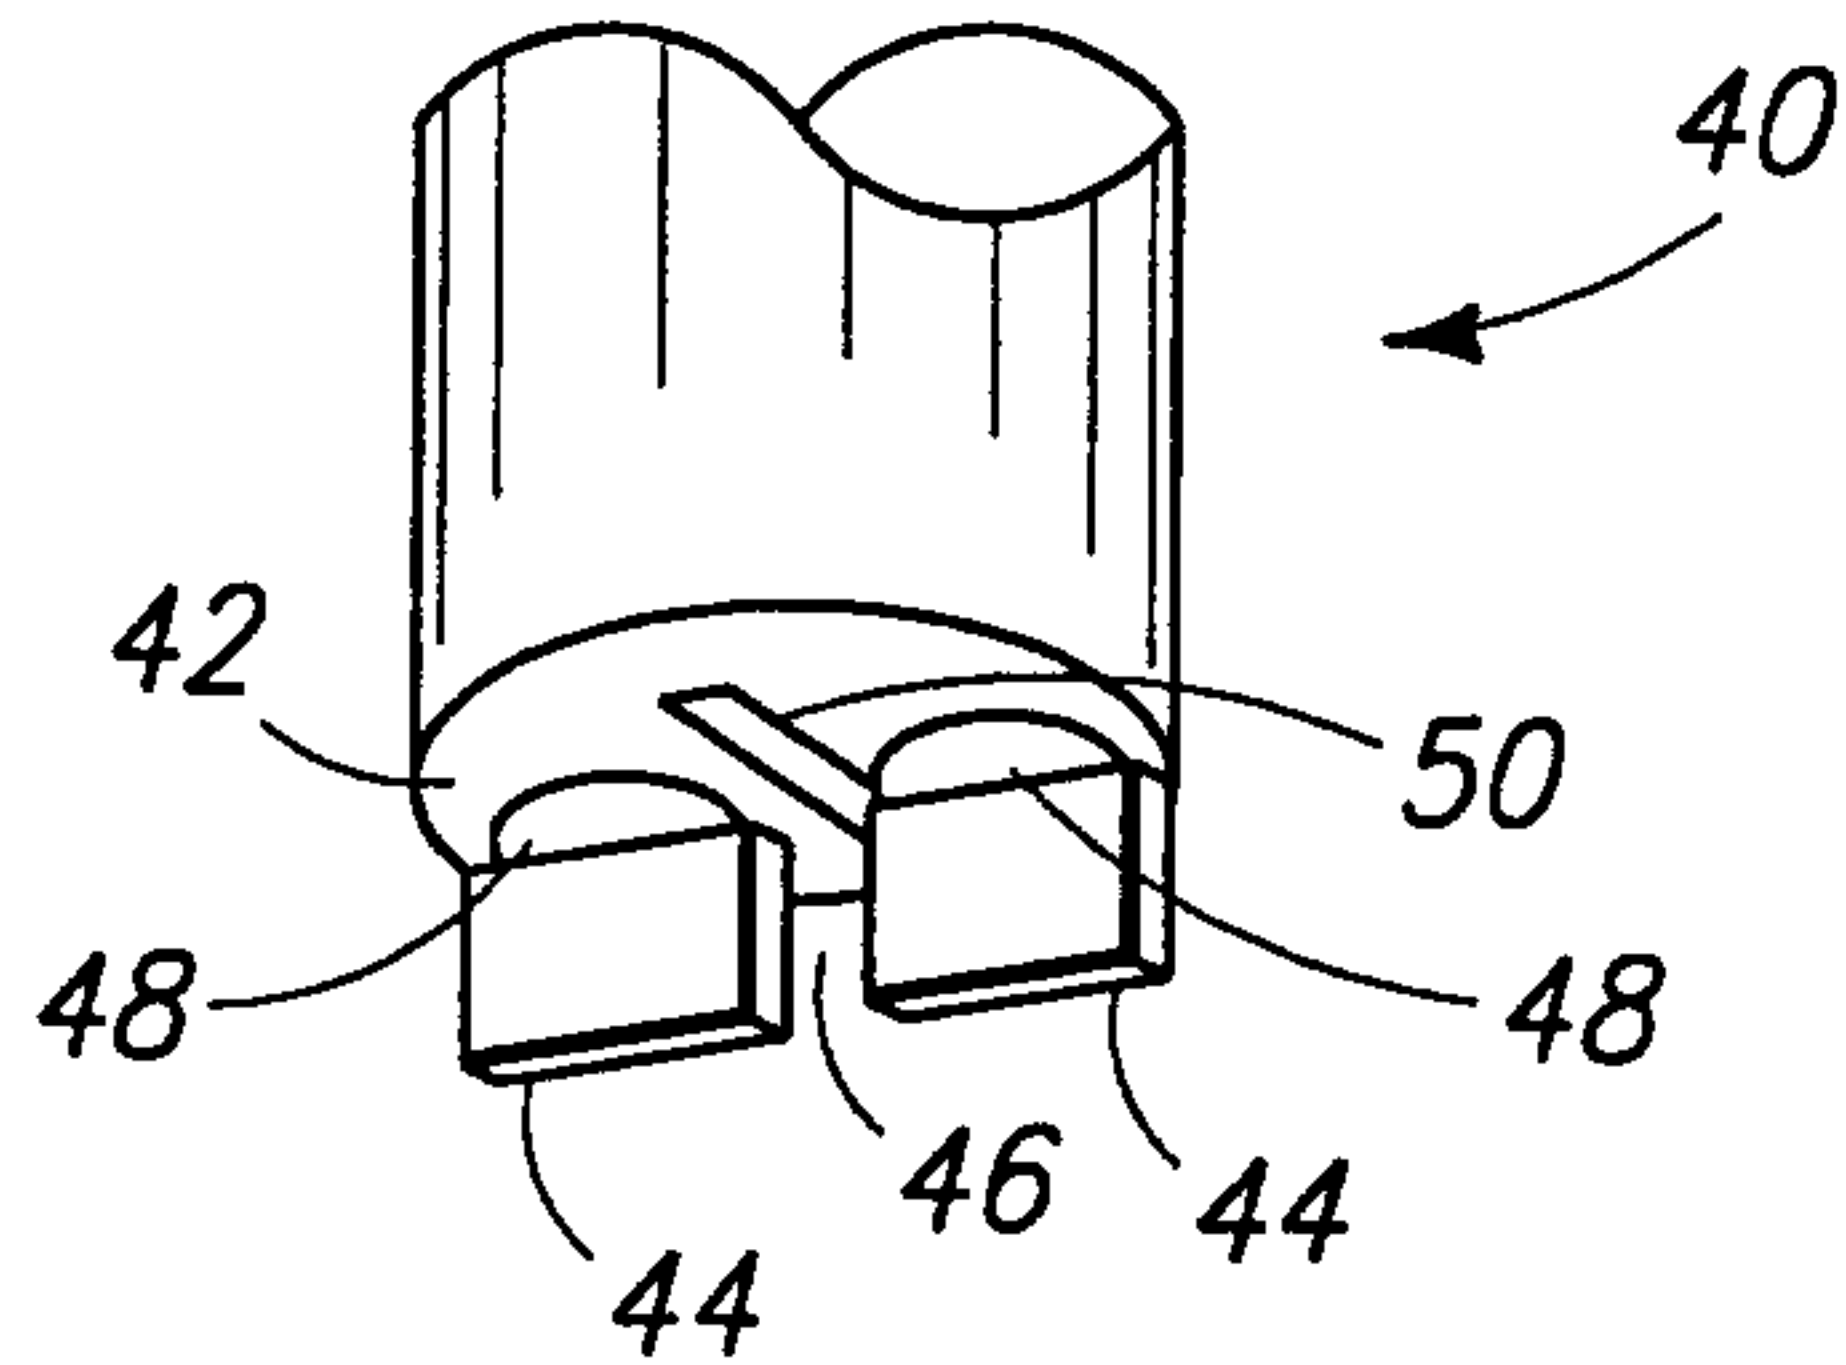


FIG. 3a

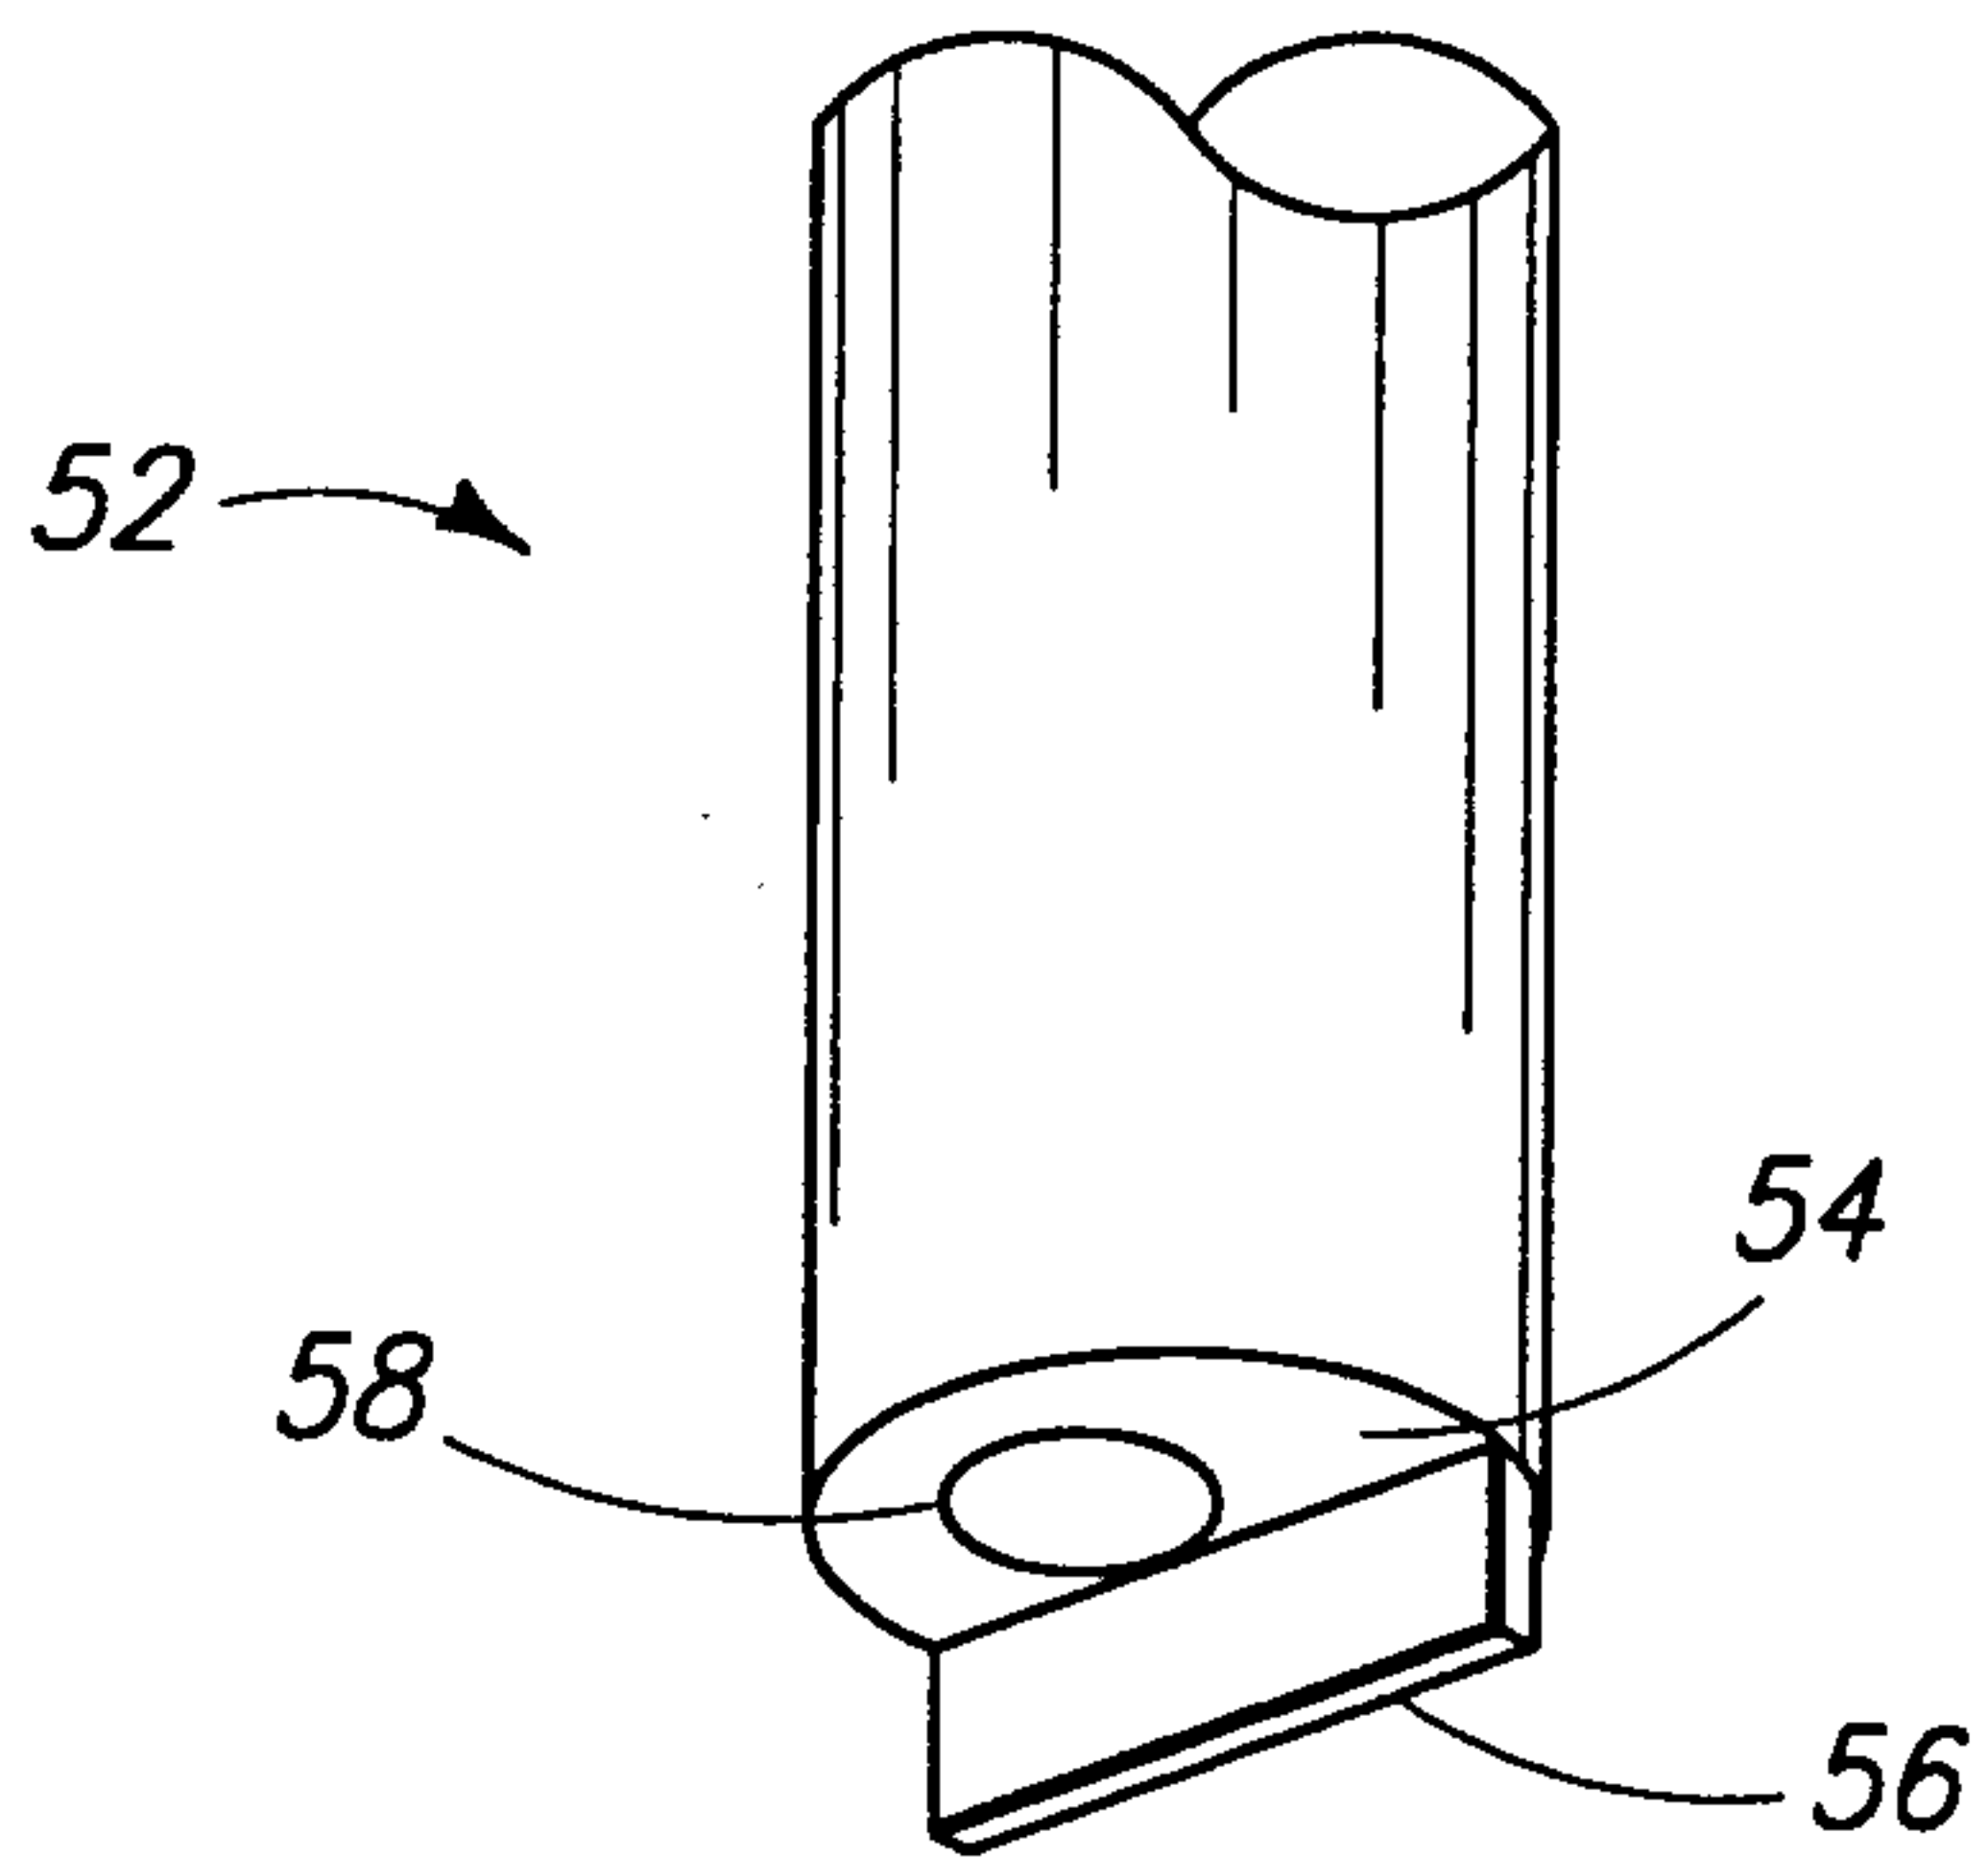


FIG. 3b

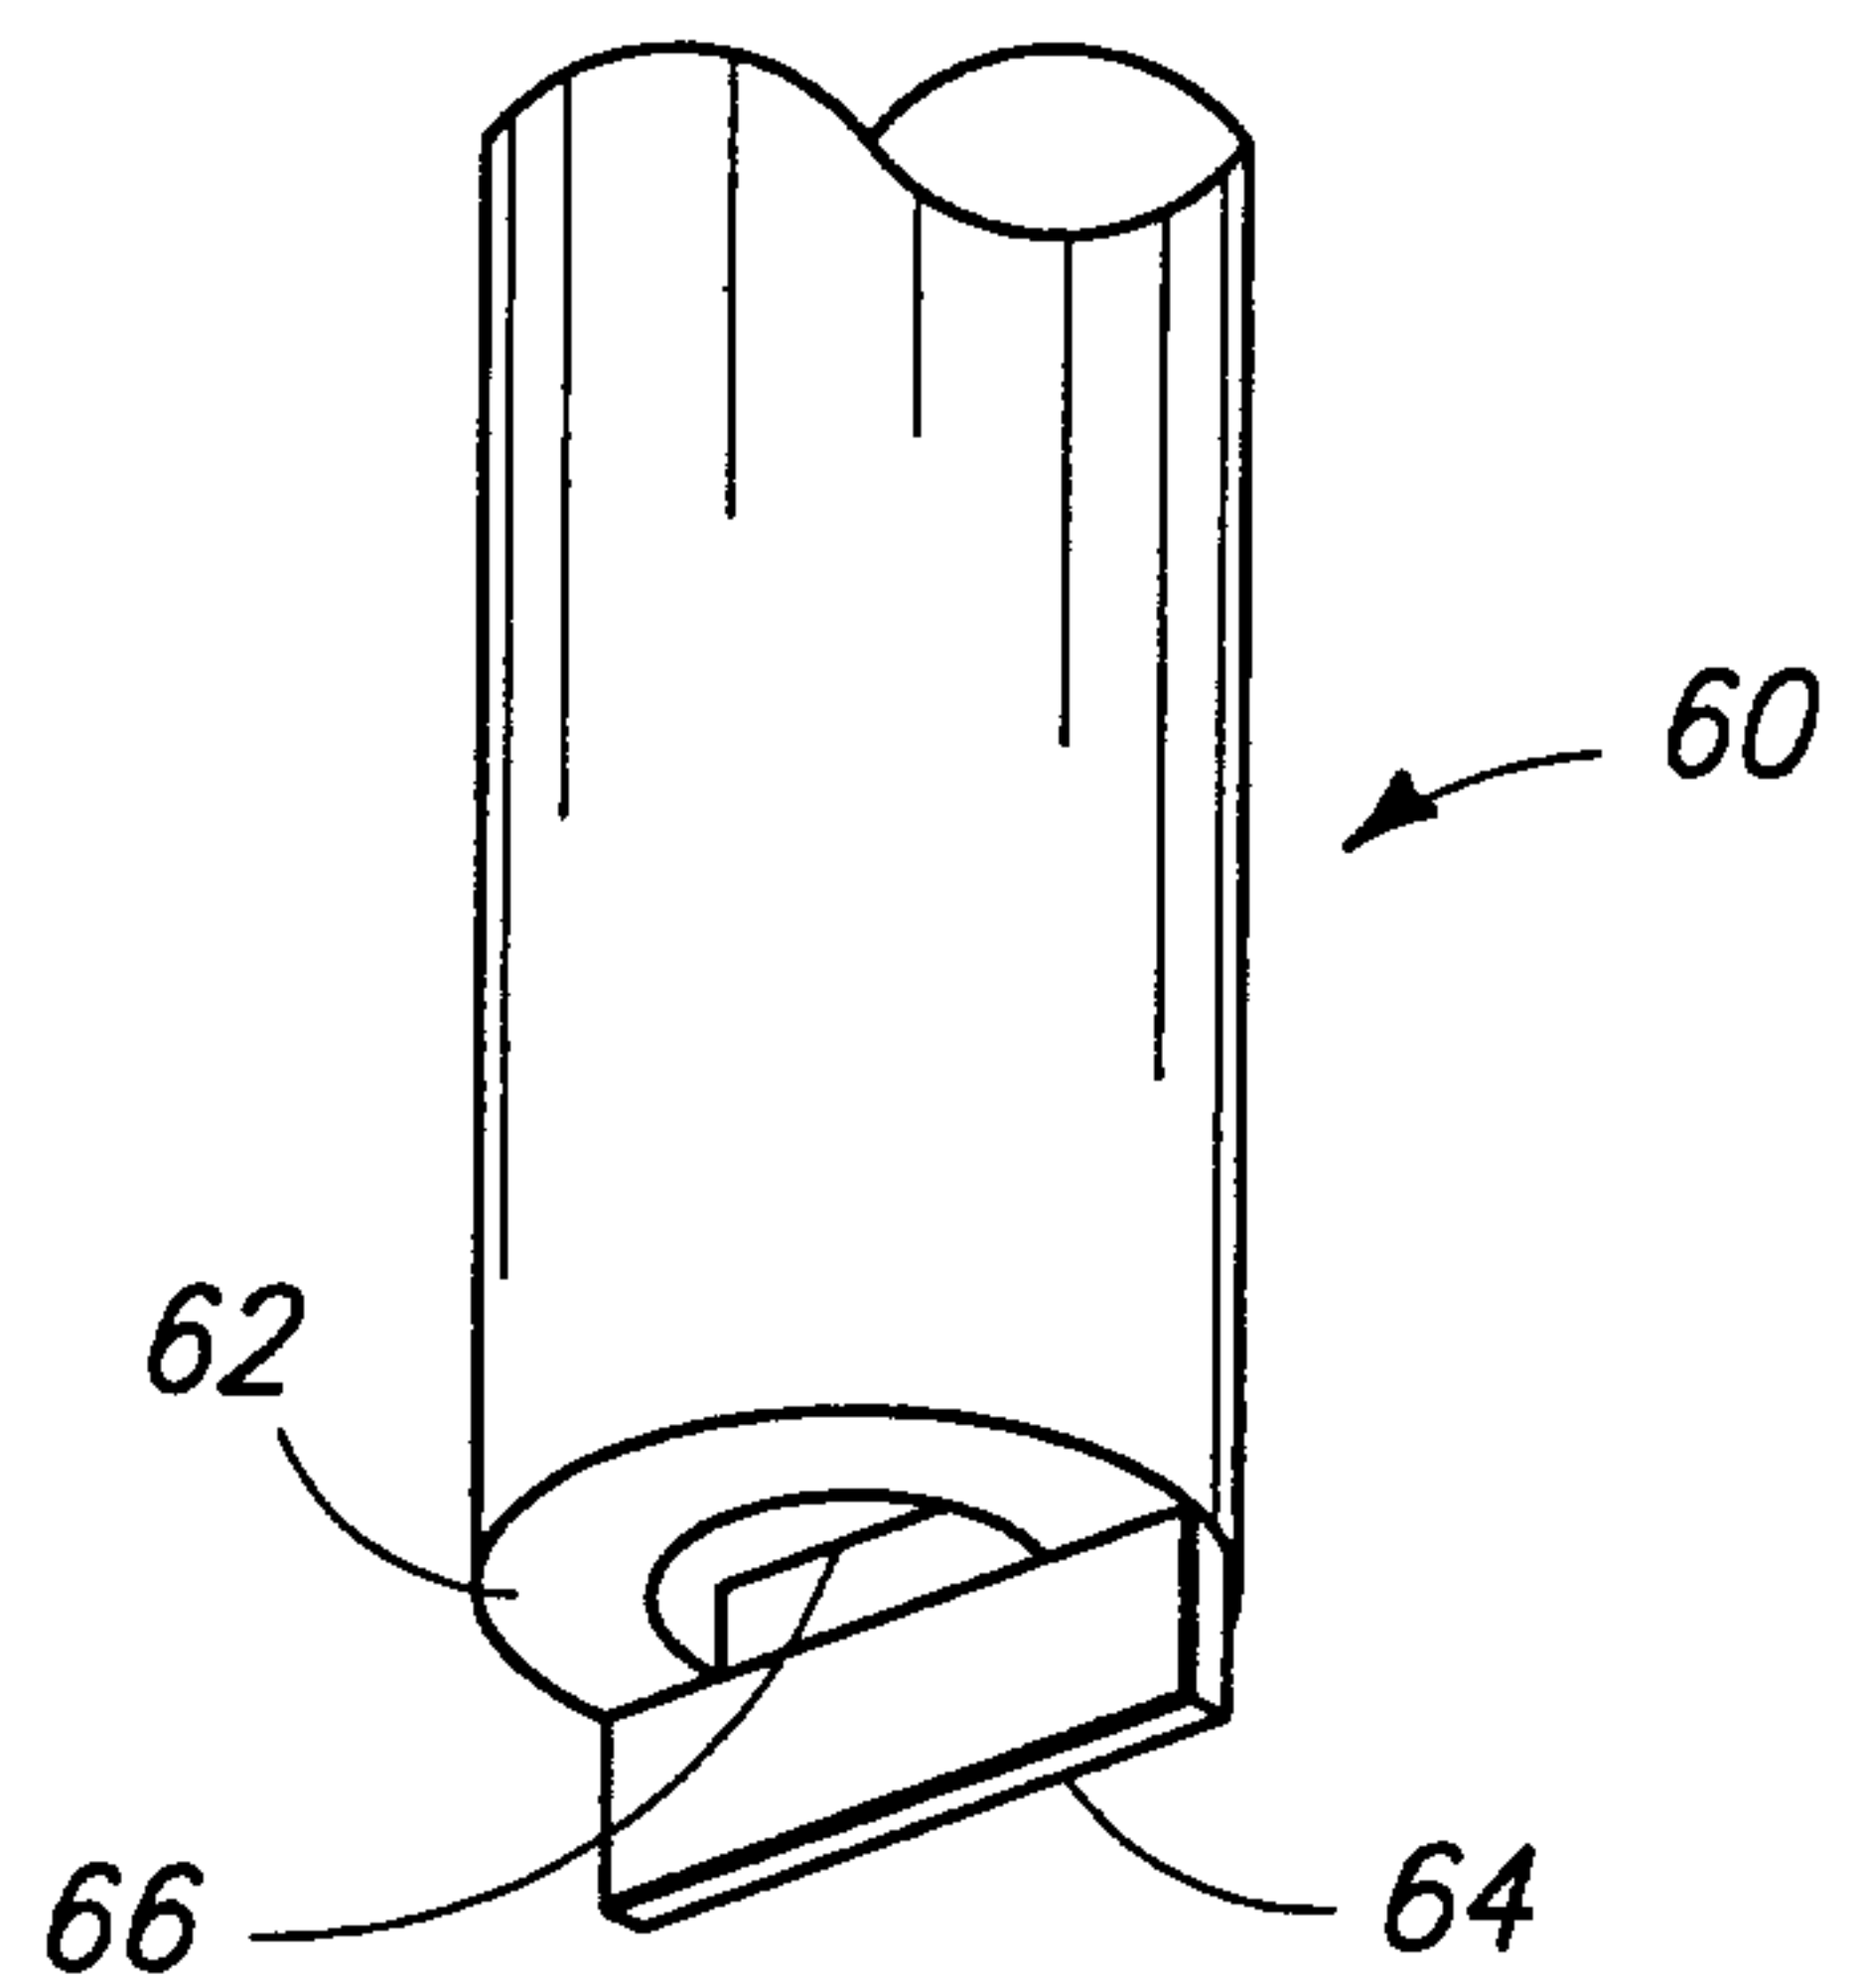


FIG. 3c

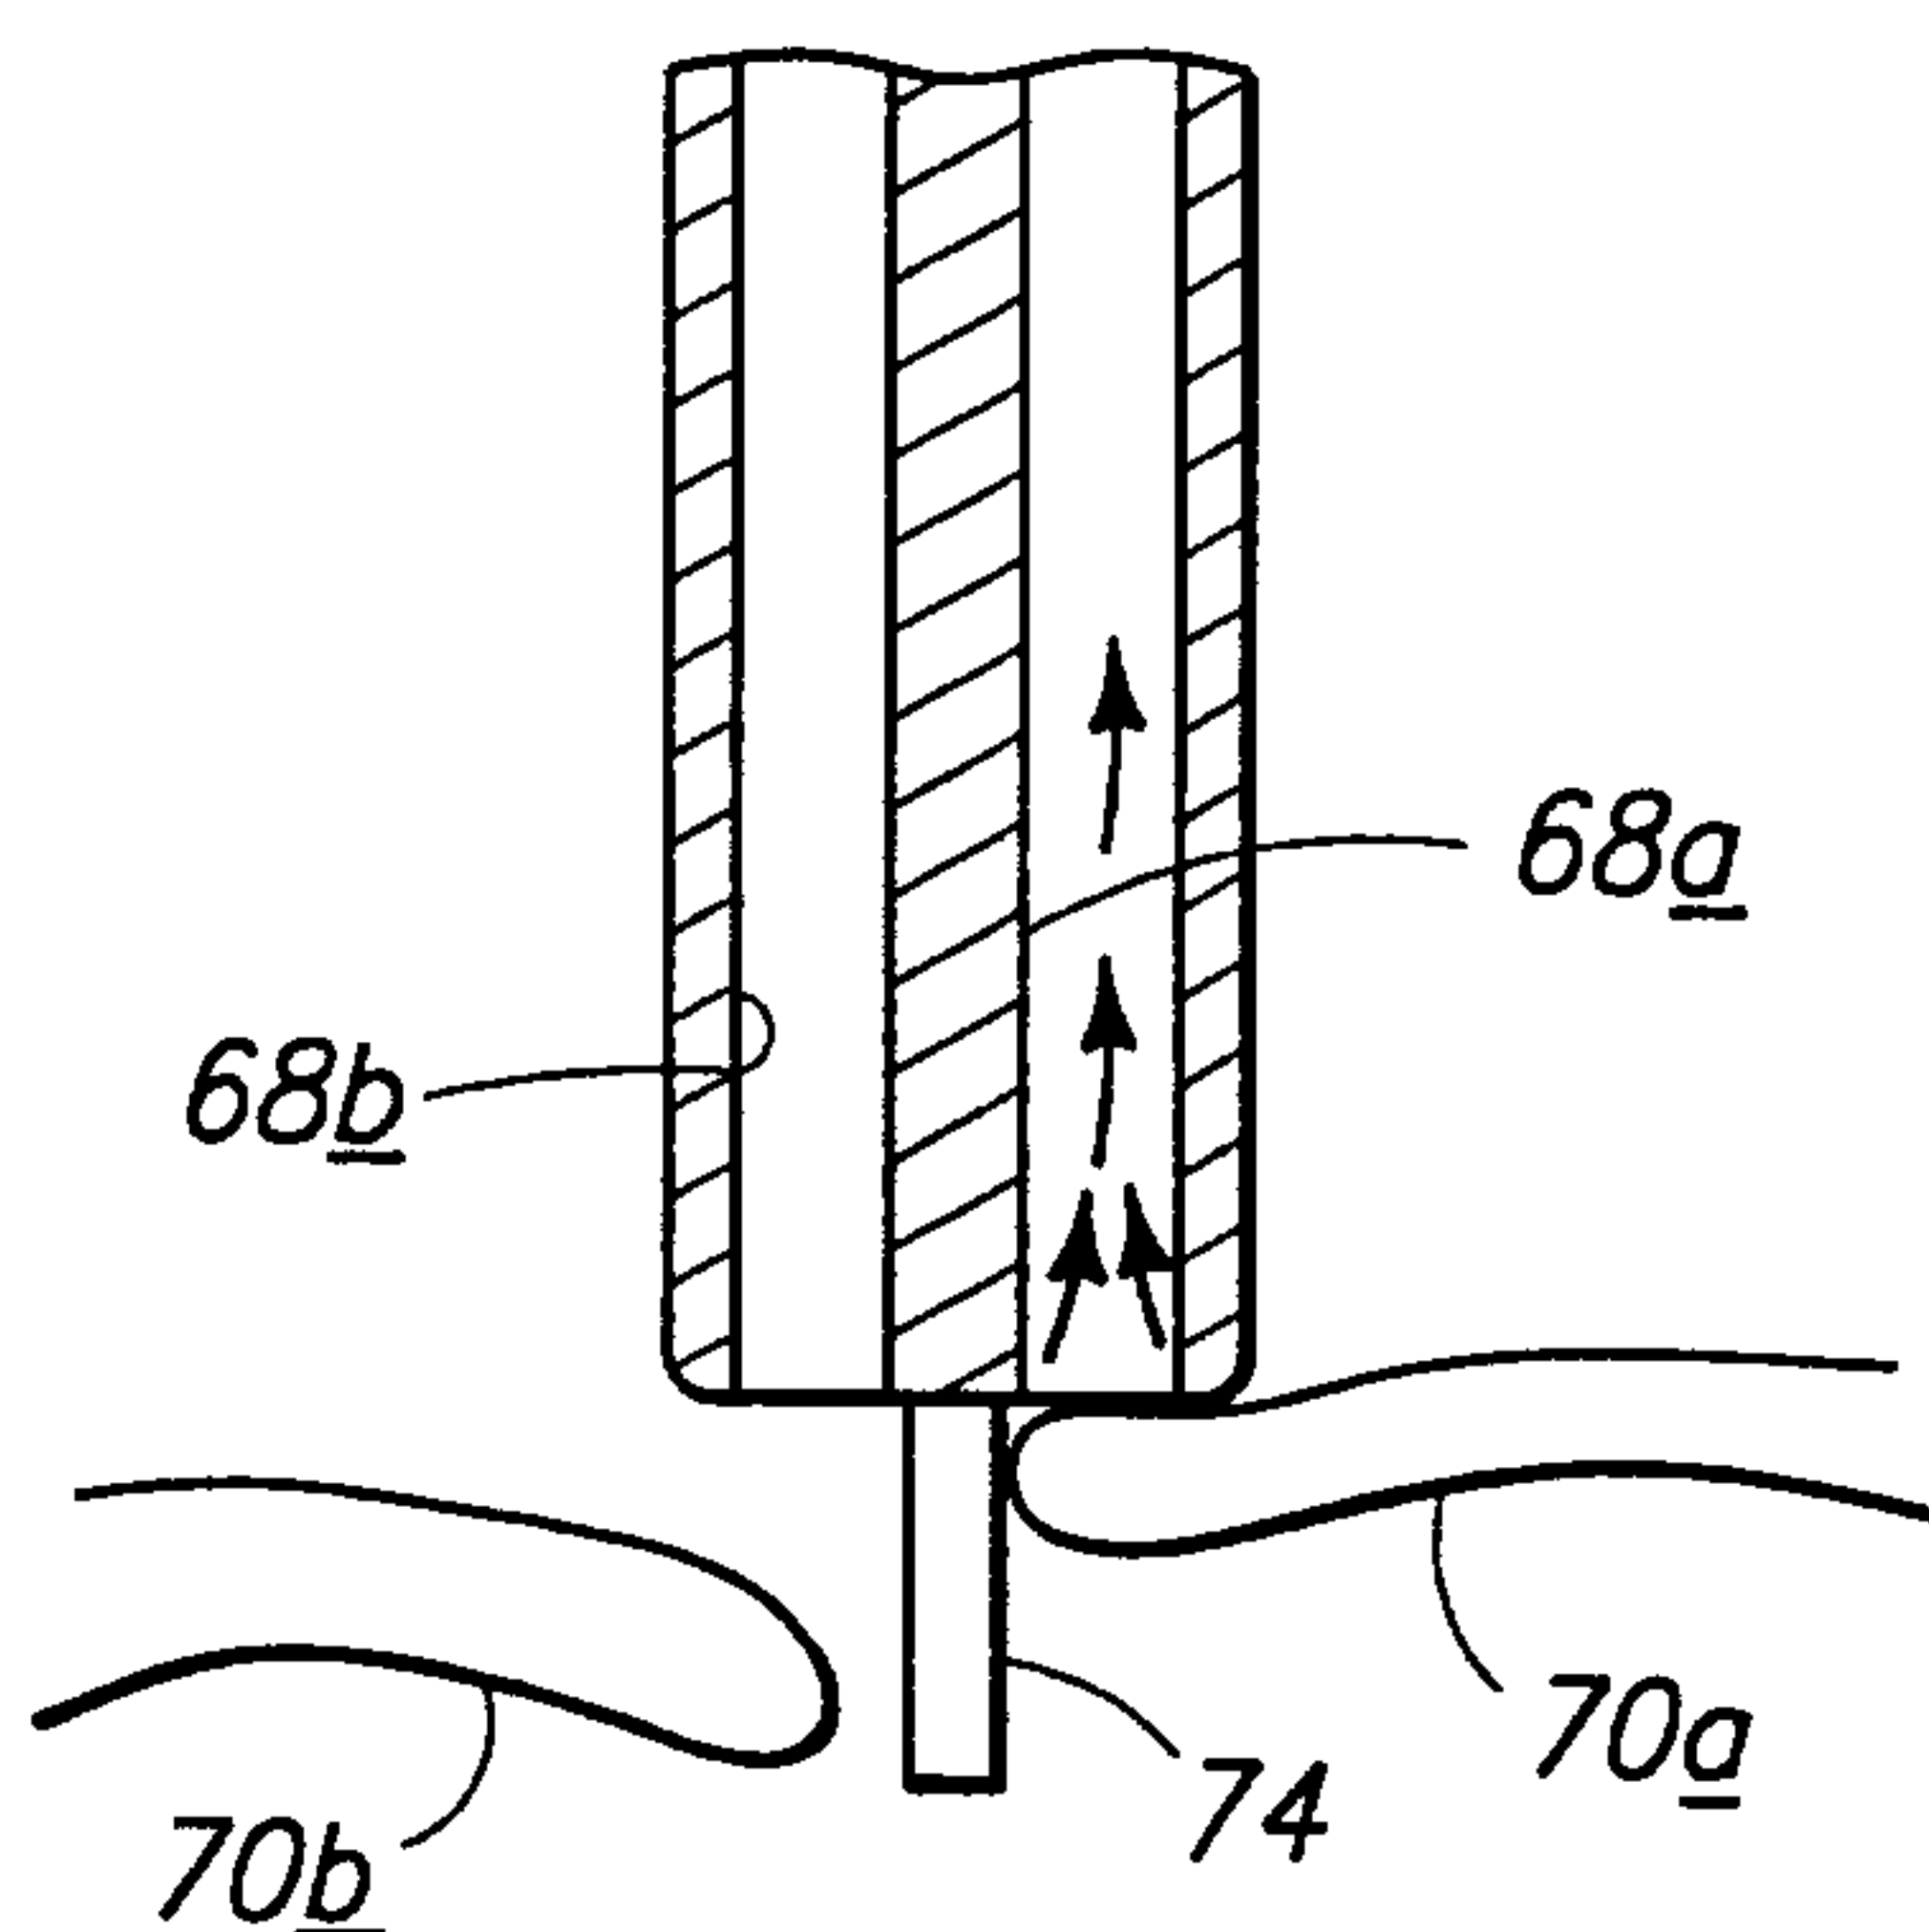


FIG. 3d

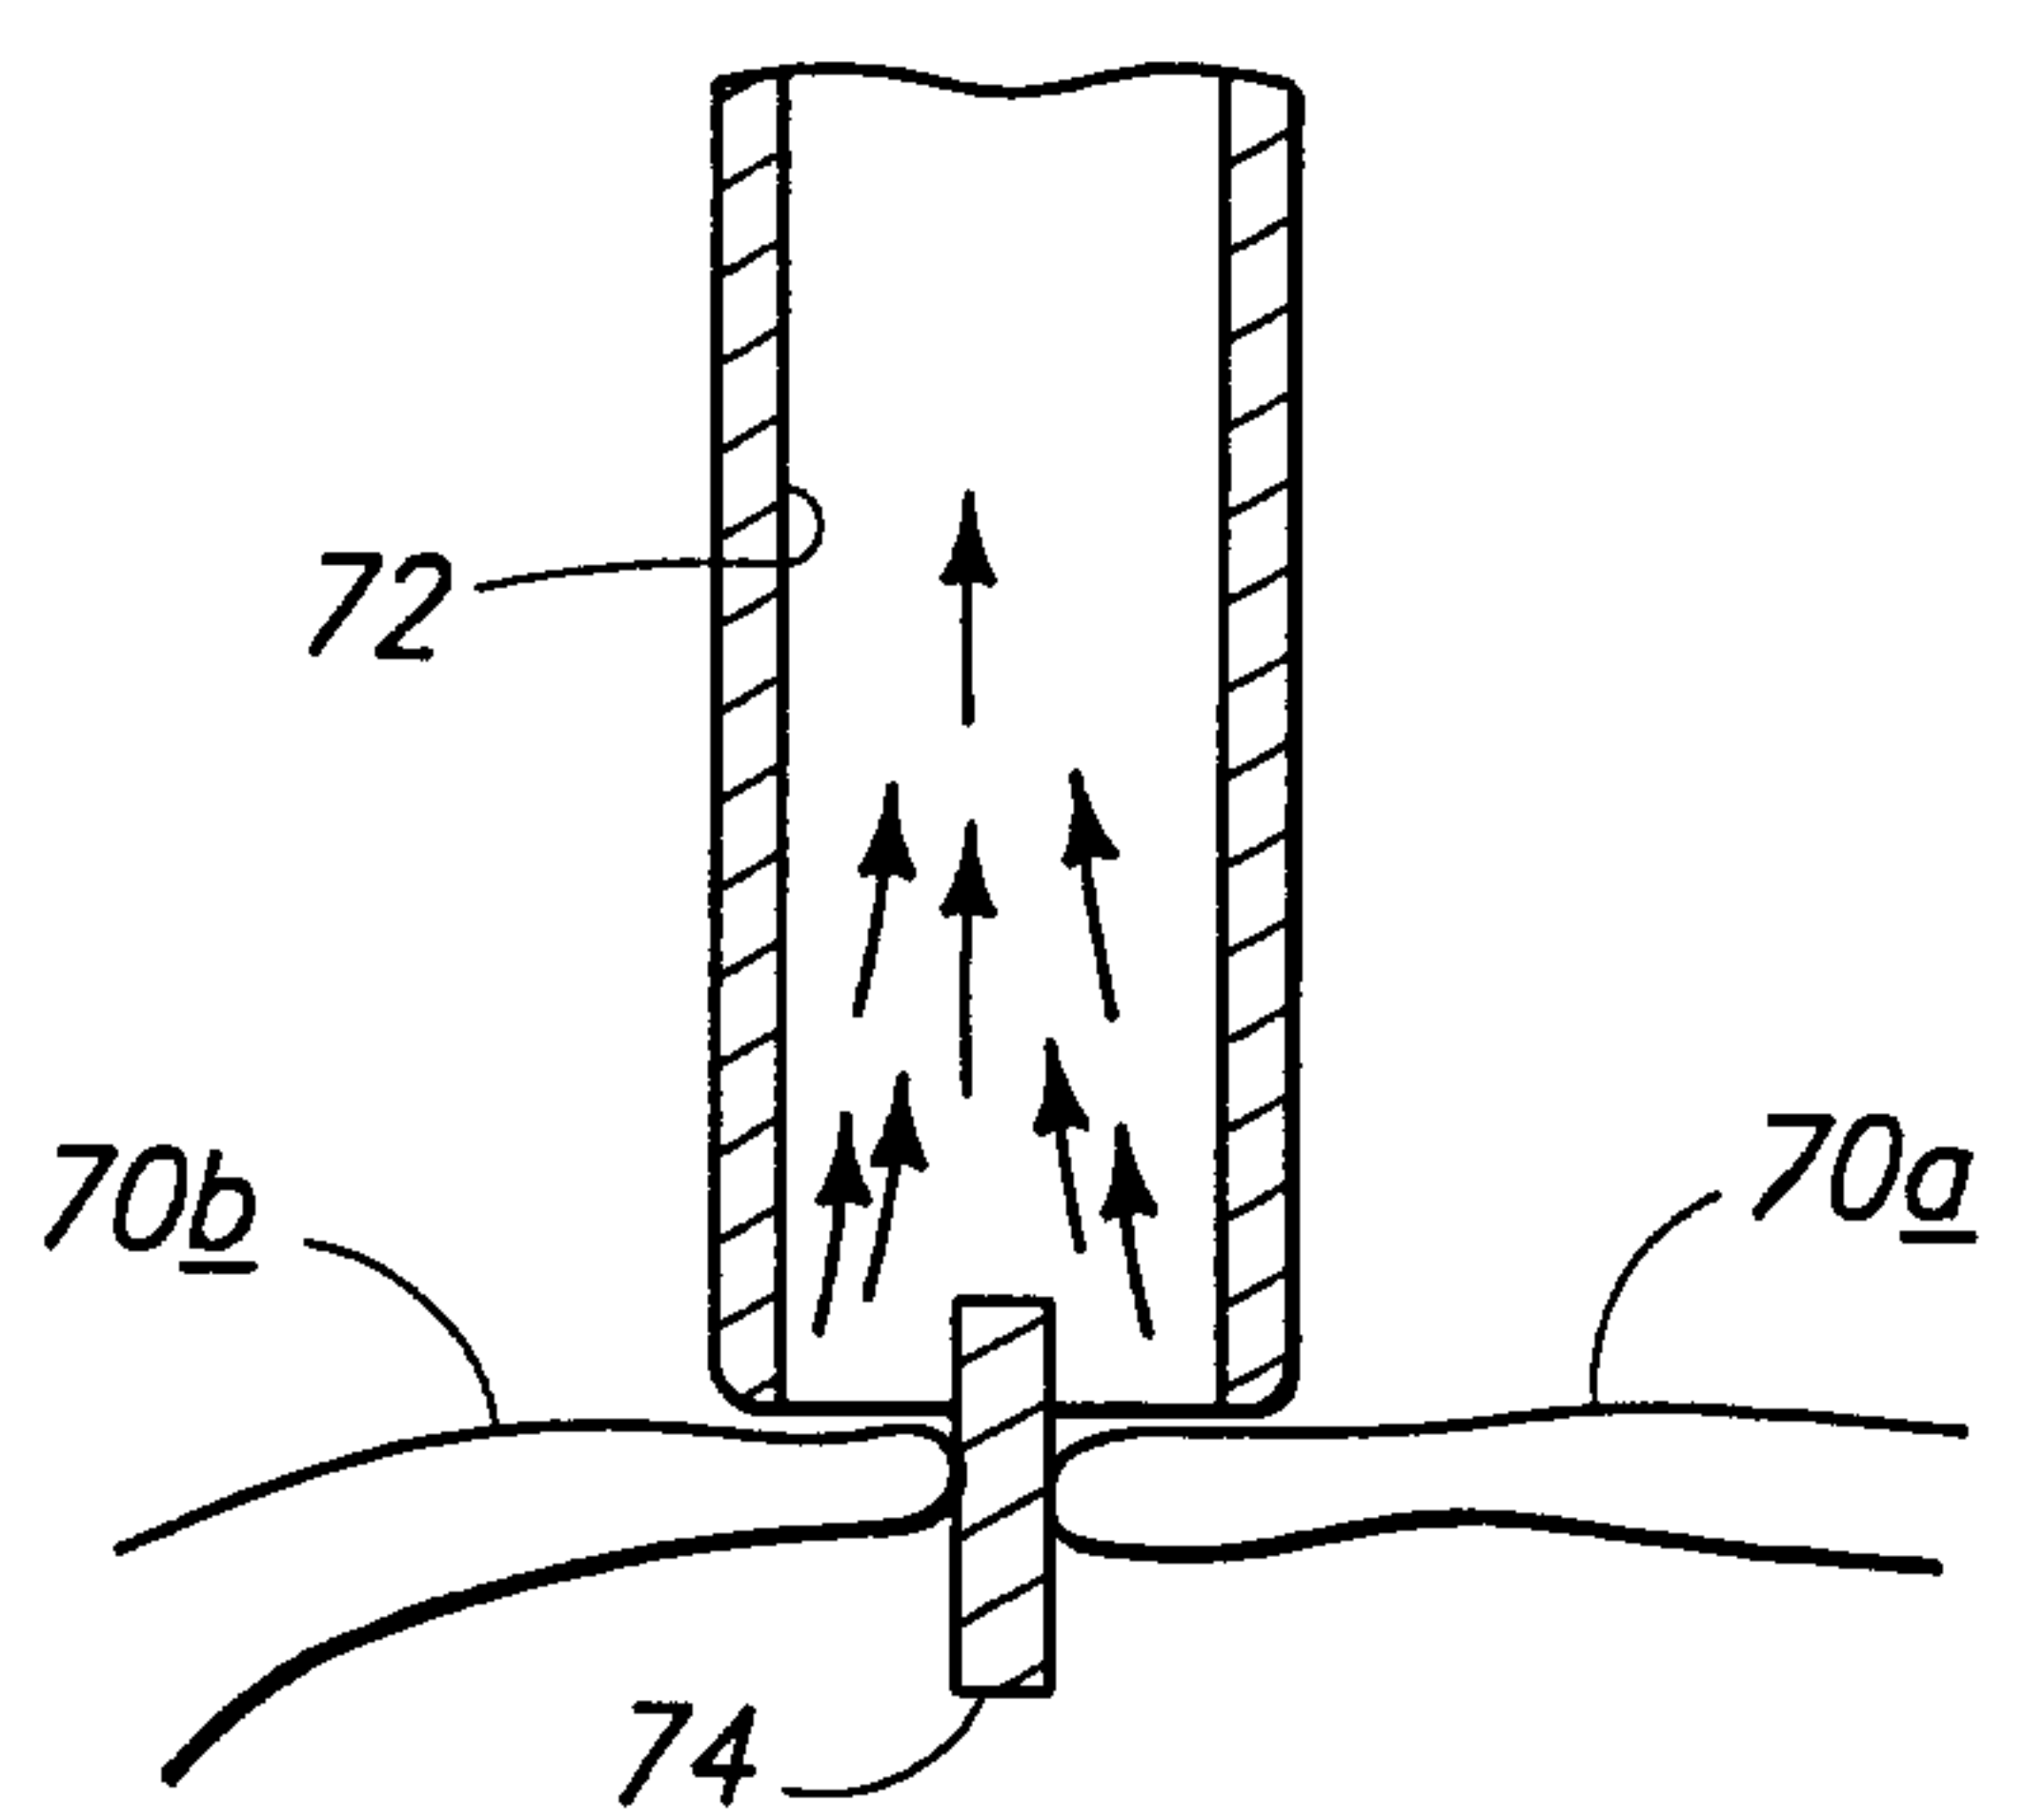


FIG. 3e

3/45

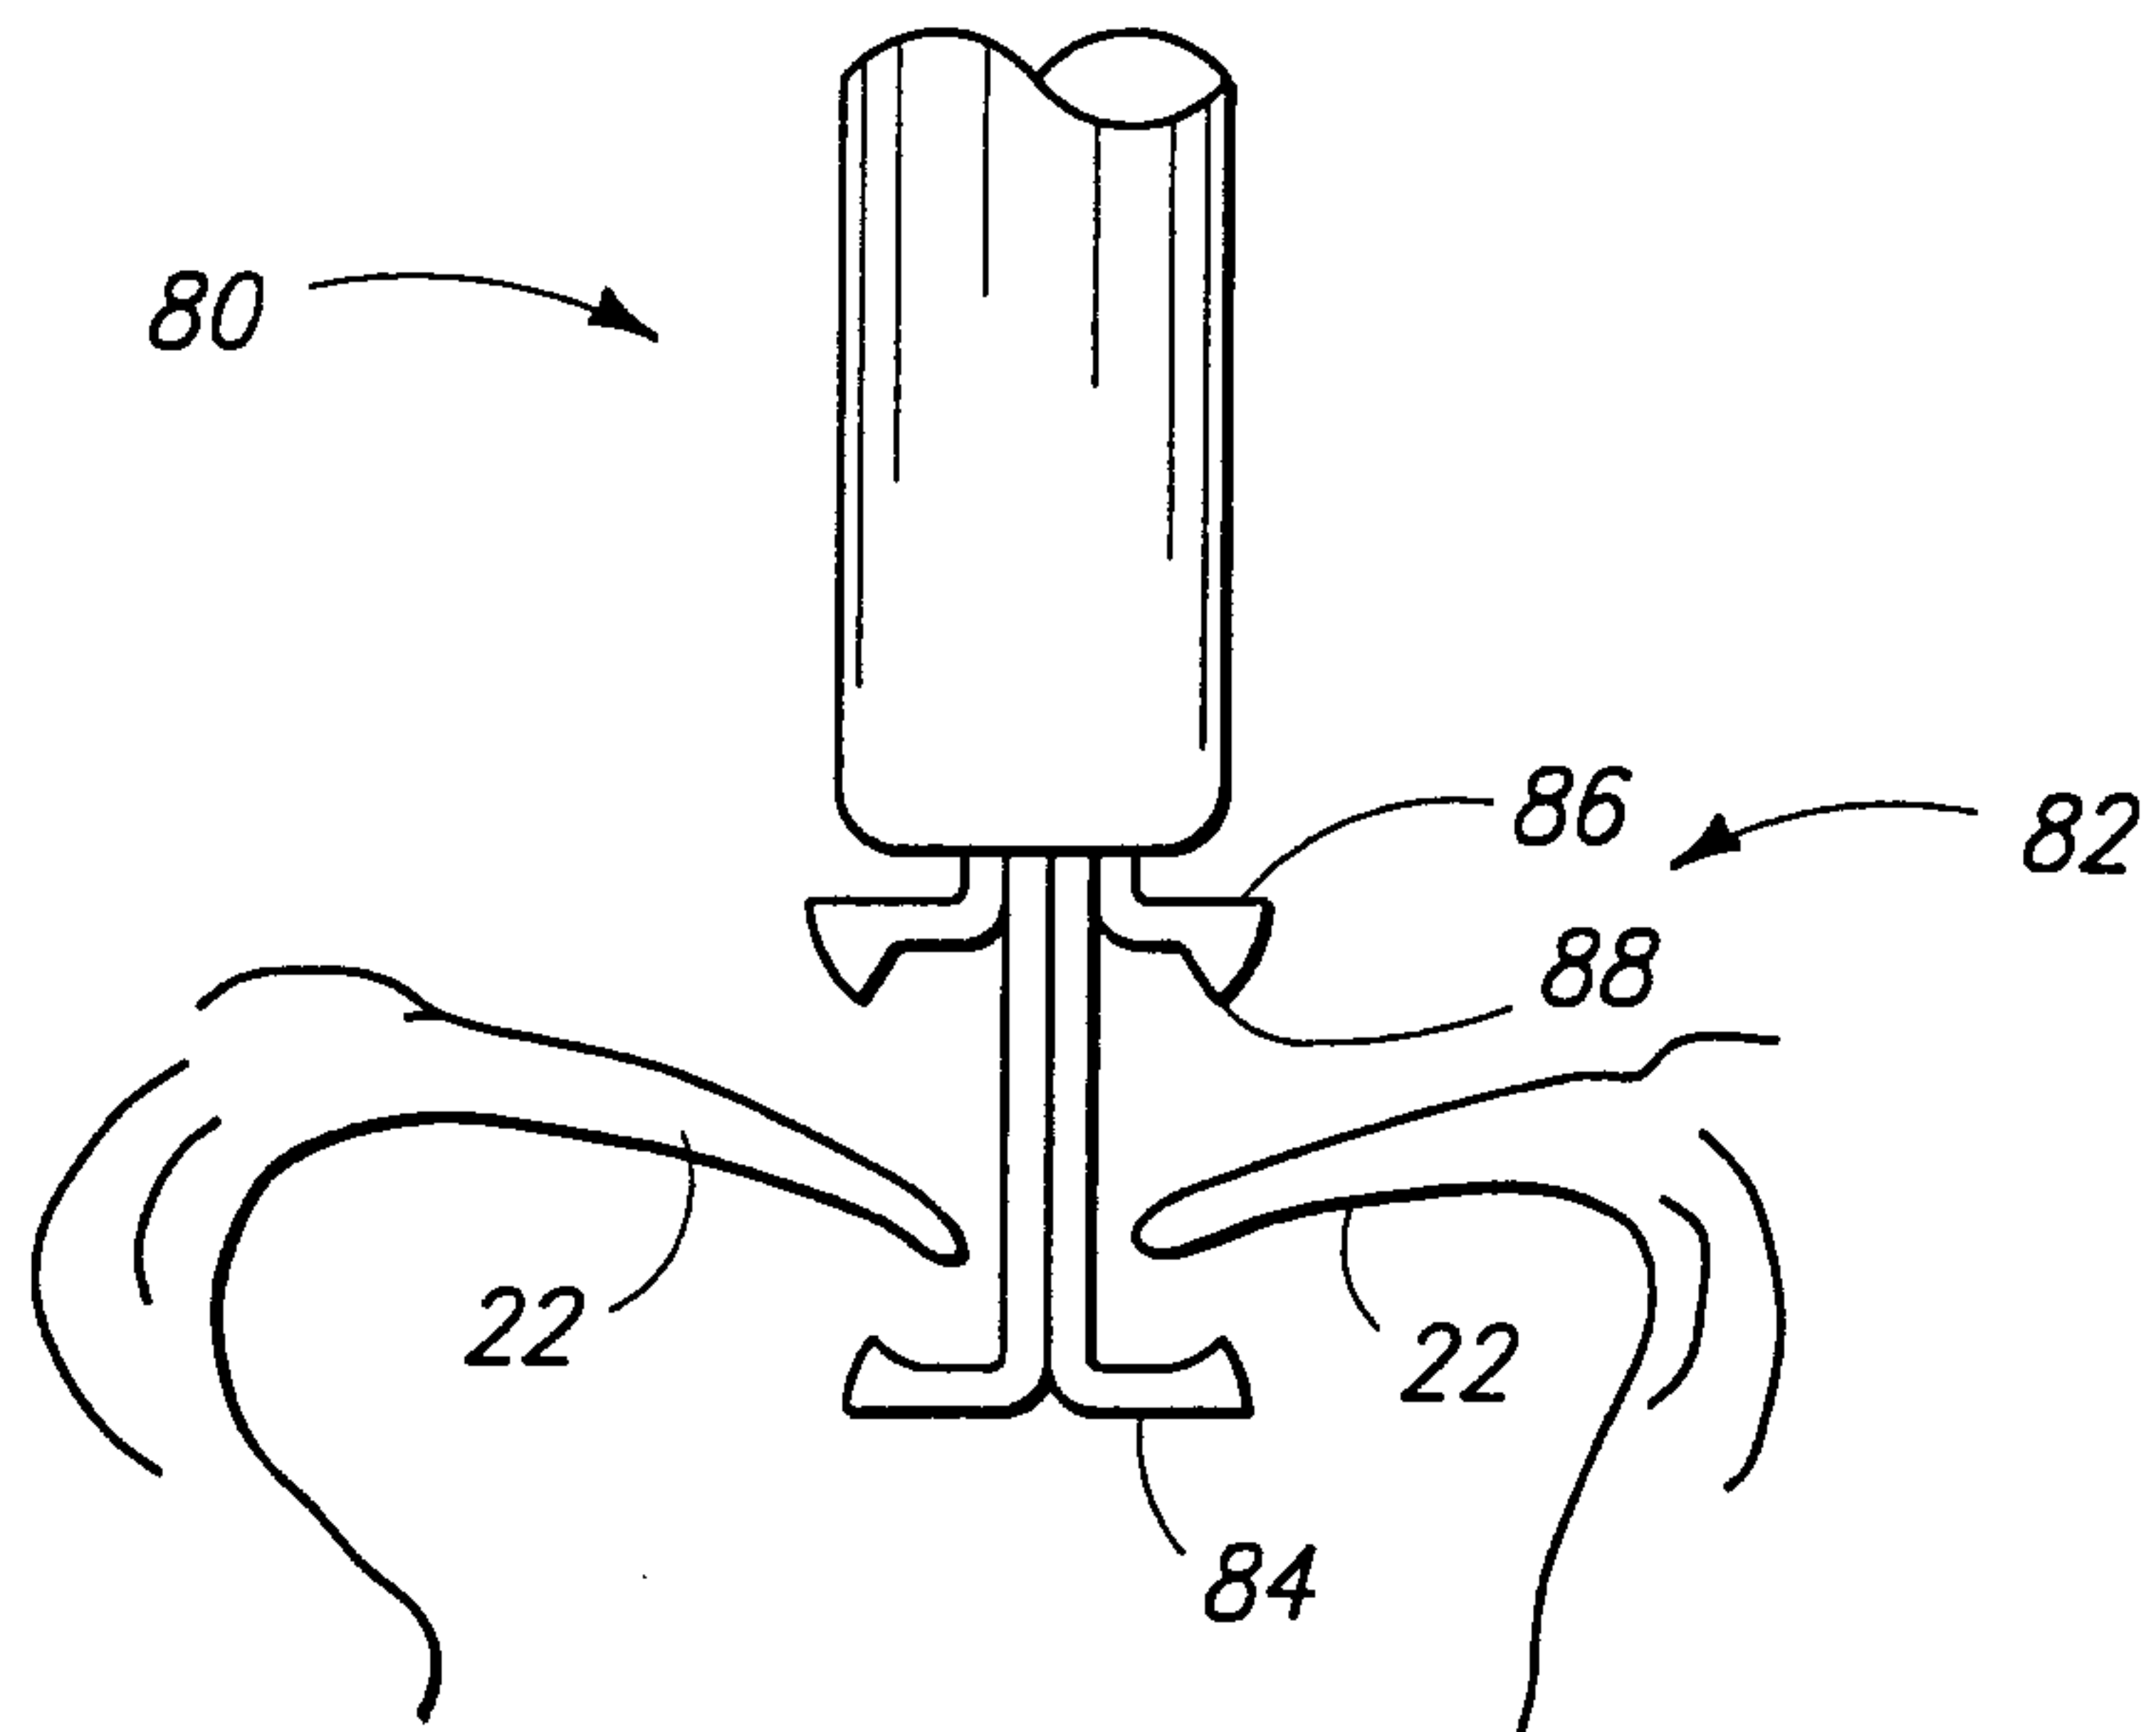


FIG. 4a

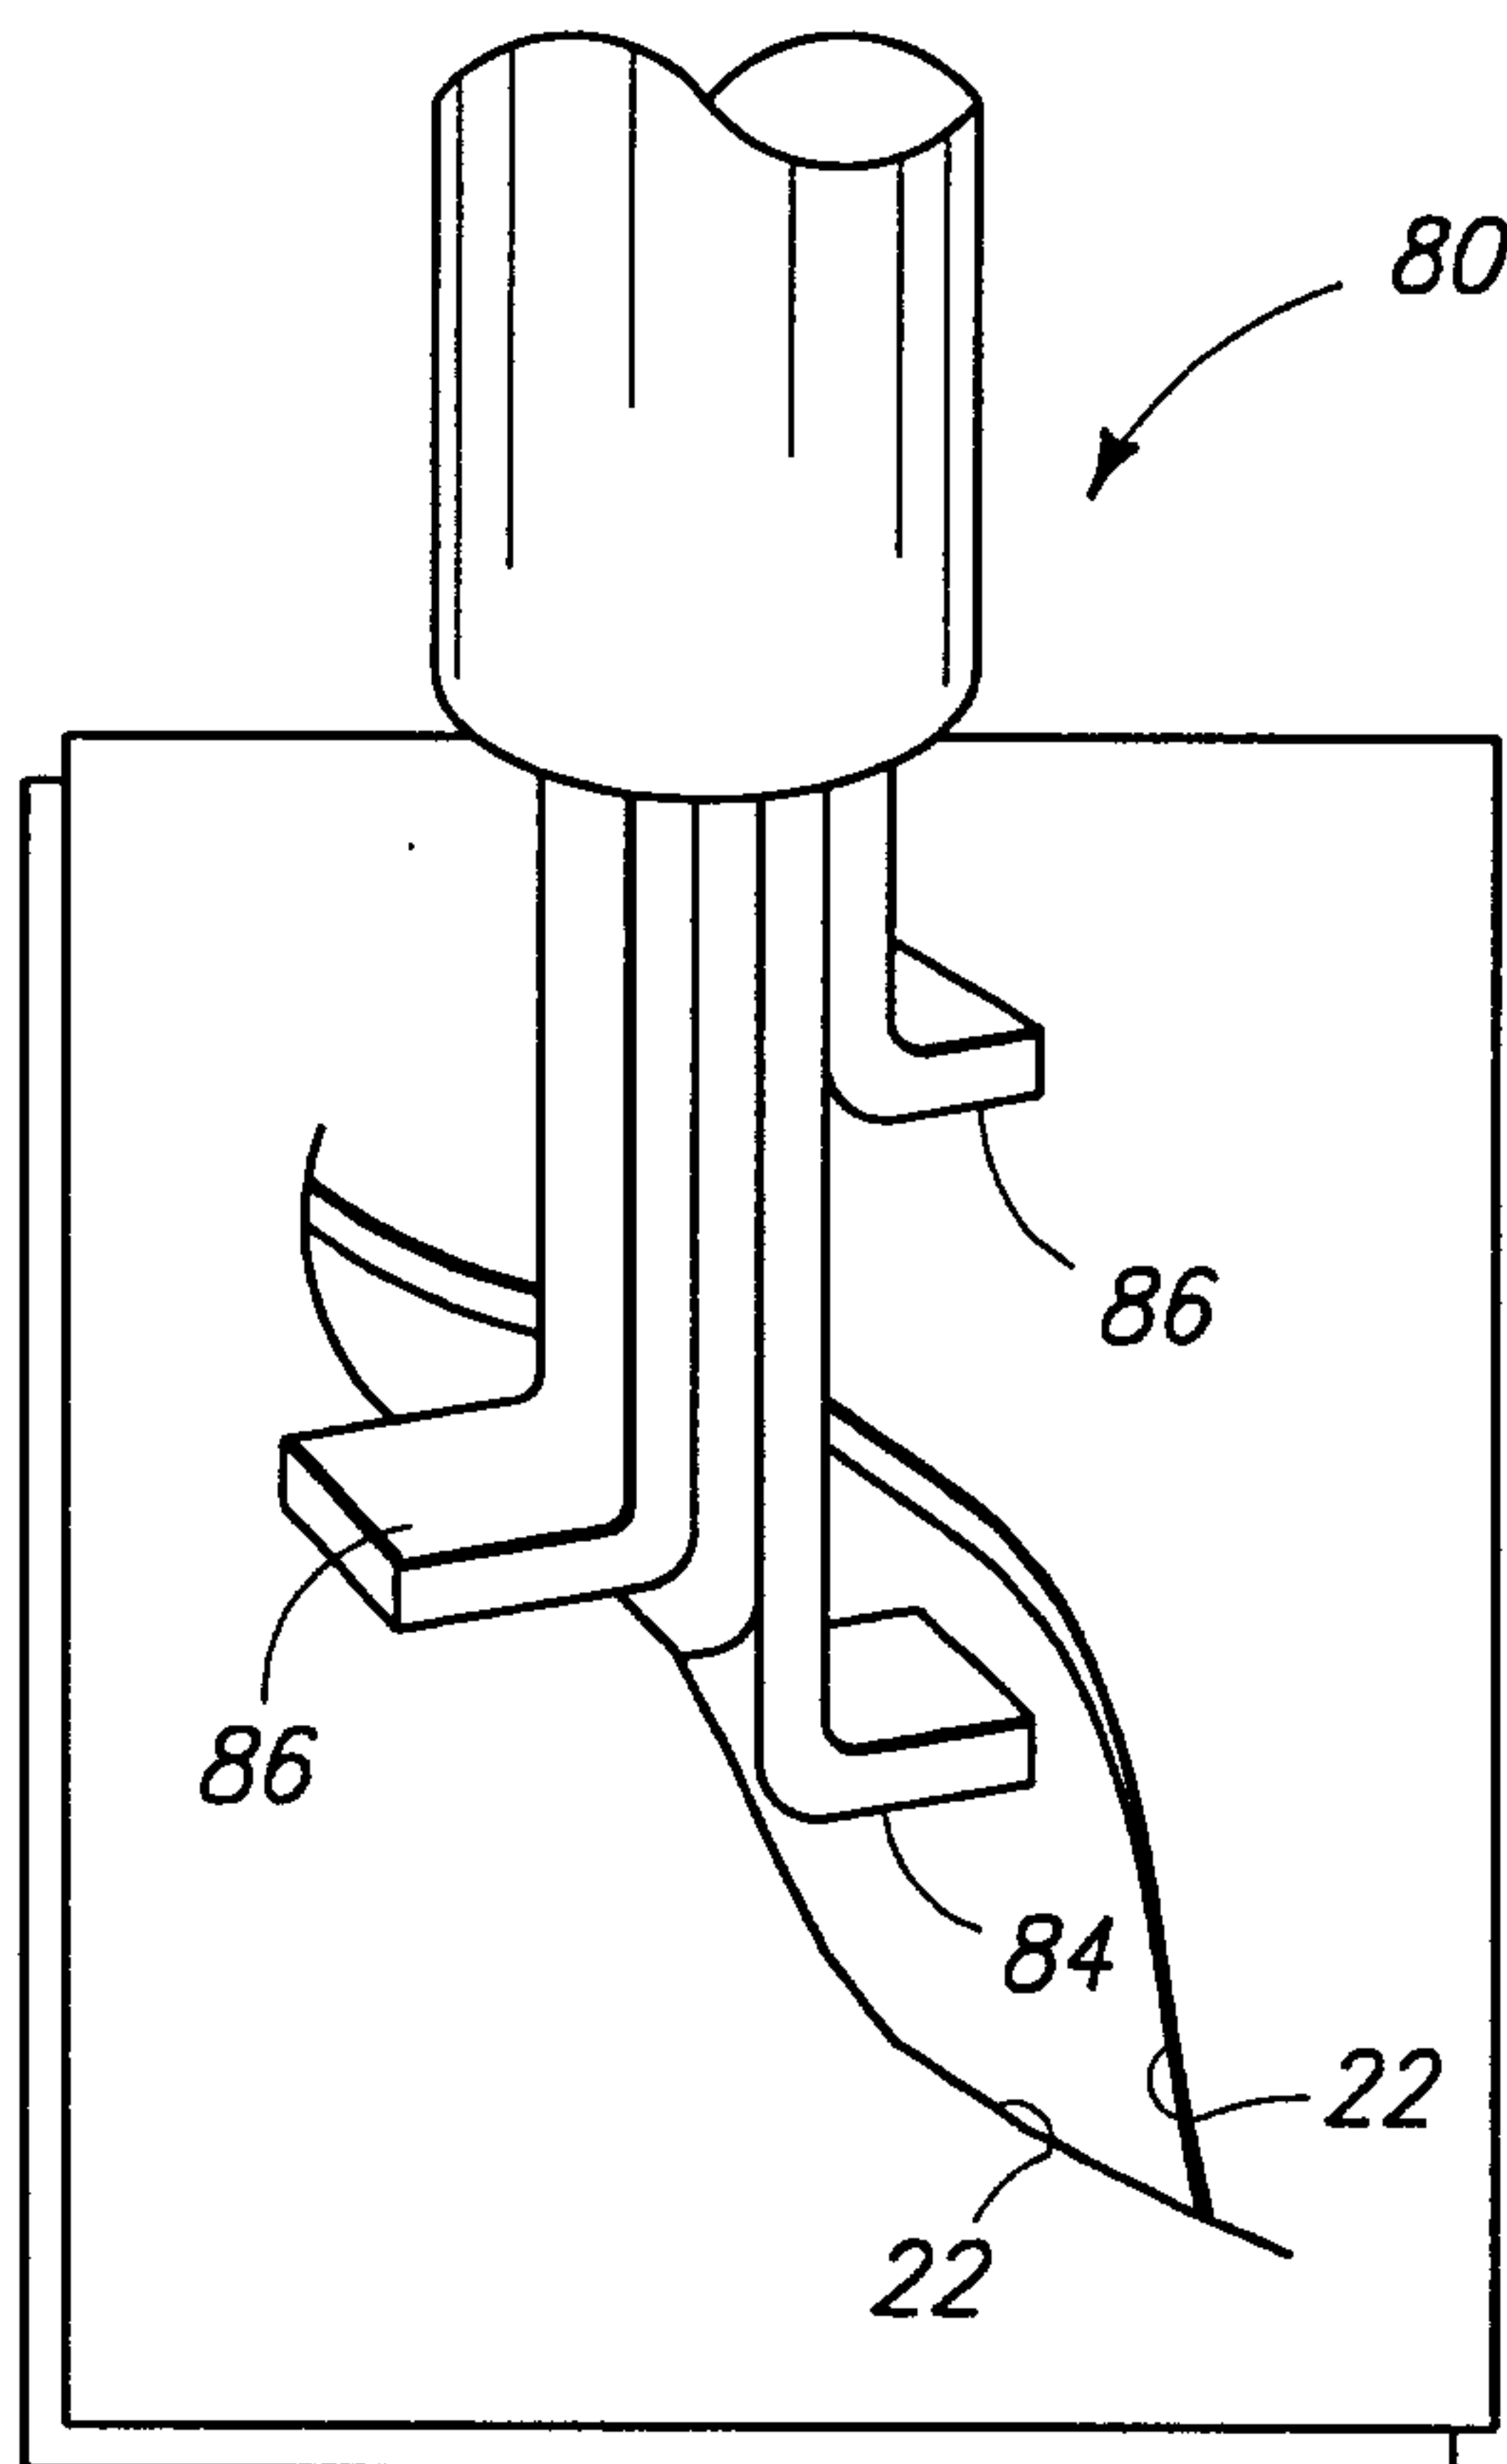


FIG. 4c

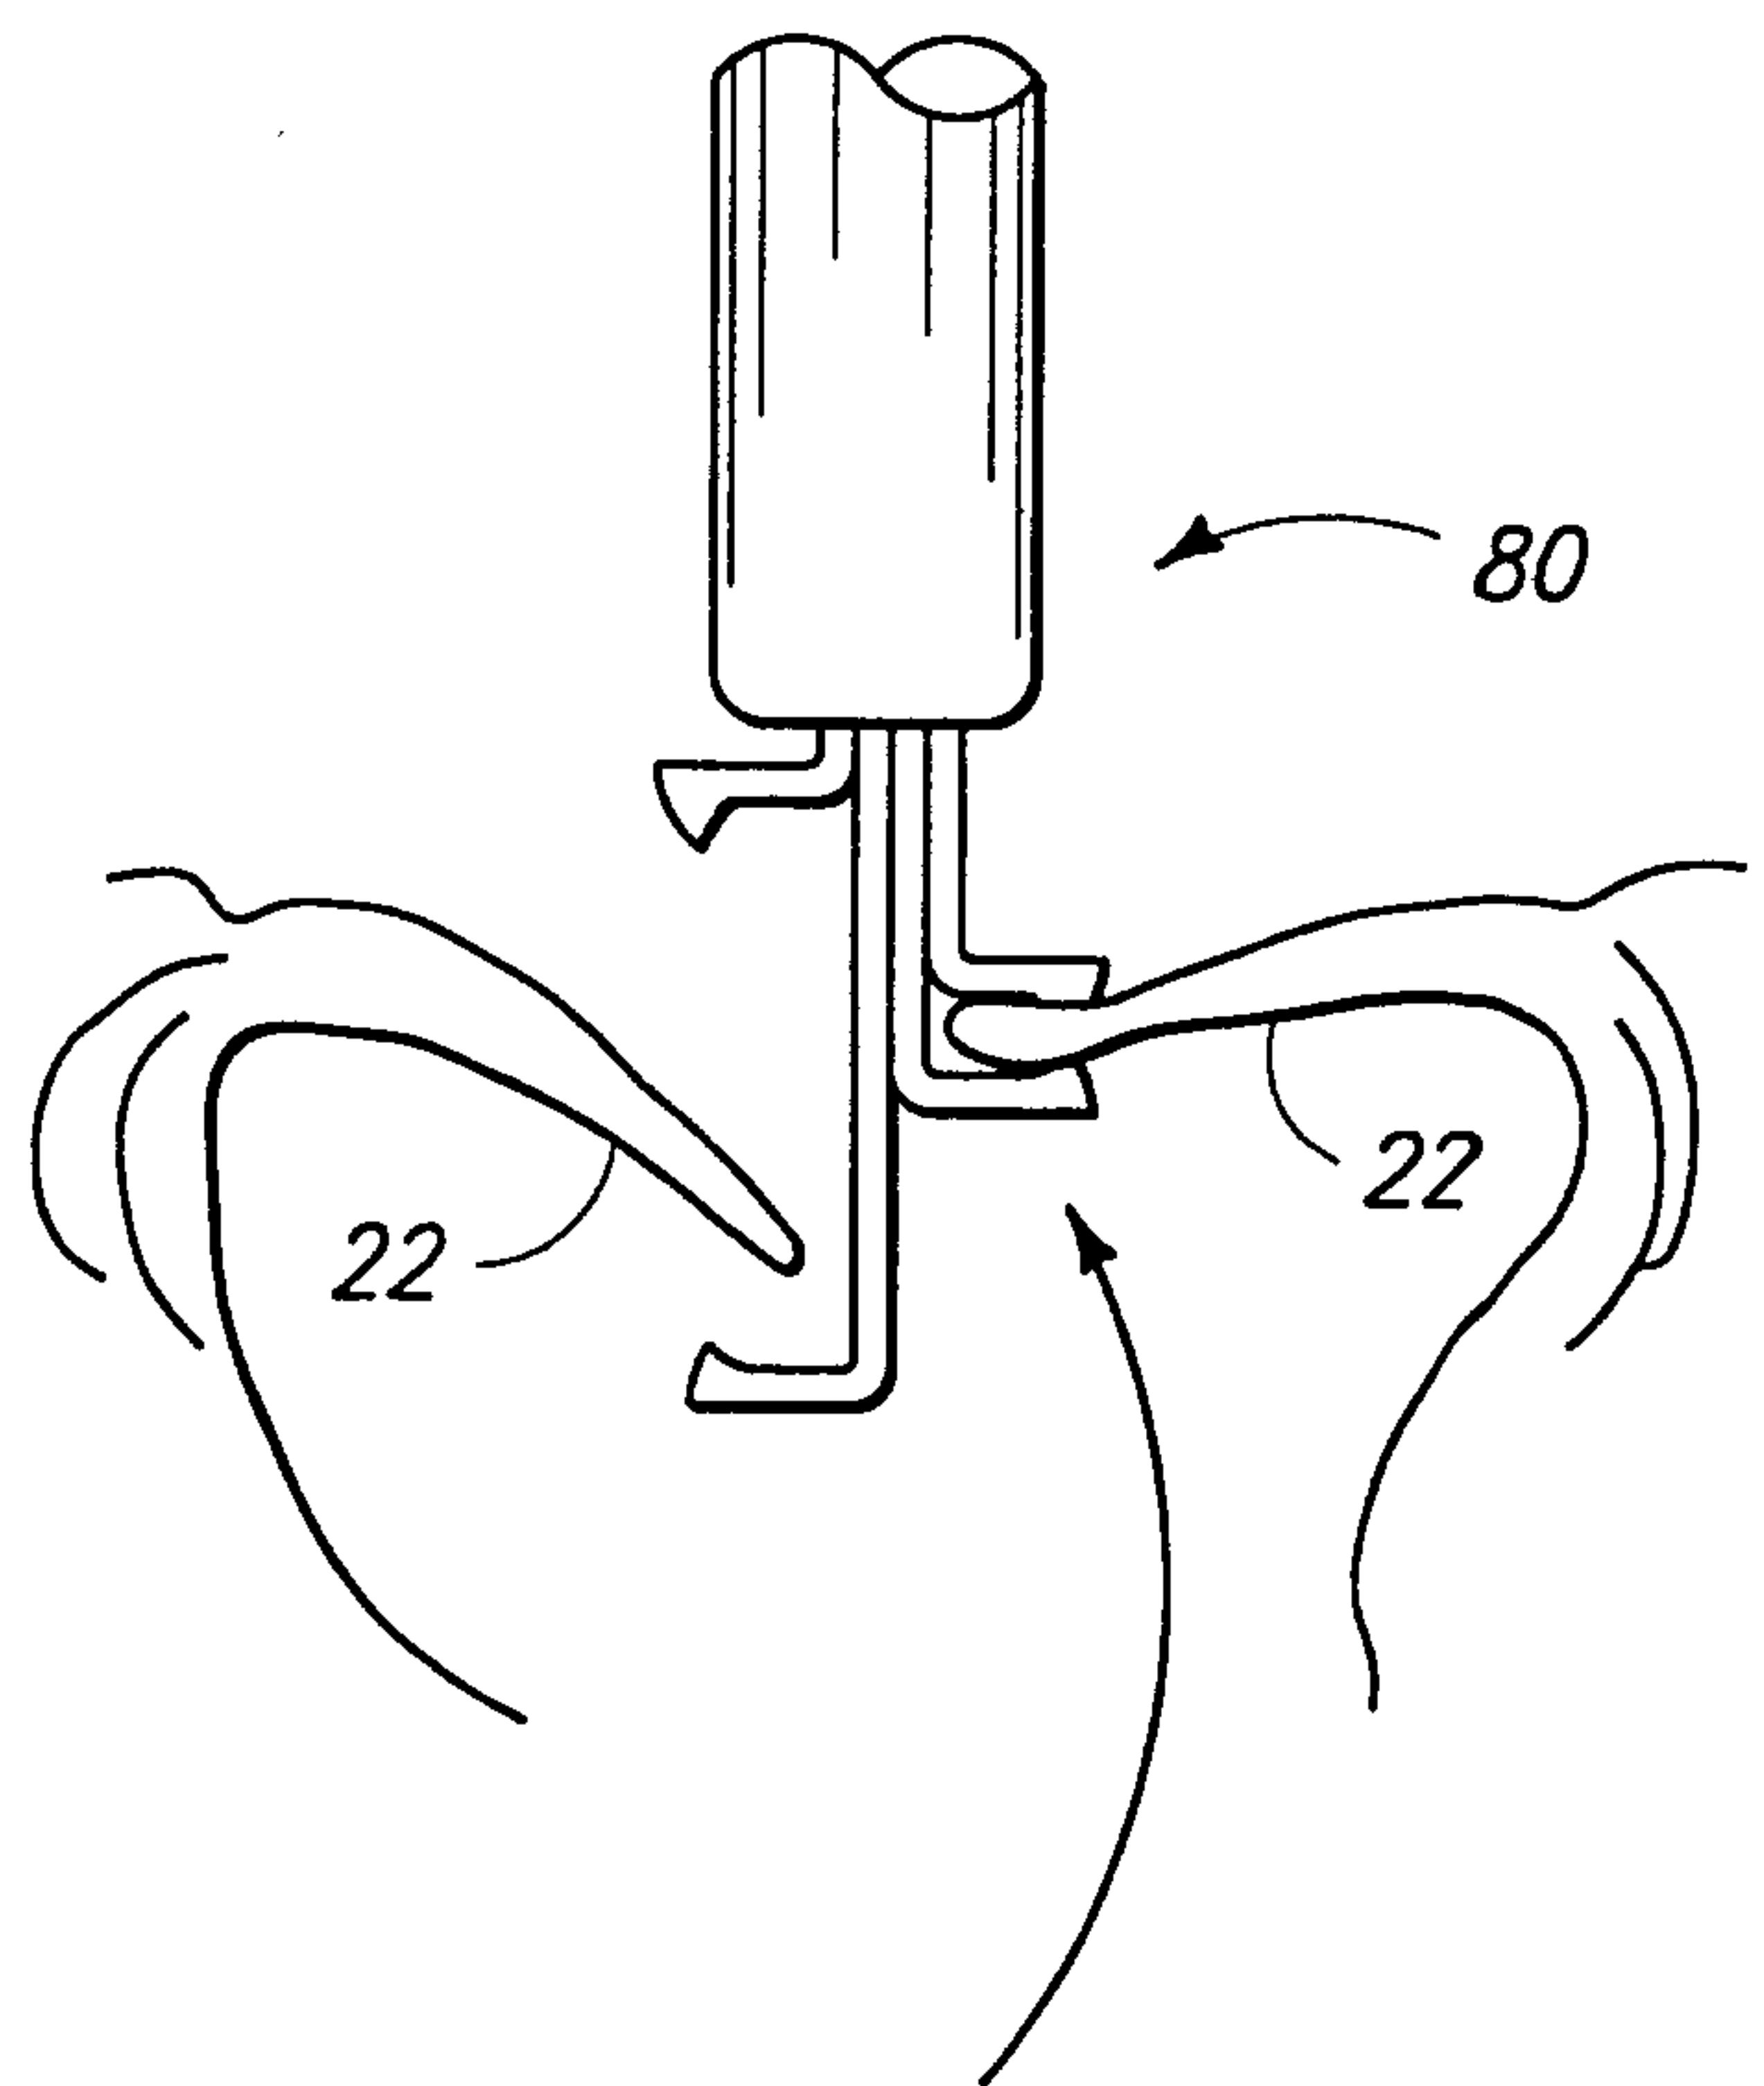


FIG. 4b

4/45

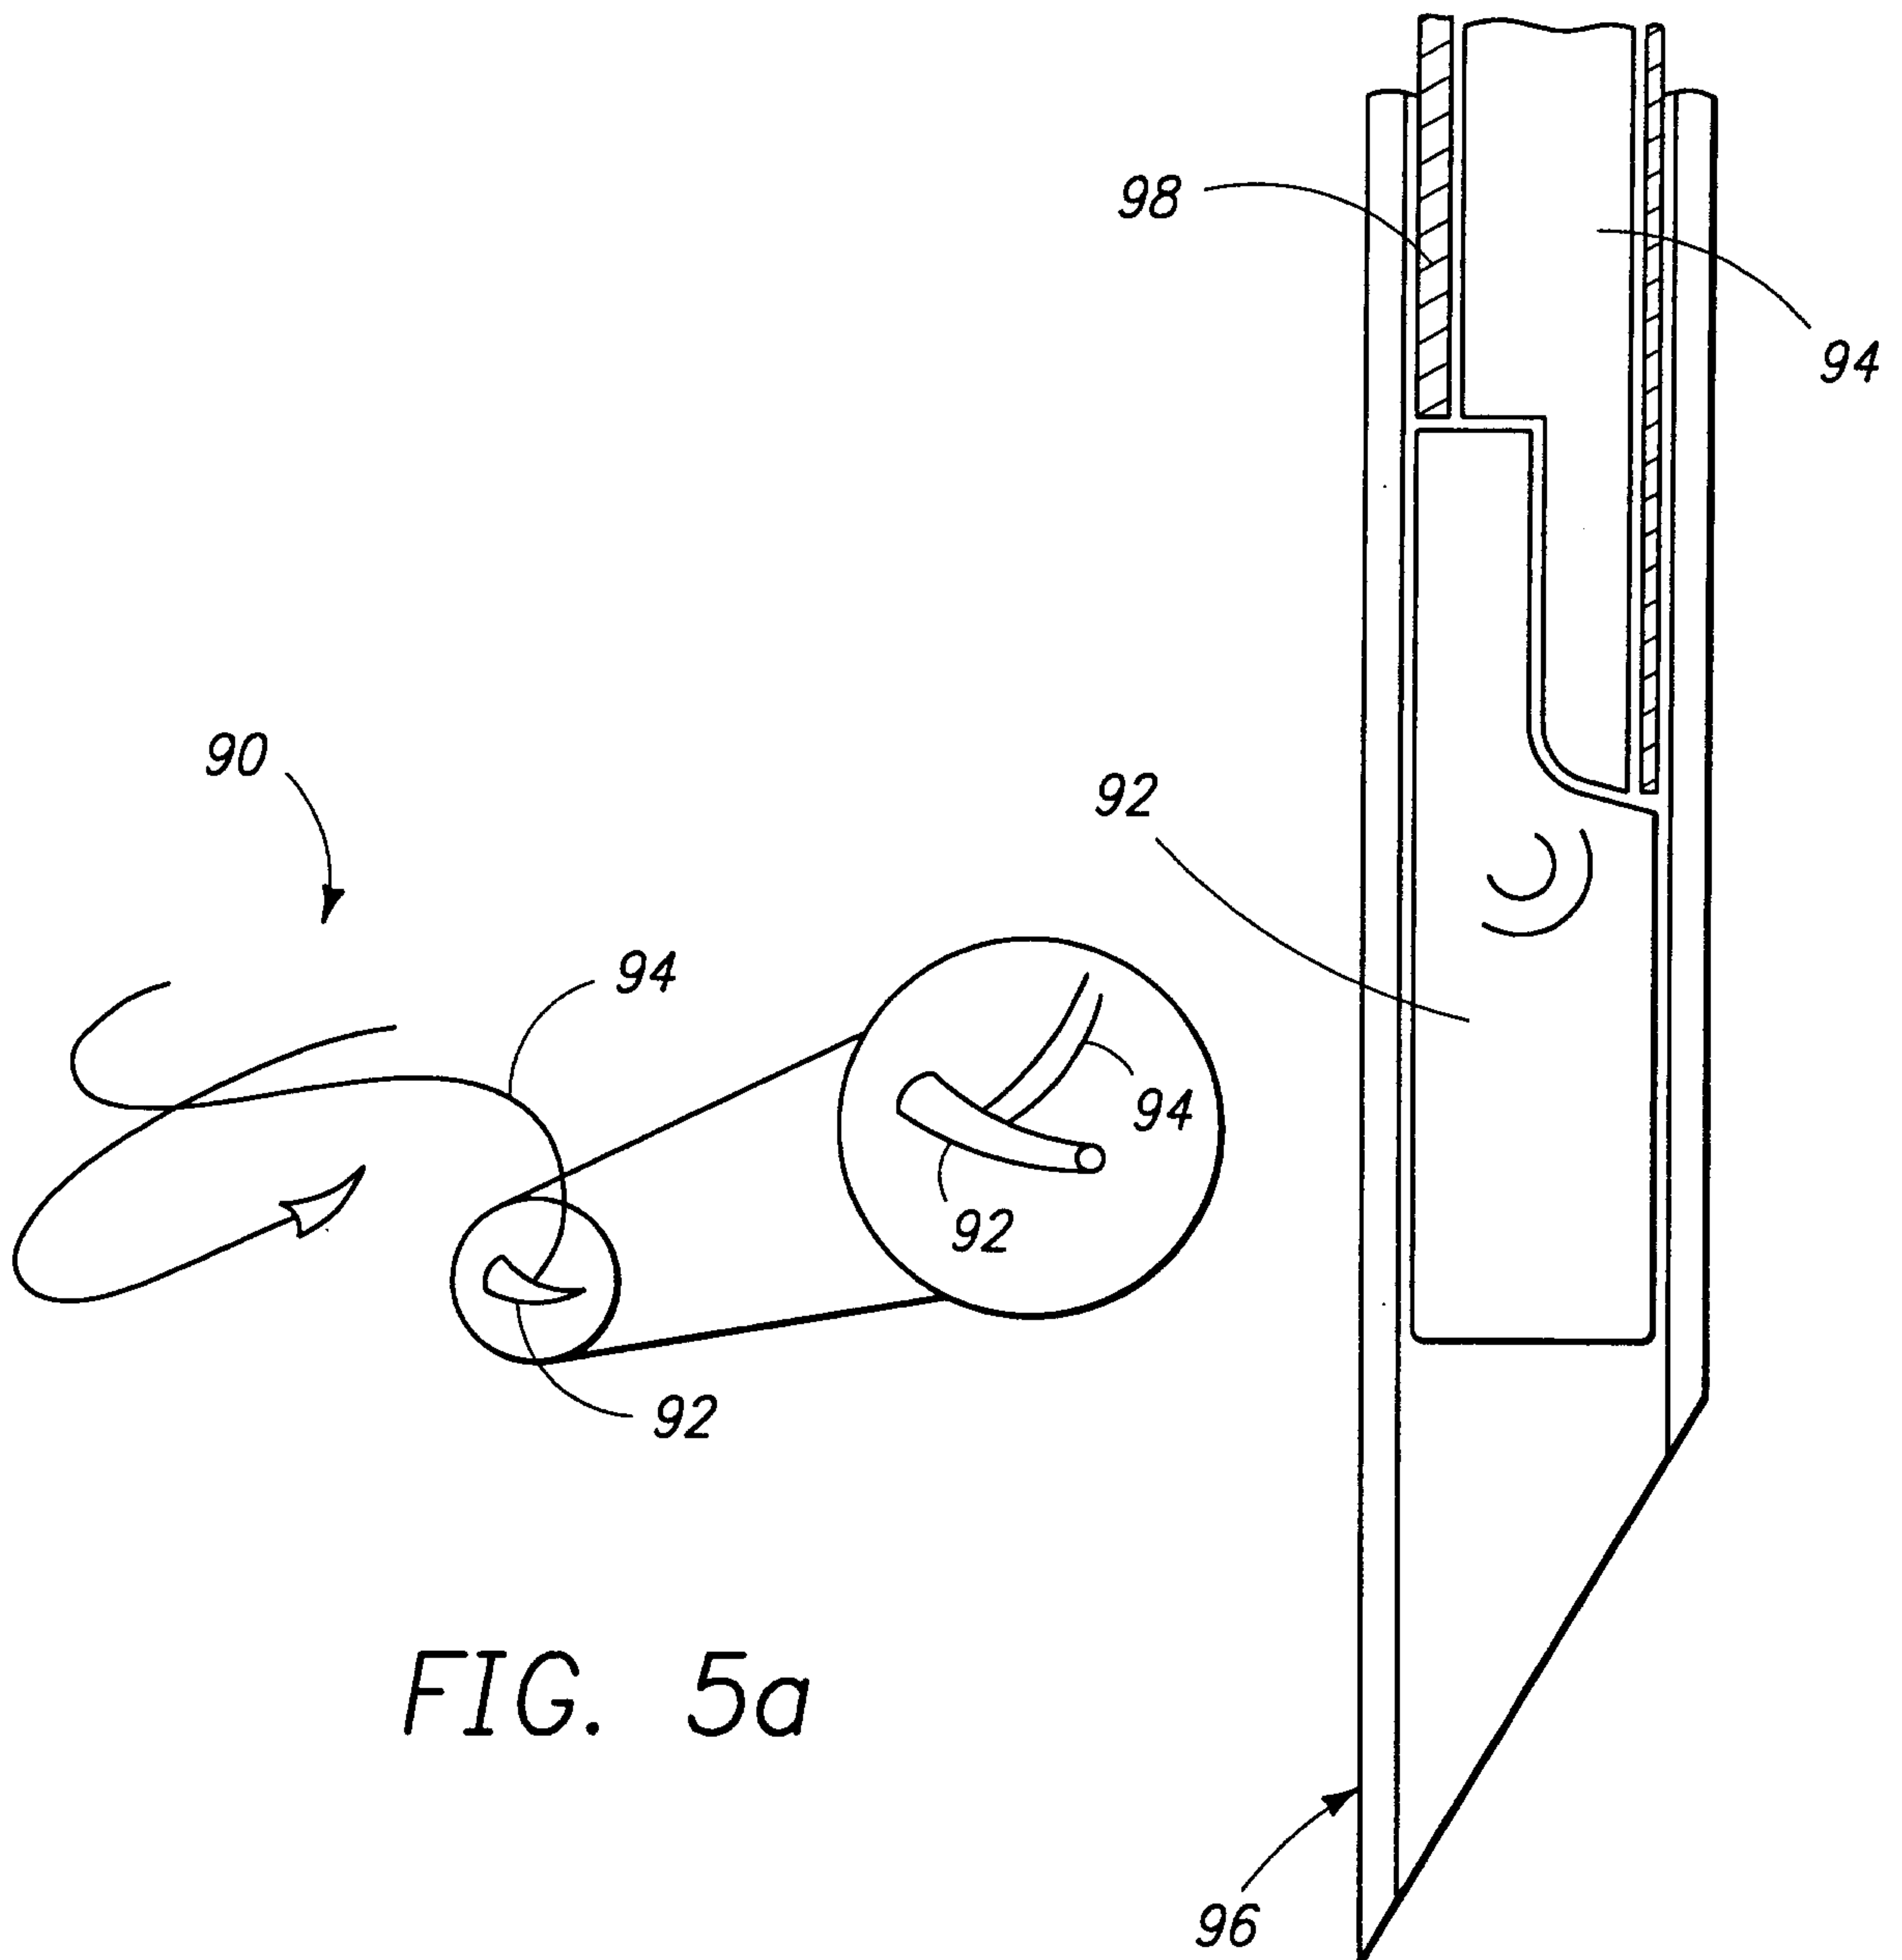
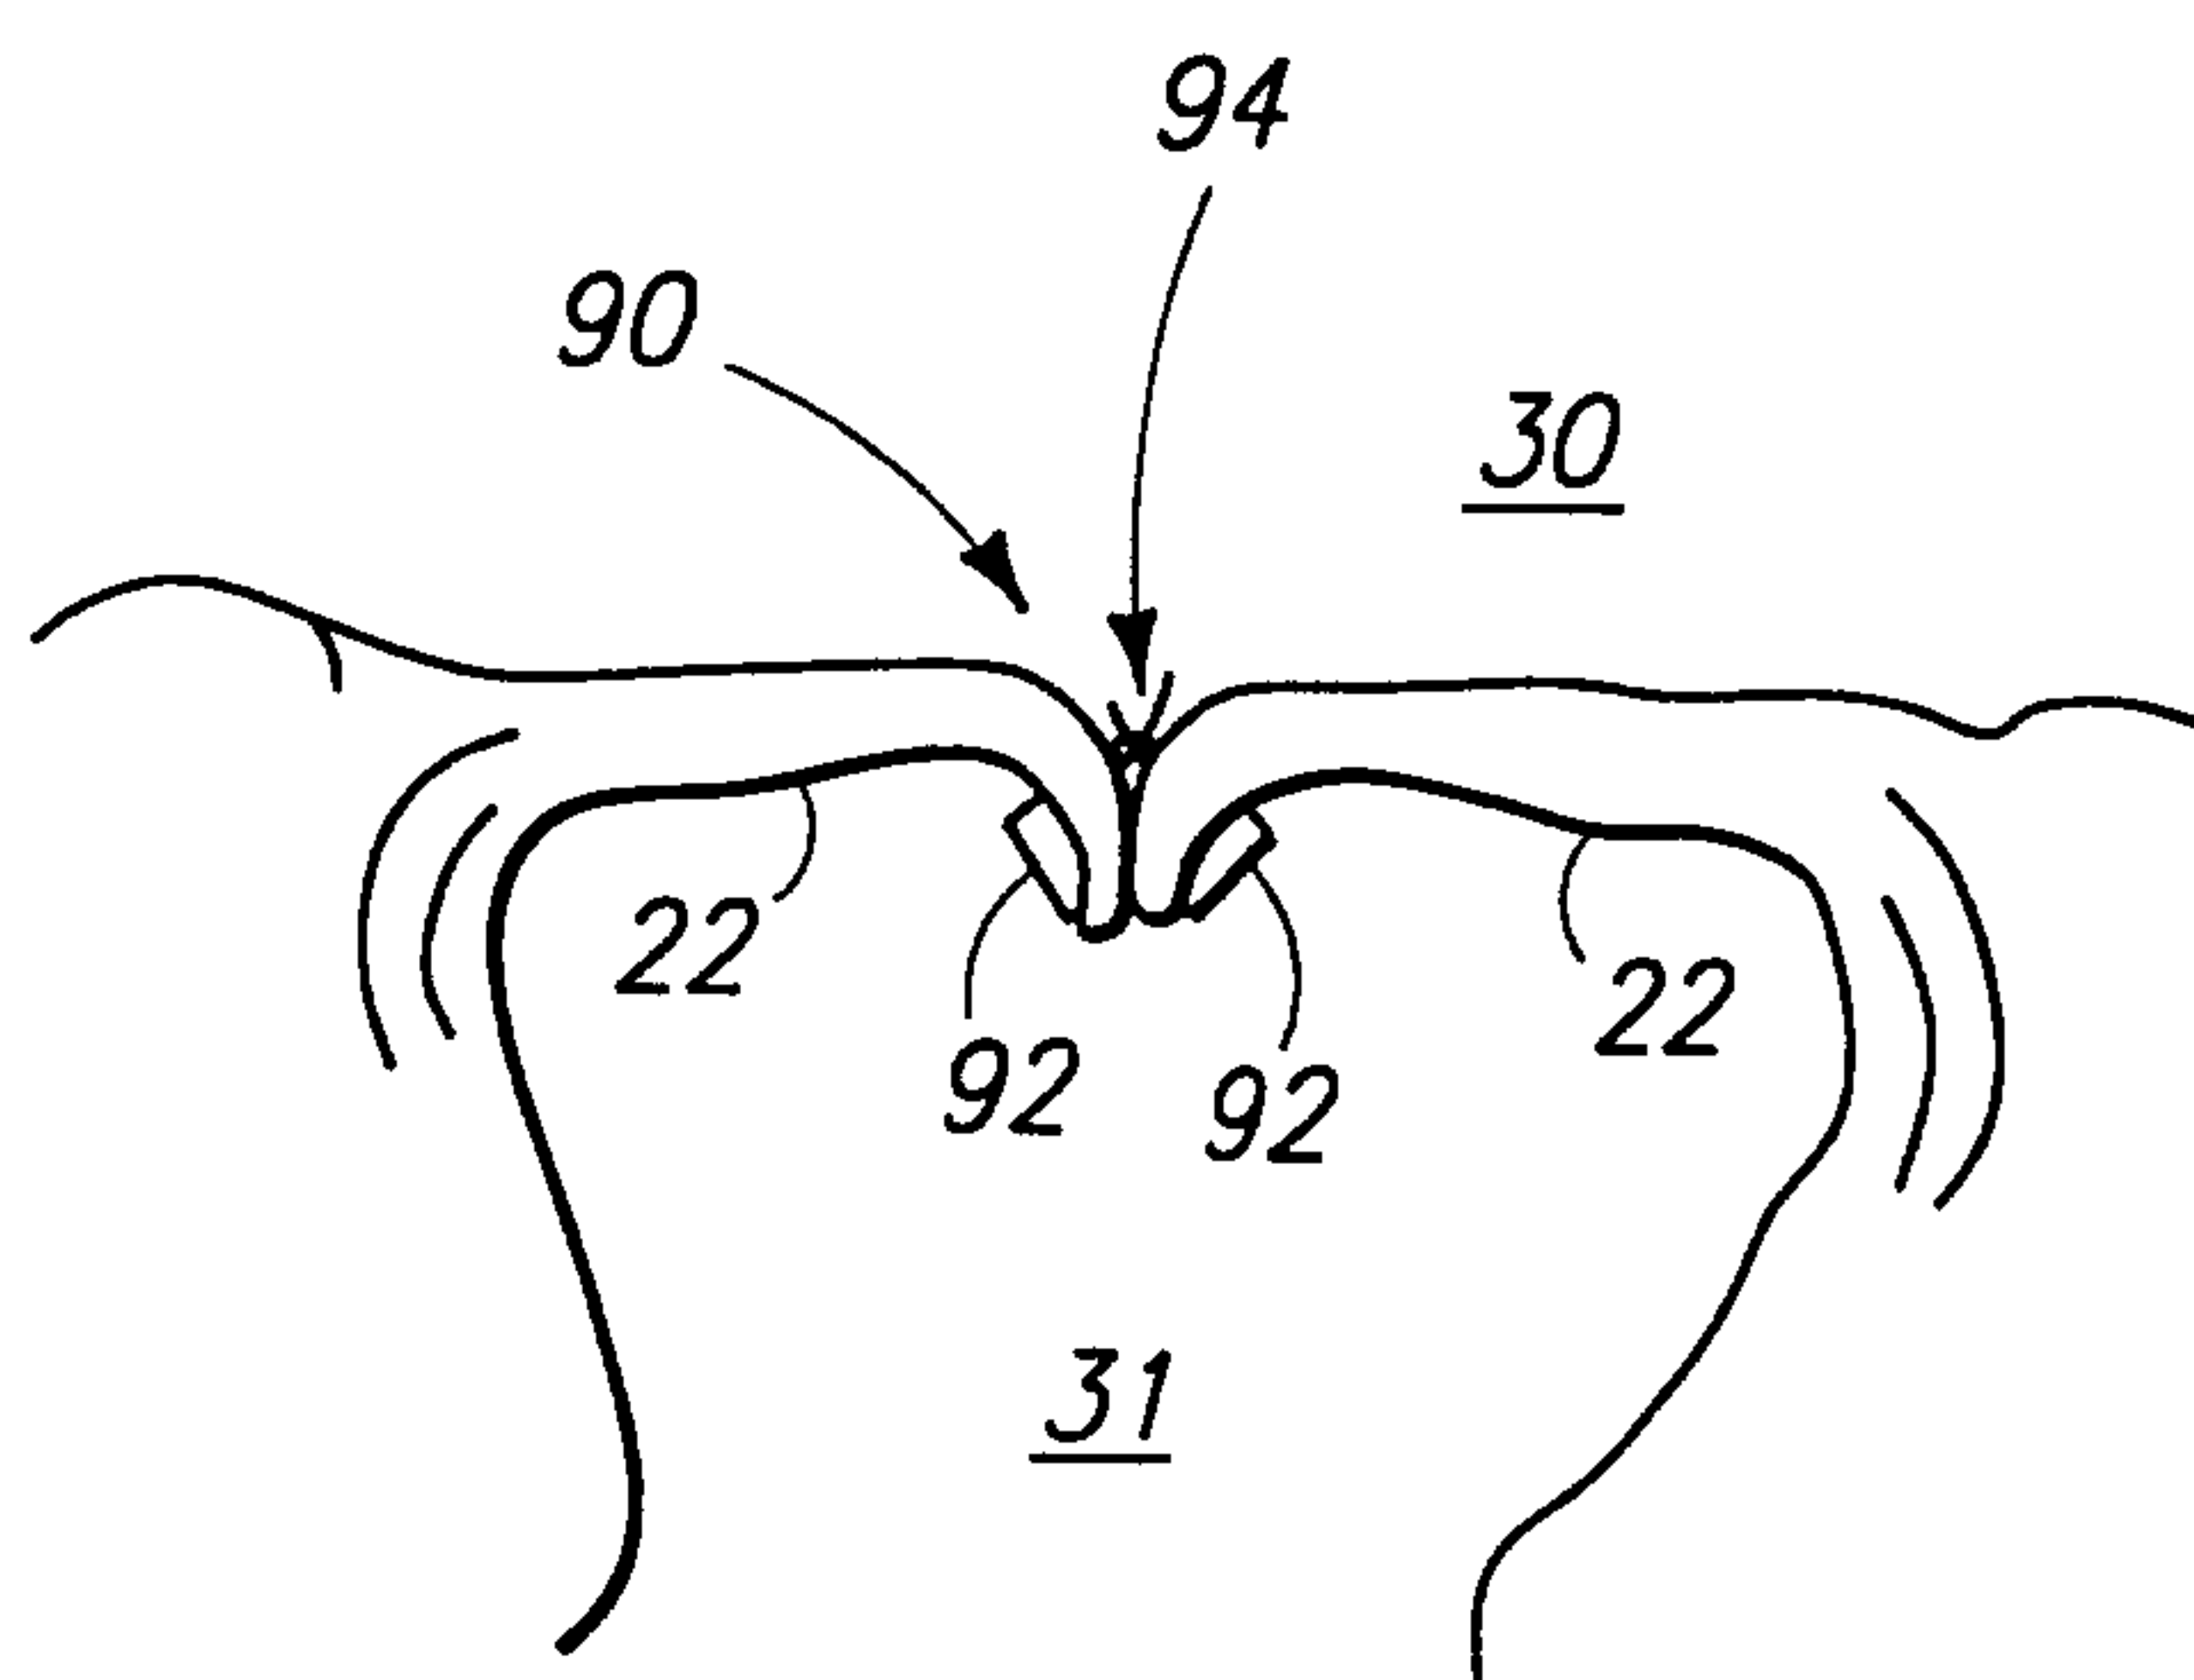
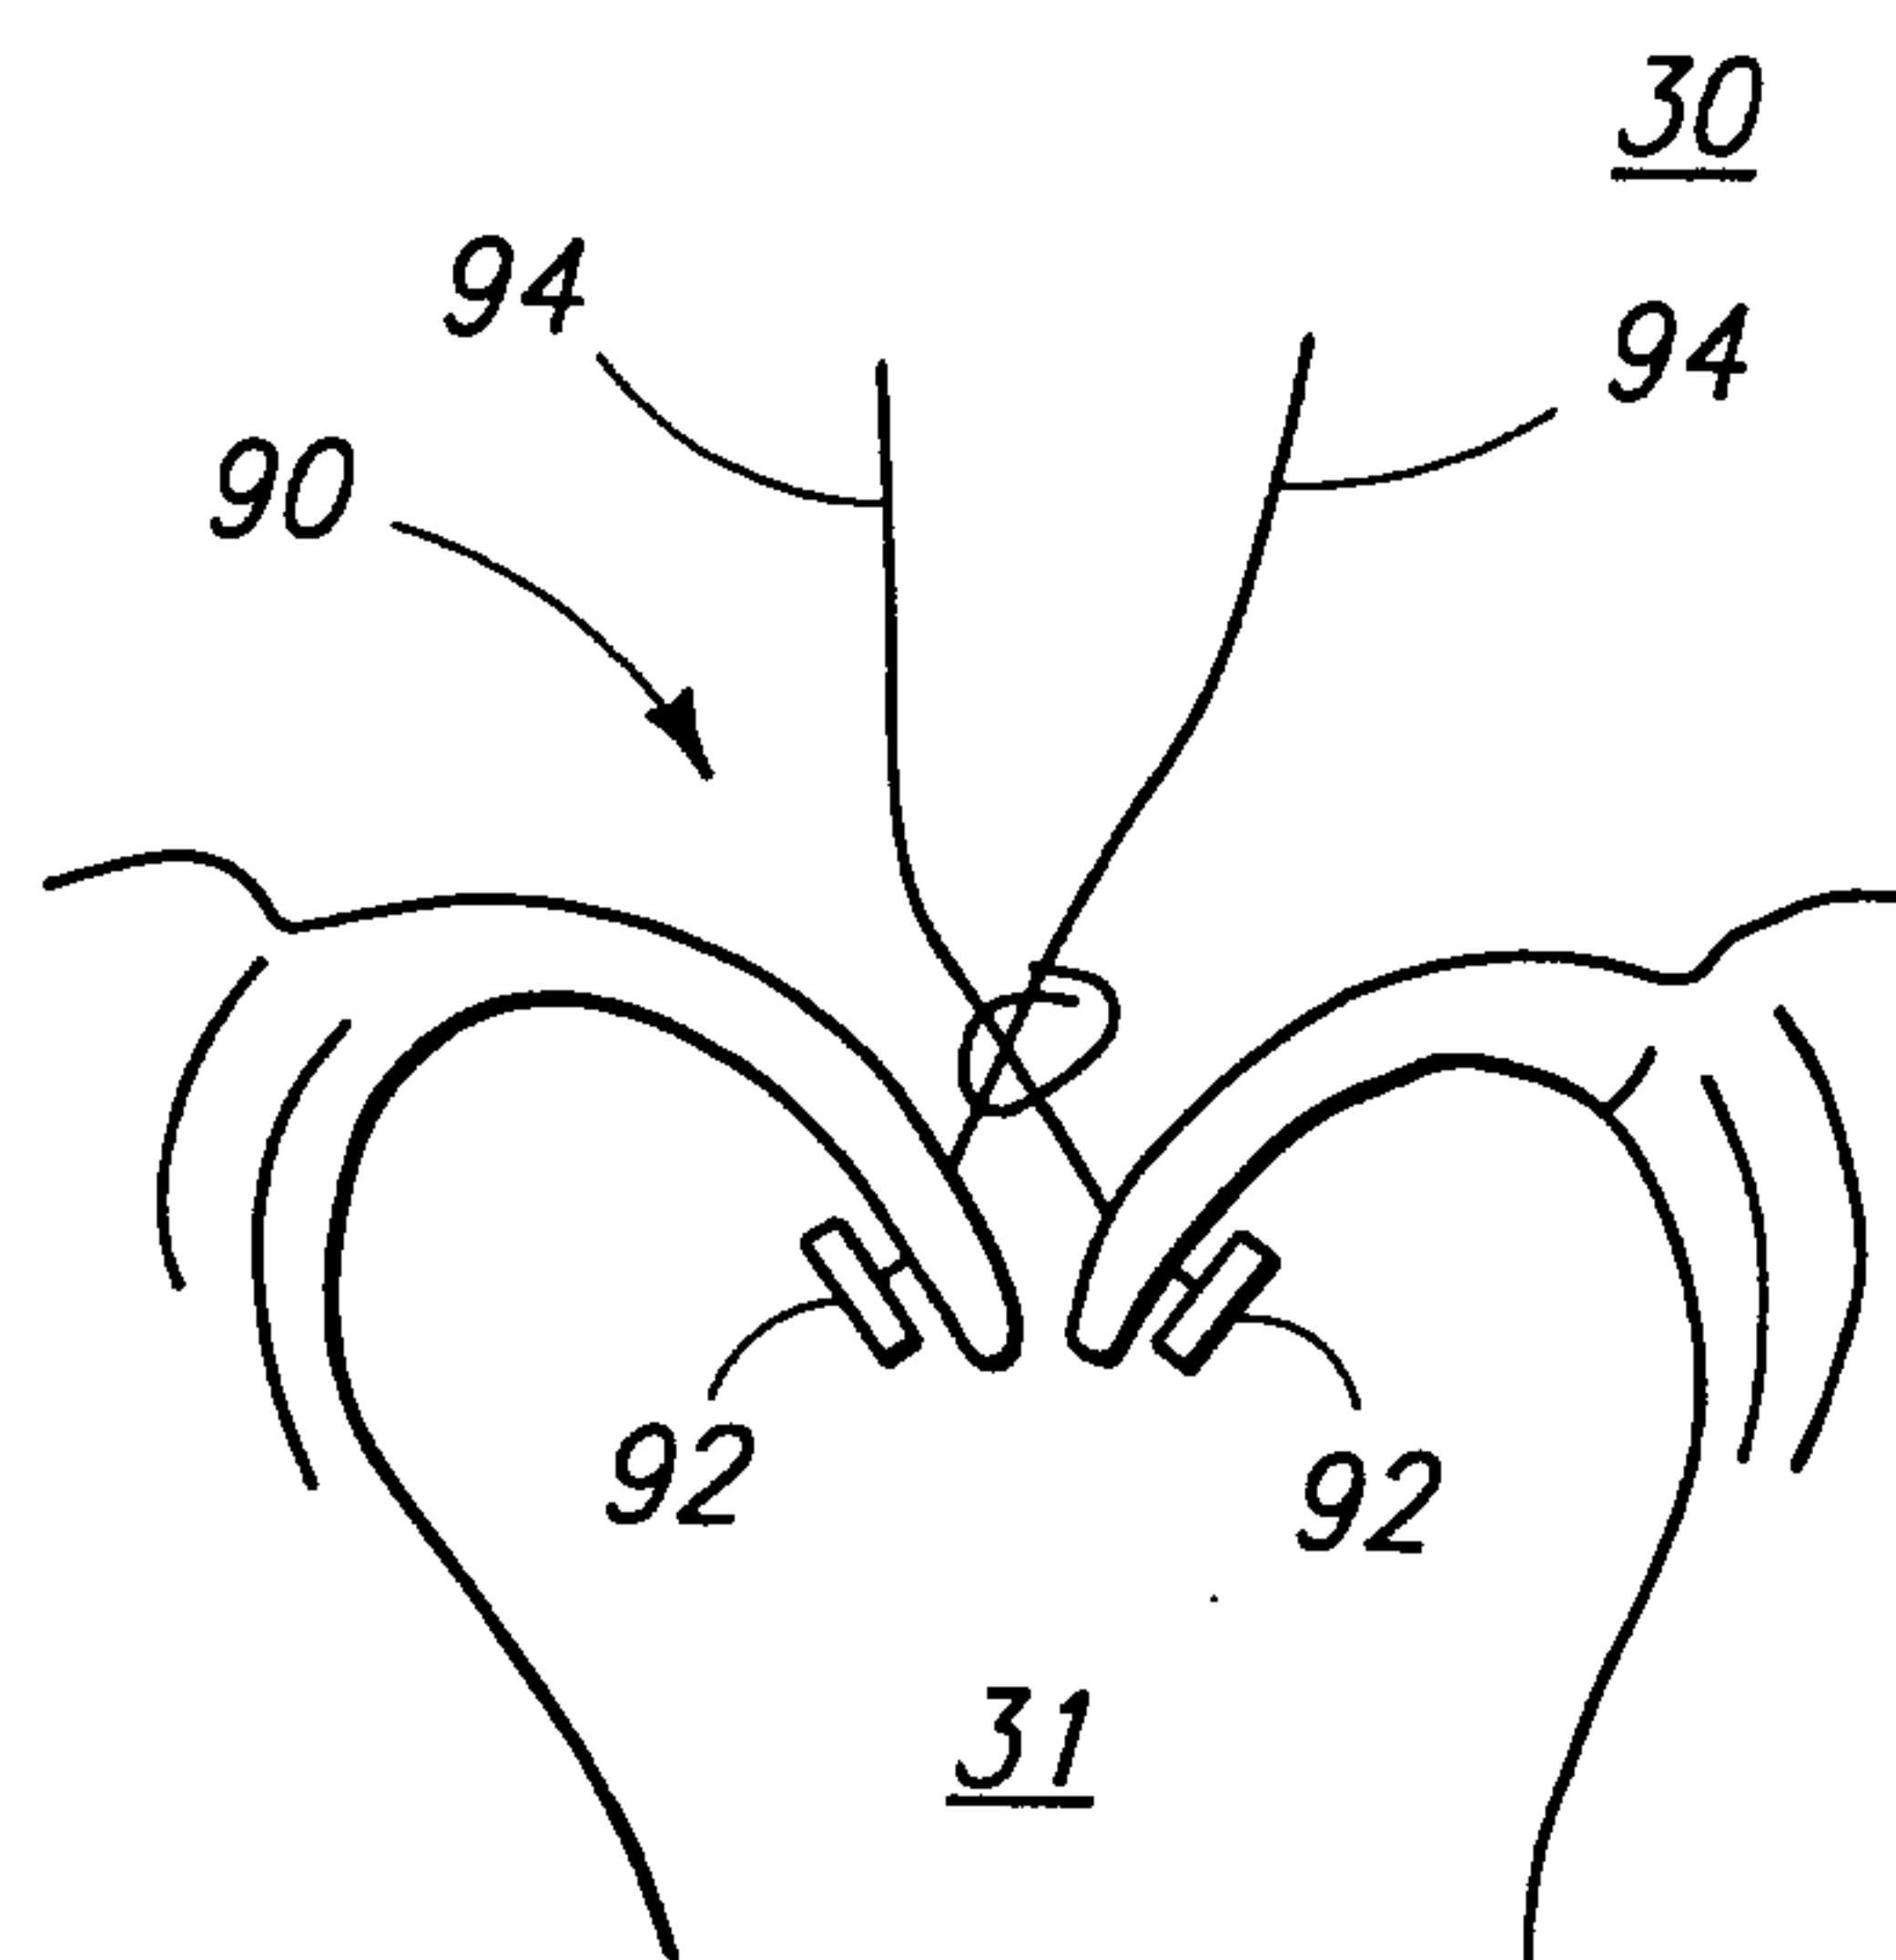
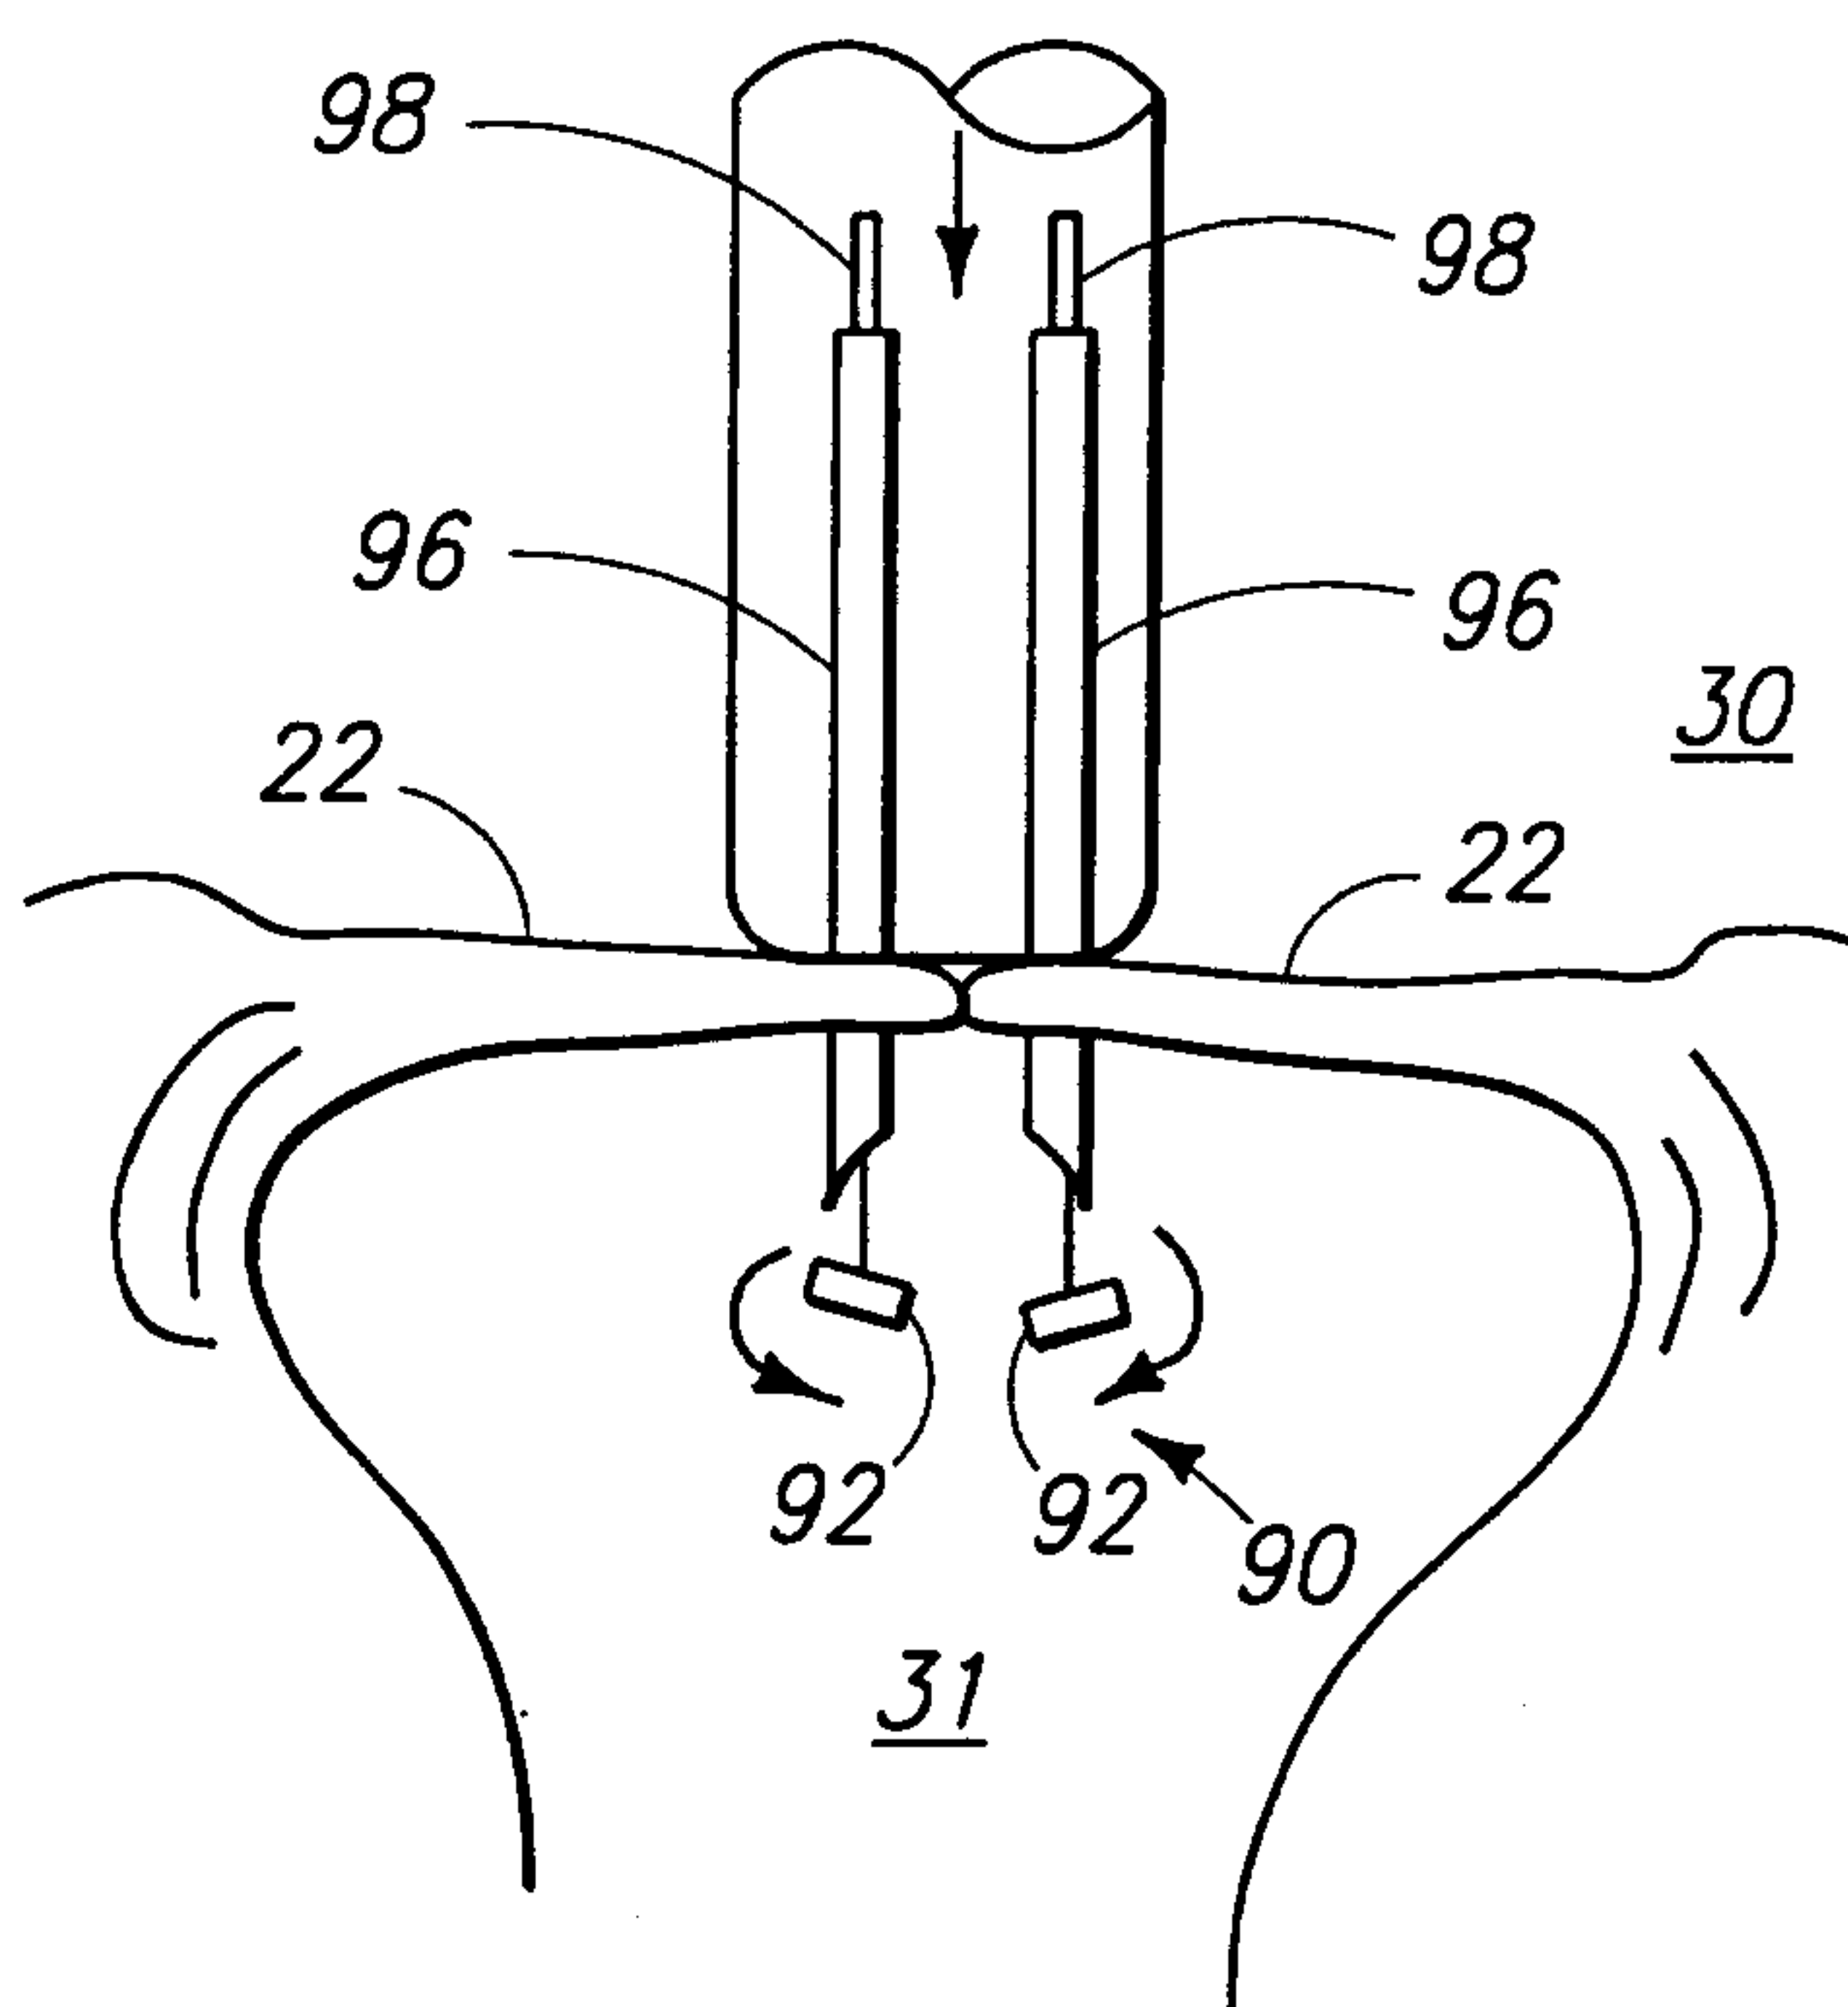


FIG. 5a

FIG. 5b

5/45



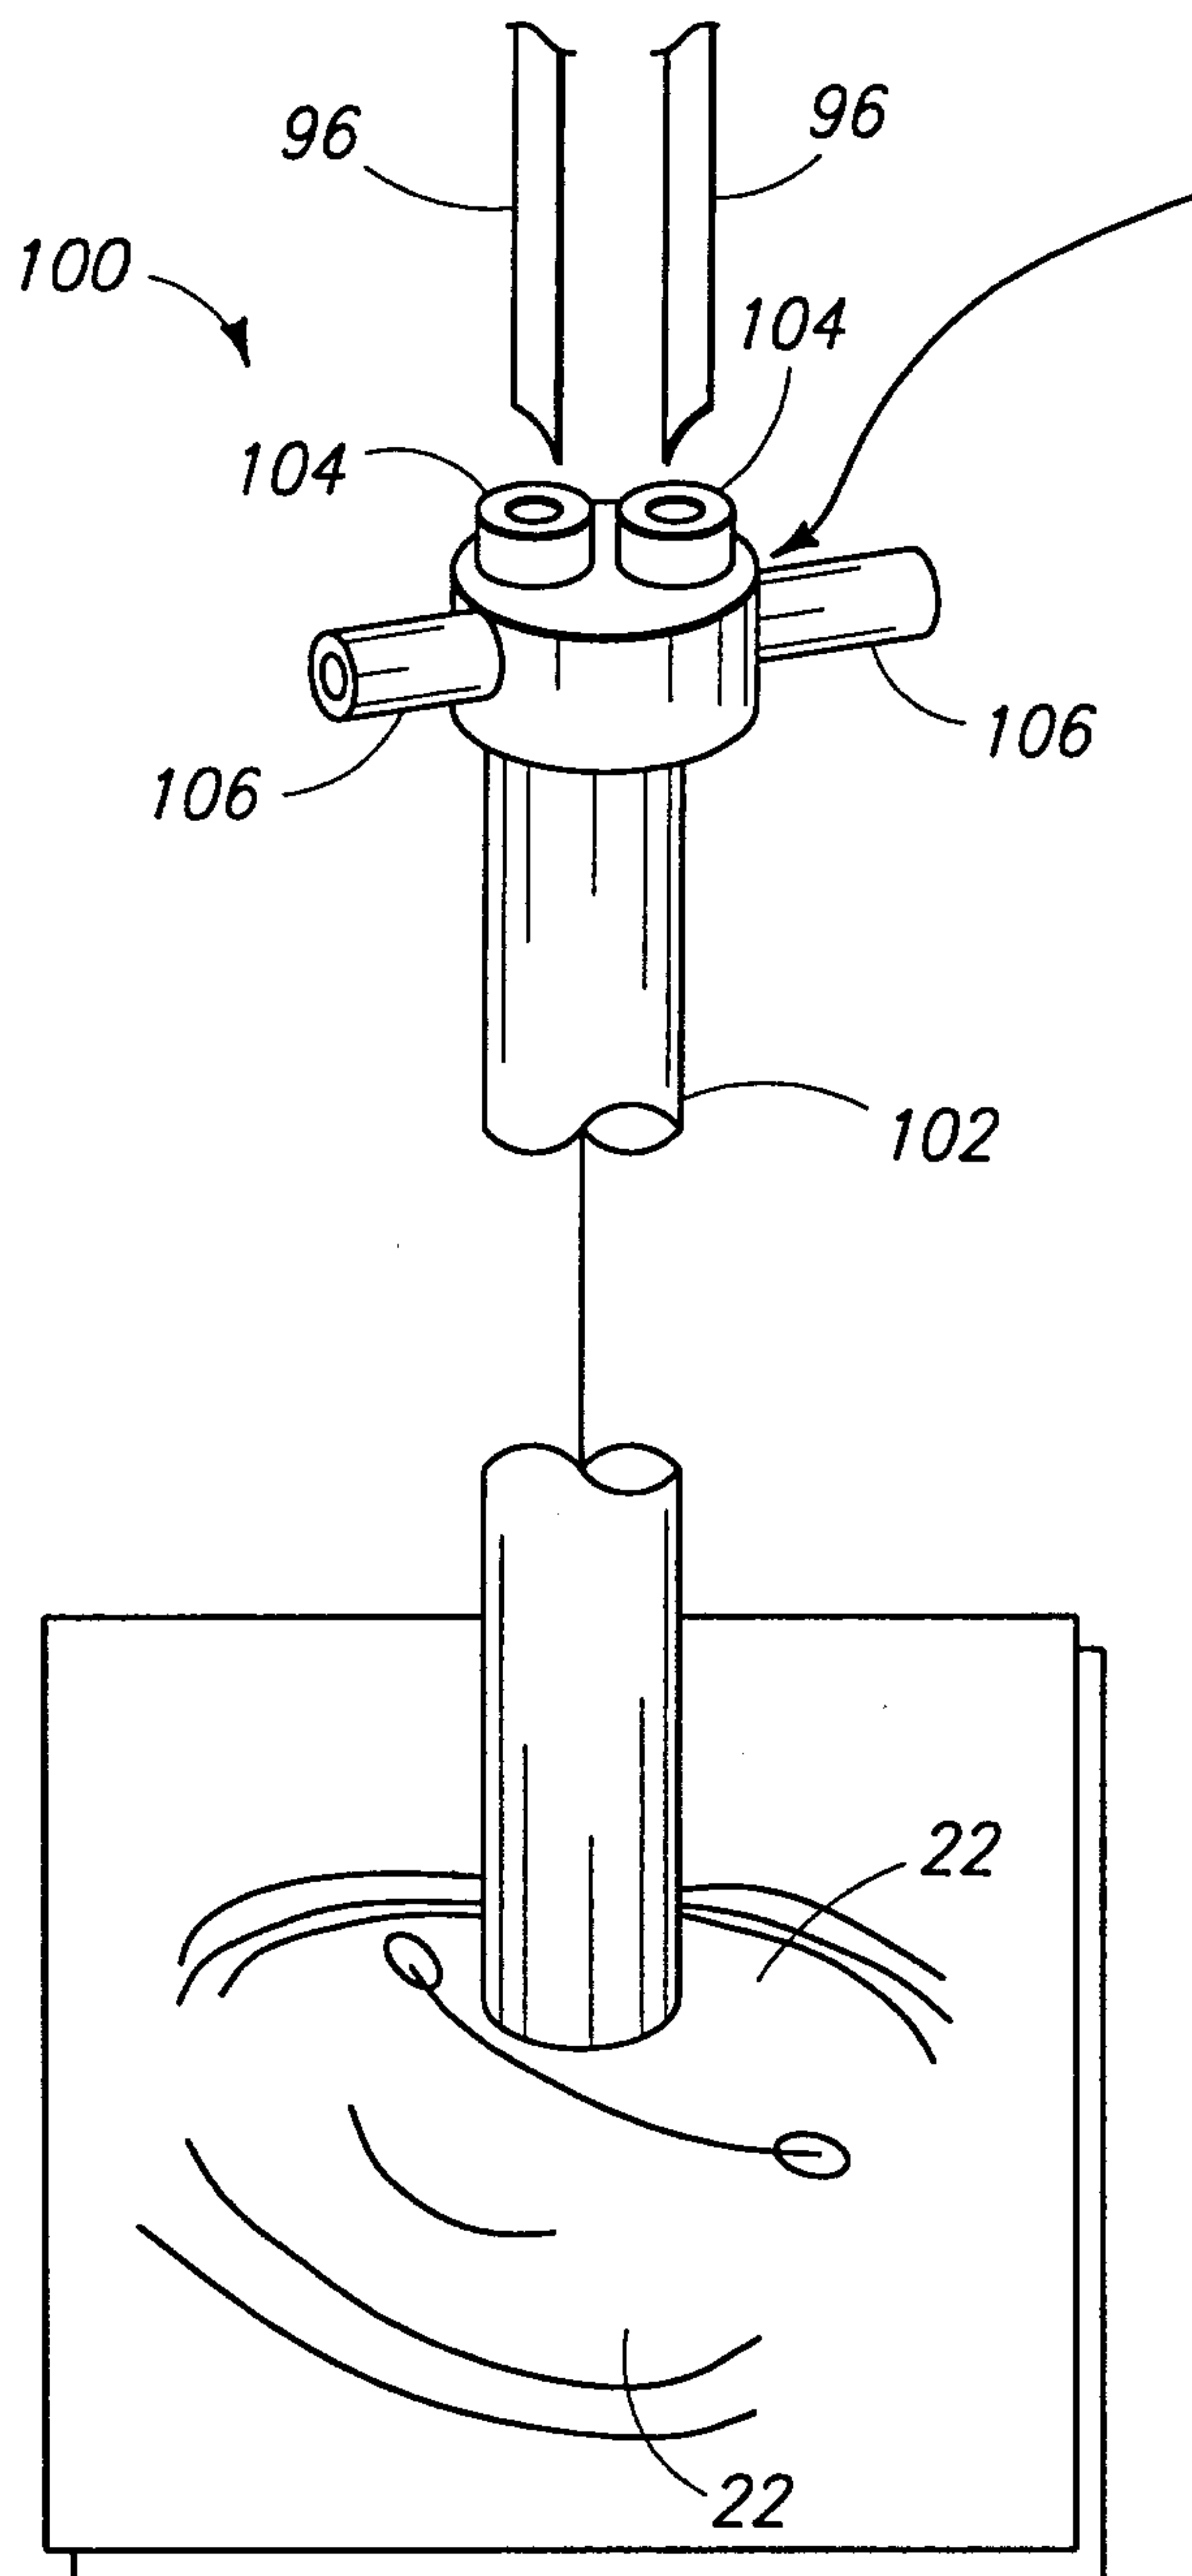


FIG. 7a

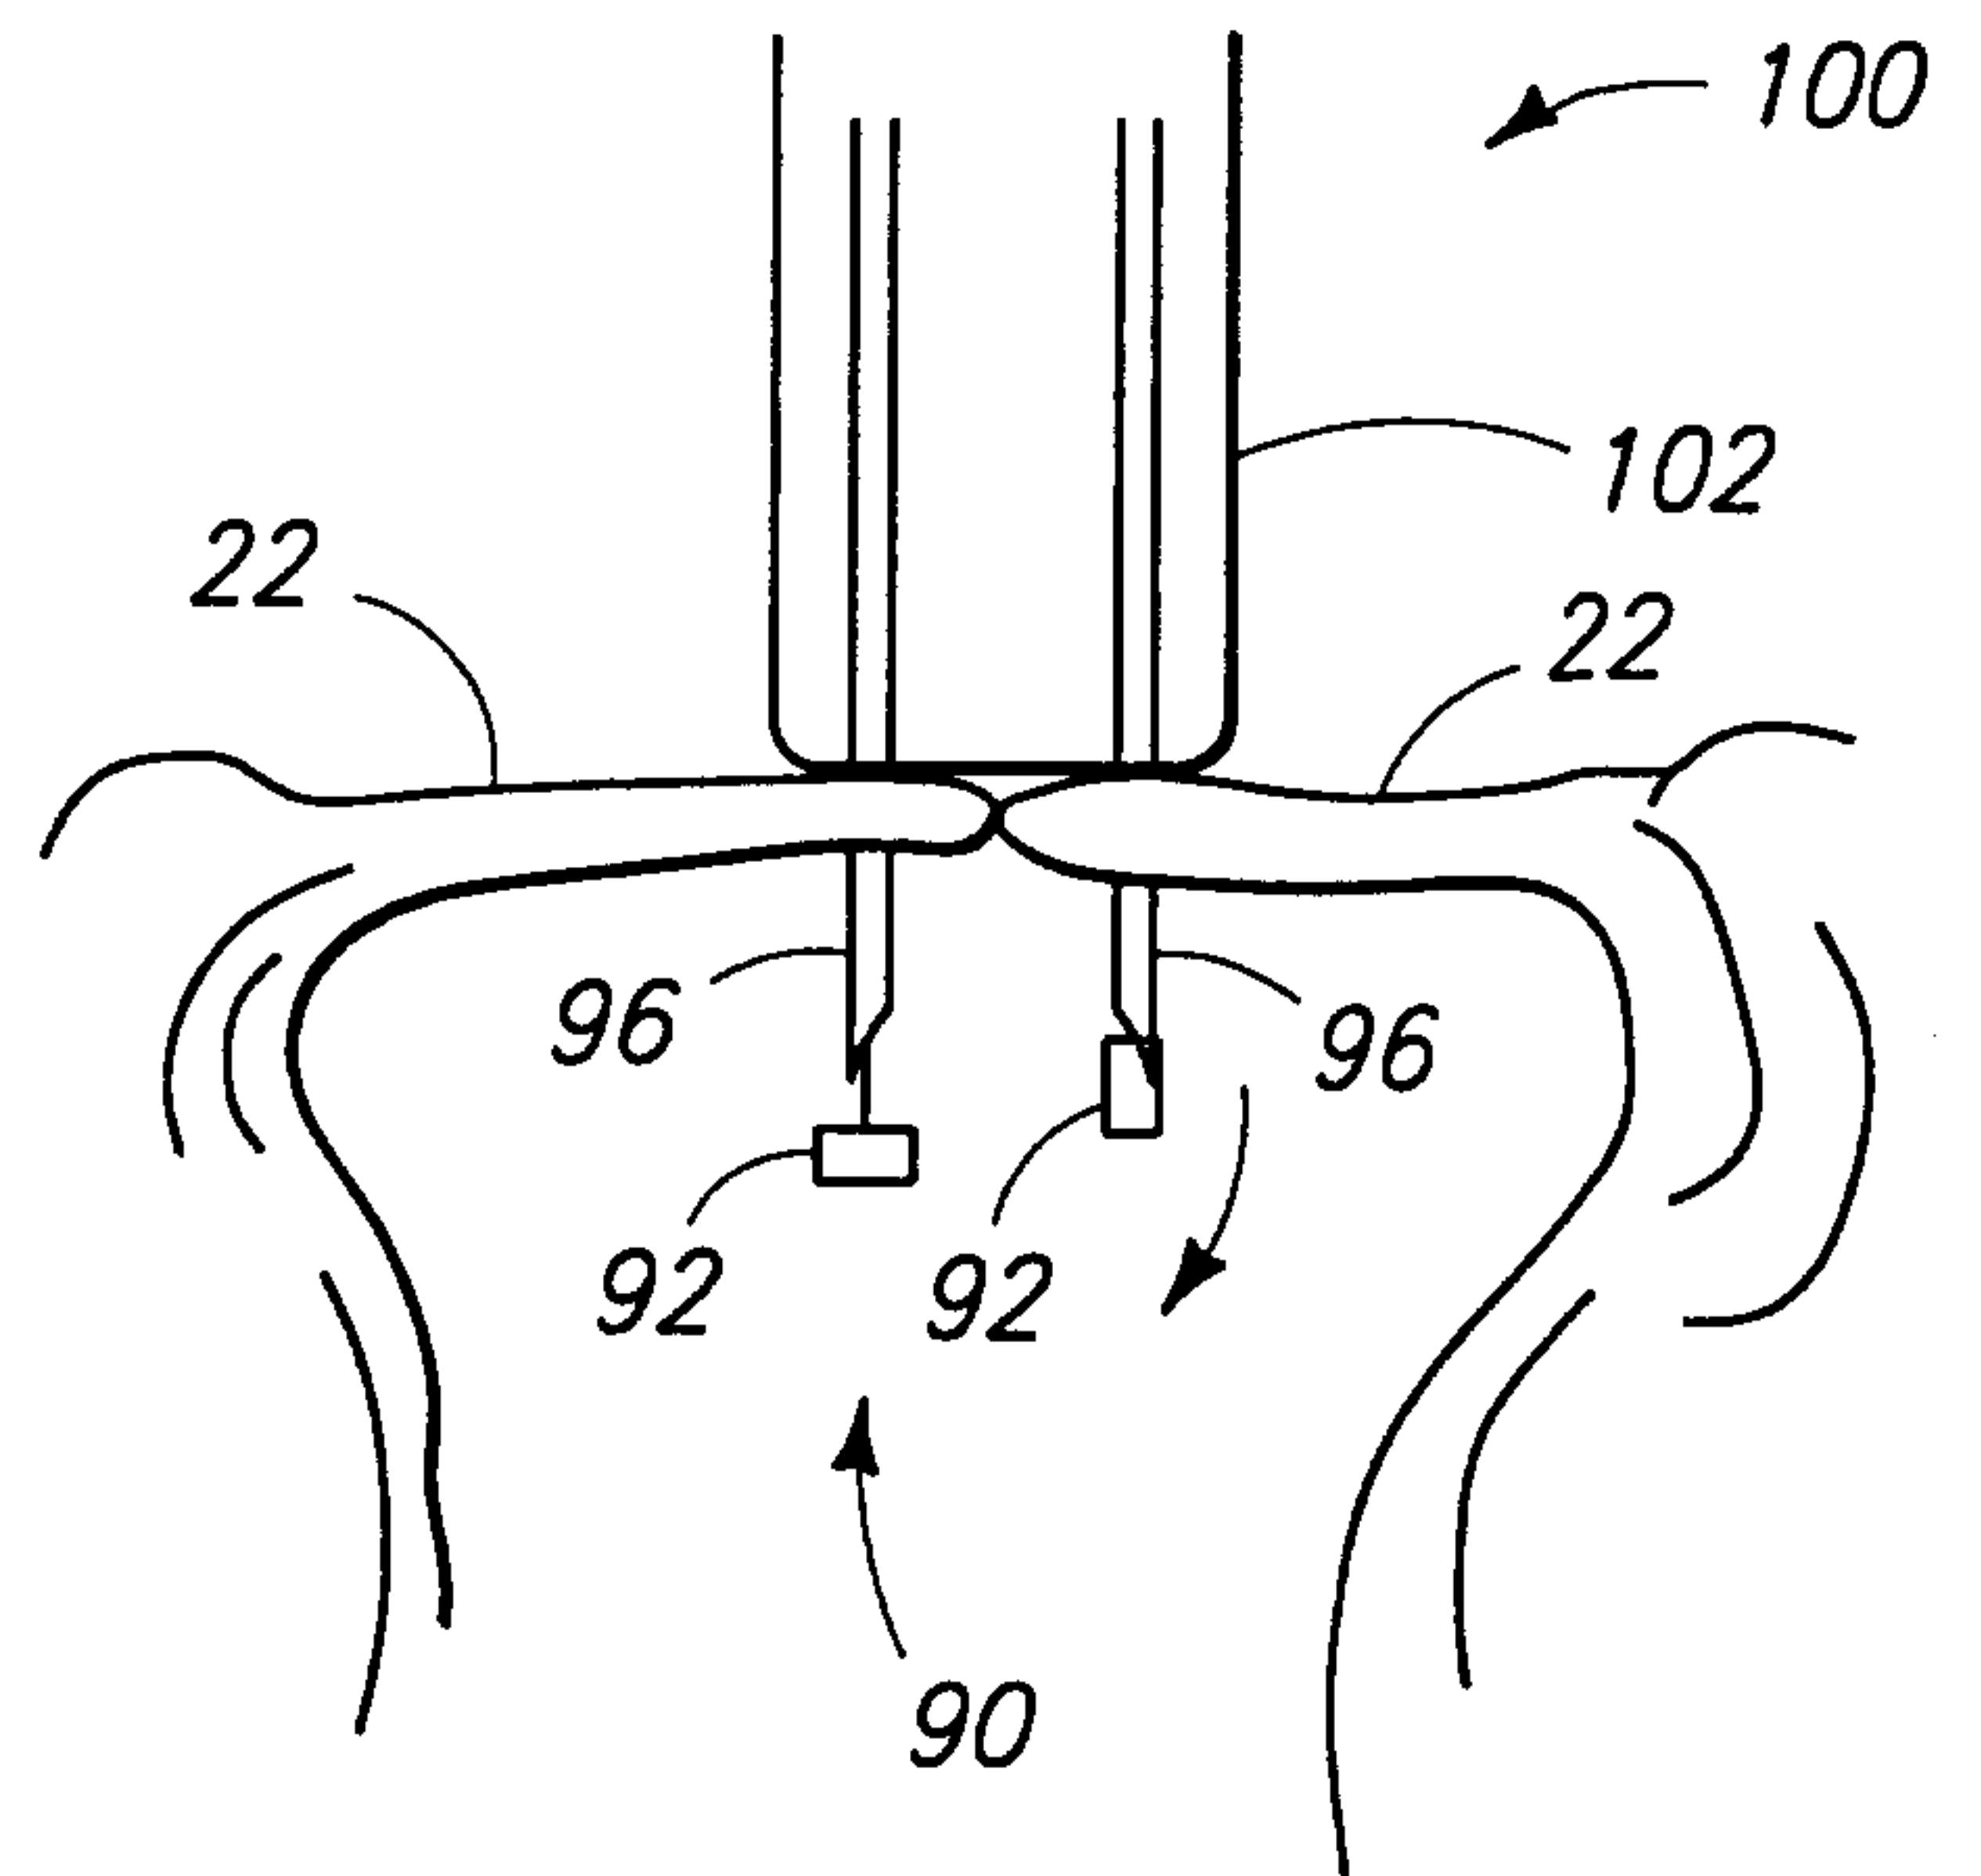


FIG. 7b


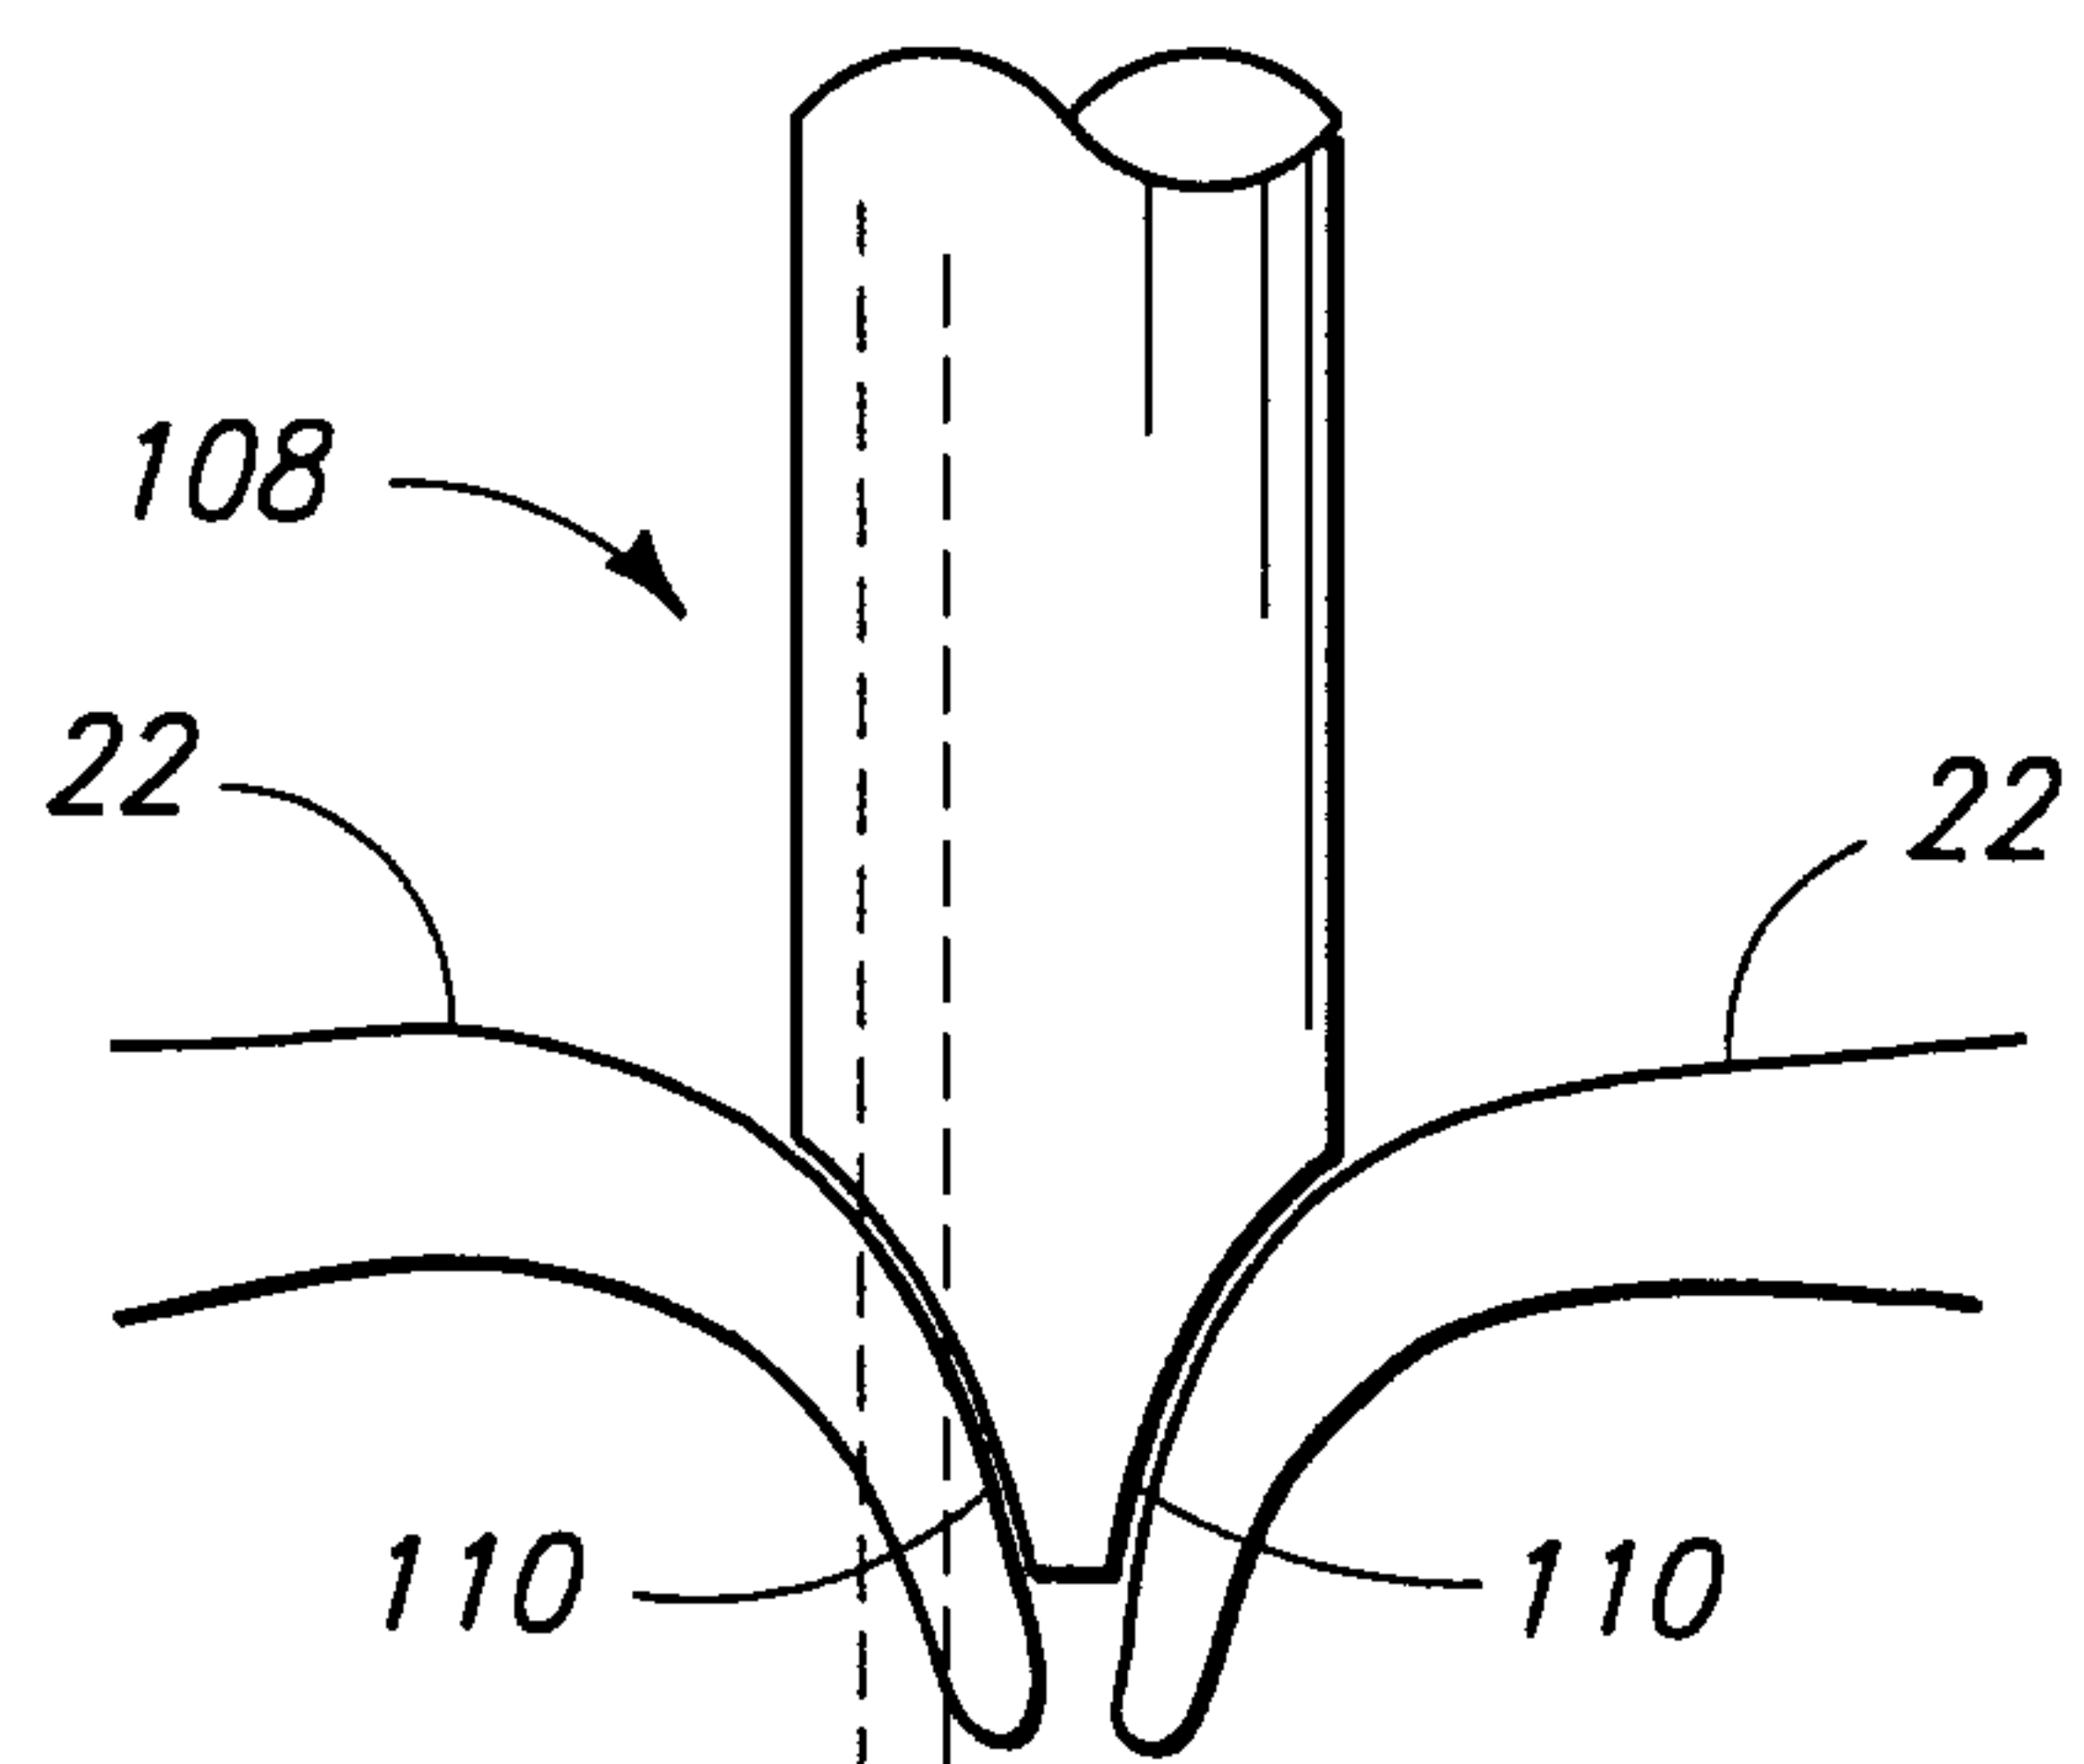


FIG. 8

7/45

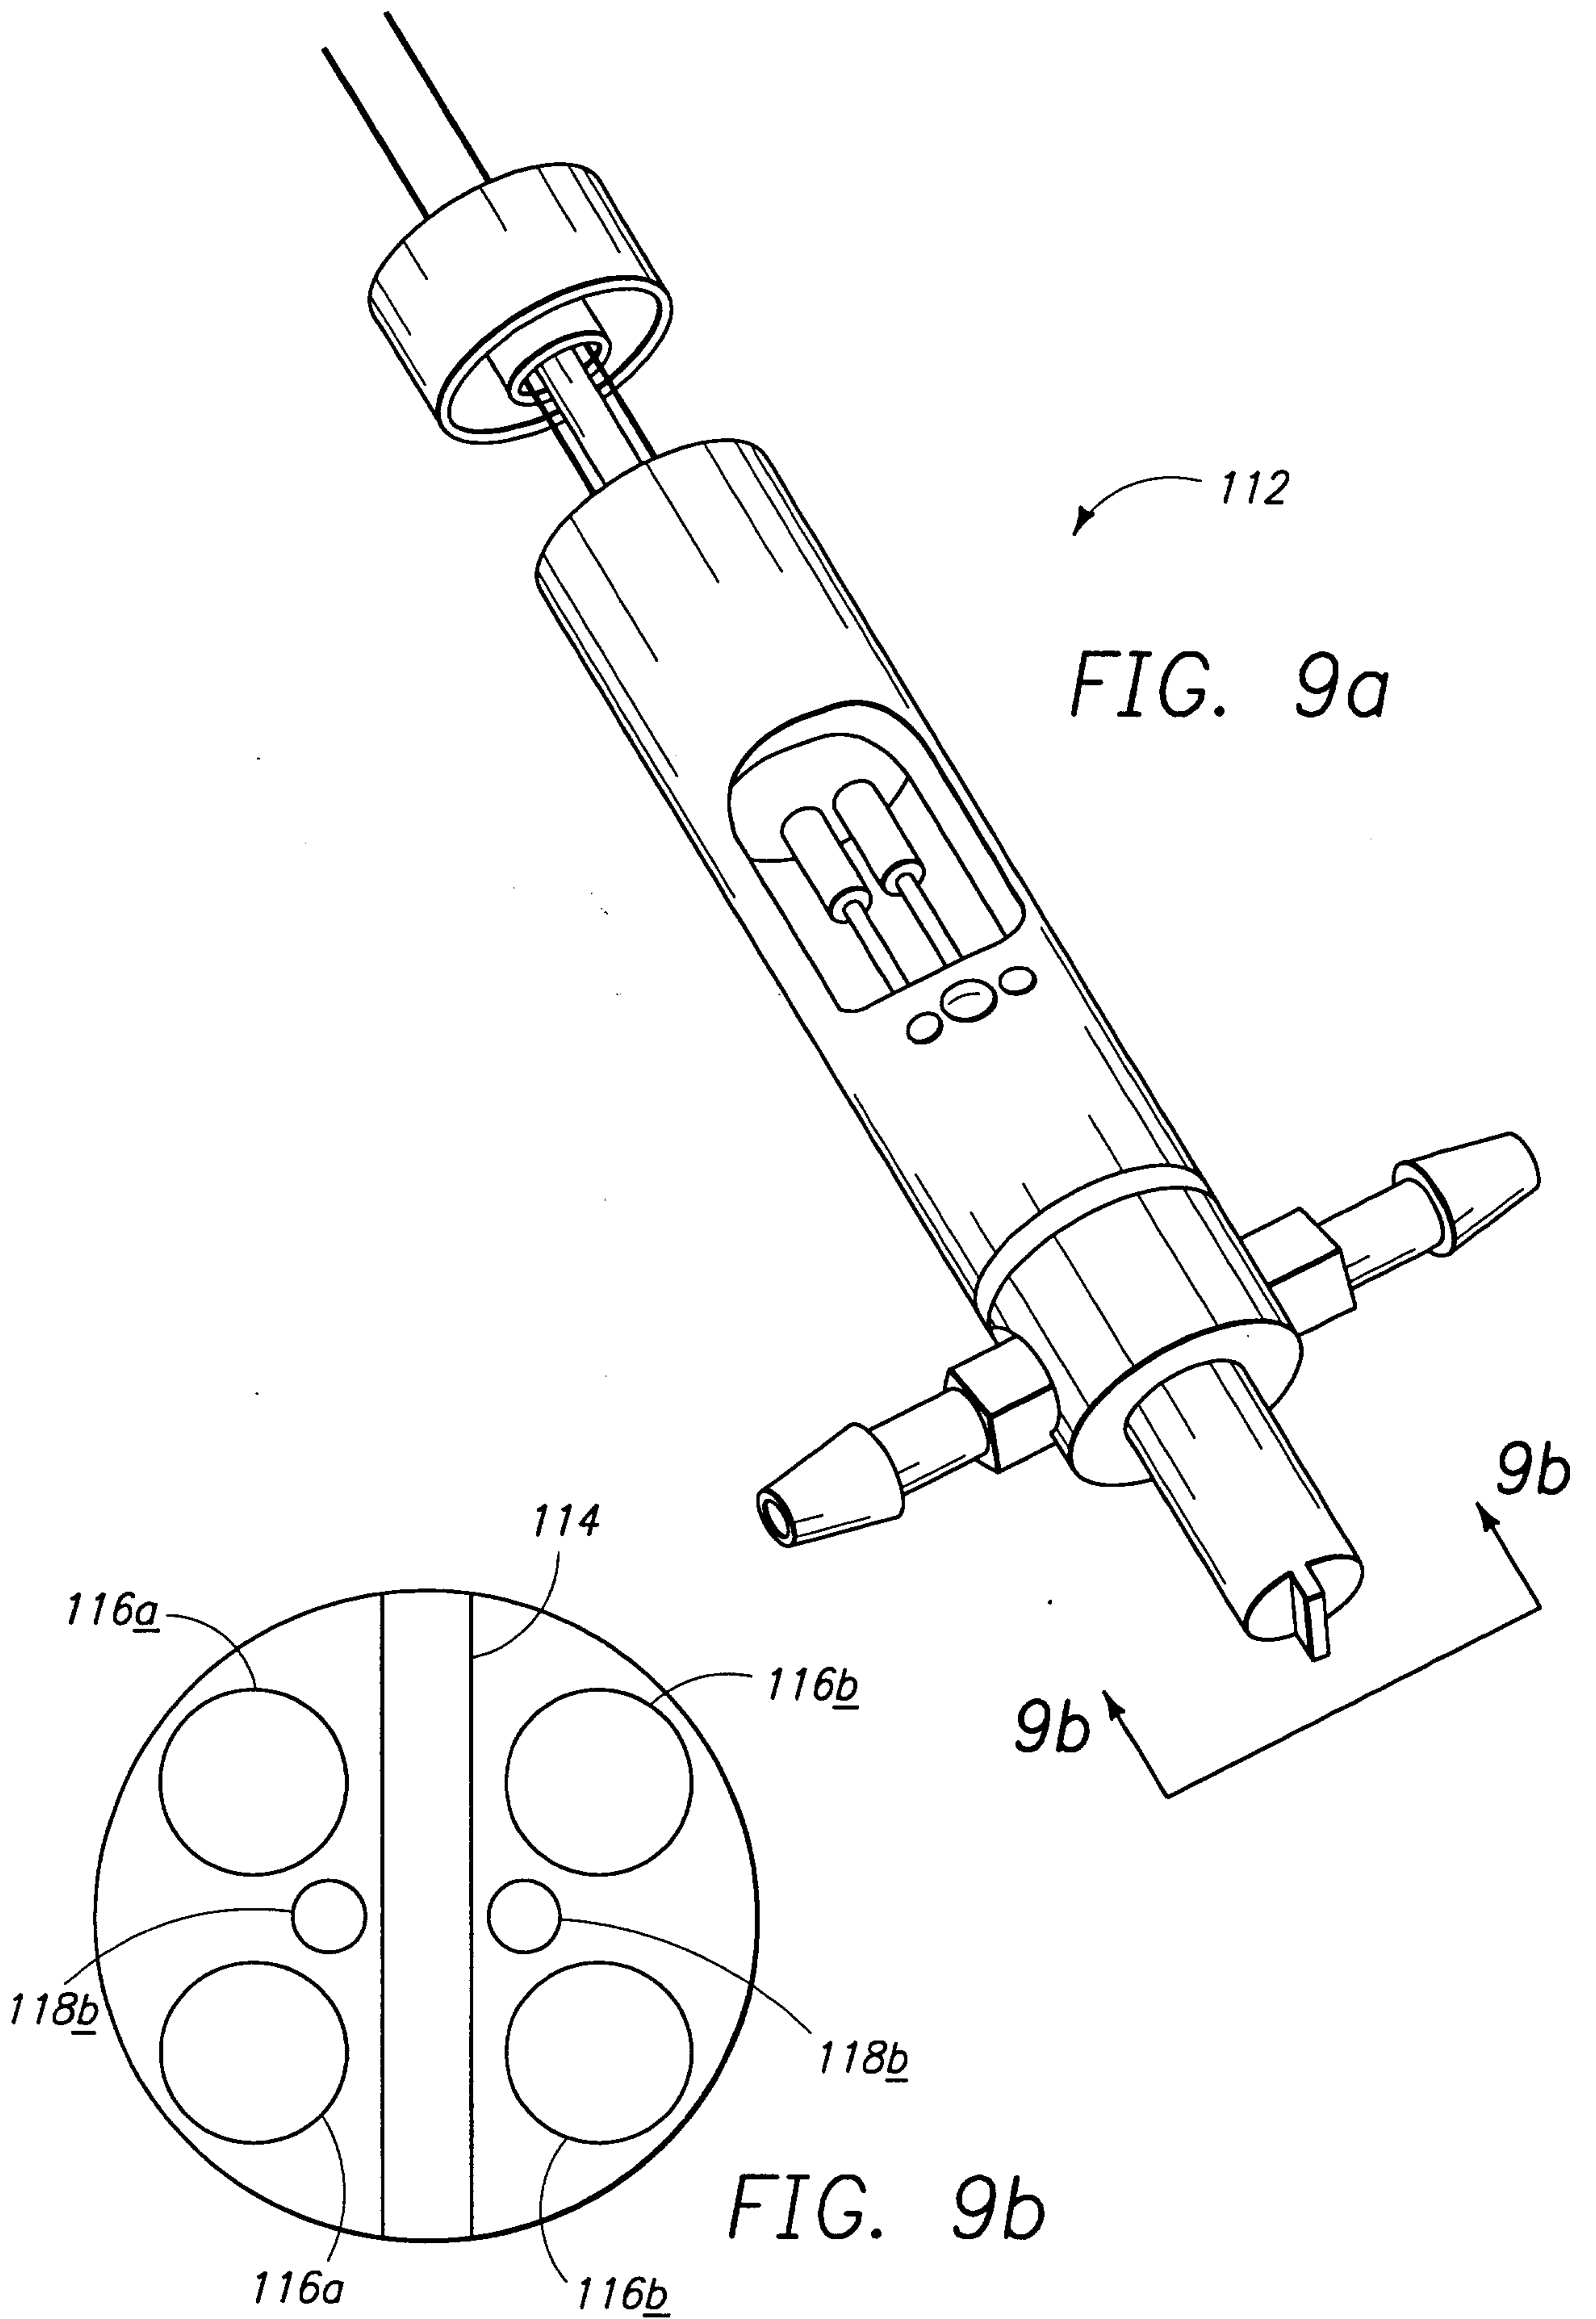

8/45

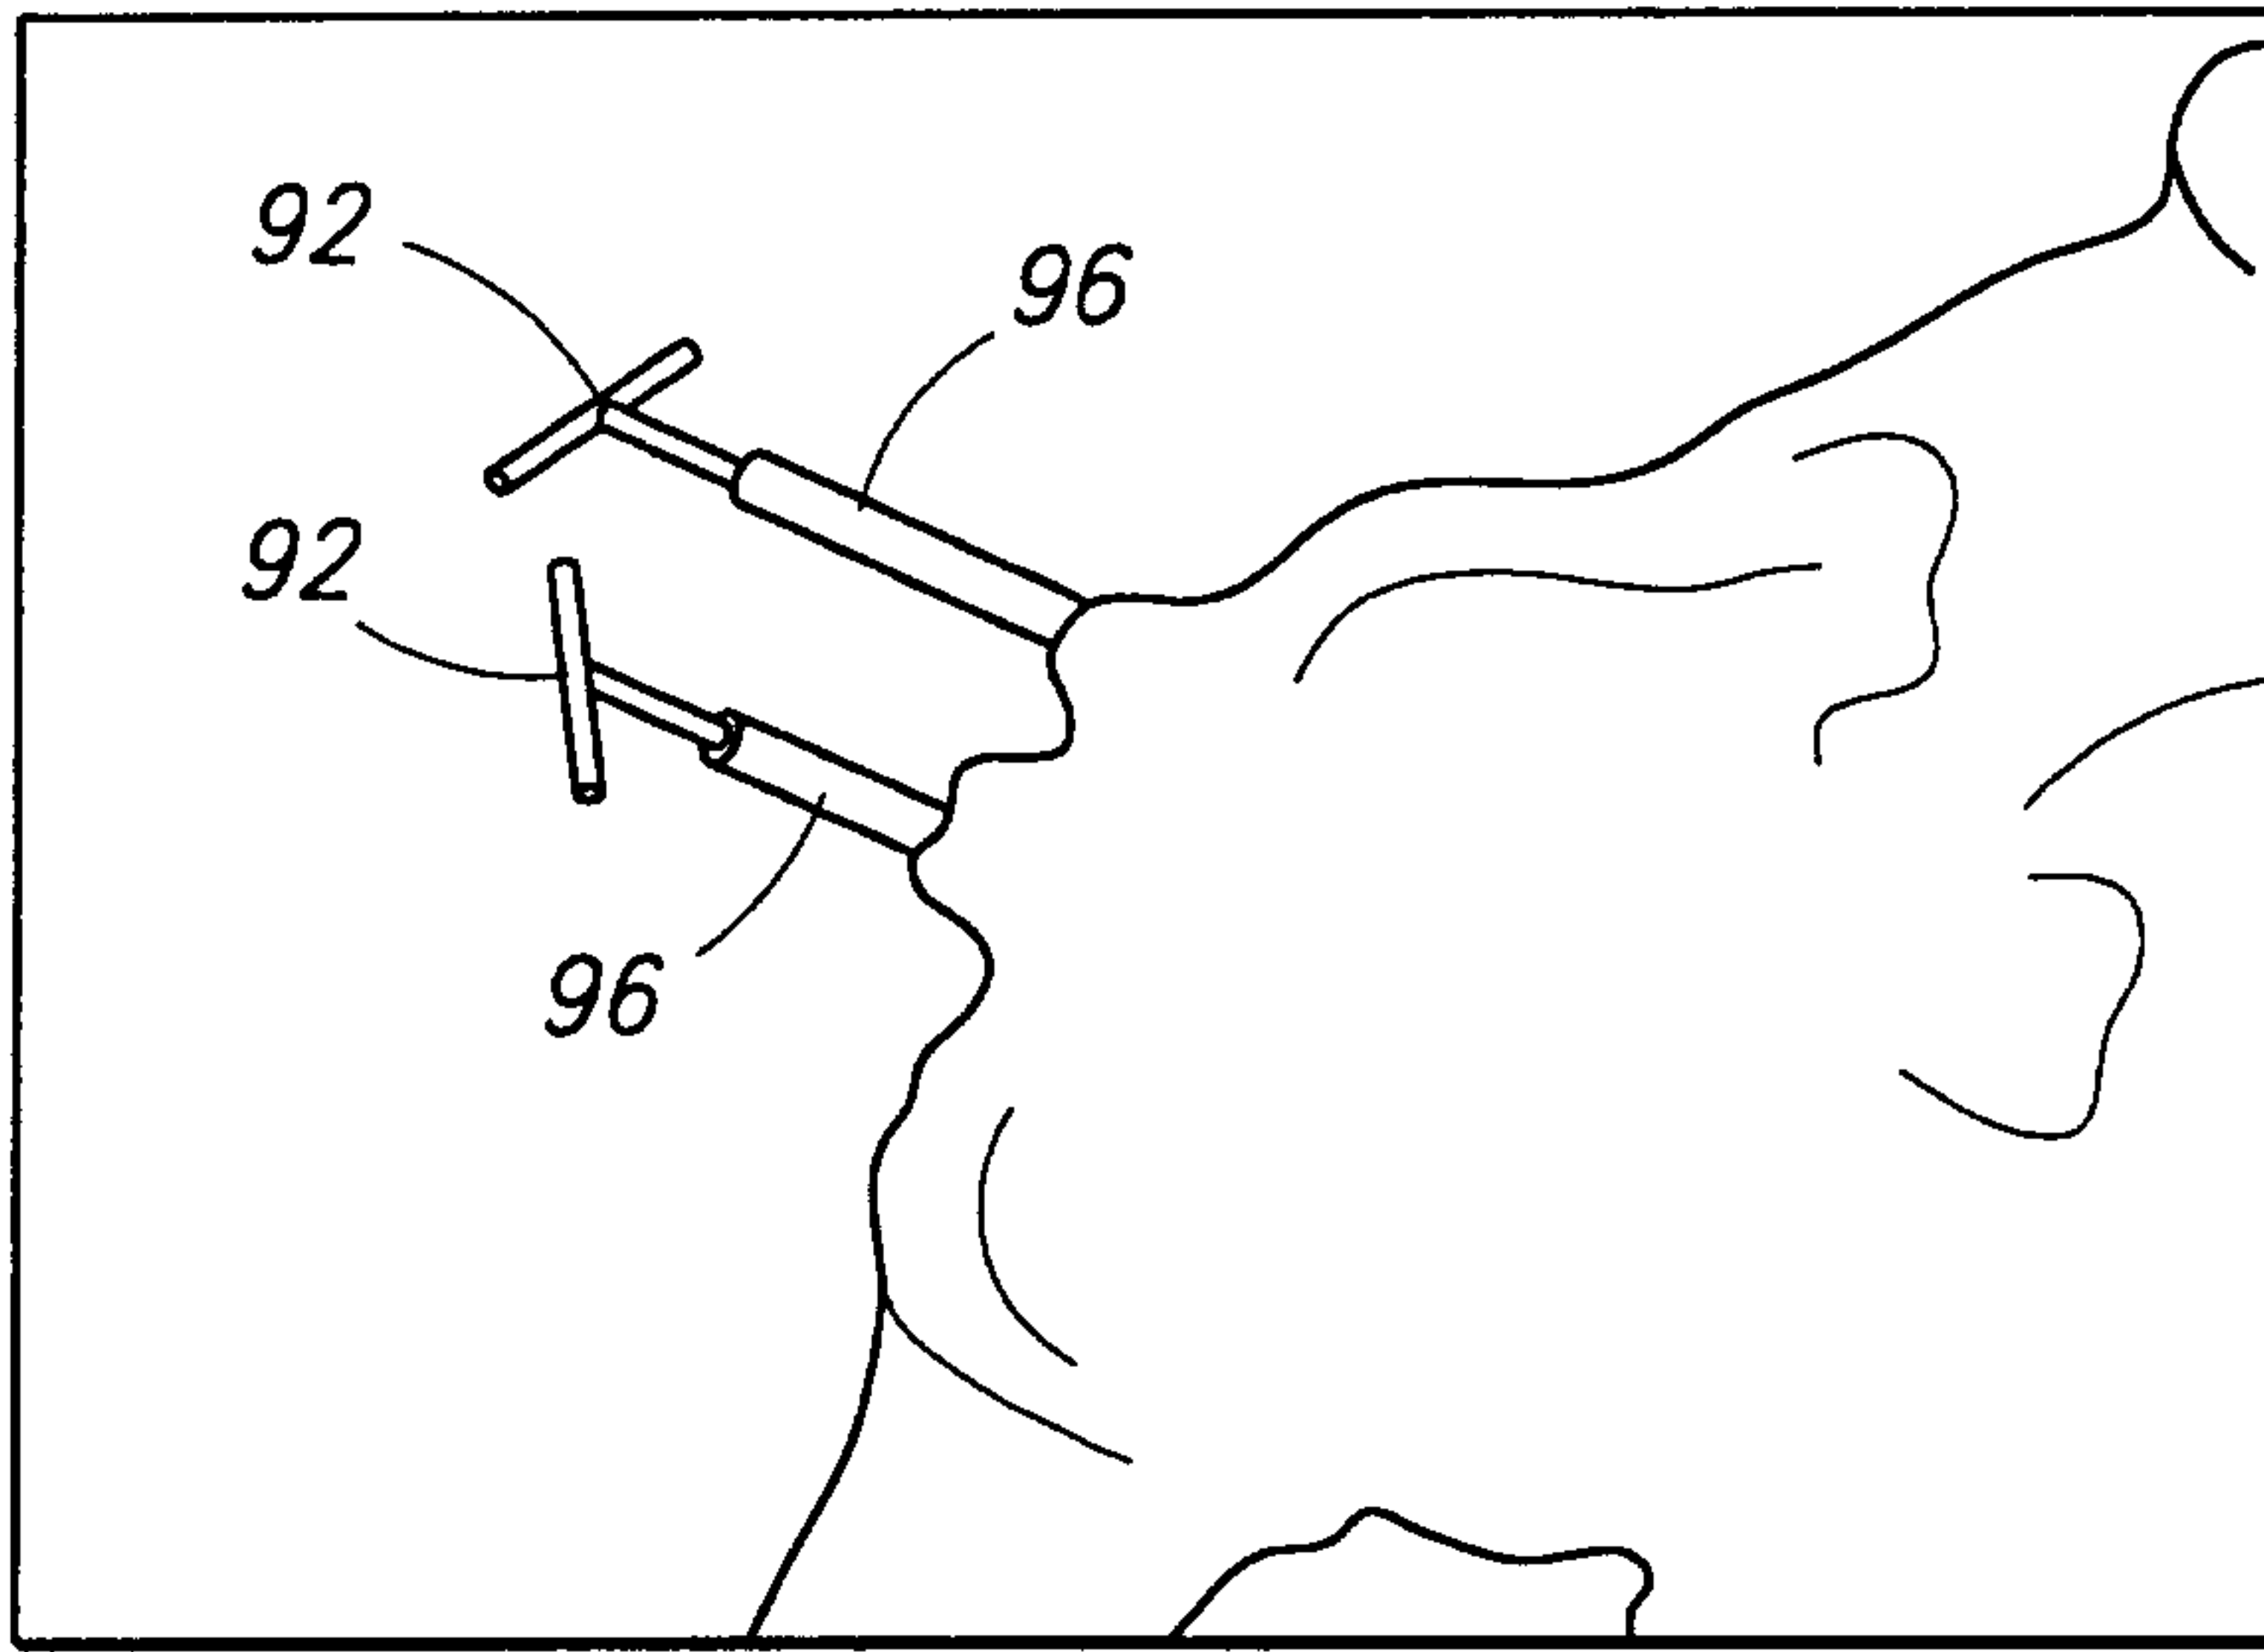


FIG. 10a



FIG. 10b

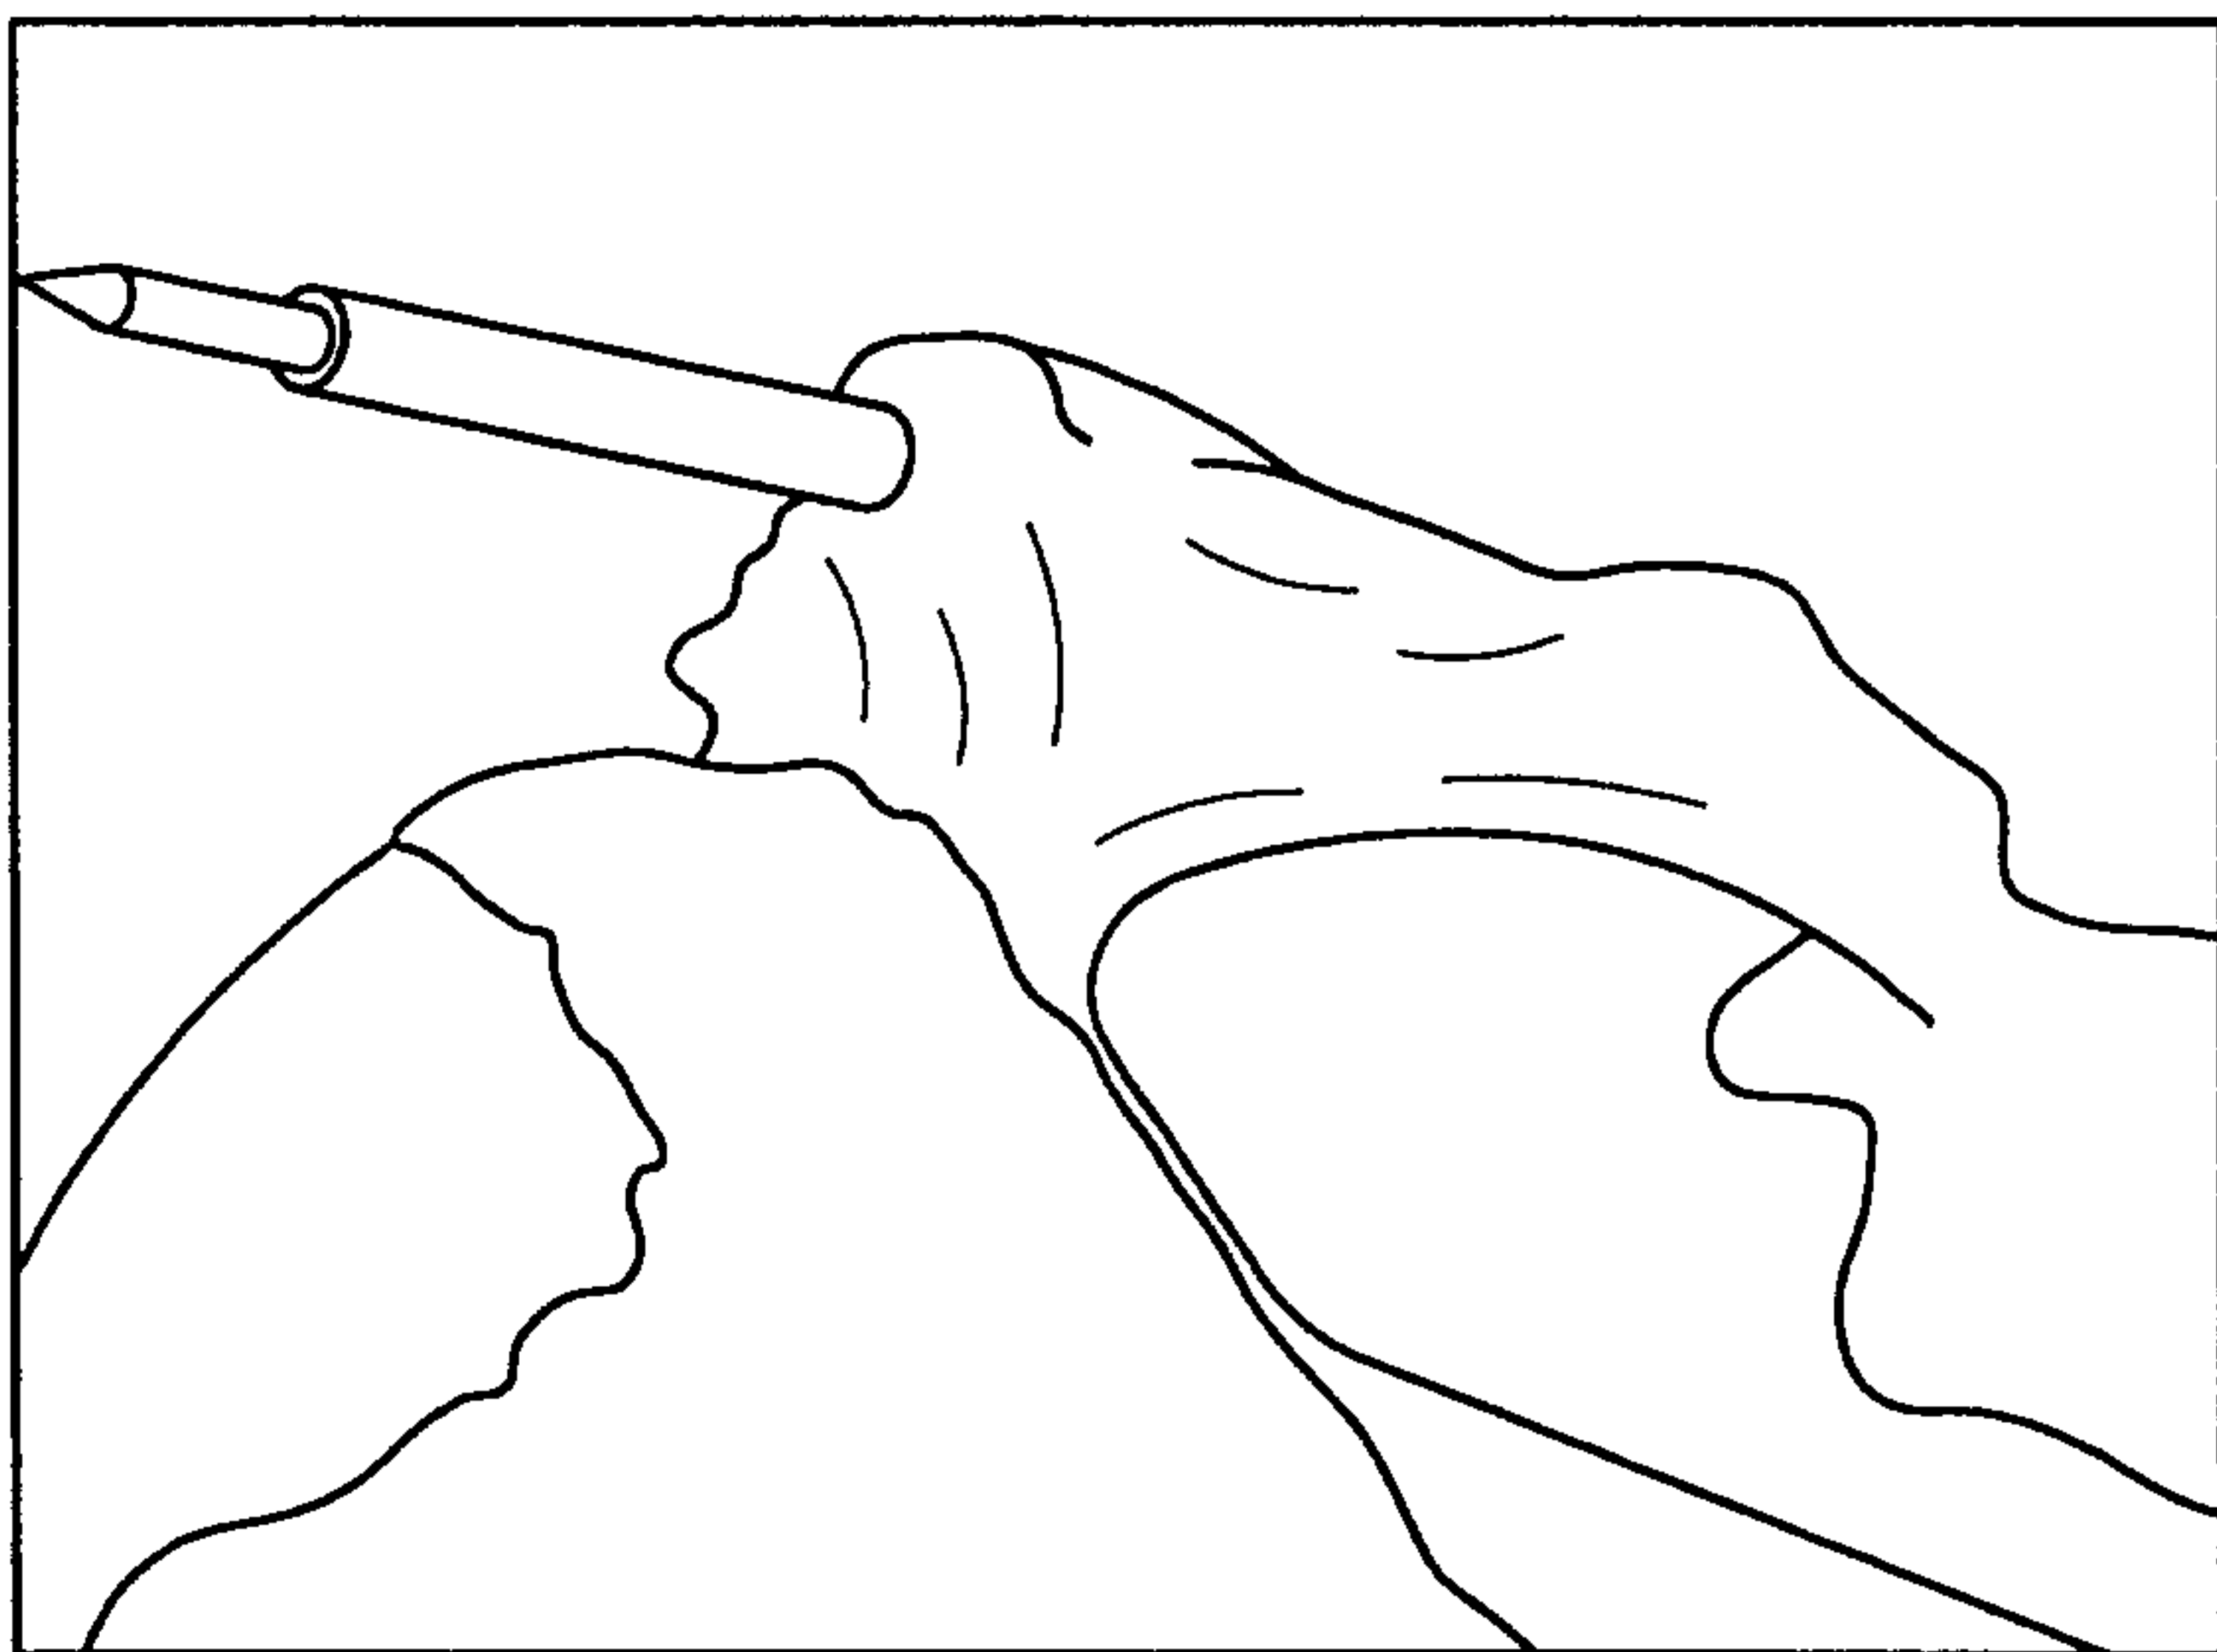


FIG. 10c

9/45

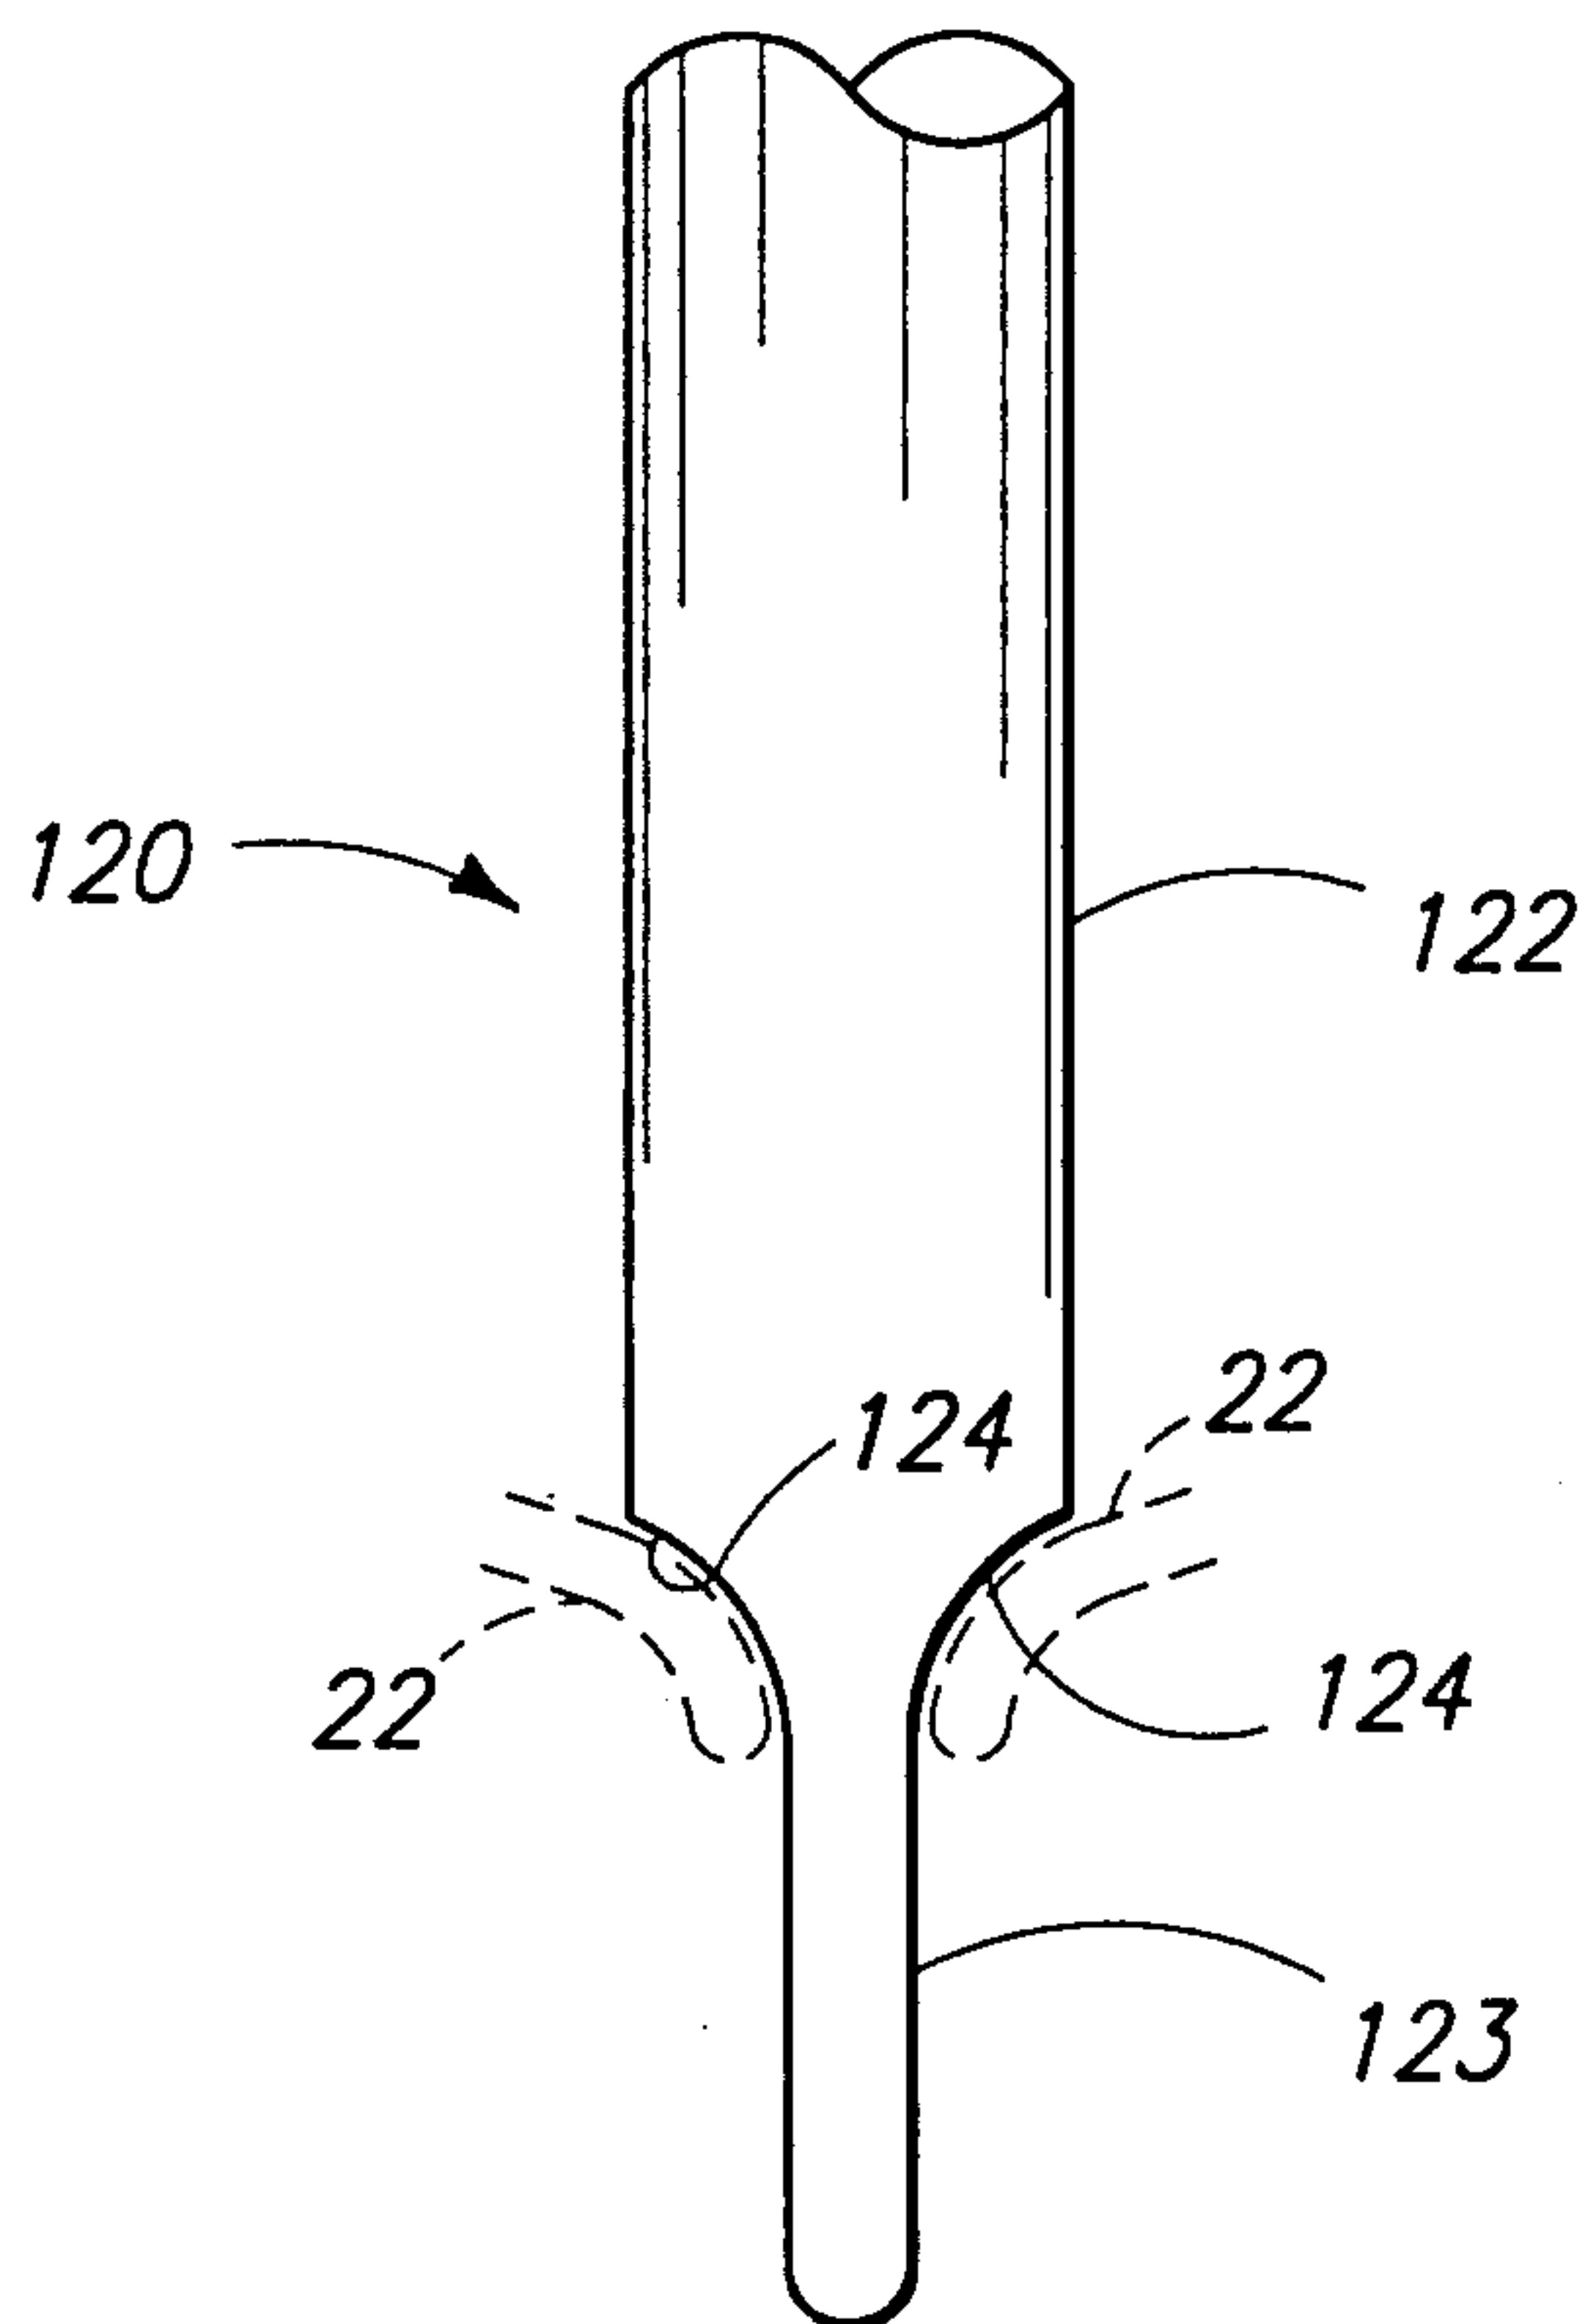


FIG. 11a

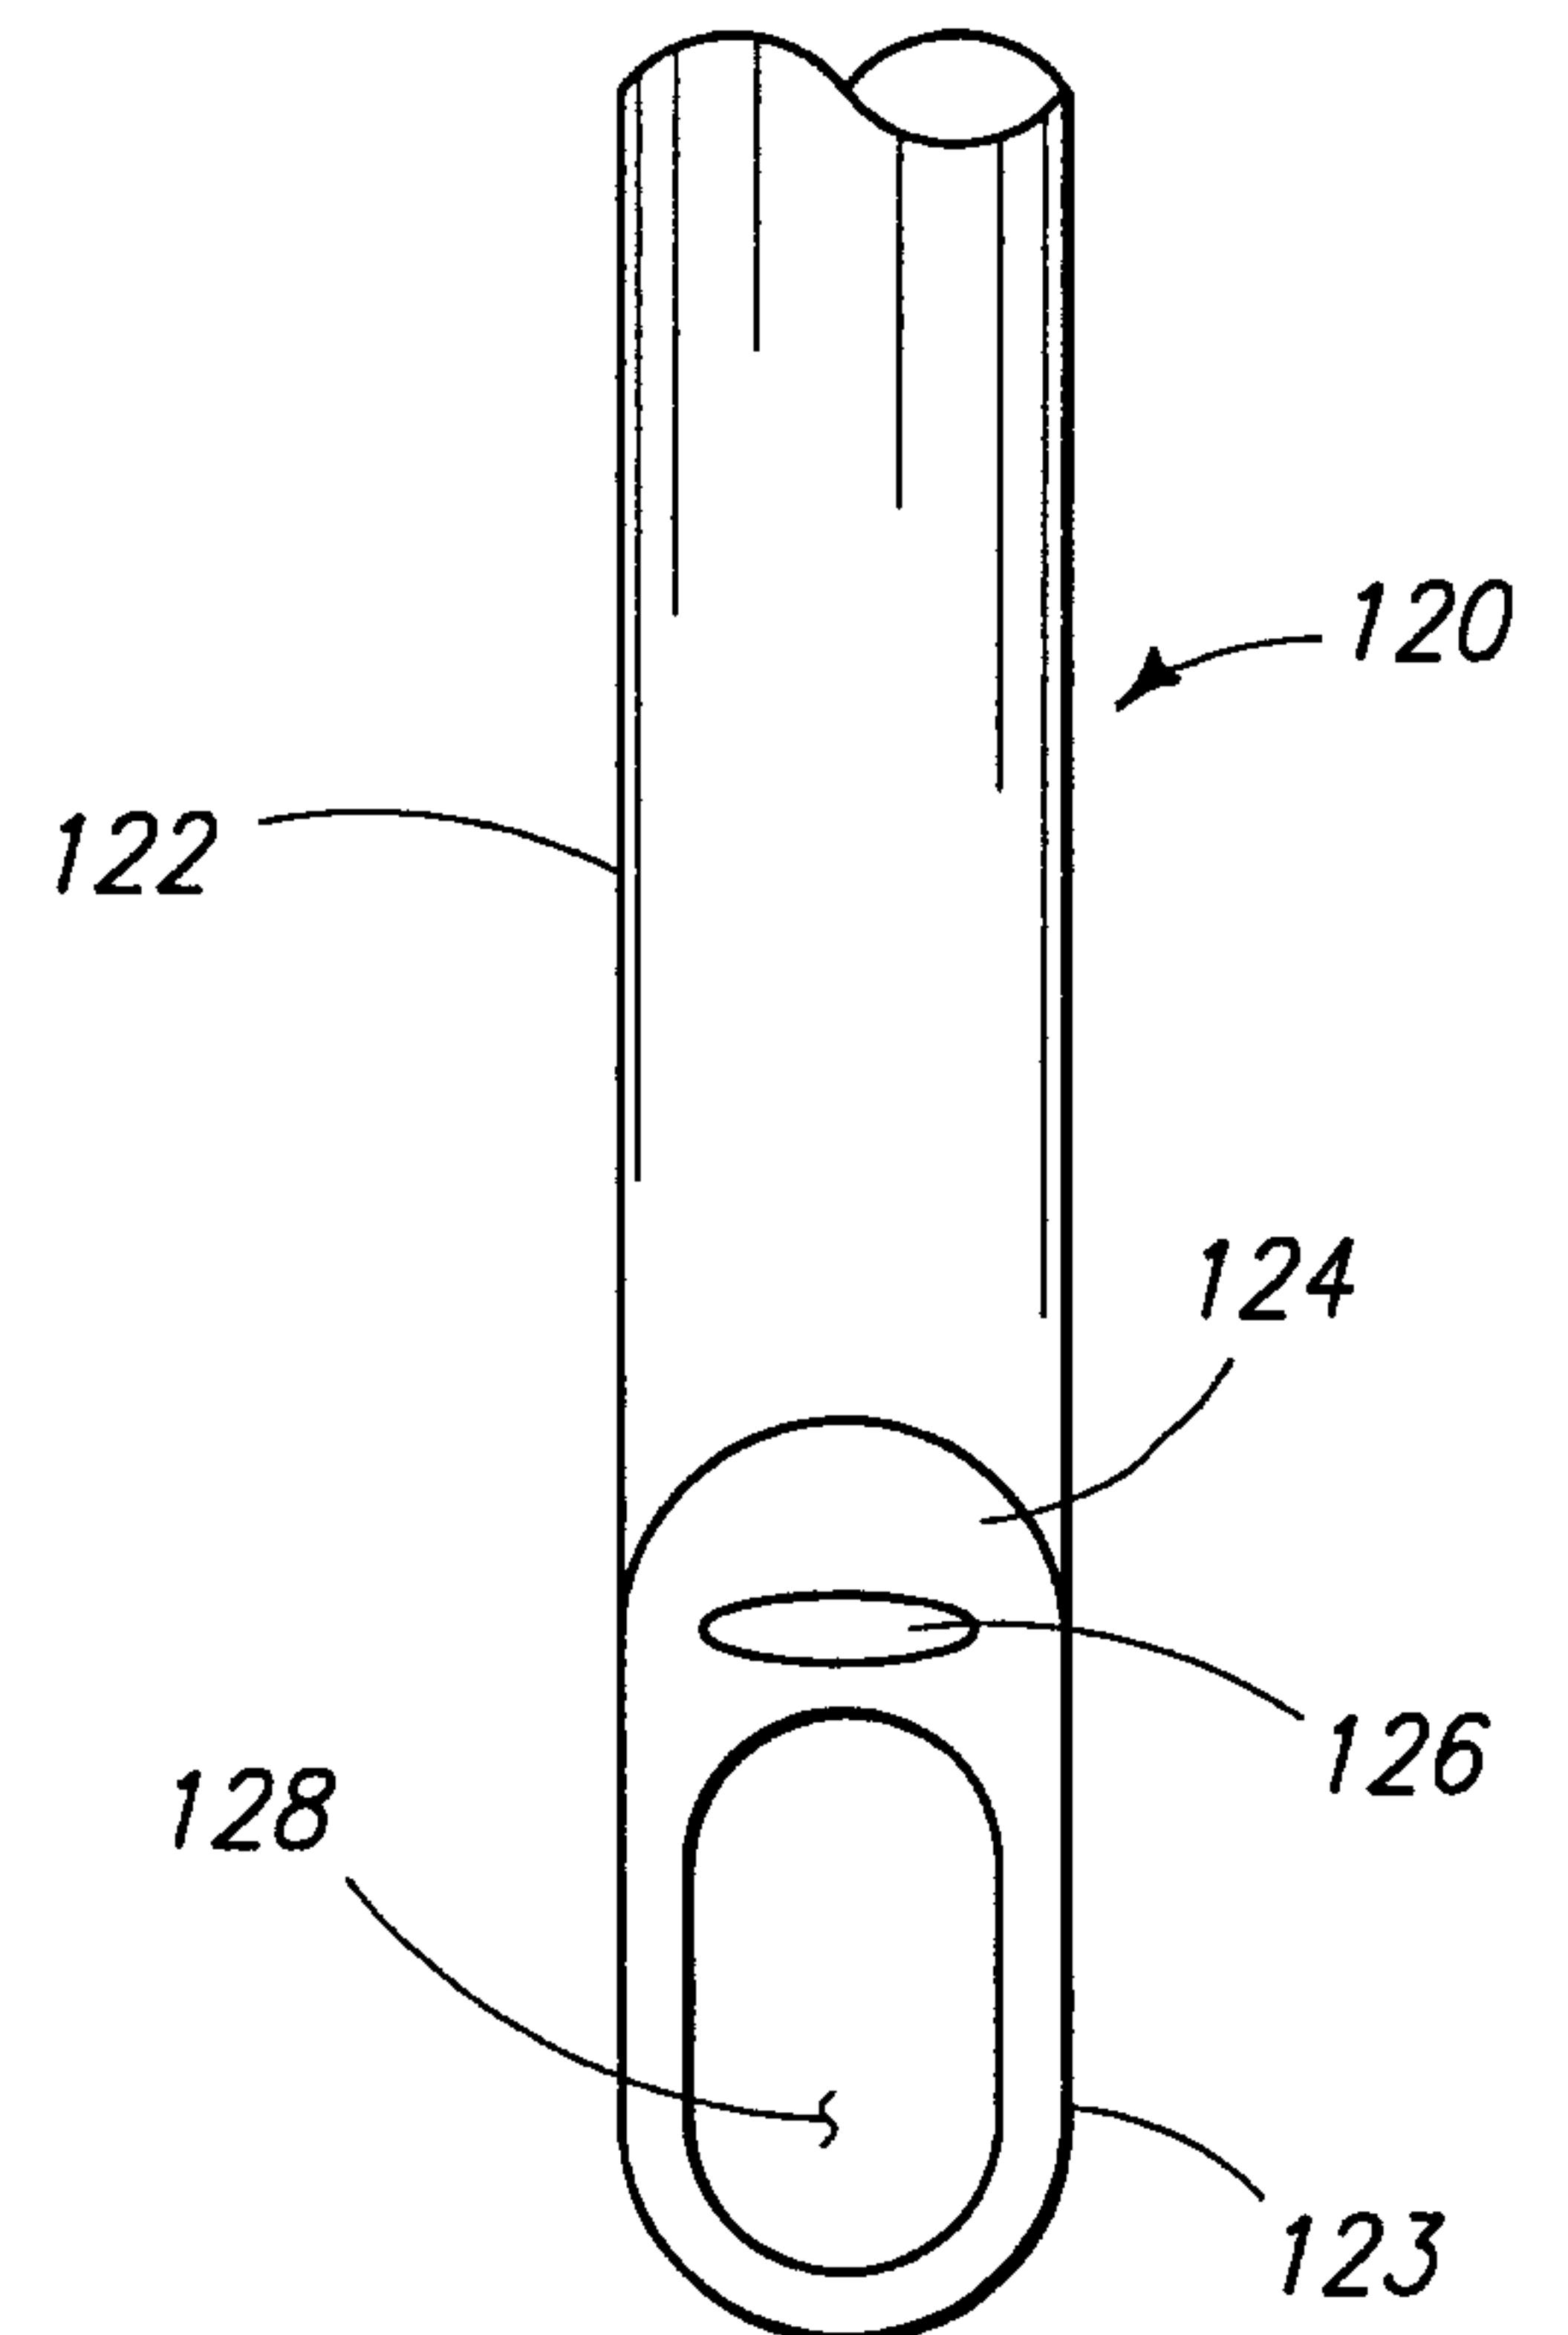


FIG. 11b

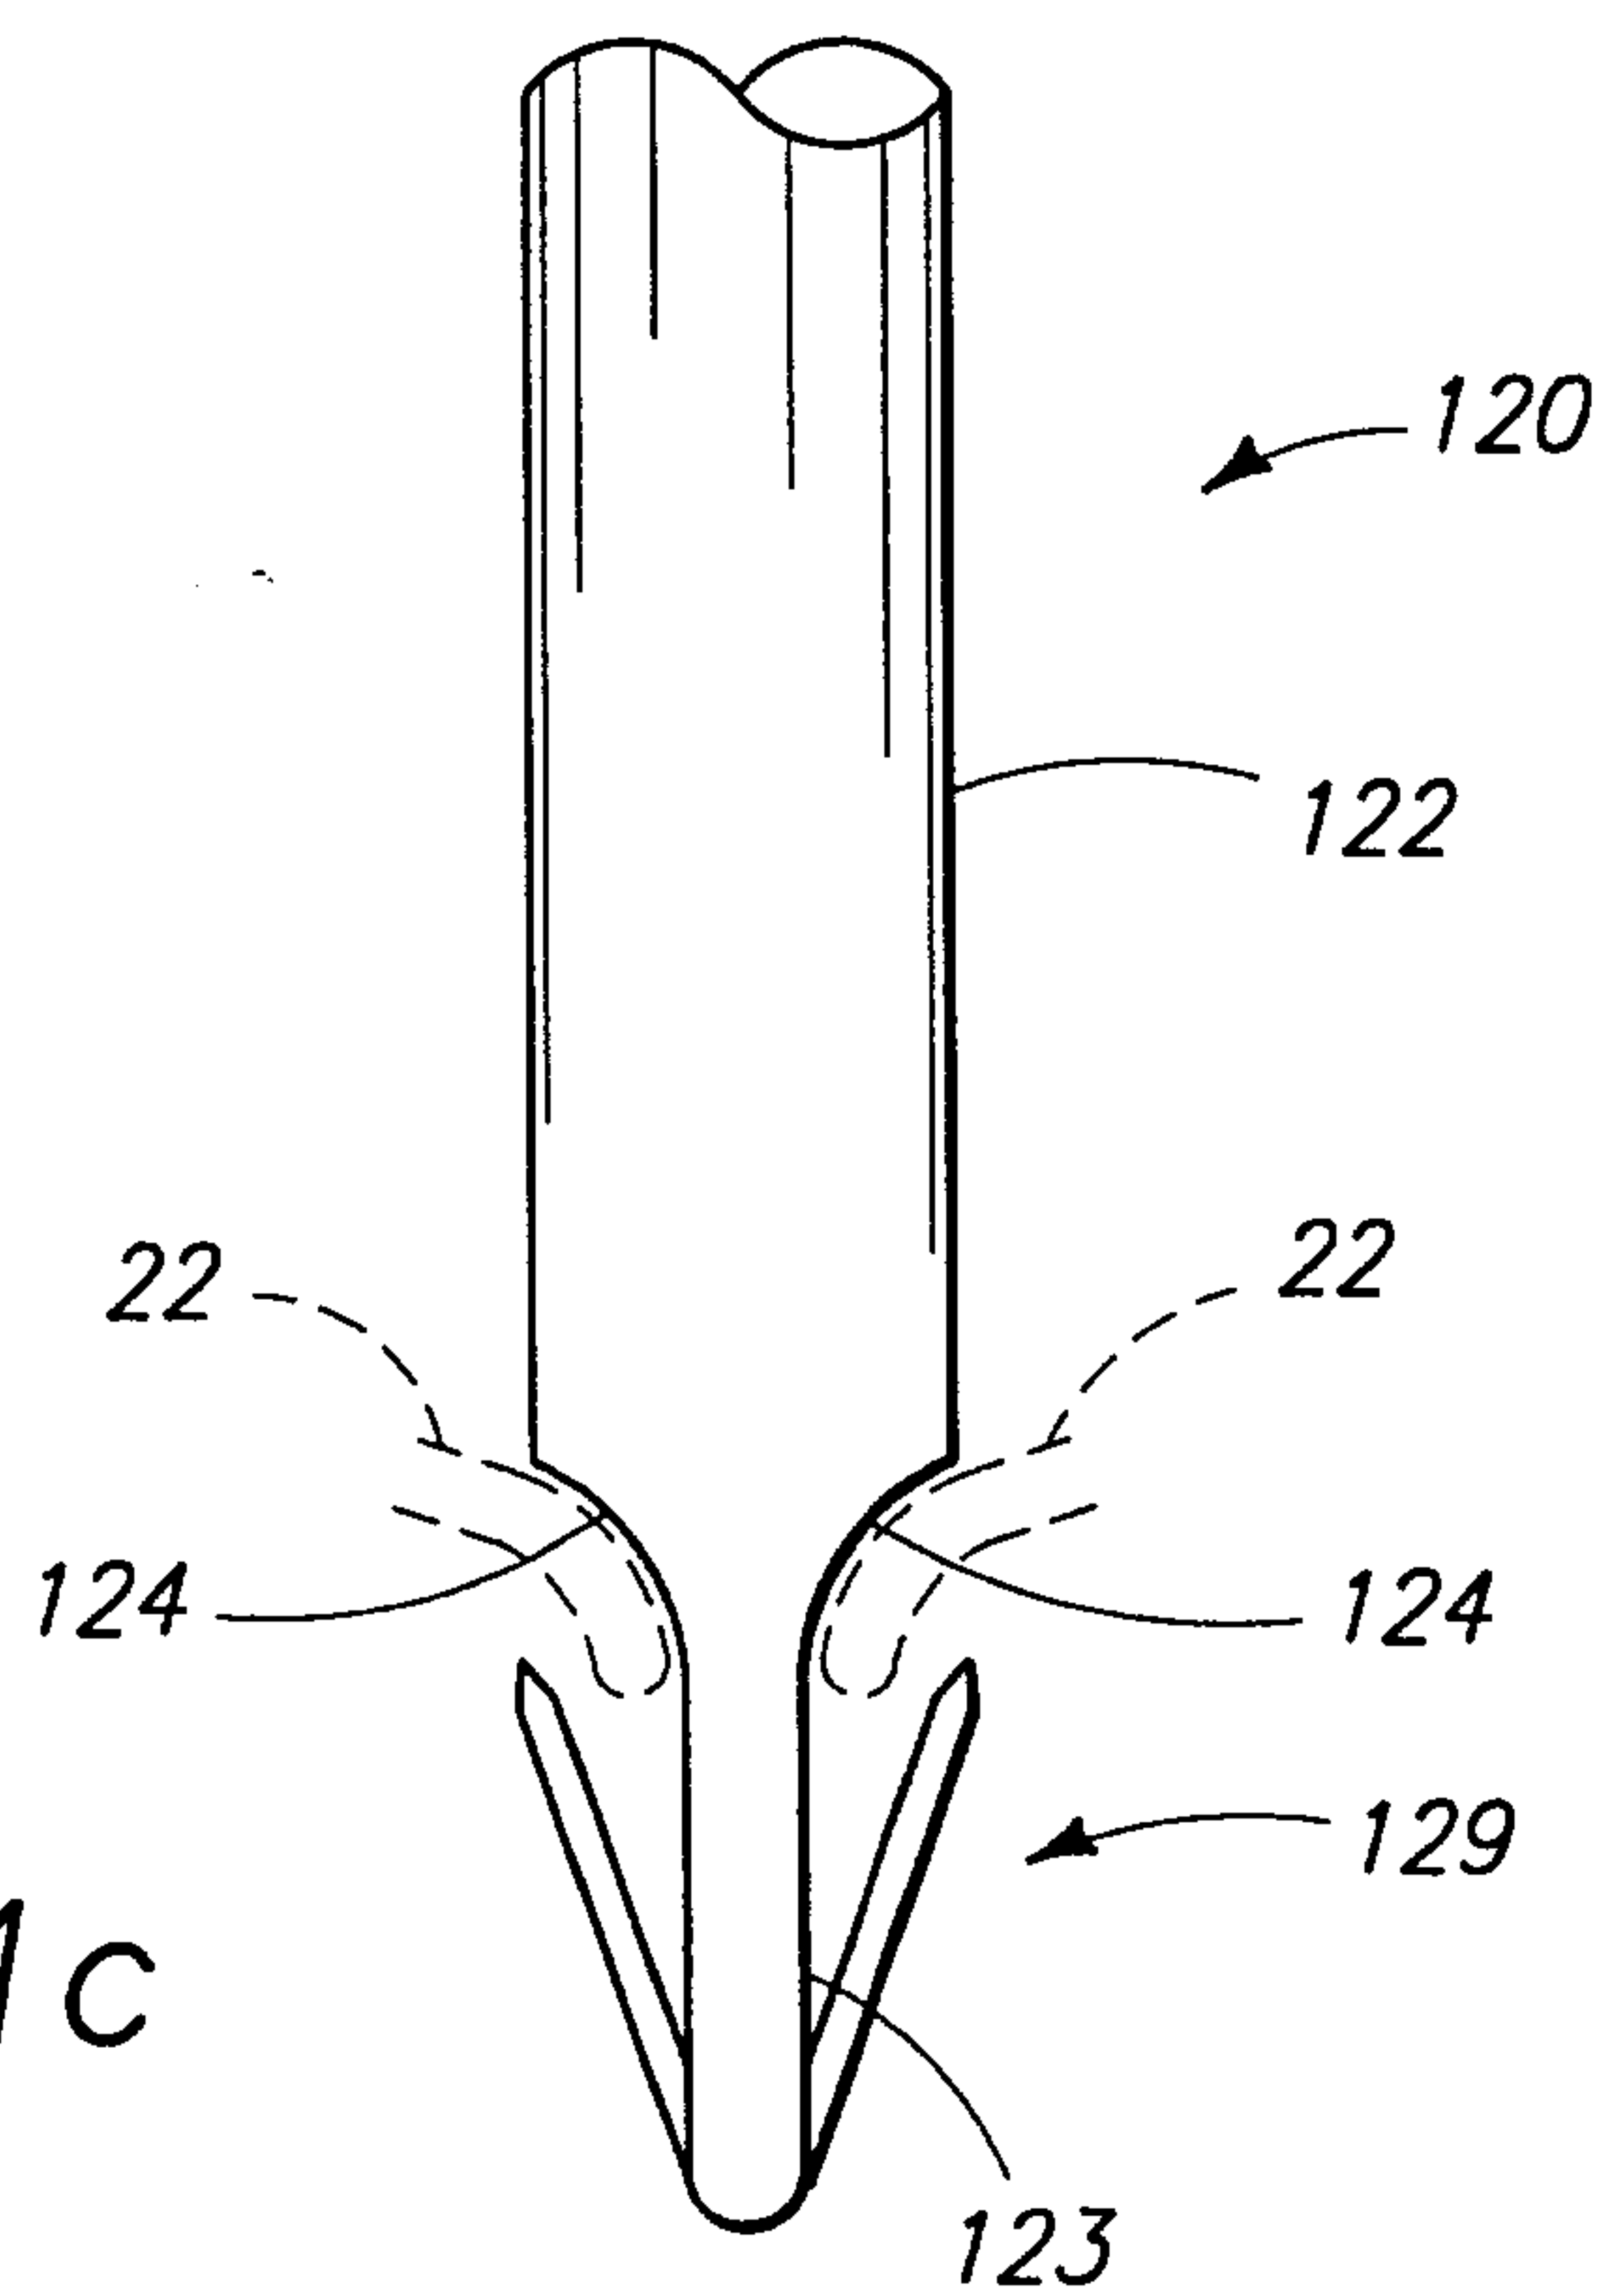


FIG. 11c

10/45

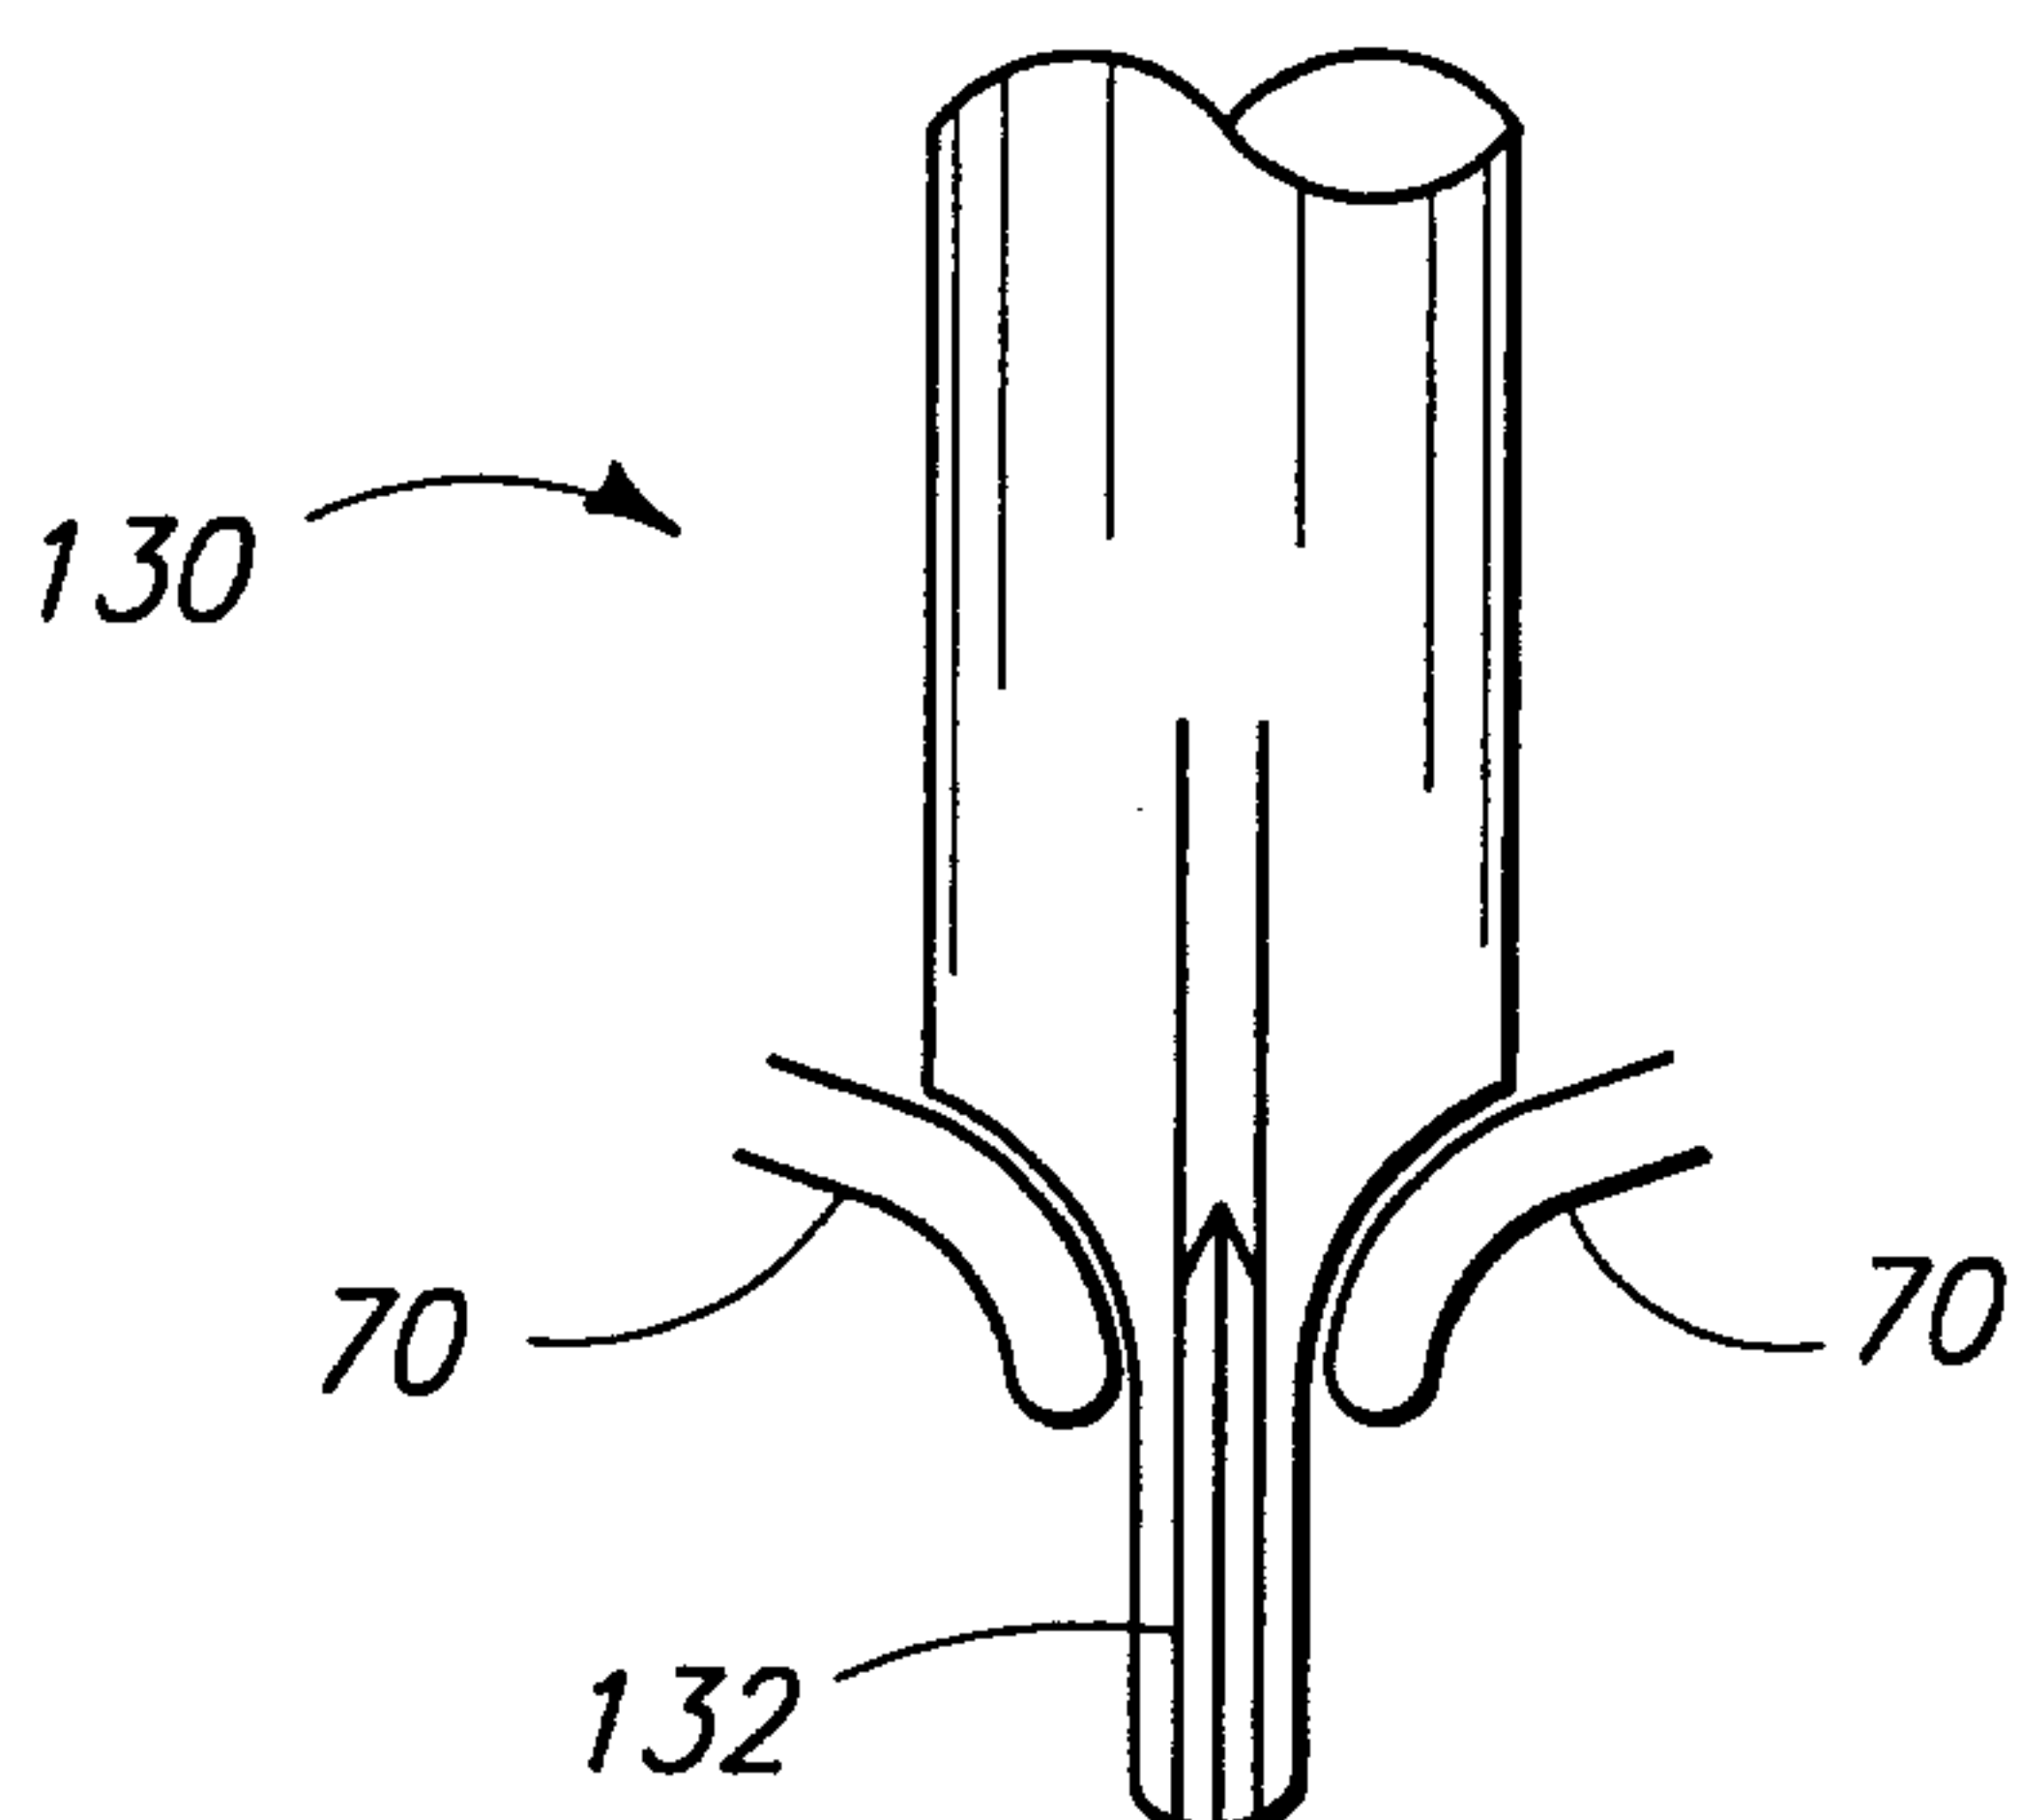


FIG. 12a

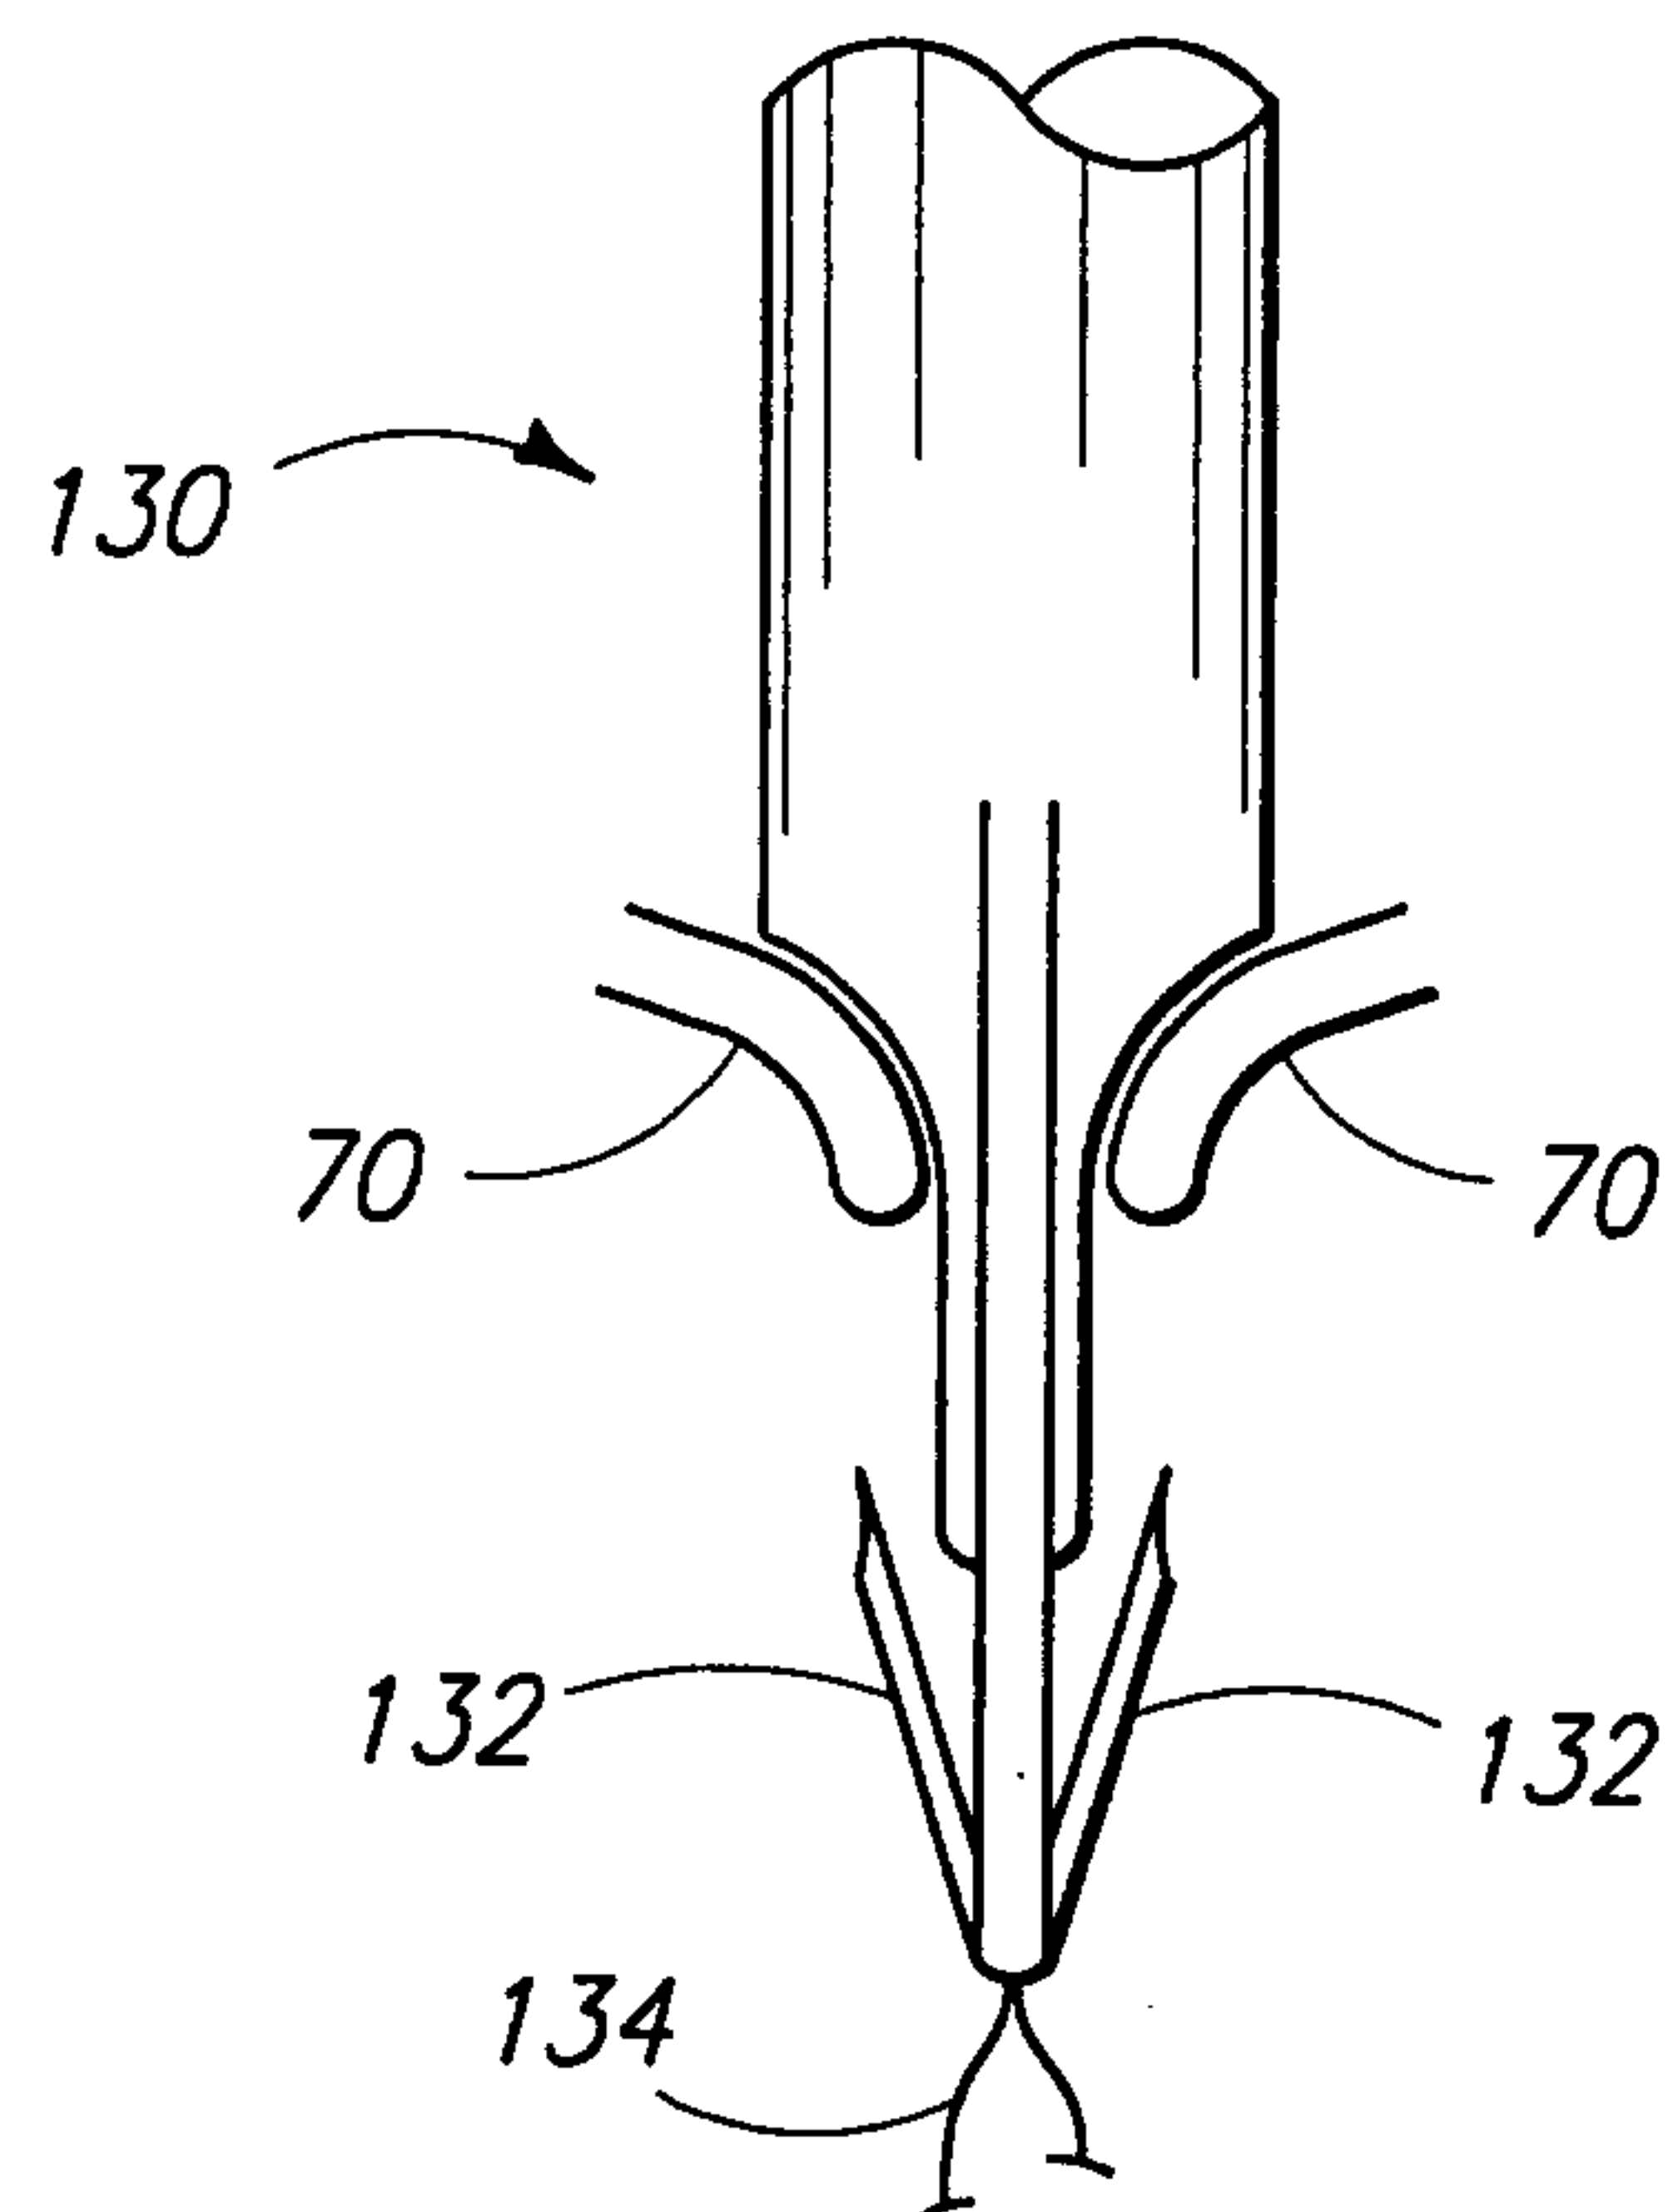


FIG. 12b

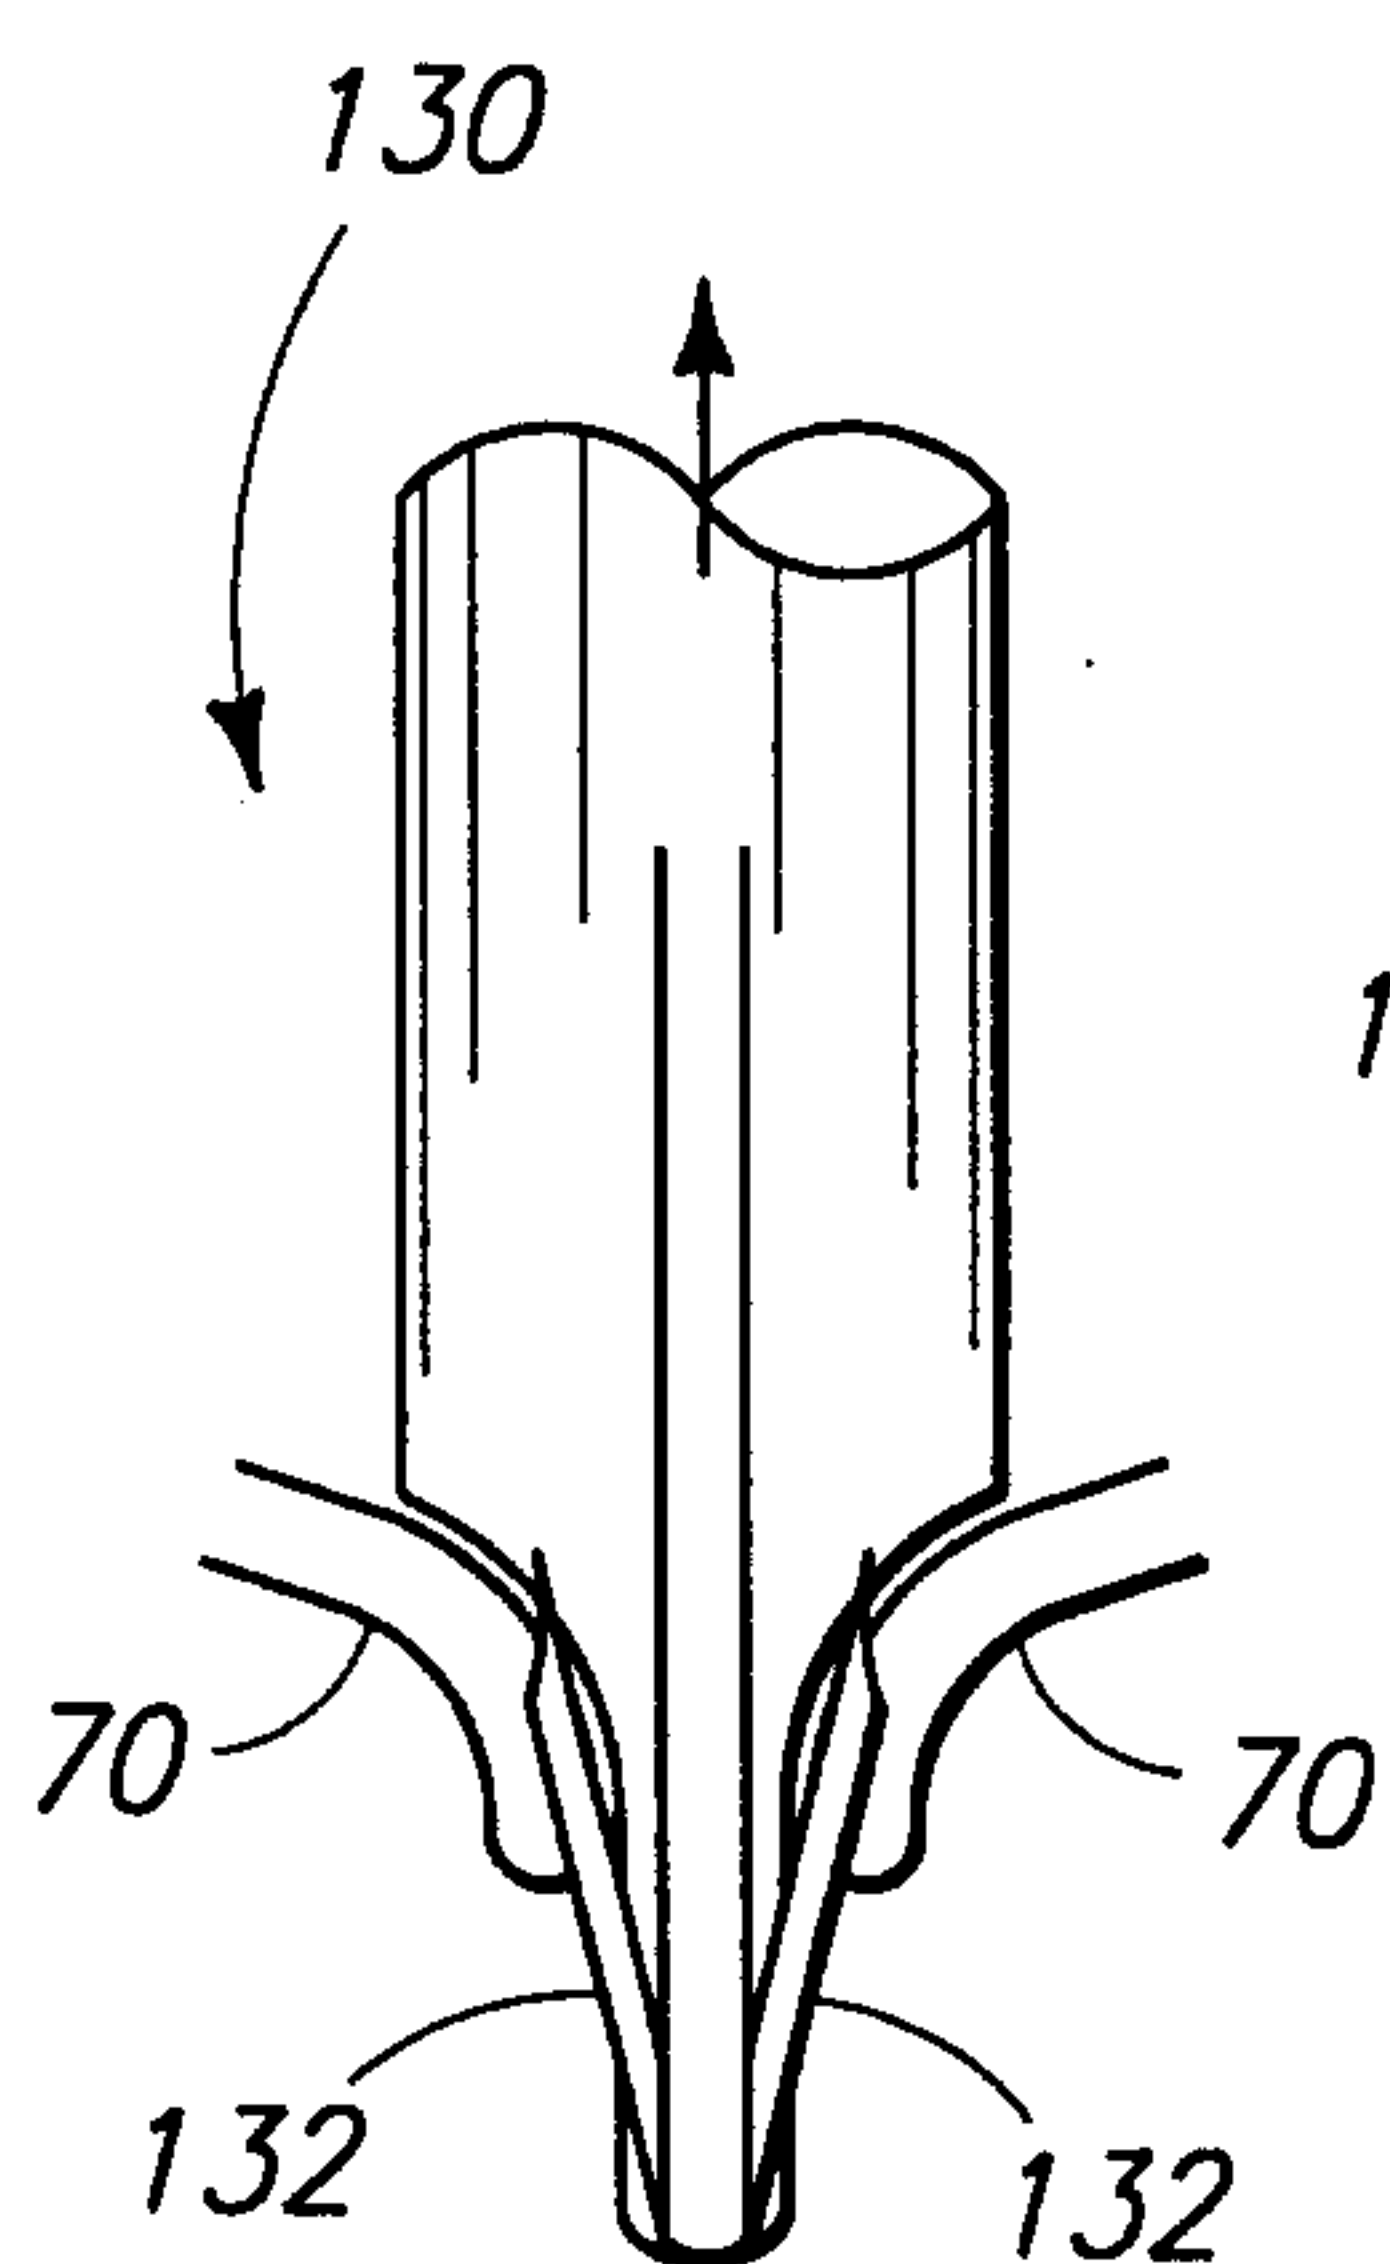


FIG. 12c

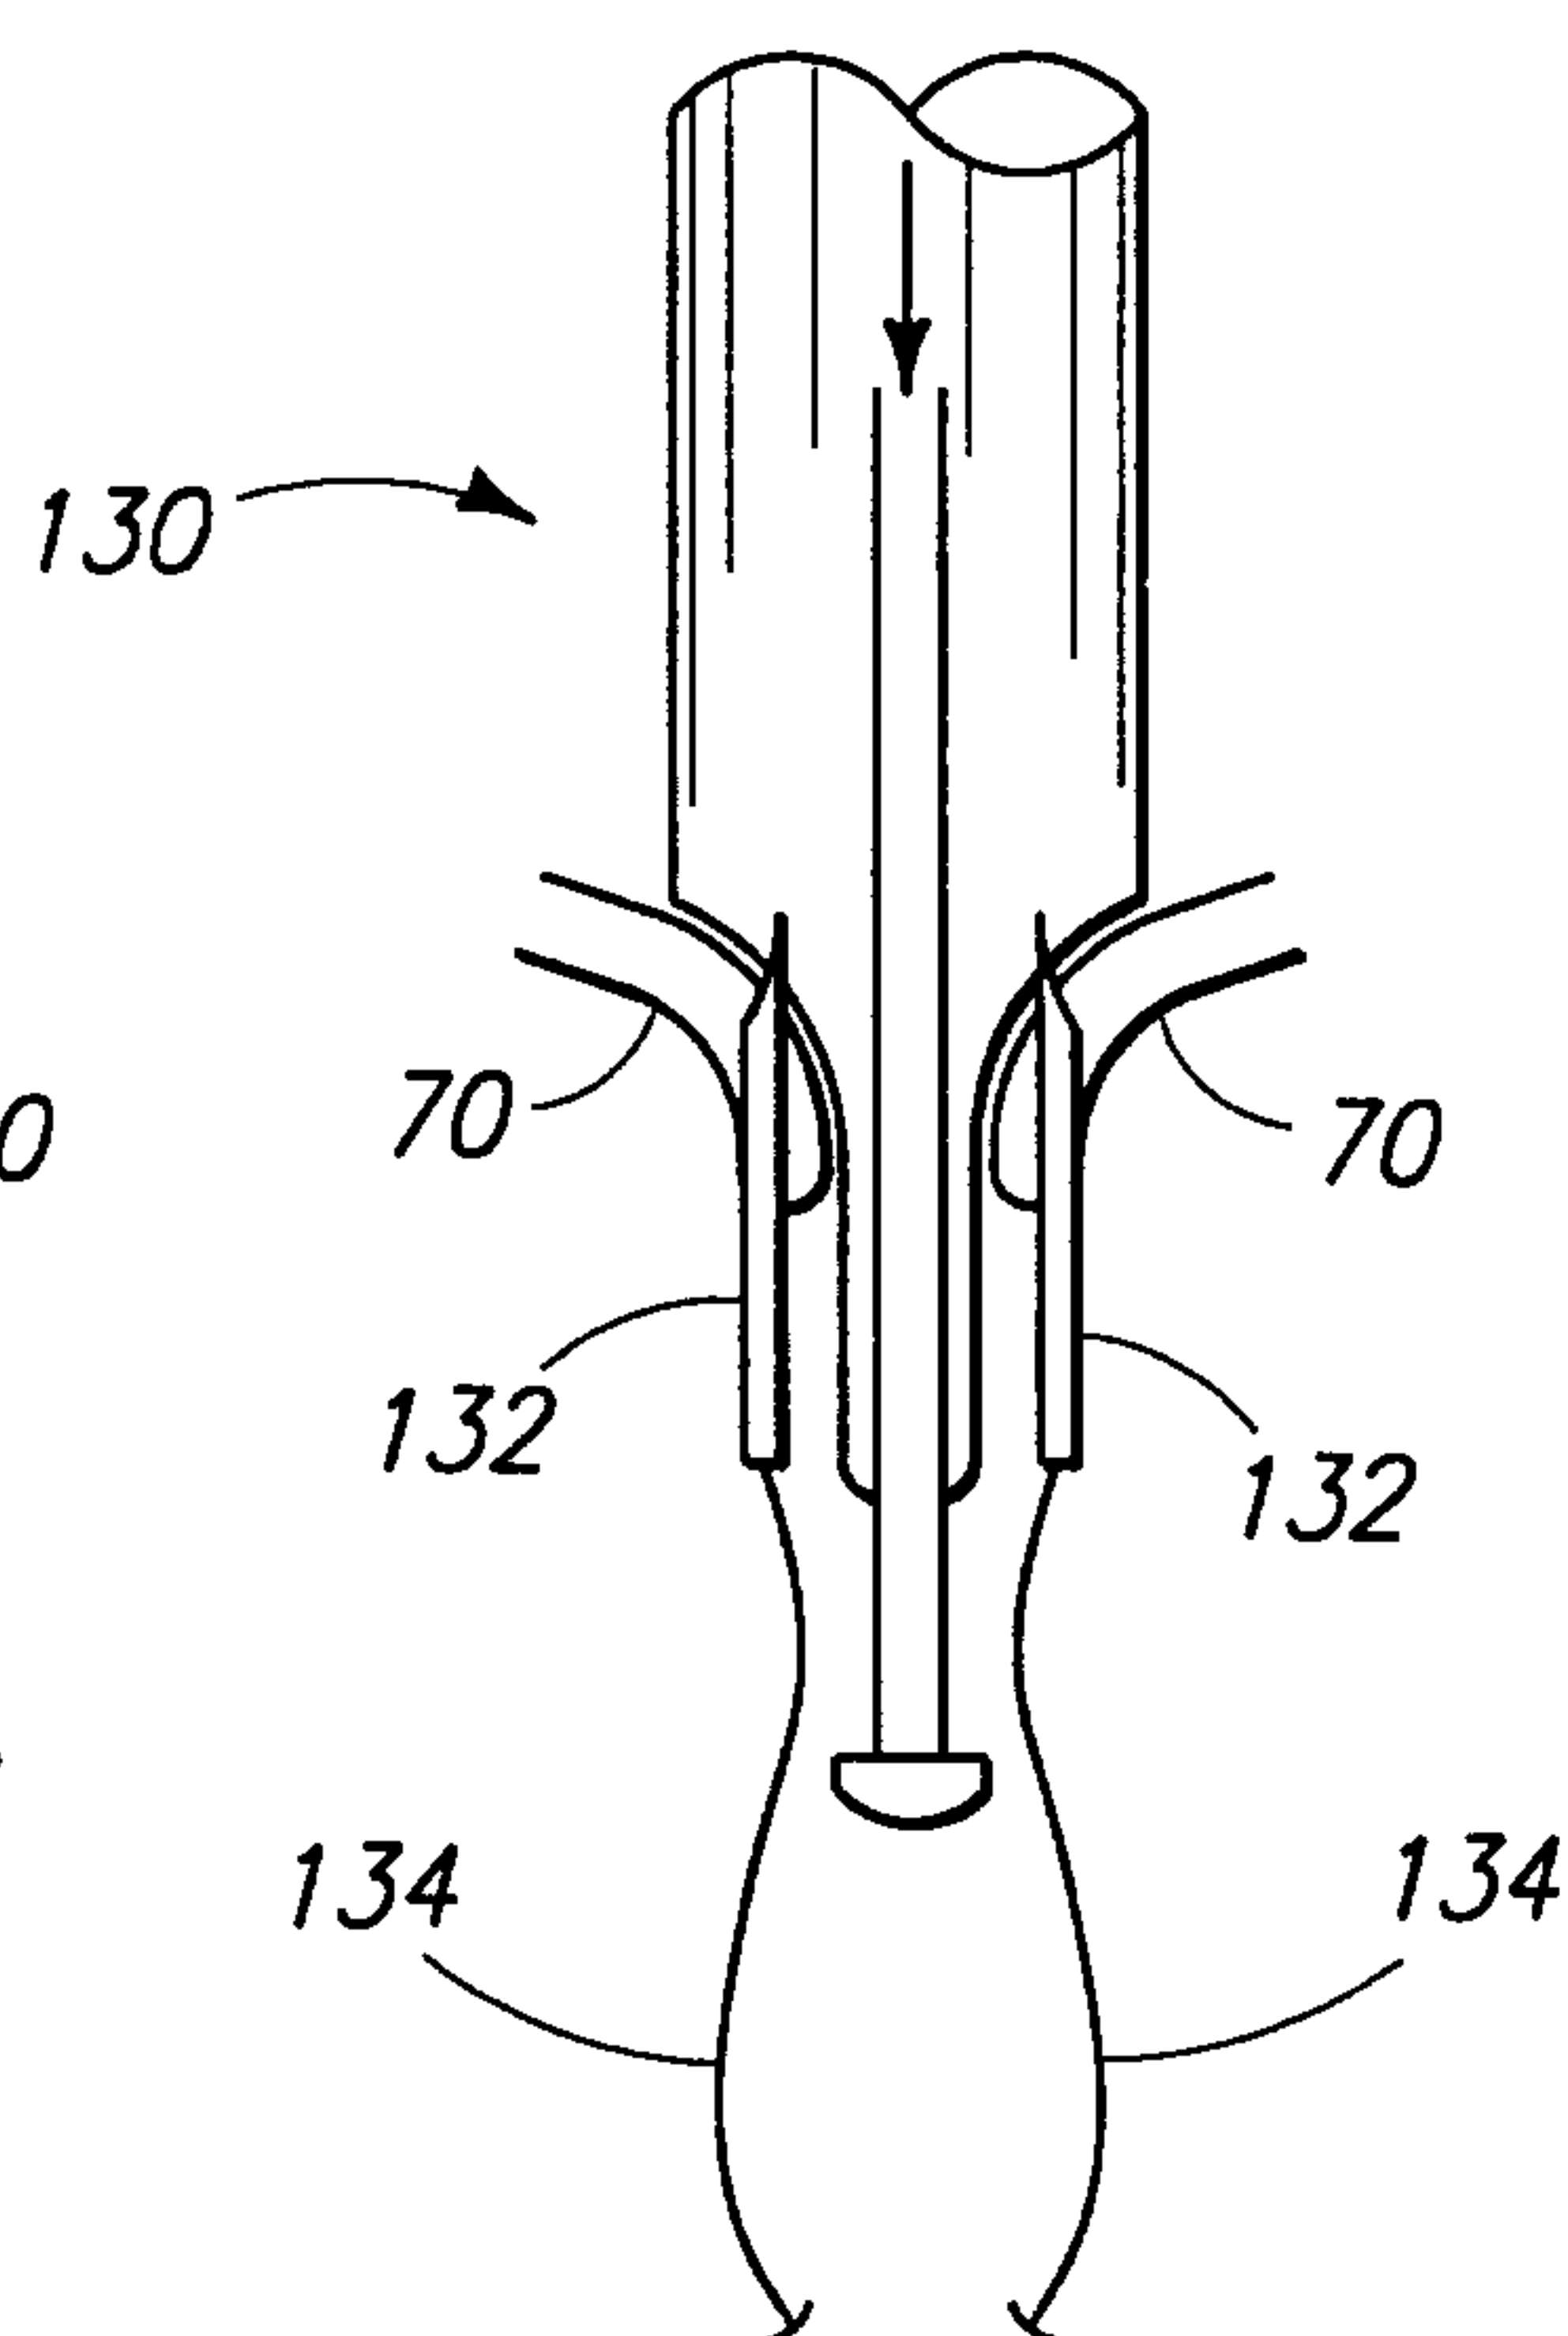


FIG. 12d



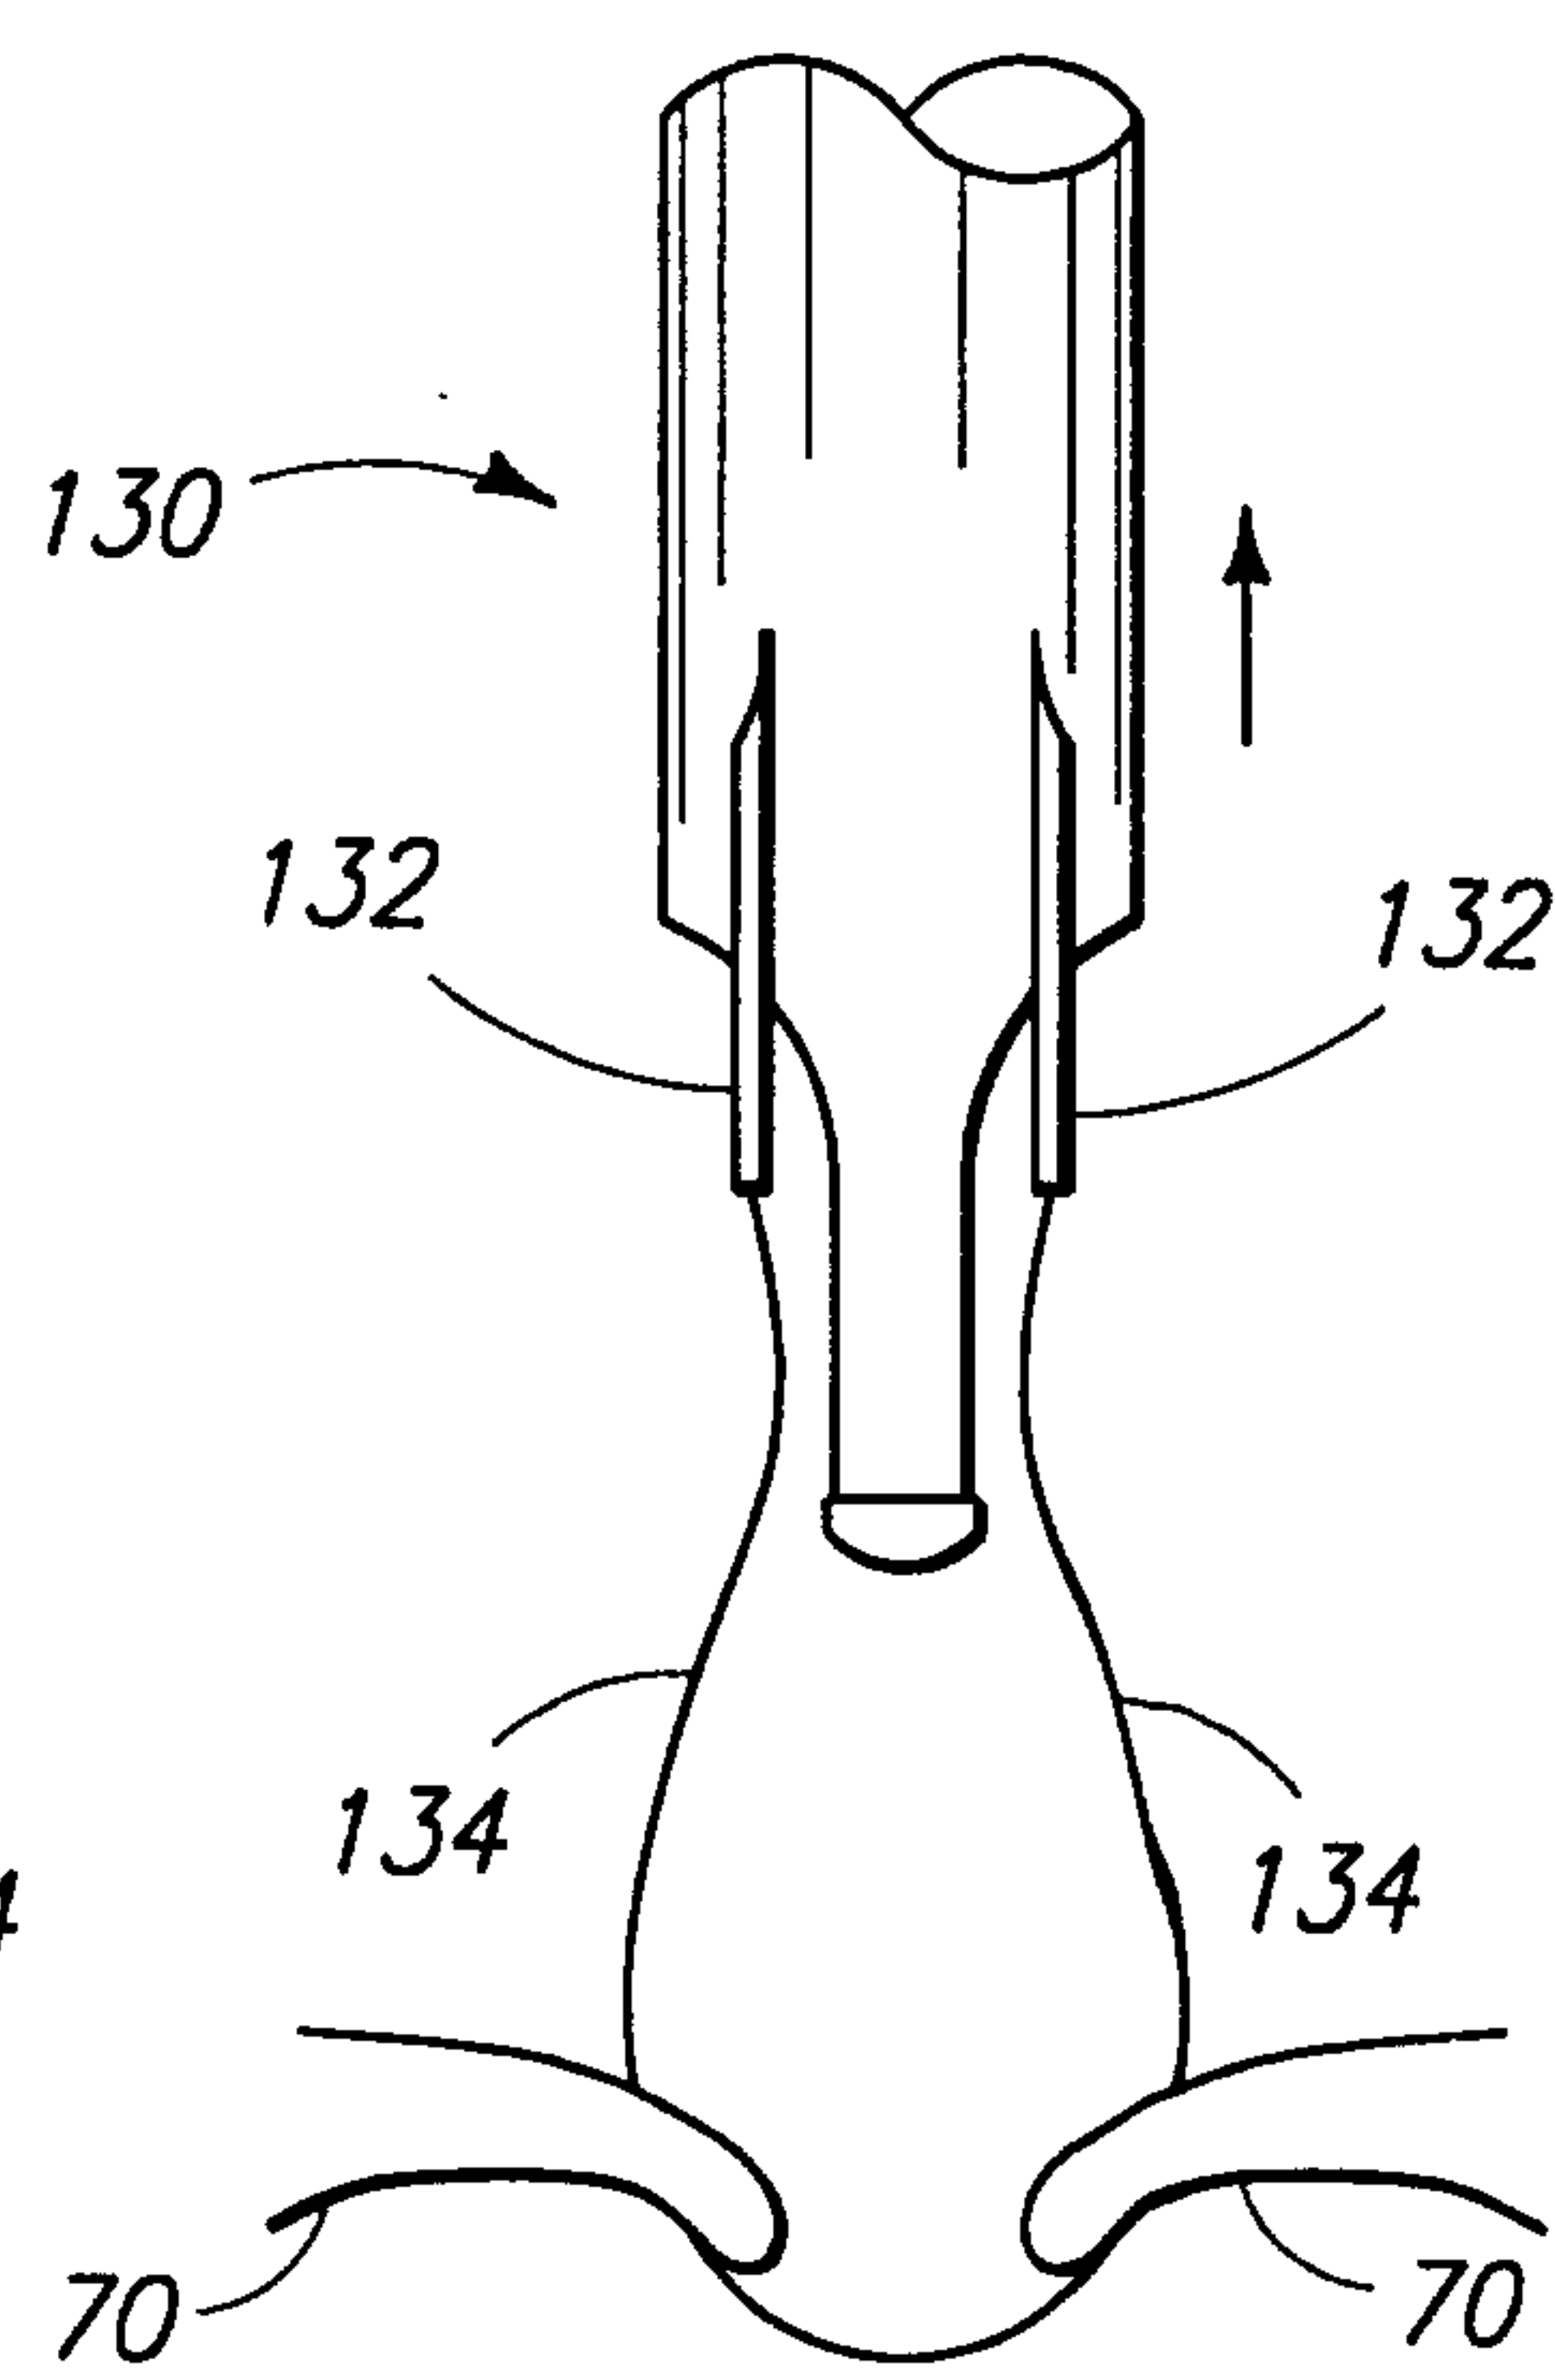


FIG. 12e

11/45

FIG. 13a

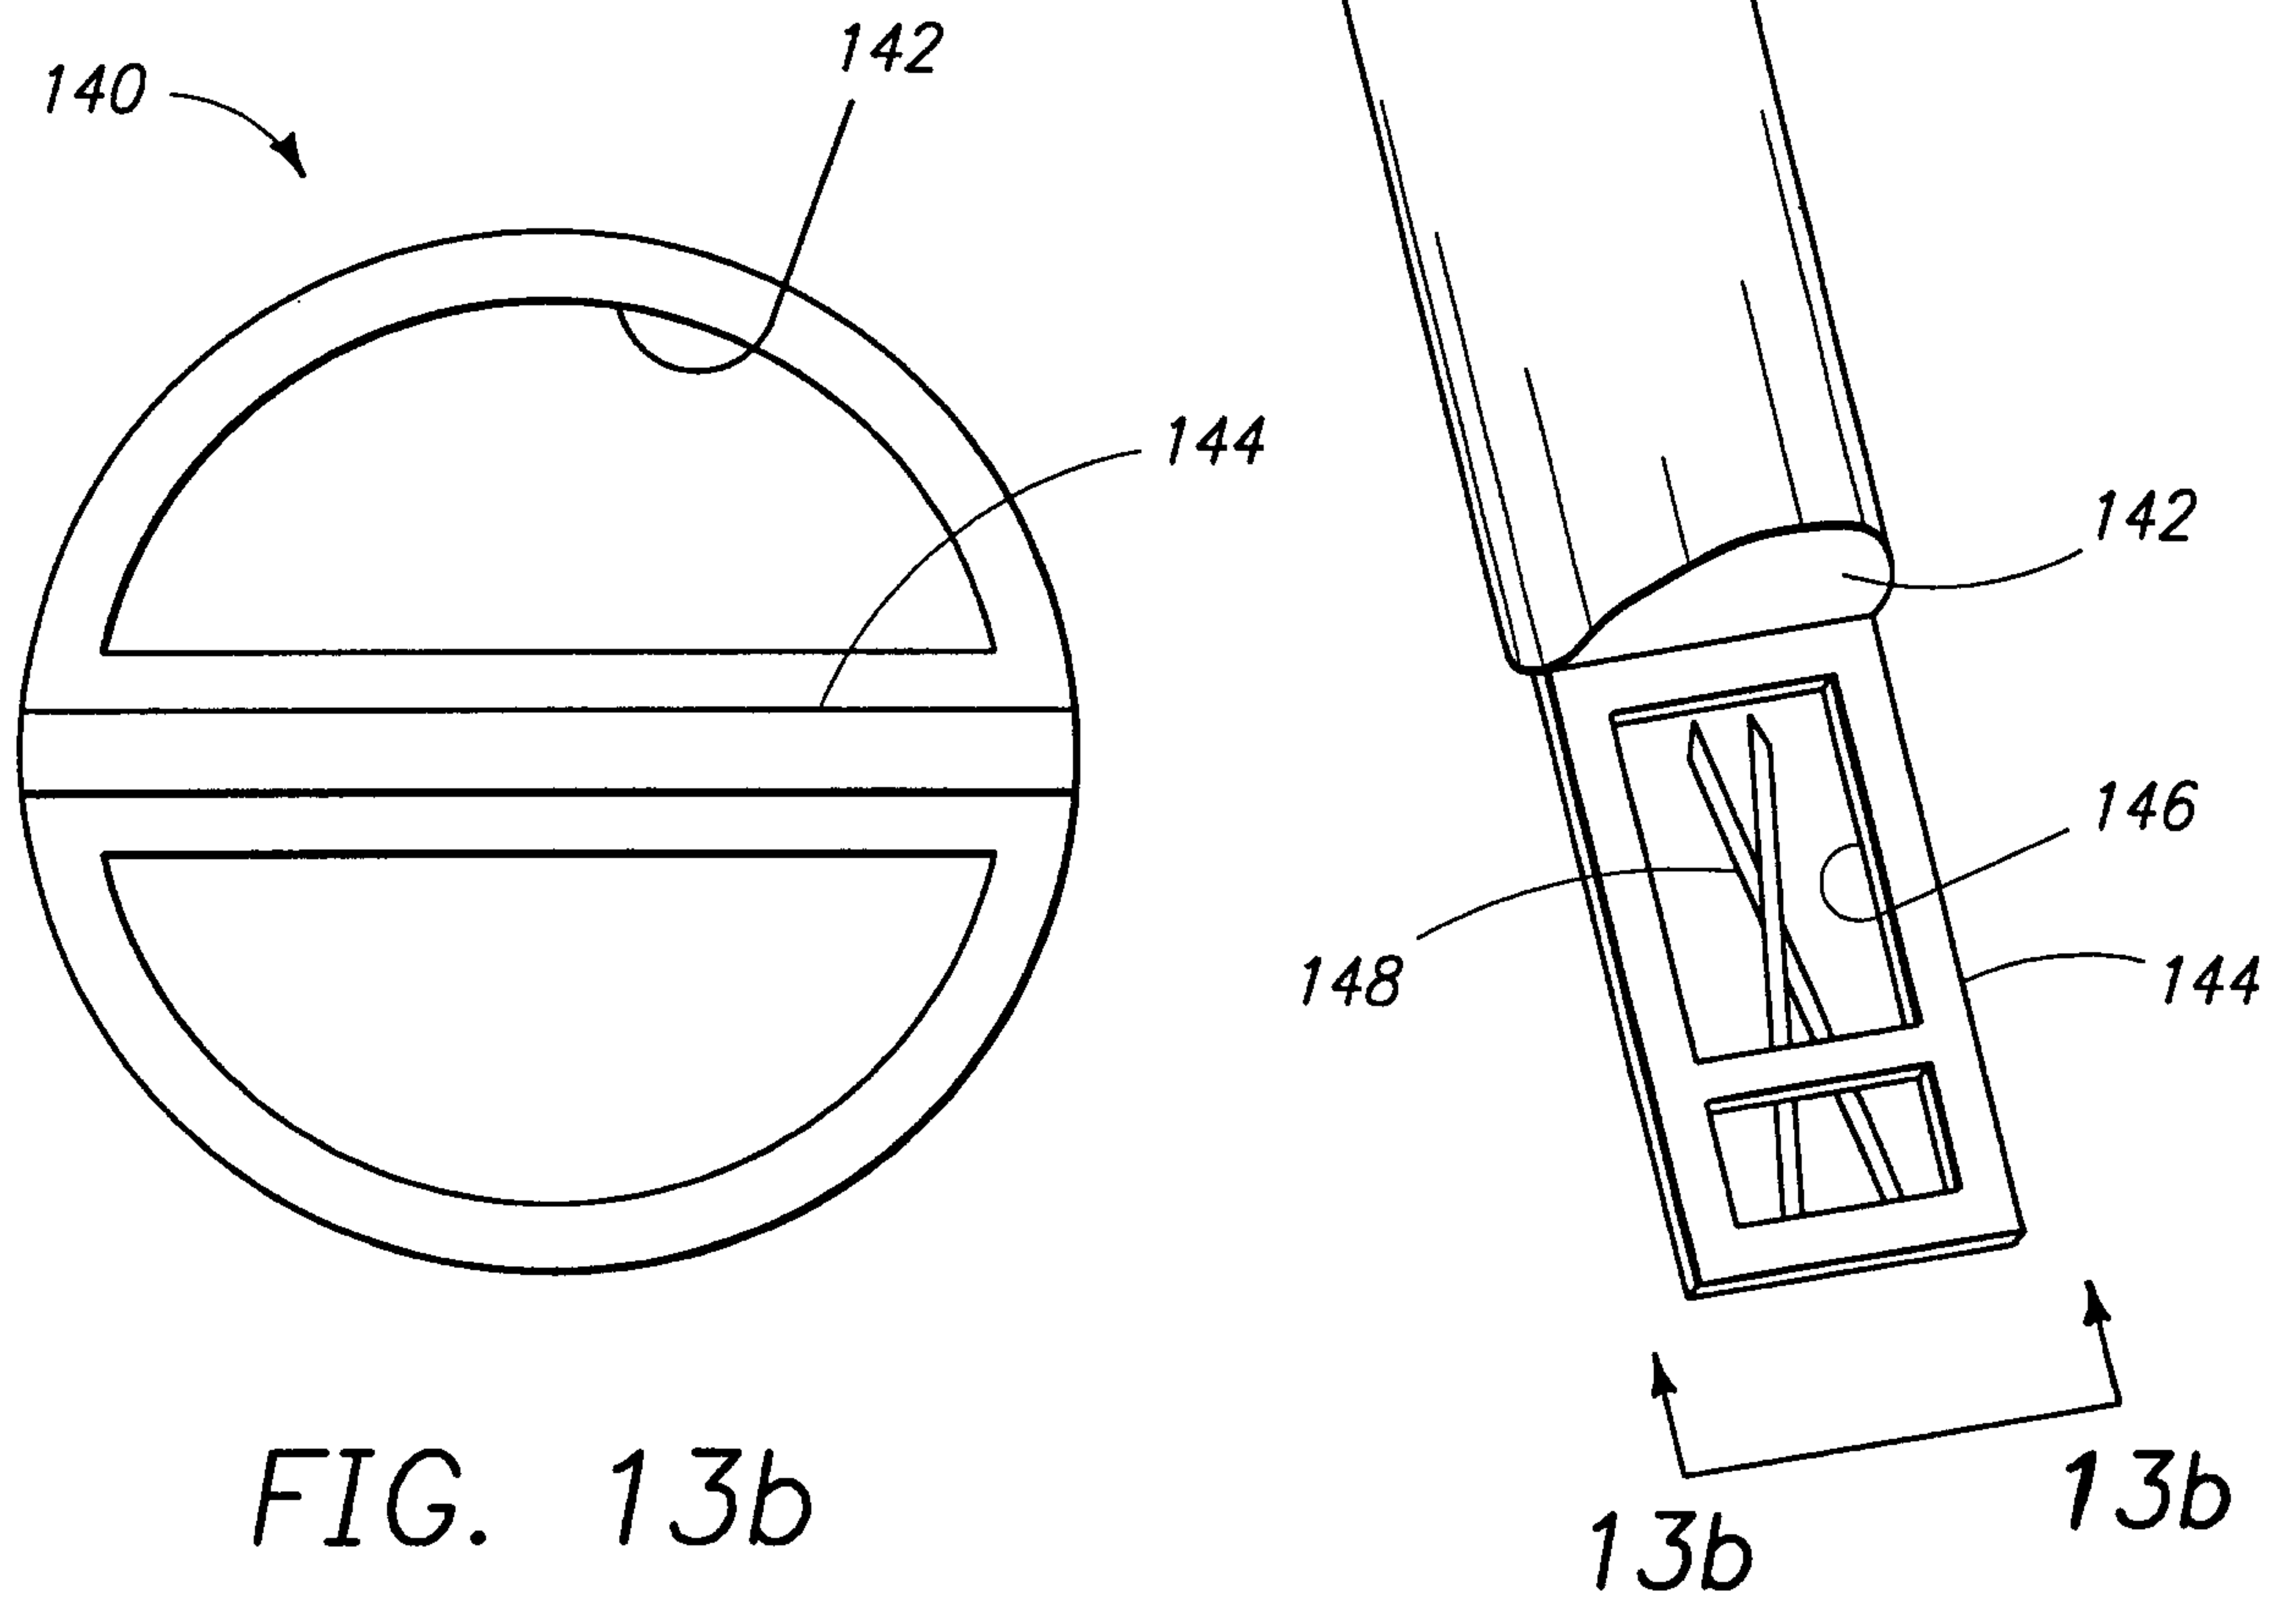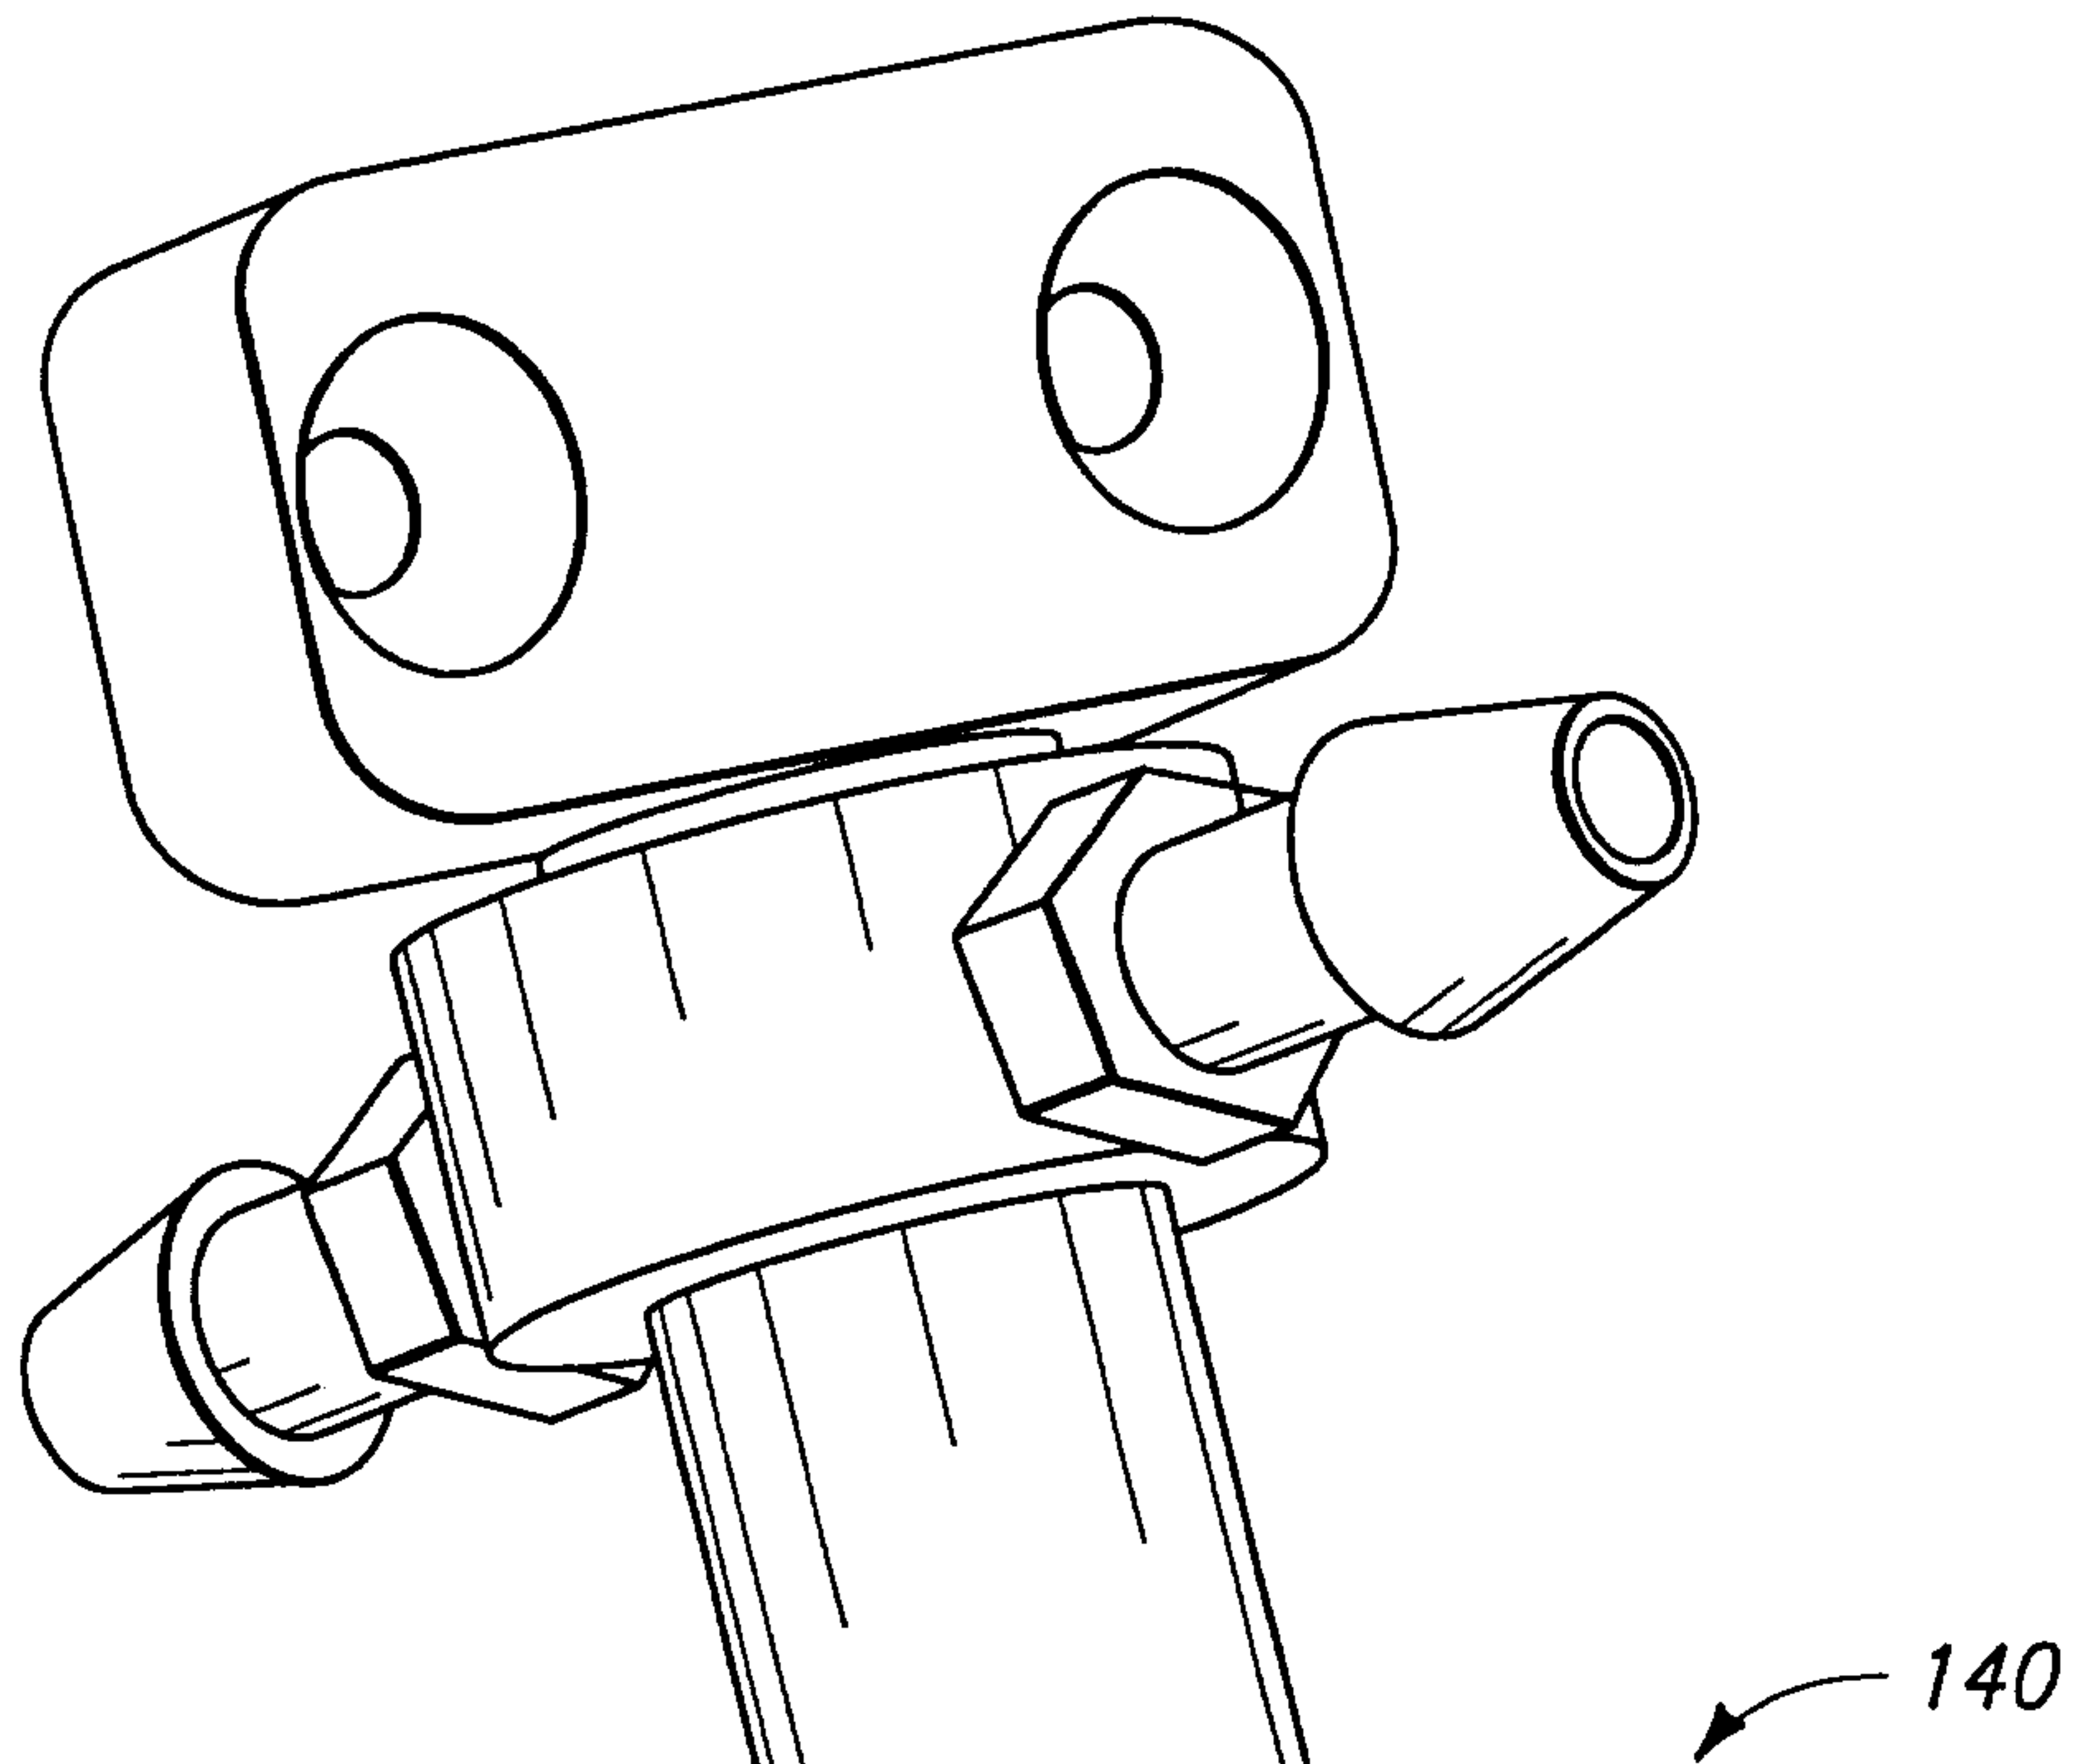

12/45

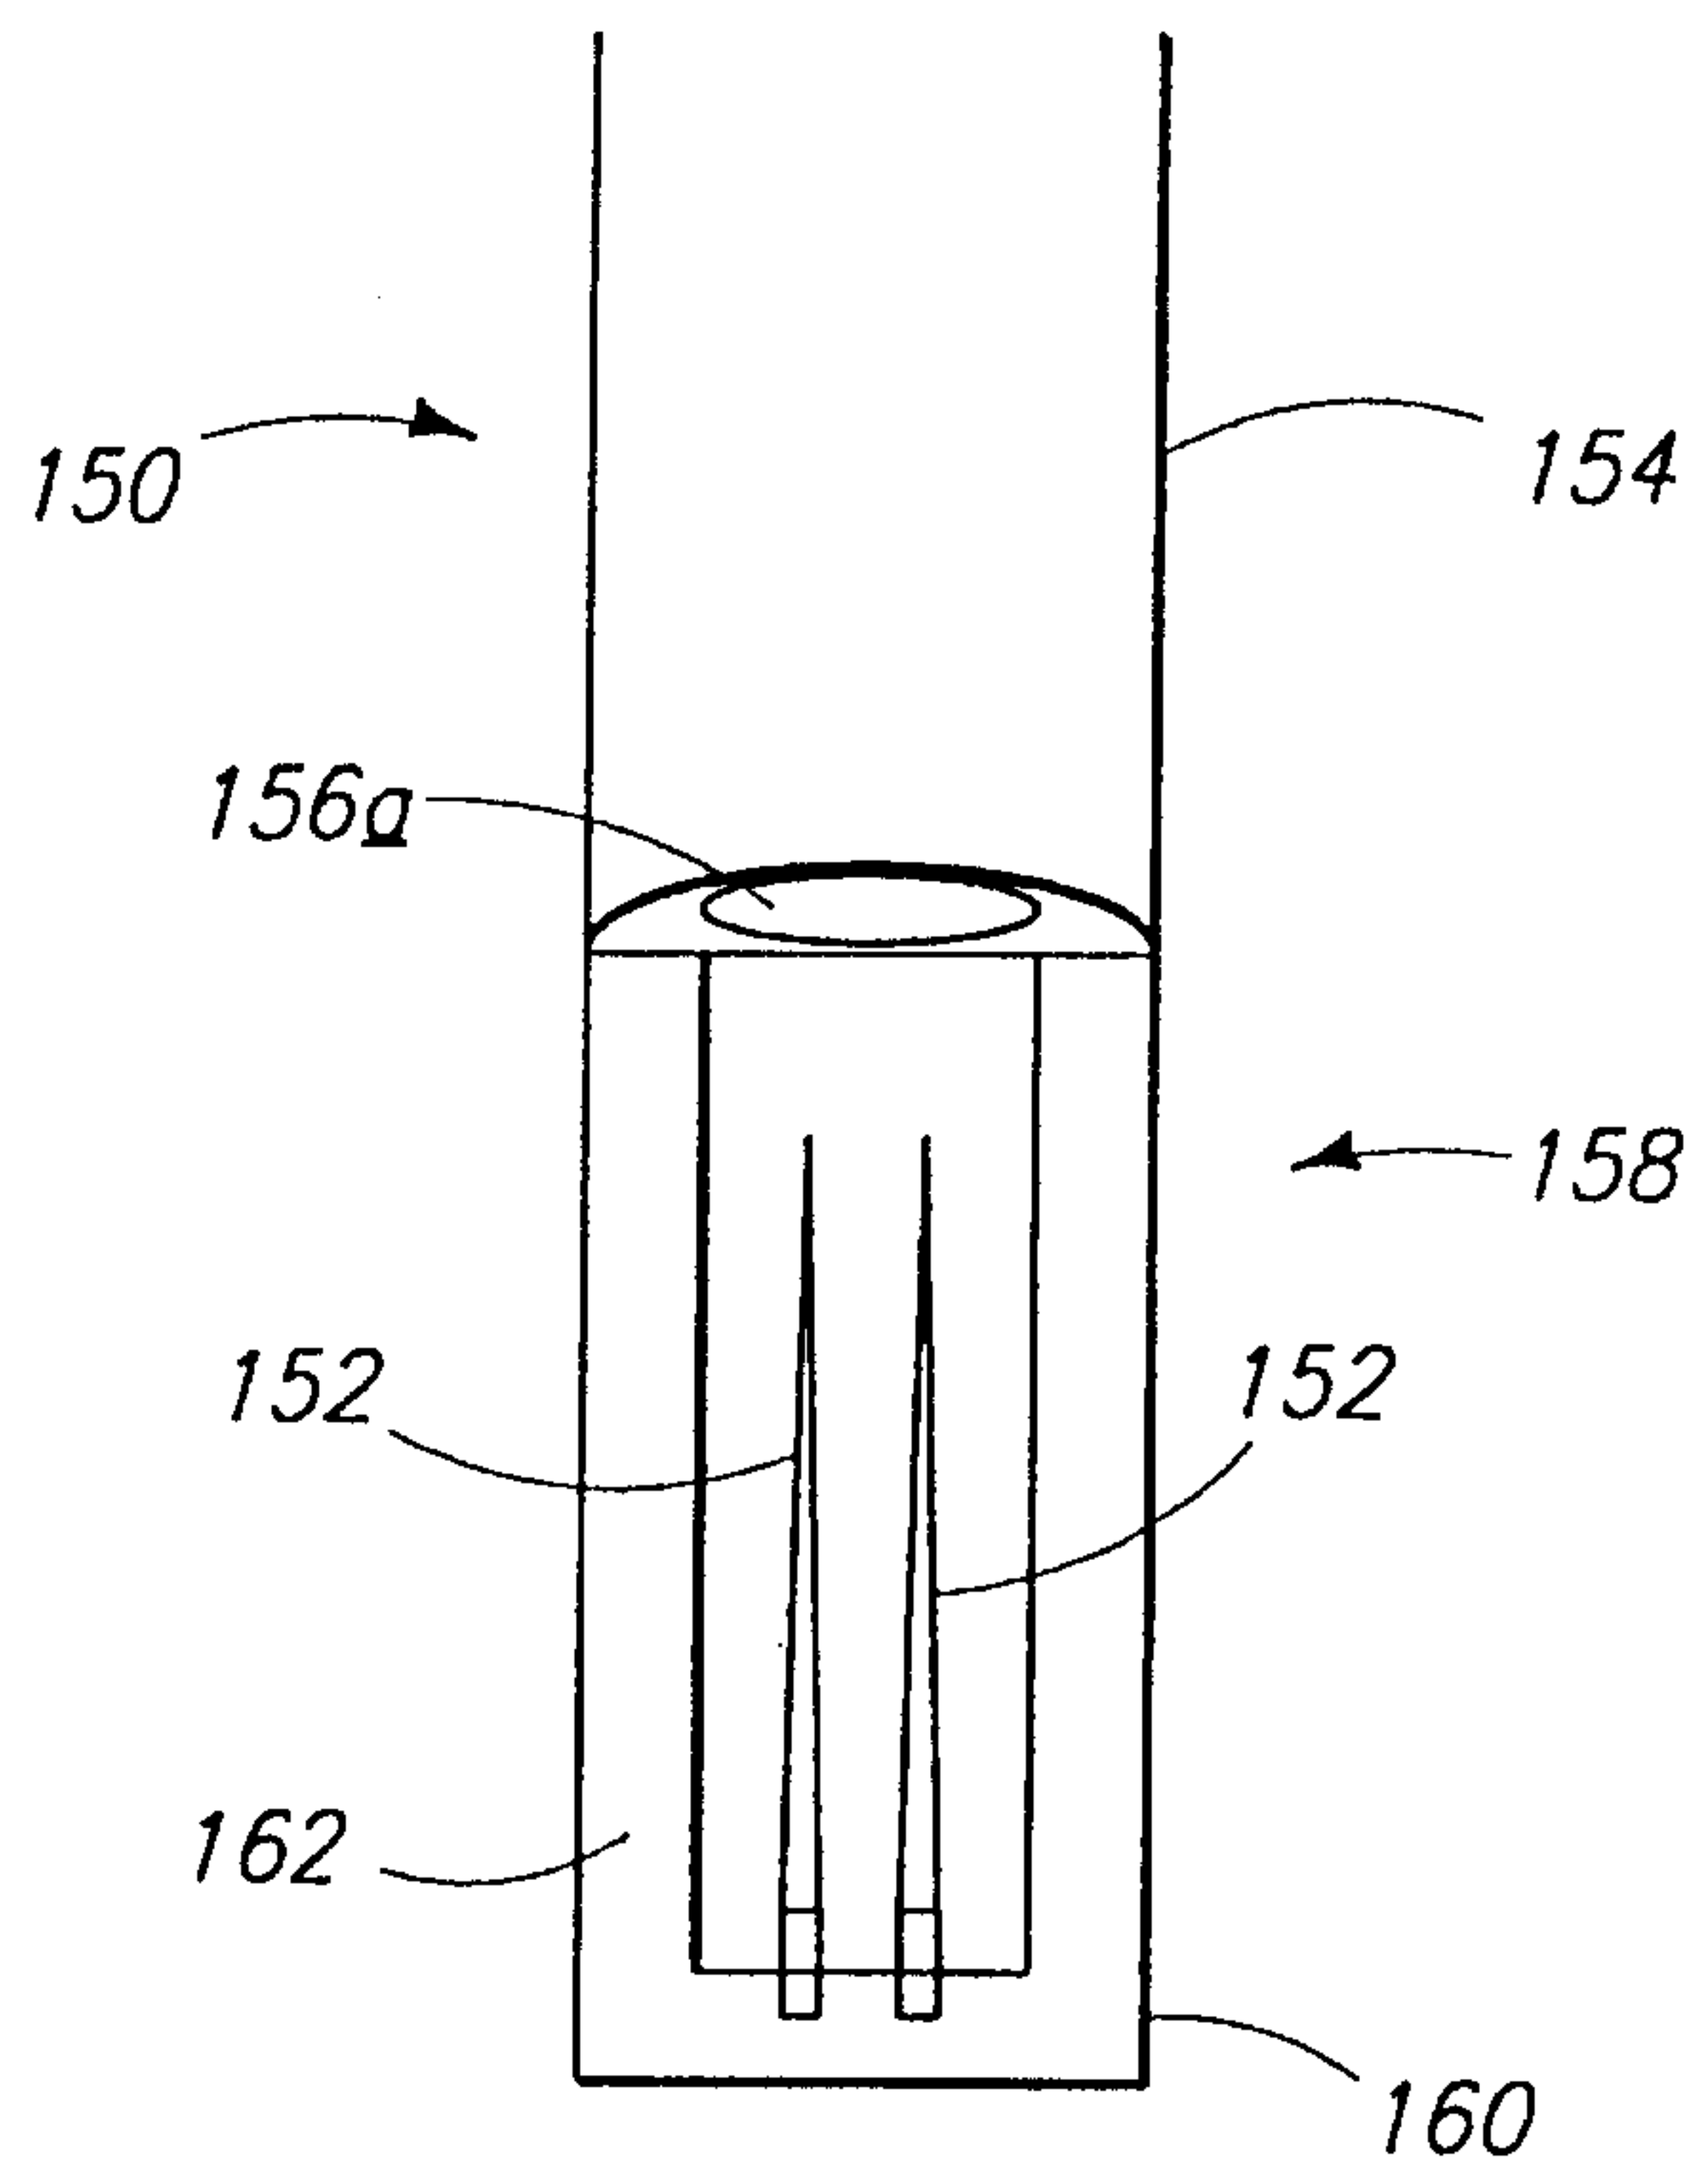


FIG. 14a



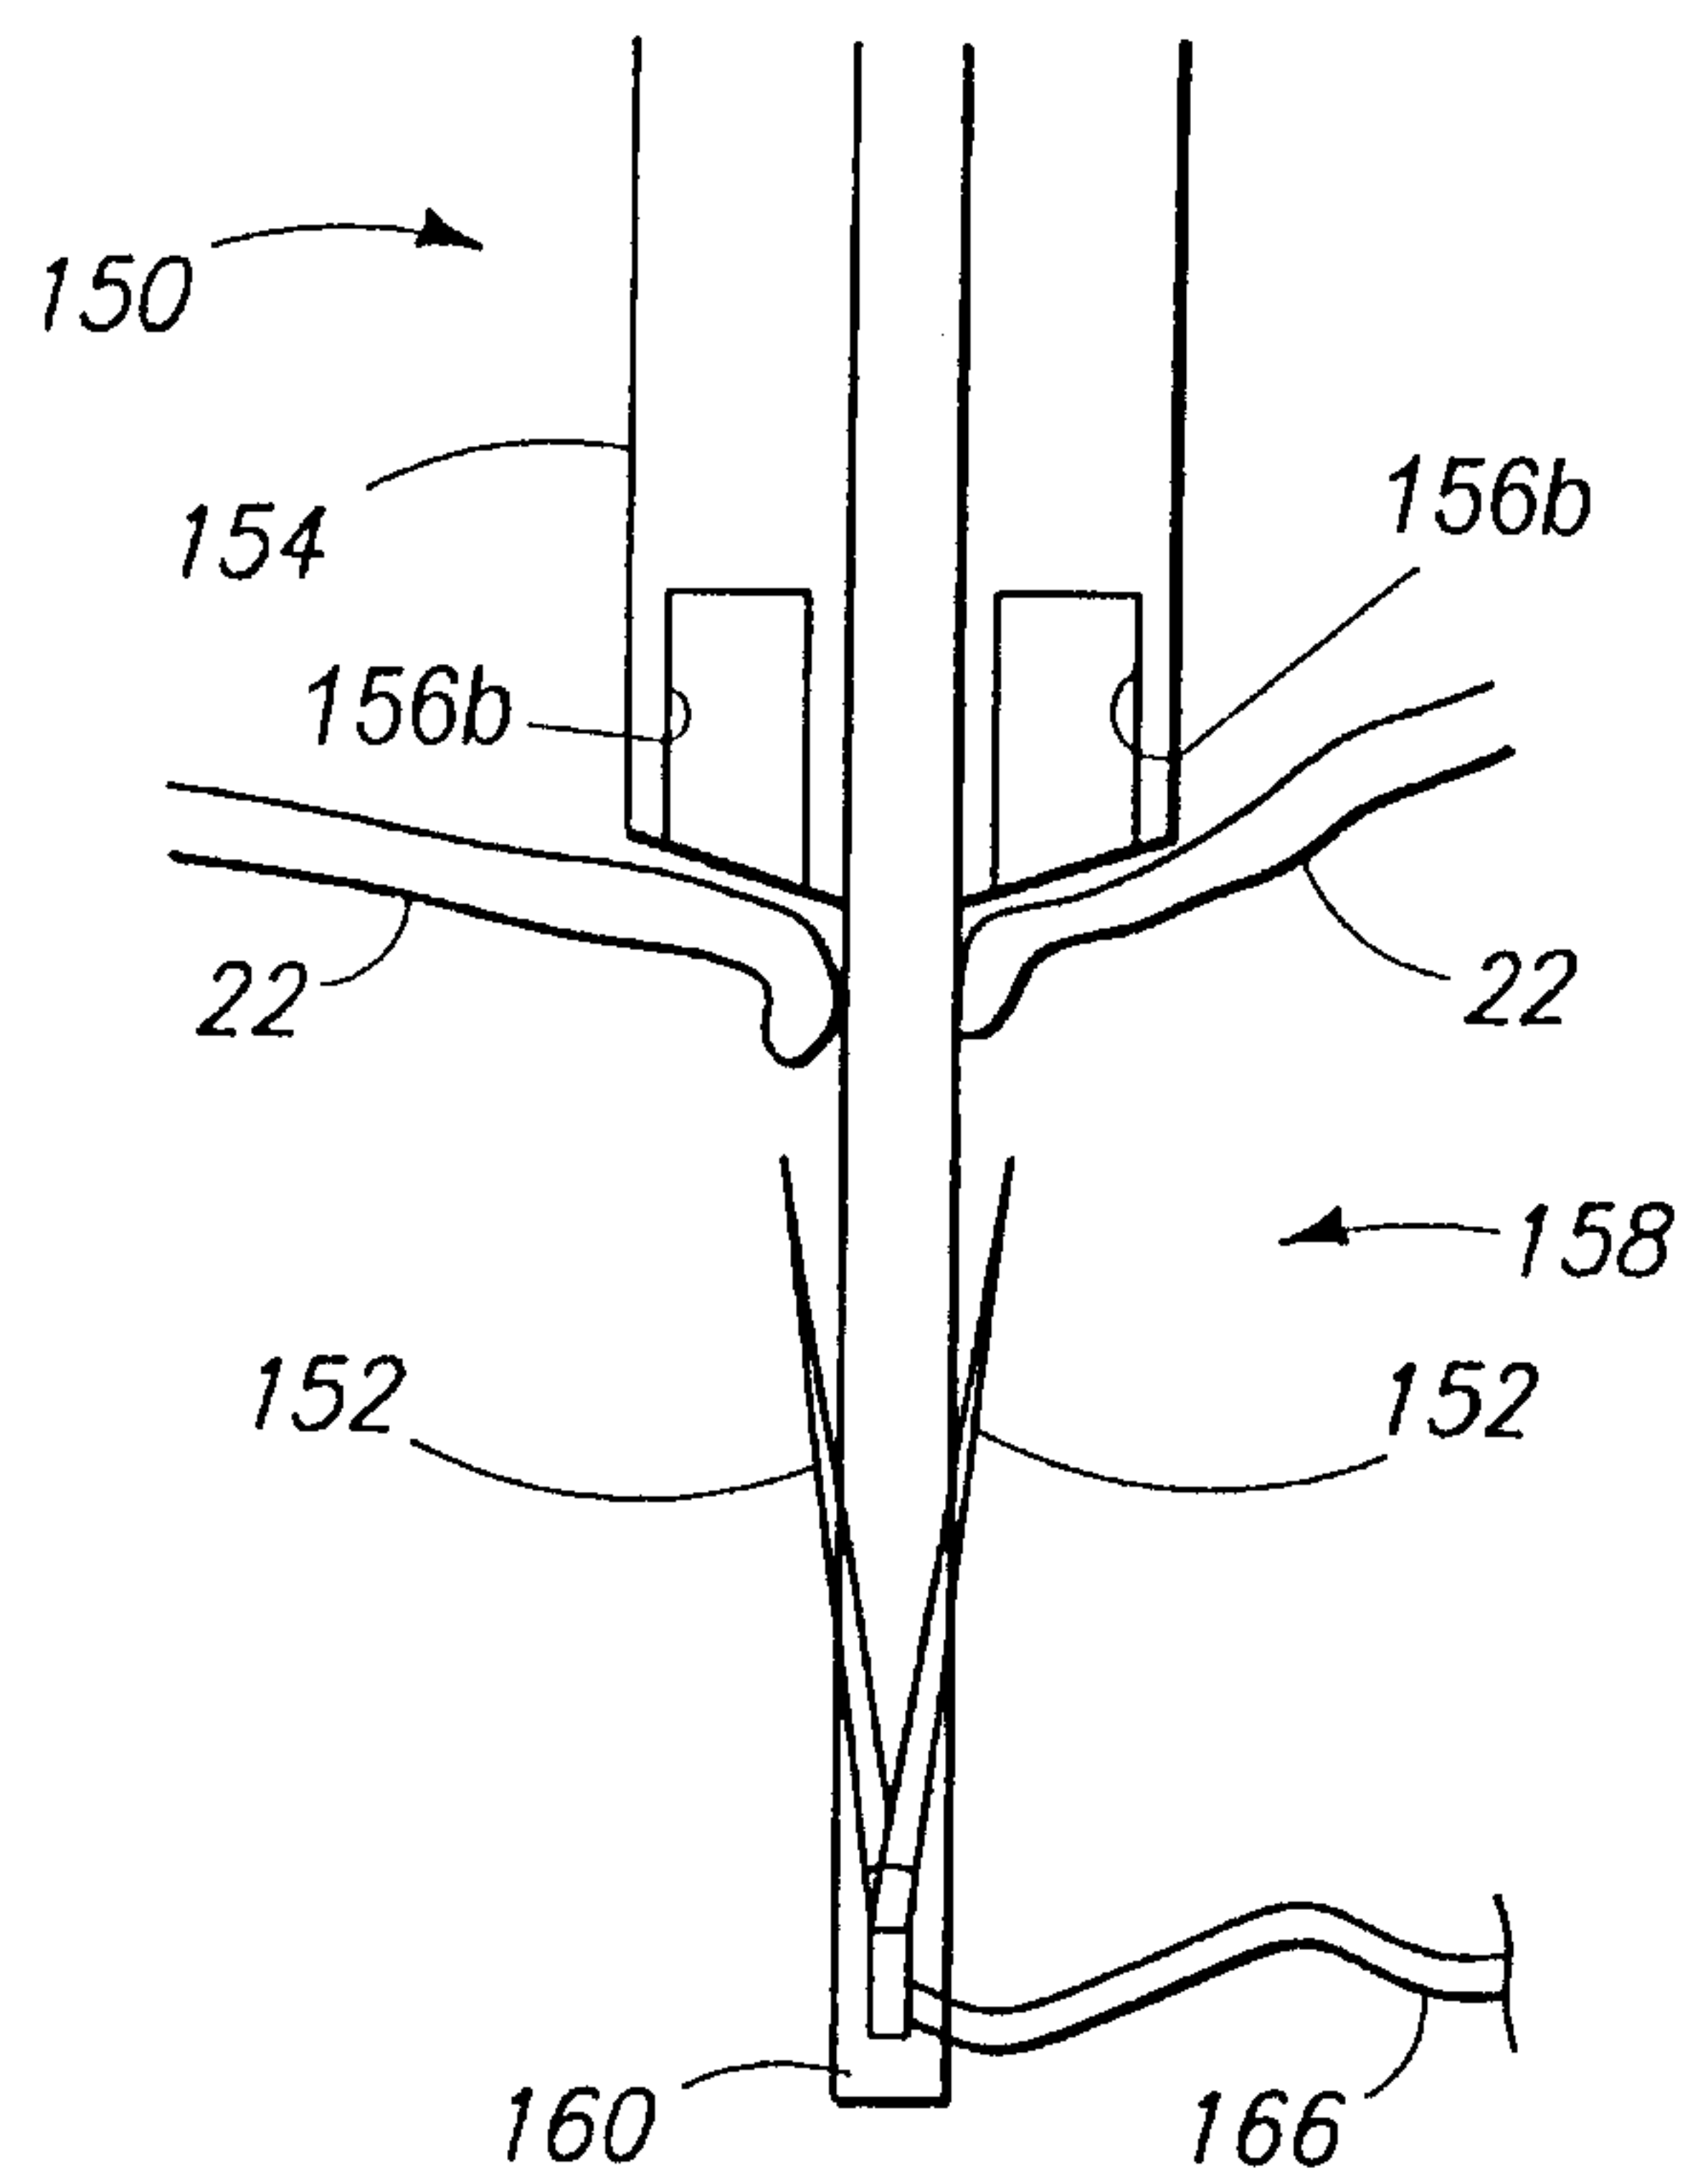


FIG. 14b

13/45

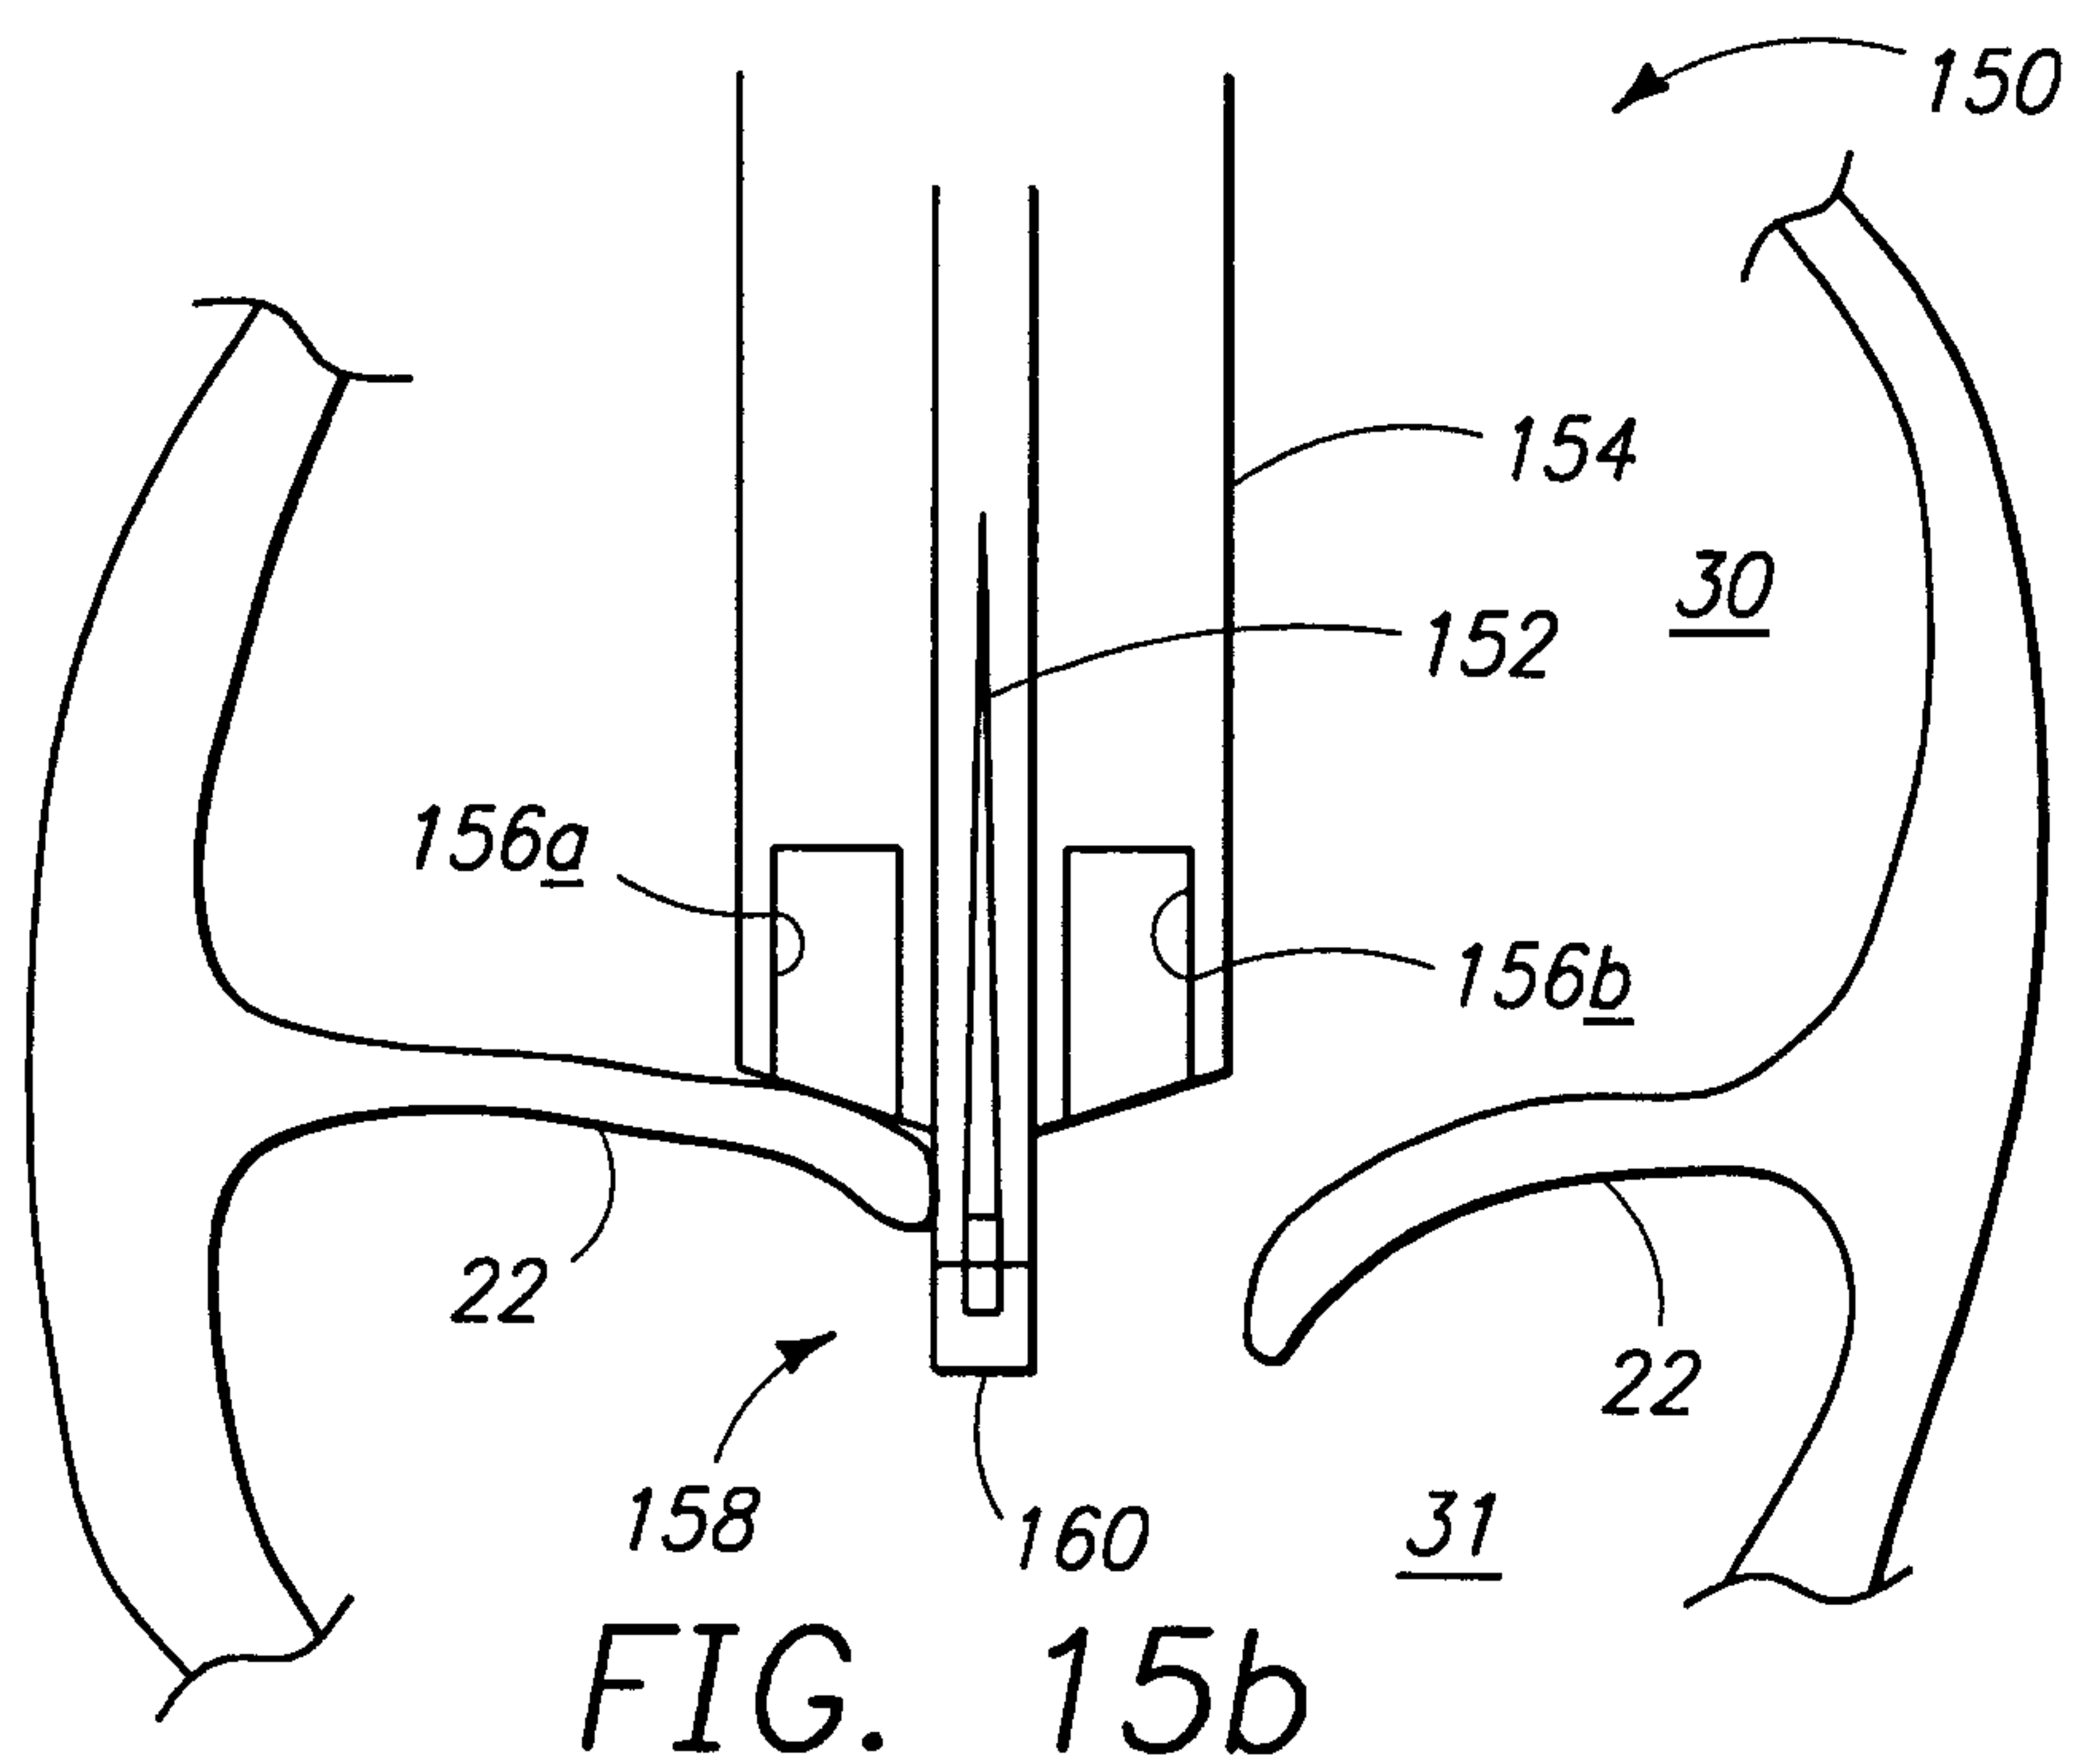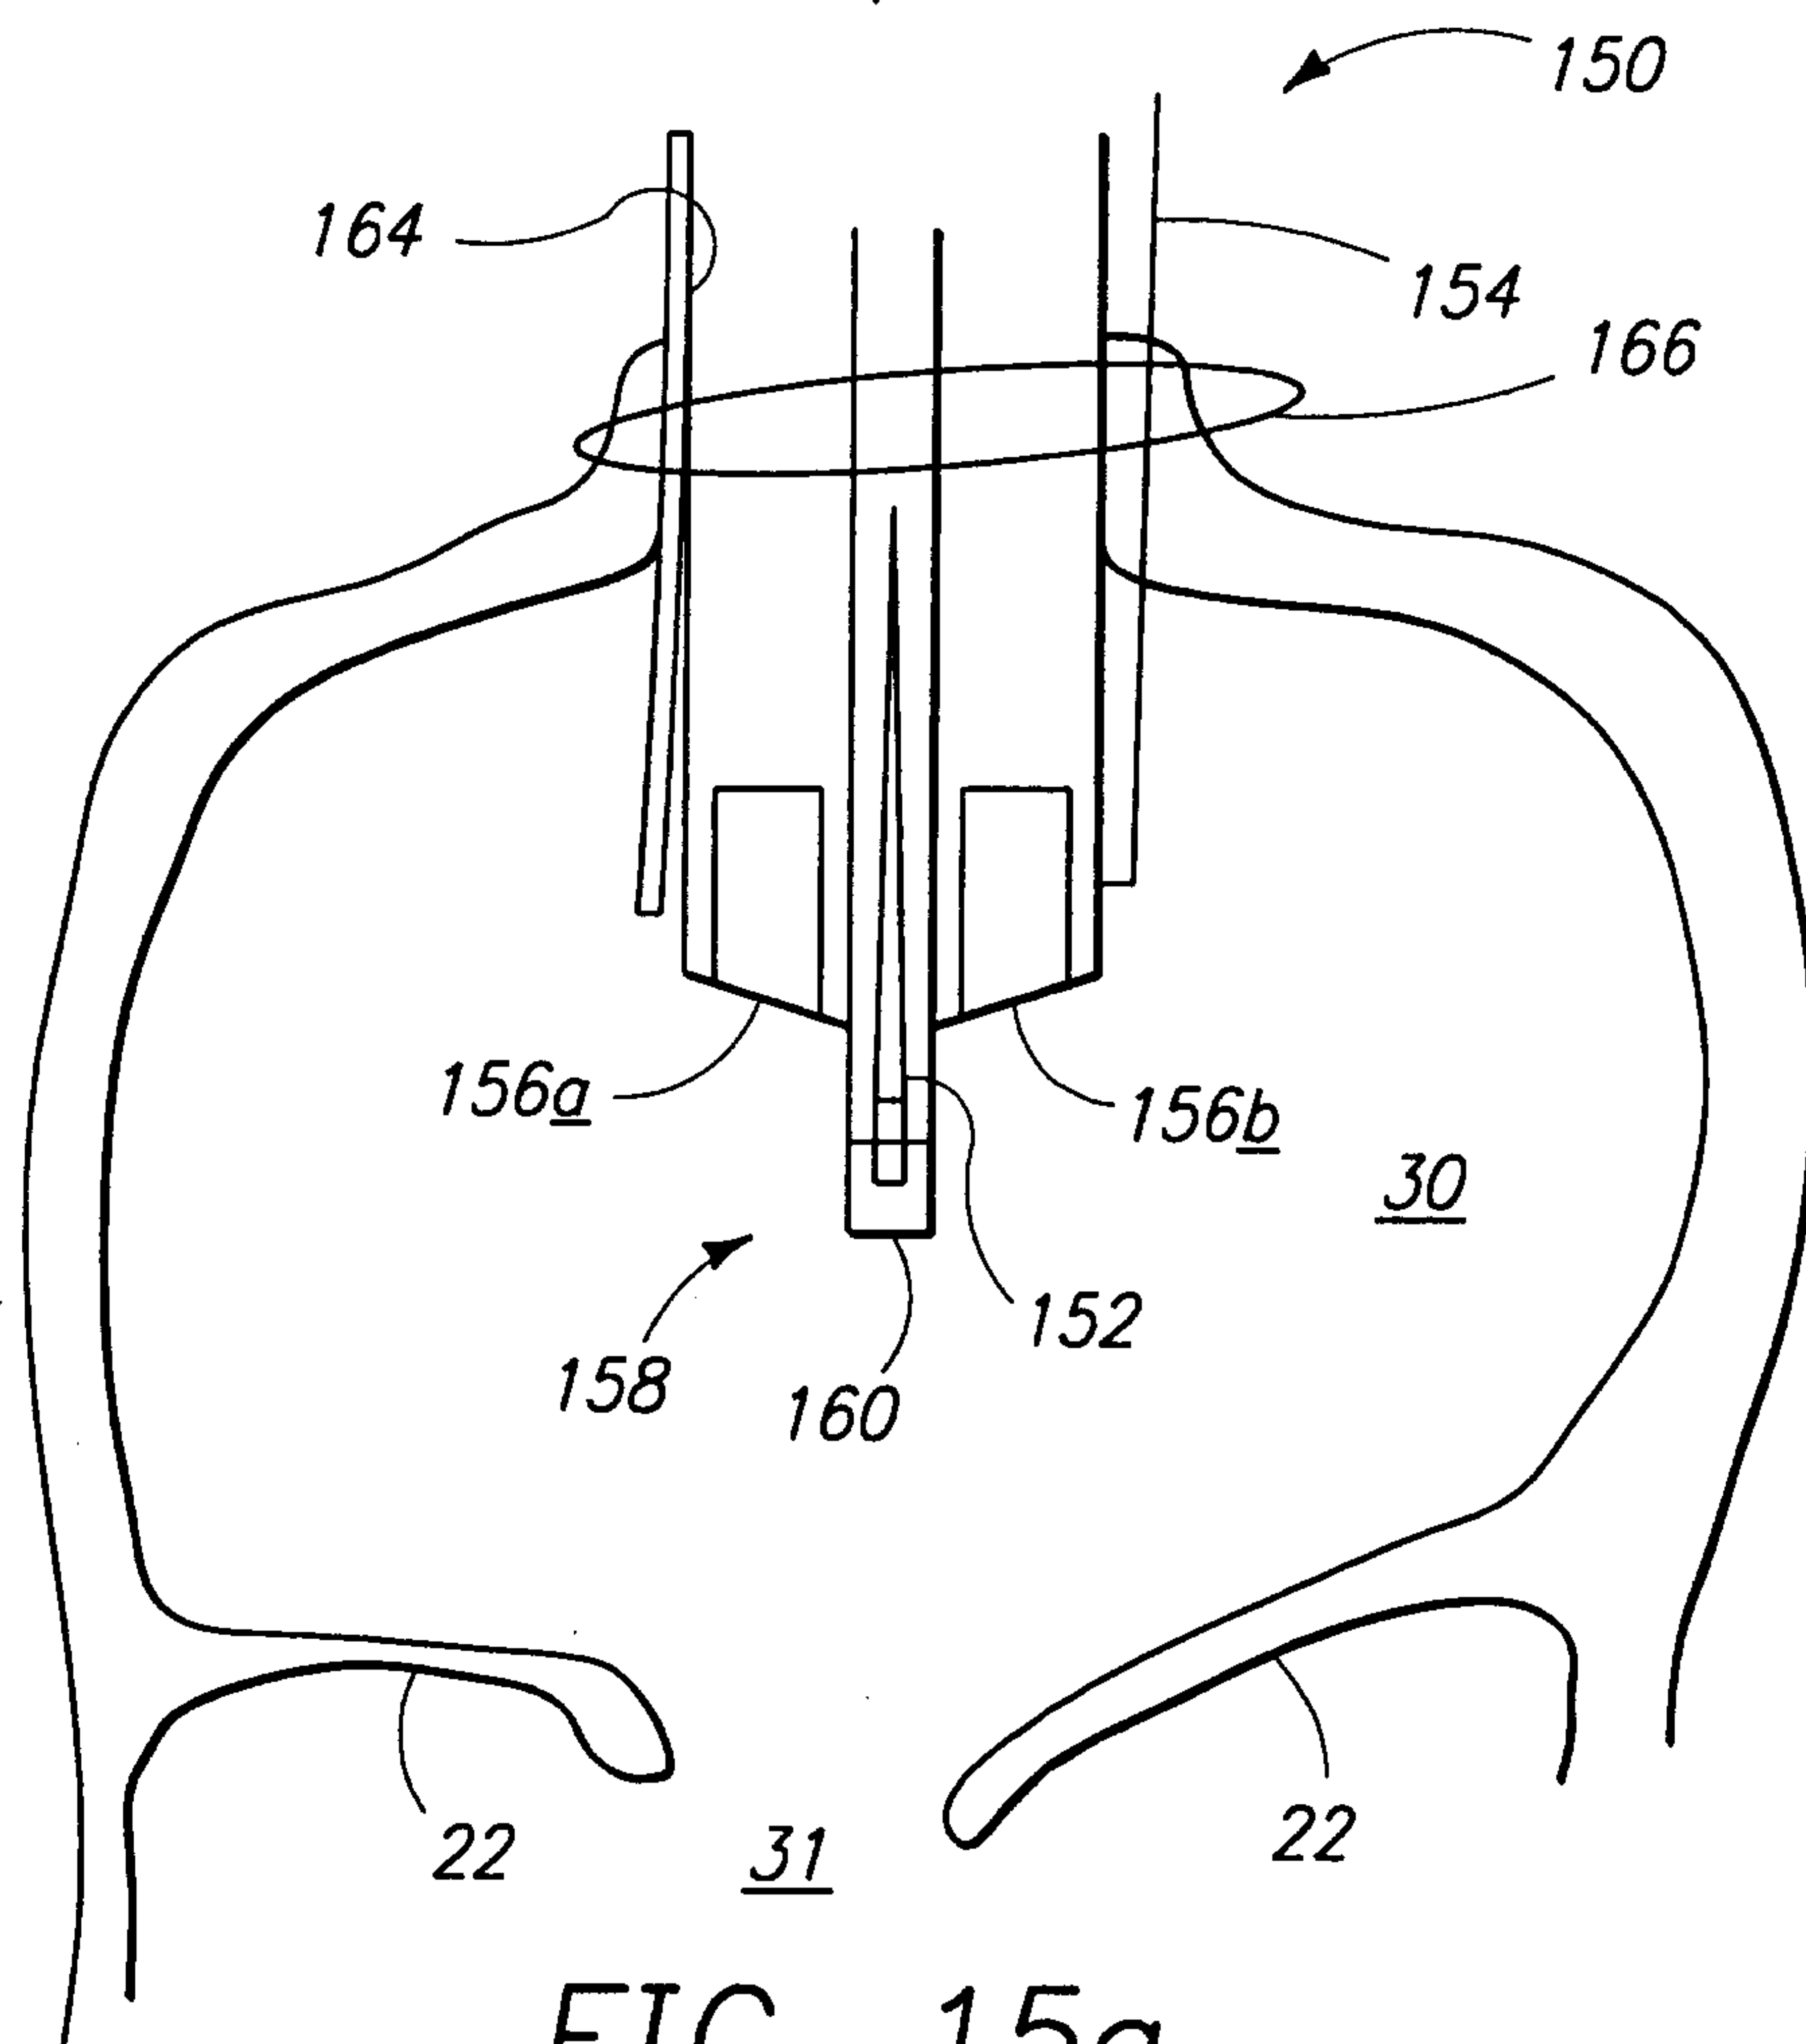

14/45

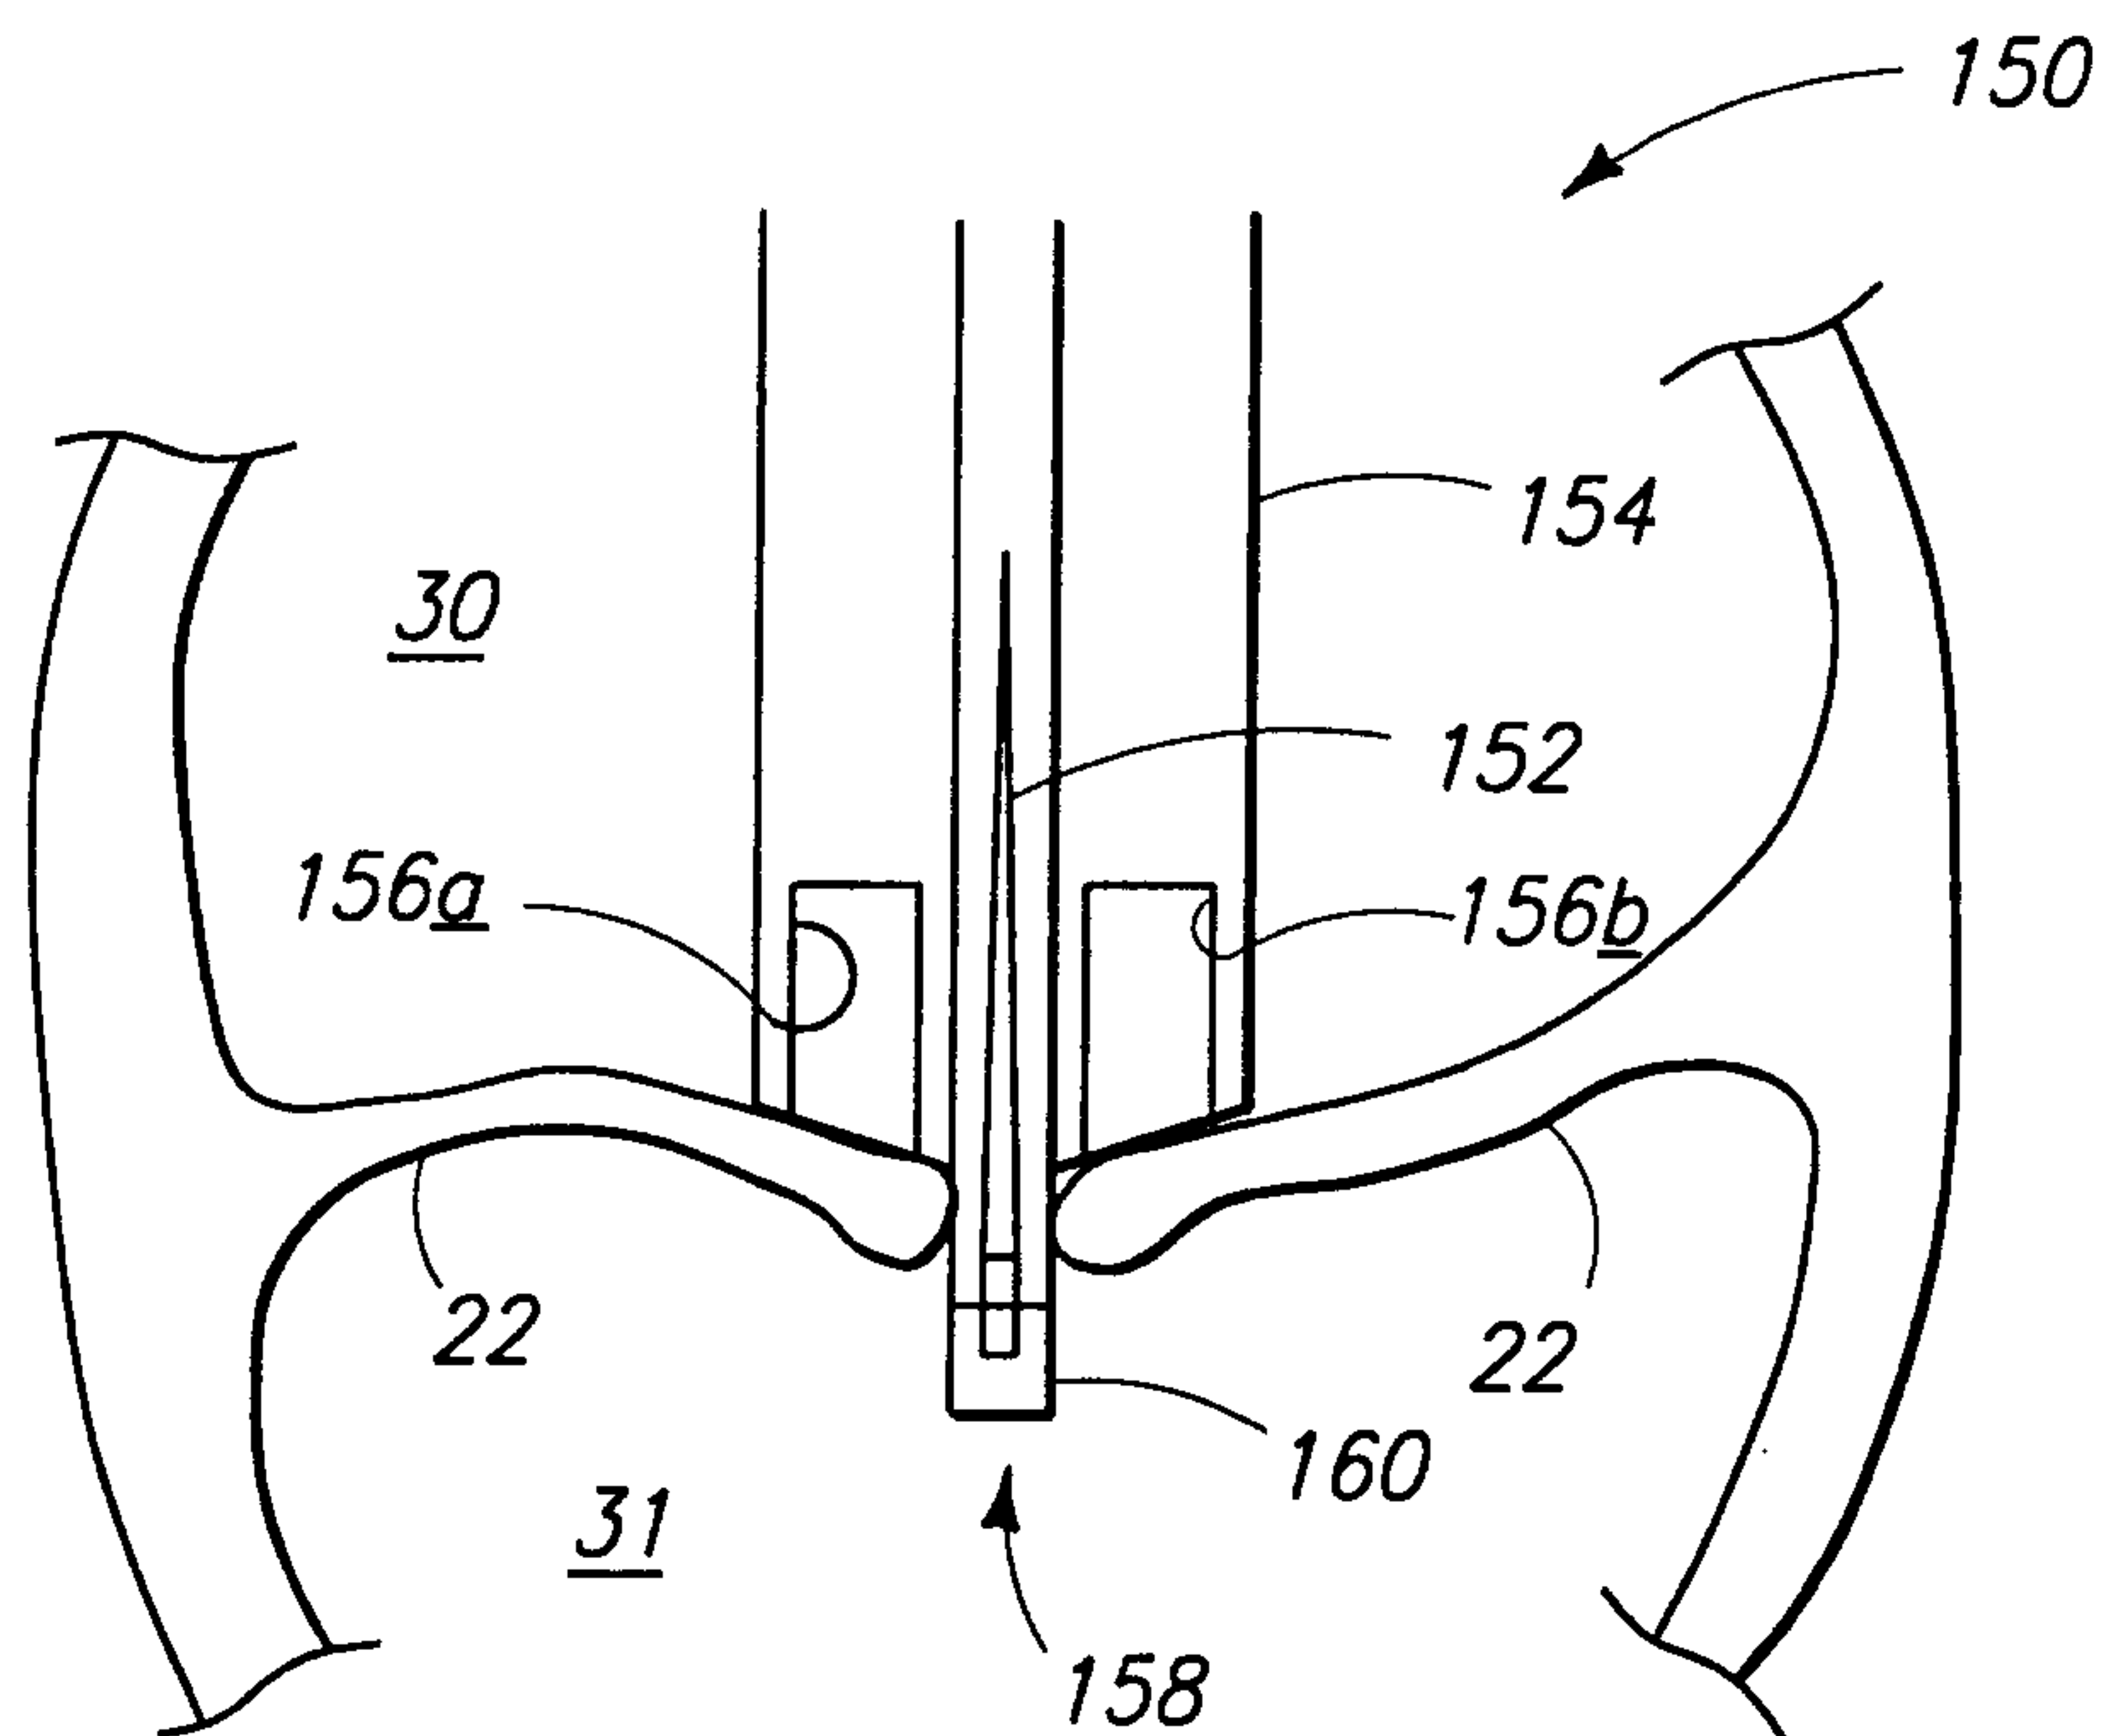


FIG. 15c

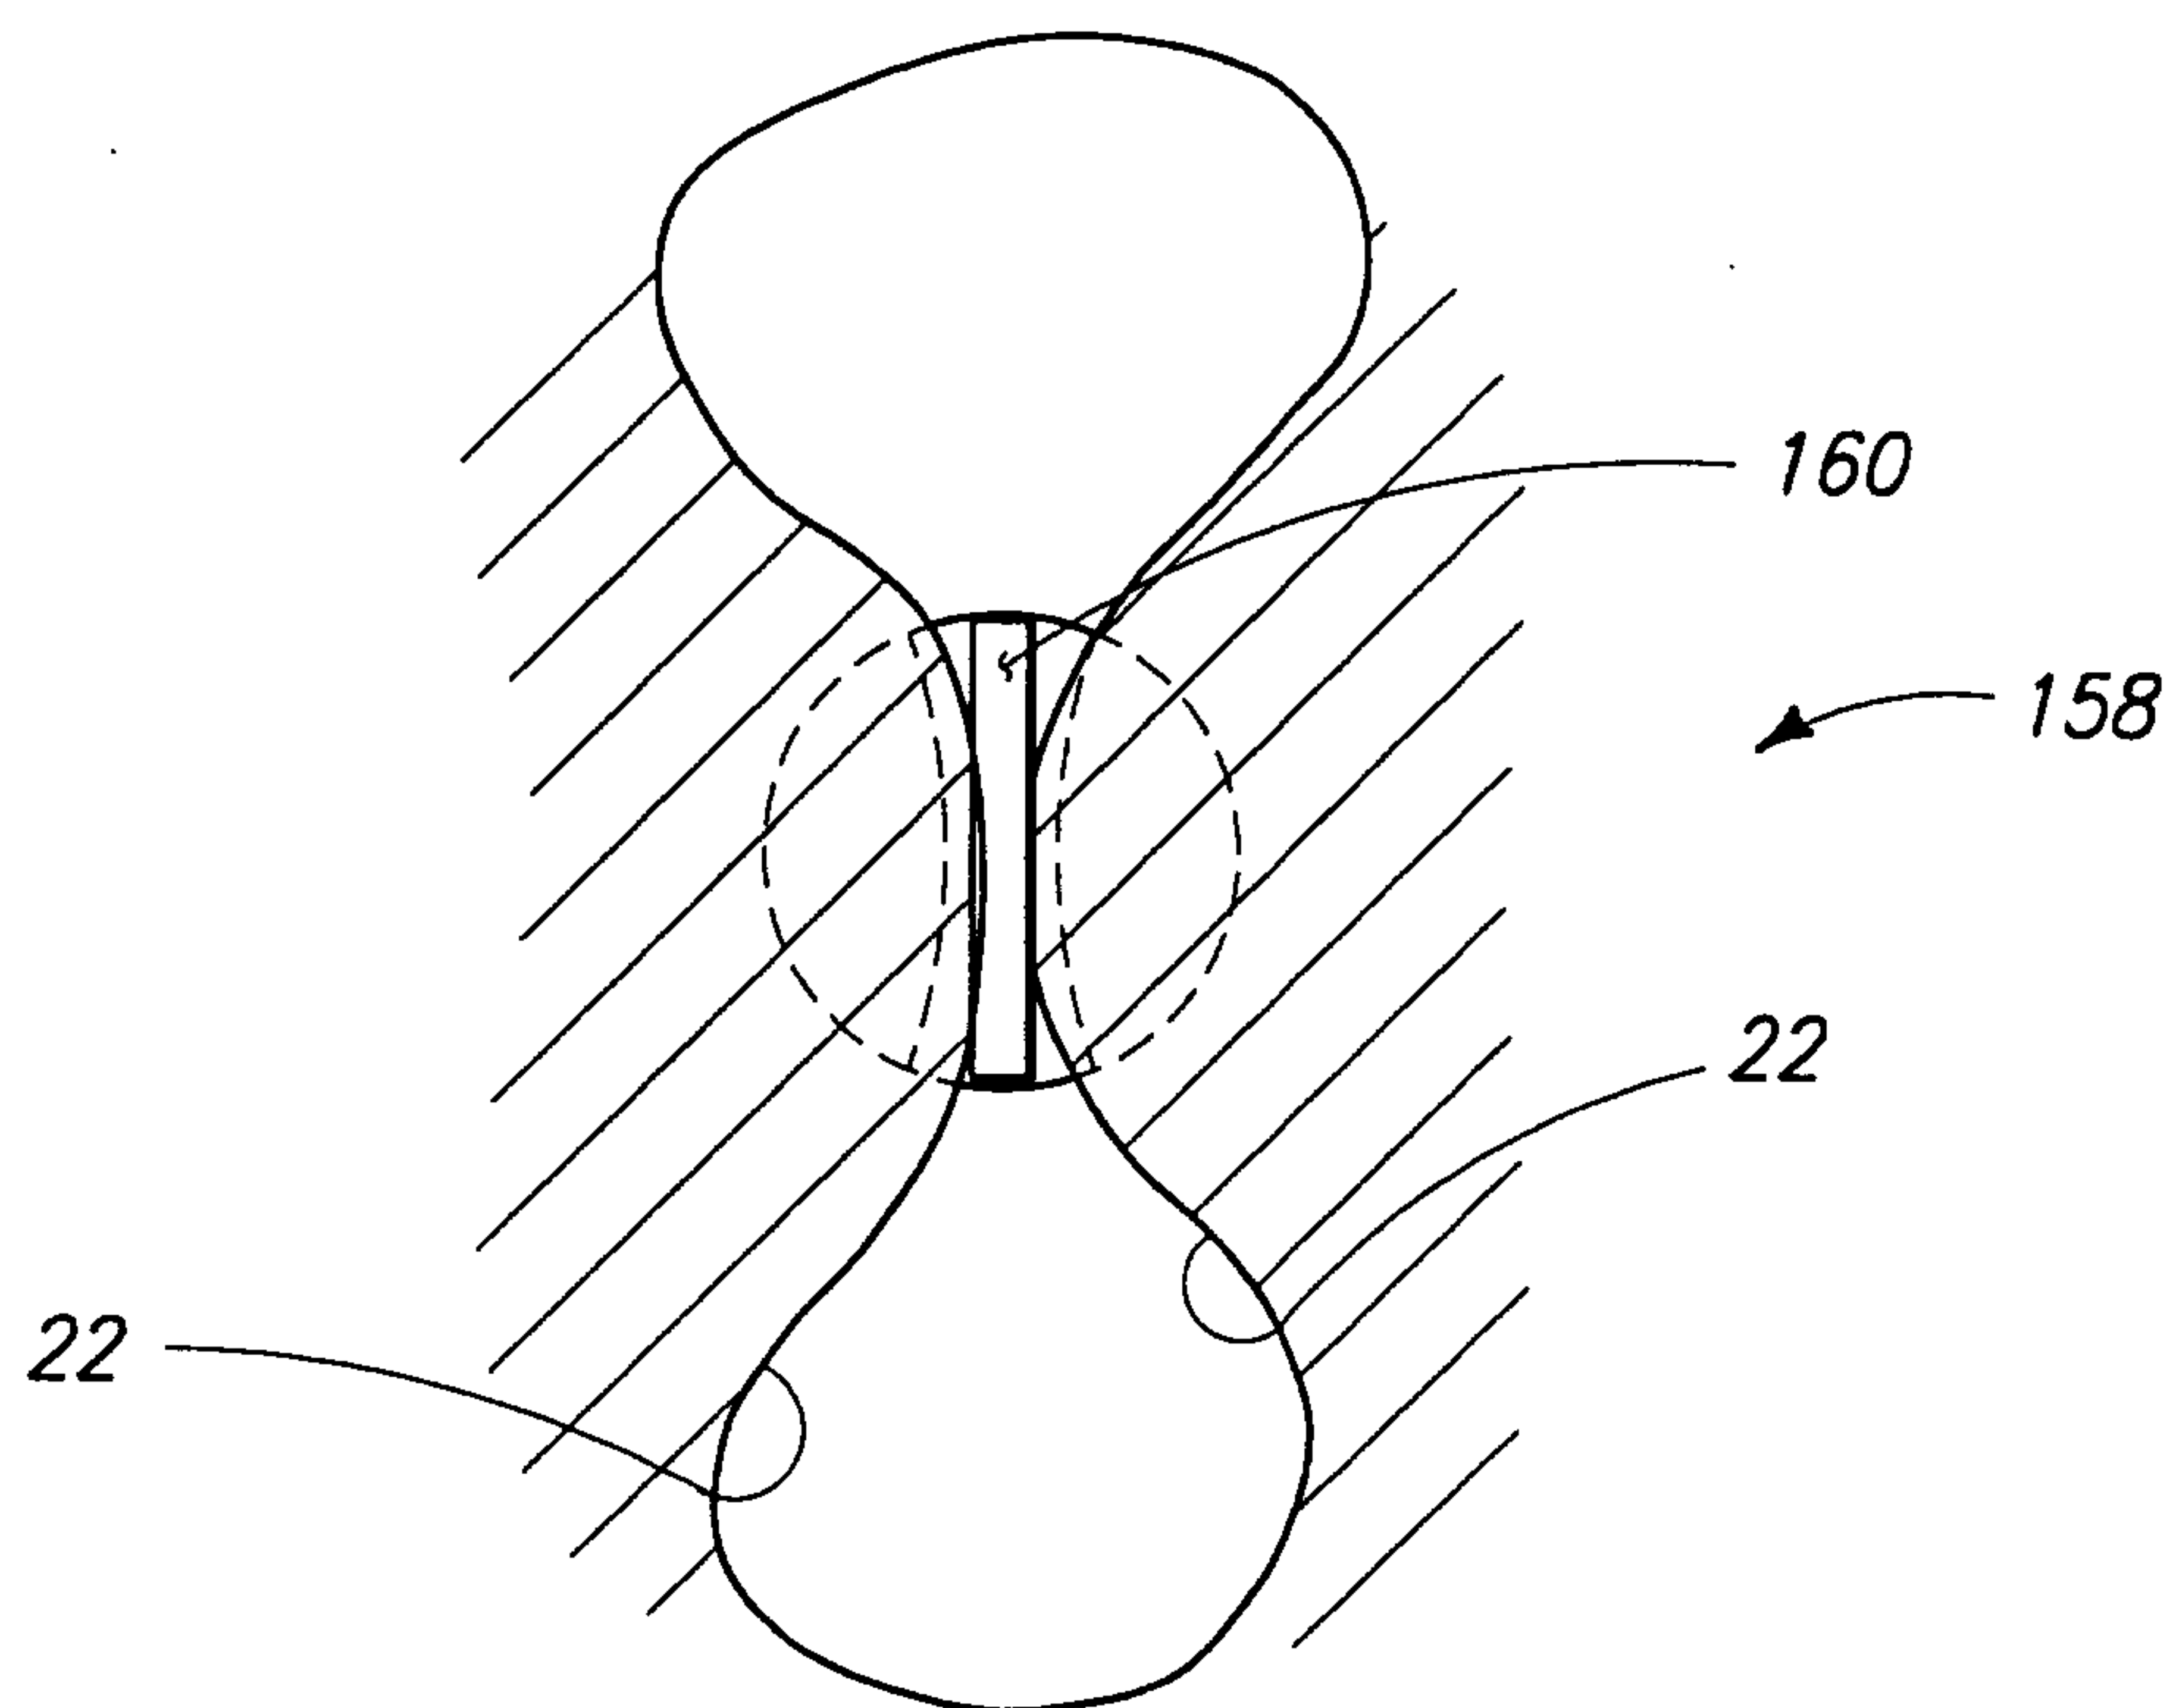
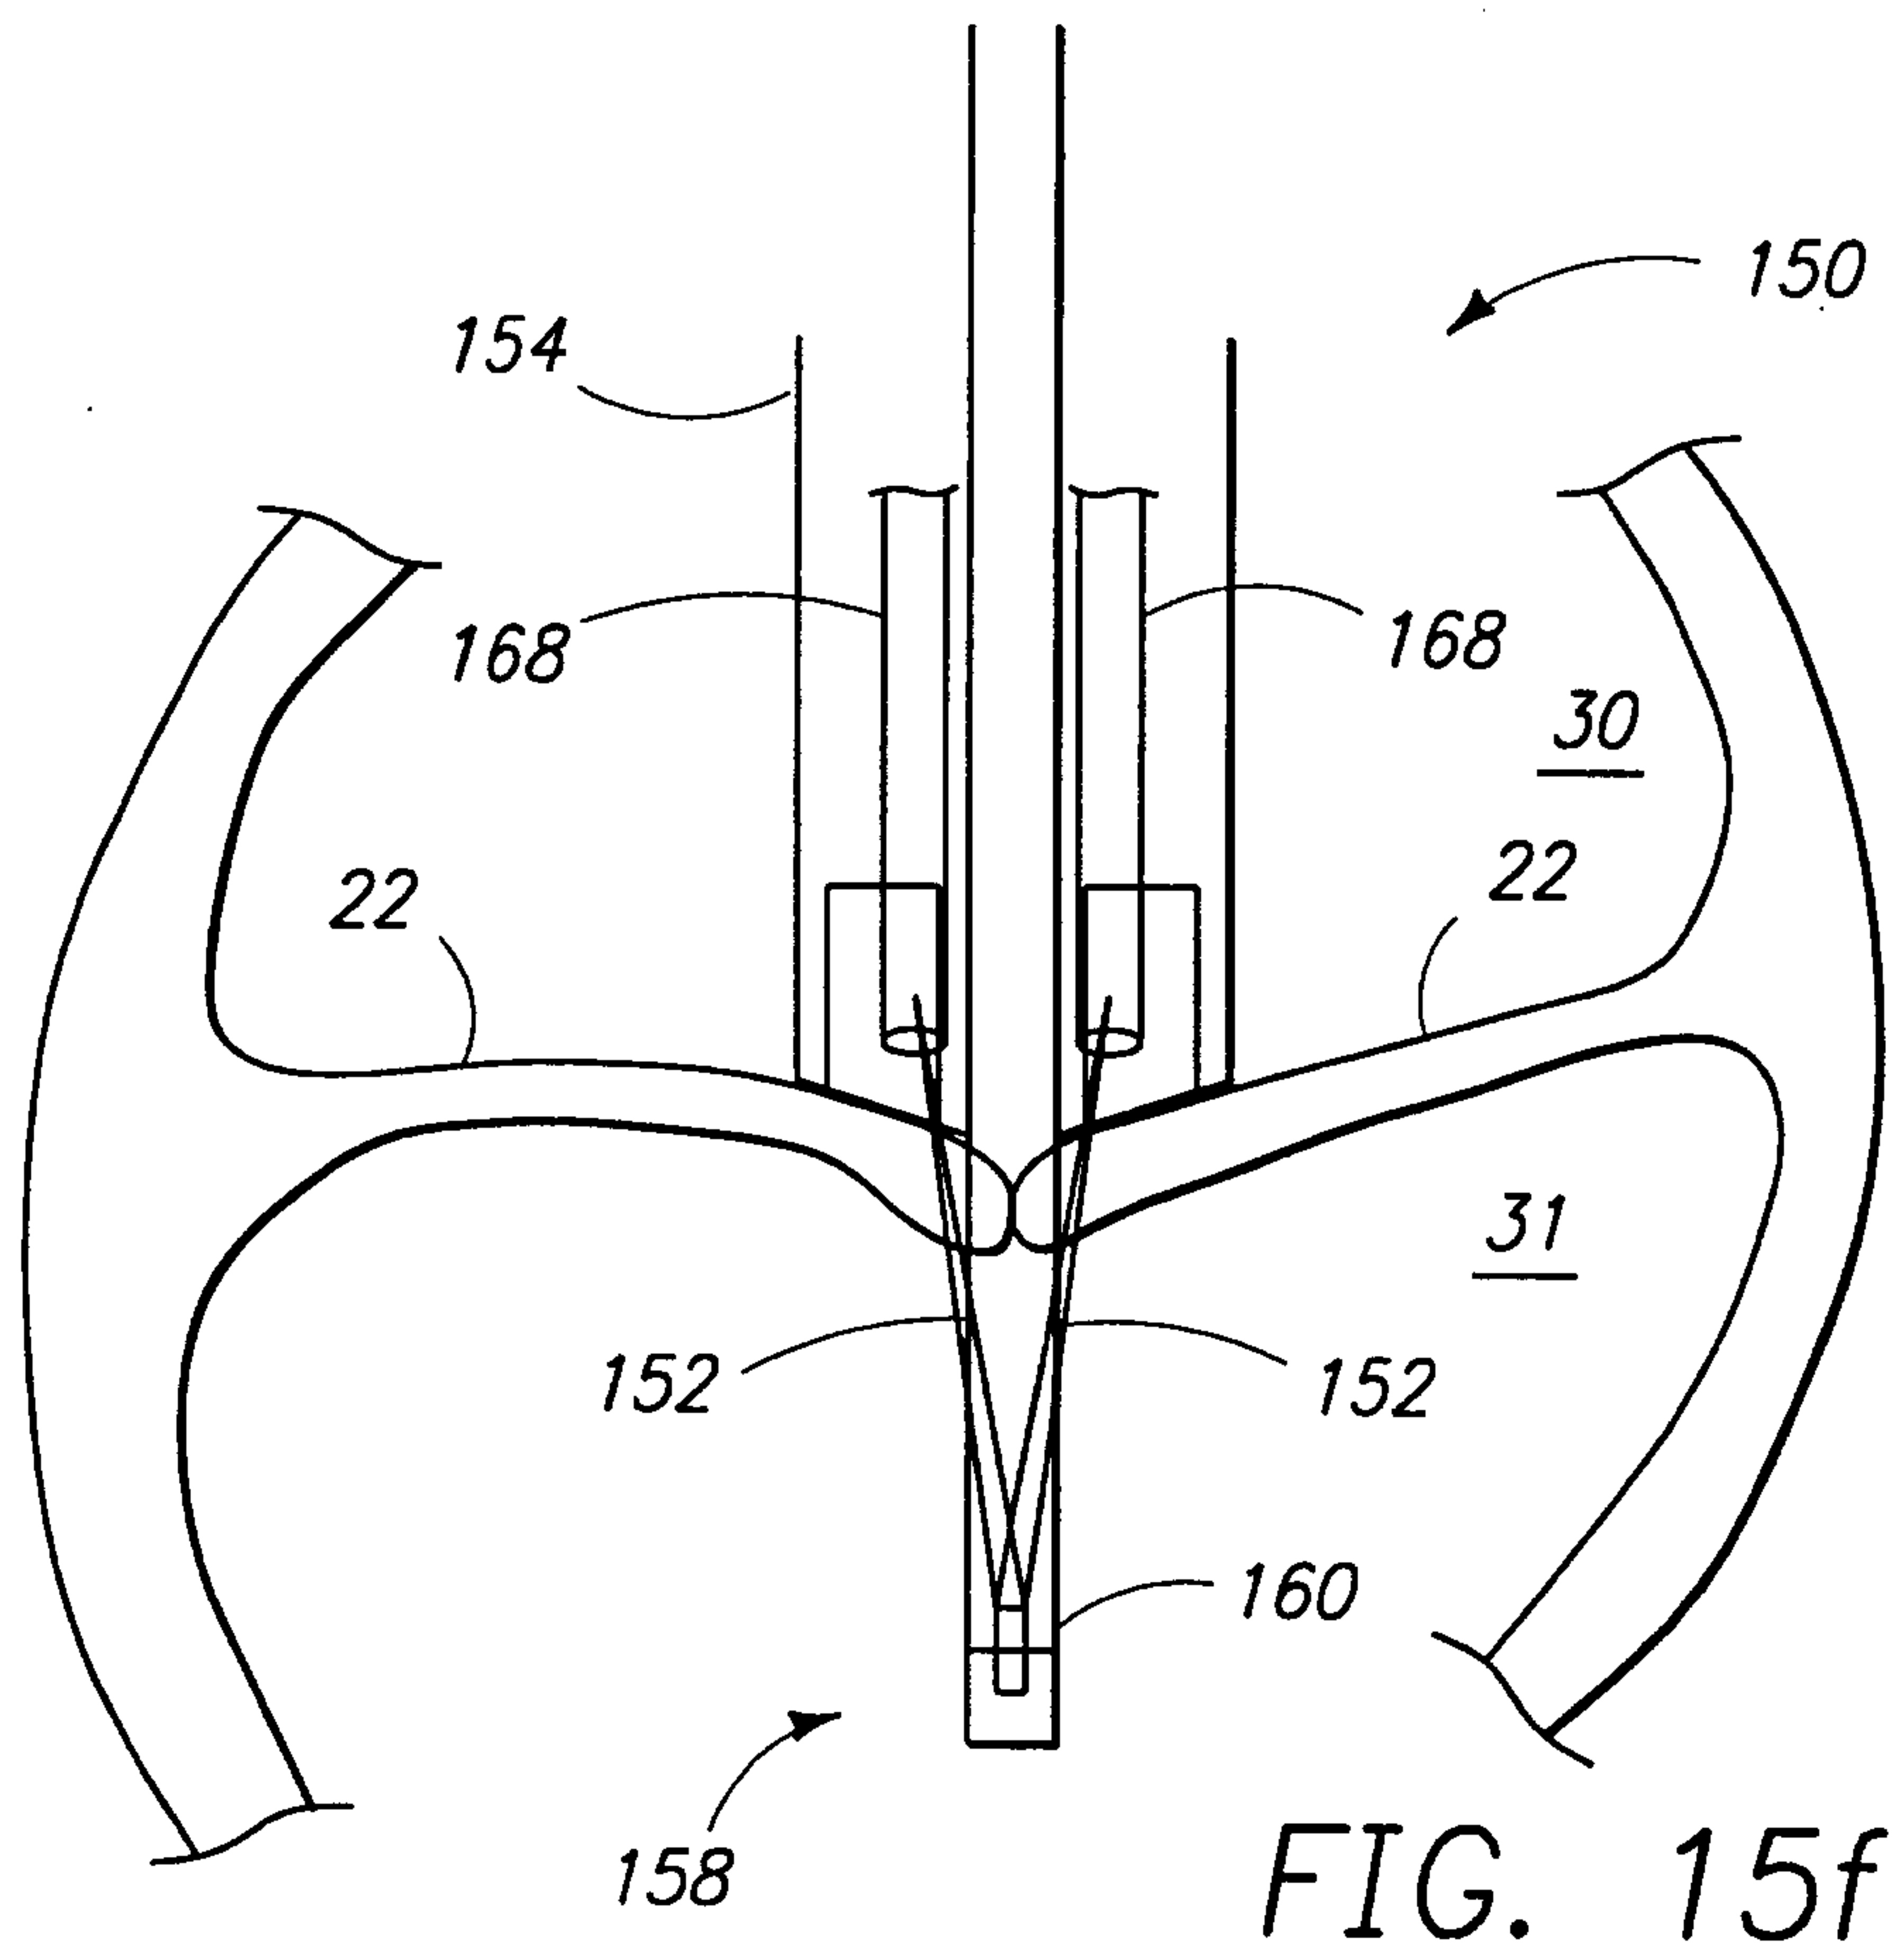
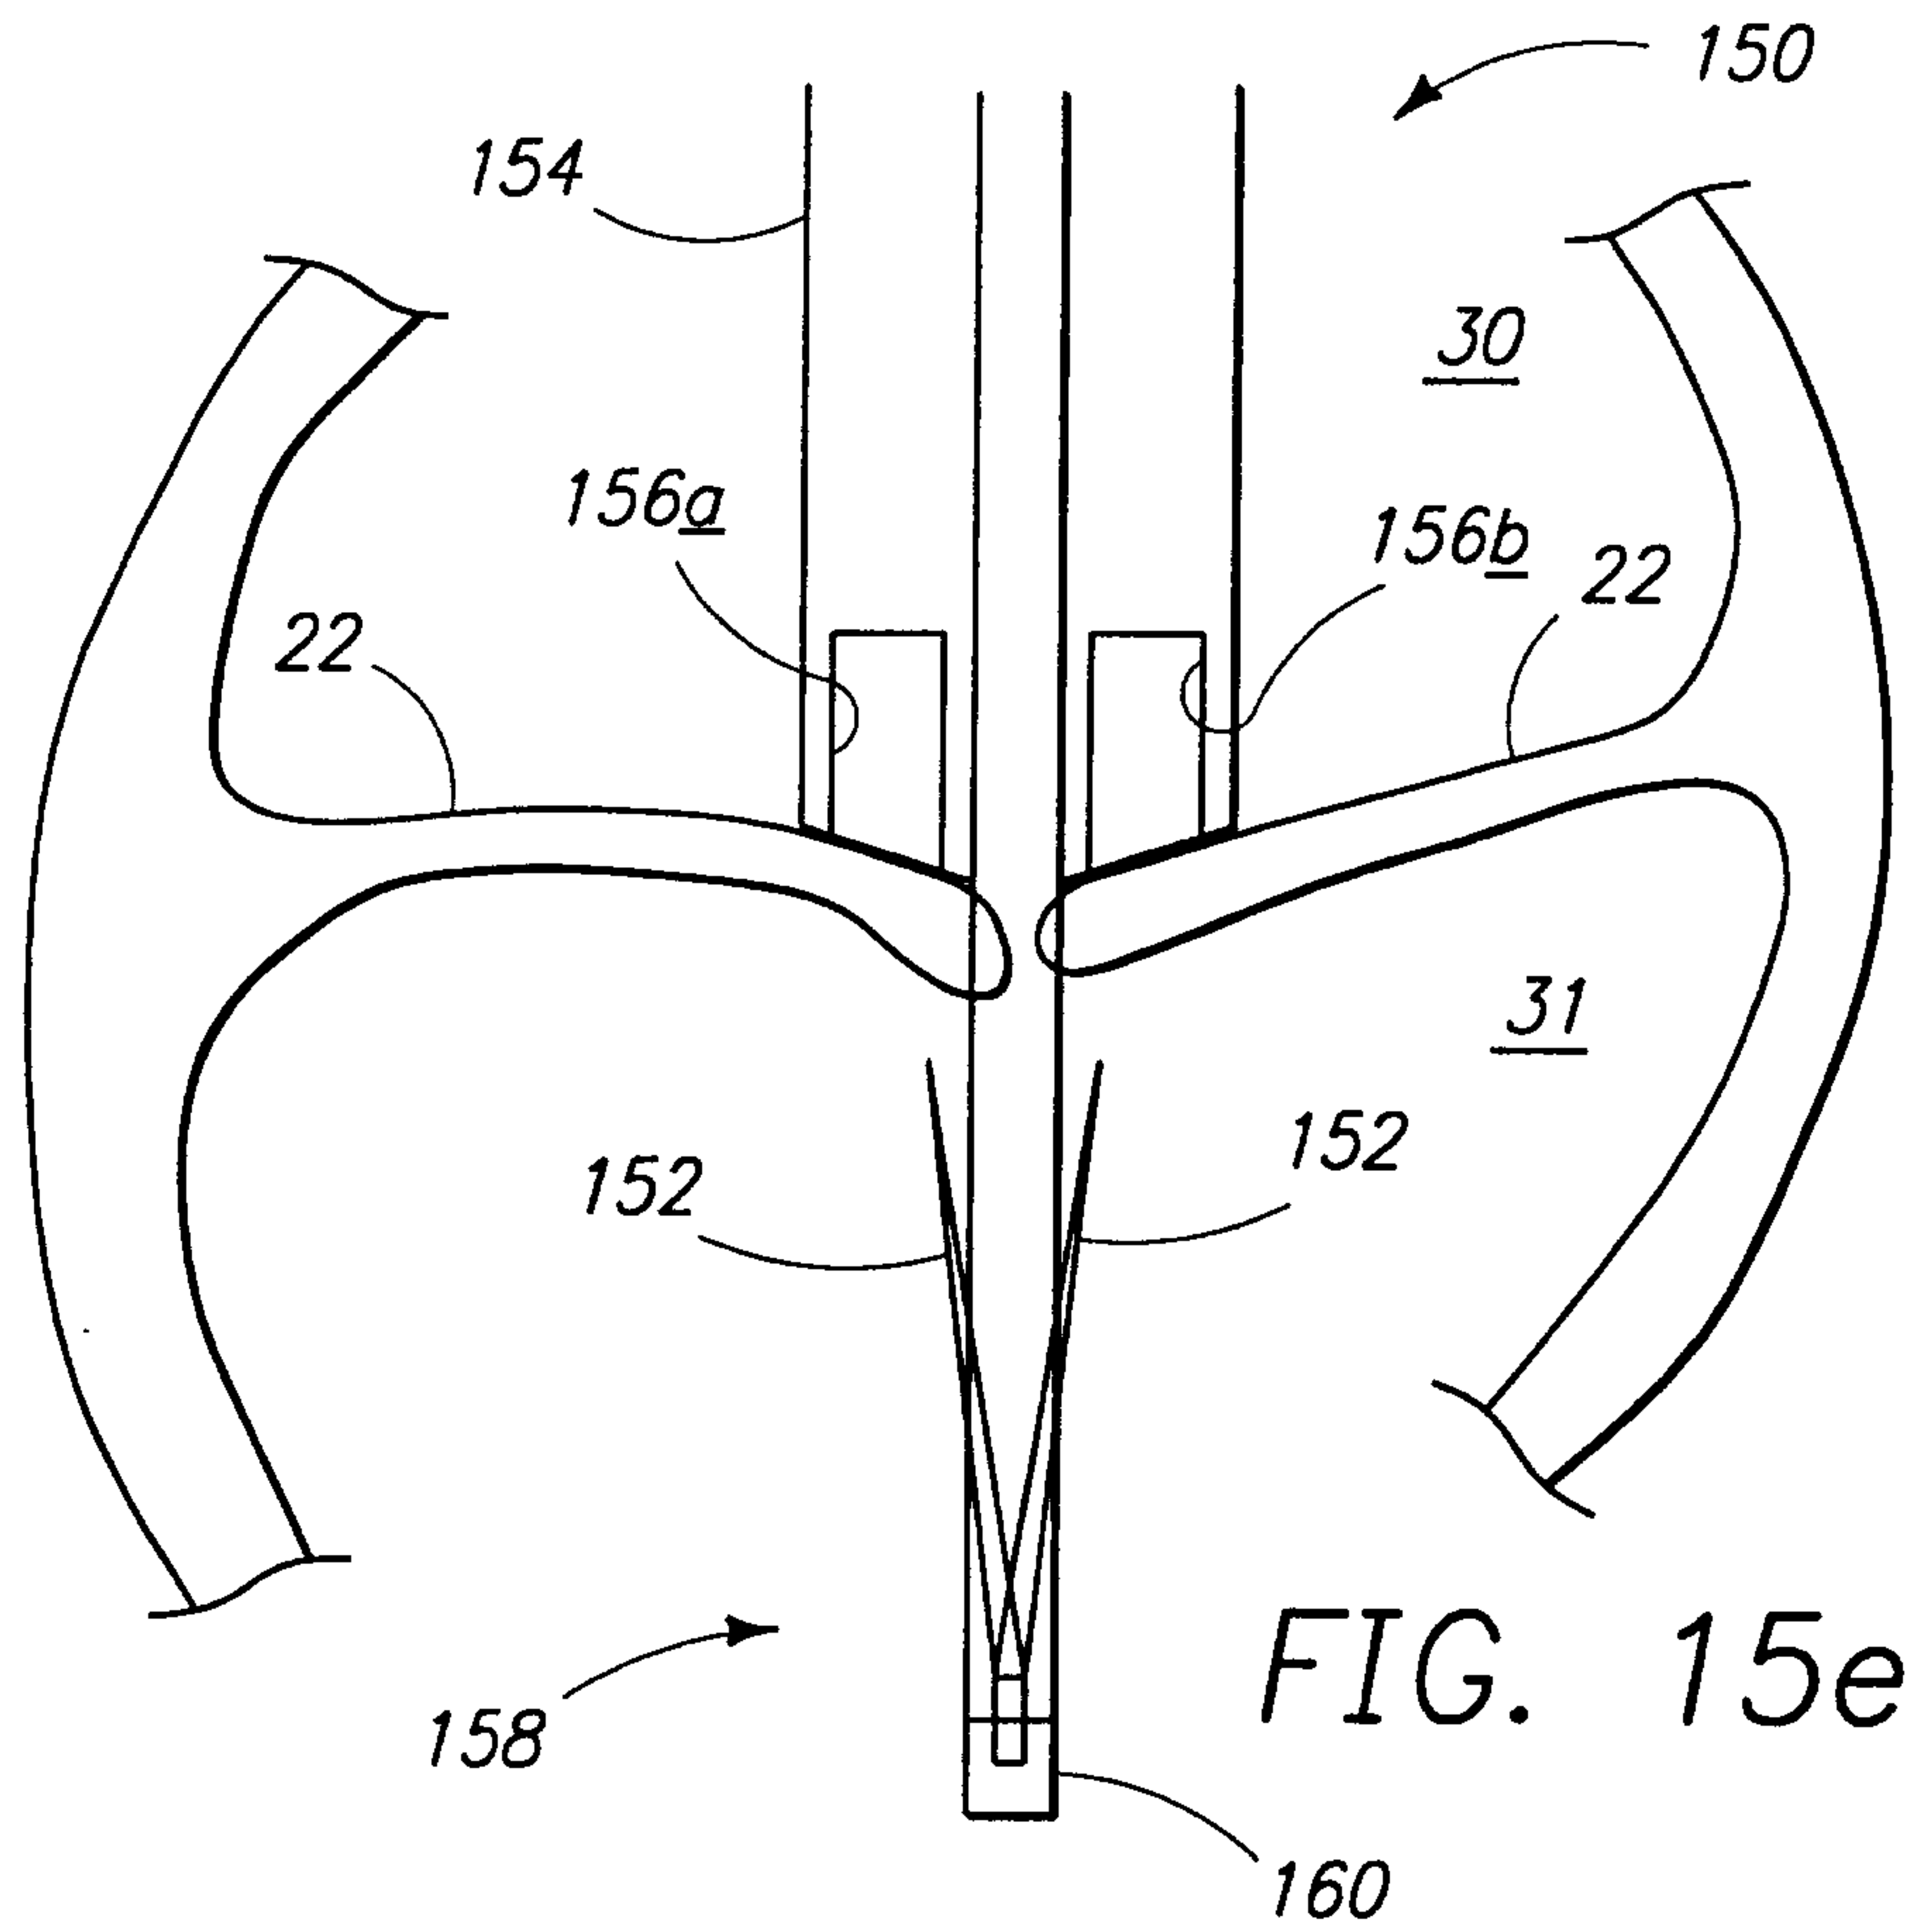
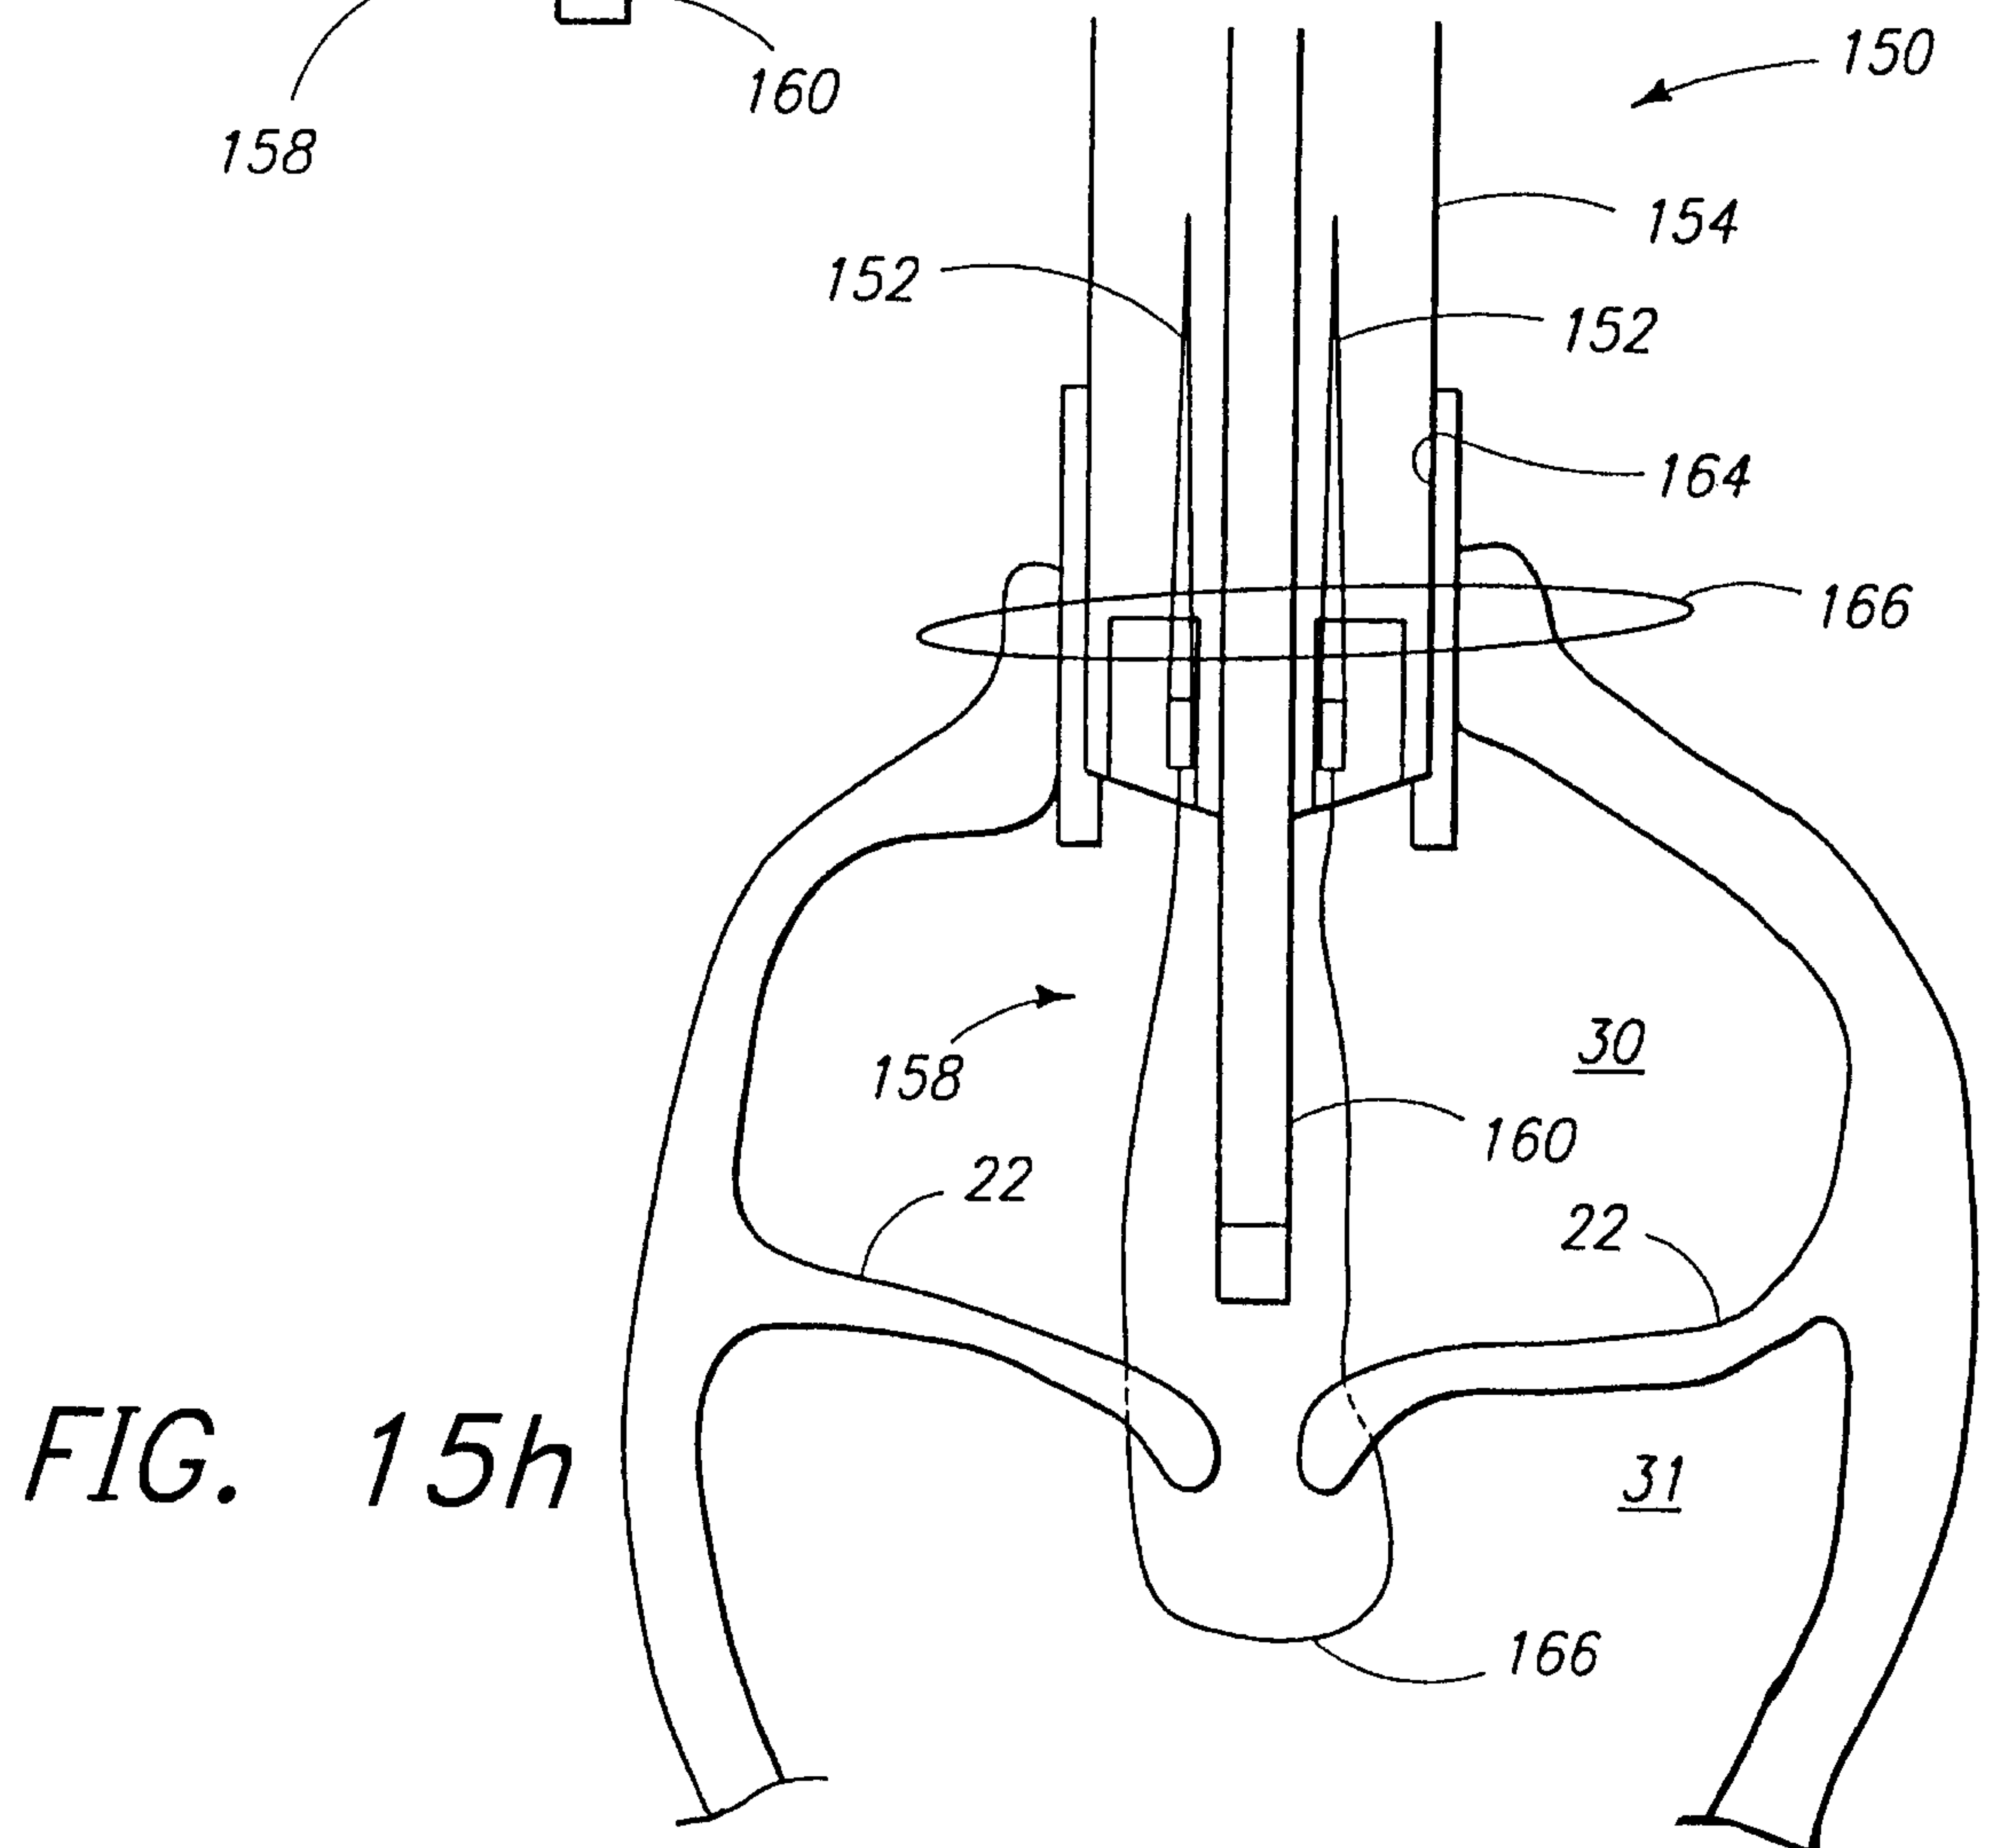
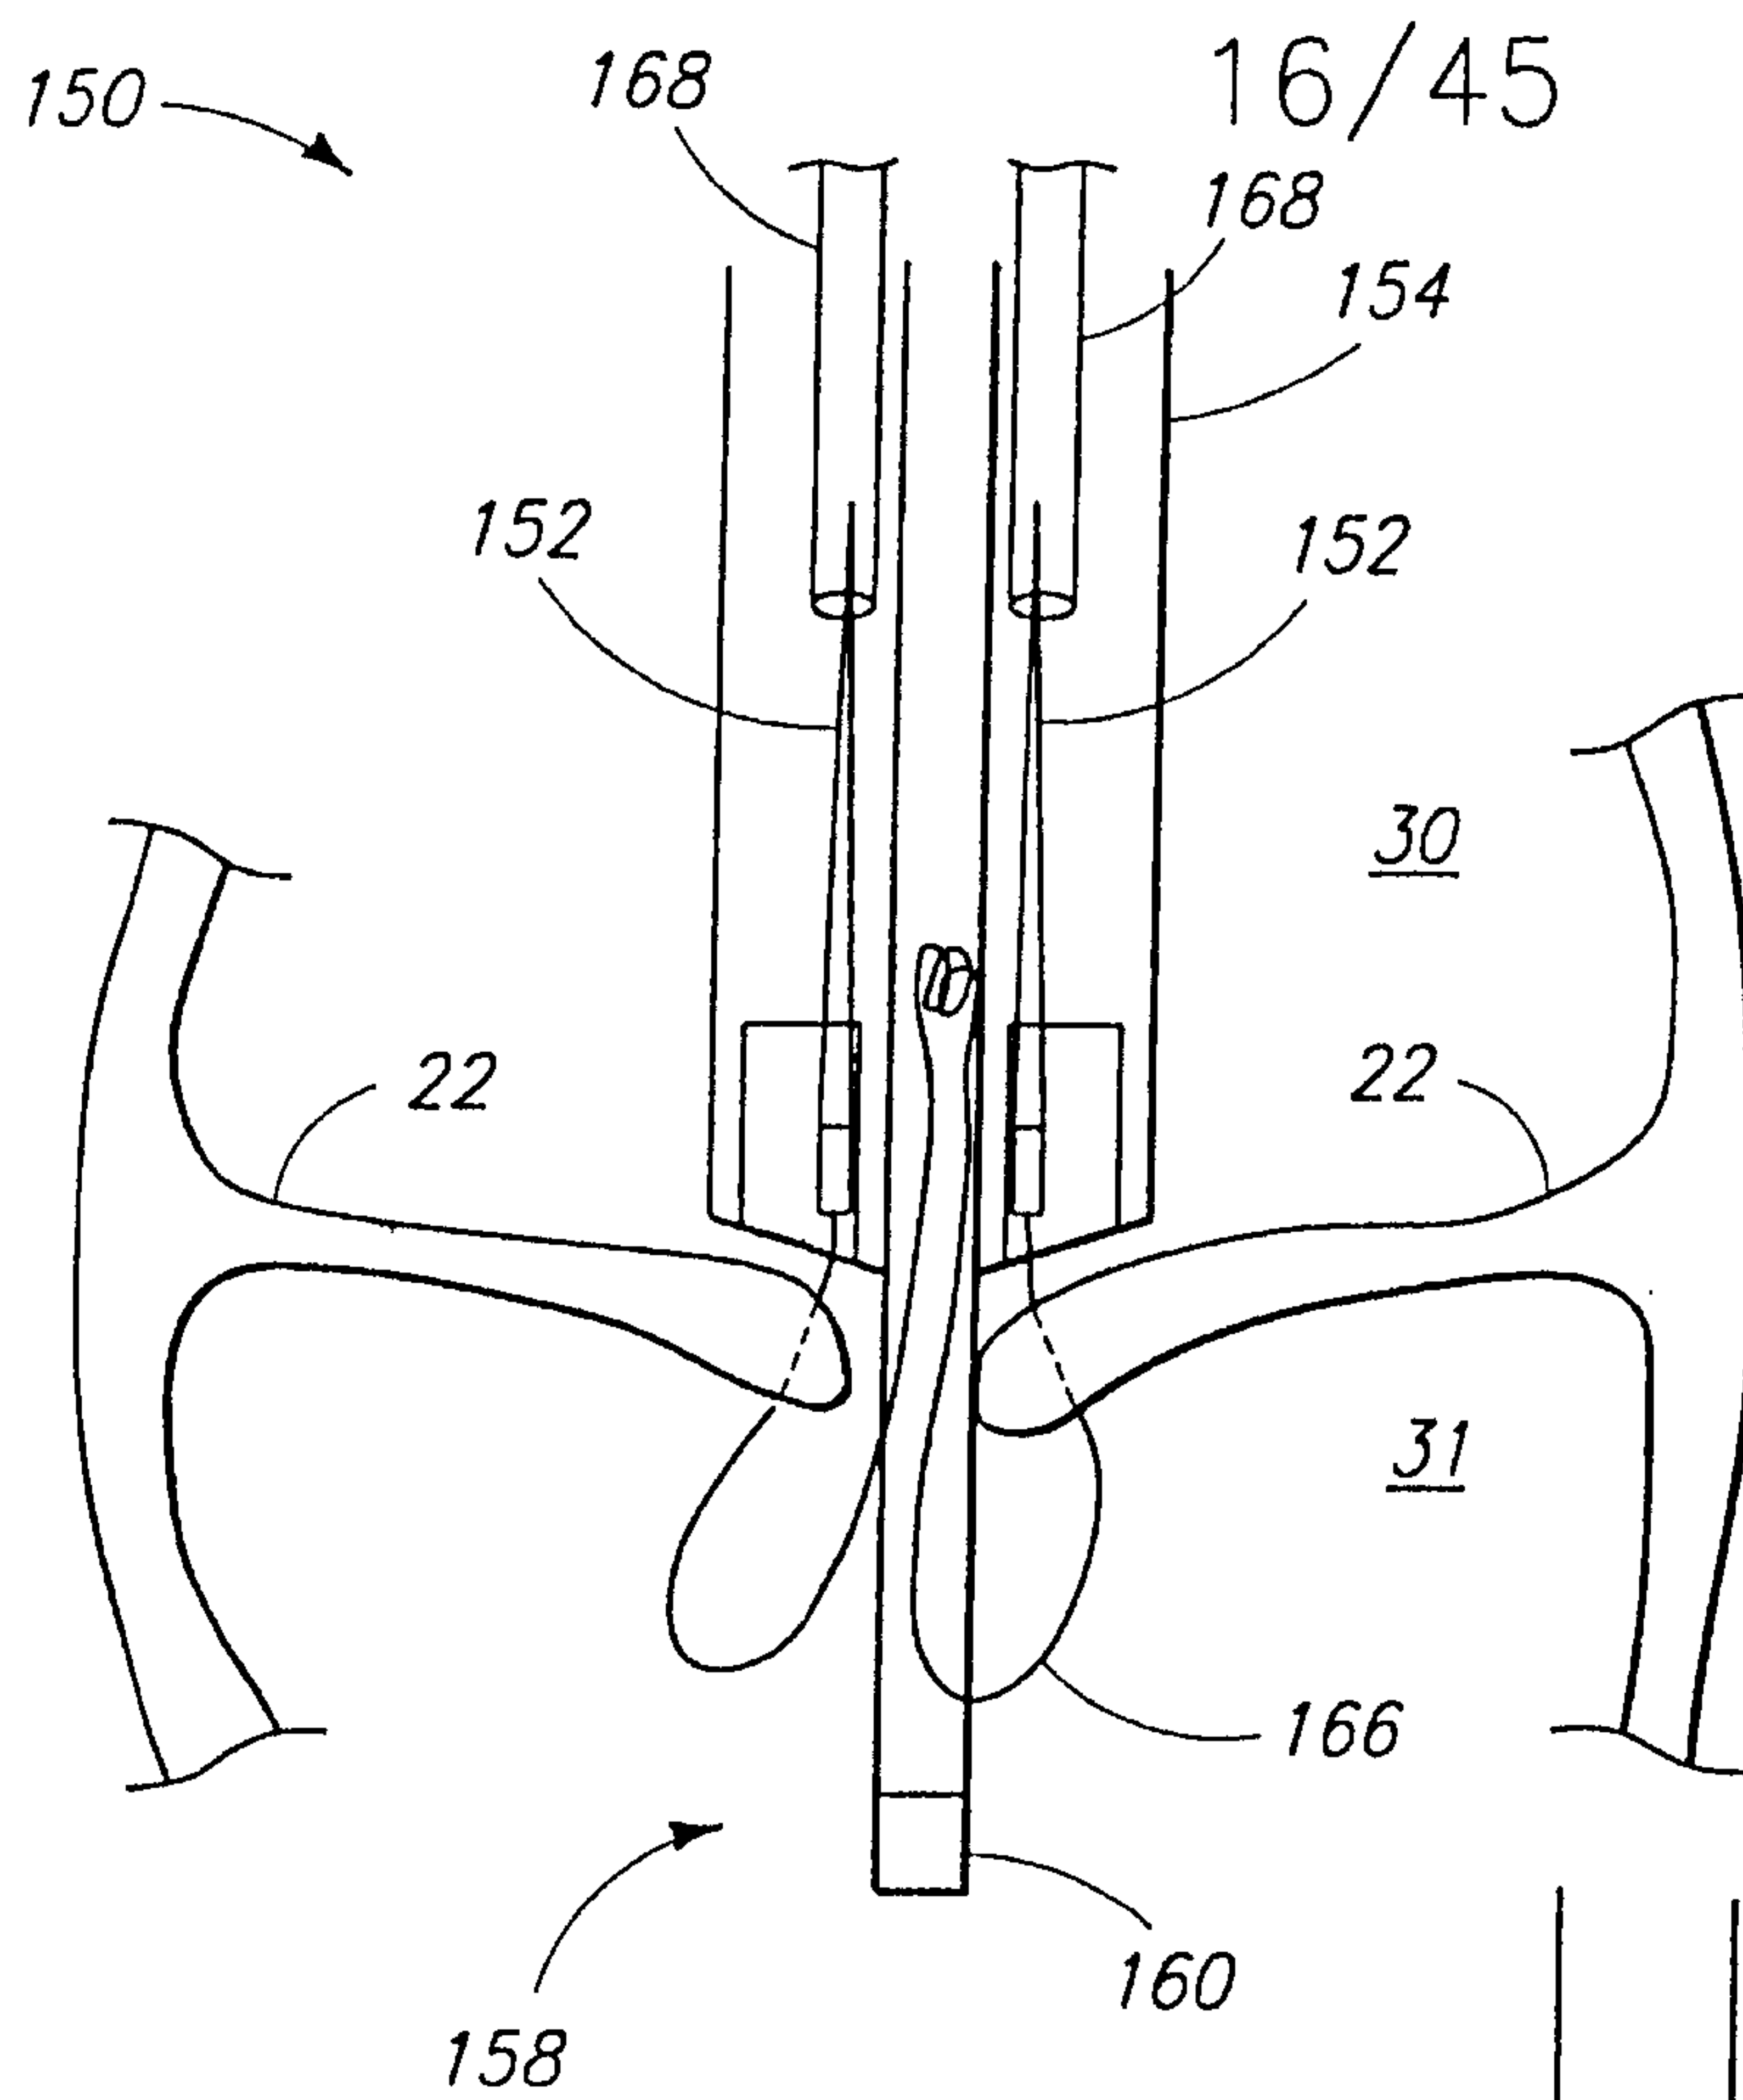


FIG. 15d

15/45





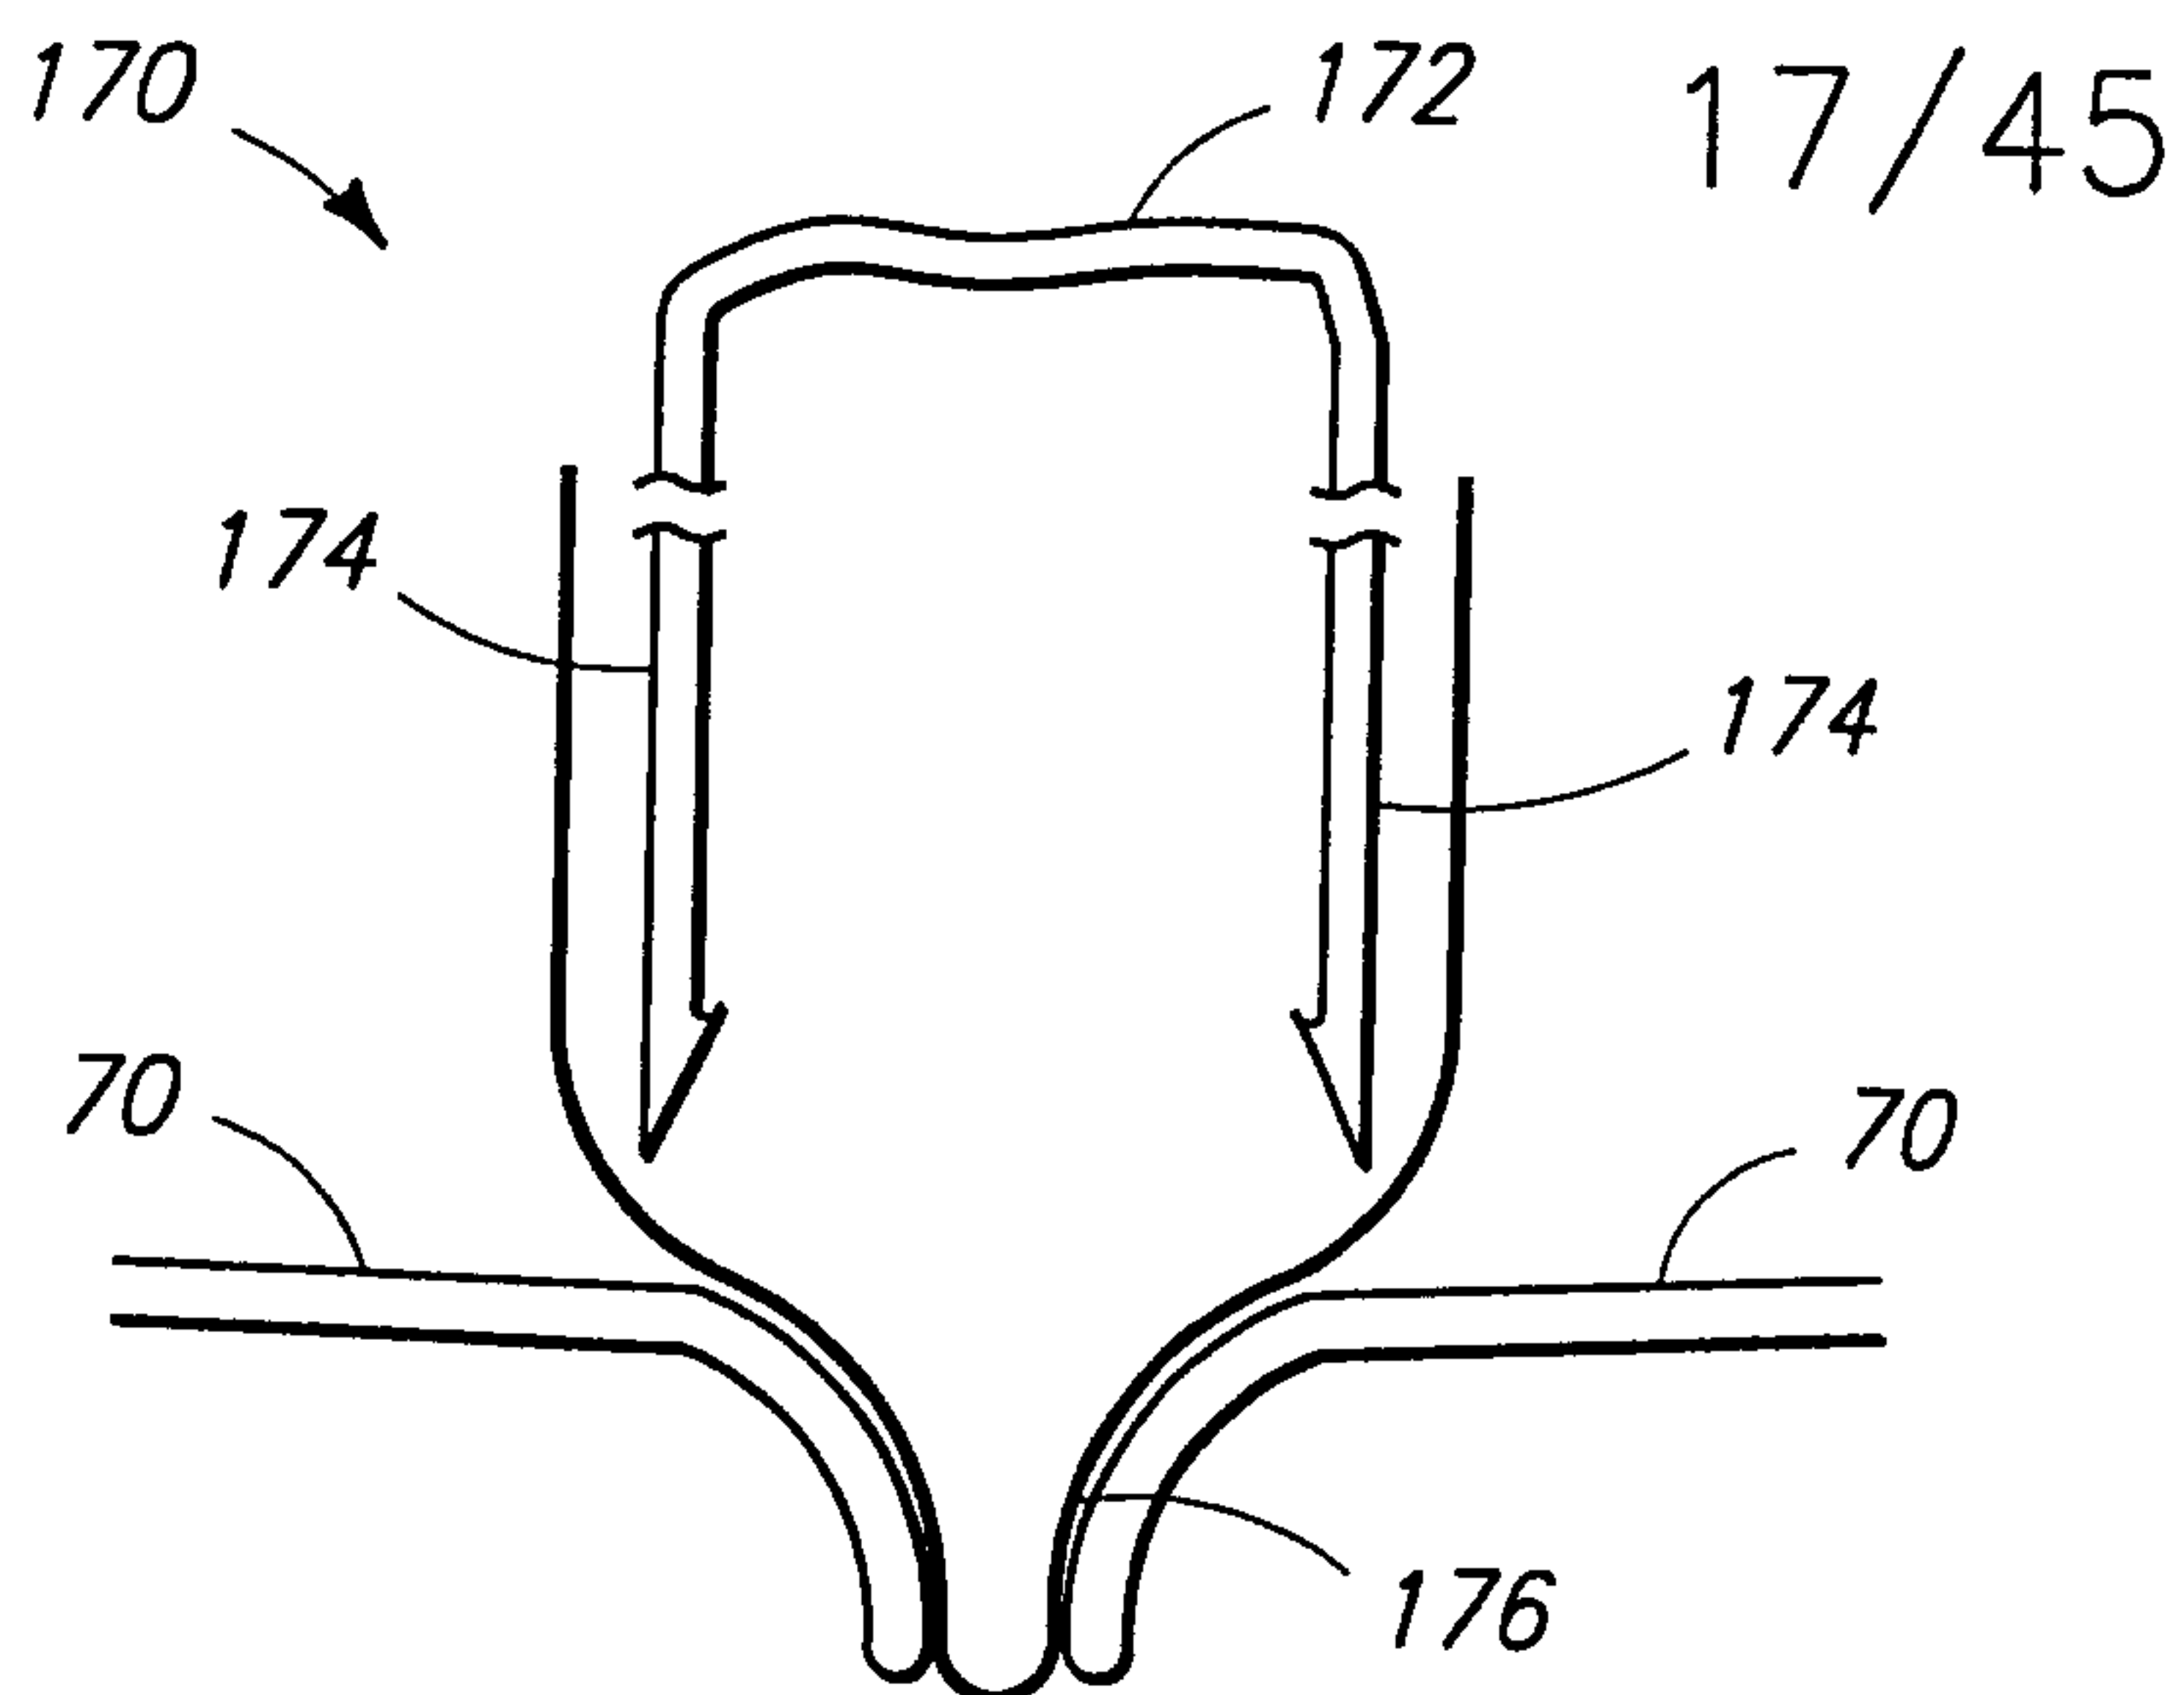


FIG. 16a

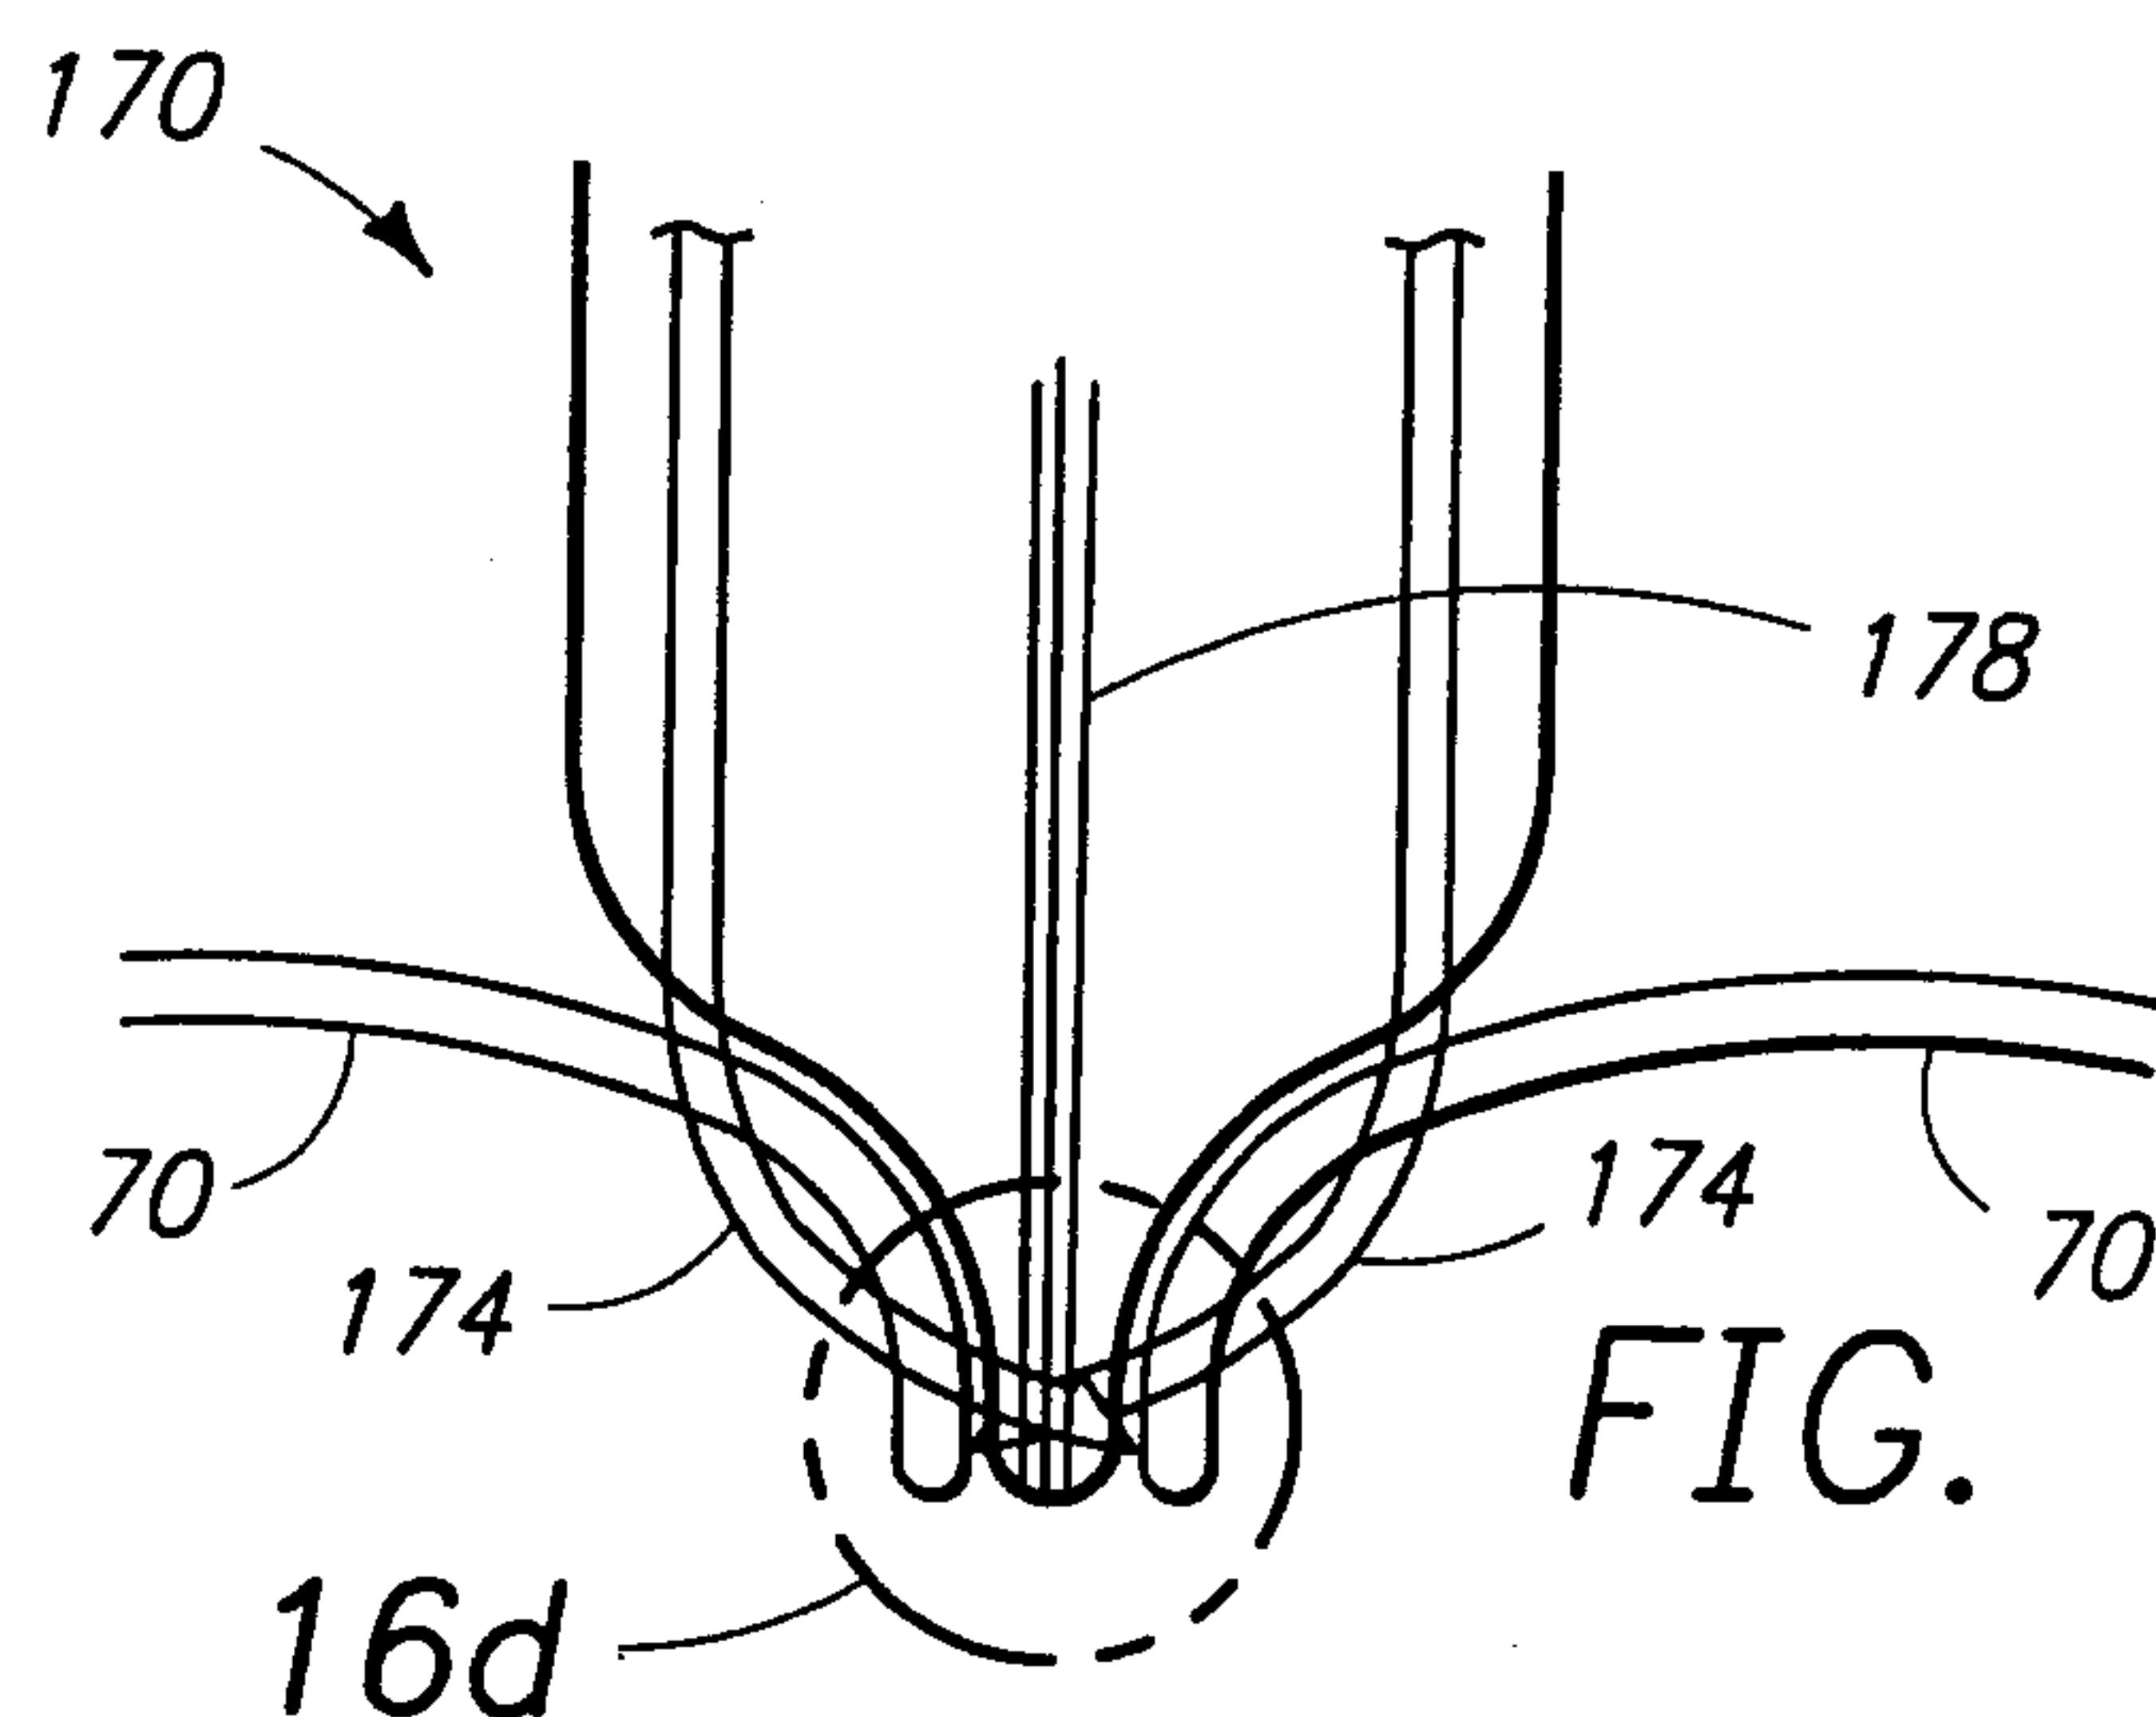


FIG. 16b

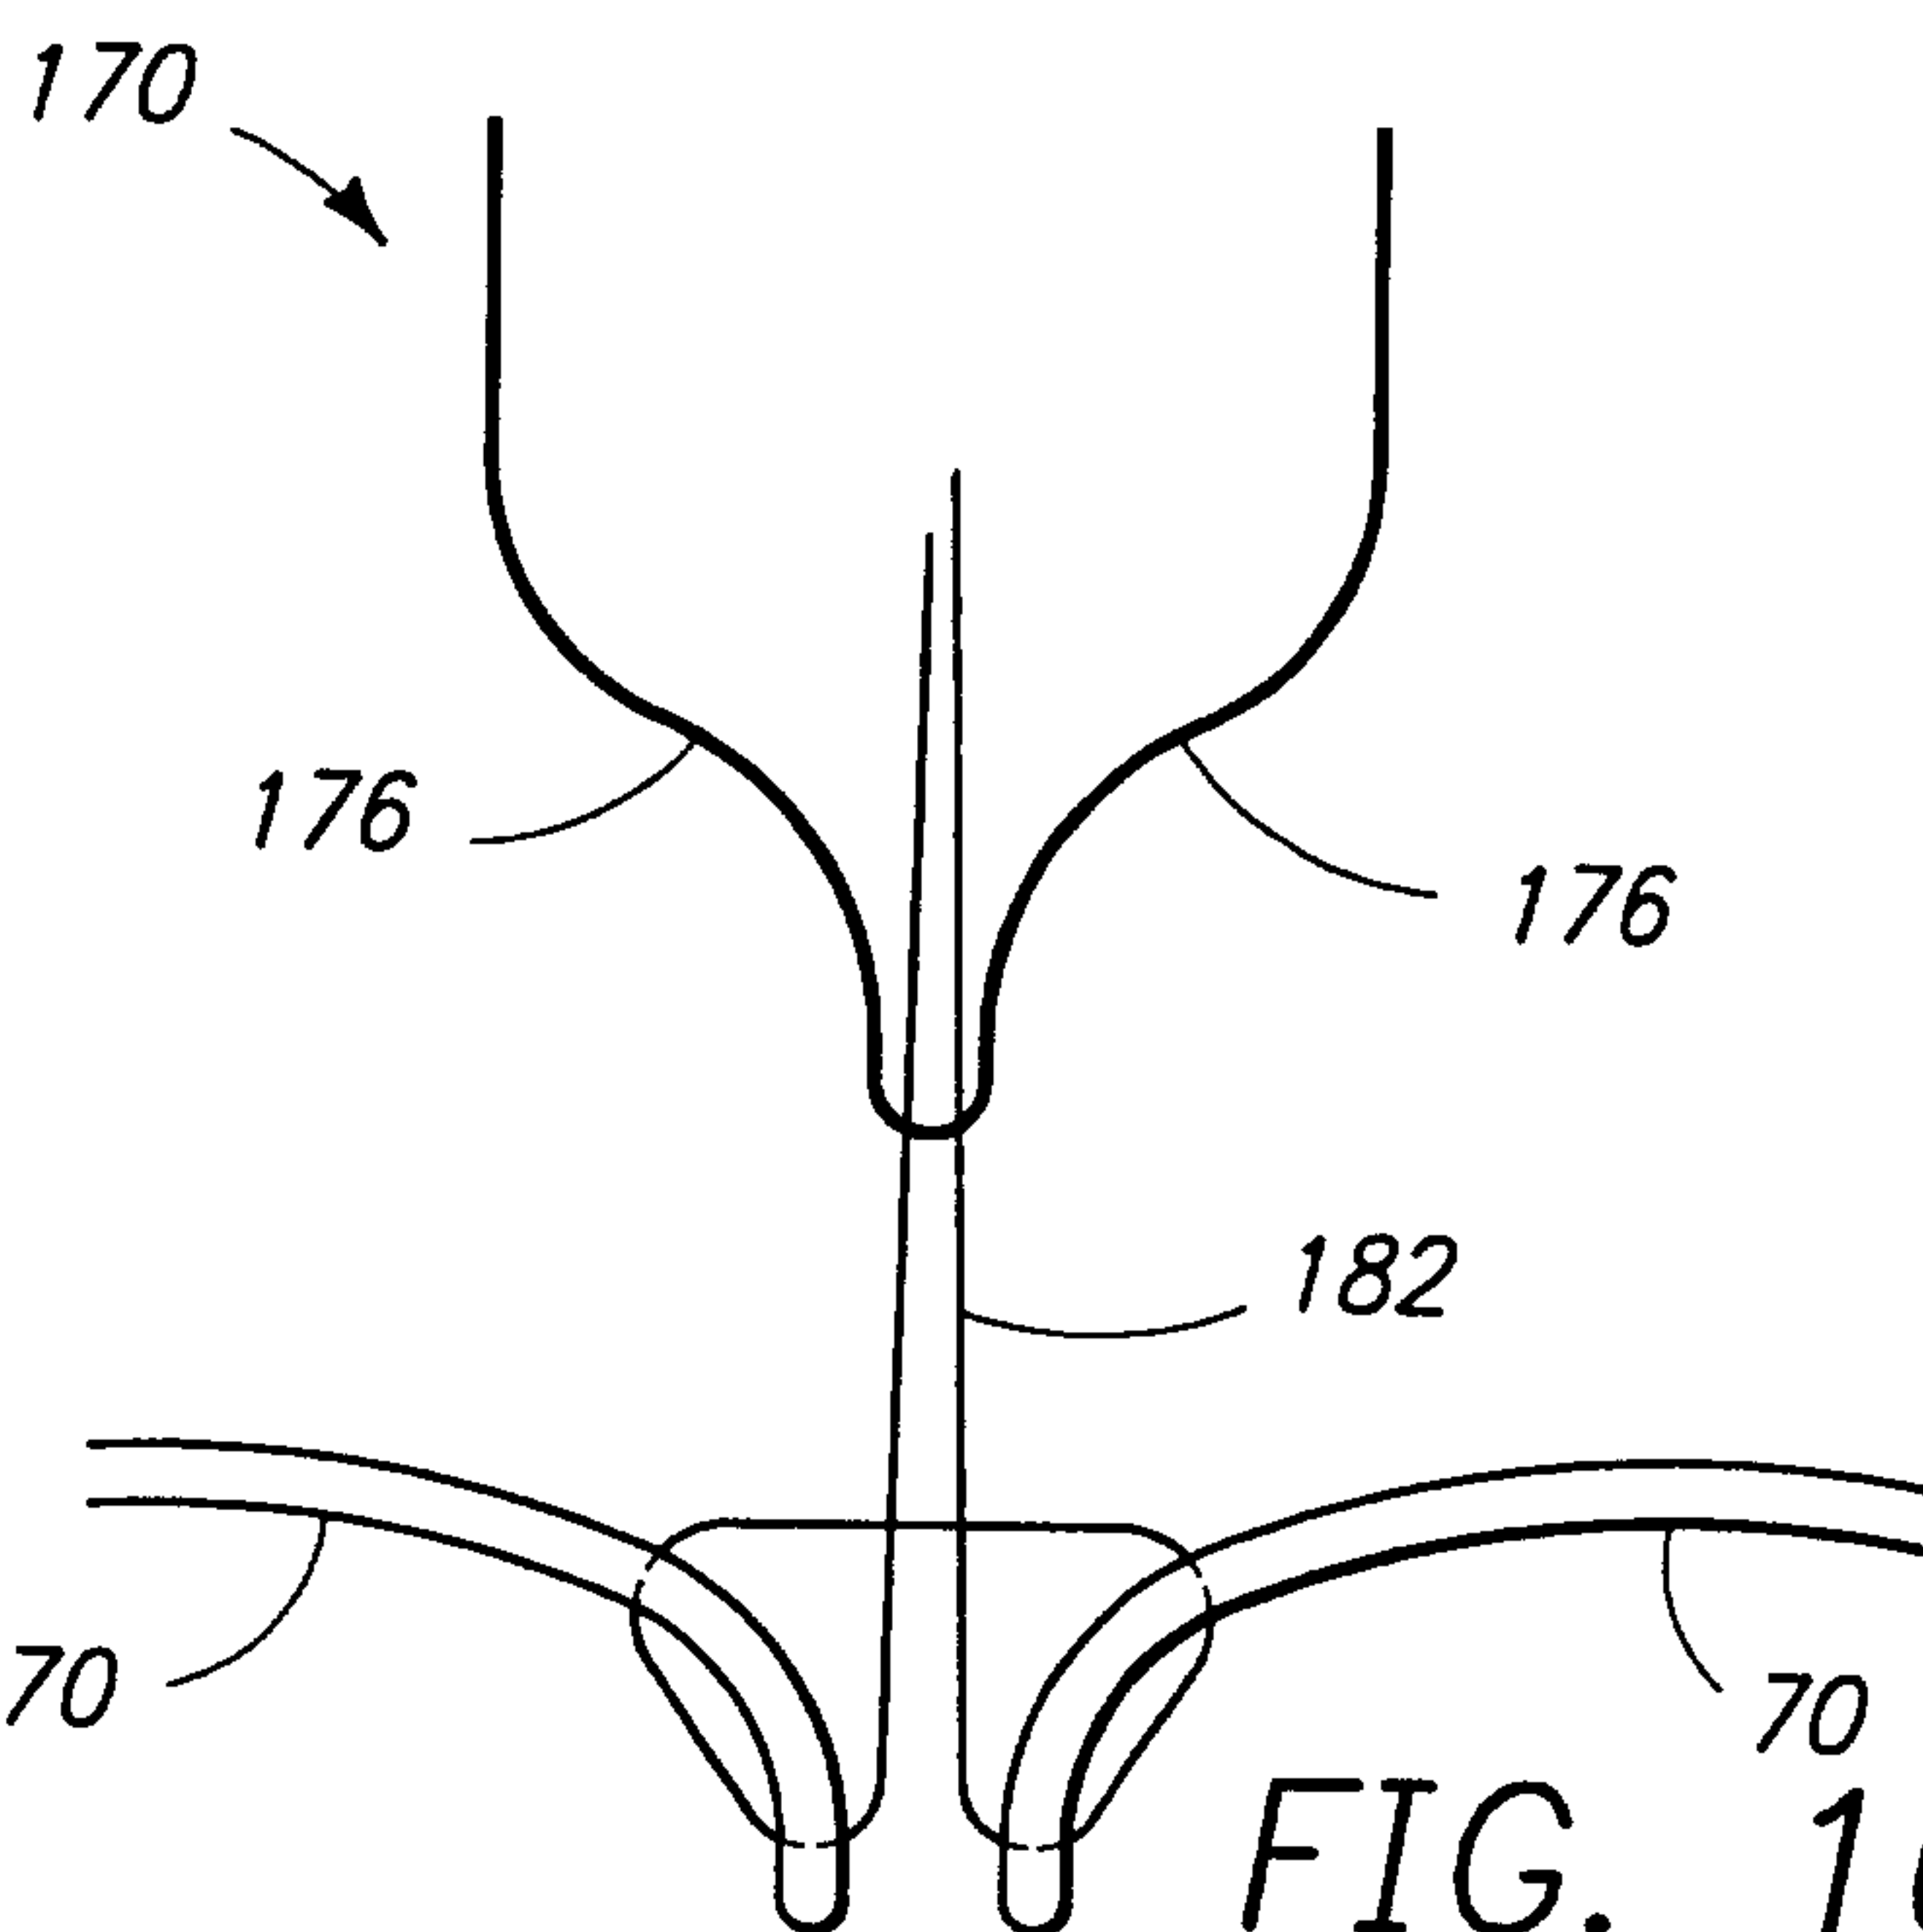


FIG. 16c

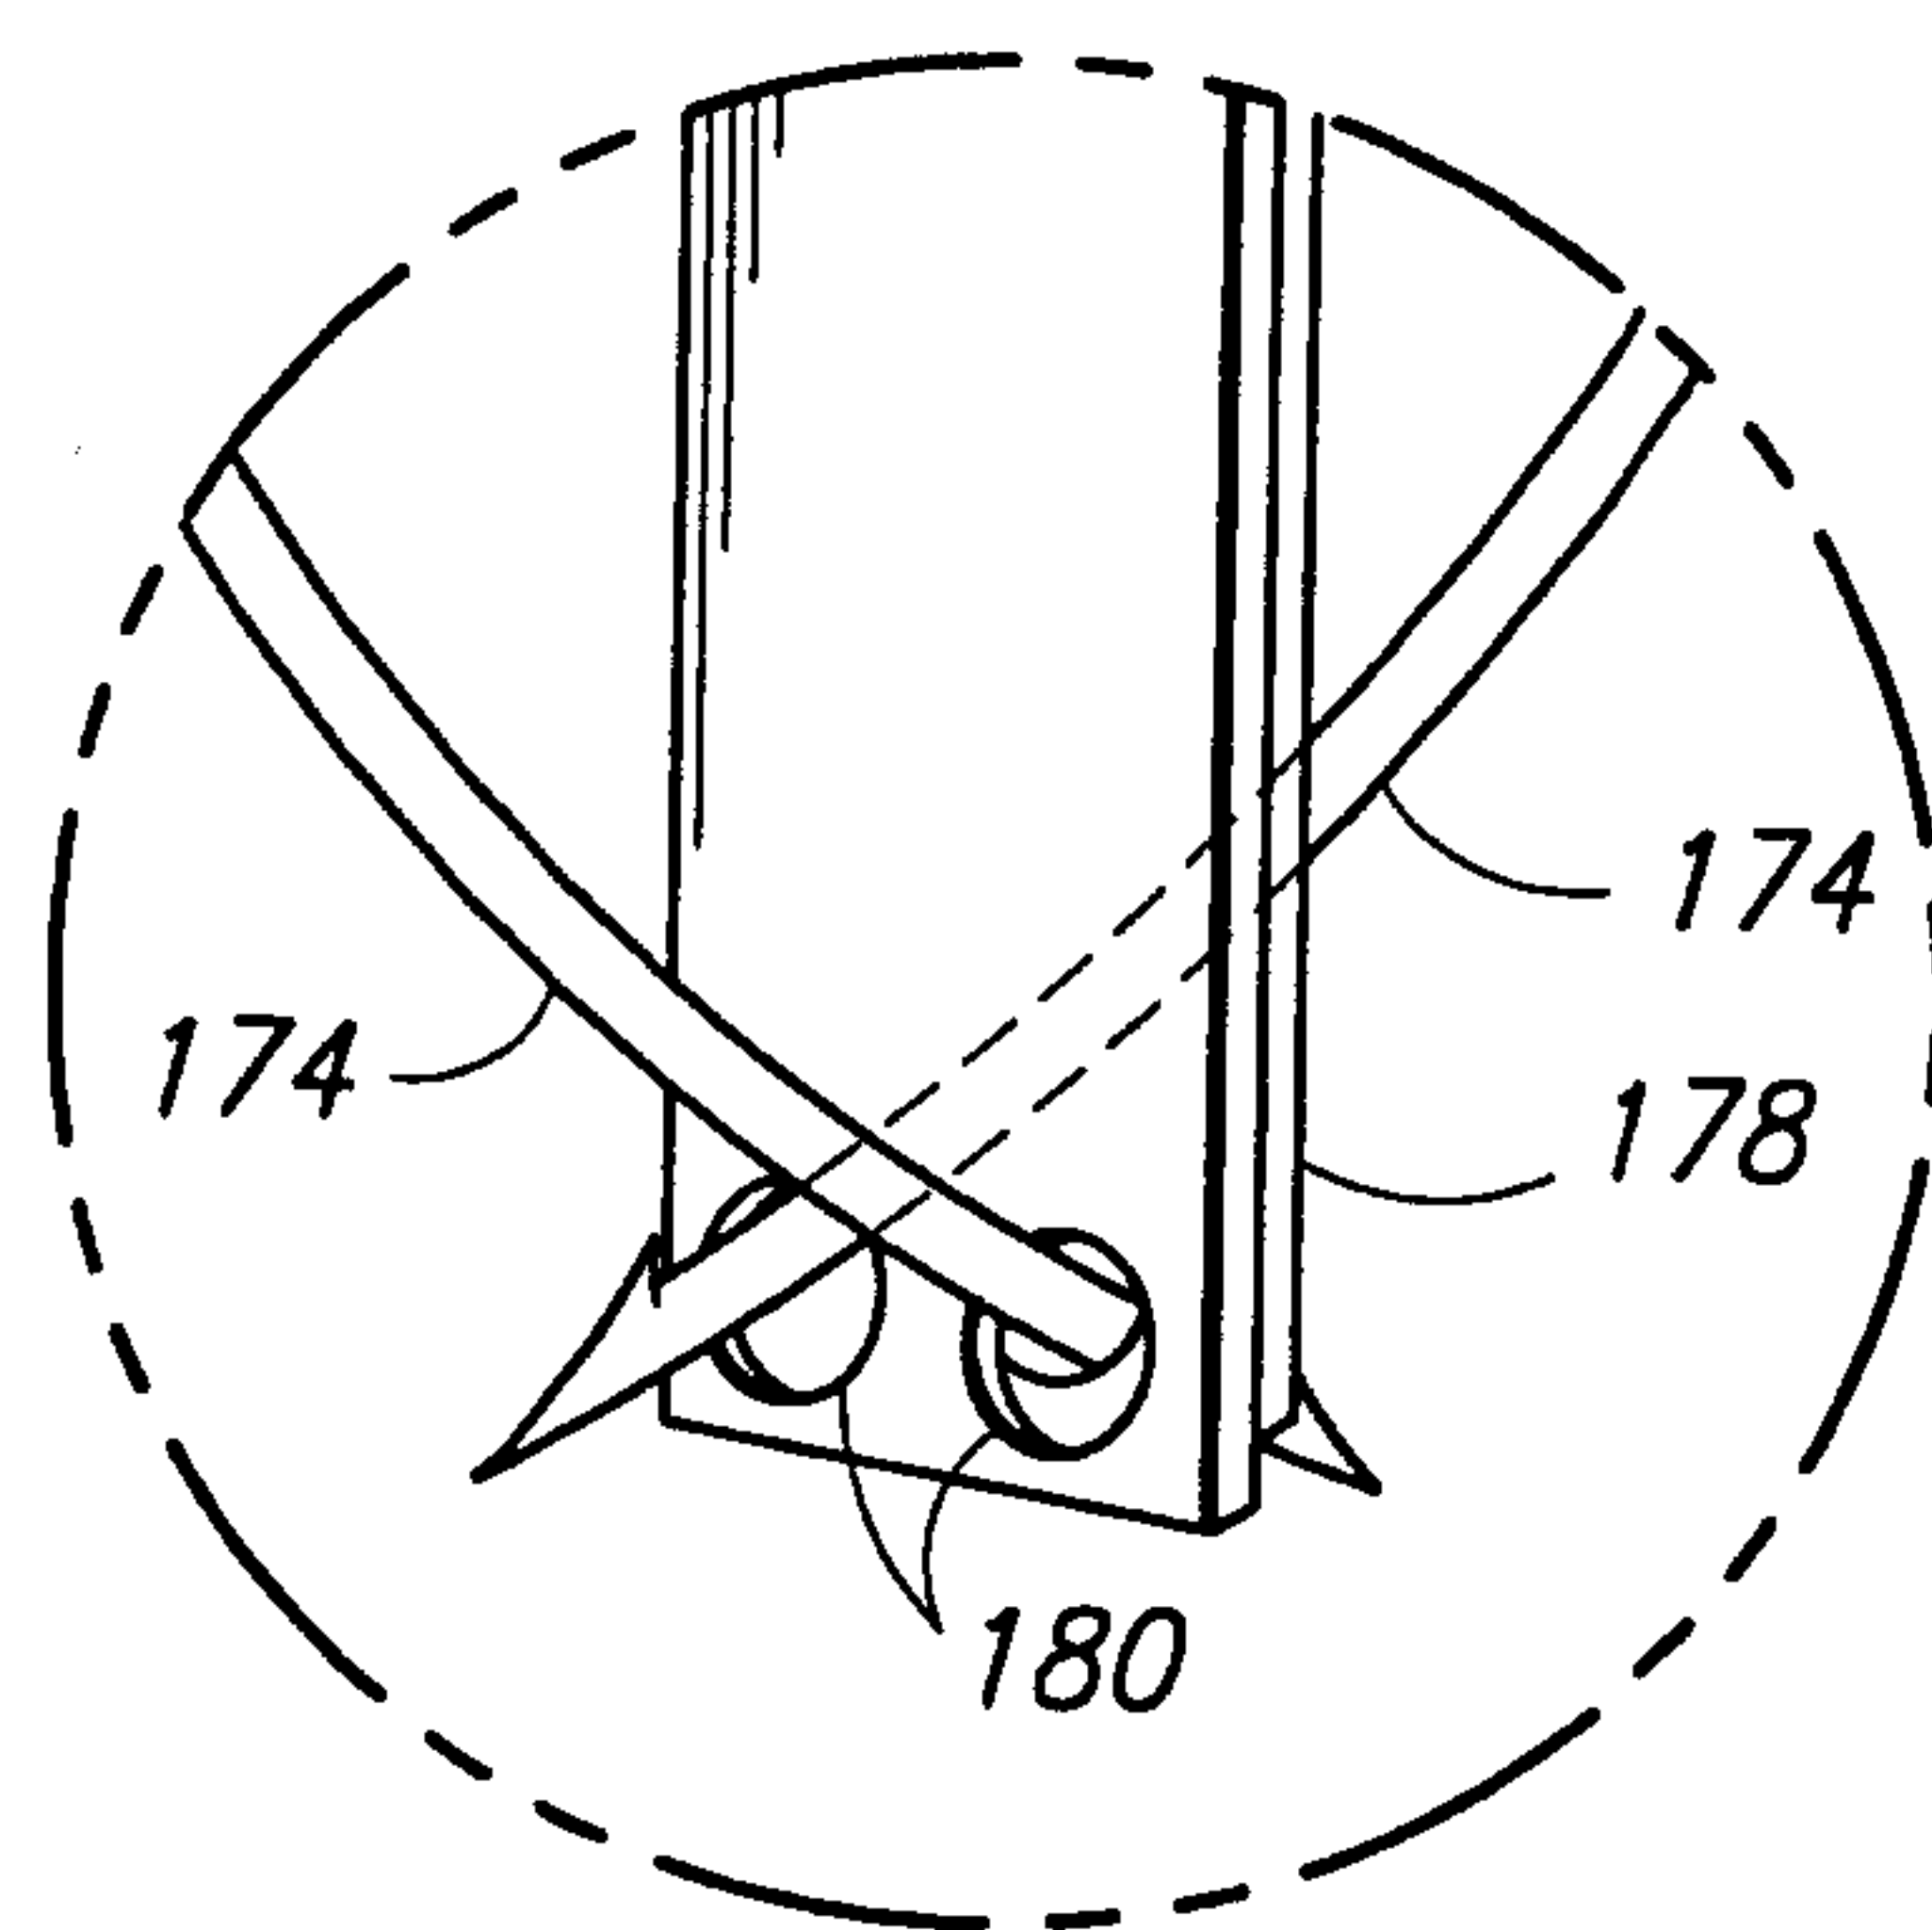


FIG. 16d

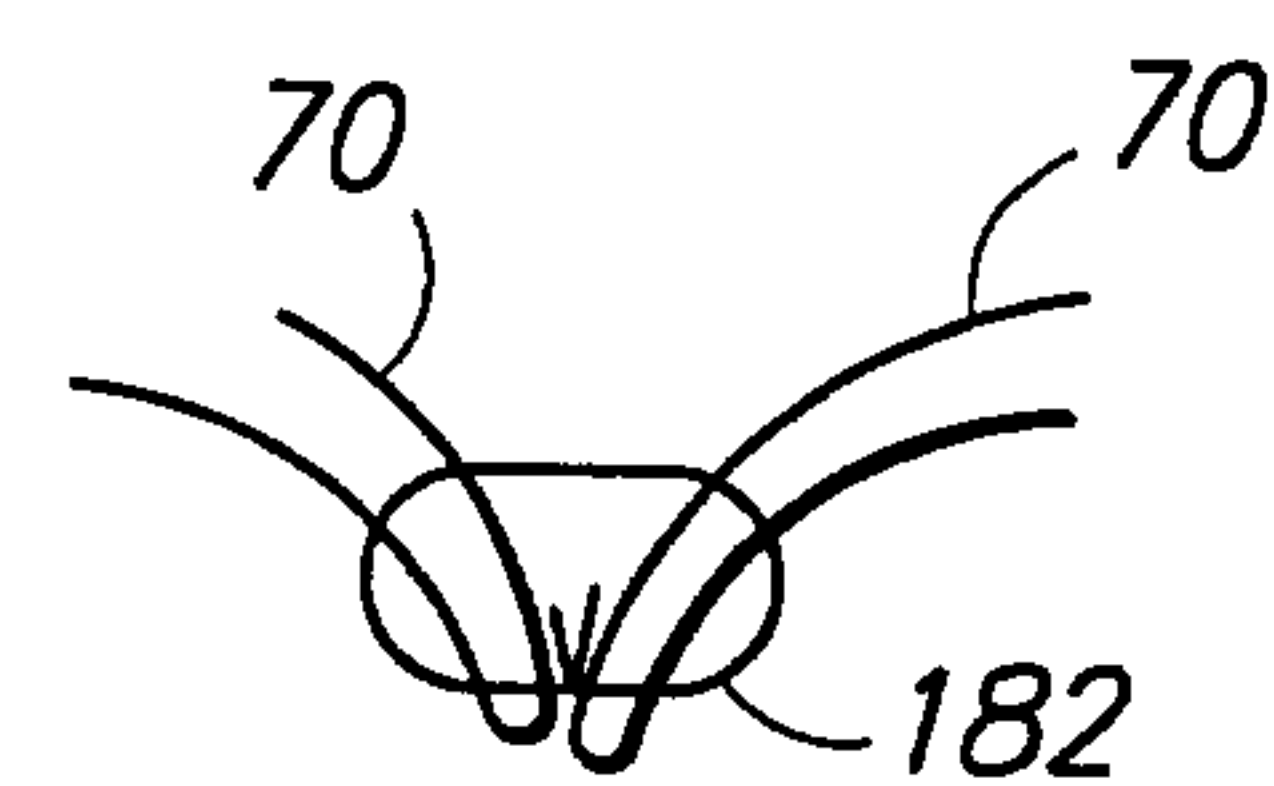


FIG. 16e




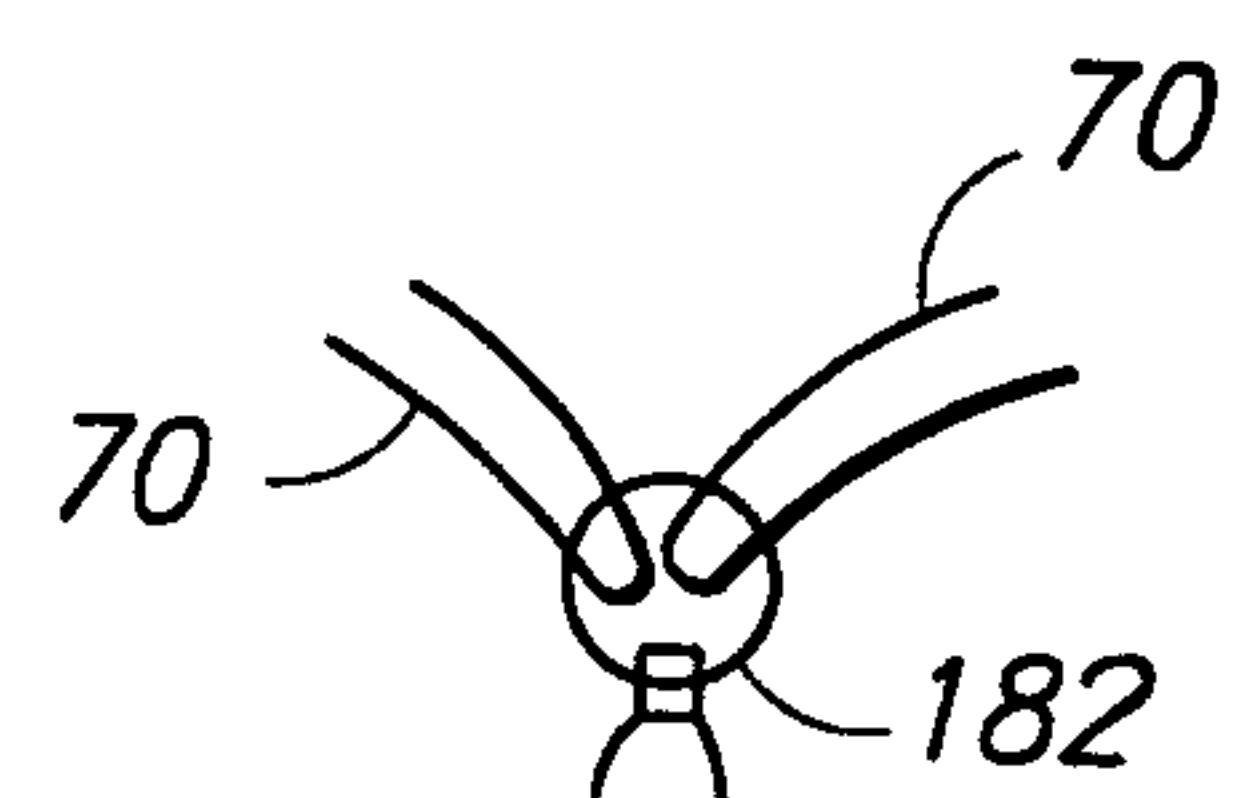


FIG. 16f

18/45

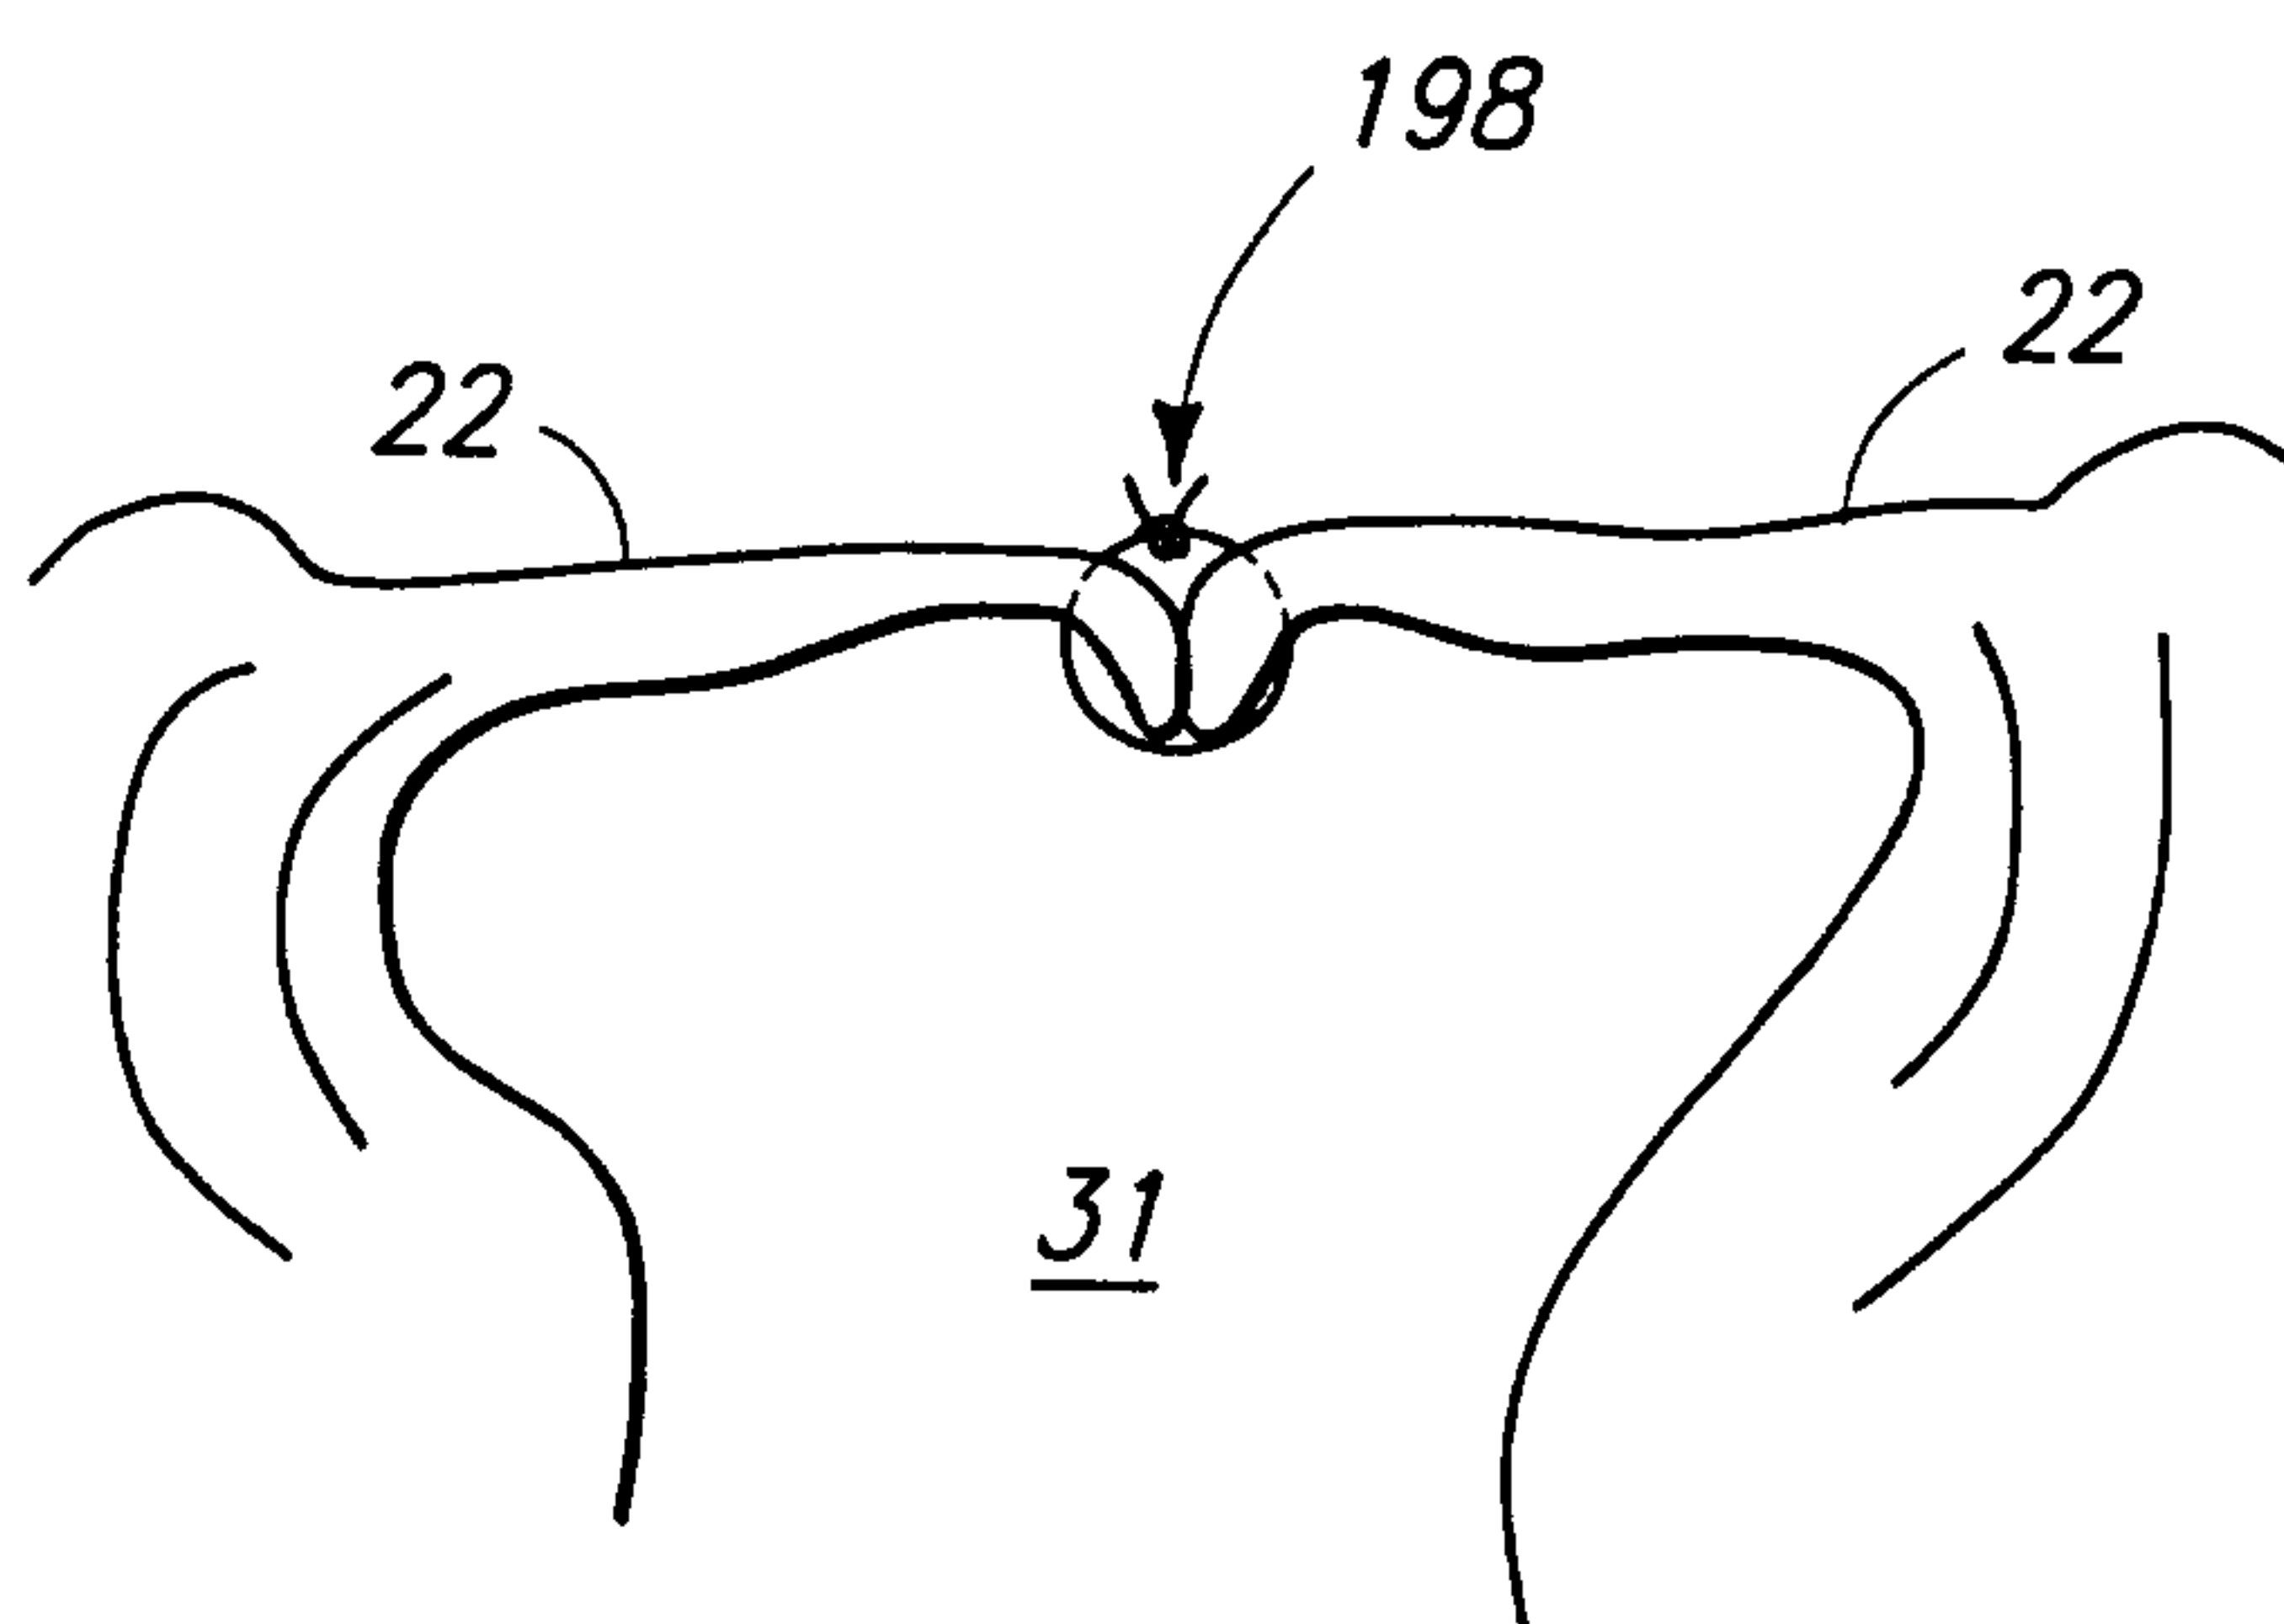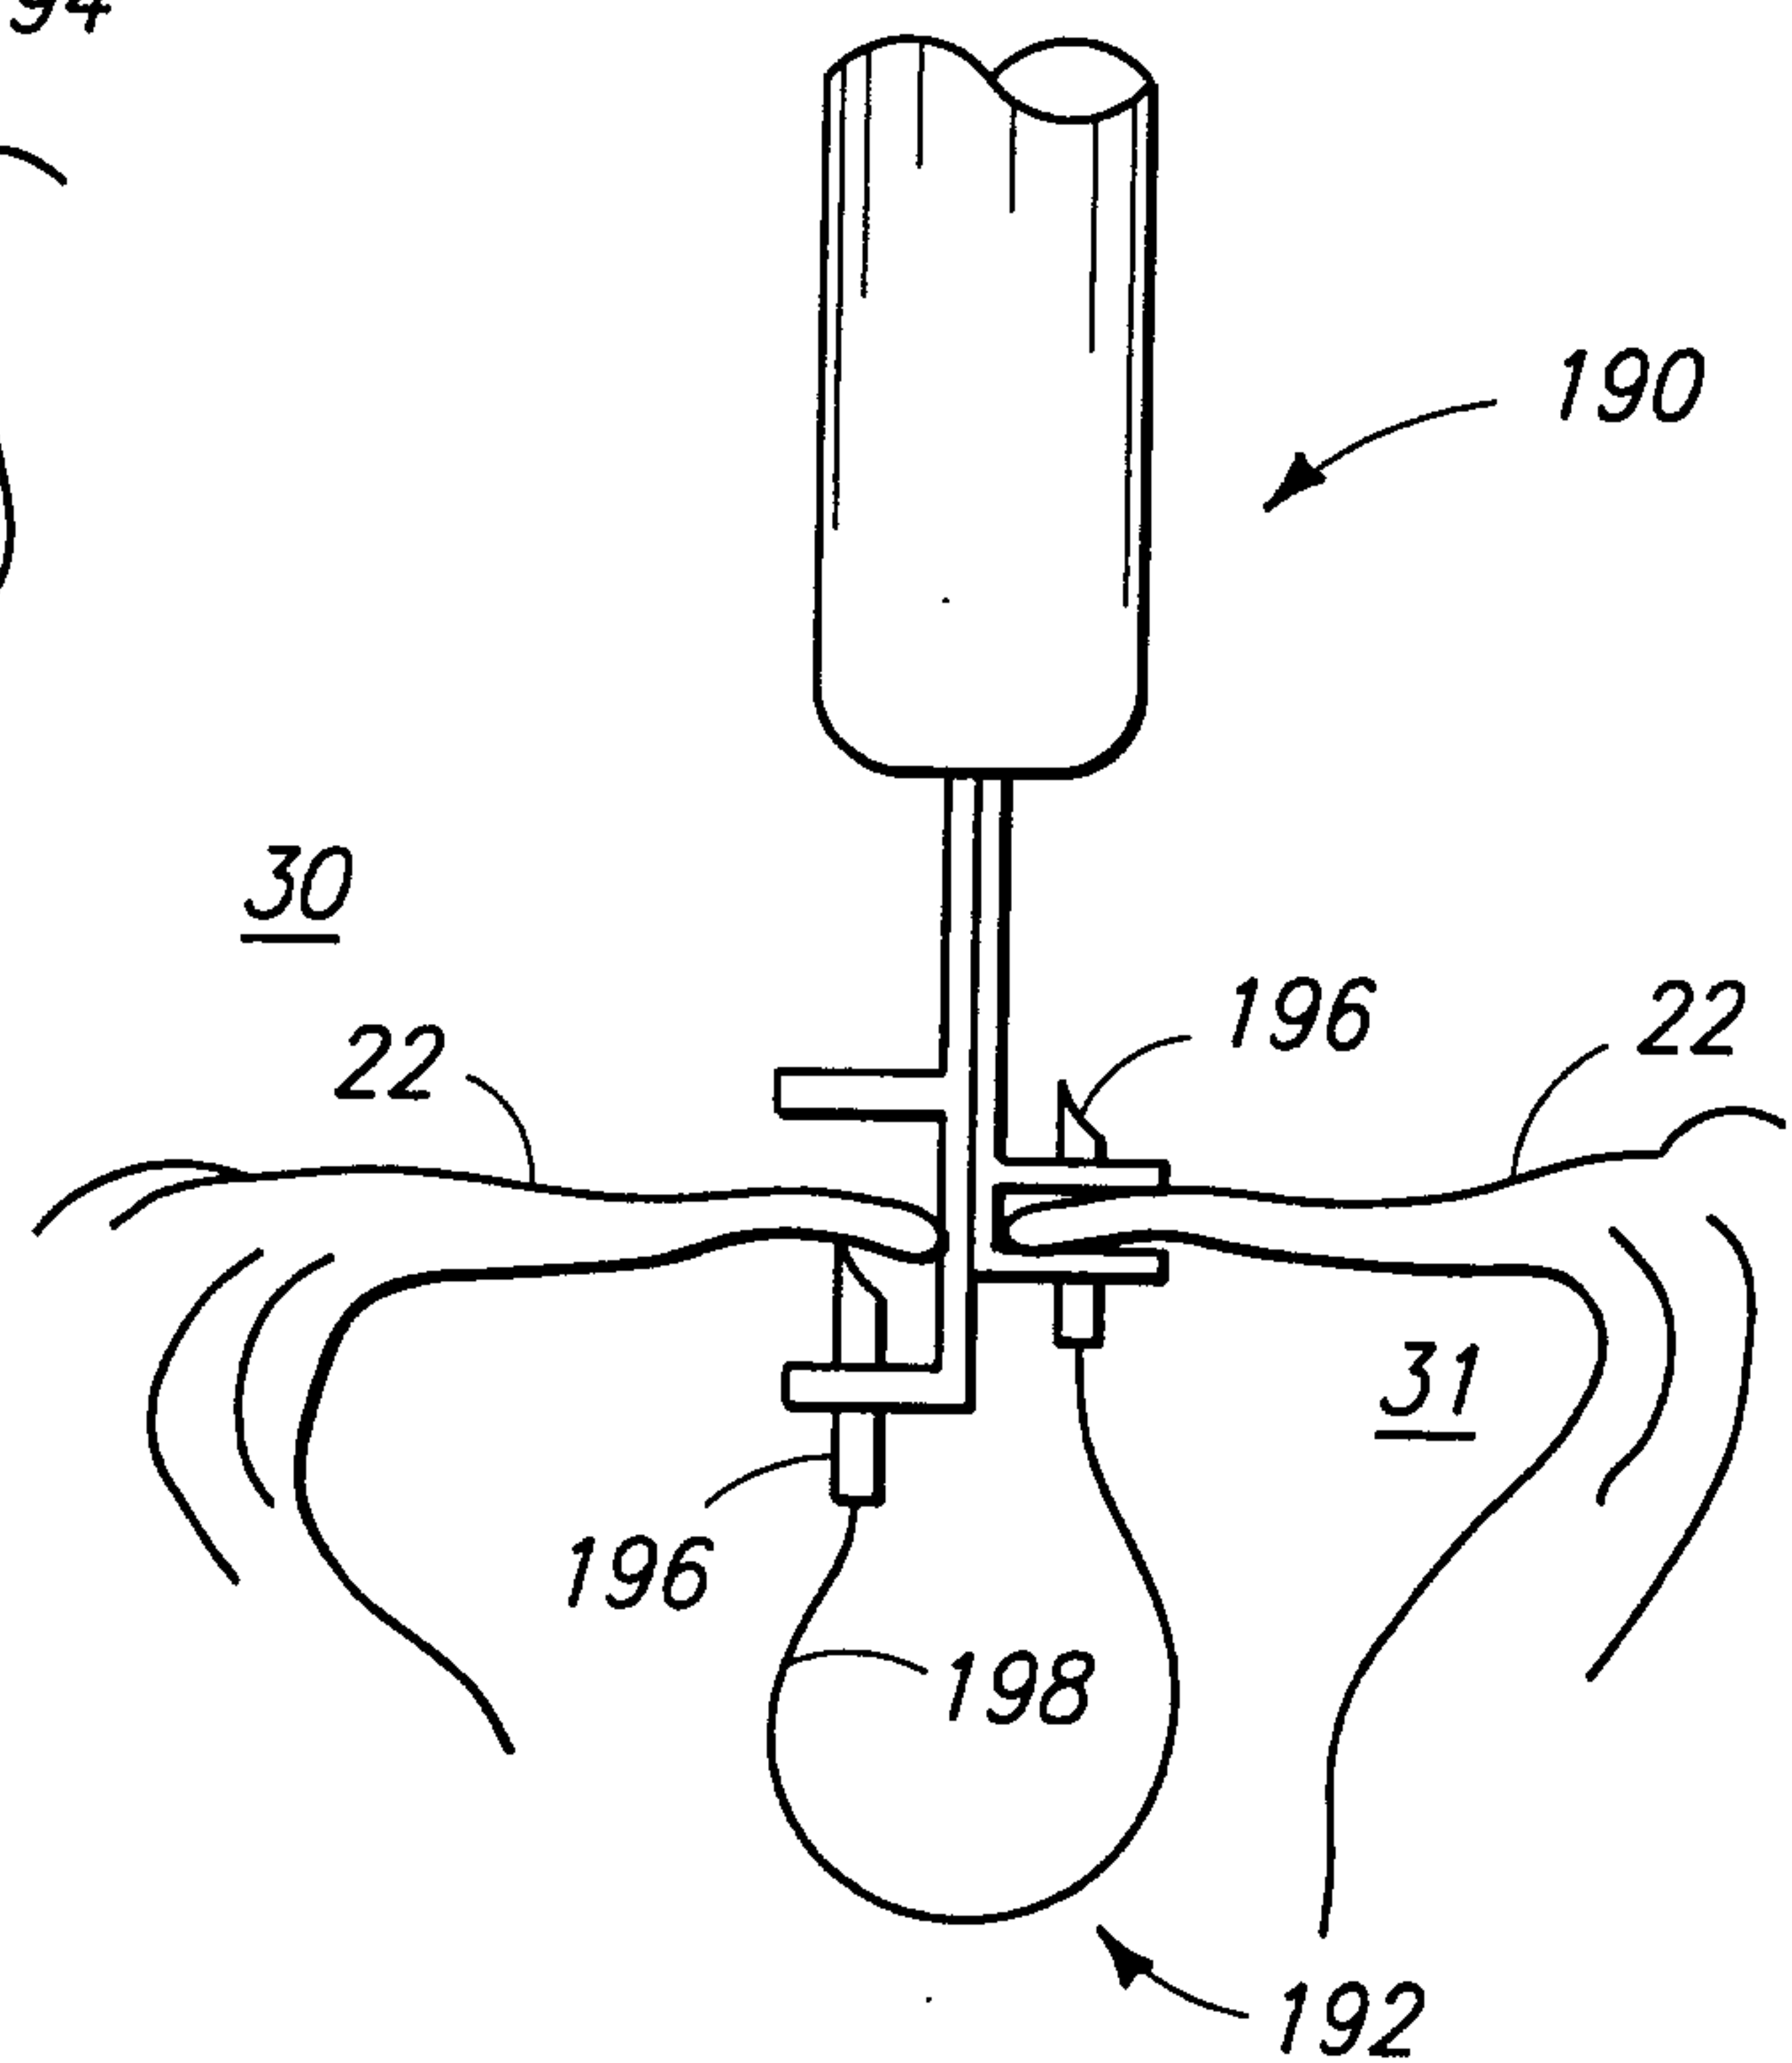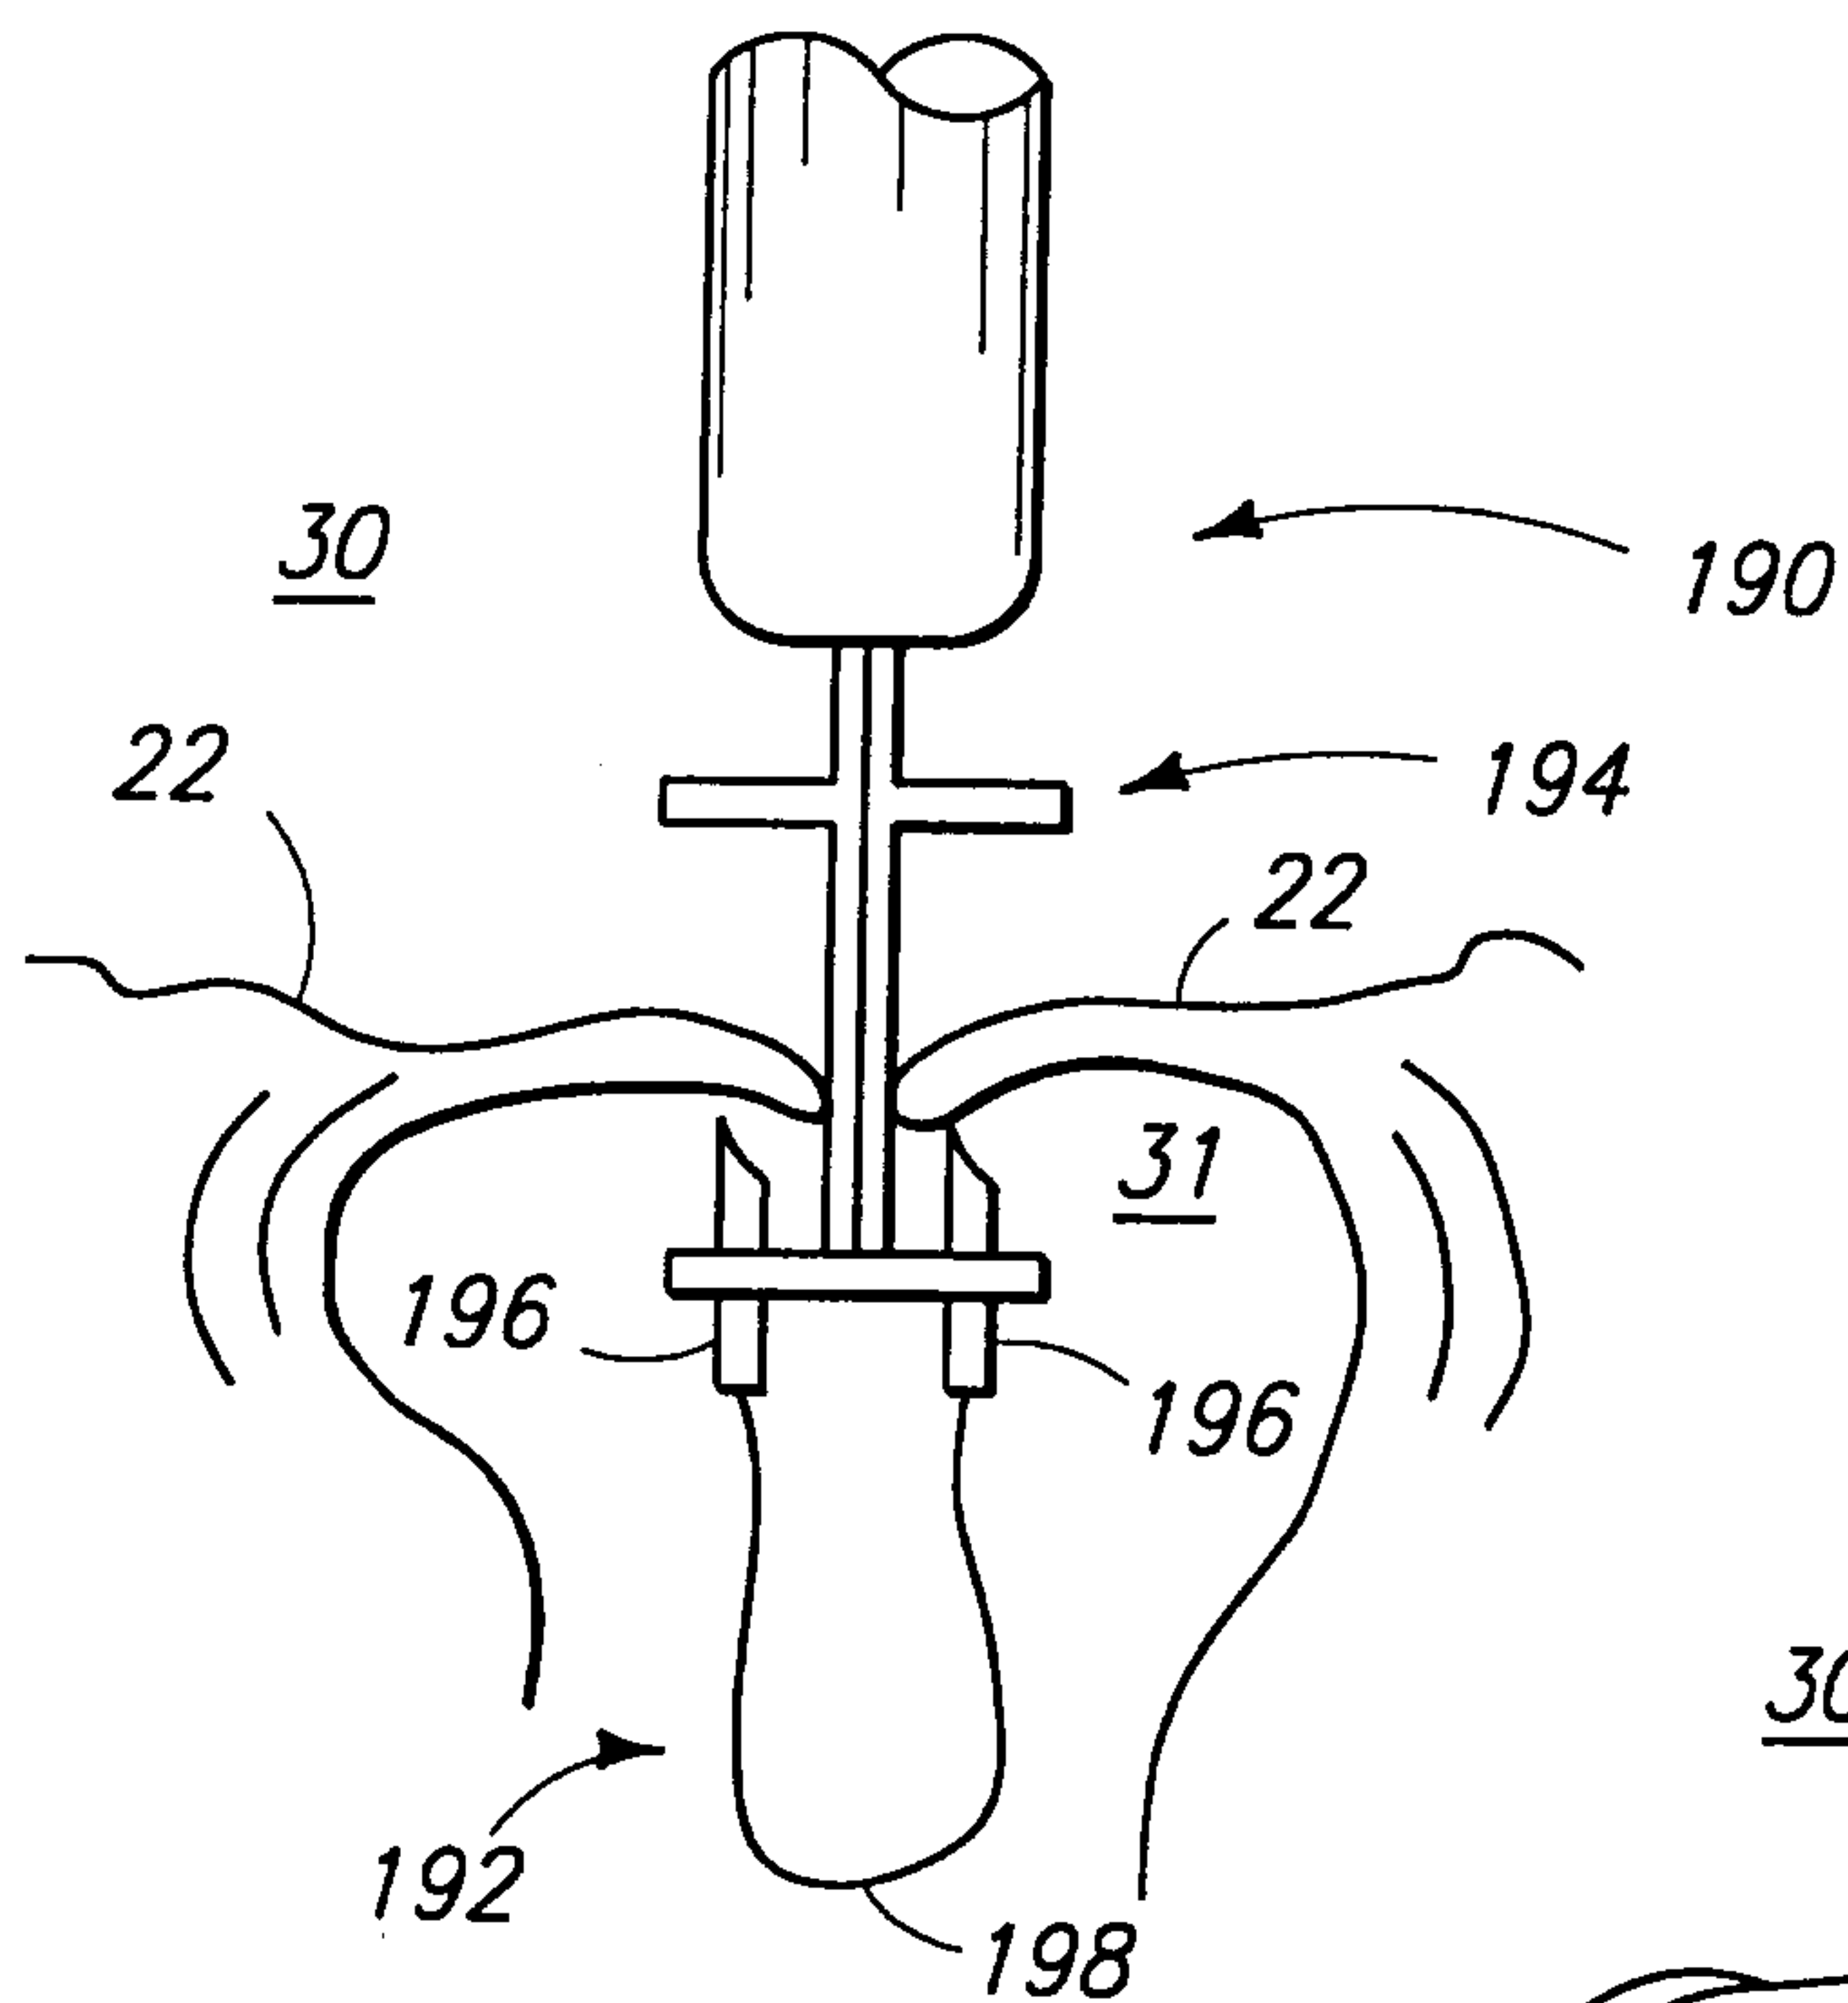

19/45

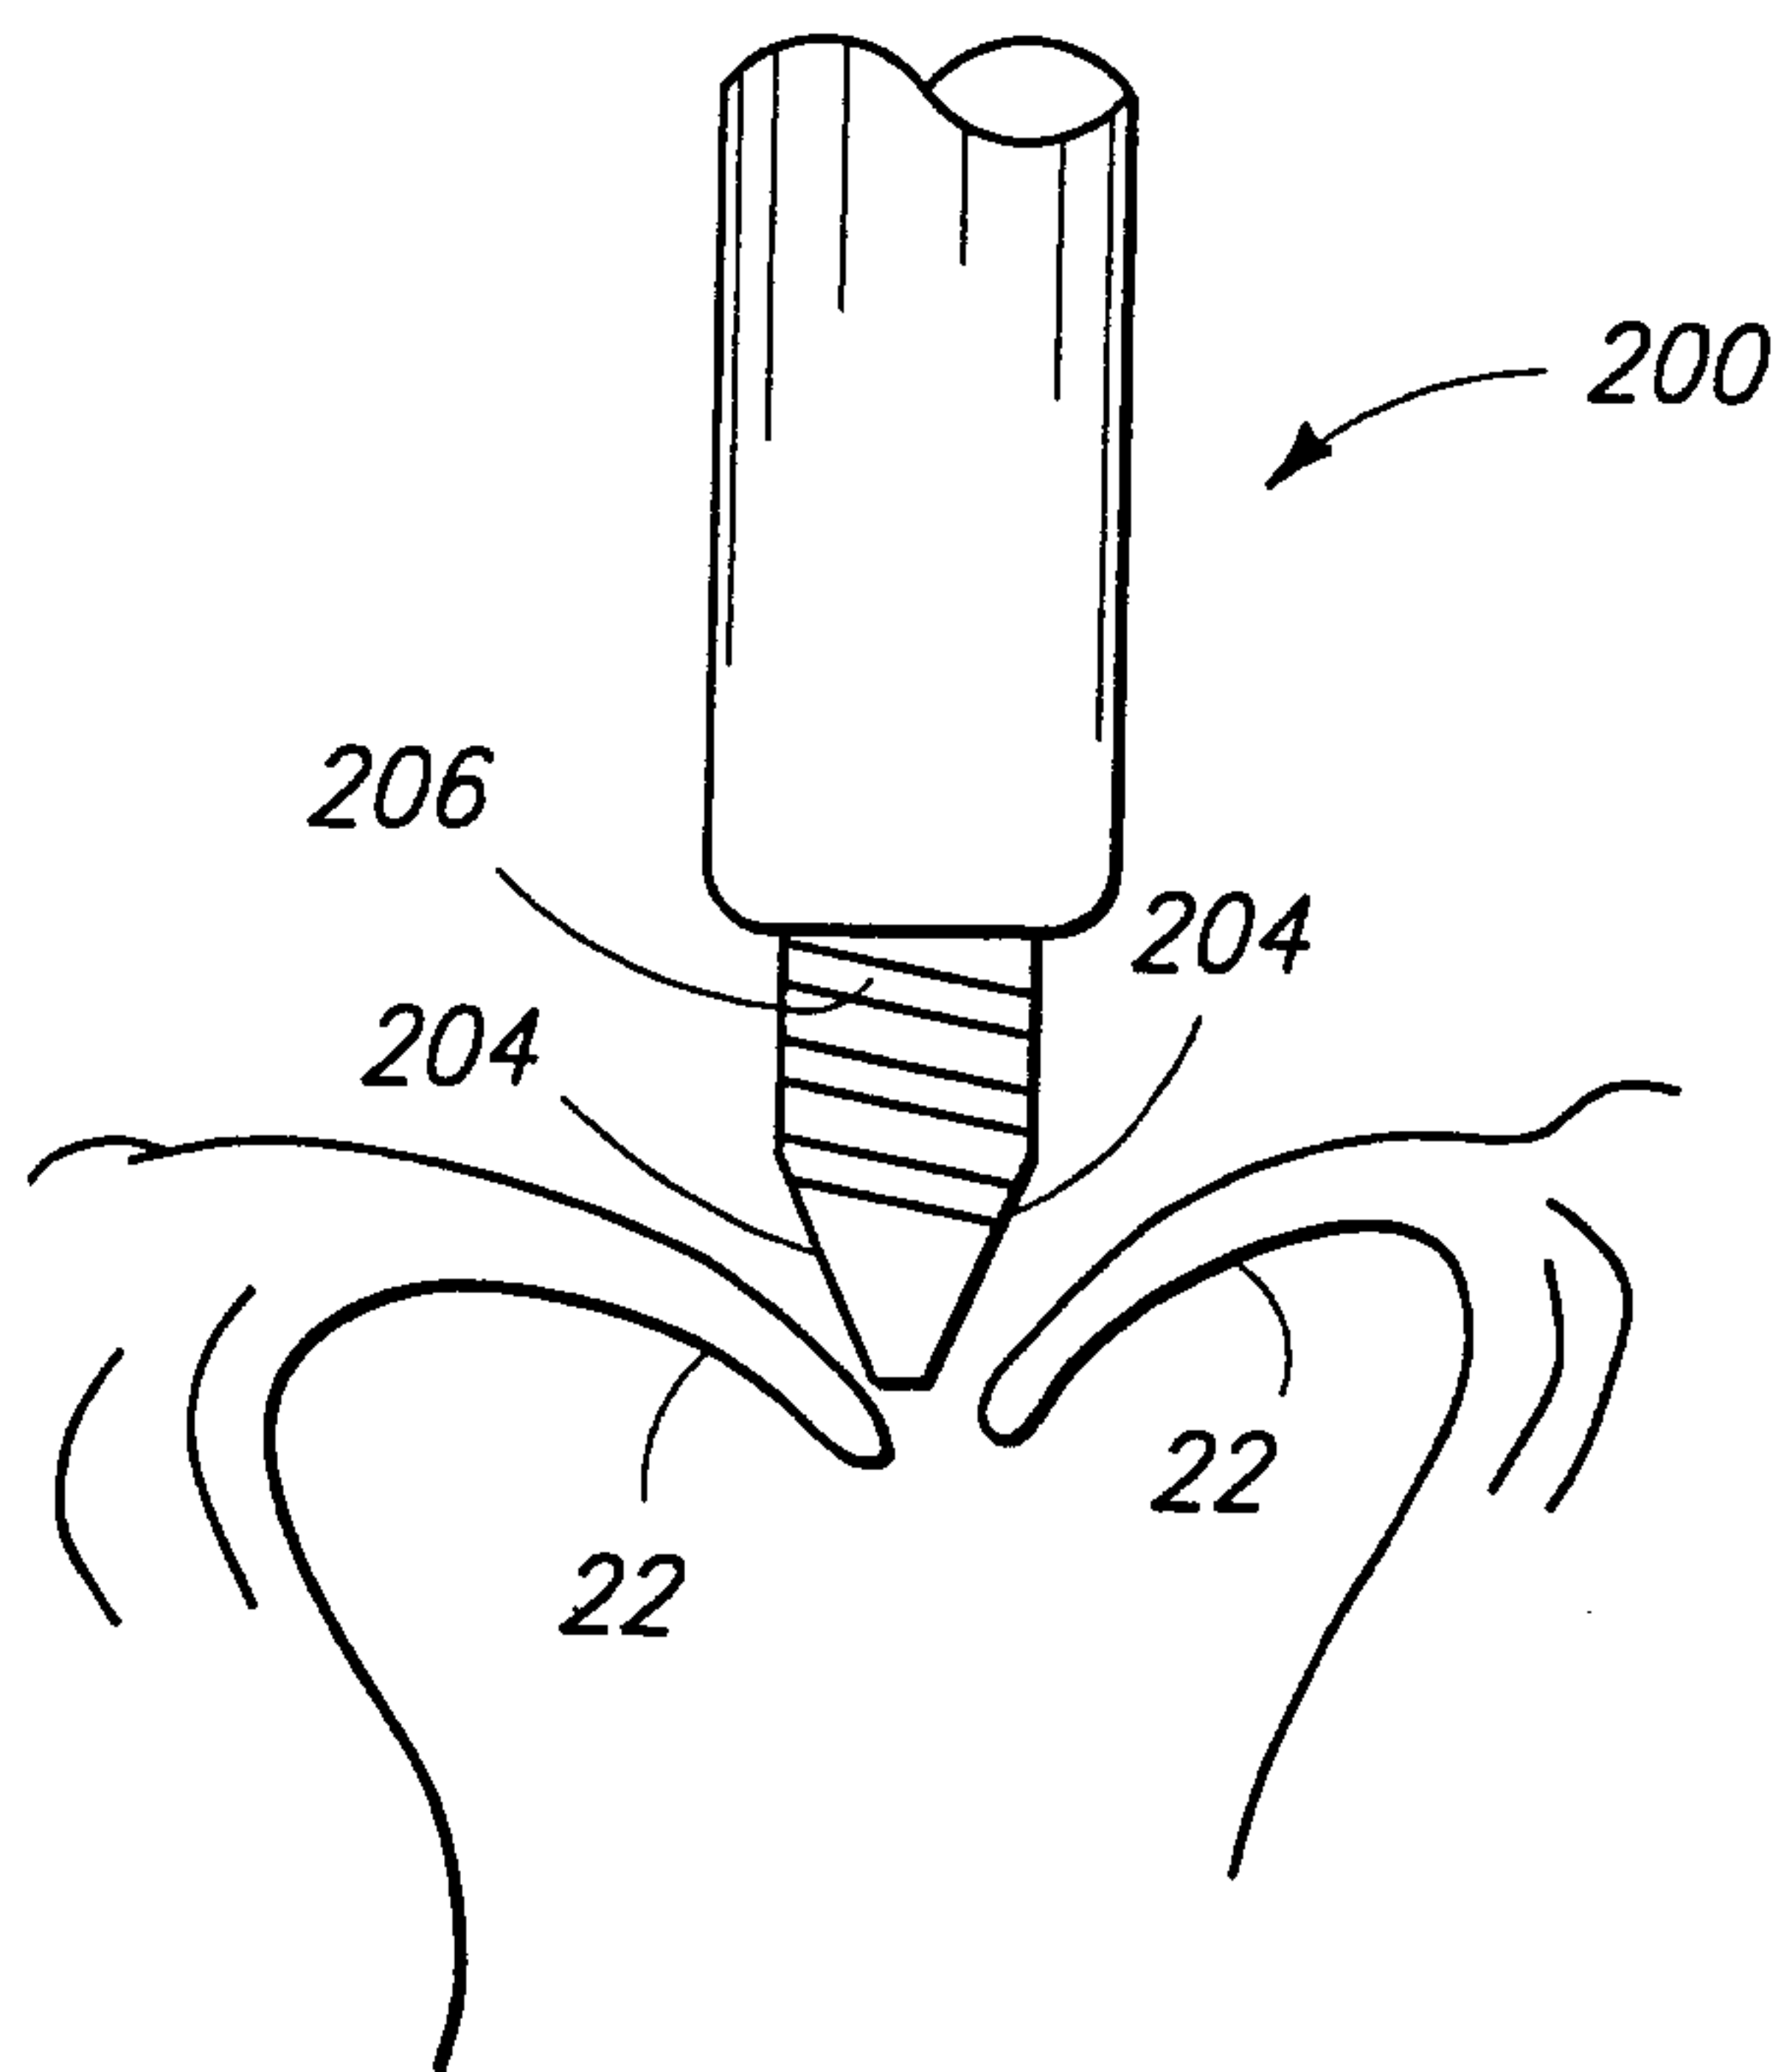


FIG. 18a

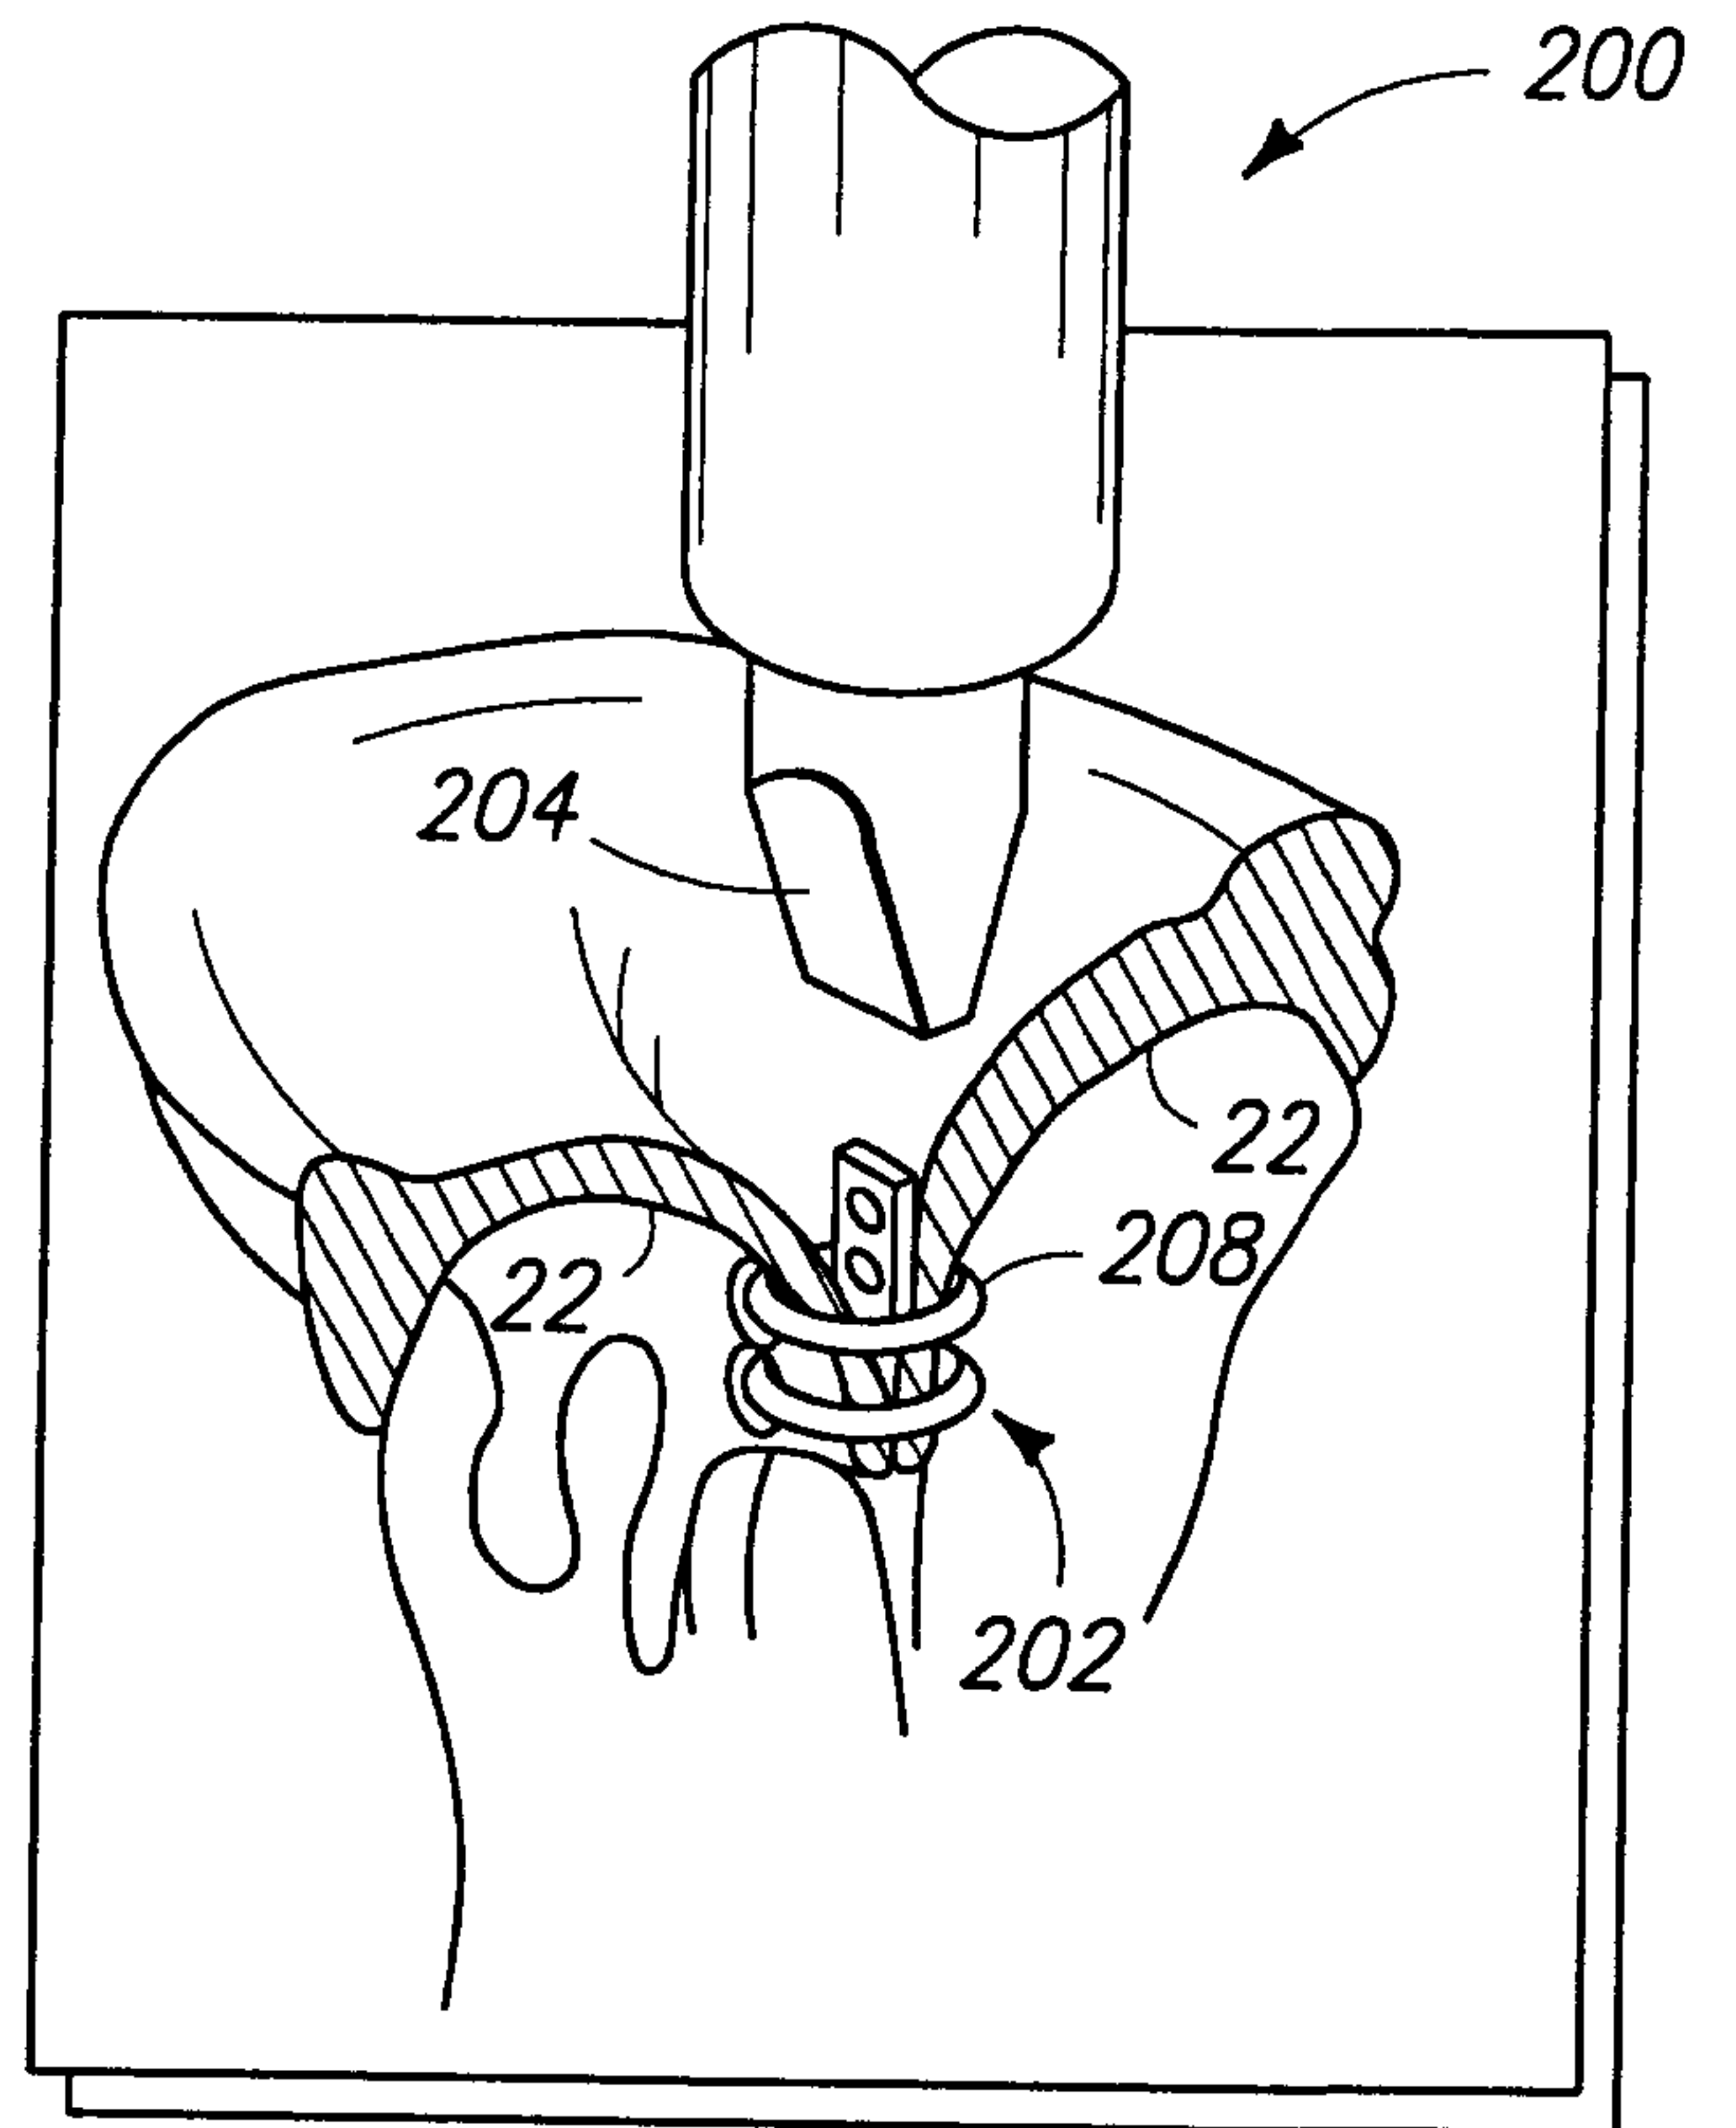


FIG. 18b

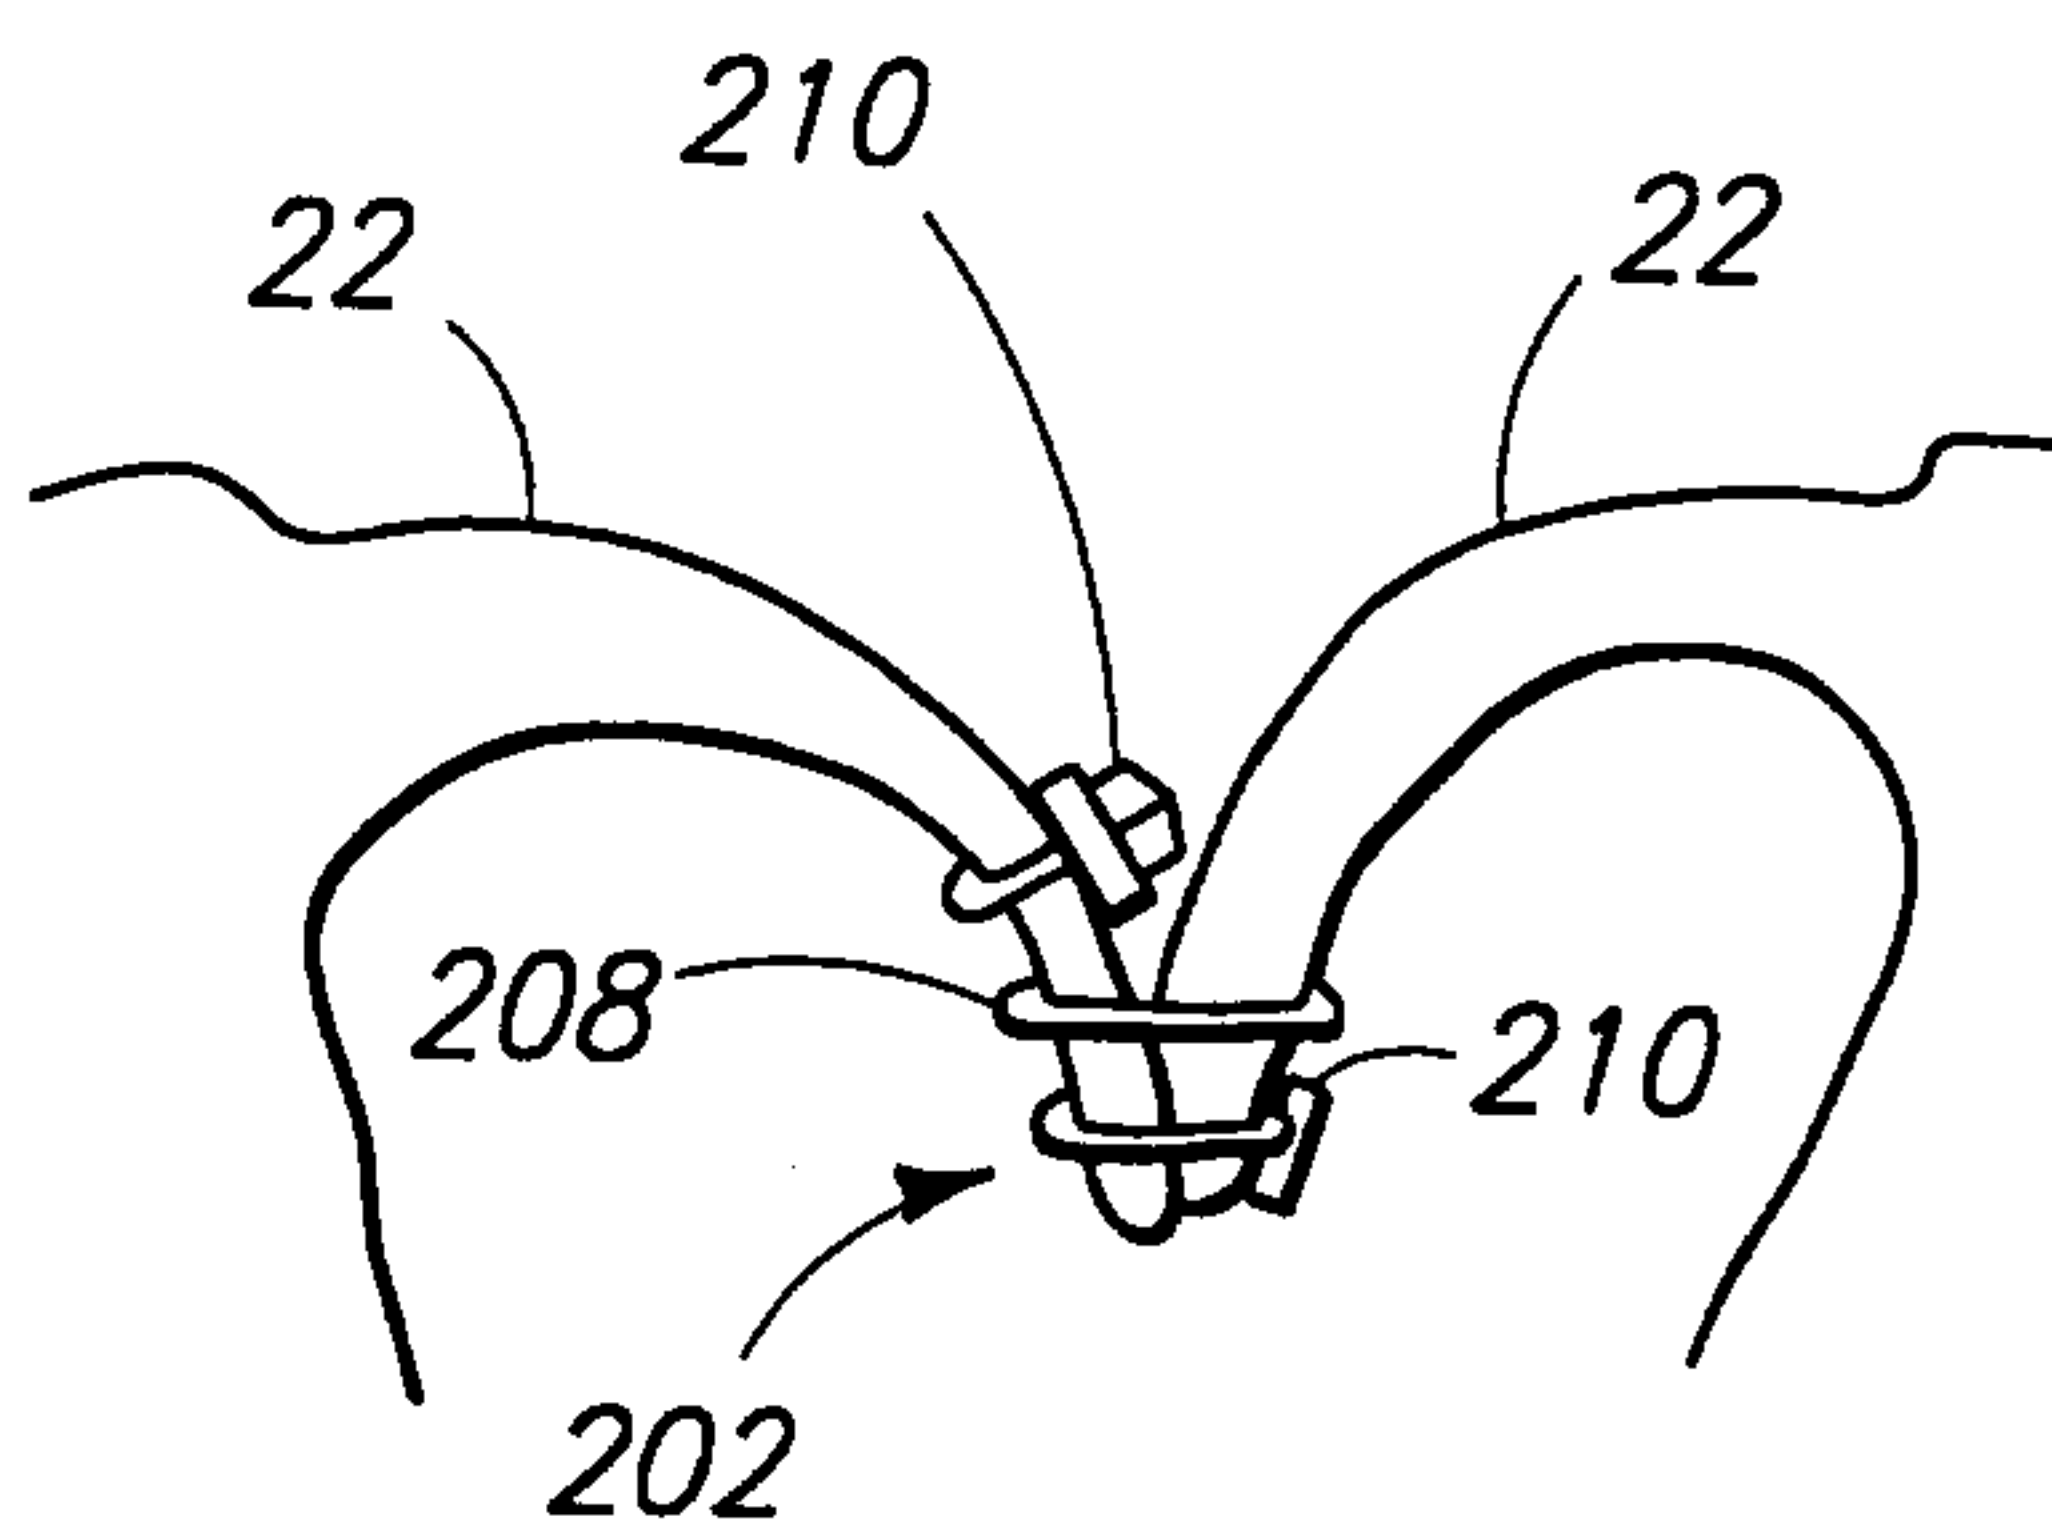


FIG. 18c

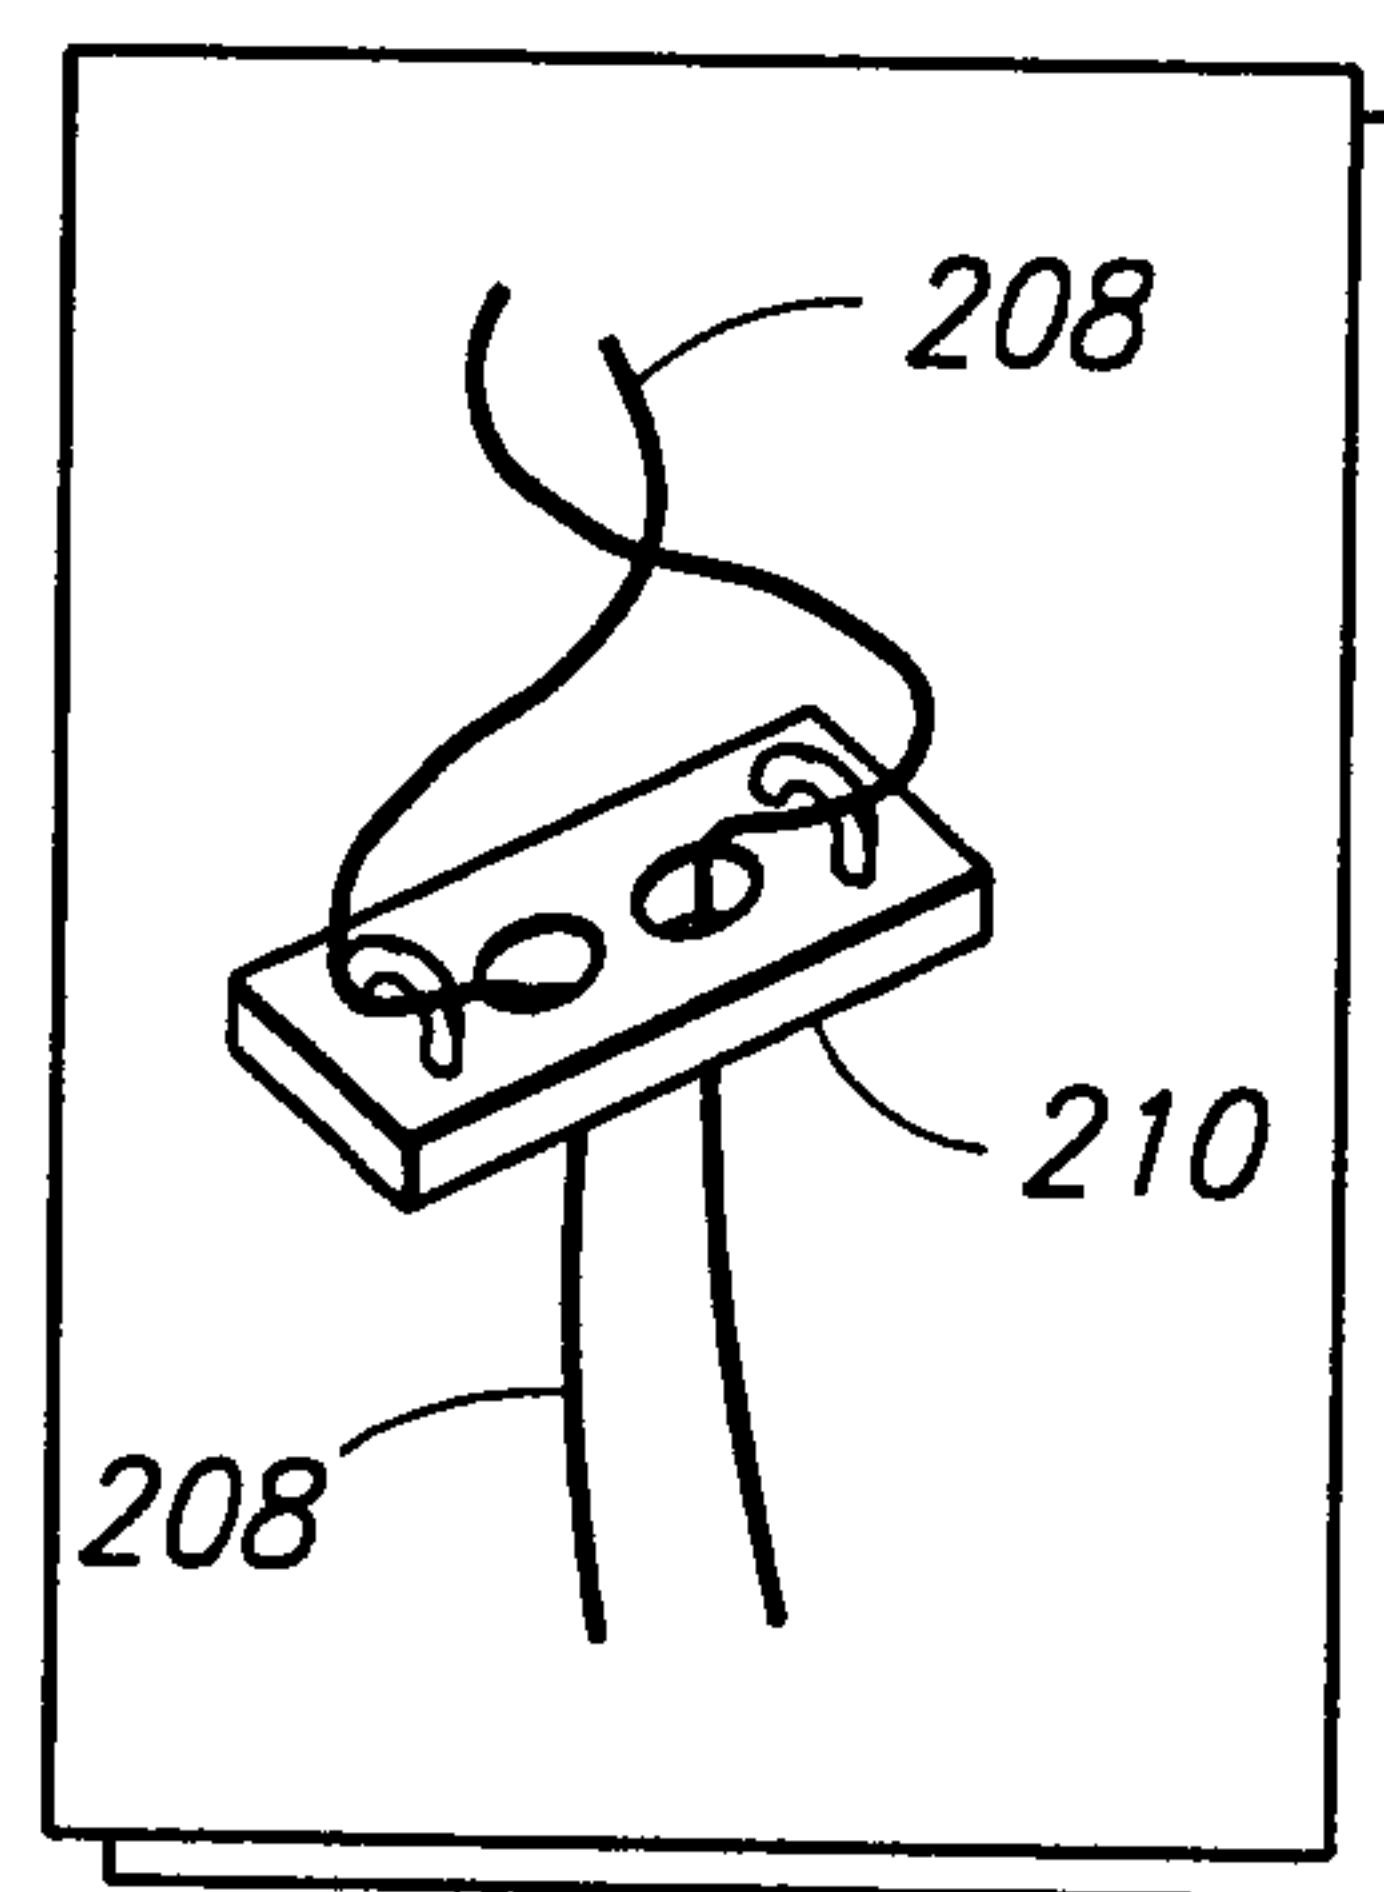


FIG. 18d

20/45

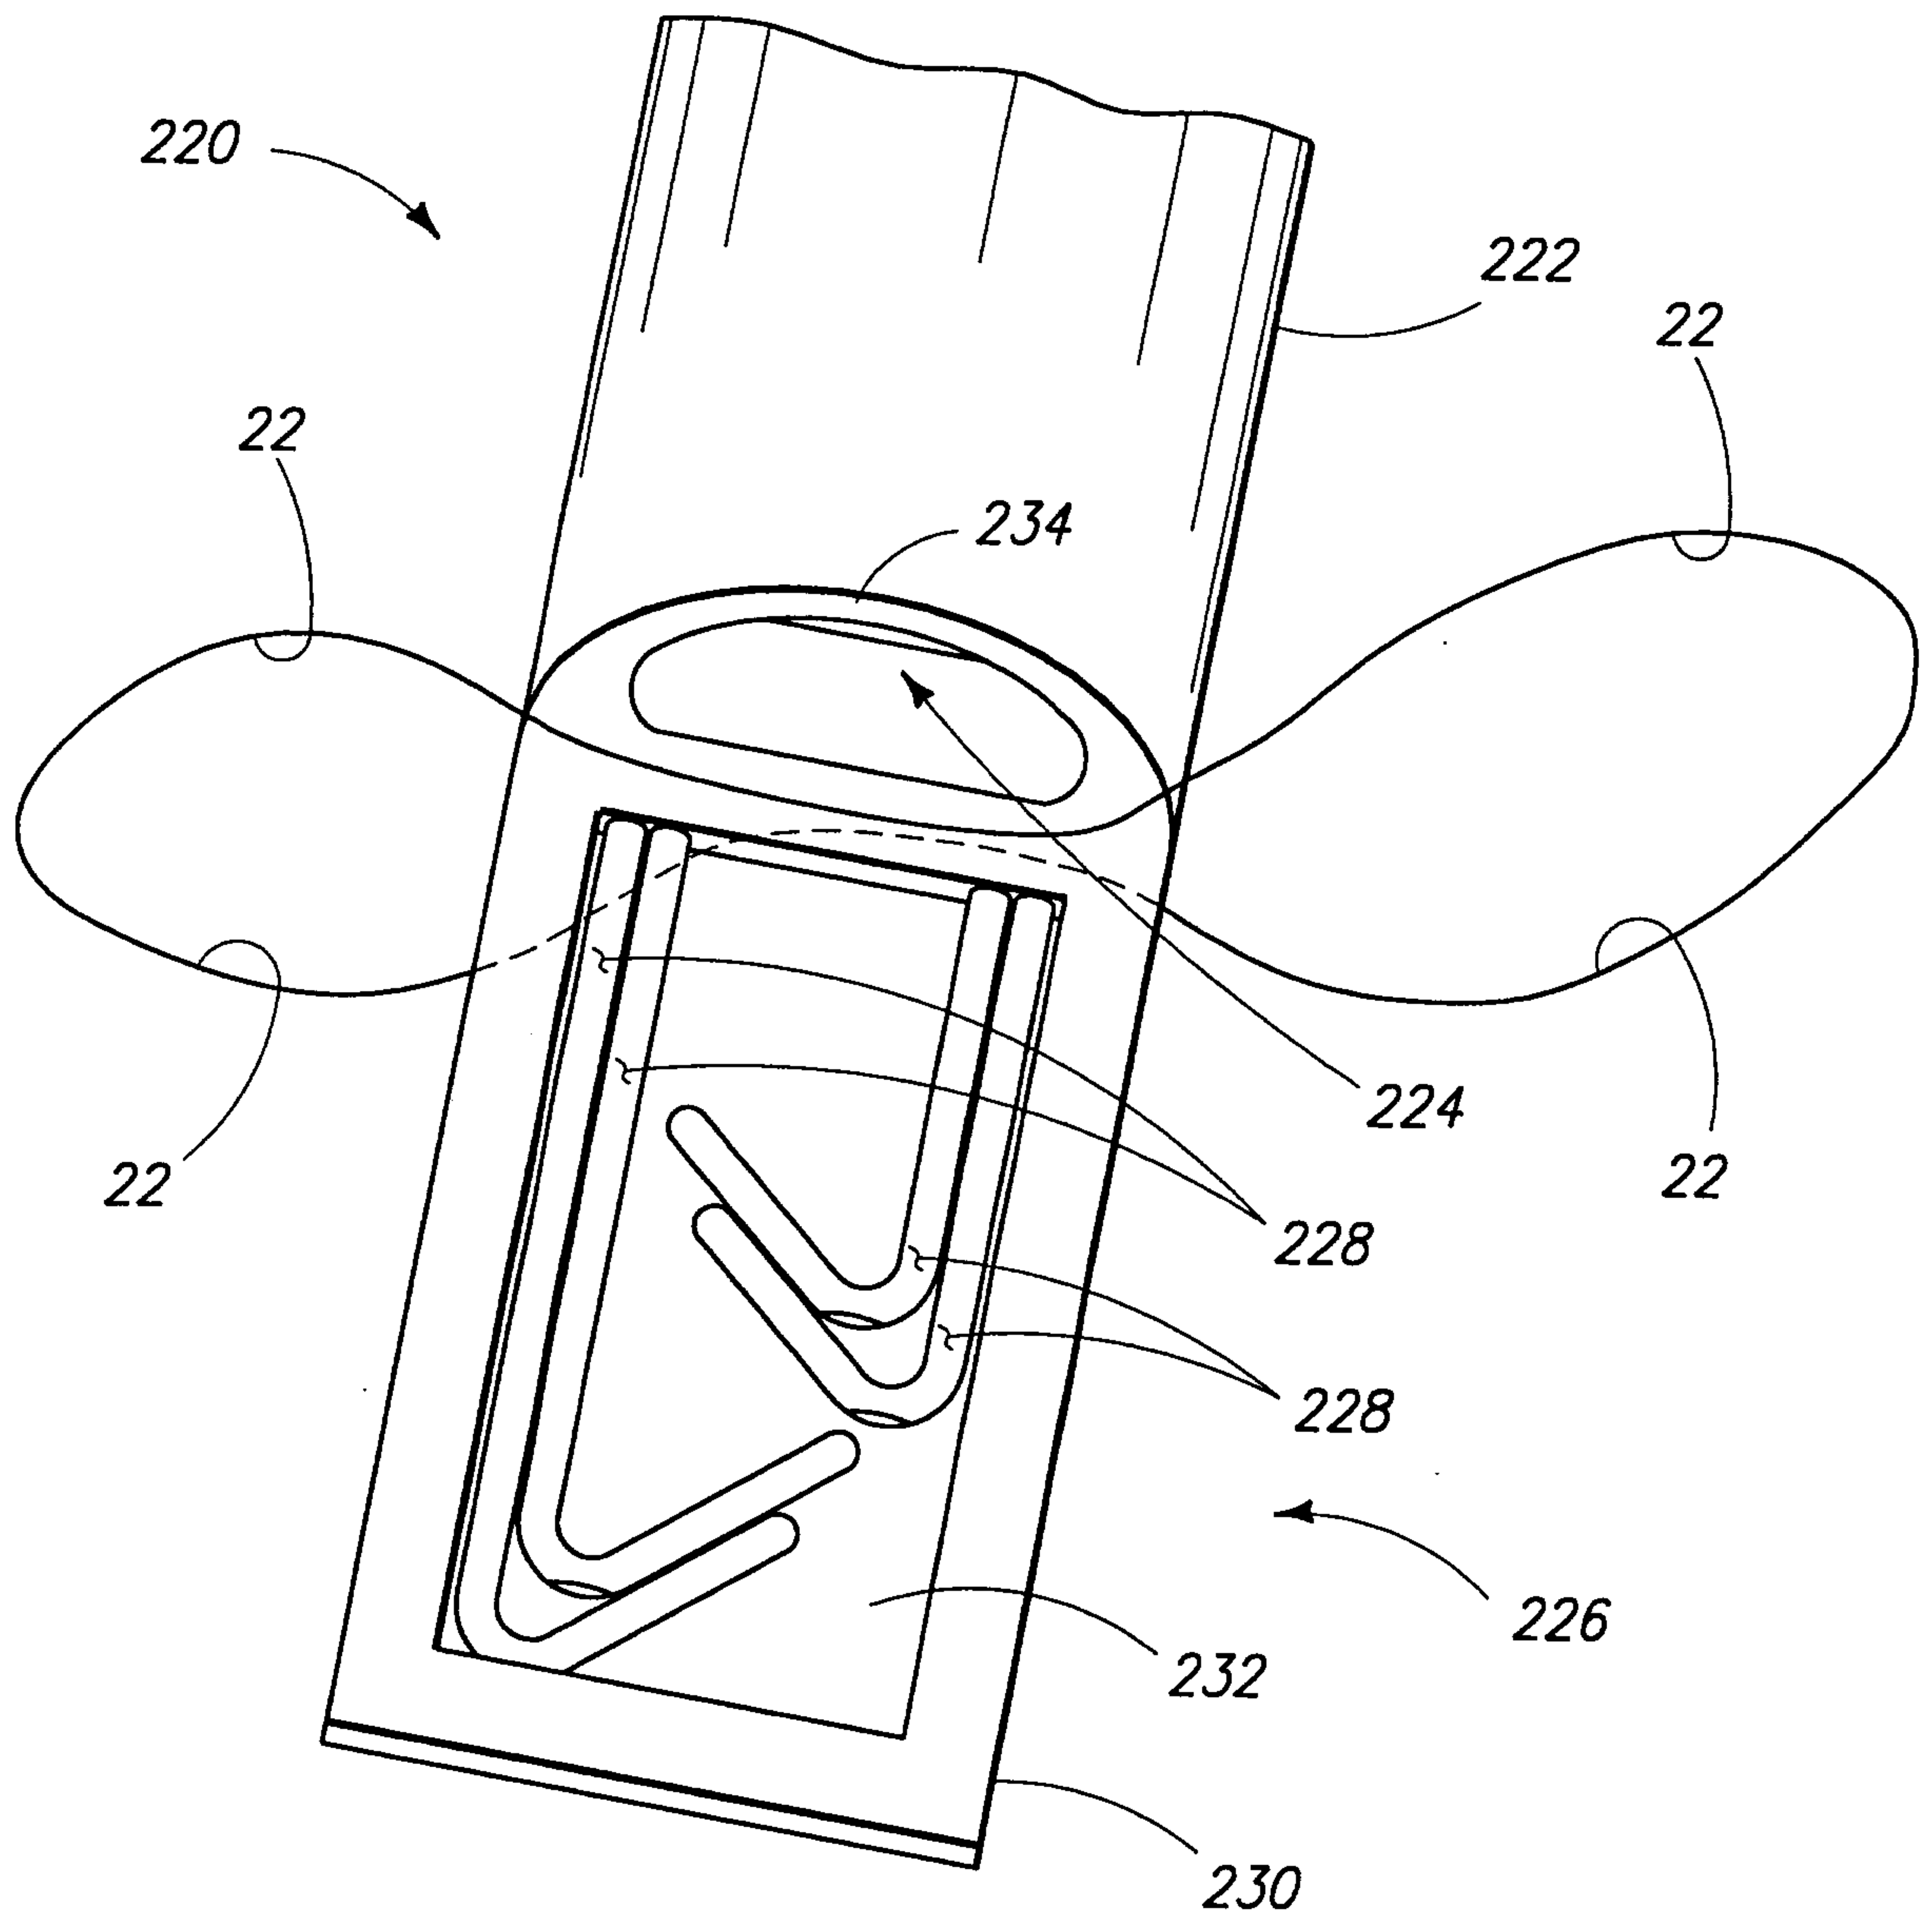


FIG. 19a

21/45

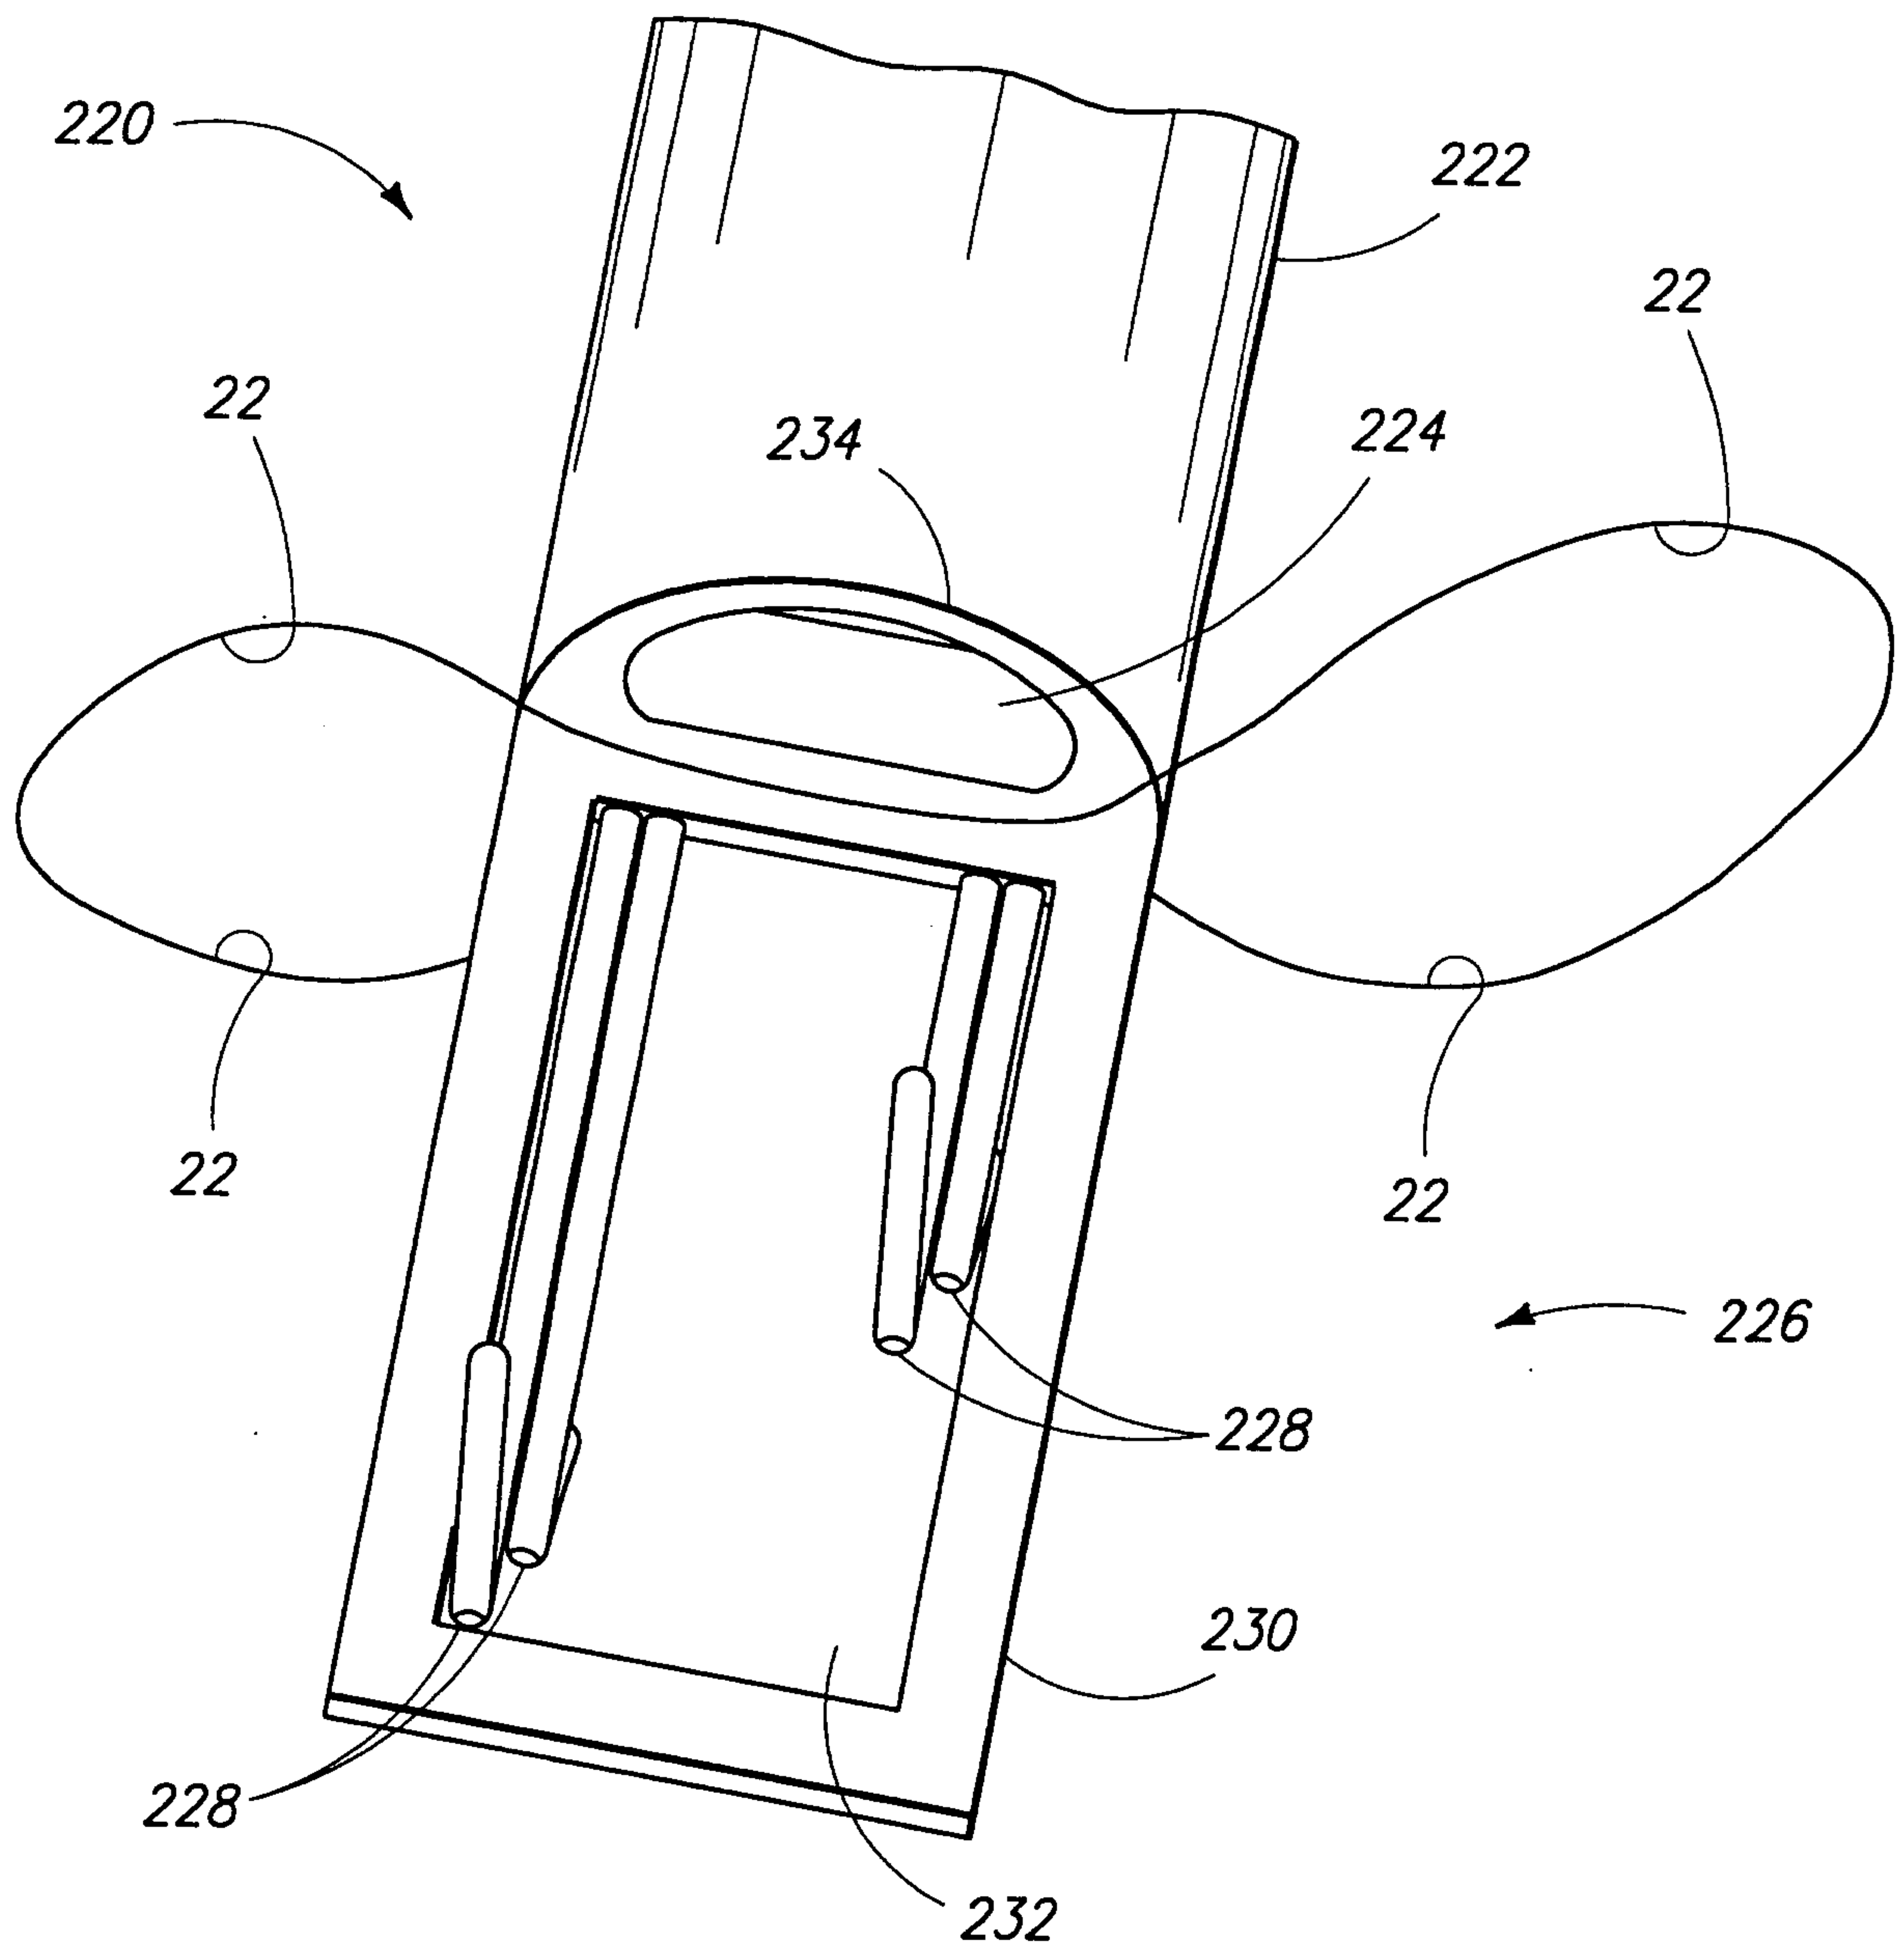


FIG. 19b

22/45

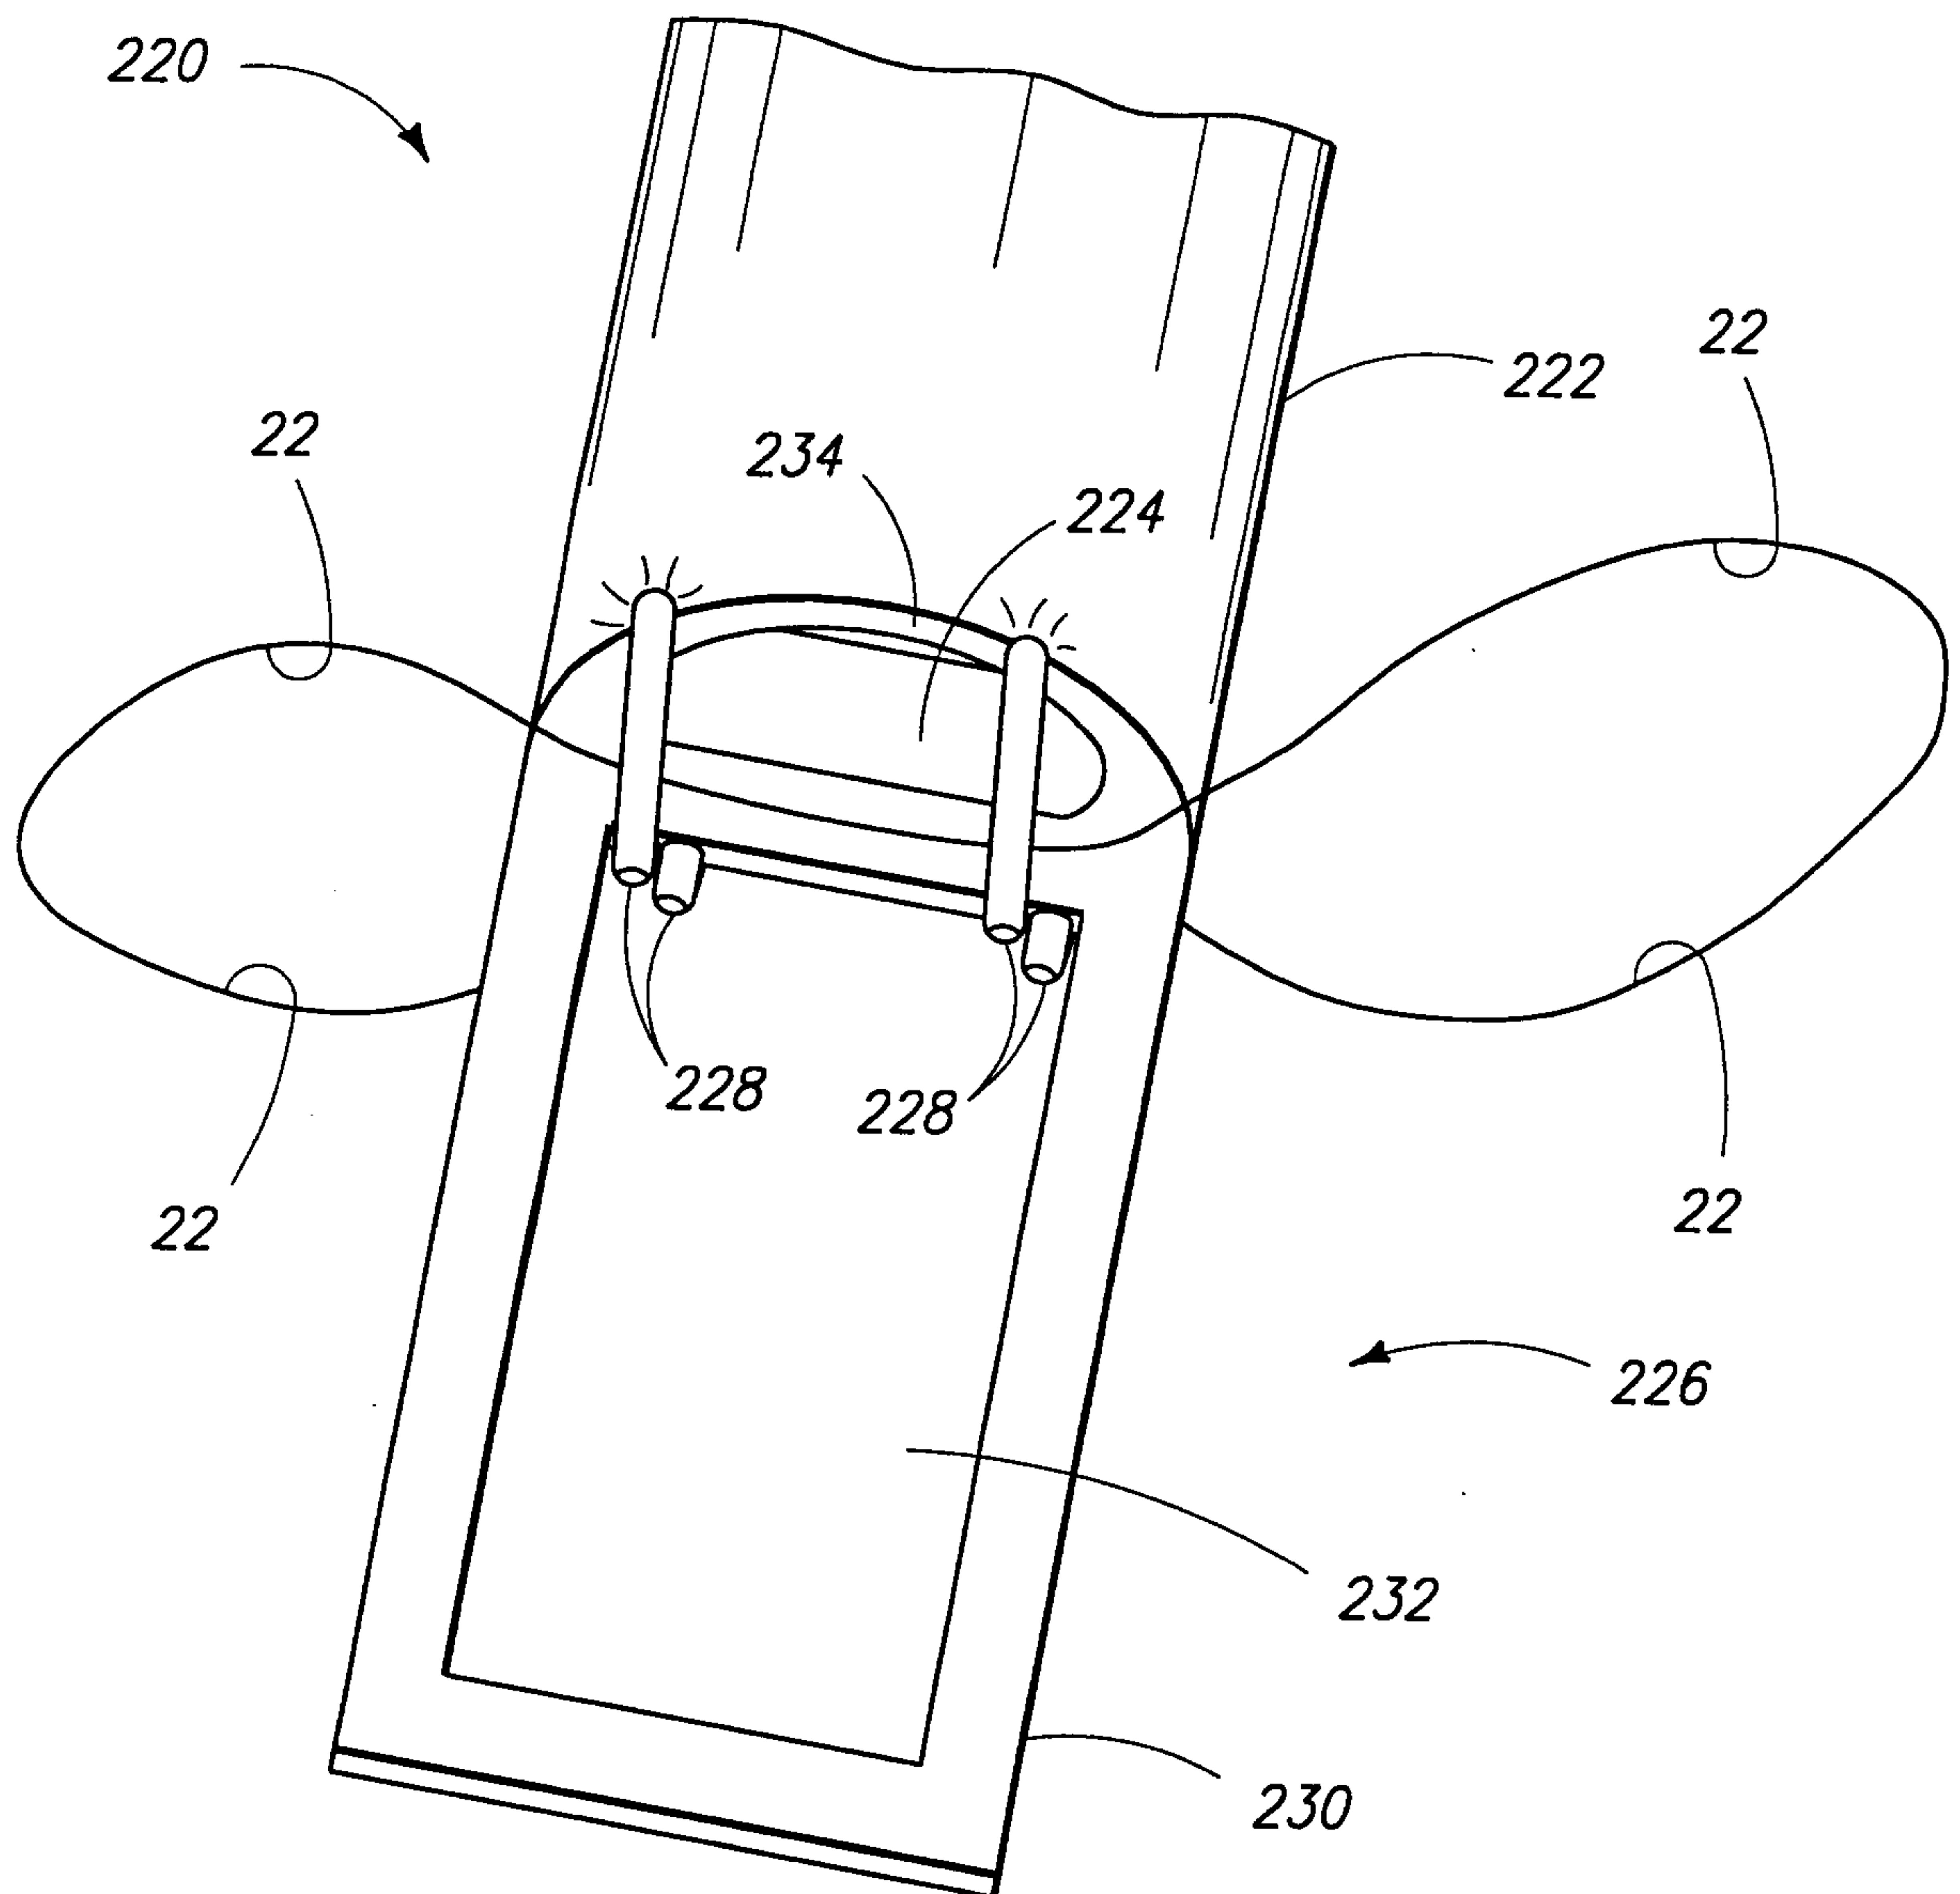


FIG. 19c

23/45

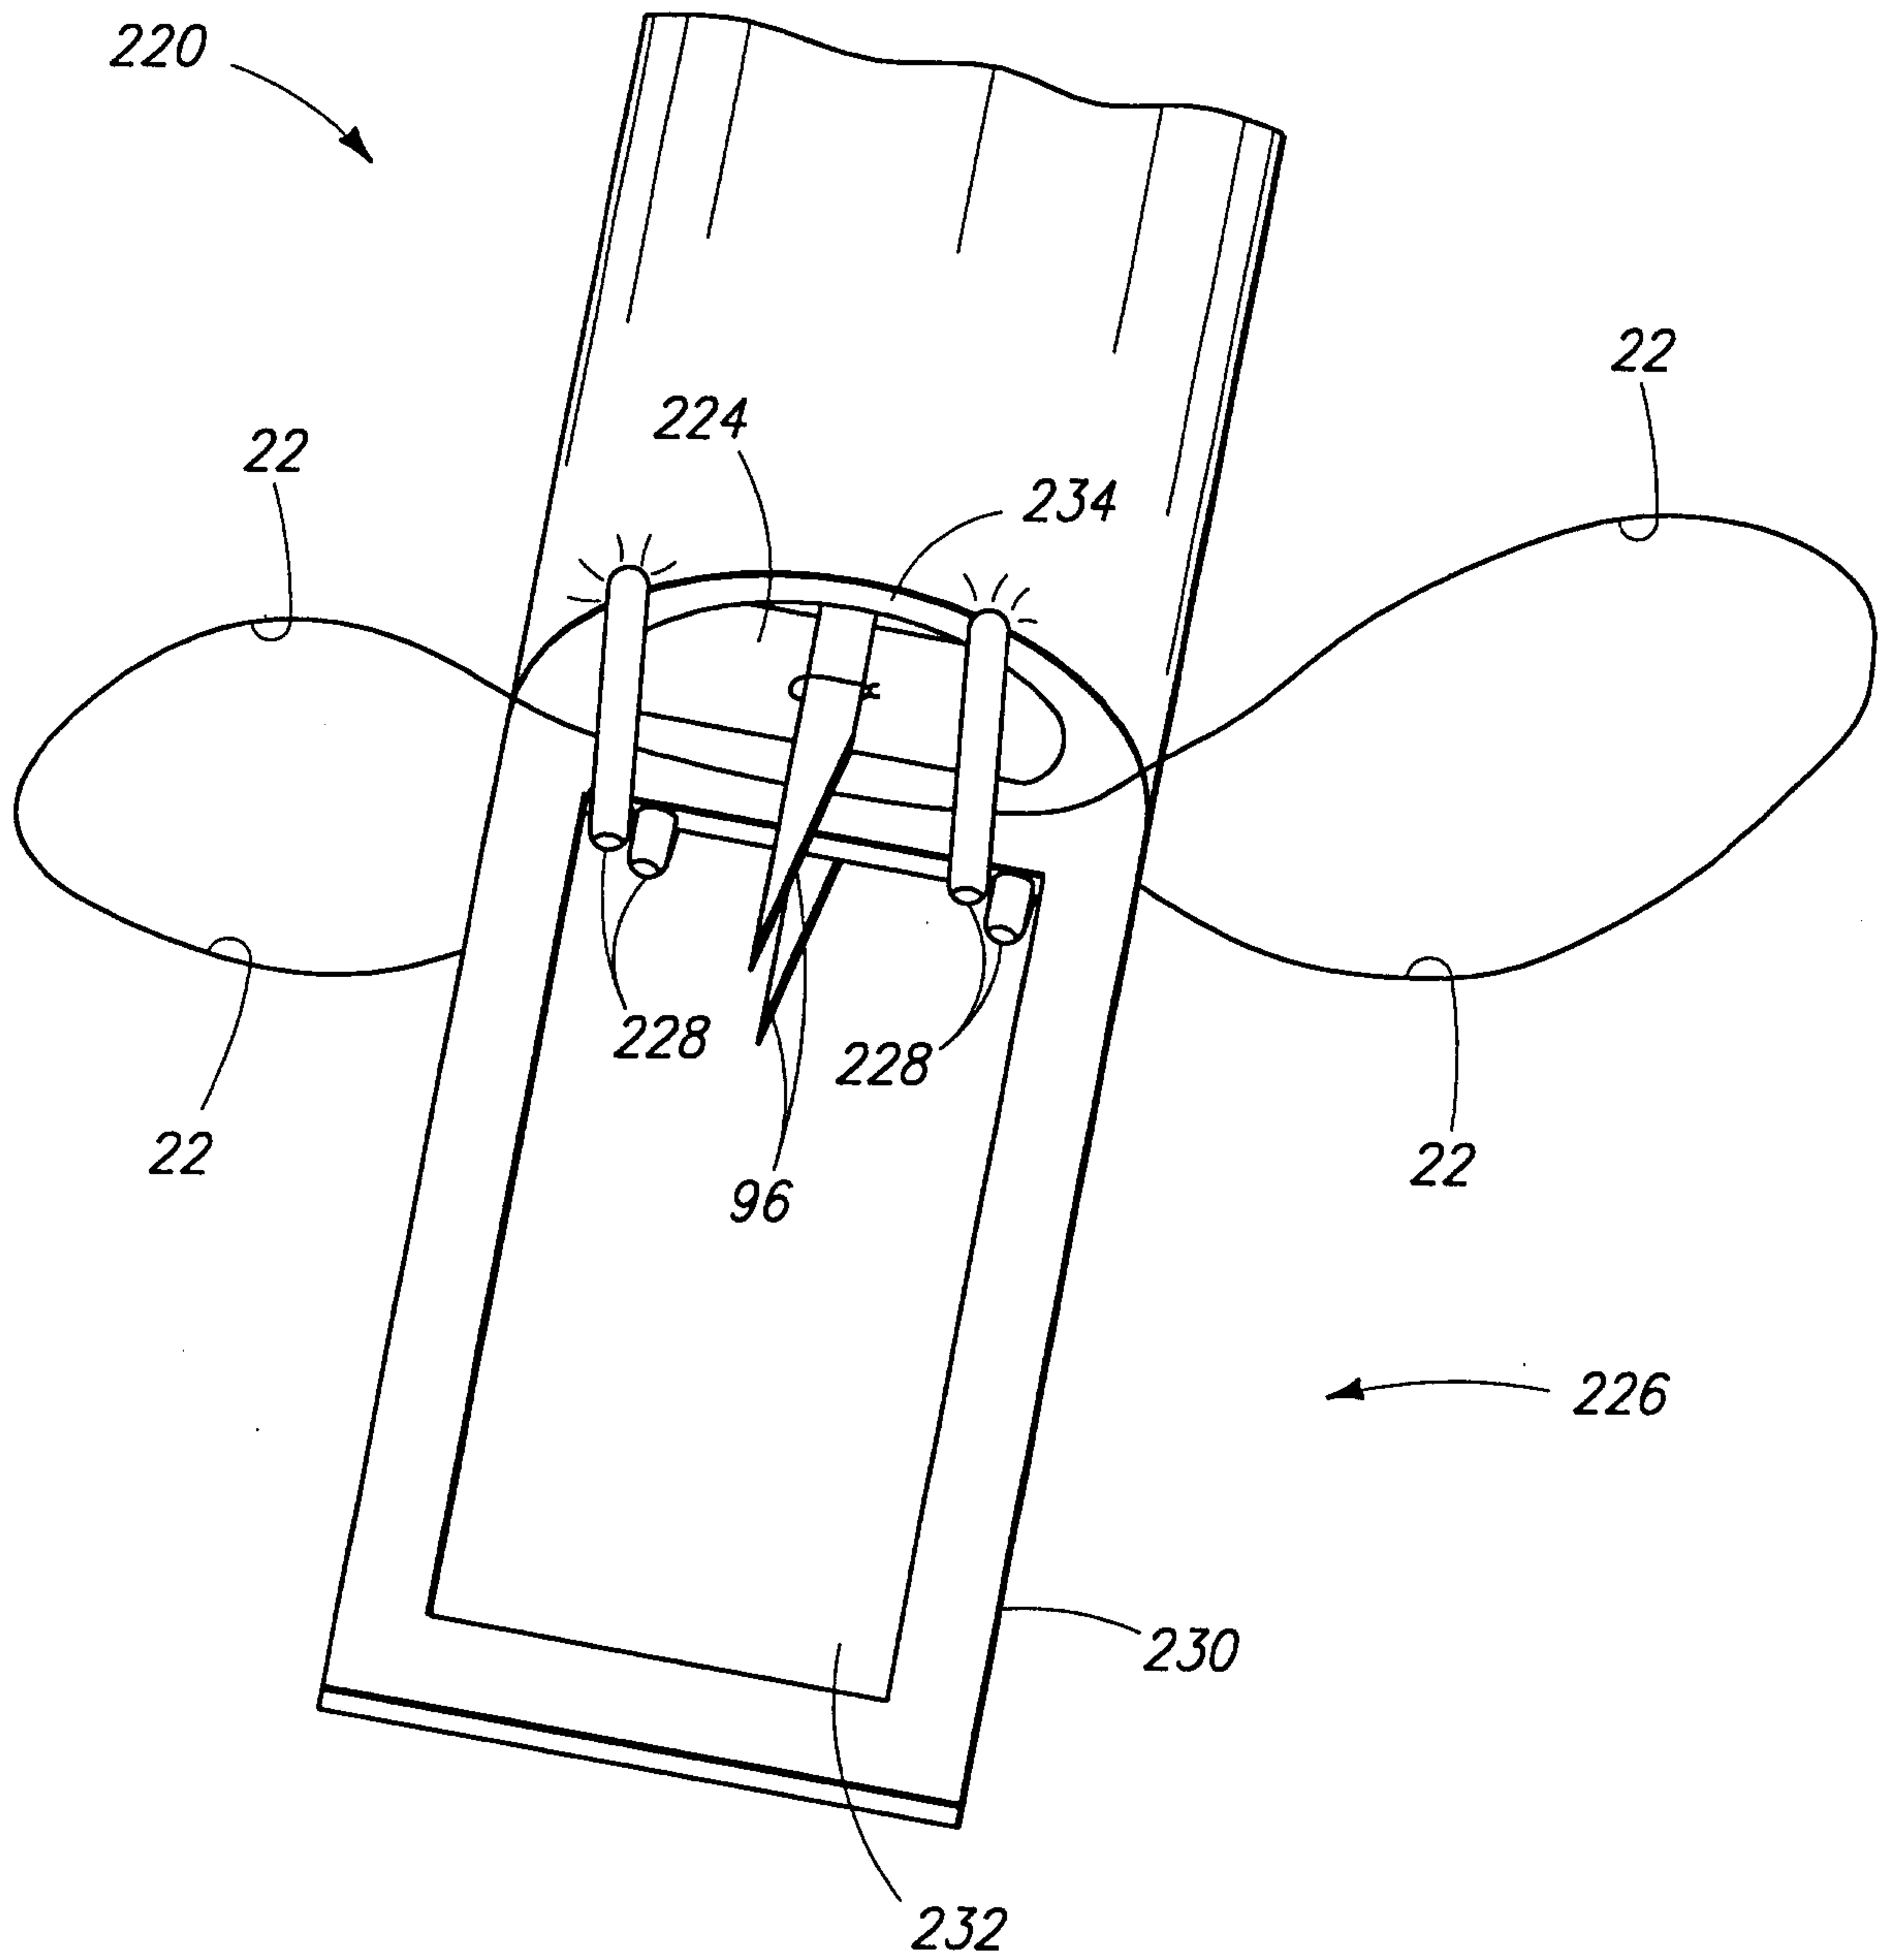


FIG. 19d

24/45

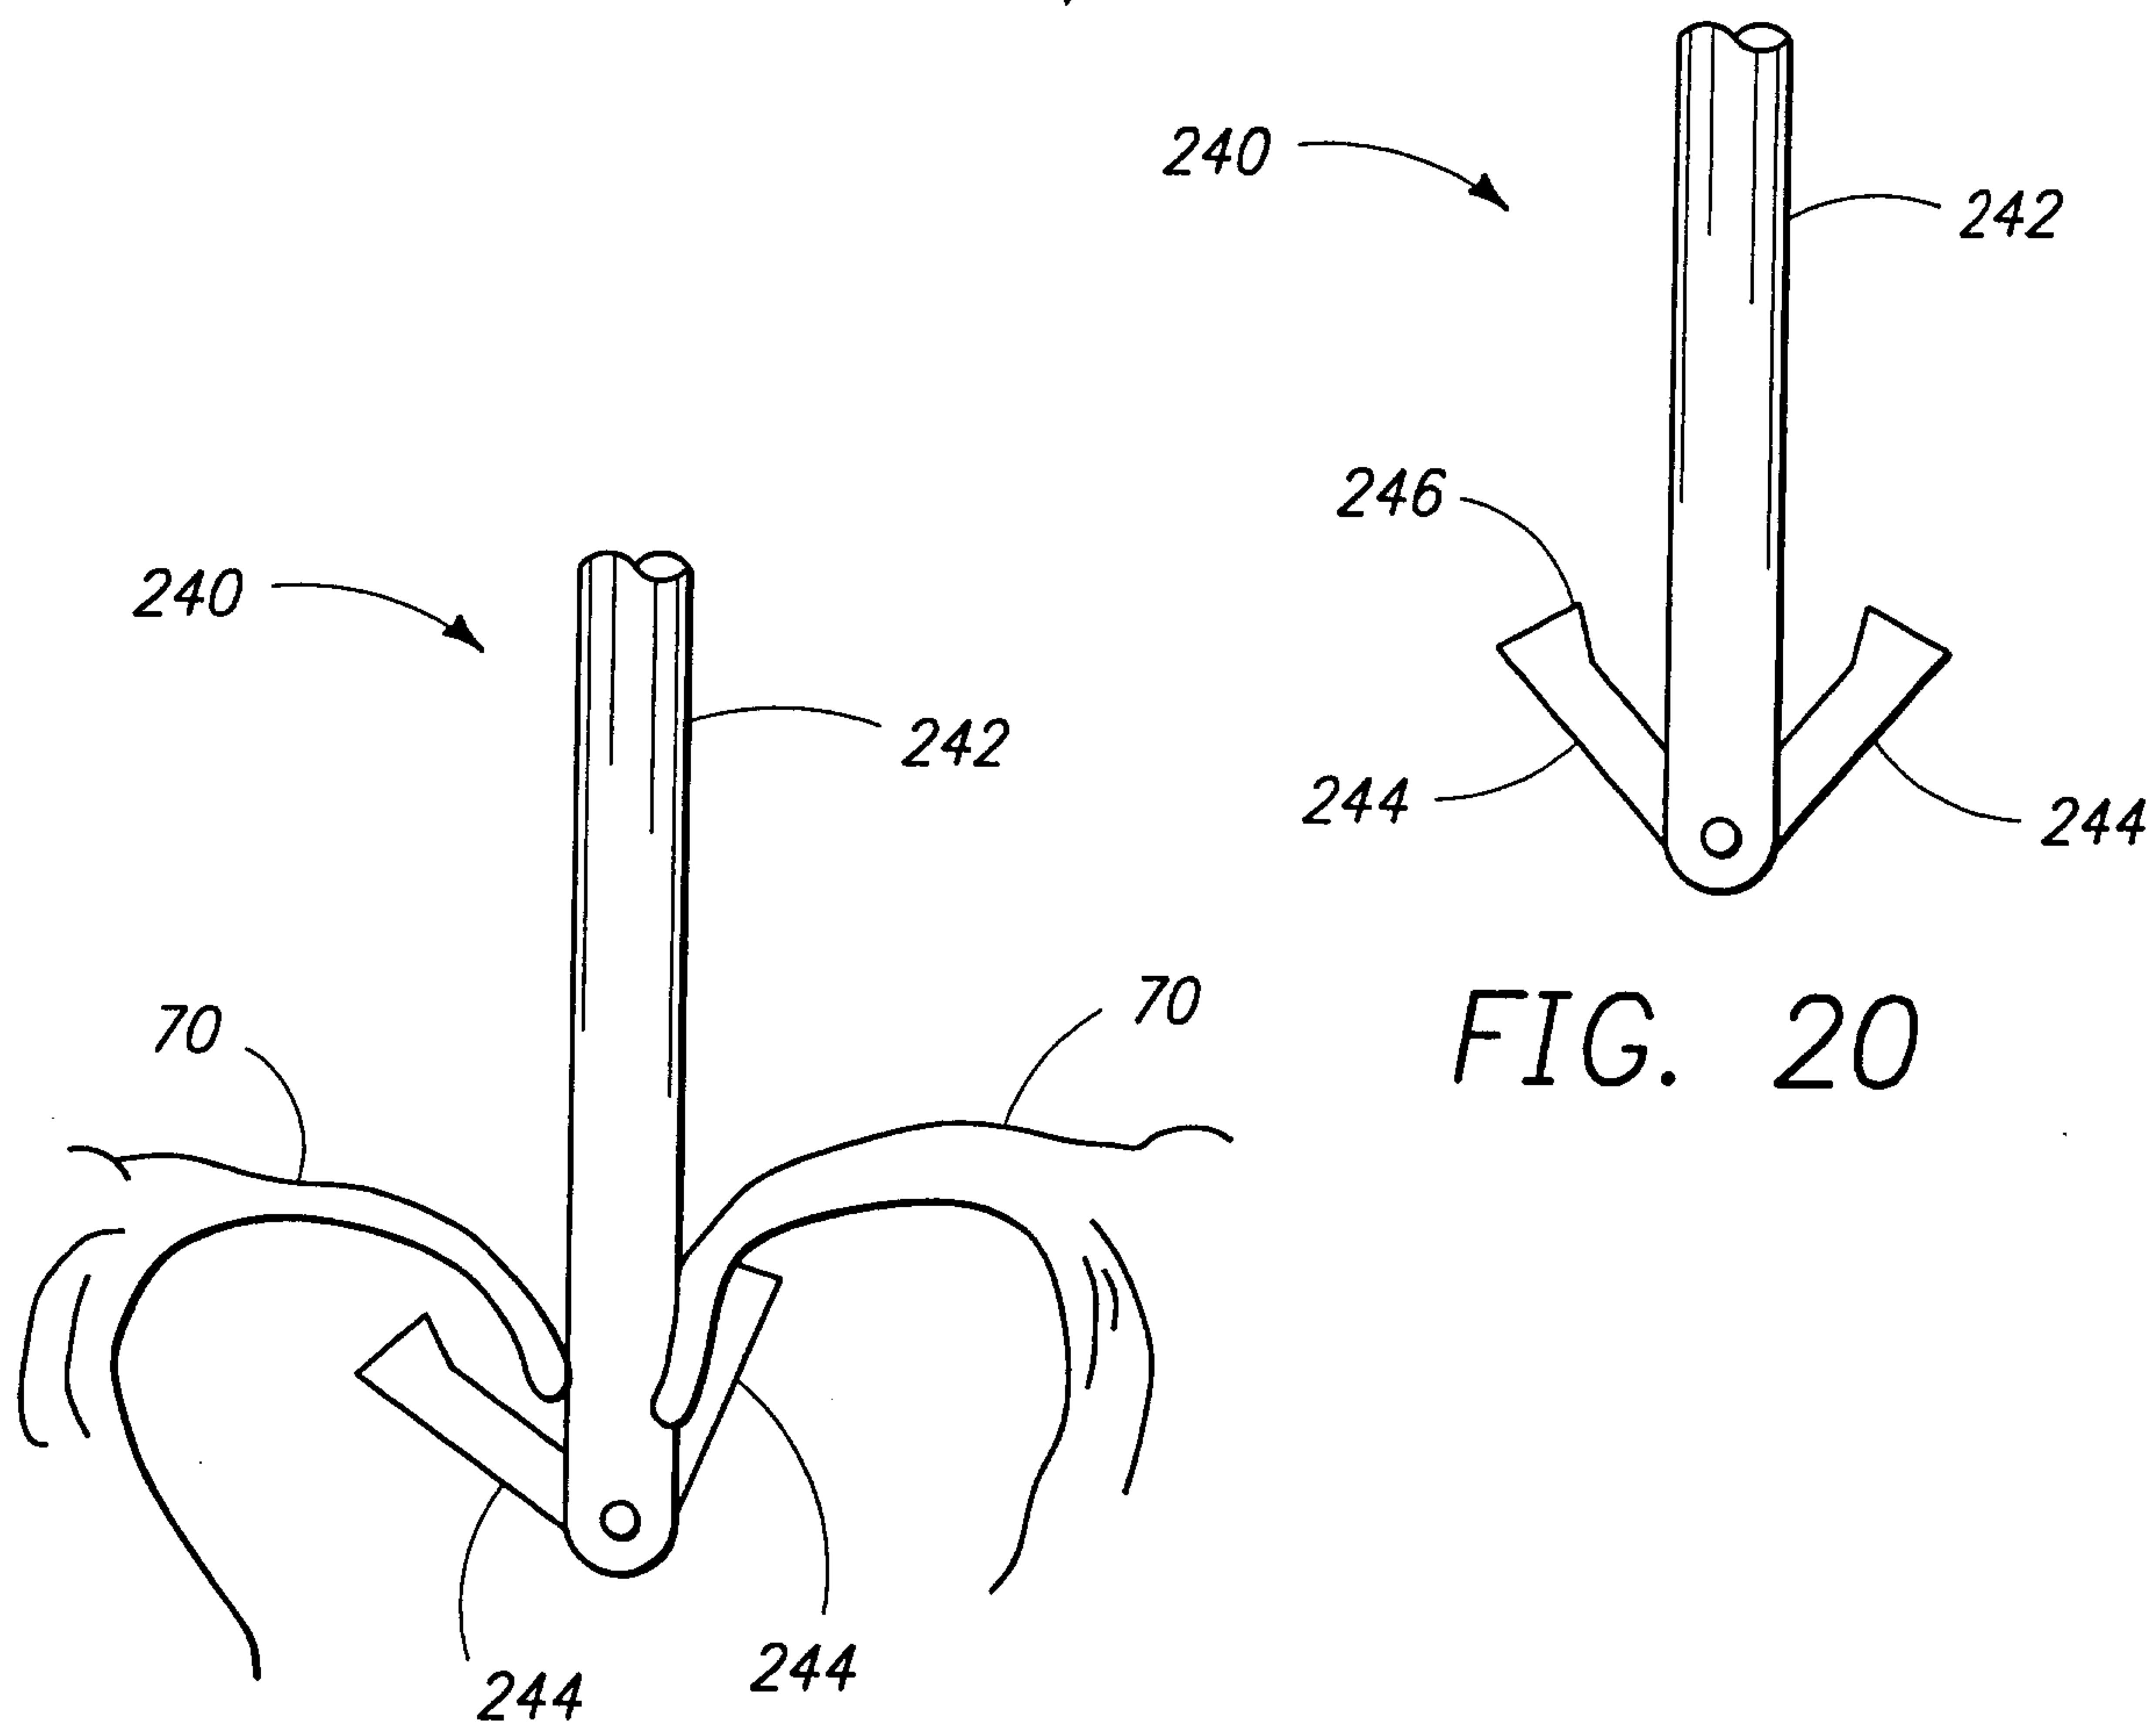


FIG. 20

FIG. 21a

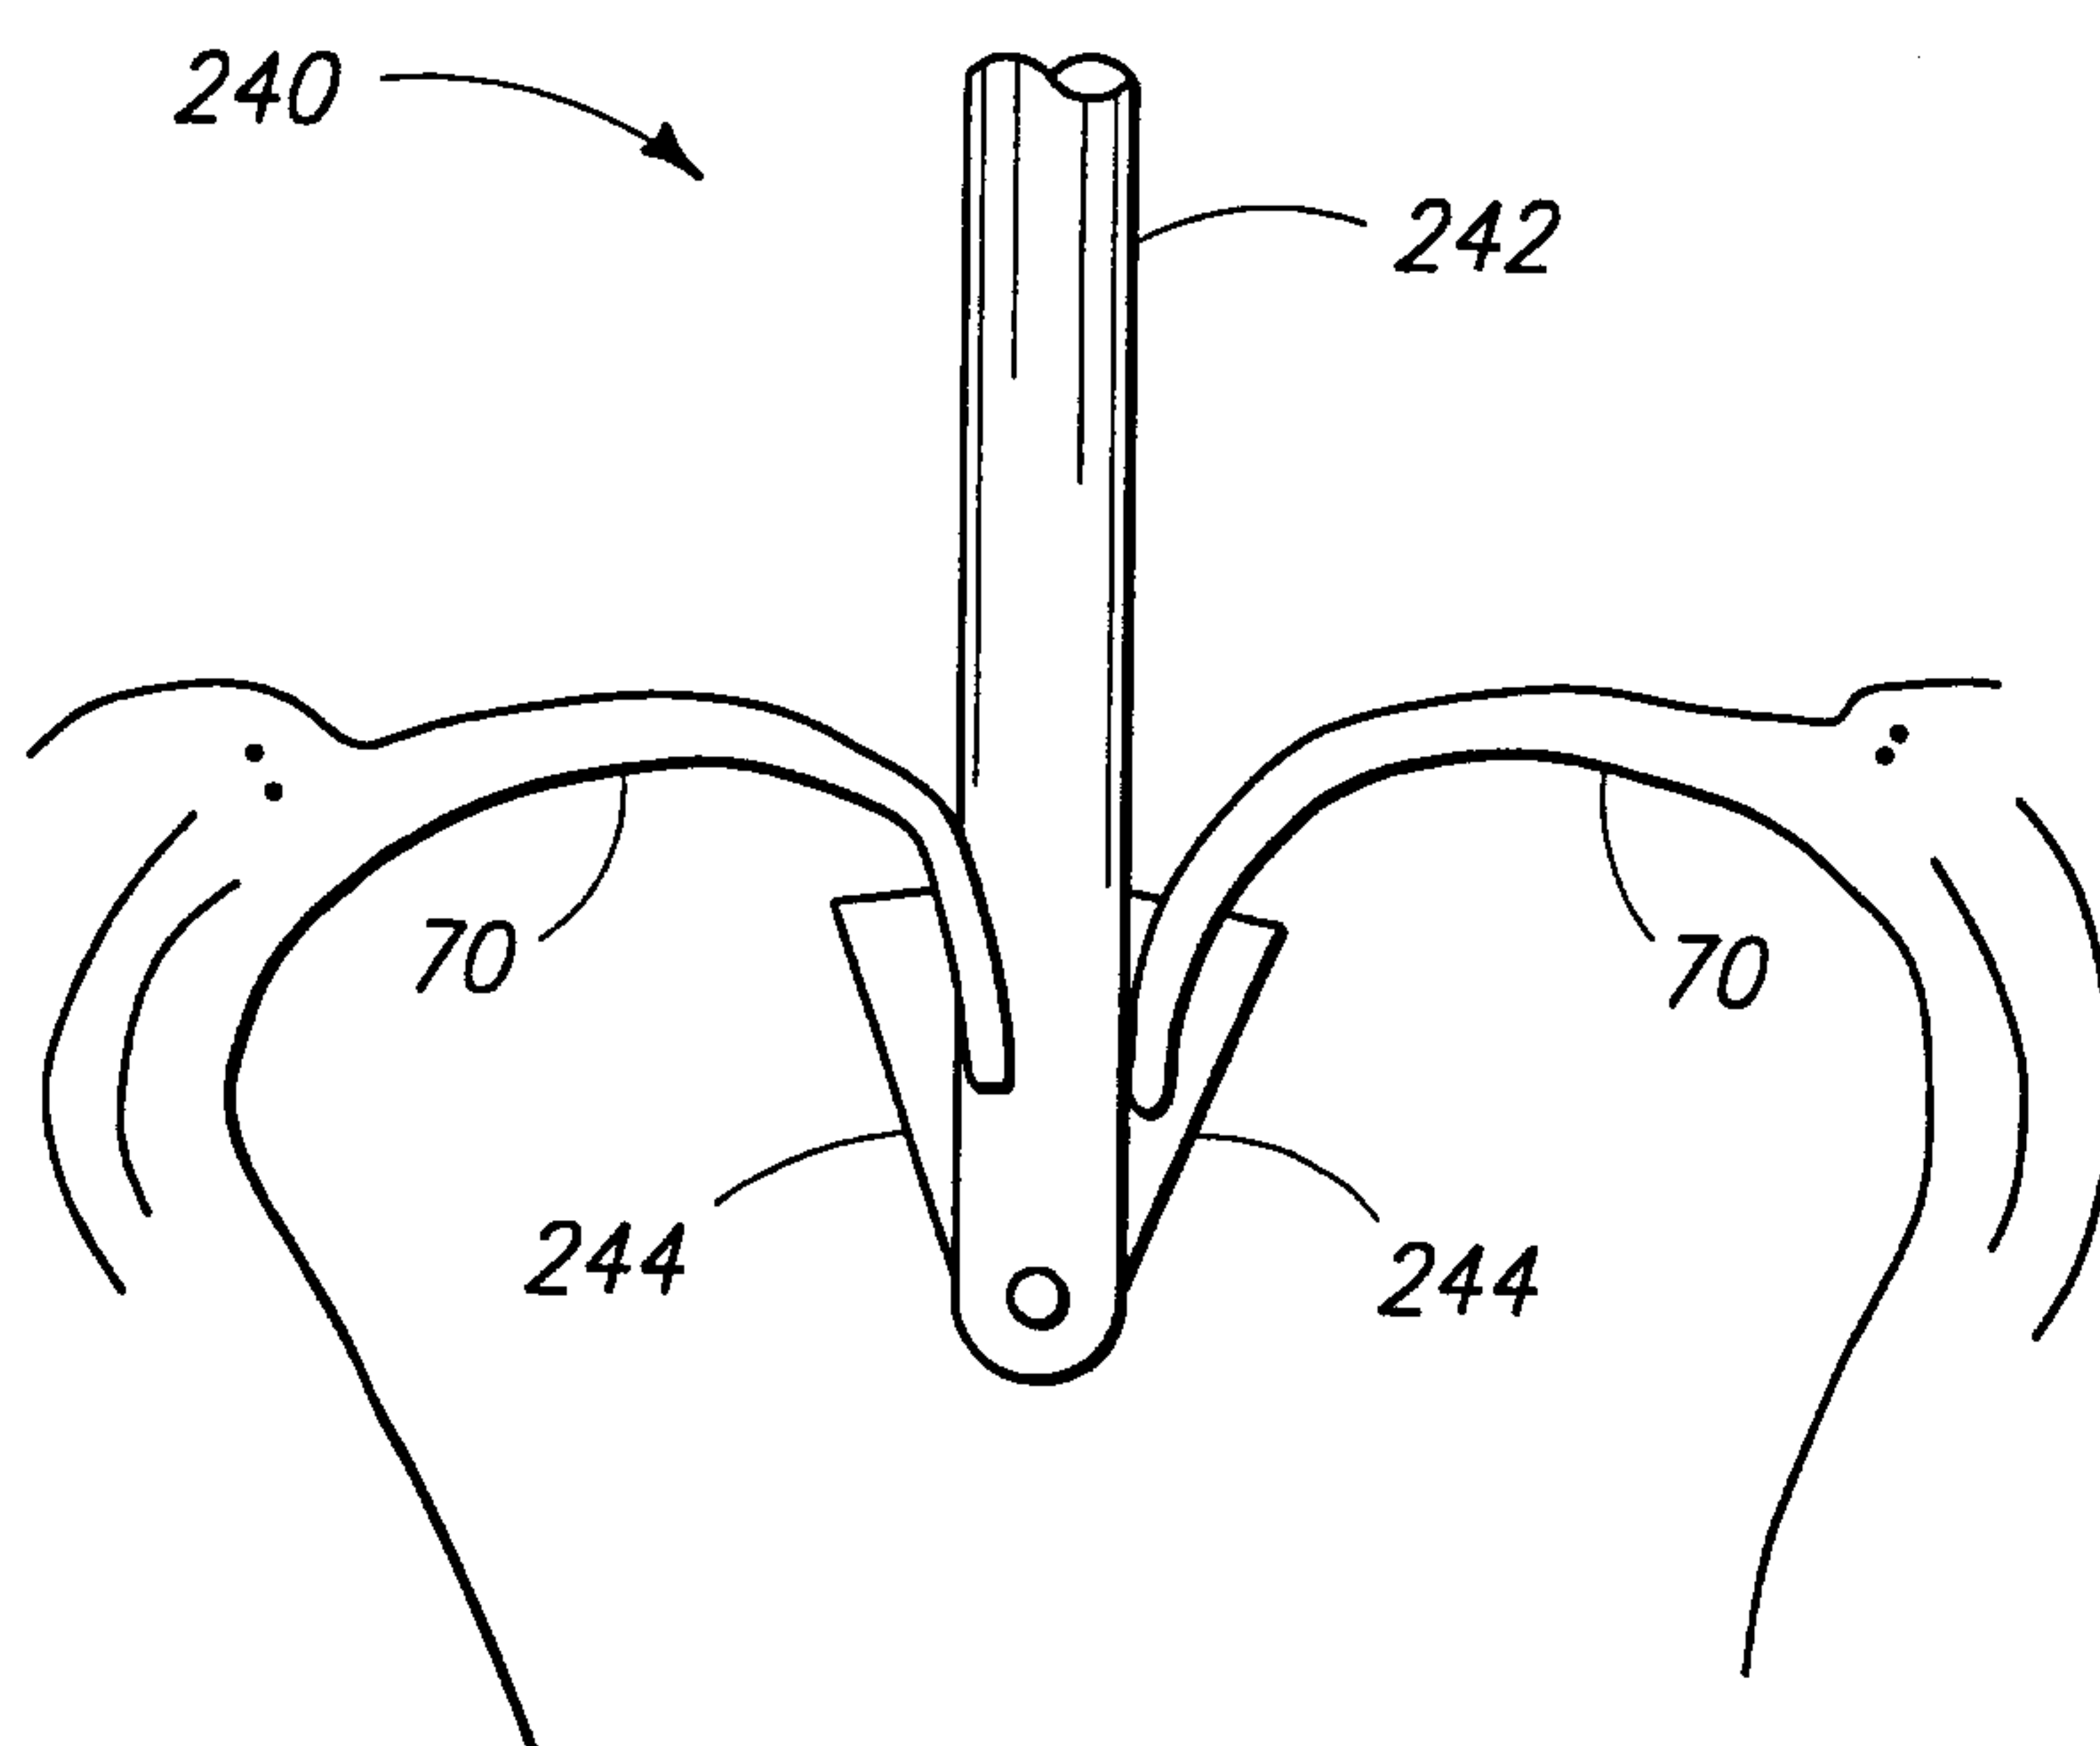


FIG. 21b

25/45

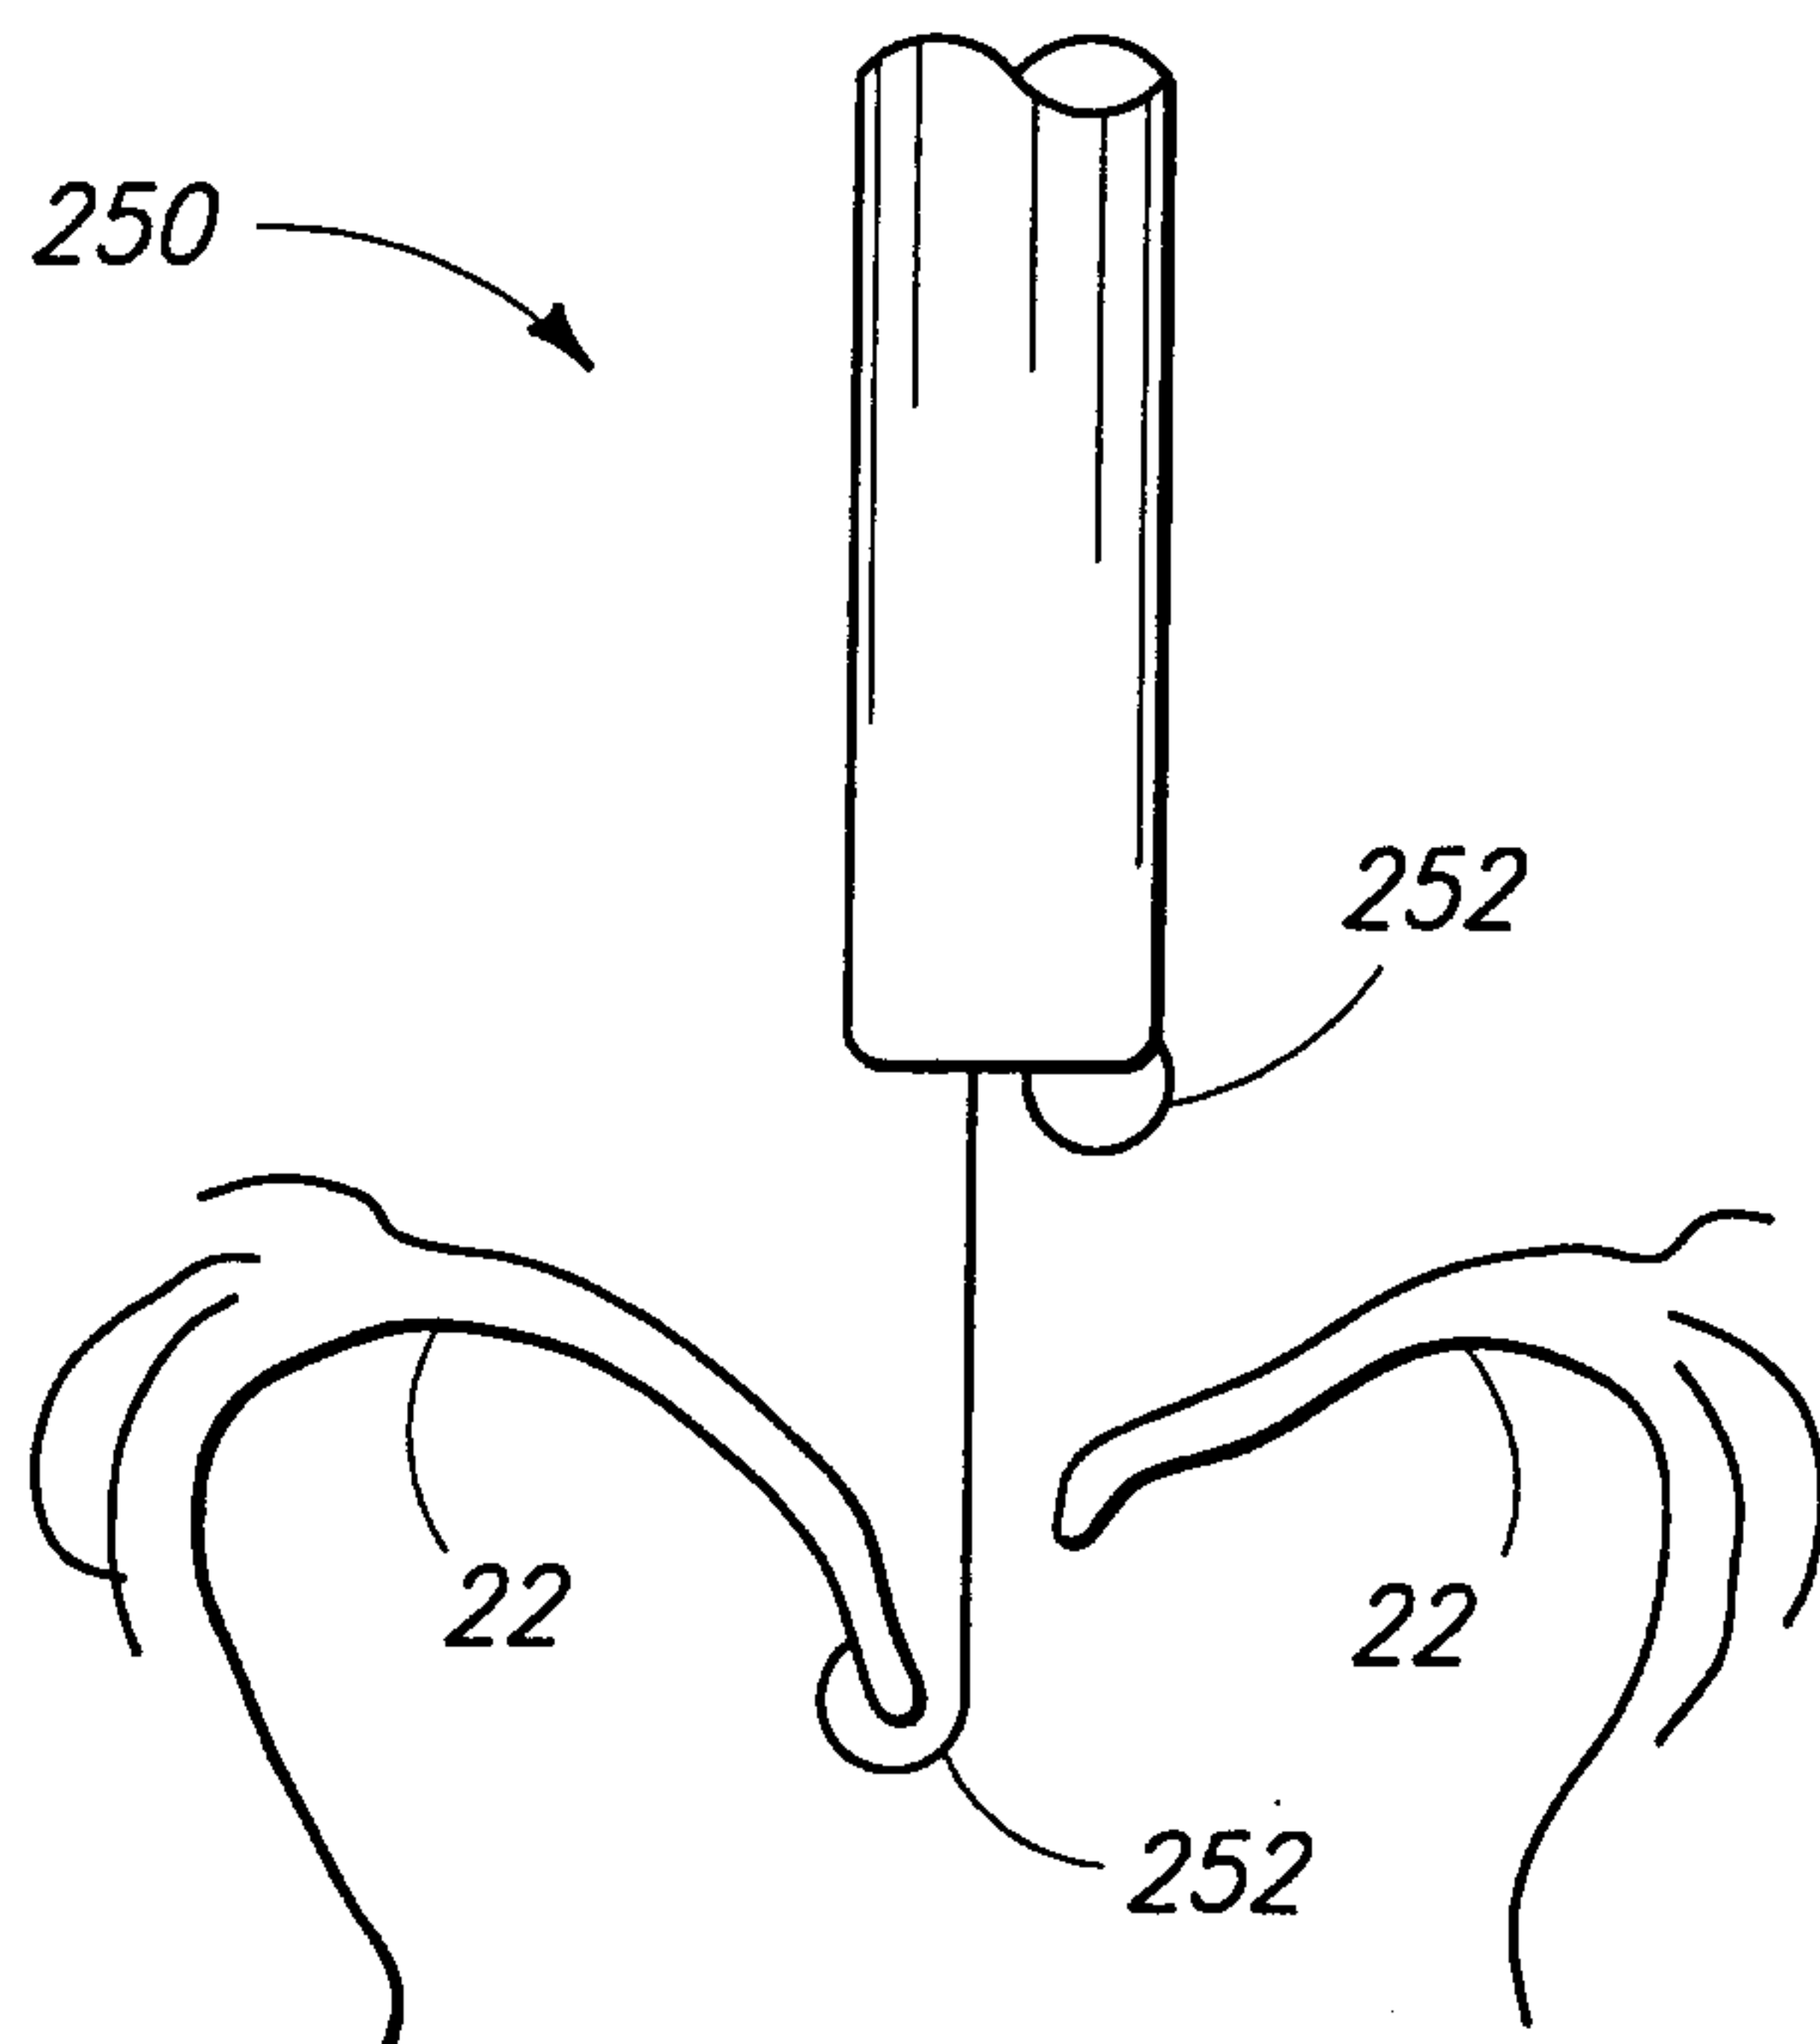


FIG. 22a

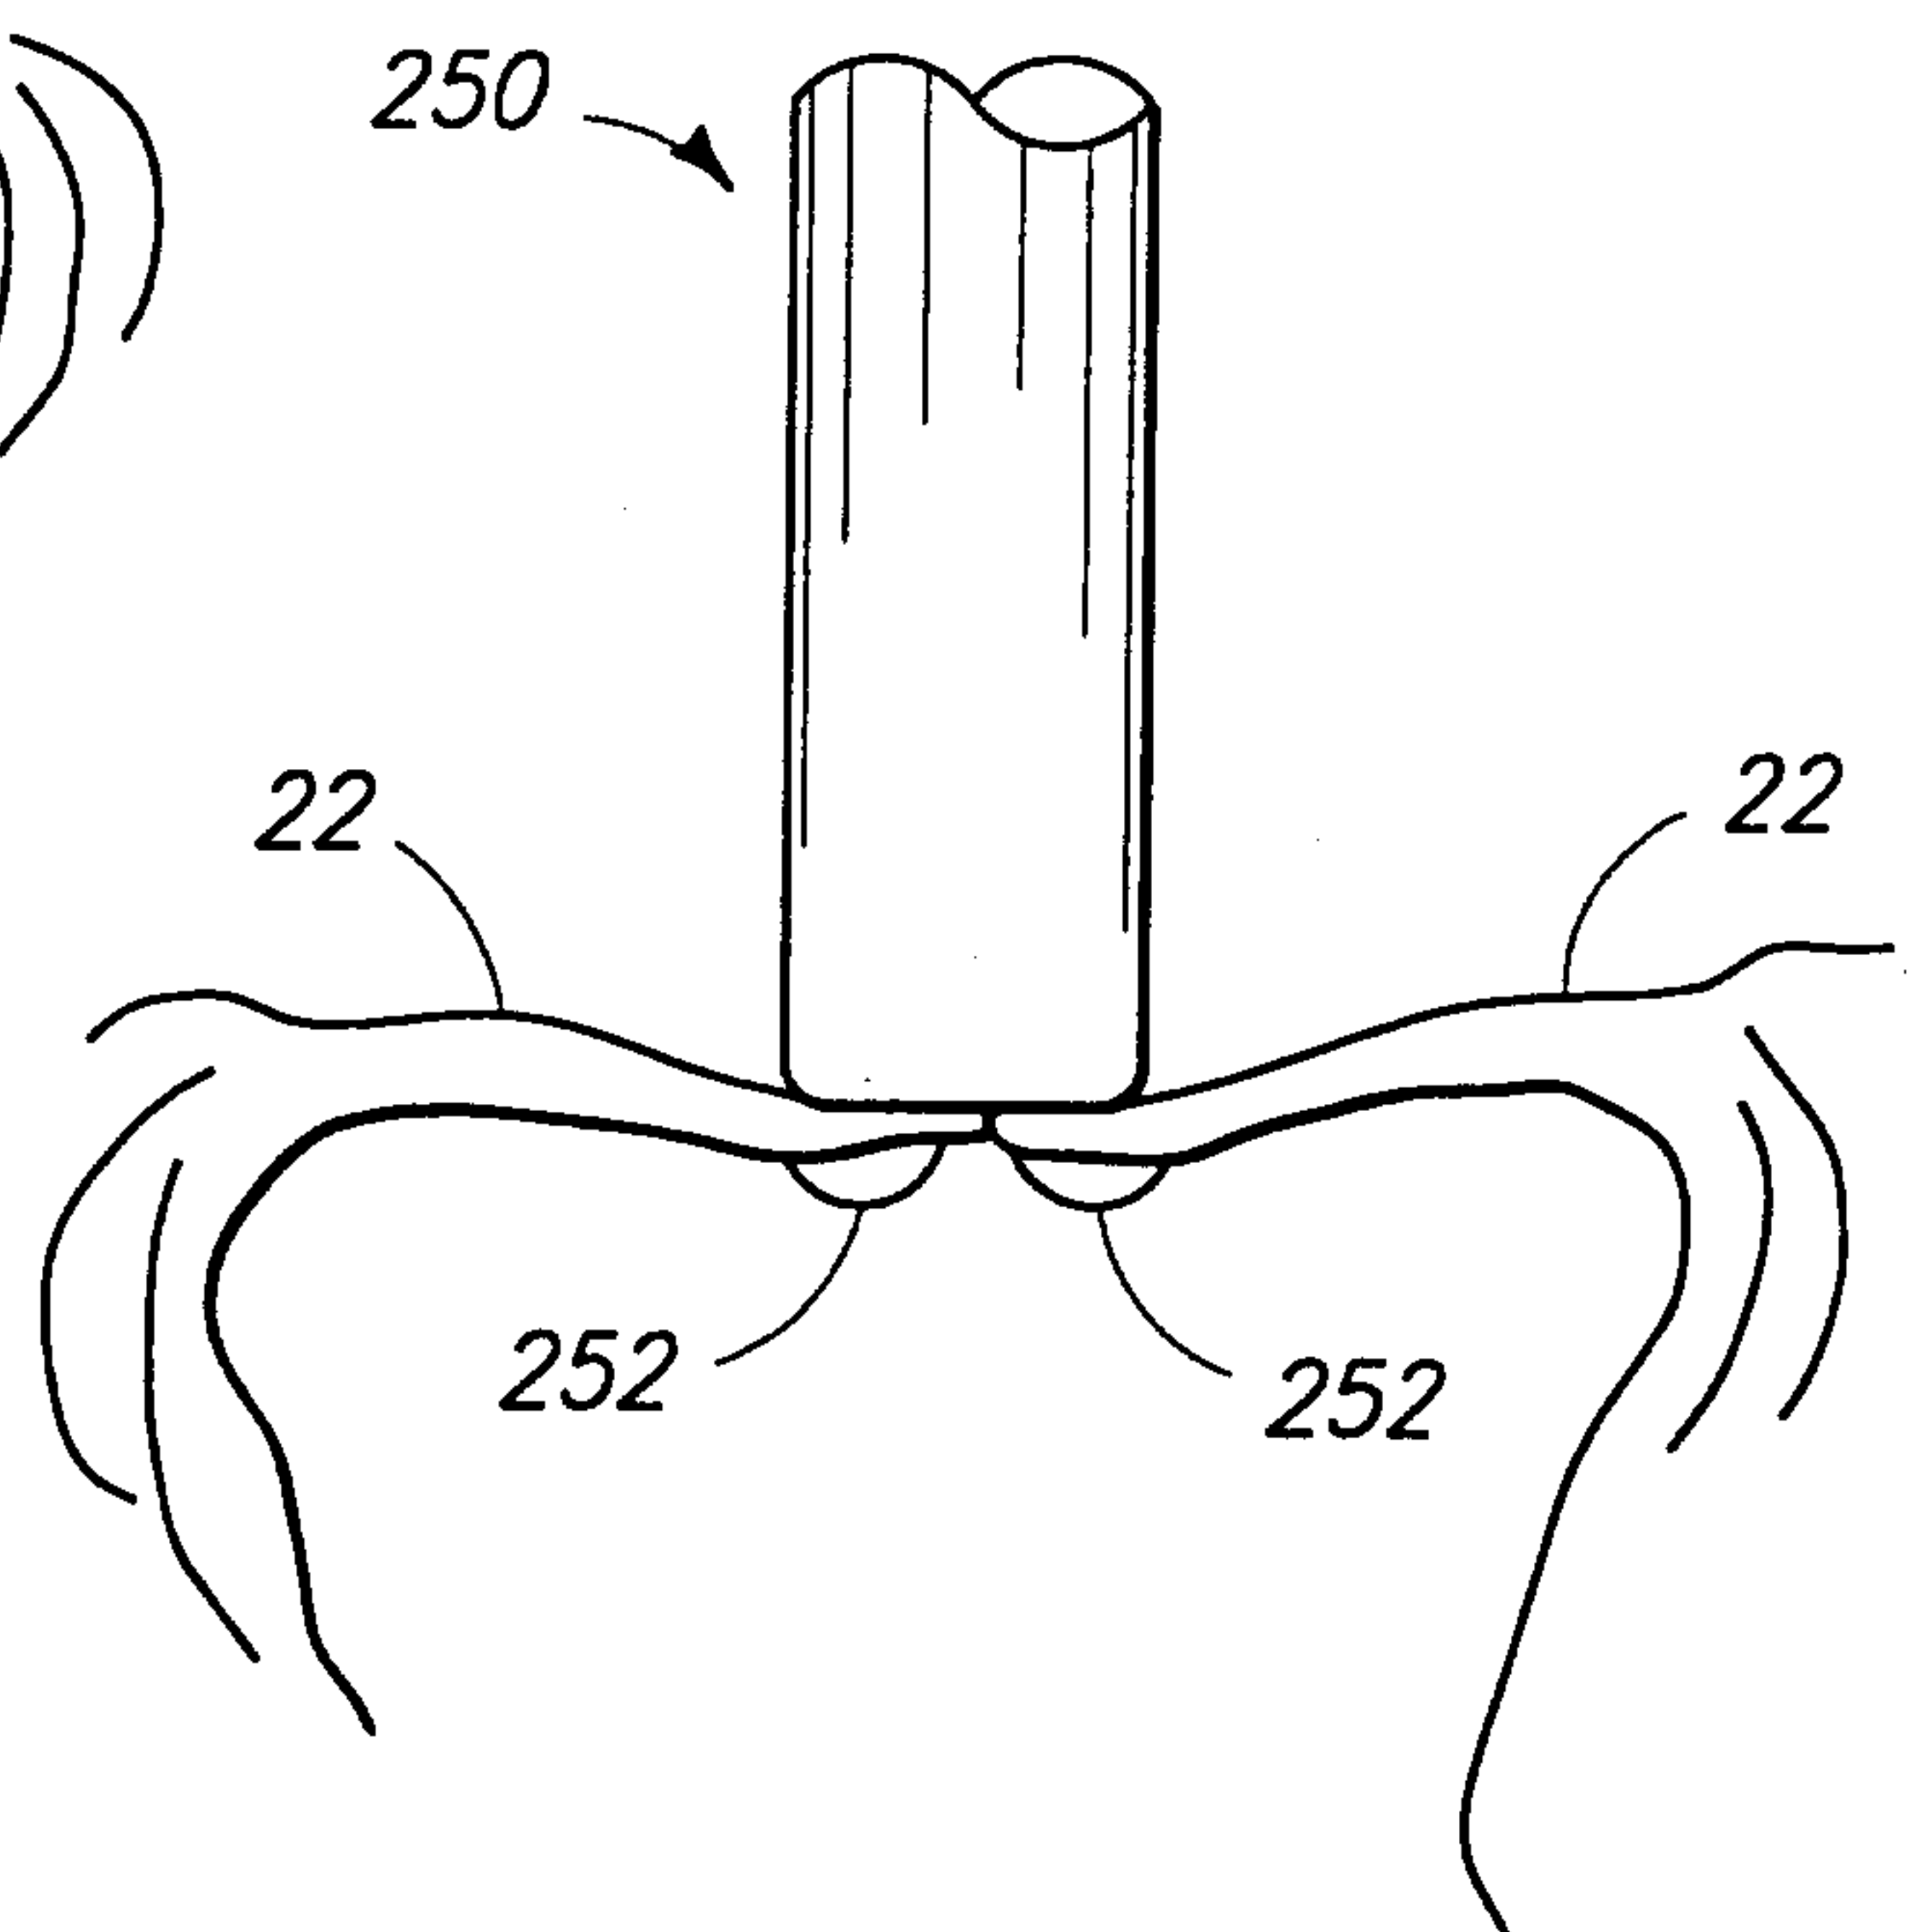


FIG. 22b

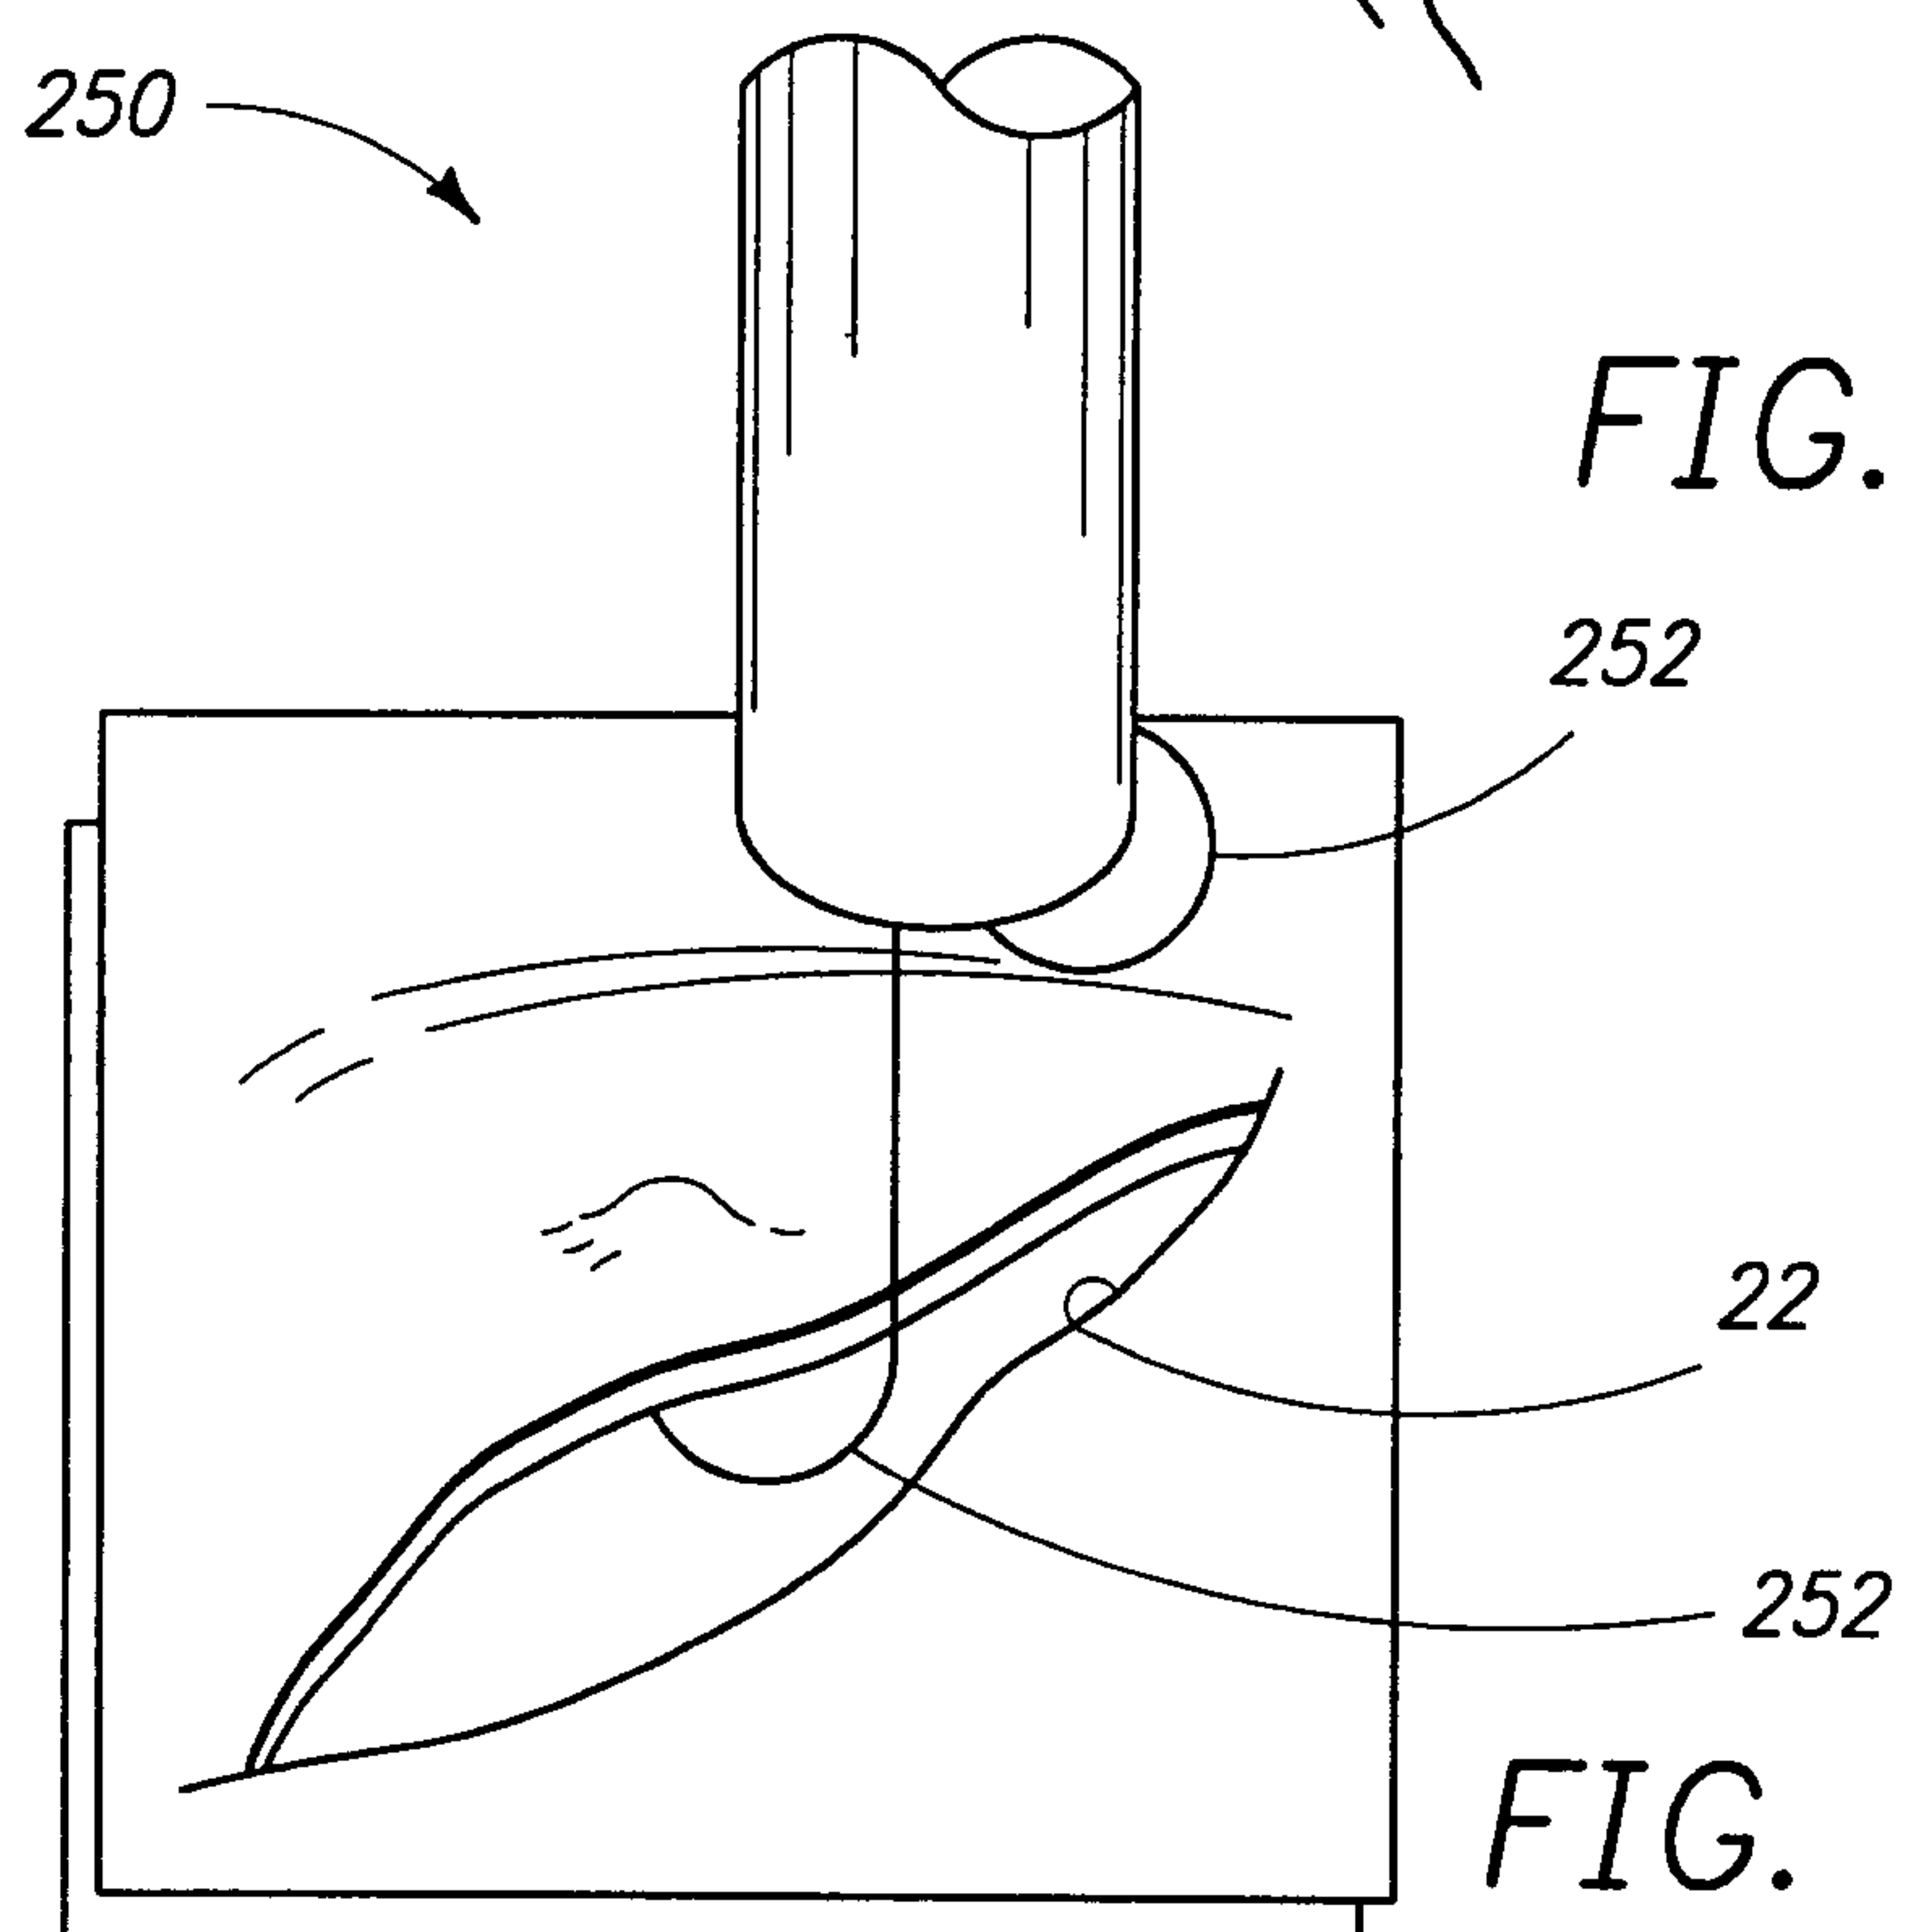


FIG. 22c

26/45

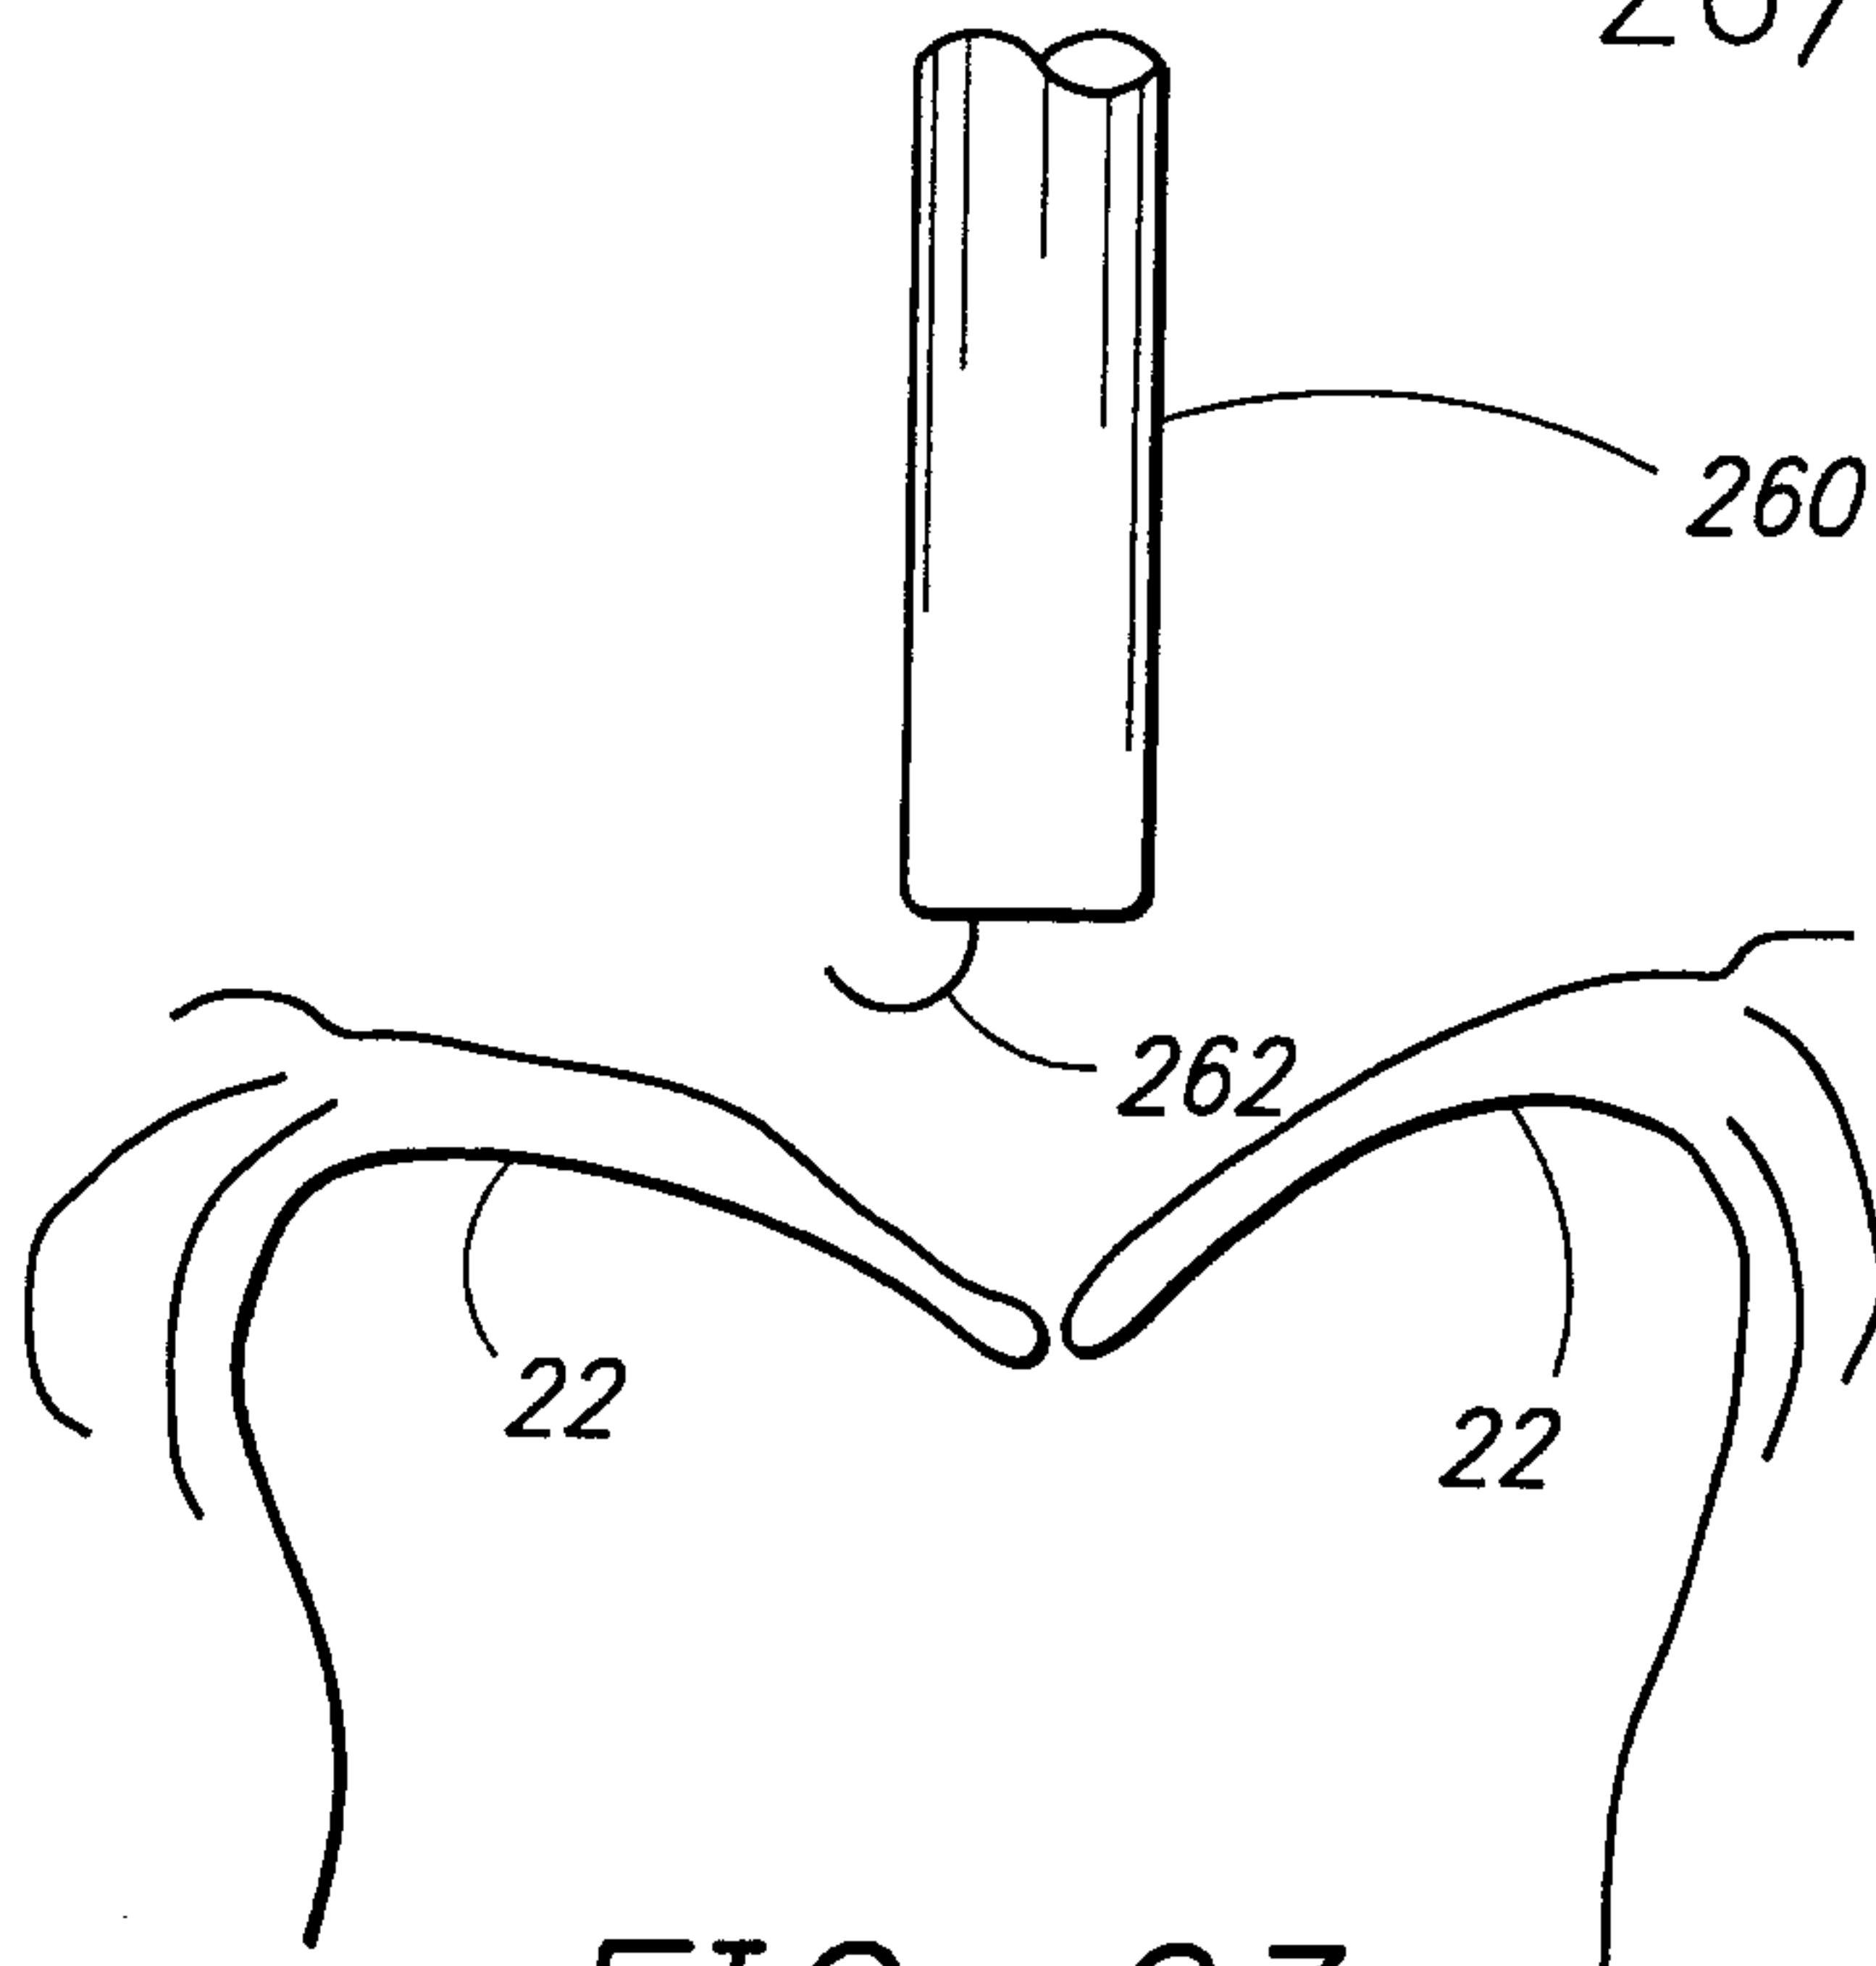


FIG. 23a

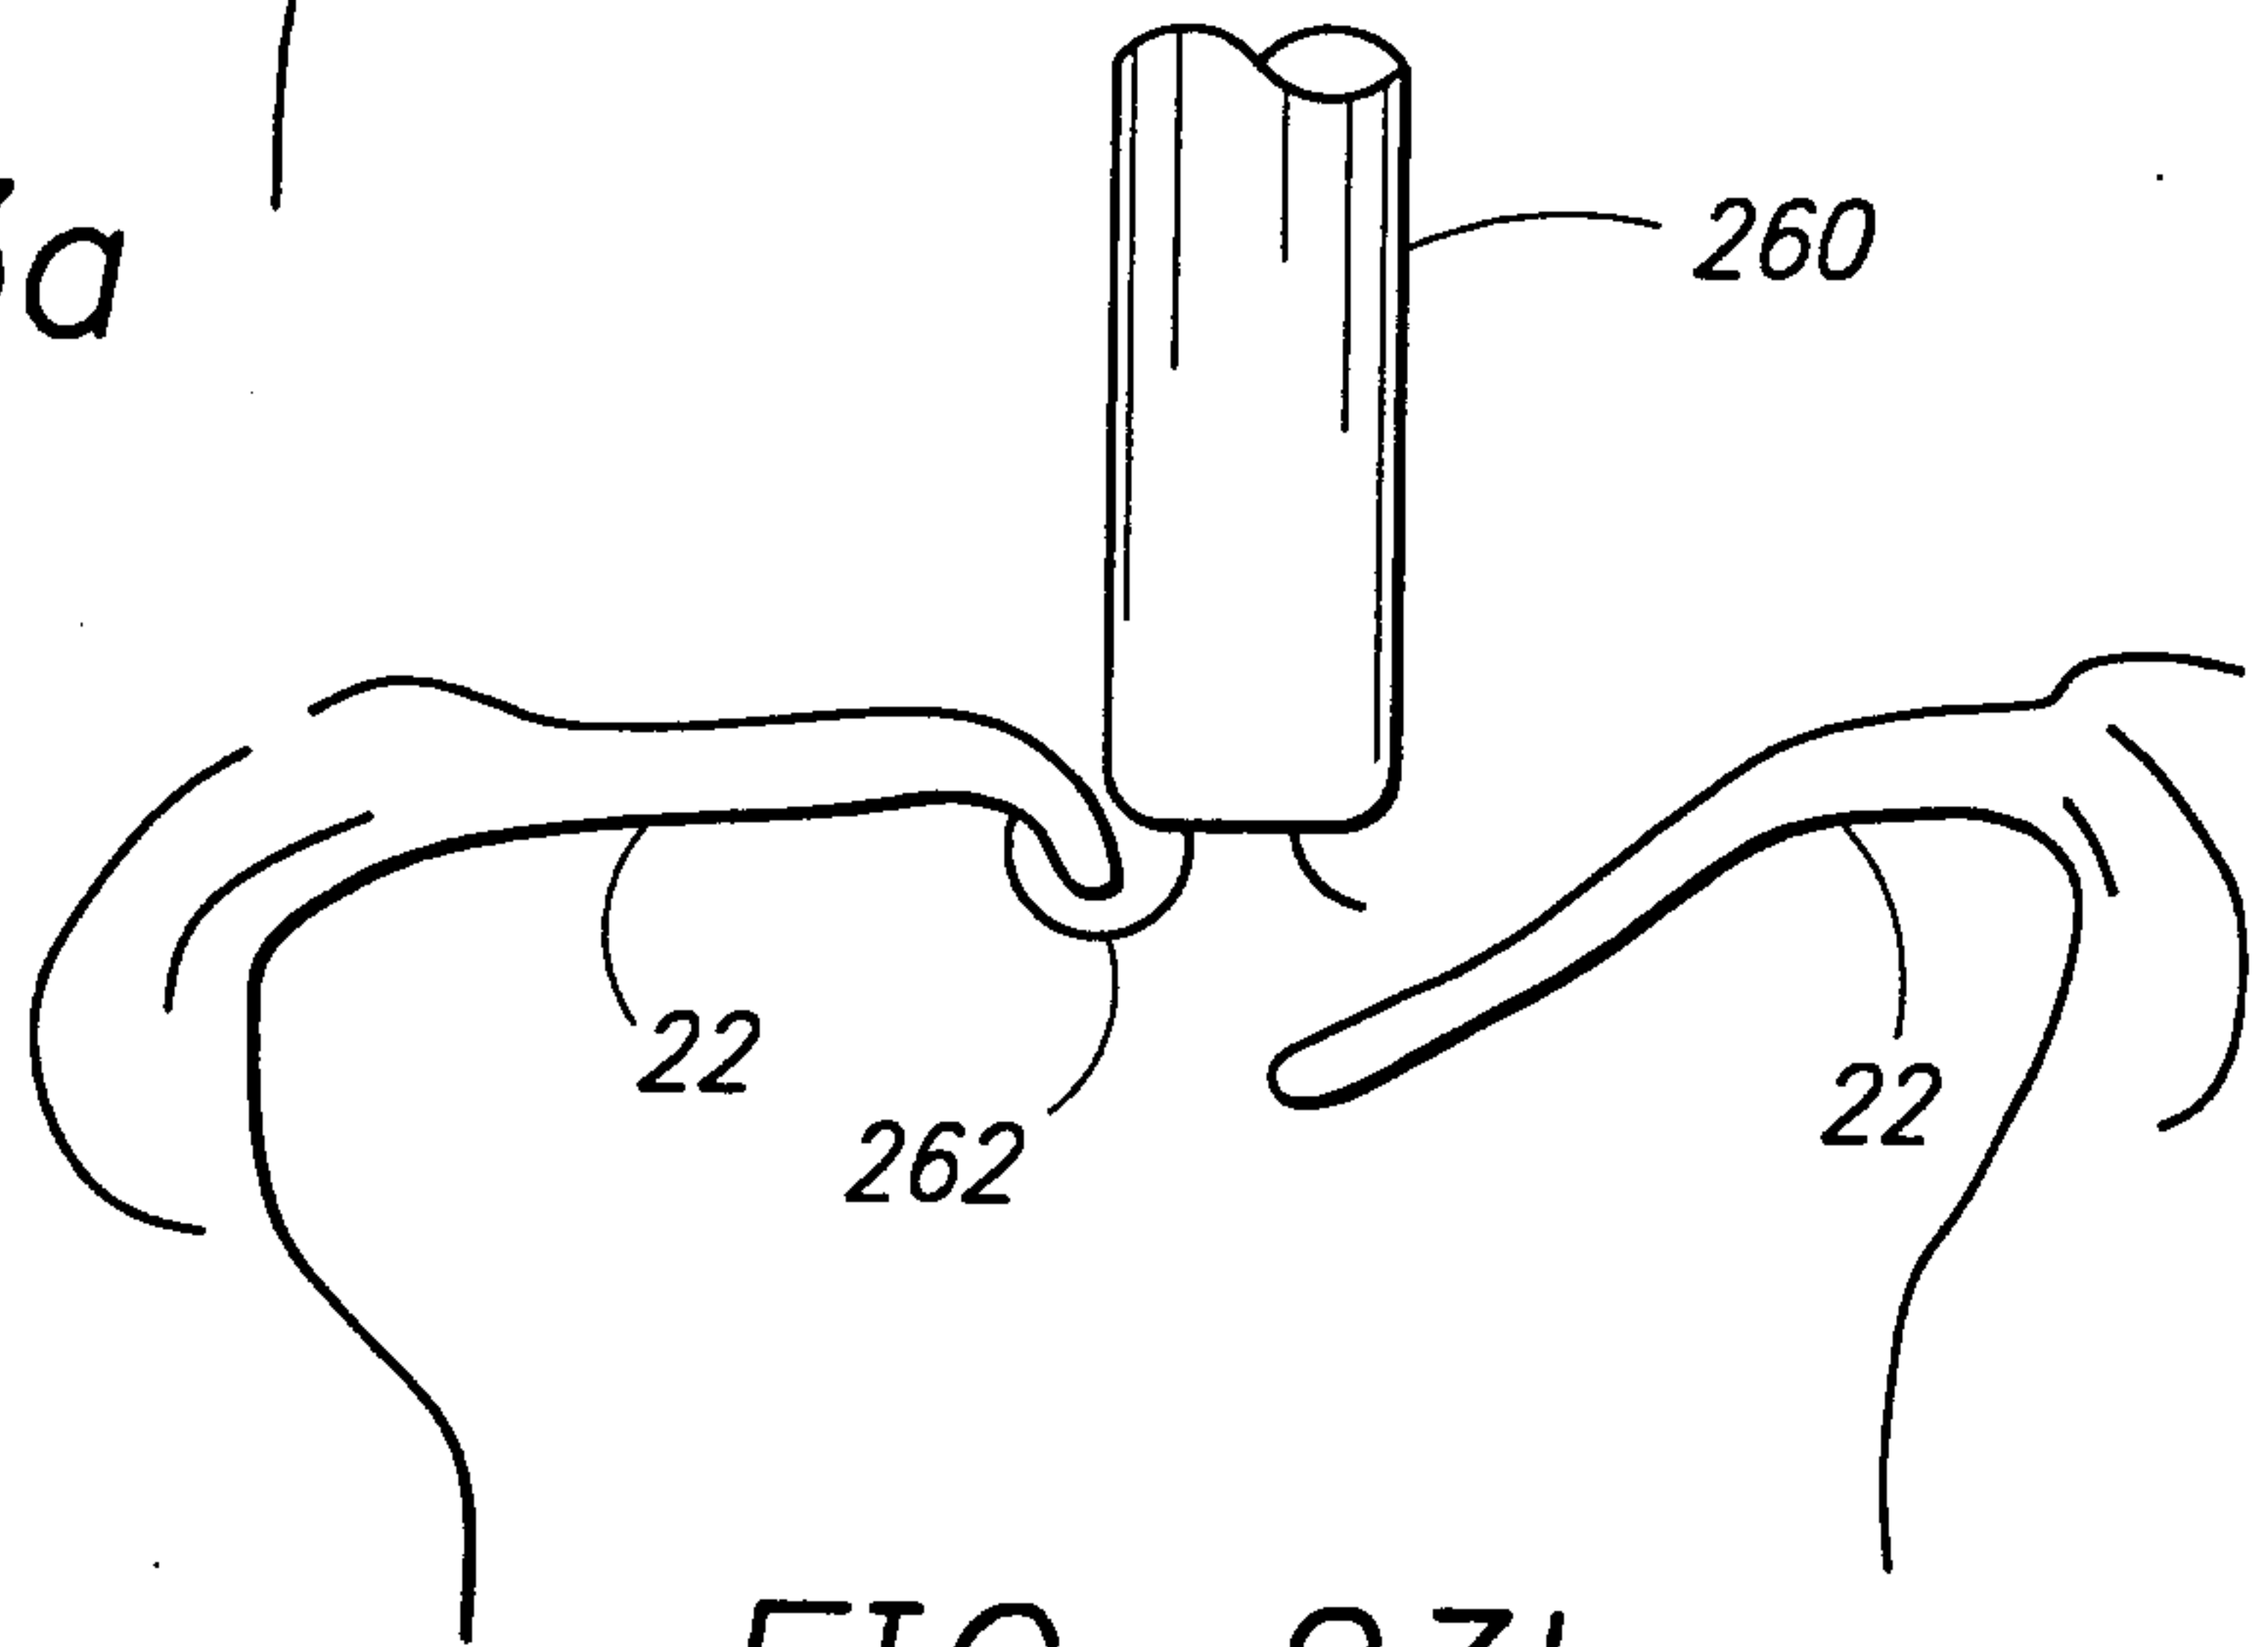


FIG. 23b










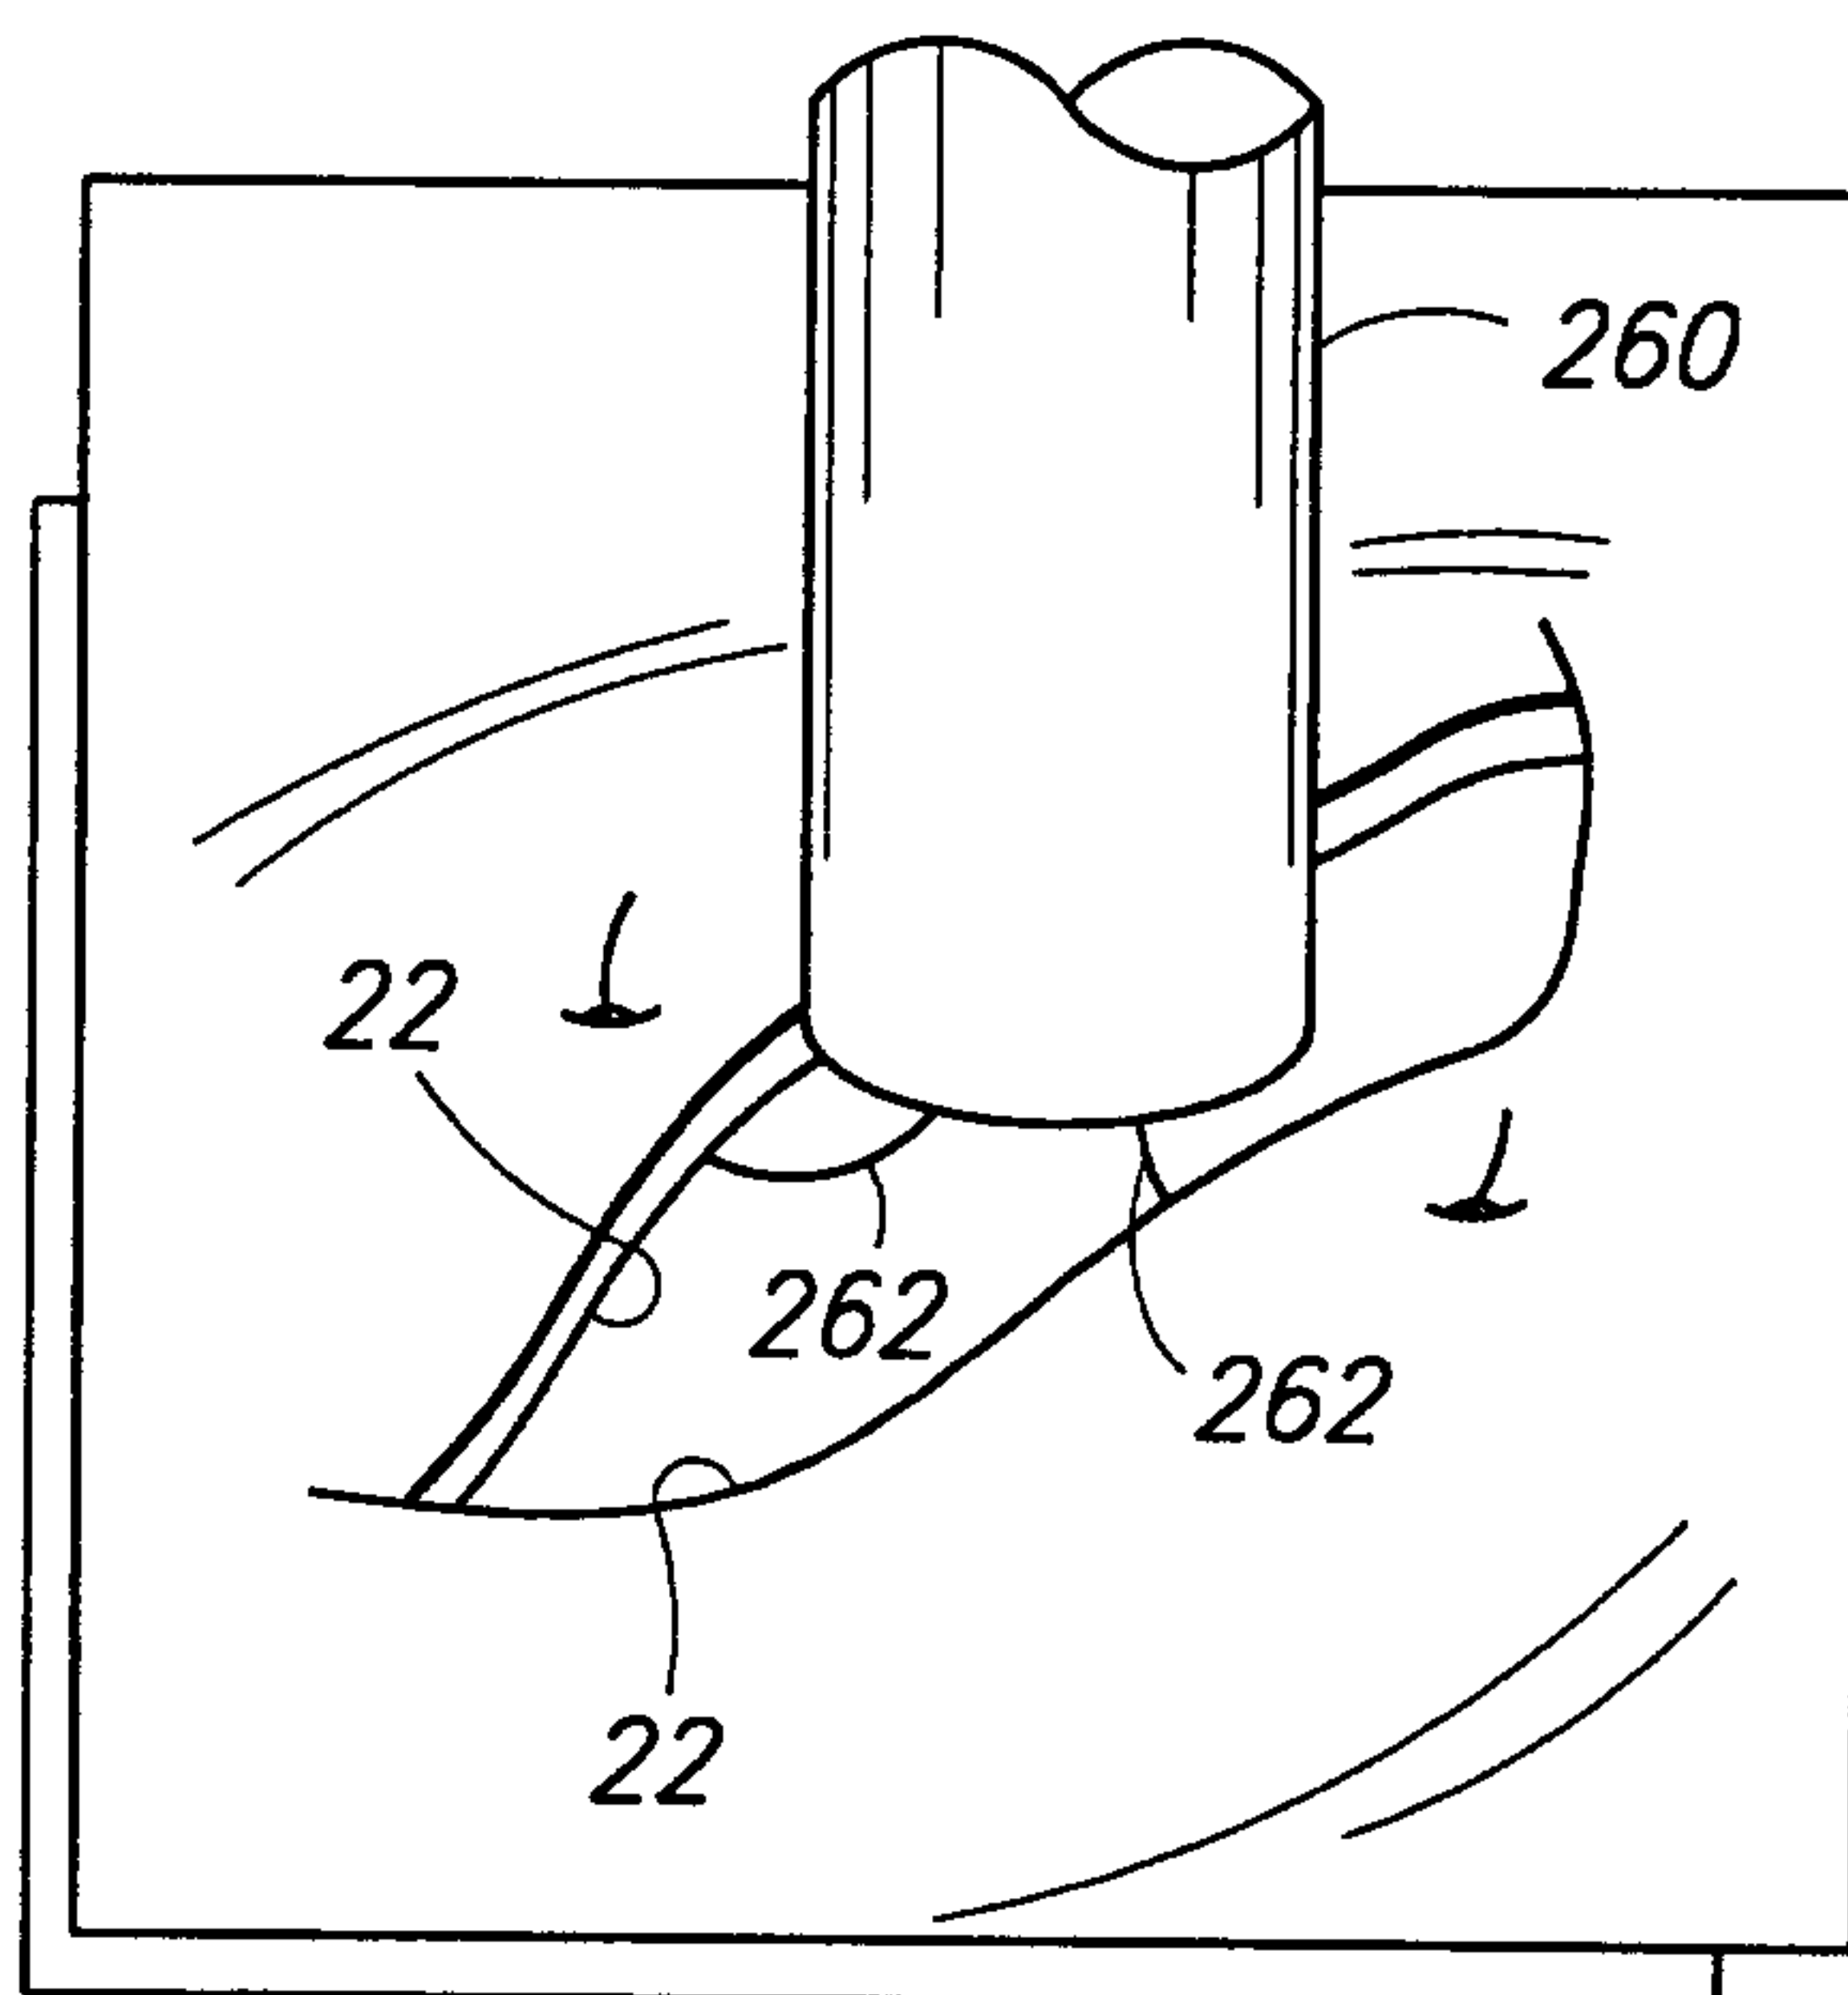




FIG. 23c

27/45

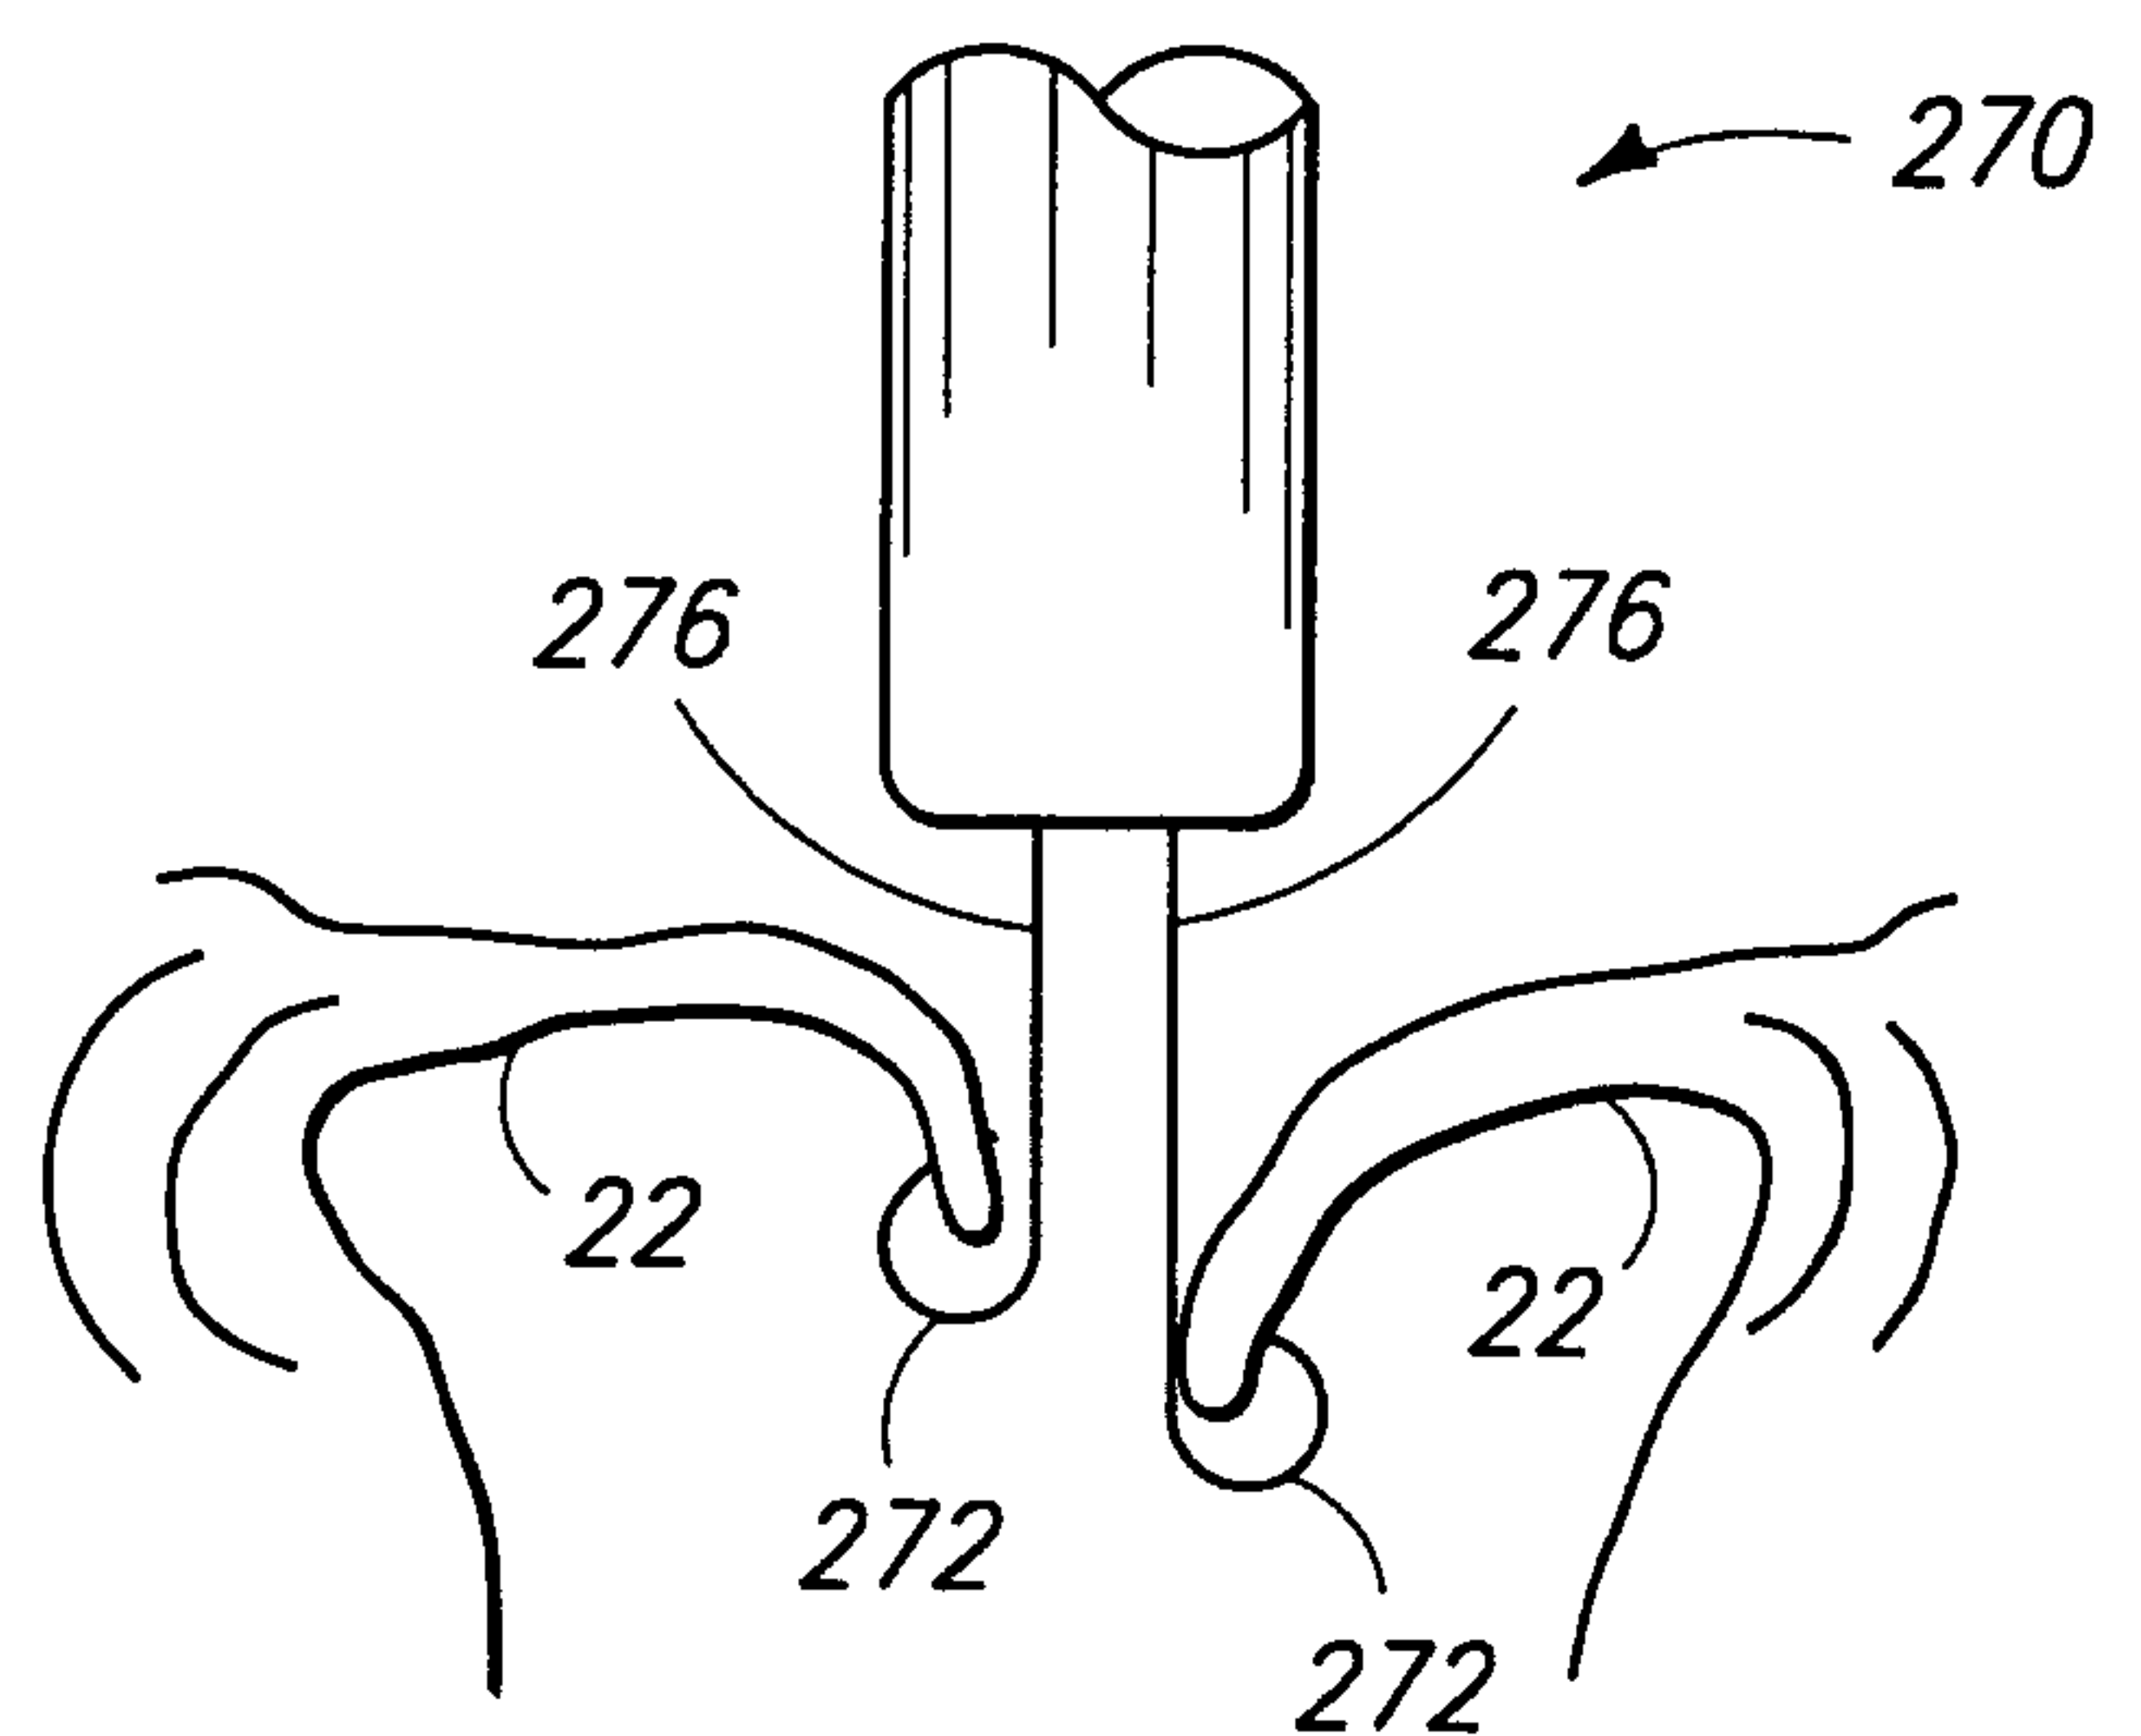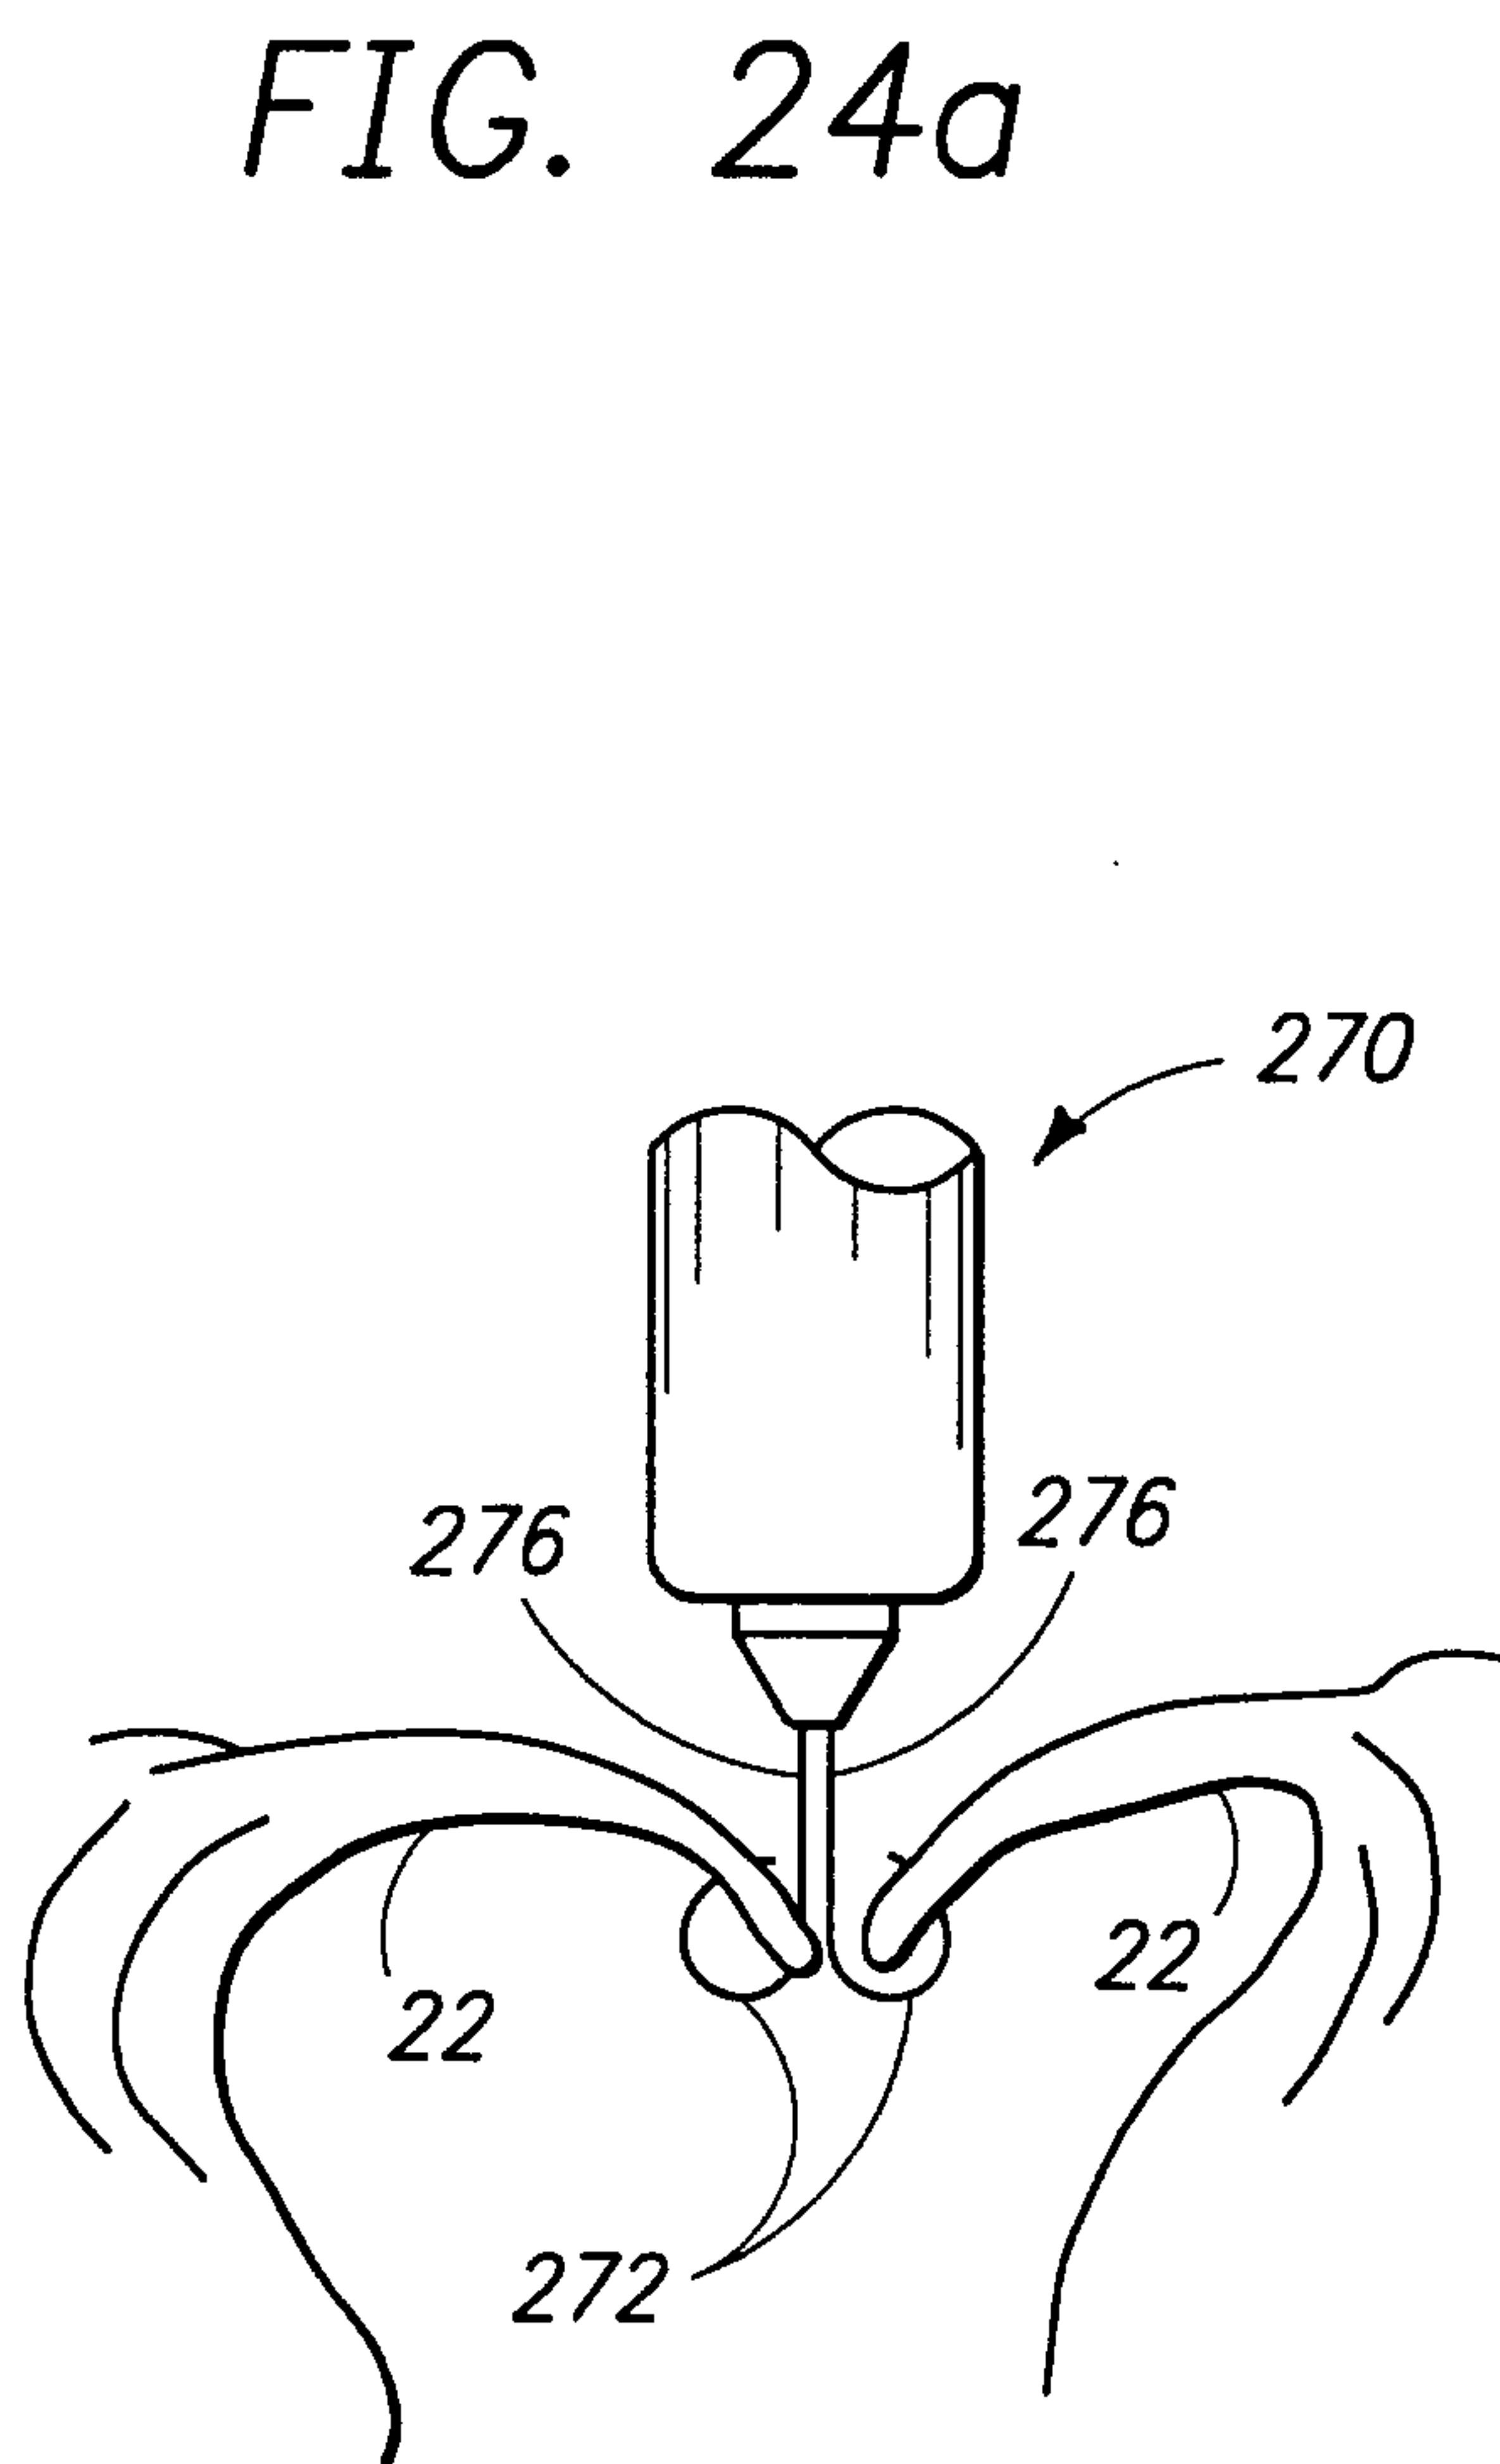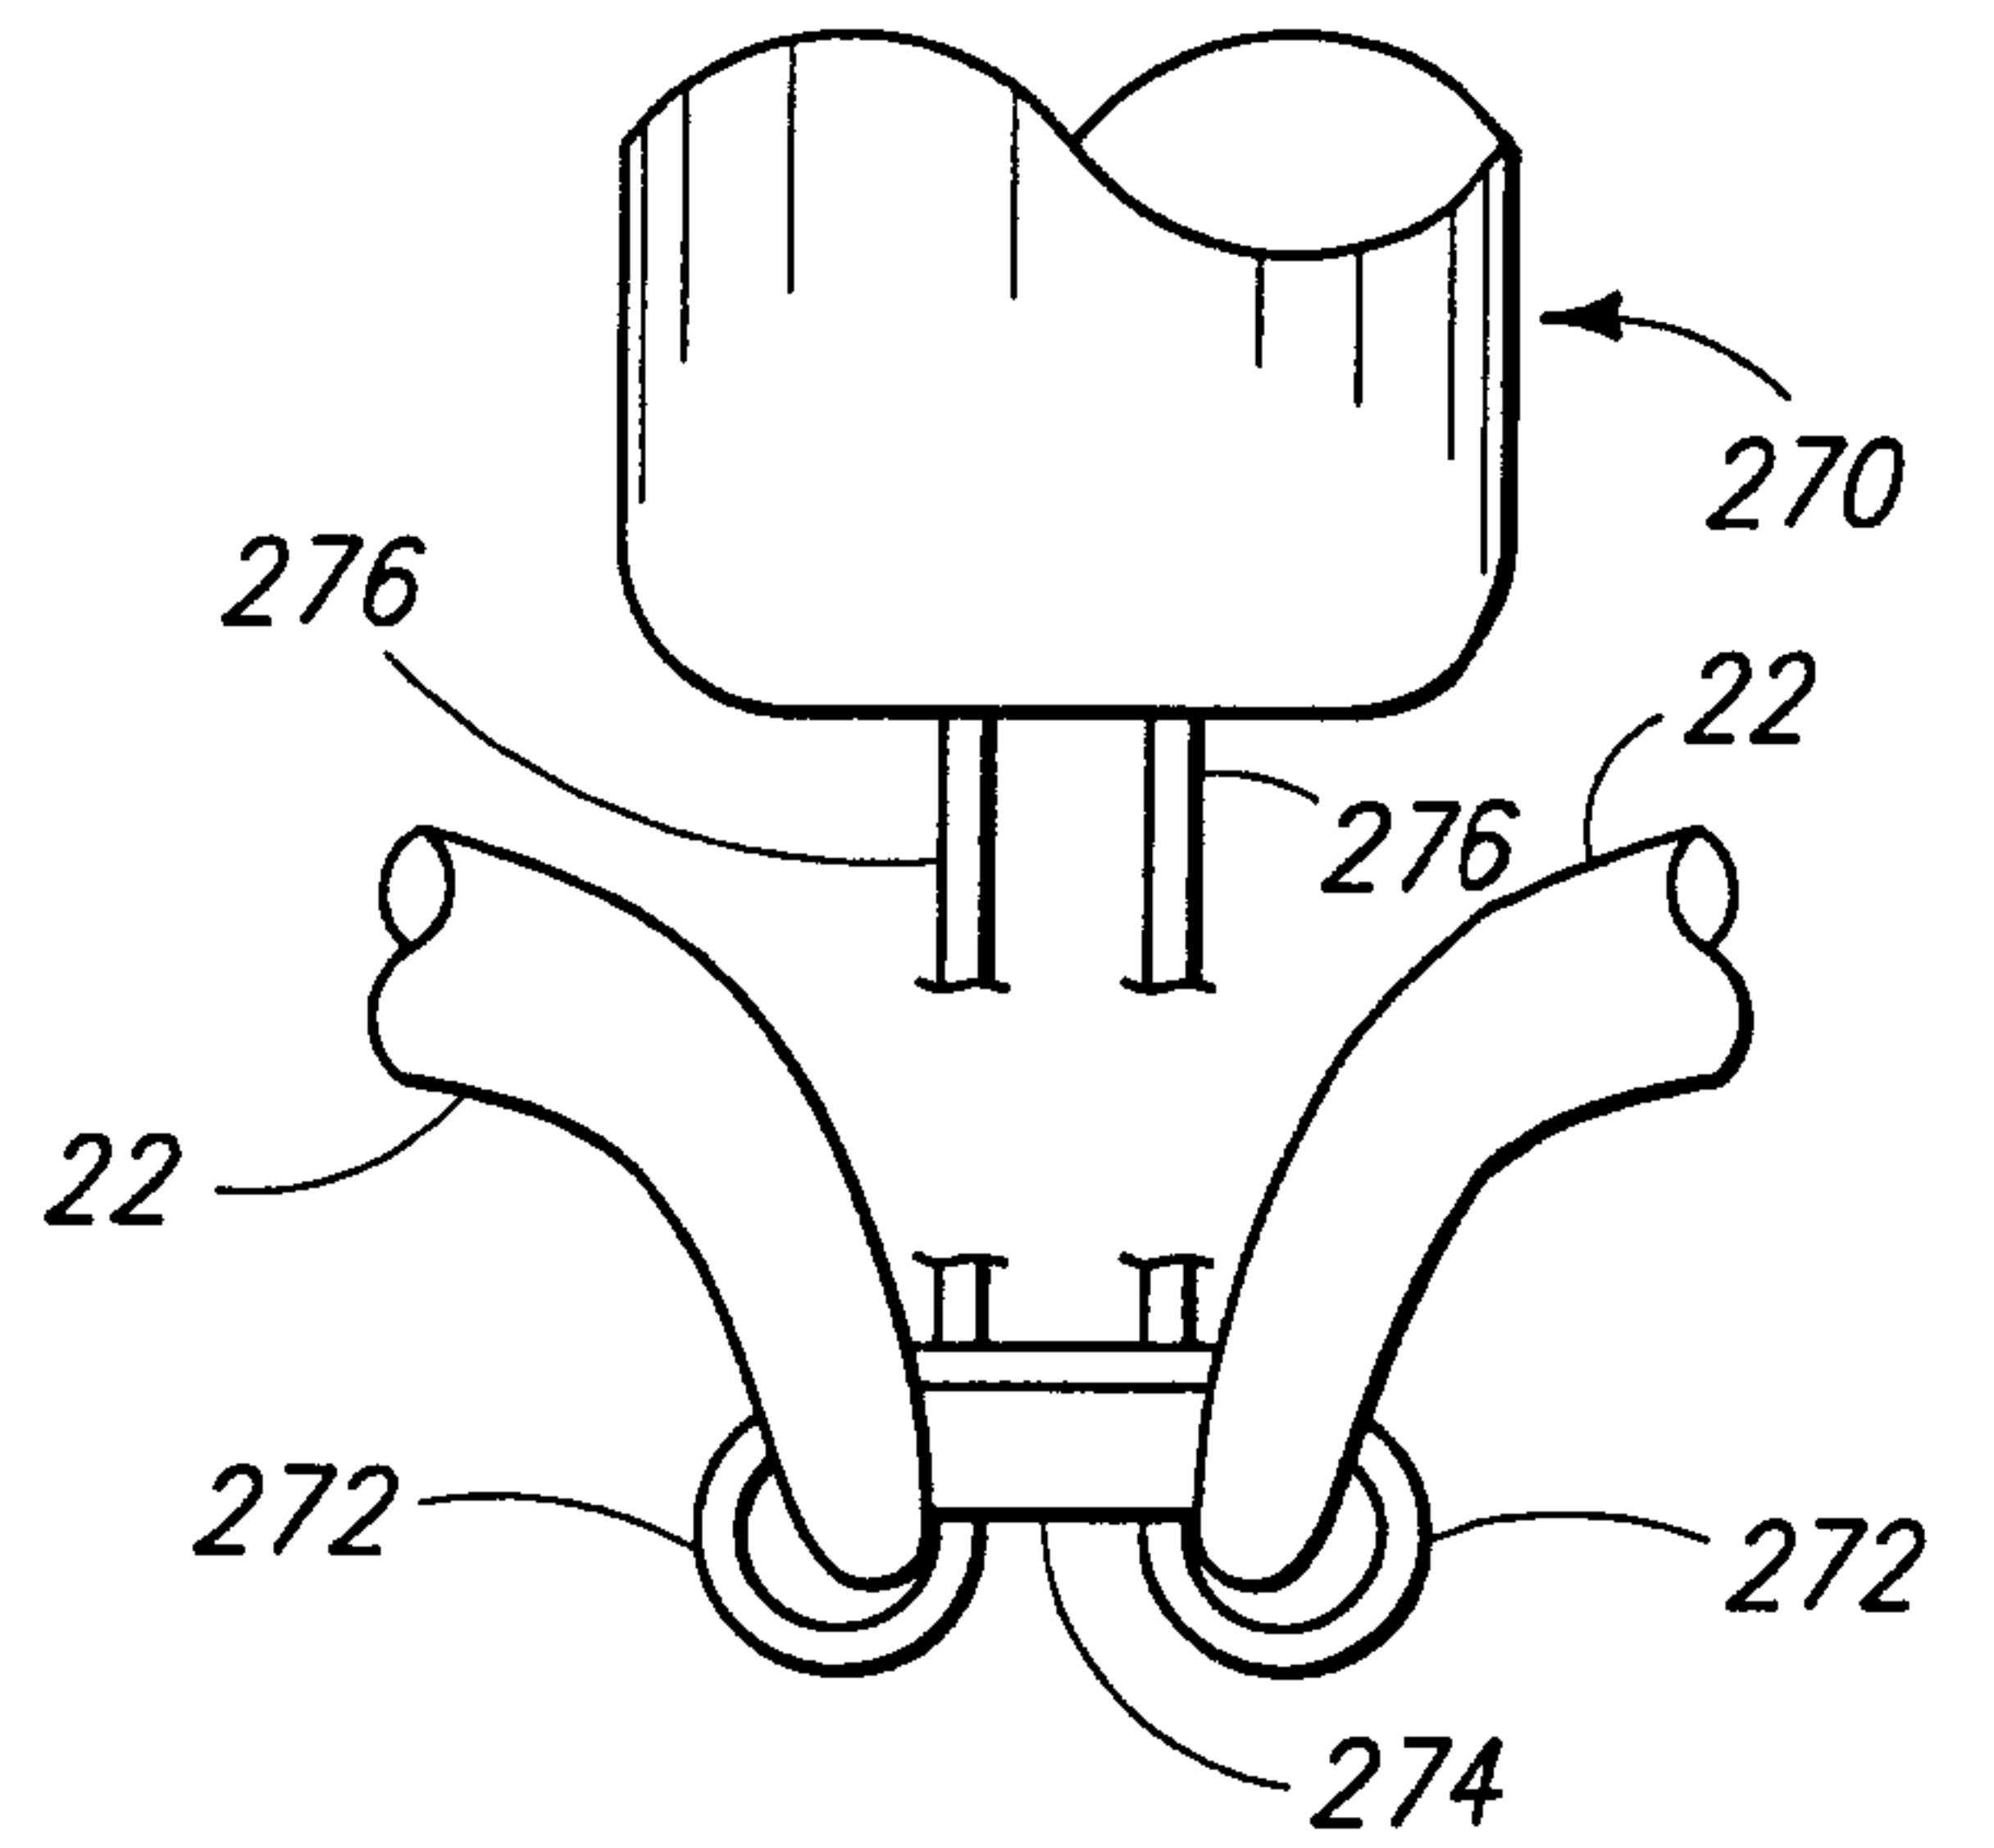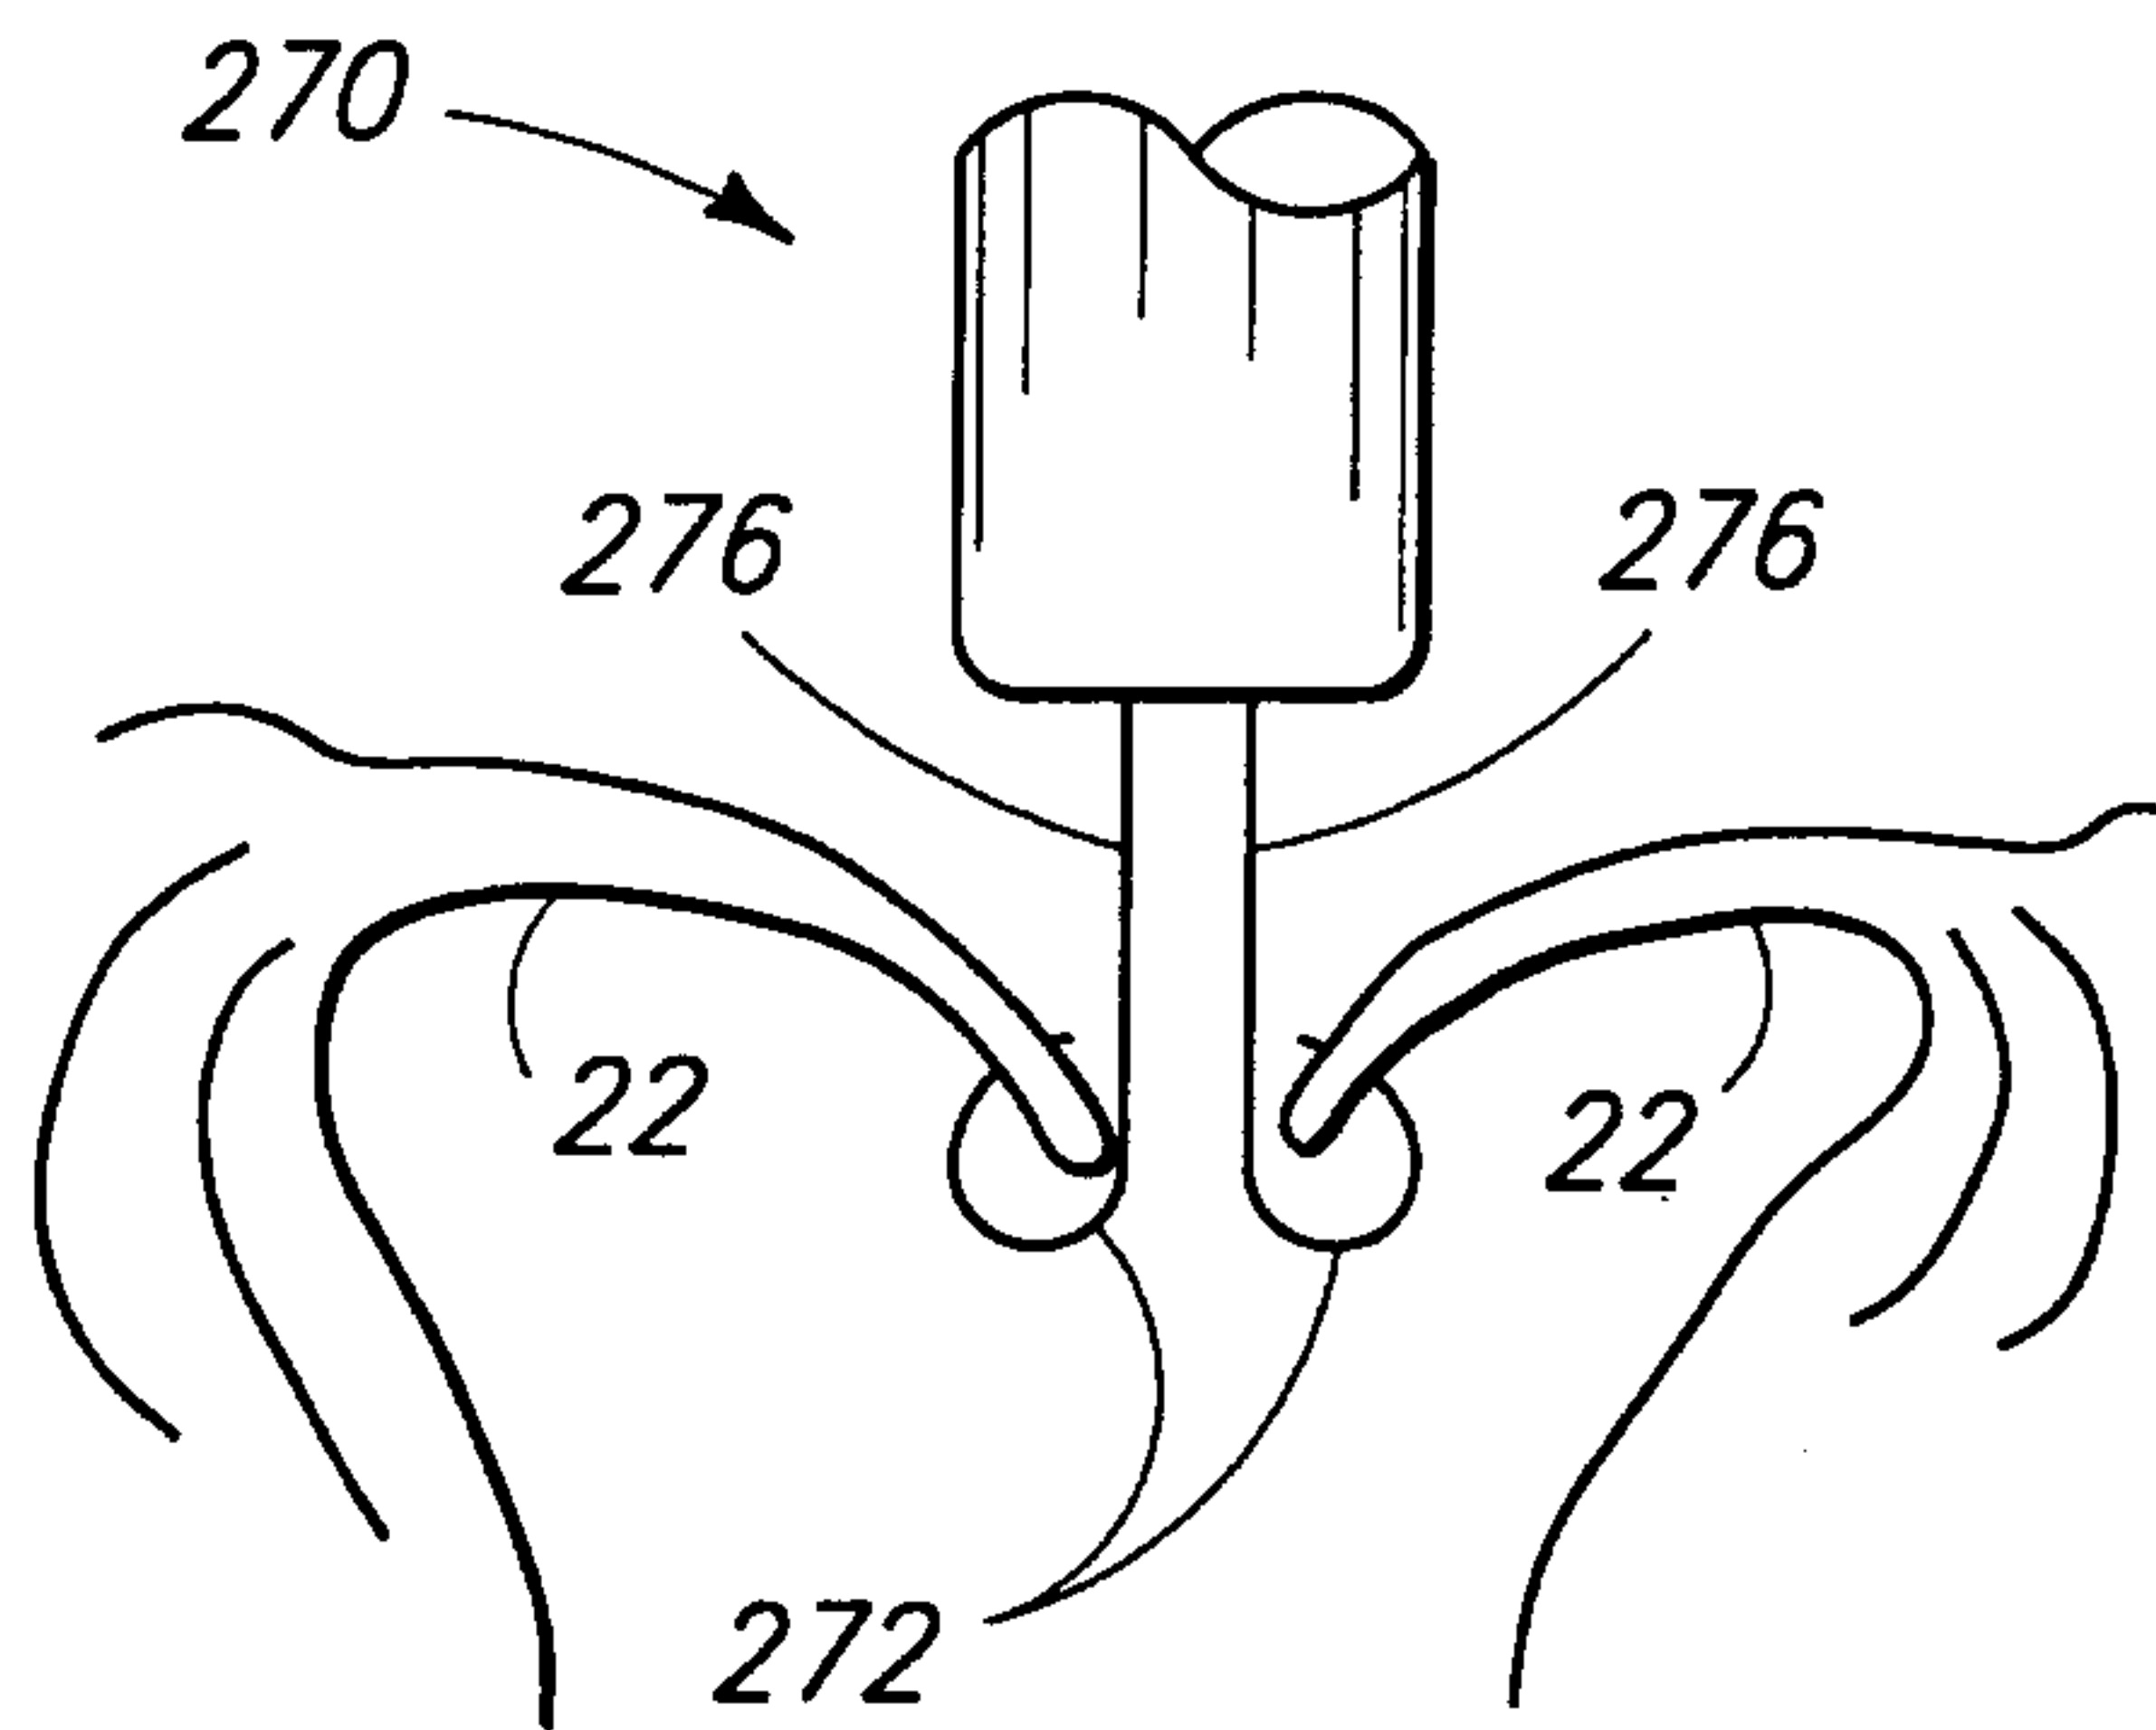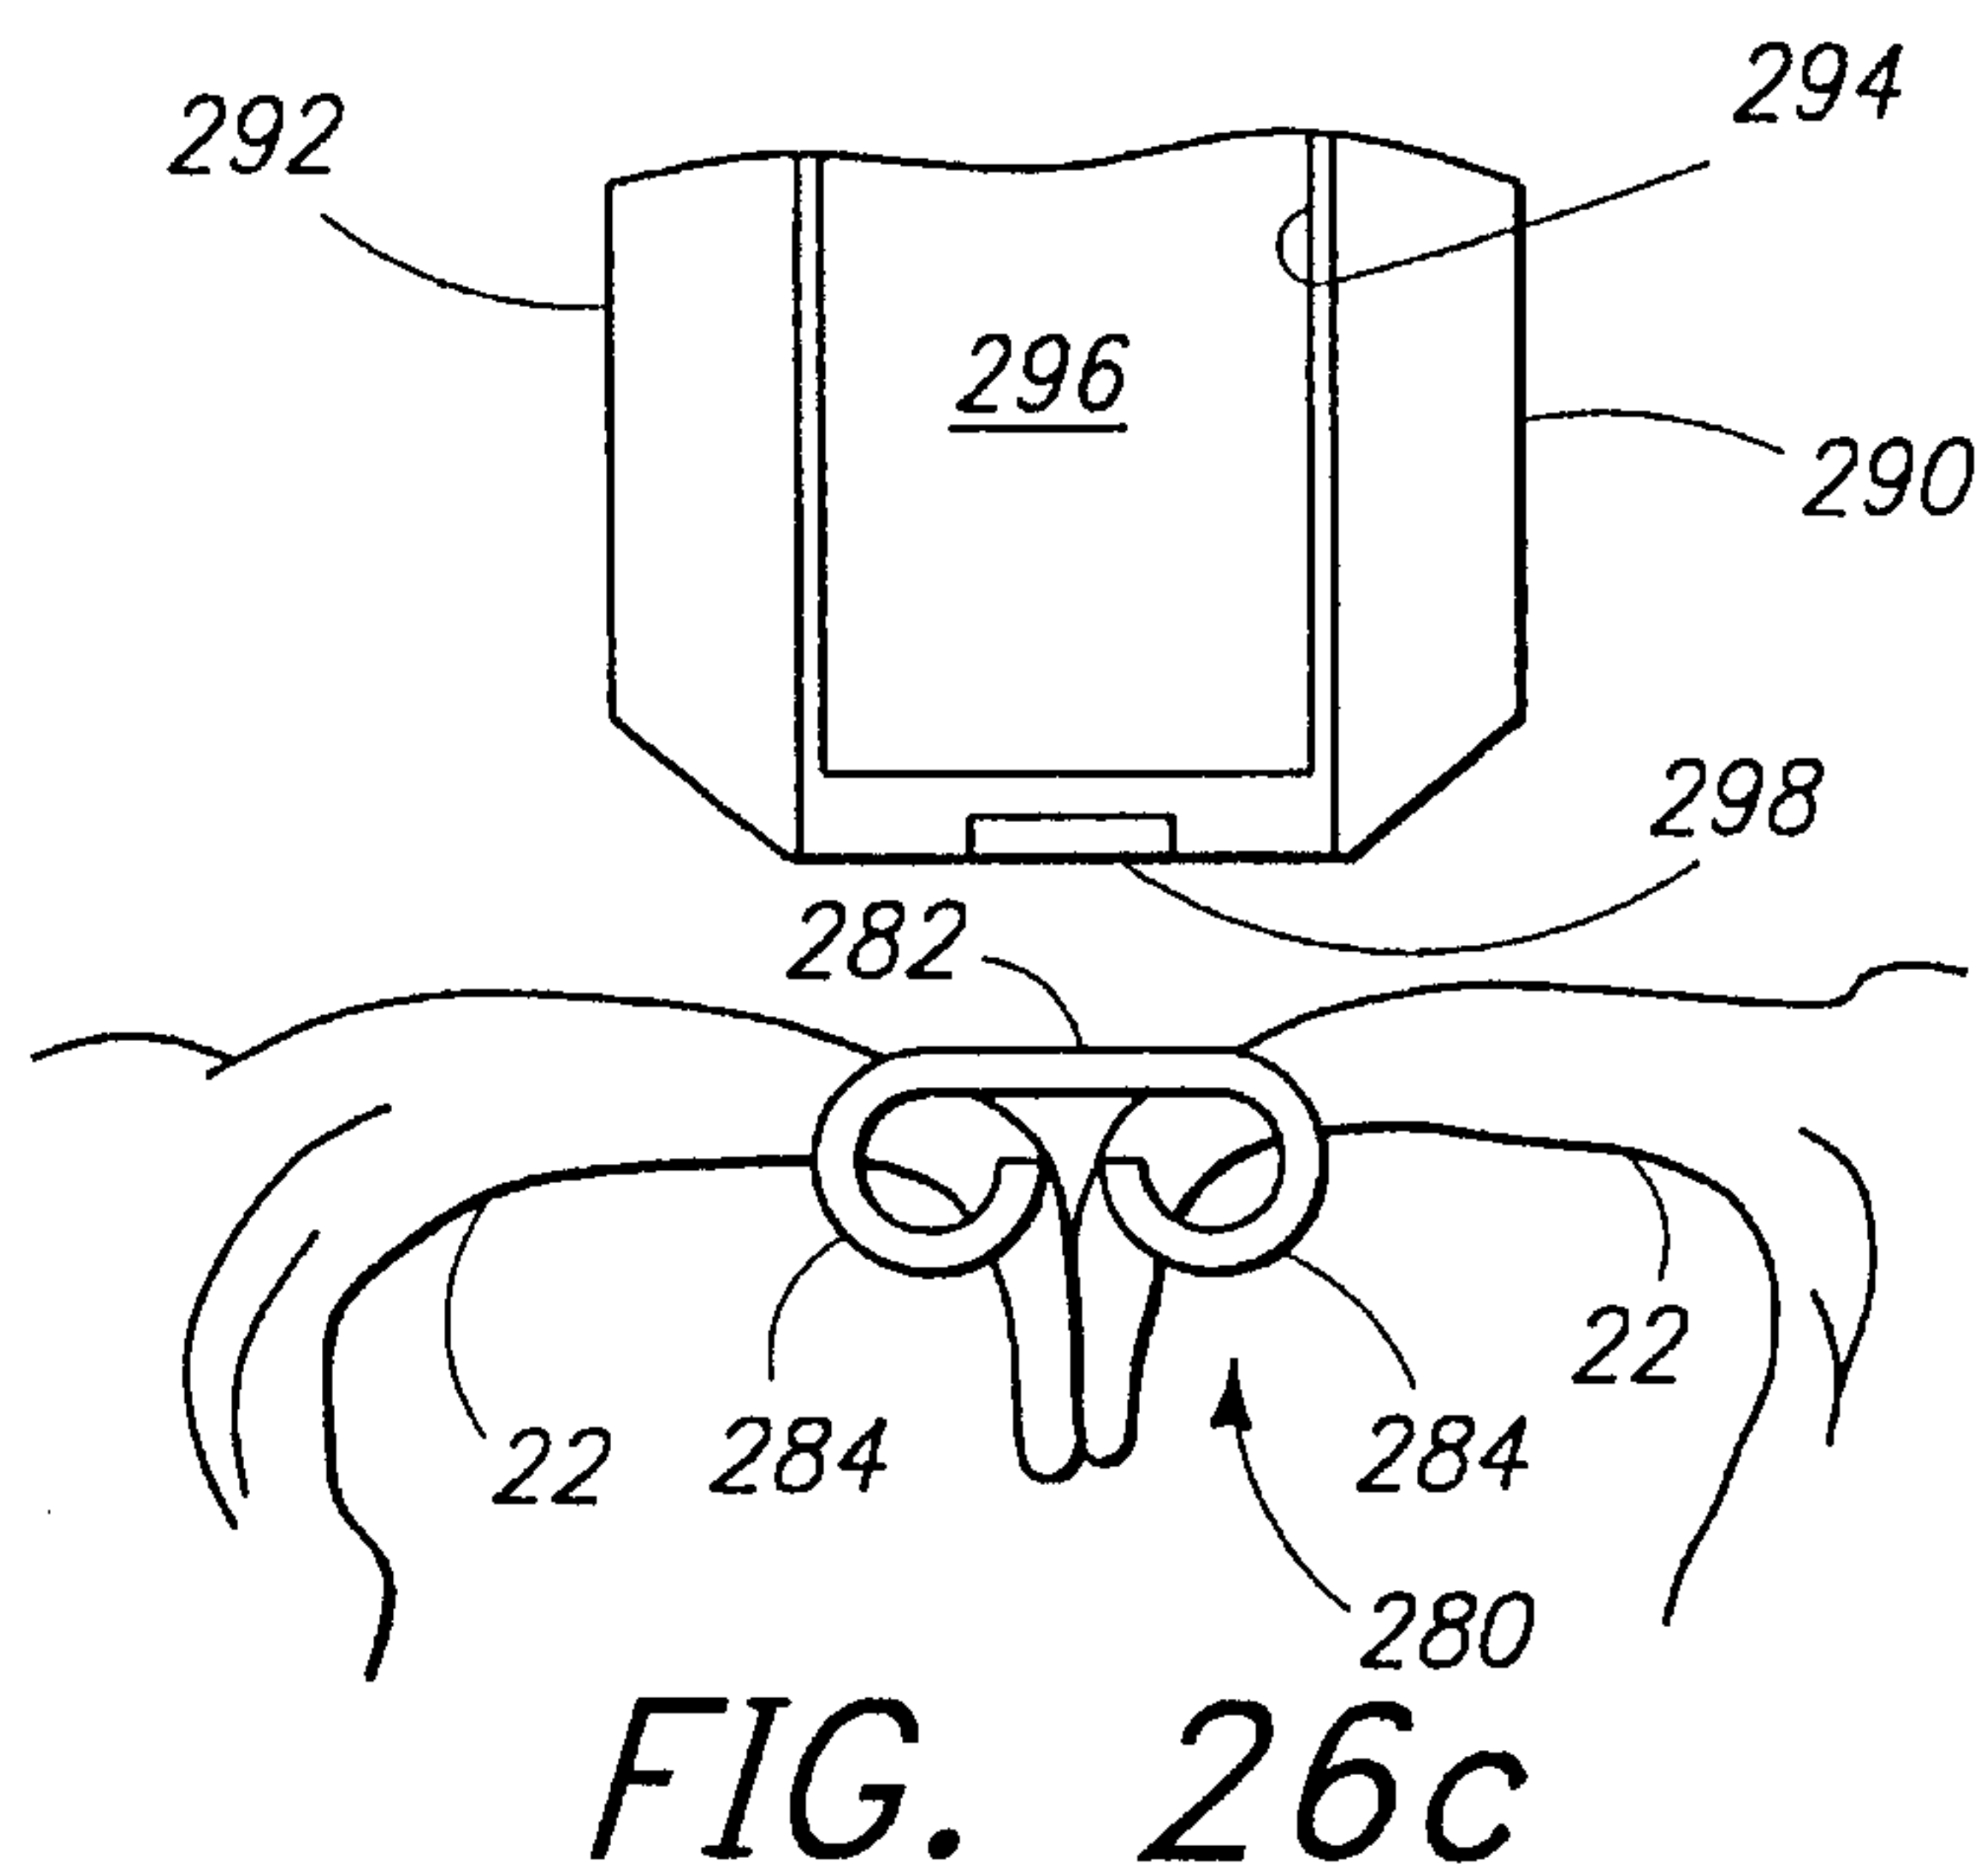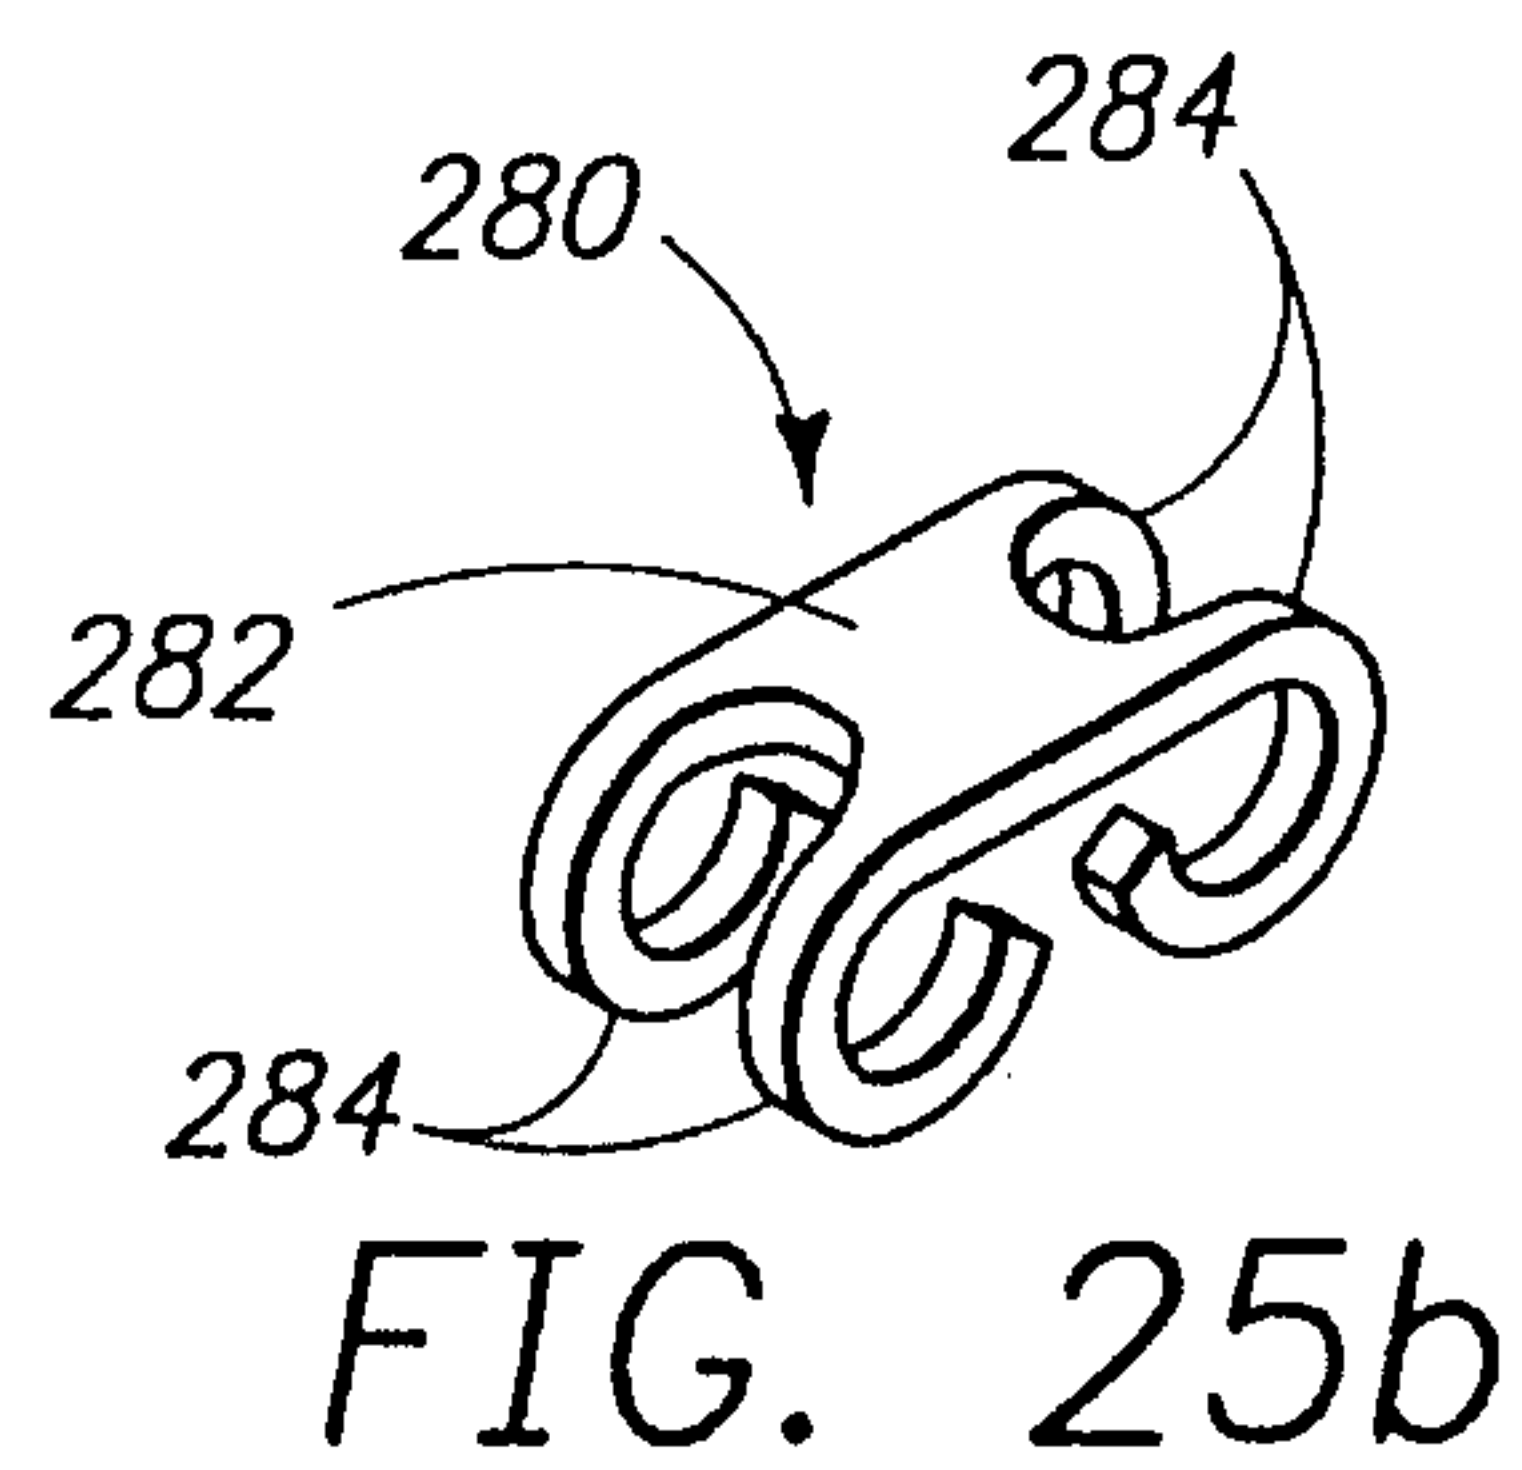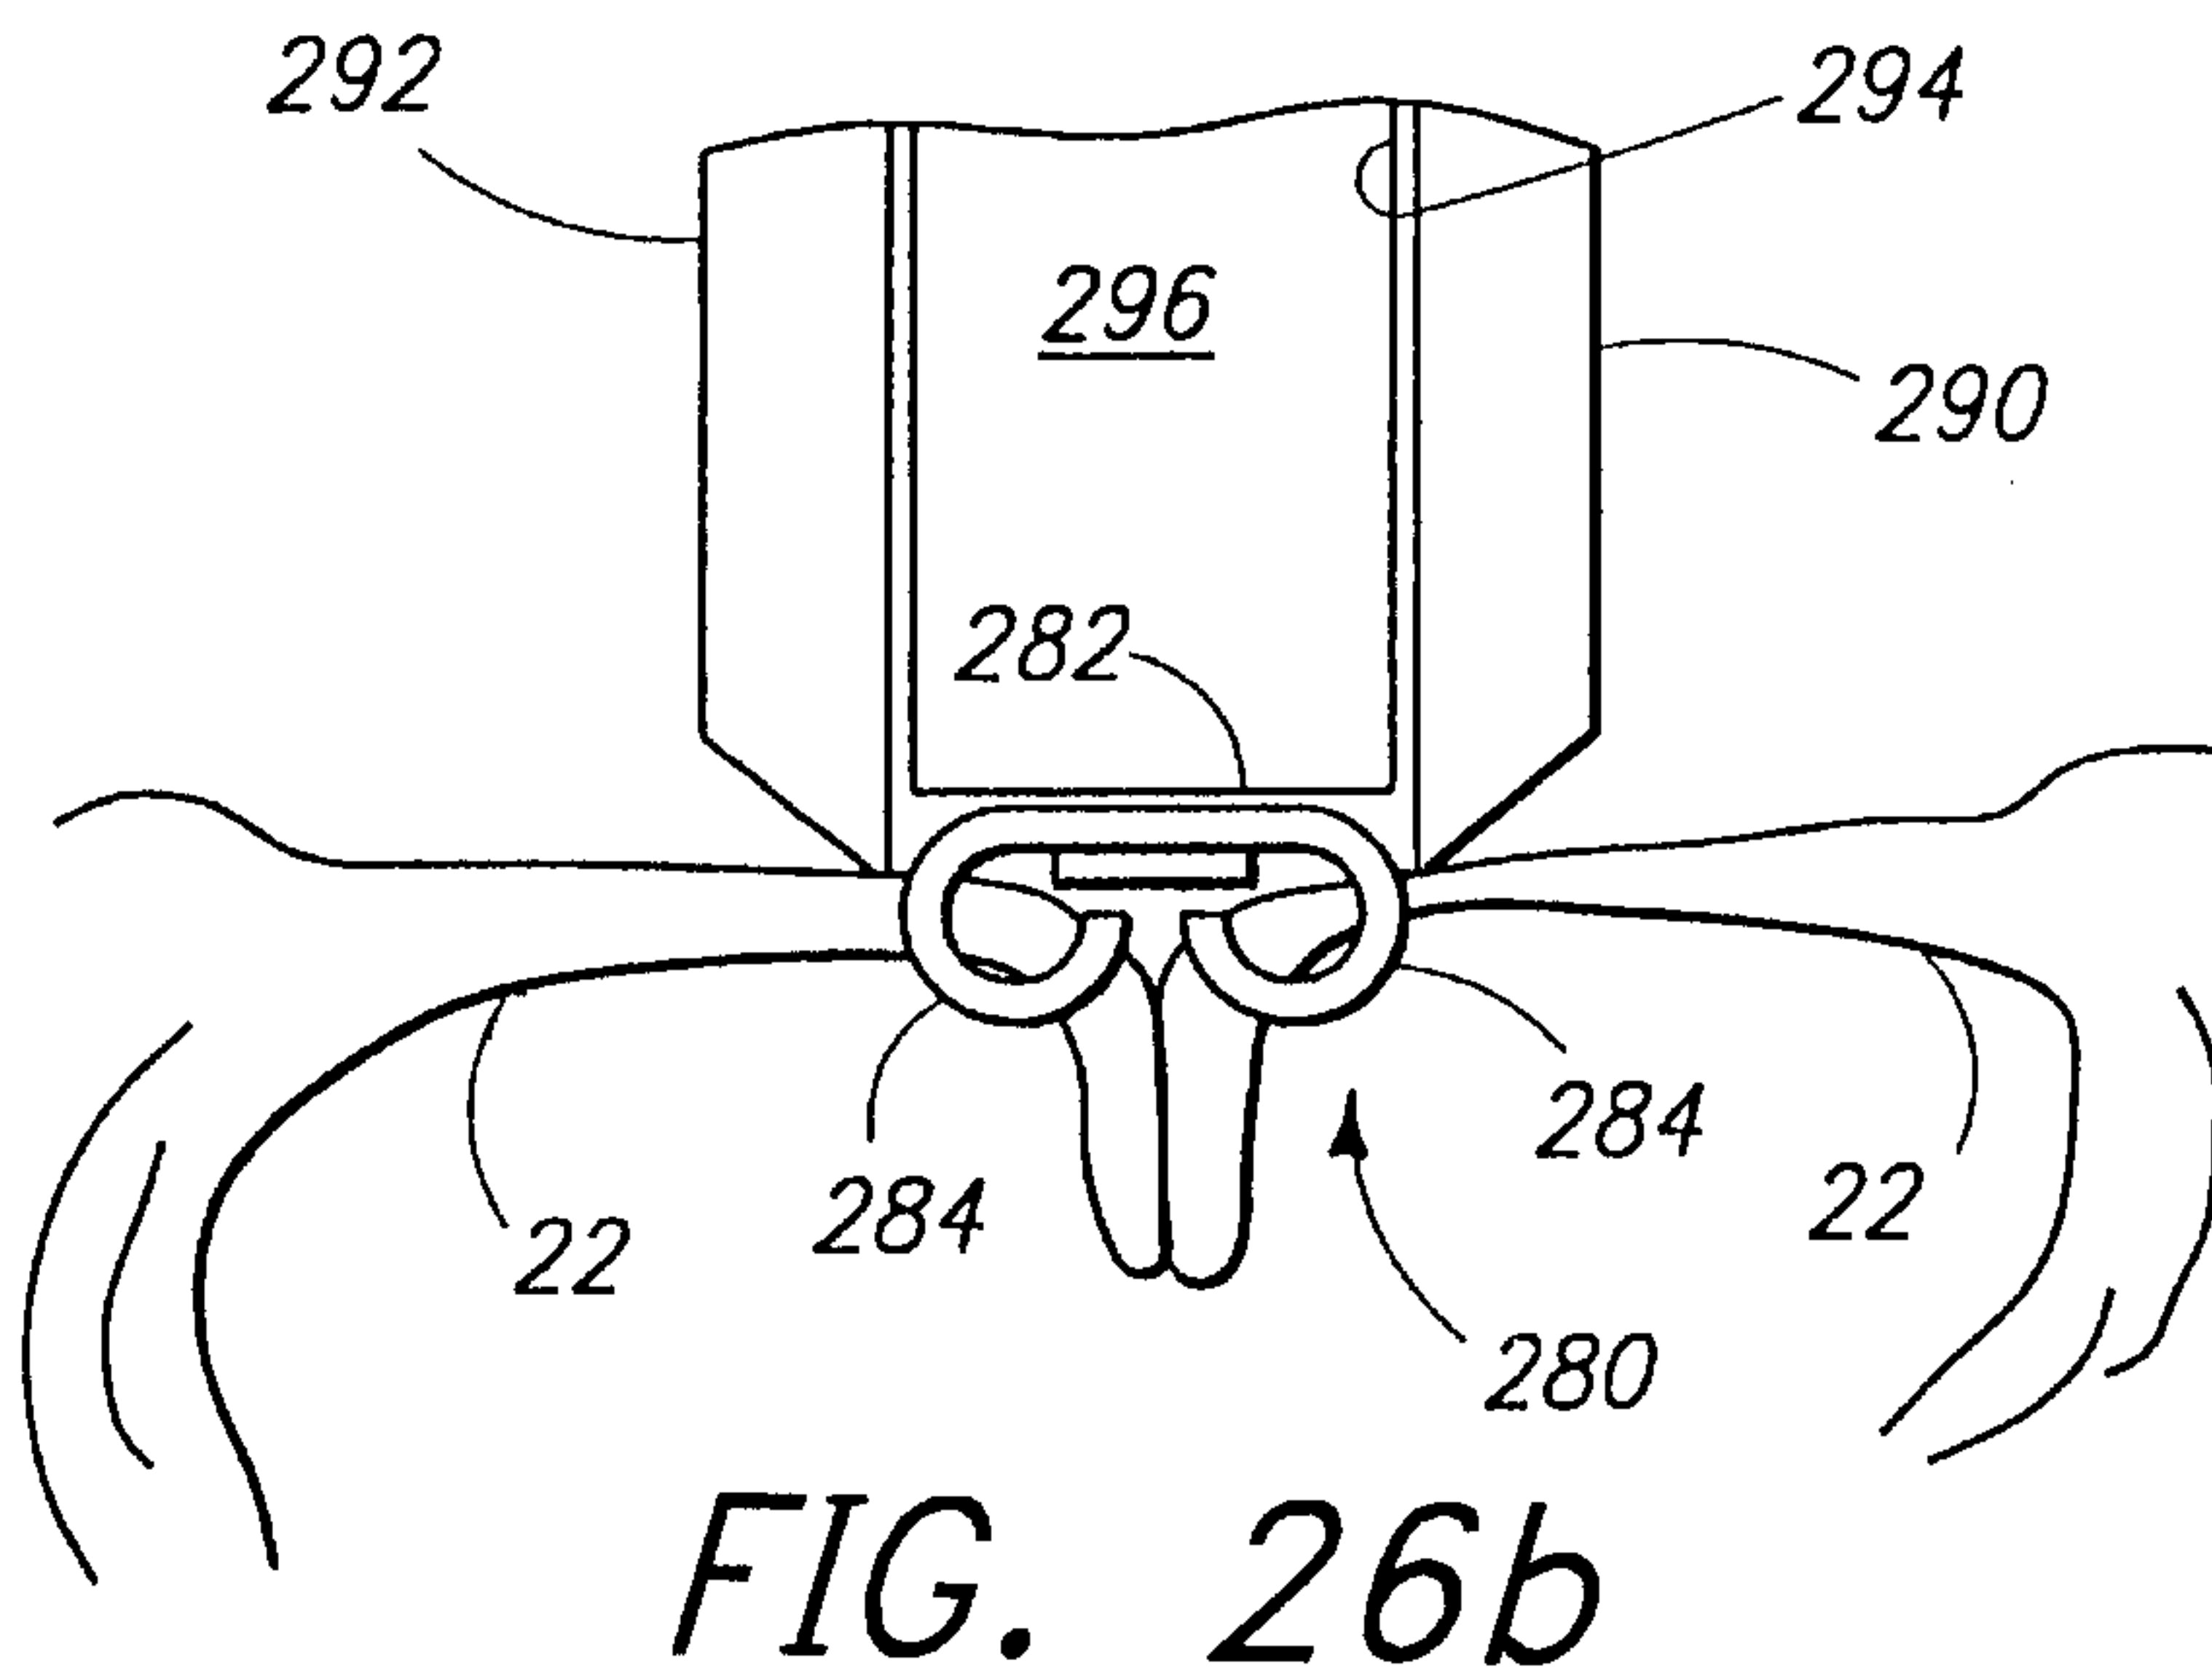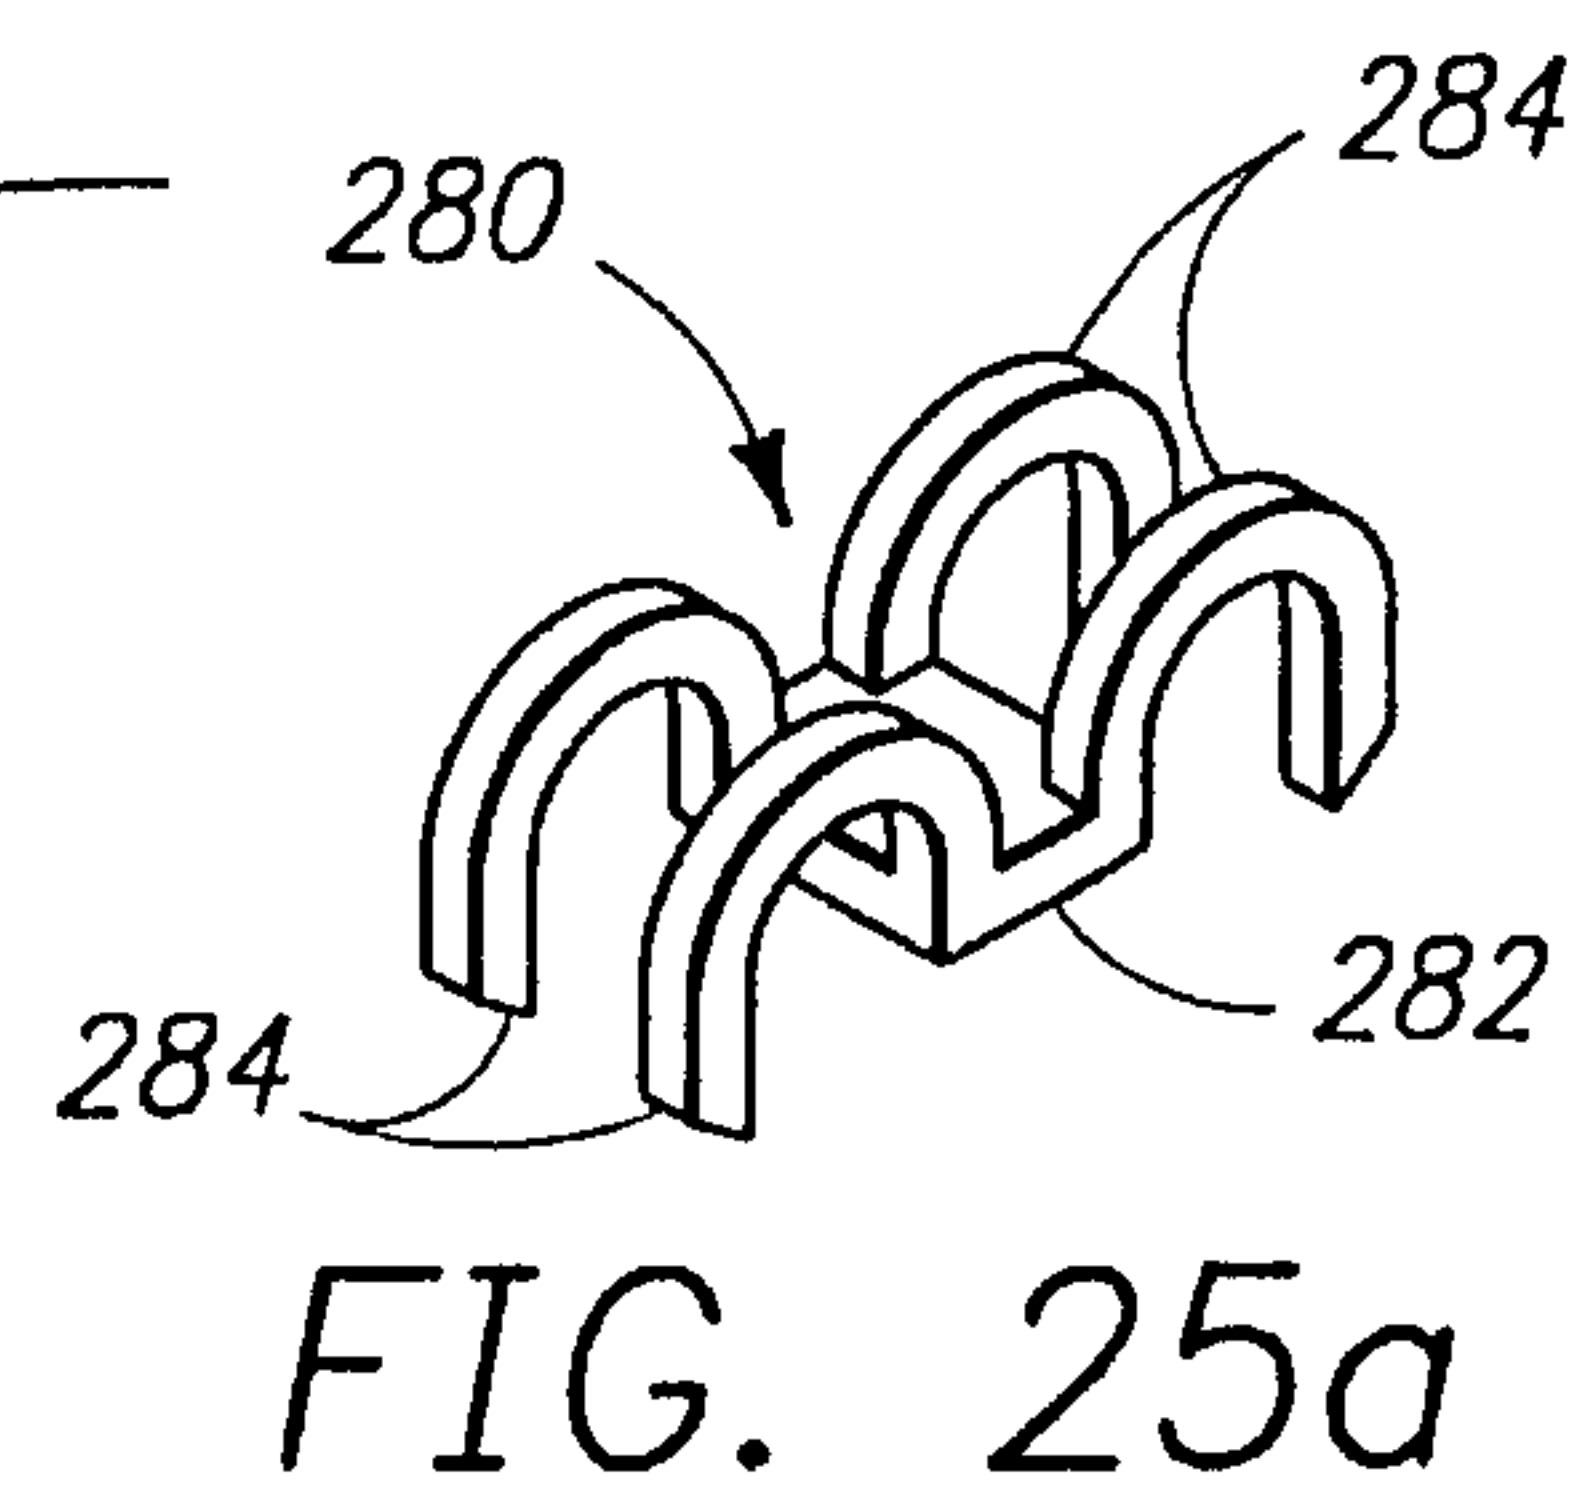

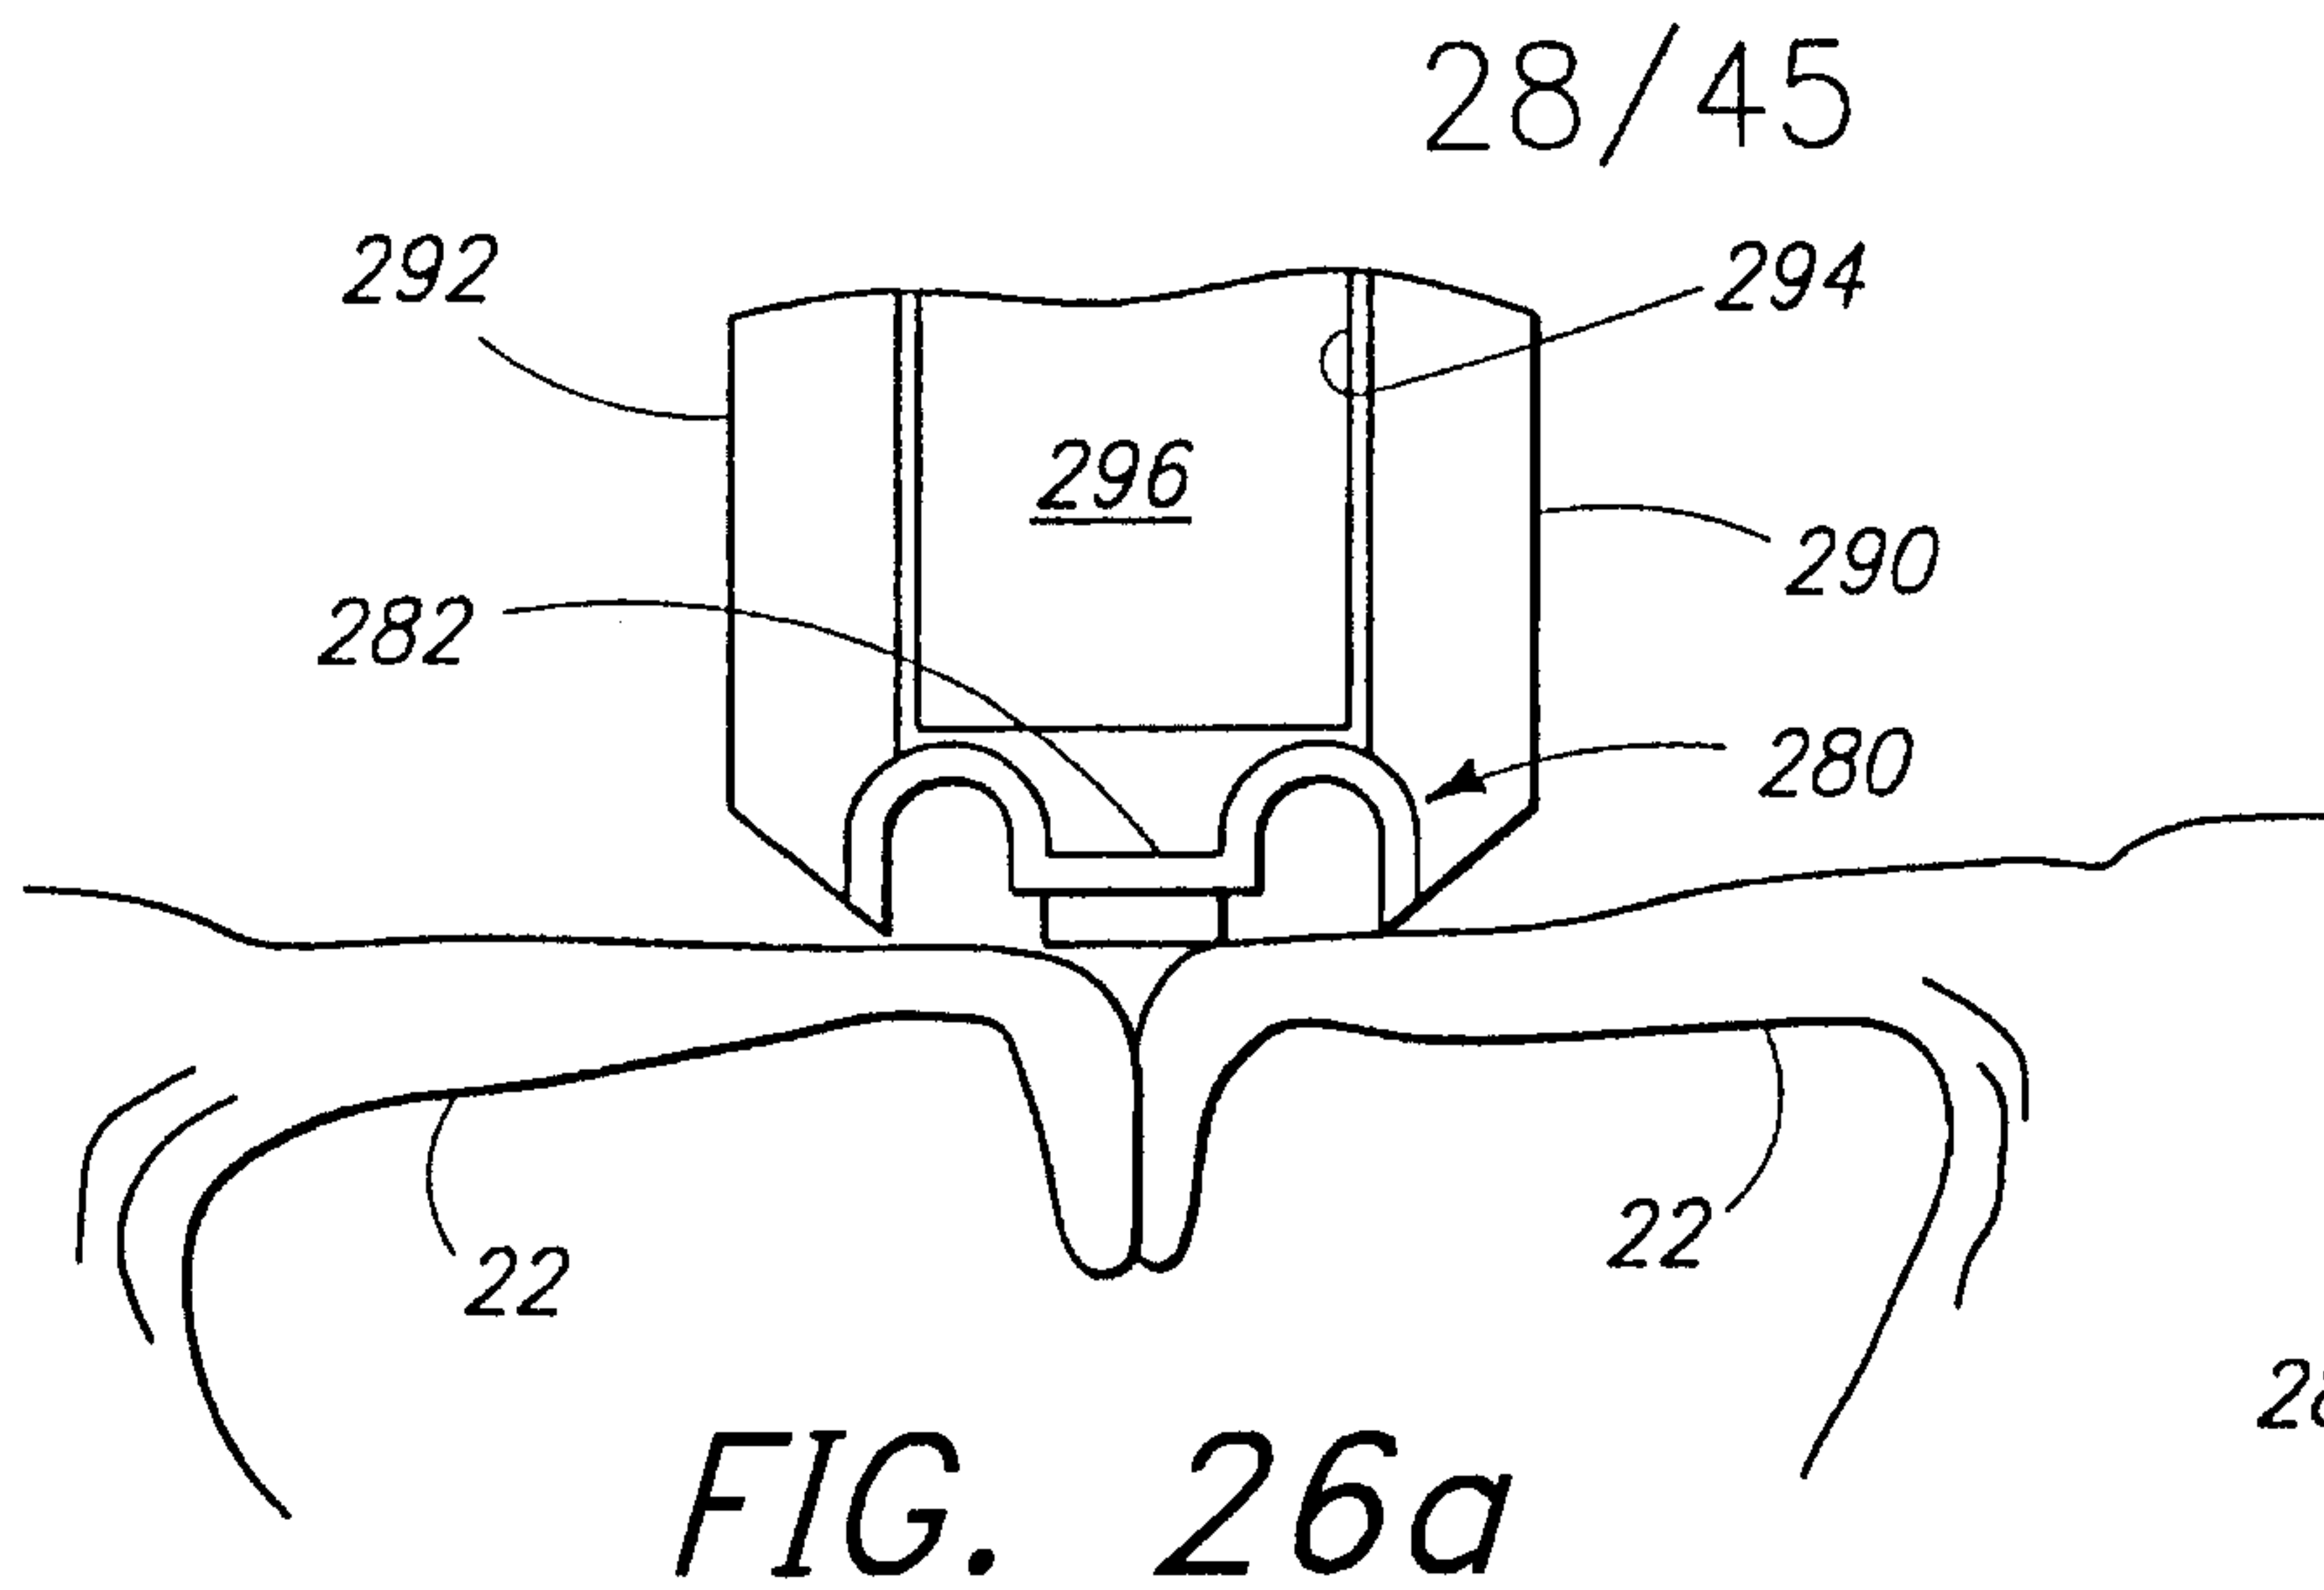

29/45

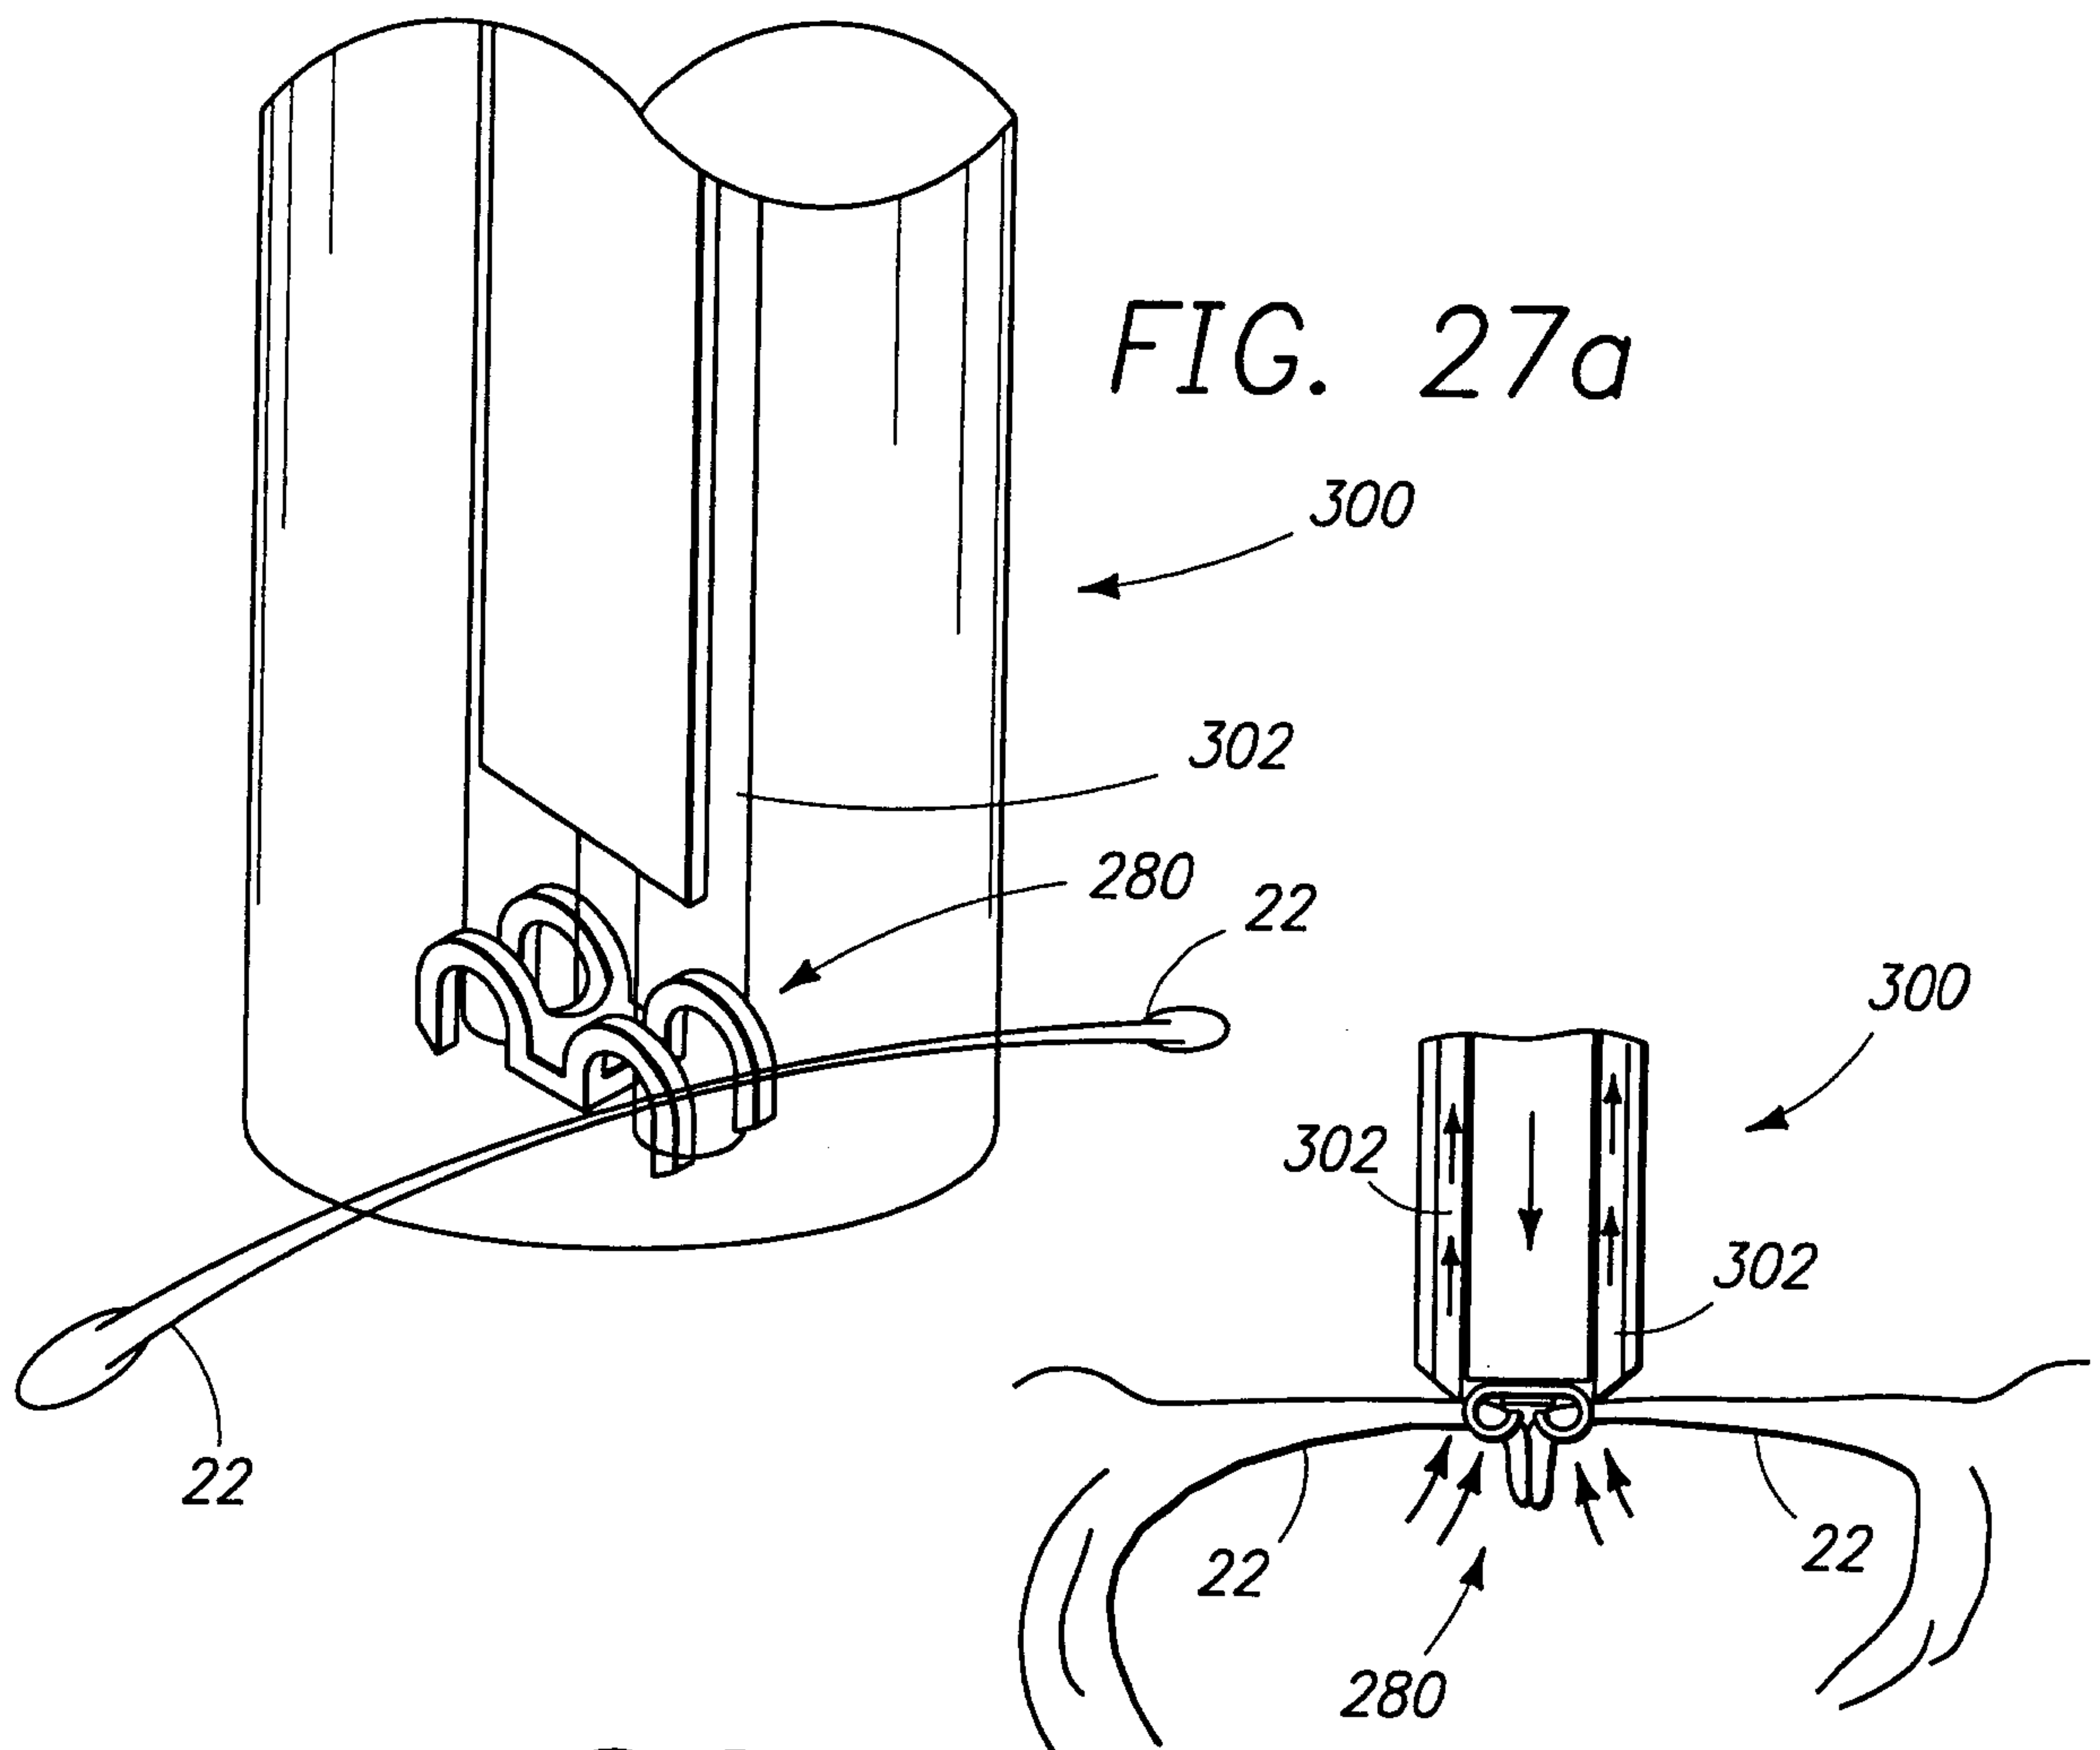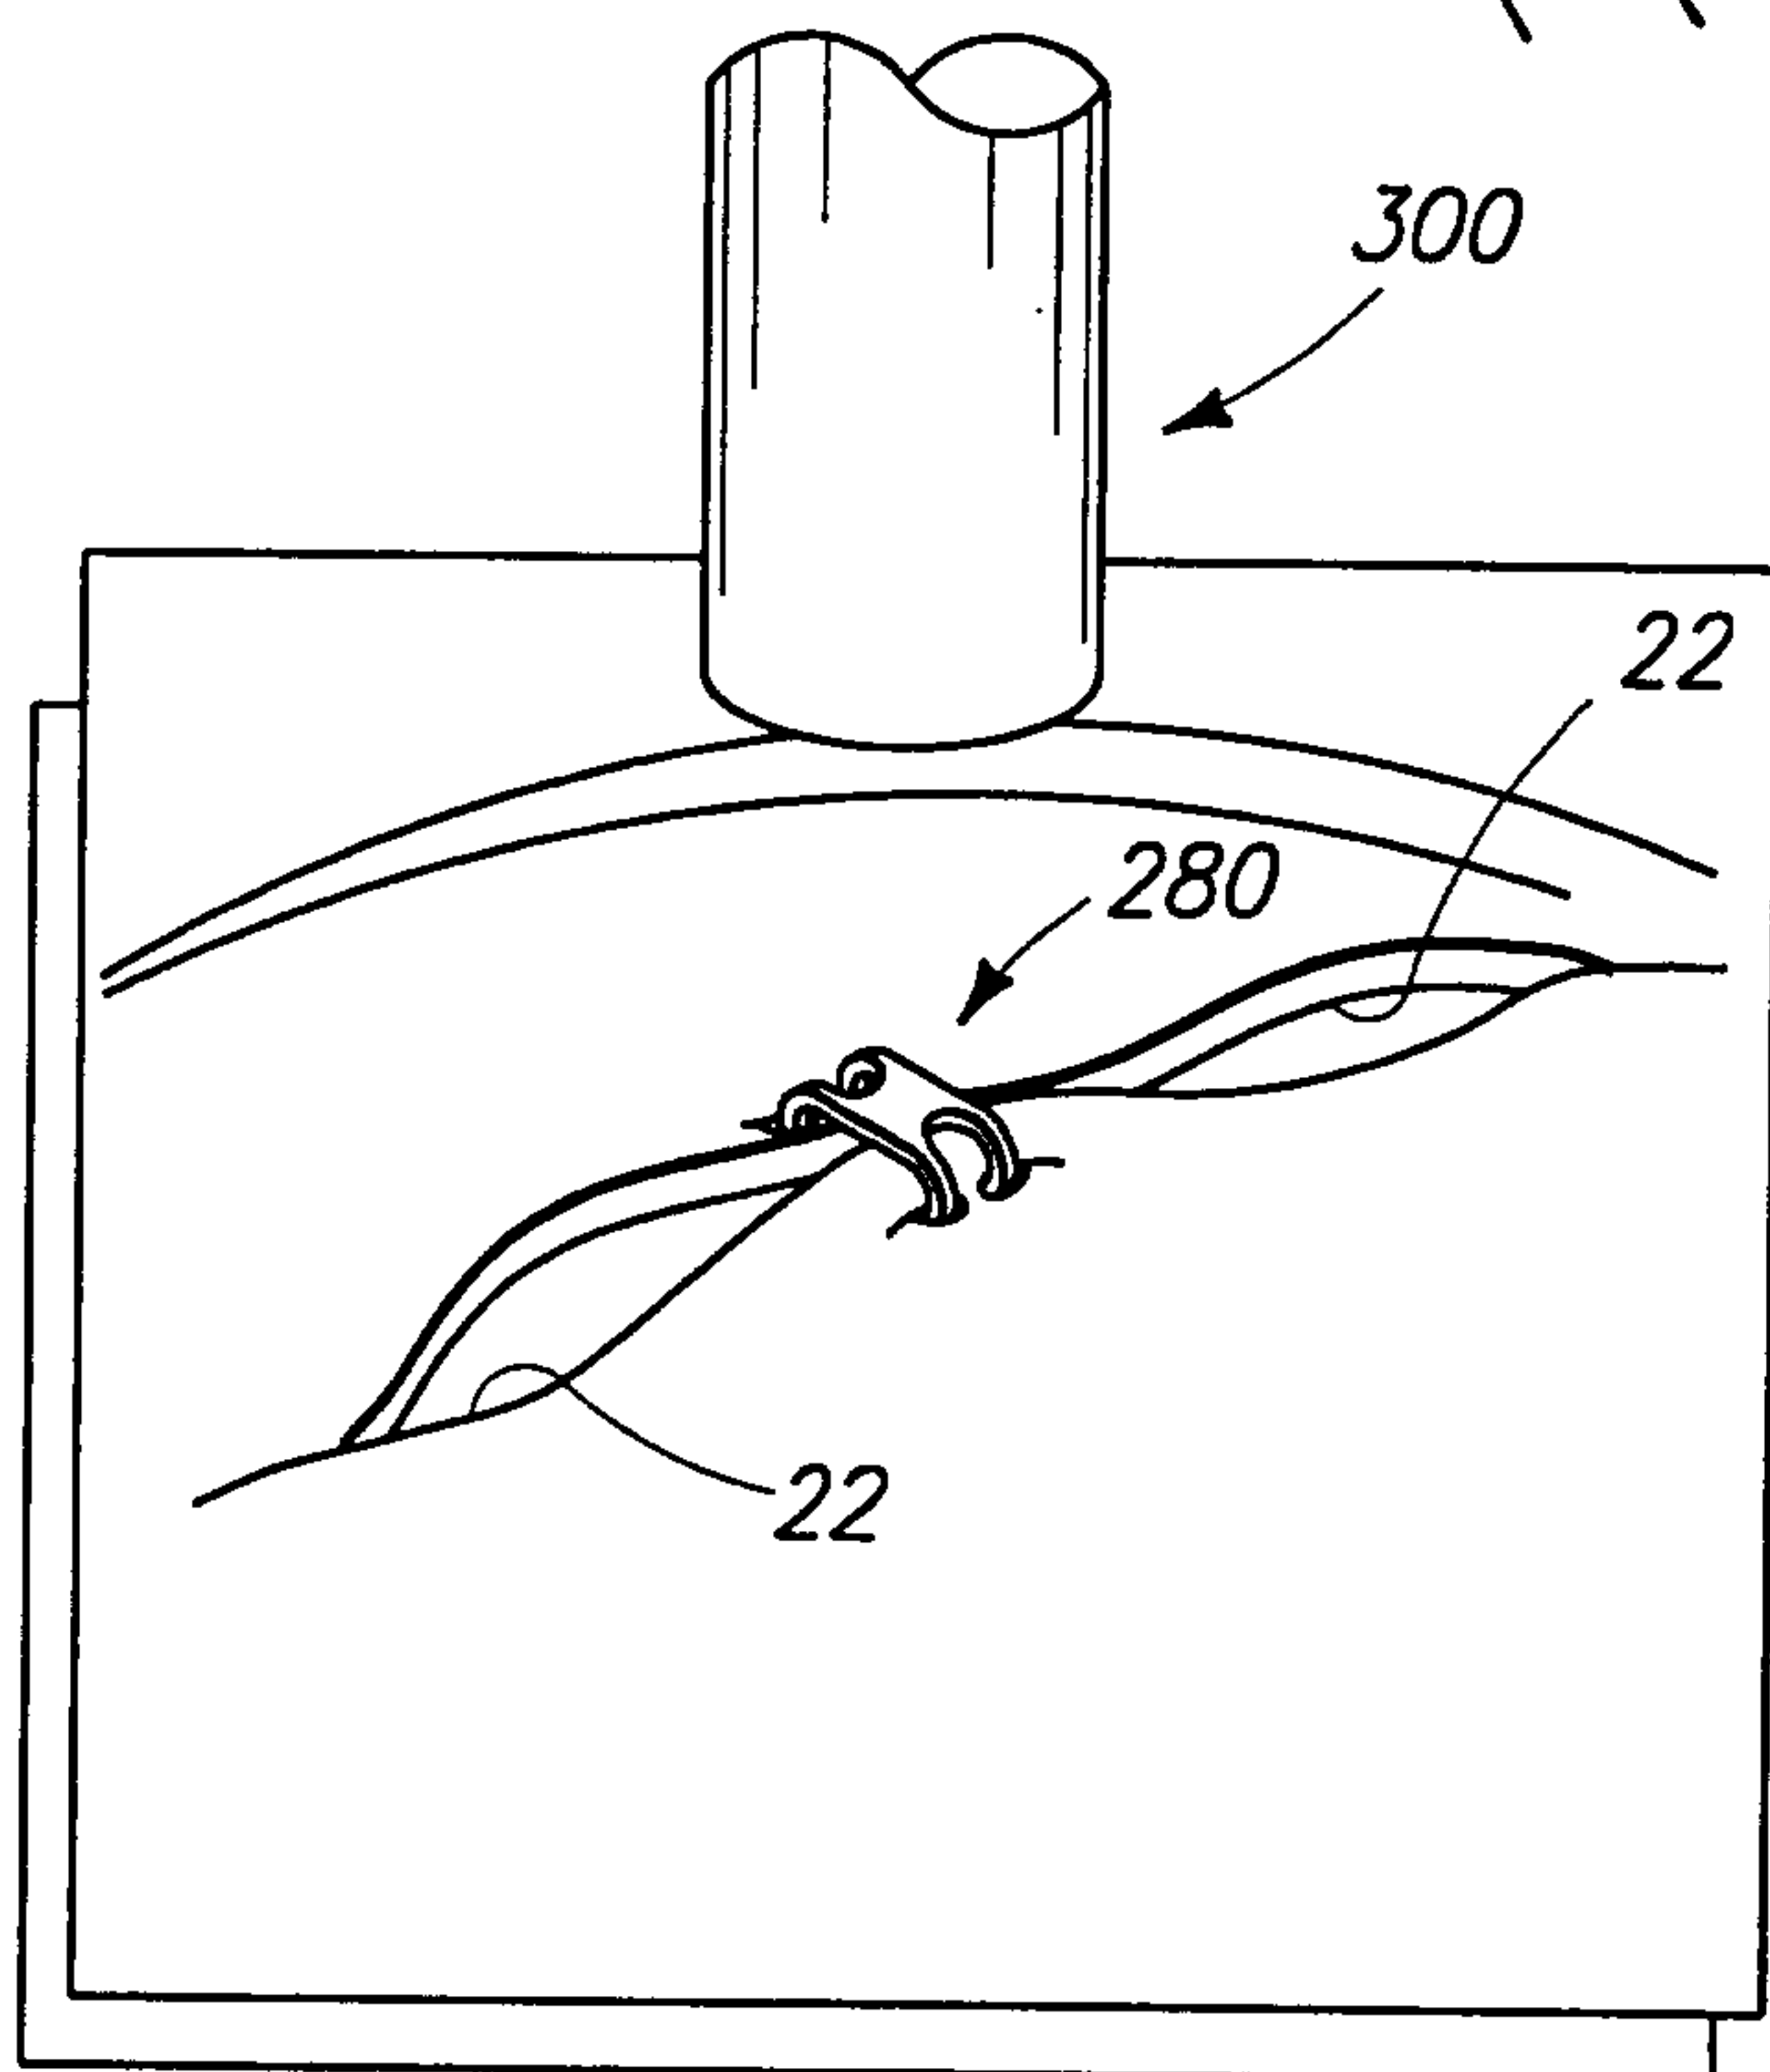*FIG. 27b**FIG. 27c*

30/45

FIG. 28a

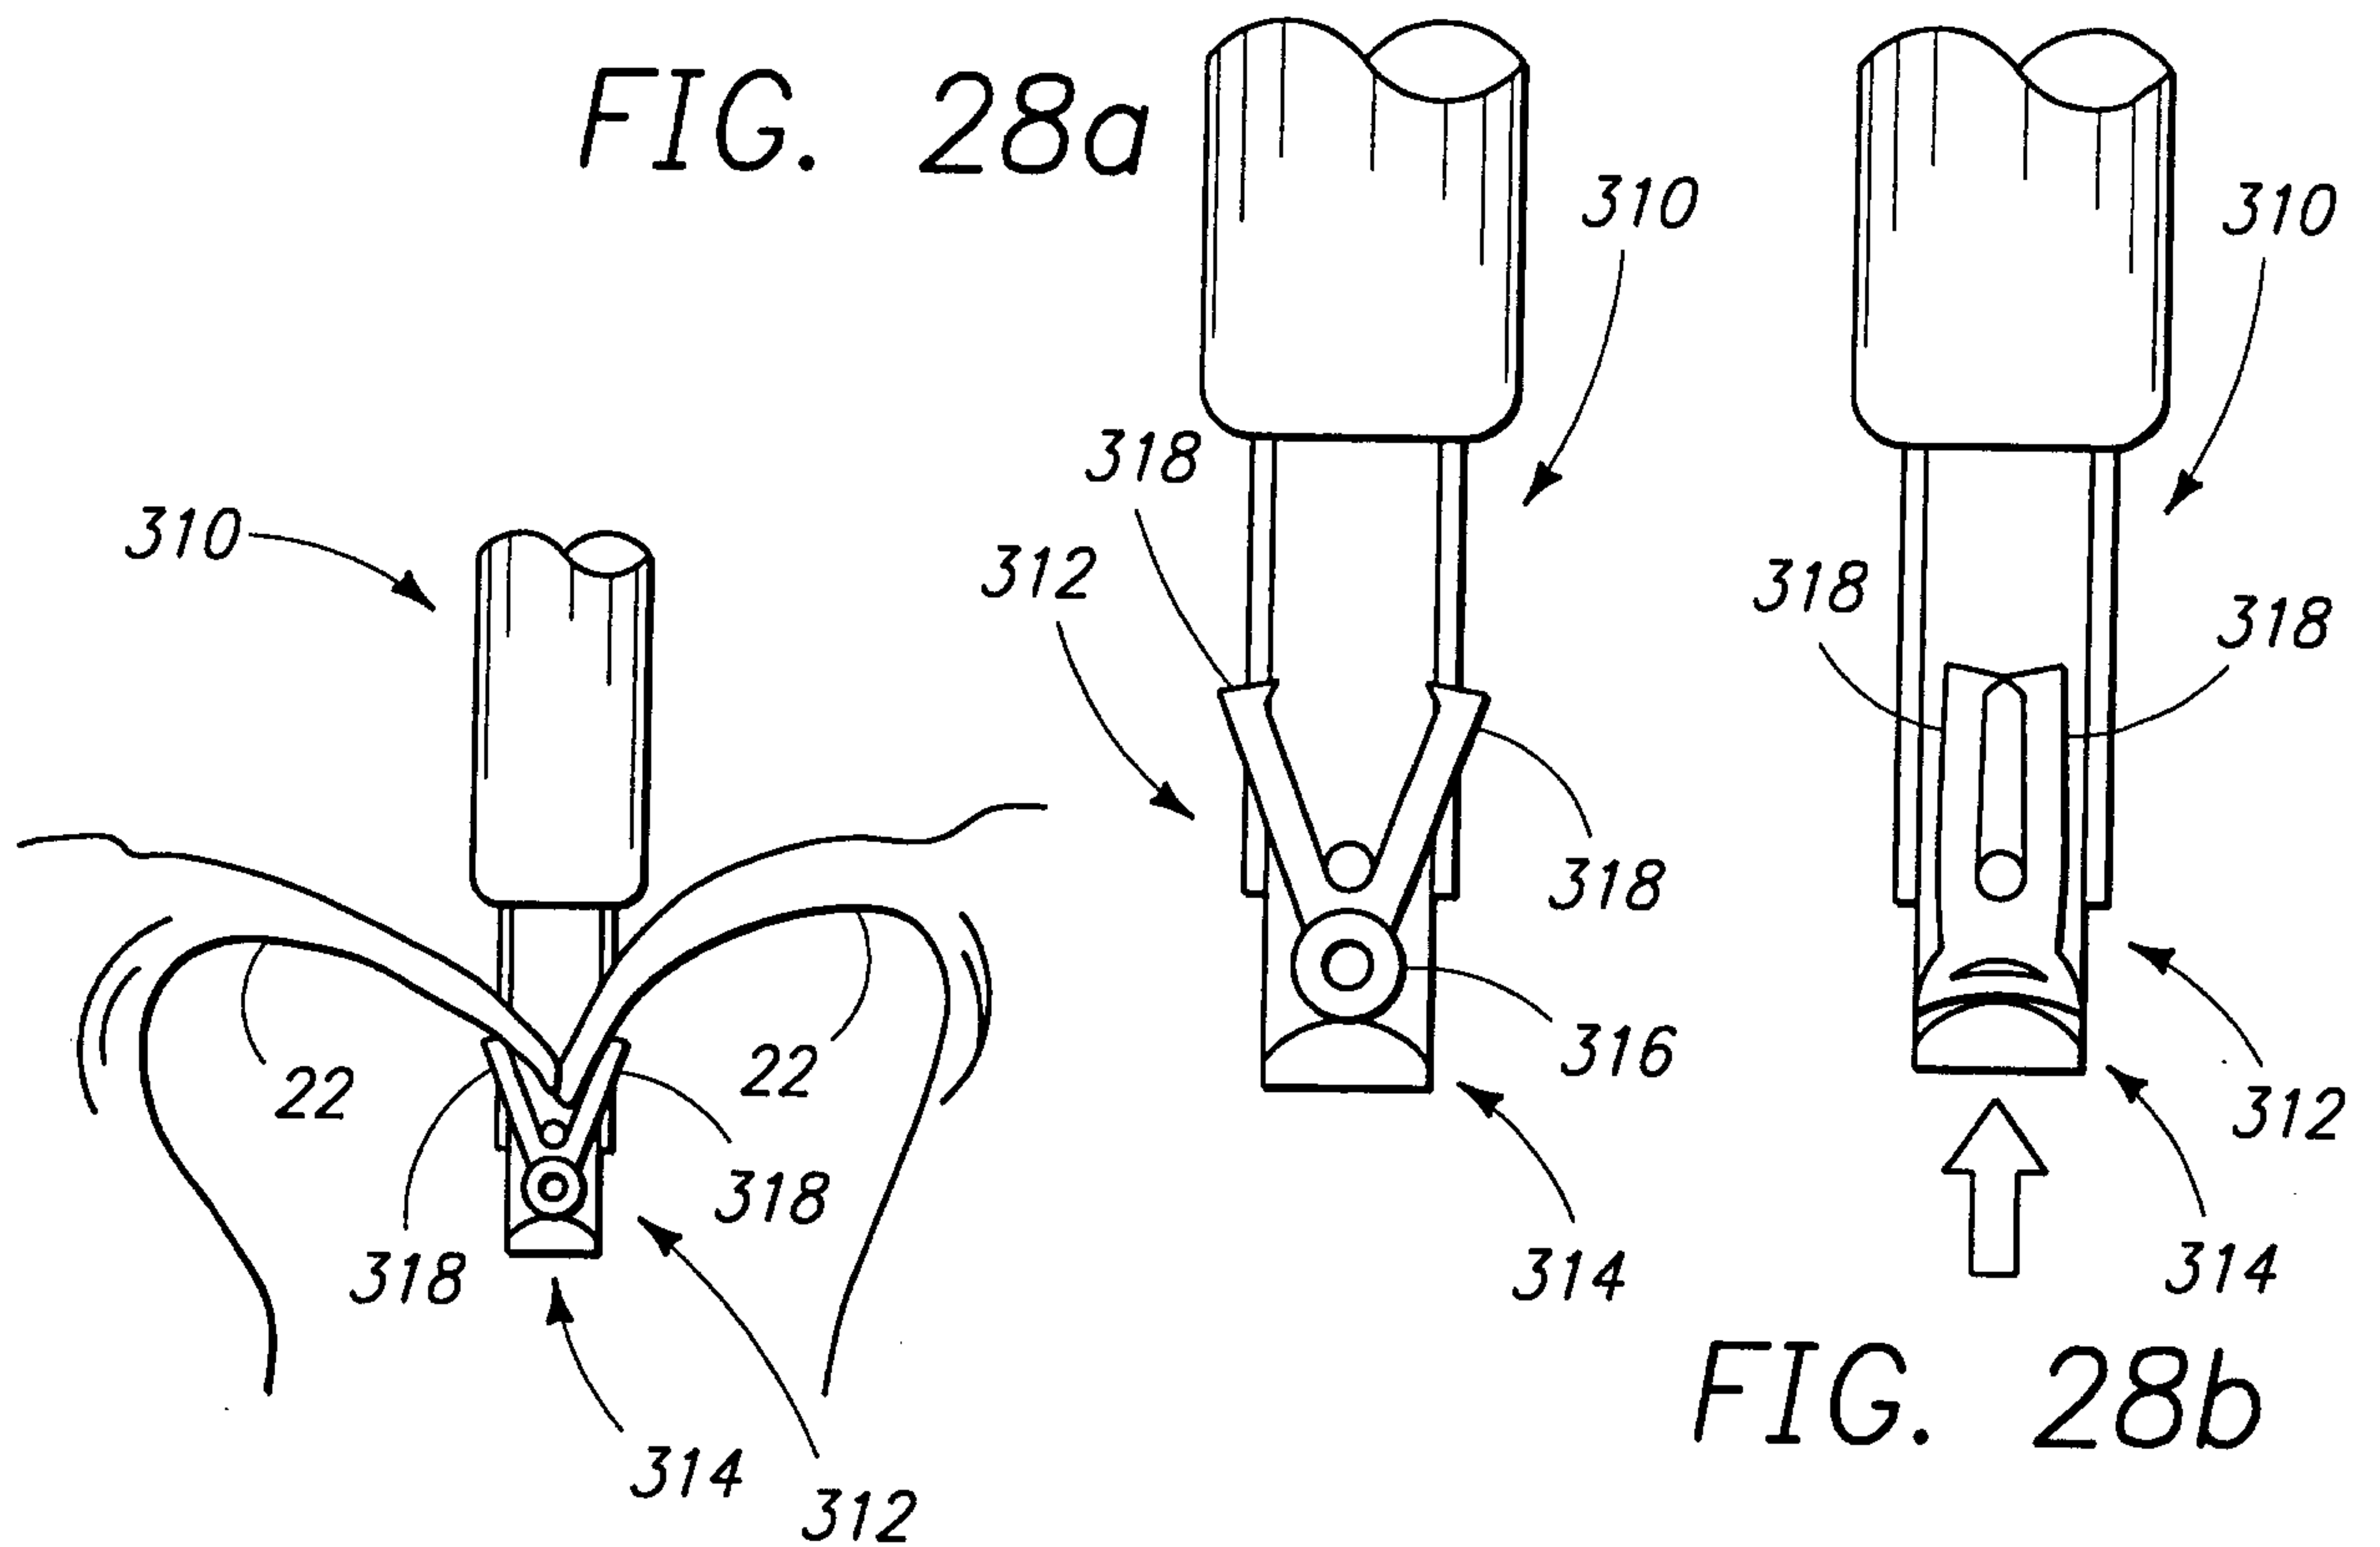


FIG. 28b

FIG. 29b

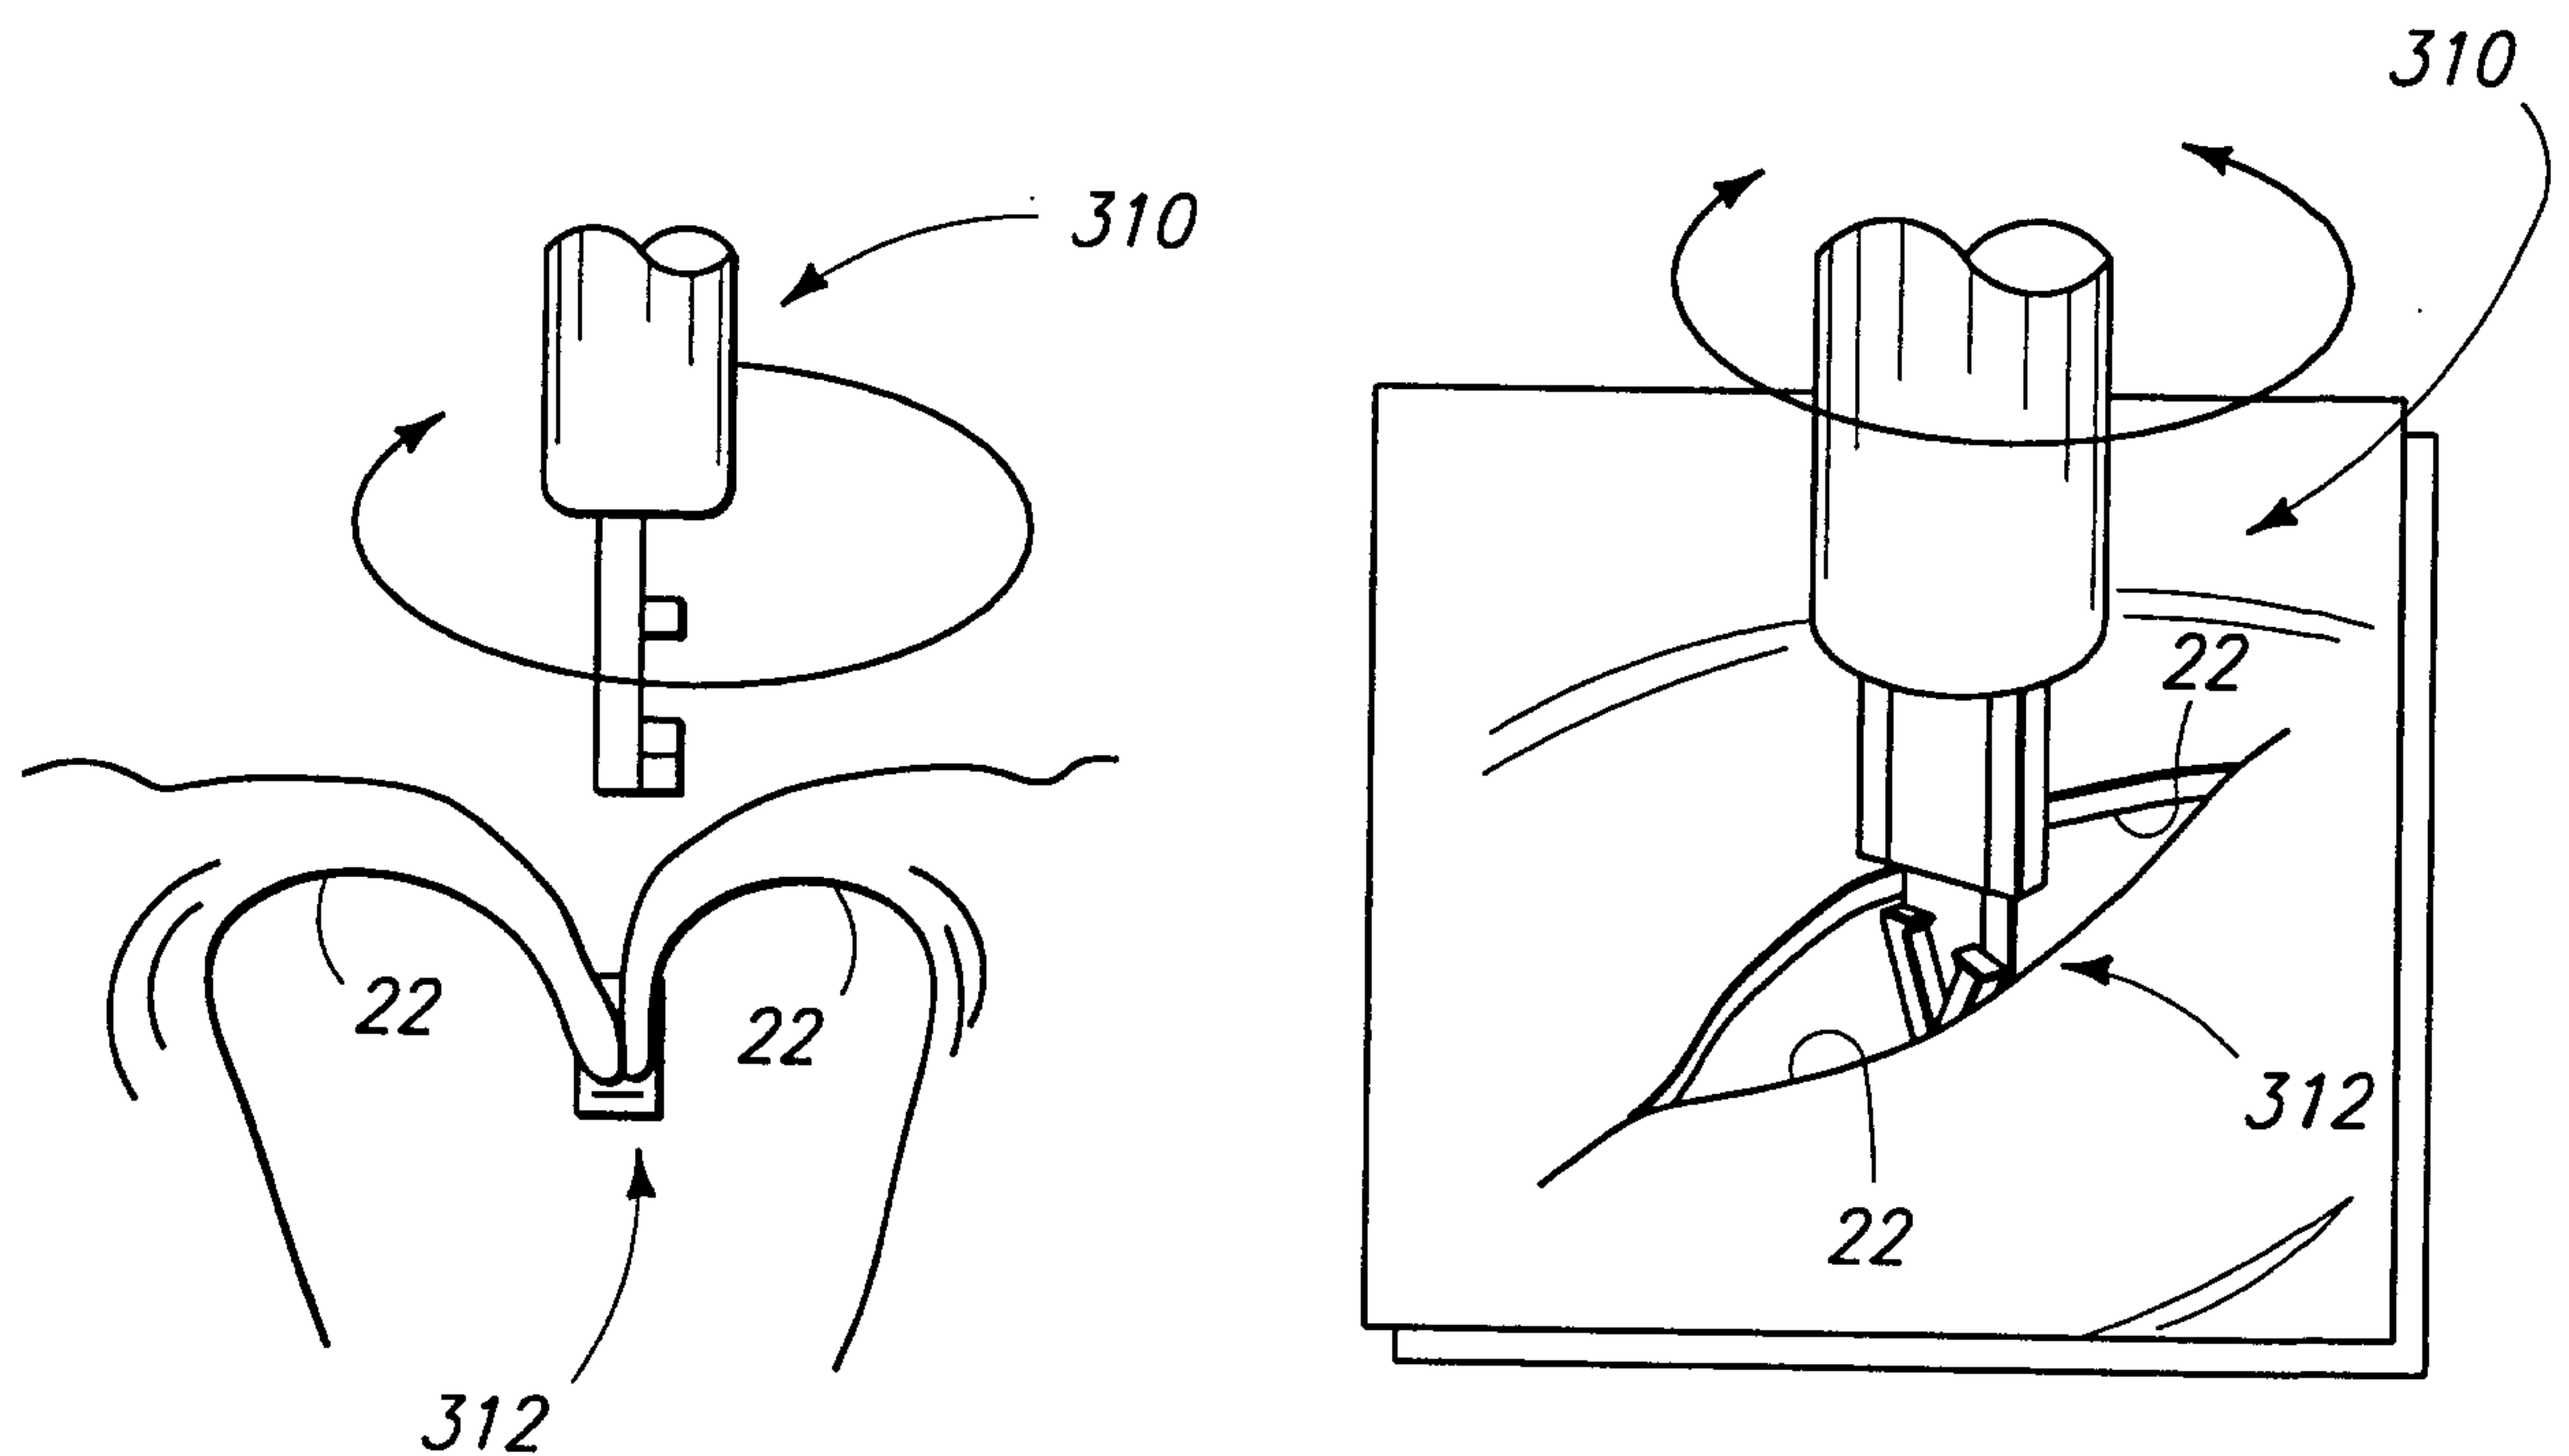


FIG. 29c

FIG. 29a

31/45

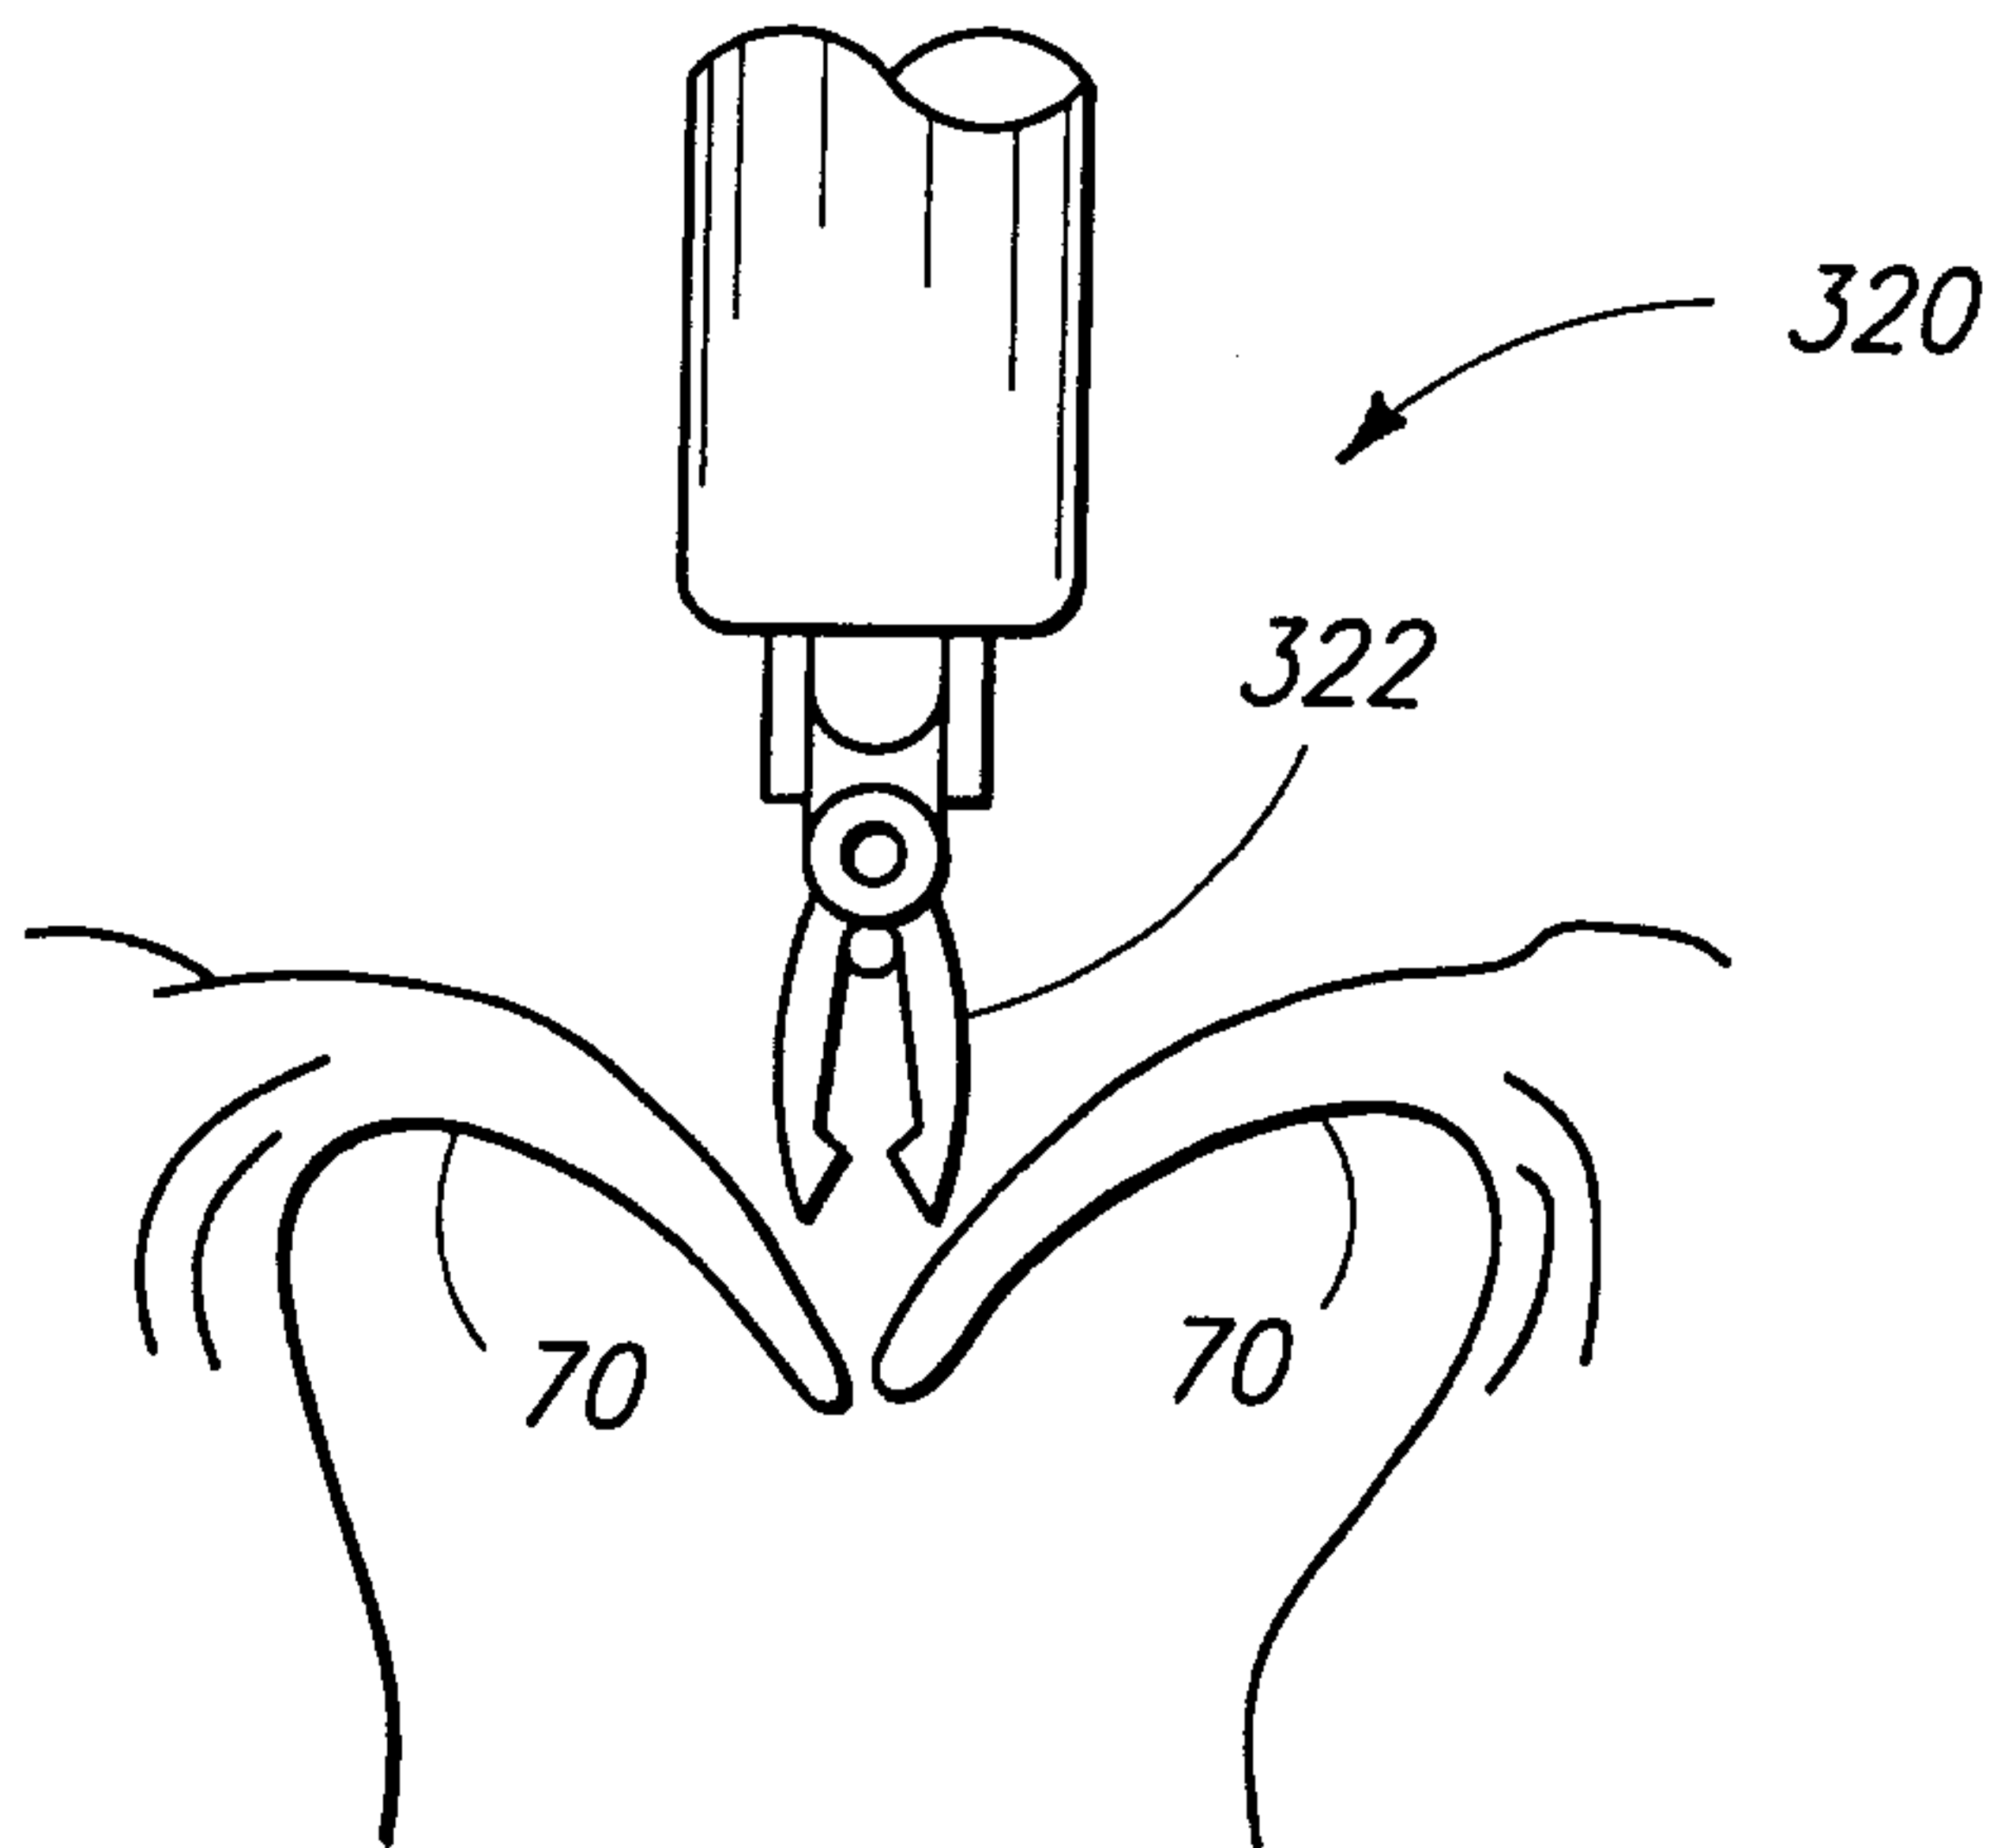


FIG. 31a

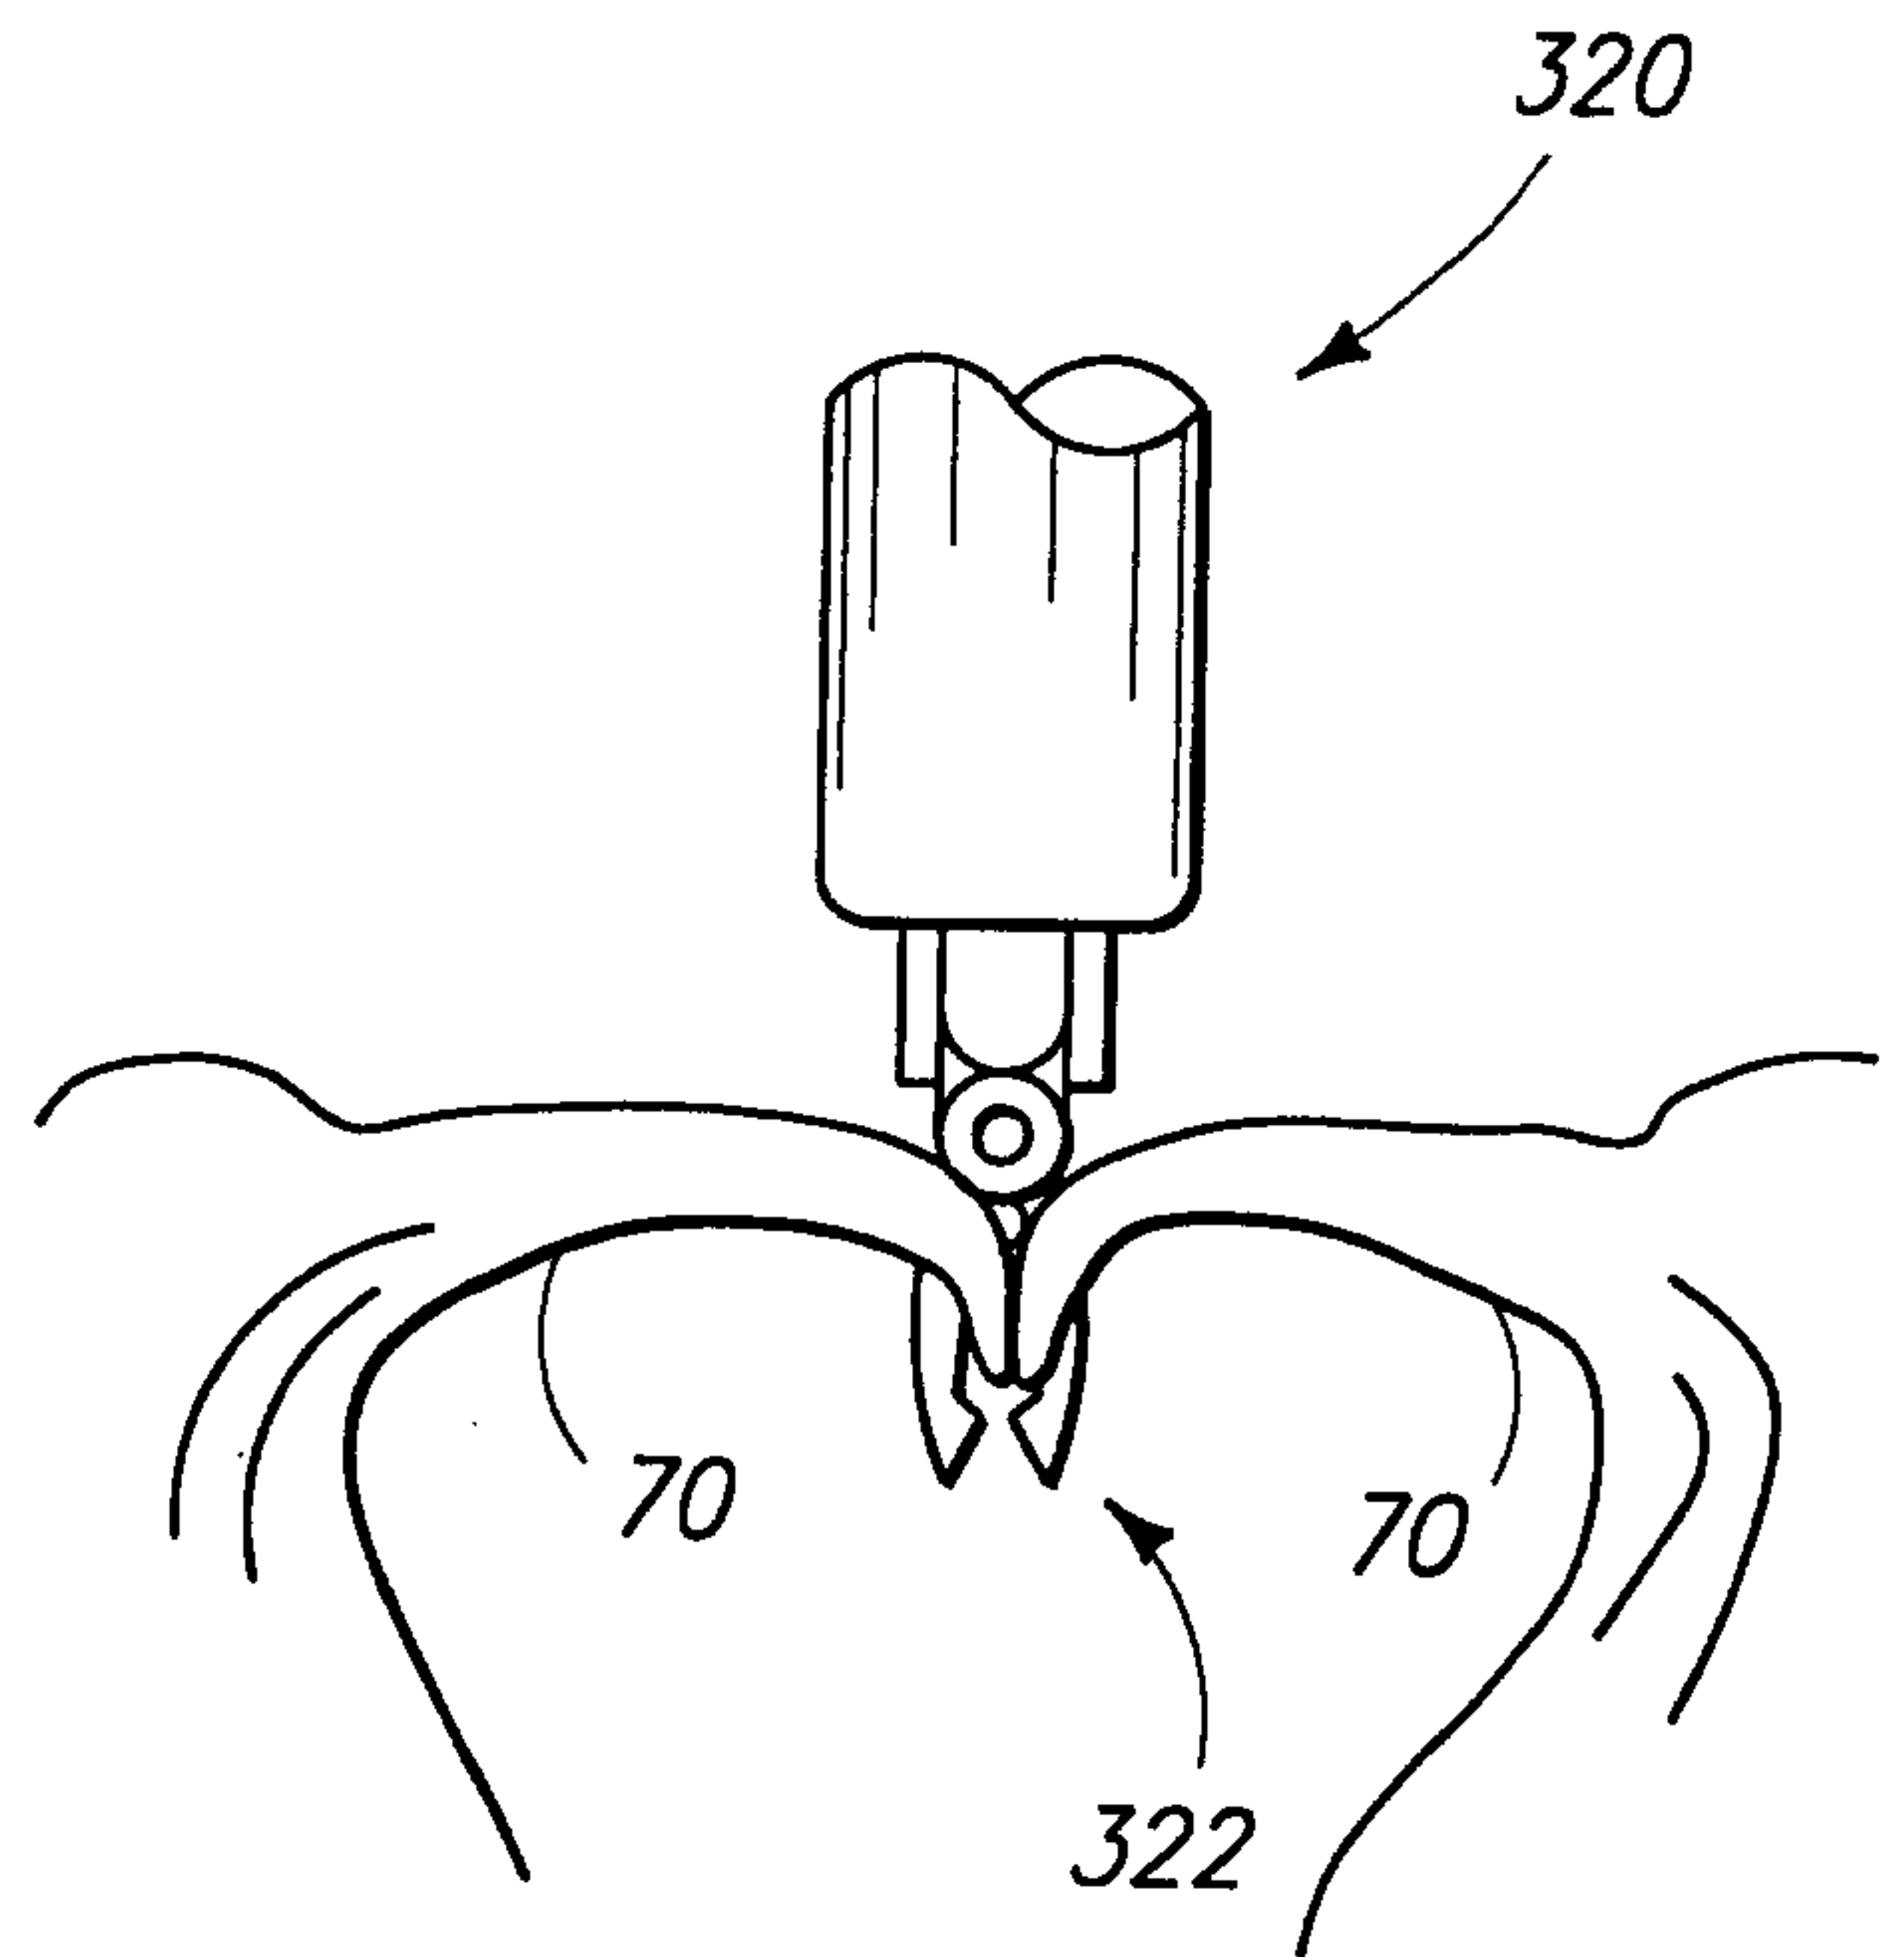


FIG. 31b

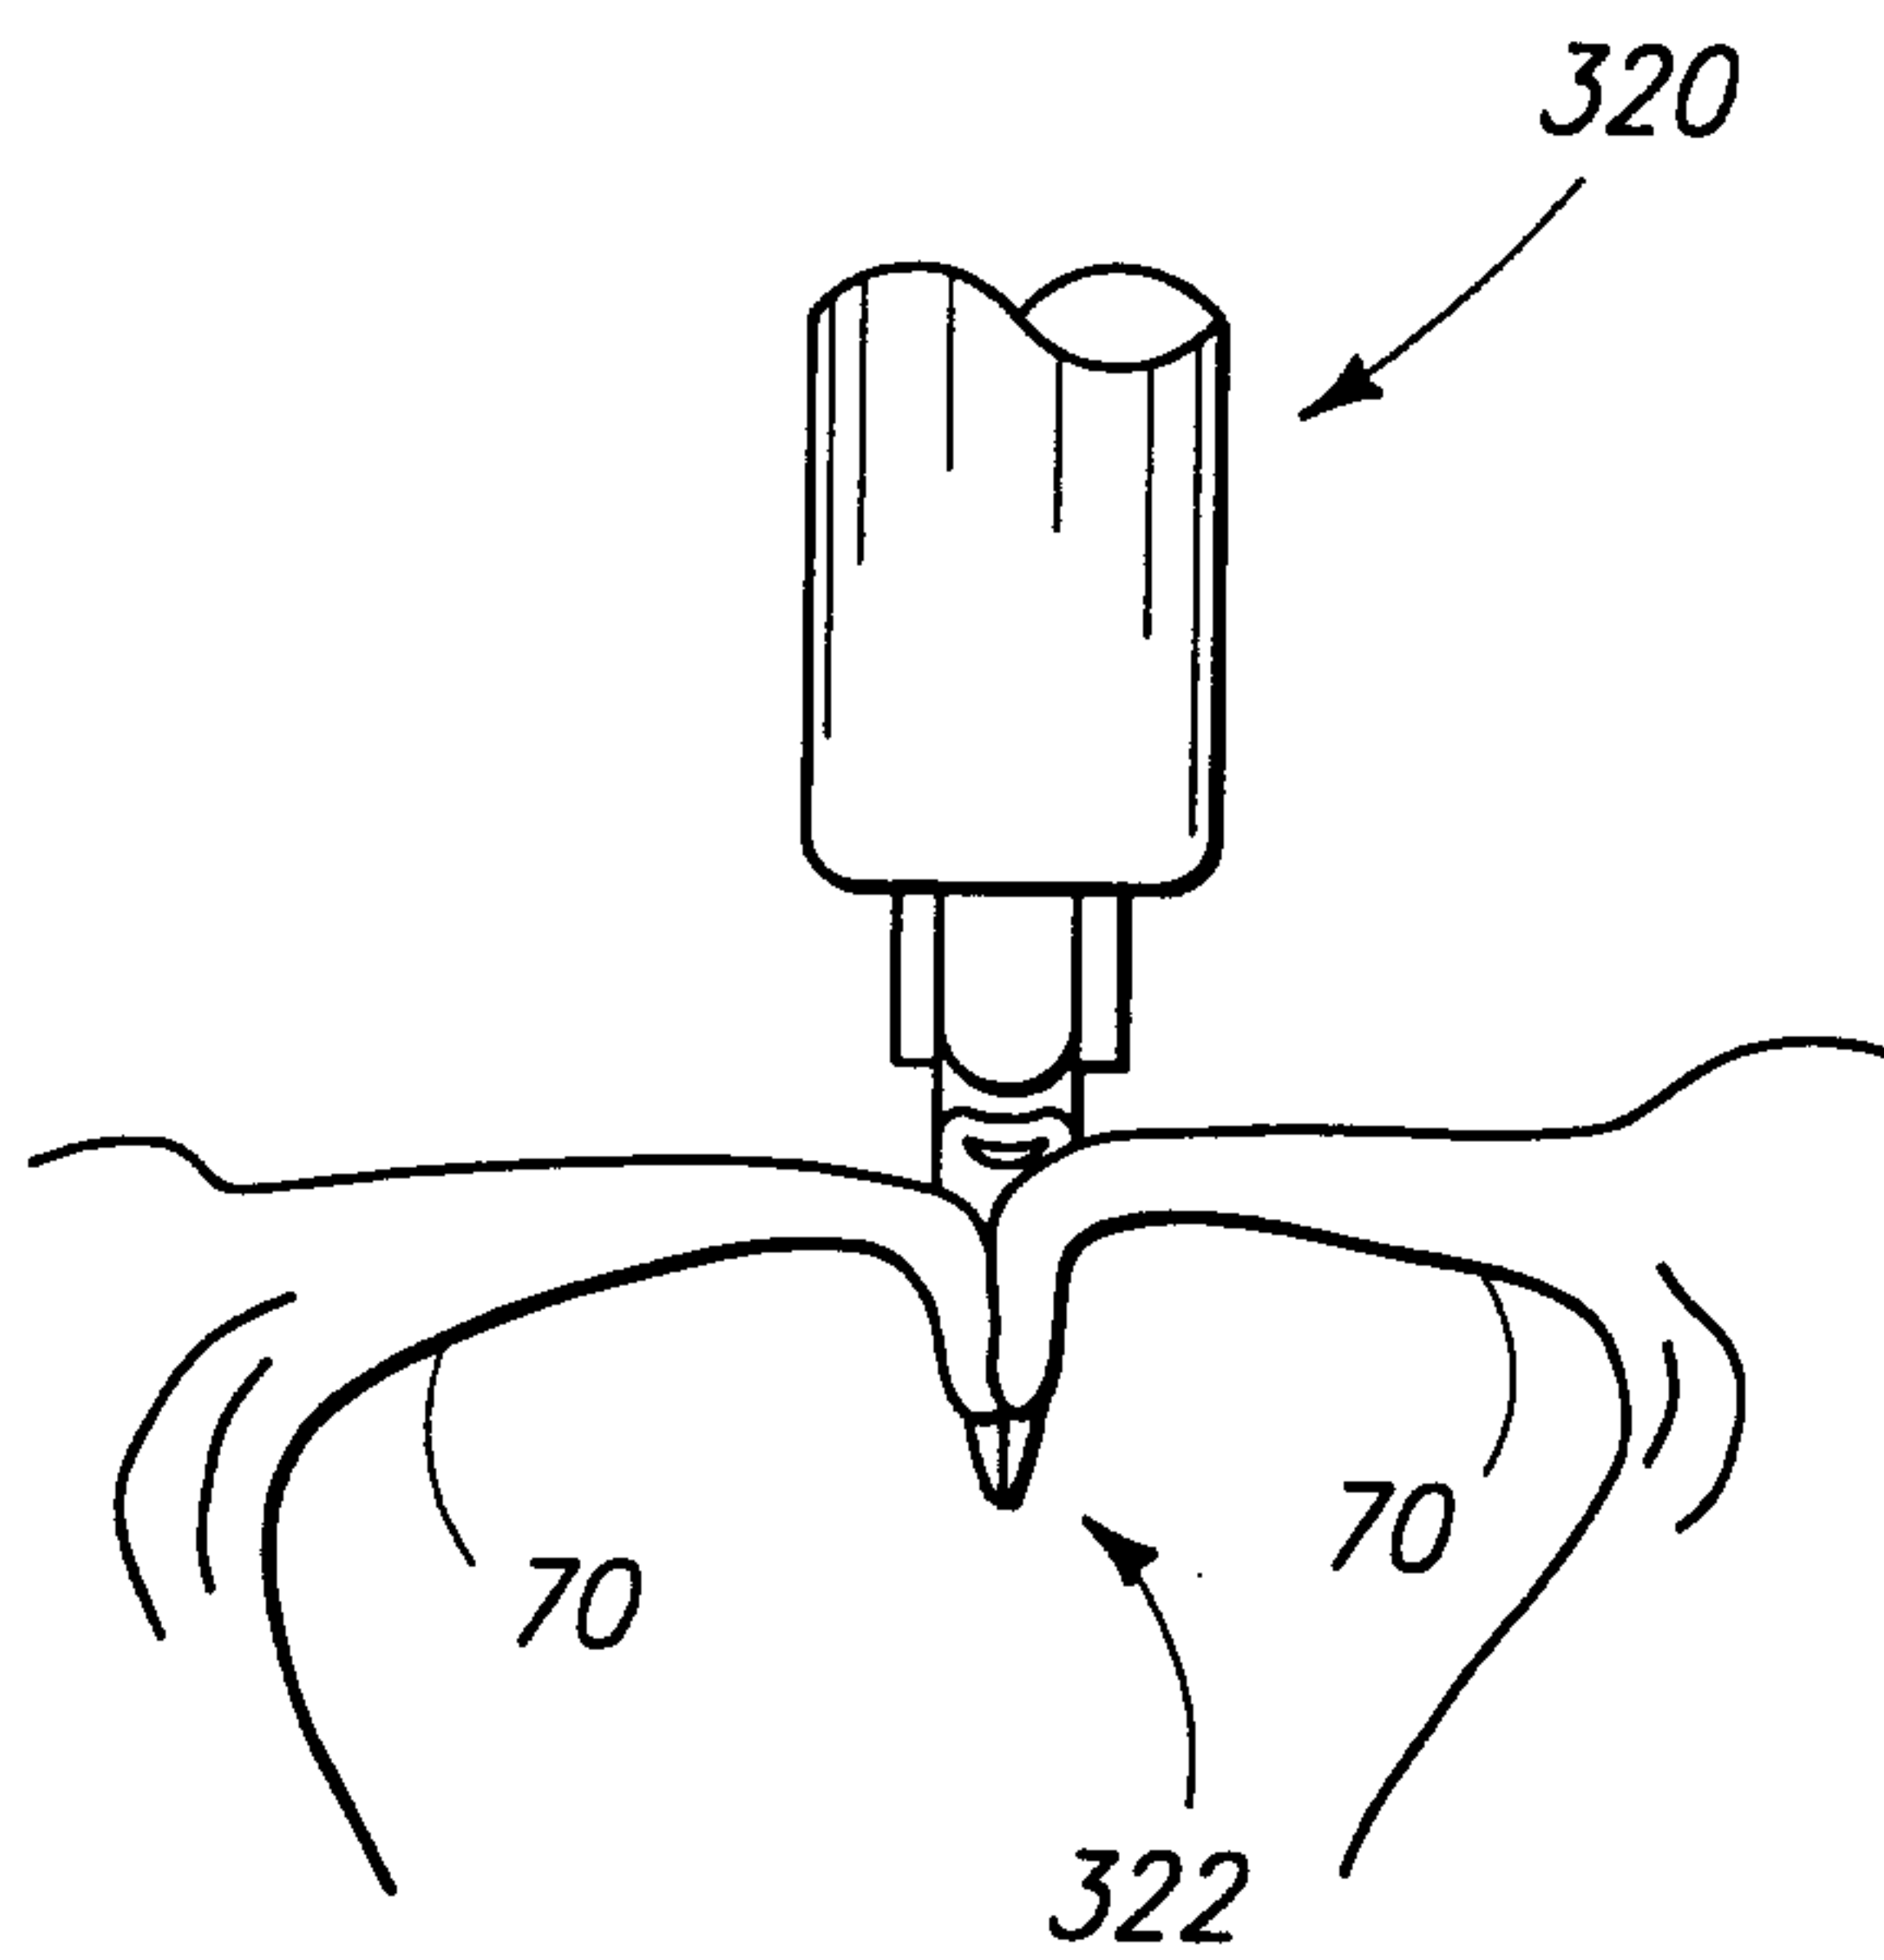


FIG. 31c

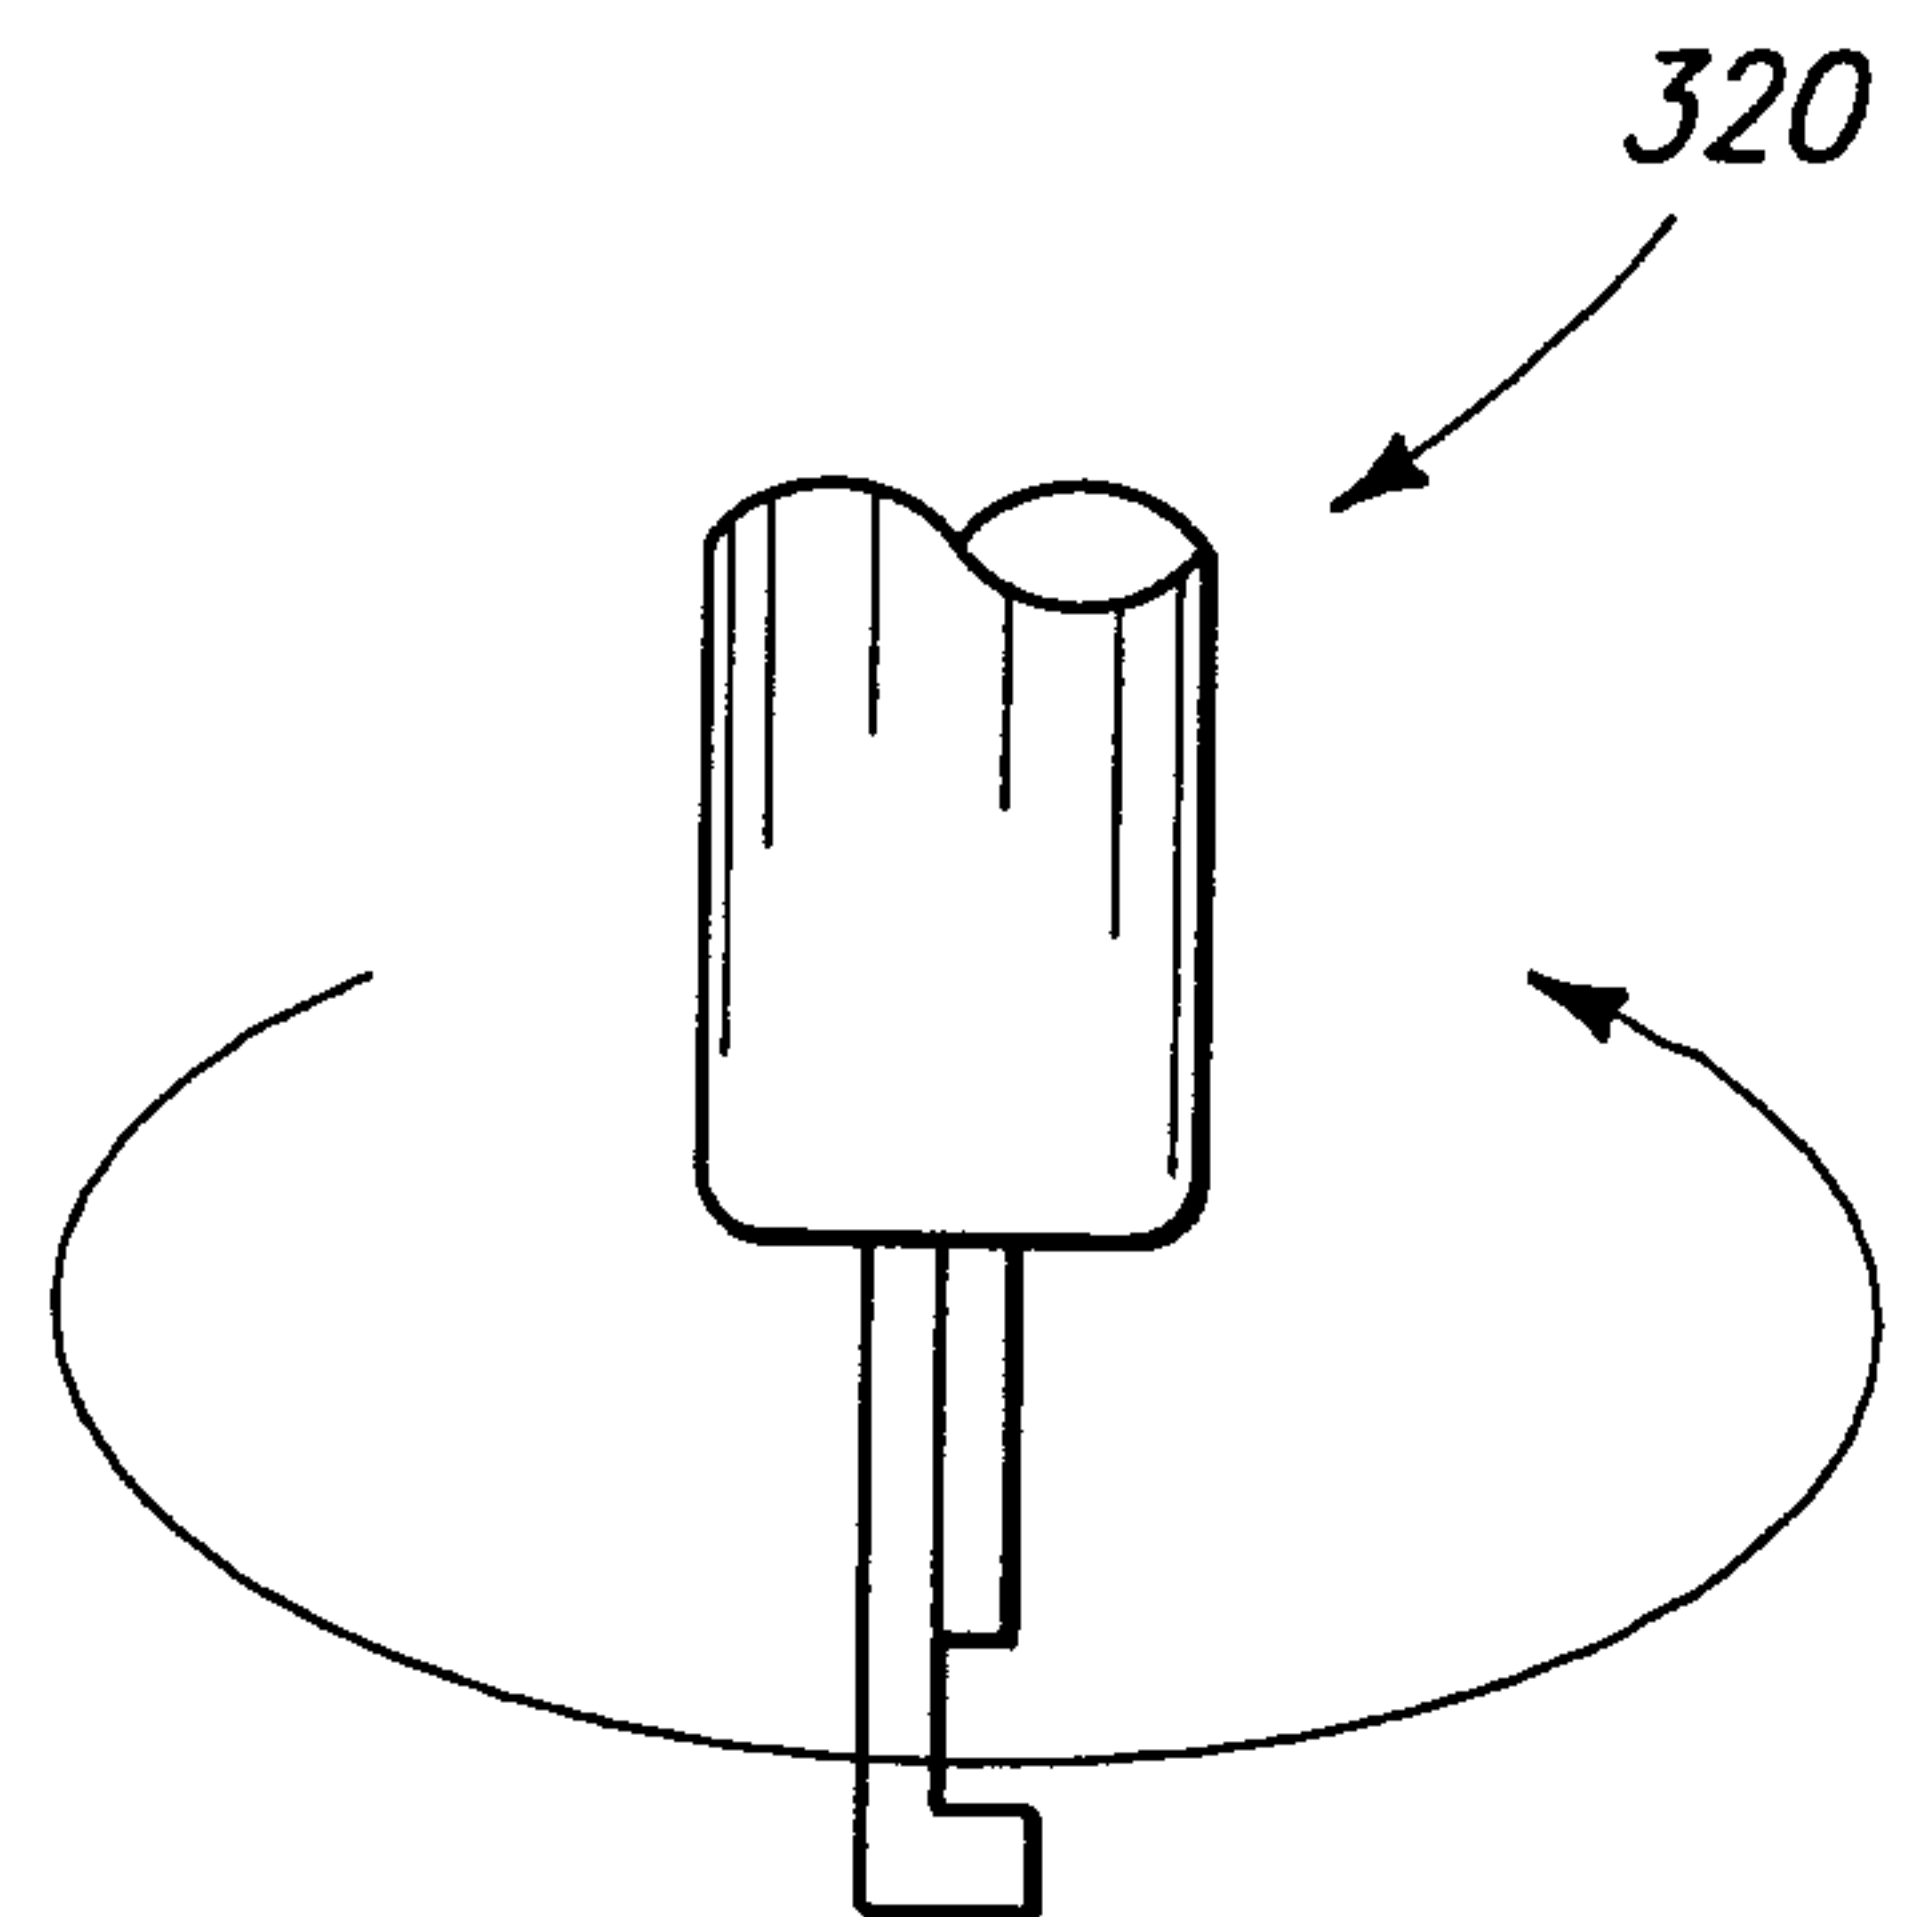


FIG. 31d

FIG. 30a

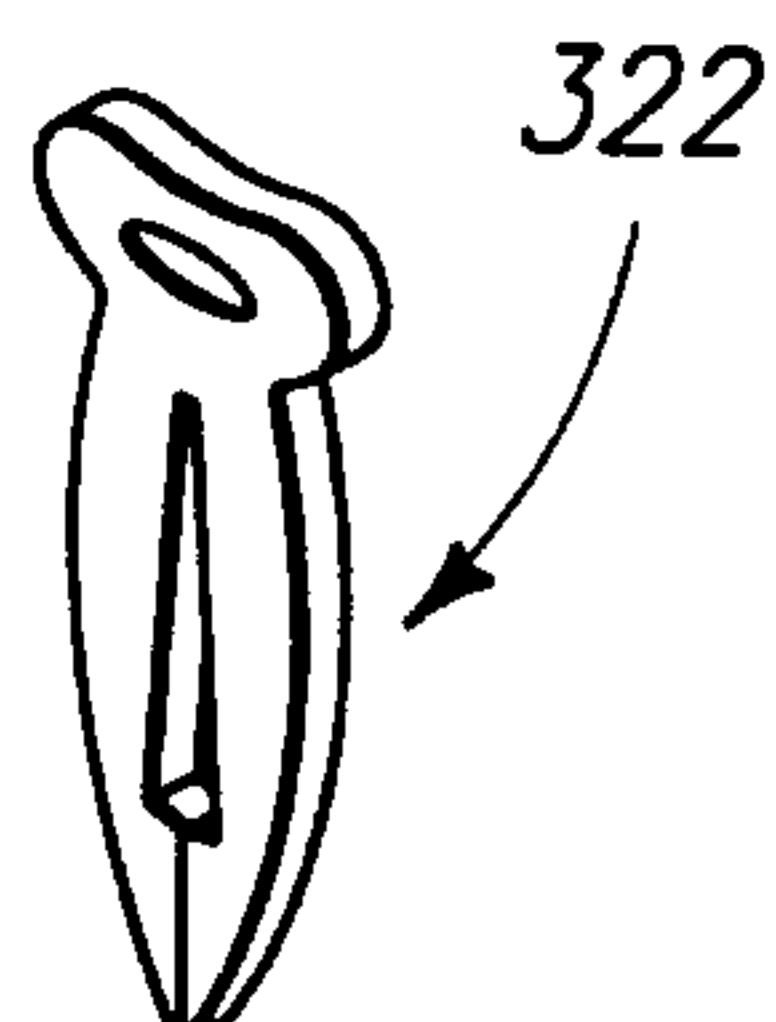
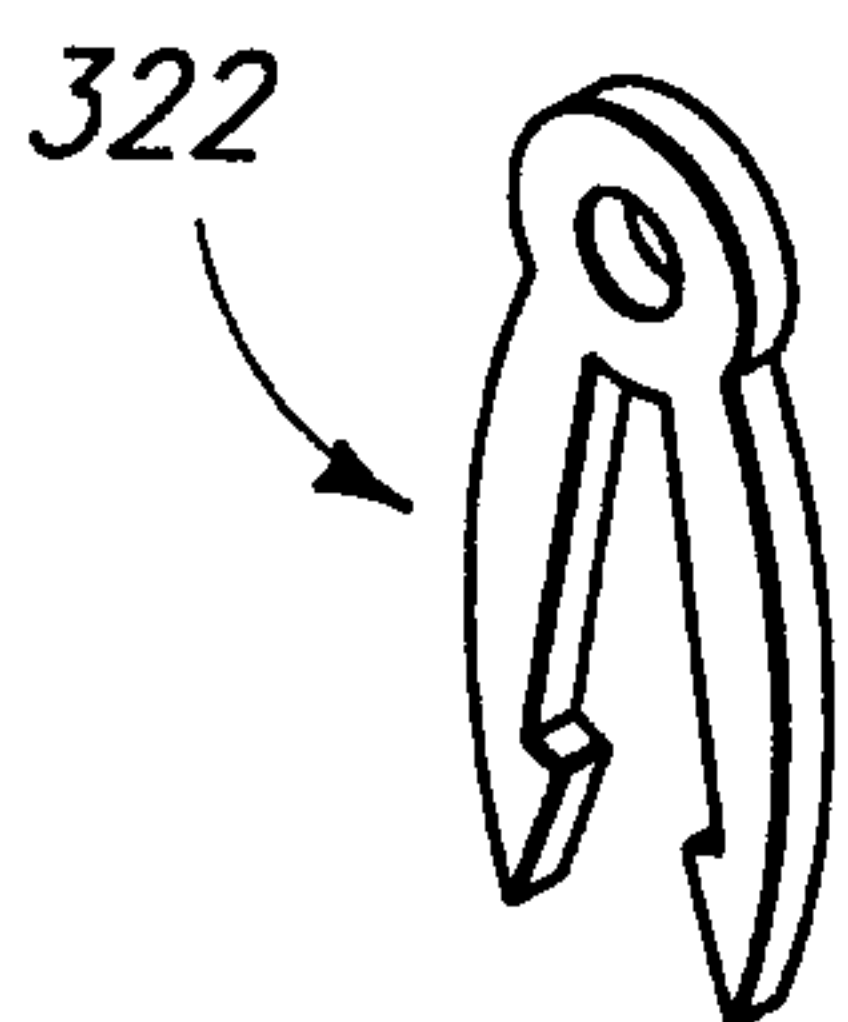


FIG. 30b

32/45

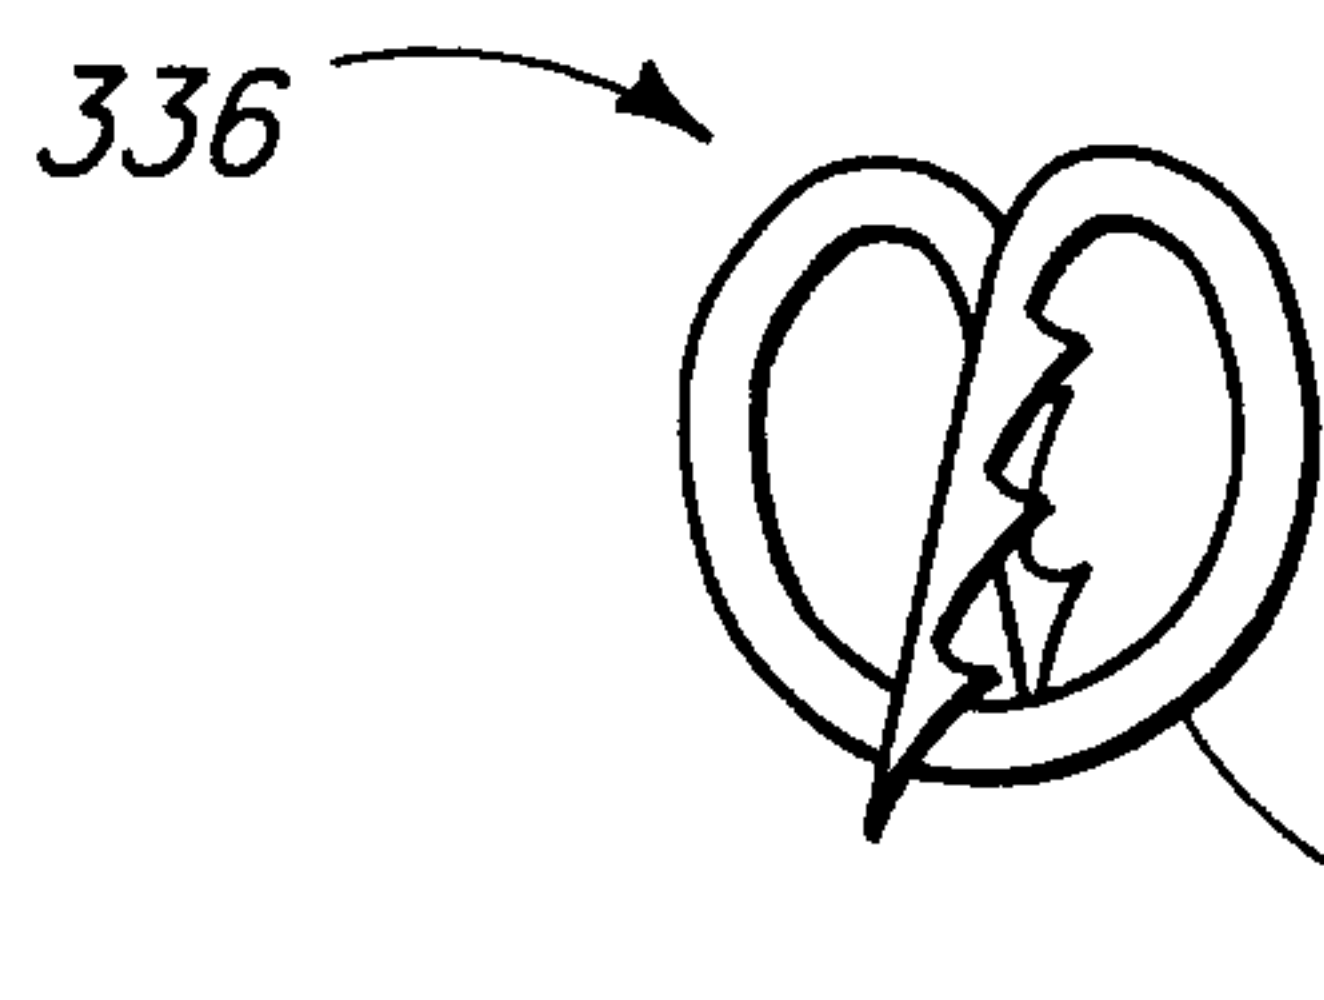


FIG. 32d

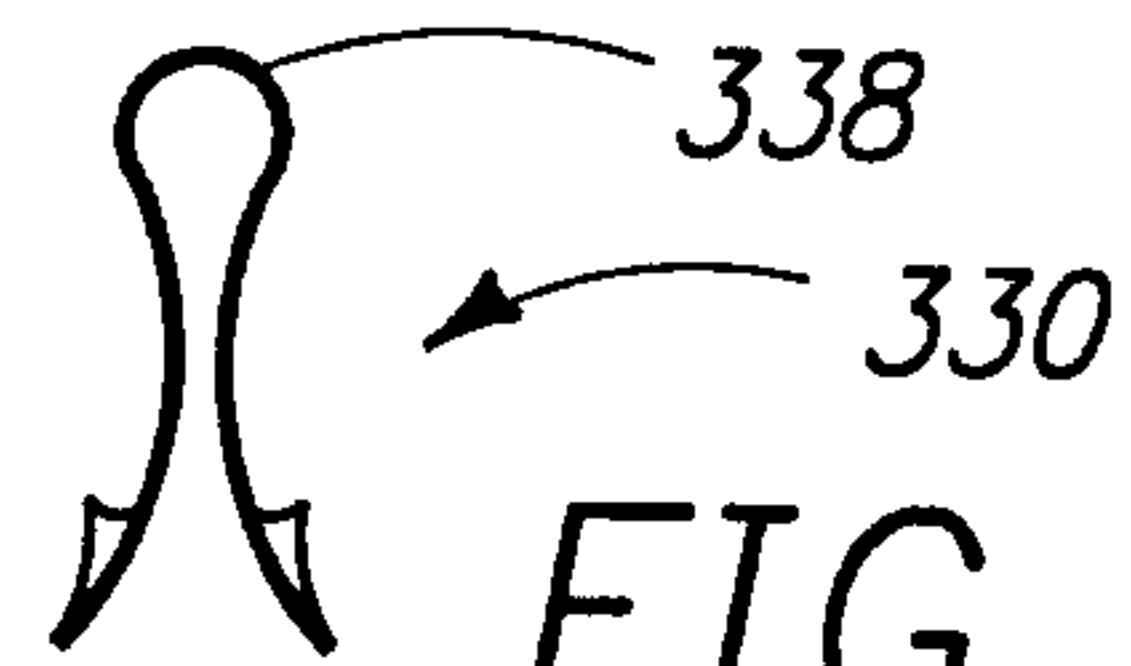


FIG. 32a

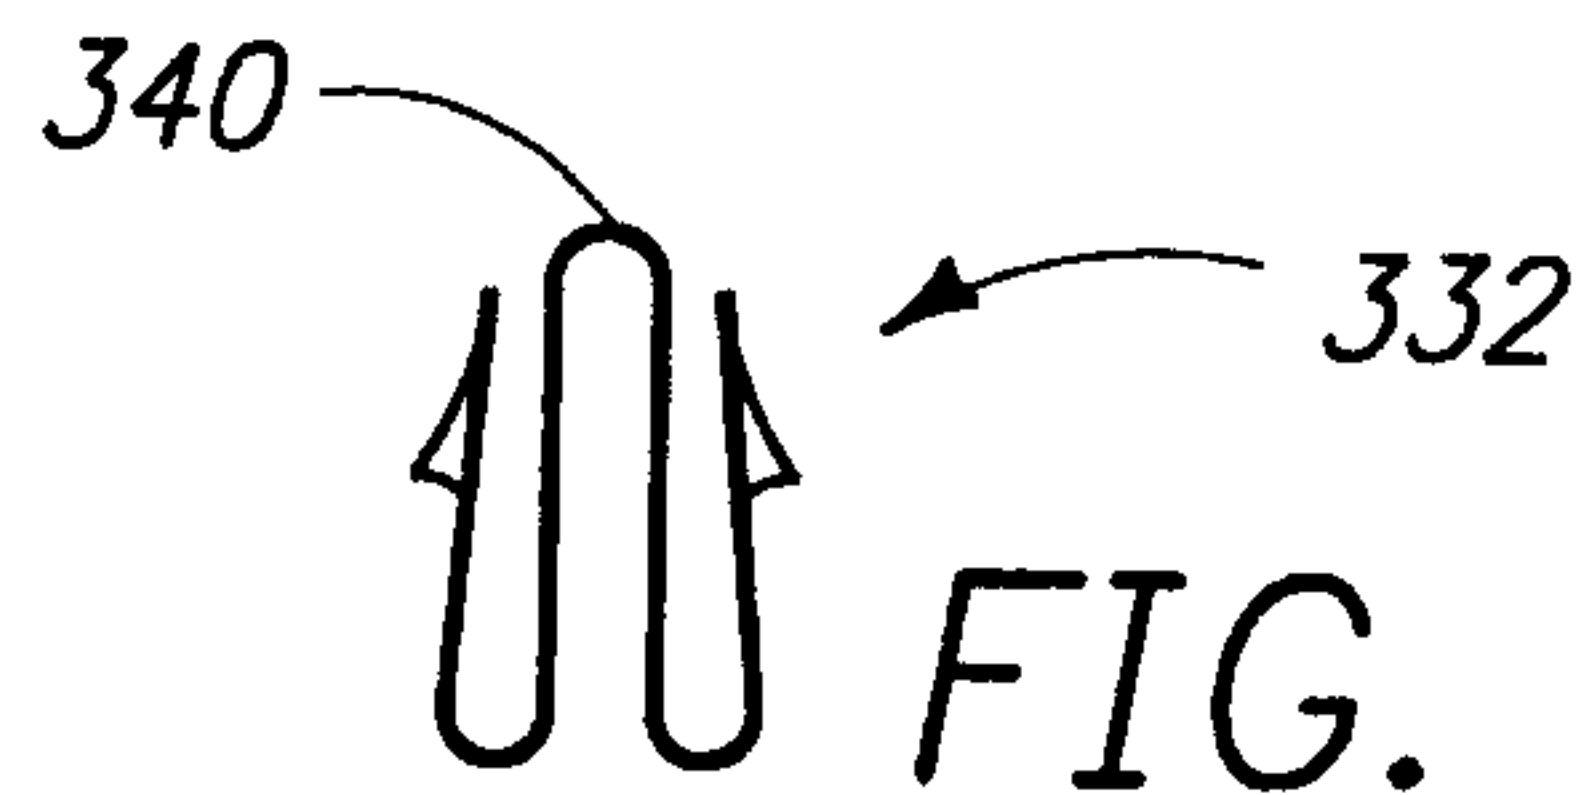


FIG. 32b

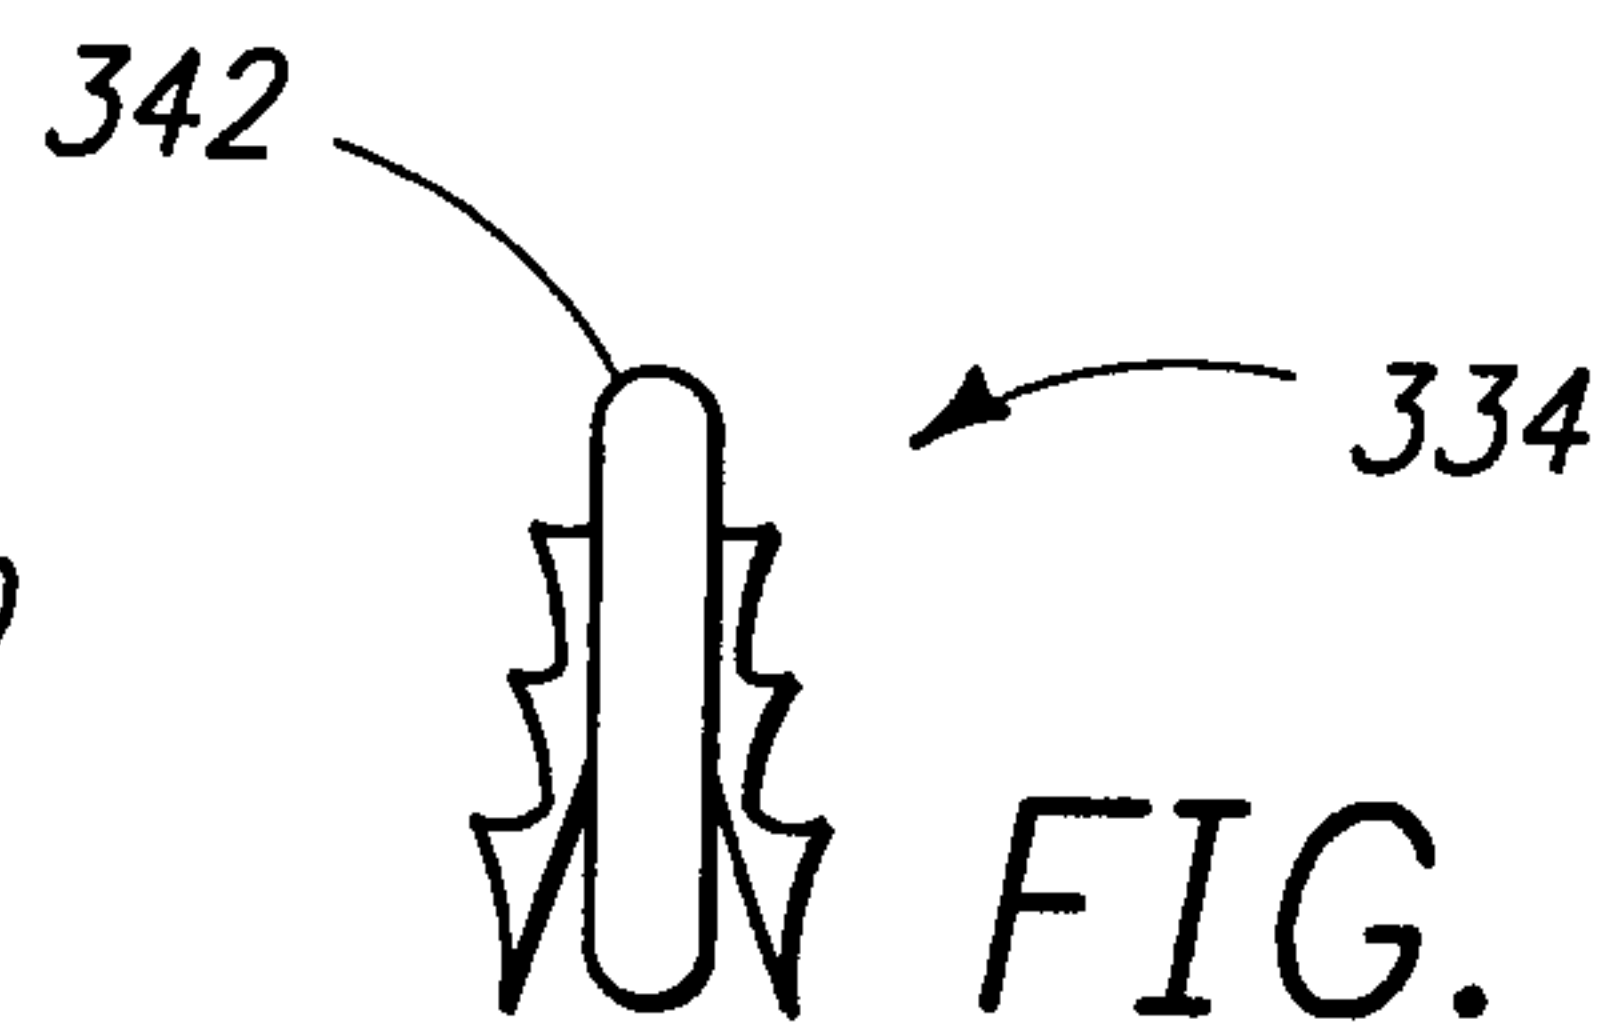


FIG. 32c

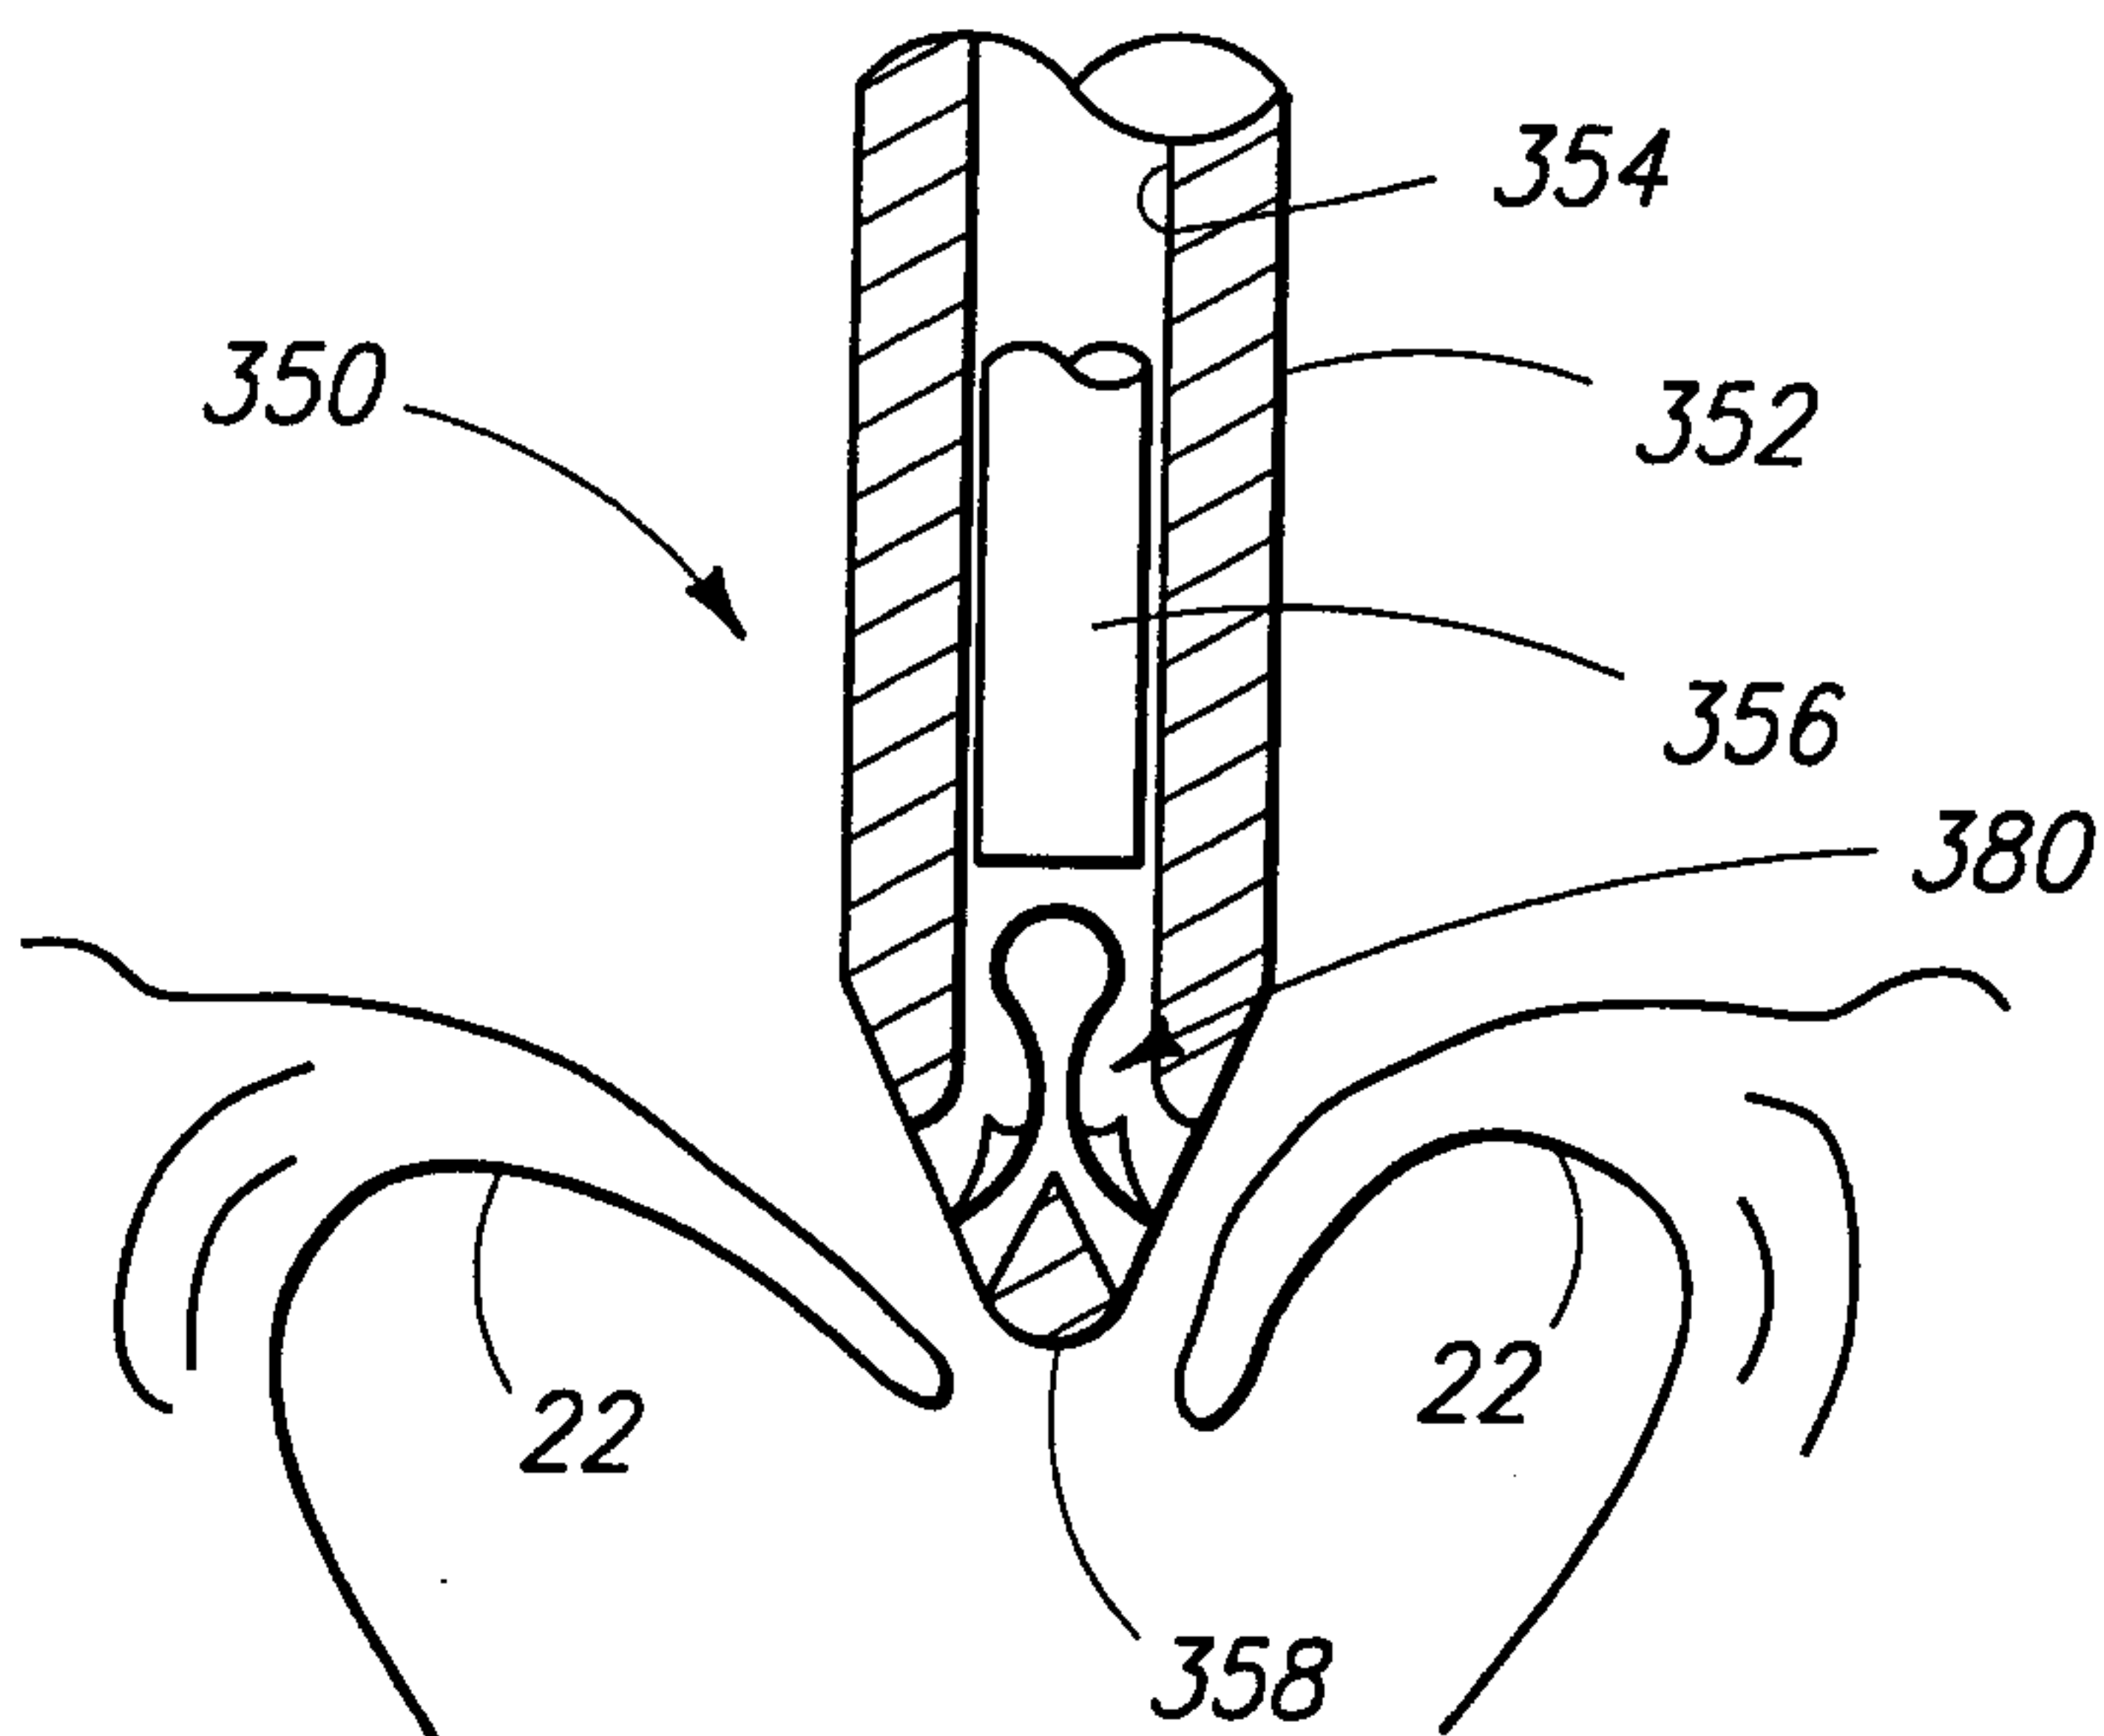


FIG. 33a

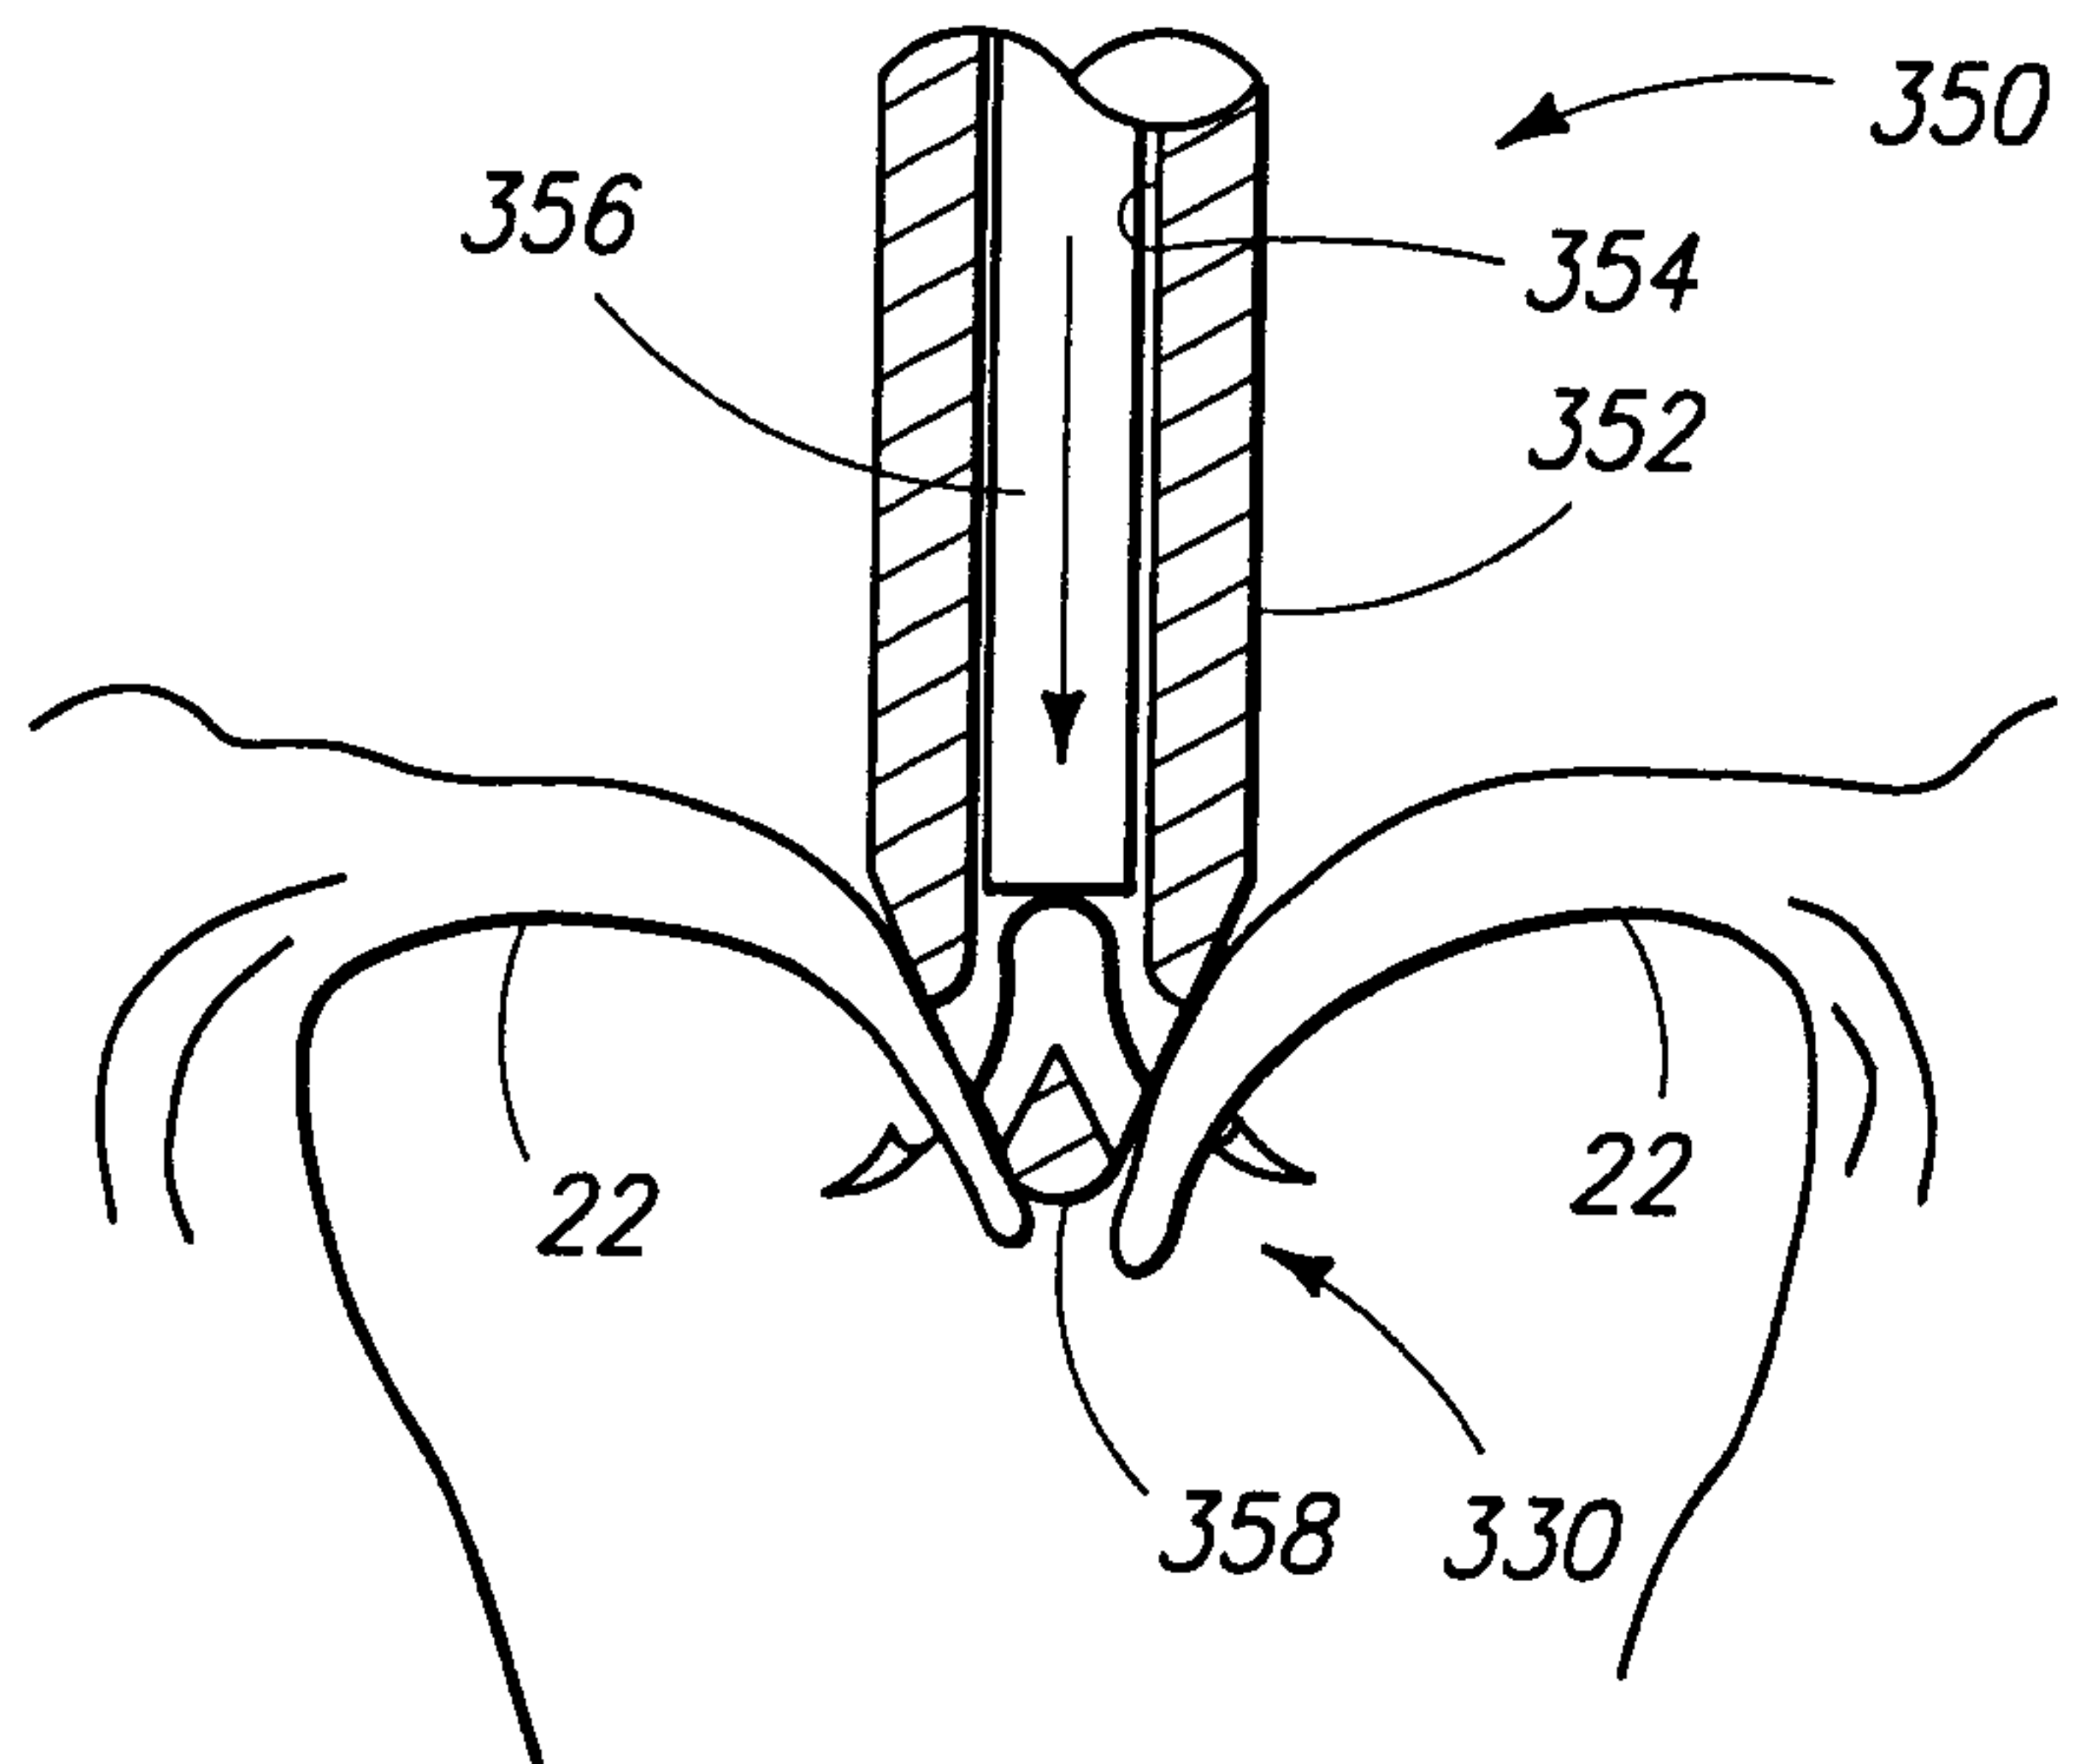


FIG. 33b

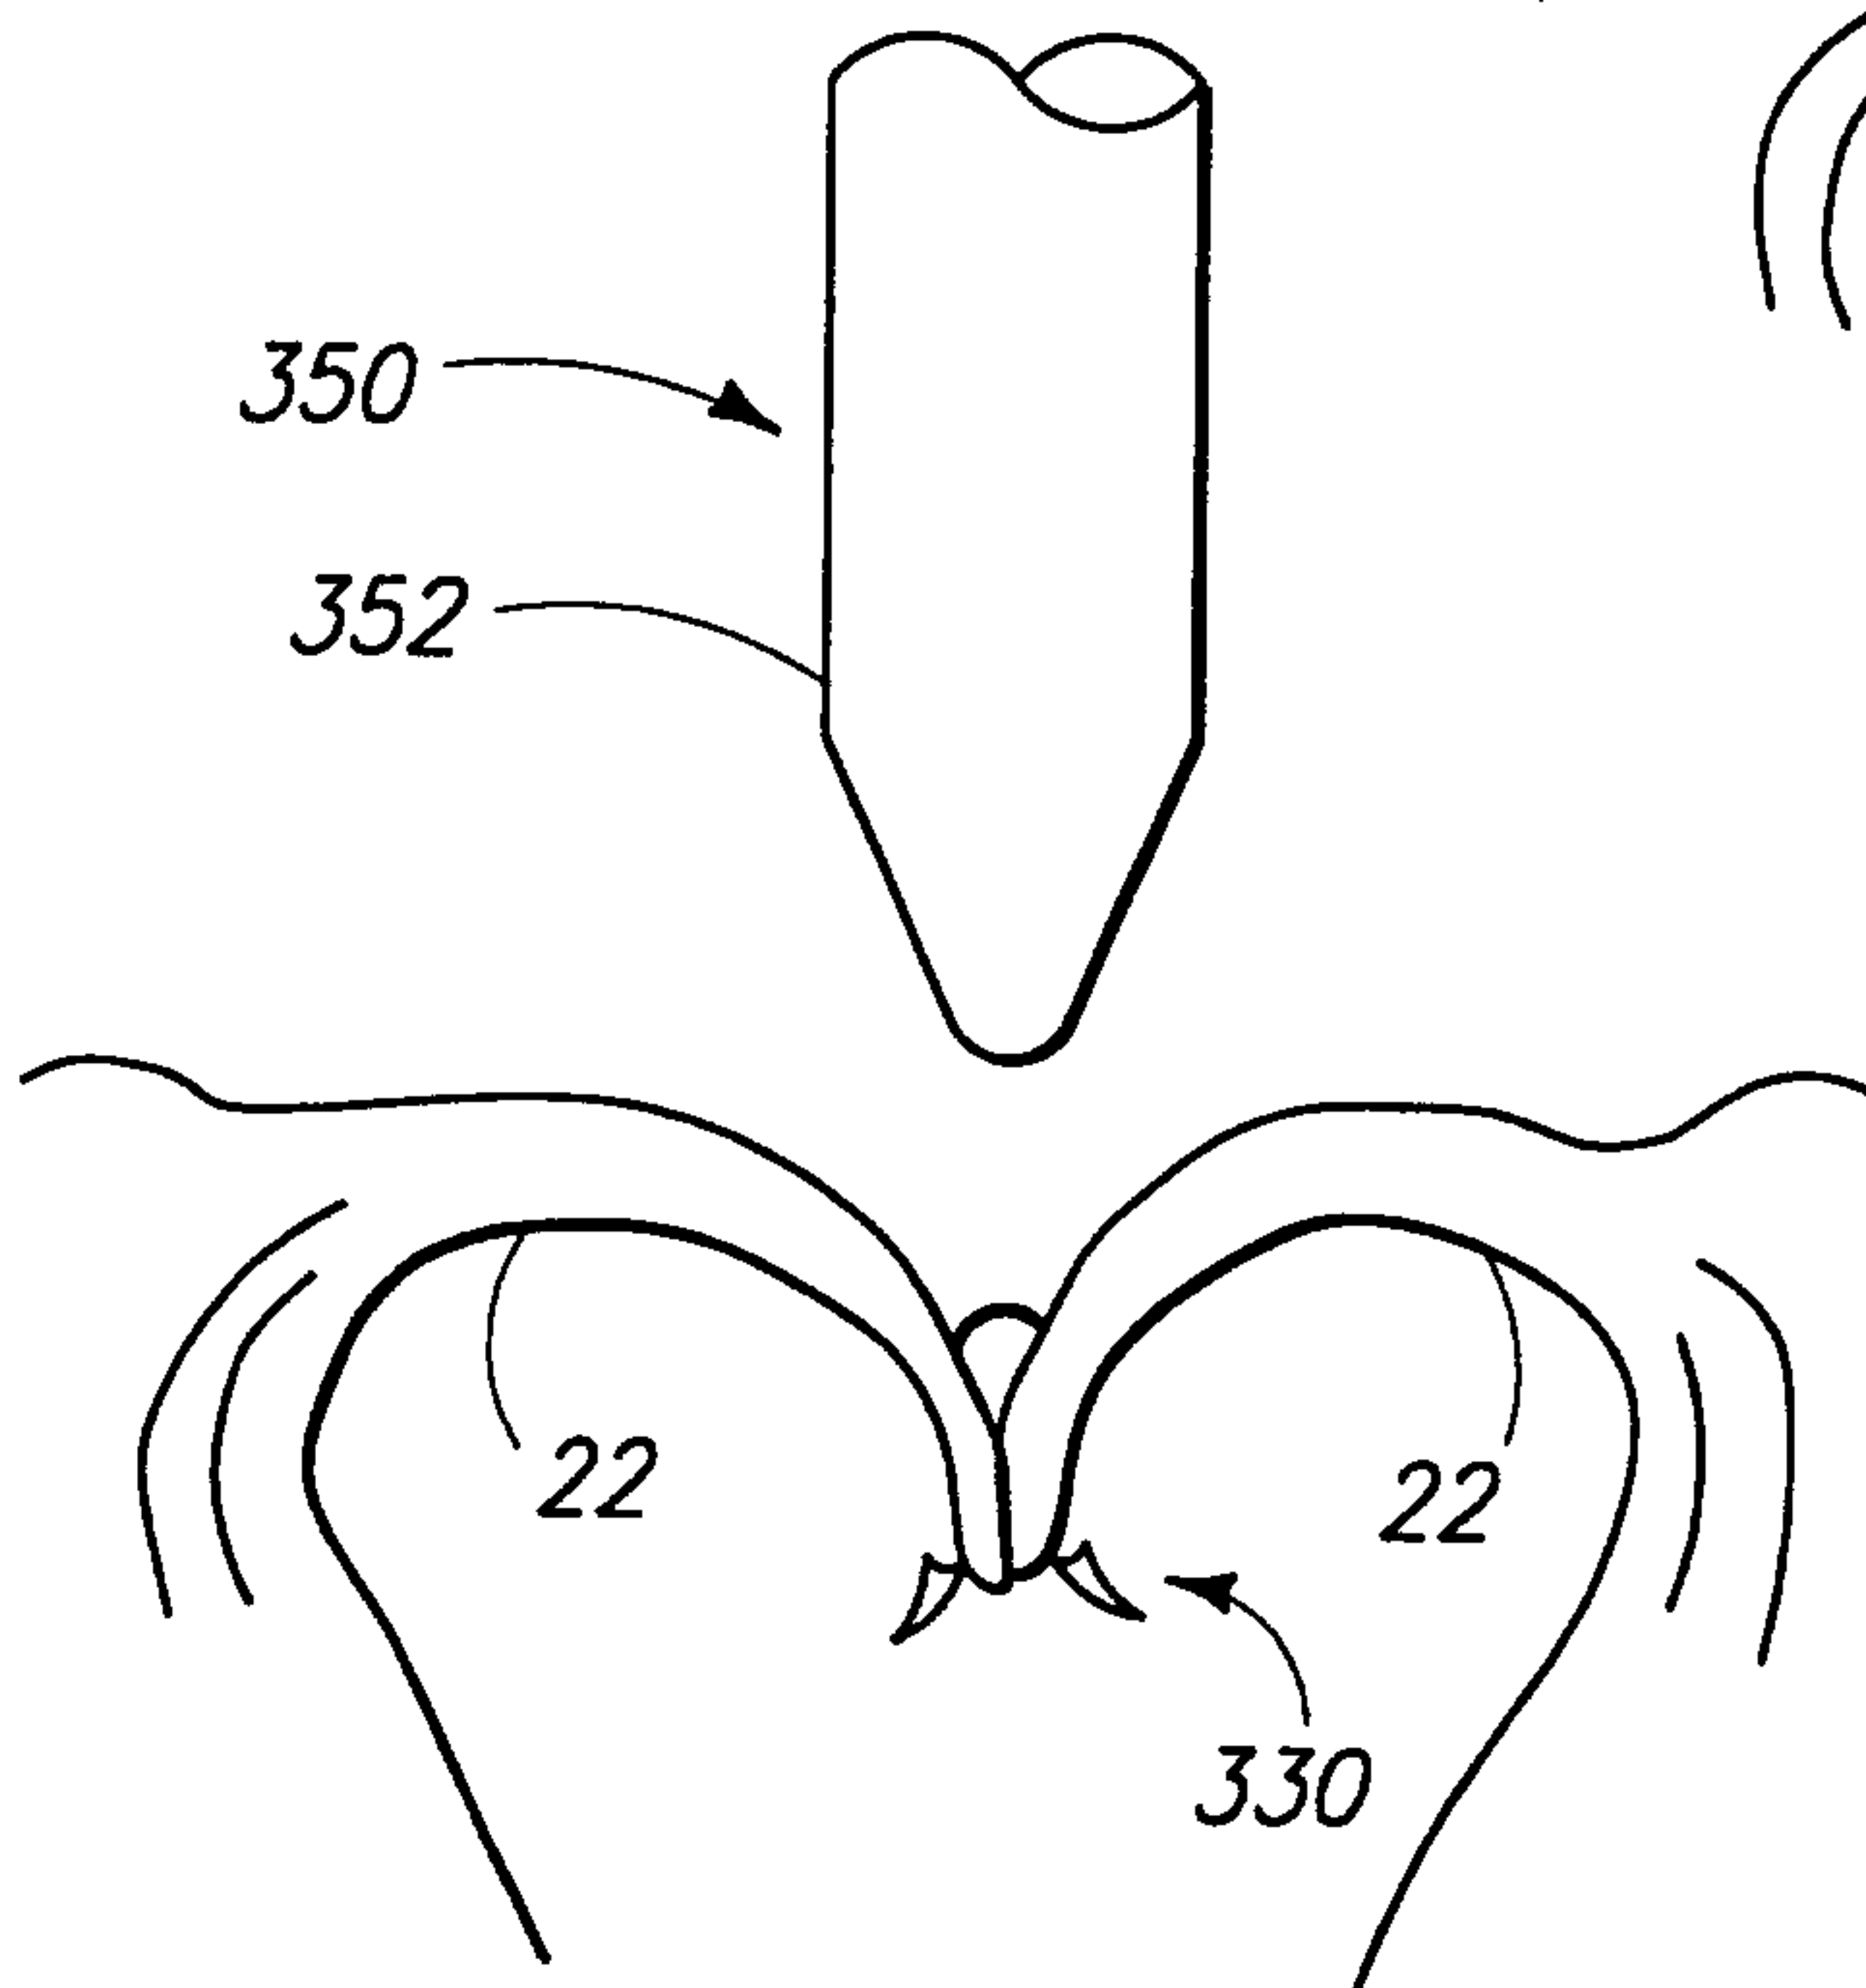


FIG. 33c

33/45

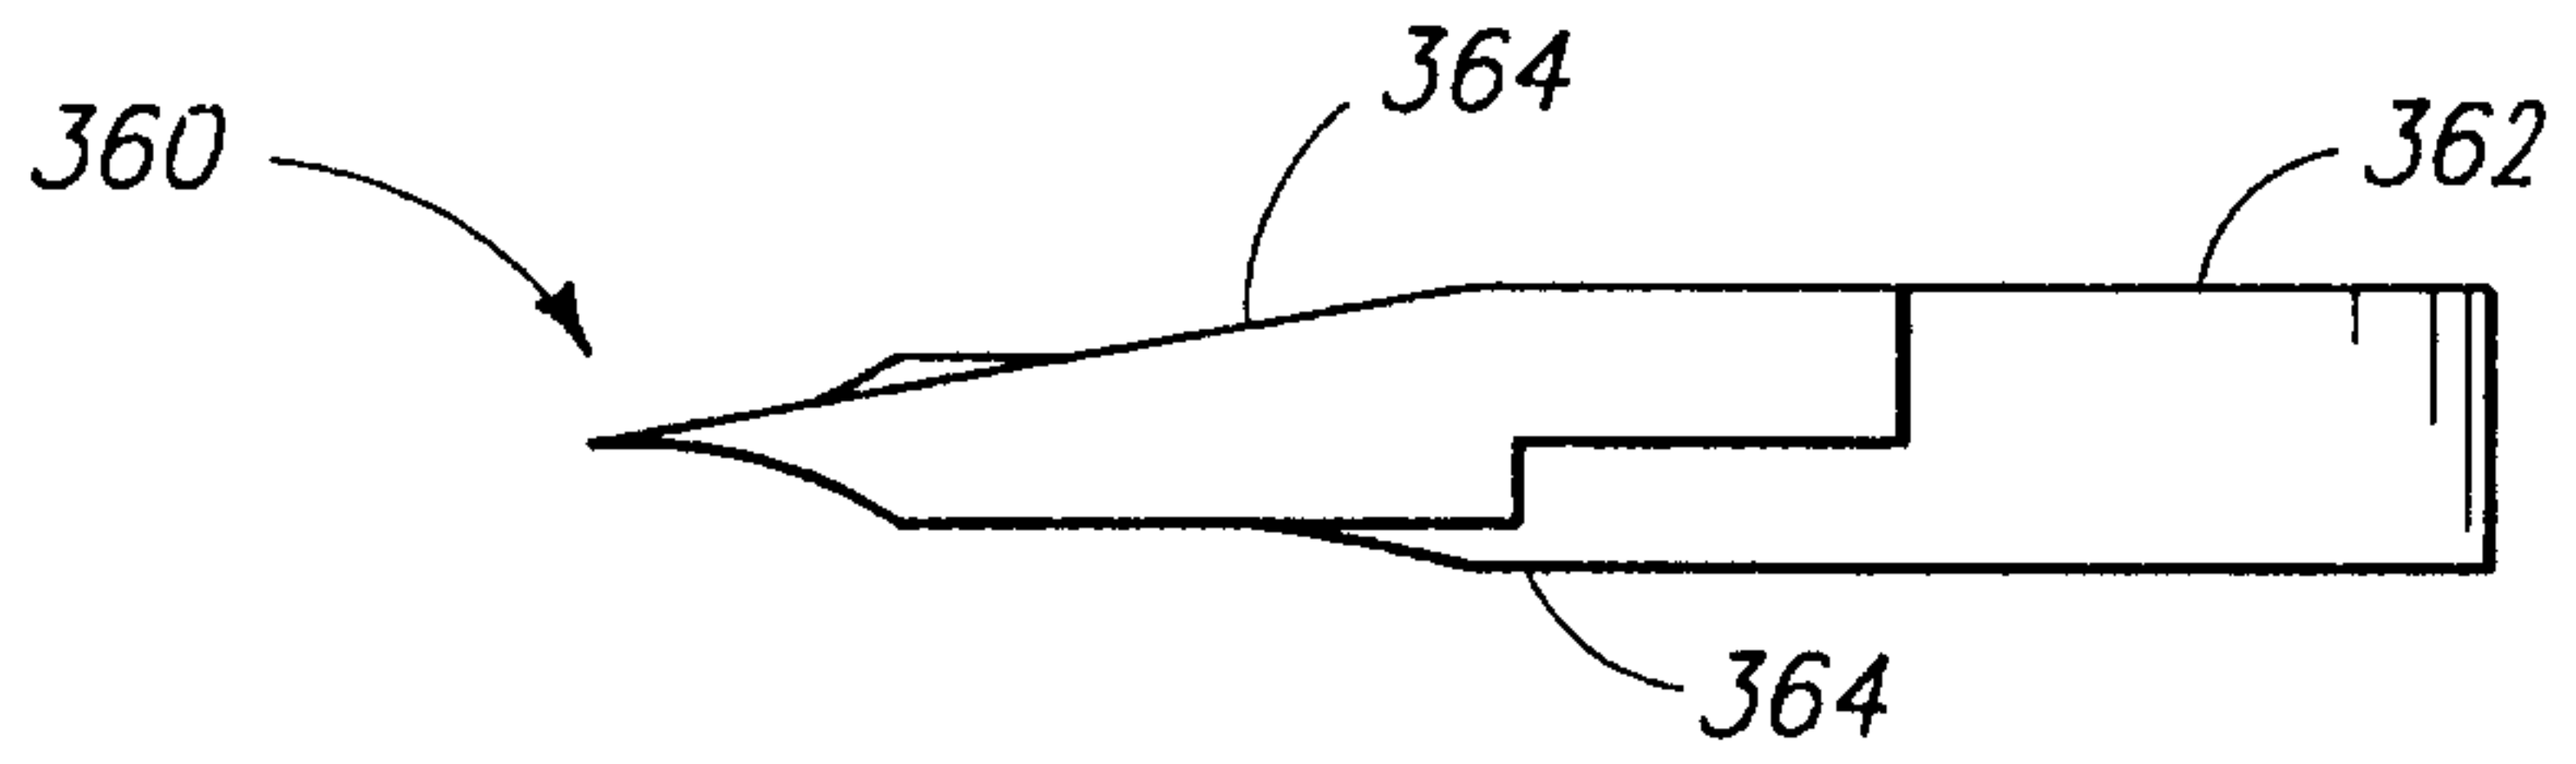


FIG. 34a

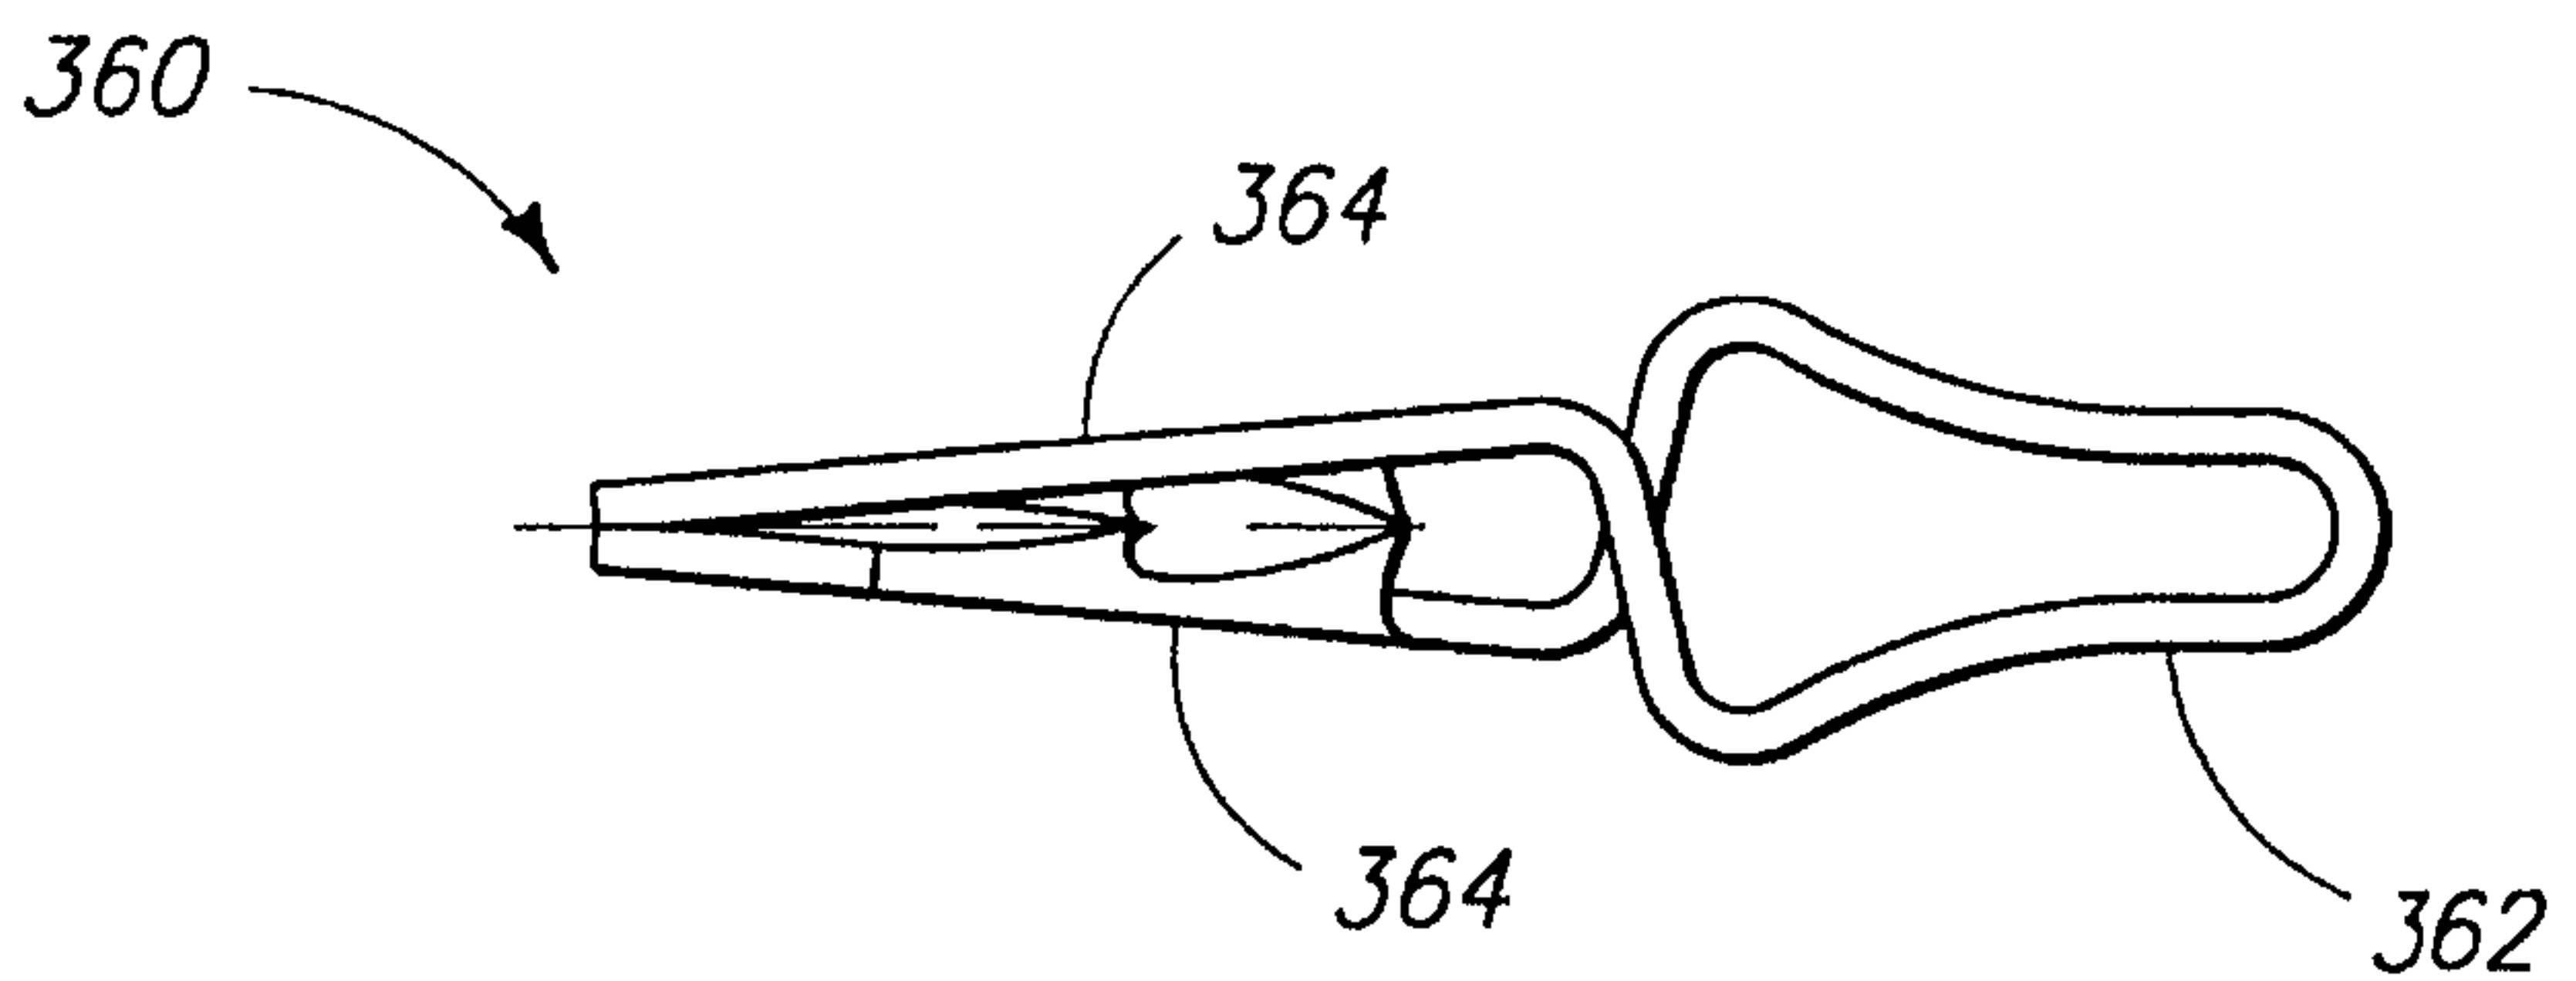


FIG. 34b

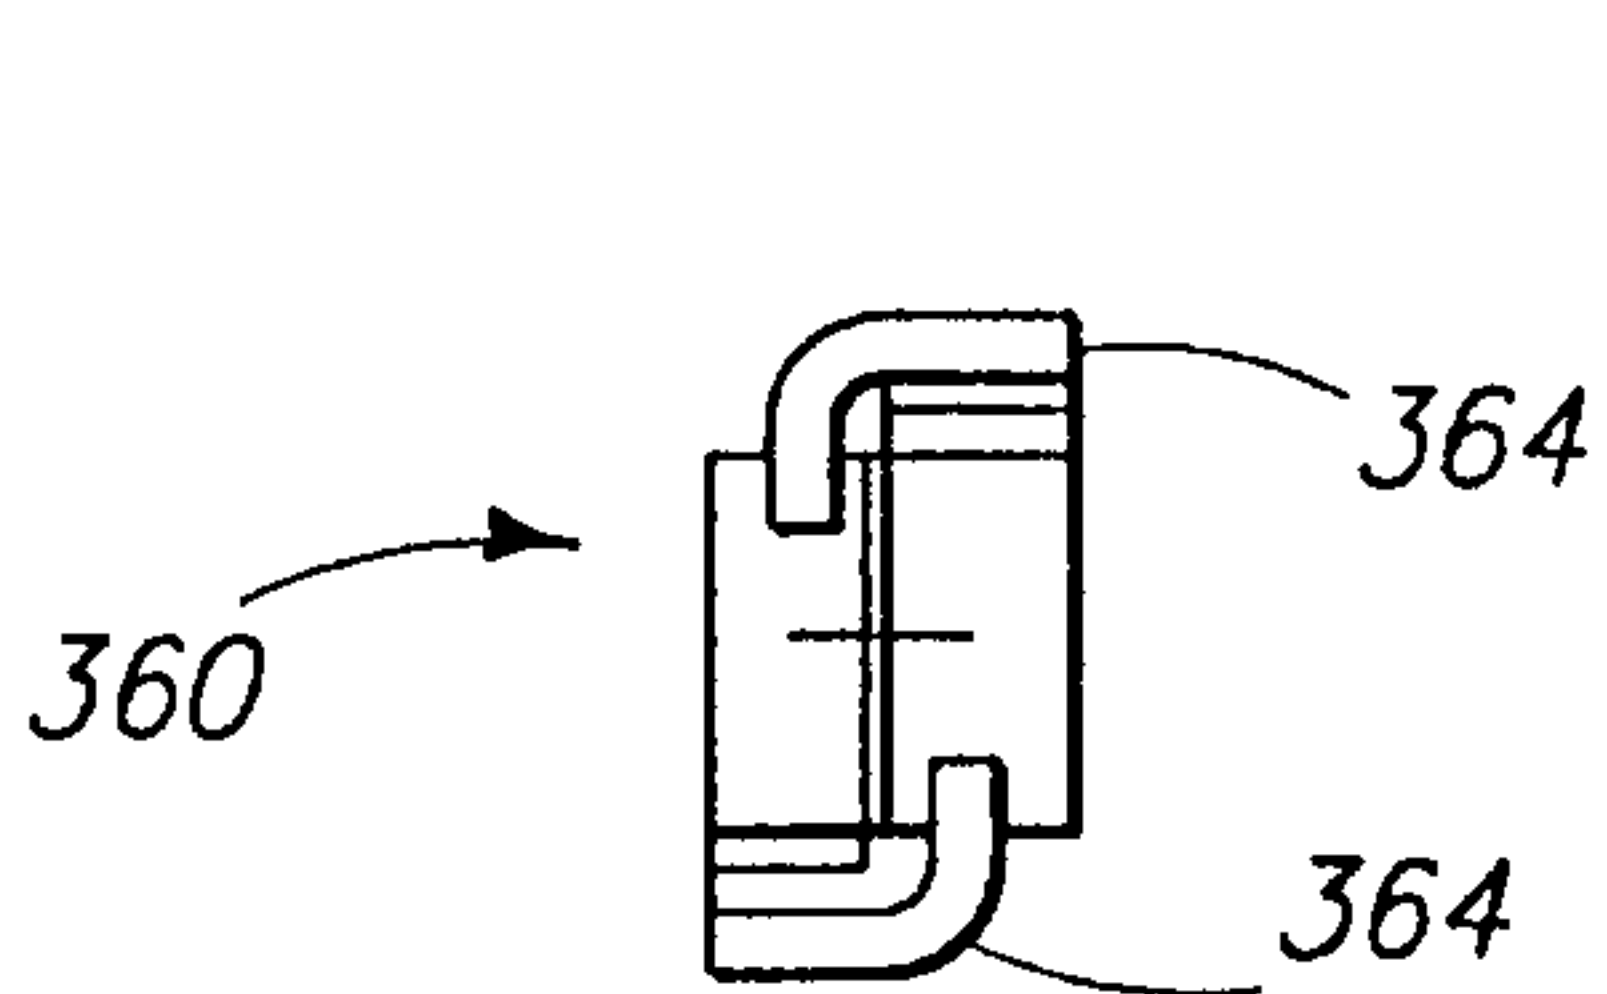


FIG. 34c

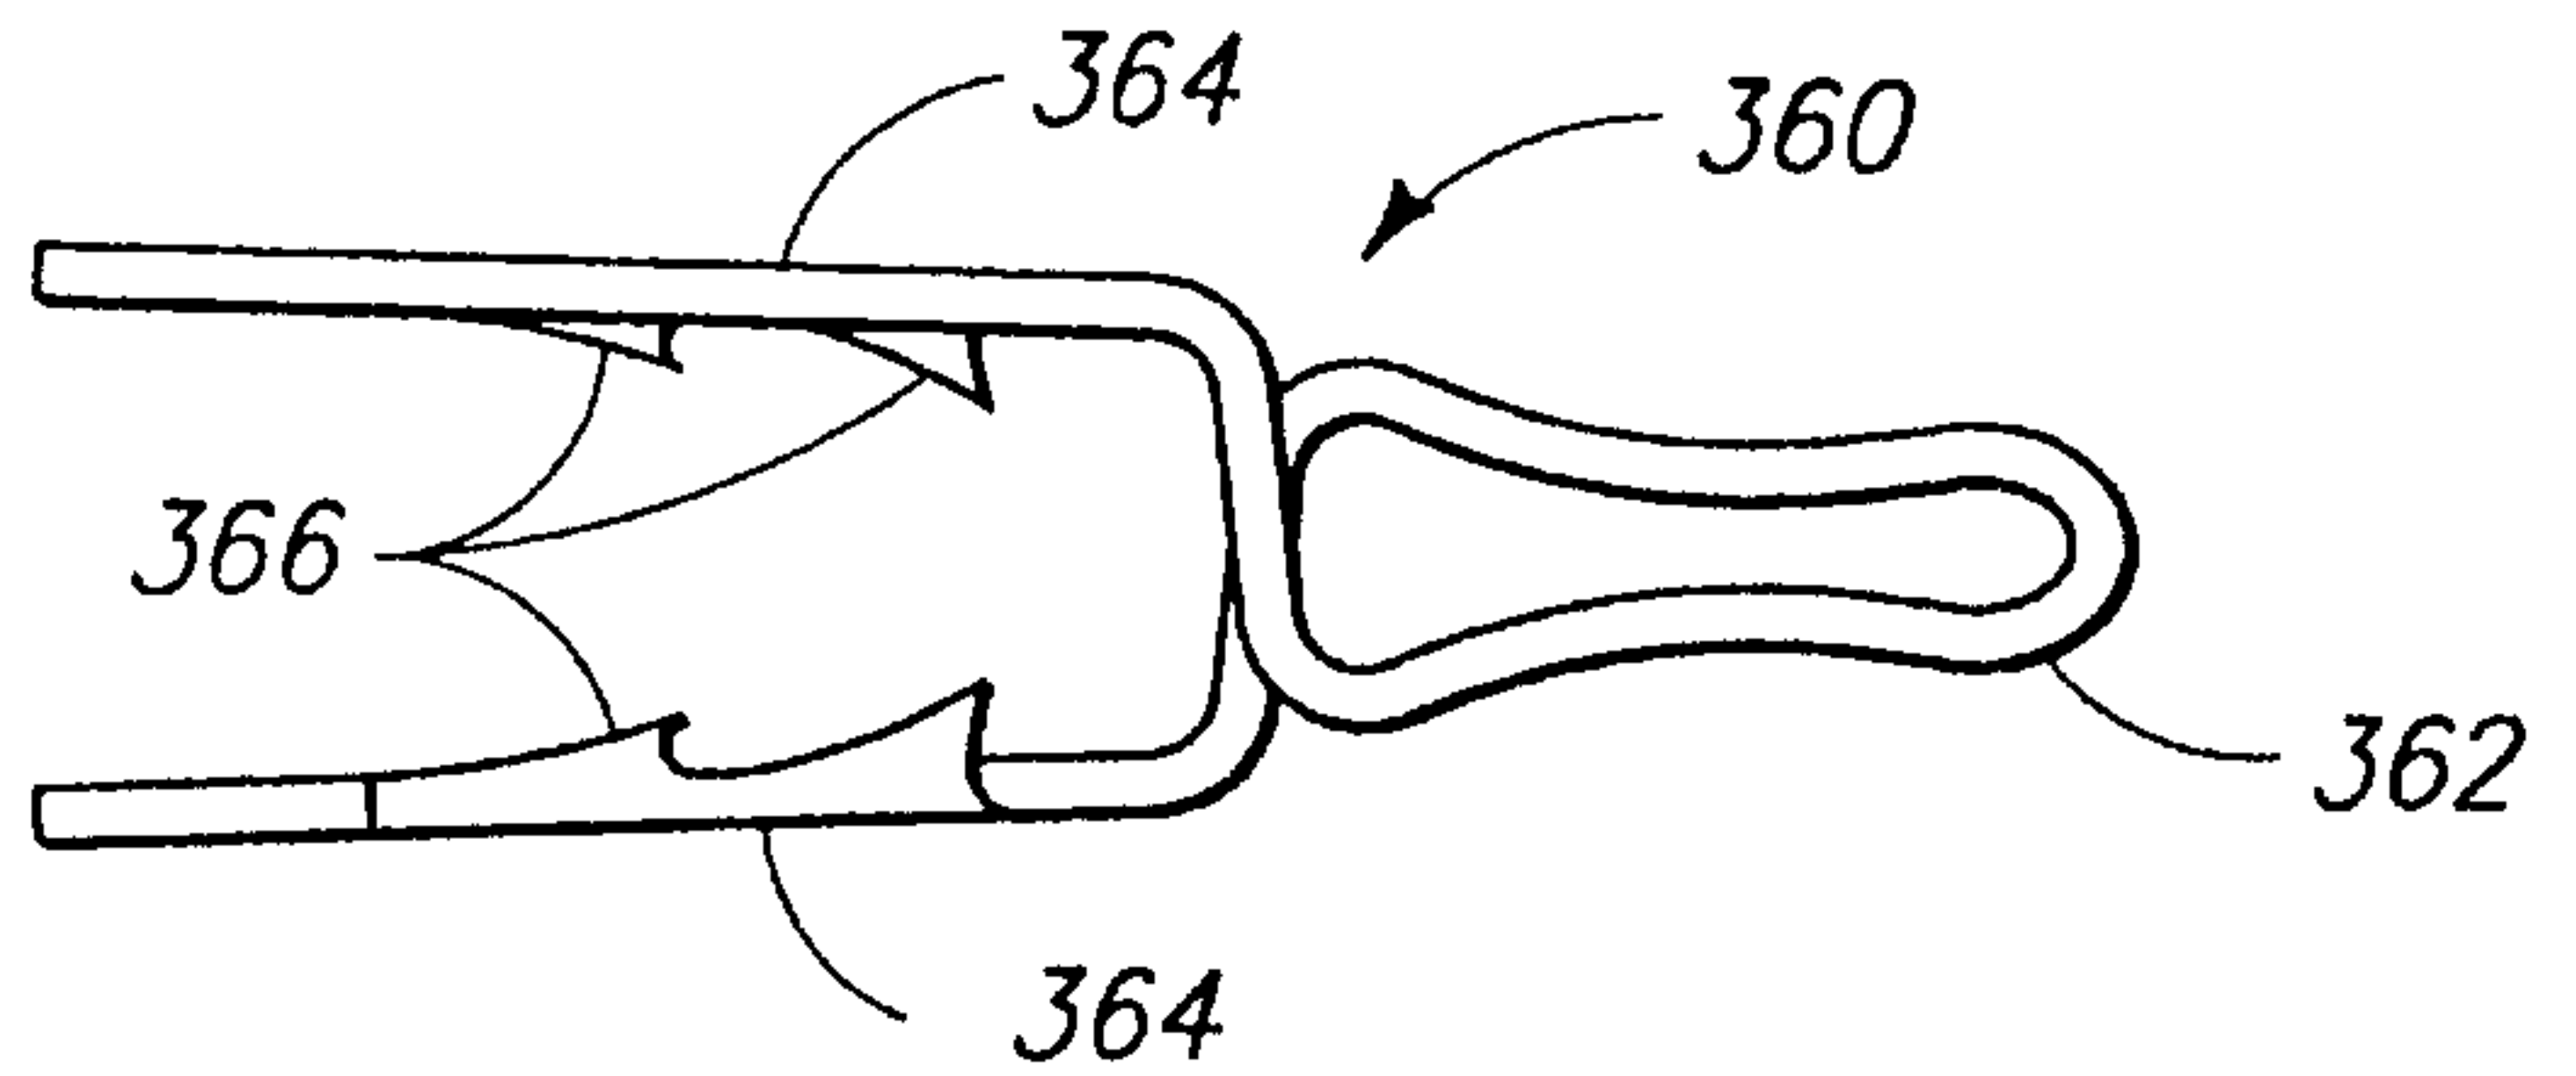


FIG. 34d

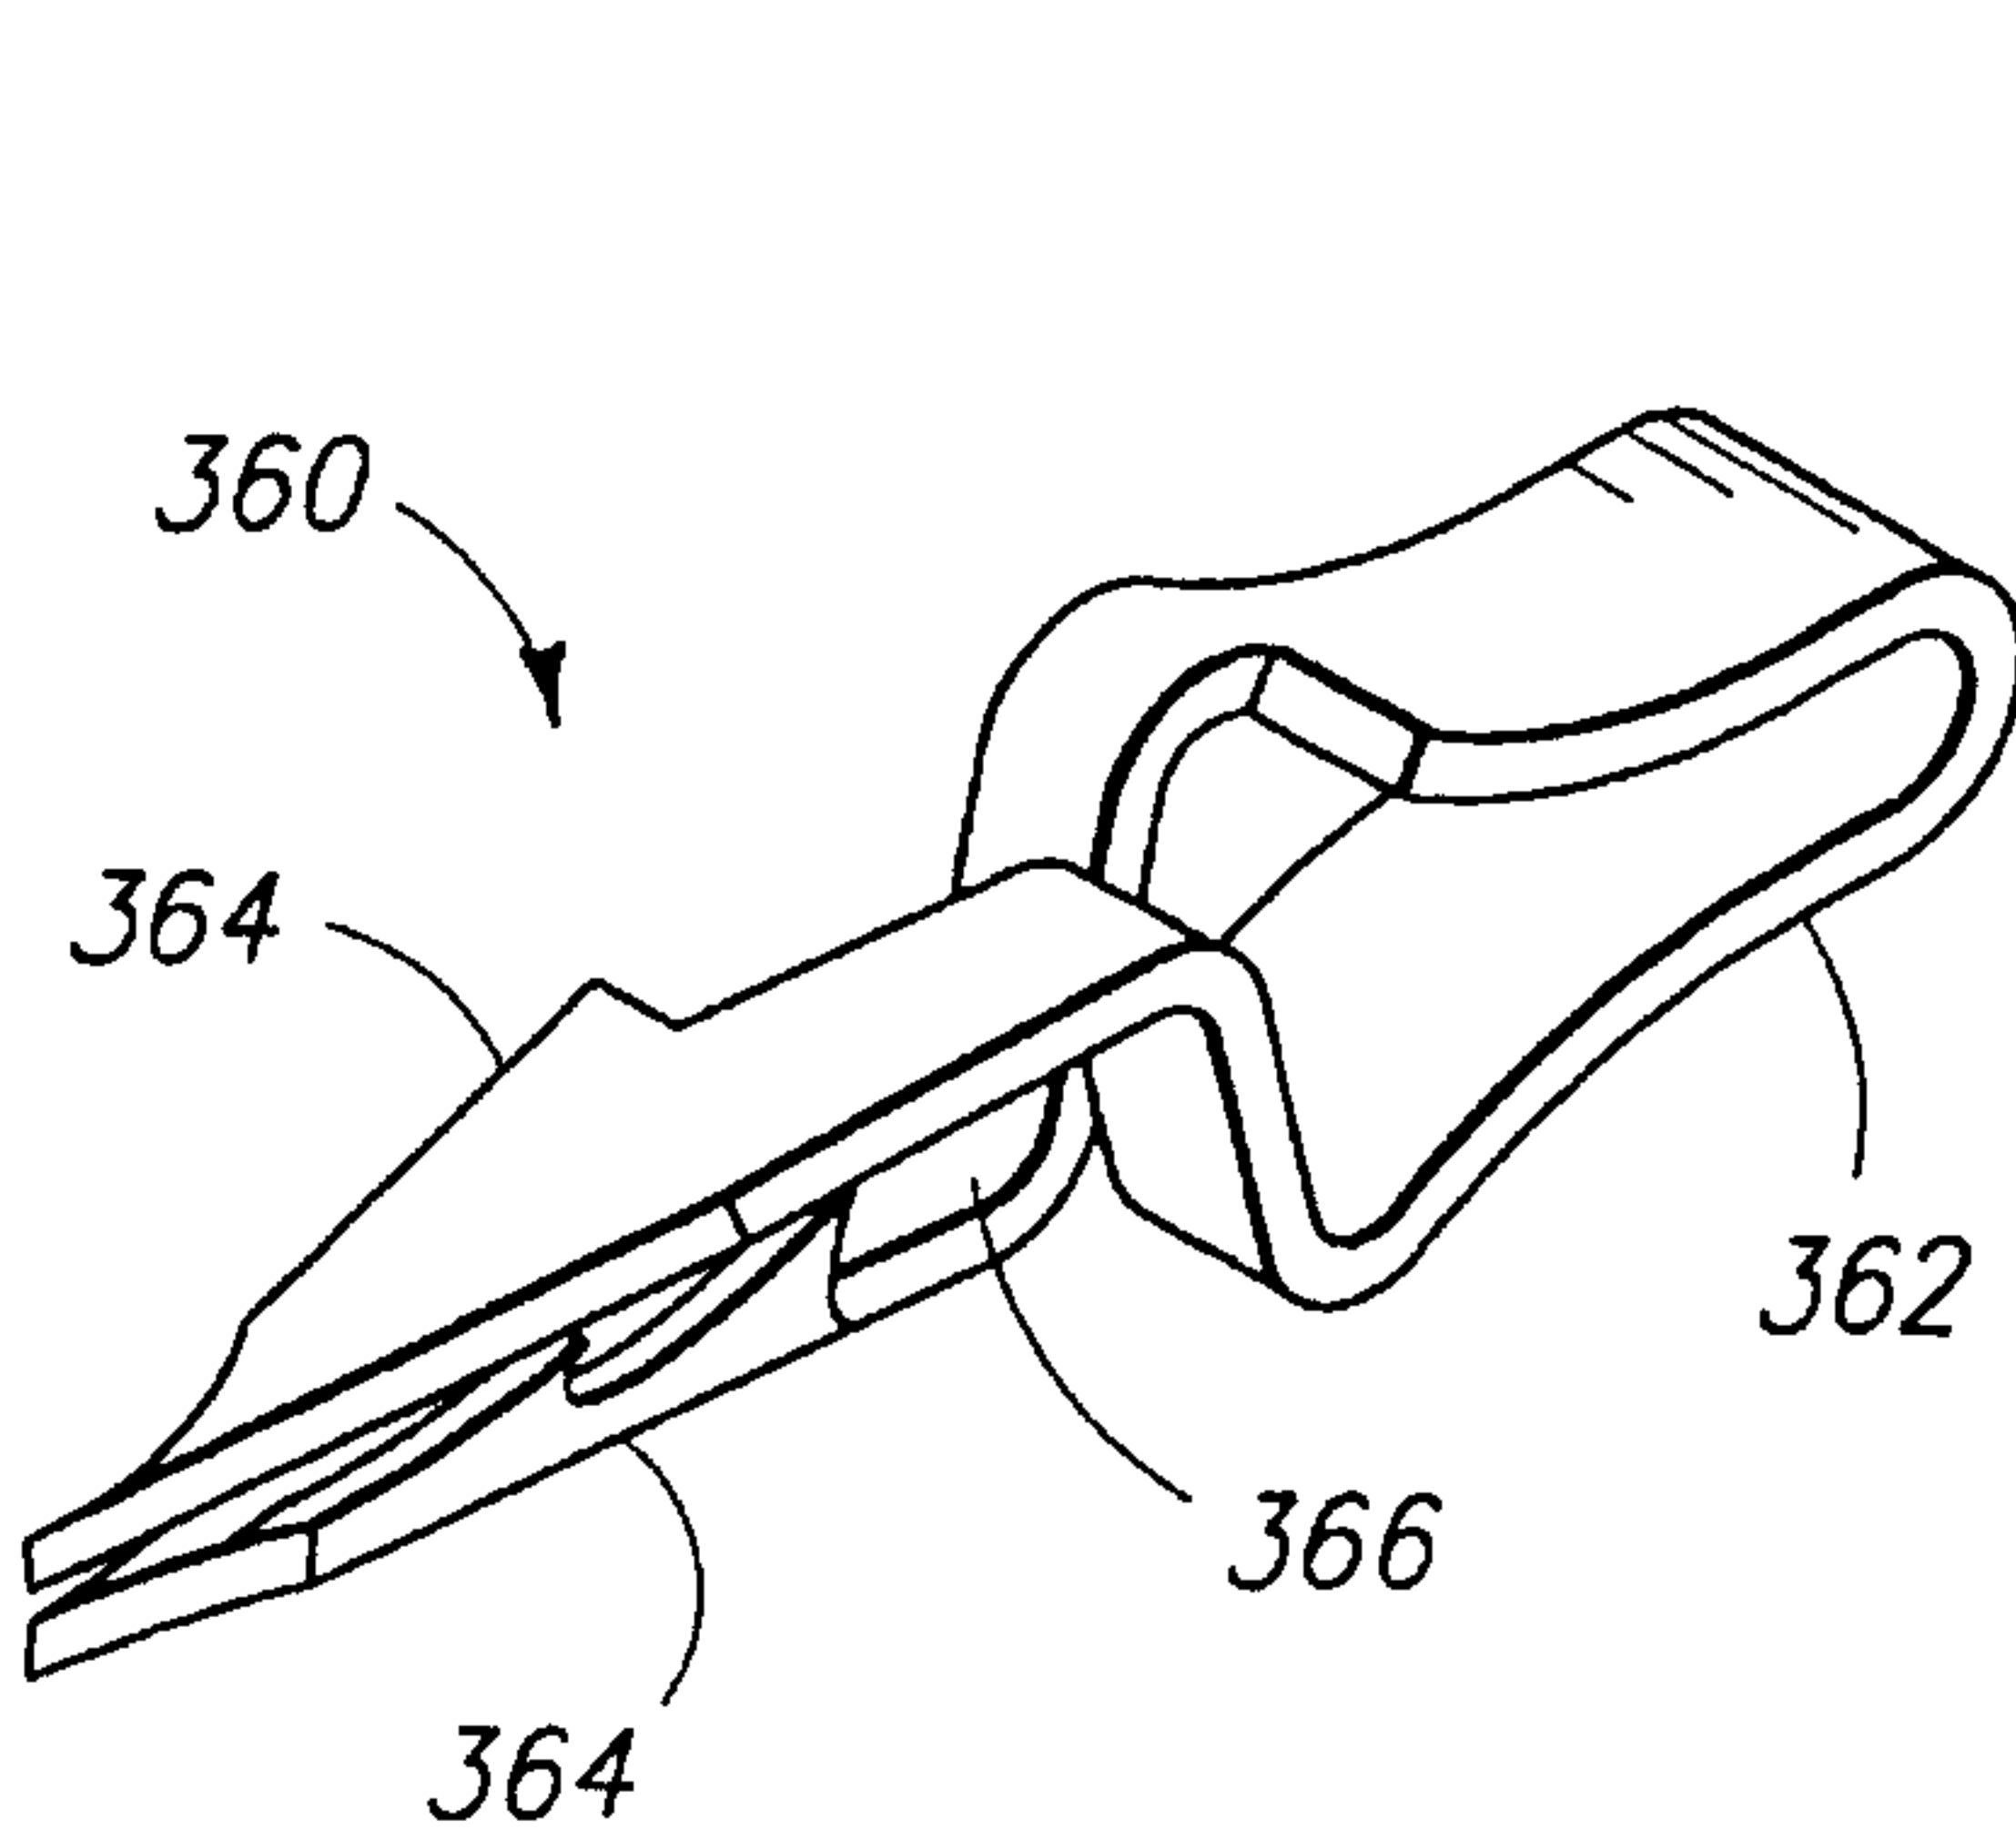


FIG. 34e




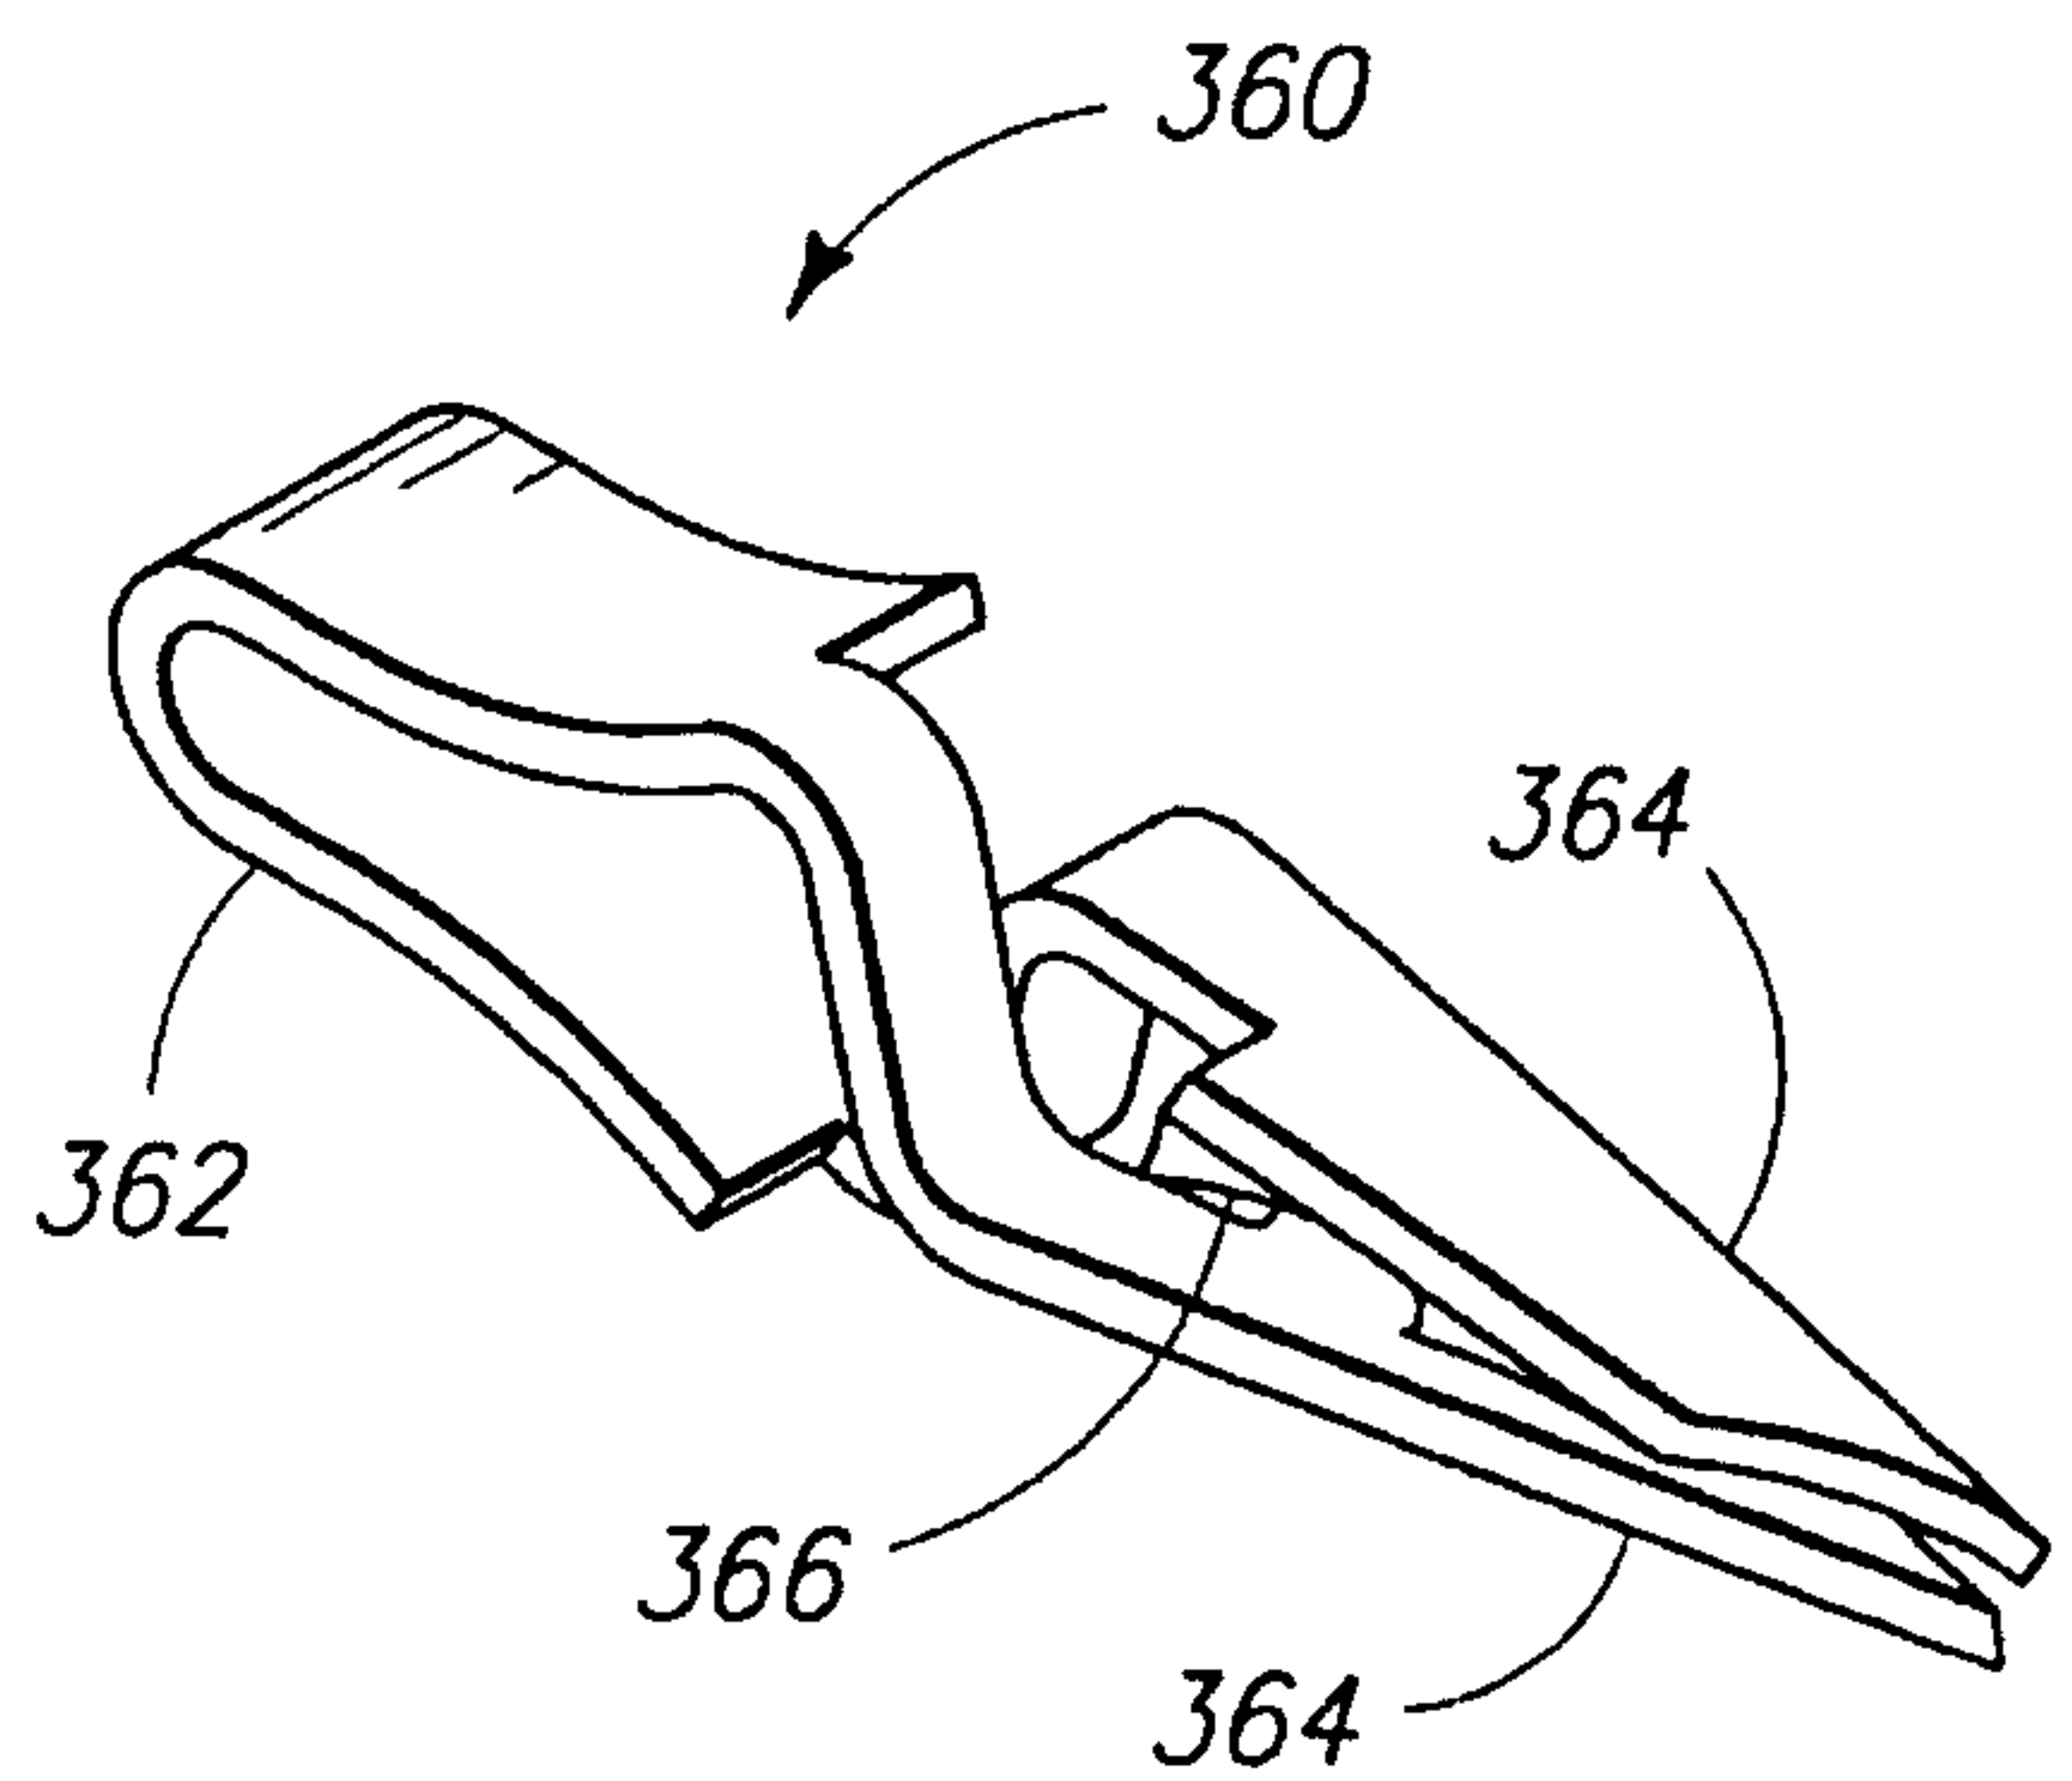


FIG. 34f

34/45

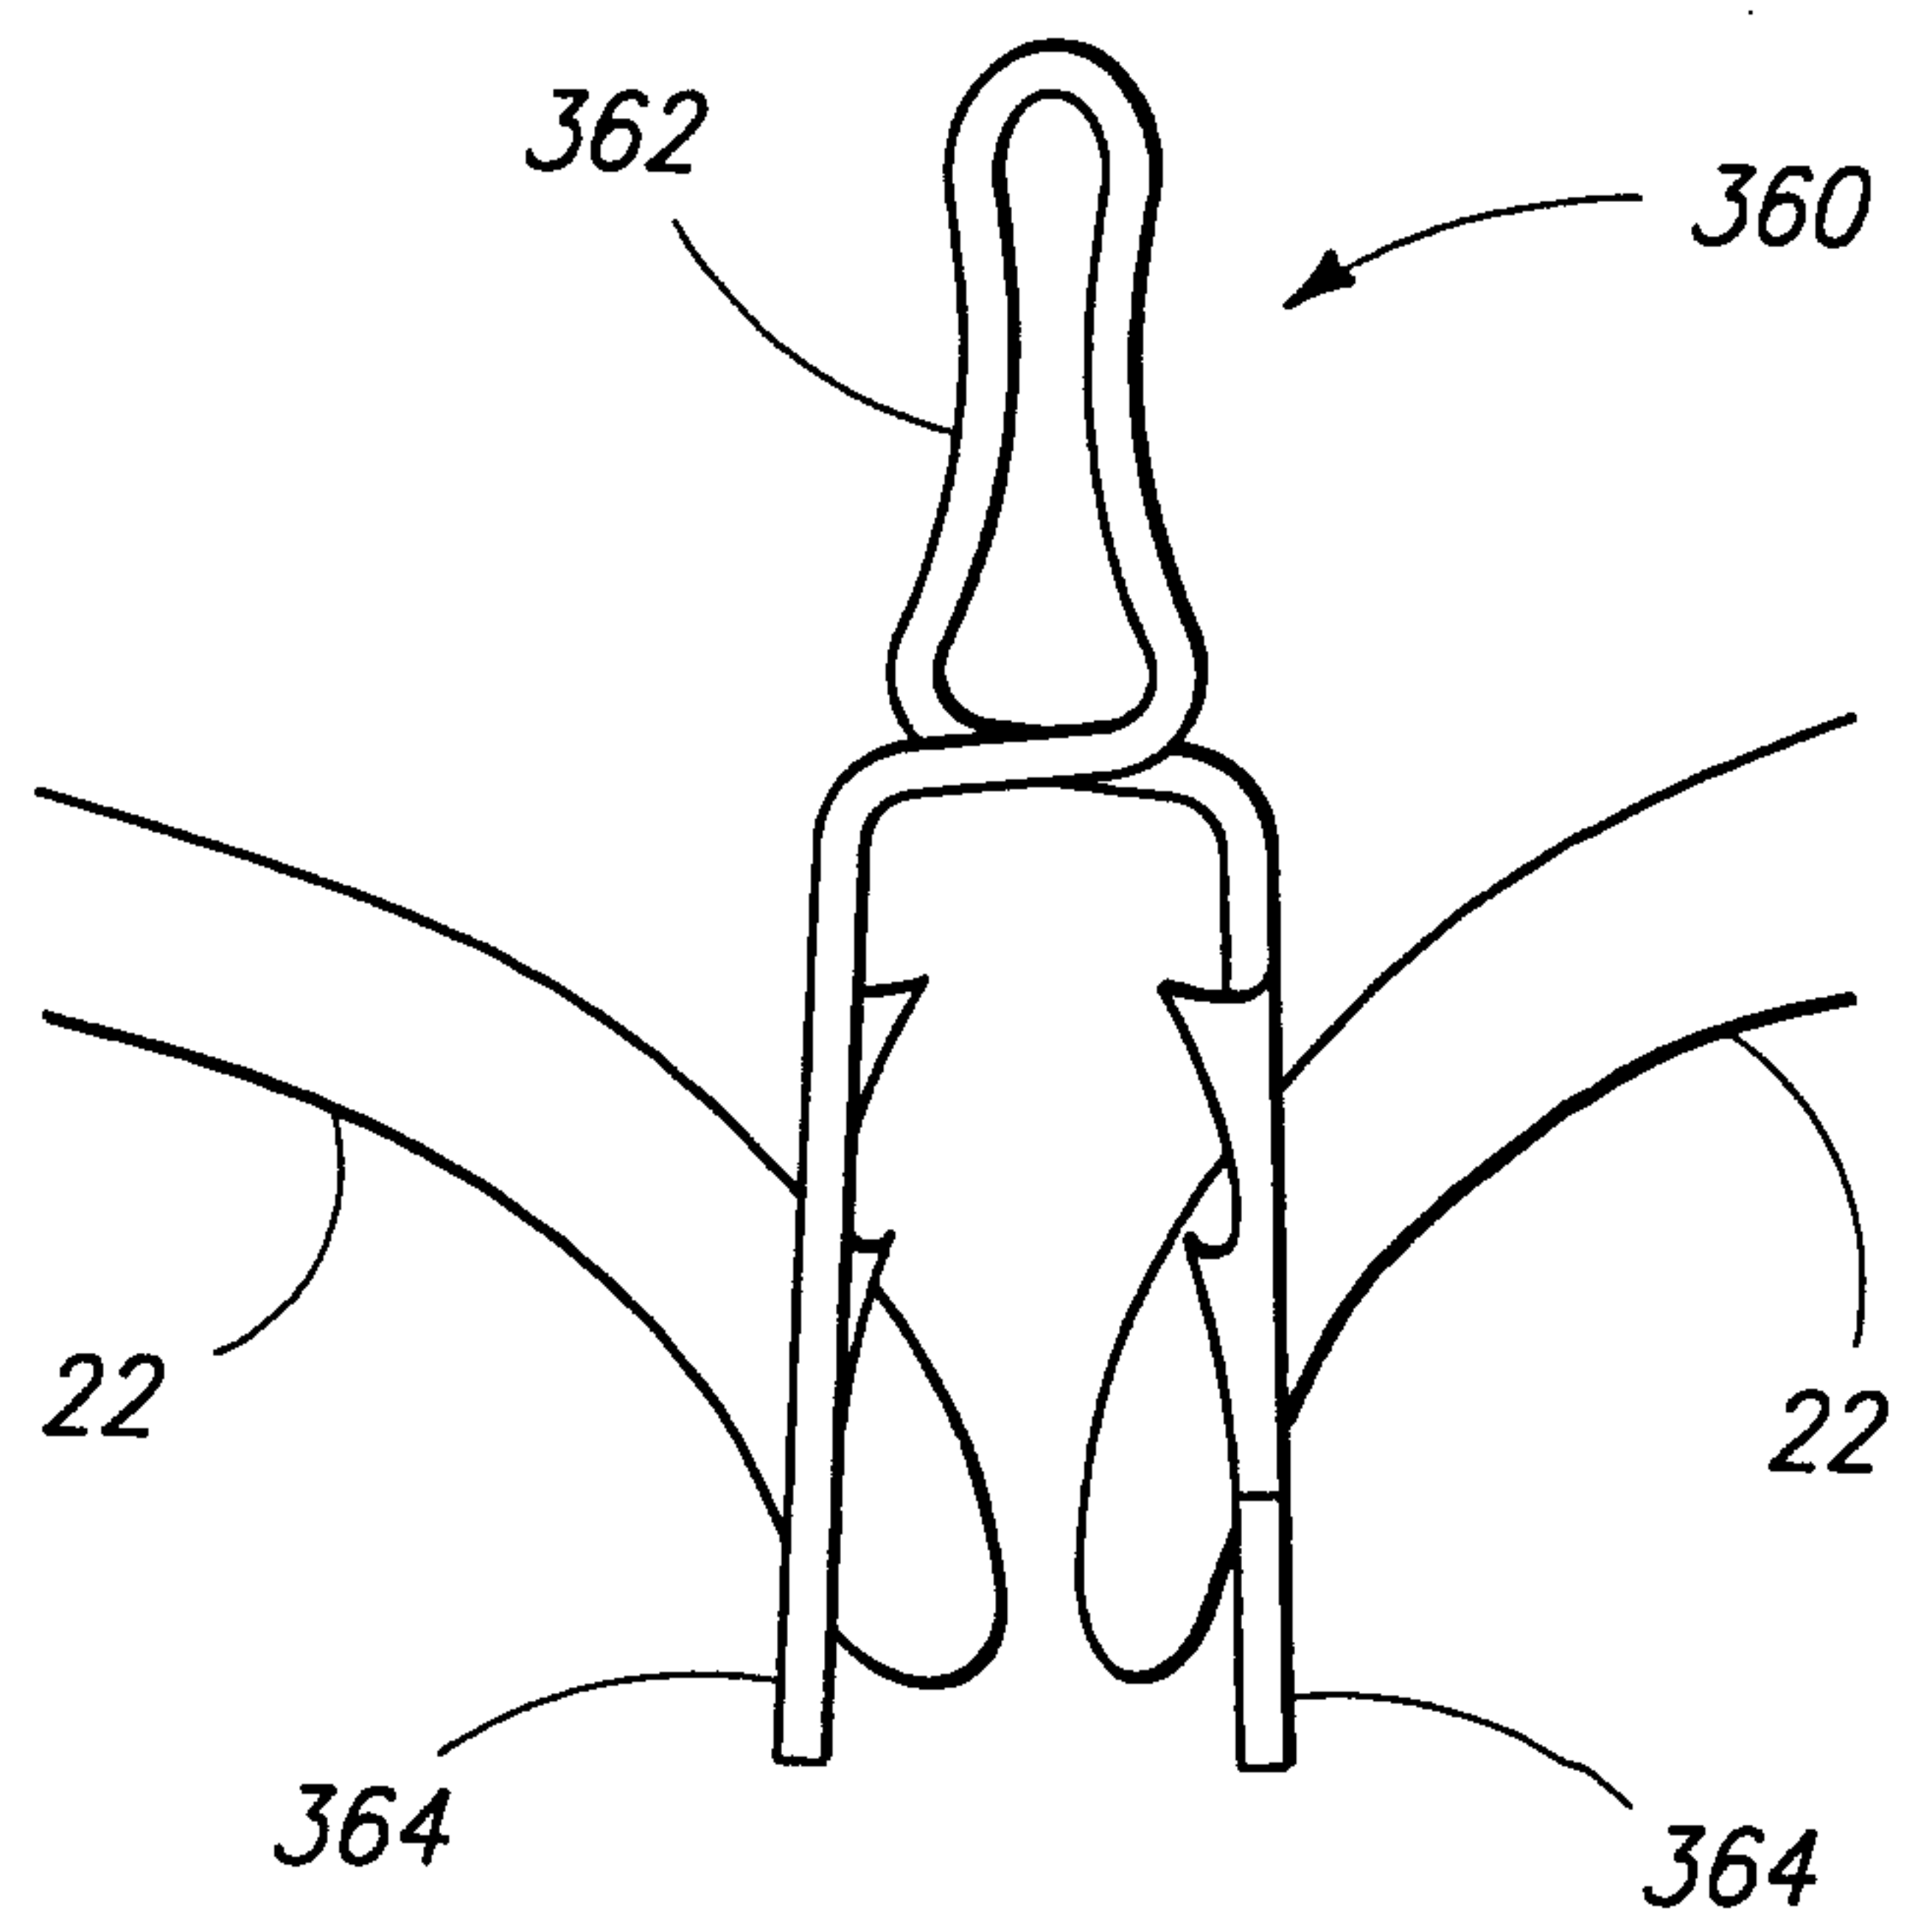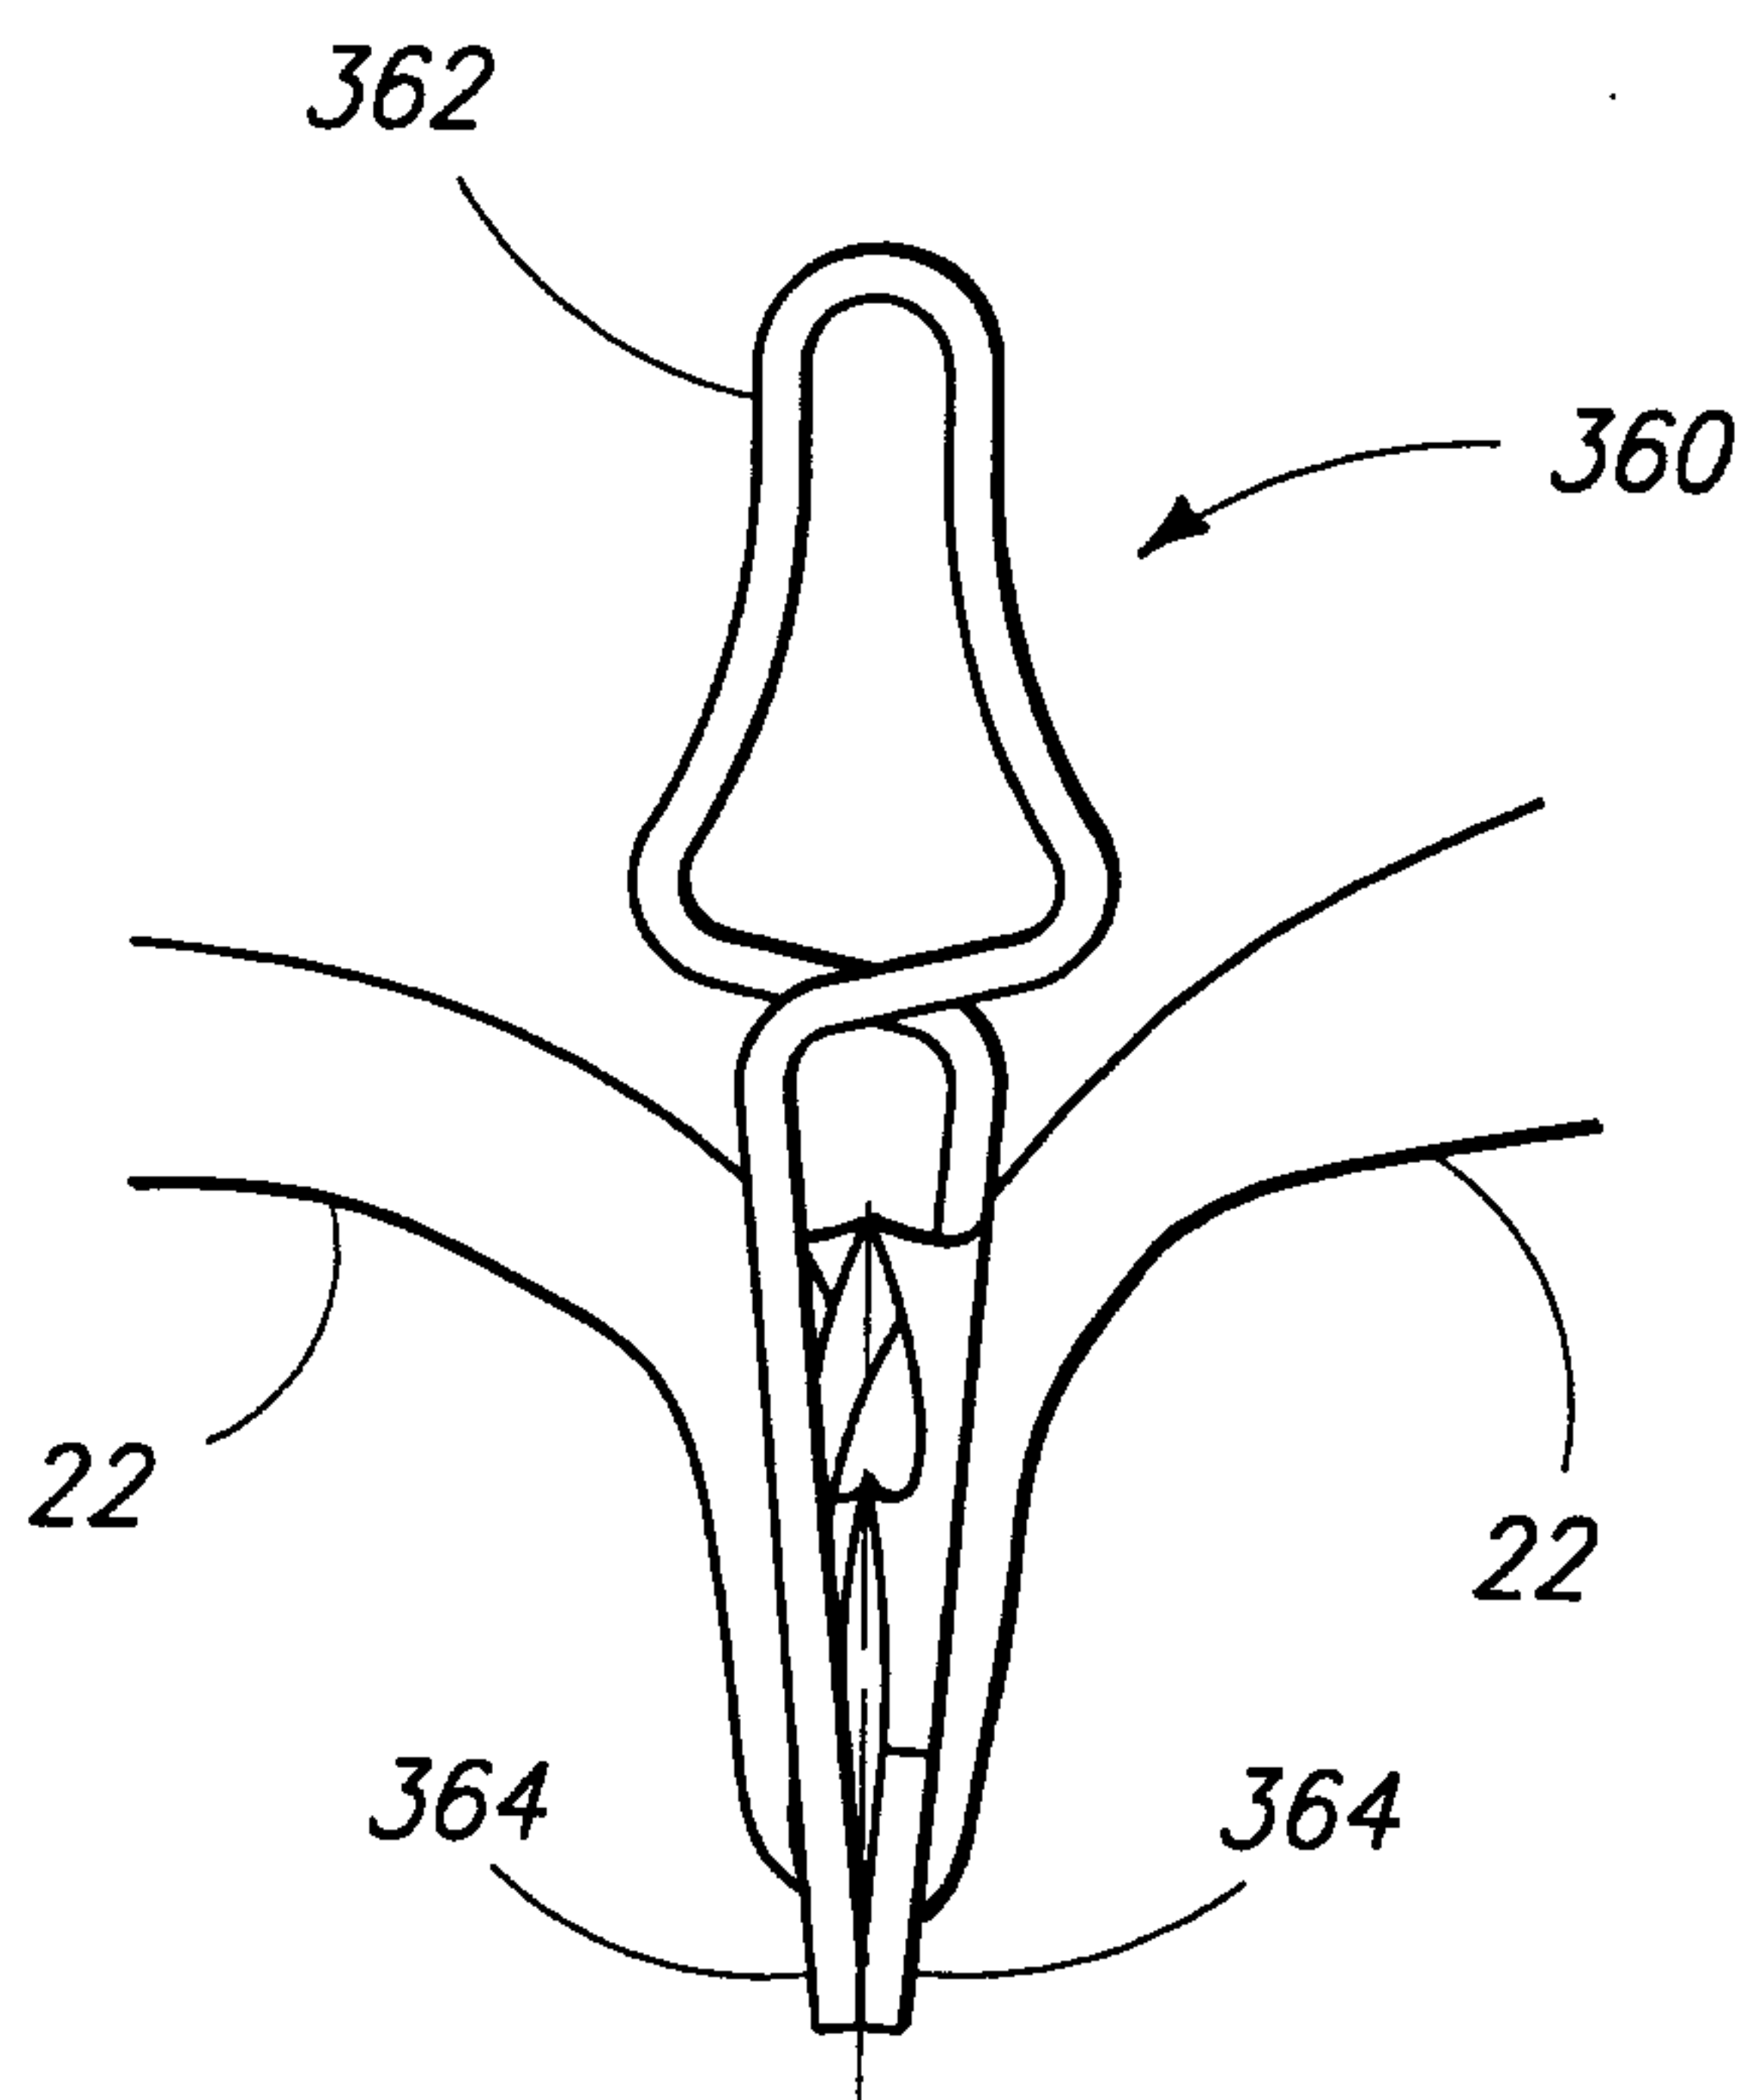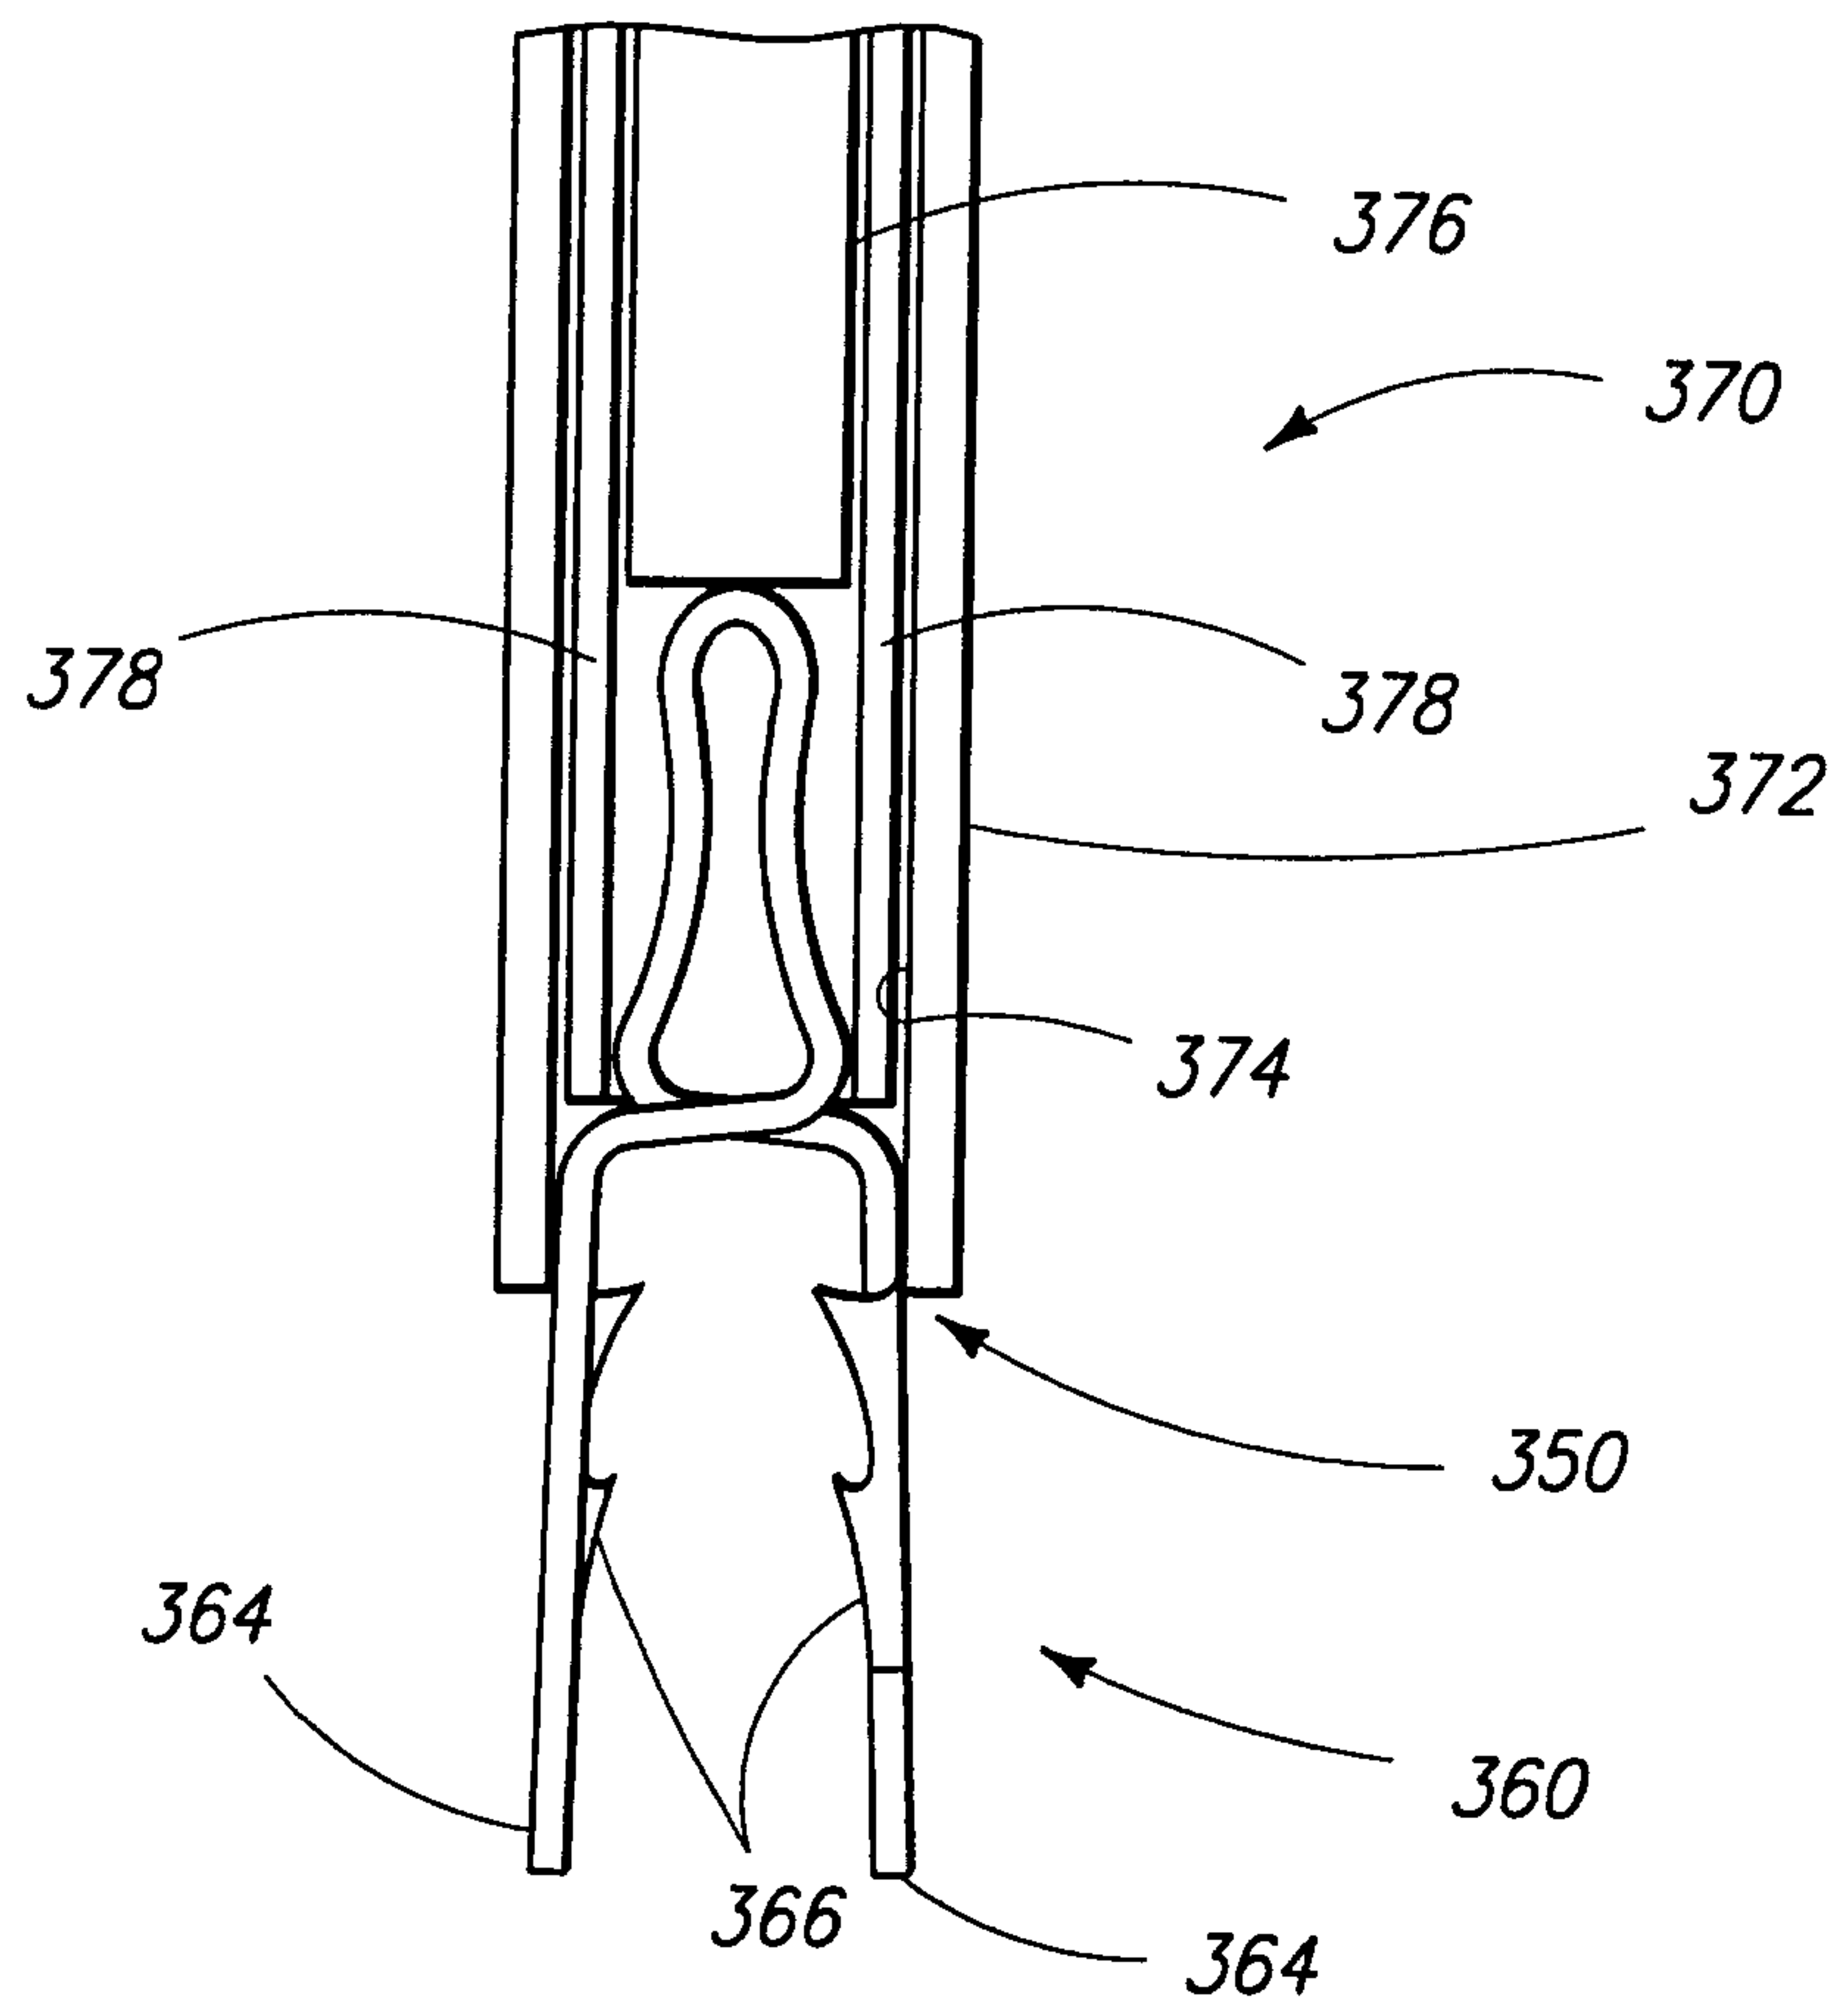

35/45

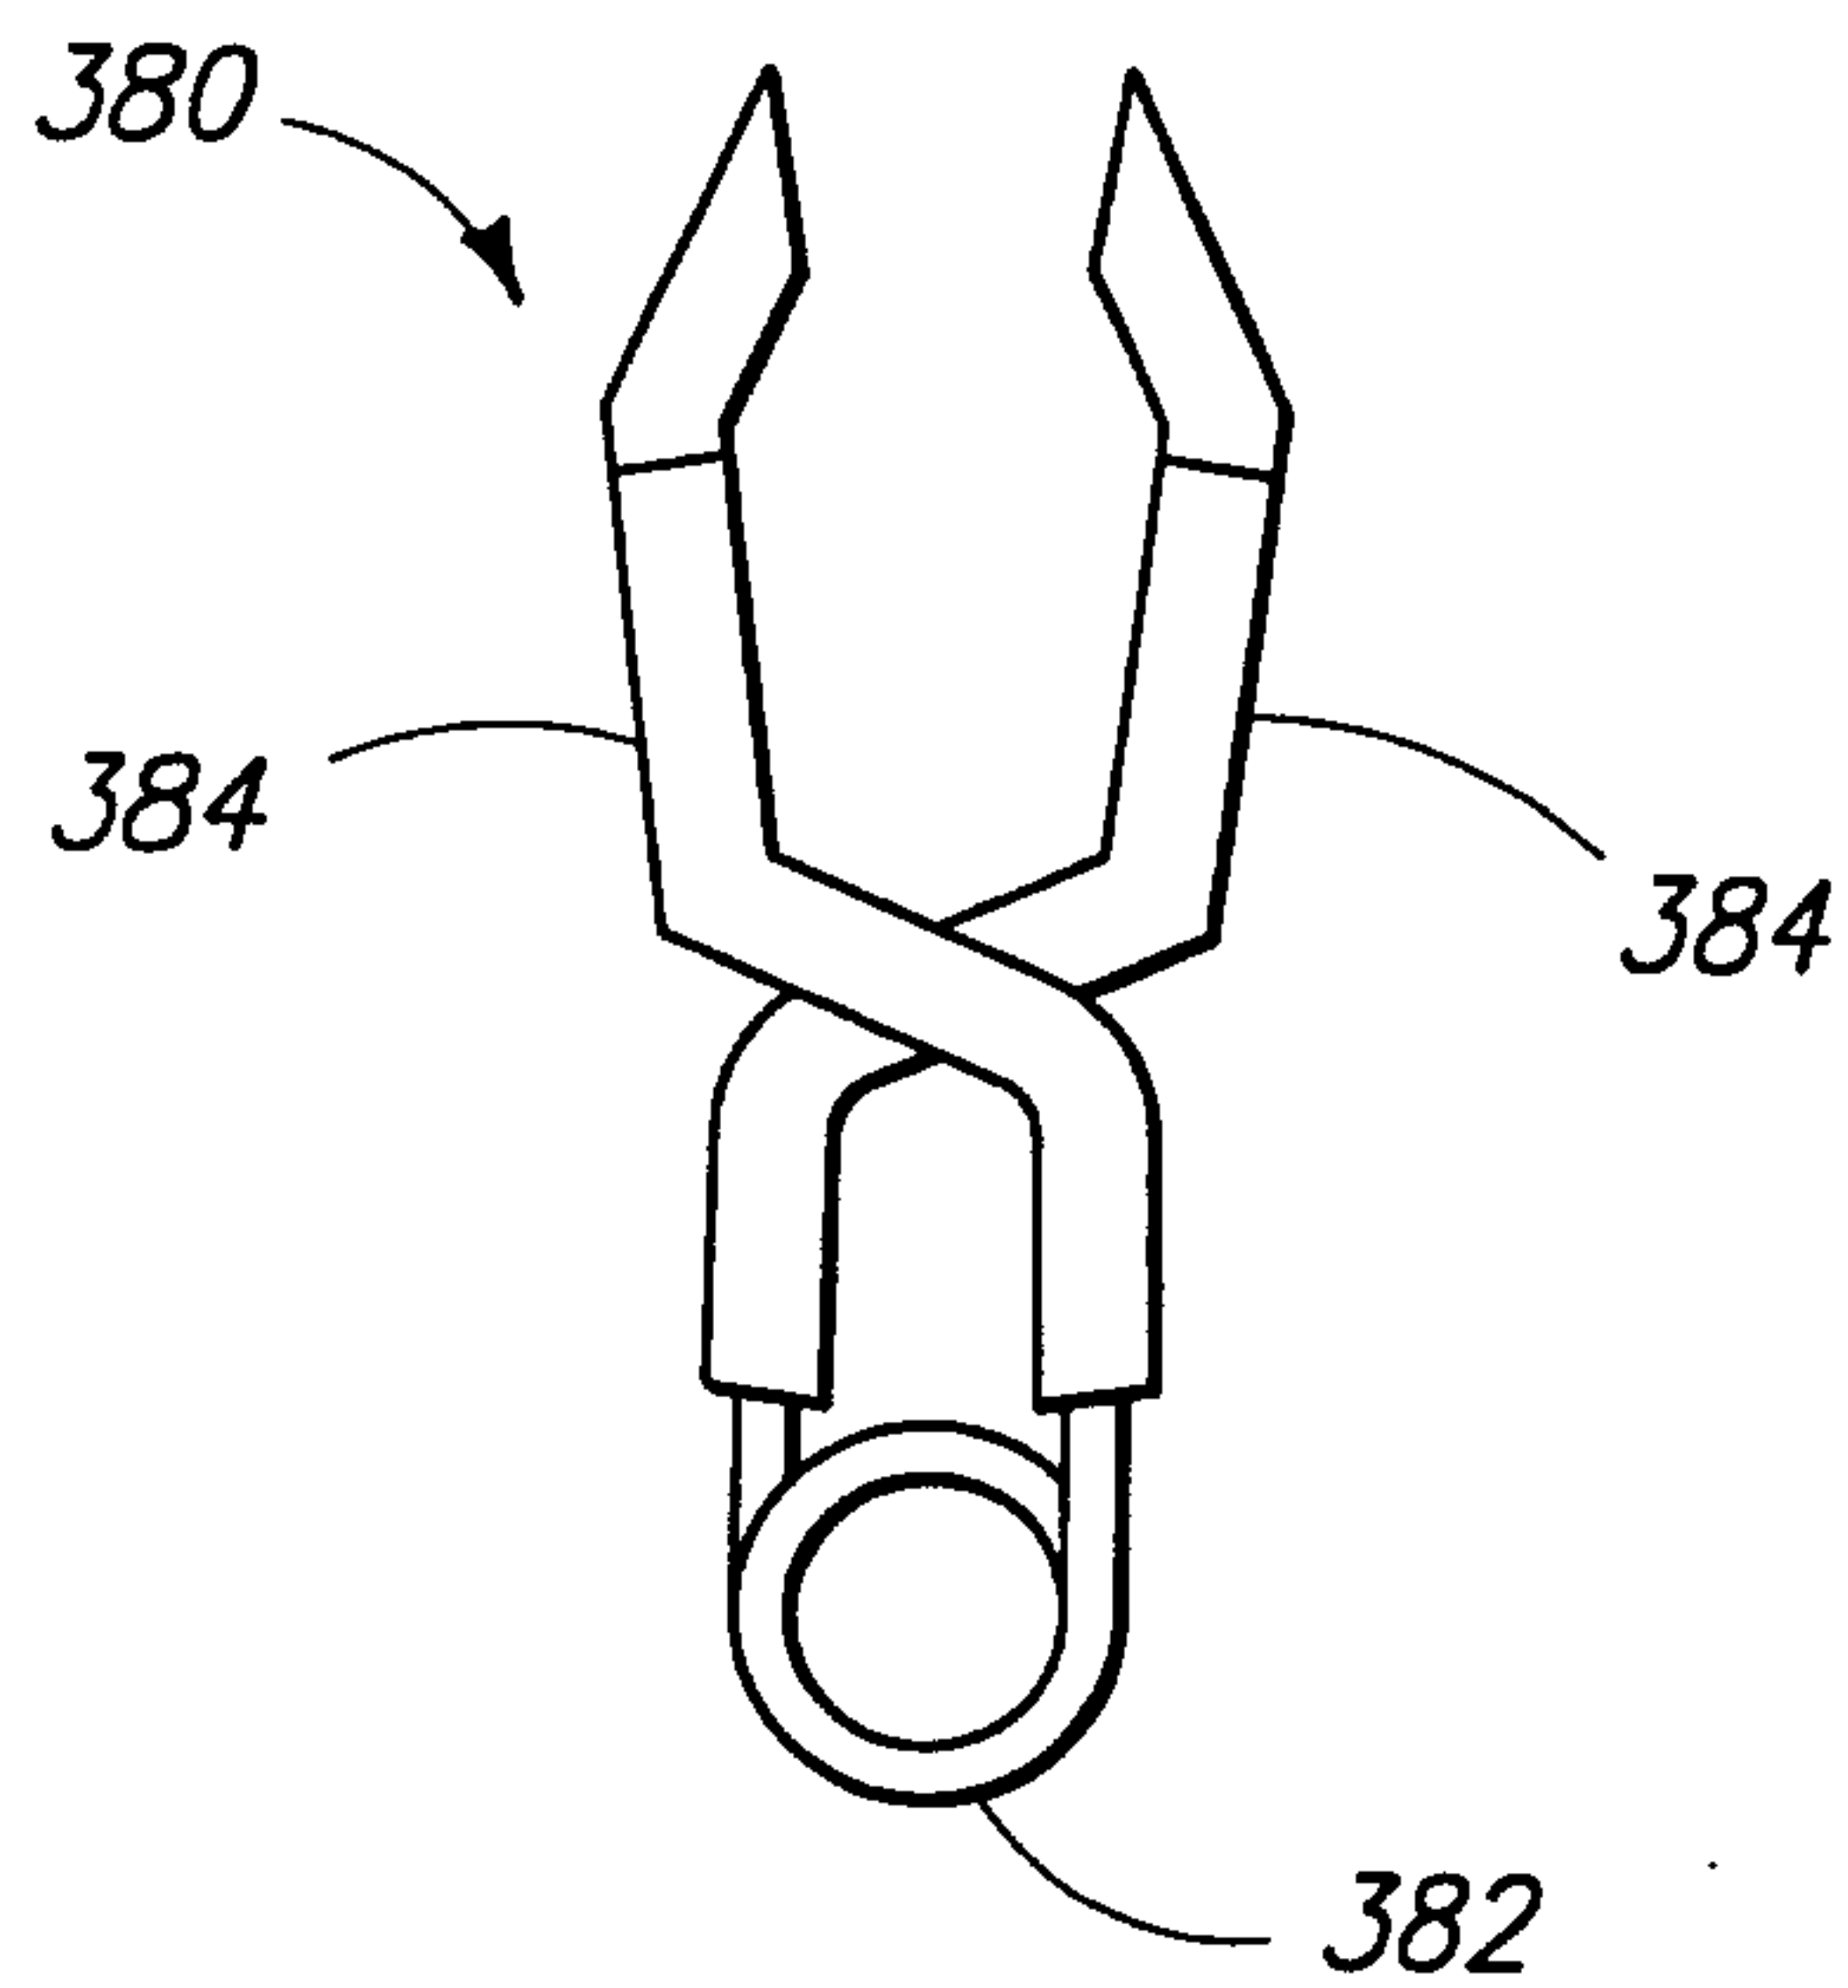


FIG. 36a

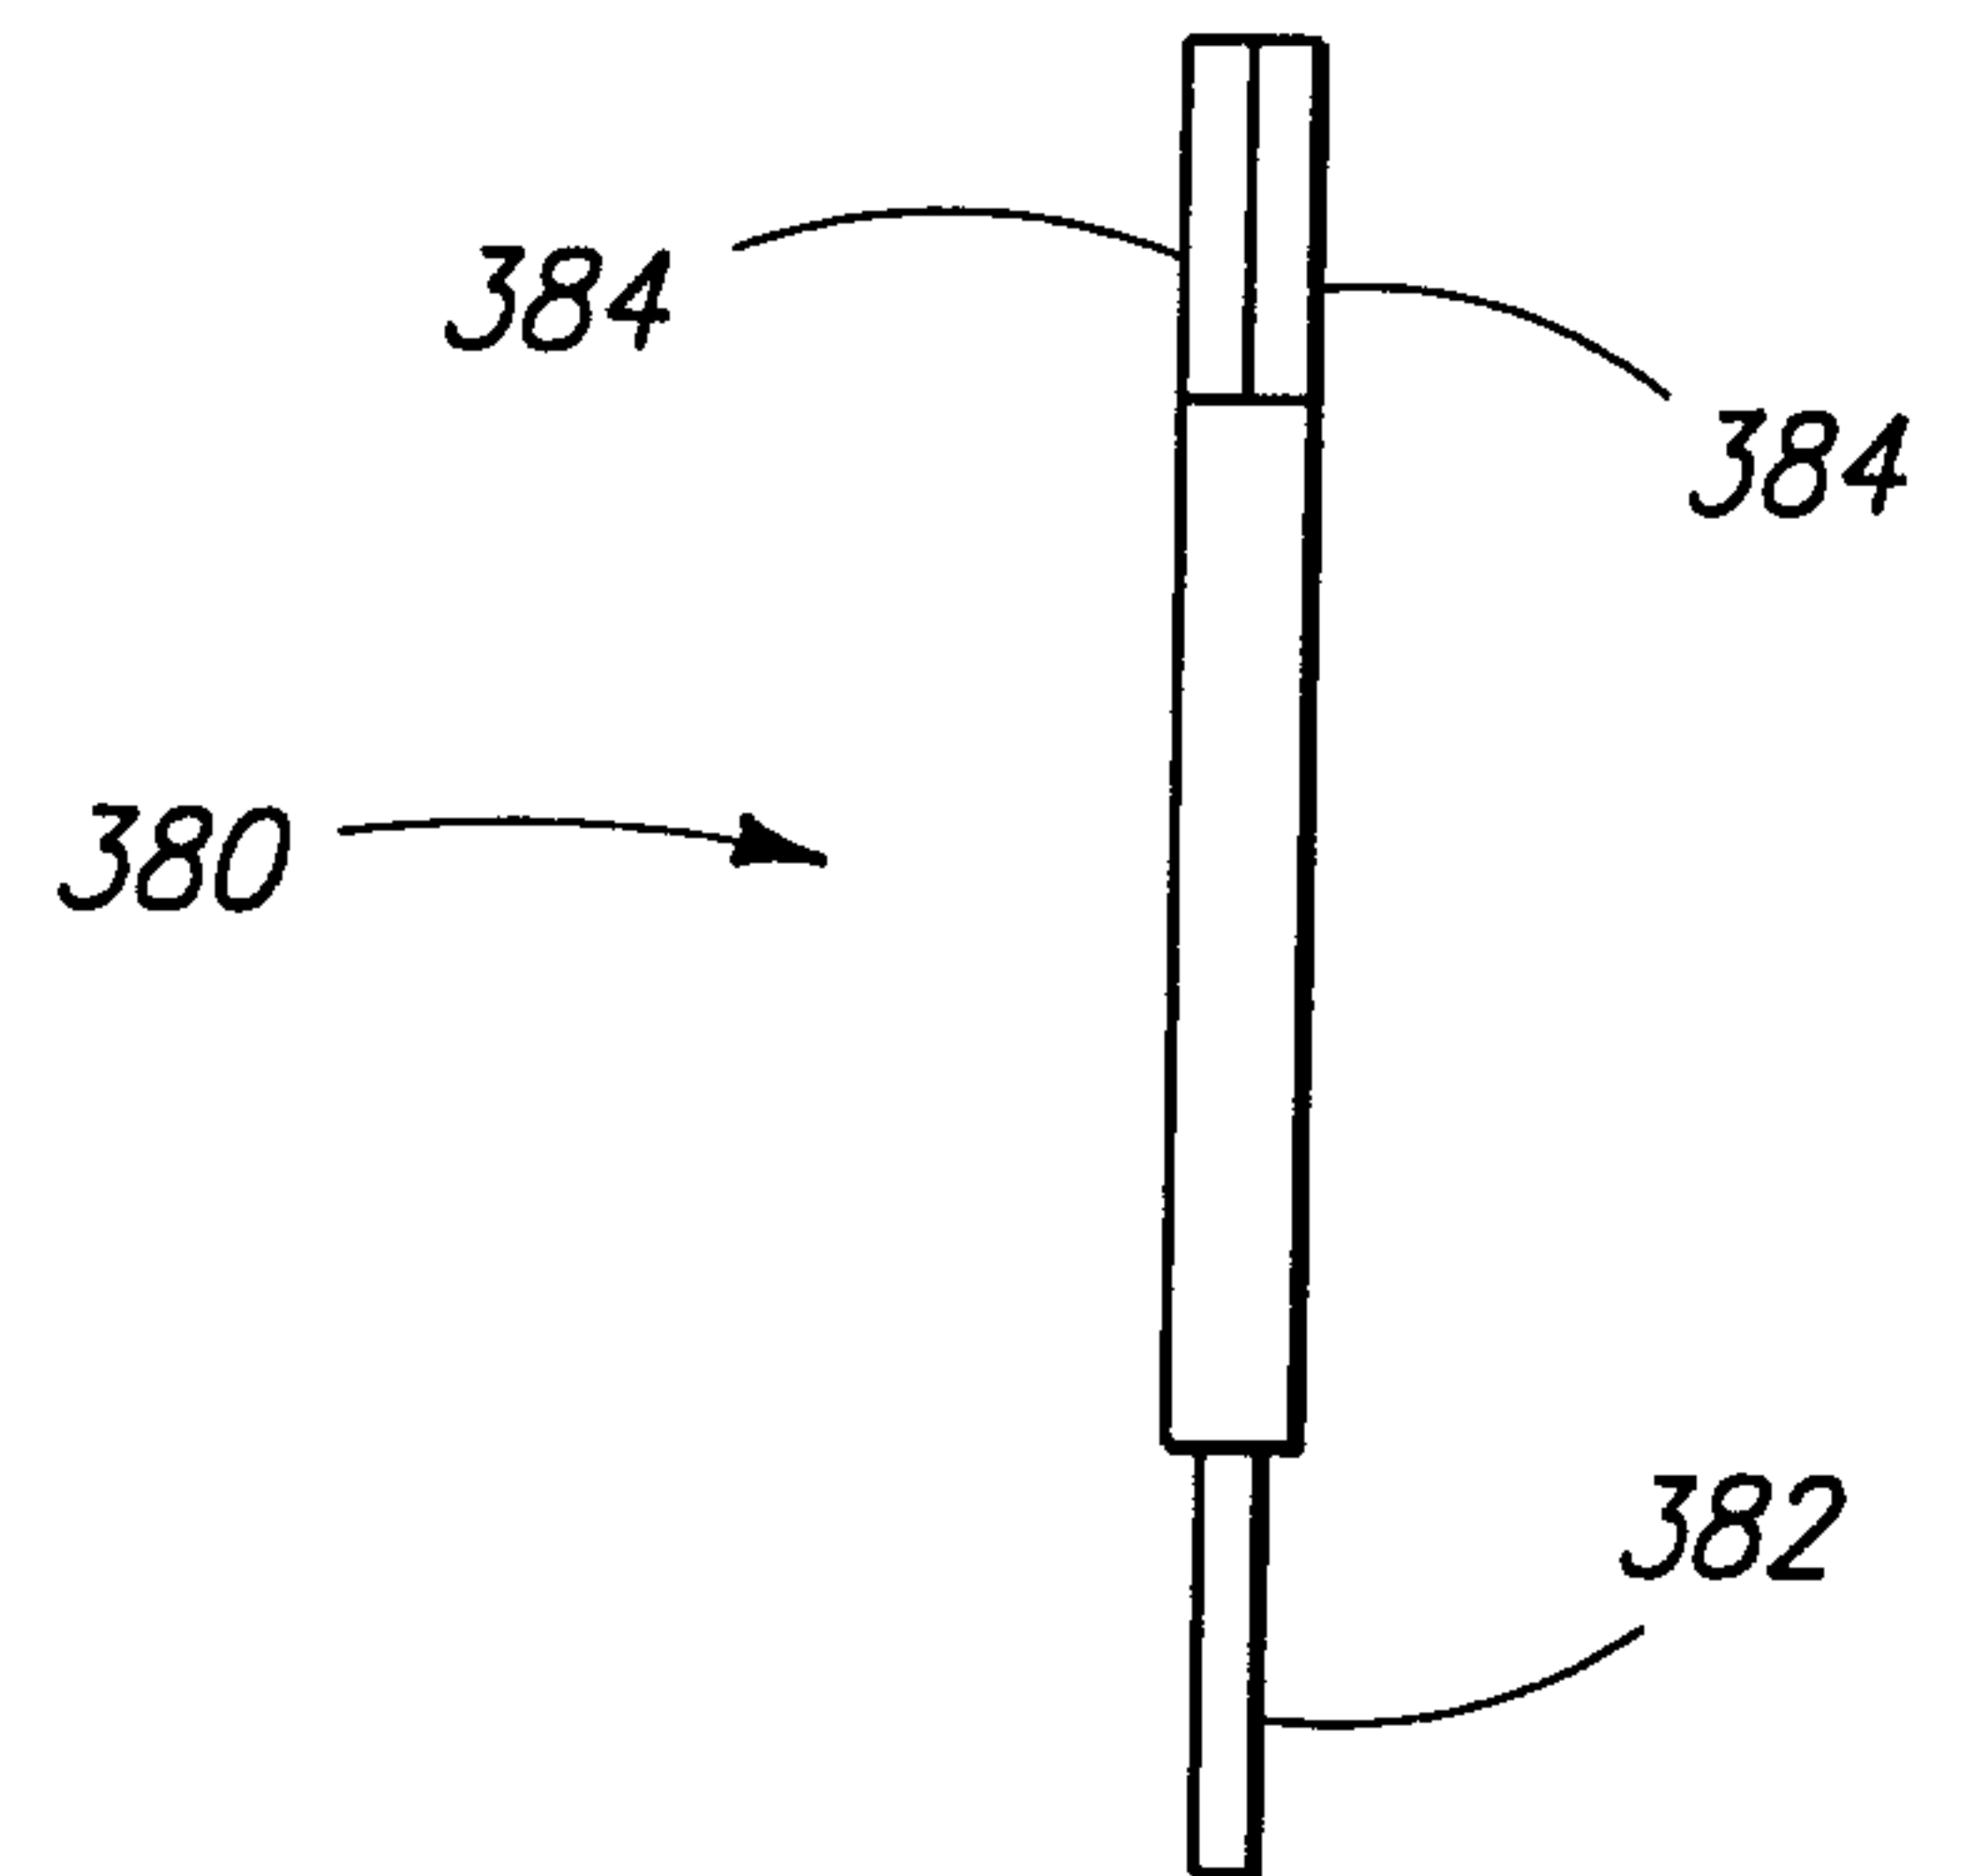


FIG. 36b

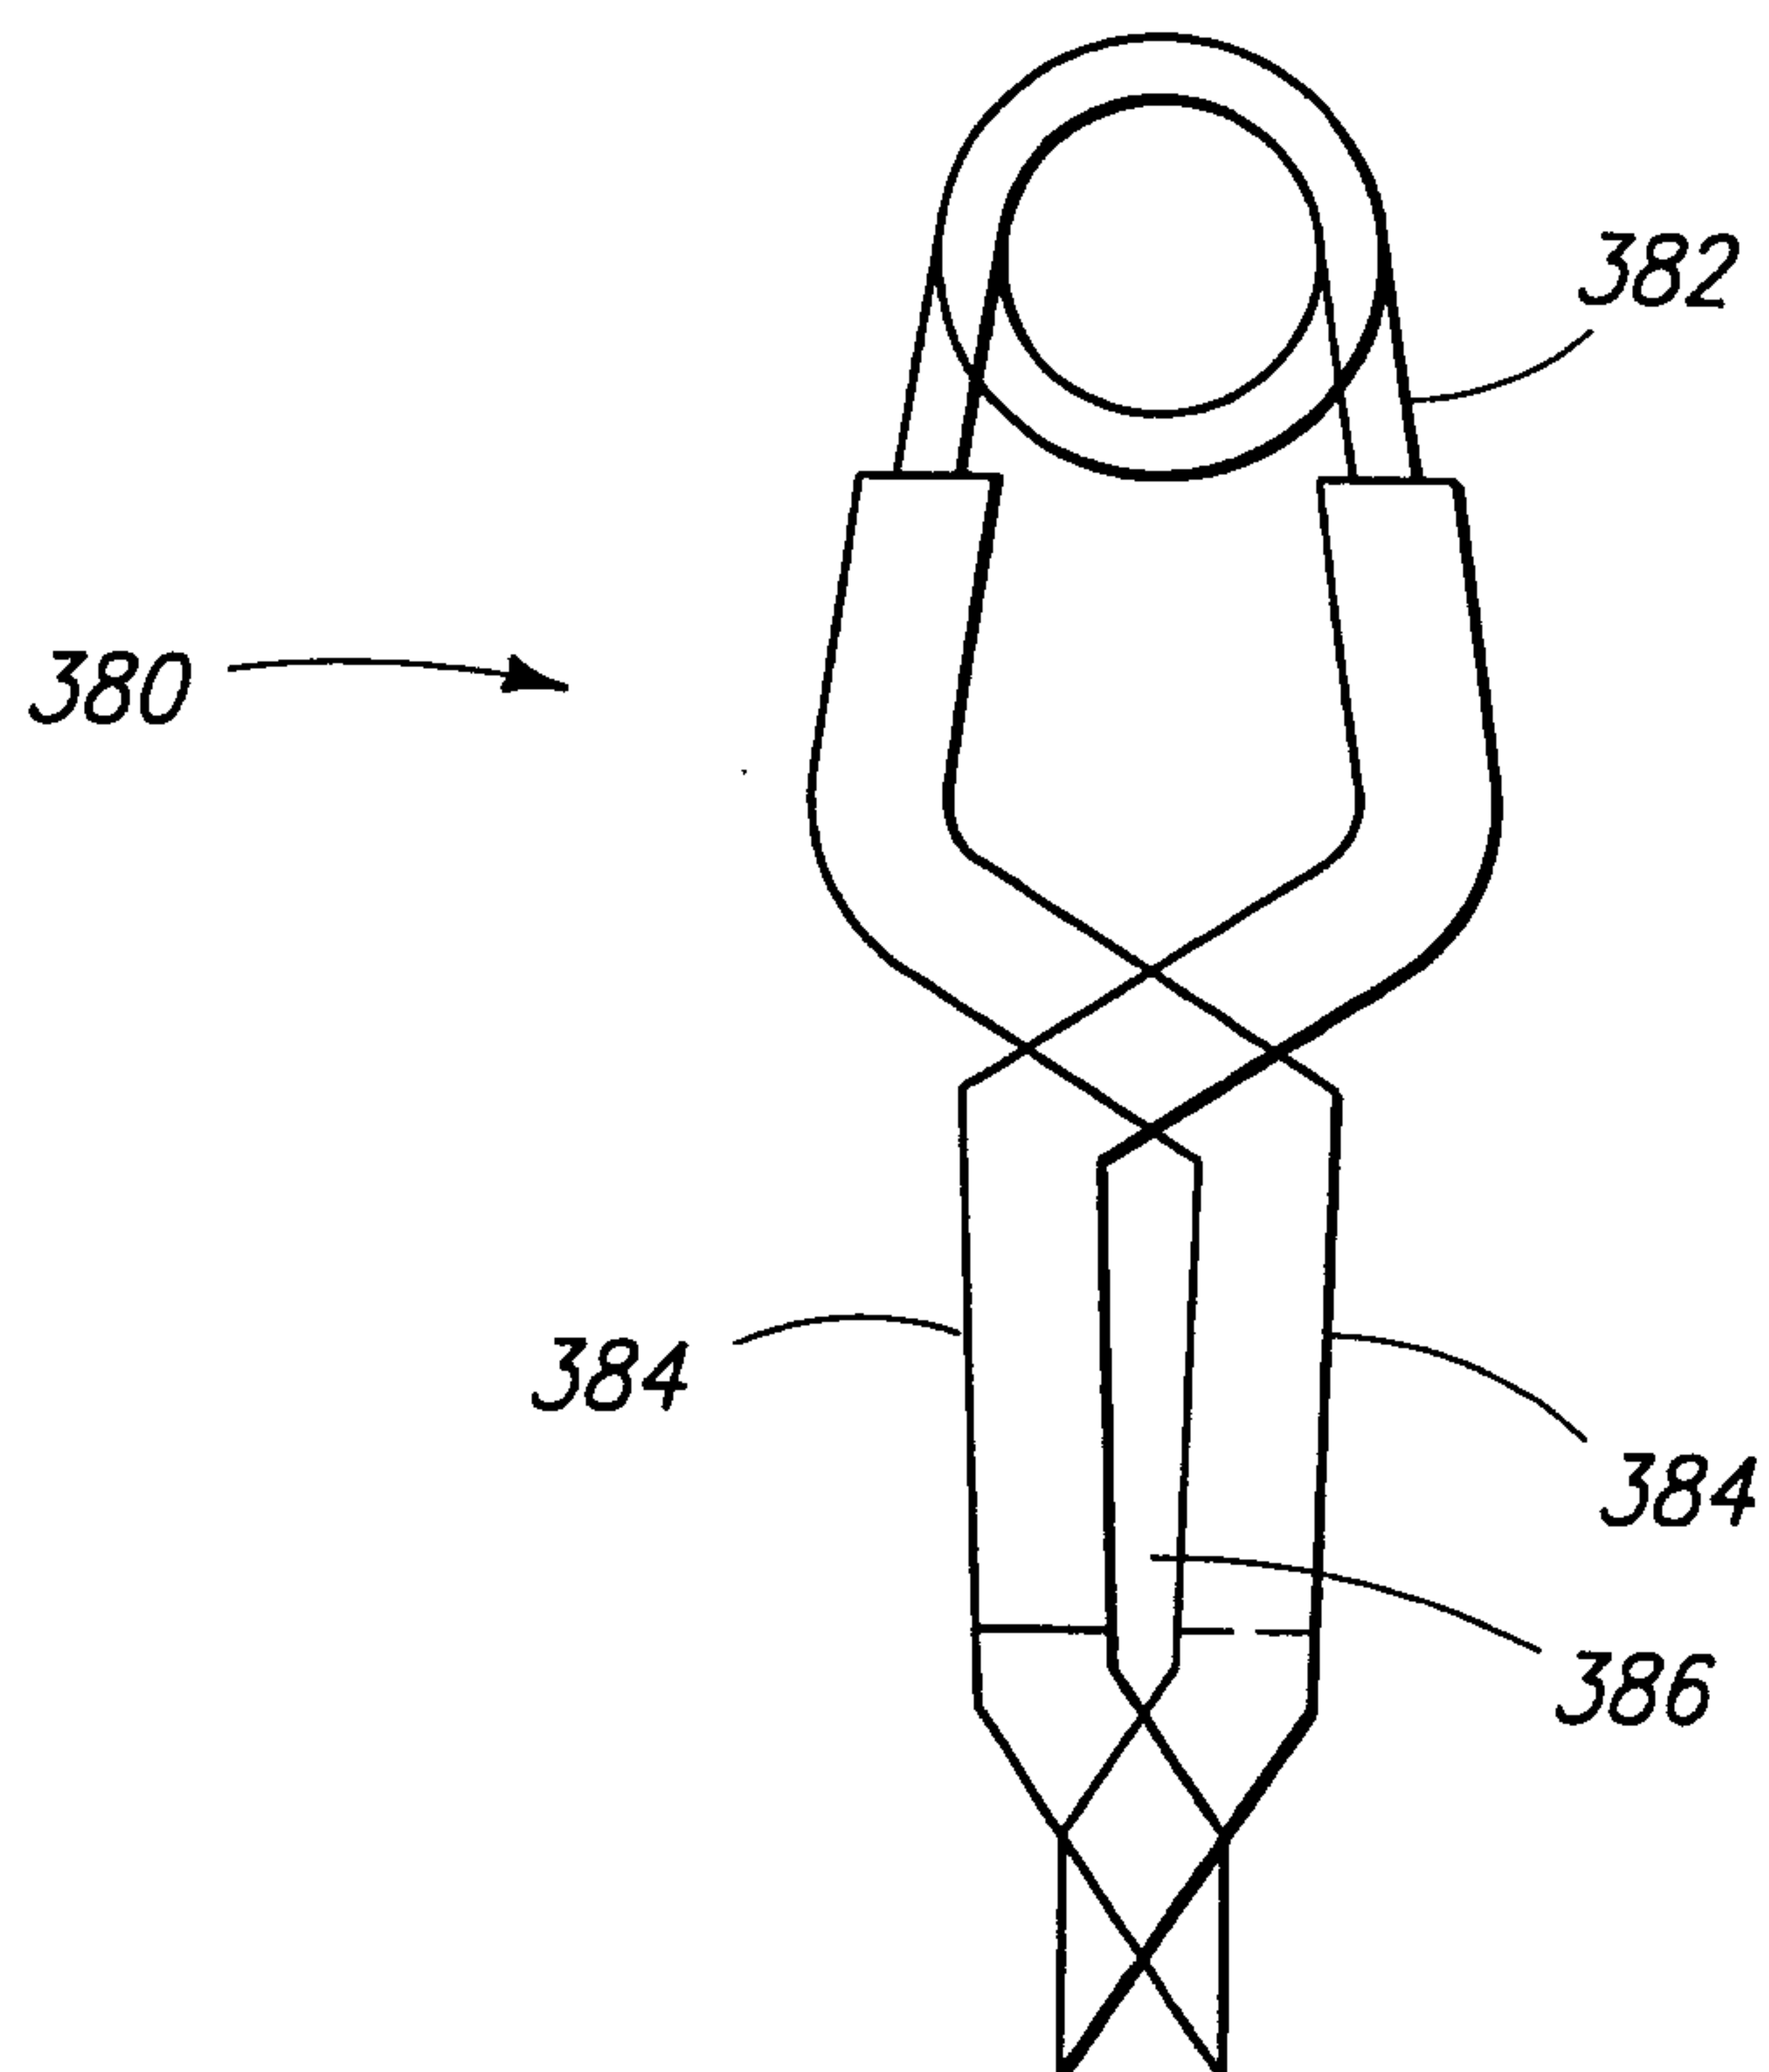


FIG. 36c

36/45

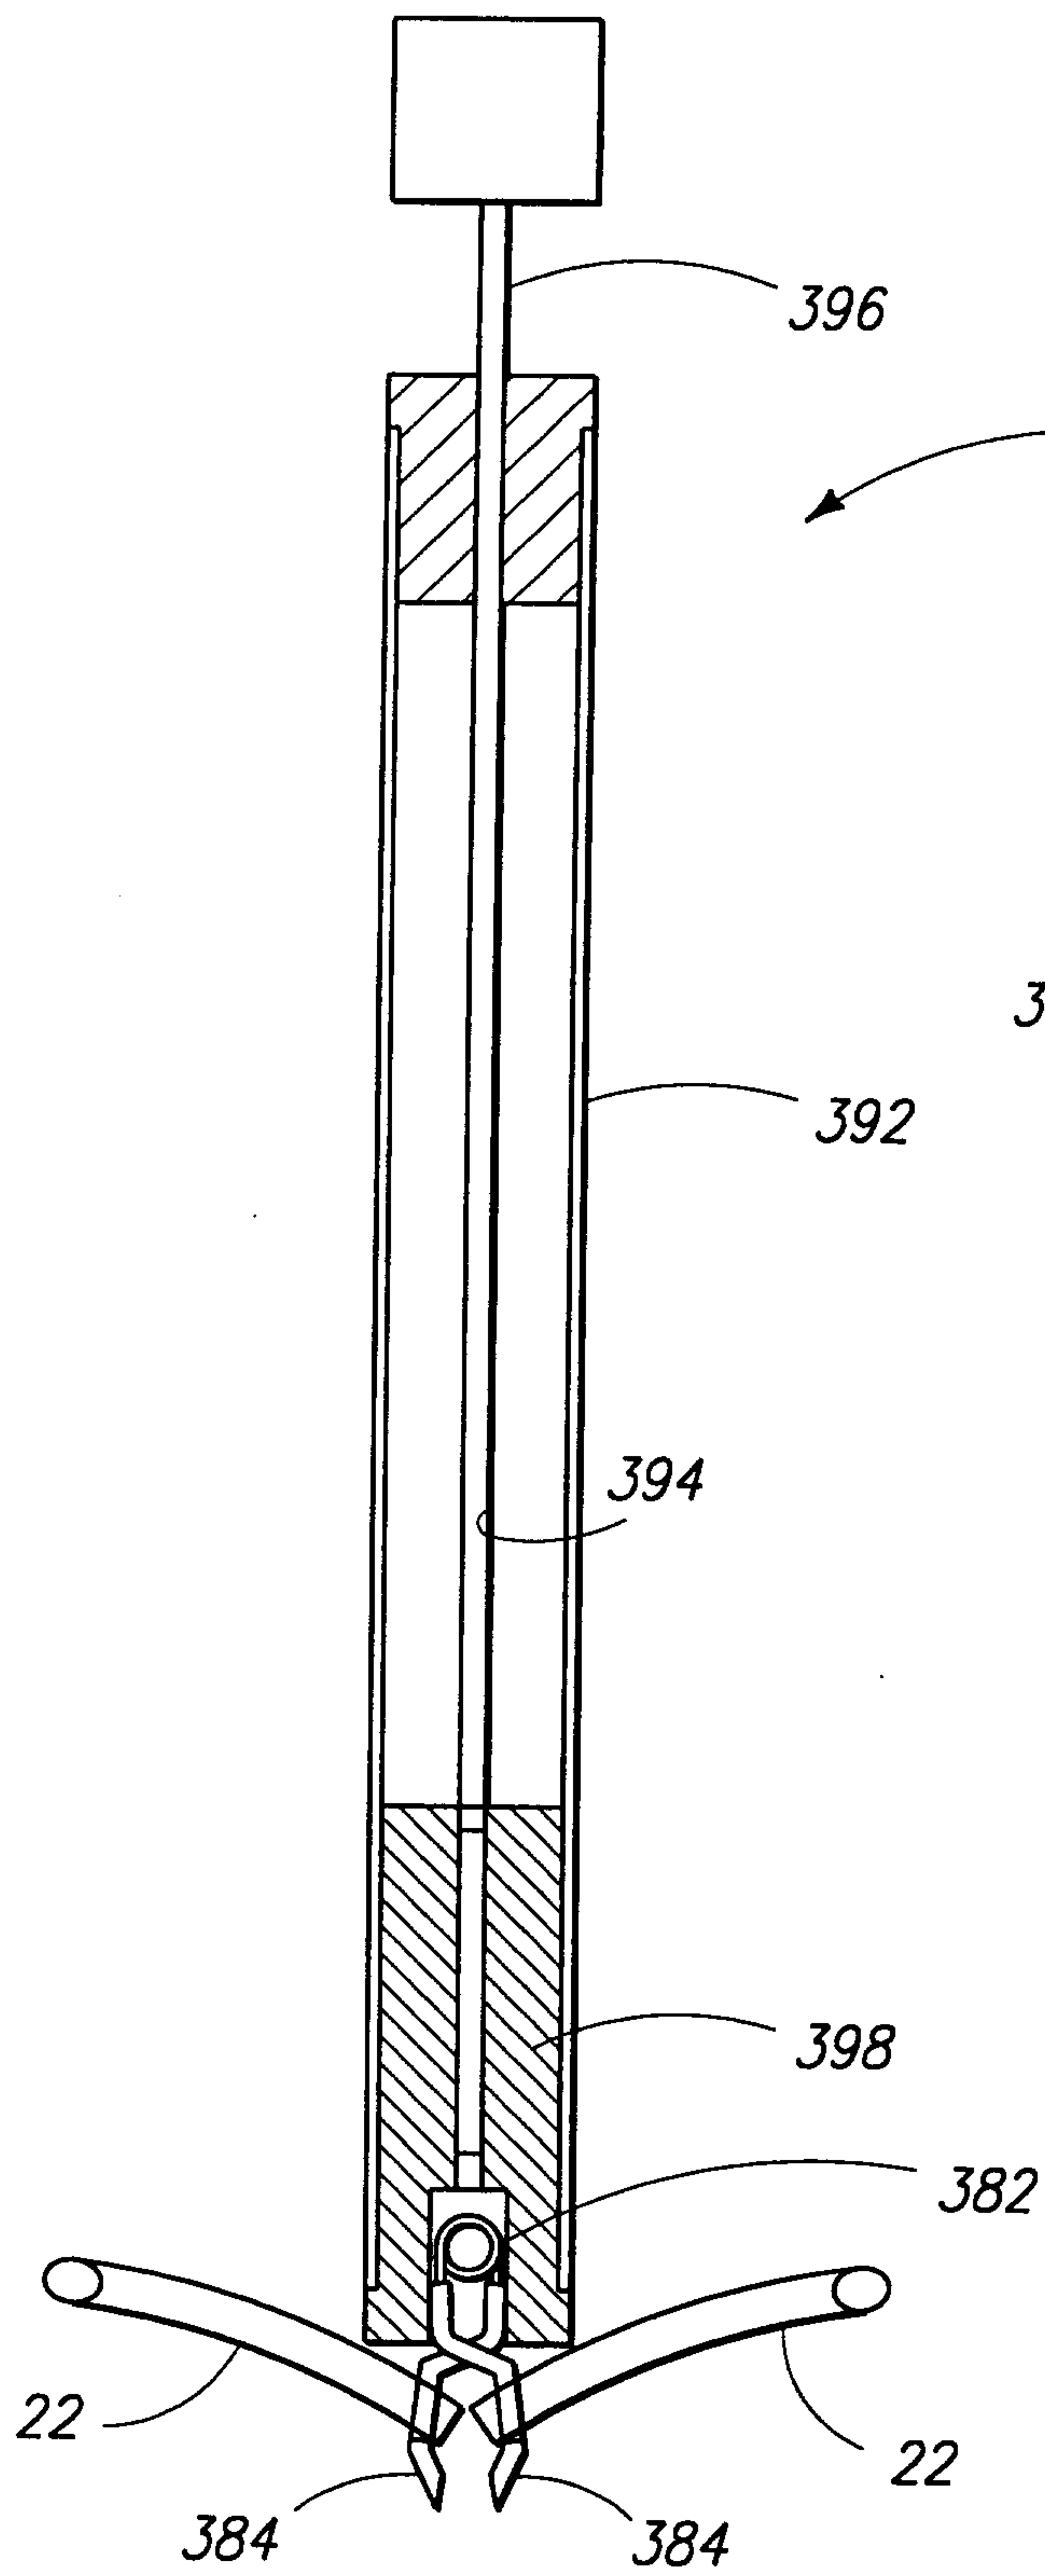


FIG. 37a

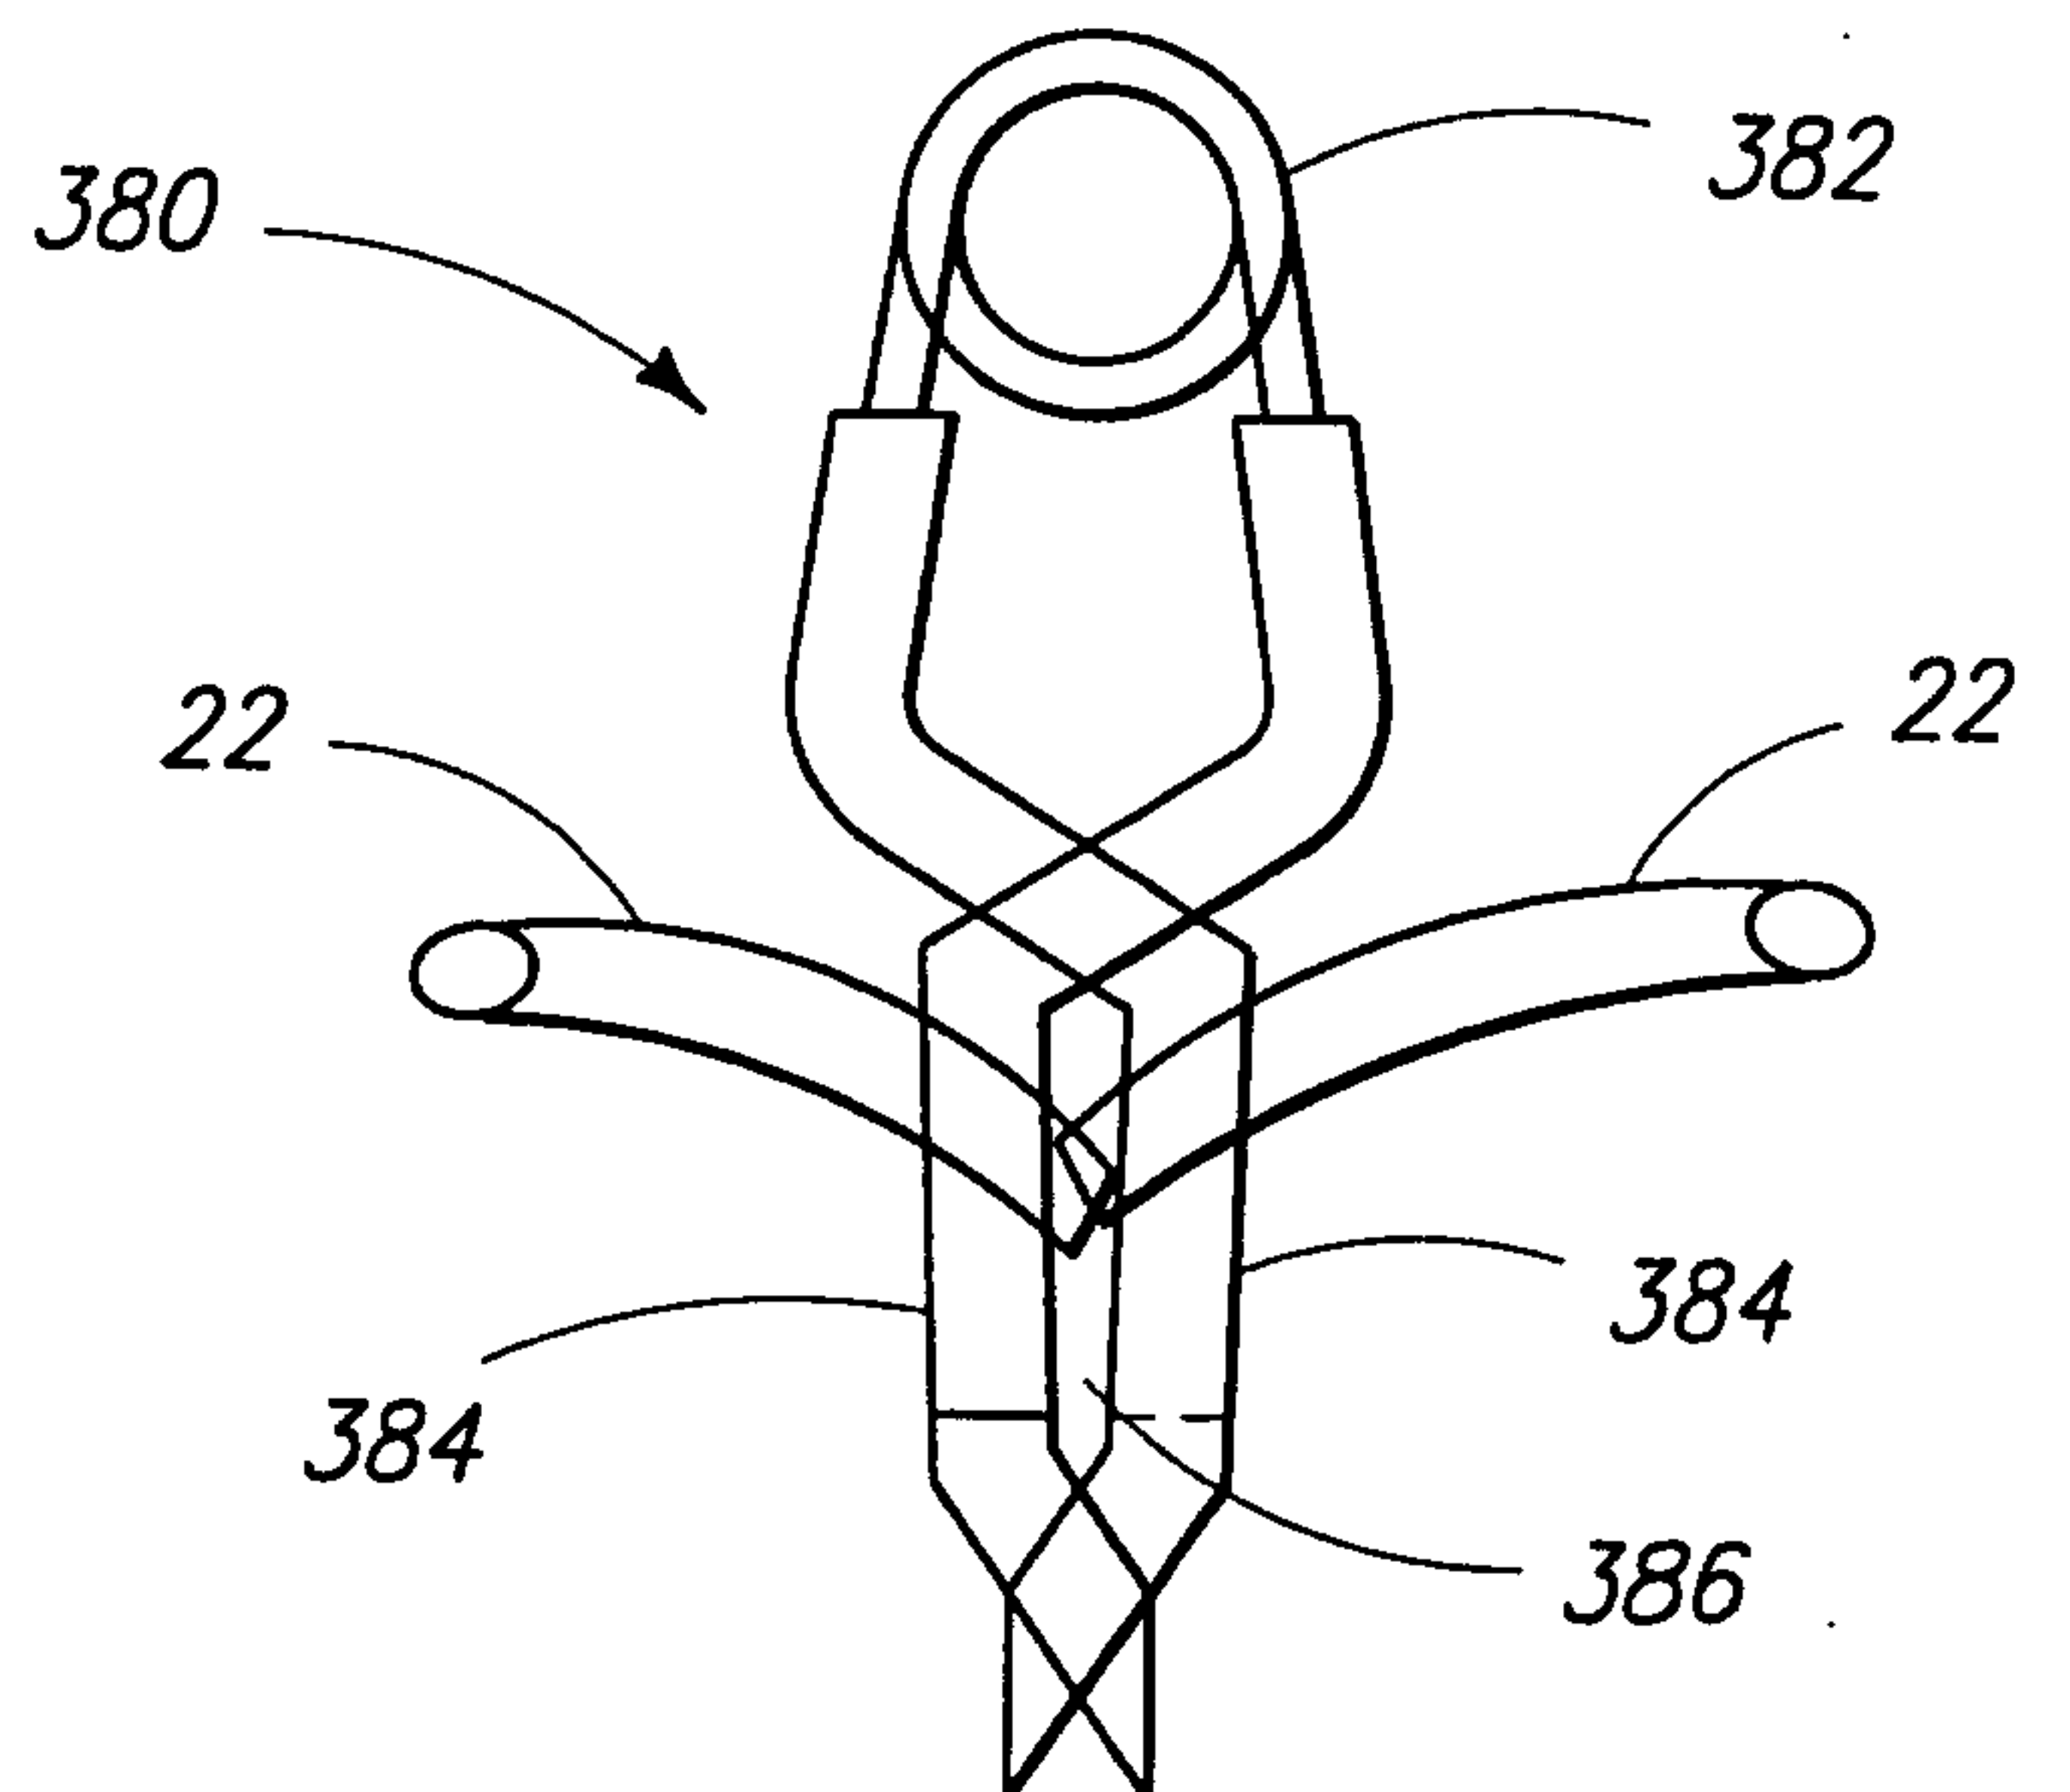


FIG. 37b

37/45

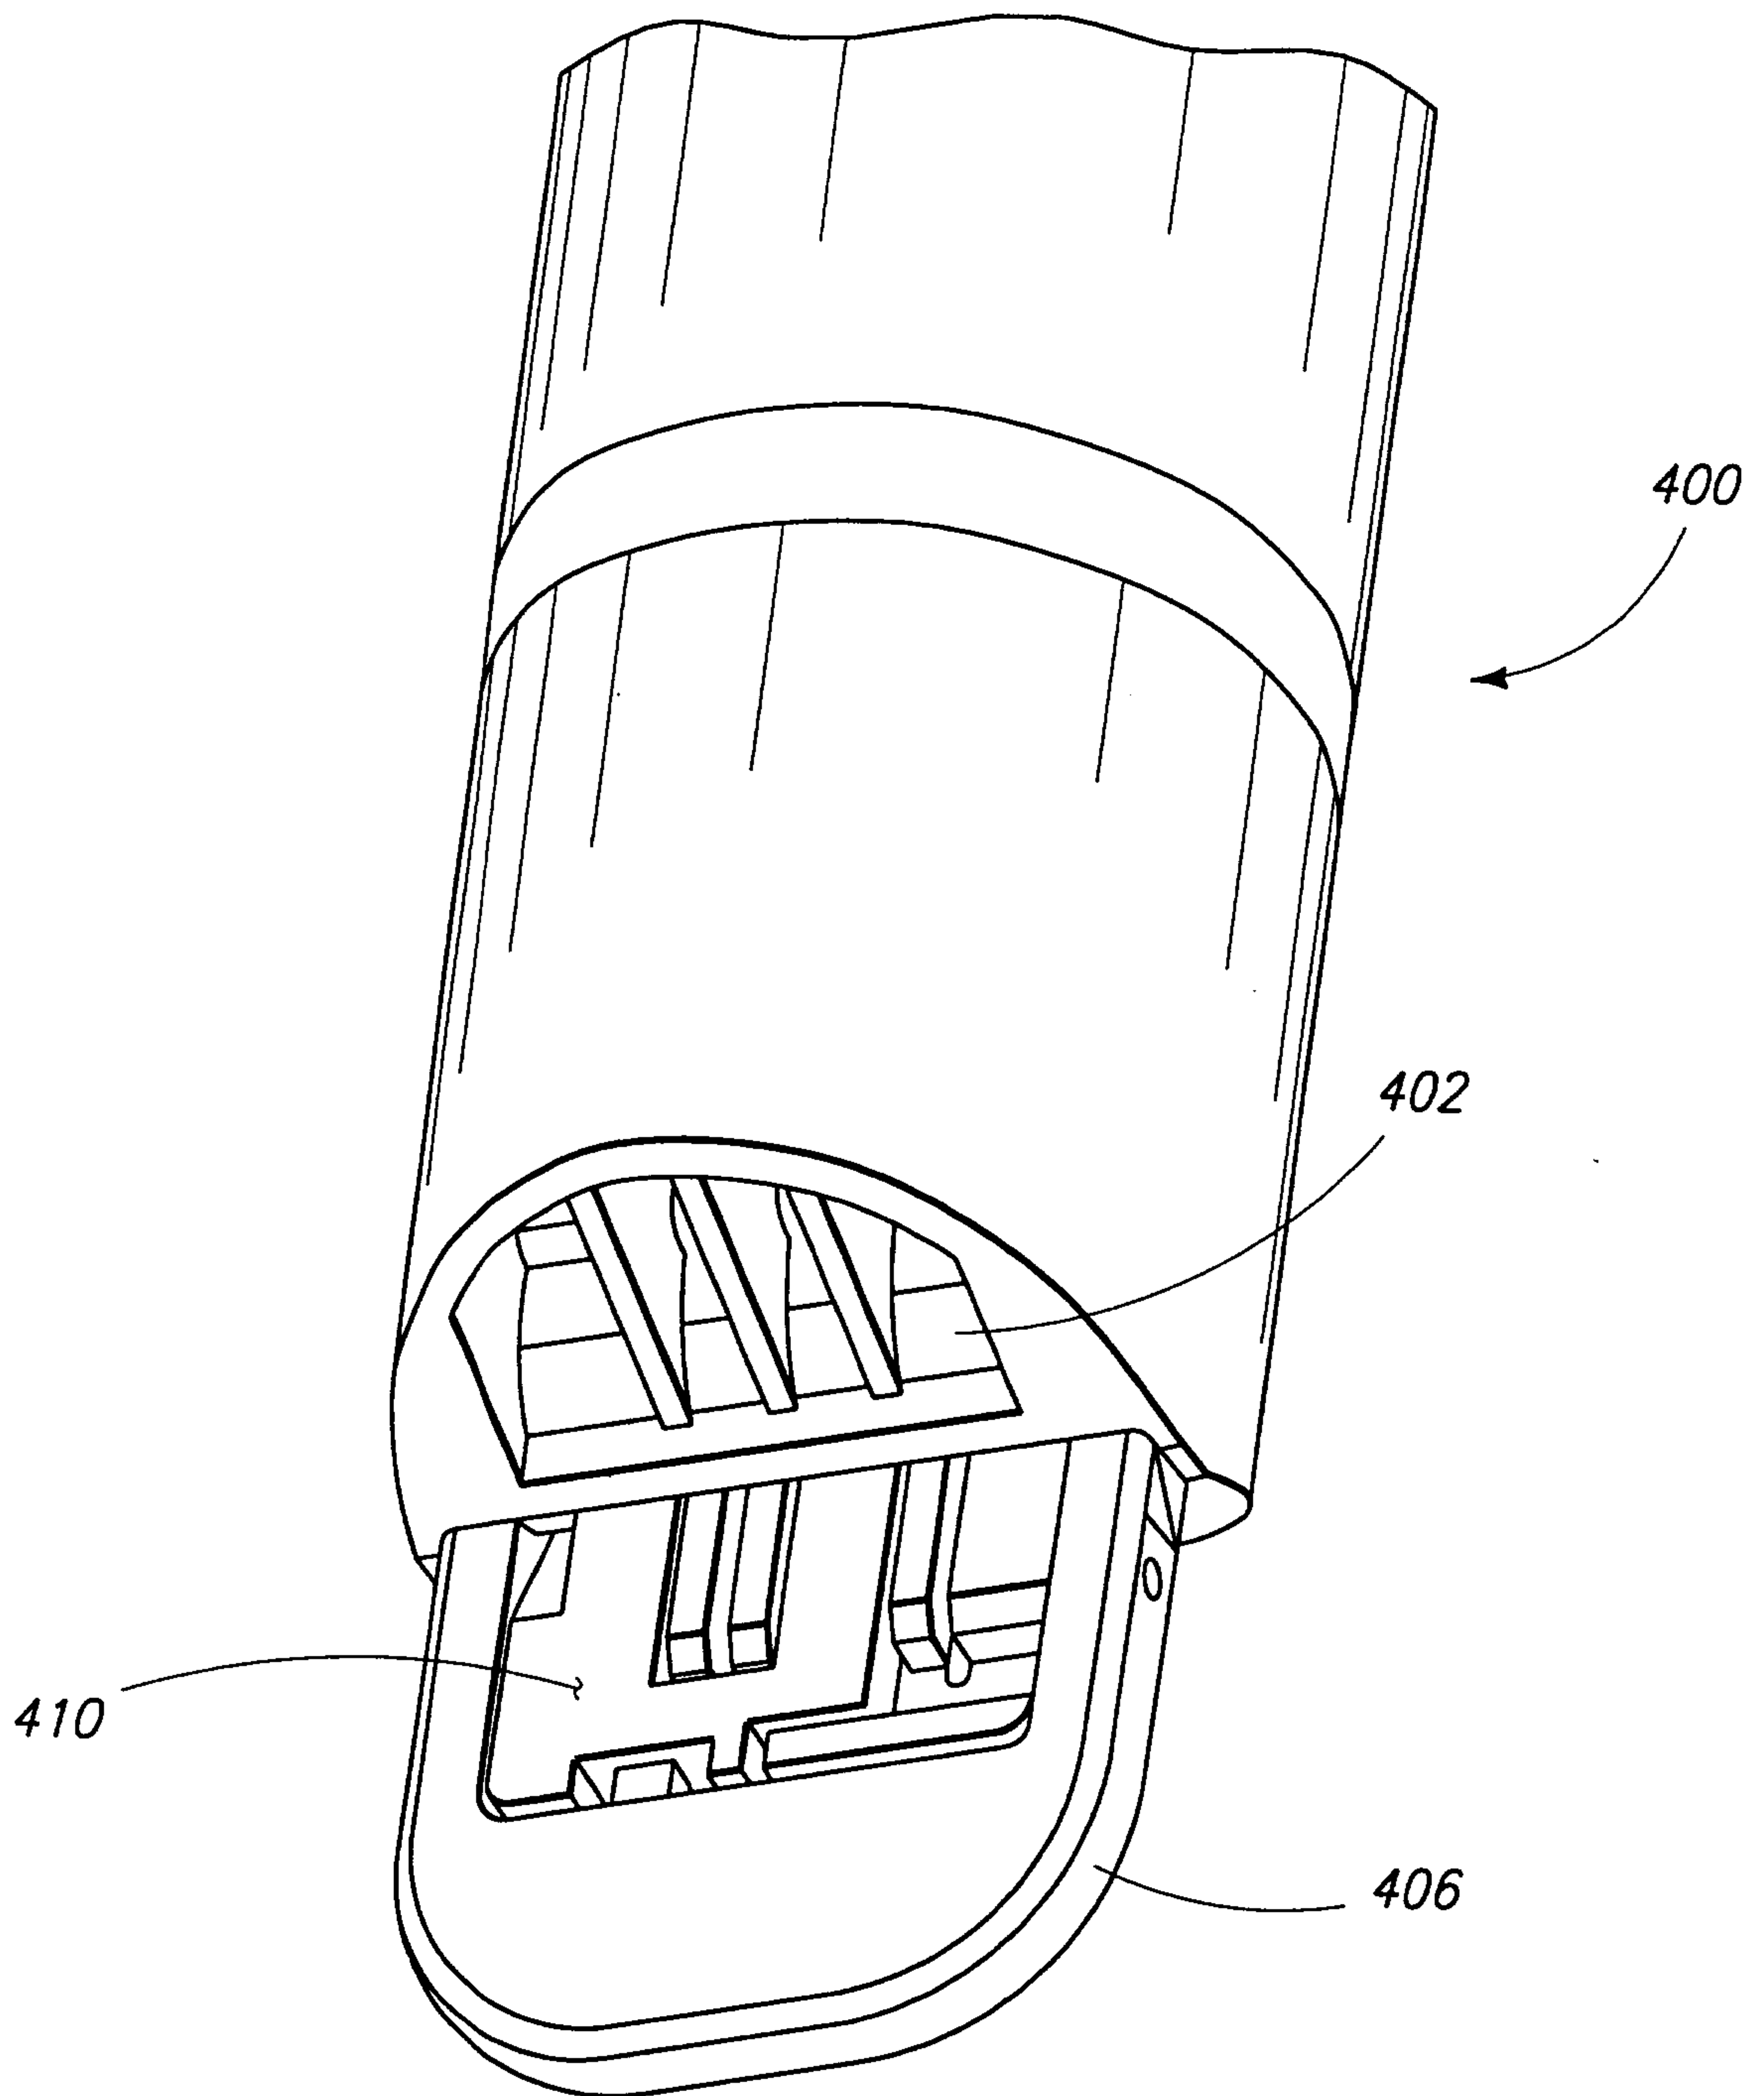


FIG. 38

38/45

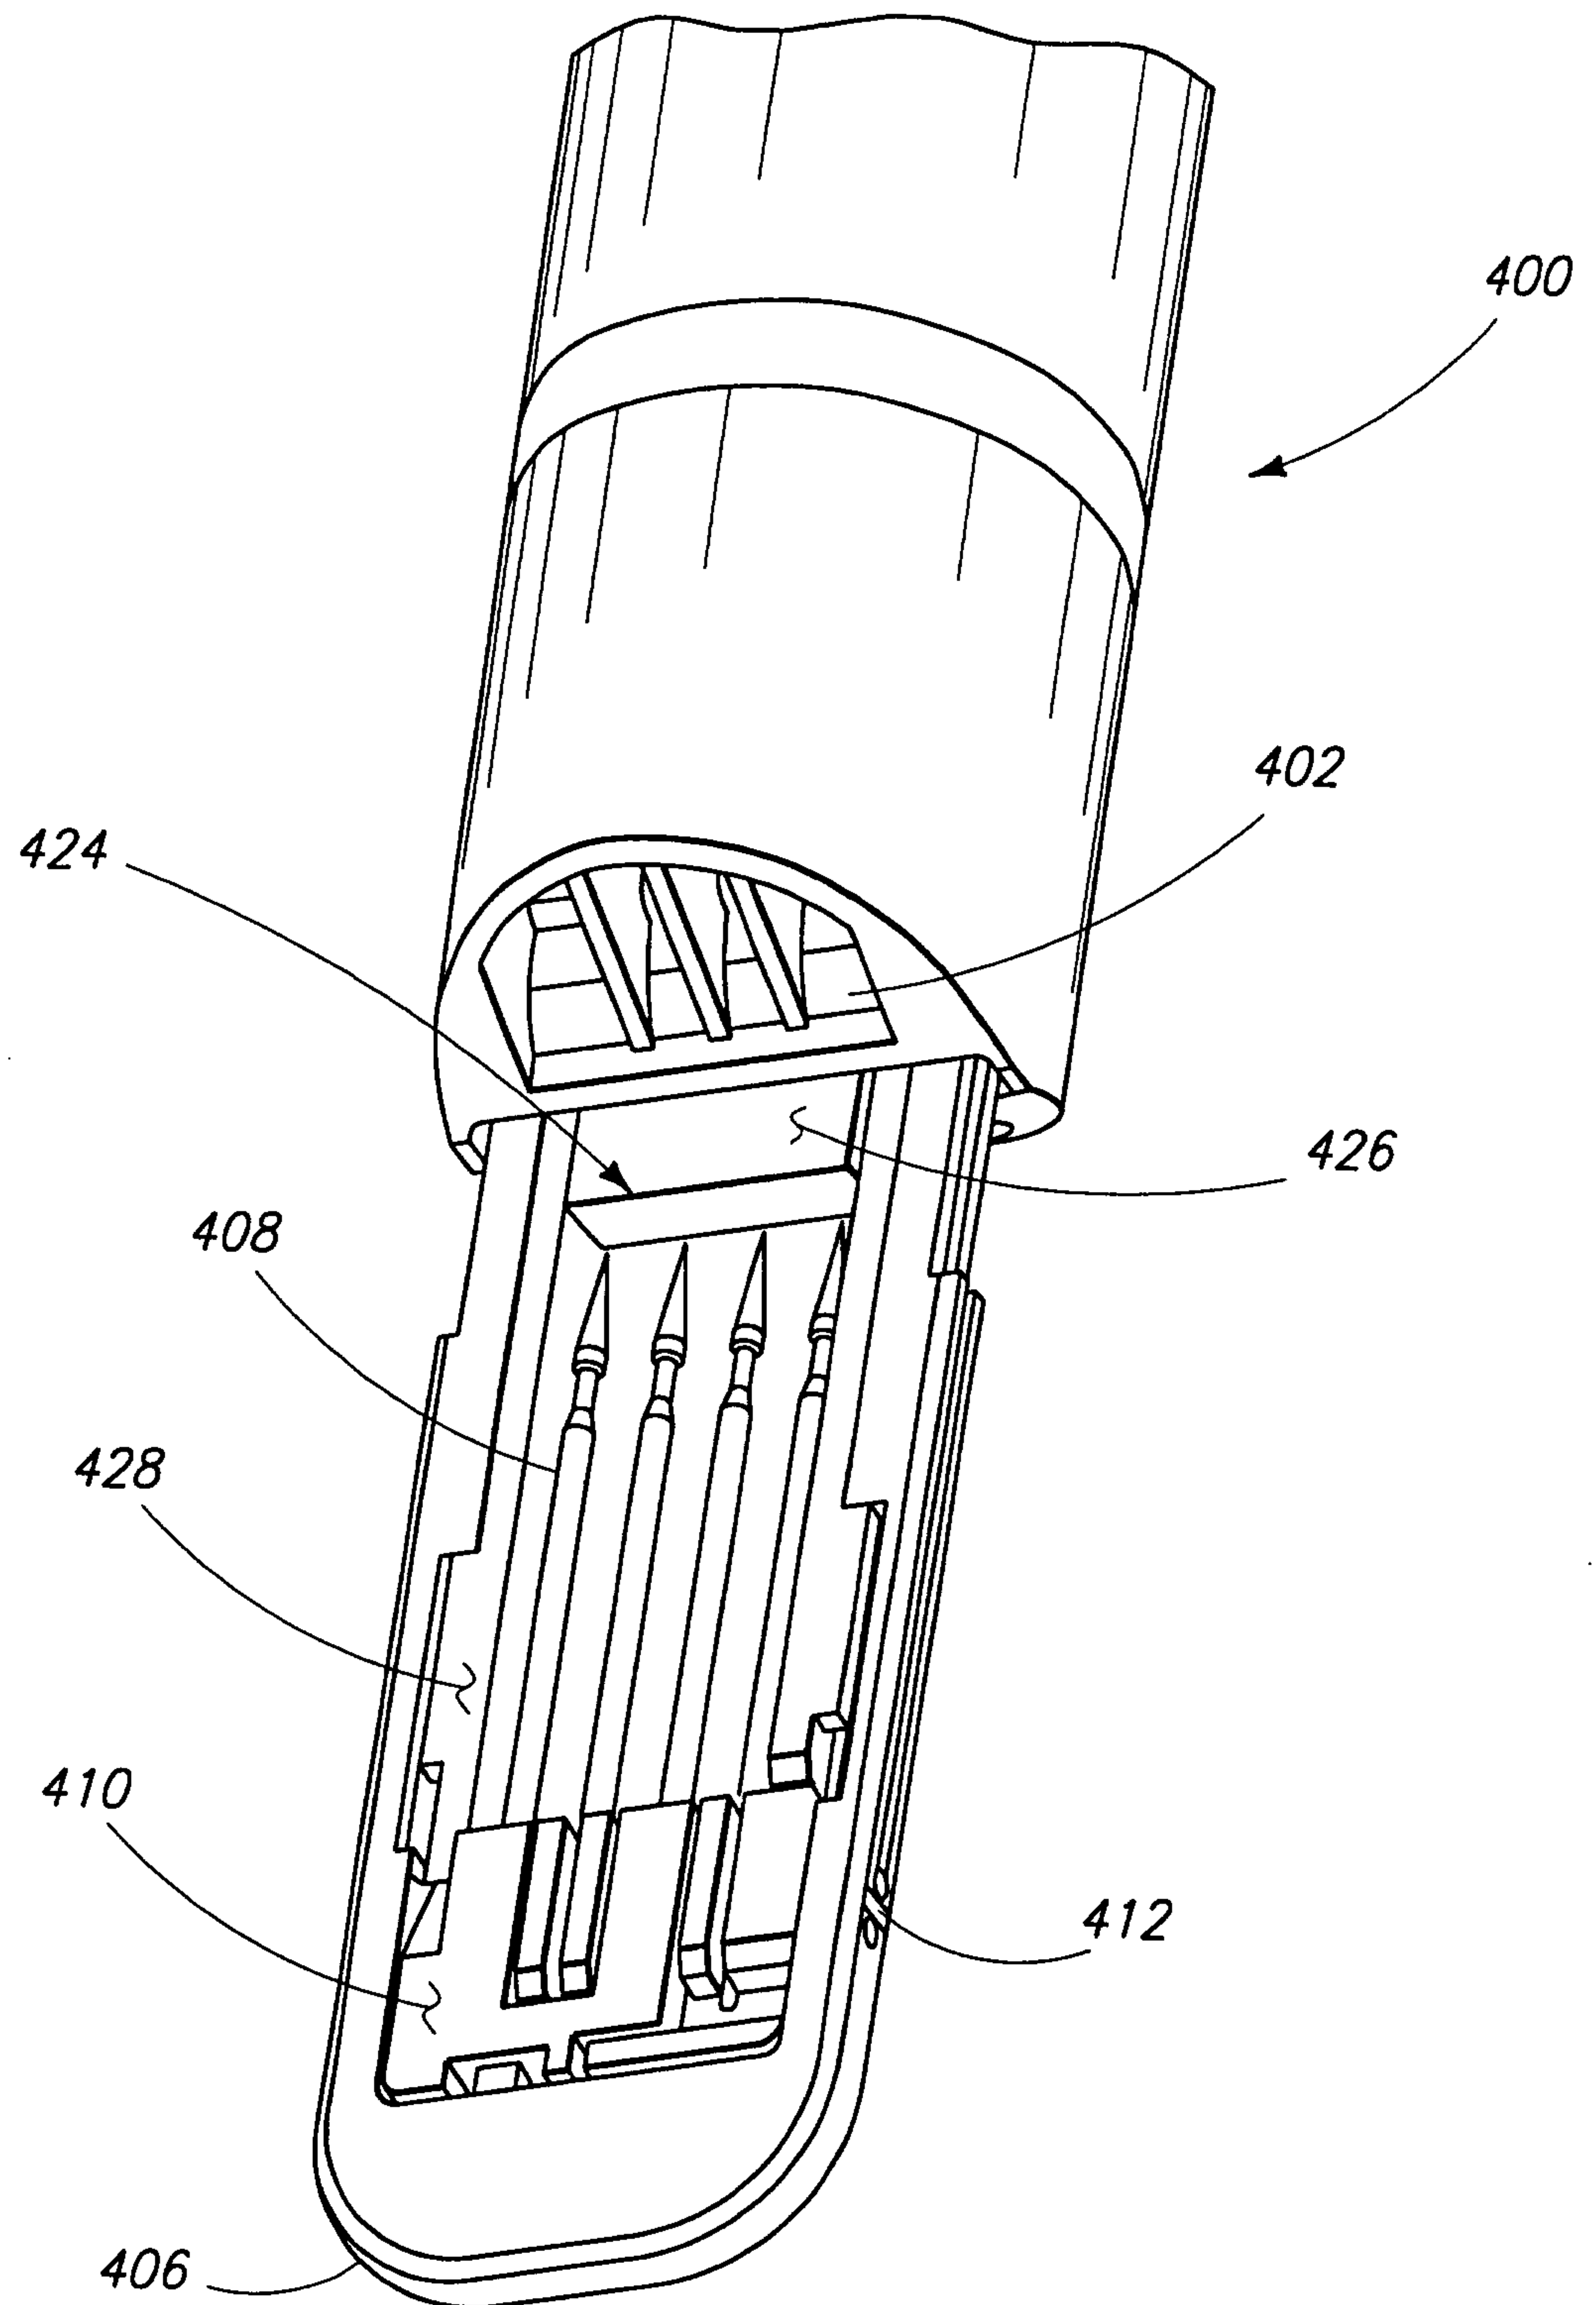


FIG. 39

39/45

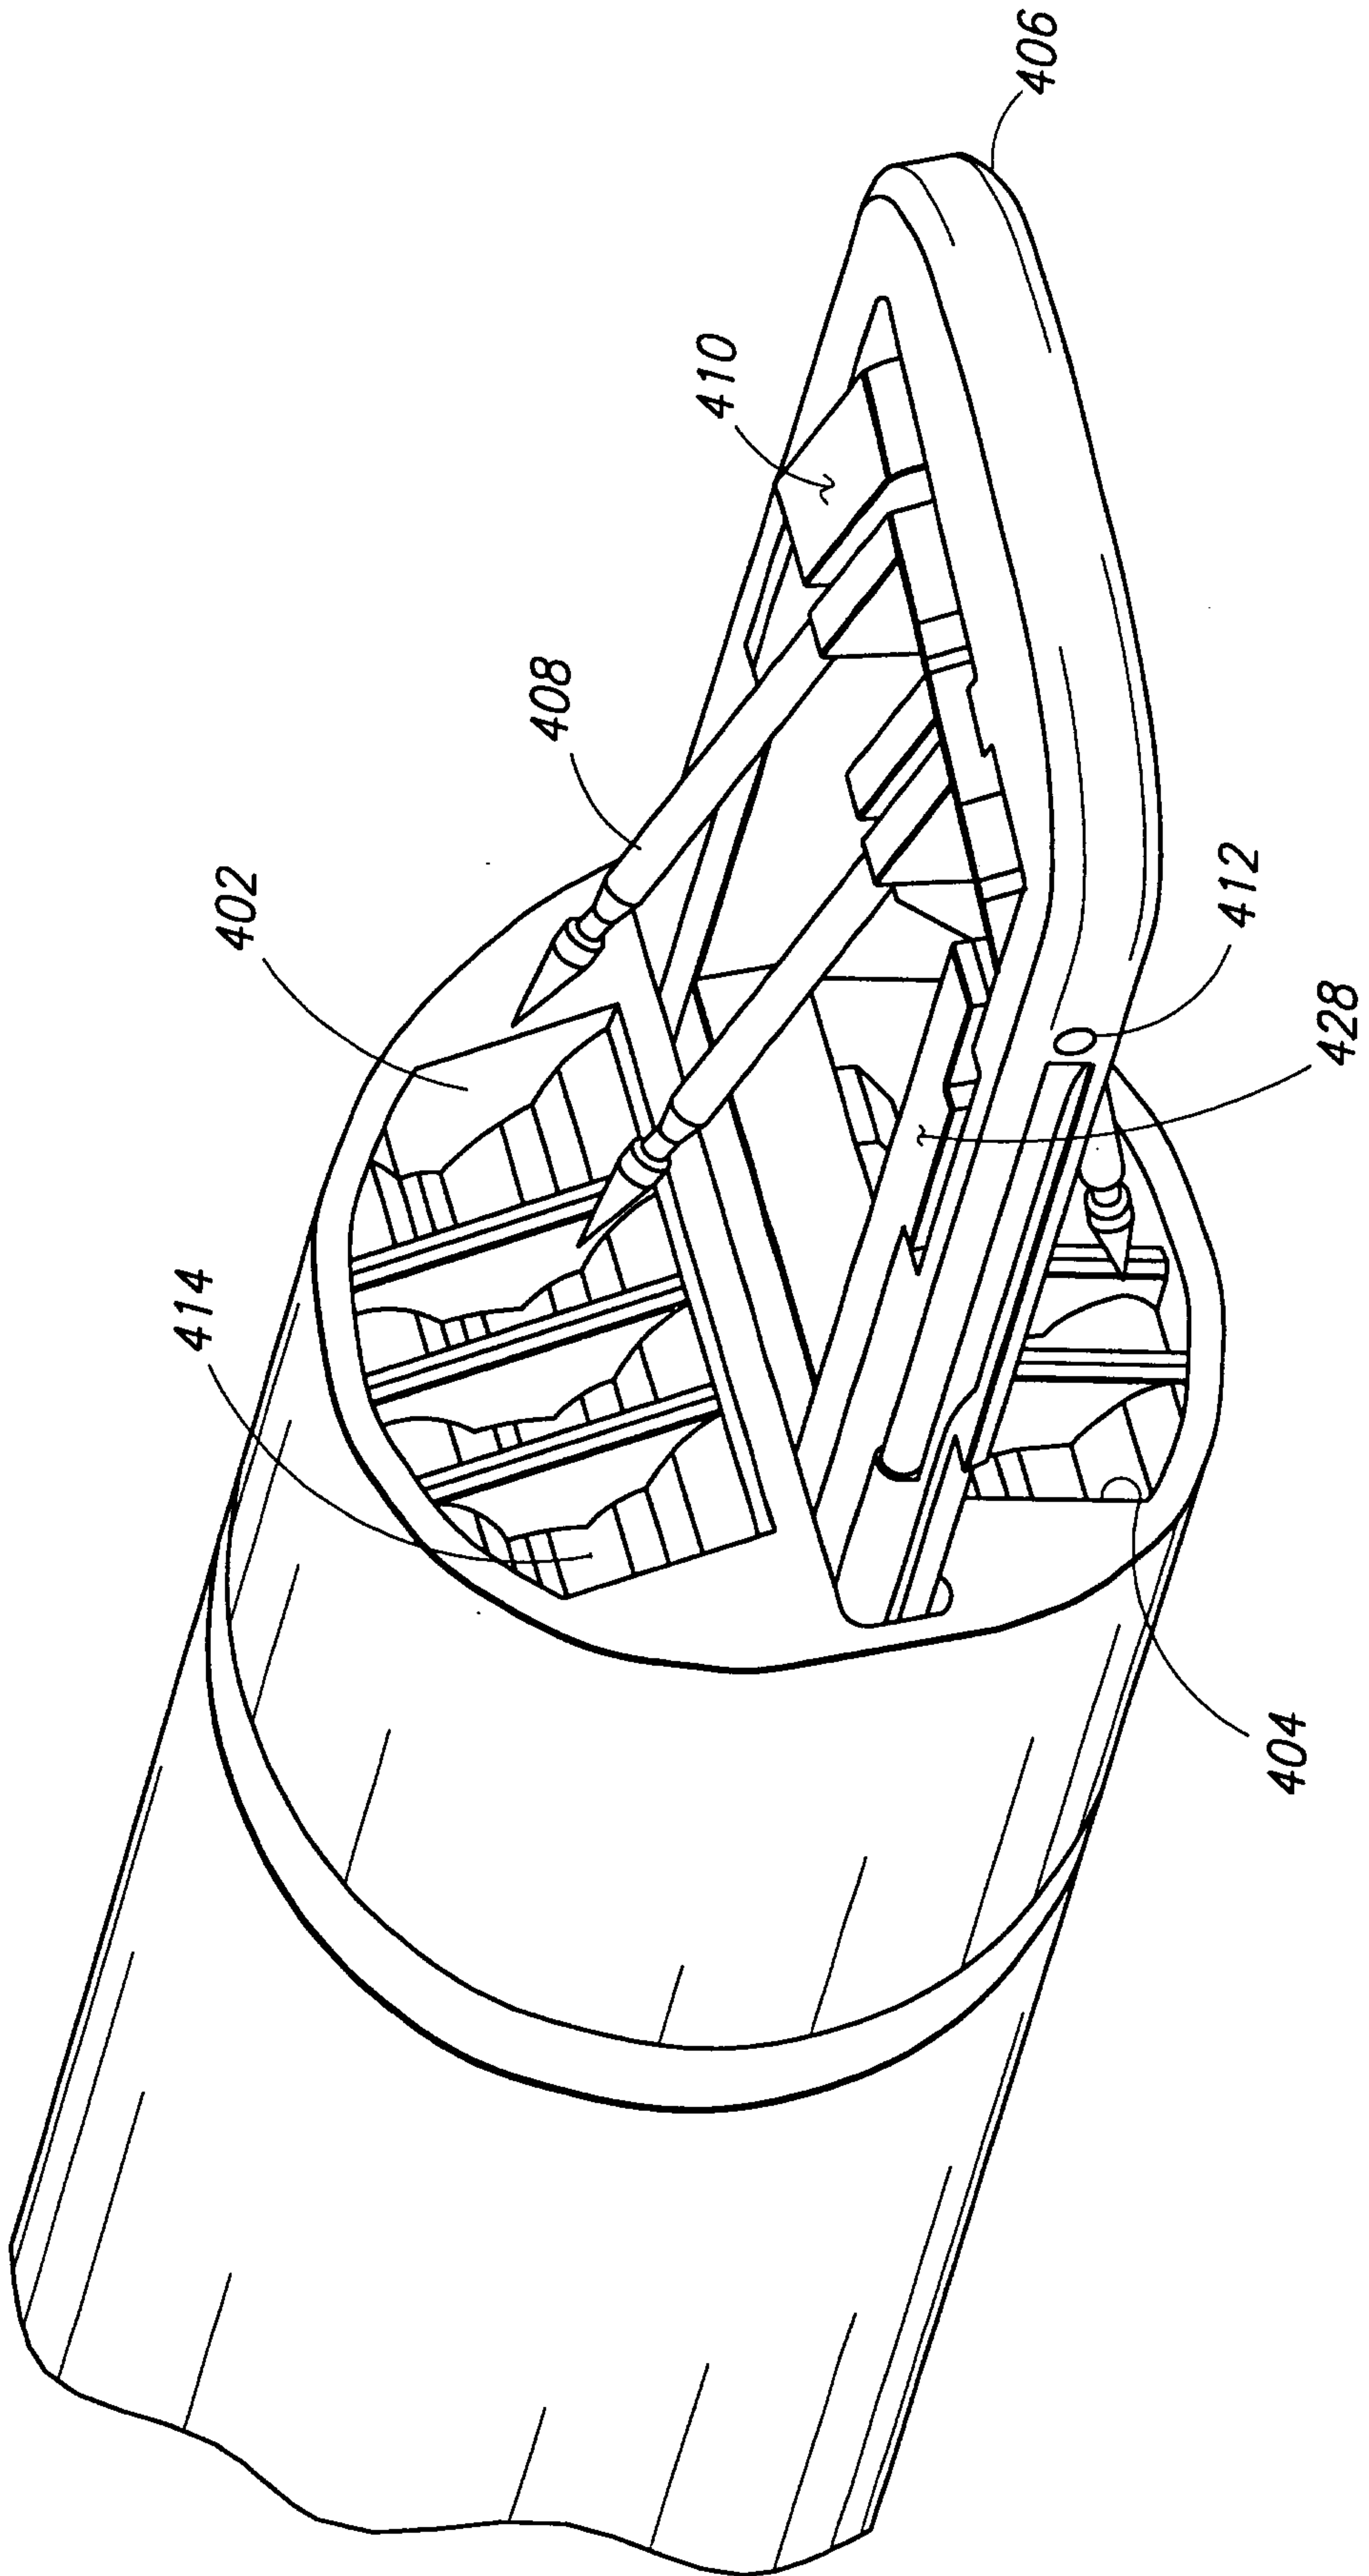


FIG. 40

40/45

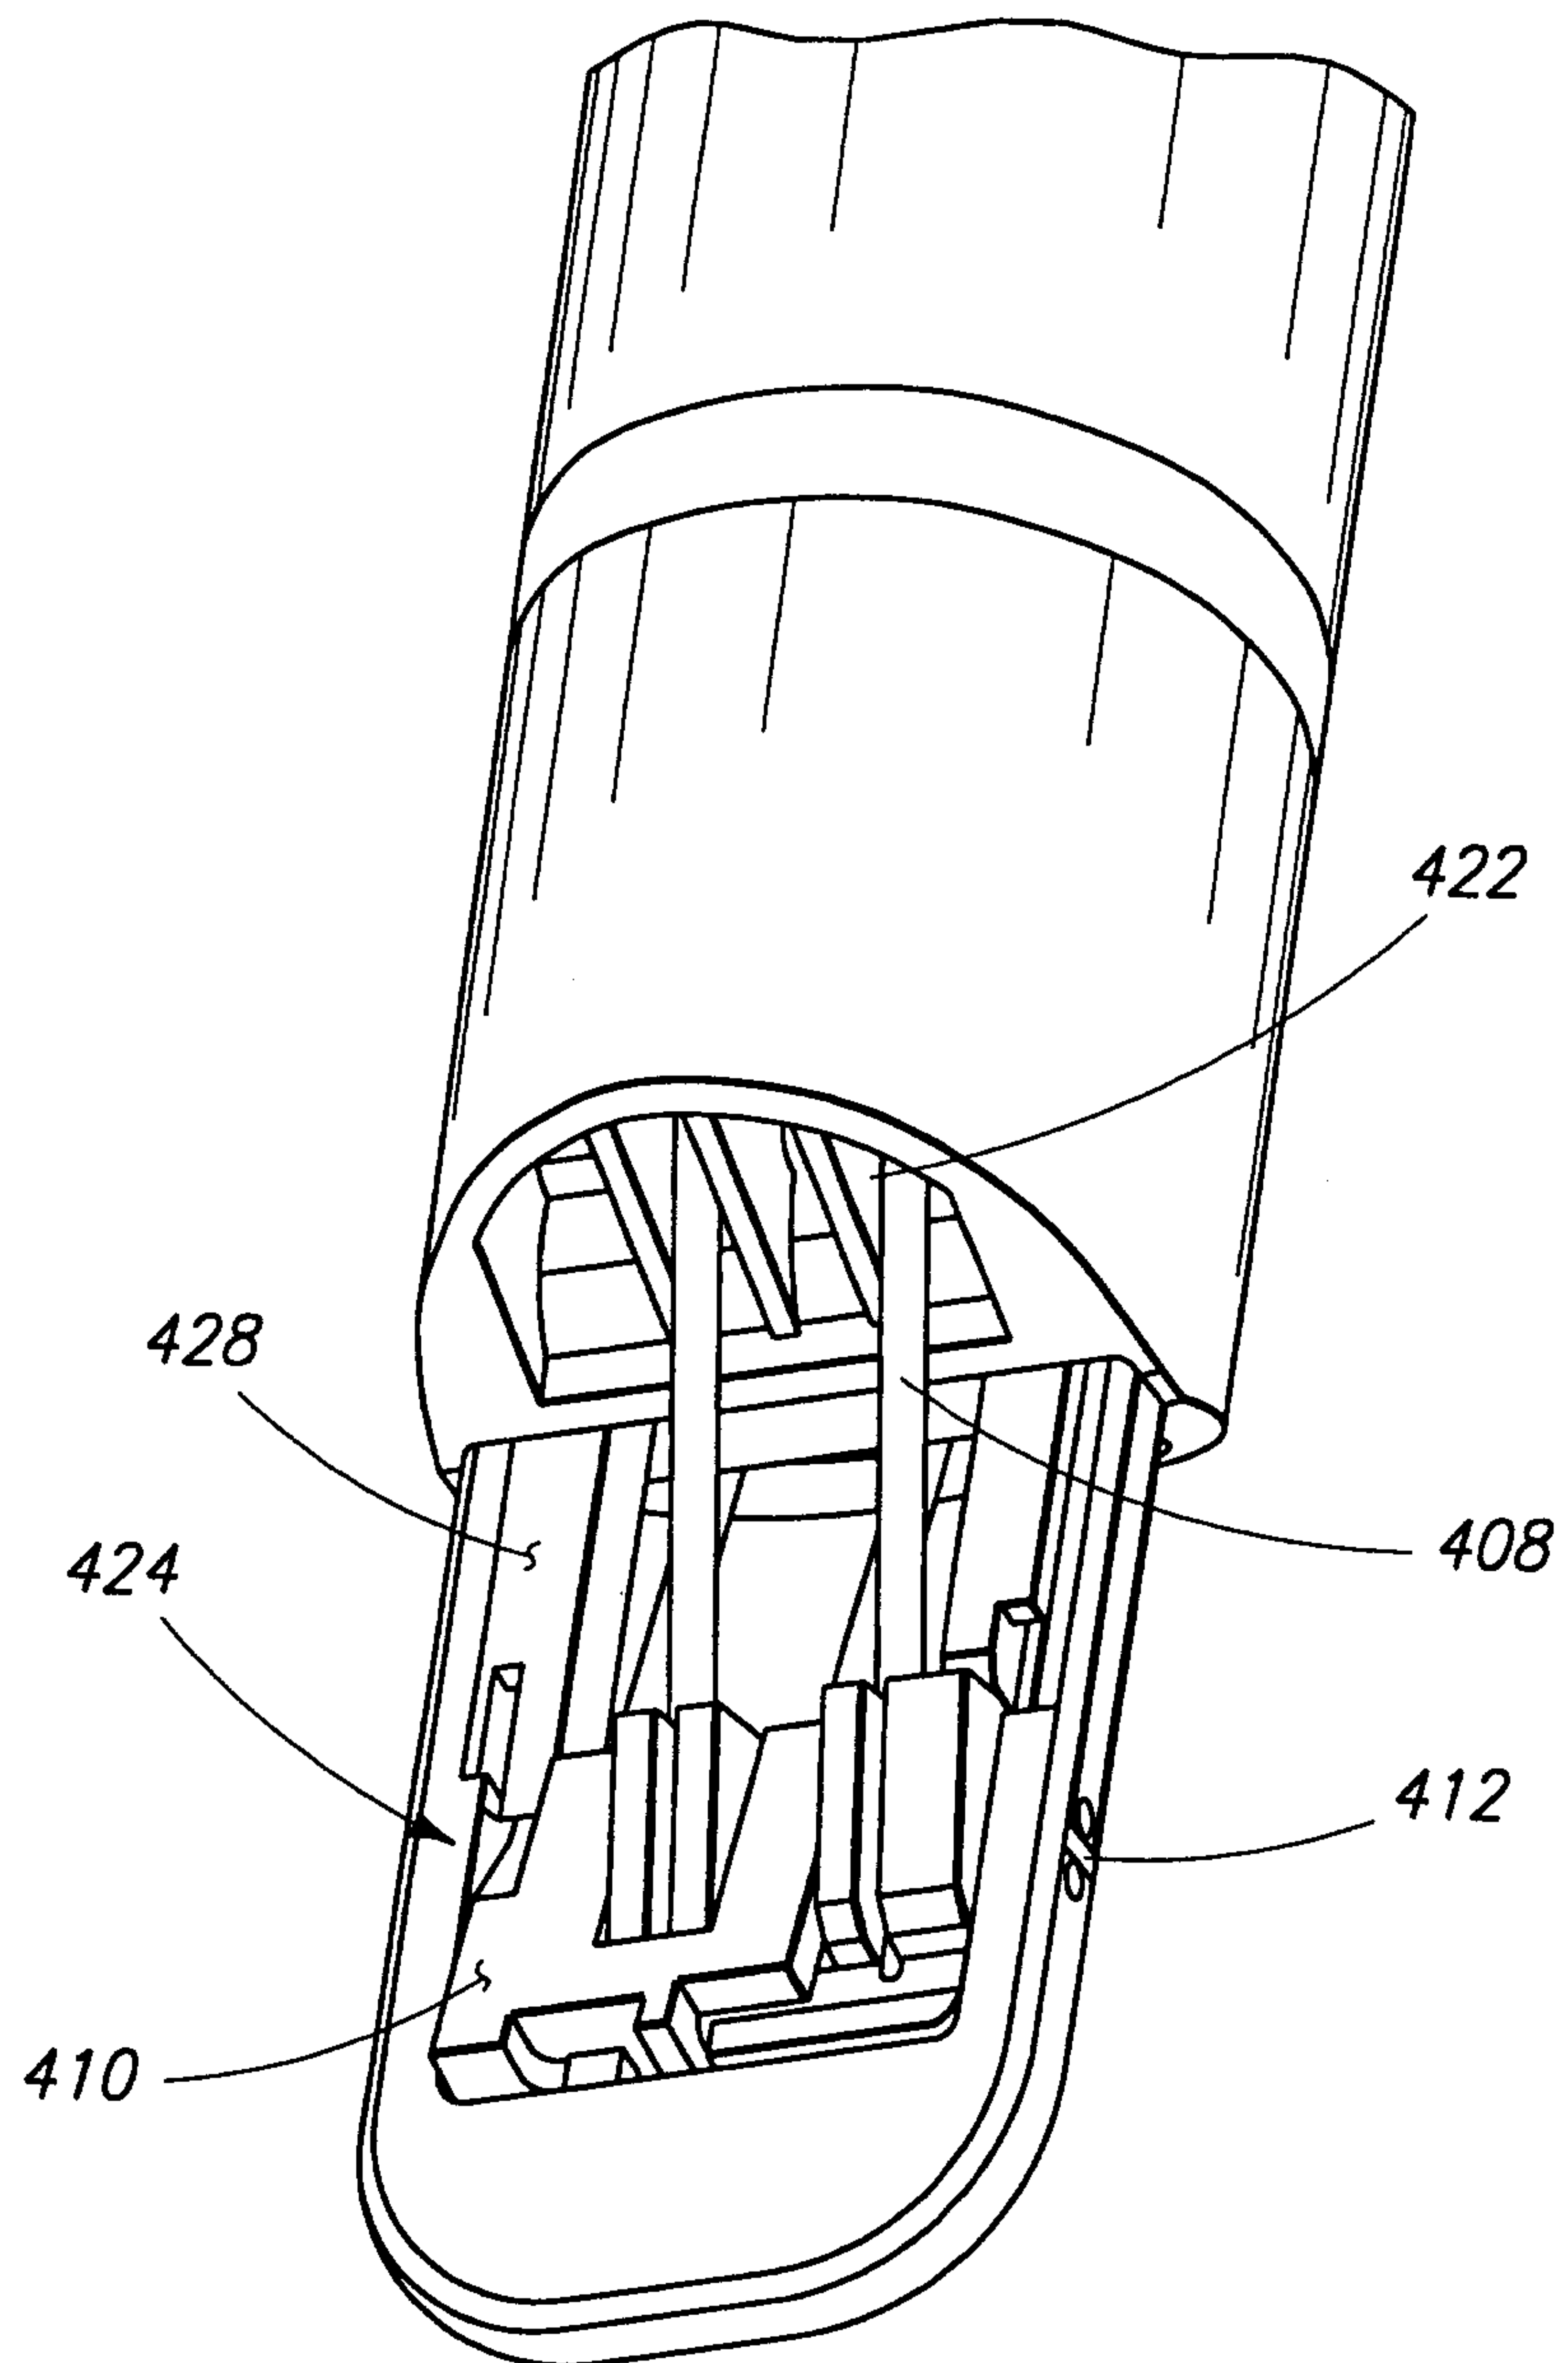


FIG. 41

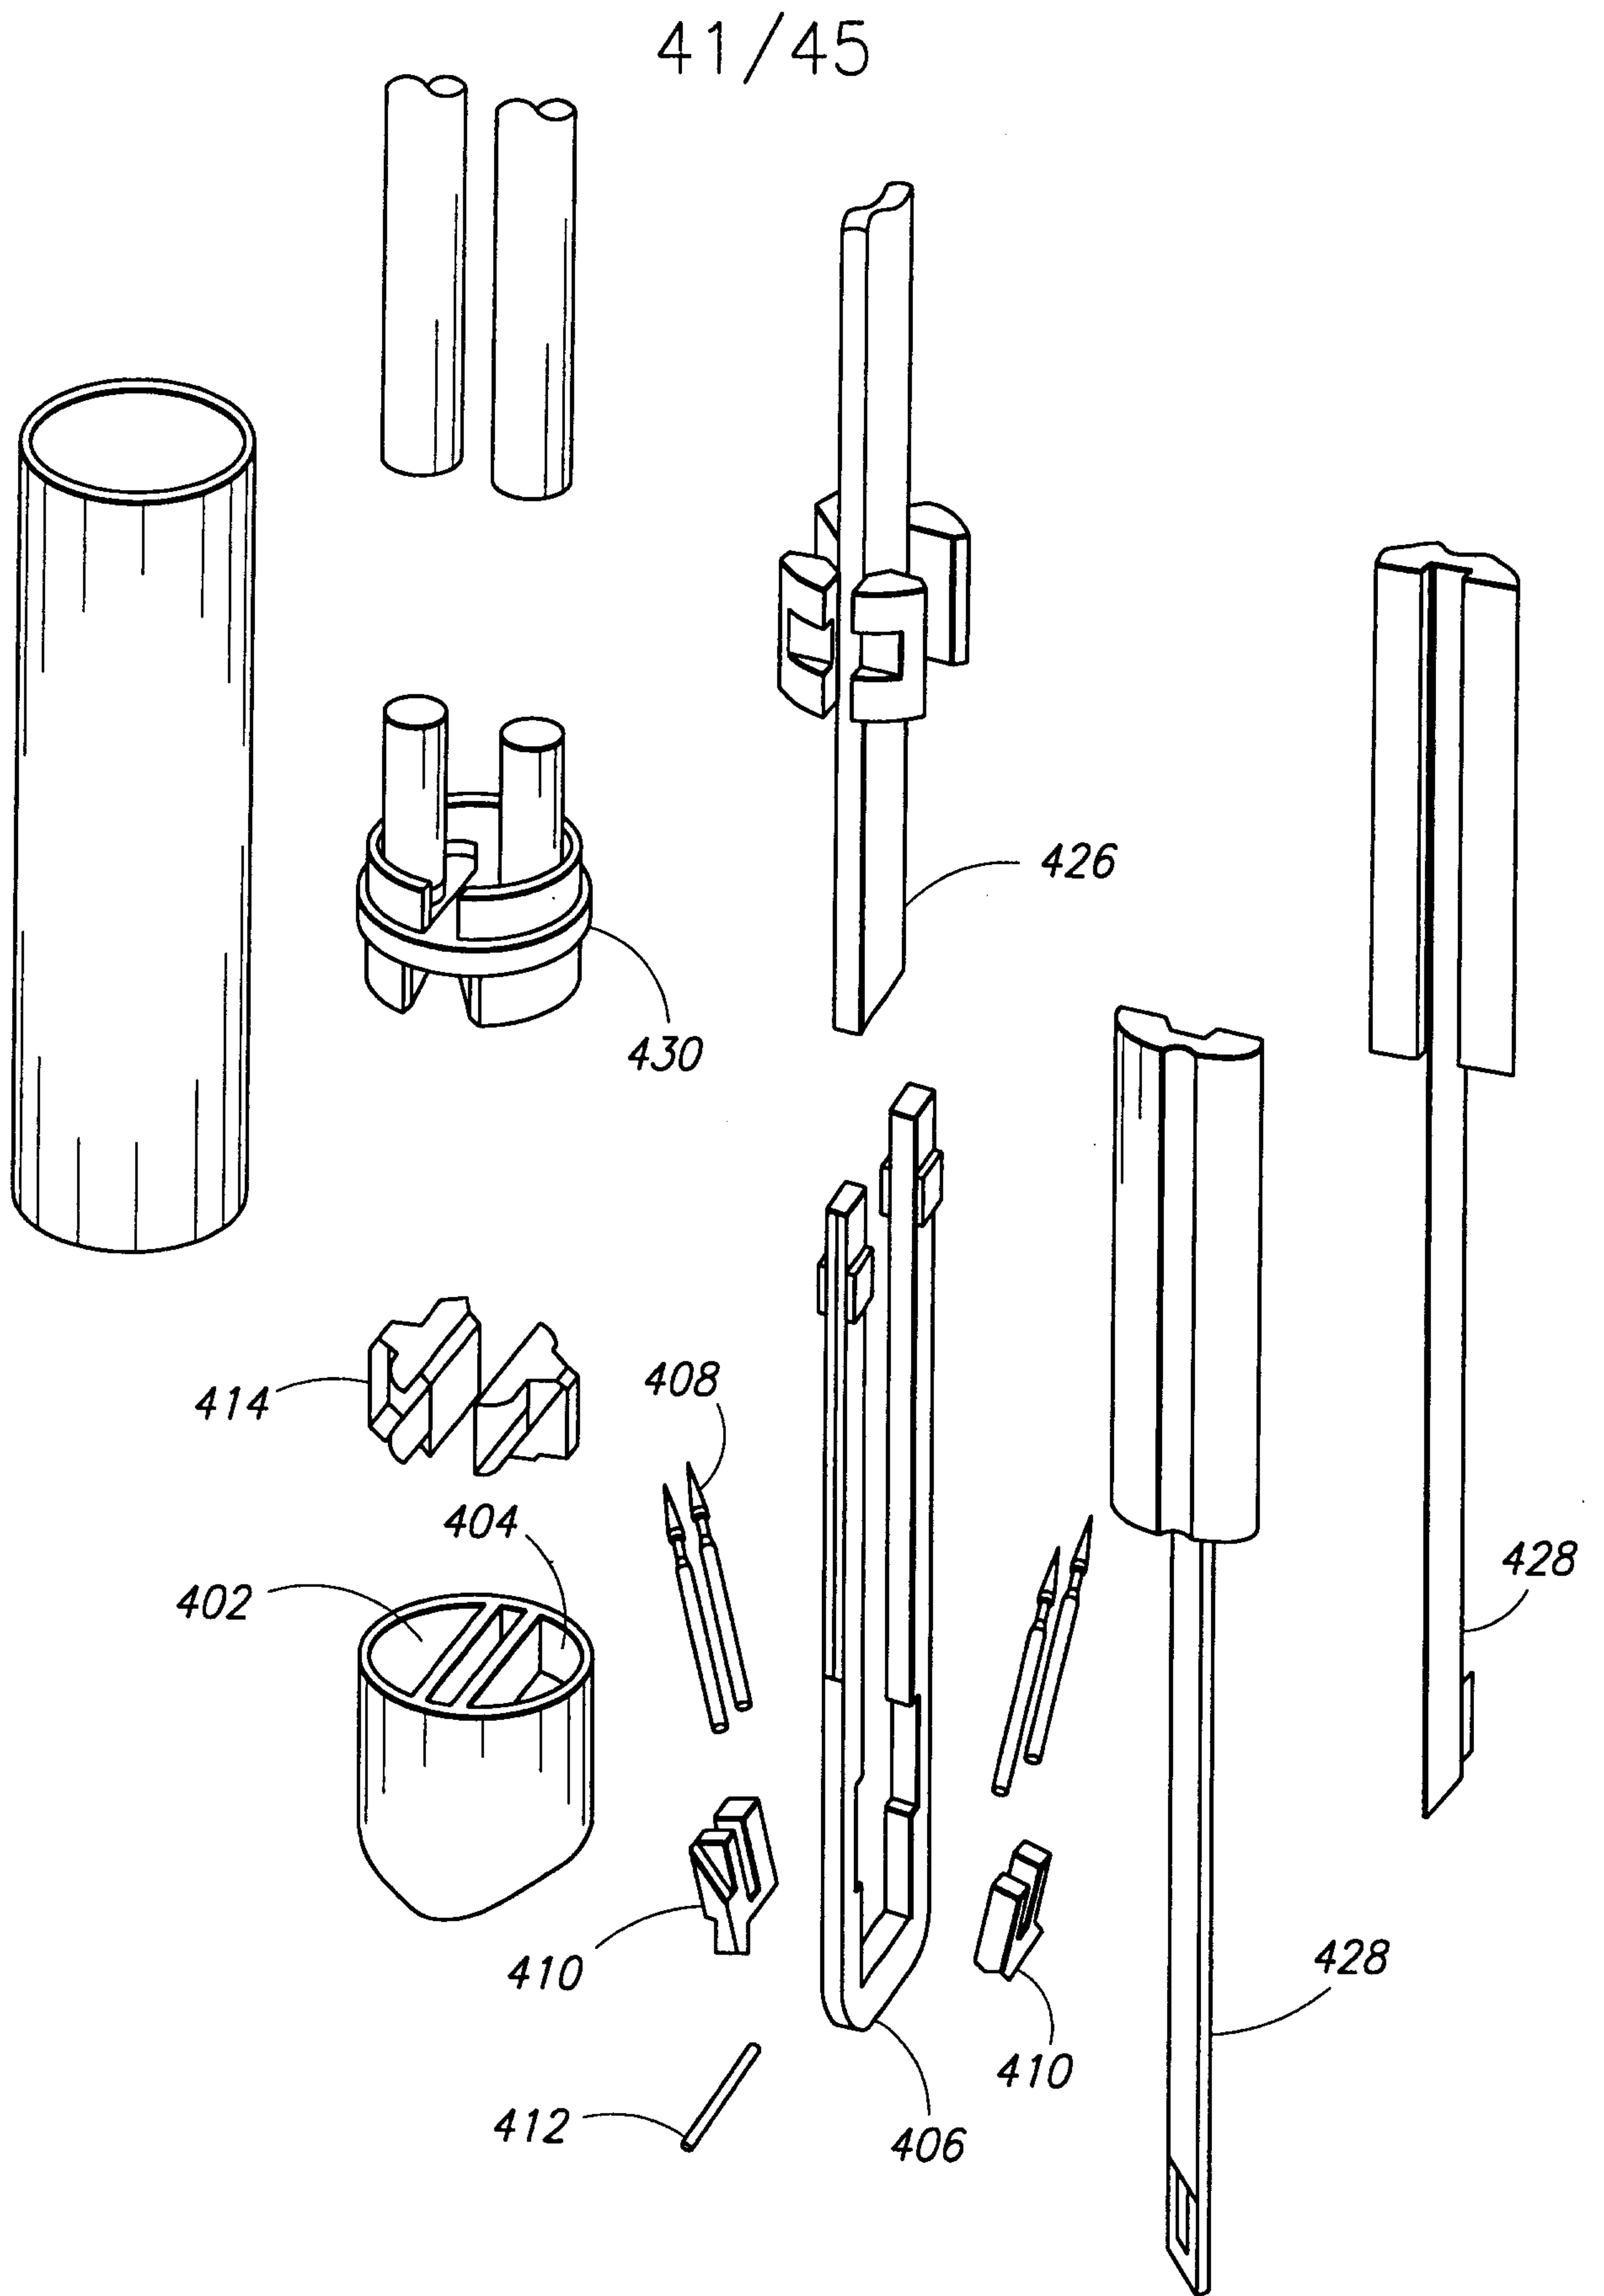


FIG. 42

42/45




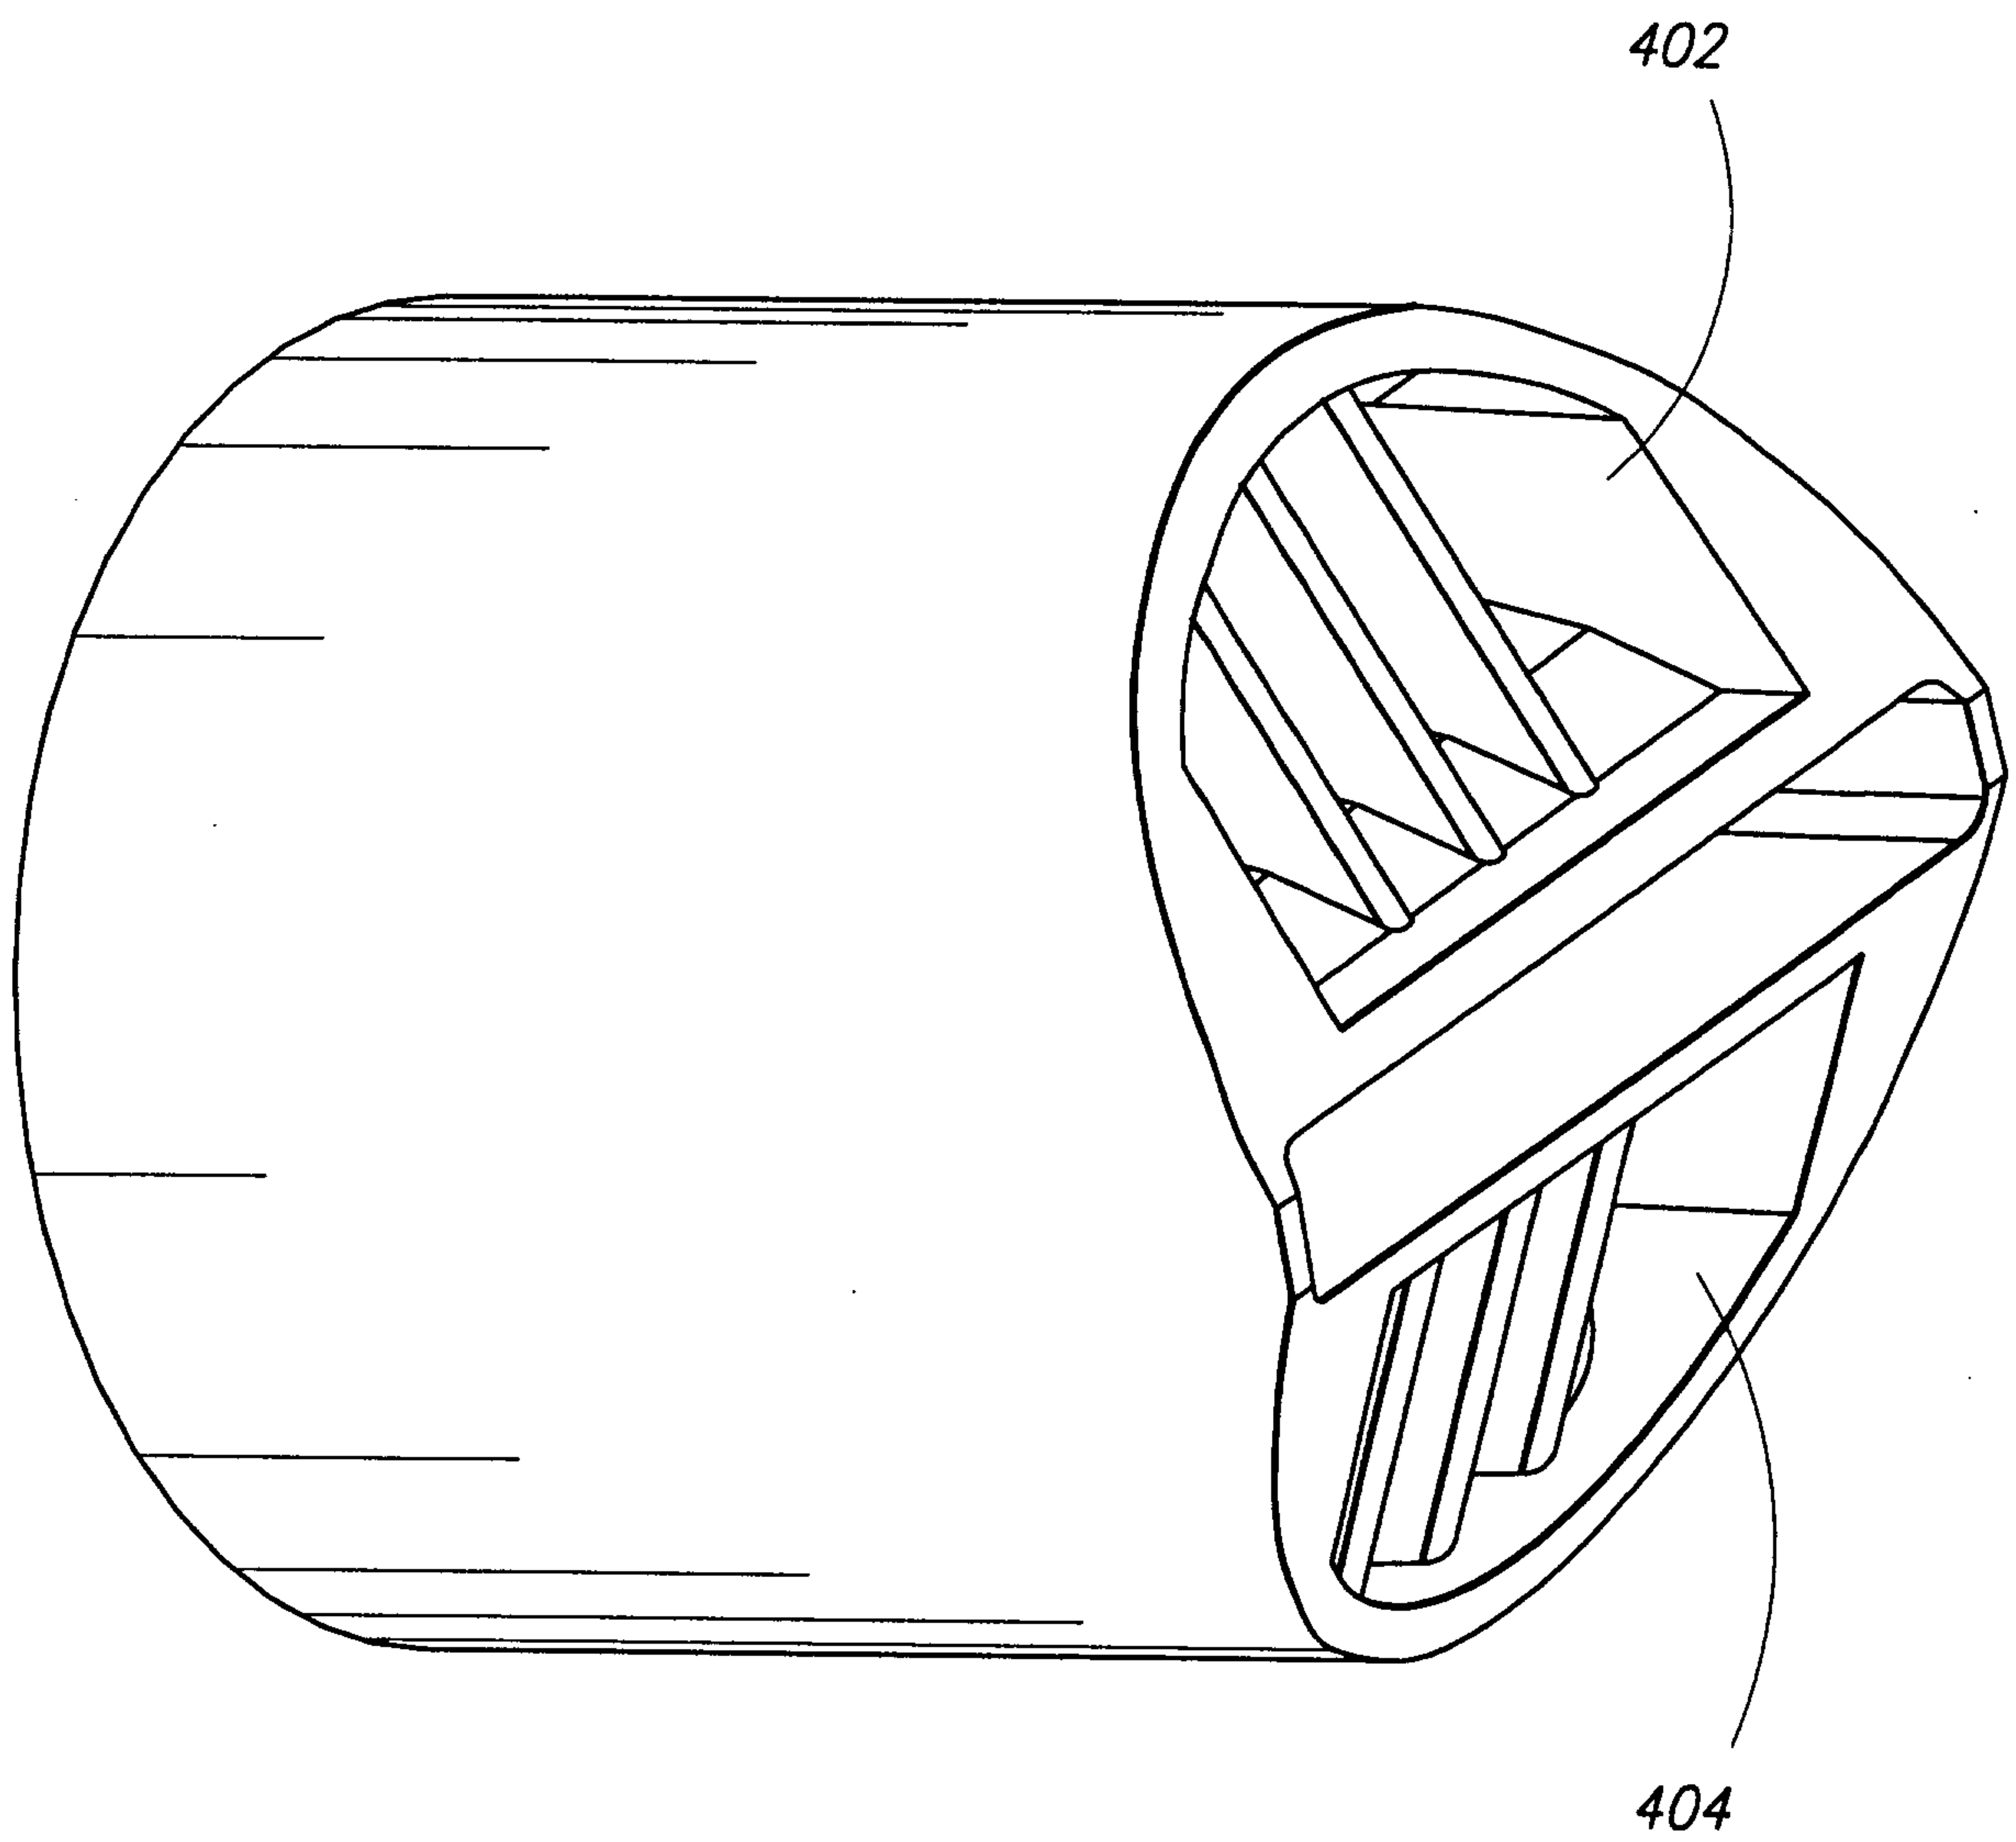


FIG. 43

43/45

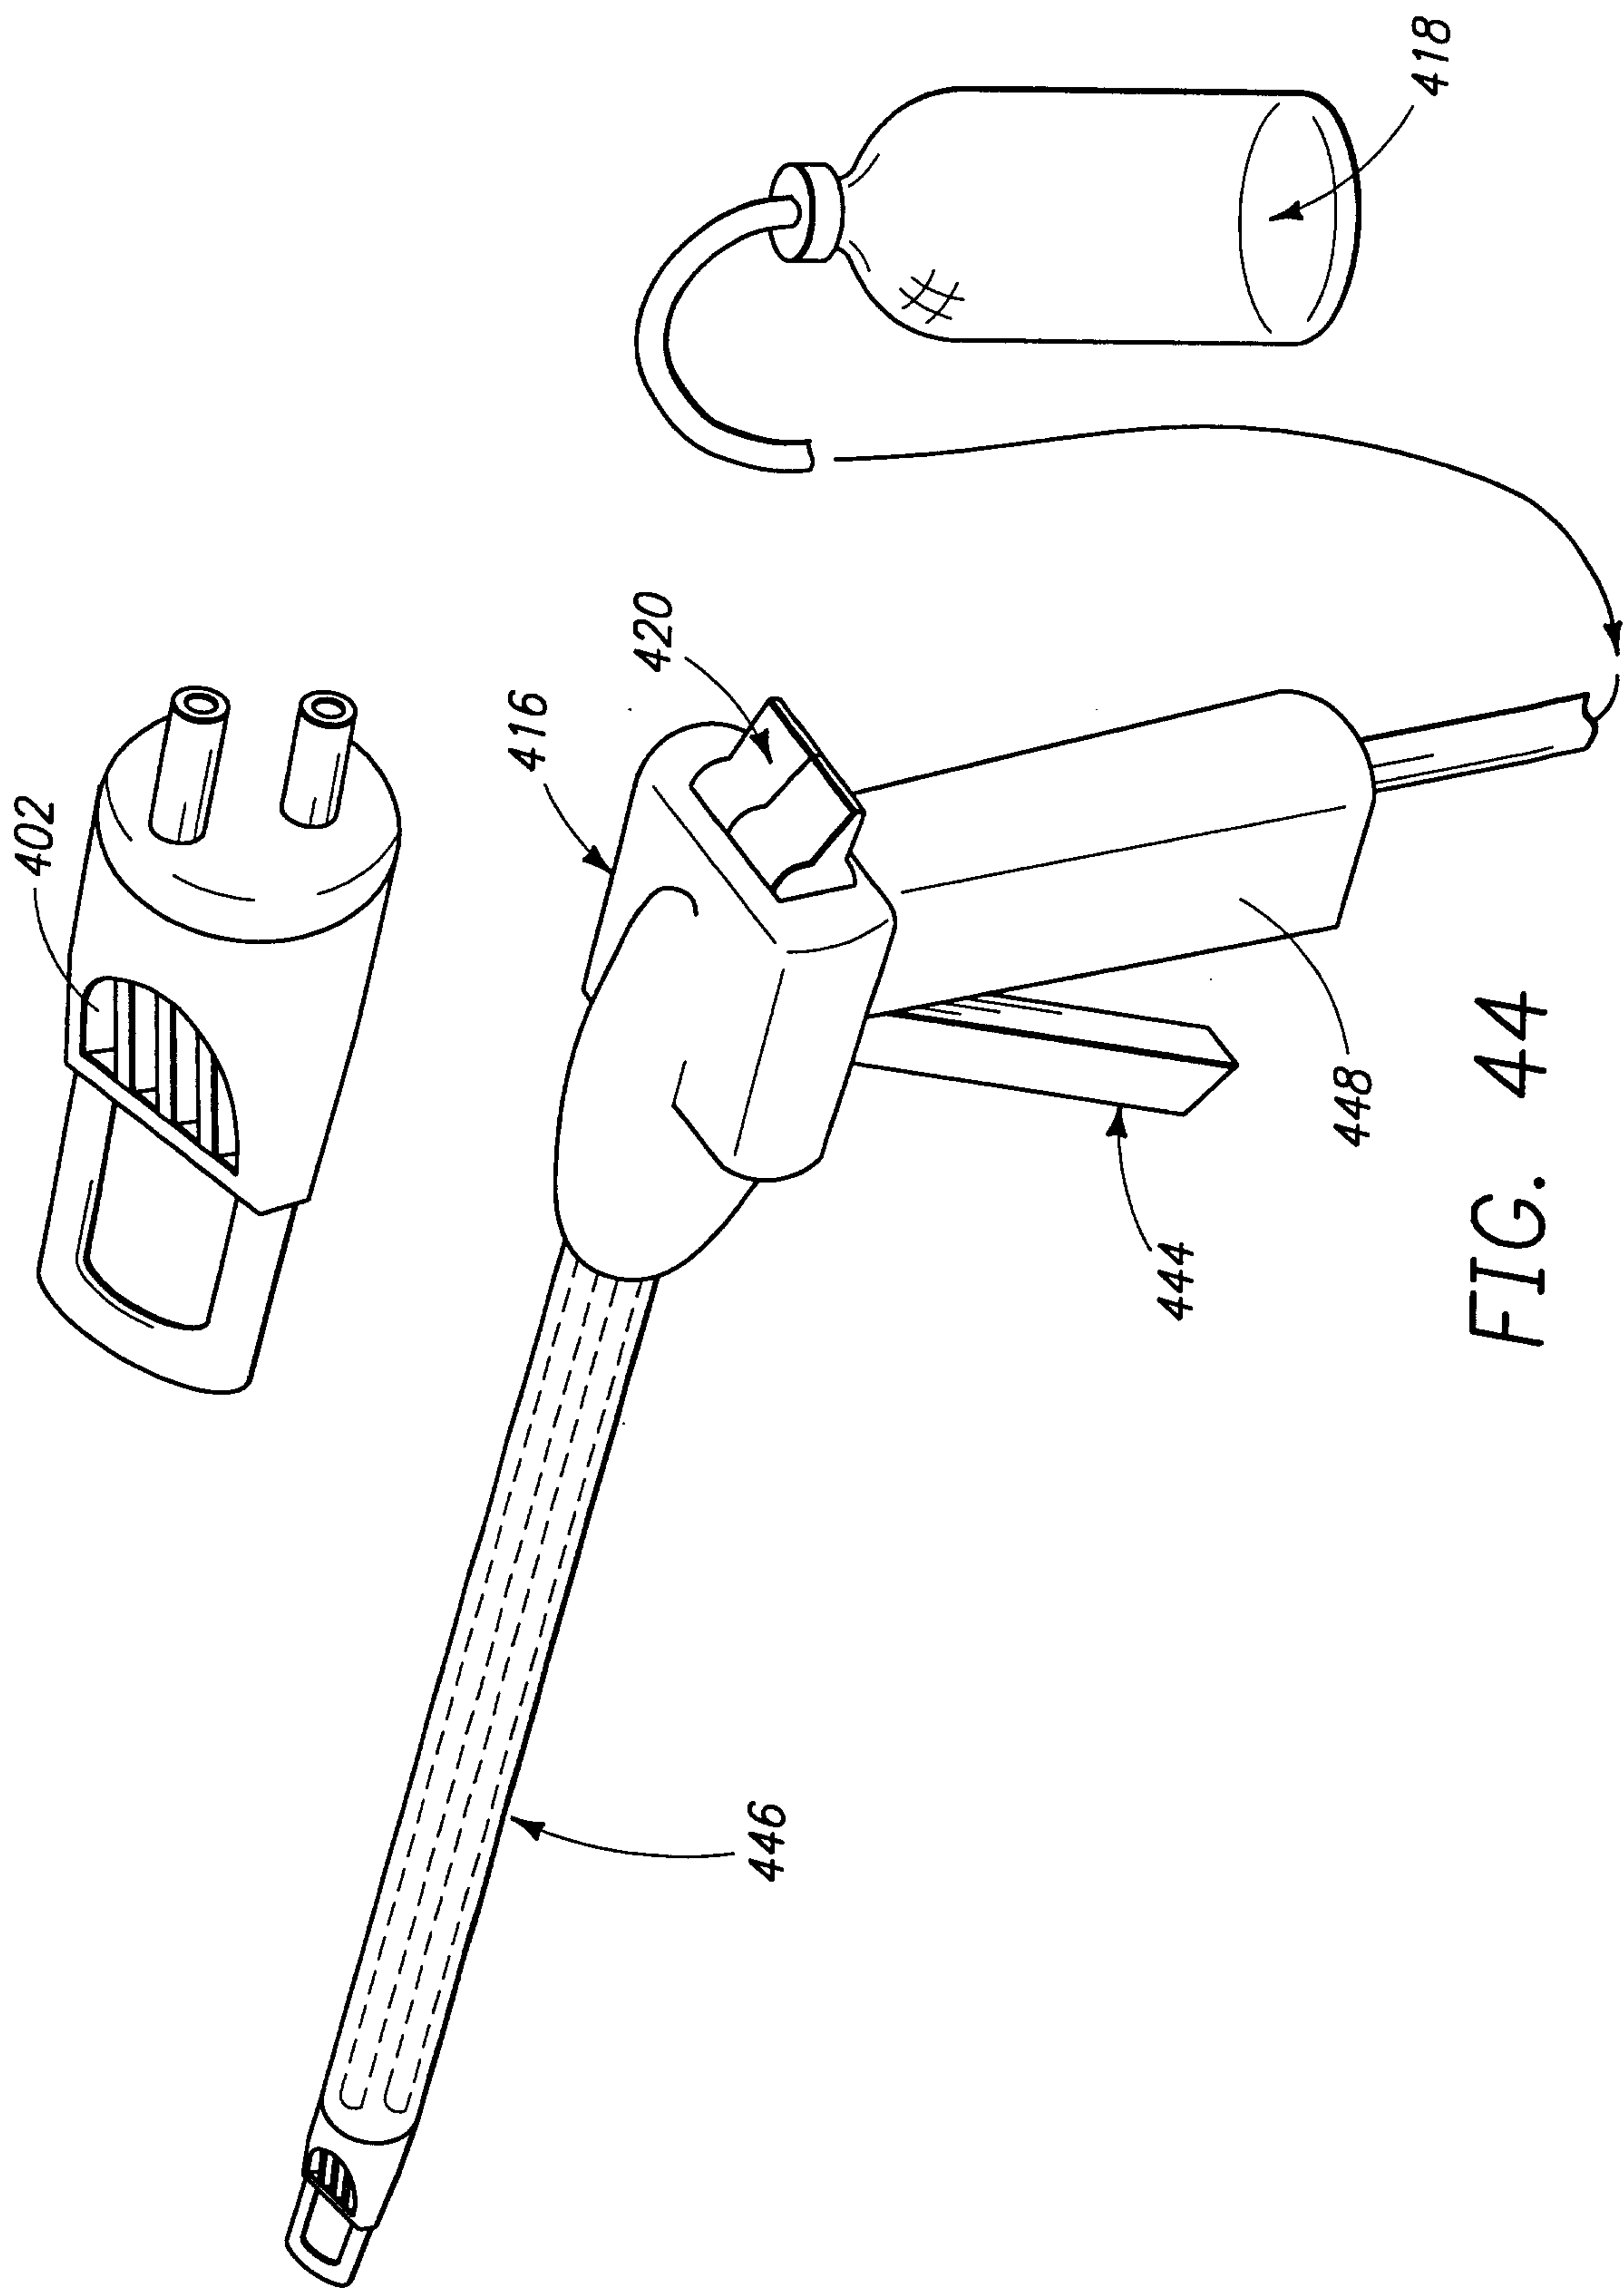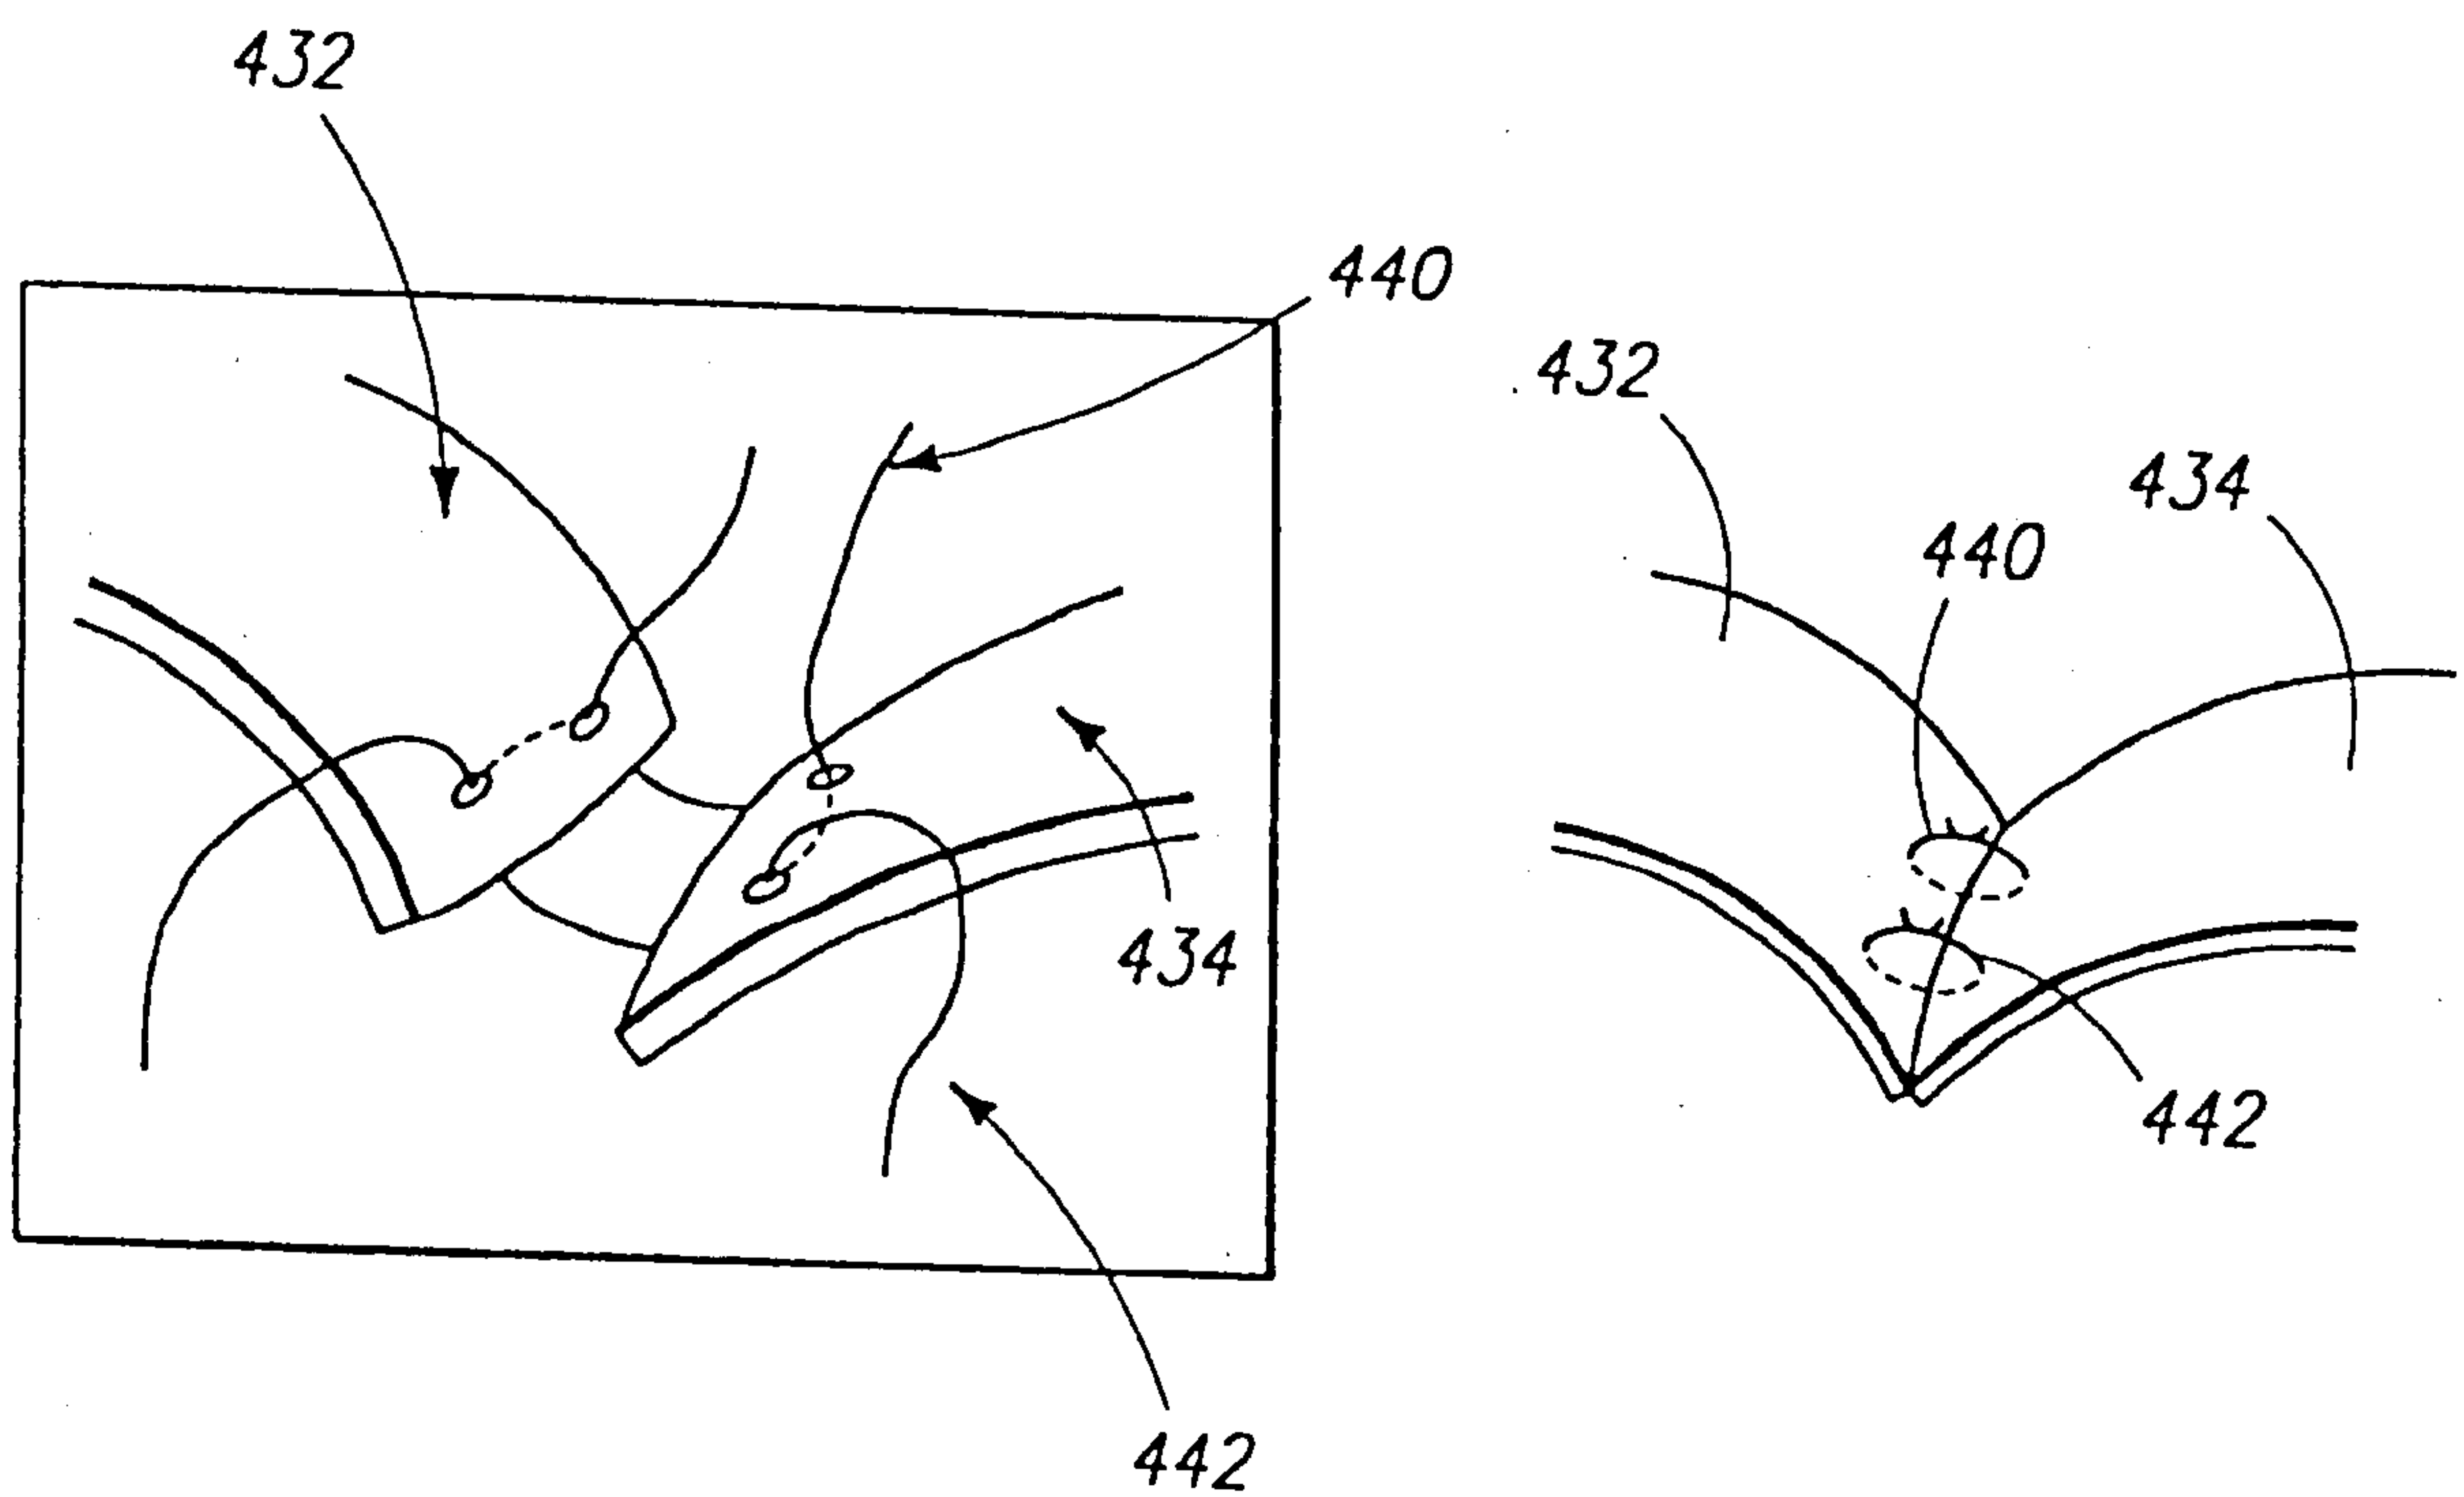

44/45

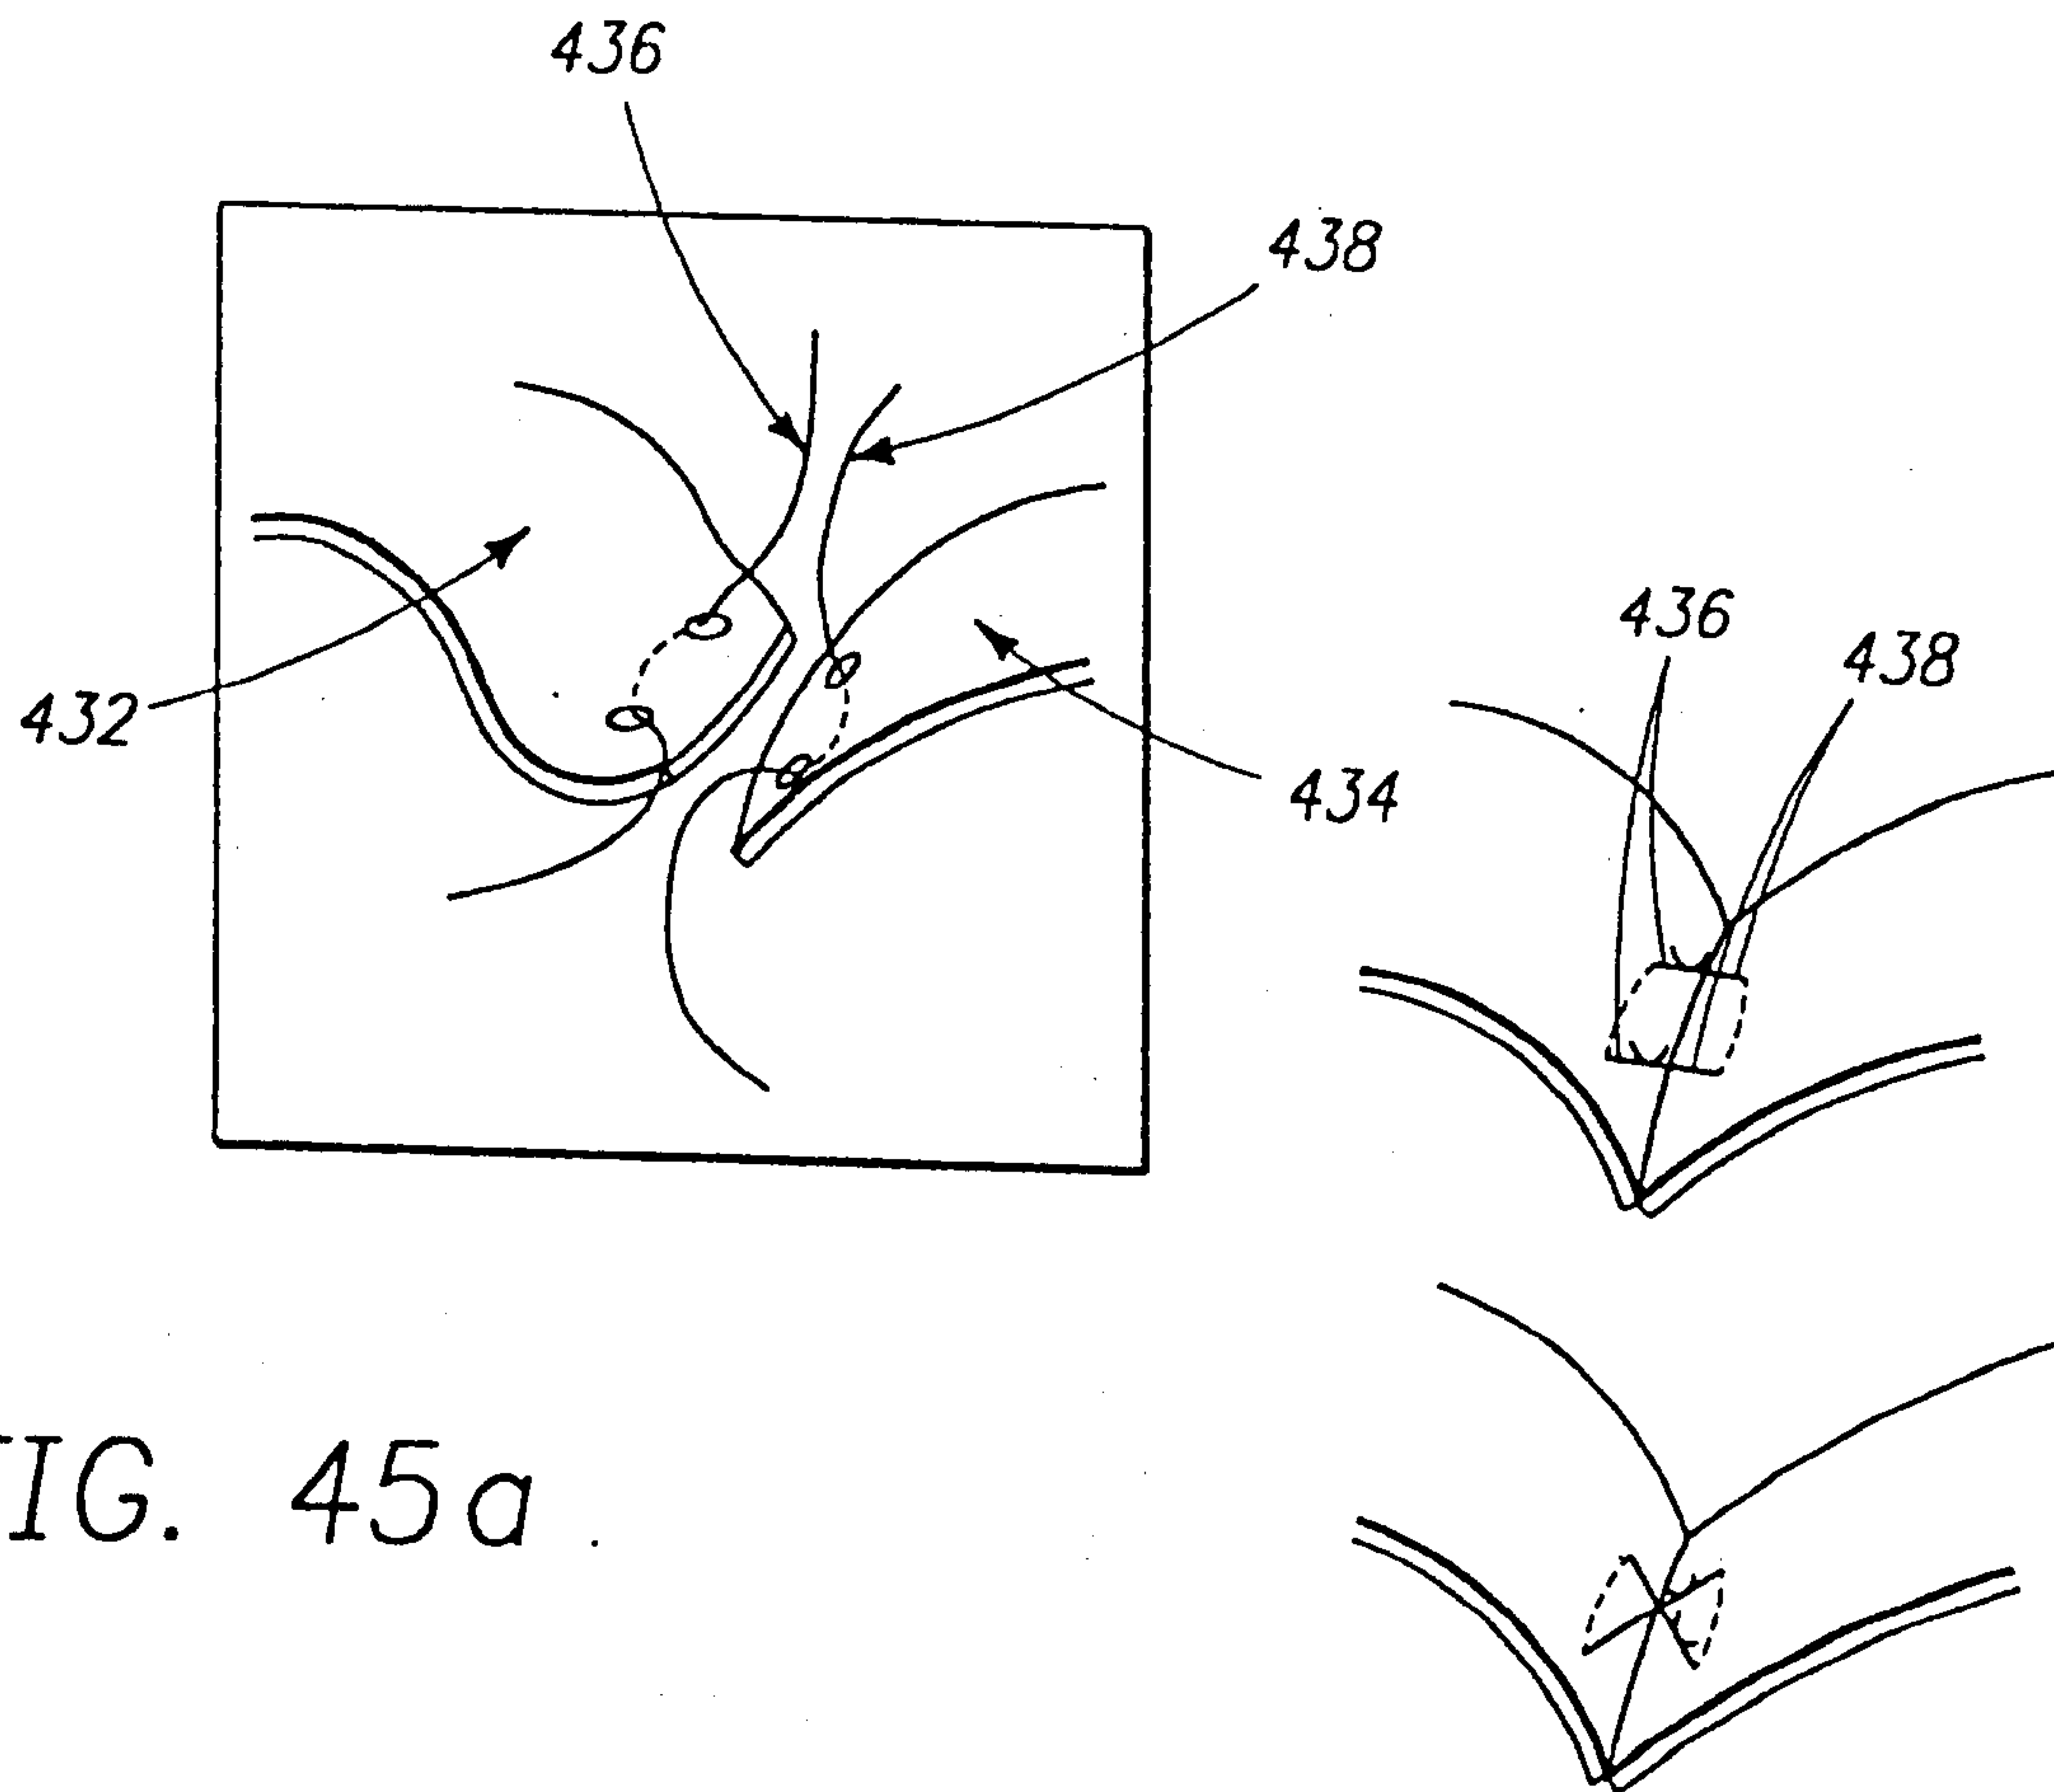

45/45

