

**(19) AUSTRALIAN PATENT OFFICE**

(54) Title

Support body, holding device therefor, apparatus with such a body for treatment of a web,  
methods of forming an extended nip in the apparatus and controlling load in the nip

(51)<sup>6</sup> International Patent Classification(s)

**D21F** 3/02 (2006.01) 20060101AFI2005100

D21F 3/02

8BMEP

PCT/SE2004/001486

(21) Application No: 2004281356

(22) Application Date: 2004 .10 .15

(87) WIPO No: W005/038130

(30) Priority Data

(31) Number	(32) Date	(33) Country
60/517,830	2003 .11 .06	US
0302767-9	2003 .10 .21	SE

(43) Publication Date : 2005 .04 .28

(71) Applicant(s)

Metso Paper Karlstad AB

(72) Inventor(s)

Gustavsson, Tord Gustav

(74) Agent/Attorney

Griffith Hack, Level 3 509 St Kilda Road, Melbourne, VIC, 3004

(56) Related Art

US 5951824

US 4468287

DE 3030233

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
28 April 2005 (28.04.2005)

PCT

(10) International Publication Number  
WO 2005/038130 A1

- (51) International Patent Classification<sup>7</sup>: **D21F 3/02**
- (21) International Application Number:  
PCT/SE2004/001486
- (22) International Filing Date: 15 October 2004 (15.10.2004)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:  
0302767-9 21 October 2003 (21.10.2003) SE  
60/517,830 6 November 2003 (06.11.2003) US
- (71) Applicant (for all designated States except US): **METSO PAPER KARLSTAD AB** [SE/SE]; Box 1014, S-651 15 Karlstad (SE).
- (72) Inventor; and  
(75) Inventor/Applicant (for US only): **GUSTAVSSON, Tord, Gustav** [SE/SE]; Enåsgatan 5, S-667 33 Forshaga (SE).
- (74) Agent: **L-O LUNDQUIST PATENTBYRÅ AB**; Box 80, S-651 03 Karlstad (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GN, GU, HK, HN, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report  
— with amended claims
- Date of publication of the amended claims: 21 July 2005
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 2005/038130 A1

(54) Title: SUPPORT BODY, HOLDING DEVICE THEREFOR, APPARATUS WITH SUCH A BODY FOR TREATMENT OF A WEB, METHODS OF FORMING AN EXTENDED NIP IN THE APPARATUS AND CONTROLLING LOAD IN THE NIP

(57) Abstract: A support body (7) for an apparatus having an extended nip (N) that is defined by a contact surface (13) of the support body and an opposed surface (4), the support body having two side surfaces (69, 70) facing from each other and connecting to the contact surface, and a bottom surface (71) facing from the contact surface, the support body being arranged to be moved towards the opposite surface by means of a loading system in order to load the nip via the contact surface. According to the invention the support body is elastically deformable and has its contact surface adaptable to the opposite surface in interaction therewith. The invention also relates to a holding device for such a support body and an apparatus, e.g. a press, for the treatment of a fibre web, said apparatus having such a support body. Furthermore, the invention relates to a method of forming the extended nip in said apparatus by loading the support body by means of the loading system, as well as a method of controlling the load in the extended nip by designing the support body with at least two layers with different elasticity providing a corresponding load profile.

Support body, holding device therefor, apparatus with  
such a body for treatment of a web, methods of forming an  
extended nip in the apparatus and controlling load in the  
nip

5

The present invention relates to a support body for an apparatus having an extended nip being defined by a contact surface of the support body and an opposed surface, said support body

- 10    - has two side surfaces facing from each other and connecting to said contact surface, and a bottom surface facing from the contact surface, and
- is arranged to be moved in the direction towards the opposite surface by means of a loading system in order
- 15    to load the nip via said contact surface.

The invention also relates to a holding device for such a support body.

- 20    The invention also relates to an apparatus/press for the treatment of a fibre web that is manufactured in a paper or board machine, comprising a first structural element and a second structural element which is movably arranged and having an opposite surface for interaction with the
- 25    first structural element while forming an extended nip, said first structural element comprising a movable clothing and a support body/press body having a contact surface/press surface which defines said nip together with the opposite surface, said support body/press body
- 30    - has two side surfaces facing from each other and connecting to said contact surface/press surface, and a bottom surface facing from the contact surface/press surface, and
- is arranged to be moved in the direction towards the
- 35    opposite surface by means of a loading system in order

to load the nip via said contact surface/press surface.

5 The invention also relates to a method of forming an extended nip in an apparatus that comprises said support body.

The invention also relates to a method of controlling the load in an extended nip in an apparatus that comprises  
10 said support body.

The previously known presses with an extended press nip has a so-called press shoe, which consists of a metallic material, such as aluminium or steel, and are designed  
15 with a press surface, usually a concave press surface, whose profile is very accurately adapted to the opposed counter-pressure surface. Such a press shoe is very complicated to manufacture and therefore involves a very high cost. Due to the fact that it consists of metal, it  
20 is relatively rigid and inflexible. The press roll acting as a counter roll of such a shoe press can have a relatively thick cylinder wall which withstands the forces from the press shoe. In accordance with another embodiment of the counter roll, it has a relatively thin  
25 cylinder wall and is provided internally with a counter-pressure system for adjustable crowning of the thin and, thus, deformable cylinder wall or shell in dependence of the forces the press shoe has to apply on the counter roll in order to obtain the desired load. Also the press  
30 shoe can be crowned in accordance with the crowning of the counter roll, and it will then be usable only in combination with this counter roll. Alternatively, the metallic press shoe can be tilted by means of hydraulic cylinders.

35

A Yankee cylinder has a cylinder wall or shell which is relatively thin, and which easily is deformed by impression of the press shoe when the Yankee cylinder is used as a counter roll. The deformation of the shell varies in an axial direction from the central region in a direction towards the end walls, where the impression is substantially smaller than within the central region. Therefore, the press shoe will act with a higher pressure at and in the vicinity of the end walls, resulting in an increased wear at the edges of the press felt and an irregular load profile along the press shoe, which in its turn results in variable paper properties crosswise to the machine direction. It has been proposed to crown the shell of the Yankee cylinder by means of an internal counter-pressure system, or to arrange two or more rows of hydraulic cylinders on the underside of the press shoe for influencing the press shoe to conform to the deformed surface, in both cases in order to achieve a more uniform load profile. Both proposals, however, are complicated and expensive to carry out.

The following documents are examples of presses having extended press nips.

DE 44 05 587 and WO 02/44467 describe a press having a hydrostatic bearing, including a press shoe 3 or double press shoes 3a, 3b of the same design. A press belt 6 rotates on top of a lubricating fluid bed of the press shoe 3 with a very small friction. The press shoe, which is made of metal, has a pressure chamber 10 containing a hydraulic fluid, preferably water. A rectangular pressure-equalizing membrane 20, consisting of a suitable solid material, preferably stainless steel, is fixed on the press nip side of the press shoe. The pressure-equalizing membrane 20 has an outer edge 26, an

inner edge 22, and an opening 27 that is defined by the inner edge 22. The pressure-equalizing membrane 20, thus looking like a frame, is flexible so that an edge zone 21, standing in direct contact with the hydraulic fluid, can deflect when pressure differences occur between its two sides. These pressure differences arise when hydraulic fluid happens to leak out through the press nip as a result of irregularities in the paper web and/or in the envelope surface of the counter roll. Thus, the flexible pressure-equalizing membrane 20 creates a self-adjusting nip 2, having no or only a minimum of fluid leakage. Thus, through the opening 27 in the pressure-equalizing membrane 20, the pressure fluid in the pressure chamber 10 stands in direct contact with the movable belt. The complementary addition which has been done in said WO-publication in comparison to said DE-publication is that the flexible membrane has been provided with "pinholes 25" within its free edge zone 21 in order to conduct hydraulic fluid from the pressure chamber 10 to the belt 6 for the purpose of lubricating the belt.

US 5,980,693 describes presses having a tube-shaped or inflatable loading element, but with a metal shoe between the loading element and the inside of the belt. Furthermore, this part of the shoe is constructed in order to provide a slow reduction of the pressure in nip outlet. Normally, an abrupt pressure drop is desired.

US 3,839,147 describes a shoe press having two opposed shoes. Each shoe has a metal bottom and sills, sealing against the inside of the belt. The side of the shoe facing the belt is a perforated diaphragm, which causes the pressure of the hydraulic fluid in a pressure chamber to load the inside of the belt directly. The shoe is of a

rather complicated construction with various apertures and reinforcements.

- 5 US 5,951,824 describes an ordinary shoe having ordinary hydraulic loading elements. The shoe is coated with a soft and durable layer of polymer or rubber in order to reduce the risk of damages to the belt and shoe from paper wads passing through the press nip.
- 10 EP 0 575 353 describes a press having a shoe, which is loaded with bellows being arranged inside a metal cover of the shoe, wherein a belt slides around said metal cover.
- 15 US 6,334,933 describes a press having a counterpart of metal, which is provided with a plurality of pressure pockets being sealed by a metal plate and hoses, which also can contribute to loading the opposite portions of the press nip.
- 20 US 6,387,216 describes a press having an open fluid chamber, over which a belt is running and which is loading the press nip. The chamber is sealed by means of setting the belt under pressure, so that it is tightened
- 25 over the edges of the chamber.
- EP 1 319 744 describes a method for measuring and regulating the nip pressure in a shoe press, crosswise to and along the web, by means of measuring and continuously
- 30 adapting the hydraulic static pressure in reference points above measurement holes in the press nip.
- DE 30 30 233 describes an elastic slide shoe which is attached to a stand of metal. The slide shoe includes a
- 35 solid body or a hollow body in the form of a hose which

can be filled with a pressure medium. The hose is surrounded by an elastic belt which is attached to the metal stand. The hollow body may be divided into chambers which can be pressurized to different pressures. However, a change of pressure in the chamber or chambers does not result in a change of the loading in the nip because of the fact that the hollow body is permitted to expand laterally during every such increase of pressure.

- 10 US 4,576,682 describes a press with a shoe consisting of two shoe parts each of which being able to load the nip in a hydrodynamic manner.

- 15 US 4,568,423 describes a press with a shoe having a shoe part in the form of a hydrostatic chamber, and two further shoe parts having hydrodynamic press function, said further shoe parts also sealing the hydrostatic shoe part.

- 20 The present invention provides a support body for an apparatus having an extended nip being defined by a contact surface of the support body and an opposed surface, said support body

- has two side surfaces facing from each other and connecting to said contact surface, and a bottom surface facing from the contact surface,
- 25 - is arranged to be moved in the direction towards the opposite surface by means of a loading system in order to load the nip via said contact surface, and
- is elastically deformable and has its contact
- 30 surface adaptable to the opposed surface in interaction therewith,

wherein the support body is made of at least two layers of elastic material, said layers being joined to a unit.

- 35 The above described support body can be manufactured in a more simple way, without any special machining and without any major consideration to the shape of the opposed



surface which it is to work against, and can provide a loading profile in dependence of the pressure that can be applied with the loading system in the same way or even in a better way than what is possible with a conventional support body of metal with one or more rows of pressure pockets which are closed by a running belt.

The support body according to the invention is elastically deformable and has its contact surface adaptable to the opposed surface in interaction therewith.

The present invention also provides a holding device for the support body as described above wherein the holding device is arranged to form a counterstay for said two side surfaces of the support body and directly or indirectly form a counterstay for said bottom surface of the support body, and wherein the support body has a top portion which has said contact surface and being arranged to protrude from the holding device at least in the nip-forming operation position of the support body.

The present invention also provides an apparatus for the treatment of a fibre web that is manufactured in a paper or board machine, comprising a first structural element and a second structural element which is movably arranged and having an opposite surface for interaction with the first structural element while forming an extended nip, said first structural element comprising a movable belt and a support device comprising a support body having a contact surface which defines said nip together with the opposite surface, said support body

- has two side surfaces facing from each other and connecting to said contact surface, and a bottom surface facing from the contact surface,
- is arranged to be moved in the direction towards the opposite surface by means of a loading system in order to load the nip via said contact surface, and

7a

- is elastically deformable and has its contact surface adaptable to the opposite surface in interaction therewith,

wherein the support body is made of at least two layers  
5 of elastic material, said layers being joined to a unit.

The present invention also provides a press for the treatment of a fibre web that is manufactured in a paper or board machine, comprising a first press element and a  
10 second press element which is movably arranged and having an opposite surface for interaction with the first press element while forming an extended press nip, said first press element comprising a movable belt and a press device which comprises a press body having a press surface which  
15 defines said nip together with the opposite surface, said press body

- has two side surfaces facing from each other and connecting to said press surface, and a bottom surface facing from the press surface,
- 20 - is arranged to be moved in the direction towards the opposite surface by means of a loading system in order to load the nip via said press surface, and
- is elastically deformable and has its press surface adaptable to the opposed surface in interaction therewith,
- 25 wherein the support body is made of at least two layers of elastic material, said layers being joined to a unit.

The present invention also provides a method of forming  
30 an extended nip, the method involves

- mounting the above described support body in the above-described holding device;
- loading the support body by means of the loading system; and
- 35 - displacing the contact surface of the support body in the direction towards the opposite surface under the

2161547\_1 (GHMatters) 28/01/10

7b

influence of said loading in order to elastically deform the contact surface and adaptation to the opposite surface.

- 5 The present invention also provides a method of controlling the load in an extended nip. The method involves
  - designing the above-described support body of at least two layers of elastic material having different
  - 10 elasticity;
  - mounting the support body in the above-described holding device;
  - loading the support body by means of the loading system; and
  - 15 - displacing the contact surface of the support body in the direction towards the opposite surface under the influence of said loading in order to elastically deform the contact surface and adaptation to the

opposite surface in order to obtain an extended nip having a load profile in dependence of different elasticities of the layers.

- 5 The expression "nip" is to be interpreted in its broadest meaning in order to involve such a nip that is defined by a wire and support body.

10 In the following, the invention will be described further with reference to the drawings.

Figure 1 shows a press according to the invention with a press body and a holding device according to a first embodiment.

15

Figure 2 is a perspective view of the press body and the holding device according to Figure 1.

20 Figure 3 is a cross-section of the press body and the holding device according to Figure 2.

Figure 4 is a perspective view of the holding device according to Figure 2, without press body.

25 Figure 5 is a perspective view of the press body itself according to Figure 2.

Figure 6 is a cross-section of the press body according to Figure 5.

30

Figure 7 is a graph depicting the pressure curve which is obtained with the press body according to the first embodiment.

Figures 8-10 show schematically a press body and a holding device according to the invention and different types of loading systems.

- 5 Figure 11 shows schematically a press body consisting of three vertical layers of elastic material with different elasticity.

- 10 Figure 12 is a graph depicting the pressure curve which can be obtained with the press body according to Figure 11.

- 15 Figures 13 and 14 show schematically press bodies consisting of two and three, respectively, inclined layers of elastic material with different elasticity.

- 20 The invention will be described in connection with a press for dewatering a fibre web. Naturally, in addition to the press section, the invention can be applied to any suitable apparatus for the treatment of a fibre web, e.g. an apparatus in a drying or forming section of a paper or board machine, and in a calender for surface treatment of the fibre web.

- 25 Figure 1 shows schematically portions of a press, which is arranged in the press section of a paper or board machine in order to press water out of a formed, wet fibre web. Advantageously, the invention can be used in a paper machine of the tissue machine type. The press  
30 includes a first press element 1 and a second press element 2. The press elements 1, 2 are interacting with each other in order to form an extended press nip N.

- 35 The second press element 2 includes a counter-pressure member being active in the press nip N and having a

movable, endless surface 3, which forms an opposed surface or counter-pressure surface 4, which can be curved or linear, within the press nip N. In the shown embodiment of the press, the second press element 2  
5 consists of a counter roll in the form of a press roll. The counter roll also can be a drying cylinder in a conventional drying section, or a drying cylinder in a tissue machine designated Yankee cylinder. In this case, the counter-pressure member includes the cylindrical wall  
10 5 of the counter roll 2 the envelope surface of which forms said movable, endless surface 3, which within the extended press nip N forms said counter-pressure surface 4, which can be at room temperature or a temperature raised by means of heating. Provided that the cylinder  
15 wall 5 is thick and stable enough, it constitutes the counter-pressure member as such. In the case when the cylinder wall 5 is thin and deformable, the counter-pressure member further includes an internal supporting system (not shown), which provides the  
20 necessary counter-force.

The first press element 1 includes a movable, endless belt 6 of a flexible material, a support body 7 in the form of a press body, a holding device 8 for mounting the  
25 press body 7, a support for mounting the holding device 8, and a loading system for activating the press body 7. The movable belt 6 describes a closed loop inside of which the press body 7 and the support are located. Before the press nip N, the movable belt 6 is arranged  
30 for meeting a press felt 9 carrying a wet fibre web W which is to be dewatered when it passes through the extended press nip N. The loading system is arranged for being activated in order to influence the press body 7 during the operation of the press for obtaining pressure  
35 forces which the press body 7 exerts against the counter

roll 2 via the belt 6, the press felt 9 and the web W.  
The press body 7 is arranged for deciding the length of  
the extended press nip N, as seen in the machine  
direction. The press body 7 has a free sliding surface 10  
5 (see Figure 3) with which the rotating belt 6 is in  
sliding contact during the operation of the press,  
whereby the sliding surface 10 entirely or partially  
forms a contact surface or press surface 13, which  
together with said counter-pressure surface 4 defines the  
10 press nip N. In addition to the sliding surface 10/press  
surface 13, the press body 7 having two vertical side  
surfaces 69, 70 (see Figure 6) facing from each other,  
being parallel with each other and connecting to the  
sliding surface 10/press surface 13, and a bottom surface  
15 71 facing from the sliding surface 10/press surface 13  
and connecting to the side surfaces 69, 70 under right  
angle. A spraying device (not shown) is mounted upstream  
the press body 7 for supplying lubricant on the inside of  
the belt 6 in order to form a film which reduces the  
20 friction between the rotating belt 6 and the press  
body 7.

In the shown embodiment of the press, the first press  
element 1 consists of a press roll, the shell of which  
25 forms the movable belt 6 which thus describes a  
substantially circular loop. In an alternative embodiment  
of the press (not shown), the flexible, movable belt is  
arranged for running in a non-circular loop, e.g. in a  
substantially oval loop or in a substantially triangular  
30 loop, around the press body and one or several guide  
rolls. In the embodiment shown, the press roll 1 has two  
circular, rotatably mounted end walls (not shown),  
whereby the shell 6 is rigidly mounted to the peripheries  
of the end walls in order to rotate together with them.  
35 The shell 6 and the end walls define a closed space in

which the support is located, said support including a stationary supporting beam 12 extending axially between the end walls without touching them. Also the press body 7 and its holding device 8 are extending axially between the end walls without touching them. Alternatively, the second press element 2 can be of the same or substantially the same design as the above-described first press element 1, whereby the press nip thus is formed by two press bodies according to the invention.

According to the invention the press body 7 is elastically deformable and has its press surface 13 adaptable to the counter-pressure surface 4 in interaction with this. This adaptation takes place under the influence of a load being created by said loading system, on the press body 7 in direction towards the counter-pressure surface 4 in order to load the entire press nip N correspondingly. The definition that the press body is elastically deformable does not necessarily imply that the entire press body consists of an elastic material, but should in the context of the invention be seen in a broader sense, viz. that the press body has at least one functional portion consisting of an elastic material and fulfilling said definition. For practical and production-engineering reasons, and according to the most preferred embodiments the press body is in its entirety made in one piece of an elastic material or several pieces of elastic material, where the pieces have different elasticity. The press body forms the entire length of the press nip seen in the machine direction.

The press body 7 and its holding device 8, that is a part of the press according to Figure 1, are shown in detail in Figures 2 and 3, whereas these two structural elements are shown separately in detail in Figures 5 and 6 and



Figure 4, respectively. As is evident from Figure 4, the holding device 8 includes an elongated, beam-formed holder 22, which is form-stable and provided with an axially through-going channel 16 having a U-shaped or rectangular cross-section and being defined by two side support portions 17, 18 and a bottom support portion 19 connecting them, said three portions 17, 18, 19 form two inner side surfaces 66, 67 (see Figure 6) facing each other and being parallel with each other, and an inner bottom surface 68 forming a right angle to the side surfaces 66, 67. The three surfaces 66, 67, 68 thus define said channel 16. Furthermore, it is evident from Figure 2 that the holding device includes two end plates 23 for detachable mounting to the opposed, parallel end surfaces of the holder 22 as well as two clamping plates 24 for detachable mounting on top of the side support portions 17, 18. As is evident from Figures 2 and 3, the side support portion 17, being intended to be located at the inlet of the press nip N, is provided with a recess 25 extending between the clamping plates 24 in order to expose the press body 7. Figures 5 and 6 show the press body 7, which is intended to be mounted in the channel 16 of the holder 22 and which has a cross-section being adapted to the cross-section of the channel 16, so that no play arises between opposite lateral surfaces 67, 69; 68, 70 and so that the press body 7 with its bottom surface 71 comes to rest against the bottom surface 68 of the channel 16. The press body 7 has a top portion 31 that includes said sliding surface 10 and being arranged to be located outside the holding device 8, as is shown in the drawings, at least when the press body entirely fills up the channel 16. In order to avoid undesired deformation laterally the top portion 31 has a limited dimension outside the holding device, however this dimension is sufficient to prevent the holding

device 8 coming in contact with the belt 6 when the press nip is loaded. The said free sliding surface 10, which will be facing the counter roll 2, and with which the rotating belt 6 will be in sliding contact during operation, is, as seen in a cross-sectional view, designed with a predetermined arch-shape in order to form an initial, curved surface portion 32 having a predetermined radius, and a surface portion 33 being tangential to the curved surface portion 32 and extending up to the sharp corner 34 which the sliding surface 10 forms with the side surface 70 being fixed in the machine direction. The purpose of the curved surface portion 32 is to create a wedge between the rotating belt 6 and the curved surface portion 32 in order to make it possible to get lubricant to follow the belt 6 on its inside while forming a film between the belt 6 and the sliding surface 10. Said corner 34 forms the outlet of the press nip N, while the inlet of the press nip N at the curved surface portion 32 becomes floating depending on the pressure provided by the loading system. The press body 7 has recessed end portions 35 which enable a simple, detachable mounting in the holder 22 by means of said clamping plates 24, as is evident from Figure 2.

As mentioned in the foregoing, the press body 7 is elastically deformable in order to bring the press surface 13 to form in compliance with the counter-pressure surface 4 of the counter roll. As is evident from Figure 6, the press body 7 is made in one piece of an elastic material. The elastic deformation occurs both in the machine direction MD and crosswise to the machine direction CD in dependence of the shape of the counter-pressure surface 4, i.e. the press surface 13 conforms to and adopts the outline of the counter-pressure surface 4, and the portion of the

sliding surface 10 defining the press nip, i.e. the press surface 13, which in this case corresponds to said press zone 15, changes its form in accordance with the opposed counter-pressure surface 4 of the counter roll 2.

5

The press body 7, being used in the embodiments according to Figures 1-6, and being designed in one piece, achieves a load profile or pressure curve as illustrated in Figure 7.

10

Figures 8-14 illustrates schematically different embodiments of the combination of press body 7, holding device 8 and loading system.

15

In the embodiment according to Figure 8 the loading system comprises a power transmitting device 50 in the form of hydraulic cylinders, pneumatic cylinders, jacks or similar which are mounted in two rows between the holder 22 and the supporting beam 12. The press surface 13 is inclined in relation to the side surfaces 69, 70. By the influence of the power transmitting device 50 the press body 7 is pressed against the counter-pressure surface 4 which is deformed elastically to conform to and adopt the contour of the counter-pressure surface 4.

25

In the embodiment according to Figure 9 the loading system comprises a power transmitting device 50 which includes a pressure chamber 57 being in communication with a pressure medium source (hydraulic or pneumatic) through a conduit and a suitable control member (not shown) for regulating the pressure in the pressure chamber 57. In this case the holder is rigidly mounted to the supporting beam 12. The pressure chamber 57 is defined by an inner portion of the channel 16 in which the press body 7 is received in a sealing manner. The

30

35

press body 7 thus functions as a piston to be slidably moved in relation to the counter roll 2 and elastically deformed against this in dependence of the pressure prevailing in the pressure chamber 57. Since the press body 7 consists of elastic material it will itself form a seal against the side walls 66, 67 of the holder 22. Alternatively, if desired, special sealings (not shown) can be mounted in said side walls 66, 67 in order to seal against the opposite side surfaces 69, 70 of the press body 7.

In the embodiment according to Figure 10 the loading system comprises a combination of the embodiments according to Figures 8 and 9, i.e. a first power transmitting device 50 of the type defined and a second power transmitting device 52 of the type defined. In such an arrangement the press body 7 can be mounted in a first starting position having its press surface 13 at a touch-free distance from the opposite counter-pressure surface 4, wherein the holding device 8 and the press body 7 are arranged to be moved together by means of the first power transmitting device 50 in the direction towards the counter-pressure surface 4 to a second starting position having the press surface 13 of the press body 7 in contact with or nearly in contact with the counter-pressure surface 4 (via the belt 6). The pressure in the pressure chamber 57 is then raised so that the press body 7 slides out from the holding device a small distance and is pressed against the counter-pressure surface 4 while becoming elastically deformed in order to form a nip-forming operation position with a desired load profile, wherein the first power transmitting device 50 now at first hand functions as a counterstay.

35

In the embodiments described above the press body 7 is made in one piece of elastic material. In the embodiment according to Figure 11 the press body 7 is made of three longitudinal, vertical pieces 53 of elastic material with different coefficients of elasticity, said pieces 53 forming layers and being parallel with the vertical side surfaces 66, 67 of the channel 16. Such a multi-layered press body 7 produces a stepped load profile or press curve as illustrated in Figure 12.

10

In Figures 13 and 14 further examples of multi-layered press bodies 7 are illustrated, wherein the surfaces of the layers 72 and 73, respectively, contacting each other are inclined, i.e. the surfaces define an acute angle with the downstream, vertical side surface 70 of the press body 7. The layers have different elasticities or hardness values, as is indicated by the line and square designed surfaces, for attaining load profiles with different progresses in dependence of the compression or deformation of the different layers.

15

20

With the exception for the embodiment according to Figure 10, the press bodies 7 are designed with a press surface 13 that is inclined so that it defines an acute angle just under 45°, i.e. between 42° and 44,9°, with the downstream side surface 71 of the press body 7 thereby initiating the load at the outlet portion of the nip when the press body is moved towards the counter-pressure surface 4. In the embodiment according to Figure 10 on the other hand, the press surface 13 is plane so that it defines a right angle to the upstream side surface 70 of the press body 7.

25

30

In an alternative embodiment (not shown) of the press body, at least one of said elastic layers is made of at

35

least three sections, that are distributed crosswise to the machine direction, of elastic material of at least two different elasticities in order to obtain load profiles describing different curves depending on the composition of the sections in each cross-section of the press body.

In the above-described embodiments, the press body is homogeneous, i.e. it lacks enclosed cavities. However, if desired, the press body can be made with one or several enclosed cavities or enclosed cells so that each such cavity or cell is without any communication with the surroundings. One or several such enclosed cavities or enclosed cells will increase the ductility of the press body in connection with its sliding surface and in relation to the counter roll.

The press body according to the invention has a number of essential advantages of which the following can be mentioned.

- It is self-conforming to the outline of the counter-pressure surface.
- It conforms to and follows the deformation of the counter-pressure surface.
- It avoids abnormal wear of the edges of the press felt.
- It is forgiving to e.g. a paper wad passing through the press nip.
- It can be manufactured at a very low cost.

- It can be designed for controlling the load within the entire press nip, or within successive sections of the press nip and independently of each other.

5 The support bodies which are described above and shown in the drawings have been designated press bodies, since they are used in a press apparatus. Naturally, the same embodiments of the press body can be used in other apparatus for the treatment of a fibre web in a paper or  
10 board machine, or in a calender. When the invention is applied to e.g. a wire section, the belt 6 of the first press element 1 in Figure 1 can be replaced with a clothing, such as e.g. a wire.

15 The load in the nip can vary from 0 to 3000 kN/m.

The support body may have a dimension in the machine direction which typically is 50-500 mm.

20 The desirable elastic properties of the support body are achieved by means of a material, having a coefficient of elasticity which is substantially lower than that of metal, such as steel and aluminium, so that the support body can be elastically compressed. Typical hardness  
25 values of the elastic material is 50-95 Shore A. The elastic material should also give the support body a sufficient strength/hardness in order to withstand wear, but at the same time make the support body elastically deformable enough in order to obtain the desired function  
30 according to the invention. As elastic materials, plastic and rubber materials can be used, such as polymers, composite materials, which can be reinforced with e.g. glass fibres, carbon fibres or textile. At present, polyurethane is a preferred polymer. If desired, the  
35 contact surface of the support body can be covered by an

exchangeable, thin wear protection (not shown), the one side edge portion of which being rigidly mounted to the upstream side of the holder, while the other side edge portion is free to follow the movement and deformation of the support body.

In the claims which follow and in the preceding description of the invention, except where the context requires otherwise due to express language or necessary implication, the word "comprise" or variations such as "comprises" or "comprising" is used in an inclusive sense, i.e. to specify the presence of the stated features but not to preclude the presence or addition of further features in various embodiments of the invention.

It is to be understood that, if any prior art publication is referred to herein, such reference does not constitute an admission that the publication forms a part of the common general knowledge in the art, in Australia or any other country.



## THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A support body for an apparatus having an extended nip being defined by a contact surface of the support body  
5 and an opposed surface, said support body
  - has two side surfaces facing from each other and connecting to said contact surface, and a bottom surface facing from the contact surface,
  - is arranged to be moved in the direction towards the  
10 opposite surface by means of a loading system in order to load the nip via said contact surface, and
  - is elastically deformable and has its contact surface adaptable to the opposed surface in interaction therewith,
- 15 wherein the support body is made of at least two layers of elastic material, said layers being joined to a unit.
2. The support body according to claim 1, wherein each of said layers forms a contact zone of the contact surface  
20 and has different elasticities.
3. The support body according to claim 2, wherein the support body is made of rubber or polymer with good elasticity and good strength.
- 25 4. The support body according to claim 3, wherein the support body is made of polyurethane.
5. The support body according to any one of claims 1-  
30 4, wherein the support body is adapted to operate at a load in the nip which varies from 0 to 3000 kN/m.
6. The support body according to any one of claims 1-  
5, wherein the support body has a dimension in the machine  
35 direction of 50-500 mm.
7. A support device for an apparatus having an

extended nip, comprising a support body as defined in any one of claims 1-6, and a holding device for the support body arranged to form a counterstay for said two side surfaces of the support body and directly or indirectly  
5 form a counterstay for said bottom surface of the support body, wherein the support body has a top portion which has said contact surface and being arranged to protrude from the holding device at least in the nip-forming operation position of the support body.

10

8. The support device according to claim 7, wherein the holding device has a space for receiving the support body, said space having two side surfaces for interaction with the opposite side surfaces of the support body, and a  
15 bottom surface facing to the bottom surface of the support body.

9. The support device according to claim 8, wherein said top portion is arranged to protrude from the holding device, said bottom surfaces of the support body and  
20 holding device are in direct contact with each other, and wherein the loading system comprises a power transmitting device arranged to move the holding device together with the support body in order to load the nip.

25

10. The support device according to claim 9, wherein the power transmitting device includes any of hydraulic cylinders, pneumatic cylinders, jacks or similar.

30 11. The support device according to claim 8, wherein the bottom surface of the support body is located at a distance from the bottom surface of the holding device to define an enclosed chamber therebetween, and that the loading system comprises a power transmitting device  
35 including a pressure chamber formed by said enclosed chamber and being arranged to be pressurized in order to move the support body in relation to the holding device in

order to load the nip while the support body being elastically deformed.

12. The support device according to claim 8, wherein  
5 the bottom surface of the support body is located at a distance from the bottom surface of the holding device to define an enclosed chamber therebetween, that the loading system comprises a first power transmitting device arranged to move the holding device together with the  
10 support body from a first starting position with the contact surface of the support body at a distance from the opposite surface to a second starting position with the contact surface of the support body located adjacent or close to the opposite surface, and a second power  
15 transmitting device comprising a pressure chamber formed by said enclosed chamber and being arranged to be pressurized with an increased pressure in order to move the support body in relation to the holding device to load the nip while the support body being elastically deformed  
20 to form a nip-forming operation position.

13. A holding device for the support body as described above wherein the holding device is arranged to form a counterstay for said two side surfaces of the support body  
25 and directly or indirectly form a counterstay for said bottom surface of the support body, and wherein the support body has a top portion which has said contact surface and being arranged to protrude from the holding device at least in the nip-forming operation position of  
30 the support body.

14. The holding device according to claim 13, wherein it has a space for receiving the support body, said space having two side surfaces for interaction with the opposite  
35 side surfaces of the support body, and a bottom surface facing to the bottom surface of the support body.

15. The holding device according to claim 13 or 14, wherein said top portion is arranged to protrude from the holding device, said bottom surfaces of the support body and holding device are in direct contact with each other, 5 and wherein the loading system comprises a power transmitting device arranged to move the holding device together with the support body in order to load the nip.

16. The holding device according to claim 15, wherein 10 the power transmitting device includes any of: hydraulic cylinders, pneumatic cylinders, jacks or similar.

17. The holding device according to any one of claims 14-16, wherein the bottom surface of the support body is 15 located at a distance from the bottom surface of the holding device to define an enclosed chamber therebetween, and the loading system comprises a power transmitting device including a pressure chamber formed by said enclosed chamber and being arranged to be pressurized in 20 order to move the support body in relation to the holding device in order to load the nip while the support body being elastically deformed.

18. The holding device according to any one of claims 25 14-17, wherein the bottom surface of the support body is located at a distance from the bottom surface of the holding device to define an enclosed chamber therebetween, the loading system comprises a first power transmitting device arranged to move the holding device together with 30 the support body from a first starting position with the contact surface of the support body at a distance from the opposite surface to a second starting position with the contact surface of the support body located adjacent or close to the opposite surface, and a second power 35 transmitting device comprising a pressure chamber formed by said enclosed chamber and being arranged to be pressurized with an increased pressure in order to move

the support body in relation to the holding device to load the nip while the support body being elastically deformed to form a nip-forming operation position.

- 5 19. an apparatus for the treatment of a fibre web that is manufactured in a paper or board machine, comprising a first structural element and a second structural element which is movably arranged and having an opposite surface for interaction with the first structural element while  
10 forming an extended nip, said first structural element comprising a movable belt and a support device comprising a support body having a contact surface which defines said nip together with the opposite surface, said support body
- has two side surfaces facing from each other and  
15 connecting to said contact surface, and a bottom surface facing from the contact surface,
  - is arranged to be moved in the direction towards the opposite surface by means of a loading system in order to load the nip via said contact surface, and  
20 - is elastically deformable and has its contact surface adaptable to the opposite surface in interaction therewith,

wherein the support body is made of at least two layers of elastic material, said layers being joined to a unit.

- 25 20. The apparatus according to claim 19, wherein said support device also comprises a holding device for the support body arranged to form a counterstay for said two side surfaces of the support body and directly or  
30 indirectly form a counterstay for said bottom surface of the support body, and the support body has a top portion which has said contact surface and being arranged to protrude from the holding device at least in the nip-forming operation position of the support body.

- 35 21. The apparatus according to claim 19, wherein the support body further is designed according to any one of

claims 2-6.

22. The apparatus according to claim 20, wherein the  
holding device further is designed according to any one of  
5 claims 13-18.

23. The apparatus according to any one of claims 19-22,  
wherein the second structural element comprises a support  
body that has a contact surface forming said opposite  
10 surface, wherein both support bodies are designed  
according to any one of claims 1-6.

24. A press for the treatment of a fibre web that is  
manufactured in a paper or board machine, comprising a  
15 first press element and a second press element which is  
movably arranged and having an opposite surface for  
interaction with the first press element while forming an  
extended press nip, said first press element comprising a  
movable belt and a press device which comprises a press  
20 body having a press surface which defines said nip  
together with the opposite surface, said press body  
- has two side surfaces facing from each other and  
connecting to said press surface, and a bottom  
surface facing from the press surface,  
25 - is arranged to be moved in the direction towards the  
opposite surface by means of a loading system in  
order to load the nip via said press surface, and  
- is elastically deformable and has its press surface  
adaptable to the opposed surface in interaction  
30 therewith,  
wherein the support body is made of at least two layers of  
elastic material, said layers being joined to a unit.

25. The press according to claim 24, wherein the press  
35 device also comprises a holding device for the support  
body arranged to form a counterstay for said two side  
surfaces of the press body and directly or indirectly form

a counterstay for said bottom surface of the press body,  
and that the press body has a top portion which has said  
press surface and being arranged to protrude from the  
holding device at least in the nip-forming operation  
5 position of the press body.

26. The press according to claim 24 or 25, wherein the  
opposite surface and/or the press surface are/is arranged  
to be heated.

10 27. The press according to any one of claims 24-26,  
wherein the press body is designed according to any one of  
claims 1-6.

15 28. The press according to any one of claims 24-27,  
wherein the second press element comprises a press body  
that has a press surface forming said opposite surface,  
wherein both press bodies are designed according to any  
one of claims 1-6.

20 29. A method of forming an extended nip in an apparatus  
that comprises a support body designed according to any  
one of claims 1-6, wherein the method comprises the steps  
of:

- 25 - mounting the support body in a holding device designed  
according to any one of claims 13-18;  
- loading the support body by means of the loading  
system; and  
- displacing the contact surface of the support body in  
30 the direction towards the opposite surface under the  
influence of said loading in order to elastically  
deform the contact surface and adaptation to the  
opposite surface.

35 30. A method of controlling the load in an extended nip  
in an apparatus that comprises a support body designed  
according to any one of claims 1-6, wherein the method

comprises the steps of:

- designing the support body of at least two layers of elastic material having different elasticity;
- mounting the support body in a holding device designed according to any one of claims 13-18;
- loading the support body by means of the loading system; and
- displacing the contact surface of the support body in the direction towards the opposite surface under the influence of said loading in order to elastically deform the contact surface and adaptation to the opposite surface in order to obtain an extended nip having a load profile in dependence of different elasticities of the layers.

31. The use of a support body according to any one of claims 1-6 as a press body in a press apparatus in a paper or board machine.


32. The use of a support body according to any one of claims 1-6 as a supporting foil for a carrying apparatus in a paper or board machine.

33. The use of a support body according to any one of claims 1-6 as a reeling support in a reel-up of a paper or board machine.



1/7

Fig. 1

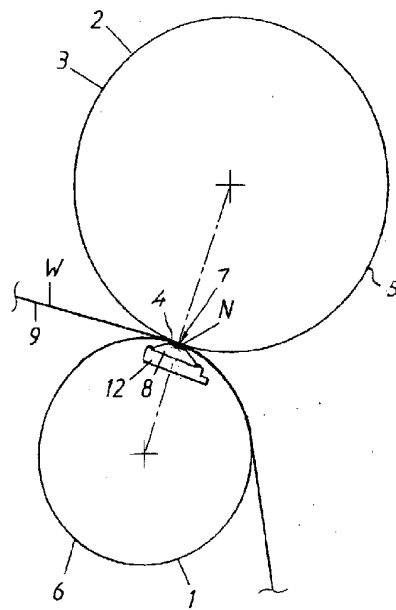


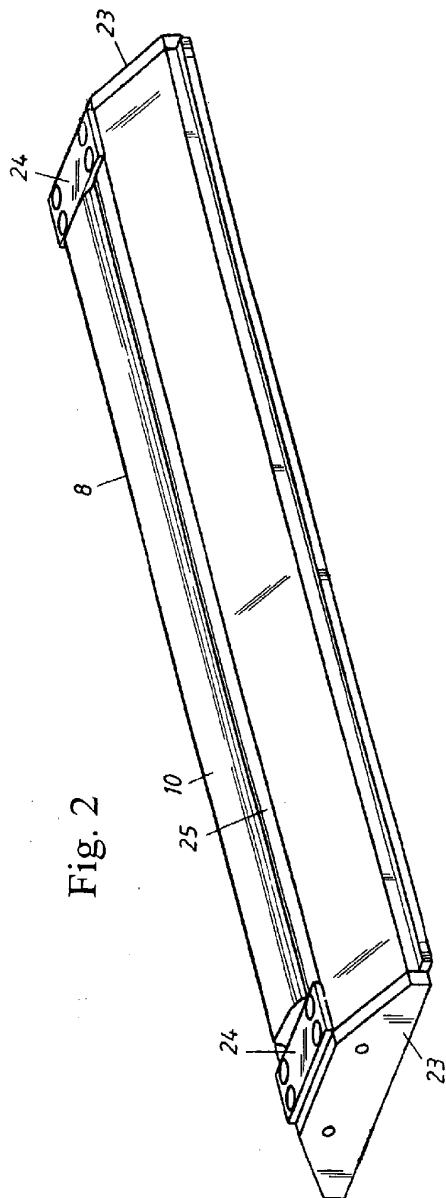


Fig. 2

Fig. 3

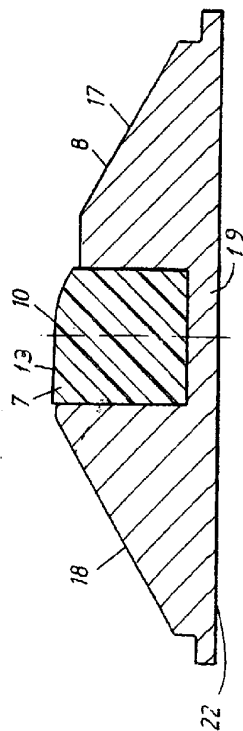

3/7

Fig. 4

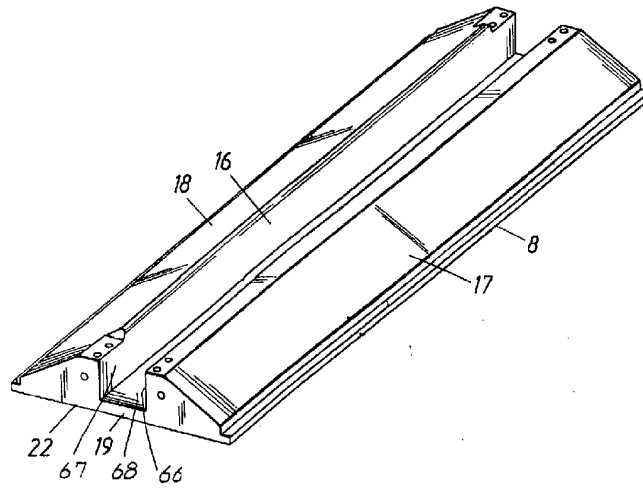


Fig. 5


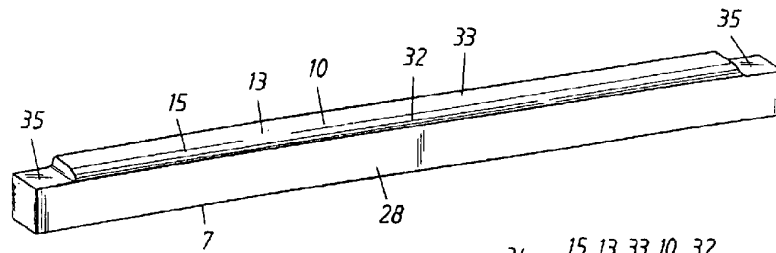


Fig. 6



4/7

Fig. 7


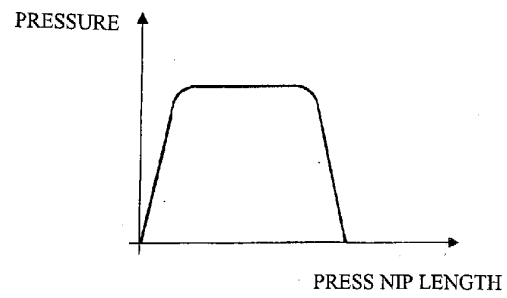


Fig. 8



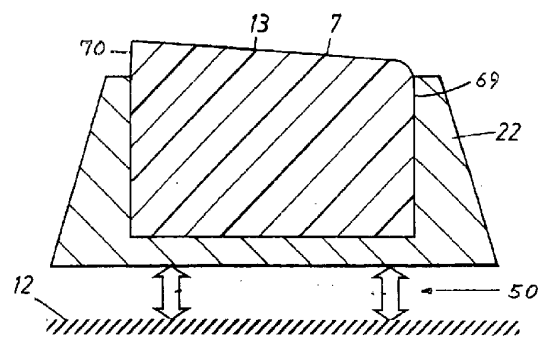

6/7

Fig. 10


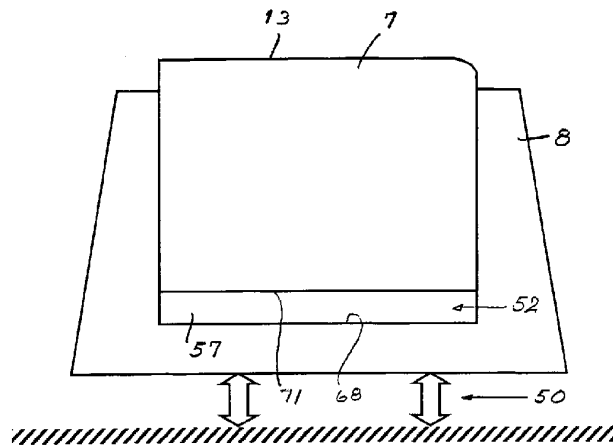


Fig. 12

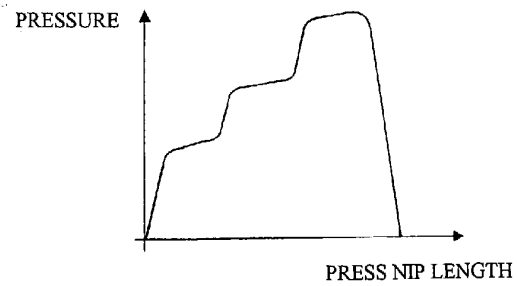

7/7

Fig. 13

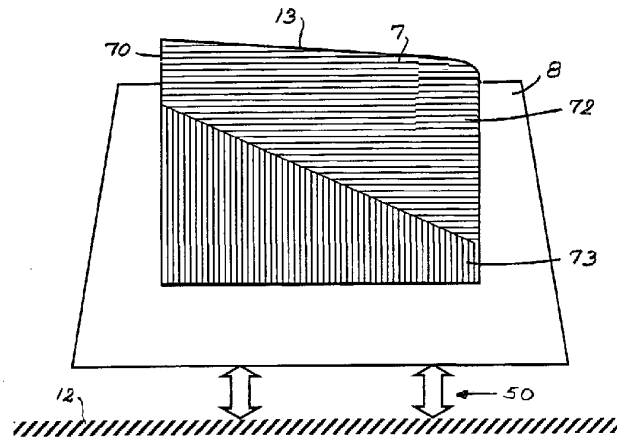


Fig. 14

