(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number: **0 194 813**
B1

(12) # EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **19.09.90**

(51) Int. Cl.[5]: **C 11 D 10/04,** C 11 D 17/04

(21) Application number: **86301604.4**

(22) Date of filing: **06.03.86**

(54) **Method and device for conditioning fabrics in a tumble-dryer.**

(30) Priority: **08.03.85 GB 8506026**

(43) Date of publication of application:
17.09.86 Bulletin 86/38

(45) Publication of the grant of the patent:
19.09.90 Bulletin 90/38

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI NL SE

(56) References cited:
EP-A-0 095 335
EP-A-0 118 313

(73) Proprietor: **UNILEVER PLC**
Unilever House Blackfriars P.O. Box 68
London EC4P 4BQ (GB)
(84) **GB**

(73) Proprietor: **UNILEVER NV**
Burgemeester s'Jacobplein 1 P.O. Box 760
NL-3000 DK Rotterdam (NL)
(84) **BE CH DE FR IT LI NL SE AT**

(72) Inventor: **Leigh, Arthur George**
High Trees Quarry Road East Heswall
Wirral Merseyside L64 6XD (GB)

(74) Representative: **Stancliffe, Terence Christopher et al**
UNILEVER PLC Patents Division P.O. Box 68
Unilever House
London EC4P 4BQ (GB)

EP 0 194 813 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

Description

The present invention relates to a method and device for conditioning fabrics in a tumble-dryer. The term "conditioning" is used herein to mean the imparting of certain consumer benefits, including softness and reduced static cling, to washed fabrics. In the process of the invention, a fabric conditioning agent in the form of a free-flowing powder is applied directly to the fabrics before or during drying in the tumble-dryer.

The present invention represents an improved modification of the invention described and claimed in GB 2 136 028A (Unilever), which is concerned with a fabric conditioning method and device using a soap-based fabric conditioning agent in the form of a simple, uncoated free-flowing powder.

In the aforementioned GB 2 136 028A, there is claimed a method of conditioning fabrics, which comprises tumbling damp fabrics under the action of heat in a laundry dryer together with a conditioning agent in the form of a free-flowing powder and having a particle size range within the range of from 20 to 1000 µm, said powder consisting to an extent of at least 55% by weight of one or more water-soluble soaps of C_8 to C_{22} saturated or unsaturated fatty acids, said soap blend containing at least 5% by weight of C_{12} soap, at least 5% by weight of C_{14} soap, at least 12% by weight of C_{16} soap and at least 20% by weight of C_{18} soap, said soap blend being in the form of a powder free of any protective coating.

It was found that the soap blends specified in GB 2 136 028A were excellent softeners, but were not optimum for reducing static cling. The latter property could be improved by the inclusion of minor amounts of cationic materials, and combinations of soap with distearyl dimethyl ammonium chloride were found to have an excellent antistatic effect: see Examples 23 and 24 of GB 2 136 028A. Recently, however, these cationic materials have been coming under increasing attack on environmental and safety grounds, and efforts have been made to identify effective softening and antistatic compositions that are free of usch materials.

It has now surprisingly been found that combinations of soap blends are described in GB 2 136 028A and certain nonionic surfactants have excellent fabric conditioning properties with respect both to softening and to reduction of static cling. These compositions, like those of GB 2 136 028A, are applied in powder form to the fabrics to be conditioned.

The applications of fabric conditioning agents in powder or granule form to fabrics prior to or during the drying cycle is already known *per se*, not only from GB 2 136 028A but also from GB 2 122 657A (Unilever), which describes and claims a preferred dispensing device for use in the present invention, and from AU 52813/73 (Economics Laboratory).

US 4 049 858 and US 4 096 071 (Murphy, Procter & Gamble) disclose a fabric sofening composition comprising a sorbitan ester, together with a phase modifier (a soap or an alkyl sulphate) in a ratio of 100:1 to 1:1. The composition may be applied to the fabric load prior to drying as a foam or dispersion or by sprinkling from a shaker; or it may be enclosed in a hollow, open-pore polyurethane foam sponge pouch which is placed in the dryer with the fabrics.

GB 1 482 782 (Procter & Gamble) discloses fabric conditioning compositions that impart crispness to the fabric. The compositions contain nonionic surfactant and a crisping component insoluble in water that may be a fatty alcohol, a fatty acid, or an insoluble (calcium or magnesium) soap of a fatty acid. The composition may be dispensed from a hollow sponge, a bag or a sheet substrate, or manually scattered, in granular form, onto the fabric before the start of the drying cycle.

The present invention provides a method of conditioning fabrics, which comprises tumbling damp fabrics under the action of heat in a laundry dryer together with a conditioning agent in the form of a free-flowing powder having a particle size within the range of from 20 to 1000 µm, said powder comprising

(i) at least 80% by weight of a soap blend as defined in the aforementioned GB 2 136 028A, and

(ii) from 5 to 20% by weight of at least one C_{16}—C_{22} aliphatic alcohol ethoxylated with an average of from 5 to 30 moles of ethylene oxide.

It has been found that compositions as defined above, when applied as a free-flowing powder to fabrics in the tumble-dryer, are highly effective fabric softeners and also reduce static cling just as well as the soap/cationic blends of GB 2 136 028A. The particles, scattered on the fabrics before drying or during the early part of the drying cycle, initially adhere to the damp fabric and then spread to cover the fabrics.

It is an essential feature of the present invention that the fabric conditioning agent be in powder form. Soap-based conditioning compositions applied as a coating or impregnant on a sheet substrate, without distributing agent, were found to be delivered very poorly to the fabrics, so that very little softening benefit was obtained; a substantial proportion of the soap remained on the sheet substrate. According to the present invention, on the other hand, 100% delivery of the conditioning agent to the fabric may easily be achieved without the use of a distributing agent.

The particle size of the powder will influence the speed and uniformity of delivery. Particle sizes above 1000 µm have been found to give insufficiently uniform conditioning, and thus powders having particle sizes above this figure, which may more properly be regarded as granules, are outside the scope of the invention. The smaller the particle size of the powder, the greater the uniformity of its distribution on the fabrics in the dryer; but a particle size smaller than 20 µm is undesirable on safety grounds because of its respirability. A preferred particle size range is 70 to 500 µm, more preferably 90 to 250 µm.

The powdered conditioning agent used according to the invention consists, to an extent of at least 80%

by weight, preferably at least 90% by weight, of the soap blend as defined above. The cation is generally alkali metal, preferably sodium or potassium; ammonium; or substituted ammonium, for example, triethanolamine. The blend preferably contains at least 7% by weigt of C_{12} soap, especially from 7 to 27%; at least 6% by weight of C_{14} soap, especially from 18 to 12%; at least 15% by weight of C_{16} soap, especially from 18 to 28%; and at least 25% by weight of C_{18} soap, especially from 32 to 54% by weight.

The soap blend used in the process of the invention thus contains significant amounts of four different chain lengths, the spread of chain lengths — from C_{12} to C_{18} — being relatively wide.

The blend may contain both saturated and unsaturated soaps. Advantageously the blend contains at least 15% by weight of C_{18} unsaturated soap, preferably at least 20% by weight and especially from 22 to 38% by weight.

Single-chain-length soaps show a slight fabric softening effect, as do soap blends having a limited chain length spread, such as tallow soap and coconut soap. All these soaps, however, are inferior softeners to commercially available impregnated sheets carrying cationic fabric conditioner and spreading agent. As described in GB 2 136 028A, however, blends having a wider and more balanced chain length spread, obtainable by mixing tallow and coconut soaps, have been found to give highly efficient softening which, at a dosage of 3 g per fabric load, is consistently as good as, if not better than, that obtained using the impregnated sheet type of article. These blends may advantageously contain from 45 to 85% by weight of tallow soap, the balance being coconut soap.

Commercial blends of coconut and tallow soaps as used in toilet soap bars and fabric washing soap flakes have been found to offer excellent softening performance. These blends may in some cases be superfatted, that is to say, they contain up to about 10% by weight of free fatty acids. This appears not to be detrimental in terms of softening performance, but can make the milling of the soap to a free-flowing powder more difficult.

The chain length distribution of some typical blends, together with those of tallow and coconut soaps, are shown in the Table.

The powdered fabric conditioning agents used according to the present invention also contain minor amounts, not exceeding 20%, of specified nonionic surfactants: C_{16}—C_{22} aliphatic alcohol 5—30 EO ethoxylates. These materials do not themselves have appreciable softening properties, so it is not desirable to use high proportions of them in the conditioning compositions, but in minor amounts of 5—20% by weight, preferably 5—10% by weight, they considerably enhance the antistatic properties of the fabric conditioning compositions.

It may be advantageous for processing reasons to use a nonionic surfactant that has a melting point above about 20°C. Accordingly materials with relatively long hydrocarbon chains (C_{16} and above) are preferred. Ethoxylates of tallow alcohol, for example the 9 EO, 18 EO and 25 EO ethoxylates are all useful in the present invention: these have melting points of about 33°C, 37°C and 44°C respectively. The 25 EO material is especially preferred for ease of processing because it is available as a free-flow spray-cooled powder. Tallow alcohols consist mostly of C_{18} alcohol. Petrochemically derived C_{16}—C_{19} OXO alcohol mixes with 7—20 ethylene oxide groups per mole (average) have also been used successfully in the present invention.

The powdered fabric conditioning agent used in accordance with the present invention may, for example, be prepared by slurrying together the soap and alcohol ethoxylate, dyring the slurry, grinding and sieving to a desired particle size range. Alternatively, if the nonionic surfactant is a free-flowing powder itself, the ingredients may be ground and sieved separately and then dry mixed. Other processing possibilities will readily suggest themselves to one skilled in the art.

The composition will consist predominantly of the two principal ingredients already mentioned, but may also include minor amounts of other materials chosen to enhance the overall fabric conditioning effect, for example, to impart crispness, perfume or easy-iron characteristics, or to improve powder properties. Any perfume included is preferably fabric-substantive, and may advantageously be protected by encapsulation.

Chain length	Tallow	Coconut	Tallow/coconut blends (wt %)			
			85/15	80/20	60/40	45/55
C_8	-	7.0	1.0	1.5	3.0	3.8
C_{10}	-	8.1	1.2	1.6	3.2	4.5
C_{12}	-	48.0	7.2	9.6	19.2	26.4
C_{14}	4.5	17.5	6.5	7.0	9.7	11.7
C_{16}	30.6	9.0	27.4	26.3	21.9	18.7
C_{18} sat.	19.2	2.1	16.6	15.8	12.3	9.8
C_{18} unsat.	42.7	5.7	37.2	35.3	27.9	22.4
Other	3.0	2.6	2.9	2.9	2.8	2.7

The amount of powdered conditioning agent used per fabric load will of course depend both on the fabric load and the size of the machine. For use in a domestic UK or European tumble-dryer, amounts of from 1.5 to 12 g, preferably from 2.5 to 10 g and especially from 2.5 to 7 g, have been found to be optimum.

The powdered conditioning agent may simply be scattered by hand onto the fabrics in the tumble-dryer before the dryer is switched on, but in a preferred embodiment of the powdered conditioning agent is contained within a dispensing device and is sprinkled onto the fabrics during the actual drying process.

The dispensing device may be fixed to an internal surface of the dryer, either a stationary surface such as the door or, preferably, a moving surface such as the drum wall. More preferably, however, the dispensing device is loose in the dryer and moves freely among the fabrics as drying progresses.

The use of a dispensing device allows the scattering of the conditioning agent onto the fabrics to take place gradually during the early part of the drying cycle, rather than instantaneously. The powder should all be dispensed onto the fabric while the fabrics are still damp enough for the powder to adhere to them. The time over which the powder should be dispensed accordingly depends on the fabric load and its initial water content, as well as on the tumble dryer itself. For UK or European tumble dryers it has been found that the powder should preferably be dispensed over a period of at least 2.5 minutes and not exceeding 20 minutes, preferably not exceeding 10 minutes. For successful dispensing the conditioning agent must obviously remain in fine powder form while it is inside the dispensing device; conversion to a fluid form must take place later when the powder has been deposited on the fabrics. It has been found that the soap-based powdered conditioning agent used according to the present invention has excellent characteristics in this respect.

The use of a dispensing device also allows more accurate control of the amount of conditioning agent, especially if it is of the disposable unit dose type containing the correct amount of conditioning agent for a single load. Such a dispensing device may take the form of a small container having openings of a size such that gradual and uniform dispensing of the powder will occur.

Accordingly, in a second aspect, the present invention provides an article for conditioning fabrics in a tumble-dryer, comprising a container having a plurality of openings the largest dimension of which does not exceed 2.5 mm, and containing from 1.5 to 12 g of a fabric conditioning agent as defined above.

The container is of such a size that it can contain the appropriate quantity (1.5 to 12 g, preferably 2.5 to 10 g) of conditioning agent and deliver it at an appropriate rate. It should not be too small, or it will become caught among the fabrics.

The hole size of the container is advantageously matched to the particle size of the powdered conditioning agent, so that the latter is dispensed in a controlled manner. For example, if the particle size is within the preferred range of 70 to 500 µm, the container is advantageously substantially free of openings larger than 2000 µm, and more preferably substantially free of openings larger than 1000 µm. Use of a container having a hole size approximately equal to the largest particle size of the powder used gives especially uniform conditioning. Some powders may, however, have a tendency to agglomerate under tumble-dryer conditions to form larger particles and in this case the openings must be sufficiently large to accommodate the agglomerate.

In a preferred embodiment of the invention, the container is a sachet of flexible sheet material provided over part or whole of its surface with openings to provide permeability to the powder. Suitable materials include paper, nonwoven fabrics, plastics films, and laminates of these. If desired, one or more sachet walls may be constituted by a material provided with openings uniformly over its whole surface; an example of a highly suitable material of this type is the paper used to make tea and coffee bags. This has been found to be suitable for dispensing powders having a particle size of less than 250 µm.

Alternatively an essentially non-porous material may be used and provided with a chosen number of perforations or slits of a chosen size in a chosen arrangement; this second possibility is preferred when relatively large, for example, 2000 µm, openings are required. The use of a sachet of this type is described and claimed in GB 2 149 825A (UNILEVER).

The sachet or other container is preferably provided with a removable outer covering, impermeable to the powderded conditioning agent, which covers all the openings and is in intimate contact with the container in the region of the openings, so as to prevent premature escape of the powder. This outer convering is removed by the consumer immediately before placing the container in the tumble-dryer.

Advantageously, the sachet or other container may be placed, for use in the tumble dryer, within a larger, also powder-permeable container. This arrangement means that at the beginning of the drying cycle the smaller container is prevented from coming into direct contact with the damp fabrics and with water droplets, which contact could cause clogging. The use of an outer container also helps to reduce the incidence of local overloading of conditioner, and hence spotting and staining. Furthermore, the inner container may be smaller without catching in the fabrics, because additional size is provided by the outer container.

The outer container may be, for example, a sachet or bag within which the small inner container preferably fits rather loosely. A loose fit is preferred because it lessens the chance of direct contact of the bulk of the powder in the inner container with damp fabrics or water droplets. The outer container is advantageously reusable and can be refilled with disposable inner containers; it may be closable, for example, by means of a drawstring, elastic, press-studs, a zip-fastener or the like. The outer bag may be made, for example, of a suitable open-weave textile material; or it may be similar in materials and

construction to the sachet embodiment of the inner container described previously.

In a highly preferred embodiment of the present invention, the powdered soap-based fabric conditioning agent is dispensed during tumble-drying by means of a device as described and claimed in GB 2 122 657A (Unilever). In that device, the powdered fabric conditioning agent is disposed within a first container of material permeable to said composition in powder form, the first container being disposed within a second container having openings for the egress of said composition in powder form, the second container being substantially form-retaining and of a shape such as to allow ready movement thereof among the fabrics in a dryer.

The outer container is substantially form-retaining, but need not be completely rigid. It should not be significantly deformed by the tumbling fabrics as it moves among them. Furthermore the container should be to some extend energy-absorbing, and thus sound-absorbing, so that the noise it makes on impact with the drum is not excessive, thus some flexing of the container walls is desirable.

The shape and size of the outer container should be such that it moves freely among the fabric load under the motion of the dryer and distributes its contents as uniformly as possible. The outer surface should be as smoothly contoured as possible, and free of protrusions and sharp edges that can catch on the fabrics. In principle any shape is suitable provided that angles between adjacent faces are not too small; any edges and corners are advatangeously rounded off. The ratio of the principal axis (major to minor) is preferably not greater than 5:1, and is advantageously 2:1 or less, a ratio of approximately 1:1 being especially preferred.

The ideal shape appears to be spherical or substantially spherical, and spherodial, ellipsoidal, cylindrical and frustoconical shapes are also highly advantageous. Other shapes of interest include cubes, hexagonal prisms, and pairs of frustocones abutting at their larger ends, and other possible shapes will readily suggest themselves to one skilled in the art.

It has been found experimentally that, when using UK or European tumble-dryers, the largest dimension of the outer container is preferably at least 6 cm. Smaller containers tend to become caught among the fabrics.

The outer container can be of any reasonable mass, but should not be too heavy, otherwise damage to the dryer could result.

Of course the material of the outer container must be relatively robust, as it will be knocked frequently against the walls of the dryer and compressed by the fabrics. It must also be stable at the temperatures encountered in the dryer, which generally should not exceed 70°C but may rise to 100°C or above in old or poorly maintained machines. Accordingly the material of the outer container is preferably stable at temperatures up to at least 130°C, and preferably up to about 170°C.

Suitable materials include thermoplastic and thermosetting resins, wood, resin-bonded cardboard, papier-mache and casein, natural and synthetic rubbers, and lightweight metal, for example aluminium. Materials that are unsuitable for contact with wet fabrics, for example cardboard, may be protected by a coating of, for example, rubber or plastics material or metal foil. Many other lightweight, robust and heat-stable materials will readily suggest themselves to the skilled worker in the art.

Thermoplastic materials of sufficiently high softening point (preferably above 130°C) and robustness offer manufacturing advantages in that suitable shapes can readily be made by moulding techniques such as injection, extrusion or blow-moulding. Preferred materials include polystyrene, high-density polyethylene and, in particular, polypropylene. The softening point of the last-mentioned material is above 130°C.

The outer container is provided with openings, for example, slits or circular holes, through which the powdered conditioning agent passes. These are larger than the openings in the inner container so that they provide no impedance to the passage of the powdered conditioning agent. Preferably the total area of the openings in the outer container is at least 3 times as large as the total area of the openings in the inner container, and advantageously at least 5 times as large. The individual openings are desirably as large as possible provided that the inner container has sufficient integrity and robustness. The shape of the openings is not important as far as delivery of the powder is concerned, but may have some influence on the strength and flexibility of the outer container and its noisiness in use. It has been found, for example, that in the case of a spherical polypropylene container the use of elongate slits rather than circular holes gives substantially less noise in use, presumably because of greater flexibility.

Optionally the surface of the outer container, especially the inner surface and the edges of the openings, may be rendered to some extent hydrophobic (if not inherently so) to prevent or reduce the penetration into its interior of water droplets, which may collect on the outer surface at an early stage in the dryer cycle.

The interior of the outer container may optionally be provided with means for keeping the inner container at a distance from its outer wall(s) and thus ensuring that no direct contact with damp fabrics or water droplets occurs. The inner wall(s) may, for example, be provided with protrusions which act as spacers. Alternatively, locating means, such as pins or pegs, may be provided to hold the inner container in a fixed position; this measure has the advantage that in the case of a flexible inner container such as a sachet the latter is prevented from becoming crumpled up. Where the outer container is injection-moulded, such pins or pegs may readily be formed as an integral part of it. Spacer ribs or other protrusions as mentioned above may also easily be formed in this way.

As mentioned previously, the inner container may be rigid or flexible but if free to move around in the outer container is preferably flexible. This is for noise reasons. If, however, locating means as described in the previous paragraph are provided in the outer container, a rigid inner container may if desired by used without creating a noise problem.

Advantageously the outer container is sufficiently robust to be reusable, and is so constructed that an inner container may readily be inserted or removed. Thus multiple use of the outer container with a succession of inner containers is possible. Furthermore two inner container may be used at once if a particularly large load is contemplated. The outer container may, for example be so designed that, by flexing, one of its apertures may be enlarged to a sufficient extent that an inner container can be inserted or removed. More conveniently, the outer container may be constructed in two or more parts that can readily be separated and re-joined. The parts may if desired by connected by a hinge or the like so that they never become completely separated. The parts should join up by a mechanism that leaves the outer surface of the closed container as smooth as possible, and that will not accidentally come open during use in the tumble-dryer. Examples of suitable mechanisms include snap-fit, a lock screw, and internal hooks joined by elastic.

If a succession of inner containers is to be used with the same outer container, it may be unnecessary to remove the spent inner containers before inserting a new one, if the inner containers are of a type, for example, a flexible sachet, that once empty occupies little space. In practice it has been found that ten sachets may be used successively within a slitted polypropylene sphere without removing the empty sachets.

If the outer container is reusable and full inner containers are separately available as refills, it is clearly desirable for these inner containers to be provided with outer packaging or covering in order to prevent premature discharge of their contents. The outer packaging or covering is advantageously also moisture-proof in order to protect the powdered conditioning agent from atmospheric moisture during storage and handling prior to use.

It is essential that such outer packaging or covering be in intimate contact with all surface regions of the inner container that are permeable to the powdered conditioning agent. If space is left between the two, powder will escape into that space and will be lost when the outer packaging or covering is removed.

The outer packaging or covering is thus preferably a flexible sheet material that can be made to conform intimately and accurately to any permeable surface region of the inner container.

Any film or sheet can be made to adhere to the inner container and subsequently removed is in principle suitable, the choice of material depending among other things on the material used for the inner container itself and the areas required to be covered.

In the case of a tea-bag-like sachet where a relatively large area of the sachet, possibly the whole of it, is powder-permeable and needs an outer covering, the outer covering is preferably a relatively durable material impermeable to moisture and perfume so that the product has a reasonable storage life. Materials that can be heat-sealed, either inherently or with the aid of hot-melt adhesives, are especially advantageous.

Plastic films may be suitable, but thin films of the "clingfilm" type (polyvinylidene chloride) that depend on static electrical attraction for adhesion are ineffective for powdered conditioning agents including an anti-static agent. Other plastic films that do not depend on static attraction may, however, be suitable. Examples include Nescofilm (Trade Mark), a plasticised polyethylene film, and Parafilm (Trade Mark), a paraffin-wax-coated packaging film.

Preferably, however, the outer covering includes or consists of a metal foil, aluminium foil being especially preferred because it is non-stretching, readily laminated, readily removable, and provides a moisture-proof outer layer which also prevents or reduces perfume loss during storage. Advantageously the foil may be laminated to an outer layer of paper, so that a very thin layer of the relatively expensive foil may be used.

Some other composite material may also combine the desired properties. For example, metallised thermoplastic (for example, polyester) film can conveniently combine moisture-impermeability and heat-sealability. Paper itself is not ideal because of its inadequate resistance to moisture, but paper coated or laminated with wax or plastics material can be highly suitable.

For example, a sachet may conveniently be formed of a laminate of metal foil/paper or paper/metal foil/paper, the term paper here being used to include nonwoven fabric. One side of the sachet may for example be of powder-permeable paper or nonwoven fabric, for example tea bag paper, laminated onto metal foil, optionally with a further outer layer of paper, and the other of impermeable material (metal foil alone, impermeable paper or nonwoven fabric alone, or a laminate). The bonding between the various layers is preferably by means of heat-sealing, using small amounts of hot-melt adhesive. The bonding between the metal foil and the permeable material is deliberately weak so that the outer (foil) layer can be peeled off immediately prior to insertion in the outer container and use.

The above discussion relates to the situation where the inner container needs to be totally or nearly totally enclosed by the outer packaging. In the case of an inner container which itself consists mainly of moistureproof, relatively durable, powder-impermeable material and which has openings localised over a relatively small area, it is clearly necessary only to cover that area itself, so that the outer packaging or covering will be small compared to the overall size of the inner container and will not be subject to such

stringent requirements as regards durability and impermeability to moisture and perfume. A label or tag coated with a pressure-sensitive adhesive may be sufficient in these circumstances; this may be of any of the material already mentioned, if desired, but paper alone may be adequate for a label or tag of relatively small area.

An example of an inner container of this type is a sachet of plastics film, for example, polyethylene, having a small number of perforations positioned relatively closely together in one wall only. An adhesive-coated label of strong paper may be used to cover just the perforated region. A problem with this type of sachet arises from the low adhesiveness of plastics film, so that the label may be detached prematurely during transit or storage. This problem may be alleviated by subjecting the plastics film to a suitable surface treatment or, preferably, making the entire sachet, or the perforated wall, of a laminate of the plastics film with paper or nonwoven fabric, the latter being outermost. This is another example of a composite material that combines desired properties.

Many other materials and constructions are of course possible for the inner container and will readily suggest themselves to one skilled in the art.

The method and device of the invention have been found to give highly effective fabric softening, using a cheap and environmentally unobjectionable material and without the need for additives such as distributing agents.

A device according to the invention will now be described in further detail, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a plan view of the device;

Figure 2 is an elevation of the device;

Figure 3 is a horizontal section, taken along the line III—III of Figure 2;

Figure 4 is a vertical section, taken along the line IV—IV of Figure 1;

Figures 5 and 6 are sectional views, on an enlarged scale, of part of the device of Figures 1 to 4;

Figure 7 is a sectional view, on an enlarged scale, of an alternative inner container;

Figure 8 is a plan view, of approximately actual size, of the inner container of Figure 7; and

Figures 9, 10 and 11 are perspective views of alternative outer containers.

Referring now to Figures 1 to 4 of the accompanying drawings, a device 1 suitable for use in the process of the invention consists of an outer container 2, and an inner container 3 containing a powdered fabric conditioning agent 4.

The outer container 2 is a hollow polypropylene sphere having a diameter of at least 6 cm, for example, 9 cm, and consisting of upper and lower hemispheres 5 and 6 fitted together by means of a firm snap-fit arrangement 7 such that the outer surface is smooth. Both hemispheres are provided with a plurality of parallel slits 8 each having a width of about 2 to 3 mm. The lower hemisphere 6 includes four integral pins 9 which extend upwardly from its base.

Wedged between the pins 9 is the inner container 3 which is a sachet of flexible porous web material of a size, for example 4 cm × 4 cm, such that when wedged firmly between the pins 9 it is spaced from each wall of the sphere 2. The sachet 3 contains a powdered fabric conditioning composition milled to a particle size of 180—250 μm.

The consumer may initially be supplied, for example, with one sphere 2 and a plurality of sachets 3.

The sachet 3 as initially supplied to the consumer is shown in Figure 5. A first wall 10 of the sachet 3 is of material impermeable to the powdered fabric conditioning composition 4, and consists of an outer layer 11 of aluminium foil laminated to an inner layer 12 of paper. The foil layer 11 can be very thin as it is supported and reinforced by the paper layer 12. A second wall 13 of the sachet also consists of a laminate, its inner layer 14 being of porous paper, of pore size approximately 250 μm, as used for tea and coffee bags, and its outer layer 15 being of aluminium foil. If desired an additional layer of paper (not shown) could be laminated to the outer side of one or both of the foil layers 11 and 15. This would allow even thinner layers of foil to be used. The thicknesses of all four layers shown in Figures 5 and 6 have of course been greatly exaggerated for the sake of clarity.

The layers are bonded together at their edge regions 16 by means of heat-sealing, a small amount of hot-melt adhesive having been provided there for that purpose. The bond between the paper layers 12 and 14 are relatively strong whereas the bonds between the aluminium layers 11 and 15 and the paper layers 12 and 14 respectively are relatively weak, because of the inherently lower adhesion of aluminium. An end region 17 of the layer 15 extends beyond one region of sealing to form a pull-tab for the consumer.

It will be noted that the sachet 3 as shown in Figure 5 is entirely covered with aluminium foil and its contents 4 are thus protected from atmospheric moisture; any perfume present in the composition 4 is also retained.

Immediately prior to use, the consumer grasps the pull tab 17 and removes the layer 15, thus exposing the permeable layer 14, as shown in Figure 6. The layer 15 comes away easily without tearing the layer 14 or opening the seals between the outer layers, because, as previously mentioned, it is bonded relatively weakly to the other parts of the sachet. The layer 15 can then be discarded and the sachet 3 is ready for use. Although the bond between the layers 11 and 12 is also relatively weak, the aluminium layer 11 does not in general come off because no pull-tab or other starting device is provided.

The consumer then snaps apart the sphere 2, wedges the sachet between the pins 9, and snaps the sphere together again. The device is now ready for use in a tumble-dryer.

Figures 7 and 8 show an alternative form of sachet suitable for use in the process of the invention. The sachet 18, shown in Figure 8 at approximately its actual size and in Figure 7 at an enlarged scale corresponding to that of Figures 5 and 6, is formed of a laminate of polyethylene film 19 and paper 20, the film 19 being innermost. As shown, the sachet 18 is composed of a single sheet of laminate, one edge 21 being constituted by a fold and the other edges 22 being closed by heat-sealing; alternatively, two sheets could have been used and all four edges closed by heat-sealing. Holes 23 of approximately 2 mm (2000 μm) diameter have been punched in one wall of the sachet, the number of holes and their size having been chosen to give an appropriate delivery rate for the powder 4. The holes 23 are positioned relatively closely together so as to occupy a relatively small area of the sachet wall. An adhesive label 24, indicated in Figure 8 by a dotted line, covers the region occupied by the holes; it adheres without difficulty to the paper of the outer sachet wall, but can readily be removed by the consumer immediately prior to use.

Figures 9, 10 and 11 show alternative forms of outer container for use in the process of the present invention. The container 25 of Figure 9 is in the shape of a hexagonal prism having an aspect ratio (ratio of major axis to minor axis) of about 1:1, formed of folded resin-bonded cardboard, and having relatively large circular openings 26.

Figures 10 and 11 show two containers 27 and 28 of injection-moulded plastics material, each in the shape of two abutting furstocones, the containers 27 and 28 having aspect of ratios of about 2:1 and about 1.5:1 respectively. Each can be separated into upper and lower parts 29 and 30 connected only by a small integral "hinge" (not shown), for insertion of an inner container, and the two parts can then be snap-fitted together.

The invention is further illustrated by the following non-limiting Examples.

Examples

In the Examples the antistatic effects of various fabric conditioning treatments in the tumble dryer were compared by means of a cling test.

Test pieces of nylon and woven polyester sheet measuring 6 cm × 3 cm were included in clean loads of mixed articles (2.2 kg dry weight) comprising approximately half cotton and half synthetic fabrics (nylon, acrylic, polyesters). The loads were washed in a Miele (Trade Mark) 429 front-loading automatic washing machine using 100 g per load of Persil (Trade Mark) Automatic washing powder and without using a rinse conditioner. After rinsing and spinning, the loads were tumble-dried as specified below.

The test pieces were then extracted from the tumble-dried loads and their cling times measured as follows.

The cling time apparatus consisted of a base to which were attached four earthed metal plates each measuring 25 cm × 10 cm and inclined at 20° to the vertical. The test piece under examination was held in place on a selected plate which was then charged to 6.5 kV using an E.H.T. supply: the induced charge caused the test piece to cling to the plate by electrostatic attraction but as the charge leaked away the attraction decreased and eventually the test piece slid off the plate under its own weight. The time for which the test piece clung to the plate before sliding off — the cling time — was measured. The measurement was then repeated on a different plate and an average cling time calculated.

Fabrics which readily dissipate charge (and hence which are unlikely to build up static in use) have only short cling times, while fabrics which because of their poor conducting properties are unable readily to dissipate the induced charge (and hence which are likely to build up static in use) have longer cling times. Synthetic fabrics such as nylon and polyester fall into this latter category. An antistatic agent is expected to improve the surface conducting properties of synthetic fabrics and so cause a reduction in cling time.

Example 1

Fabric loads as described above, containing test pieces, were conditioned in the tumble dryer with mixtures of soap and tallow alcohol 25 EO in varying proportions. The soap blend used consisted of 82% tallow soap and 18% coconut soap; the tallow 25 EO was Lutensol (Trade Mark) AT25 ext BASF in spray-cooled powder form; and powders of particle size <300 μm were prepared by grinding and sieving the separate ingredients followed by dry mixing. 6 g doses of powder were packed in sachets of Storalene (Trade Mark) nonwoven fabric, measuring 6 cm × 6.5 cm, provided with dispensing holes of 2 mm diameter as described above with reference to Figures 7 and 8 of the accompanying drawings. Each sachet was placed inside a spherical outer container of polypropylene, as described above with reference to Figures 1 to 4 of the accompanying drawings: the sphere had a diameter of 9 cm. The spherical container was placed togetehr with the washed and spun fabric load in a Creda (Trade Mark) Debonair (Trade Mark) tumble dryer, and the load was then dried using the low heat setting. Test pieces were then extracted and cling times measured. The results were as follows:

composition (weight %)		Cling time (secs)	
Soap	Tallow alcohol 25EO	Nylon	Polyester
None (control)		>598*	>587*
100	0	>586*	>529*
96.7	3.3	562	278
93.3	6.7	45	56
91.7	8.3	30	31
90	10	25*	23*

These results show that the inclusion of relatively low levels of tallow alcohol 25 EO in a soap base substantially reduces the cling time.

Example 2

In a similar procedure to that of Example 1, the effect of varying the degree of ethoxylation of the tallow alcohol was studied. The conditioning compositions containing the 18 EO and 9 EO ethoxylates could not be prepared by dry mixing because the ethoxylates were too sticky. Accordingly, all the compositions were prepared by slurrying, drying, grinding and sieving, those contaning the 18 EO and 19 EO ethoxylates being frozen after drying to facilitate the grinding operation. The compositions were dispensed as described in Example 1, in 6 g doses from ball and sachet devices: each composition contained 91.7% by weight of soap (60% tallow, 40% coconut, plus 7.5% free fatty acid), and 8.3% by weight of ethoxylated tallow alcohol. The tumble dryer used this time was a Creda Reversair (Trade Mark), and both high and low heat settings were used. The results were as follows:

Degree of ethoxylation	Heat setting	Cling time (sec) Nylon	Polyester
25	Low	22	14
18	"	17	5
9	"	25	24
25	High	38	48
18	"	17	6
9	"	31	53

These results, all of single runs, show that all three tallow alcohol ethoxylates substantially reduced cling times compared to those obtained with soap alone (see example 1). The 18 EO ethoxylate gave the best reduction in clin time, but, as previously indicated, the 25 EO ethoxylate is preferred for processing reasons.

Example 3

The test procedure of Example 2 was repeated using C_{16}—C_{16} OXO alcohols of varying degrees of ethoxylation instead of the tallow alcohol ethoxylates; the soap blend used was that of Example 1 (82% tallow, 18% coconut), and the proportions were again 91.7% soap, 8.3% ethoxylated alcohol. The melting points of the ethoxylates were as follows: 20 EO 37.5°C, 15 EO 36°C, 12 EO 29.5°C, 7 EO 24°C. All the compositions were prepared by slurrying, drying, freezing, grinding and sieving. The tumble dryer used was the Creda Debonair, on a low heat setting. The results were as follows:

Degree of ethoxylation	Cling time (sec) Nylon	Polyester
20	31	71
15	29	25
12	70	24
7	15	75

These results, all of single runs, again show that all four alcohol ethoxylates reduced cling times as compared with soap alone (Example 1).

Comparative Example

For comparison, the effect on cling time of an impregnated sheet product commercially available in the USA, Bounce (Trade Mark) ex Procter & Gamble, was determined. Six runs were carried out using a single sheet of Bounce per load, using the Creda Debonair and Reversair tumble dryers on low and high heat settings, and the cling times were as follows:

	Nylon	Polyester
Creda Debonair, low heat, average of 3 runs	>600	143
Creda Reversair, high heat, average of 2 runs	528	128
Creda Reversair, low heat, single run	307	496

All these times were substantially greater than those obtained according to the invention in Examples 1, 2 and 3.

Claims

1. A method of conditioning fabrics, which comprises tumbling damp fabrics under the action of heat in a laundry dryer together with a conditioning agent in the form of a free-flowing powder having a particle size range within the range of from 20 to 1000 μm, said powder comprising a blend of soaps of C_8 to C_{22} saturated or unsaturated fatty acids, said soap blend containing at least 5% by weight of C_{12} soap, at least 5% by weight of C_{14} soap, at least 12% by weight of C_{16} soap and at least 20% by weight of C_{18} soap, said soap blend being in the form of a powder free of any protective coating, characterized in that the powder comprises at least 80% by weight of said blend of soaps and from 5 to 20% by weight of at least one C_{16}—C_{22} aliphatic alcohol ethoxylated with an average of from 5 to 30 moles of ethylene oxide.

2. A method as claimed in claim 1, characterised in that the powdered fabric conditioning agent contains from 5 to 10% by weight of said ethoxylated alcohol.

3. A method as claimed in claim 1 or claim 2, characterised in that said ethoxylated alcohol is an ethoxylate of tallow alcohol.

4. A method as claimed in claim 3, characterised in that said ethoxylated alcohol is tallow alcohol 25 EO.

5. A method as claimed any one of claims 1 to 4, characterised in that said ethoxylated alcohol has a melting point higher than 20°C.

6. A method as claimed any one of claims 1 to 5, characterised in that said soap blend contains from 7 to 27% by weight of C_{12} soap, from 6 to 12% by weight of C_{14} soap, from 18 to 28% by weight of C_{16} soap and from 32 to 54% by weight of C_{18} soap.

7. A method as claimed any one of claims 1 to 6, characterised in that said soap blend contains from 22 to 38% by weight of C_{18} unsaturated soap.

8. A method as claimed any one of claims 1 to 7, characterised in that said soap blend contains from 45 to 85% by weight of tallow soap and from 15 to 55% by weight of coconut soap.

9. A method as claimed any one of claims 1 to 8, characterised in that the particle size range of the powder is within the range of from 70 to 500 µm.

10. A method as claimed in claim 9, characterised in that the particle size range of the powder is within the range of from 90 to 250 µm.

11. A method as claimed any one of claims 1 to 10, characterised in that the powdered fabric conditioning agent is sprinkled onto the fabrics during drying from a dispensing device that can move freely among the fabrics in the tumble dryer.

12. A dispensing device for use in a method as claimed in claim 1, said device comprising a container having a plurality of openings the largest dimension of which does not exceed 2.5 mm, characterised in that said container contains from 1.5 to 12 g of a powdered fabric conditioning agent as specified in any one of claims 1 to 10.

13. A device as claimed in claim 12, characterised in that said container contains from 2.5 to 10 g of said powdered fabric conditioning agent.

14. A device as claimed in claim 12 or claim 13, characterised in that said container is a sachet of paper, nonwoven fabric, plastics film or a laminate of any two or more of said materials.

15. A device as claimed any one of claims 12 to 14, characterised in that said container is within a second container having openings for the egress of said powdered fabric conditioner, said second container being substantially form-retaining and of a shape such as to allow ready movement thereof among the fabrics in a dryer.

Patentansprüche

1. Verfahren zum Konditionieren von Textilien, das das Trocknen von feuchten Textilien unter Einwirkung von Hitze in einem Wäschetrockner zusammen mit einem Konditionierungsmittel in Form eines frei-fließenden Pulvers mit einer Teilchengröße im Bereich von 20 bis 1000 µm umfaßt, wobei das Pulver eine Mischung von Seifen von C_8- bis C_{22}-gesättigten oder ungesättigten Fettsäuren umfaßt, wobei die Seifenmischung wenigstens 5 Gew.-% C_{12}-Seife, wenigstens 5 Gew.-% C_{14}-Seife, wenigstens 12 Gew.-% C_{16}-Seife und wenigstens 20 Gew.-% C_{18}-Seife enthält und die Seifenmischung in Form eines Pulvers vorliegt, das frei von einem Schutzüberzug ist, dadurch gekennzeichnet, daß das Pulver wenigstens 80 Gew.-% dieser Mischung von Seifen und 5 bis 20 Gew.-% wenigstens eines C_{16}—C_{22} aliphatischen Alkohols, der mit einem Durchschnitt von 5 bis 30 Mol Ethylenoxid ethoxyliert ist, umfaßt.

2. Verfahren nach Anspruch 1, dadurch gekennzeichnet, daß das pulverisierte Textil-Konditionierungsmittel 5 bis 10 Gew.-% des ethoxylierten Alkohols enthält.

3. Verfahren nach Anspruch 1 oder Anspruch 2, dadurch gekennzeichnet, daß der ethoxylierte Alkohol ein Ethoxylat von Talgalkohol ist.

4. Verfahren nach Anspruch 3, dadurch gekennzeichnet, daß der ethoxylierte Alkohol Talgalkohol 25 EO ist.

5. Verfahren nach einem der Ansprüche 1 bis 4, dadurch gekennzeichnet, daß der ethoxylierte Alkhol eine Schemelzpunkt höher als 20°C aufweist.

6. Verfahren nach einem der Ansprüche 1 bis 5, dadurch gekennzeichnet, daß die Seifenmischung 7 bis 27 Gew.-% C_{12}-Seife, 6 bis 12 Gew.-% C_{14}-Seife, 18 bis 28 Gew.-% C_{16}-Seife und 32 bis 54 Gew.-% C_{18}-Seife enthält.

7. Verfahren nach einem der Ansprüche 1 bis 6, dadurch gekennzeichnet, daß die Seifenmischung 22 bis 38 Gew.-% C_{18}-ungesättigte Seife enthält.

8. Verfahren nach einem der Ansprüche 1 bis 7, dadurch gekennzeichnet, daß die Seifenmischung 45 bis 85 Gew.-% Talgseife und 15 bis 55 Gew.-% Kokosnußseife enthält.

9. Verfahren nach einem der Ansprüche 1 bis 8, dadurch gekennzeichnet, daß die Teilchengröße des Pulvers im Bereich von 70 bis 500 µm liegt.

10. Verfahren nach Anspruch 9, dadurch gekennzeichnet, daß die Teilchengröße des Pulvers im Bereich von 90 bis 250 µm liegt.

11. Verfahren nach einem der Ansprüche 1 bis 10, dadurch gekennzeichnet, daß das pulverisierte Textil-Konditionierungsmittel auf die Textilien während des Trocknens aus einer Abgabevorrichtung, die sich frei zwischen den Textilien in dem Trommeltrockner bewegen kan, gesprüht wird.

12. Abgabevorrichtung zur Verwendung in einem Verfahren nach Anspruch 1, wobei diese Vorrichtung einen Behälter umfaßt, der eine Vielzahl von Öffnungen aufweist, deren größte Abmessung 2,5 mm nicht übersteigt, dadurch gekennzeichnet, daß der Behälter 1,5 bis 12 g eines pulverisierten Textil-Konditionierungsmittels wie in einem der Ansprüche 1 bis 10 beschrieben, enthält.

13. Vorrichtung nach Anspruch 12, dadurch gekennzeichnet, daß der Behälter 2,5 bis 10 g des pulverisierten Textil-Konditionierungsmittels enthält.

14. Vorrichtung nach Anspruch 12 oder Anspruch 13, dadurch gekennzeichnet, daß der Behälter ein Beutel aus Papier, Vliesstoff, Kunststofffilm oder einem Laminat von zwei oder mehreren dieser Materialien ist.

15. Vorrichtung nach einem der Ansprüche 12 bis 14, dadurch gekennzeichnet, daß der Behälter in

einem zweiten Behälter ist, der Öffnungen zum Austreten des pulverisierten Textil-Konditionierungsmittels aufweist, wobei der zweite Behälter seine Form im wesentlichen behält und eine Forme aufweist, die seine freie Bewegung zwischen den Textilien in einem Trockner erlaubt.

Revendications

1. Un procédé pour conditionner les tissus comprenant le fait de faire tourner des tissus humides pour les sécher sous l'action de la chaluer dans un séchoir à linge avec un agent de conditionnement sous la forme d'une poudre qui ne s'agglomère pas ayant une gamme de tailles de particules comprise dans la gamme allant de 20 à 1000 µm, ladite poudre comprenant un mélange de savons avec des acides gras en C_8 à C_{22} saturés ou insaturés, ledit mélange de savons contenant au moins 5% en poids de savon en C_{12}, au moins 5% en poids de savon en C_{14}, au moins 12% en poids de savon en C_{16} et au moins 20% en poids de savon en C_{18}, ledit mélange de savons étant sous la forme d'une poudre ne contenant pas d'enduit protecteur, caractérisé en ce que la poudre contient au moins 80% en poids dudit mélange de savons et de 5 à 20% en poids d'au moins un alcool aliphatique en C_{16}—C_{22} éthoxylé avec un moyenne de 5 à 30 moles d'oxyde d'éthylène.

2. Un procédé selon la Revendication 1, caractérisé en ce que l'agent de conditionnement en poudre pour tissus contient de 5 à 10% en poids dudit alcool éthoxylé.

3. Un procédé selon la Revendication 1 ou 2, caractérisé en ce que ledit alcool éthoxylé est un éthoxylate d'alcool de suif.

4. Un procédé selon la Revendication 3, caractérisé en ce que ledit alcool éthoxylé est de l'alcool de suif 25 EO.

5. Un procédé selon l'une des Revendications 1 à 4, caractérisé en ce que ledit alcool éthoxylé a un point de fusion supérieur à 20°C.

6. Un procédé selon l'une des Revendications 1 à 5, caractérisé en ce que ledit mélange de savons contient de 7 à 27% en poids de savon en C_{12}, de 6 à 12% en poids de savon en C_{14}, de 18 à 28% en poids de savon en C_{16} et de 32 à 54% en poids de savon en C_{18}.

7. Un procédé selon l'une des Revendications 1 à 6, caractérisé en ce que ledit mélange de savons contient de 22 à 38% en poids de savon insaturé en C_{18}.

8. Un procédé selon l'une des Revendications 1 à 7, caractérisé en ce que ledit mélange de savons contient de 45 à 85% en poids de savon de suif et de 15 à 55% en poids de savon de noix de coco.

9. Un procédé selon l'une des Revendications 1 à 8, caractérisé en ce que la gamme de tailles de particules de la poudre est comprise dans la gamme allant de 70 à 500 µm.

10. Un procédé selon la Revendication 9, caractérisé en ce que la gamme de tailles de particulles de la poudre est comprise dans la gamme allant de 90 à 250 µm.

11. Un procédé selon l'une des Revendications 1 à 10, caractérisé en ce que l'agent de conditionnement en poudre pour tissus est vaporisé sur les tissus durant le séchage depuis un appareil de distribution qui peut se déplacer librement parmi les tissus dans le séchoir à tambour.

12. Un appareil de distribution pouvant être utilisé dans un procédé selon la Revendication 1, ledit appareil comprenant un récipient ayant une pluralité d'ouvertures dont la plus grande dimension ne dépasse pas 2,5 mm, caractérisé en ce que ledit récipient contient de 1,5 à 12 g d'un agent de conditionnement en poudre pour tissus tel que spécifié dans l'une des Revendications 1 à 10.

13. Un appareil selon la Revendication 12, caractérisé en ce que ledit récipient contient de 2,5 a 10 g dudit agent de conditionnement en poudre pour tissus.

14. Un appareil selon la Revendication 12 ou 13, caractérisé en ce que ledit récipient est un sachet en papier, en tissu non tissé, en film plastique ou en un laminé de deux ou de plusieurs desdits matériaux.

15. Un appareil selon l'une des Revendications 12 à 14, caractérisé en ce que ledit récipient est placé à l'intérieur d'un second récipient ayant Ides ouvertures permettant la sortie dudit agent de conditionnement en poudre pour tissus, ledit second récipient conservant substantiellement sa forme et étant d'une forme telle qu'elle permette un mouvement facile de celui-ci parmi les tissus dans un séchoir.

Fig.1.

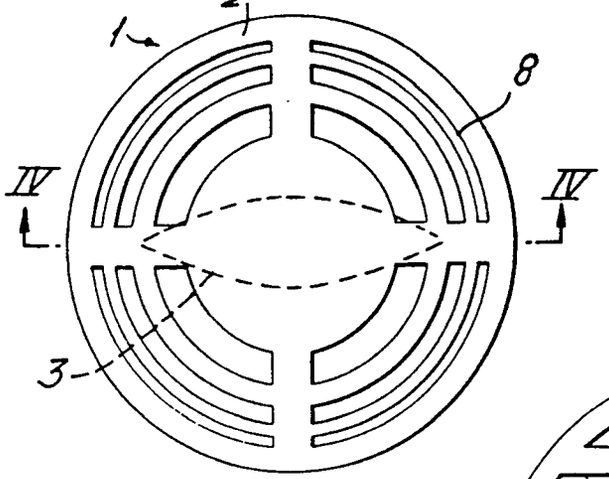


Fig.2.

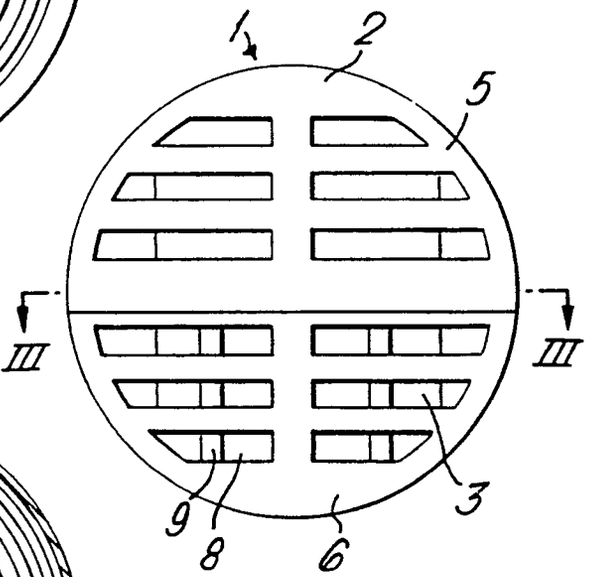


Fig.3.

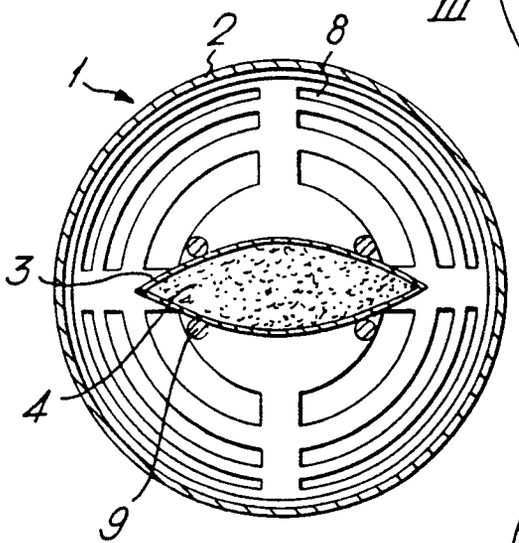


Fig.4.

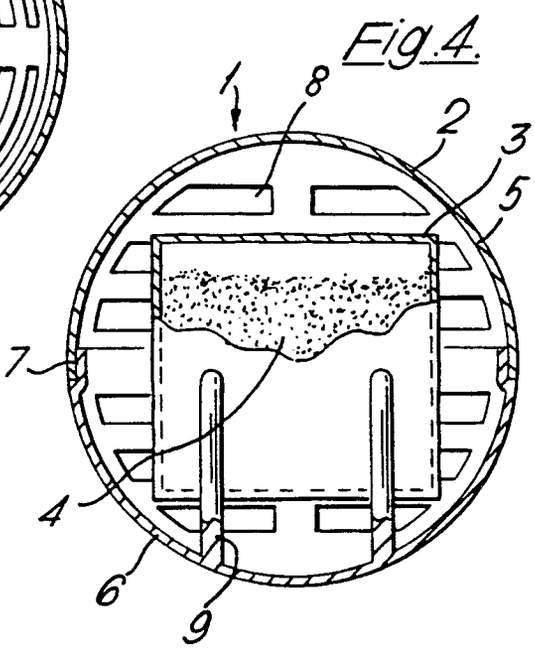


Fig. 5.

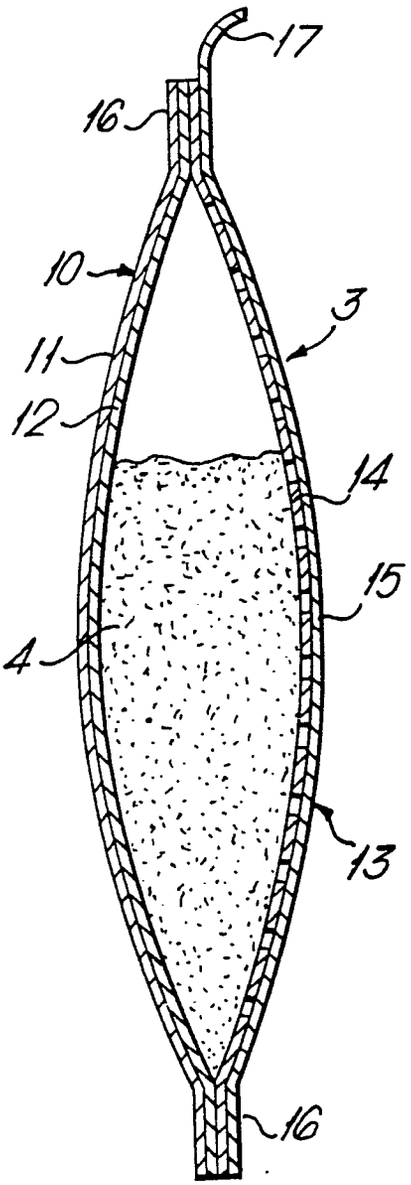


Fig. 6.

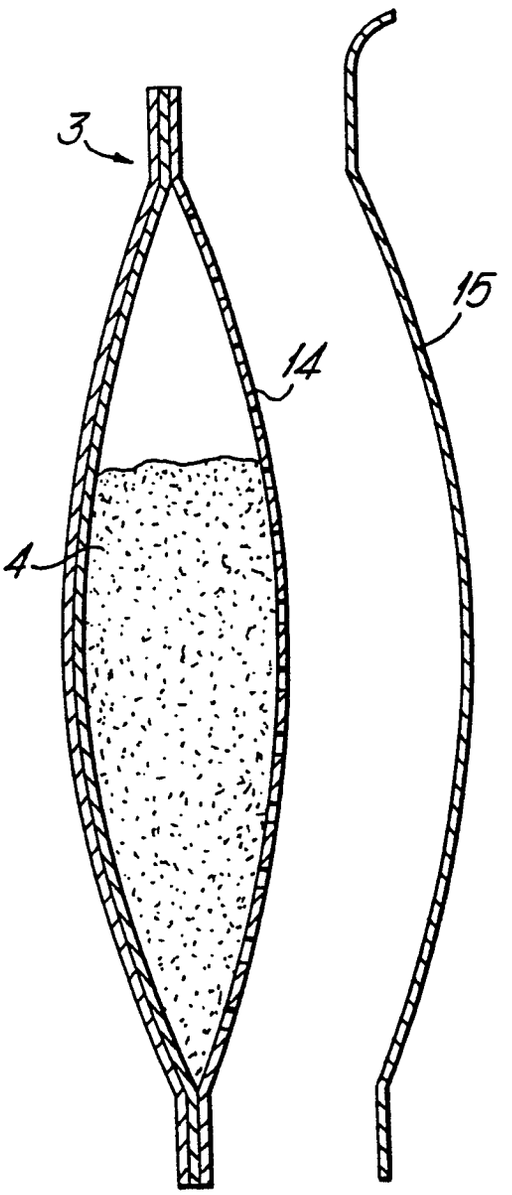
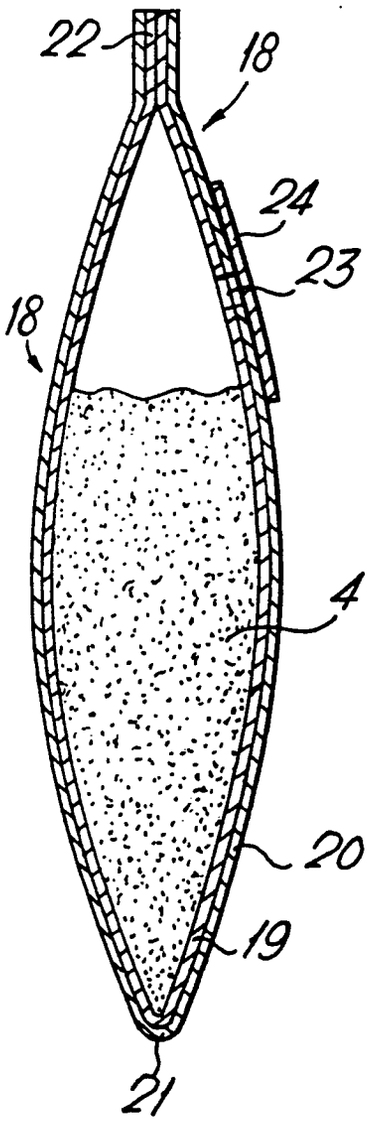


Fig. 7.



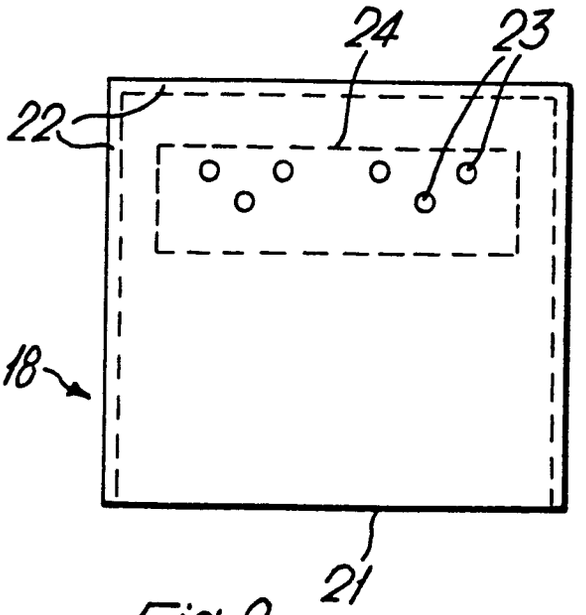
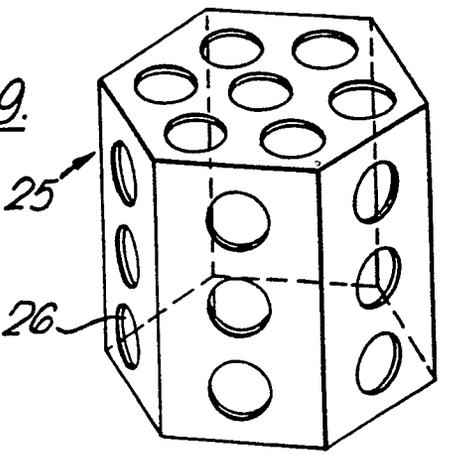


Fig. 8.

Fig.9.



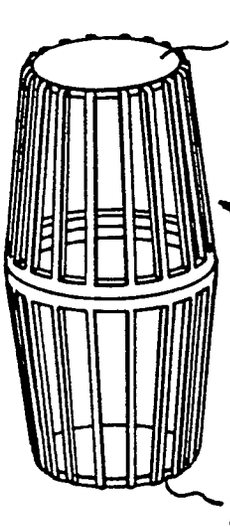


Fig.10.

Fig.11.

