




(86) Date de dépôt PCT/PCT Filing Date: 2012/05/16
(87) Date publication PCT/PCT Publication Date: 2013/11/21
(45) Date de délivrance/Issue Date: 2015/07/07
(85) Entrée phase nationale/National Entry: 2014/11/06
(86) N° demande PCT/PCT Application No.: EP 2012/059206
(87) N° publication PCT/PCT Publication No.: 2013/170899

(51) Cl.Int./Int.Cl. *H02J 3/32* (2006.01),
H02J 7/00 (2006.01), *H02M 3/07* (2006.01),
H02M 7/48 (2007.01)
(72) Inventeur/Inventor:
TENGNER, TOMAS, SE
(73) Propriétaire/Owner:
ABB RESEARCH LTD, CH
(74) Agent: MARKS & CLERK

(54) Titre : DISPOSITIF DE STOCKAGE D'ENERGIE DE BATTERIE, SYSTEME ET PROCEDE DE STOCKAGE
D'ENERGIE DE BATTERIE, PROGRAMME INFORMATIQUE ET PRODUIT DE PROGRAMME INFORMATIQUE
(54) Title: A BATTERY ENERGY STORAGE, BATTERY ENERGY STORAGE SYSTEM, METHOD, COMPUTER
PROGRAM AND COMPUTER PROGRAM PRODUCT

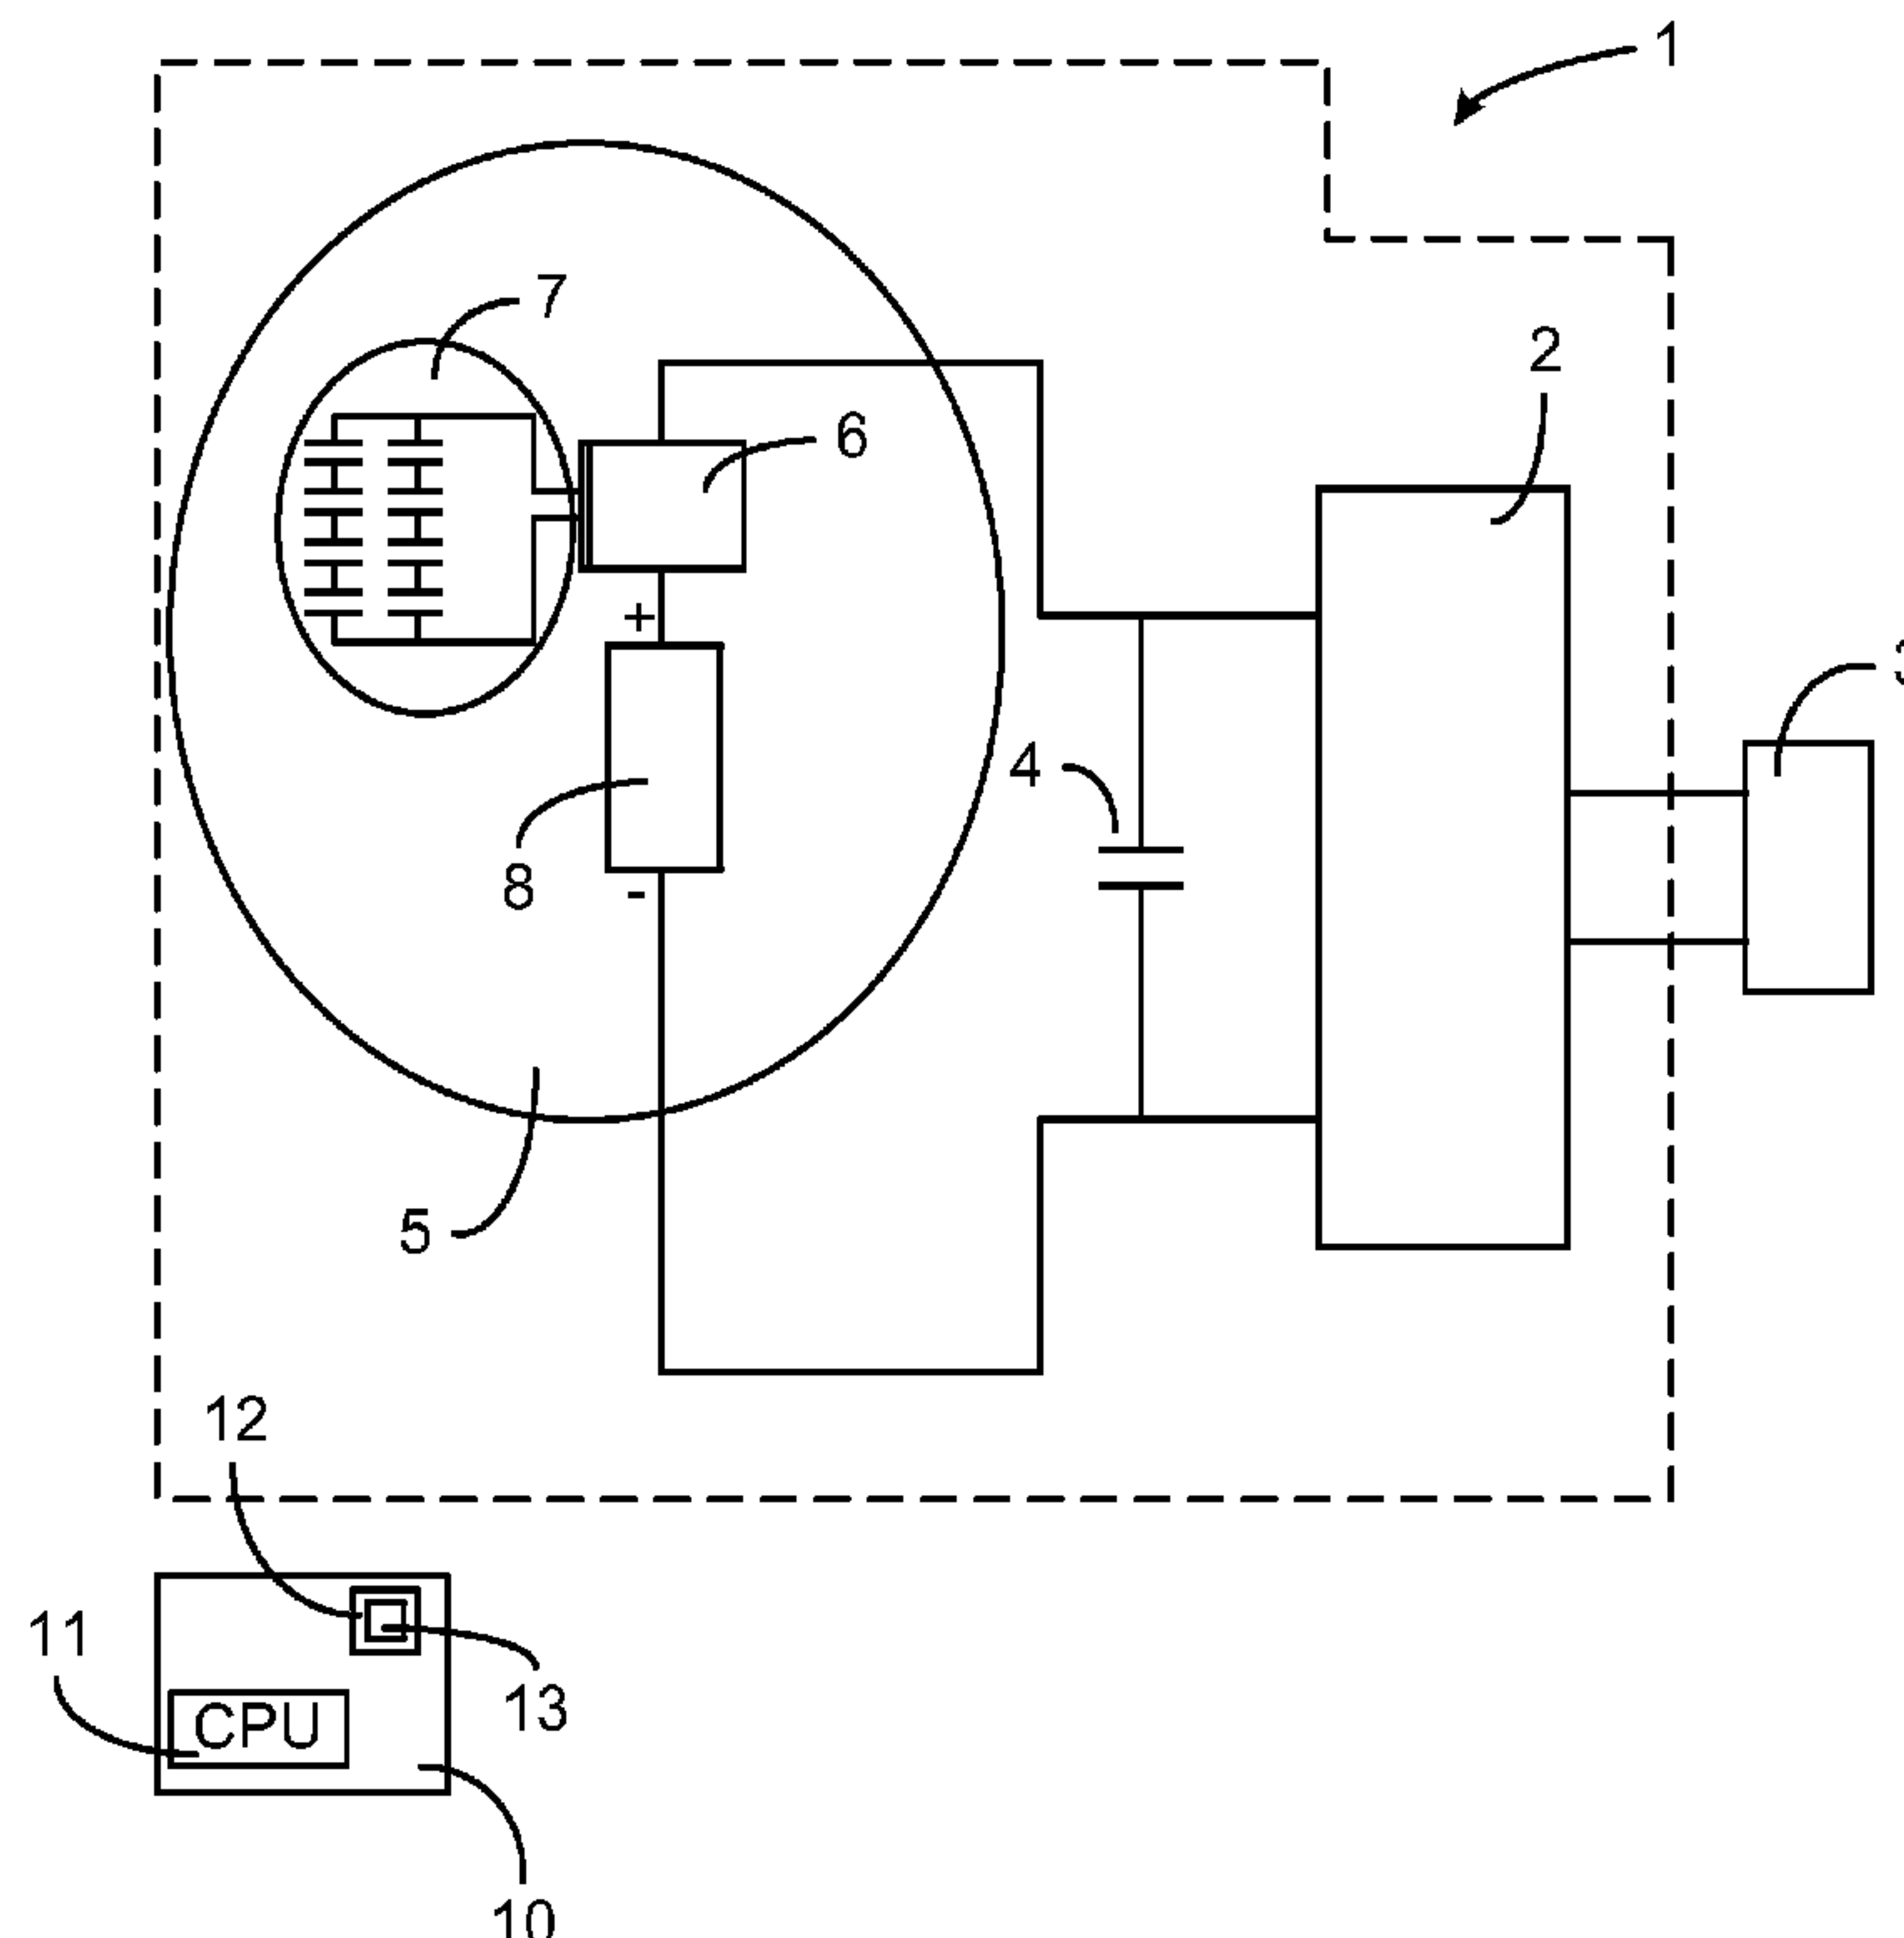

(57) Abrégé/Abstract:

The present disclosure provides a battery energy storage 5 arranged to be connected to a capacitor link 4, which is connected in parallel to a power converter 2. The battery energy storage comprises a battery module 8 and a direct current energy source 7



(57) **Abrégé(suite)/Abstract(continued):**

connected in series with a voltage source converter 6. The voltage source converter 6 is adapted to insert a positive voltage when the voltage of the battery module 8 falls below a first threshold value, and to insert a negative voltage when the voltage of the battery module 8 exceeds a second threshold value. The direct current energy source 7 is adapted to be either charged or discharged during the voltage insertion by the voltage source converter 6. The disclosure also provides a battery energy storage system 1 comprising such battery energy storage 5.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

WIPO | PCT

(10) International Publication Number
WO 2013/170899 A1(43) International Publication Date
21 November 2013 (21.11.2013)

(51) International Patent Classification:

H02J 3/32 (2006.01) *H02M 3/07* (2006.01)
H02J 7/00 (2006.01) *H02M 7/48* (2007.01)

(21) International Application Number:

PCT/EP2012/059206

(22) International Filing Date:

16 May 2012 (16.05.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **ABB RESEARCH LTD** [CH/CH]; Affolternstrasse 44, CH-8050 Zürich (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **TENGNER, Tomas** [SE/SE]; Stentorpsgatan 15A, S-723 43 Västerås (SE).(74) Agent: **AHRENGART, Kenneth**; Ingenjör Bååths gata 11, Mimer T2, Floor E, S-721 83 Västerås (SE).

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

(54) Title: A BATTERY ENERGY STORAGE, BATTERY ENERGY STORAGE SYSTEM, METHOD, COMPUTER PROGRAM AND COMPUTER PROGRAM PRODUCT

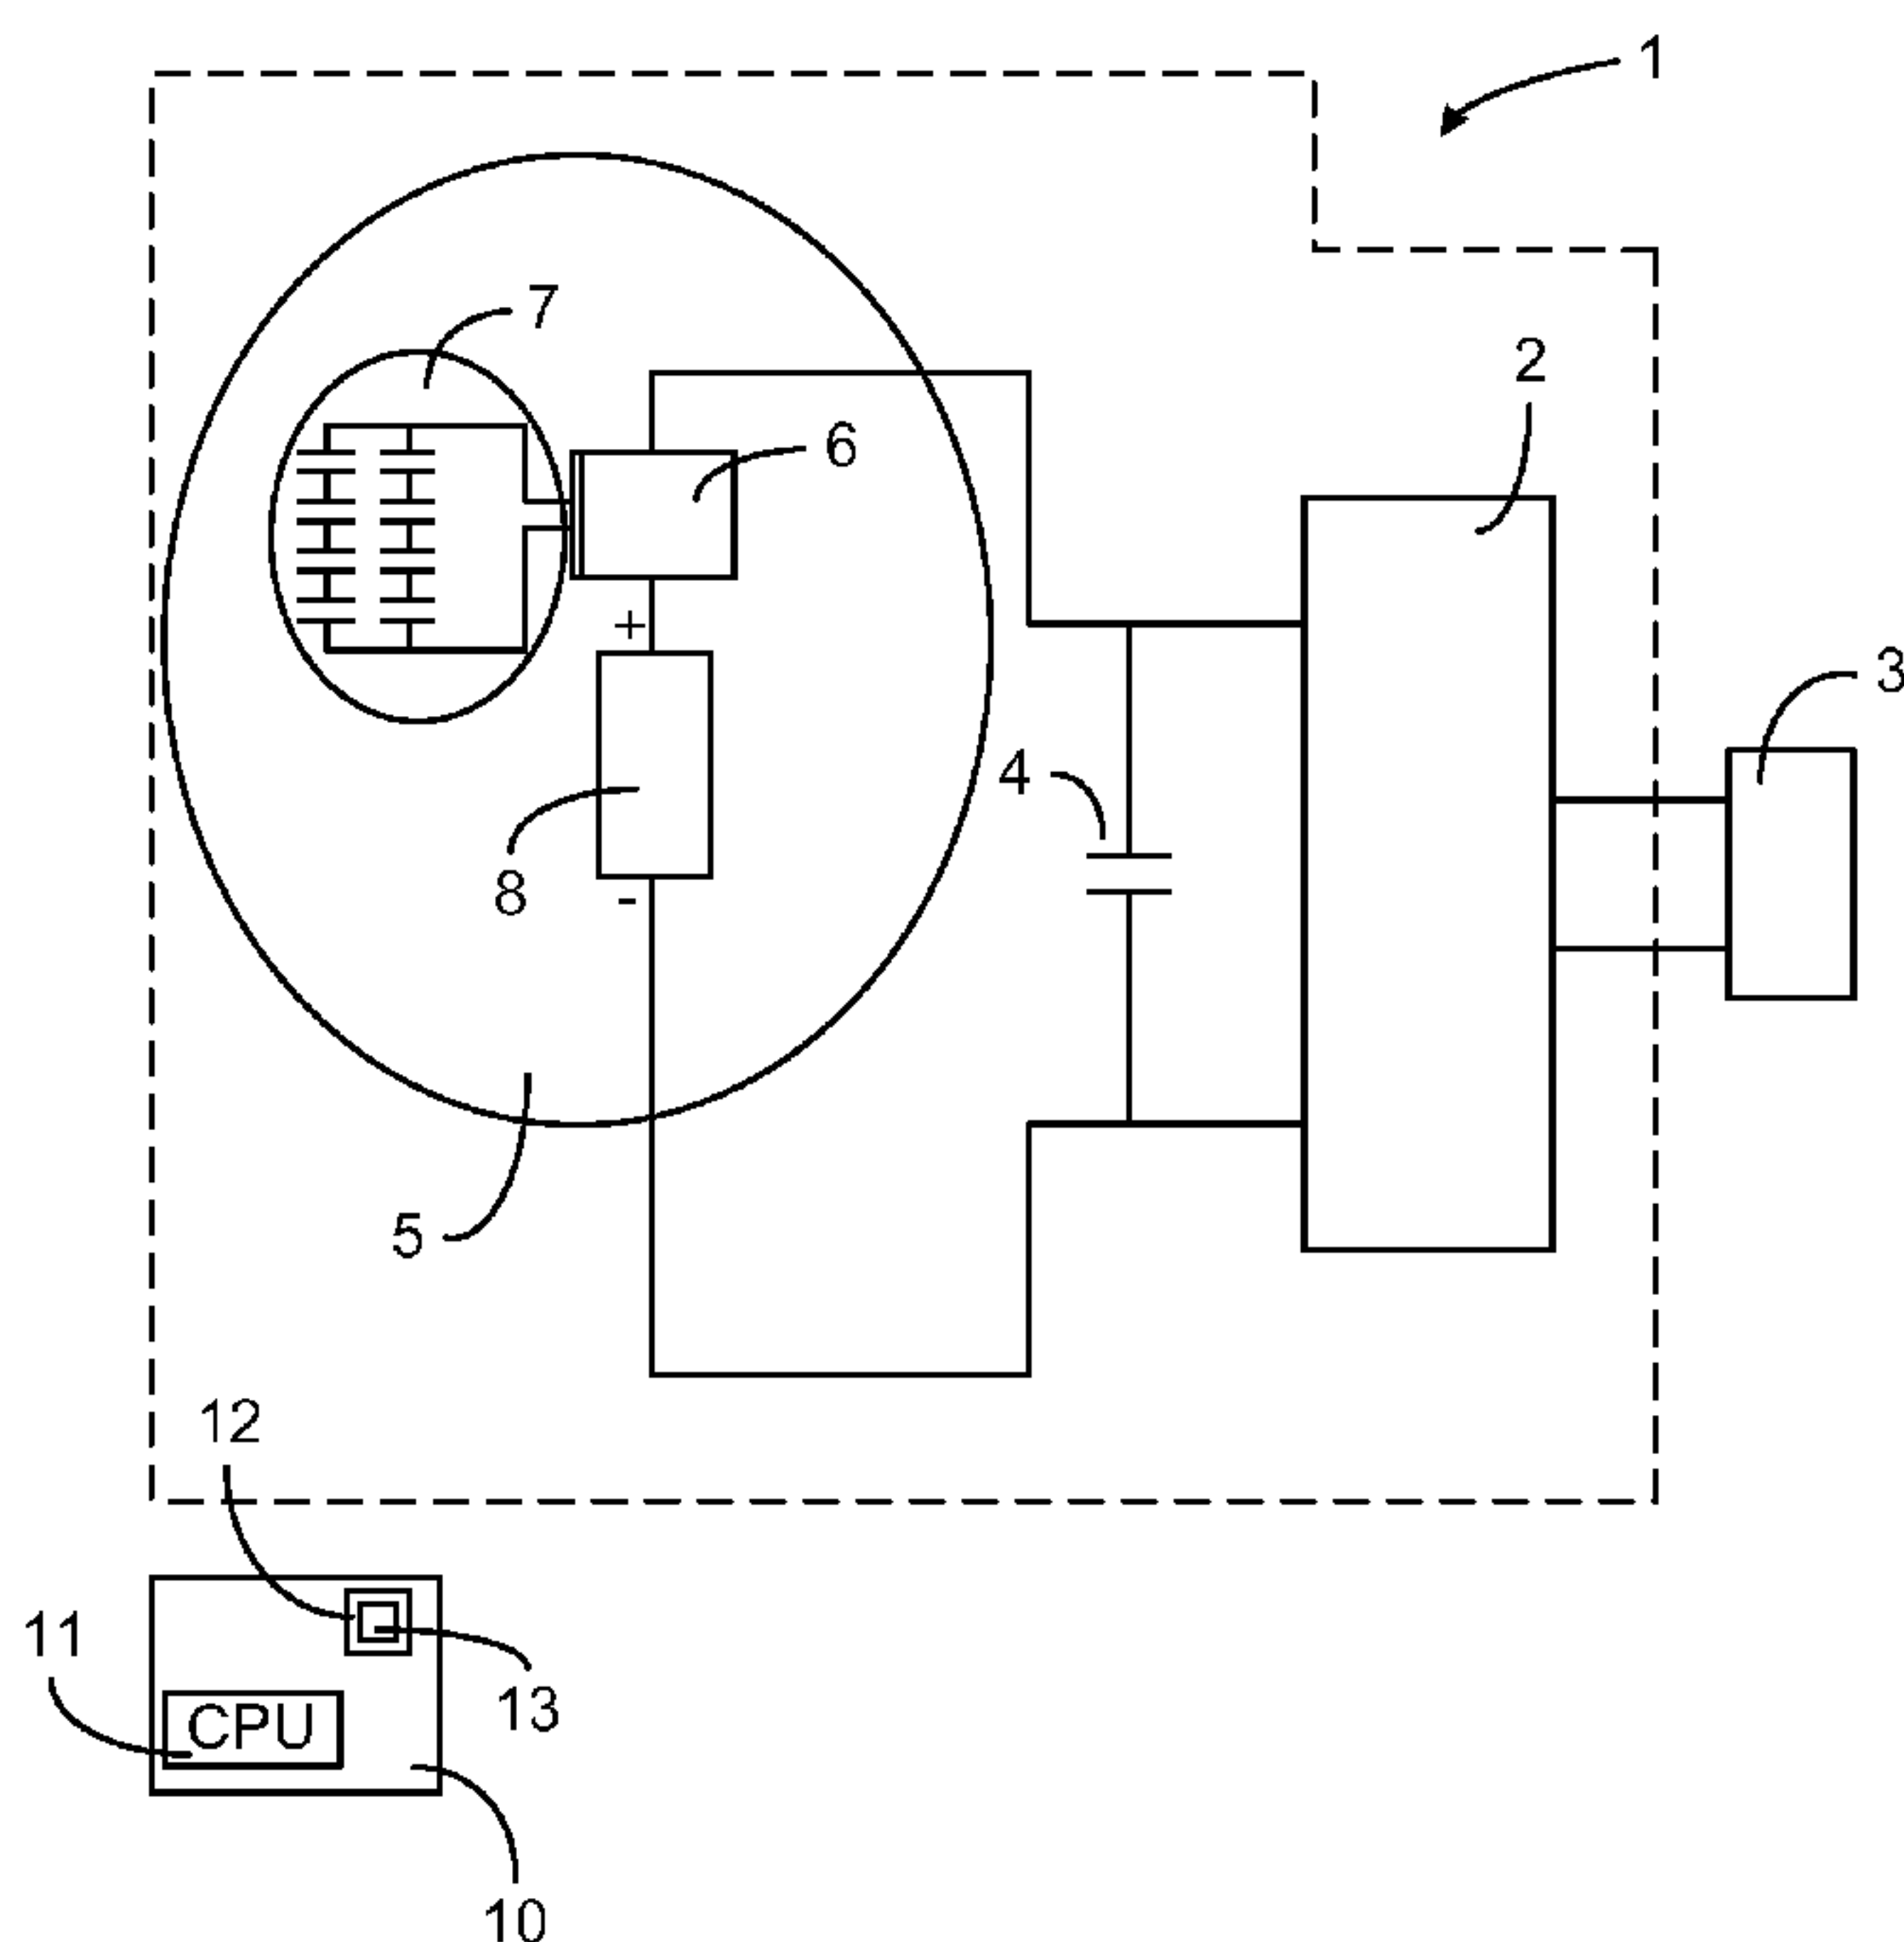


Fig. 1

(57) Abstract: The present disclosure provides a battery energy storage 5 arranged to be connected to a capacitor link 4, which is connected in parallel to a power converter 2. The battery energy storage comprises a battery module 8 and a direct current energy source 7 connected in series with a voltage source converter 6. The voltage source converter 6 is adapted to insert a positive voltage when the voltage of the battery module 8 falls below a first threshold value, and to insert a negative voltage when the voltage of the battery module 8 exceeds a second threshold value. The direct current energy source 7 is adapted to be either charged or discharged during the voltage insertion by the voltage source converter 6. The disclosure also provides a battery energy storage system 1 comprising such battery energy storage 5.

**A battery energy storage, battery energy storage system, method,
computer program and computer program product**

Technical field

The technology disclosed herein relates generally to the field of
5 battery systems, and in particular to battery energy storage systems
comprising such battery energy storages.

Background

A battery energy storage system (BESS) typically comprises a power
converter, such as a STATic VAR COMpensator (STATCOM), and batteries
10 connected to one or more direct current (DC) link capacitor(s) of
the power converter. The batteries enable the power converter to
consume and deliver reactive power as well as active power to an
electric power grid at the point of connection.

The batteries often comprise electro-chemical batteries, which have
15 a varying output voltage. For such batteries the output voltage may
vary 30 % or even more during a full charge-discharge cycle. If the
batteries are connected directly in parallel with the DC link
capacitor of the power converter, the DC link voltage of the power
converter will be determined by the battery voltage and hence vary
20 during discharge of the batteries. This requires a de-rating of the
power converter that is proportional to the battery voltage
variation.

A BESS that has an active power rating (MW-rating) that is equal or
close to its apparent power rating (MVA-rating) such de-rating could
25 possibly be acceptable. However, in a BESS that has a MVA rating
that is significantly higher than the MW rating, the cost for de-
rating the power converter can become large compared to the active
power that is added.

A known way of avoiding de-rating is to use a DC/DC boost converter,
30 or a DC-DC buck converter, or a DC-DC buck-boost converter, which is
arranged to keep the converter's DC-link voltage constant. However,
such solution has a disadvantage in that with a constant load
current from the load, the discharge current of the battery will
increase during discharge and hence provide a larger voltage drop.

The battery therefore has to be dimensioned to be able to handle this increased current, which increases the cost.

Summary

5 An object of the present disclosure is to overcome or at least alleviate one or more of the above mentioned problems.

The object is, according to a first aspect, achieved by a battery energy storage arranged to be connected to a capacitor link, which is connected in parallel to a power converter. The battery energy storage comprises a battery module and a direct current energy
10 source connected in series with a voltage source converter. The voltage source converter is adapted to insert a positive voltage when the voltage of the battery module falls below a first threshold value, and to insert a negative voltage when the voltage of the battery module exceeds a second threshold value. The direct current
15 energy source is adapted to be either charged or discharged during the voltage insertion by the voltage source converter.

Large voltage drops in the battery energy module is avoided, owing to the extra power that is delivered from the DC energy storage. Further, low voltage switching devices may be used when implementing
20 the present disclosure. Still further, the present disclosure provides a very cost-efficient and competitive solution since de-rating of the power converter, e.g. STATCOM, is avoided. The additional cost for adding the DC energy storage is in many cases much lower than the cost for de-rating of the power converter.

25 In an embodiment, the battery energy storage comprises a direct current to direct current converter, a primary side of which is connected to the battery module and a secondary side of which is connected to the direct current energy source.

In an embodiment, the energy storage capacity of the direct current
30 energy source is less than 30 % of the energy storage capacity of the battery module, in particular less than 10 % of the energy storage capacity of the battery module.

In different embodiments, the voltage source converter comprises an H-bridge converter or a cascaded H-bridge multilevel converter.

In various embodiments, the direct current energy source comprises a supercapacitor, or an electro-chemical battery.

- 5 In an embodiment, the battery energy storage comprises two or more direct current energy sources.

The object is, according to a second aspect, achieved by a battery energy storage system comprising a power converter, a capacitor link connected in parallel with the power converter and a battery energy
10 storage as in any of the above embodiments connected in parallel to the capacitor link. Advantages corresponding to the earlier mentioned are obtained.

In an embodiment, the battery energy storage system comprises a control device adapted to control the power converter and/or the
15 voltage source converter.

The object is, according to a third aspect, achieved by computer program for a control device controlling a battery energy storage system comprising a power converter, a capacitor link connected in parallel with the power converter and a battery energy storage
20 connected in parallel to the capacitor link. The battery energy storage comprises a battery module and a direct current energy source connected in series with a voltage source converter. The computer program comprises computer program code which when run on the control device cause the control device to: determine that the
25 battery module voltage falls below a first threshold value, Thres_1 , or that the battery module voltage exceeds a second threshold value, Thres_2 , and control the voltage source converter to insert a positive voltage when the voltage of the battery module falls below the first threshold value, and to insert a negative voltage when the voltage
30 of the battery module exceeds the second threshold value.

The object is, according to a fourth aspect, achieved by a computer program product comprising a computer program as above and a computer readable means on which the computer program is stored.

Further features and advantages of the invention will become clear upon reading the following description and the accompanying drawings.

Brief description of the drawings

5 Figure 1 illustrates an embodiment of the present disclosure.

Figure 2 illustrates a voltage-capacity characteristic for a battery energy module.

Figure 3a illustrates voltage profiles during discharge.

Figure 3b illustrates voltage profiles during charging.

10 Figure 4 illustrates an embodiment of the present disclosure.

Figure 5 is a flow chart of a method for controlling a battery energy storage.

Detailed description of embodiments

In the following description, for purposes of explanation and not
15 limitation, specific details are set forth such as particular architectures, interfaces, techniques, etc. in order to provide a thorough understanding. In other instances, detailed descriptions of well-known devices, circuits, and methods are omitted so as not to obscure the description with unnecessary detail. Same reference
20 numerals refer to same or similar elements throughout the description.

Briefly, the present disclosure describes devices and methods for stabilizing the DC output voltage from a battery module and thereby avoiding costly de-rating of the apparatus, e.g. a power converter,
25 to which the battery is connected.

Figure 1 illustrates schematically an embodiment of the present disclosure in an environment in which it may be implemented. In particular, a battery energy storage system 1 is illustrated comprising a power converter 2, e.g. a STATCOM (comprising a Voltage
30 Source Converter, VSC). A direct current (DC) link capacitor 4, also

denoted DC capacitor 4, is connected in parallel to the power converter 2. Although illustrated as a single capacitor, the DC capacitor 4 may comprise a bank of series-connected capacitors. That is, the power converter 2 is on its DC side connected to the DC link capacitor 4.

The power converter 2 is on its alternating current (AC) side connected to a load 3, for example the electric power transmission system.

In an aspect, a battery energy storage 5 is provided. The battery energy storage 5 comprises one or more battery energy module(s) 8 (only one illustrated) which is connected in parallel with the DC capacitor 4. The battery energy module 8 may comprise e.g. one or more electro-chemical batteries.

The battery energy storage 5 further comprises a voltage source converter (VSC) 6 connected in series with the battery energy module 8. The VSC 6 may for example comprise an H-bridge converter or a cascaded H-bridge multilevel converter. It is noted that other single-phase converters may alternatively be used, e.g. low voltage single-phase converters.

The operation of the voltage source converter 6 is controlled by a control device 10. The same control device 10 may be adapted to control also the power converter 2. The device 10 comprises a processing unit 11, e.g. a central processing unit, microcontroller, digital signal processor (DSP), etc., capable of executing software instructions, e.g. a computer program 13, stored in a computer program product 12 e.g. in the form of a memory.

The VSC 6 is provided with, i.e. connected to, a DC energy storage 7, which for example may comprise a supercapacitor (SC) as illustrated in the figure 1, or a high power battery energy storage (HPB). The DC energy storage 7 is also denoted short-term energy storage in the present disclosure.

It is noted that the battery energy storage 5 may comprise one, two or more such direct current energy sources 7.

In figure 2, a typical discharge curve 100 of the battery energy module 8 is illustrated. The voltage of the battery energy module 8 is indicated at the y-axis as function of its capacity expressed in Ampere-hour (the x-axis). The hatched area 120 thus represents
5 energy.

Due to hysteresis in the battery voltage of the battery energy module 8, a certain amount of voltage variation has to be allowed. At reference numeral 110 such acceptable voltage variation is indicated as a range. In the exemplifying illustration, the
10 hysteresis requires a voltage variation of 3 %. This can be compared to a voltage variation of 25 % if the battery energy storage 5 would not have the DC energy storage 7.

In order to stabilize the output voltage from the battery energy module 8, the VSC 6 is arranged to insert a positive voltage when
15 the battery energy storage 5 voltage is lower than a specified limit, a first threshold value (Thres_1 in figure 2). The positive voltage compensates for an undesired low voltage in the battery energy module 8. When the voltage of the battery energy module 8 is higher than a specified limit, a second threshold value (Thres_2 in
20 figure 2), the VSC 6 is arranged to insert a negative voltage in order to compensate for an undesired high voltage in the battery energy module 8.

The battery energy module 8 current will charge and discharge the DC energy storage 7 while the VSC 6 inserts a voltage in series with
25 the battery energy module 8. The hatched areas 130 and 140 represent energy that is stored and released, respectively, from the DC energy storage 7. The inserted voltage is typically small compared to the voltage of the battery energy module 8, and therefore the energy capacity that the DC energy storage 7 is required to have is small
30 compared to the energy capacity of the battery energy module 8.

By using the VSC 6 and the DC energy storage 7, the operation of the battery module 8 within the hatched areas 130 and 140 is avoided; the operation can instead be maintained within the interval indicated at reference numeral 110. At reference numeral 150 a
35 nominal voltage, also denoted target voltage and reference voltage,

of the battery energy module 8 is indicated. How to choose this is described more in the following.

Figure 3a illustrates voltage profiles during discharge, wherein the voltage is indicated at the y-axis as function of the capacity measured in Ah and indicated at the x-axis. The curve indicated at reference numeral 40 illustrates the voltage profile of the battery module 8 and the curve indicated at reference numeral 41 indicates the voltage profile of the DC energy source 7. The curve indicated at reference numeral 42 indicates the sum of these two voltages:
battery module 8 voltage + DC energy source 7 voltage, i.e. the voltage of the DC link capacitor 4 (or equivalently the voltage of the battery energy storage 5). As can be seen, the sum of the voltages can be kept at a desired set target voltage (3.6 V in the illustrated case) and well within the interval 110 (refer to figure 2).

Figure 3b illustrates voltage profiles during charging. As above, the voltage is indicated at the y-axis as function of the capacity measured in Ah and indicated at the x-axis. The curve indicated at reference numeral 50 illustrates the voltage profile of the battery module 8 and the curve indicated at reference numeral 51 indicates the voltage profile of the DC energy source 7. The curve indicated at reference numeral 52 indicates the sum of these two voltages:
battery module 8 voltage + DC energy source 7 voltage, i.e. the voltage of the DC link capacitor 4 (or equivalently the voltage of the battery energy storage 5). Again, the DC terminal voltage can be kept at a desired target voltage.

When sizing the DC energy source 7, the specific discharge characteristics (e.g. as exemplified in figures 3a and 3b) of the battery energy storage 5 should be considered, as the most suitable size strongly depends on such characteristics. For example, a battery energy storage 5 type having flat discharge characteristics typically requires a direct current energy source 7 with smaller energy storage capacity. In an embodiment, the energy storage capacity of the direct current energy source 7 is less than 30 % of the energy storage capacity of the battery energy storage 5, in

particular less than 30%, less than 20 %, less than 10 %, less than 5 %, less than 3 % or even less than 2 % of the energy storage capacity of the battery energy storage 5.

5 The terminal voltage of the battery energy storage 5 is controlled to the earlier mentioned target voltage. Generally, the battery energy module 8 may be chosen in dependence on the type of battery used, e.g. depending on the chemical composition thereof, and how it will be loaded in use, i.e. in its particular application. The battery energy module 8 may be selected and the energy that would be
10 required from the DC energy source 7 may be calculated by integrating the voltage curve of the DC energy source 7. The target voltage may then be adjusted so that the DC energy source 7 used is charged as much as it is discharged, i.e. so that the state-of-charge (SOC) of the DC energy source 7 is maintained within a
15 desired range. With reference again to figure 2, this would mean that the hatched areas 130 and 140 would be approximately equal.

Figure 4 illustrates an embodiment of the present disclosure. This embodiment is similar to the embodiment described with reference to figure 1, but with the addition of a DC/DC converter 9, in
20 particular an isolated DC-DC converter. The primary side of the DC-DC converter 9 is connected to the battery module 8 and the secondary side of the DC-DC converter 9 is connected to the DC energy source 7. The DC-DC converter 9 may be used together with the DC energy source 7 to power the VSC 6. If such DC-DC converter 9 is
25 used, the capacity required by the DC energy source 7 may be reduced even further.

In an aspect thus, a battery energy storage 5 is provided. The battery energy storage 5 is arranged to be connected to a capacitor link 4, which is connected in parallel to a power converter 2 and
30 the battery energy storage 5 comprises a battery module 8 as described earlier. The battery energy storage 5 further comprises a DC energy source 7 connected in series with a voltage source converter 6, wherein the voltage source converter 6 is adapted to insert a positive voltage when the voltage of the battery energy
35 module 8 falls below a first threshold value, and to insert a

negative voltage when the voltage of the battery energy module 8 exceeds a second threshold value. The direct current energy source 7 is adapted to be either charged or discharged during the voltage insertion by the voltage source converter 6.

- 5 In another aspect, and with reference to figure 5, a method 50 for controlling such battery energy storage 5 is provided. The method 50 comprises determining 51 that the battery module 8 voltage falls below a first threshold value, Thres_1 , or that the battery module 8 voltage exceeds a second threshold value, Thres_2 . That is,
- 10 determining that the battery module 8 voltage is not within set limits of an interval 110. The method 50 then comprises controlling 52 the VSC 6 to insert a positive voltage when the voltage of the battery module 8 falls below the first threshold value, and to insert a negative voltage when the voltage of the battery module 8
- 15 exceeds the second threshold value. The battery module 8 voltage may thus be kept within the set limits.

The method 50 may be implemented in hardware, software or any combination thereof. For example, a computer program 13 (refer to figure 2) may be provided comprising computer program code which

20 when run on e.g. the control device 10 cause the control device 10 to determine that the battery module 8 voltage falls below a first threshold value, Thres_1 , or that the battery module 8 voltage exceeds a second threshold value, Thres_2 , and to control the VSC 6 to insert a positive voltage when the voltage of the battery module 8 falls

25 below the first threshold value, and to insert a negative voltage when the voltage of the battery module 8 exceeds the second threshold value.

A computer program product 40 (refer to figure 2) is also provided comprising the computer program 41 and computer readable means on

30 which the computer program 40 is stored. The computer program product 40 may be any combination of read and write memory (RAM) or read only memory (ROM). The computer program product 40 may also comprise persistent storage, which, for example can be any single one or combination of magnetic memory, optical memory, or solid

35 state memory.

In contrast to the known solution of using a DC/DC boost converter, the present disclosure does not suffer from the large voltage drops in the battery energy module 8, owing to the extra power that is delivered from the DC energy storage 7. Further, while the DC/DC
5 boost converter solution requires power electronic switches that are rated for the full battery voltage, the embodiments of the present disclosure may be implemented using low voltage switching devices.

The additional cost of the battery energy storage system 1 for adding the DC energy storage 7 is in many cases much lower than the
10 cost for de-rating of the power converter 2 and the present disclosure provides a very cost-efficient and competitive solution.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A battery energy storage arranged to be connected to a capacitor link, which is connected in parallel to a power converter, the battery energy storage comprising a battery module and a direct current energy source connected in series with a voltage source converter, wherein the voltage source converter is adapted to insert a positive voltage when the voltage of the battery module falls below a first threshold value, and to insert a negative voltage when the voltage of the battery module exceeds a second threshold value, and wherein the direct current energy source is adapted to be either charged or discharged during the voltage insertion by the voltage source converter.
2. The battery energy storage as claimed in claim 1, comprising a direct current to direct current converter, a primary side of which is connected to the battery module and a secondary side of which is connected to the direct current energy source.
3. The battery energy storage as claimed in claim 1 or 2, wherein the energy storage capacity of the direct current energy source is less than 30 % of the energy storage capacity of the battery module.
4. The battery energy storage as claimed in claim 1 or 2, wherein the energy storage capacity of the direct current energy source is less than 10 % of the energy storage capacity of the battery module.

5. The battery energy storage as claimed in any one of claims 1 to 4, wherein the voltage source converter comprises an H-bridge converter or a cascaded H-bridge multilevel converter.

6. The battery energy storage as claimed in any one of claims 1 to 5, wherein the direct current energy source comprises a supercapacitor or an electro-chemical battery.

7. The battery energy storage as claimed in any one of claims 1 to 6, comprising two or more direct current energy sources.

8. A battery energy storage system comprising a power converter, a capacitor link connected in parallel with the power converter and a battery energy storage as defined in any one of claims 1 to 7 connected in parallel to the capacitor link.

9. The battery energy storage system as claimed in claim 8, comprising a control device adapted to control the power converter and/or the voltage source converter.

10. A method for controlling a battery energy storage system comprising a power converter, a capacitor link connected in parallel with the power converter and a battery energy storage connected in parallel to the capacitor link, the battery energy storage comprising a battery module and a direct current energy source connected in series with a voltage source converter, the method comprising:

determining that the battery module voltage falls below a first threshold value, Thres_1 , or that the battery module voltage exceeds a second threshold value, Thres_2 ; and

controlling the voltage source converter to insert a positive voltage when the voltage of the battery module falls below the first threshold value, and to insert a negative voltage when the voltage of the battery module exceeds the second threshold value.

11. A computer readable medium on which is stored a computer program for a control device controlling a battery energy storage arranged to be connected to a capacitor link, which is connected in parallel to a power converter, the battery energy storage comprising a battery module and a direct current energy source connected in series with a voltage source converter, the computer program comprising computer program code which when run on the control device cause the control device to:

determine that the battery module voltage falls below a first threshold value, Thres_1 , or that the battery module voltage exceeds a second threshold value, Thres_2 , and

control the voltage source converter to insert a positive voltage when the voltage of the battery module falls below the first threshold value, and to insert a negative voltage when the voltage of the battery module exceeds the second threshold value.

12. A computer program product comprising a computer readable medium as claimed in claim 11 on which the computer program is stored.

1/3

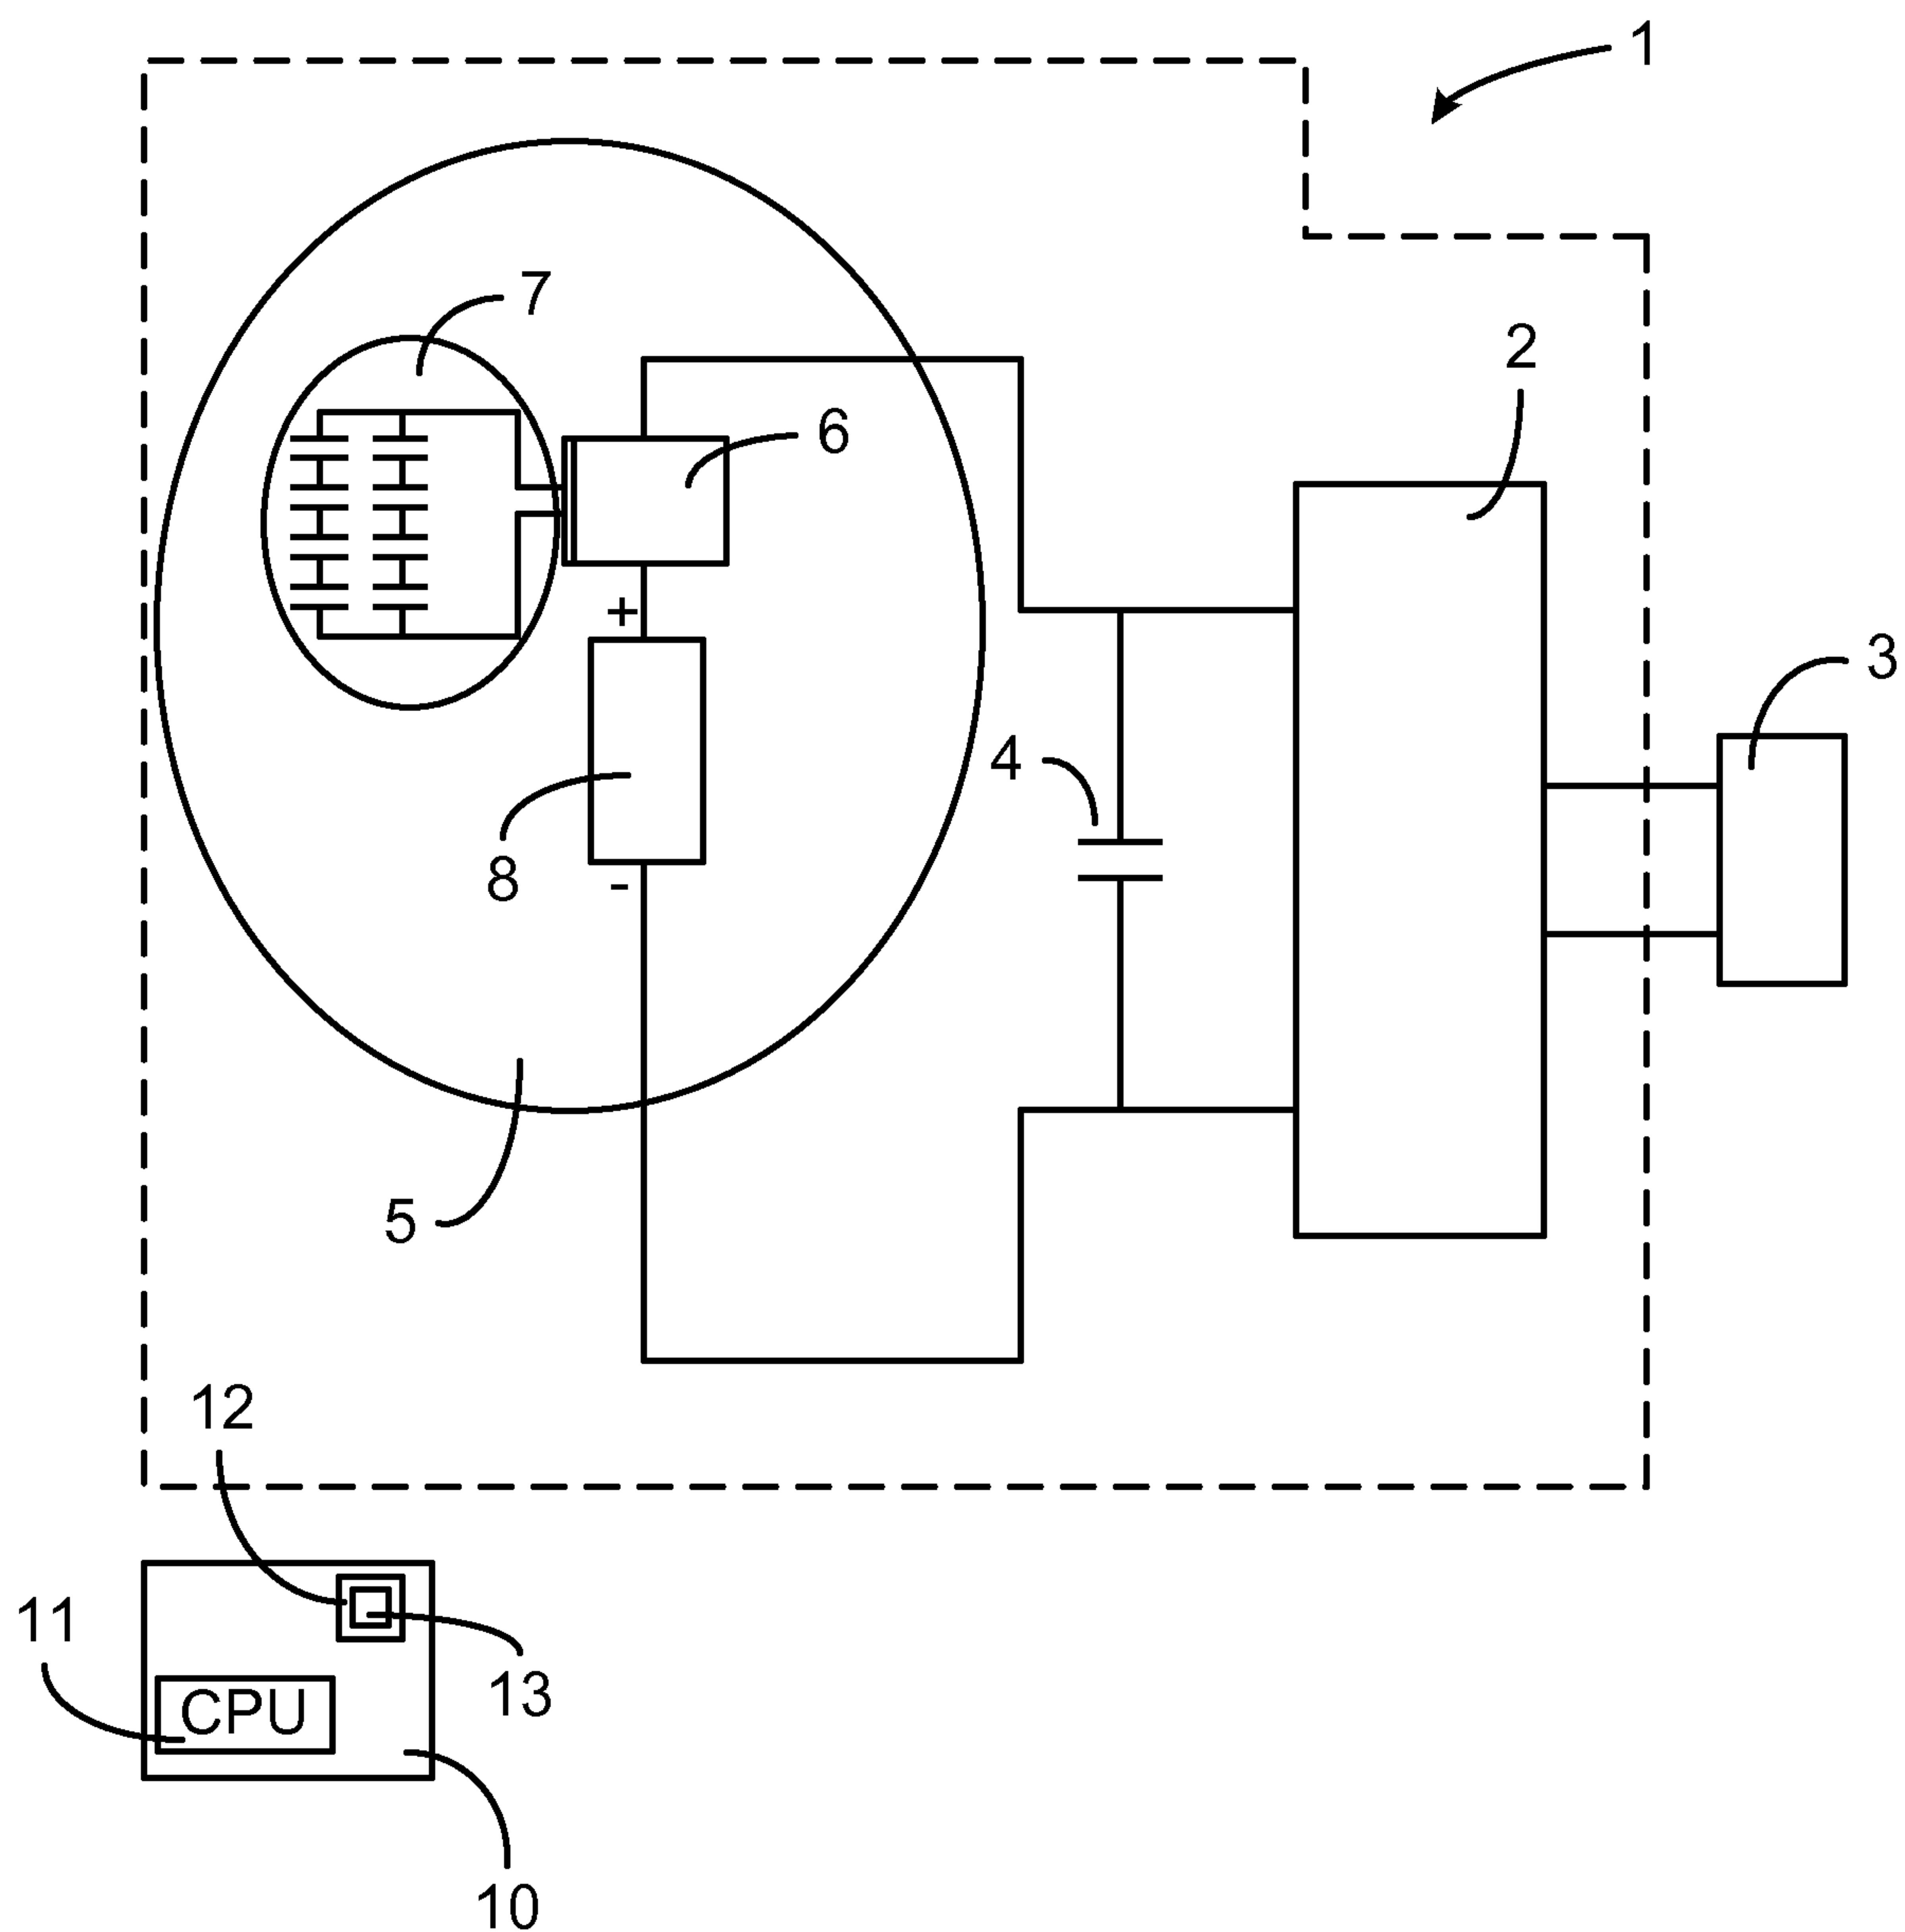


Fig. 1

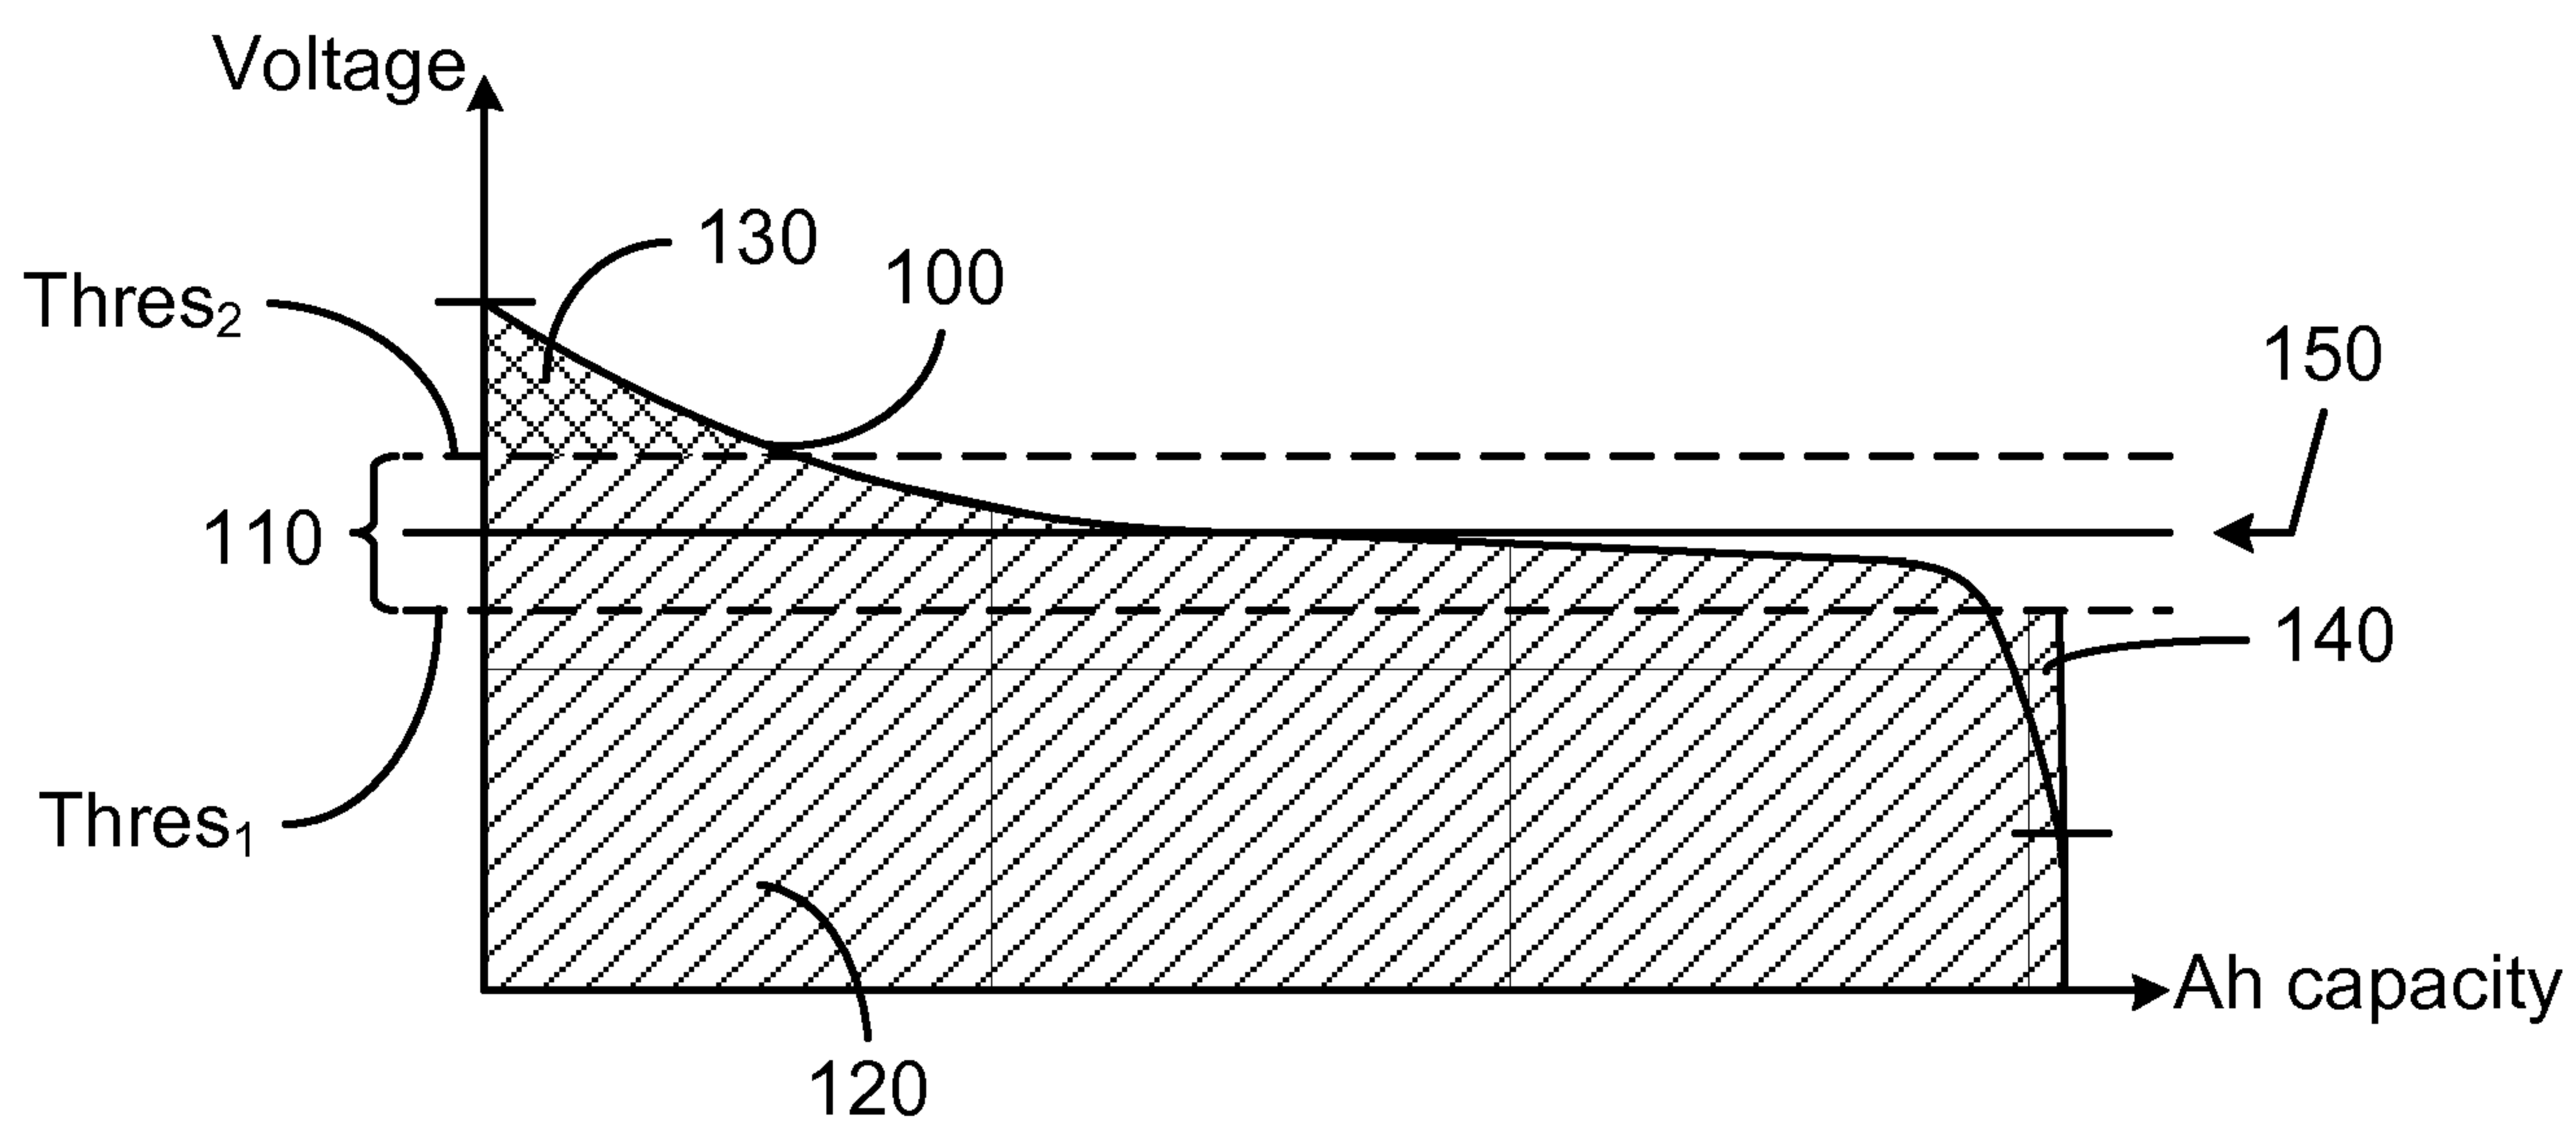


Fig. 2

2/3

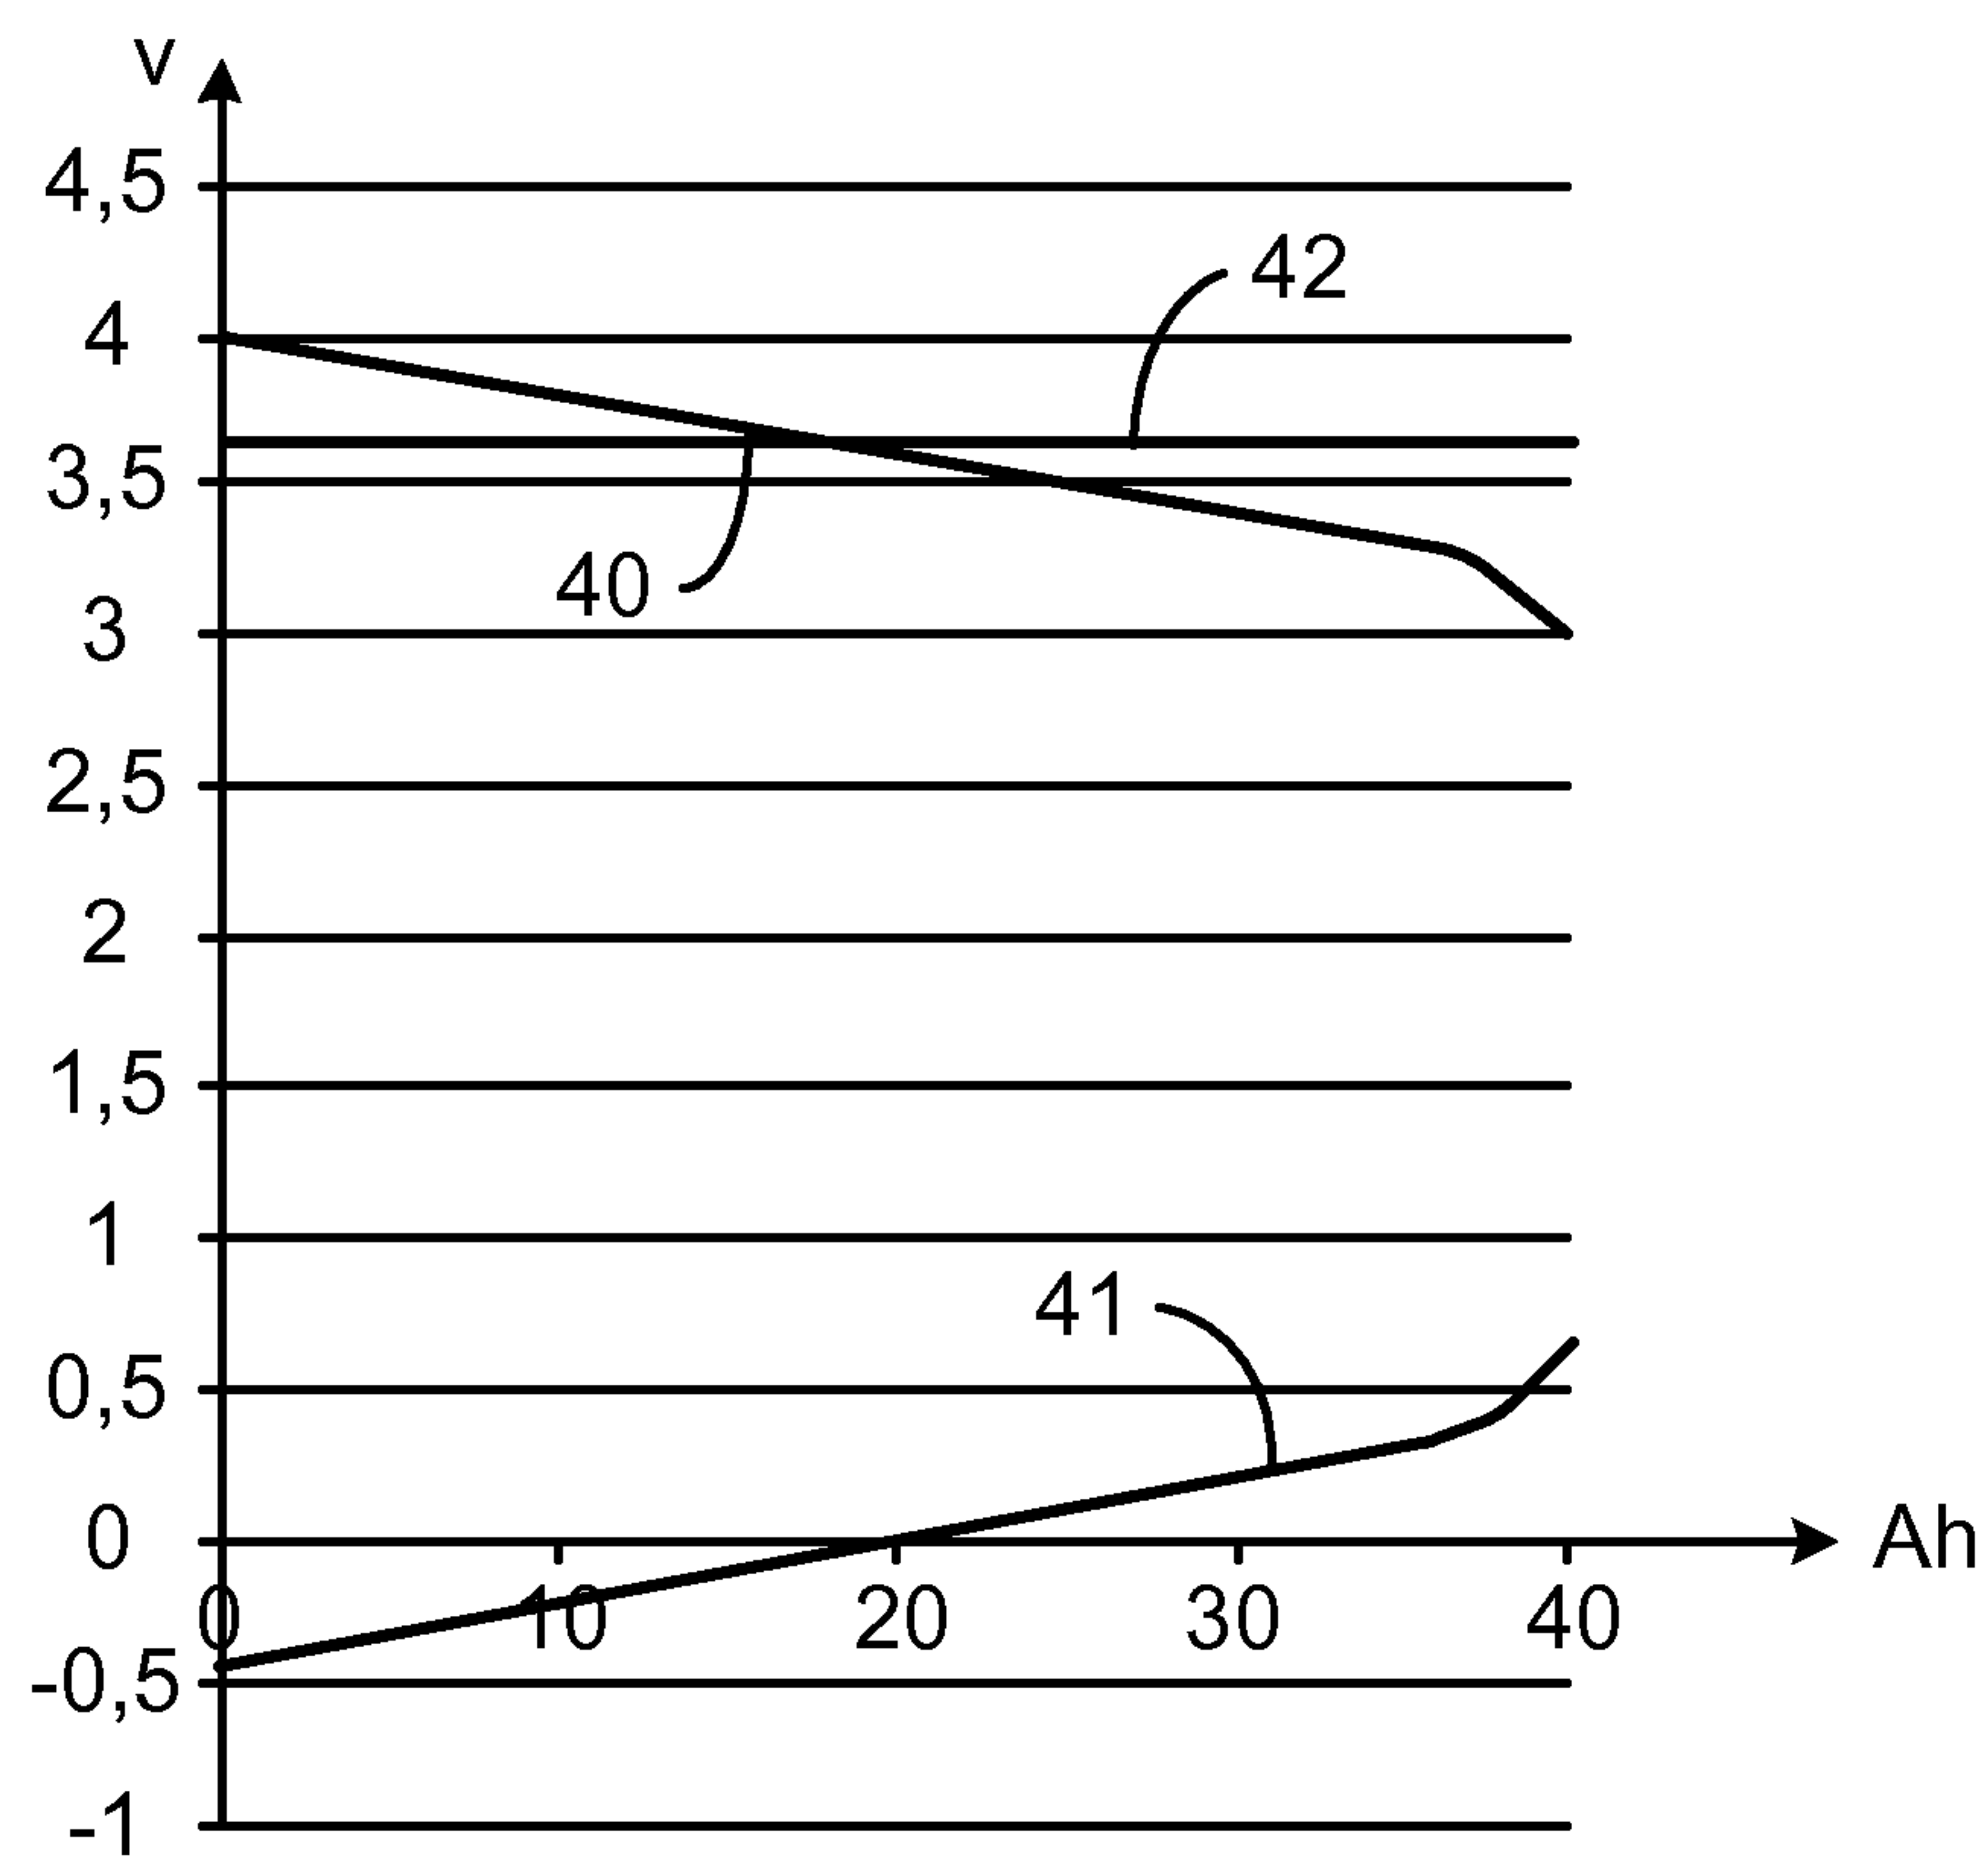


Fig. 3a

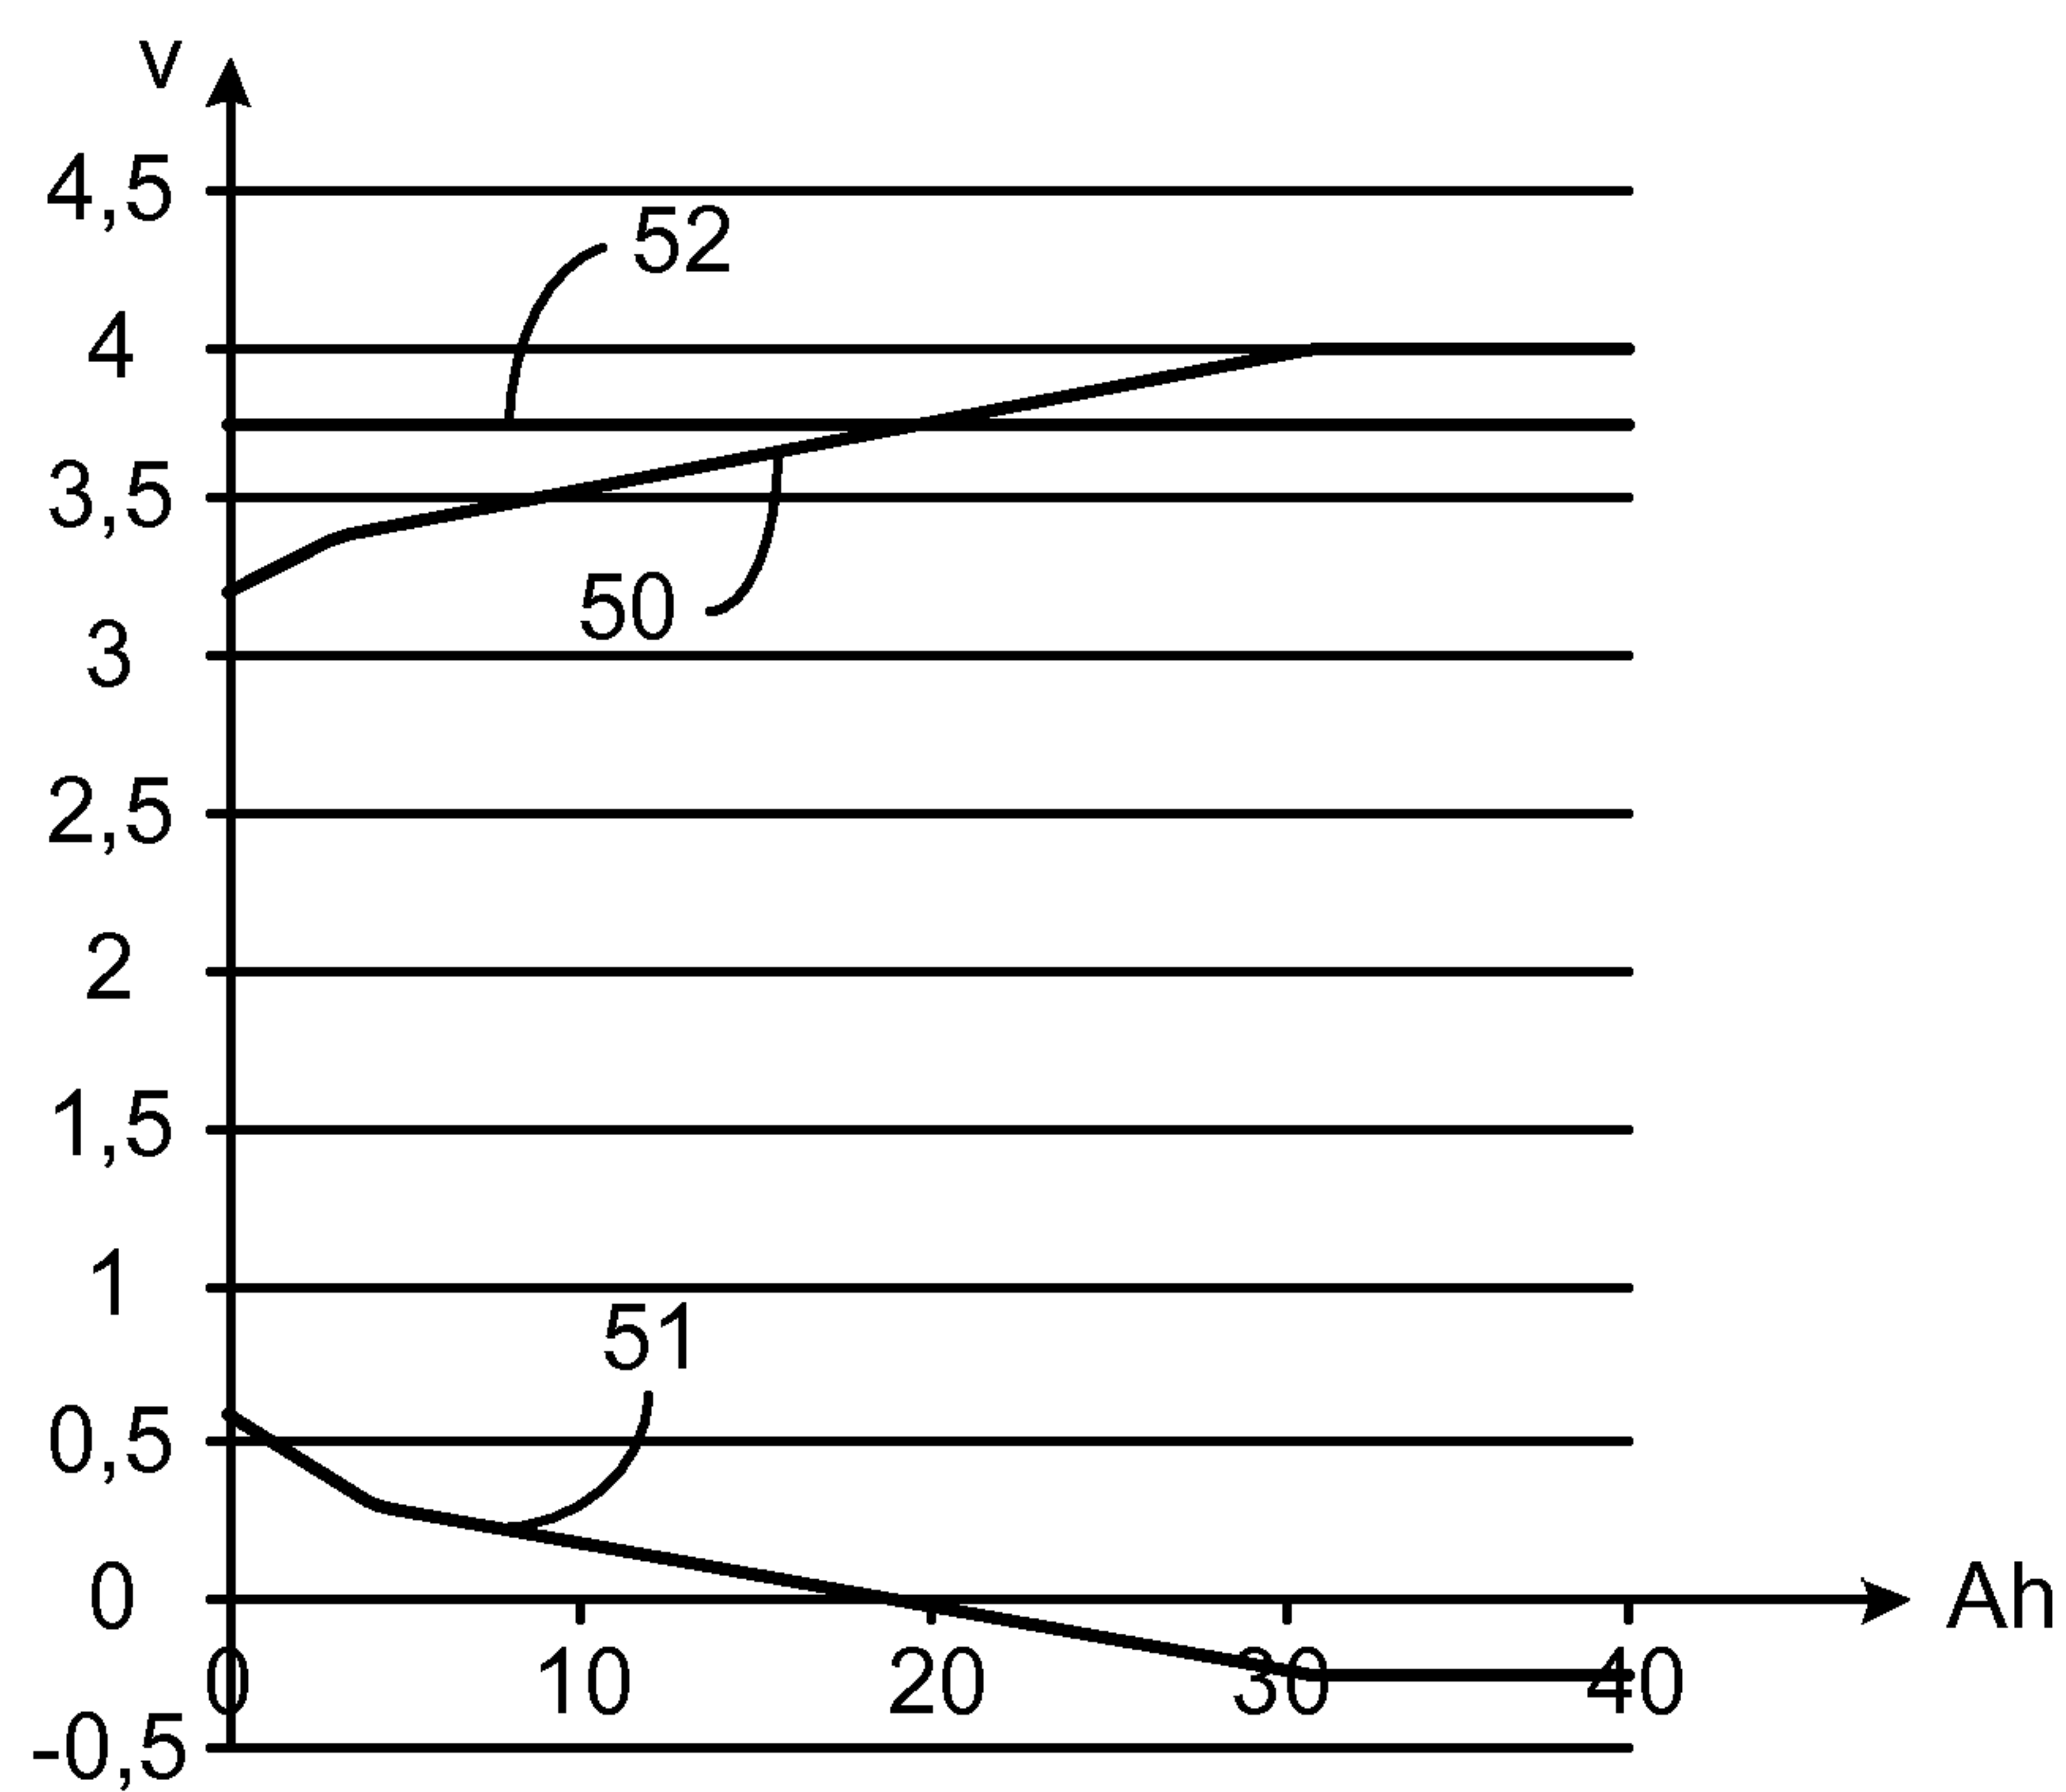


Fig. 3b

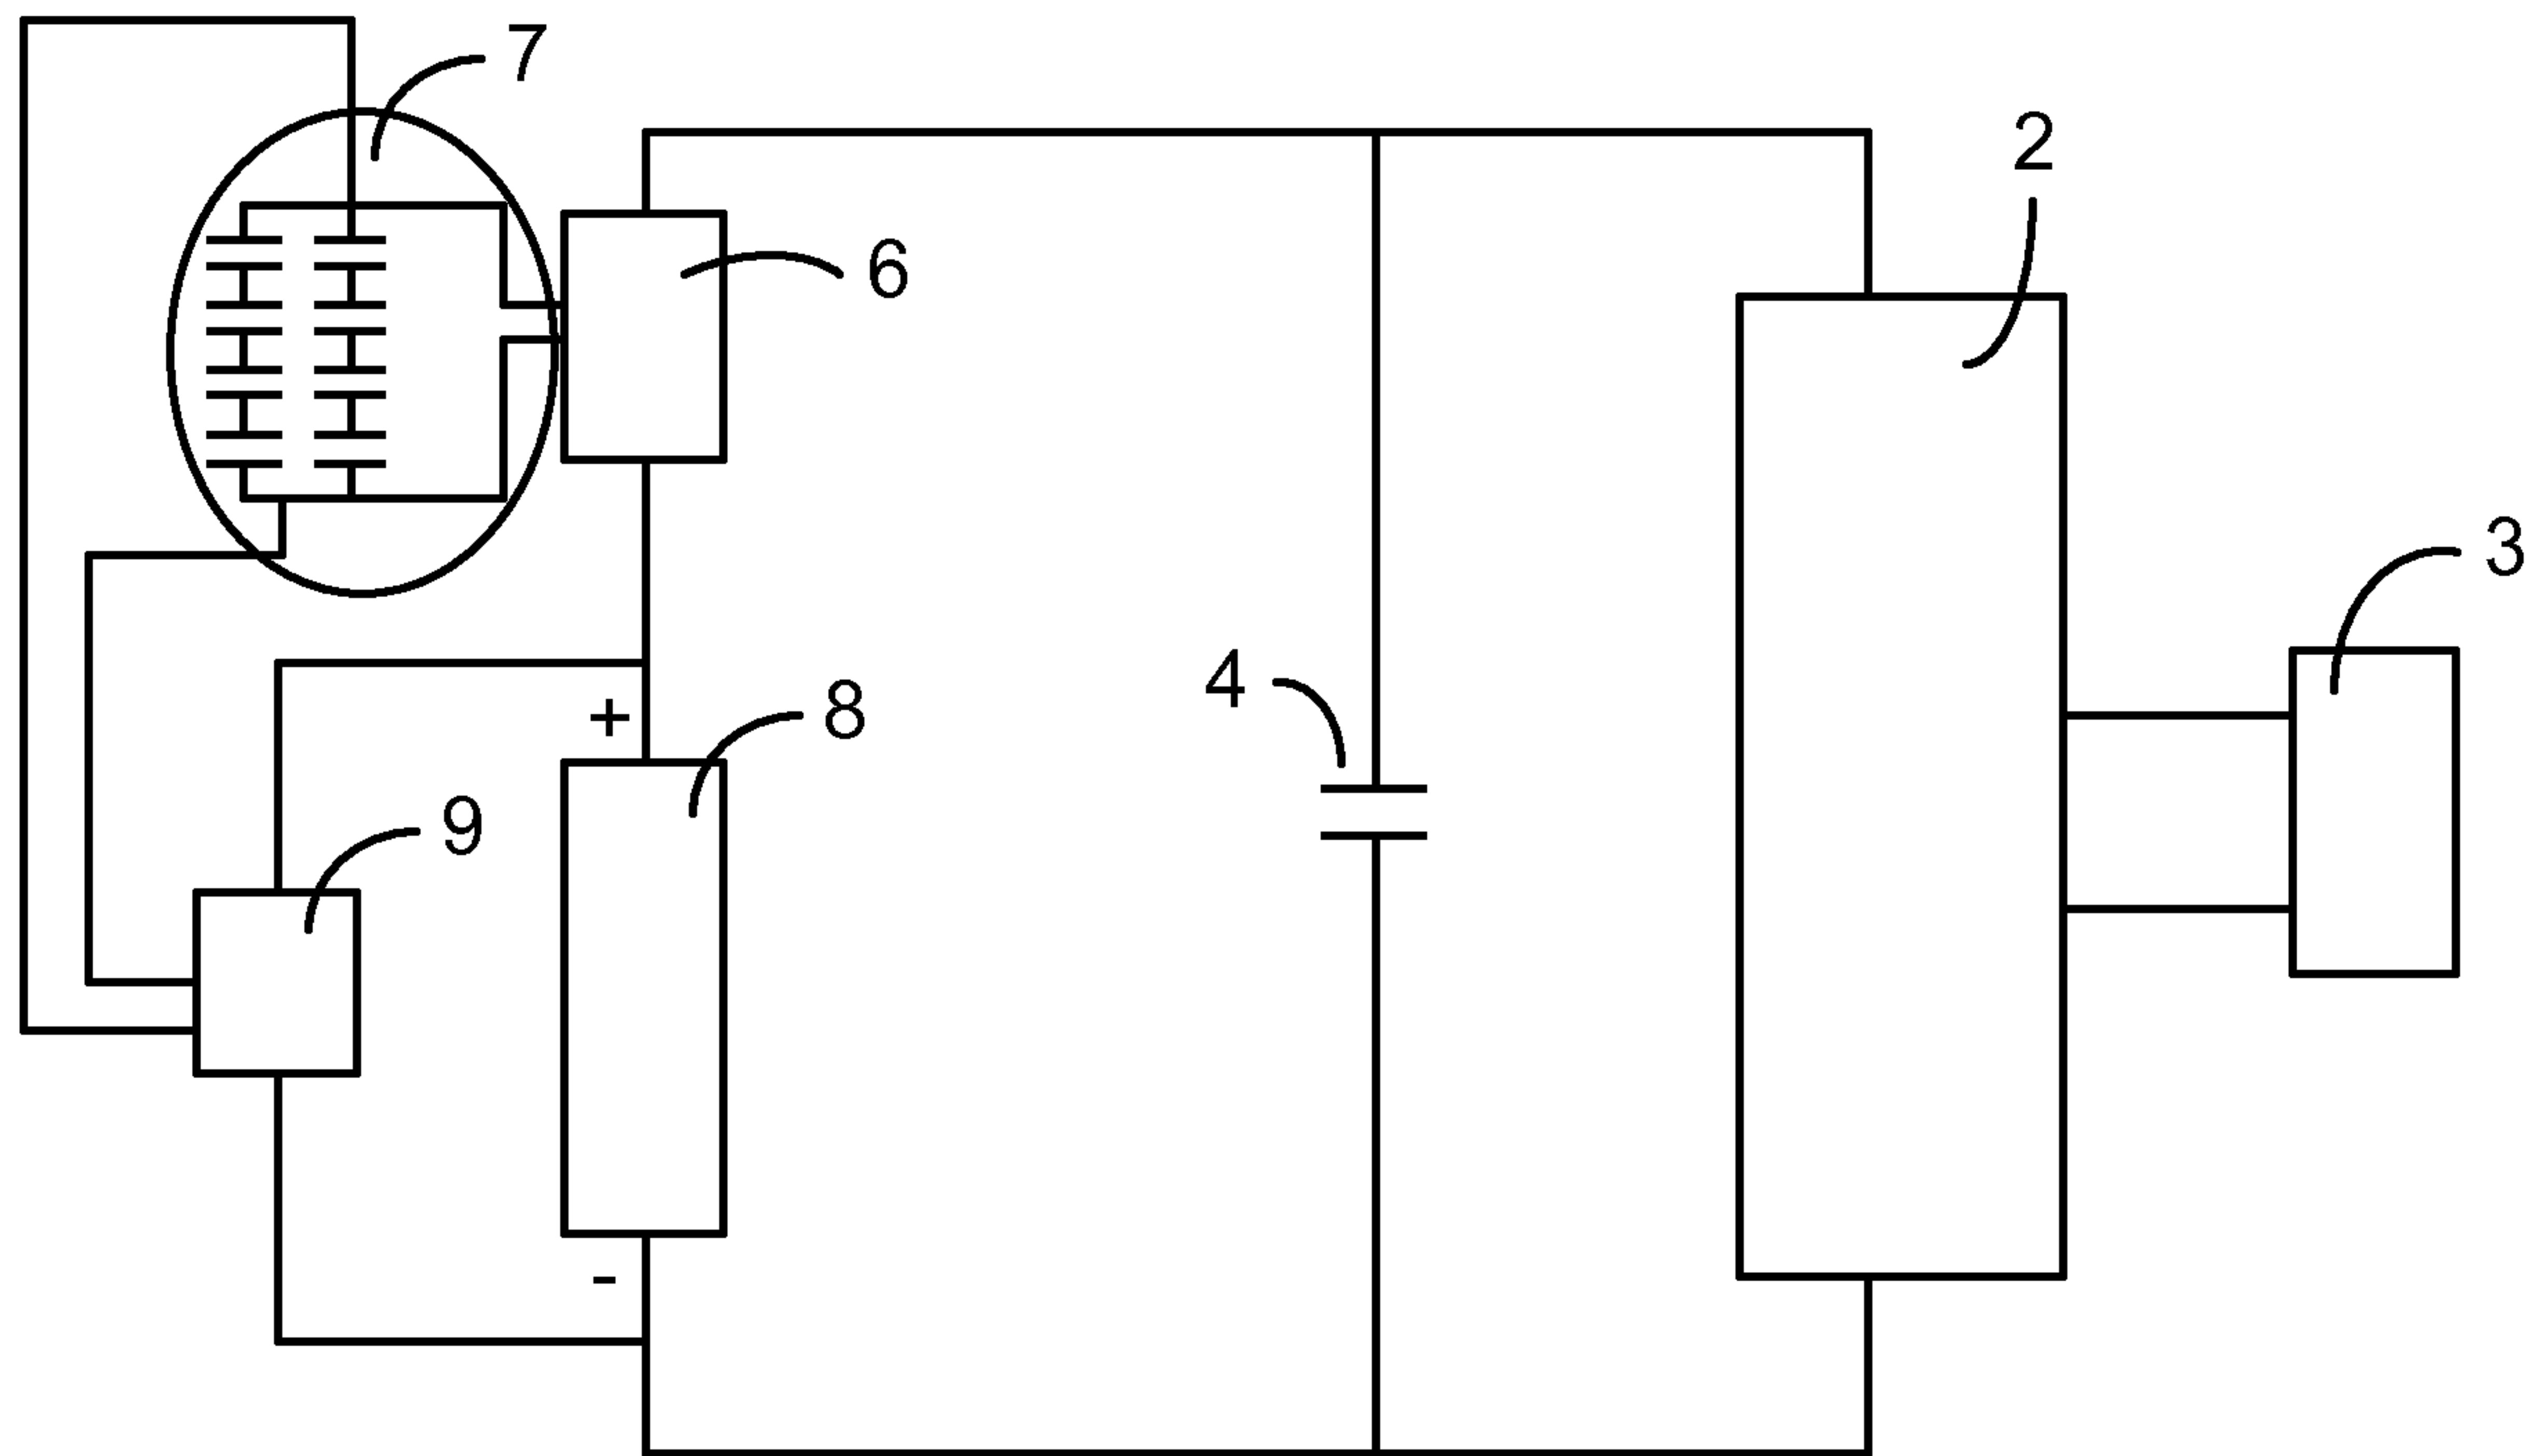


Fig. 4

50

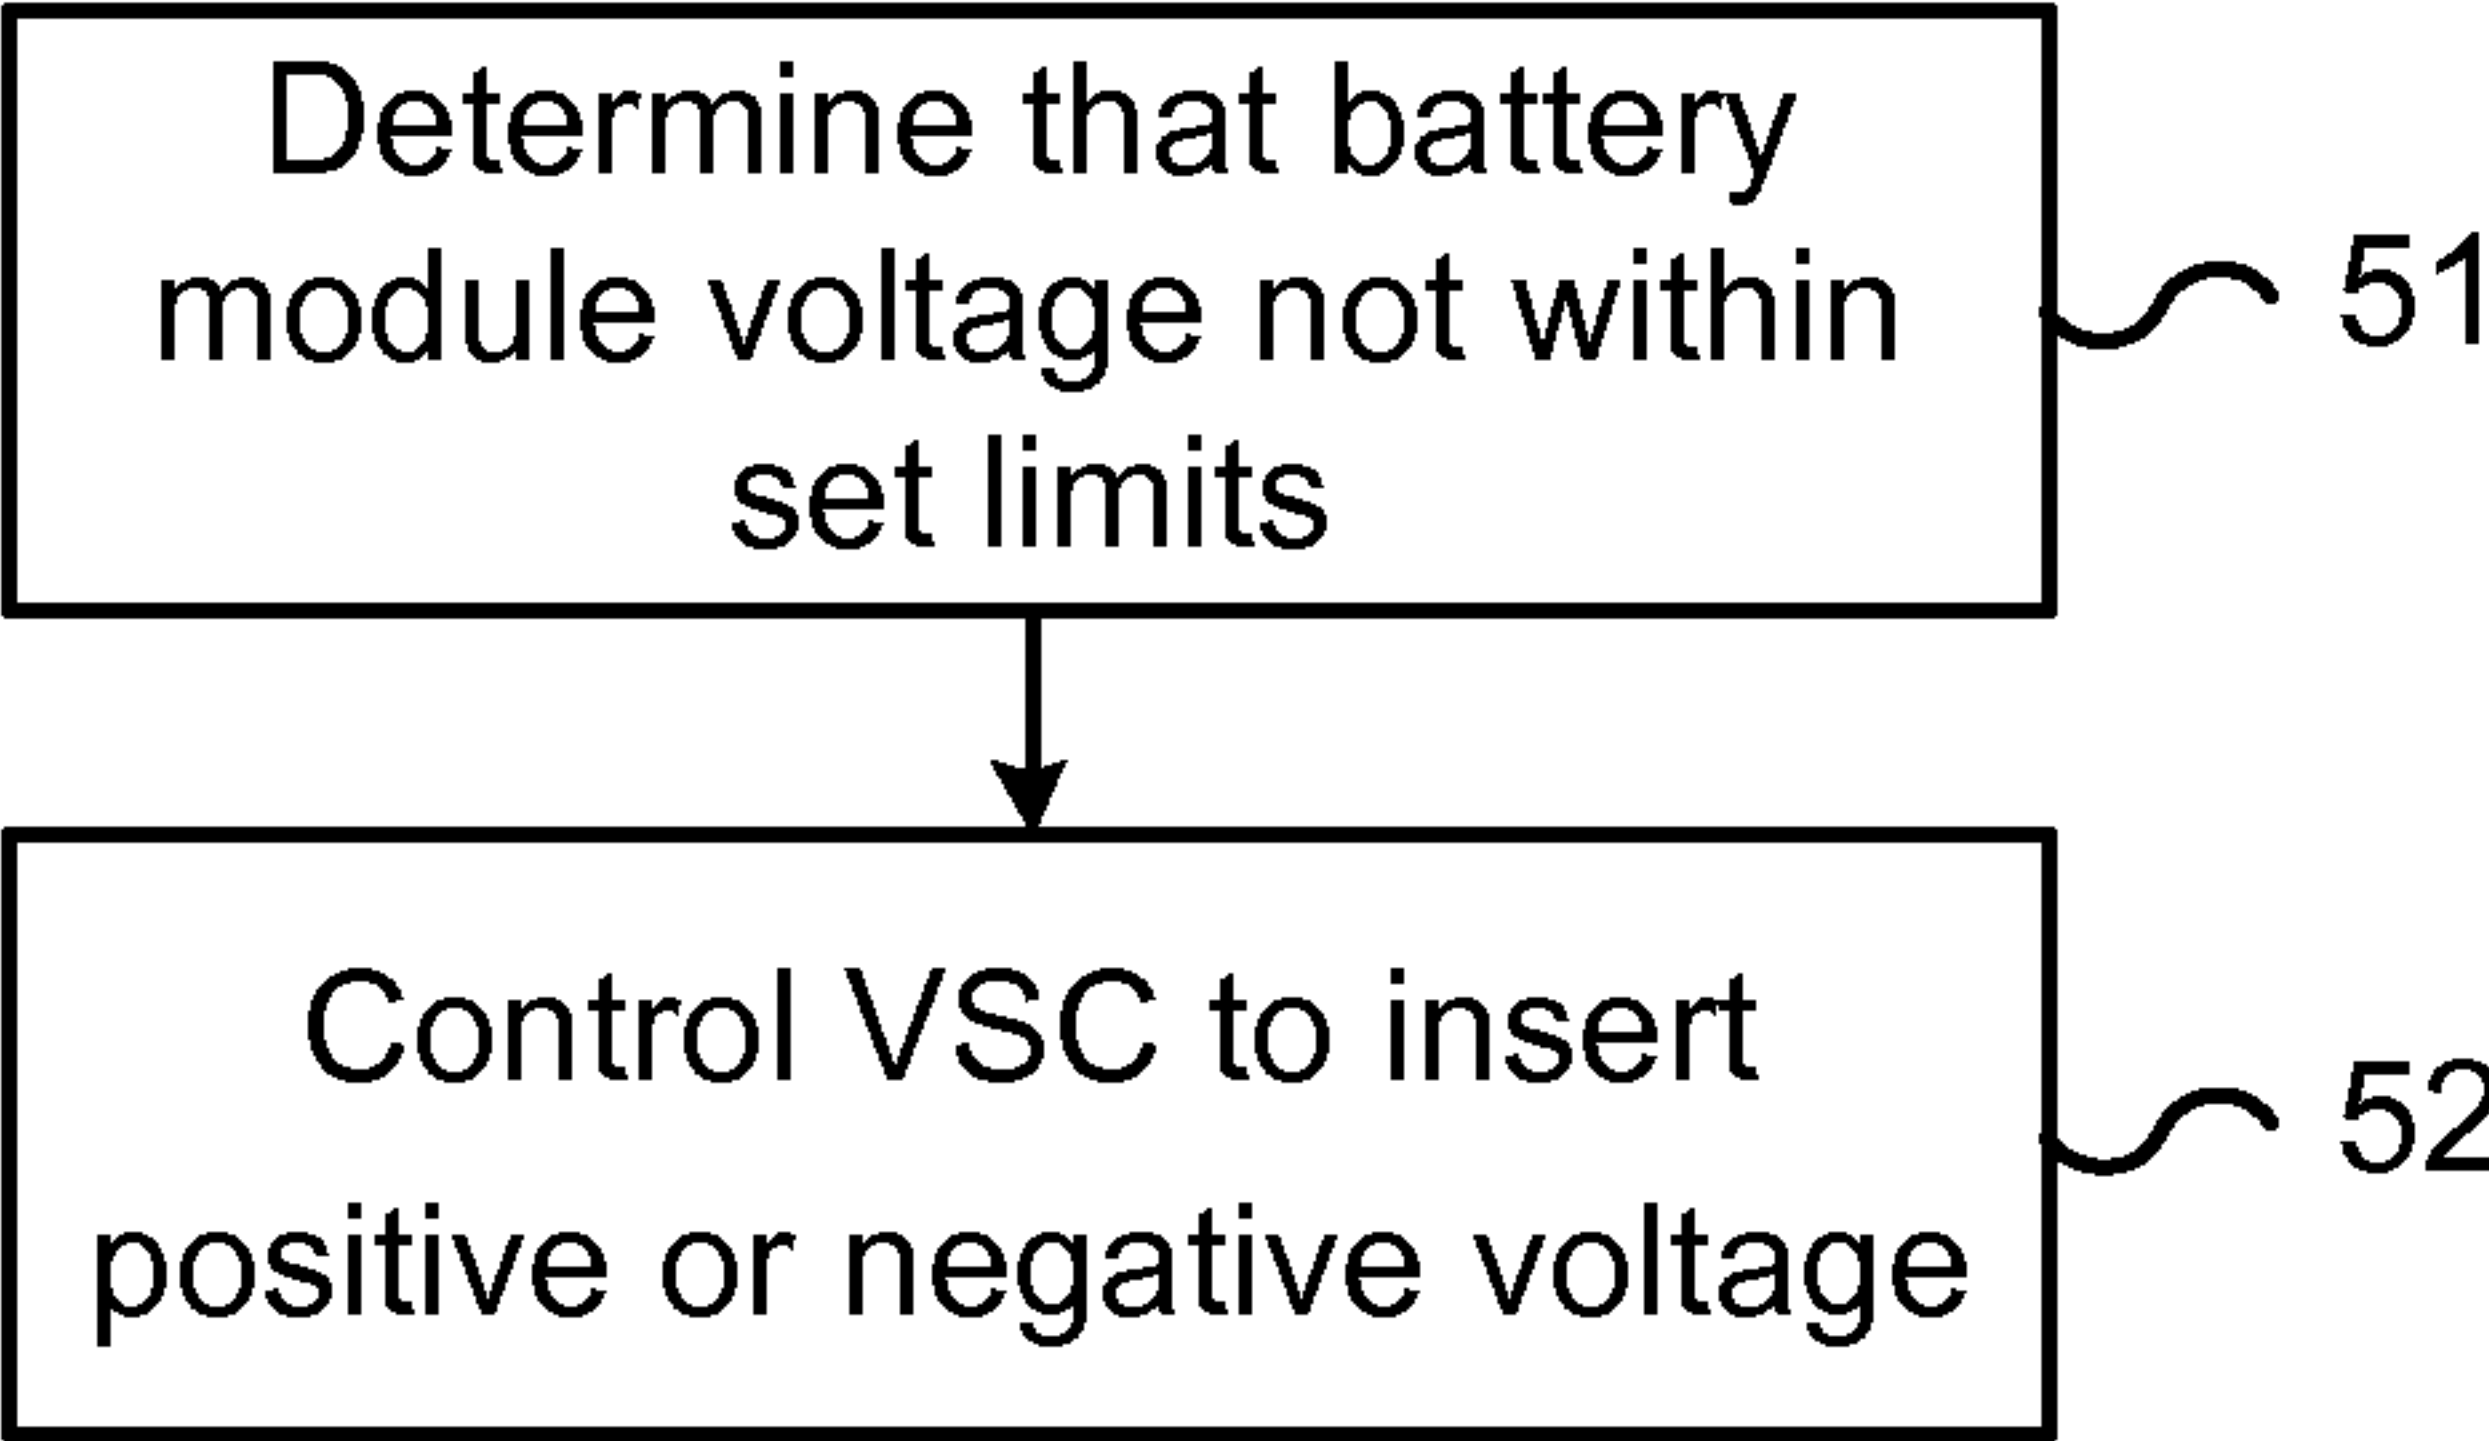


Fig. 5

