

(51) International Patent Classification:
E21B 47/00 (2006.01)(21) International Application Number:
PCT/US2014/020293(22) International Filing Date:
4 March 2014 (04.03.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

61/772,470	4 March 2013 (04.03.2013)	US
61/791,536	15 March 2013 (15.03.2013)	US
61/790,906	15 March 2013 (15.03.2013)	US
61/791,136	15 March 2013 (15.03.2013)	US
61/791,299	15 March 2013 (15.03.2013)	US

(72) Inventors; and

(71) Applicants : **ABBASSIAN, Fereidoun** [GB/US]; 12017 Tall Oaks, Houston, TX 77024 (US). **ALBERTIN, Martin** [US/US]; 4322 Cannondale Lane, Katy, TX 77450 (US). **ANDRESEN, Per, Arild** [NO/NO]; Odderheitoppen 1, N-4639 Kristiansand (NO). **ASTON, Mark, Shelton** [GB/GB]; 35 Fairfax Road, Teddington, Middlesex TW11 9DJ (GB). **EDWARDS, Stephen, Tean** [GB/US]; 26320 Century Oaks Blvd.H, Hockley, TX 77447 (US). **GOMES, Paulo, Jorge Da Cunha** [PT/GB]; 72-74 Hill Rise, Flat 2,

Richmond TW10 6UB (GB). **HONEY, Mark, Adrian** [GB/GB]; 21, Colthill Circle, Milltimber, Aberdeen AB13 0EH (GB). **LAST, Nigel, Charles** [GB/GB]; 18, Drynham Park, Weybridge, Surrey KT13 9RE (GB). **LOCKYEAR, Christopher, Francis** [GB/GB]; 33 Oxford Road, Highfield, Thame OX9 2AJ (GB). **MASON, Colin, James** [GB/GB]; Chersey Road, Sunbury-on-thames, Middlesex TW16 7BP (GB). **PAYNE, Michael, Lyle** [US/US]; 20110 Echo Falls Drive, Katy, TX 77450 (US). **PERIY-ASAMY, Sankarrappan** [US/US]; 8530 Iron Tree Lane, Katy, TX 77494 (US). **SANT, Randall, Vashishta** [TT/US]; 1614 Crystal Meadow Pl, Katy, TX 77494 (US). **THEROND, Emmanuel, Claude** [FR/GB]; Sunnybrook, Green Road, Egham TW20 8QN (GB). **WAAGE, Trond** [NO/NO]; Eventyrveien 16A, N-4629 Kristiansand (NO). **WHITELEY, Nicholas, Adam** [GB/GB]; 47 King Street, Oldmeldrum, Aberdennshire AB51 0EQ (GB).

(72) Inventors: **COLEY, Christopher, Jeremy**; 44 Morell Avenue, Oxford, Oxfordshire OX4 1ND (GB). **JAKOBSEN, Thomas**; Johan Markussens Vei 34, N-4888 Hom-borsund (NO). **MCKAY, James**; 6644 Wakeforest Ave., Houston, TX 77005 (US). **STREETER, Edward, James**; 2 Burdocks, The Green, Dunsfold, Surrey GU8 4NB (GB). **WINTERS, Warren Jeffrey**; 16058 Roseview Lane, Cypress, TX 77429 (US).

[Continued on next page]

(54) Title: SYSTEM AND CONSOLE FOR MONITORING AND MANAGING WELL SITE OPERATIONS

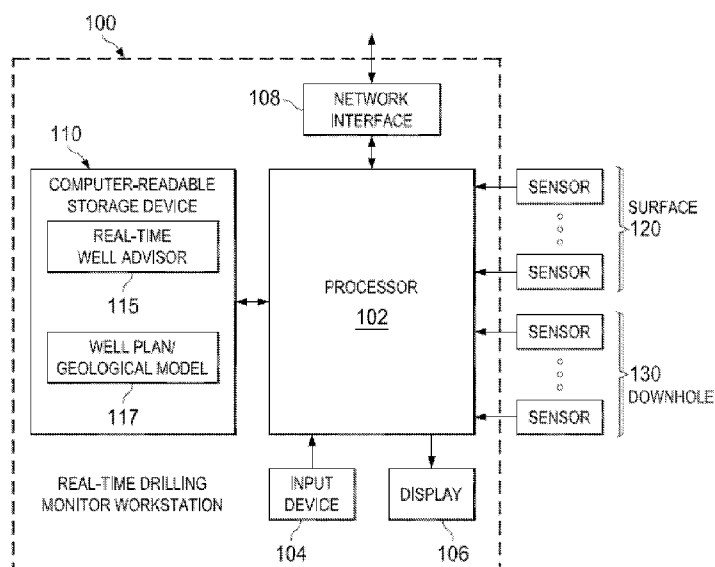


FIGURE 1

(57) Abstract: A well advisor system for monitoring and managing well drilling and production operations. The system may be accessed through one or more workstations, or other computing devices, which may be located at a well site or remotely. The system is in communication with and receives input from various sensors. It collects real-time sensor data sampled during operations at the well site, which may include drilling operations, running casing or tubular goods, completion operations, or the like. The system processes the data, and provides nearly instantaneous numerical and visual feedback through a variety of graphical user interfaces ("GUIs"), which are presented in the form of operation- specific consoles.



(74) **Agent: RAMAGE, W., Edward**; 211 Commerce Street, Suite 1000, Nashville, TN 37201 (US).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

SYSTEM AND CONSOLE FOR MONITORING AND MANAGING WELL SITE OPERATIONS

This application claims benefit of and priority to U.S. Provisional Application No.
5 61/772,470, filed March 4, 2013, No. 61/791,136, filed March 15, 2013, No. 61/791,299,
filed March 15, 2013, No. 61/791,536, filed March 15, 2013, and No. 61/790,906, filed
March 15, 2013, and is entitled to those filing dates for priority. The specifications,
figures and complete disclosures of U.S. Provisional Application Nos. 61/772,470;
61/791,136; 61/791,299; 61/791,536; and 61/790,906 are incorporated herein in their
10 entireties by specific reference for all purposes.

FIELD OF INVENTION

This invention relates generally to oil and gas well drilling and production, and
related operations. More particularly, this invention relates to a computer-implemented
15 system for monitoring and managing well drilling and production operations.

BACKGROUND OF THE INVENTION

It is well-known that the drilling of an oil or gas well, and related operations, is
responsible for a significant portion of the costs related to oil and gas exploration and
20 production. In particular, as new wells are being drilled into remote or less-accessible
reservoirs, the complexity, time and expense to drill a well have substantially increased.

Accordingly, it is critical that drilling operations be completed safely, accurately,
and efficiently. With directional drilling techniques, and the greater depths to which
wells are being drilled, many complexities are added to the drilling operation, and the
25 cost and effort required to respond to a problem during drilling are high. This requires a
high level of competence from the driller or drilling engineer at the drilling rig (or
elsewhere) to safely drill the well as planned.

A "well plan" specifies a number of parameters for drilling a well, and is
developed, in part, based on a geological model. A geological model of various sub-
30 surface formations is generated by a geologist from a variety of sources, including
seismic studies, data from wells drilled in the area, core samples, and the like. A

geological model typically includes depths to the various "tops" that define the formations (the term "top" generally refers to the top of a stratigraphic or biostratigraphic boundary of significance, a horizon, a fault, a pore pressure transition zone, change in rock type, or the like. Geological models usually include multiple tops, thereby defining the presence, geometry and composition of subsurface features.

The well plan specifies drilling parameters as the well bore advances through the various subsurface features. Parameters include, but are not limited to, mud weight, drill bit rotational speed, and weight on bit (WOB). The drilling operators rely on the well plan to anticipate tops and changes in subsurface features, account for drilling uncertainties, and adjust drilling parameters accordingly.

In many cases, the initial geological model may be inaccurate. The depth or location of a particular top may be off by a number of feet. Further, since some geological models recite distances based on the distance between two tops, an error in the absolute depth of one top can result in errors in the depths of multiple tops. Thus, a wellbore can advance into a high pressure subsurface formation before anticipated.

Such errors thus affect safety as well as cost and efficiency. It is fundamental in the art to use drilling "mud" circulating through the drill string to remove cuttings, lubricate the drill bit (and perhaps power it), and control the subsurface pressures. The drilling mud returns to the surface, where cuttings are removed, and is then recycled.

In some cases, the penetration of a high pressure formation can cause a sudden pressure increase (or "kick") in the wellbore. If not detected and controlled, a "blowout" can occur, which may result in failure of the well. Blowout preventers ("BOP") are well known in the art, and are used to protect drilling personnel and the well site from the effects of a blowout. A variety of systems and methods for BOP monitoring and testing are known in the art, including "Blowout Preventer Testing System and Method," U.S. Pat. No. 7,706,890, and "Monitoring the Health of Blowout Preventer," US 2012/0197527, both of which are incorporated herein in their entireties by specific reference for all purposes.

Conversely, if the mud weight is too heavy, or the wellbore advances into a particularly fragile or fractured formation, a "lost circulation" condition may result where drilling mud is lost into the formation rather than returning to the surface. This leads not

only to the increased cost to replace the expensive drilling mud, but can also result in more serious problems, such as stuck drill pipe, damage to the formation or reservoir, and blowouts.

Similar problems and concerns arise during other well operations, such as running
5 and cementing casing and tubulars in the wellbore, wellbore completions, or subsurface formation characterizations.

Drills strings and drilling operations equipment include a number of sensors and devices to measure, monitor and detect a variety of conditions in the wellbore, including, but not limited to, hole depth, bit depth, mud weight, choke pressure, and the like. This
10 data can be generated in real-time, but can be enormous, and too voluminous for personnel at the drilling site to review and interpret in sufficient detail and time to affect the drilling operation. Some of the monitored data may be transmitted back to an engineer or geologist at a remote site, but the amount of data transmitted may be limited due to bandwidth limitations. Thus, not only is there a delay in processing due to
15 transmission time, the processing and analysis of the data may be inaccurate due to missing or incomplete data. Drilling operations continue, however, even while awaiting the results of analysis (such as an updated geological model).

A real-time drilling monitor (RTDM) workstation is disclosed in "Drilling Rig Advisor Console," U.S. App. No. 13/31,646, which is incorporated herein by specific
20 reference for all purposes. The RTDM receives sensor signals from a plurality of sensors and generates single graphical user interface with dynamically generated parameters based on the sensor signals.

Likewise, an intelligent drilling advisor system is disclosed in "Intelligent Drilling Advisor," U.S. Pat. No. 8,121,971, which is incorporated herein by specific reference for
25 all purposes. The intelligent advisor system comprises an information integration environment that accesses and configures software agents that acquire data from sensors at a drilling site, transmit that data to the information integration environment, and drive the drilling state and the drilling recommendations for drilling operations at the drilling site.

SUMMARY OF INVENTION

In various embodiments, the present invention comprises a well advisor system for monitoring and managing well drilling and production operations. The system may be accessed through one or more workstations, or other computing devices. A workstation comprises one or more computers or computing devices, and may be located at a well site or remotely. The system can be implemented on a single computer system, multiple computers, a computer server, a handheld computing device, a tablet computing device, a smart phone, or any other type of computing device.

The system is in communication with and receives input from various sensors. In general, the system collects real-time sensor data sampled during operations at the well site, which may include drilling operations, running casing or tubular goods, completion operations, or the like. The system processes the data, and provides nearly instantaneous numerical and visual feedback through a variety of graphical user interfaces ("GUIs").

The GUIs are populated with dynamically updated information, static information, and risk assessments, although they also may be populated with other types of information. The users of the system thus are able to view and understand a substantial amount of information about the status of the particular well site operation in a single view, with the ability to obtain more detailed information in a series of additional views.

In one embodiment, the system is installed at the well site, and thus reduces the need to transmit data to a remote site for processing. The well site can be an offshore drilling platform or land-based drilling rig. This reduces delays due to transmitting information to a remote site for processing, then transmitting the results of that processing back to the well site. It also reduces potential inaccuracies in the analysis due to the reduction in the data being transmitted. The system thus allows personnel at the well site to monitor the well site operation in real time, and respond to changes or uncertainties encountered during the operation. The response may include comparing the real time data to the current well plan, and modifying the well plan.

In yet another embodiment, the system is installed at a remote site, in addition to the well site. This permits users at the remote site to monitor the well-site operation in a similar manner to a user at the well-site installation.

In some exemplary embodiments, the system is a web-enabled application, and the system software may be accessed over a network connection such as the Internet. A user can access the software via the user's web browser. In some embodiments, the system performs all of the computations and processing described herein and only display
5 data is transmitted to the remote browser or client for rendering screen displays on the remote computer. In another embodiment, the remote browser or software on the remote system performs some of the functionality described herein.

Sensors may be connected directly to the workstation at the well site, or through one or more intermediate devices, such as switches, networks, or the like. Sensors may
10 comprise both surface sensors and downhole sensors. Surface sensors include, but are not limited to, sensors that detect torque, revolutions per minute (RPM), and weight on bit (WOB). Downhole sensors include, but are not limited to, gamma ray, pressure while drilling (PWD), and resistivity sensors. The surface and downhole sensors are sampled by the system during drilling or well site operations to provide information about a
15 number of parameters. Surface-related parameters include, but are not limited to, the following: block position; block height; trip/running speed; bit depth; hole depth; lag depth; gas total; lithography percentage; weight on bit; hook load; choke pressure; stand pipe pressure; surface torque; surface rotary; mud motor speed; flow in; flow out; mud weight; rate of penetration; pump rate; cumulative stroke count; active mud system total; active mud system change; all trip tanks; and mud temperature (in and out). Downhole
20 parameters include, but are not limited to, the following: all FEMWD; bit depth; hole depth; PWD annular pressure; PWD internal pressure; PWD EMW; PWD pumps off (min, max and average); drill string vibration; drilling dynamics; pump rate; pump pressure; slurry density; cumulative volume pumped; leak off test (LOT) data; and formation integrity test (FIT) data. Based on the sensed parameters, the system causes
25 the processors or microprocessor to calculate a variety of other parameters, as described below.

In several embodiments, the system software comprises a database/server, a display or visualization module, one or more smart agents, one or more templates, and
30 one or more "widgets." The database/server aggregates, distributes and manages real-time data being generated on the rig and received through the sensors. The display or

visualization module implements a variety of GUI displays, referred to herein as "consoles," for a variety of well site operations. The information shown on a console may comprise raw data and calculated data in real time.

Templates defining a visual layout may be selected or created by a user to display information in some portions of or all of a console. In some embodiments, a template comprises an XML file. A template can be populated with a variety of information, including, but not limited to, raw sensor data, processed sensor data, calculated data values, and other information, graphs, and text. Some information may be static, while other information is dynamically updated in real time during the well site operation. In one embodiment, a template may be built by combining one or more display "widgets" which present data or other information. Smart agents perform calculations based on data generated through or by one or more sensors, and said calculated data can then be displayed by a corresponding display widgets.

In one exemplary embodiment, the system provides the user the option to implement a number of consoles corresponding to particular well site operations. In one embodiment, consoles include, but are not limited to, rig-site fluid management, BOP management, cementing, and casing running. A variety of smart agents and other programs are used by the consoles. Smart agents and other programs may be designed for use by a particular console, or may be used by multiple consoles. A particular installation of the system may comprise a single console, a sub-set of available consoles, or all available consoles.

Agents can be configured, and configuration files created or modified, using the agent properties display. The same properties are used for each agent, whether the agent configuration is created or imported. The specific configuration information (including, but not limited to, parameters, tables, inputs, and outputs) varies depending on the smart agent. Parameters represent the overall configuration of the agent, and include basic settings including, but not limited to, start and stop parameters, tracing, whether data is read to a log, and other basic agent information. Tables comprise information appearing in database tables associated with the agent. Inputs and outputs are the input or output mnemonics that are being tracked or reported on by the agent. For several embodiments,

in order for data to be tracked or reported on, each output must have an associated output. This includes, but is not limited to, log and curve information.

In one embodiment, the system comprises a Casing Running Console used to monitor the running and installation of casing and tubular goods in a wellbore. The Casing Running Console may comprise several agents (e.g., Hookload Signature Agent, and Zone Agent), and at least four widgets (e.g., Trip Schedule, Drag Chart, Hookload Signature, and Zone). The smart agents receive and pass information to these programs.

In a further embodiment, the system comprises a Cementing Console used to manage and monitor cement jobs within the wellbore. It may comprise a configuration screen and at least four widgets (e.g., Frequency Analysis, Plan Tracking, Pumping Stage, and 2D Wellbore Schematic), which allow the user to monitor fluid displacement, densities, pressure, and pump plans in real-time, and compare the real-time data to a cementing plan.

In yet another embodiment, the system comprises a Rig Site Fluid Management Console used to monitor real-time data to provide early warnings and intelligence to users during all drilling and well construction activities and operations. More particularly, the console aggregates and presents the data in manner to assist a user to visualize and interpret the data, and identify and predict fluid gains and losses during operations. The Rig Site Fluid Management Console may comprises smart agents and numerous widgets (e.g., 2D Wellbore Schematic, Zone, Gas Monitor, Flow Back, Pressure While Drilling, Fluid Monitoring Configuration, Log Widget Template configurations, Pore Pressure Fracture Gradient Look-Ahead, and Under Reaming).

The Zone Widget used in conjunction with several of the consoles is a performance metric program designed to display the current status of the selected parameters based on pre-established threshold values, which may be user defined. The visual display is the form of a polygon (symmetric or asymmetric) with a number of vertices, with each vertex representing a particular parameter. The vertex may be labeled. A similar number of threshold values are established for each parameter, and the scale is normalized so that the corresponding threshold appears to be the same distance along a line between the center of the polygon and the respective vertex. Examples of

parameters that may be displayed include, but are not limited to, High Hookload, Hookload Variation, Low Hookload, Static Friction, TripIn Speed, and TripOut Speed.

In one exemplary embodiment, the visual display of the Zone Widget has three areas, which may be colored or patterned: normal (green); warning (amber); and alert (red). The background area in the polygon is colored or patterned accordingly. The value of a particular parameter in real-time is plotted as a point along its respective line (typically with the base normal value in the center, with warning and alert thresholds proceeding outward), and can be plotted in real time or by using the most recent value for the parameter available. The plotted points of adjacent parameters are connected by a straight line on the display, the total effect comprising a polygon of changing size and shape over time that overlays the background. The user can thereby quickly determine if any parameters are in a warning or alert status, and take appropriate action. Historical data may be stored, so that a user can view the history of the parameters over time by viewing the change in shape and size of the parameter polygon.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a view of a system in accordance with an embodiment of the present invention.

Figure 2 shows a software architecture in accordance with various embodiments of the present invention.

Figure 3 shows a smart agent management toolbar.

Figure 4 shows a smart agent management menu.

Figure 5 shows a smart agent configuration file import menu.

Figure 6 shows a smart agent configuration display screen.

Figure 7 shows a smart agent configuration file export menu.

Figure 8 shows a smart agent configuration file download display screen.

Figure 9 shows a smart agent configuration file copy menu.

Figure 10 shows a Casing Running Console display screen.

Figure 11 shows a Hookload Signature agent configuration input screen.

Figure 12 shows a Zone Signature agent configuration input screen.

Figure 13 shows a display produced by the Trip Schedule Widget.

Figure 14 shows a Trip Schedule Widget general settings input screen.

Figures 15-18 show various Trip Schedule Widget Tracks and Curves input
5 screens.

Figure 19 shows a display produced by the Drag Chart Widget.

Figure 20 shows a Drag Chart Widget general settings input screen.

Figures 21-23 show various Drag Chart Widget Tracks and Curves input screens.

Figure 24 shows a display produced by the Hookload Signature Widget.

10 Figure 25 shows a Hookload Signature Widget general settings screen.

Figure 26 shows a Hookload Signature Widget appearance settings screen.

Figure 27A shows various displays produced by the Zone Widget.

Figure 27B shows another display produced by the Zone Widget.

Figure 28 shows a Zone Widget general setting screen.

15 Figure 29 shows a Cementing Console display screen.

Figure 30 shows a Cementing Console configuration screen.

Figure 31 shows an example of configuration menu.

Figure 32 shows an example of a wellbore selection dialog screen.

Figure 33 shows an example of a wellbore geometry window.

20 Figure 34 shows an example of a WITSML tree display.

Figure 35 shows a cement jobs grid from the Cementing Console configuration
display.

Figure 36 shows a cement component section from the Cementing Console
configuration display.

25 Figure 37 shows an example of a tools and settings options menu.

Figure 38 shows an example of a validity error message.

Figure 39 shows an example of a validity error summary window.

Figure 40 shows an input source data selection grid from the agent configuration
section of the Cementing Console configuration display.

30 Figure 41 shows an output data selection grid from the agent configuration section
of the Cementing Console configuration display.

Figure 42 shows an example of the smart agent status display.

Figure 43 shows a display produced by the Frequency Analysis Widget.

Figure 44A shows an example of a "edit display" menu.

Figure 44B shows a row of design mode icons.

5 Figure 45 shows an editable form of the Frequency Analysis Widget display.

Figure 46 shows a Frequency Analysis Widget general settings input screen.

Figure 47 shows a Frequency Analysis Widget statistics input screen.

Figure 48 shows a display produced through the Plan Tracking Widget.

Figure 49A shows a row of design mode icons.

10 Figure 49B shows an editable form of the Plan Tracking Widget.

Figure 50 shows a Plan Tracking Widget general settings input screen.

Figure 51 shows a Plan Tracking Widget annotation input screen.

Figure 52 shows a display produced by the Pumping Stage Widget.

Figure 53A shows a row of design mode icons.

15 Figure 53B shows an editable form of the Pumping Stage Widget.

Figure 54 shows a Pumping Stage Widget general settings input screen.

Figure 55 shows a Pumping Stage Widget pattern mapping screen.

Figure 56 shows a display produced by the 2D Wellbore Schematic Widget.

Figure 57A shows an example of a "edit display" menu.

20 Figure 57B shows a row of design mode icons.

Figure 58 shows an editable form of the 2D Wellbore Schematic Widget display.

Figure 59 shows a 2D Wellbore Schematic Widget general settings input screen.

Figure 60 shows a 2D Wellbore Schematic Widget deviated logs screen.

Figure 61 shows 2D Wellbore Schematic Widget cement screen.

25 Figure 62 shows an example of a 2D Wellbore Schematic Widget display zoomed in to the top of a wellbore.

Figure 63 shows an example of a 2D Wellbore Schematic Widget display zoomed out to show the entire wellbore.

30 Figure 64 shows an example of a 2D Wellbore Schematic Widget display zoomed in to the bottom of a wellbore to show the bottom hole assembly.

Figure 65 shows a Rig Site Fluid Management Console display screen.

Figure 66 shows a display produced by the Gas Monitor Widget.

Figure 67A shows an example of a "edit display" menu.

Figure 67B shows a row of design mode icons.

Figure 68 shows an editable form of the Gas Monitor Widget display.

5 Figure 69 shows a Gas Monitor Widget properties settings screen.

Figure 70 shows a display produced by the Flow Back Widget.

Figure 71A shows an example of an "edit display" menu.

Figure 71B shows a row of design mode icons.

Figure 71C shows an editable form of the Flow Back Widget display.

10 Figure 72 shows a Flow Back Widget properties settings screen.

Figure 73 shows a display produced by the Pressure While Drilling Widget.

Figure 74A shows a row of design mode icons.

Figure 74B shows an editable form of the Pressure While Drilling Widget display.

Figure 75 shows a Pressure While Drilling Widget properties settings screen.

15 Figure 76A shows an example of a Fluid Monitoring Configuration Widget display.

Figure 76B shows a row of design mode icons.

Figure 76C shows an editable form of the Fluid Monitoring Configuration Widget display.

20 Figure 76D shows a configuration window for warnings and alarms for the Flow In Flow Out Widget.

Figure 77 shows an example of a template screen for the Pore Pressure Fracture Gradient LookAhead Widget.

Figure 78 shows an example of a PPFG Time Based Widget display.

25 Figure 79A shows a row of design mode icons.

Figure 79B shows an editable form of the PPFG LookAhead Widget display.

Figure 80 shows a PPFG LookAhead Widget properties settings screen.

Figure 81A shows an example of an UnderReaming Widget display.

Figure 81B shows a row of design mode icons.

30 Figure 81C shows an editable form of the UnderReaming Widget display.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

Computing Environment Context

The following discussion is directed to various exemplary embodiments of the present invention, particularly as implemented into a situationally-aware distributed hardware and software architecture in communication with one or more operating drilling rigs. However, it is contemplated that this invention may provide substantial benefits when implemented in systems according to other architectures, and that some or all of the benefits of this invention may be applicable in other applications. For example, while the embodiments of the invention may be described herein in connection with wells used for oil and gas exploration and production, the invention also is contemplated for use in connection with other wells, including, but not limited to, geothermal wells, disposal wells, injection wells, and many other types of wells. One skilled in the art will understand that the examples disclosed herein have broad application, and that the discussion of any particular embodiment is meant only to be exemplary of that embodiment, and not intended to suggest that the scope of the disclosure, including the claims, is limited to that embodiment.

In order to provide a context for the various aspects of the invention, the following discussion provides a brief, general description of a suitable computing environment in which the various aspects of the present invention may be implemented. A computing system environment is one example of a suitable computing environment, but is not intended to suggest any limitation as to the scope of use or functionality of the invention. A computing environment may contain any one or combination of components discussed below, and may contain additional components, or some of the illustrated components may be absent. Various embodiments of the invention are operational with numerous general purpose or special purpose computing systems, environments or configurations. Examples of computing systems, environments, or configurations that may be suitable for use with various embodiments of the invention include, but are not limited to, personal computers, laptop computers, computer servers, computer notebooks, hand-held devices, microprocessor-based systems, multiprocessor systems, TV set-top boxes and devices, programmable consumer electronics, cell phones, personal digital

assistants (PDAs), network PCs, minicomputers, mainframe computers, embedded systems, distributed computing environments, and the like.

Embodiments of the invention may be implemented in the form of computer-executable instructions, such as program code or program modules, being executed by a computer or computing device. Program code or modules may include programs, objections, components, data elements and structures, routines, subroutines, functions and the like. These are used to perform or implement particular tasks or functions. Embodiments of the invention also may be implemented in distributed computing environments. In such environments, tasks are performed by remote processing devices linked via a communications network or other data transmission medium, and data and program code or modules may be located in both local and remote computer storage media including memory storage devices.

In one embodiment, a computer system comprises multiple client devices in communication with at least one server device through or over a network. In various embodiments, the network may comprise the Internet, an intranet, Wide Area Network (WAN), or Local Area Network (LAN). It should be noted that many of the methods of the present invention are operable within a single computing device.

A client device may be any type of processor-based platform that is connected to a network and that interacts with one or more application programs. The client devices each comprise a computer-readable medium in the form of volatile and/or nonvolatile memory such as read only memory (ROM) and random access memory (RAM) in communication with a processor. The processor executes computer-executable program instructions stored in memory. Examples of such processors include, but are not limited to, microprocessors, ASICs, and the like.

Client devices may further comprise computer-readable media in communication with the processor, said media storing program code, modules and instructions that, when executed by the processor, cause the processor to execute the program and perform the steps described herein. Computer readable media can be any available media that can be accessed by computer or computing device and includes both volatile and nonvolatile media, and removable and non-removable media. Computer-readable media may further comprise computer storage media and communication media. Computer storage media

comprises media for storage of information, such as computer readable instructions, data, data structures, or program code or modules. Examples of computer-readable media include, but are not limited to, any electronic, optical, magnetic, or other storage or transmission device, a floppy disk, hard disk drive, CD-ROM, DVD, magnetic disk, memory chip, ROM, RAM, EEPROM, flash memory or other memory technology, an ASIC, a configured processor, CDROM, DVD or other optical disk storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium from which a computer processor can read instructions or that can store desired information. Communication media comprises media that may transmit or carry instructions to a computer, including, but not limited to, a router, private or public network, wired network, direct wired connection, wireless network, other wireless media (such as acoustic, RF, infrared, or the like) or other transmission device or channel. This may include computer readable instructions, data structures, program modules or other data in a modulated data signal such as a carrier wave or other transport mechanism. Said transmission may be wired, wireless, or both. Combinations of any of the above should also be included within the scope of computer readable media. The instructions may comprise code from any computer-programming language, including, for example, C, C++, C#, Visual Basic, Java, and the like.

Components of a general purpose client or computing device may further include a system bus that connects various system components, including the memory and processor. A system bus may be any of several types of bus structures, including, but not limited to, a memory bus or memory controller, a peripheral bus, and a local bus using any of a variety of bus architectures. Such architectures include, but are not limited to, Industry Standard Architecture (ISA) bus, Micro Channel Architecture (MCA) bus, Enhanced ISA (EISA) bus, Video Electronics Standards Association (VESA) local bus, and Peripheral Component Interconnect (PCI) bus.

Computing and client devices also may include a basic input/output system (BIOS), which contains the basic routines that help to transfer information between elements within a computer, such as during start-up. BIOS typically is stored in ROM. In contrast, RAM typically contains data or program code or modules that are accessible

to or presently being operated on by processor, such as, but not limited to, the operating system, application program, and data.

Client devices also may comprise a variety of other internal or external components, such as a monitor or display, a keyboard, a mouse, a trackball, a pointing device, touch pad, microphone, joystick, satellite dish, scanner, a disk drive, a CD-ROM or DVD drive, or other input or output devices. These and other devices are typically connected to the processor through a user input interface coupled to the system bus, but may be connected by other interface and bus structures, such as a parallel port, serial port, game port or a universal serial bus (USB). A monitor or other type of display device is typically connected to the system bus via a video interface. In addition to the monitor, client devices may also include other peripheral output devices such as speakers and printer, which may be connected through an output peripheral interface.

Client devices may operate on any operating system capable of supporting an application of the type disclosed herein. Client devices also may support a browser or browser-enabled application. Examples of client devices include, but are not limited to, personal computers, laptop computers, personal digital assistants, computer notebooks, hand-held devices, cellular phones, mobile phones, smart phones, pagers, digital tablets, Internet appliances, and other processor-based devices. Users may communicate with each other, and with other systems, networks, and devices, over the network through the respective client devices.

By way of further background, the term "software agent" refers to a computer software program or object that is capable of acting in a somewhat autonomous manner to carry out one or more tasks on behalf of another program or object in the system. Software agents can also have one or more other attributes, including mobility among computers in a network, the ability to cooperate and collaborate with other agents in the system, adaptability, and also specificity of function (e.g., interface agents). Some software agents are sufficiently autonomous as to be able to instantiate themselves when appropriate, and also to terminate themselves upon completion of their task.

The term "expert system" refers to a software system that is designed to emulate a human expert, typically in solving a particular problem or accomplishing a particular task. Conventional expert systems commonly operate by creating a "knowledge base"

that formalizes some of the information known by human experts in the applicable field, and by codifying some type of formalism by way the information in the knowledge base applicable to a particular situation can be gathered and actions determined. Some conventional expert systems are also capable of adaptation, or "learning", from one
5 situation to the next. Expert systems are commonly considered to be in the realm of "artificial intelligence."

The term "knowledge base" refers to a specialized database for the computerized collection, organization, and retrieval of knowledge, for example in connection with an expert system. The term "rules engine" refers to a software component that executes one
10 or more rules in a runtime environment providing among other functions, the ability to: register, define, classify, and manage all the rules, verify consistency of rules definitions, define the relationships among different rules, and relate some of these rules to other software components that are affected or need to enforce one or more of the rules. Conventional approaches to the "reasoning" applied by such a rules engine in performing
15 these functions involve the use of inference rules, by way of which logical consequences can be inferred from a set of asserted facts or axioms. These inference rules are commonly specified by means of an ontology language, and often a description language. Many reasoners use first-order predicate logic to perform reasoning; inference commonly proceeds by forward chaining and backward chaining.

20 The present invention may be implemented into an expert computer hardware and software system, implemented and operating on multiple levels, to derive and apply specific tools at a drilling site from a common knowledge base, including, but not limited to, information from multiple drilling sites, production fields, drilling equipment, and drilling environments. At a highest level, a knowledge base is developed from attributes
25 and measurements of prior and current wells, information regarding the subsurface of the production fields into which prior and current wells have been or are being drilled, lithology models for the subsurface at or near the drilling site, and the like. In this highest level, an inference engine drives formulations (in the form of rules, heuristics, calibrations, or a combination thereof) based on the knowledge base and on current data.
30 An interface to human expert drilling administrators is provided for verification of these rules and heuristics. These formulations pertain to drilling states and drilling operations,

as well as recommendations for the driller, and also include a trendologist function that manages incoming data based on the quality of that data, such management including the amount of processing and filtering to be applied to such data, as well as the reliability level of the data and of calculations therefrom.

5 At another level, an information integration environment is provided that identifies the current drilling sites, and drilling equipment and processes at those current drilling sites. Based upon that identification, and upon data received from the drilling sites, servers access and configure software agents that are sent to a host client system at the drilling site; these software agents operate at the host client system to acquire data
10 from sensors at the drilling site, to transmit that data to the information integration environment, and to derive the drilling state and drilling recommendations for the driller at the drilling site. These software agents include one or more rules, heuristics, or calibrations derived by the inference engine, and called by the information integration environment. In addition, the software agents sent from the information integration
15 environment to the host client system operate to display values, trends, and reliability estimates for various drilling parameters, whether measured or calculated.

 The information integration environment is also operative to receive input from the driller via the host client system, and to act as a knowledge base server to forward those inputs and other results to the knowledge base and the inference engine, with
20 verification or input from the drilling administrators as appropriate.

 According to another aspect of the invention, the system develops a knowledge base from attributes and measurements of prior and current wells, and from information regarding the subsurface of the production fields into which prior and current wells have been or are being drilled. According to this aspect of the invention, the system self-
25 organizes and validates historic, real time, and/or near real time depth or time based measurement data, including information pertaining to drilling dynamics, earth properties, drilling processes and driller reactions. This drilling knowledge base suggests solutions to problems based on feedback provided by human experts, learns from experience, represents knowledge, instantiates automated reasoning and argumentation
30 for embodying best drilling practices.

According to yet another aspect of the invention, the system includes the capability of virtualizing information from a well being drilled into a collection of metalayers, such metalayers corresponding to a collection of physical information about the layer (material properties, depths at a particular location, and the like) and also
5 information on how to successfully drill through such a layer, such metalayers re-associating as additional knowledge is acquired, to manage real-time feedback values in optimizing the drilling operation, and in optimizing the driller response to dysfunction. Normalization into a continuum, using a system of such metalayers, enables real-time reaction to predicted downhole changes that are identified from sensor readings.

10 According to another aspect of the invention, the system is capable of carrying out these functions by creating and managing a network of software agents that interact with the drilling environment to collect and organize information for the knowledge base, and to deliver that information to the knowledge base. The software agents in this network are persistent, autonomous, goal-directed, sociable, reactive, non-prescriptive, adaptive,
15 heuristic, distributed, mobile and self-organizing agents for directing the driller toward drilling optimization, for collecting data and information, and for creating dynamic transitional triggers for metalayer instantiation. These software entities interact with their environment through an adaptive rule-base to intelligently collect, deliver, adapt and organize information for the drilling knowledge base. According to this aspect of the
20 invention, the software agents are created, modified and destroyed as needed based on the situation at the drilling rig, within the field, or at any feasible knowledge collection point or time instance within the control scope of any active agent.

According to another aspect of the invention, the software agents in the network of agents are controlled by the system to provide the recommendations to the drillers,
25 using one or more rules, heuristics, and calibrations derived from the knowledge base and current sensor signals from the drilling site, and as such in a situationally aware manner. In this regard, the software agents interact among multiple software servers and hardware states in order to provide recommendations that assist human drillers in the drilling of a borehole into the earth at a safely maximized drilling rate. The software "experts"
30 dispatch agents, initiate transport of remote memory resources, and provide transport of knowledge base components including rules, heuristics, and calibrations according to

which a drilling state or drilling recommendation is identified responsive to sensed drilling conditions in combination with a selected parameter that is indicative of a metalayer of the earth, and in combination with selected minimums and maximums of the drilling equipment sensor parameters. The software experts develop rules, heuristics, and calibrations applicable to the drilling site derived from the knowledge base that are transmitted via an agent to a drilling advisor application, located at the drilling site, that is coupled to receive signals from multiple sensors at the drilling site, and also to one or more servers that configure and service multiple software agents.

According to another aspect of the invention, the system is applied to circulation actors to optimize circulation, hydraulics at the drill bit point of contact with the medium being drilled, rationalization of distributed pressure and temperature measurements and to provide recommendations to avoid or recover from loss of circulation events.

In addition, while this invention is described in connection with a multiple level hardware and software architecture system, in combination with drilling equipment and human operators, it is contemplated that several portions and facets of this invention are separately and independently inventive and beneficial, whether implemented in this overall system environment or if implemented on a stand-alone basis or in other system architectures and environments. Those skilled in the art having reference to this specification are thus directed to consider this description in such a light.

Well Advisor System and Consoles

Figure 1 illustrates a workstation showing a well advisor system **100** in accordance with various exemplary embodiments of the present invention. The workstation comprises one or more computers or computing devices, and may be located at a well site or remotely. The system can be implemented on a single computer system, multiple computers, a computer server, a handheld computing device, a tablet computing device, a smart phone, or any other type of computing device.

The system is in communication with and receives input from various sensors **120, 130**. In general, the system collects real-time sensor data sampled during operations at the well site, which may include drilling operations, running casing or tubular goods, completion operations, or the like. The system processes the data, and provides nearly

instantaneous numerical and visual feedback through a variety of graphical user interfaces (GUIs).

The GUIs are populated with dynamically updated information, static information, and risk assessments, although they also may be populated with other types of information, as described below. The users of the system thus are able to view and understand a substantial amount of information about the status of the particular well site operation in a single view, with the ability to obtain more detailed information in a series of additional views.

In one embodiment, the system is installed at the well site, and thus reduces the need to transmit data to a remote site for processing. The well site can be an offshore drilling platform or land-based drilling rig. This reduces delays due to transmitting information to a remote site for processing, then transmitting the results of that processing back to the well site. It also reduces potential inaccuracies in the analysis due to the reduction in the data being transmitted. The system thus allows personnel at the well site to monitor the well site operation in real time, and respond to changes or uncertainties encountered during the operation. The response may include comparing the real time data to the current well plan, and modifying the well plan.

In yet another embodiment, the system is installed at a remote site, in addition to the well site. This permits users at the remote site to monitor the well-site operation in a similar manner to a user at the well-site installation.

The architecture of the system workstation shown in Figure 1 is only one example of multiple possible architectures. In one embodiment, the workstation comprises one or more processors or microprocessors **102** coupled to one or more input devices **104** (e.g., mouse, keyboard, touchscreen, or the like), one or more output devices **106** (e.g., display, printer, or the like), a network interface **108**, and one or more non-transitory computer-readable storage devices **110**. In some embodiments, the input and output devices may be part of the workstation itself, while in other embodiment such devices may be accessible to the workstation through a network or other connection.

In one exemplary embodiment, the network interface may comprise a wire-based interface (e.g., Ethernet), or a wireless interface (e.g., Bluetooth, wireless broadband, IEEE 802.11x WiFi, or the like), which provides network connectivity to the workstation

and system to enable communications across local and/or wide area networks. For example, the workstation can receive portions of or entire well or cementing plans or geological models **117** from a variety of locations.

The storage devices **110** may comprise both non-volatile storage devices (e.g., flash memory, hard disk drive, or the like) and volatile storage devices (e.g., RAM), or combinations thereof. The storage devices store the system software **115** which is executable by the processors or microprocessors to perform some or all of the functions describe below. The storage devices also may be used to store well plans, geological models **117**, configuration files and other data.

In some exemplary embodiments, the system is a web-enabled application, and the system software may be accessed over a network connection such as the Internet. A user can access the software via the user's web browser. In some embodiments, the system performs all of the computations and processing described herein and only display data is transmitted to the remote browser or client for rendering screen displays on the remote computer. In other embodiments, the remote browser or software on the remote system performs some of the functionality described herein.

Sensors **120, 130** may be connected directly to the workstation at the well site, or through one or more intermediate devices, such as switches, networks, or the like. Sensors may comprise both surface sensors **120** and downhole sensors **130**. Surface sensors include, but are not limited to, sensors that detect torque, revolutions per minute (RPM), and weight on bit (WOB). Downhole sensors include, but are not limited to, gamma ray, pressure while drilling (PWD), and resistivity sensors. The surface and downhole sensors are sampled by the system during drilling or well site operations to provide information about a number of parameters. Surface-related parameters include, but are not limited to, the following: block position; block height; trip/running speed; bit depth; hole depth; lag depth; gas total; lithography percentage; weight on bit; hook load; choke pressure; stand pipe pressure; surface torque; surface rotary; mud motor speed; flow in; flow out; mud weight; rate of penetration; pump rate; cumulative stroke count; active mud system total; active mud system change; all trip tanks; and mud temperature (in and out). Downhole parameters include, but are not limited to, the following: all FEMWD; bit depth; hole depth; PWD annular pressure; PWD internal pressure; PWD

EMW; PWD pumps off (min, max and average); drill string vibration; drilling dynamics; pump rate; pump pressure; slurry density; cumulative volume pumped; leak off test (LOT) data; and formation integrity test (FIT) data. Based on the sensed parameters, the system causes the processors or microprocessor to calculate a variety of other parameters, as described below.

Figure 2 provides an example of the system software architecture. The system software comprises a database/server **150**, a display or visualization module **152**, one or more smart agents **154**, one or more templates **156**, and one or more "widgets" **160**. The database/server **150** aggregates, distributes and manages real-time data being generated on the rig and received through the sensors. The display or visualization module **152** implements a variety of graphical user interface displays, referred to herein as "consoles," for a variety of well site operations. The information shown on a console may comprise raw data and calculated data in real time.

Templates **156** defining a visual layout may be selected or created by a user to display information in some portions of or all of a console. In some embodiments, a template comprises an XML file. A template can be populated with a variety of information, including, but not limited to, raw sensor data, processed sensor data, calculated data values, and other information, graphs, and text. Some information may be static, while other information is dynamically updated in real time during the well site operation. In one embodiment, a template may be built by combining one or more display "widgets" **160** which present data or other information. Smart agents **154** perform calculations based on data generated through or by one or more sensors, and said calculated data can then be displayed by a corresponding display widgets.

In one exemplary embodiment, the system provides the user the option to implement a number of consoles corresponding to particular well site operations. In one embodiment, consoles include, but are not limited to, rig-site fluid management, BOP management, cementing, and casing running. A variety of smart agents and other programs are used by the consoles. Smart agents and other programs may be designed for use by a particular console, or may be used by multiple consoles. A particular installation of the system may comprise a single console, a sub-set of available consoles, or all available consoles.

In various embodiments, smart agents in the system can be managed with a toolbar **200** (as seen in Figure 3) or by a drop-down menu **210** (as seen in Figure 4), which may be activated by clicking on a smart agent icon, right-click on a mouse button, or the like. Functions include, but are not limited to, adding a new agent **202a**, copying an agent configuration **202b**, importing **202c** or exporting **202d** an agent configuration file, deleting an agent **202e**, refreshing the status of an agent **202f**, or starting or stopping an agent.

For certain smart agents, an agent configuration file must be imported **220** to use the smart agent, as seen in Figure 5. In one embodiment, configuration files are denominated as *.agent files. Selecting the import option provides the user the option to enter the configuration file name, or browse to a location where the configuration file is stored.

Agents can be configured, and configuration files created or modified, using the agent properties display, as seen in Figure 6. The same properties are used for each agent, whether the agent configuration is created or imported. The specific configuration information (including, but not limited to, parameters, tables, inputs, and outputs) varies depending on the smart agent. Parameters **232** represent the overall configuration of the agent, and include basic settings including, but not limited to, start and stop parameters, tracing, whether data is read to a log, and other basic agent information. Tables **234** comprise information appearing in database tables associated with the agent. Inputs **236** and outputs **238** are the input or output mnemonics that are being tracked or reported on by the agent. For several embodiments, in order for data to be tracked or reported on, each output must have an associated output. This includes, but is not limited to, log and curve information.

Users can export an agent configuration file for other users to import and use. The export configuration button in the toolbar can be used for a selected agent, or the agent can be right-clicked on and the export configuration option **240** chosen, as shown in Figure 7. The user confirms **242** the action to download the file to a local hard drive or other file storage location, as seen in Figure 8. The user may name the file as desired. Once downloaded, the file can be copied, emailed, or otherwise transferred to another user for importation and use.

Copying an agent configuration **244**, as seen in Figure 9, allows the user to copy an agent configuration file and rename it. This saves the user from having to perform an initial setup of the agent properties or create a new configuration file multiple times, if the user has agent configurations that are similar. In one embodiment, the user right
5 clicks on the desired agent, selects the copy option, and identifies the wellbore for which the configuration is to be used. The user can name or rename the new agent configuration.

Casing Running Console

The GUI display for an embodiment of a Casing Running Console is shown in
10 Figure 10. The Casing Running Console is used to monitor the running and installation of casing and tubular goods in a wellbore. In the embodiment shown, the Casing Running Console comprises two agents (Hookload Signature Agent, and Zone Agent), and at least four widgets (Trip Schedule, Drag Chart, Hookload Signature, and Zone). The smart agents receive and pass information to these programs.

15 The Casing Running smart agents must be configured with parameter, table, input and output settings for the desired operation. Figure 11 shows an example of an input screen for inputting or displaying this configuration information for the Hookload Signature Agent.

The Hookload Signature Agent outputs data to several output logs (e.g.,
20 HookloadTcrcTime). The Zone Agent reads information from the output logs and processes it for display using the Zone Widget (described below). Figure 12 shows an example of an input screen for inputting or displaying this configuration information for the Zone Agent.

Figure 13 shows an example of a visual display produced by the Trip Schedule
25 Widget. The Trip Schedule Widget calculates and displays average trip time in **272** and out **274** during the casing running operation. It requires that the Hookload Signature Agent be running, and that the appropriate output logs are being created (e.g., HookloadTcrcTime, and TripSchedule).

An instance of the Trip Schedule Widget can be created by clicking the "Add Log
30 Widget" icon in the console menu. The user is then presented with the "General" tab settings screen **280** as seen in Figure 14, where the user can set a variety of parameters

for the display, including, but not limited to, plot orientation, auto-scrolling, axis labels and scaling, zoom, number and size of tracks, and width and color of gridlines and tickmarks.

Examples of the "Tracks and Curves" settings screens are seen in Figures 15-18.

5 Figure 15 and 17 show Appearance settings screens. Figures 16 and 18 show Backplotting setting screens. Users can add a trip-in schedule curve, trip-out schedule curve, VSO_AVG curve, VPU_AVG curve, or other curve as desired.

Figure 19 shows an example of a visual display provided by the Drag Chart Widget. It displays drag chart data on several tracks. It requires that the Hookload
10 Signature Agent be running, and that the appropriate output logs are being created (e.g., HookloadTcrTime, HookloadFilter, and DragResults). An instance of the Drag Chart Widget is created in the same manner as the Trip Schedule Widget, and presents corresponding "General" and "Tracks and Curves" screens, as shown in Figures 20-23. Curve tracks that may be added include, but are not limited to, drag results curves,
15 hookload and block speed curves, and static drag curves.

Figure 24 shows an example of a visual display provided by the Hookload Signature Widget. The Hookload Signature Widget analyzes hookload and block height data while doing casing runs. It also provides a historical view, where previous runs can be compared against each other to look at overall performance and tendencies. Clicking
20 on one of the thumbnail images **310** causes a larger view **312** of that image to appear. The Hookload Signature Widget uses a specially designed WITSML log produced by the Hookload Signature Agent.

The plot line in the Hookload Signature Widget displays several symbols referred to as "events." Each symbol represents a specific event. In one exemplary embodiment,
25 the symbols are as follows (green triangle, green circle, green square, red circle, red square):

Symbol	Event Code	TCRC Log Mnemonic	Description
	7	HKSOmin	Minimum Dynamic Slack Off Hookload
	8	HKSOavg	Average Dynamic Slack Off Hookload
	9	HKPUmax	Maximum Dynamic Pick Up Hookload
	10	SDSO	Static Drag (down force)
	11	SDPU	Static Drag (up force)

As with the widgets described above, the user can change labels, curve colors, line thickness, background color, grid lines, axis and axis interval, scroll mode, curve offset values, the location of the history area, and the number of history boxes and navigation elements, among other parameters. An example of the general and appearance settings screens are shown in Figures 25 and 26.

Both the left and right axes can be assigned to a curve. In one embodiment, the left axis is most commonly used as the real-time hookload curve, while the right axis is usually the real-time block height curve.

Figures 27A and 27B show several examples of a visual display produced by the Zone Widget. The Zone Widget is a performance metric program designed to display the current status of the selected parameters based on pre-established threshold values, which may be user defined. The visual display is the form of a polygon (symmetric or asymmetric) with a number of vertices, with each vertex representing a particular parameter. The vertex may be labeled, as shown. A similar number of threshold values are established for each parameter, and the scale is normalized so that the corresponding threshold appears to be the same distance along a line between the center of the polygon and the respective vertex.

Examples of parameters that may be displayed include, but are not limited to, High Hookload, Hookload Variation, Low Hookload, Static Friction, TripIn Speed, and TripOut Speed.

In one exemplary embodiment, the visual display has three areas, which may be colored or patterned: normal (green); warning (amber); and alert (red). The background area in the polygon is colored or patterned accordingly. The value of a particular parameter in real-time is plotted as a point along its respective line (typically with the

base normal value in the center, with warning and alert thresholds proceeding outward), and can be plotted in real time or by using the most recent value for the parameter available. The plotted points of adjacent parameters are connected by a straight line on the display, the total effect comprising a polygon of changing size and shape over time that overlays the background. The user can thereby quickly determine if any parameters are in a warning or alert status, and take appropriate action. Historical data may be stored, so that a user can view the history of the parameters over time by viewing the change in shape and size of the parameter polygon.

As seen in Figure 28, the user can change the number of vertices **360** (shown as 3 to 8, although a lower or higher range can be used), designate the data source or parameter to be used for each vertex, set the threshold levels, level of transparency, and other parameters. The user can group particular parameters together (e.g., on one side of the polygon), or arrange them in any other manner desired.

In one embodiment, the normal (green) to warning (amber) threshold is normalized to be at 33% of the distance from the center to the vertex, while the warning (amber) to alert (red) threshold is set at 66% **362**. This results in the normal (green) area being visually twice the size of the other areas. Parameter values are expected to most often occur in this zone, and this visual effect helps the user to see changes and fluctuations with this normal value range.

In one embodiment, the background colors may be brighter than the parameter polygon. The parameter polygon overlay may be wholly or partially transparent. Alternatively, the background colors may be lighter or more faded, so that parameter polygon shows as a brighter color when it overlays a particular area. Thus, a portion of the parameter polygon will show as a bright yellow or red around a parameter whose value has passed those thresholds, thereby drawing the attention of the user. In yet another embodiment, the background may not be colored, with the parameter polygon showing as a bright color (e.g., green, amber, red) when it overlays a particular area.

Other colors may be used. Similarly, other forms of alert may be provided through the alert tab. For example, the vertex label can change to an amber or red color when the parameter passes the respective threshold. The vertex label or the plotted parameter point, or both, also may blink or flash periodically, to draw the attention of the

user. The frequency of the blinking or flashing may vary depending on the actual parameter value. An audible alert or alarm also may be used. And in yet another embodiment, the system may automatically send an email, text, phone call, or other form of notice to a user (or a plurality of users) when certain conditions are met (such as two or more particular parameters exceeding the alert threshold for more than a set period of time).

Cementing Console

The GUI display for an embodiment of a Cementing Console is shown in Figure 29. The Cementing Console is used to manage and monitor cement jobs within the wellbore. In the embodiment shown, the Cementing Console comprises a configuration screen and at least four widgets (Frequency Analysis, Plan Tracking, Pumping Stage, and 2D Wellbore Schematic), which allow the user to monitor fluid displacement, densities, pressure, and pump plans in real-time, and compare the real-time data to a cementing plan.

Figure 30 shows an example of a Cementing Console configuration screen, which is the main entry point for a cement job. Cement jobs can be configured and planned using this screen, although a stored configuration or plan file can be uploaded in some embodiments. The user can input or modify, validate, and save the various parameters **380** shown.

A new Cementing Console configuration can be created in the manner described above for smart agent configuration. In one exemplary embodiment, the user creates the new configuration by right clicking on the "Cementing Console" node in the system map, and selecting "Add" **390**, as shown in Figure 31. This brings up the wellbore selector dialog window, as seen in Figure 32, where the user selects the wellbore in which the cement job is to be performed. In the embodiment shown, there is only one cementing configuration file per wellbore, although multiple cement jobs can be configured within that one configuration file. Alternatively, each cement job may have its own configuration file.

The user is then shown the currently active wellbore geometry object with all of its wellbore geometry sections (i.e., the latest object with "Item State" set to "actual" and the newest creation date **394**), as seen in Figure 33. This shows the current geometry of

various sections of the wellbore. The user can use the WITSML tree in the side bar of the display to confirm what object is currently in use. The user can select the wellbore geometry objects on the desired wellbore, and view the detail information box section to see the Item State and creation date. The user can also confirm the unique identifier ("Uid") **396** of the object in use, which can be displayed in the header of cement jobs section of the configuration screen as well as in the information box.

New cement jobs and plans should be created on open hole sections within the wellbore. In one embodiment, if an open hole section is unavailable in the wellbore geometry object, a new cement job or plan cannot be configured. Thus, the wellbore geometry object should be updated well in advance of the cement job, and ideally, right after the new wellbore section has been drilled. The wellbore geometry object can be updated through the WITSML WellboreGeometry editor, which can be initiated through the system's WITSML tree in the side bar **410**, as seen in Figure 34. Once the wellbore geometry object has been updated, the system replicates the changes to the server and various widgets and editors in the system. In one embodiment, the cementing configuration screen must be manually refreshed to reflect any change made to the wellbore geometry object. The cementing configuration screen does not modify or change the wellbore geometry data itself, and only reads the data.

When an open hole section exists in the wellbore geometry object, and the cementing configuration screen has been refreshed (if needed), a "Create New Cement Plan" button or icon **420** is enabled on the open hole row (or rows) of the cement jobs grid, as seen in Figure 35. When a plan is created for that section of the wellbore, a unique identifier replaces the create plan button.

Clicking the "Create New Cement Plan" button **420** enables the user to create and configure the cement plan, and also configure the cementing smart agent. The cement plan is configured in the "cement component" section **422** of the configuration screen, as seen in Figure 36. Components can be added or removed by clicking the appropriate buttons or icons (in one embodiment, a green "+" button is used to add components, and a red "X" button is used to delete components).

The "Stage #" column **424** indicates the order in which the components will be pumped in the cementing job (e.g., starting with 1). For each component, at least the

following parameters must be input: component or stage type, planned volume, planned density, the pump the component will be pumped from, and planned pumped rate. Units for these parameters are displayed in the headers for each column, and are automatically set based upon the global system settings for the user and the type of unit. Users can change the units by using the "Tools and Settings" option from the system menu, and select "Unit set" from the dialog window **430**, as shown in Figure 37. For example, the user can change the planned density unit of measure ("uom") **432** default to the desired units ("lbm/galUS" **434**, for example, as seen in Figure 37), as well as the number of default decimals for the value. Once applied or accepted, the main screen will update accordingly.

In one embodiment, the unit types (as shown in Figure 37) for the basic set of cementing components are as follows:

Planned Volume:	volumeUom
Planned Density:	densityUom
Planned Pump Rate:	volumeFlowRateUom
Casing OD:	DI - Diameter
Casing ID:	DI - Diameter
MD Top:	LD - Length and depth

Once the user has configured all stages of the cementing job, the validate button is used to check all of the entries to ensure validity. As seen in Figure 38, an error icon (in this example, an exclamation point **440**, although other icons can be used), is displayed in the cell or cells that contain errors. A short error message can be displayed by hovering the mouse or pointer over an icon. As seen in Figure 39, a summary total of validation errors is displayed in the status information bar **446** at the bottom of the screen. Hovering the mouse or pointer over this status bar will display the error messages for all validation errors.

After correcting the errors, the user can re-validate the input, and then save the cement job configuration.

The cementing smart agent is configured in the "agent configuration" section of the screen. There are several types of configuration data displayed. Parameters (indicated by orange arrows in this example) are input variable to the smart agent. In the

input sections (indicated by green arrows in this example), the user selects the input source data for the agent (see Figure 40). The output data section (indicated by blue arrows in this example) shows all the outputs from the smart agent (see Figure 41). In the embodiment shown, the outputs are static, and do not need to be configured.

5 Once the cement job has been configured, validated and saved, the system replicates the cement plan and configuration to the appropriate servers in the system. After replication, the cementing smart agent can be started and stopped as needed. Once started, the status is updated in the upper left corner of the configuration screen as well as in the tree view (as seen in Figure 42). The status can be manually refreshed by right
10 clicking the agent node and selecting "Refresh status" **460** in the menu.

 Figure 43 shows an example of a visual display provided by the Frequency Analysis Widget. The Frequency Analysis Widget allows the user to do a frequency distribution of data in real-time by monitoring the density of the various fluids that are pumped during the cement job, and measuring those densities against planned densities
15 **468**. Several relevant statistics **470** can be calculated and displayed, as shown.

 In one embodiment, the Frequency Analysis Widget may be configured through the Properties dialog, which may be accessed by right-clicking on the display tab and selecting "Edit display," **480** as seen in Figure 44A. A row of design mode icons is presented, and the user can then select the Frequency Analysis Widget icon **482**, as seen
20 in Figure 44B. This causes an editable form of the widget to appear (in the embodiment shown in Figure 45, a red line **488** appears around the widget display, indicating it can be edited). Right-clicking in the widget and selecting "Properties" in the menu displays the "General" and "Statistics" tabs, as seen in Figures 46 and 47.

 The Plan Tracking Widget allows the user to compare real-time data curves
25 against planned curves. The data can be monitored based on elapsed time or cumulative volume. The Plan Tracking Widget is used to set up the Cumulative Volume Widget, Pumping Schedule Widget, and Surface Pressure widgets, examples of which are seen in Figures 29 and 48 (and described elsewhere herein). The Plan Tracking Widget can run with the cementing agent output, although it also can be run without it.

30 The Plan Tracking Widget may be configured through the Properties dialog in a similar manner to the Frequency Analysis Widget (i.e., select "Edit display" and select

the Plan Tracking Widget icon **490**, as seen in Figure 49A). The editable form of the Plan Tracking Widget is shown in Figure 49B. Selecting "Properties" from the menu displays the "General" and "Annotation" tabs, as seen in Figures 50 and 51.

If the "sync with cement activity" option is selected, the widget will automatically start drawing real-time data when the cementing smart agent has detected that the cement job has started. It also will annotate the widget displays in the form of background colors representing the various cement components being pumped. If it is not selected, the user can manually start the real-time plot by selecting the "Show actual curve" option from the context menu, and the widget will plot real-time data from that moment. If the "sync with cement activity" option is selected, the "Pattern mapping" tab or page also become enabled. This allows the user to select the pattern mapping to use.

Figure 52 shows an example of a visual display provided by the Pumping Stage Widget, which gives an overview of the cement job and tracks the volume pumped for each component. It also displays information about what pump is currently being used, and the current state of the cement job. Each of the value sections at the top of the display can be customized to show any real-time data, some of which is obtained from the cementing smart agent by default.

The Pumping Stage Widget may be configured through the Properties dialog in a similar manner to the Frequency Analysis Widget (i.e., select "Edit display" and select the Pumping Stage Widget icon **510**, as seen in Figure 53A). The editable form of the Pumping Stage Widget is shown in Figure 53B. Selecting "Properties" from the menu displays the "General" and "Pattern Mapping" tabs, as seen in Figures 54 and 55.

If "Use cement mapping" is chosen as an option, the widget will use colors in the mapping file to file in the displacement volumes in the widget display. If the volume exceeds the planned volume, a red rectangle (or other warning indicator) is displayed on the end of the displacement bar. If not chosen as an option, the widget display will use a green color while the volume is less than the planned volume, as seen in Figure 52. If the volume exceeds the planned volume, the displacement bar will turn red. Other forms of indicating a volume-exceeded condition may be used.

Figure 56 shows an example of a visual display provided by the 2D Wellbore Schematic Widget. This widget allows drilling and cementing activities to be visualized

in real time. In the example shown, a vertical track showing lithography **550** is on the left, and the two-dimension view of the wellbore. In one embodiment, the two-dimensional display has a horizontal scale of equivalent departure ("ED") **552** and a vertical scale of true vertical depth **554**. The display comprises two outer deviated log tracks **558a, b**, and a central inner track **560** that displays lithography, well-bore geometry, tubular components, the drill bit and string, caliper (representing the diameter of the hole while being drilled), and annotations (as overlaid view).

The 2D Wellbore Schematic Widget may be configured through the Properties dialog in a similar manner to the Frequency Analysis Widget and other widgets described above (i.e., select "Edit display" and select the 2D Wellbore Schematic Widget icon **570**, as seen in Figures 57A and B). The editable form of the 2D Wellbore Schematic Widget is shown in Figure 58. Selecting "Properties" from the menu displays the "General," "Deviated Logs," and "Cement" tabs, as seen in Figures 59-61.

The cementing phase can be activated once a drilling phase is finished and a cement job is starting. The cement is represented by colored sections (e.g., rectilinear) that move down inside the tubular components while descending, and outside the tubular components and inside the caliper curve when ascending. This is updated in real-time, allowing the user to visually monitoring the progress of the cementing job in relation to the wellbore. Multiple cement components can be represented.

The user can actively manipulate the widget display, allowing panning, scrolling, zooming or similar actions. Examples of the display using these functions are shown in Figures 62 (zoomed in to top of well), 63 (zoomed out to show entire wellbore), and 64 (zoomed into the bottom hole assembly).

Rig Site Fluid Management Console

The GUI display for an embodiment of a Rig Site Fluid Management Console is shown in Figure 65. The Rig Site Fluid Management Console is used to monitor real-time data to provide early warnings and intelligence to users during all drilling and well construction activities and operations. More particularly, the console aggregates and presents the data in manner to assist a user to visualize and interpret the data, and identify and predict fluid gains and losses during operations. In the embodiment shown, the Rig Site Fluid Management Console comprises smart agents and nine widgets (2D Wellbore

Schematic, Zone, Gas Monitor, Flow Back, Pressure While Drilling, Fluid Monitoring Configuration, Log Widget Template configurations, Pore Pressure Fracture Gradient Look-Ahead, and Under Reaming).

The Zone Widget and 2D Wellbore Schematic Widgets have been discussed in detail above.

Figure 66 shows an example of a visual display provided by the Gas Monitor Widget, which monitors the surface gas response that may be associated with connection events or when the pumps are switched off. The widget allows pumps with switched-off activities to be visualized in historical and real-time views. In the embodiment shown, the display is two-dimensional, with a horizontal scale of equivalent time, and a vertical scale of true total gas. The total gas volume versus time for the latest and several preceding connections of pump on/off events can be plotted (Figure 66 shows the latest and the four previous events). In one embodiment, plotting begins five minutes (by default, although another time period may be chosen) before the fluid interface event reaches the surface (at time "0") and continues for ten minutes after (by default, although another time period may be chosen).

In one embodiment, the Gas Monitor Widget may be configured through the Properties dialog, which may be accessed by right-clicking on the display tab and selecting "Edit display," **700** as seen in Figure 67A. A row of design mode icons is presented, and the user can then select the Gas Monitor Widget icon **702**, as seen in Figure 67B. This causes an editable form of the widget to appear (in the embodiment shown in Figure 68, a red line appears around the widget display, indicating it can be edited). Right-clicking in the widget and selecting "Properties" in the menu displays the widget settings dialog window, as seen in Figure 69.

Figure 70 shows an example of a visual display provided by the Flow Back Widget, which visually represents the time-based horizontal log plotting of total mud flow back volume during connection events and when mud pumps are shut off. In the embodiment shown, the chart displays curves for flow back volume versus time. As with the Gas Monitor Widget, the curves for the latest and several preceding events can be plotted, and plotting may begin five minutes (or other selected time) before the event and continues for ten minutes (or other selected time) after the event.

As seen in Figure 70, the display also comprises a text readout **720** comprising details about a particular plotted curve (the latest curve, by default, although other curves can be chosen). These details include, but are not limited to, time, hole depth, bit depth, total volume gained, expected volume game, time taken from pumps off to a "no-flow" state, volume gained three minutes after reaching the no-flow state, trip tank volume (or active pit volume), pump name, and a description of the curve.

The display contains an indication of where the flow back is redirected to. This indicates the current status of the mud flow, i.e., whether it is redirected to the "active pit" or to the "trip tank." This information is initially obtained from the latest pump off events in the system, but the user also can choose either option. Based on the selection, the active pit or trip tank curves will be plotted in the chart. Changes in this option are saved in a log file, and will be used as input for a marker info tracker smart agent.

In one embodiment, there are two different modes of display that can be selected: monitoring mode, and fingerprinting mode. The monitoring mode is the default. In monitoring mode, both historic and real-time curves are plotted. The first historic curve will be marked as the default fingerprinted curve in the case there is no SPA-defined fingerprint curve or aggregated fingerprint curve. The fingerprinting mode renders only real-time curves for only one active pump. The user is prompted to confirm or select the active pump before the curves are plotted. The user can click the "New Fingerprint" button to render the real-time curves for different active pumps.

The navigation buttons are used to navigate between the curves rendered in the chart. In one embodiment, the navigation buttons are enabled only when the current curve count is greater than the number of recent pump off events to be monitored entered as an option through the properties dialog. The "Previous" button causes the widget to render the curve for the previous pump off event, while the "Next" button causes the widget to render the curve for the next pump off event.

The Flow Back Widget may be configured through the Properties dialog in a similar manner to the Gas Monitor Widget (i.e., select "Edit display" and select the Flow Back Widget icon **730**, as seen in Figures 71A and B). The editable form of the Flow Back Widget is shown in Figure 71C. Selecting "Properties" from the menu displays the settings dialog window, as seen in Figure 72.

Figure 73 shows an example of a visual display provided by the Pressure While Drilling Widget. The display shows the time-based pressure response curves for Equivalent Circulating Density (ECD) and Equivalent Static Density (ESD) that result from switching the mud pumps from on to off then on again. This widget allows "switched off" and "switched on" pump activities to be visualized in historical and real-time views. In the embodiment shown, the display is two-dimensional, with a horizontal scale of equivalent time, and a vertical scale of true ECD/ESD. ECD and ESD versus time for the latest and several preceding connections of pump on/off events can be plotted (Figure 73 shows the latest and the four previous events). In one embodiment, plotting begins five minutes (by default, although another time period may be chosen) before the fluid interface event reaches the surface (at time "0") and continues for ten minutes after (by default, although another time period may be chosen).

The display also comprises a text readout (or data view) comprising details about a particular plotted curve (the latest curve, by default, although other curves can be chosen). These details include, but are not limited to, pump off time, pump on time, bit depth, hole depth, compliancy indicator, and a description of the curve.

The Pressure While Drilling Widget may be configured through the Properties dialog in a similar manner to the Gas Monitor Widget (i.e., select "Edit display" and select the Pressure While Drilling icon **760**, as seen in Figure 74A). The editable form of the Pressure While Drilling Widget is shown in Figure 74B. Selecting "Properties" from the menu displays the settings dialog window, as seen in Figure 75.

The Fluid Monitoring Configuration Widget, as seen in Figure 76A, allows the user to configure the Flow In Flow Out (FIFO) Widget. The Fluid Monitoring Configuration Widget may be configured through the Properties dialog in a similar manner to the Gas Monitor Widget (i.e., select "Edit display" and select the Fluid Monitoring Configuration Widget icon **770**, as seen in Figure 76B). The editable form of the Fluid Monitoring Configuration Widget is shown in Figure 76C. The top button allows the user to reset the cumulative gains and losses to zero. The "Change Threshold" button opens a configuration window (Figure 76D) to specify threshold values for warnings and alarms that will appear in the Flow In Flow Out Widget.

The Pore Pressure Fracture Gradient (PPFG) LookAhead Widget is used during drilling phases to help monitor ECD, ESD, and Mud Weight, and compare them against pore pressure and fracture gradient values determined prior to drilling. There are several variations of real-time pore pressure measurements, including, but not limited to, pore pressure resistivity (PPRes), pore pressure dT (PPdT), pore pressure dTs (PPdTs), and pore pressure Dxc (PPdxc).

The PPFG LookAhead widget allows the user to monitor the gamma ray and/or rate of penetration, which can provide sand or shale formation visibility. The porosity of the formation can be determined by monitoring the resistivity, dT, dTs, and Dxc across the entire depth. Warnings and alarms are displayed when there is a risk of gain or loss in the real-time or lookahead regions.

In one embodiment, as seen in Figure 77, the widget has five templates that can be imported from the Log Widget property page to display different tracks. These templates are "PPRes," "PPdT," "PPdTs," "PPdxc," and "PPFGCombo." Each has ten tracks, as follows:

A. PPRes

1. Track1 - A curve track displaying the Gamma Ray.
2. Track 2 – A lithology track displaying the sand or shale formation across the depth.

3. Track 3 – A curve track displaying the Resistivity and Resistivity in Shale formation.

4. Track 4 – A curve track displaying multiple curves which allow the user to monitor ECD, ESD and Mud Weight, and compare them against maximum Predrill Pore Pressure and/or minimum predrill Fracture Gradient and Real-time Pore Pressure for Resistivity. Curves displayed in this track are: Max Pore Pressure (Predrill); Min Pore Pressure (Predrill); Most likely Pore Pressure (Predrill); Fracture Gradient for Shale (Predrill); Fracture Gradient for Sand (Real-time); Fracture Gradient for Shale (Real-time); Fracture Gradient for Sand (Predrill); Pore Pressure Resistivity (Real-time); ECD (Real-time); ESD (Real-time); Mud weight (Real-time);

5. Track 5 – A curve track displaying Total Gas Volume and the Flow In Temperature. The use also can configure any other curve.

6. Track 6 – A status track displaying a warning or alarm when there is risk of gain. In one embodiment, the color red indicates an alarm, while yellow is the warning. Green means there is no risk.

7. Track 7 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of loss.

8. Track 8 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of gain in the look-ahead region.

9. Track 9 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of loss in the look-ahead region.

10. Track 10 - A status track, similar to Track 6, displaying a warning or alarm when the real time resistivity is beyond a certain threshold applied on the expected resistivity.

B. PPdT

1. Track1 - A curve track displaying the Gamma Ray.

2. Track 2 – A lithology track displaying the sand or shale formation across the depth.

3. Track 3 – A curve track displaying the dT and dT in Shale formation.

4. Track 4 – A curve track displaying multiple curves which allow the user to monitor ECD, ESD and Mud Weight, and compare them against maximum Predrill Pore Pressure and/or minimum predrill Fracture Gradient and Real-time Pore Pressure for dT. Curves displayed in this track are: Max Pore Pressure (Predrill); Min Pore Pressure (Predrill); Most likely Pore Pressure (Predrill); Fracture Gradient for Shale (Predrill); Fracture Gradient for Sand (Real-time); Fracture Gradient for Shale (Real-time); Fracture Gradient for Sand (Predrill); Pore Pressure dT (Real-time); ECD (Real-time); ESD (Real-time); Mud weight (Real-time);

5. Track 5 – A curve track displaying Total Gas Volume and the Flow In Temperature. The use also can configure any other curve.

6. Track 6 – A status track displaying a warning or alarm when there is risk of gain. In one embodiment, the color red indicates an alarm, while yellow is the warning. Green means there is no risk.

7. Track 7 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of loss.

8. Track 8 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of gain in the look-ahead region.

5 9. Track 9 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of loss in the look-ahead region.

10. Track 10 - A status track, similar to Track 6, displaying a warning or alarm when the real time dT is beyond a certain threshold applied on the expected dT.

C. PPdTs

10 1. Track1 - A curve track displaying the Gamma Ray.

2. Track 2 – A lithology track displaying the sand or shale formation across the depth.

3. Track 3 – A curve track displaying the dTs and dTs in Shale formation.

4. Track 4 – A curve track displaying multiple curves which allow the user to
 15 monitor ECD, ESD and Mud Weight, and compare them against maximum Predrill Pore Pressure and/or minimum predrill Fracture Gradient and Real-time Pore Pressure for dTs. Curves displayed in this track are: Max Pore Pressure (Predrill); Min Pore Pressure (Predrill); Most likely Pore Pressure (Predrill); Fracture Gradient for Shale (Predrill); Fracture Gradient for Sand (Real-time); Fracture Gradient for Shale (Real-time); Fracture
 20 Gradient for Sand (Predrill); Pore Pressure dTs (Real-time); ECD (Real-time); ESD (Real-time); Mud weight (Real-time);

5. Track 5 – A curve track displaying Total Gas Volume and the Flow In Temperature. The use also can configure any other curve.

6. Track 6 – A status track displaying a warning or alarm when there is risk of
 25 gain. In one embodiment, the color red indicates an alarm, while yellow is the warning. Green means there is no risk.

7. Track 7 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of loss.

8. Track 8 - A status track, similar to Track 6, displaying a warning or alarm when
 30 there is risk of gain in the look-ahead region.

9. Track 9 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of loss in the look-ahead region.

10. Track 10 - A status track, similar to Track 6, displaying a warning or alarm when the real time dTs is beyond a certain threshold applied on the expected dTs.

5 D. PPdxc

1. Track 1 - A curve track displaying the Gamma Ray.

2. Track 2 - A lithology track displaying the sand or shale formation across the depth.

3. Track 3 - A curve track displaying the dxc and dxc in Shale formation. Dxc
10 may be calculated using the D-Exponent agent.

4. Track 4 - A curve track displaying multiple curves which allow the user to monitor ECD, ESD and Mud Weight, and compare them against maximum Predrill Pore Pressure and/or minimum predrill Fracture Gradient and Real-time Pore Pressure for dxc. Curves displayed in this track are: Max Pore Pressure (Predrill); Min Pore Pressure
15 (Predrill); Most likely Pore Pressure (Predrill); Fracture Gradient for Shale (Predrill); Fracture Gradient for Sand (Real-time); Fracture Gradient for Shale (Real-time); Fracture Gradient for Sand (Predrill); Pore Pressure dxc (Real-time); ECD (Real-time); ESD (Real-time); Mud weight (Real-time);

5. Track 5 - A curve track displaying Total Gas Volume and the Flow In
20 Temperature. The user can also configure any other curve.

6. Track 6 - A status track displaying a warning or alarm when there is risk of gain. In one embodiment, the color red indicates an alarm, while yellow is the warning. Green means there is no risk.

7. Track 7 - A status track, similar to Track 6, displaying a warning or alarm when
25 there is risk of loss.

8. Track 8 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of gain in the look-ahead region.

9. Track 9 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of loss in the look-ahead region.

30 10. Track 10 - A status track, similar to Track 6, displaying a warning or alarm when the real time dxc is beyond a certain threshold applied on the expected dxc.

E. PPFGCombo

1. Track 1 - A curve track displaying the Rate of Penetration (ROP).

2. Track 2 - A lithology track displaying the sand or shale formation across the depth (based on ROP).

3. Track 3 - A curve track displaying the resistivity, dT, dTs and dxc for the entire depth, and the same curves in the Shale formation region.

4. Track 4 - A curve track displaying multiple curves which allow the user to monitor ECD, ESD and Mud Weight, and compare them against maximum Predrill Pore Pressure and/or minimum predrill Fracture Gradient and Real-time Pore Pressure for the specified parameters. Curves displayed in this track are: Max Pore Pressure (Predrill); Min Pore Pressure (Predrill); Most likely Pore Pressure (Predrill); Fracture Gradient for Shale (Predrill); Fracture Gradient for Sand (Real-time); Fracture Gradient for Shale (Real-time); Fracture Gradient for Sand (Predrill); Pore Pressure dxc (Real-time); Pore Pressure resistivity (Real-time); Pore Pressure dT (Real-time); Pore Pressure dTs (Real-time); ECD (Real-time); ESD (Real-time); Mud weight (Real-time);

5. Track 5 - A curve track displaying Total Gas Volume and the Flow In Temperature. The user can also configure any other curve.

6. Track 6 - A status track displaying a warning or alarm when there is risk of gain. In one embodiment, the color red indicates an alarm, while yellow is the warning. Green means there is no risk.

7. Track 7 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of loss.

8. Track 8 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of gain in the look-ahead region.

9. Track 9 - A status track, similar to Track 6, displaying a warning or alarm when there is risk of loss in the look-ahead region.

10. Track 10 - A status track, similar to Track 6, displaying a warning or alarm when the real time resistivity, dT, dTs and/or dxc is beyond a certain threshold applied on the expected resistivity, dT, dTs and/or dxc.

When drilling is not taking place, the PPFG Time Based Widget is used to monitor mud density (e.g., ECD, ESD, and Mud Weight), and compare these values against maximum pore pressure (pre-drill determination), minimum fracture gradient for sand, and pore pressure resistivity. The PPFG Time Based Widget display, as seen in Figure 78, combines a Log Widget display (on the left) **800** with the LookAhead Widget display **802**. In one embodiment, the Log Widget uses a template for the tracks and curves.

The template shown has two horizontal tracks: a multiple curve track on top, and a status track on the bottom. The multiple curve track can display a number of curves based on real-time or pre-drill data, including, but not limited to, fracture gradient for sand, ECD, ESD, Mud Weight, Pore Pressure Resistivity, Minimum Pore Pressure, Maximum Pore Pressure, and Most Likely Pore Pressure. This track can be configured by modifying the template (e.g., PPFGtimebased.xml) in the Property page of the Log Widget. The status track displays a warning or alarm when there is a risk of loss.

The LookAhead portion of the display can be configured through the PPFG LookAhead Widget configuration (as described below). This section of the display allows the user to observe and monitor the maximum pore pressure and minimum fracture gradient in the LookAhead region, and compare it against the current real-time values for ECD, ESD and Mud Weight (which are expected to be within the maximum pore pressure and minimum fracture gradient value ranges).

The PPFG LookAhead Widget may be configured through the Properties dialog in a similar manner to the Gas Monitor Widget (i.e., select "Edit display" and select the PPFG LookAhead Widget icon **810**, as seen in Figure 79A). The editable form of the PPFG LookAhead Widget is shown in Figure 79B. Selecting "Properties" from the menu displays the settings dialog window, as seen in Figure 80.

The UnderReaming Widget, as seen in Figure 81A, allows the user to turn the UnderReamer (used in conjunction with the 2D Wellbore Schematic Widget) on and off, and specify its diameter. Turning it on and changing its diameter has a direct impact on the Marker Tracker smart agent used to track the movement of markers in the 2D Wellbore Schematic Widget. Increasing its diameter increases the volume of mud at the bottom of the wellbore, thereby slowing down the markers. The UnderReaming Widget

may be configured through the Properties dialog in a similar manner to the Gas Monitor Widget (i.e., select "Edit display" and select the UnderReaming Widget icon **830**, as seen in Figure 81B). The editable form of the UnderReaming Widget is shown in Figure 81C.

Thus, it should be understood that the embodiments and examples described
5 herein have been chosen and described in order to best illustrate the principles of the invention and its practical applications to thereby enable one of ordinary skill in the art to best utilize the invention in various embodiments and with various modifications as are suited for particular uses contemplated. Even though specific embodiments of this invention have been described, they are not to be taken as exhaustive. There are several
10 variations that will be apparent to those skilled in the art.

CLAIMS

What is claimed is:

1. A system for monitoring a plurality of operations at a well site, comprising:

5 a plurality of sensors to sample or detect parameters related to at least one well site operation, said plurality of sensors comprising surface sensors or downhole sensors or a combination thereof;

one or more computing devices adapted to receive parameter information in real time from said plurality of sensors, said one or more computing devices each further
10 comprising a processor or microprocessor, said processor or microprocessor adapted to process the received parameter information to calculate derived parameters;

at least one computer-readable storage medium for storing some or all of said received parameter information and said derived parameters; and

a visual display, coupled to said one or more computing devices, for displaying
15 some or all of the received parameter information and said derived parameters for said at least one well site operation;

wherein said at least one well site operation comprises one or more of the following: installation of casing or tubular goods in a well; a cementing process in a well; or the monitoring of fluid gains or losses during drilling in the a well.

20 2. The system of claim 1, wherein said surface sensors comprise torque detection sensors, revolution per minute sensors, and weight on bit sensors.

25 3. The system of claim 1, wherein said downhole sensors comprise gamma ray sensors, pressure while drilling sensors, and resistivity sensors.

4. The system of claim 1, said one or more computing devices further comprising at least one software smart agent having one or more formulations applicable to said at least one well site operation.

5. The system of claim 1, wherein said visual display comprises a console display specific to a particular well site operation.

6. The system of claim 5, wherein said console display comprises a geometric performance metric display of the current status of selected parameters based upon established threshold values.

7. The system of claim 6, wherein said geometric performance metric display comprises a polygon with vertices, each vertex representing a particular parameter, with threshold values normalized in scale for each parameter so that corresponding thresholds appear to be the same distance along a line between the center of the polygon and the respective vertex for each parameter;

further wherein the value of a particular parameter is plotted as a point along its respective line, and the plotted points of adjacent parameters are connected by a straight line to form a polygon of changing size and shape over time.

8. A non-transitory computer-readable storage medium with an executable program stored thereon, wherein the program instructs a processor or microprocessor to perform the following steps:

receive parameter information related to at least one well site operation from a plurality of sensors;

process the received parameter information to calculate derived parameters;

store some or all of the received parameter information and derived parameters on a computer-readable storage device; and

display some or all of the received parameter information and said derived parameters for said at least one well site operation;

wherein said at least one well site operation comprises one or more of the following: installation of casing or tubular goods in a well; a cementing process in a well; or the monitoring of fluid gains or losses during drilling in the a well.

9. The medium of claim 8, wherein said sensors comprise torque detection sensors, revolution per minute sensors, and weight on bit sensors.

10. The medium of claim 8, wherein said sensors comprise gamma ray sensors, pressure while drilling sensors, and resistivity sensors.

11. The medium of claim 8, wherein said processing of received parameter information is carried out by at least one software smart agent having one or more formulations applicable to said at least one well site operation.

12. The medium of claim 8, wherein said display comprises a console display specific to a particular well site operation.

13. The medium of claim 12, wherein said console display comprises a geometric performance metric display of the current status of selected parameters based upon established threshold values.

14. A method of monitoring a plurality of operations at a well site, comprising the steps of:

receiving, using a processor or microprocessor, parameter information related to at least one well site operation from a plurality of sensors;

processing, using a processor or microprocessor, the received parameter information to calculate derived parameters;

storing the received parameter information and derived parameters on a computer-readable storage device; and

displaying, on a computer monitor or visual display, some or all of the received parameter information and said derived parameters for said at least one well site operation;

wherein said at least one well site operation comprises one or more of the following: installation of casing or tubular goods in a well; a cementing process in a well; or the monitoring of fluid gains or losses during drilling in the a well.

15. The method of claim 14, wherein said sensors comprise torque detection sensors, revolution per minute sensors, and weight on bit sensors.

5 16. The method of claim 14, wherein said sensors comprise gamma ray sensors, pressure while drilling sensors, and resistivity sensors.

17. The method of claim 14, wherein said processing of received parameter information is carried out by at least one software smart agent having one or more formulations
10 applicable to said at least one well site operation.

18. The method of claim 14, wherein said display comprises a console display specific to a particular well site operation.

15 19. The method of claim 18, wherein said console display comprises a geometric performance metric display of the current status of selected parameters based upon established threshold values.

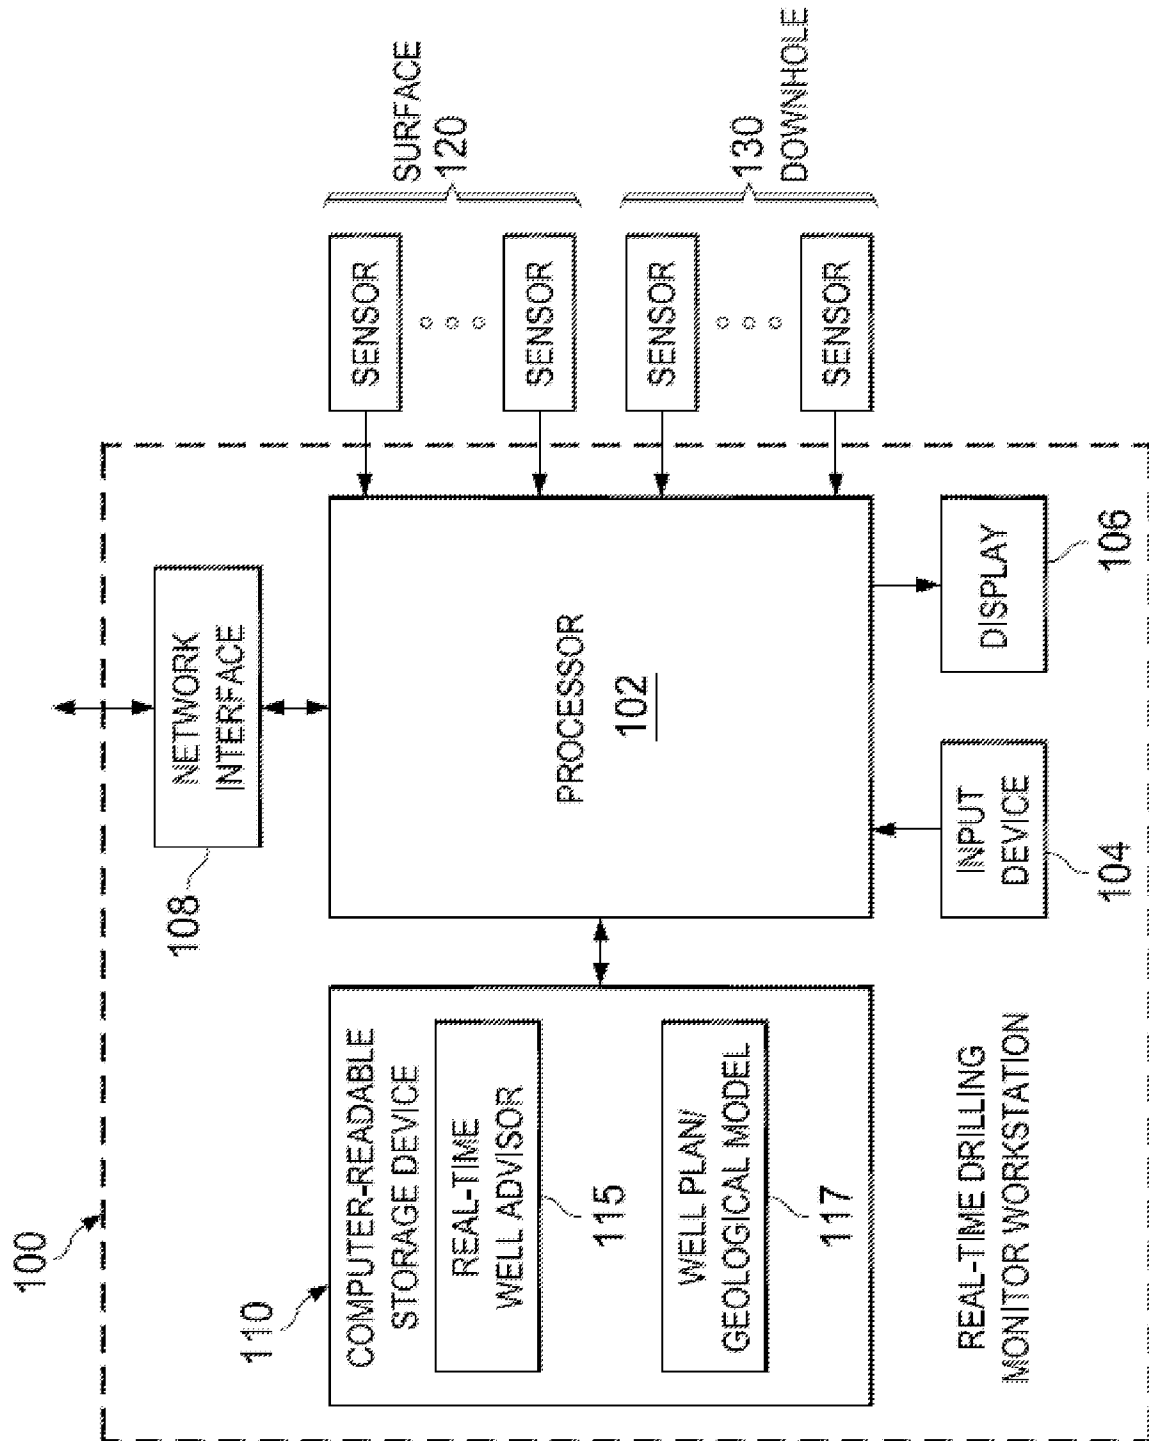


FIGURE 1

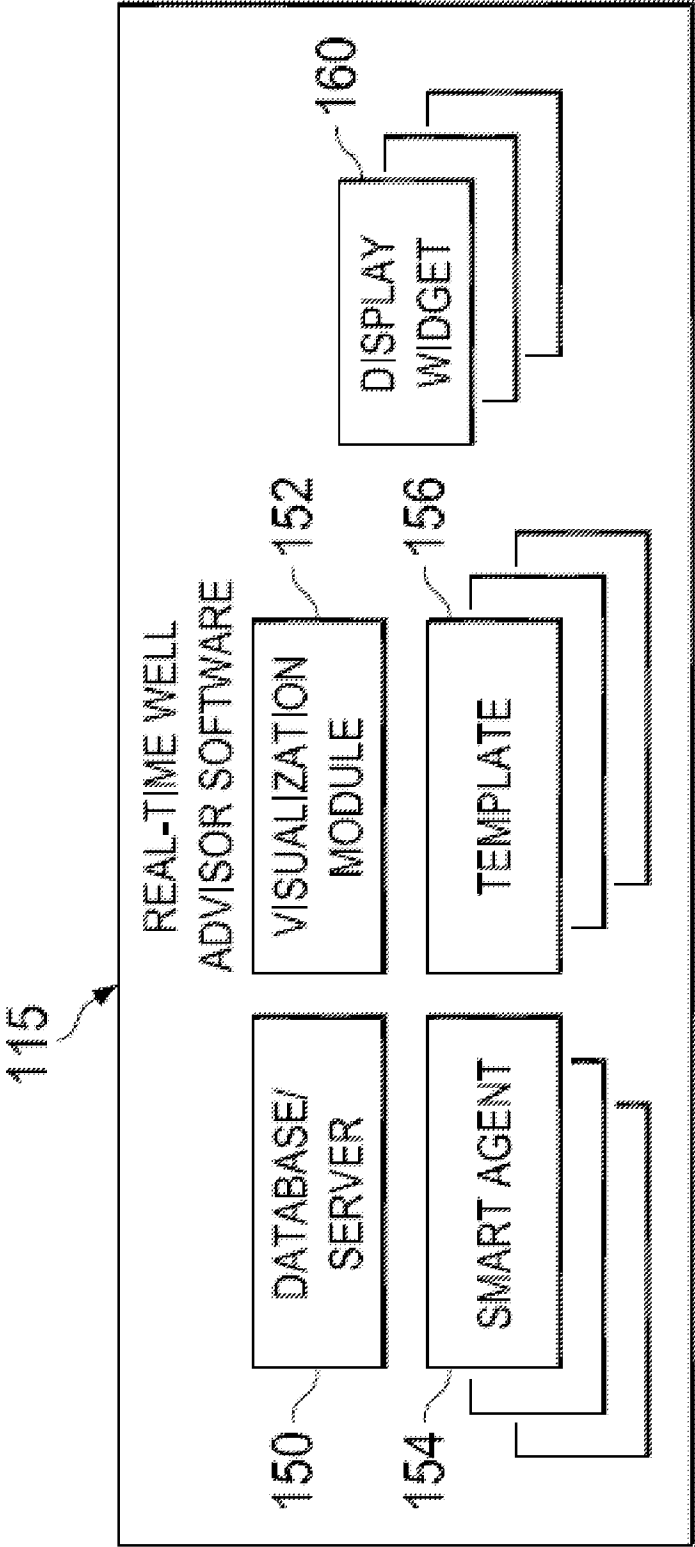


FIGURE 2

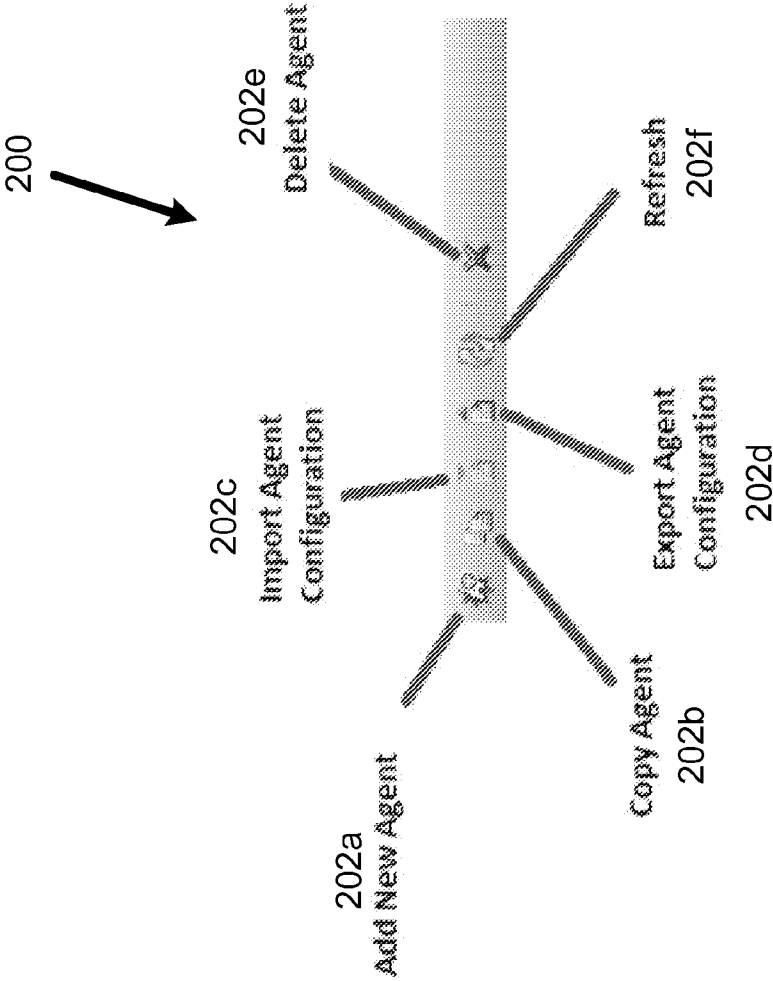


FIGURE 3

210



Right-Click Menu Functions

Start or Stop the Agent		Start
		Stop
Refresh the status of the Agent		Refresh Status
Add an Agent		Add
Copy an Agent		Copy
Import or Export Agent Configuration File		Import Configuration Export Configuration
Delete Agent		Delete

FIGURE 4

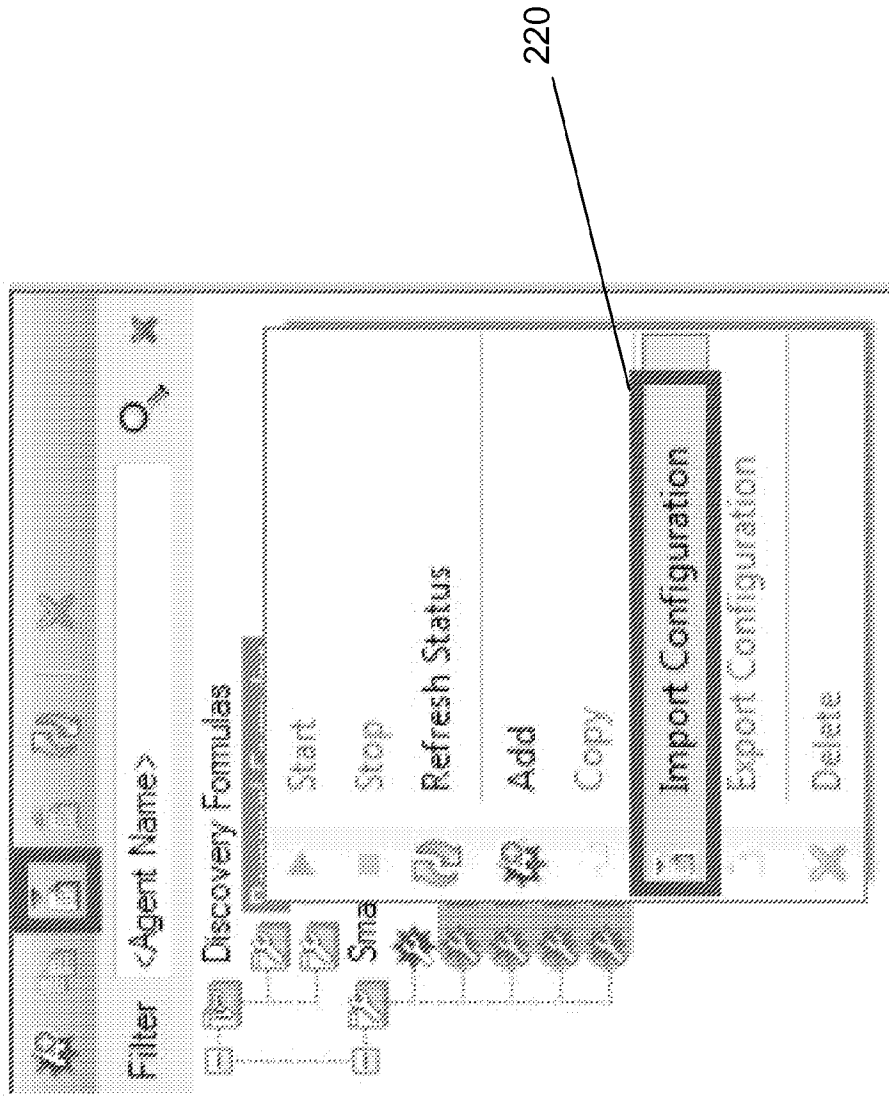


FIGURE 5

H5 E19H-0		Description: TCN: Host-based Signature Smart Agent	
Agent Type		EP EP/PA Tracing/Config/Running Smart Agent Host-based Signature Agent	
Host Address		E19H and G54H0 E19H_SmartAgent	
<u>Parameters 232</u>			
Key	Index Type	Value	
Agent Address	string	E19H-000 000 000	
Agent ID: Stop	string	*	
Agent Output Logs	bool	* False	
Tracing Assembly: Output	string	* 115	
Exclude Traces	bool	* True	
<u>Fields 234</u>			
Field: Key	Key	Value	
<u>Signature 236</u>			
Key	Minimizes	Log name	Index type
Host-based Signature type	SPIN	GENERAL TIME BASED C.	True
Host-based Signature type	SPIN	GENERAL TIME BASED C.	True
Host-based Signature type	MDA	GENERAL TIME BASED C.	True
<u>Output 238</u>			
Key	Minimizes	Log name	Index type
Host-based Signature	SPIN	GENERAL TIME BASED C.	True
Host-based Signature	SPIN	GENERAL TIME BASED C.	True

FIGURE 6

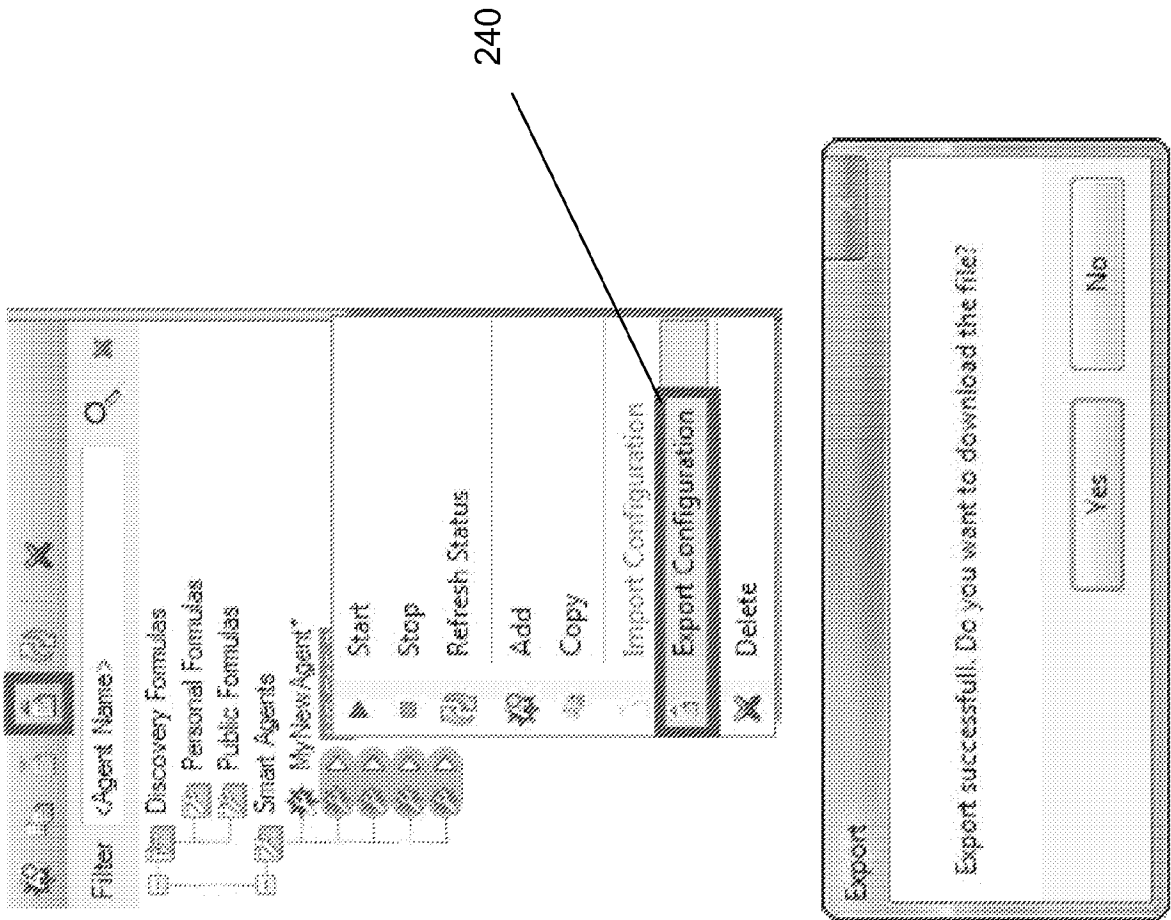


FIGURE 7

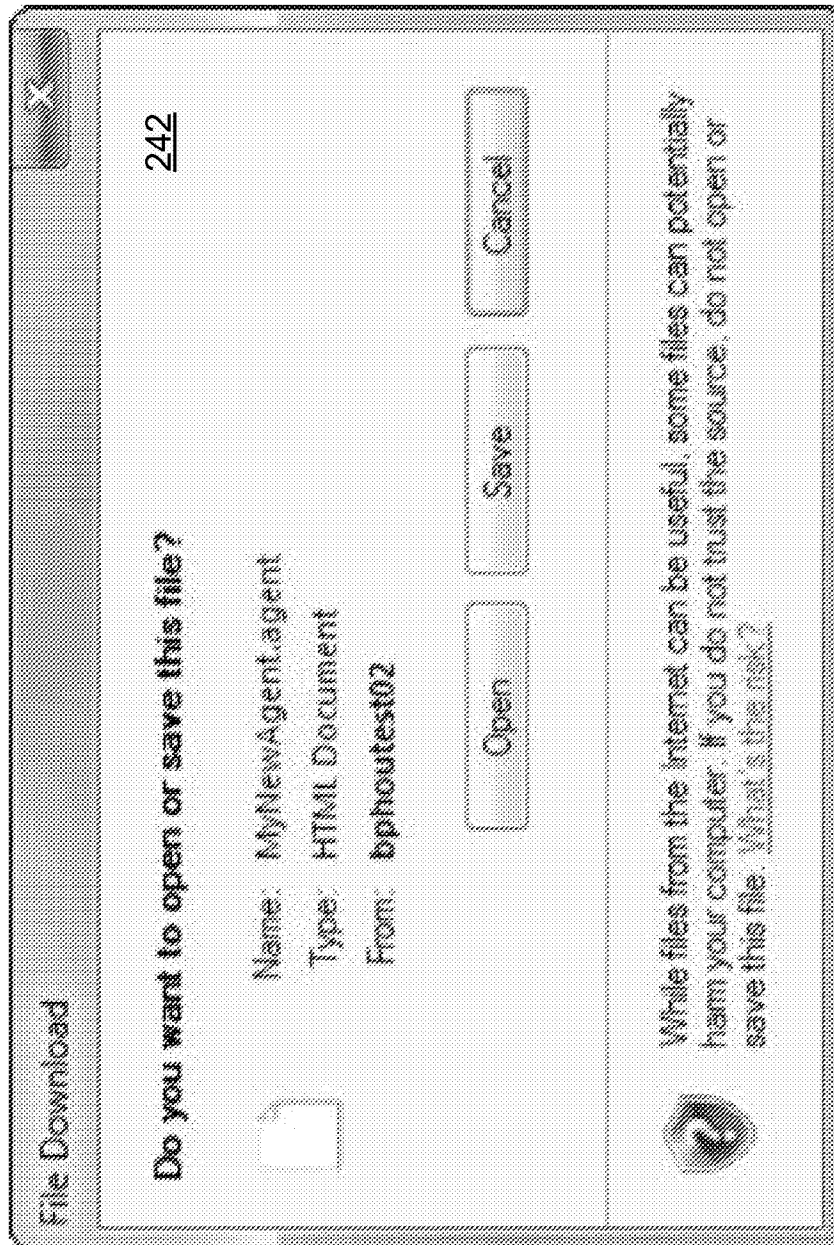


FIGURE 8

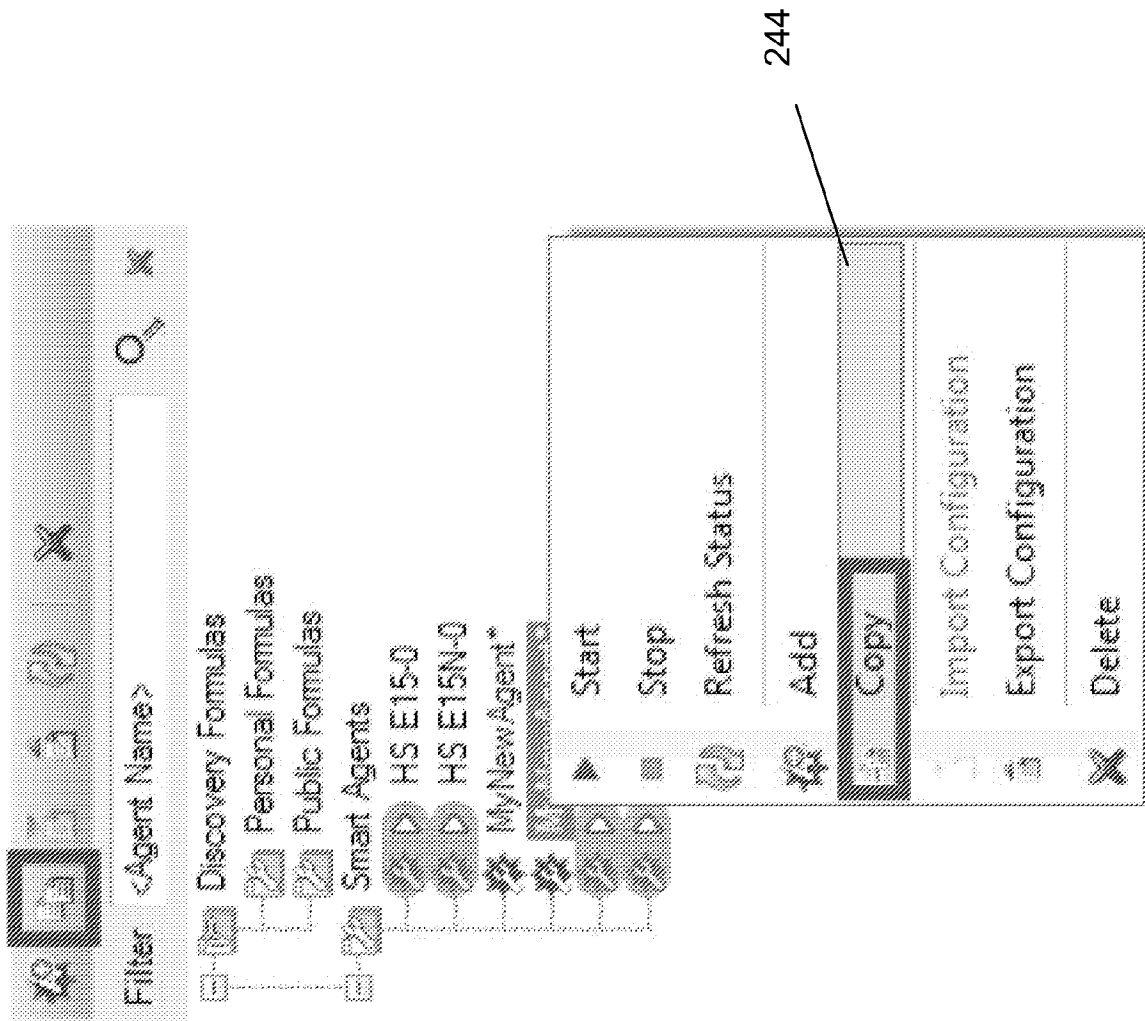


FIGURE 9

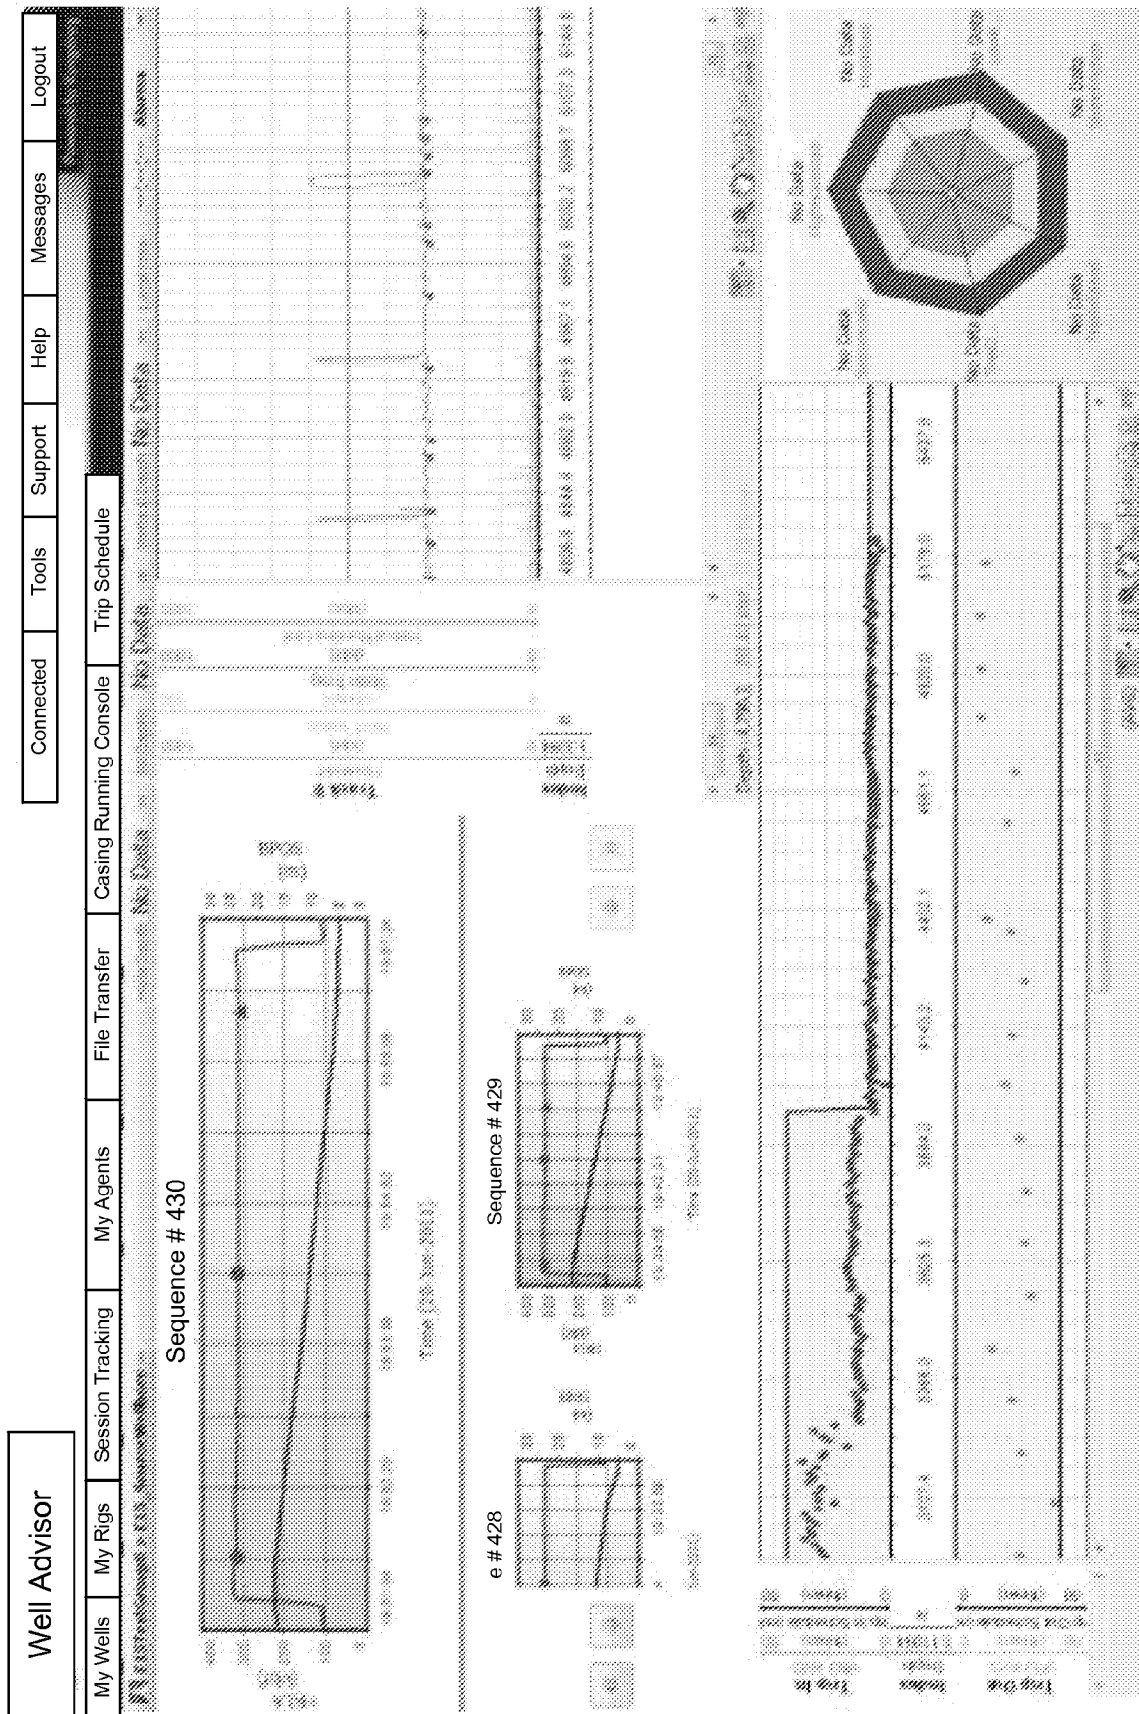


FIGURE 10

TCRc Hookload Signature V1		Description	TCRc Hookload Signature Smart Agent					
Agent Type	TrippingCasingRunning Smart Agent HookloadSignatureAgent							
Well/Wellbore	E15 Test Group/E15_Source Wellbore							
Parameters								
Key	Data Type	Value						
AgentUtcStart	string	10/11/14 00:00:00						
AgentUtcStop	string							
RushOutputLogs	bool							
TravellingAssemblyWeight	string							
Enable Tracing	bool	True						
Tables								
Table Key		Key	Value					
Inputs								
Key	Mnemonic	Log Name	Index Type	Index Curve	Index Unit	Type Log Data	Axis Count	Mnemonic unit
HookloadSignatureInput	Bit_Depth	EA_D13_TestData	Time		Time	Double	10	unitless
HookloadSignatureInput	HK_Hght	EA_D13_TestData	Time		Time	Double	0	unitless
HookloadSignatureInput	WHO_Raw	EA_D13_TestData	Time		Time	Double	0	unitless
Outputs								
Key	Mnemonic	Log Name	Index Type	Index Curve	Index Unit	Type Log Data	Axis Count	Mnemonic unit
HookloadSignature	Start	HookloadSignature	Time		Time	Double	10	unitless
HookloadSignature	Stop	HookloadSignature	Time		Time	Double	0	unitless
HookloadSignature	SequenceNr	HookloadSignature	Time		Time	Double	0	unitless
HookloadSignature	EventType	HookloadSignature	Time		Time	Double	10	unitless
HookloadSignature	EventTimeStamp	HookloadSignature	Time		Time	Double	0	unitless

FIGURE 11

TCRc Zone V1		Description		TCRc Zone Smart Agent	
Agent Type		TrippingCasingRunning Smart Agent ZoneAgent			
Well/Wellbore		E15 Test Group/E15_Source Wellbore			
Parameters					
Key	Data Type	Value			
TravellingAssemblyWeight	string	1095/11/14 00:00:00			
RigHoistLimitKbs	string	1000			
LowHookloadBest	string	200			
LowHookloadWorst	string	0			
LowHookloadGreenAmber	string	100			
Tables					
Table Key		Key		Value	
Inputs					
Key	Mnemonic	Log Name		Index Type	
ZoneInput	Tw	HookloadTcrTime		Time	
ZoneInput	SequenceNr	HookloadTcrTime		Time	
ZoneInput	HKSO_MIN	HookloadTcrTime		Time	
ZoneInput	HKSO_MAX	HookloadTcrTime		Time	
ZoneInput	VSO_AVG	HookloadTcrTime		Time	
Outputs					
Key	Mnemonic	Log Name		Index Type	
CasingRunningZone	SequenceNr	CasingRunningZone		Time	
CasingRunningZone	LowHookload	CasingRunningZone		Time	
CasingRunningZone	HighHookload	CasingRunningZone		Time	
CasingRunningZone	TripInSpeed	CasingRunningZone		Time	
CasingRunningZone	StaticFriction	CasingRunningZone		Time	

FIGURE 12

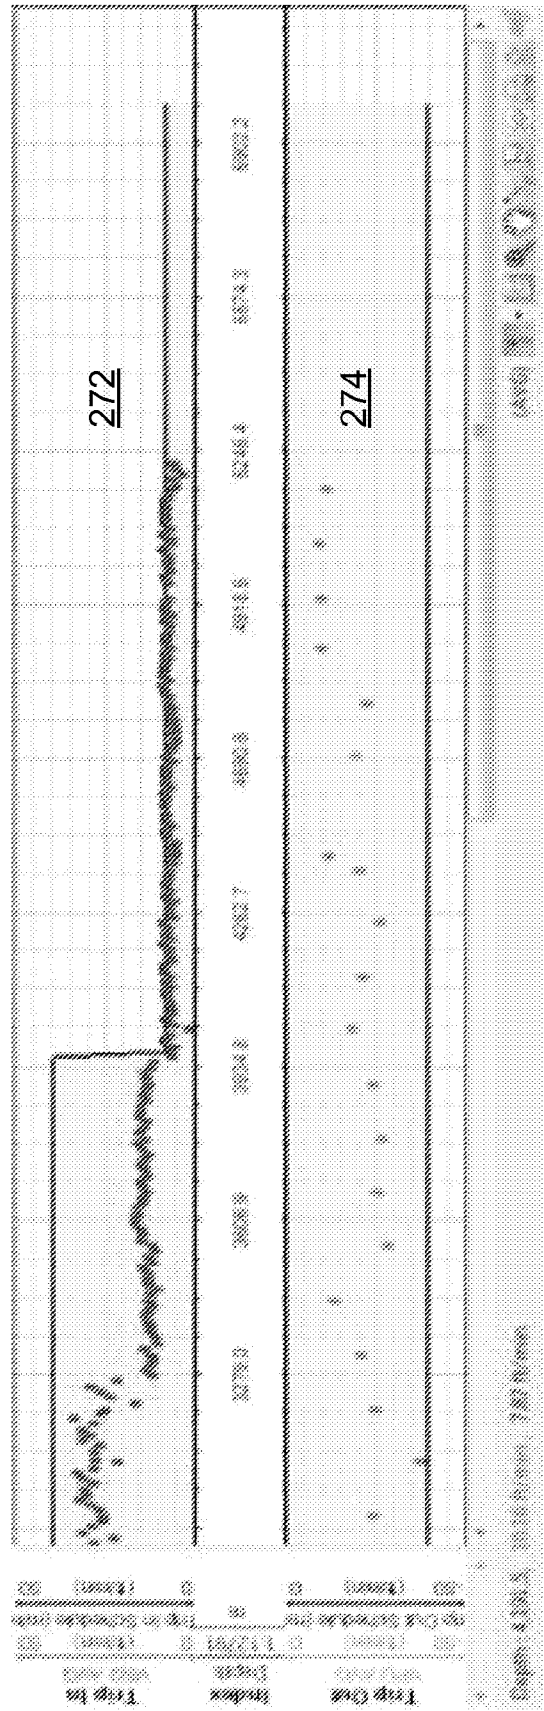


FIGURE 13

Log Widget

General

Tracks and Curves

Plot Orientation

Horizontal

Auto Scroll

Start with auto-scroll on

Bit depth mnemonic

MD

Auto-Scroll Mode

Follow bit depth

Change

Log name

HookloadTcrTime

Backplotting

Backplotting enabled

Axis

Depth Based

Unit

ft

Decimals

1

Note: To switch the axis between time or depth, first remove all curves, then add the curves of the desired index

Zoom/Scale

Custom

3279

units variables

Tracks

Auto-fit Tracks

Title	Width
Trip In	40
Index	20
Trip Out	40

Master track width 15 %

Gridlines and Tickmarks

Line/Tick interval

Predefined

Line width

2

Color

Select

Preview

1

Select

Preview

Undo

OK

Cancel

Apply

FIGURE 14

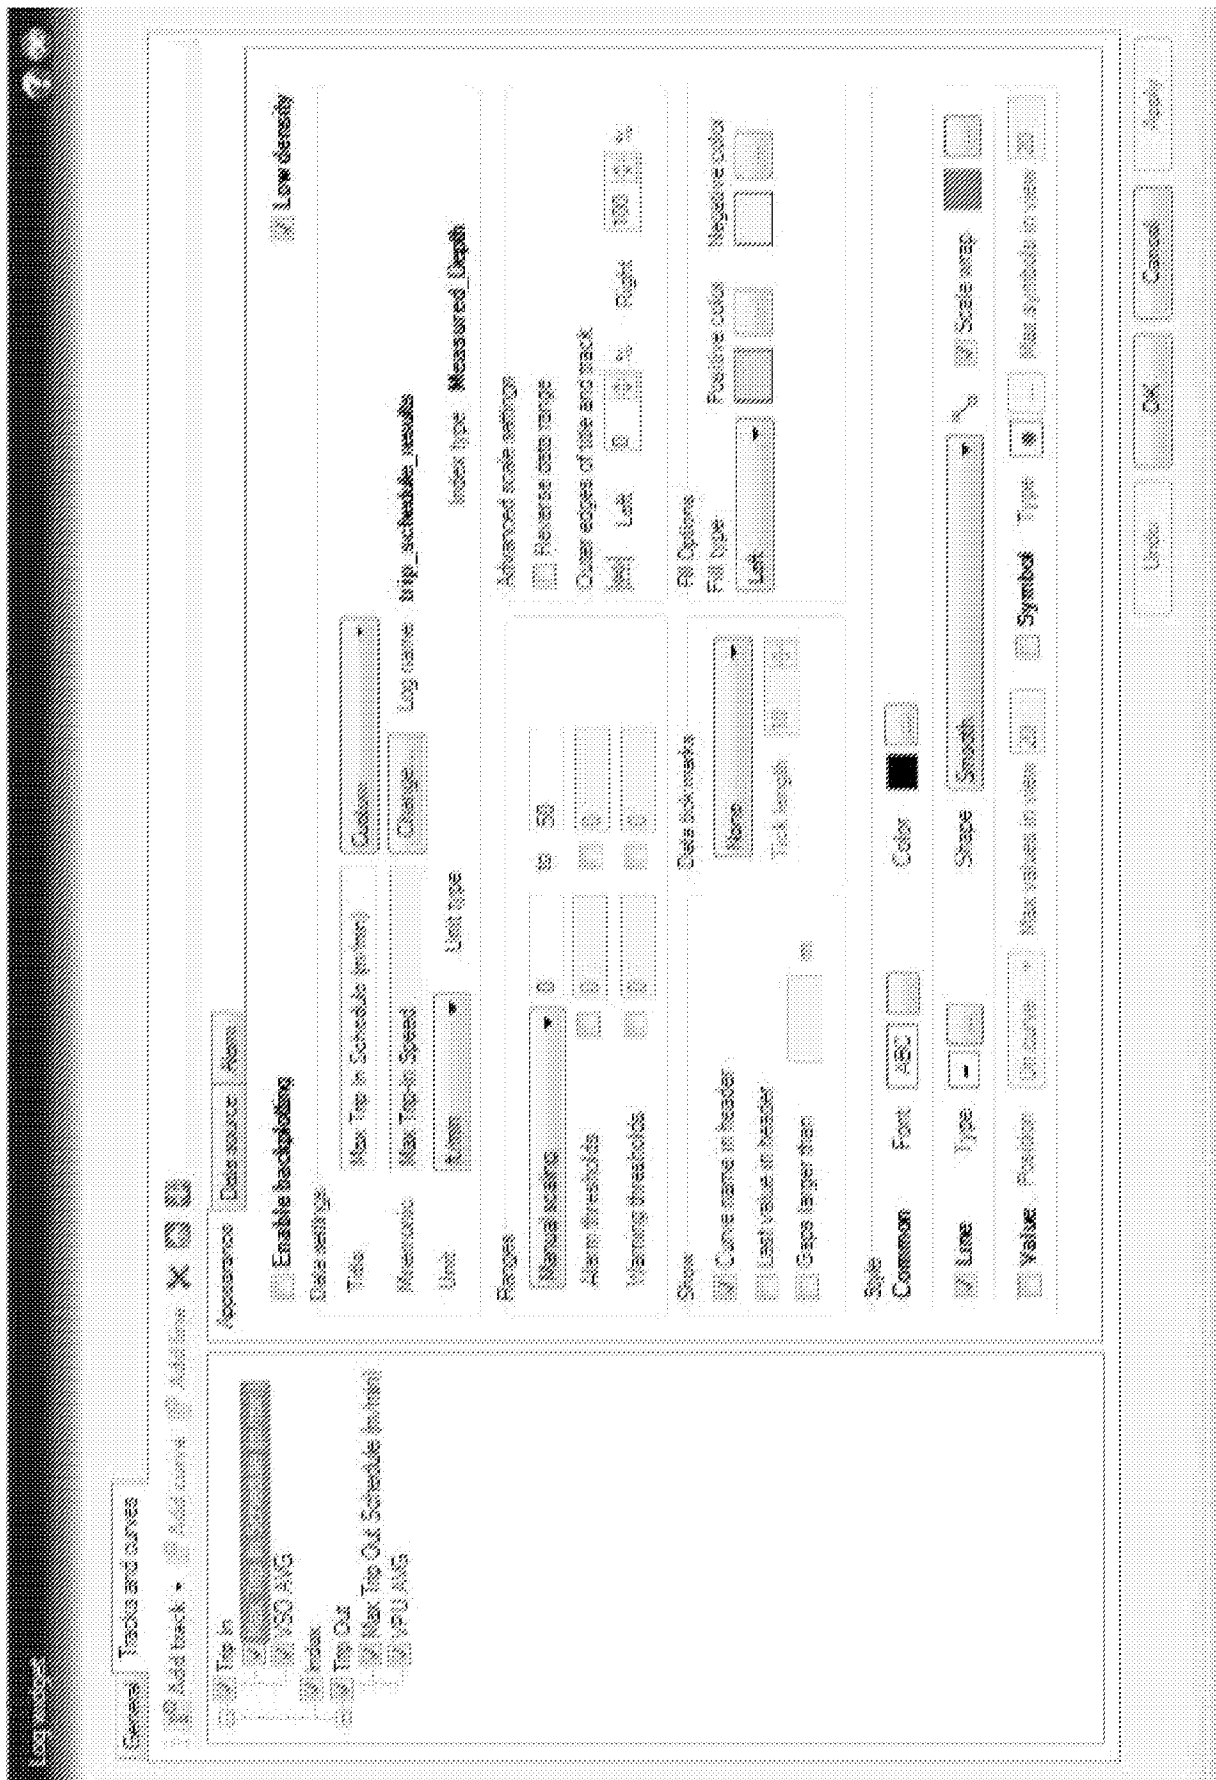


FIGURE 15

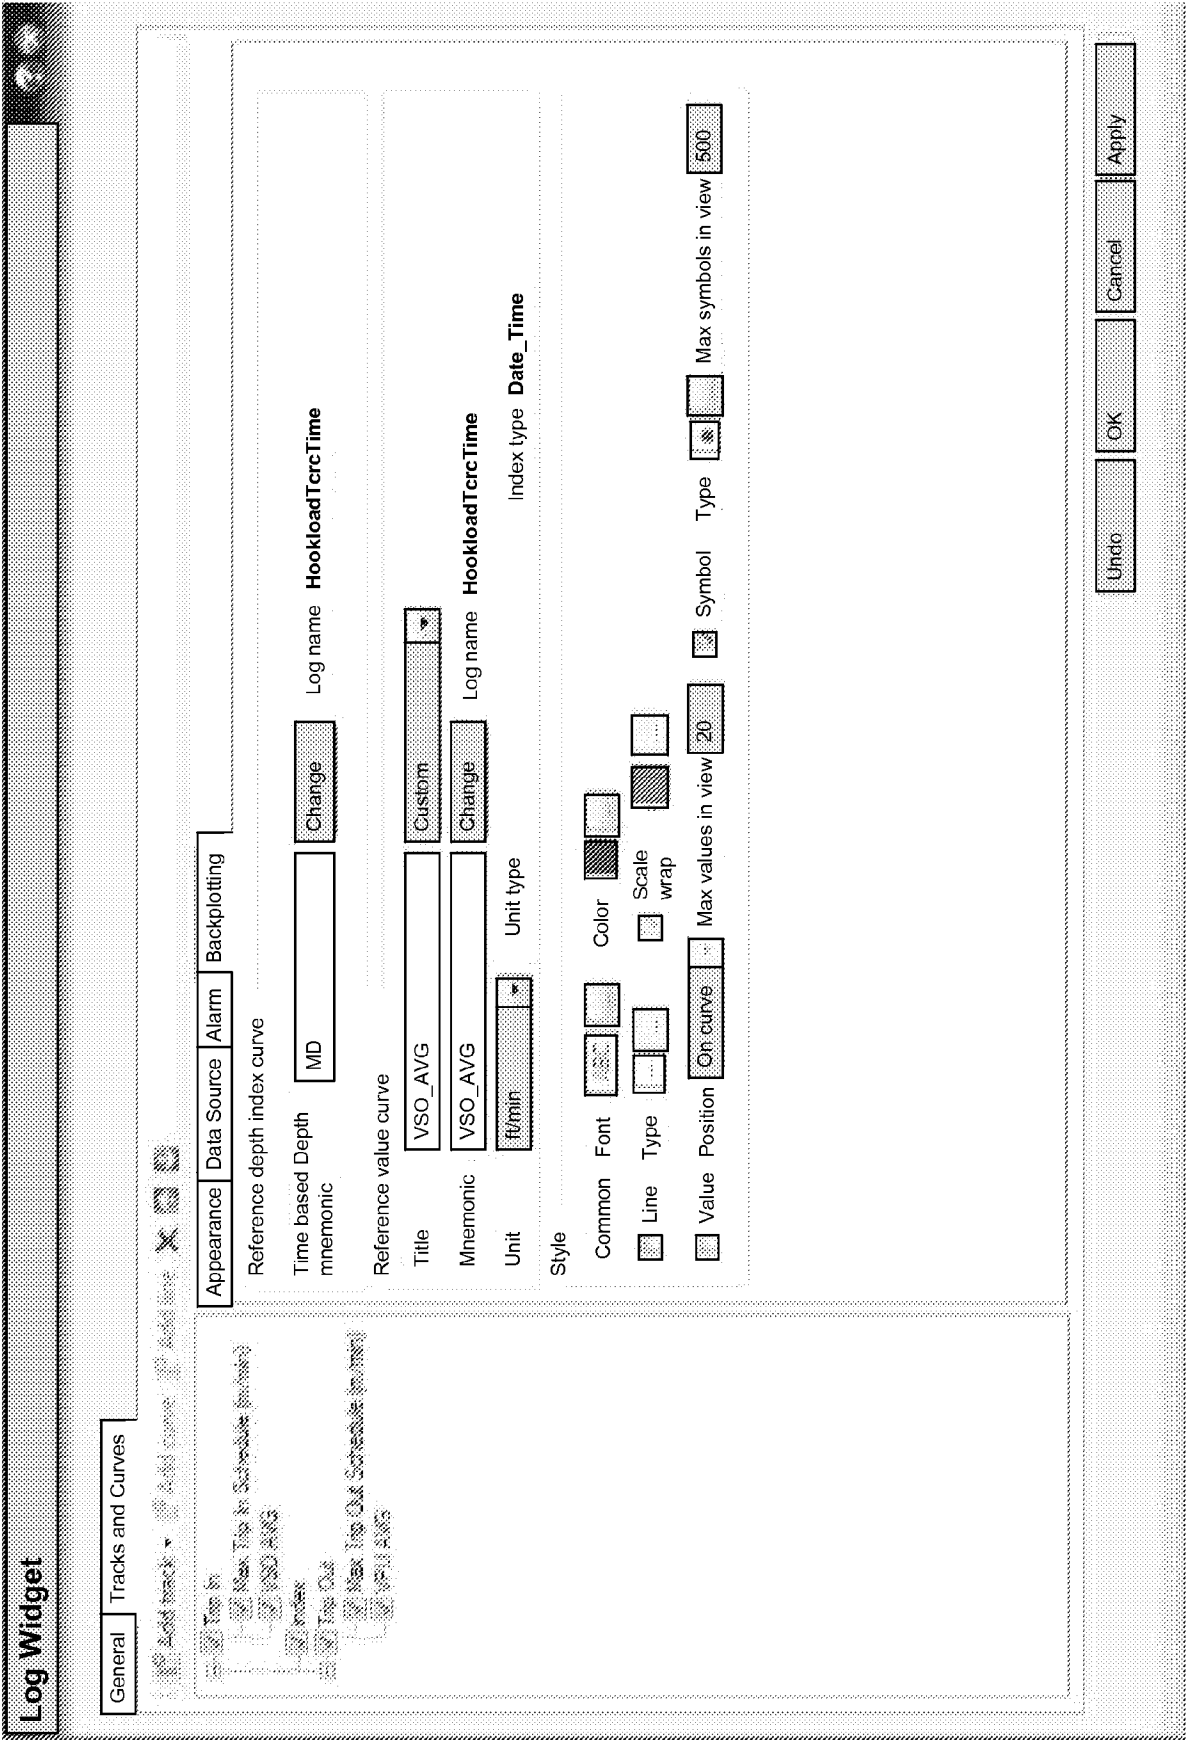


FIGURE 16

Log Widget

General Tracks and Curves

Add track ▾ Add curve ▾ Add line ▾

☒ Add Trip In
☒ Add Trip In Schedule (m/min)
☒ VSD ANG
☒ Index
☒ Trip Out
☒ Max Trip Out Schedule (m/min)
☒ VSD ANG

Appearance Data Source Alarm Backplotting

☒ **Enable backplotting**

☒ Low density

Data settings

Title Max Trip-Out Schedule (m/min) Custom

Mnemonic Max Trip-Out Speed Change Log name trip_schedule_results

Unit ft/min Unit type Index type Measured_Depth

Ranges

Manual scaling 50 to 0

Alarm thresholds 0

Warning thresholds 0

Advanced scale settings

☒ Reverse data range

Outer edges of title and track

Left 0 % Right 100 %

Fill Options

Fill type Right Positive color Negative color

Show

☒ Curve name in header

☒ Last value in header

☒ Gaps larger than m

Data tick marks

none Tick length 10

Style

Common Font Color

Line Type Shape smooth Scale wrap

Value Position On curve Max values in view 20 Symbol Type Max symbols in view 20

Undo OK Cancel Apply

FIGURE 17

AppearanceData sourceAlarmBackplotting

Reference depth index curve

Time based Depth
mnemonic

ND

Change...

Log name

HockloadIracTime

Reference value curve

Title

VPU_AVG

Custom

Mnemonic

VPU_AVG

Change...

Log name

HockloadIracTime

Unit

R/min

Unit type

Index type

Date_Time

Style

Common

Font

ABC

Color

Line

Type

Value

Position

On curve

Max values in view

20

Symbol

Type

Max symbols in view

500

Undo

OK

Cancel

Apply

FIGURE 18

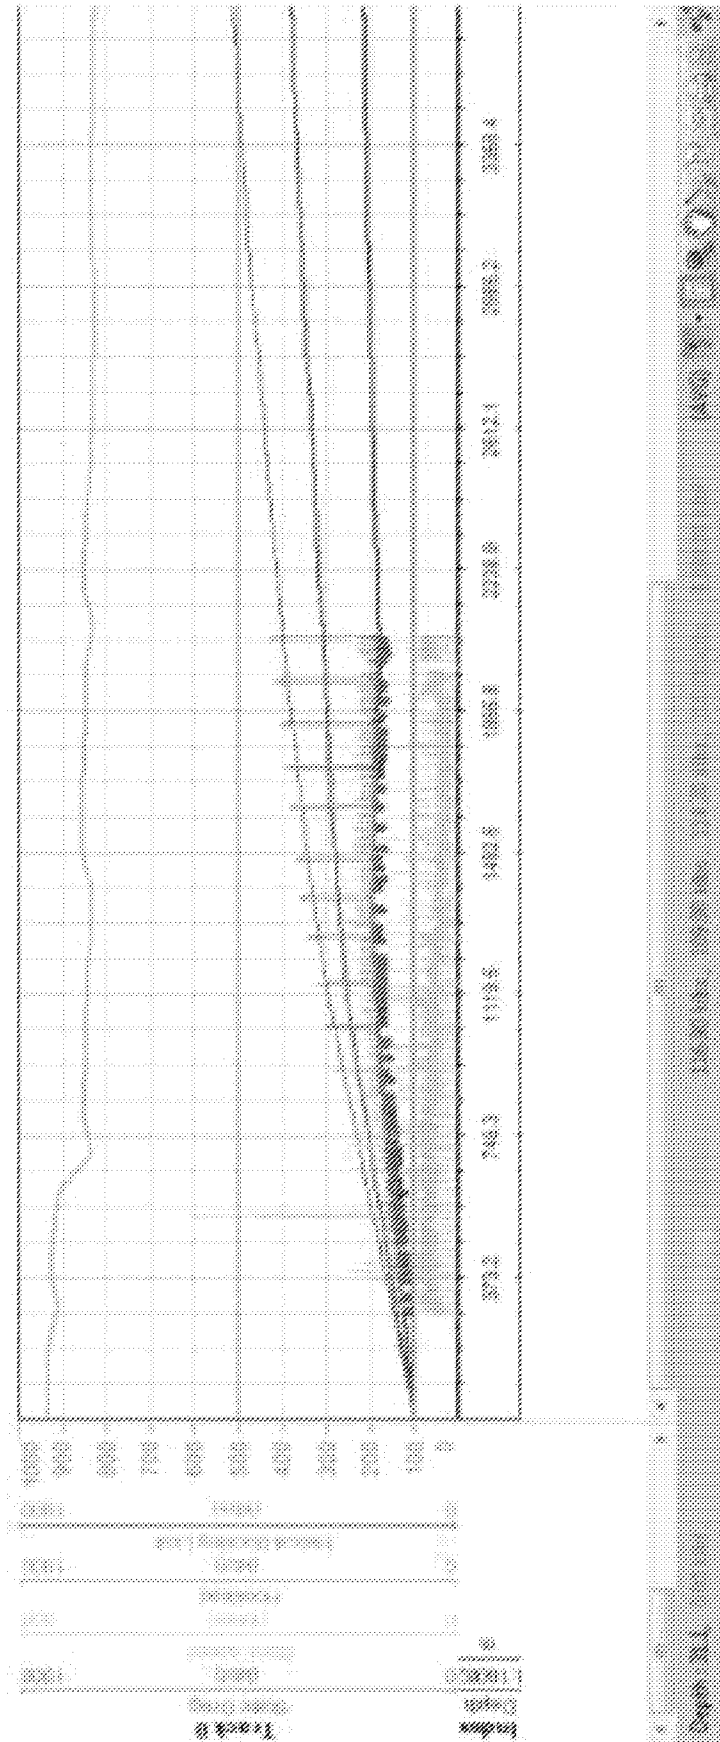


FIGURE 19

General **Tracks and curves**

Plot orientation:   **Horizontal**

Auto scroll: ☒ Start with auto-scroll on **Auto-scroll mode: Follow bit depth**

Bit depth mnemonic: **Bit Depth** **Log name: Hookhead Filter** **Changes**

Axis:  **Depth based** **Unit: m** **Decimals: 1**

Note: To switch the axis between time or depth, first remove all curves, then add the curves of the desired index.

Zoom/Scale:  **Custom** **17/15** units visible

Tracks


☒ Auto-fit tracks

Title	Width
Track 1	70
Index	10

Master track width: **15** %

Gridlines and linkmarks

Line/Click interval: **Predefined**

Line width: **2** **Color:**  **Primary grid lines:** **Select...** **Secondary grid lines:** **Select...** **Preview:** 

Backplotting

☒ Backplotting enabled

Buttons: **Undo** **OK** **Cancel** **Apply**

FIGURE 20

[illegible]

FIGURE 21

AppearanceData sourceAlarmBackplotting

Reference depth index curve

Time based Depth
interpolating

St_Depth

Change...

Log nameHookloadFilter

Reference value curve

TitleWCH_Raw

Custom

Change...

Log nameHookloadFilter

MoemonicWCH_Raw

Unitklbf

Unit type

Index typeDate_Time

Style

CommonFontABC

Color

☒ LineType

☒ Scale wrap

☐ ValuePositionOn curve

Max values in view100

☐ SymbolType

Max symbols in view20

Undo

OK

Cancel

Apply

FIGURE 22

AppearanceData sourceAlarmBackplotting

Reference depth index curve

Time based Depth mnemonic

MD

Change...

Log nameHookloadTcrTime

Reference value curve

TitleSD50_WOH

Custom

NnemonicSD50_WOH

Change...

Unitkbit

Unit type

Index typeDate_Time

Style

CommonFontABC

Color

LineType

Scale wrap

ValuePositionOn curve

Max values in view20

SymbolType

Max symbols in view500

Undo

OK

Cancel

Apply

FIGURE 23

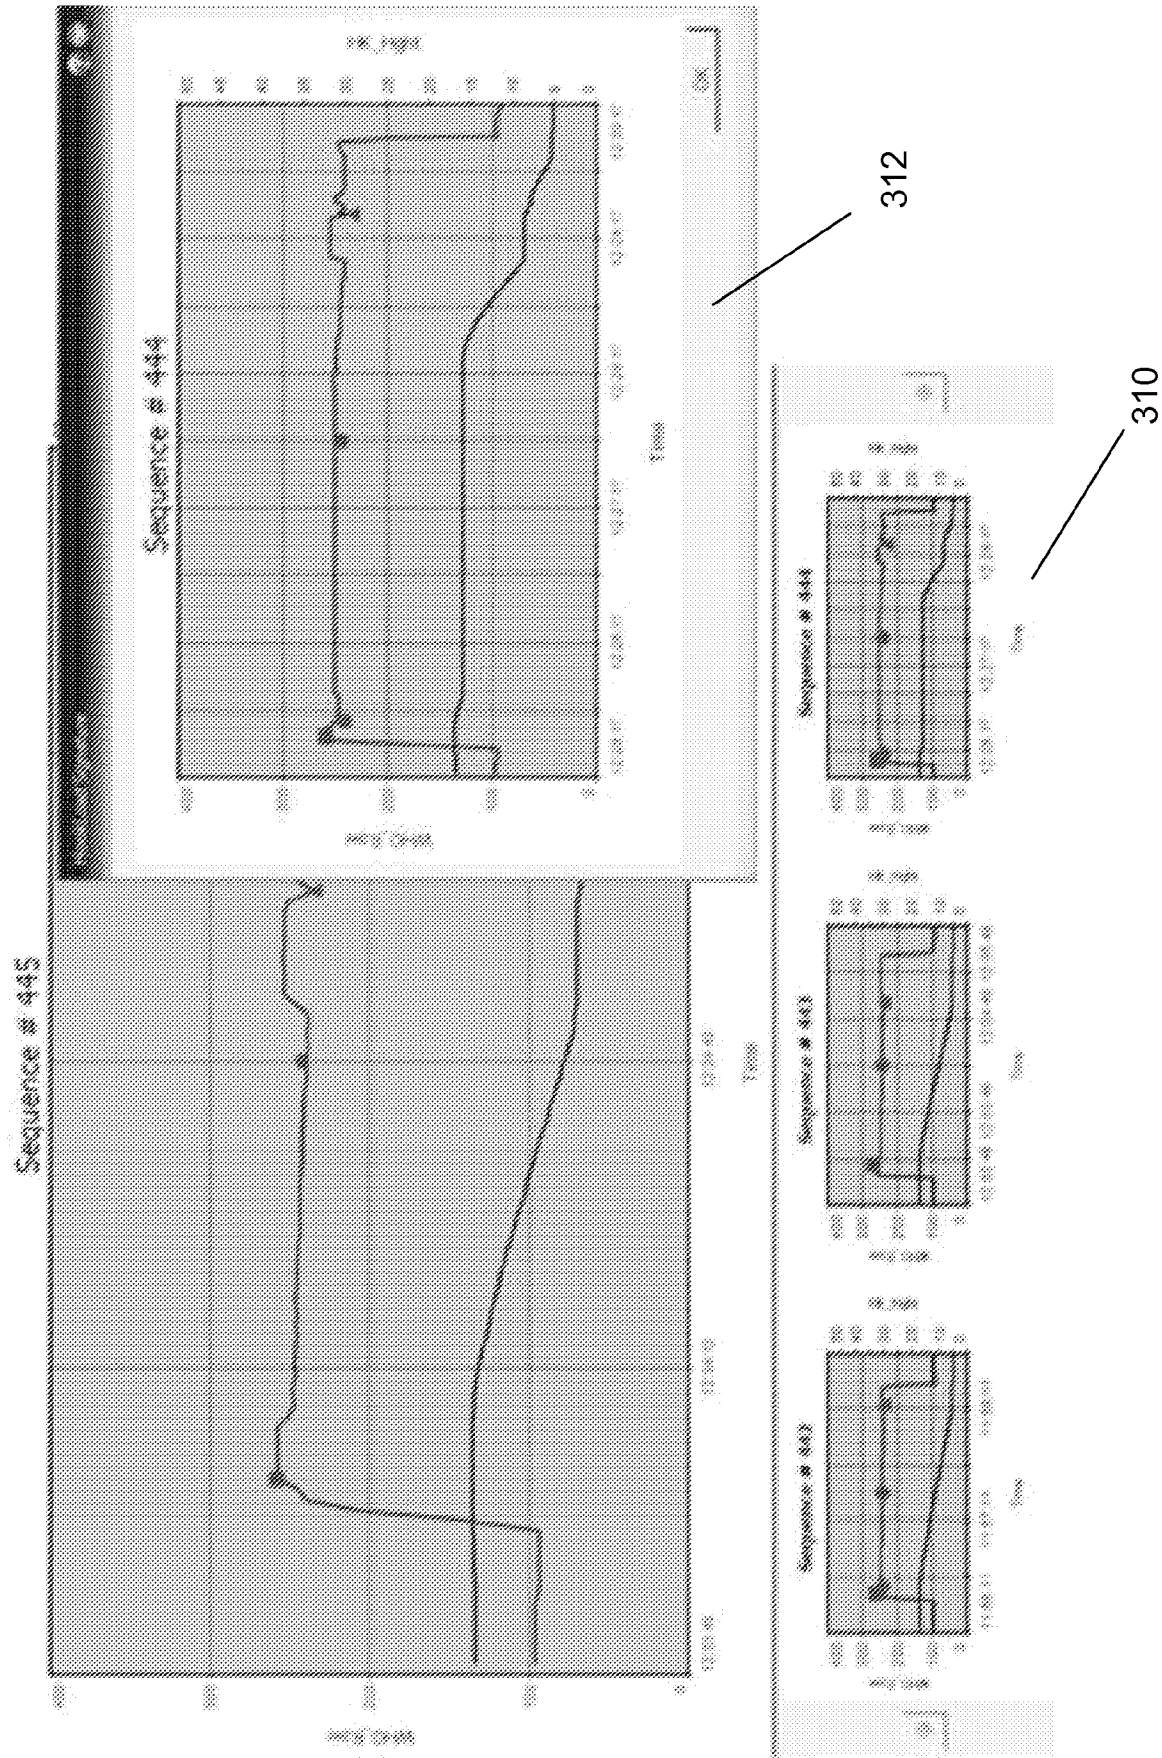


FIGURE 24

Hook load signature widget

General | Appearance

☒ X axis Index type: Date_Time Label: Time

Label interval(Sec): 30

☒ Y axis curves

Curves

Left Right

Mnemonic: Select... WHO_Raw

Label: WHO_Raw

Minimum: 0 klbs Label interval: 100

Maximum: 400 klbs

Line thickness: 2 ☒ Show units

Color: Select... 

141340

OK Cancel

FIGURE 25

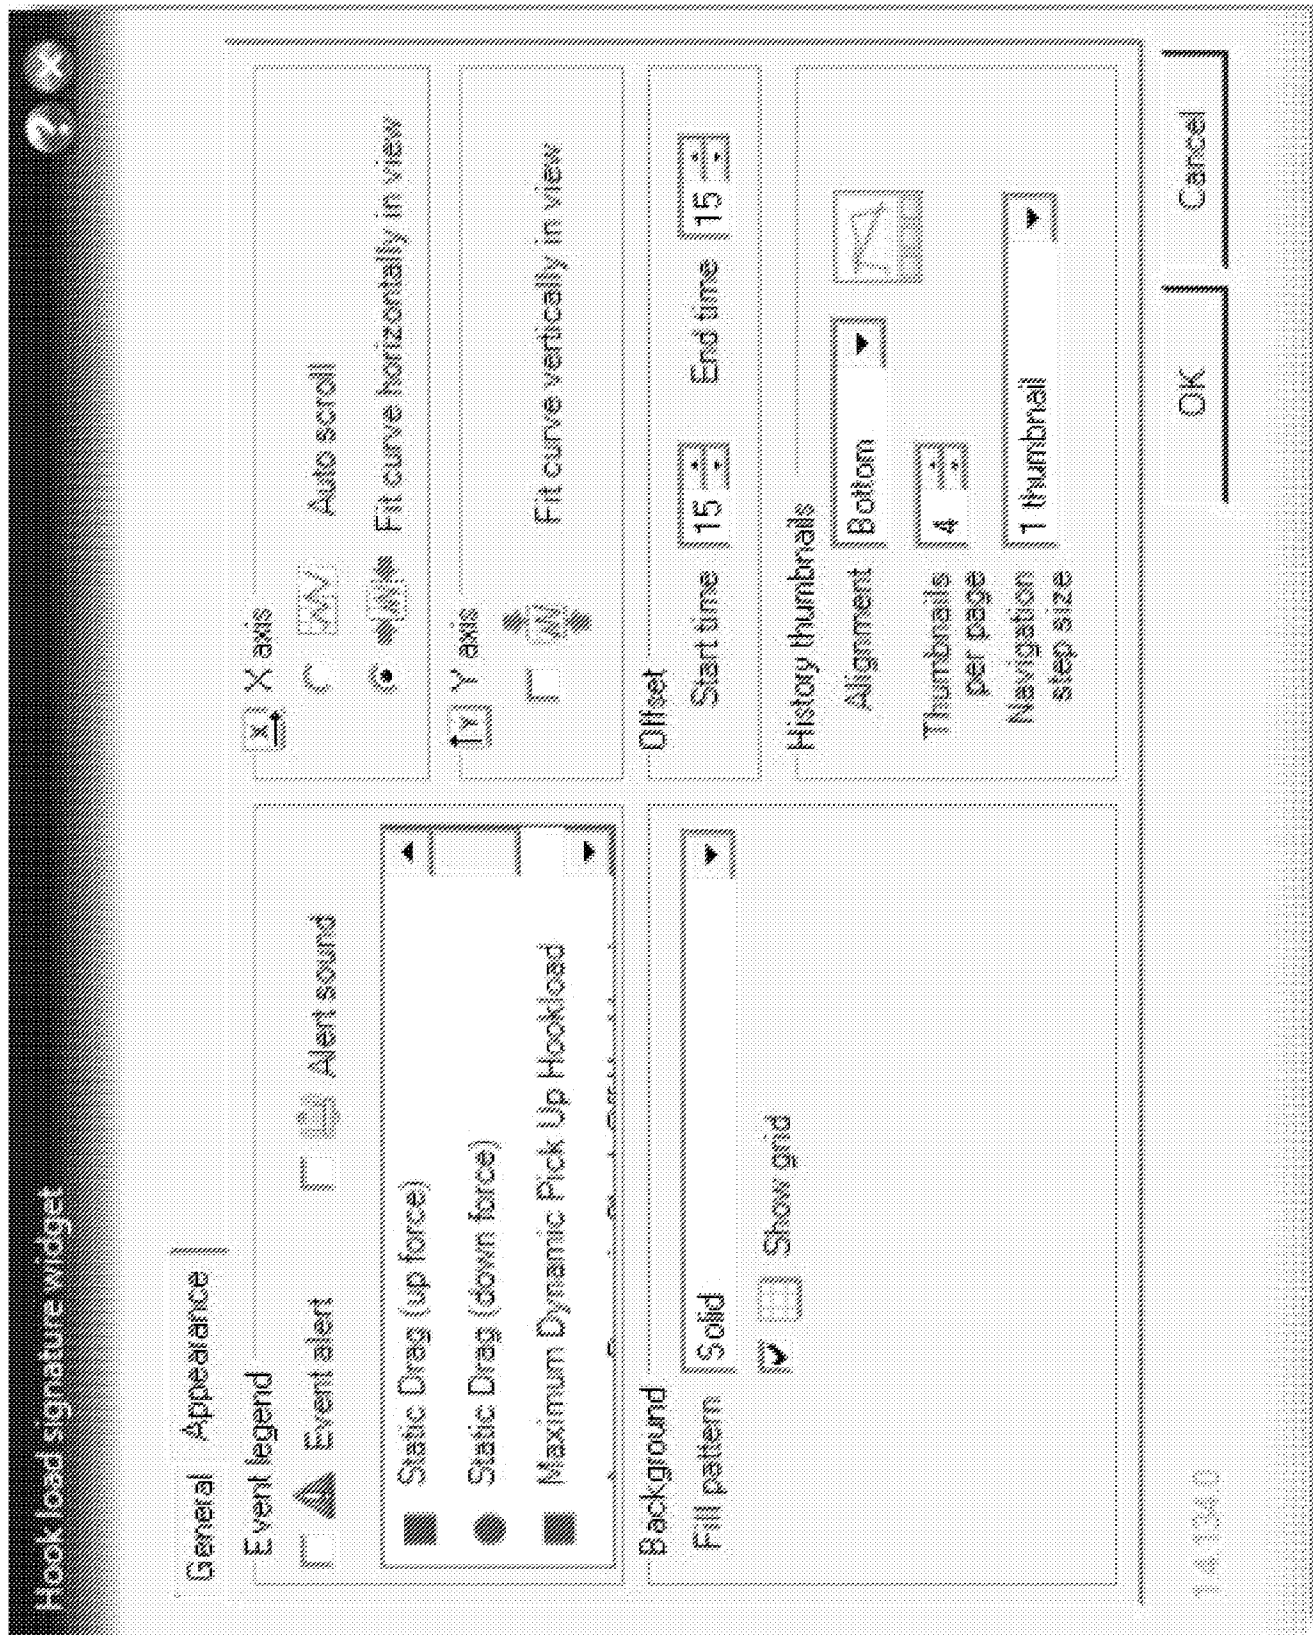


FIGURE 26

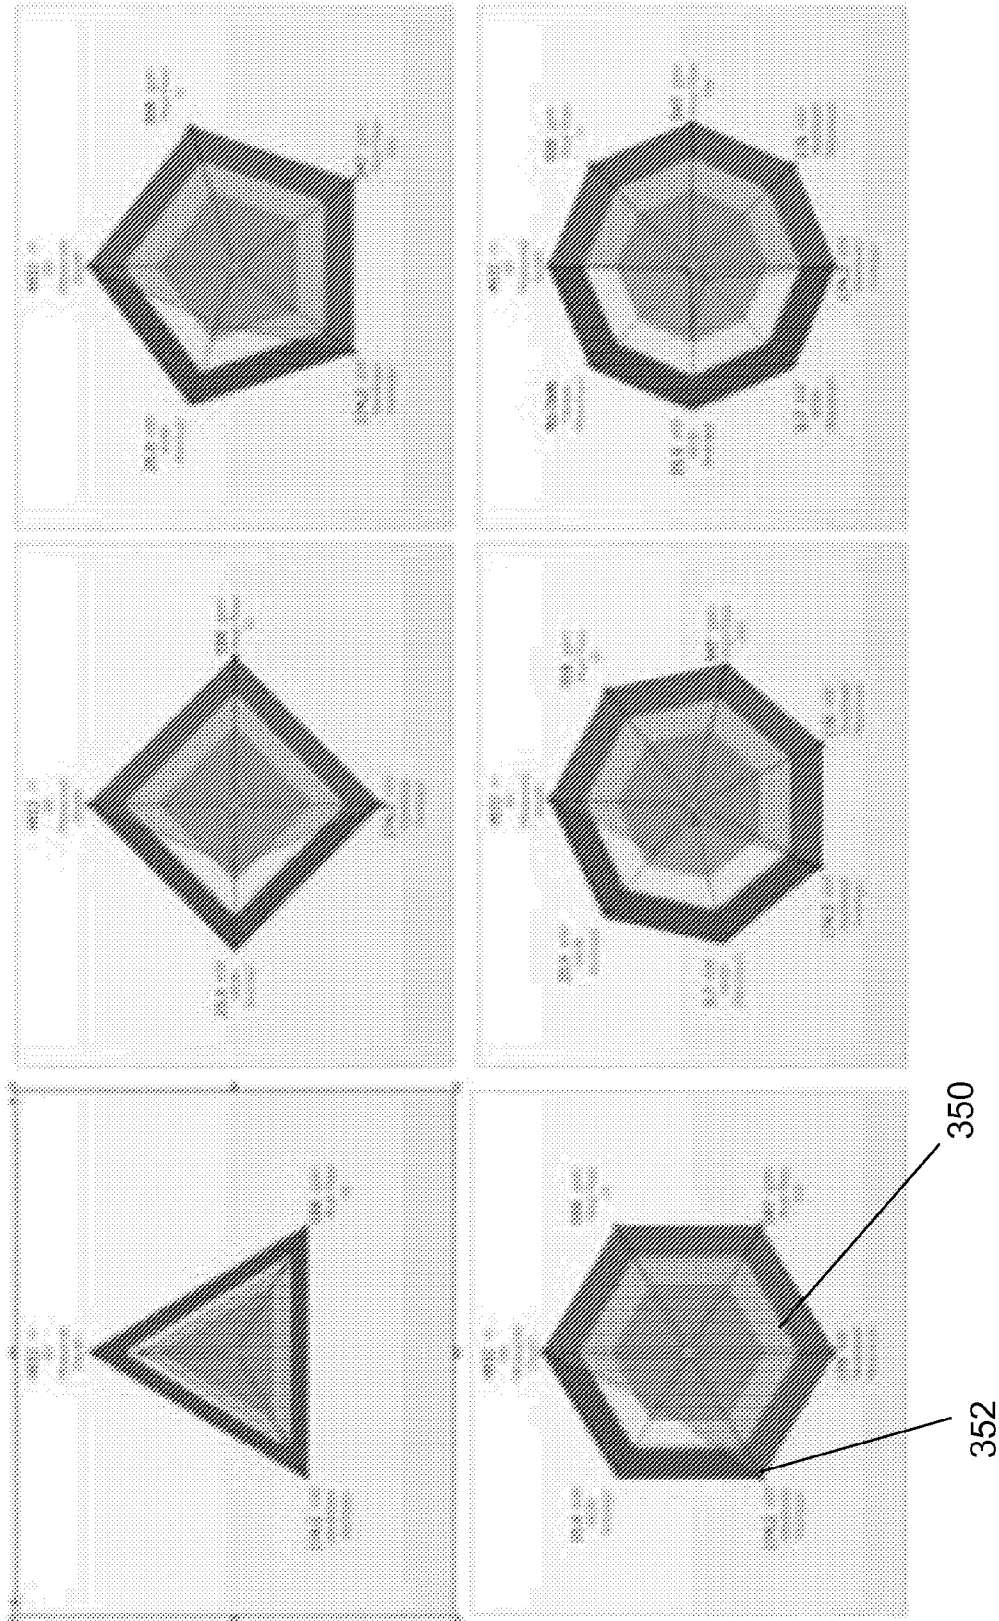


FIGURE 27A

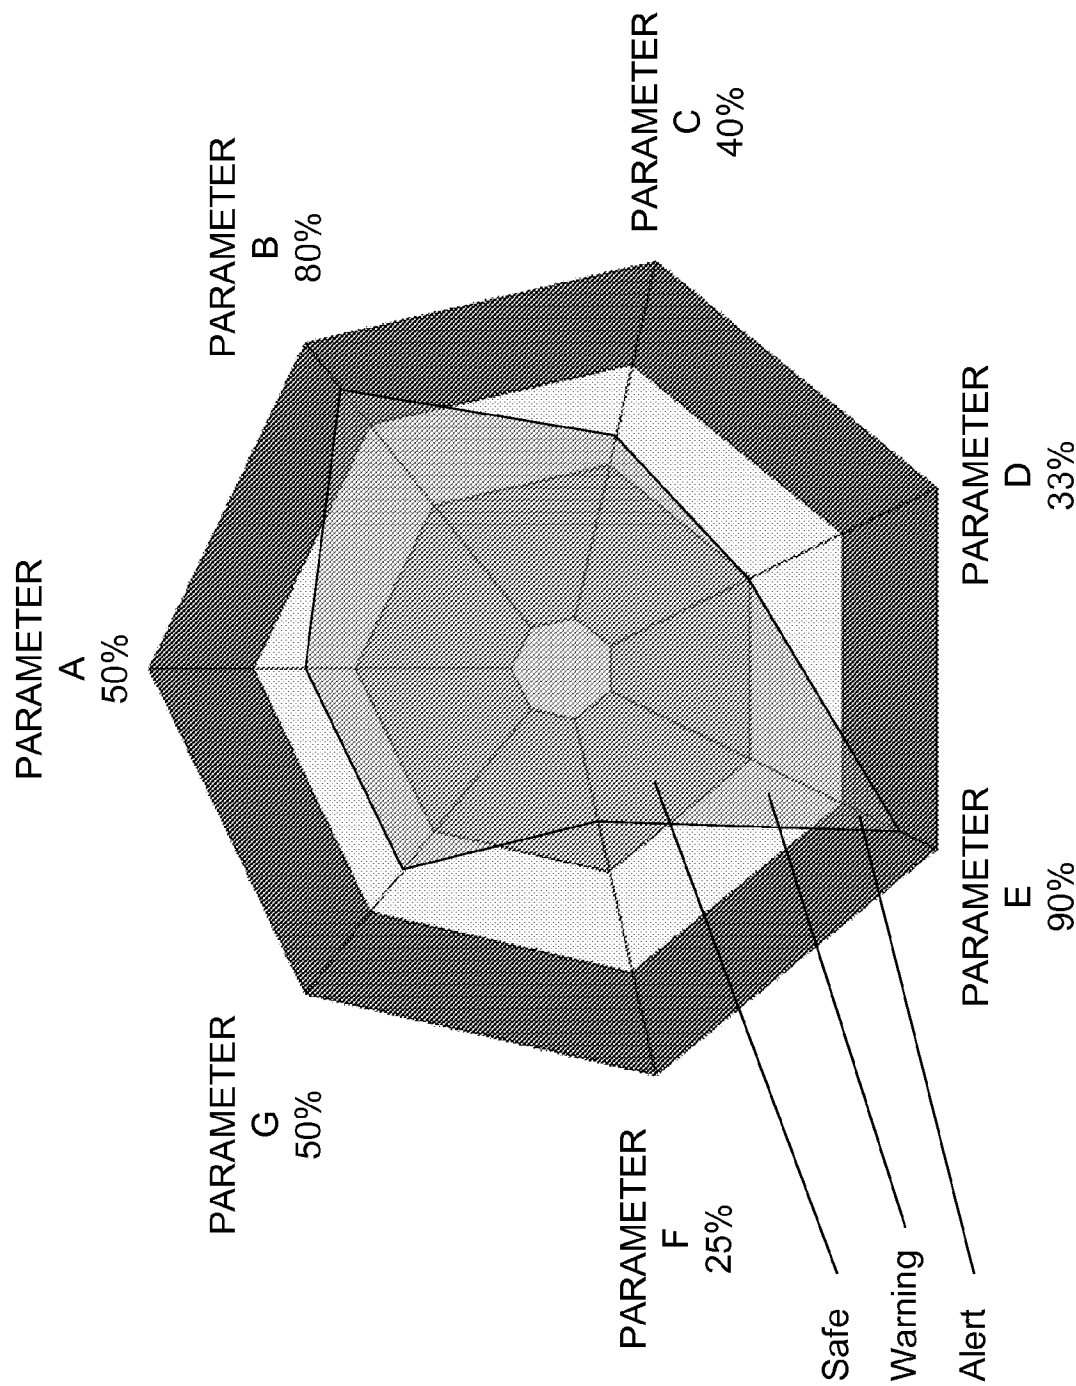


FIGURE 27B

Zone widget

General

Vertices (3 to 8) 360

Add

Remove

TripInSpeed

StaticFriction

HighHookload

LowHookload

HoleQuality

Appearance

Data source

Alarm

Vertex details

Data settings

Title

TripInSpeed

Custom

Mnemonic

TripInSpeed

Change

Index type

Date_Time

Log name

CasingRunningZone

Unit

%

Unit type

Decimals

2

Ranges

☒ Auto range

Normal threshold

0

33

%

Warning threshold

33

66

%

Alert threshold

66

100

%

Common

Transparent

50

OK

Cancel

FIGURE 28

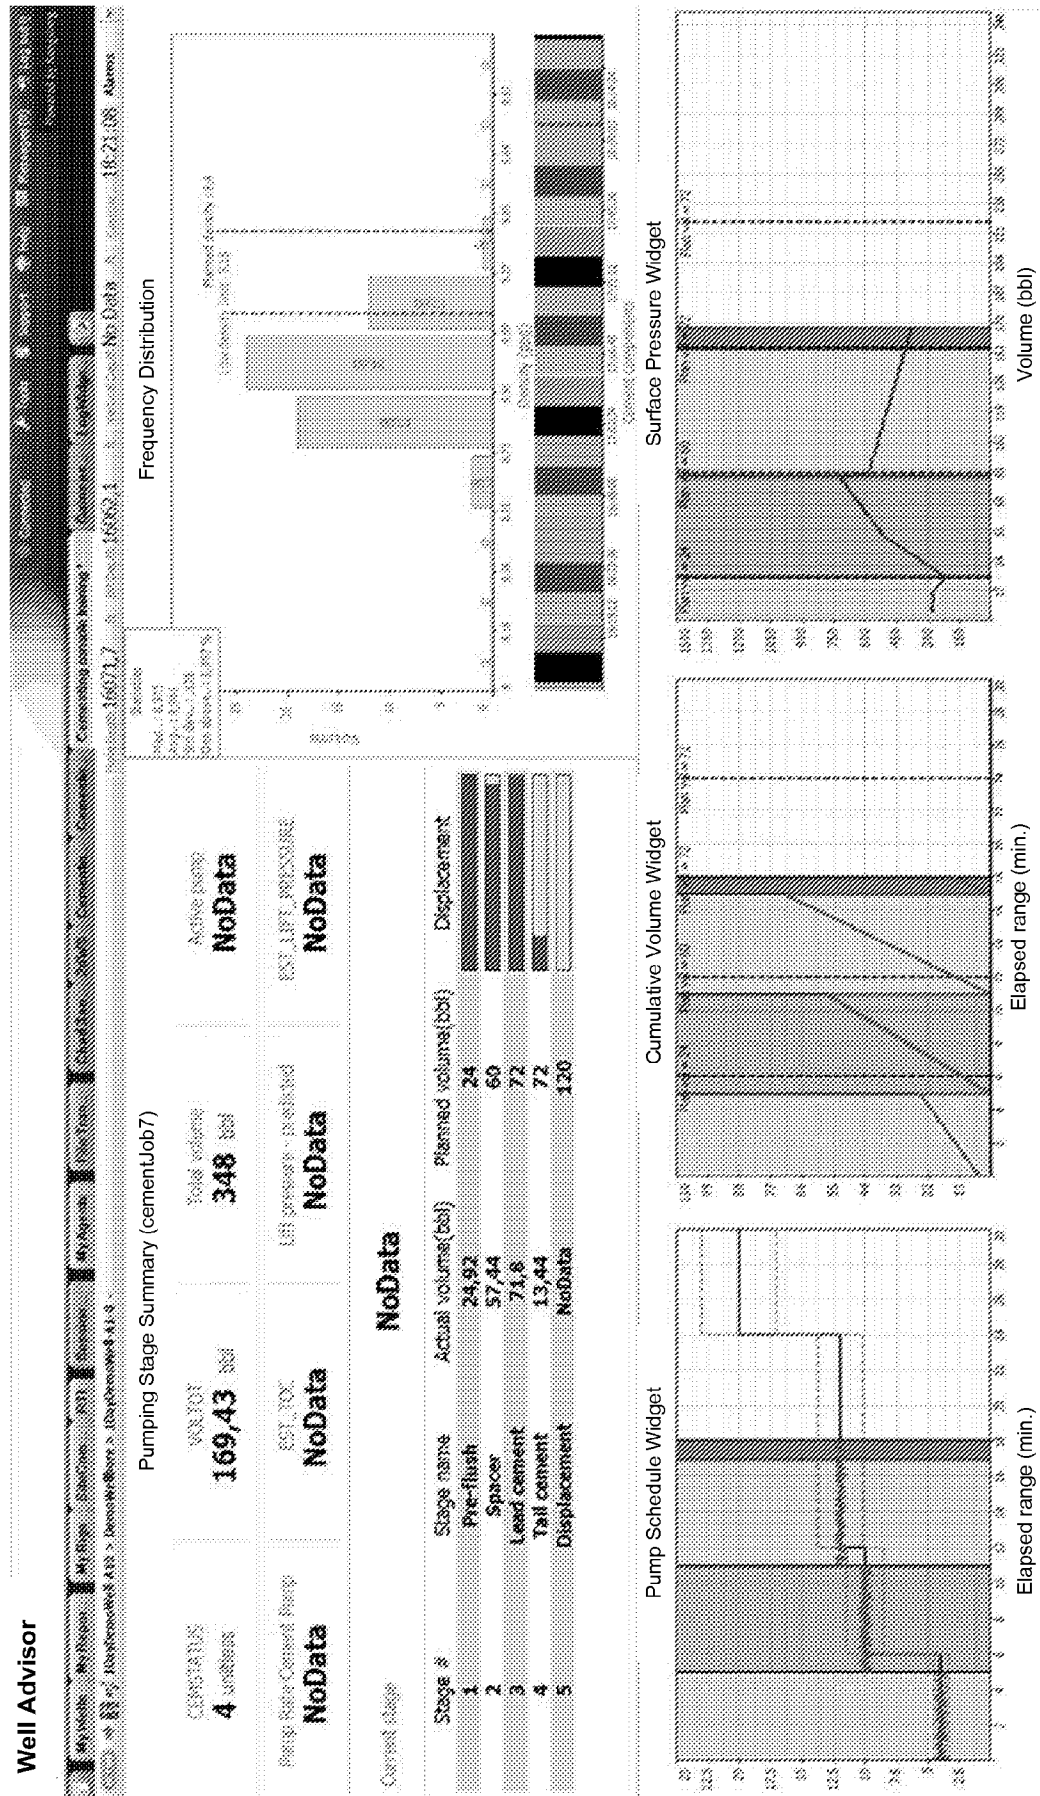


FIGURE 29

[illegible]

FIGURE 30

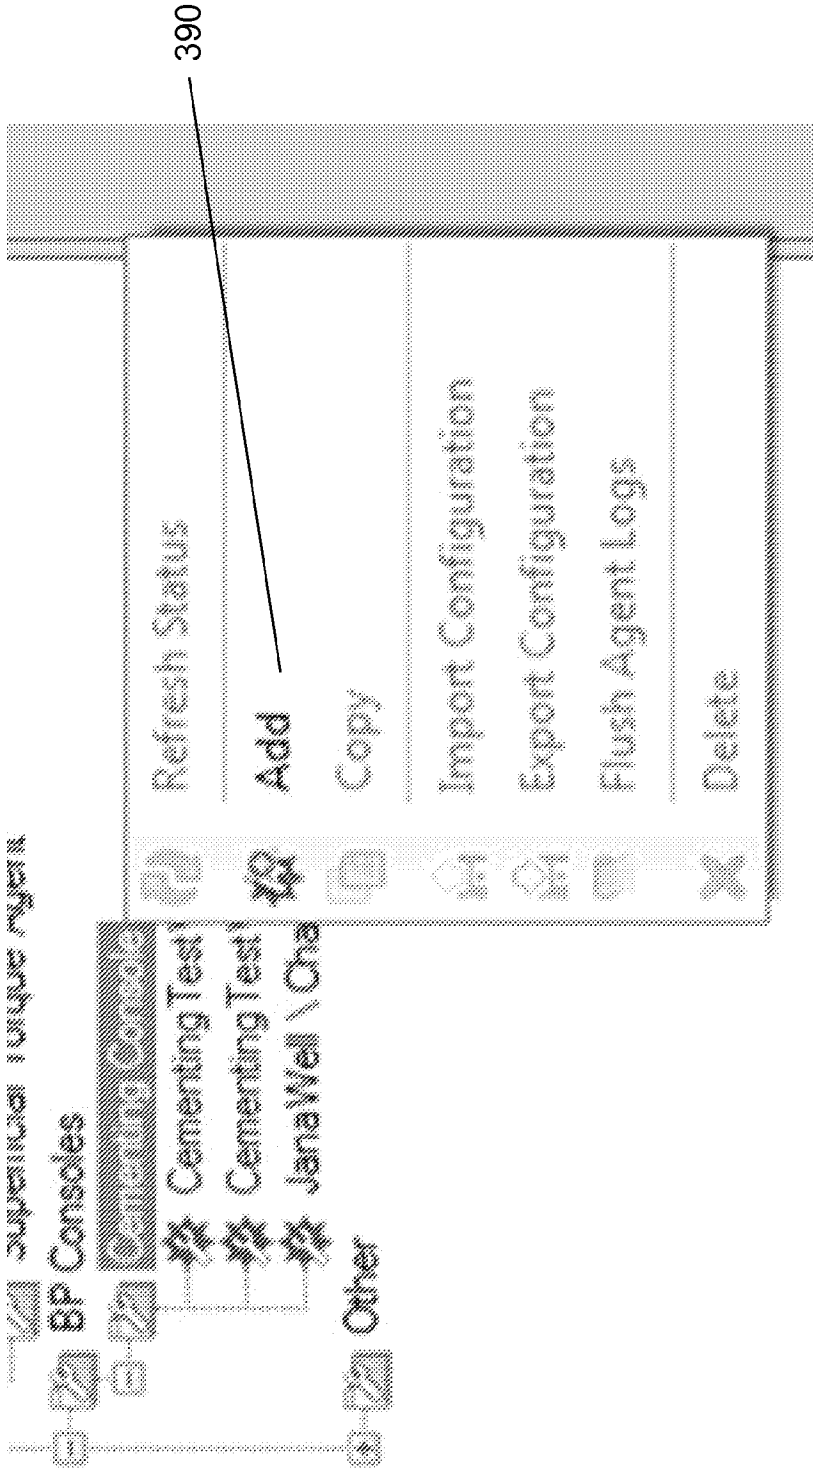


FIGURE 31

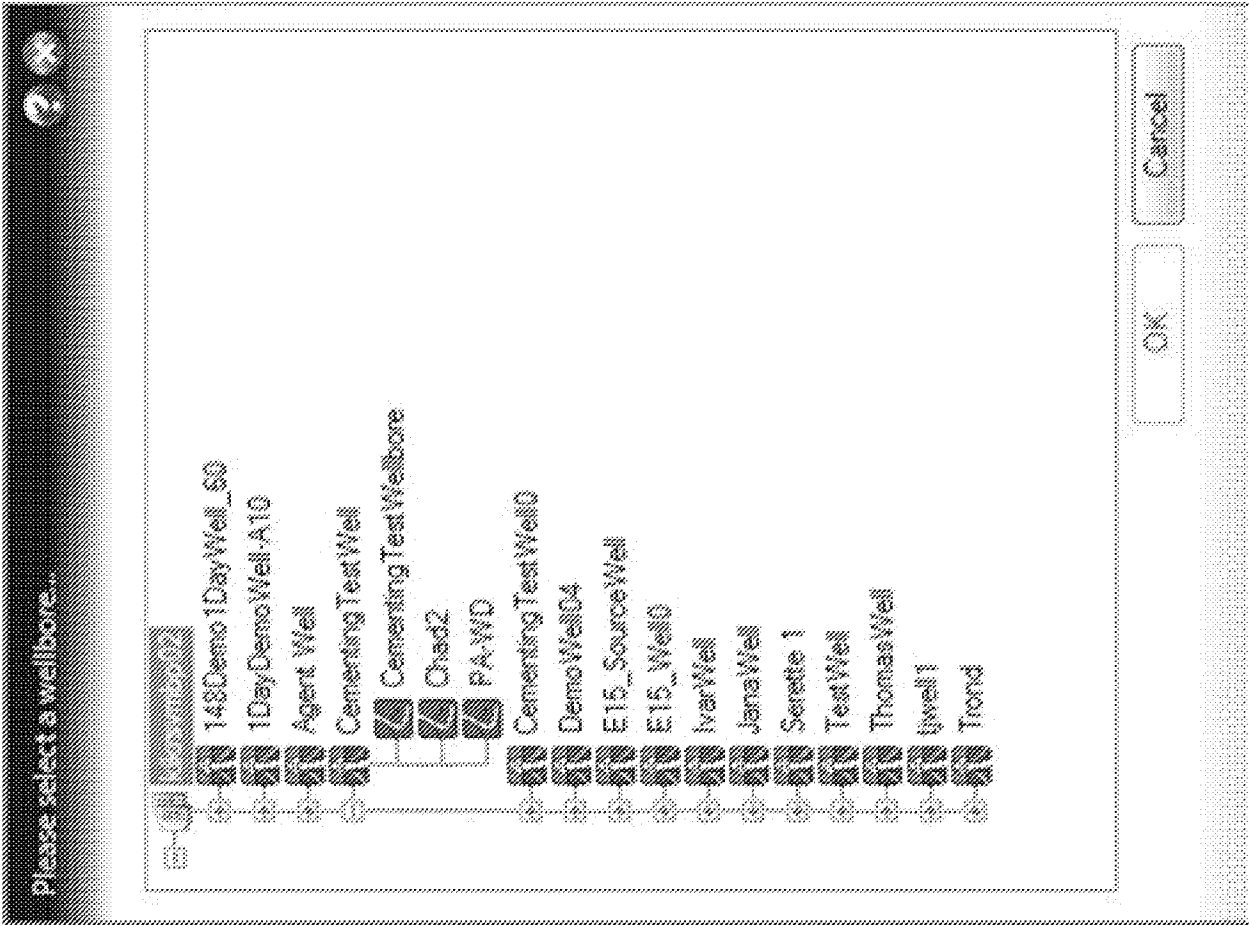


FIGURE 32

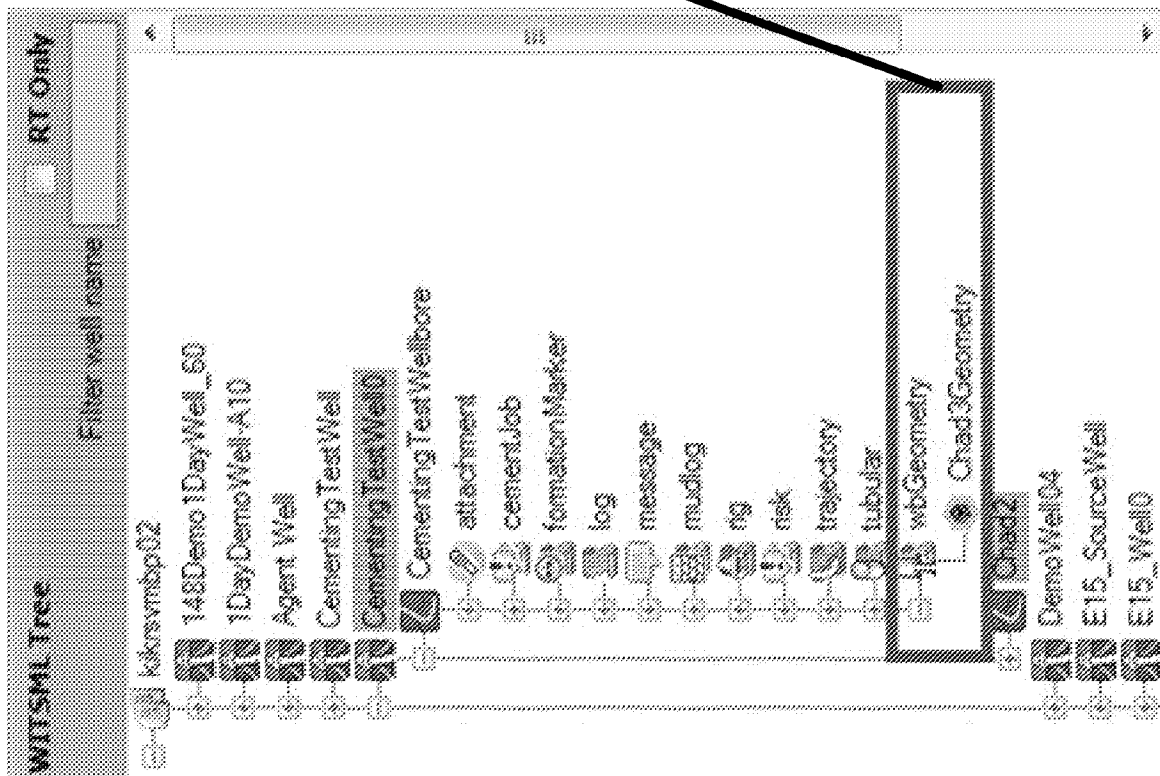


FIGURE 33



⌕ Cement jobs (18B985FAB) ⓘ

Cement Job uid	Crossover	Section	Casing type
<No Cement Plan>		Section 1	casing
Create New Cement Plan		Section 2	open hole

420

FIGURE 35

Cementing console configuration Description: Configuration page for Cementing console

Agent edition: full

Region: N/A	Rig: N/A	Well depth: N/A
Field: N/A	Well name: CementingTestWell	Air gaps: N/A
	Riser ID: N/A	

Cement job #	Cement job uid	Cross-over	Section	Casing type	Casing ID (in)	Casing OD (in)	MD top (in)	MD bottom (in)
1	Cement job (1818054 A03)		Section 1	casing	8.75	8.75	0	120
2	Default New Cement Plan		Section 2	open hole	8.48	8.48	120	1200

Cement job **422**

Cement components **424**

Stage # **424** Stage type

Planned volume (bbl)	Planned density (lbm/gal US)	Pumped from	Planned pump rate (gal US/min)
1 Load cement	24	Cement pump	12
2 Tail cement	20	Agitate	8

FIGURE 36

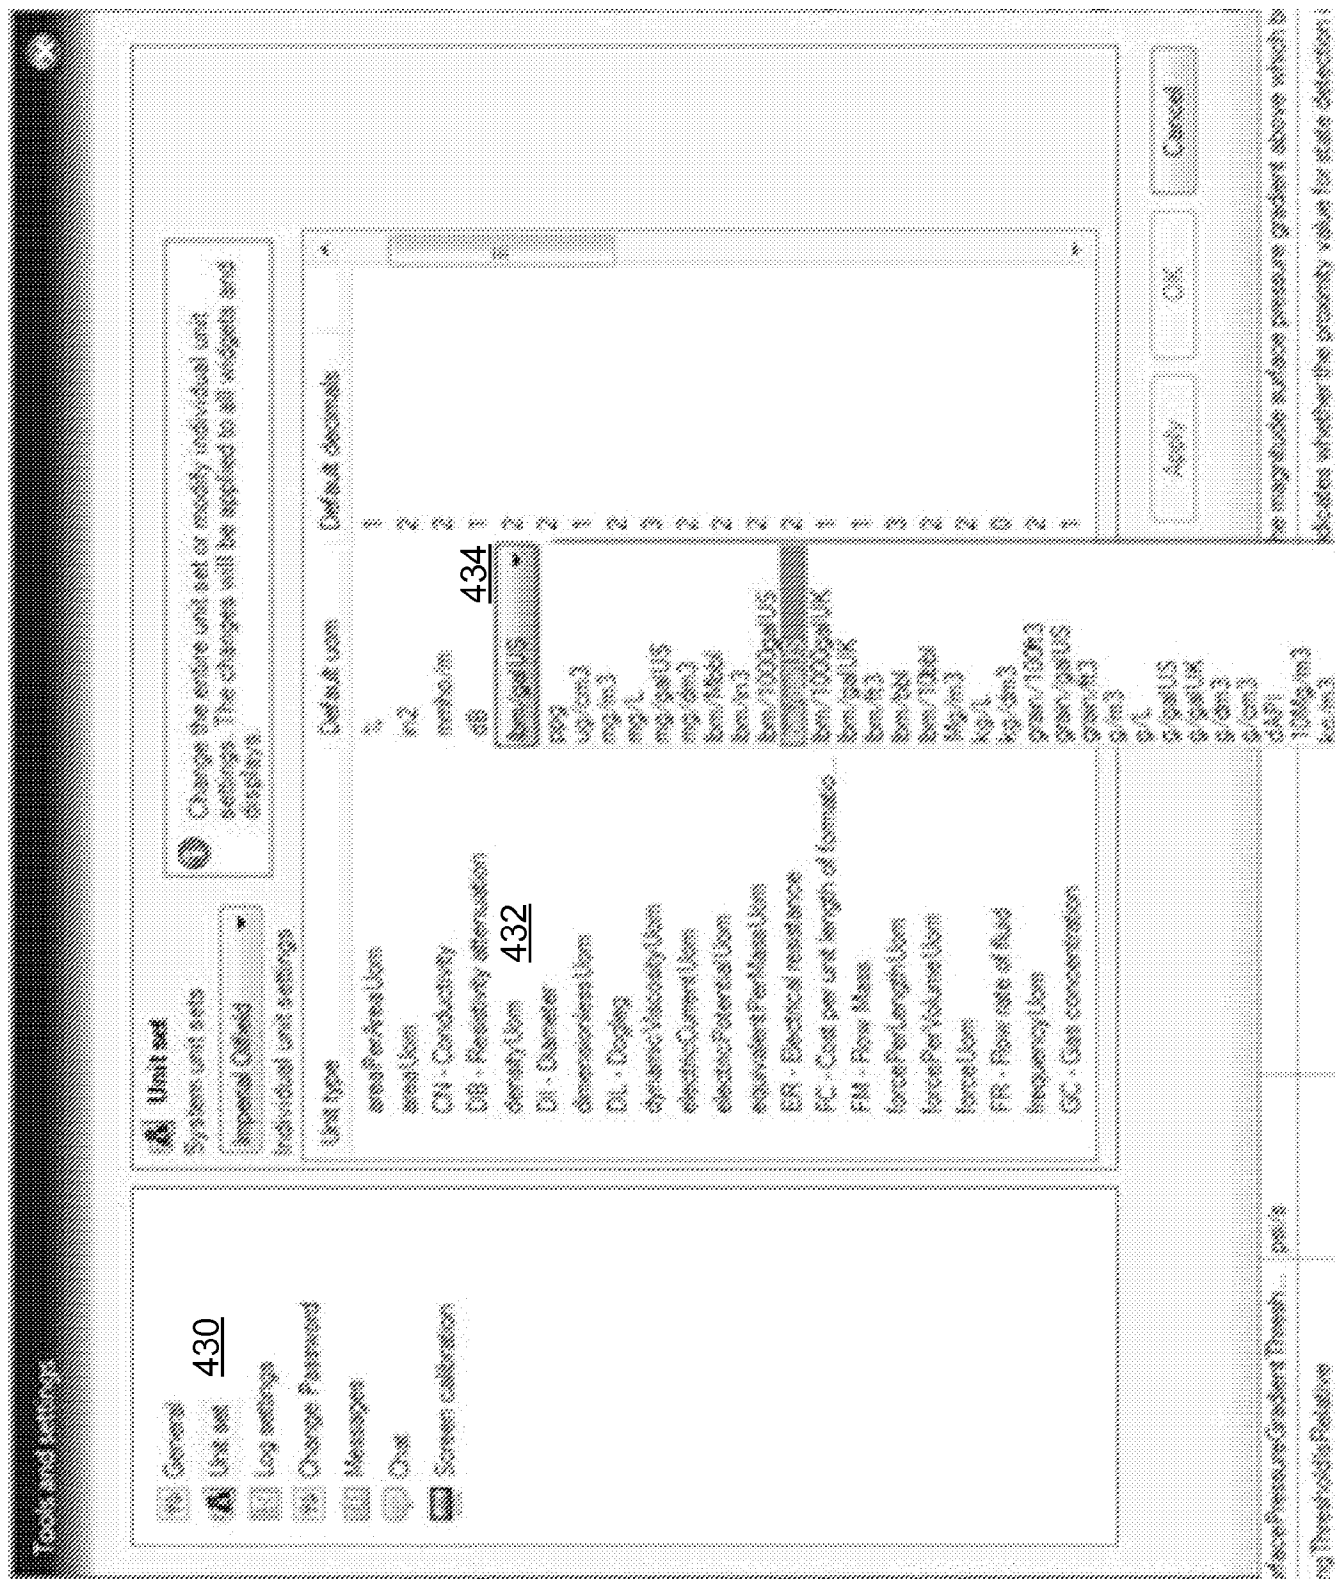


FIGURE 37

Planned volume (bbl)	Planned density (lbm/gal US)	Pumped from	Planned pump rate (gal)
all		Unknown	
		Unknown	
		Unknown	
	12.8	440	
		planned density must have a Double value	
		Unknown	

FIGURE 38

*** Cement job (STANDARD JOB)**

Cement Job Unit	Overview	Section	Casing type	Casing OD (in)	Casing ID (in)	MD Top (in)
010 Cement Run		Section 1	Casing	3.62	3.75	0
020 Run Cement Run		Section 2	Open Hole	10	1.45	100

*** Cement job**

*** Cement components**

Stage #	Stage type	Planned volume (bbl)	Planned density (lbm/gal US)	Pumped from	Planned pump rate (gal US/min)
1	Unknown	0.0	0	Unknown	0
2	Unknown	0	0	Unknown	0
3	Unknown	0	0	Unknown	0
4	Unknown	0	12.00	Unknown	0
5	Unknown	0	0	Unknown	0

*** Agent configuration**

Parameter / Log name	Unit	Value / Curve
VolumeCalc/VolumeCalc		5 The number of minutes allowed to pass without new data being written.
Engine Tracing		True Indicates whether run-time tracing is enabled or not.
Agent/RunTime/PC		The start date and time from which the input log data to be read. If blank the agent will read the data.
Log/Source/VolumeCalc/Volume		0 The stop increment used to create interpolation buffer for volume calculations.
VolumeCalc/VolumeCalc		5 The rate of the volume is calculated, used to smooth the volume pressure value.
Curve/VolumeCalc/VolumeCalc		True Indicates whether the density monitoring plot is given as a fraction of the change in density. If not 1.
Curve/VolumeCalc/VolumeCalc		1 The deviation is absolute from the density in the cement plan for the monitoring region.
Curve/VolumeCalc/VolumeCalc		0.15 The deviation is fraction from the density in the cement plan for the monitoring region.
Planned/VolumeCalc/VolumeCalc		0.1 The percentage of the planned volume to ignore readings for data detection after the start of the log.
Start/Change/VolumeCalc/VolumeCalc		10 The time threshold for density stage change detection. Stage change is only detected when all the 2.
Planned/VolumeCalc/VolumeCalc		50 The magnitude volume pressure gradient above which bumping of the plugs will be assumed to per.
VolumeCalc/VolumeCalc/VolumeCalc		True Indicates whether the pressure value for data detection is given as a percentage of the planned vol.
VolumeCalc/VolumeCalc/VolumeCalc		10 The pressure value as an offset to a value of 100 for data detection.

446

FIGURE 39

 CommentOutput		*	 PUMPSTATUS	☐	Raw surface pressure data
 CommentOutput		*	 FLOWING_R	☐	Raw data from the rig pump
 CommentOutput		*	 FLOWING_C	☐	Raw data from the cement unit (pump)
 CommentOutput		*	 DEN	☐	Nominal density from the cement unit (pump)
 caliper		*	 caliper	☐	Optional curve containing the diameter of the open hole given a depth
 CommentOutput		*	 end	☐	Optional curve for current bit depth

FIGURE 40

Component	Value	Component	Value
Component 1	1	Component 2	1
Component 3	1	Component 4	1
Component 5	1	Component 6	1
Component 7	1	Component 8	1
Component 9	1	Component 10	1
Component 11	1	Component 12	1
Component 13	1	Component 14	1
Component 15	1	Component 16	1
Component 17	1	Component 18	1
Component 19	1	Component 20	1
Component 21	1	Component 22	1
Component 23	1	Component 24	1
Component 25	1	Component 26	1
Component 27	1	Component 28	1
Component 29	1	Component 30	1
Component 31	1	Component 32	1
Component 33	1	Component 34	1
Component 35	1	Component 36	1
Component 37	1	Component 38	1
Component 39	1	Component 40	1
Component 41	1	Component 42	1
Component 43	1	Component 44	1
Component 45	1	Component 46	1
Component 47	1	Component 48	1
Component 49	1	Component 50	1
Component 51	1	Component 52	1
Component 53	1	Component 54	1
Component 55	1	Component 56	1
Component 57	1	Component 58	1
Component 59	1	Component 60	1
Component 61	1	Component 62	1
Component 63	1	Component 64	1
Component 65	1	Component 66	1
Component 67	1	Component 68	1
Component 69	1	Component 70	1
Component 71	1	Component 72	1
Component 73	1	Component 74	1
Component 75	1	Component 76	1
Component 77	1	Component 78	1
Component 79	1	Component 80	1
Component 81	1	Component 82	1
Component 83	1	Component 84	1
Component 85	1	Component 86	1
Component 87	1	Component 88	1
Component 89	1	Component 90	1
Component 91	1	Component 92	1
Component 93	1	Component 94	1
Component 95	1	Component 96	1
Component 97	1	Component 98	1
Component 99	1	Component 100	1

FIGURE 41

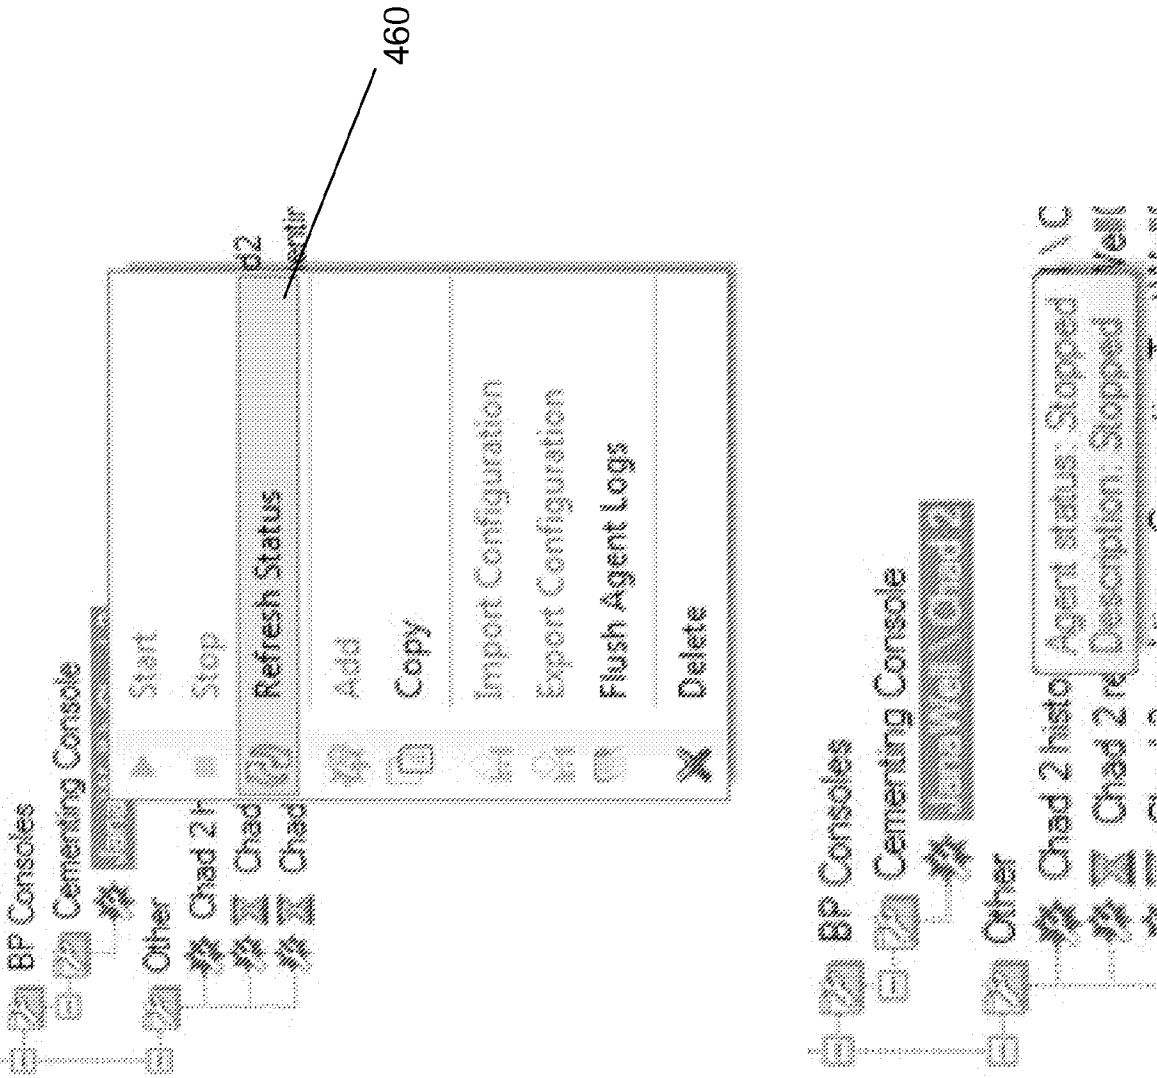


FIGURE 42

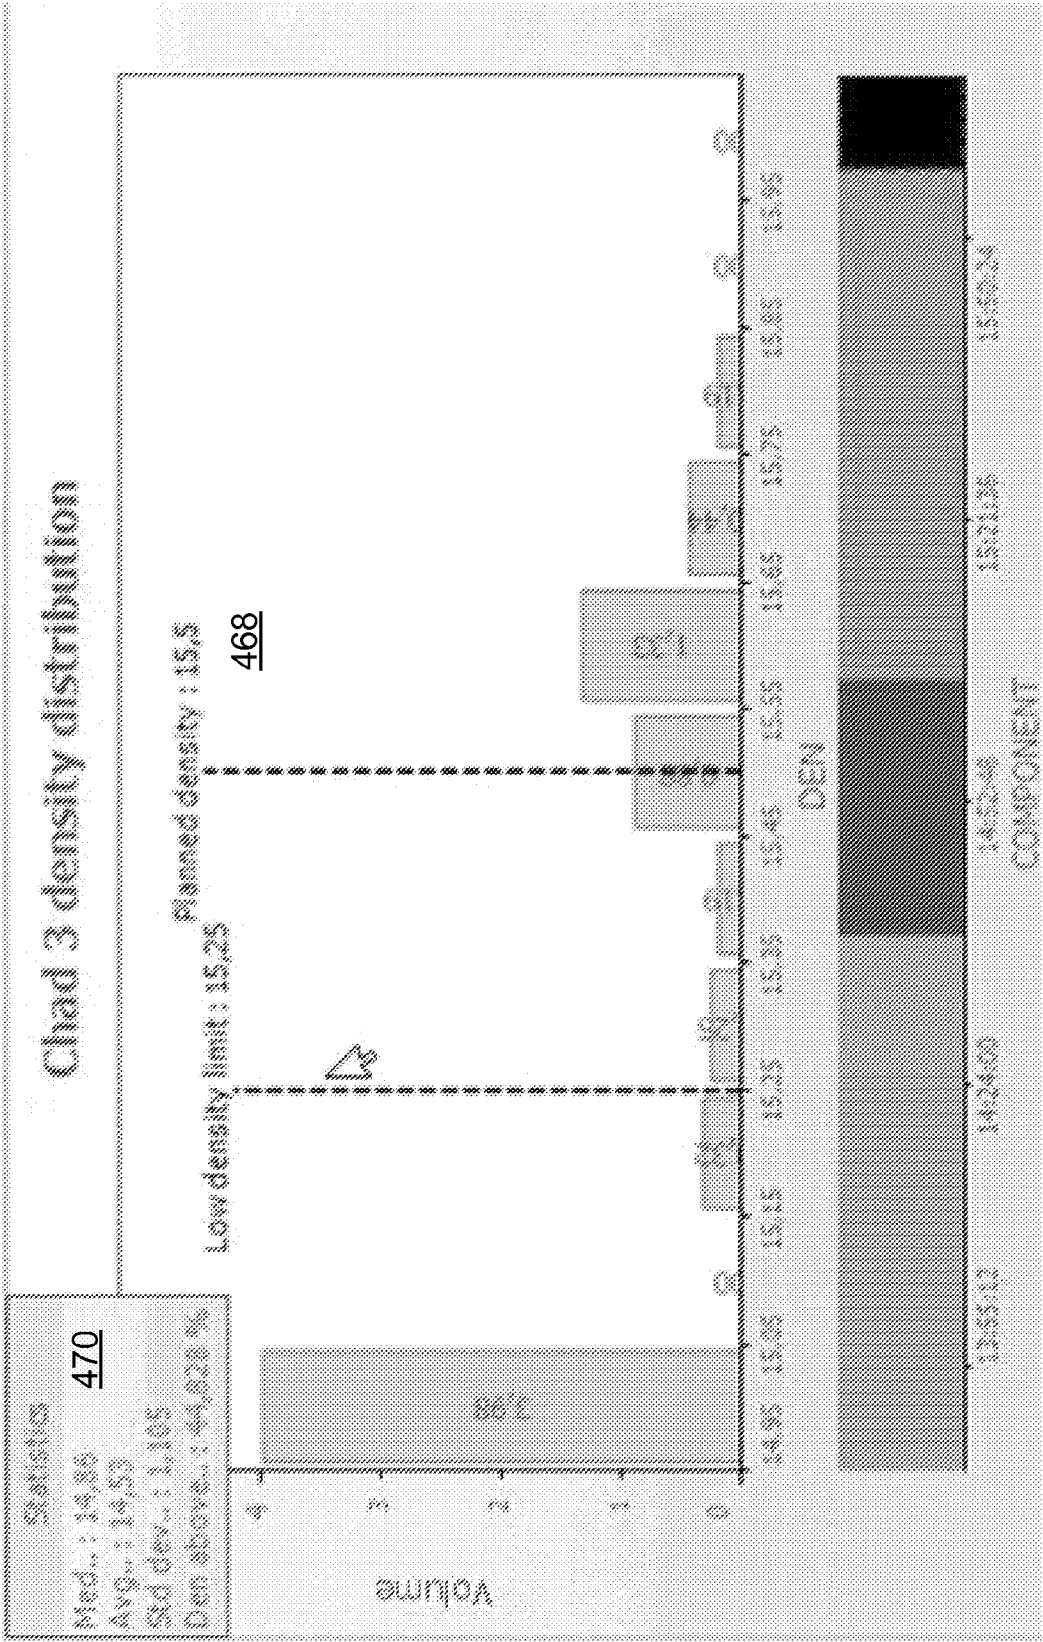


FIGURE 43

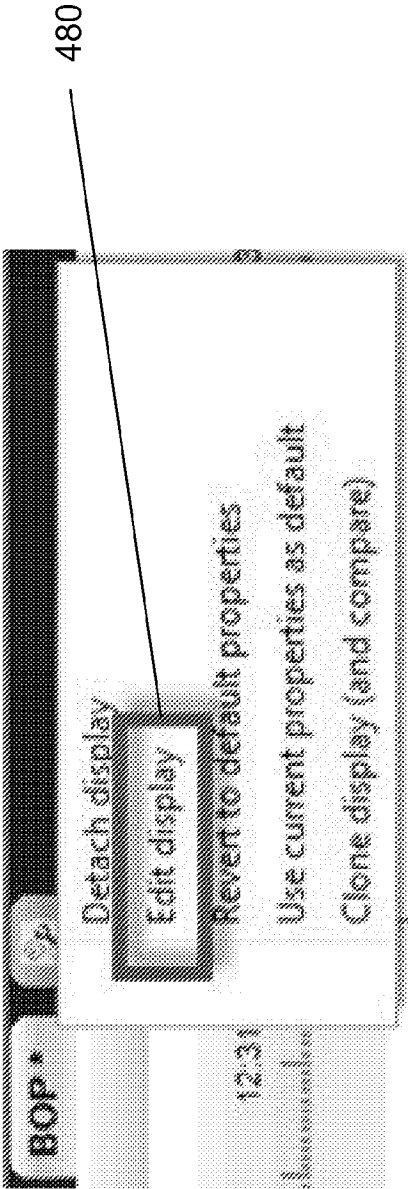


FIGURE 44A

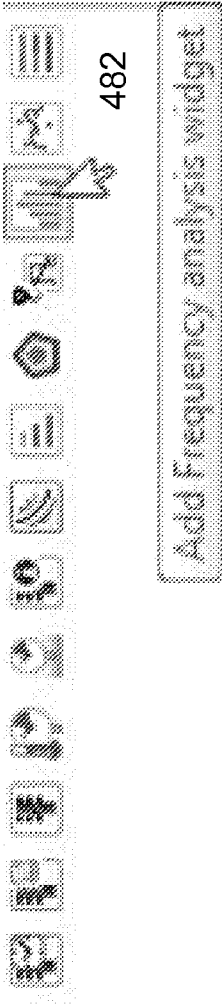


FIGURE 44B

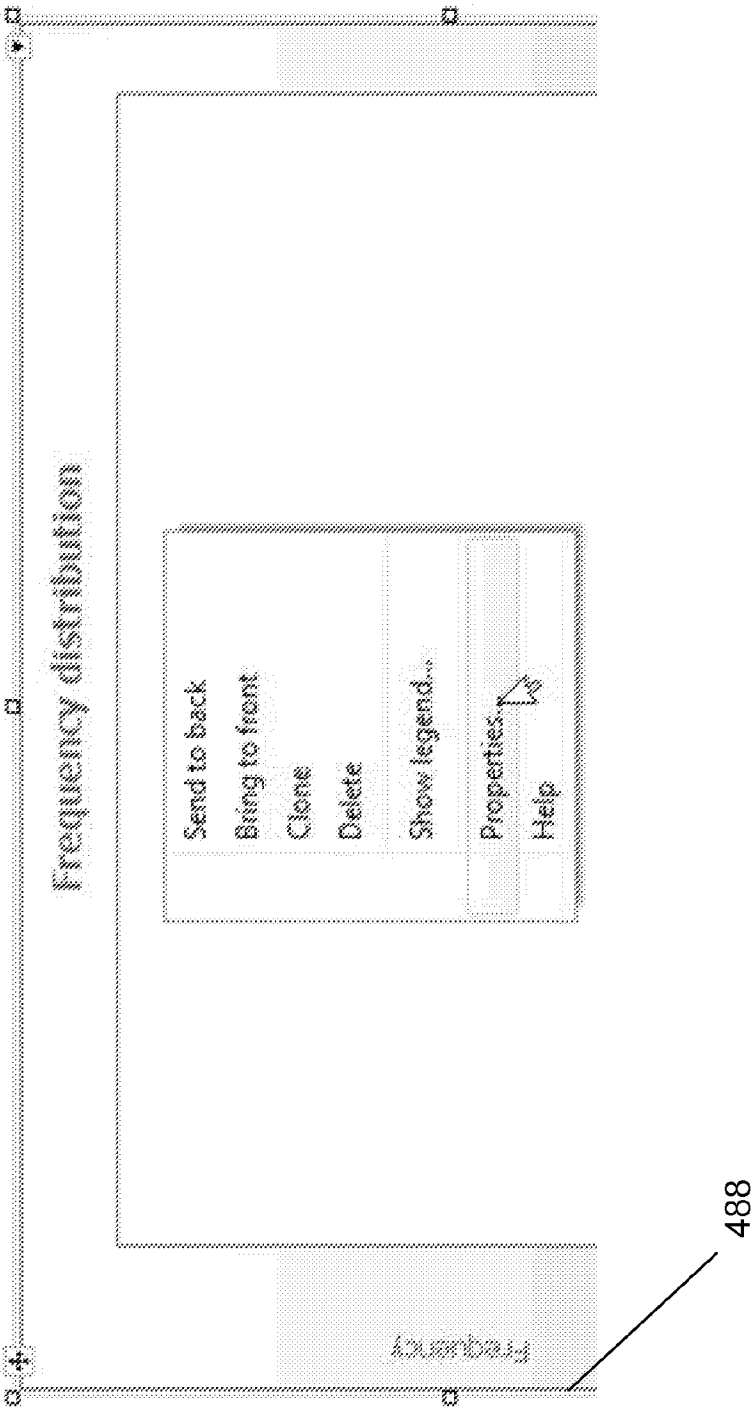


FIGURE 45

Frequency Analysis Widget

General

Statistics

General properties

Header text

Frequency distribution

Wellbore reference

Pebbles > Bandam

Frequency as

Percentage

Value

Enable cumulative volumetric mode

Title

Custom

Change

Mnemonic

Mnemonic

Change

Index type

Index type

Log name

Log name

Unit

Unit type

Period

Use state

Display text

Mnemonic name

Activity Mnemonic

Select

Mnemonic name

Pattern set

Standard

Use cement components

Preview

0

Undefined Status

3

Lead cement

1

Pre-flush

4

Tail cement

2

Spacer

5

Displacement

OK

Cancel

FIGURE 46

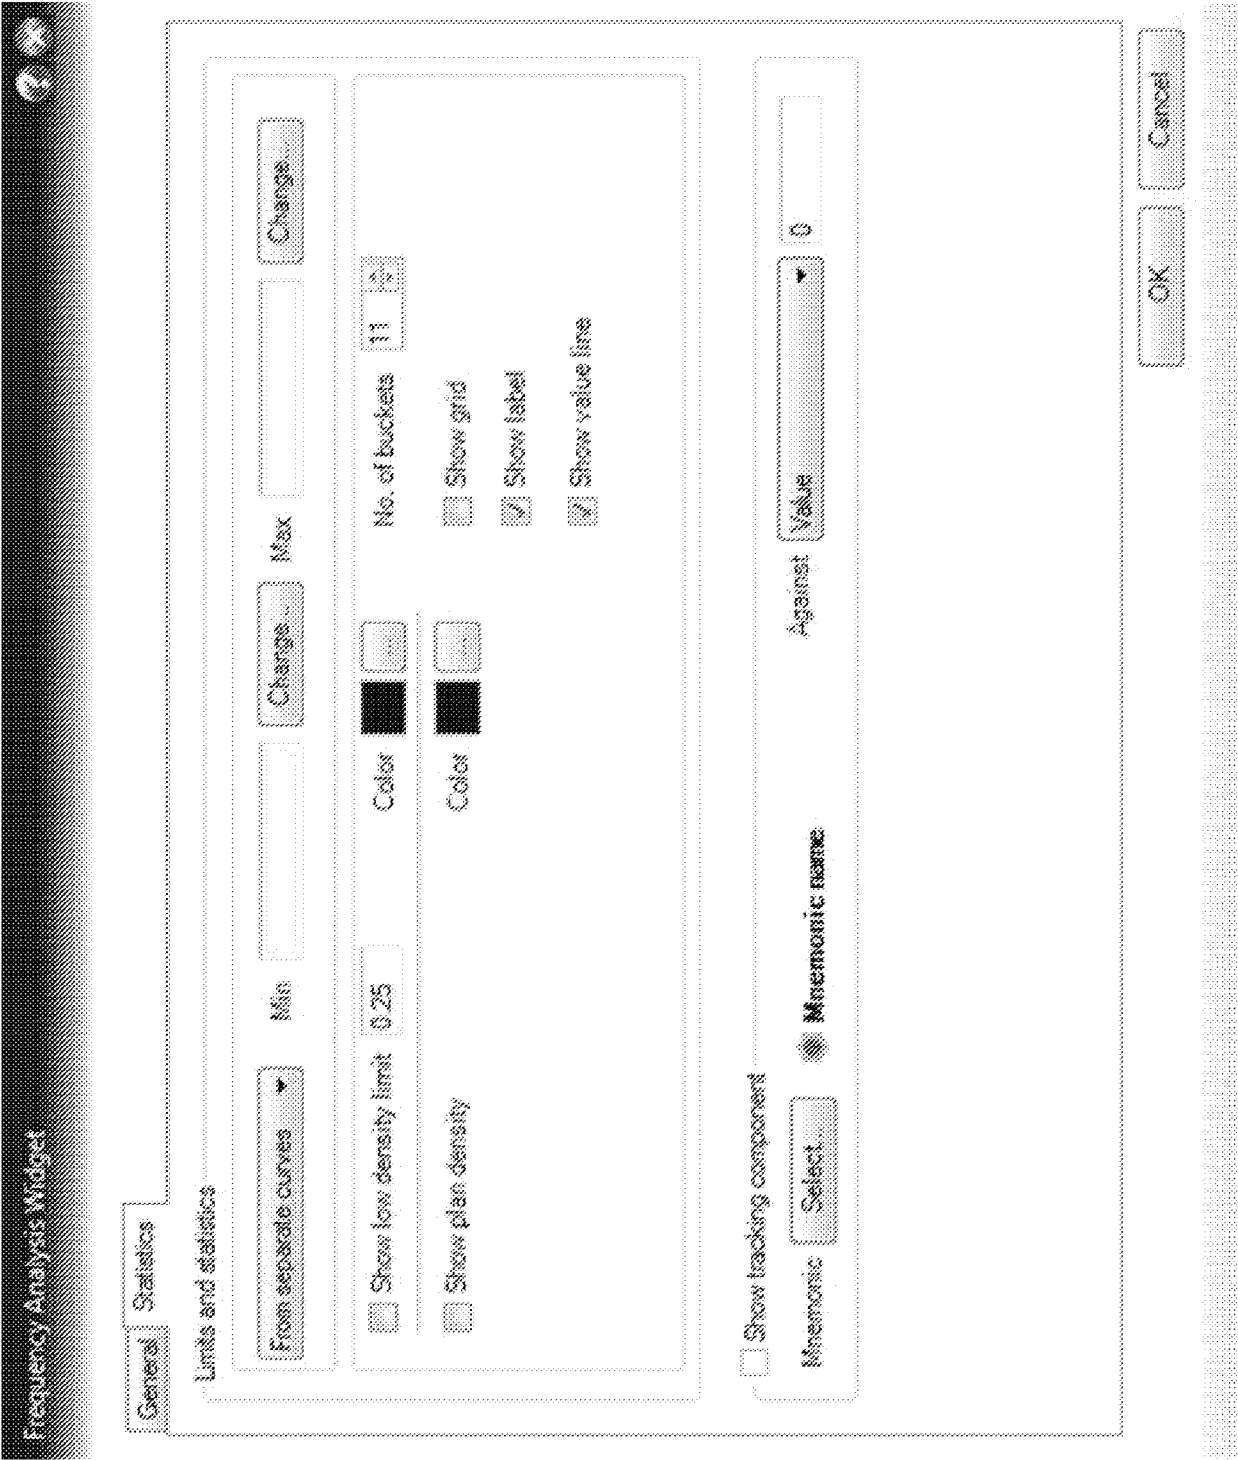


FIGURE 47

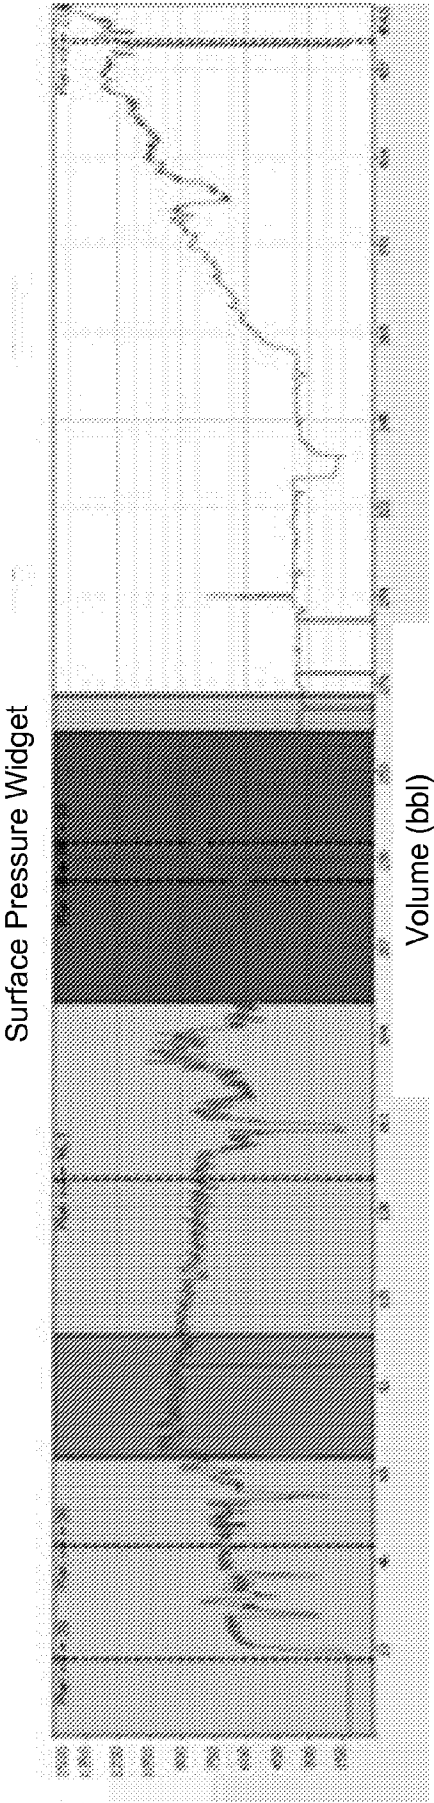


FIGURE 48

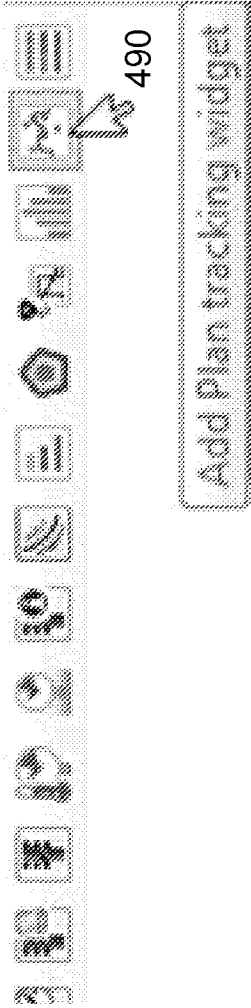


FIGURE 49A

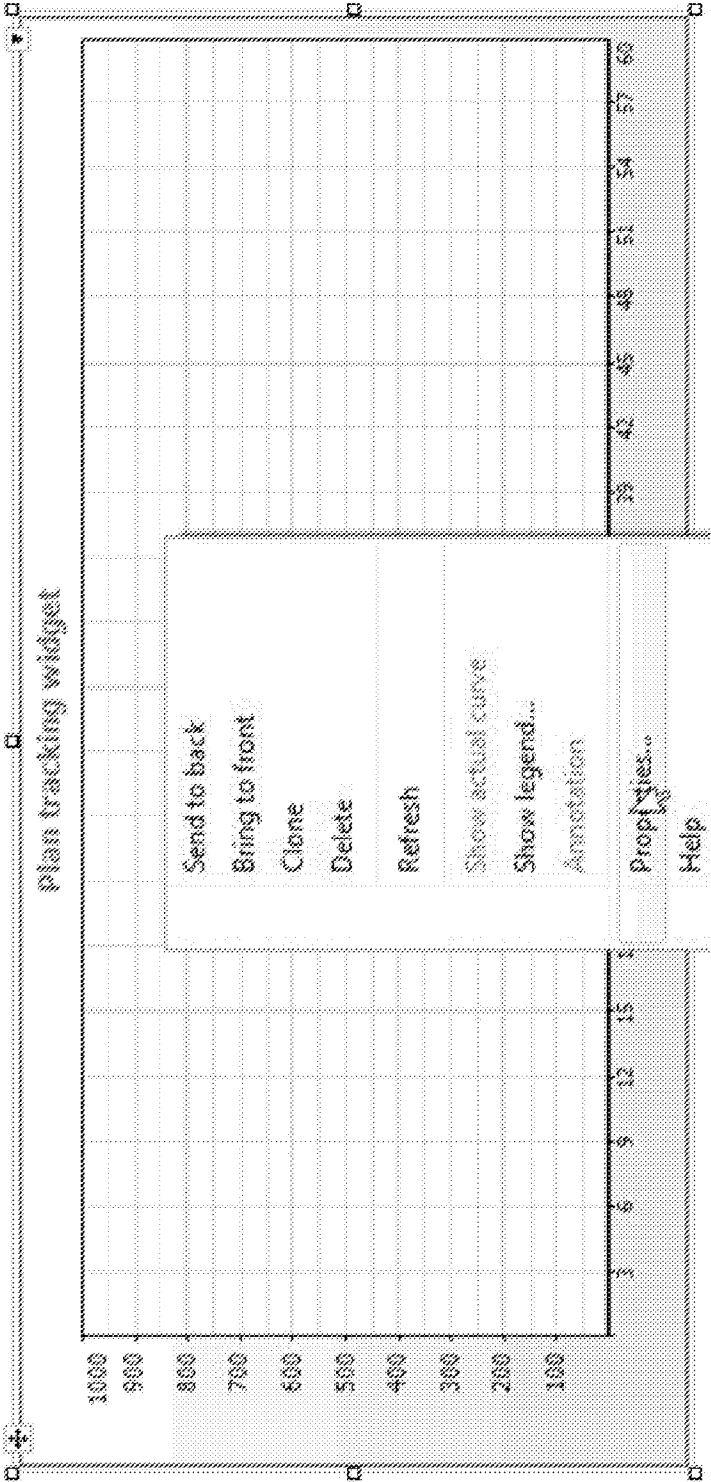


FIGURE 49B

Plan tracking properties

General | Pattern mapping | Annotation

General properties

Header Text: Plan tracking widget

Ranges

Manual: 0 to 1000

Wellbore reference: Reference: Pebbles > BamBam

☒ Track elapsed time ☐ Track volume curve

Volume index from: Change...

☐ Sync with cement activity

Mnemonic: Change... Line color: Use pattern mapping (pattern mapping tab)

Planned curves/curves (2 of 5)

☒ Volume from cement plan
☒ Pump rate from cement plan

☐ Set as master
☐ Plot +/- 15% limit

Actual curve

Actual curves/curves (0 of 3)

Curve properties

Title: Custom

Mnemonic: Change...

Index type: Index type Log name: Log name Unit: Unit type

Style: Color: Line Type Value Position Symbol Type

OK Cancel

FIGURE 50

Plan tracking properties

General | Pattern mapping | Annotation

Annotations

☐ Apply annotation filter

Extended category

Type	Category	Subcategory	Affected personnel
☐ event	☐ mechanical	☐ gas kick	☐ company_man
☐ near_miss	☐ time_related	☐ shallow_water_influx	☐ contractor
☐ best_practice	☐ wellbore_stability	☐ other_influx_or_kicks	☐ directional_driller
☐ lessons_learned	☐ directional_drilling	☐ loss_circulation	☐ driller
☐ other	☐ bit	☐ poor_hole_cleaning	☐ drilling_engineer
☐ unknown	☐ equipment_failure	☐ good_hole_cleaning_at_high_	☐ drilling_superintendent
	☐ completion	☐ high_mud_weight	☐ drilling_team
	☐ casing	☐ special_additives_needed	☐ facility_engineer
	☐ other	☐ gumbie_problems	☐ field_service_manager
	☐ HSE	☐ high_end_rheology_related	☐ foreman
	☐ unknown	☐ excessive_circulation	☐ general_service_supervisor
		☐ performing_a_kill	☐ geologist
		☐ mud_weight_change	☐ member
		☐ excessive_pipe_cement_soc	☐ mud_engineer
		☐ pit_gain_or_loss	☐ mud_logger
		☐ mud_stability_problems	☐ mud_or_lwd_engineer
		☐ shallow_gas_flow	☐ perform_engineer
		☐ twist_off	☐ petrophysicist
		☐ stuck_pipe	☐ production_engineer
		☐ wireline_stuck_in_hole	☐ remotely_operated_vehicle_eng
		☐ stick_and_slip	☐ safety_manager
		☐ vibration_axial	☐ sales_engineer
		☐ vibration_torsional	☐ service_supervisor
		☐ vibration_transverse	☐ technical_support
		☐ vibration_unknown_or_rough	☐ tool_pusher
		☐ uneven_wear_of_bit	☐ wireline_engineer
		☐ uneven_wear_of_drilling	

OK Cancel

FIGURE 51



FIGURE 52

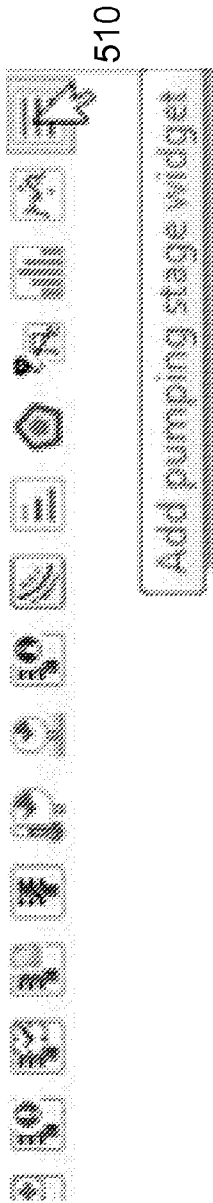


FIGURE 53A

Pumping stage summary					
Stage #	Current volume	Total volume	Active pump		
NoData	NoData	NoData	NoData		
TOC - Planned:	Send to back Bring to front Clone Delete Properties... Help		Pure - predicted	Lift pressure - actual	
NoData			NoData	NoData	
Current stage					
Stage #	Stage n	Planned volume	Displacement		

FIGURE 53B

?

x

Pumping stage properties

General

Pattern mapping

Configurations

Title

Pumping stage summary

(Show cement name in header)

Wellbore reference

Pebbles > BamBam

Single value curves

Curve

Use cement plan

Undecided

Title

Stage #

Custom

Change

Mnemonic

COMPONENT

Log name

CementingOutput

Index type

Date_Time

Unit

Unit type

Row 1 >> Column 2

Row 1 >> Column 3

Row 1 >> Column 4

Row 2 >> Column 1

Row 2 >> Column 2

Row 2 >> Column 3

Row 2 >> Column 4

Row 3

Table Curves

Current Stage Mnemonic

COMPONENT

Change

Actual Volume Mnemonic

Title

Actual volume

Custom

Change

Mnemonic

COMPONENT_VOLUME

Log name

CementingOutput

Index type

Date_Time

Unit

Unit type

OK

Cancel

FIGURE 54

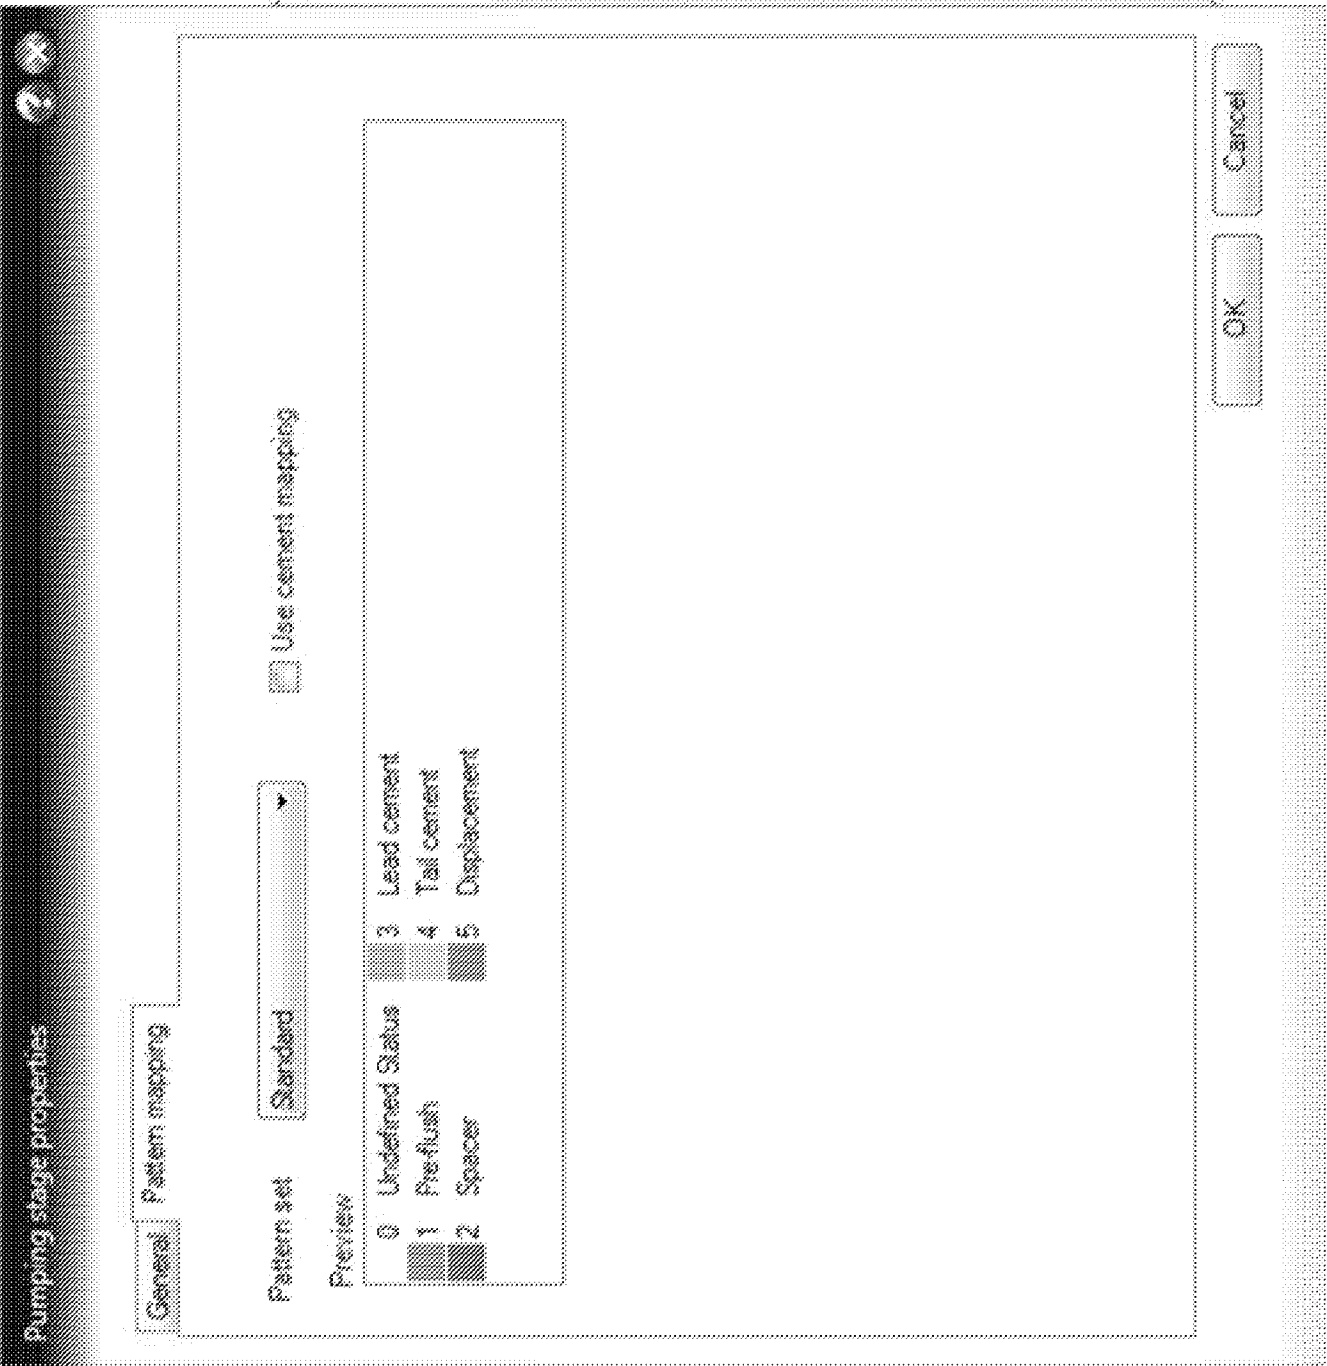


FIGURE 55

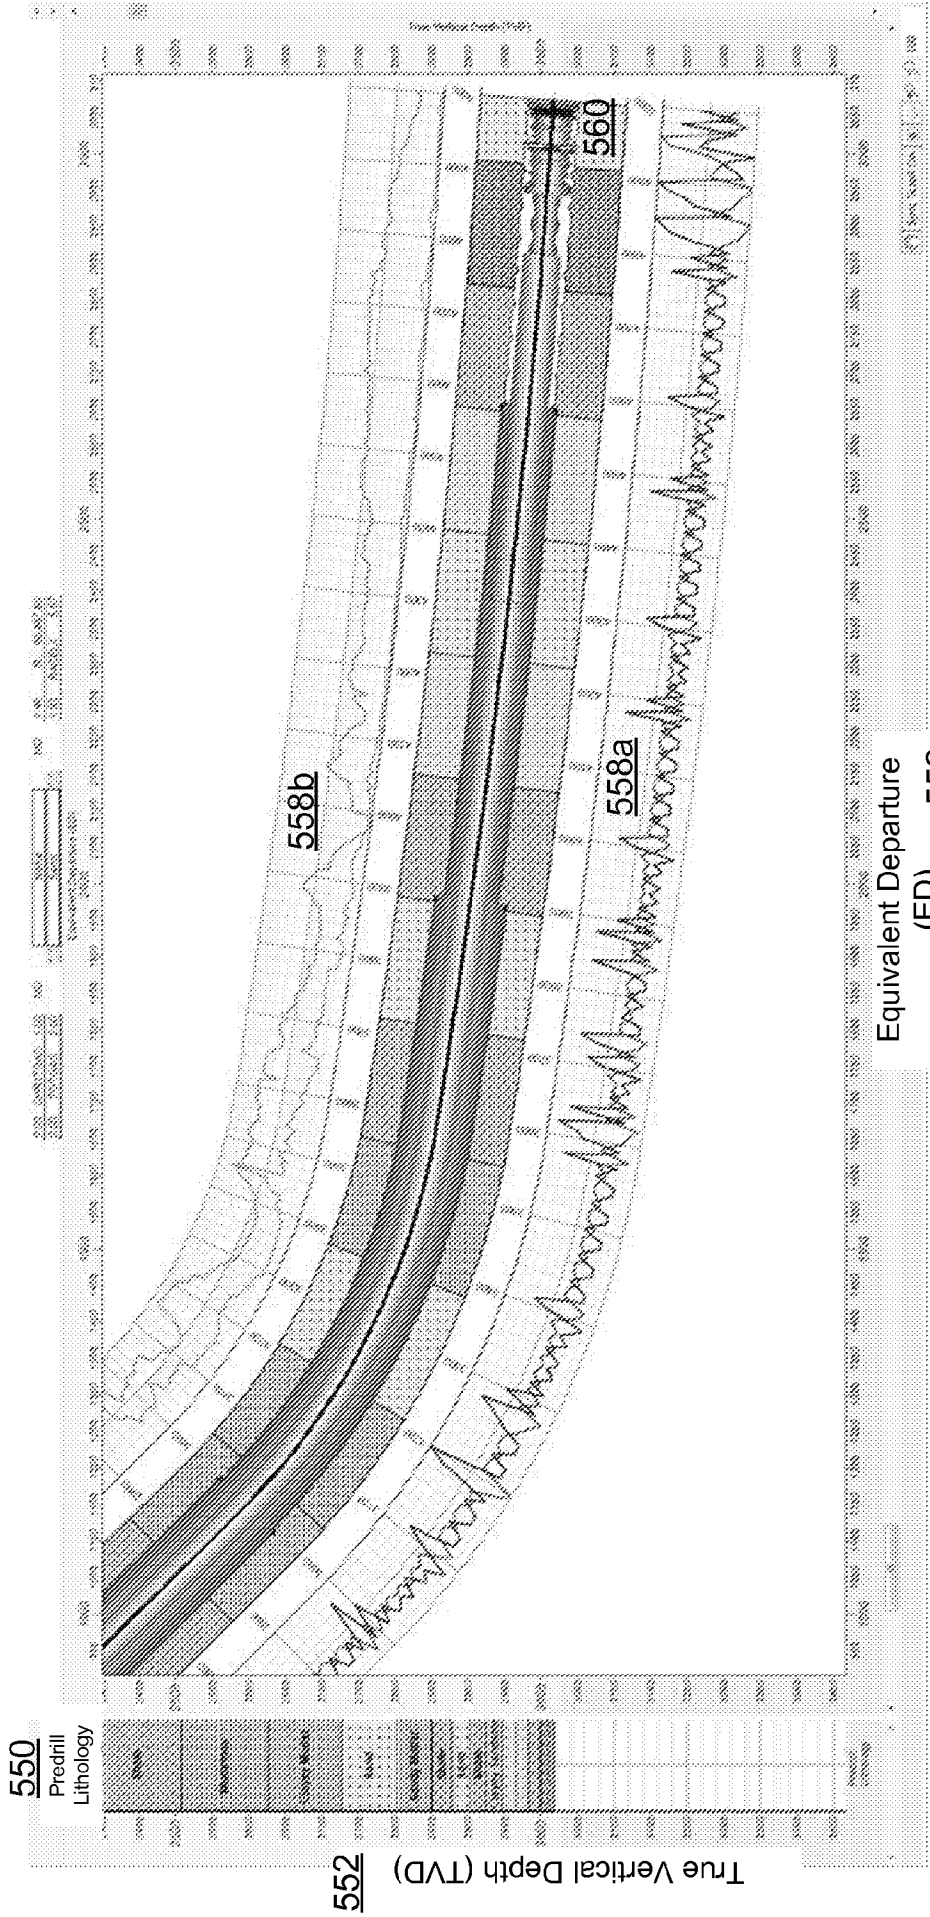


FIGURE 56

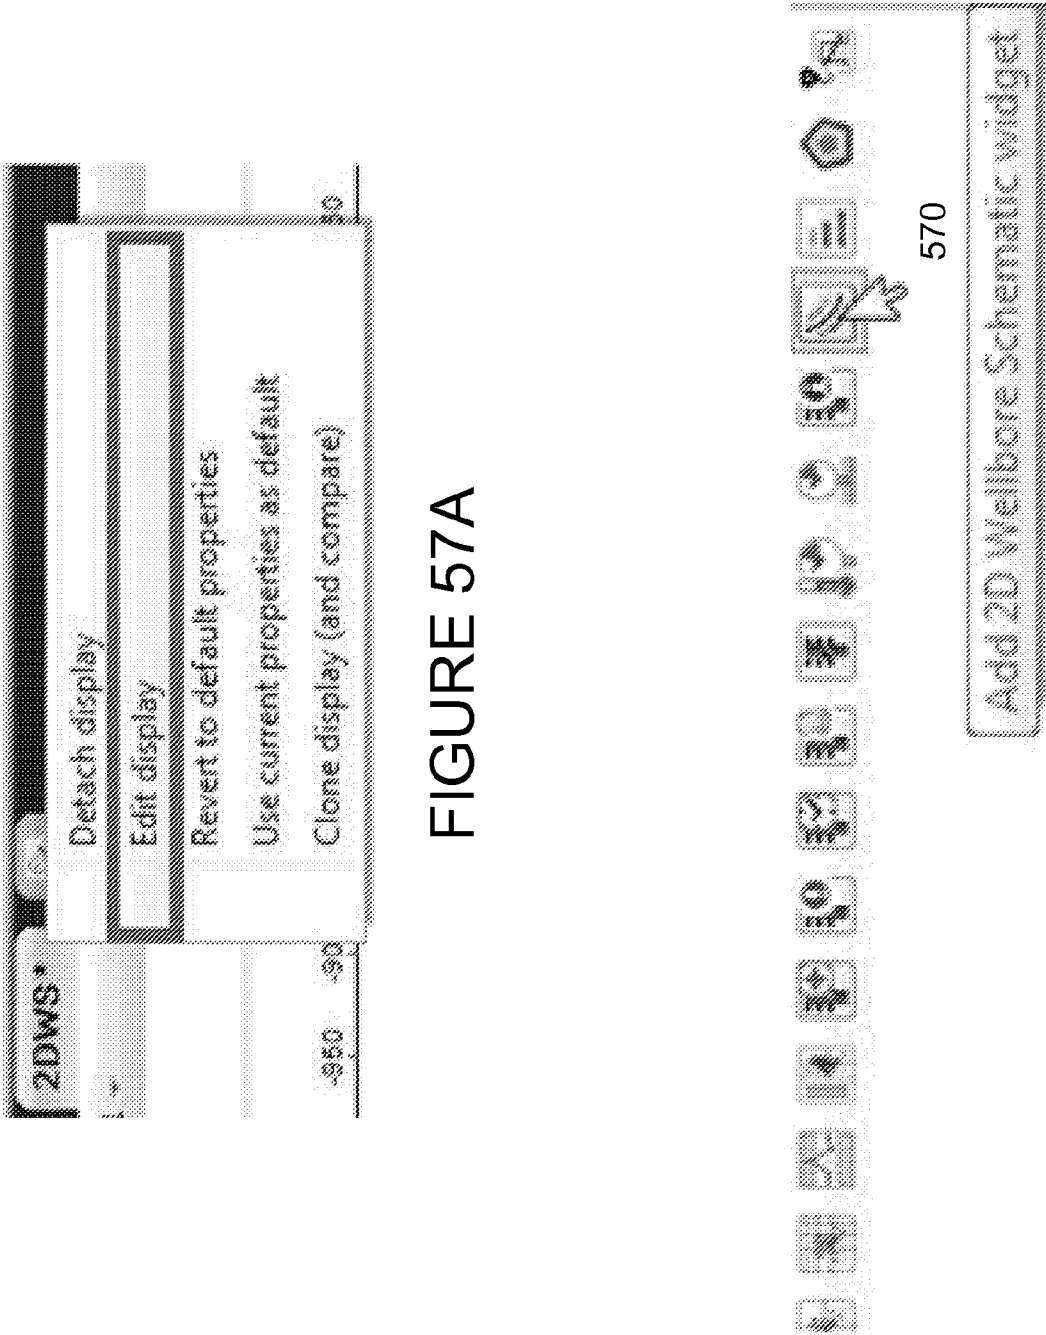


FIGURE 57A

FIGURE 57B

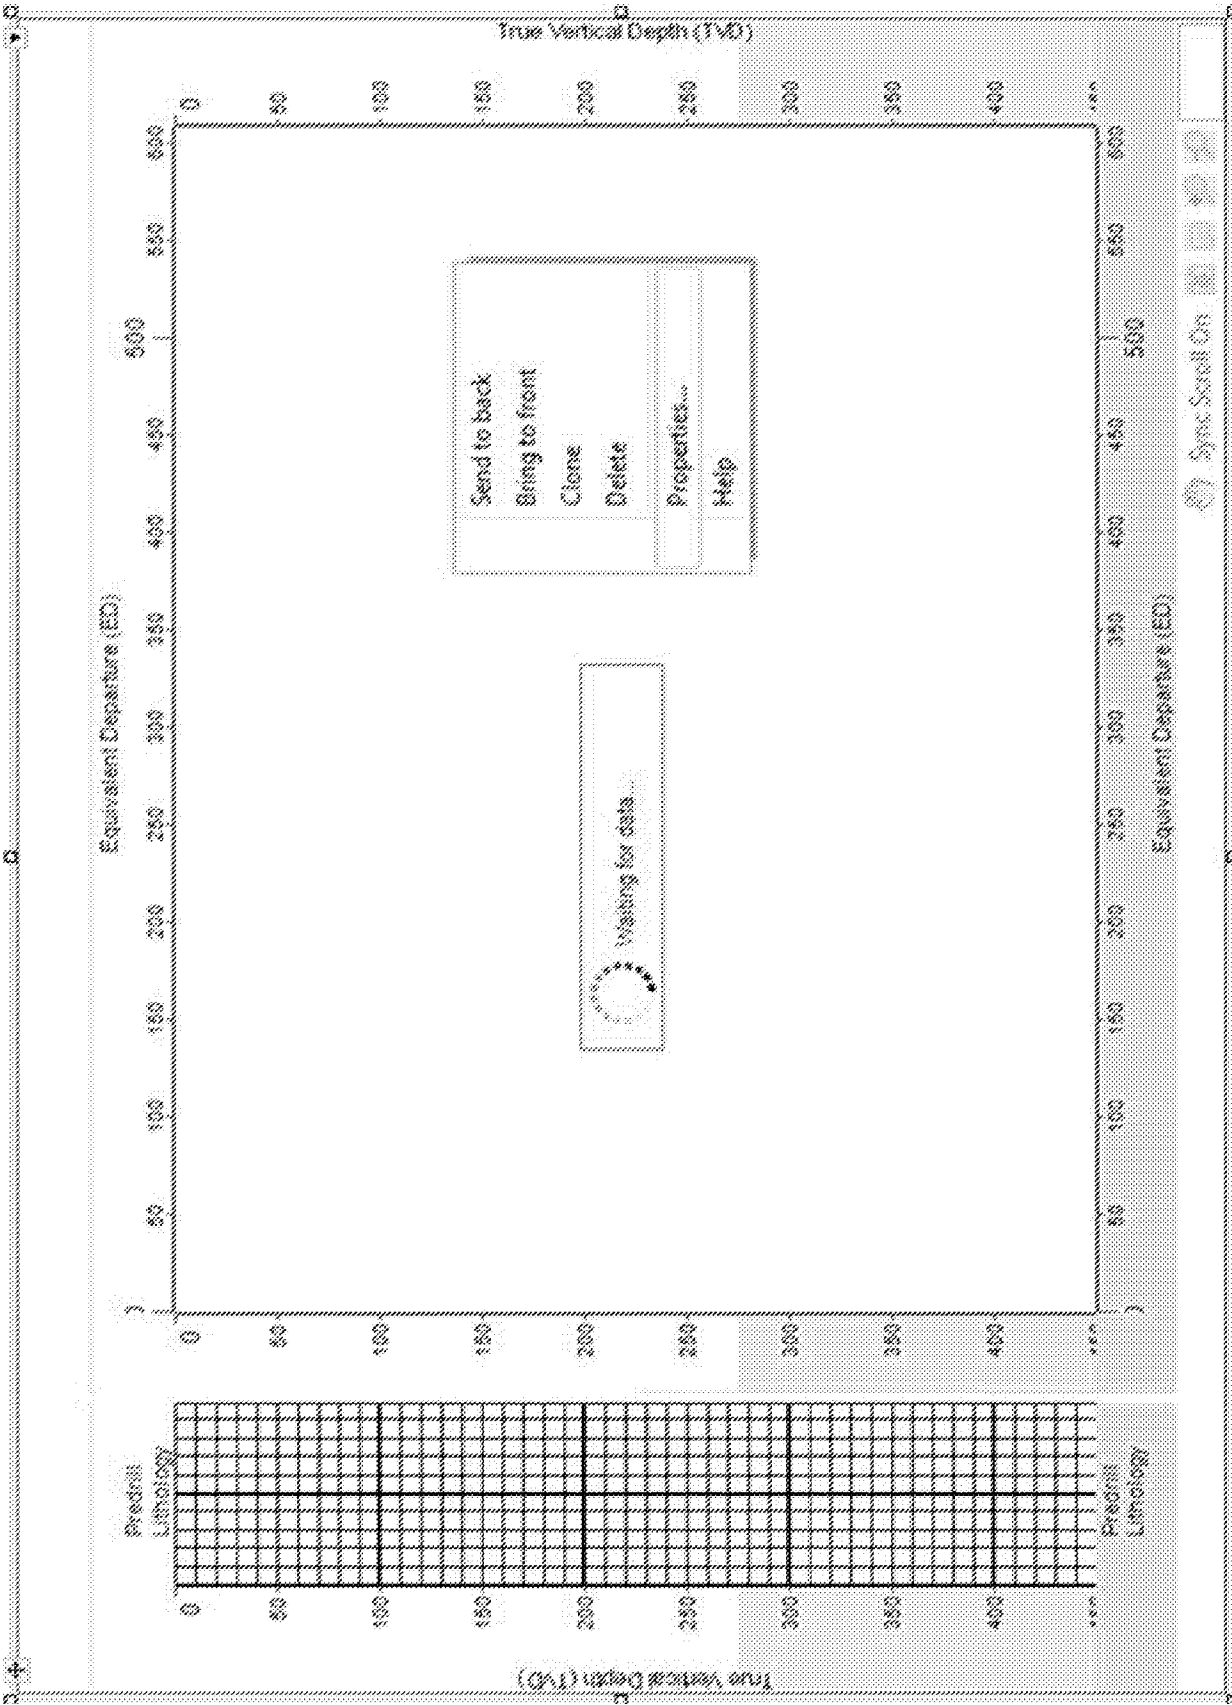


FIGURE 58

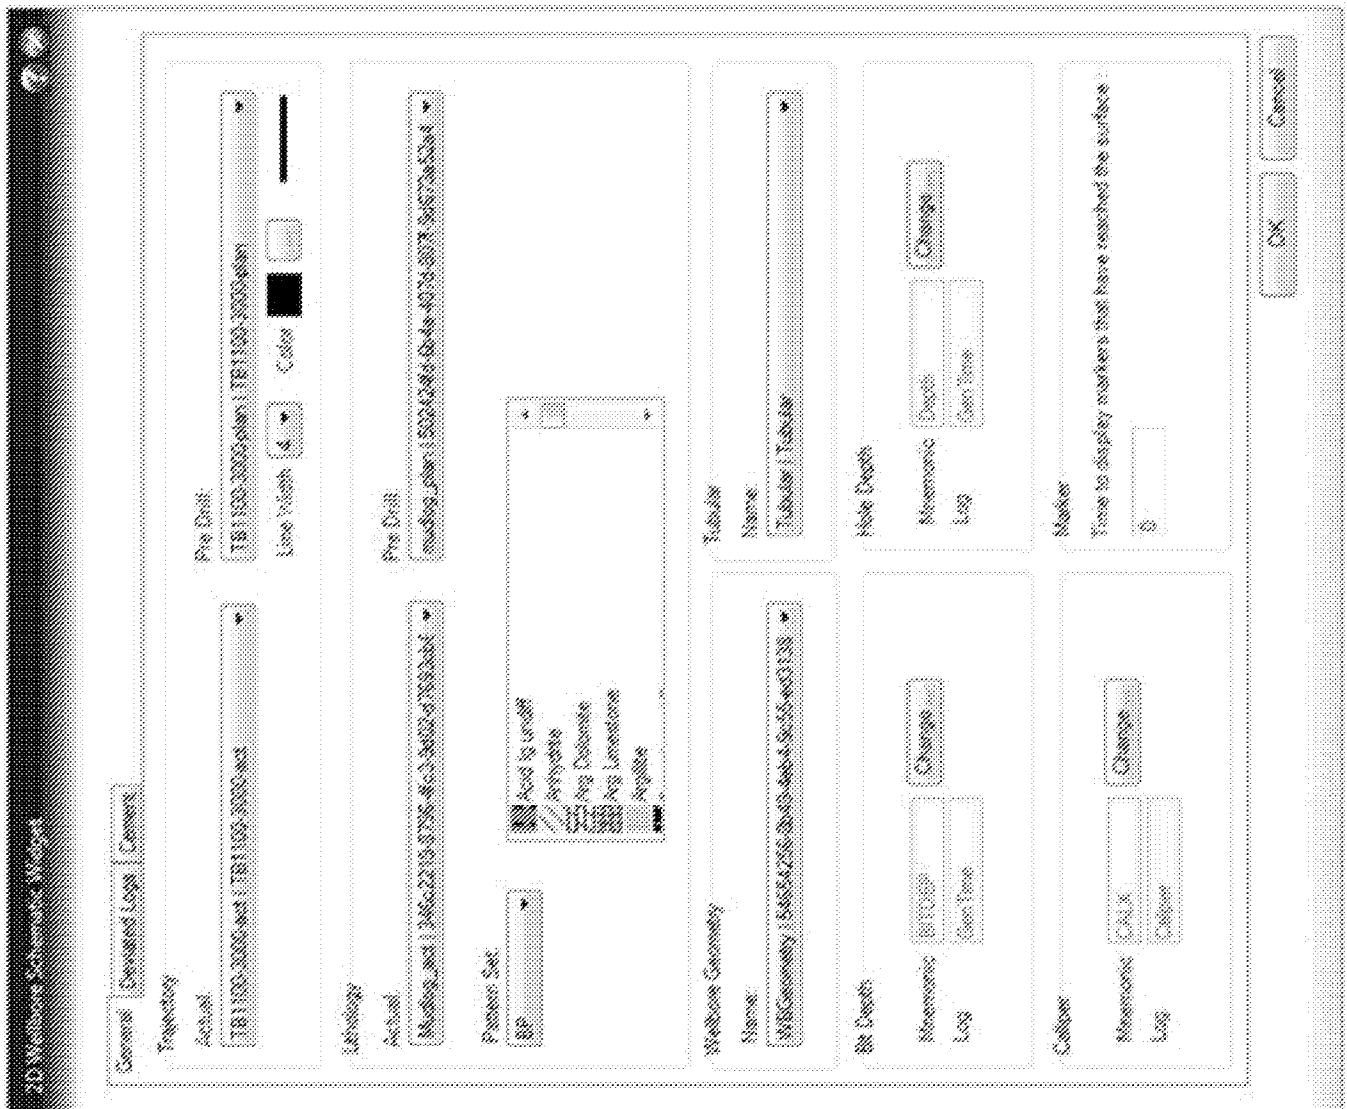


FIGURE 59

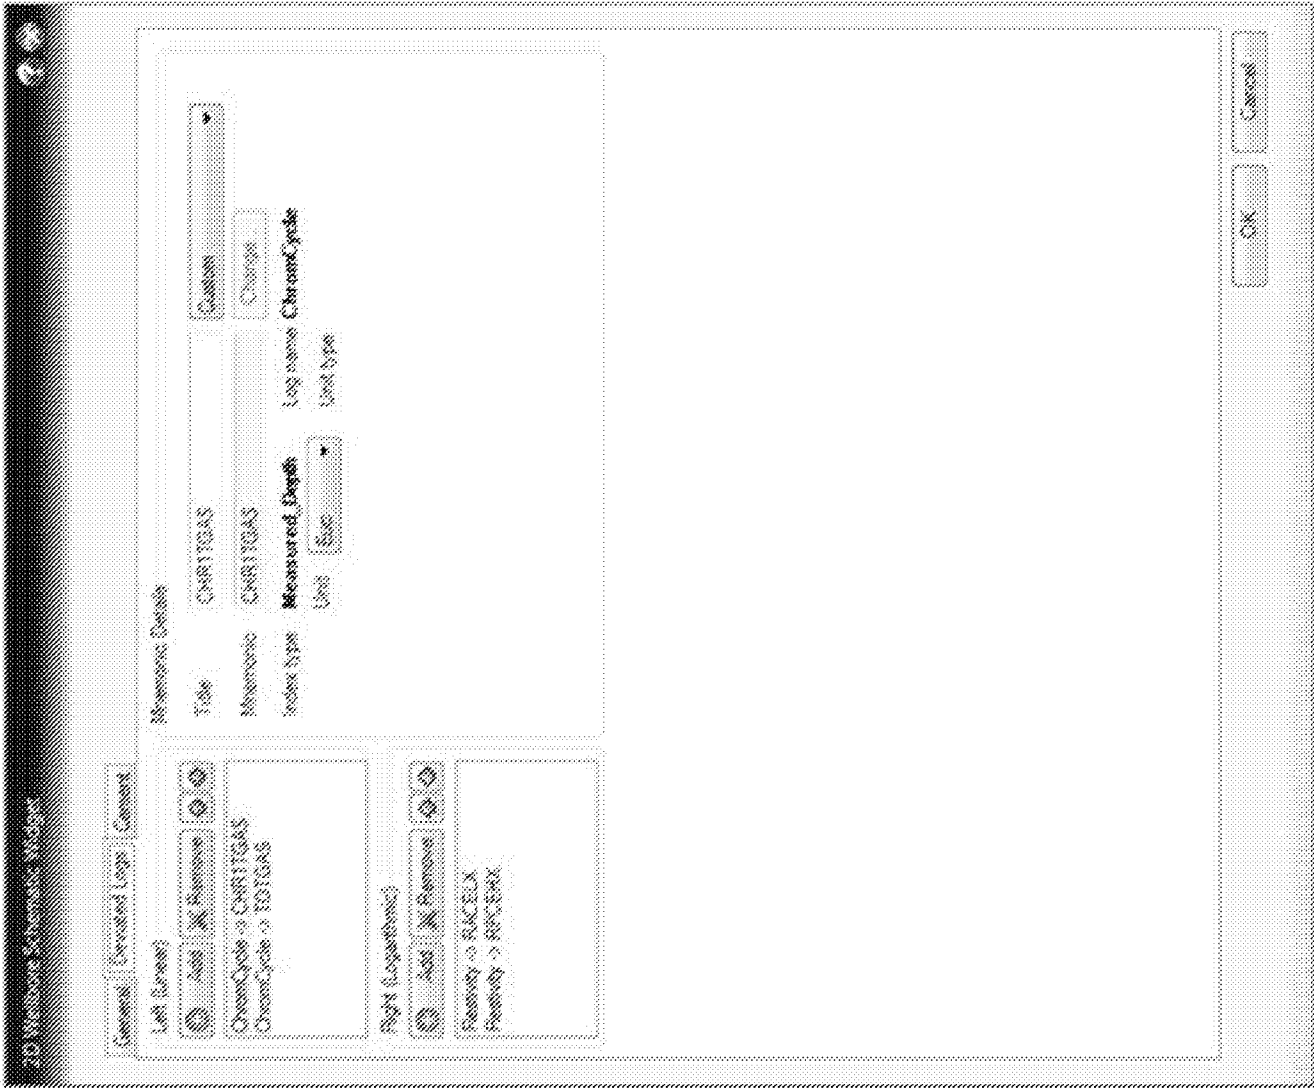


FIGURE 60

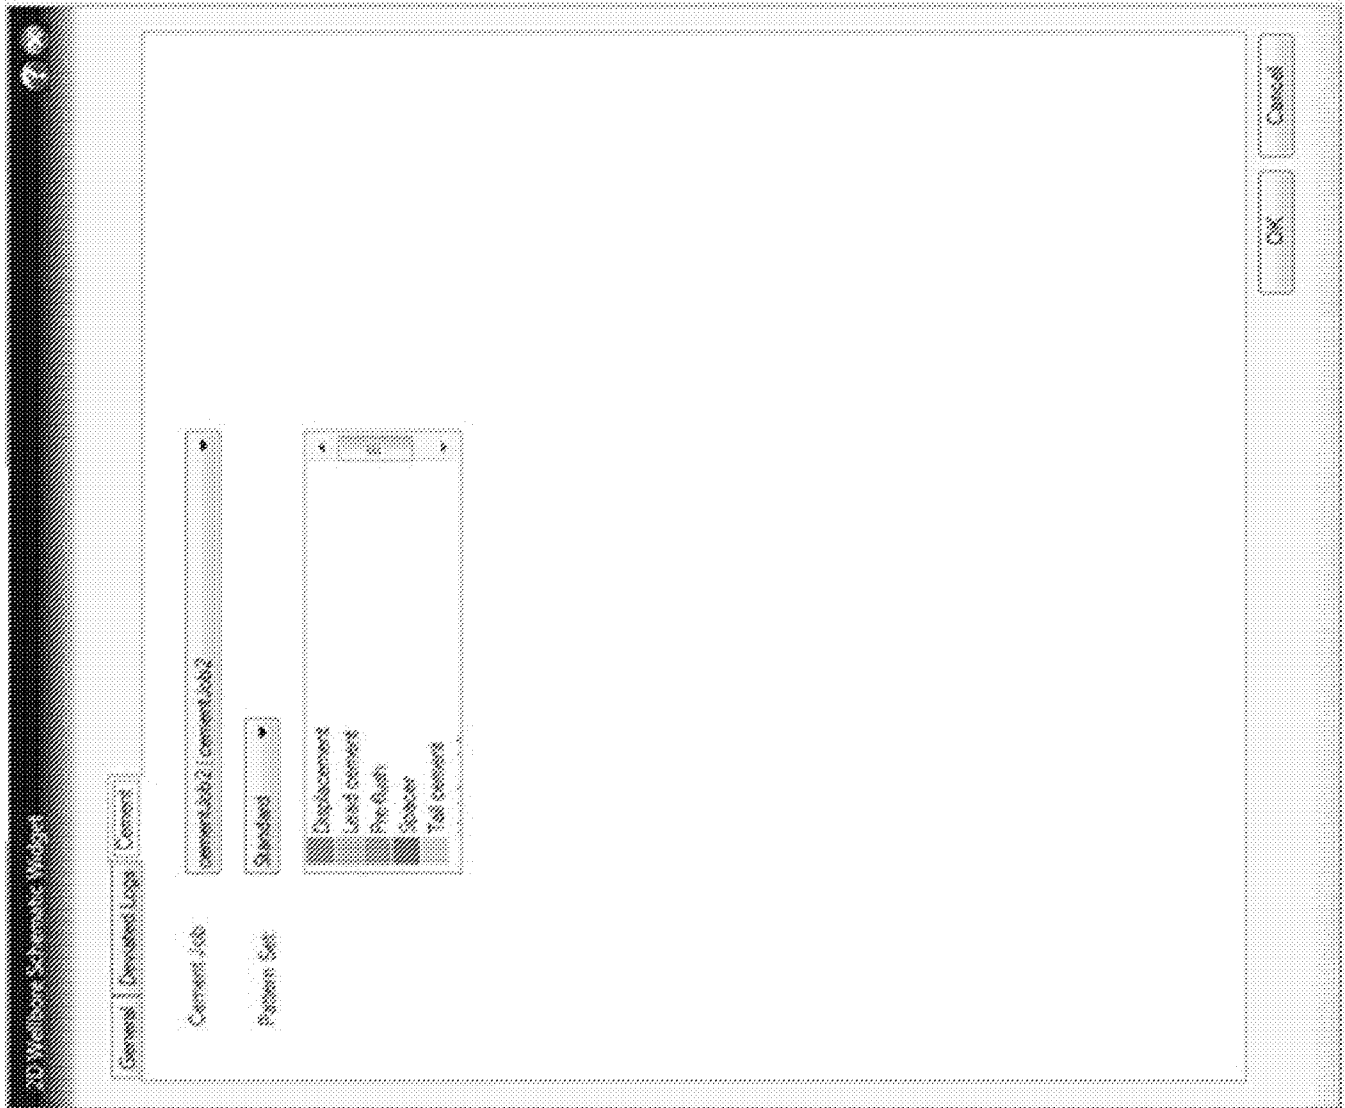


FIGURE 61

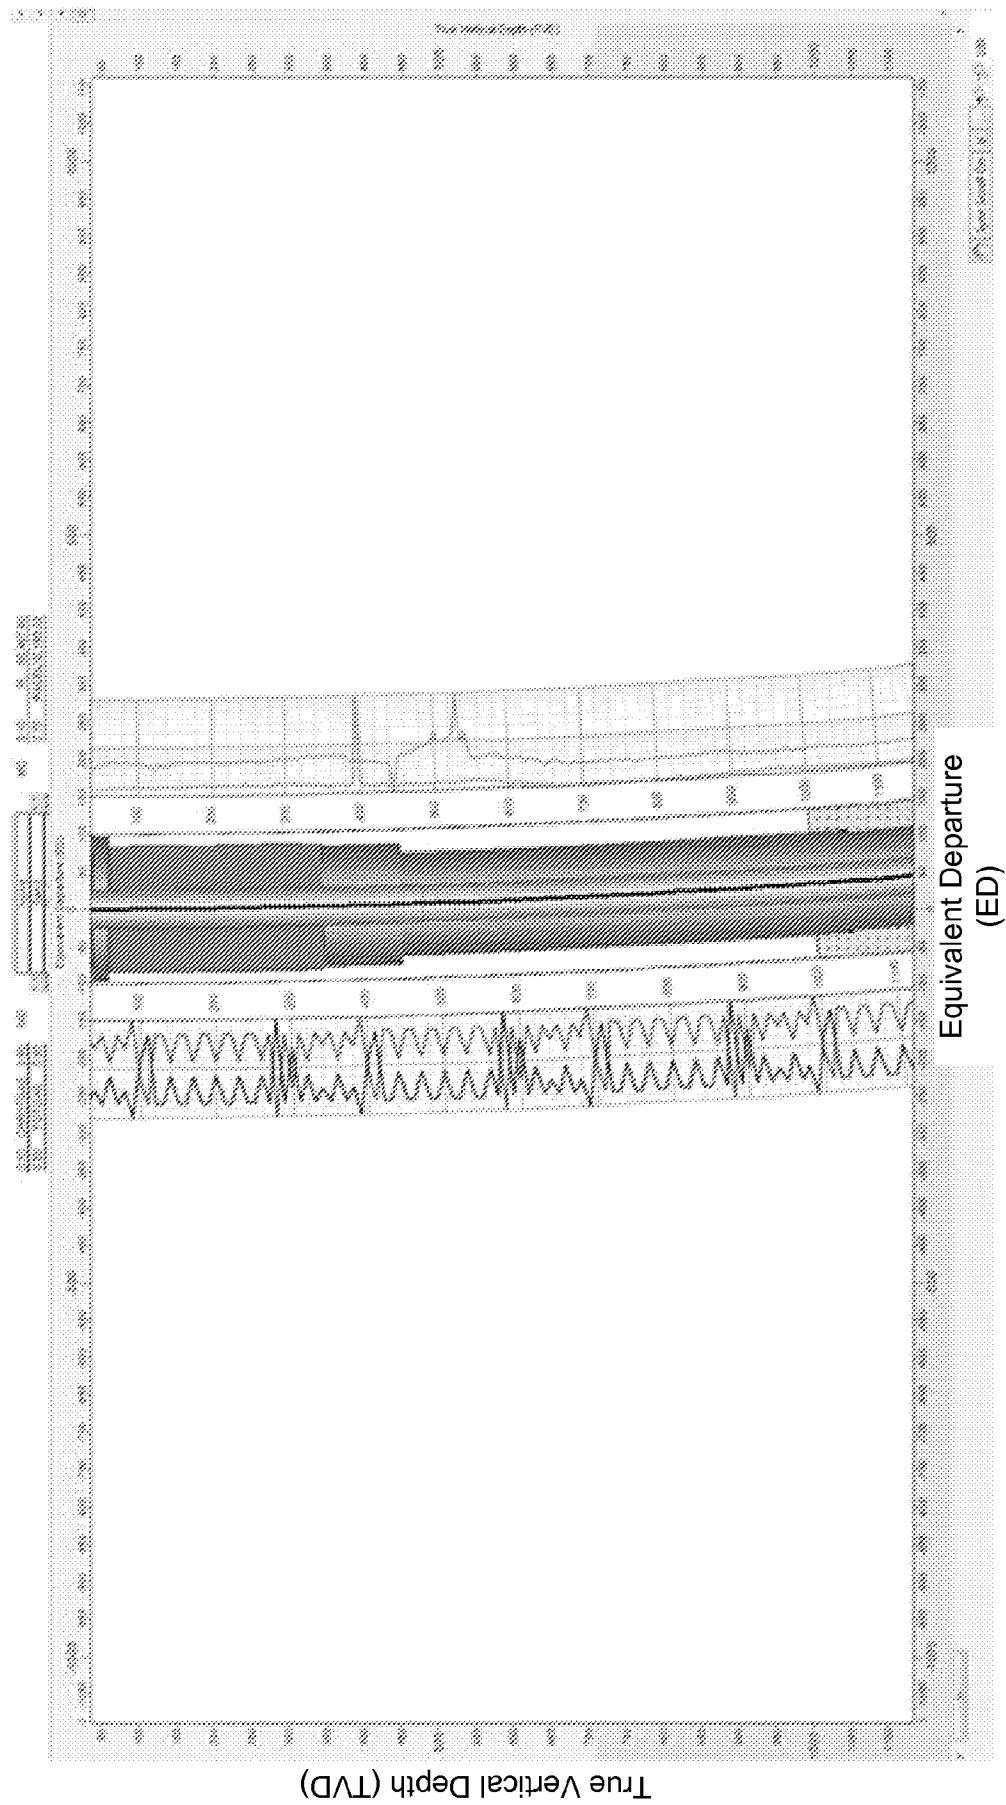


FIGURE 62

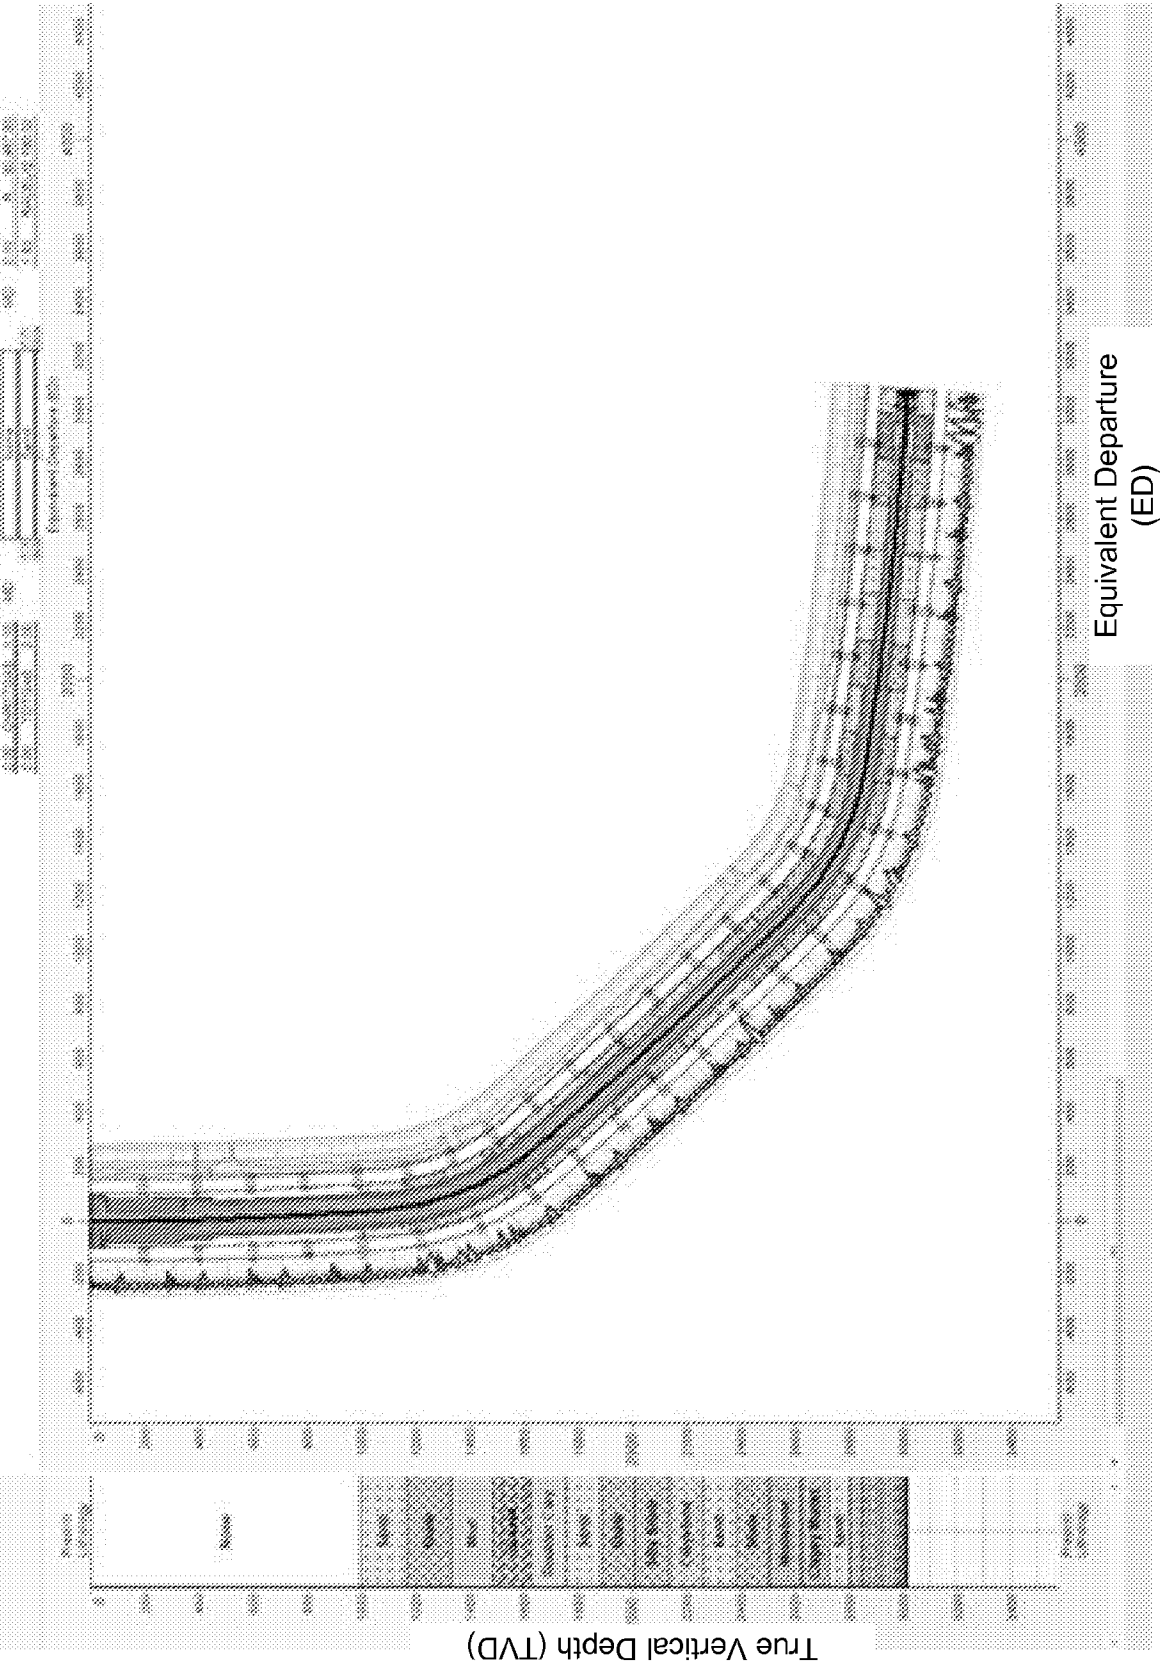


FIGURE 63

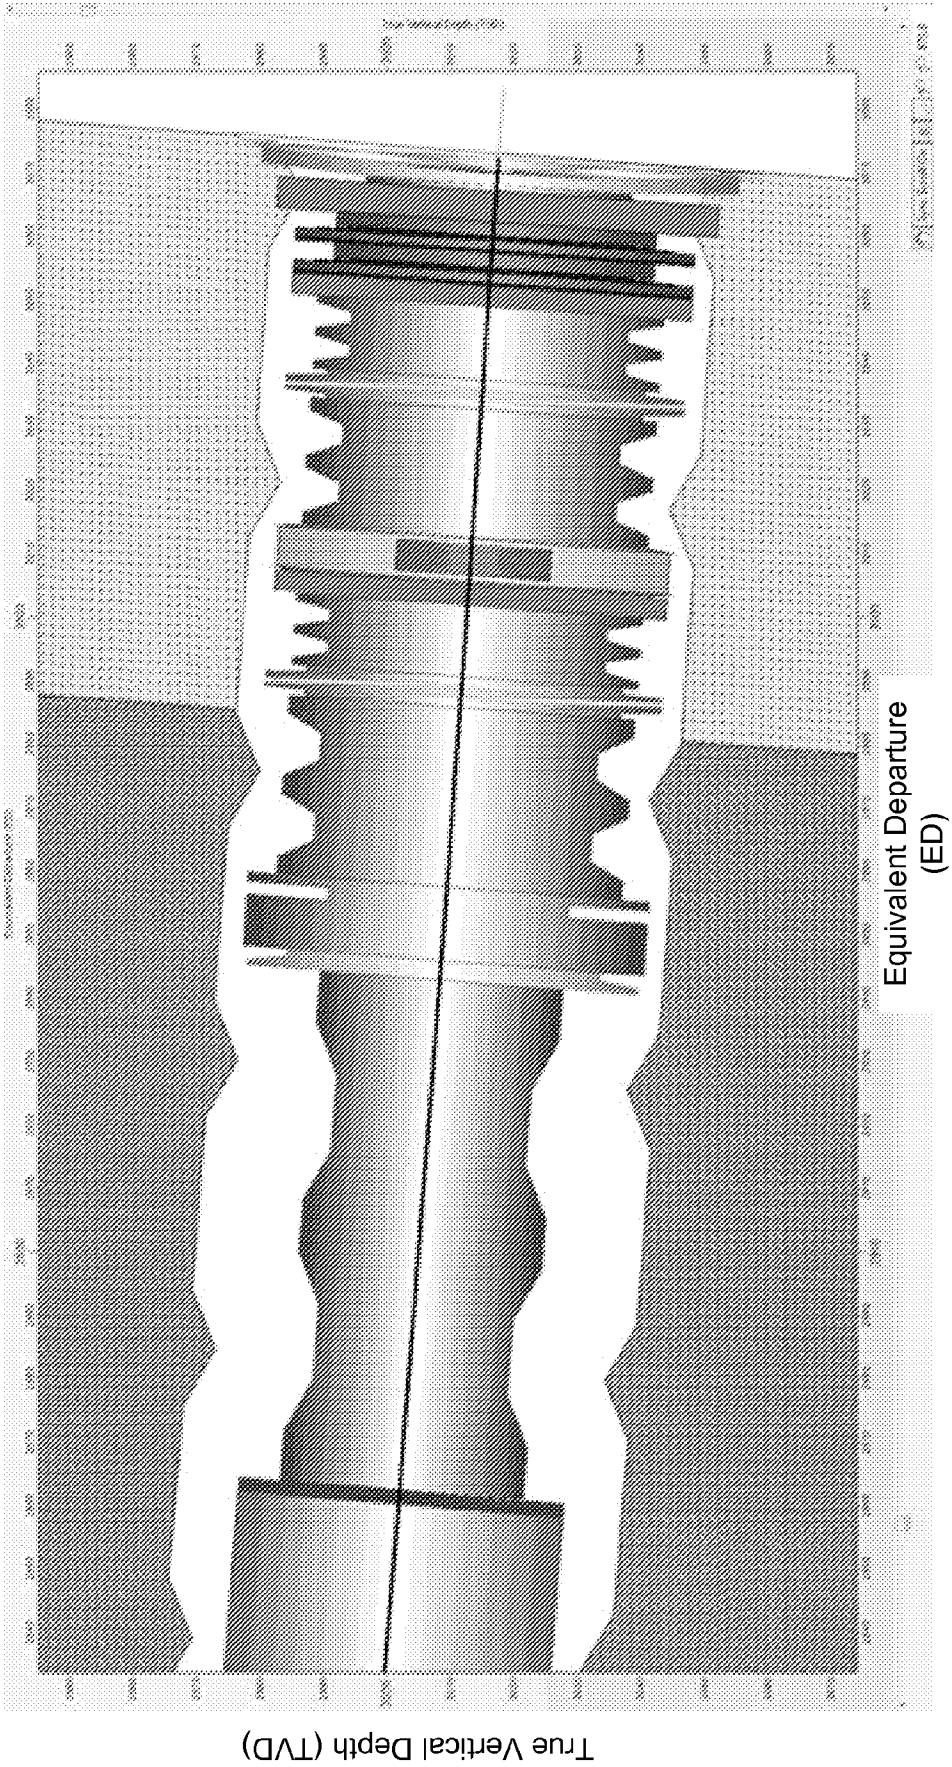


FIGURE 64

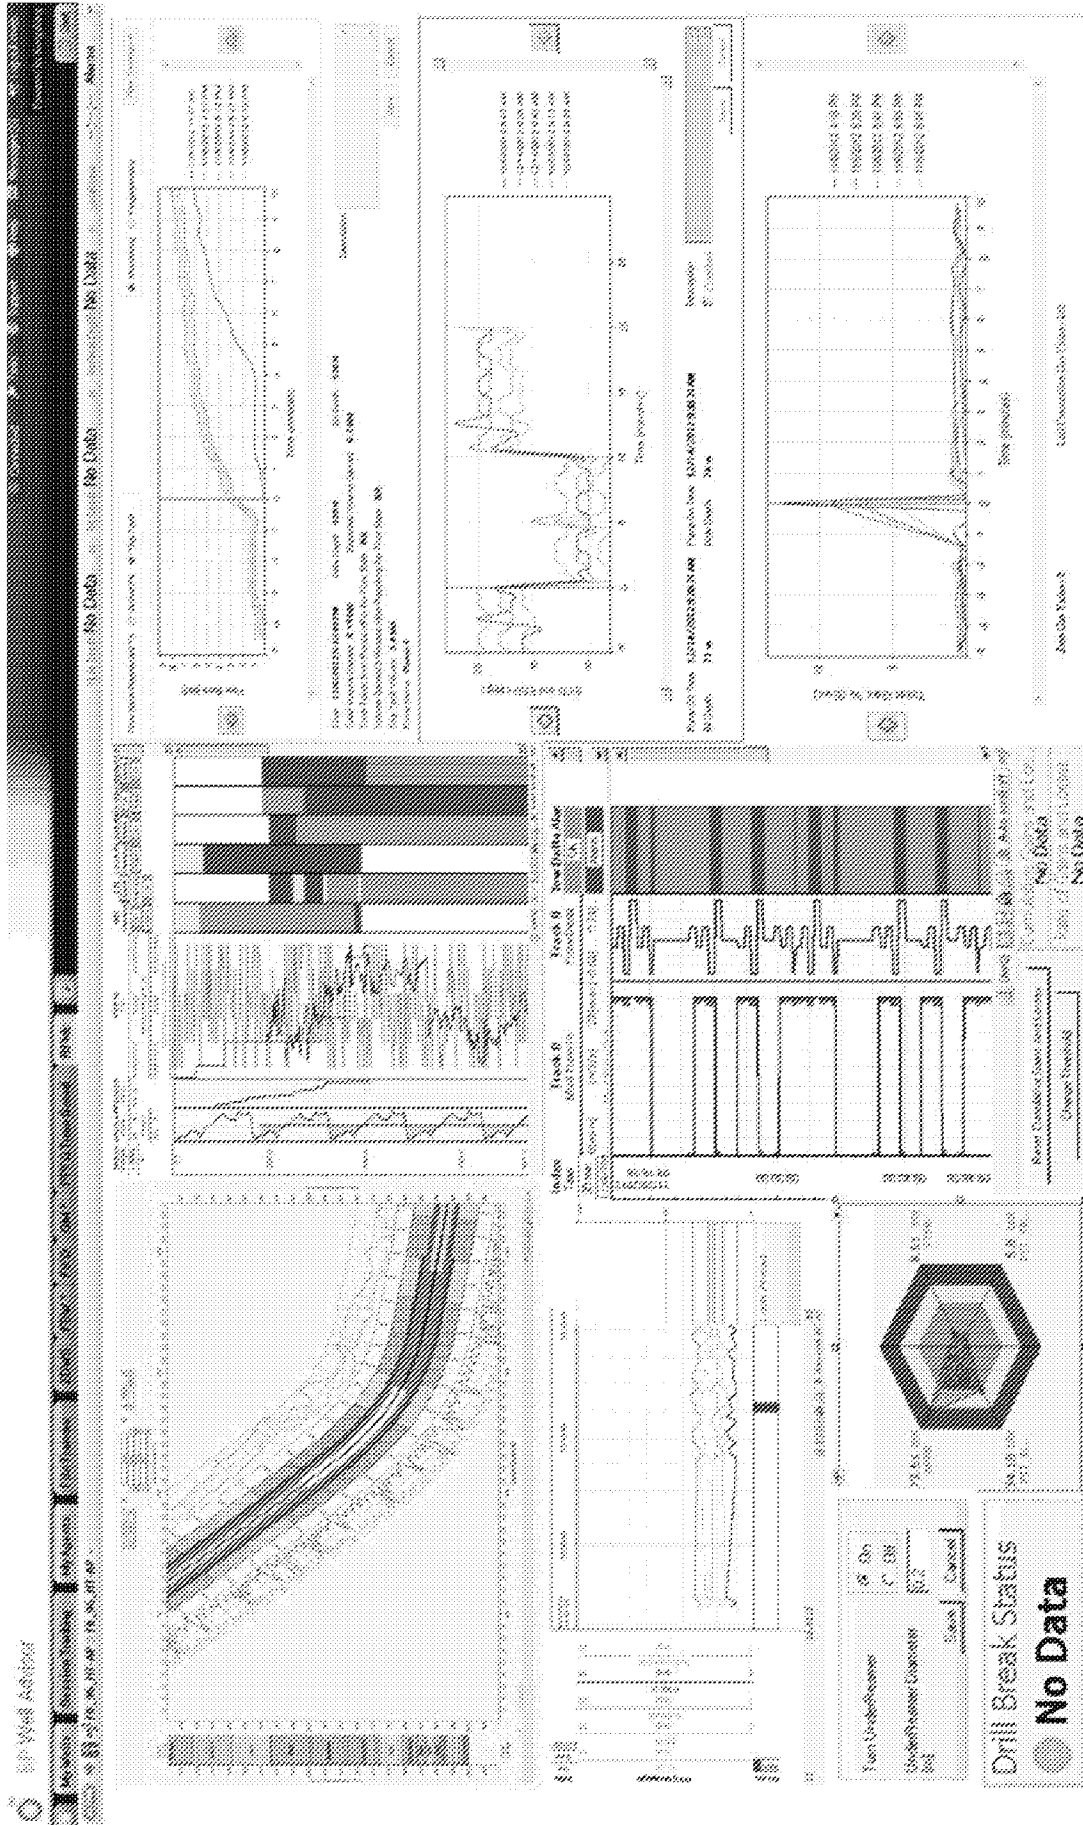


FIGURE 65

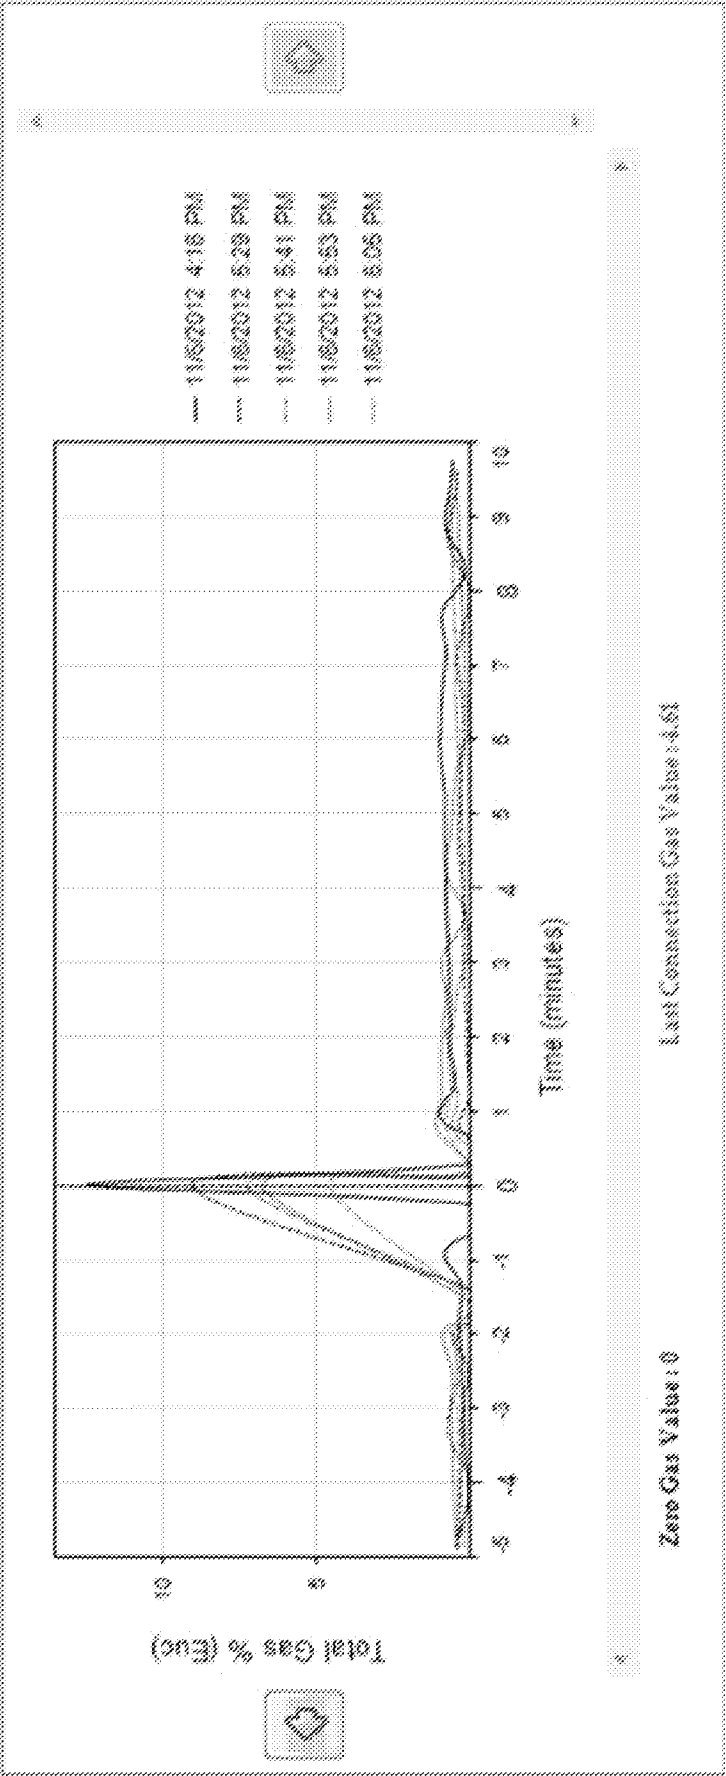


FIGURE 66

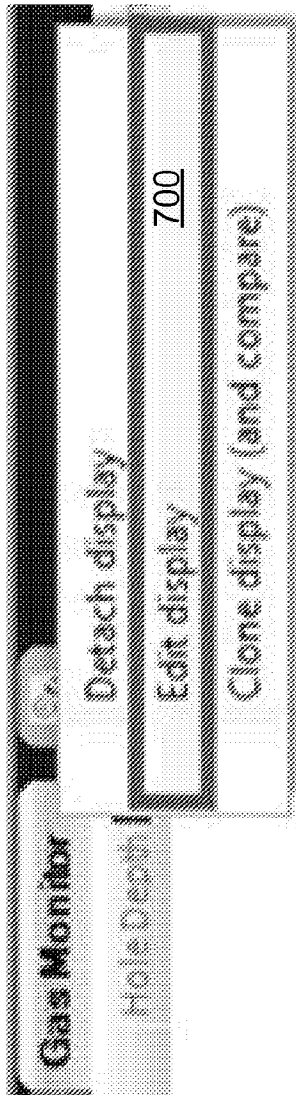


FIGURE 67A

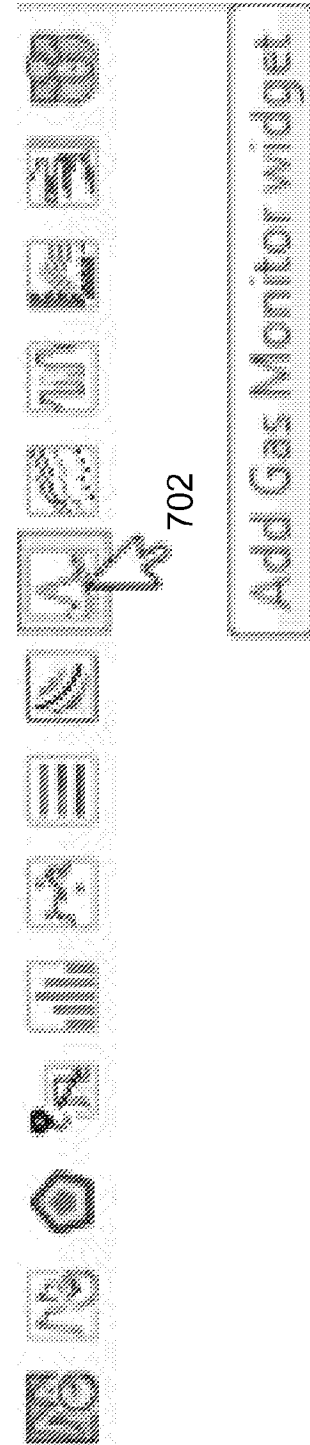


FIGURE 67B

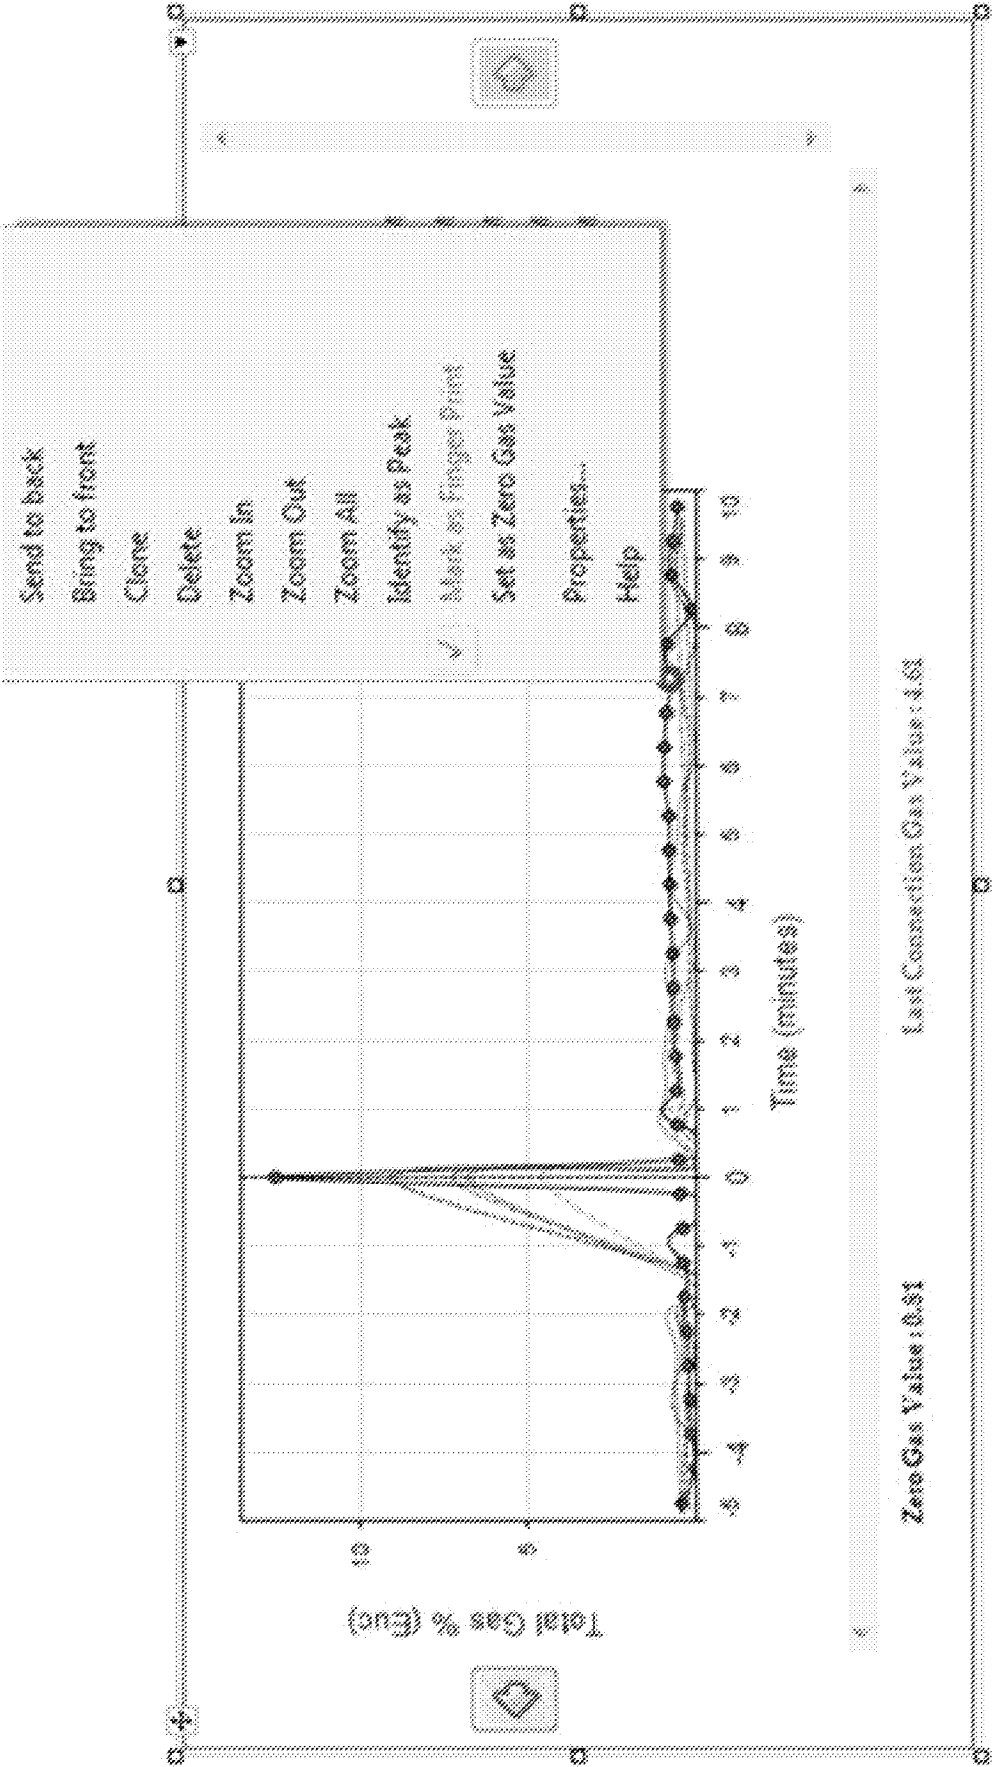


FIGURE 68

Gas Monitor Widget

Total Gas

Mnemonic NameTOTGAS

Log NameGen Time

Change

Master Key

Flat Duration Configuration

Start Monitoring Before Connection Gas Reaches to Surface (in minutes)5

Stop Monitoring After Connection Gas Reaches to Surface (in minutes)10

Curve Configuration

Number of Recent Pump Off Events to Monitor5

Threshold Gas Volume0

Curve Number	Color	Line Style	Preview
Recent Pump Off			
1			
2			
3			
4			
5			

OK

Cancel

FIGURE 69

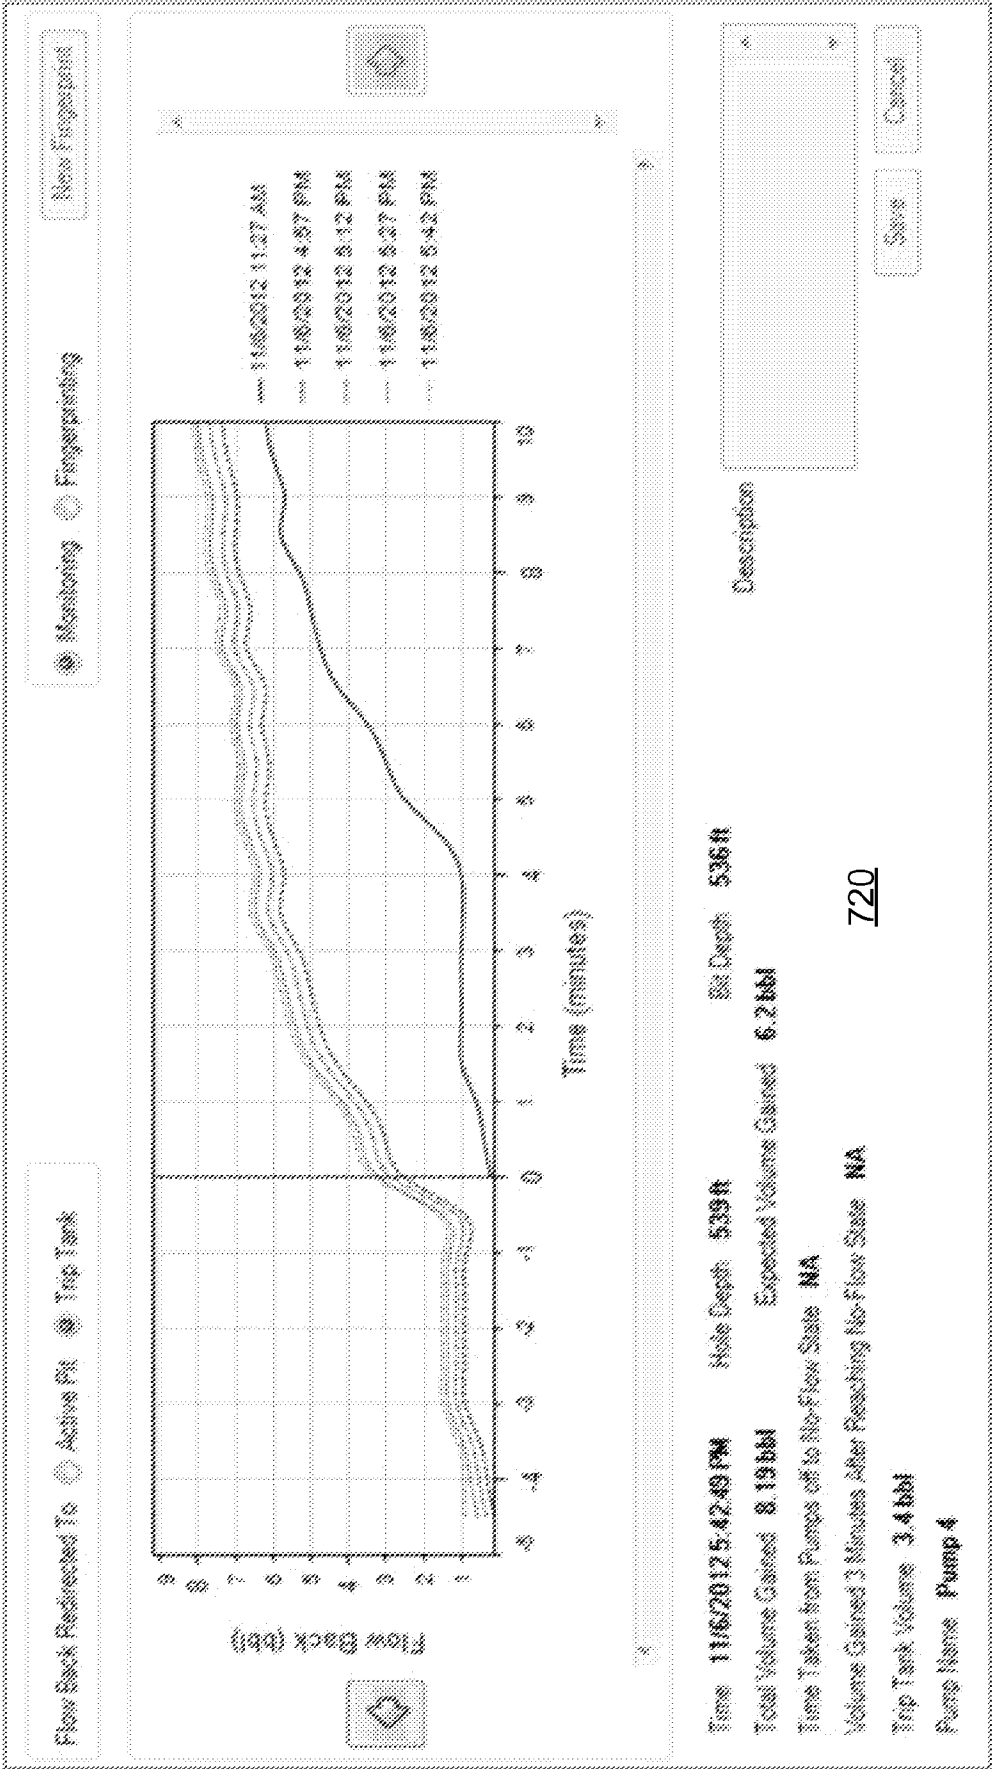


FIGURE 70

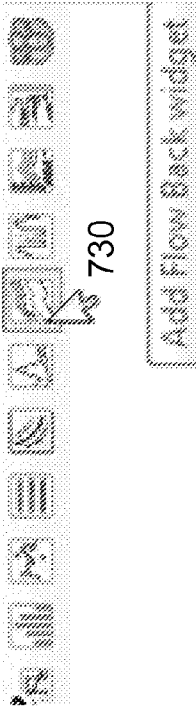
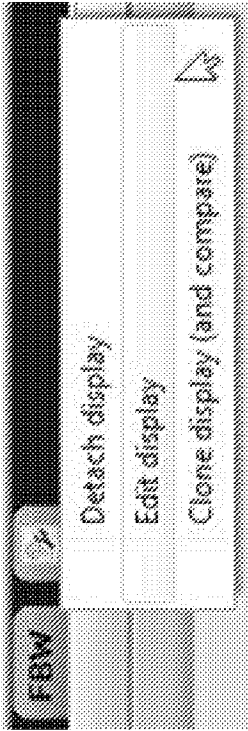


FIGURE 71A

FIGURE 71B

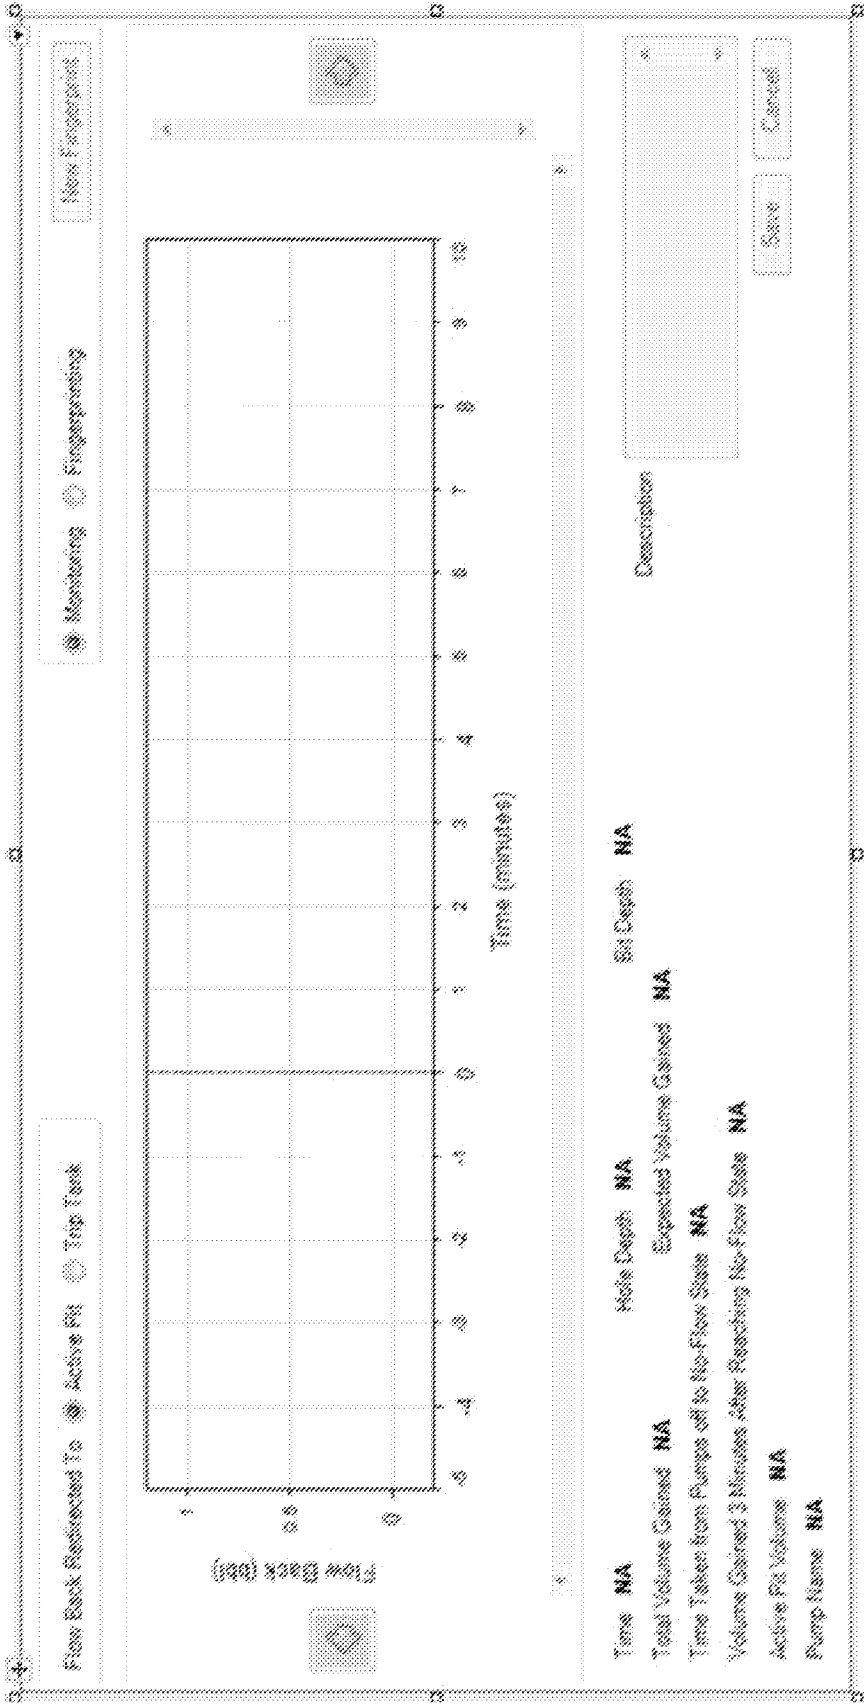


FIGURE 71C

Flow Back Widget

General

Master Key

testkey

Active PR Volume

Memmonic Name

PIT_DRILL

Change

Log

GenTime

Unit

bit

Tip Tank Volume

Memmonic Name

PIT_TRIPIN

Change

Log

GenTime

Unit

bit

Plot Duration Configuration

Start monitoring before pump off event (in minutes)

5

Stop monitoring after pump off event (in minutes)

10

Curve Configuration

Number of recent pump off events to be monitored

5

☐ Use aggregated fingerprint curve

Curve Number	Color	Line Style	Preview
0			
1			
2			
3			
4			
5			

OK

Cancel

FIGURE 72

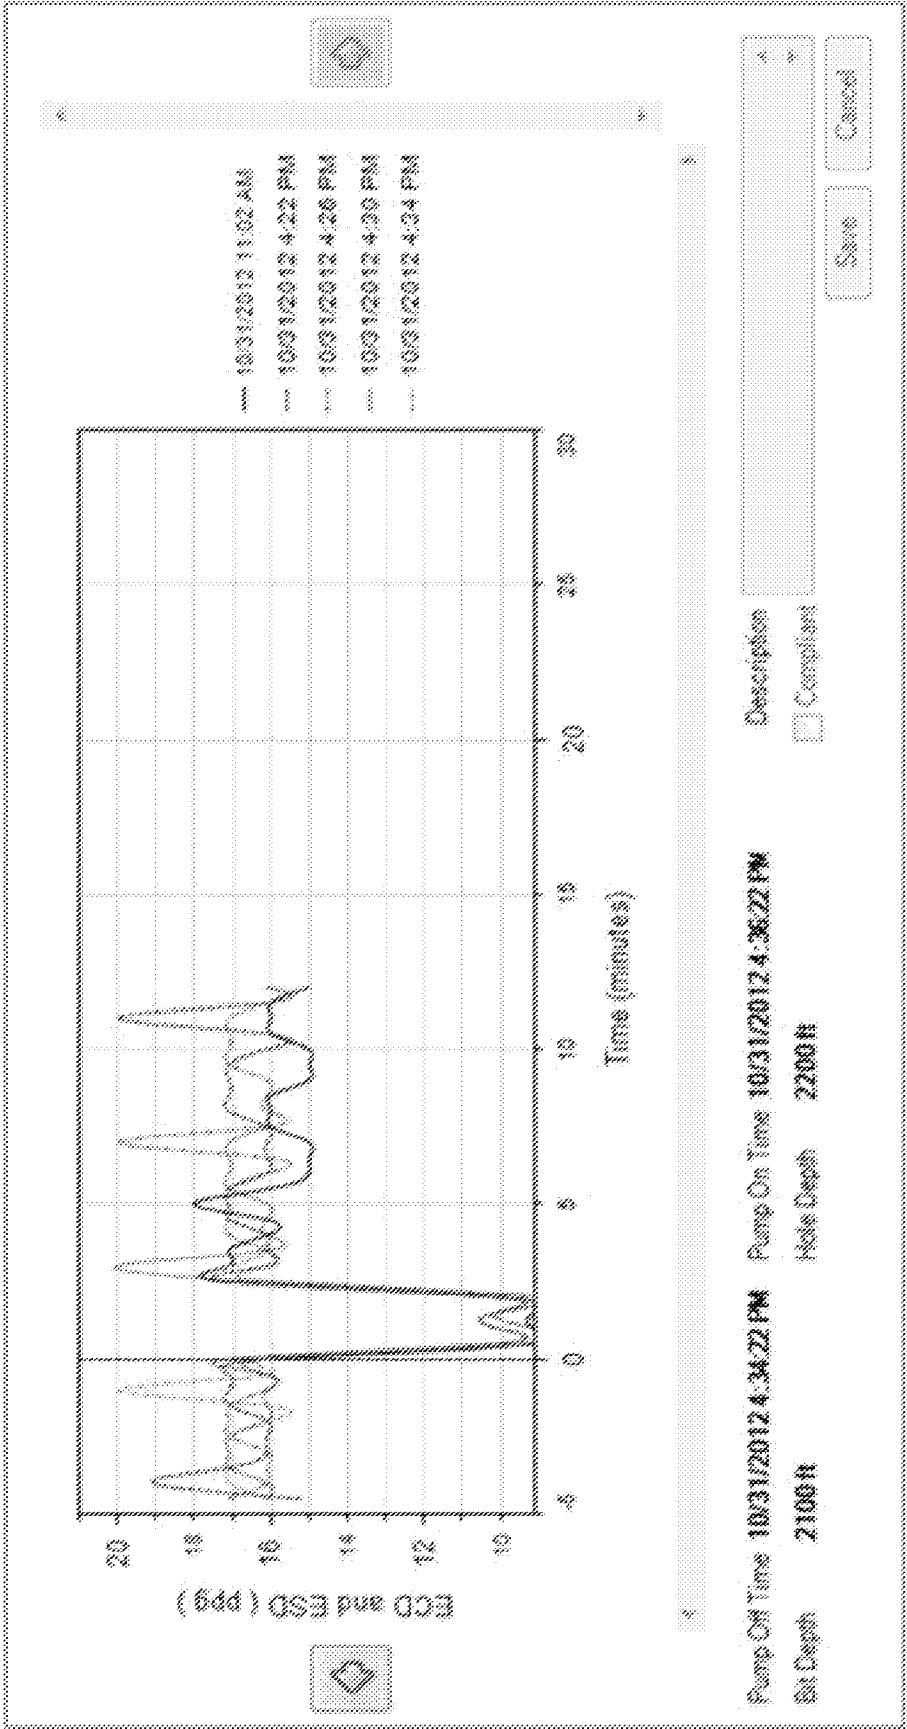


FIGURE 73

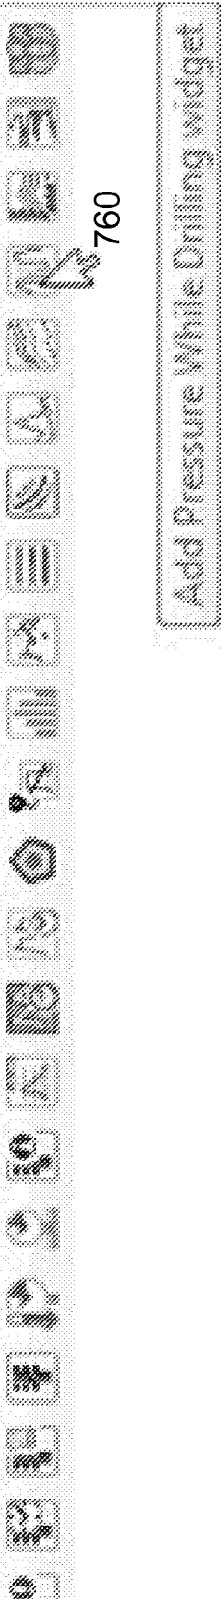


FIGURE 74A

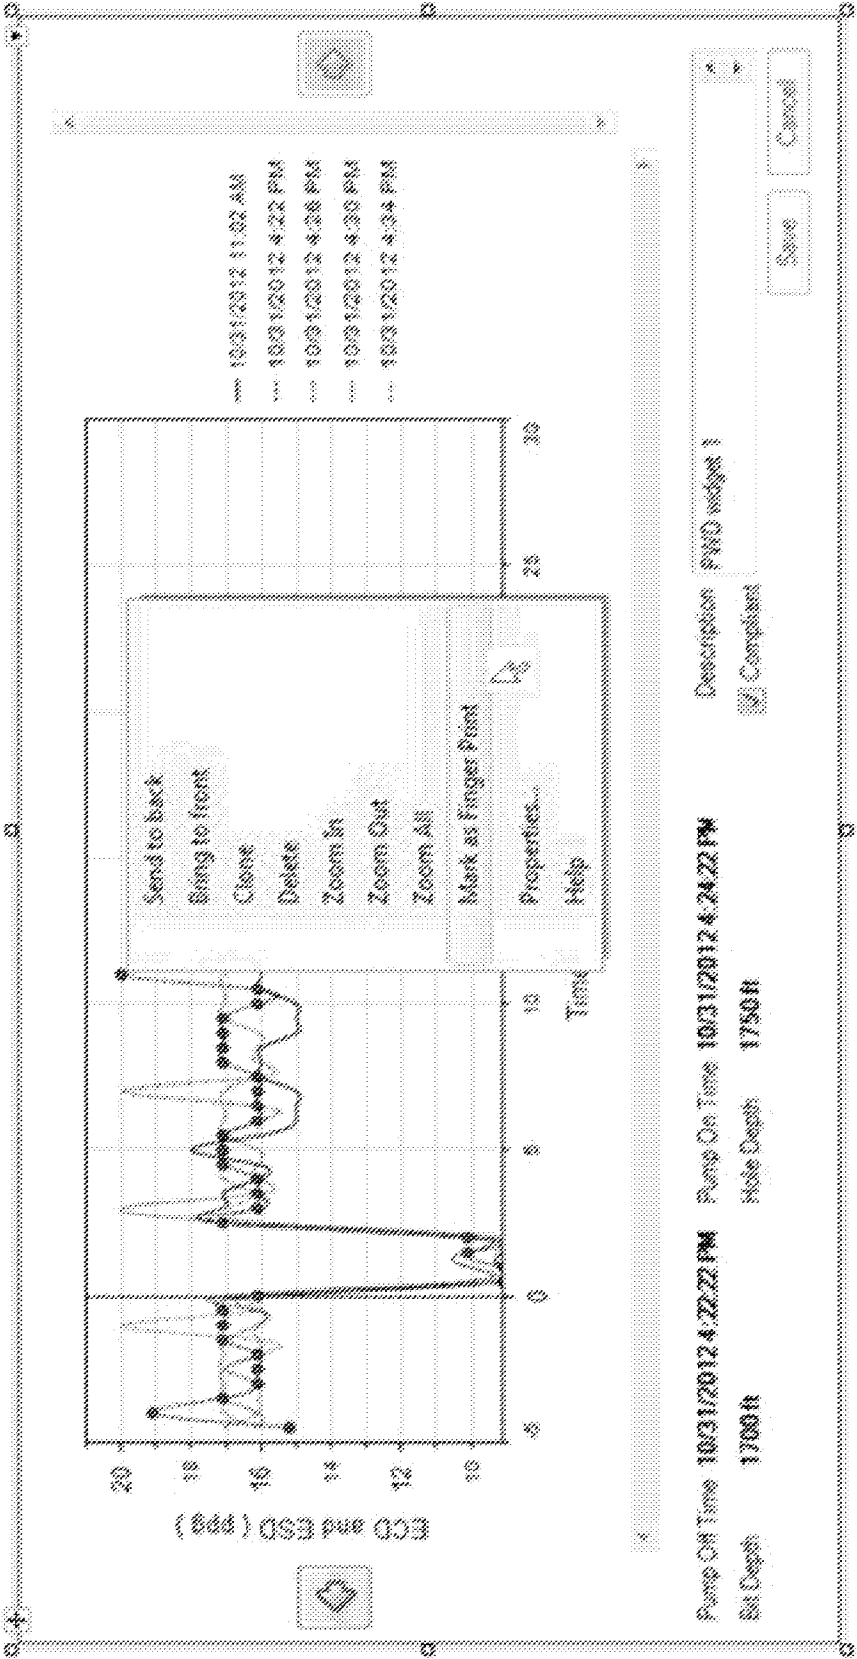


FIGURE 74B

Pressure While Drilling Widget

General

Master Key

Change

ESD

Mnemonic Name

Log Name

Change

ESD

Mnemonic Name

Log Name

Change

Plot Duration Configuration

Start before pump off event (in minutes)

Stop after pump on event (in minutes)

Maximum time for Pump On event to happen(in minutes)

5

10

20

Curve Configuration

Number of recent connection profiles to show

5

Curve Number	Color	Line Style	Preview
1			
2			
3			
4			

OK

Cancel

FIGURE 75

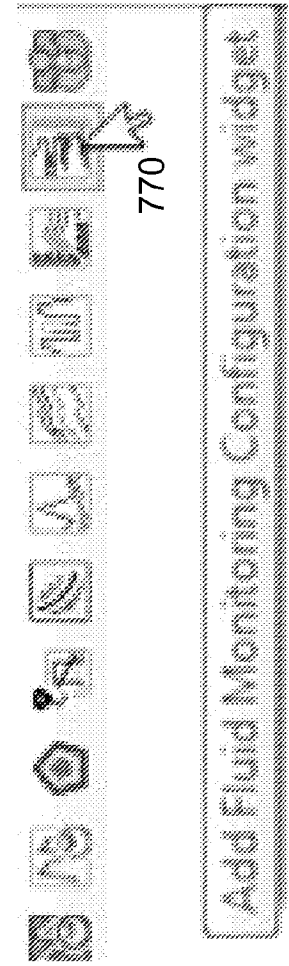


FIGURE 76B

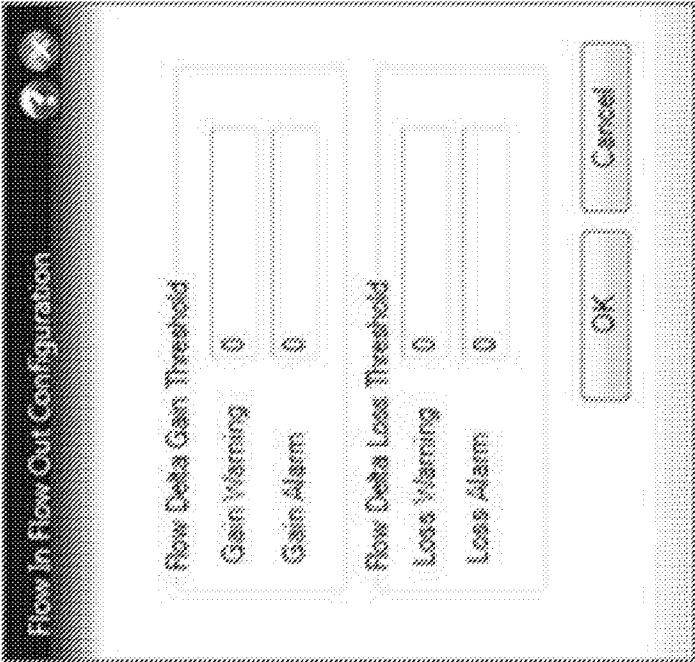


FIGURE 76D

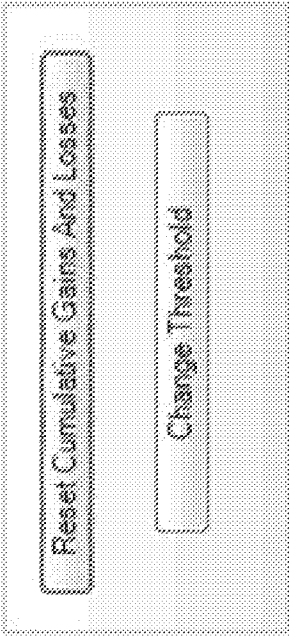


FIGURE 76A

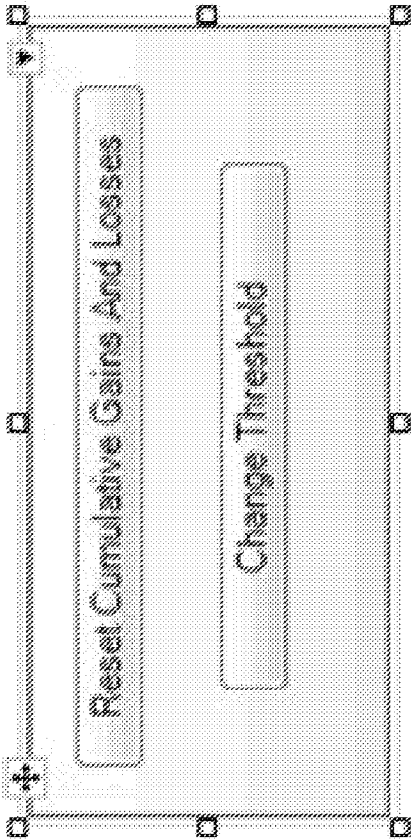


FIGURE 76C

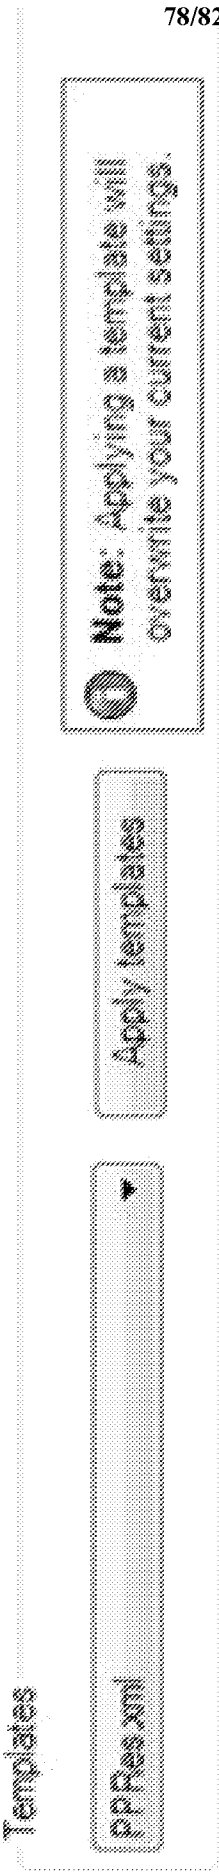


FIGURE 77

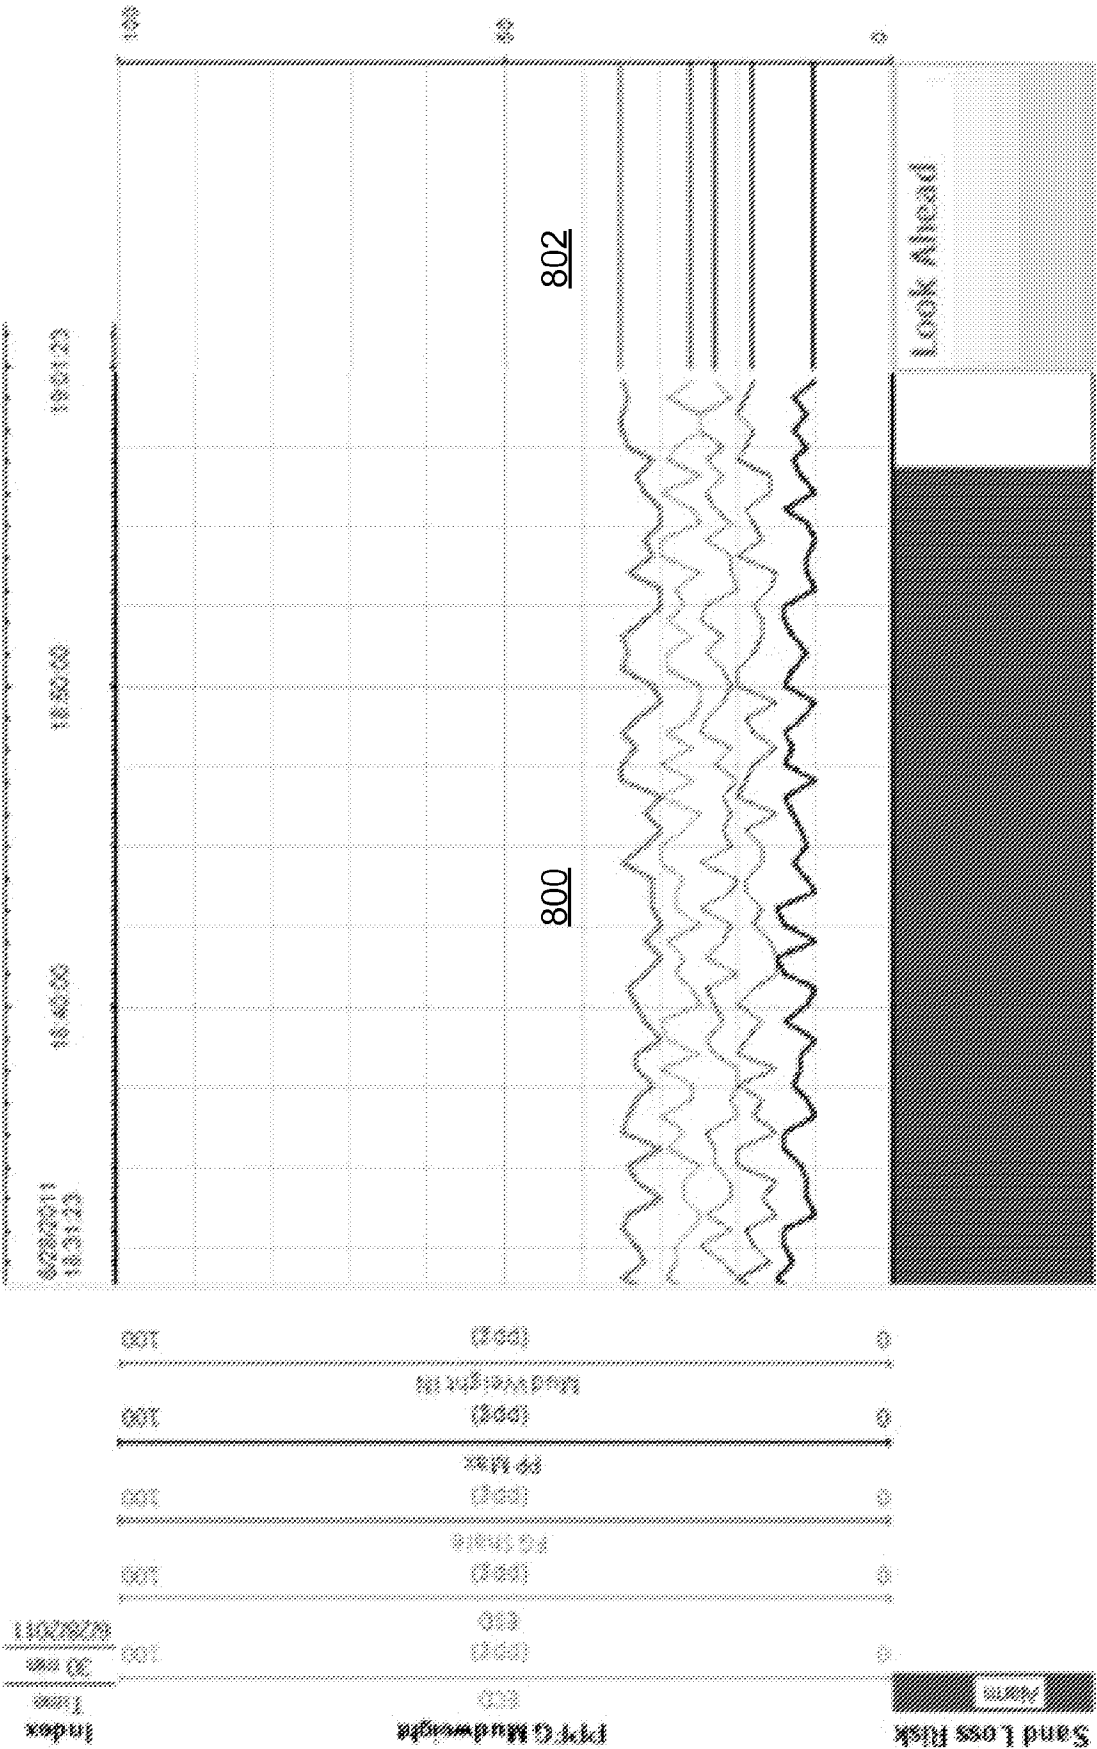


FIGURE 78

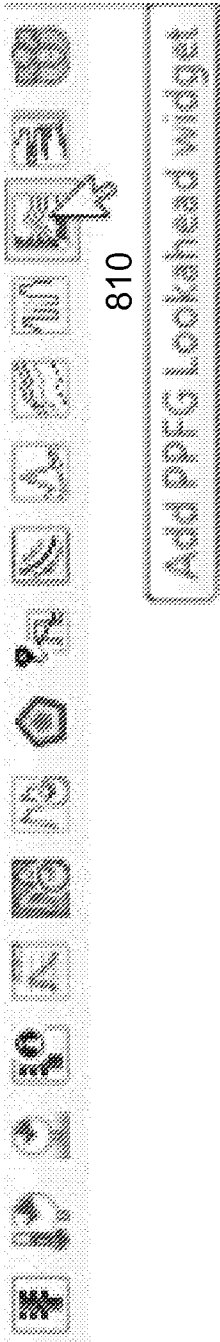


FIGURE 79A

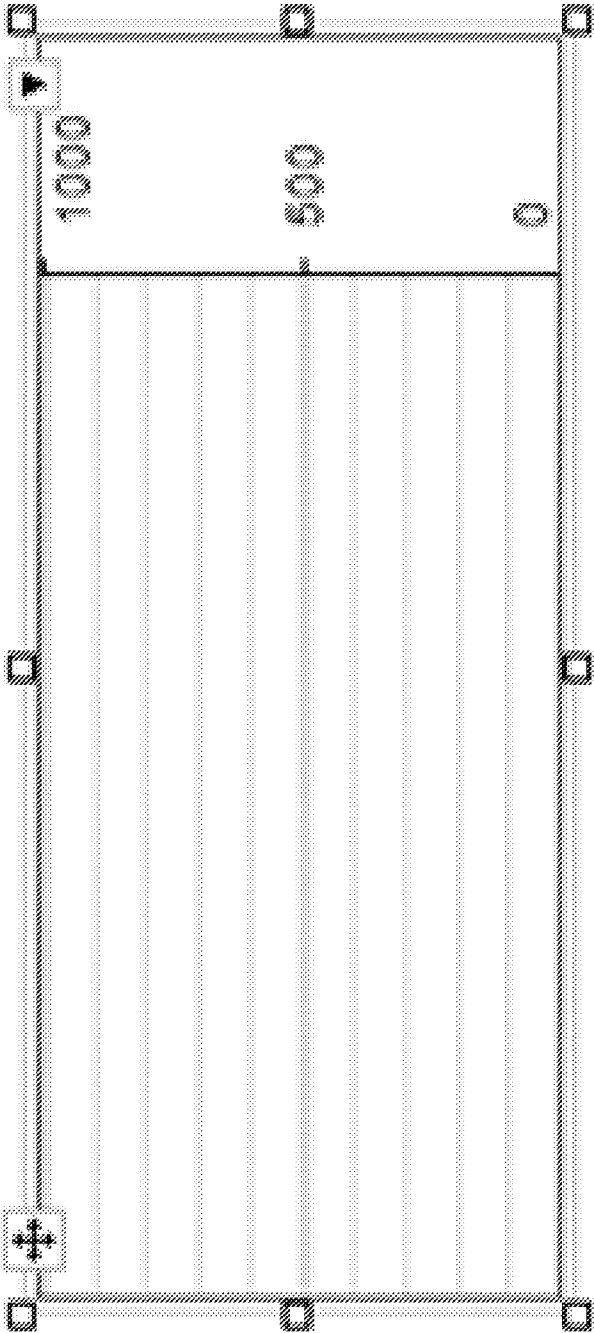


FIGURE 79B

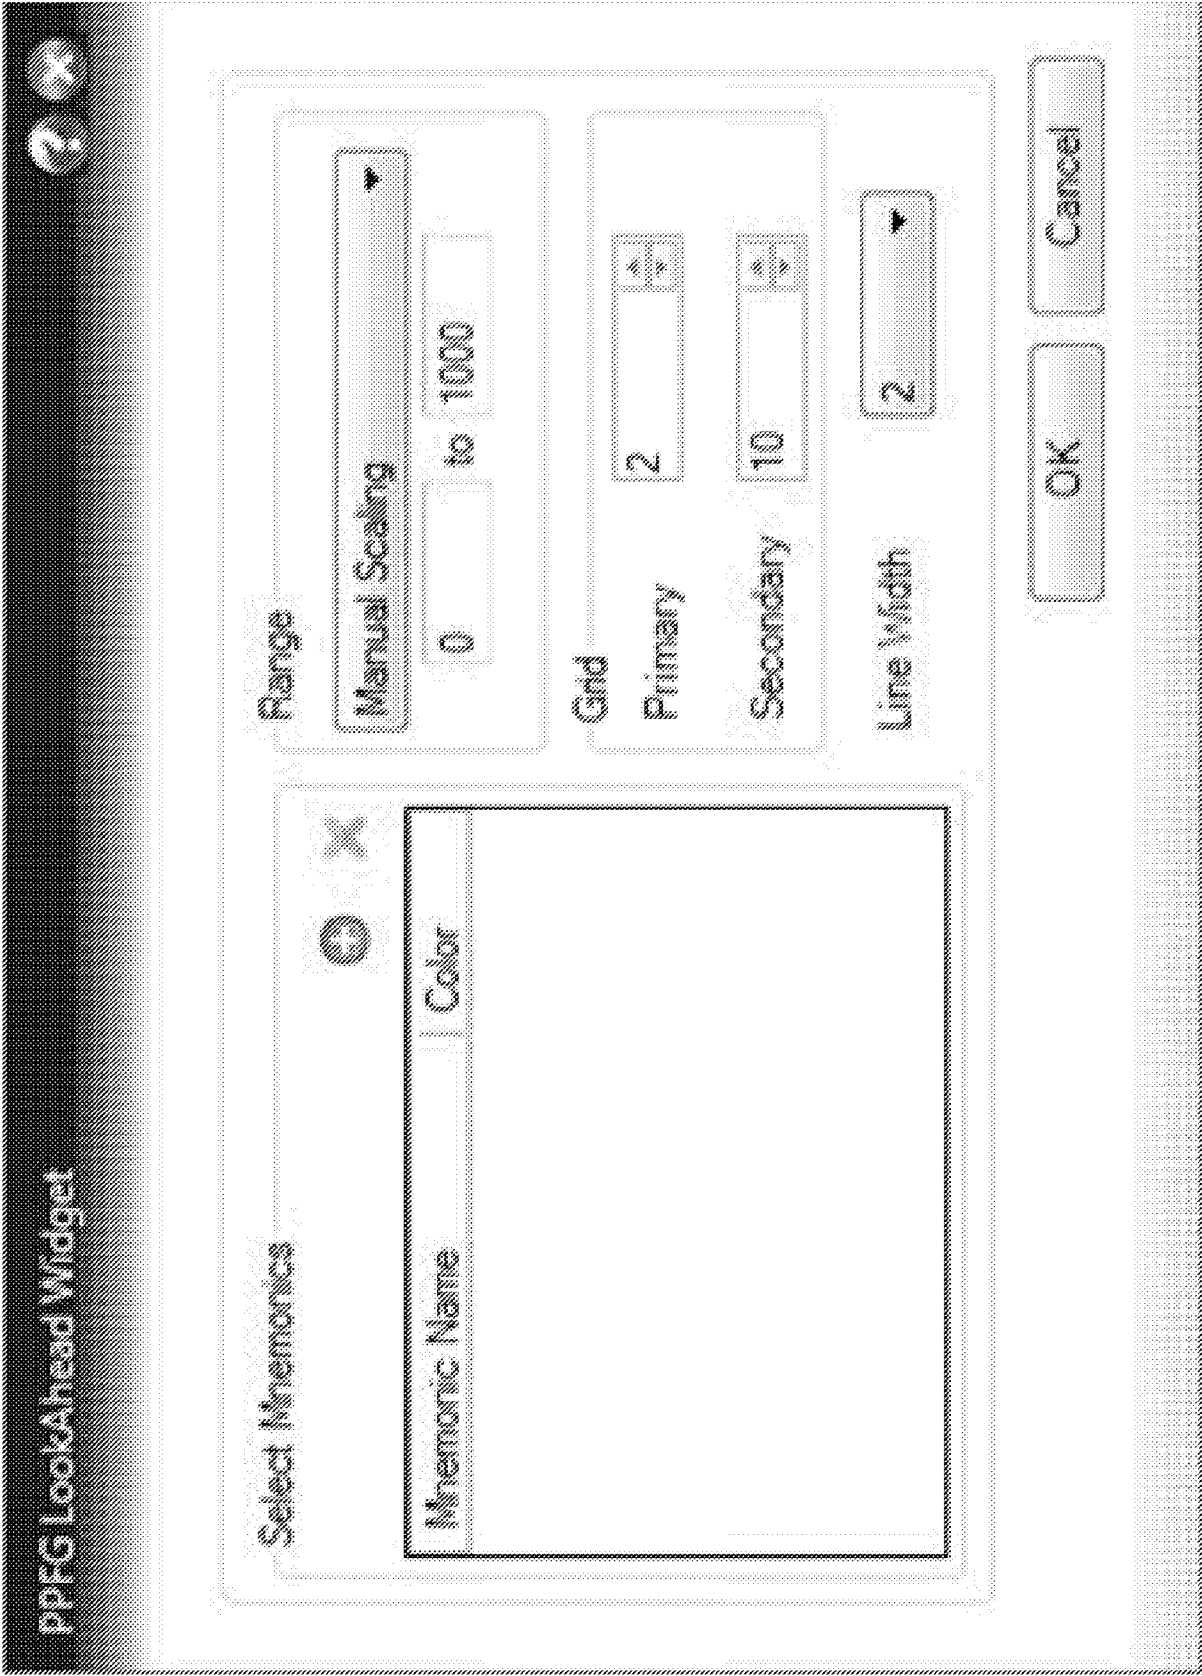


FIGURE 80

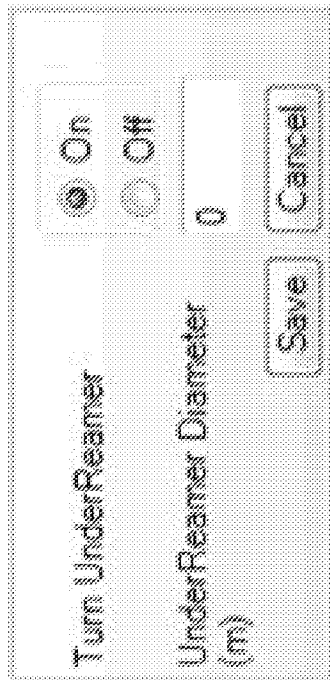


FIGURE 81A

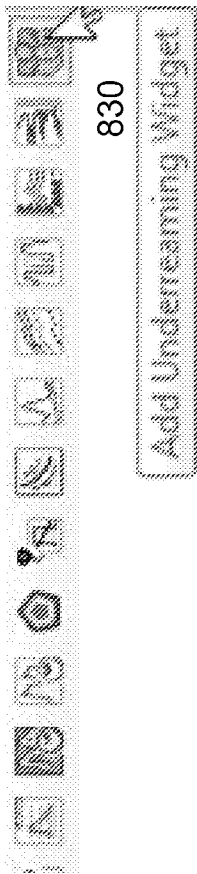


FIGURE 81B

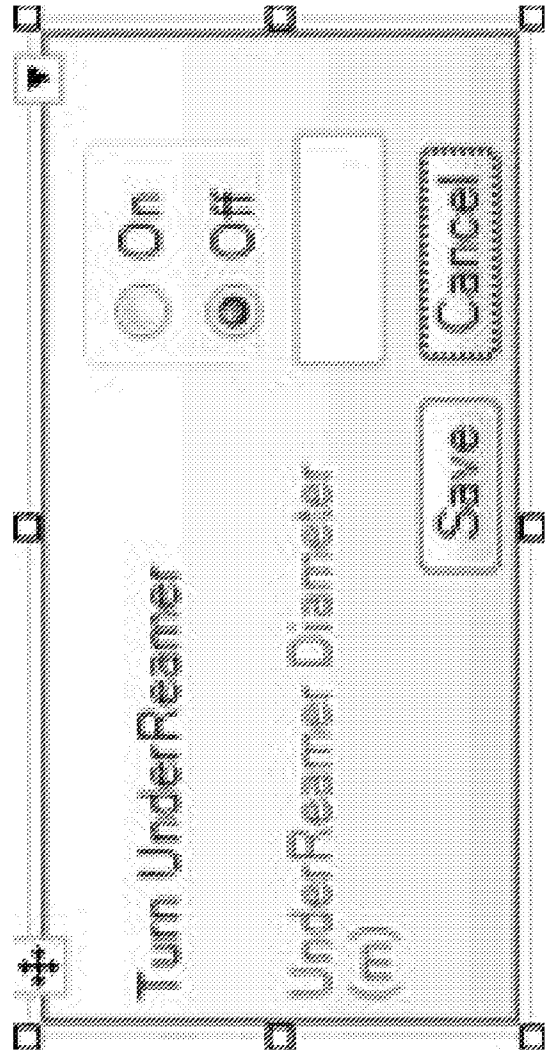


FIGURE 81C