



(51) International Patent Classification:

B01D 53/047 (2006.01) **B01D 53/04** (2006.01)

(21) International Application Number:

PCT/US2017/029344

(22) International Filing Date:

25 April 2017 (25.04.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/343,424 31 May 2016 (31.05.2016) US

(71) Applicant (for all designated States except US):
**EXXONMOBIL UPSTREAM RESEARCH COMPAN-
NY** [US/US]; CORP-URC-E2.4A.296, 22777 Springwoods
Village Parkway, Spring, TX 77389 (US).

(72) Inventors; and

(71) Applicants (for US only): **NAGAVARAPU, Ananda, K.**
[IN/US]; 4200 Scotland St., Apt. 307, Houston, TX 77007
(US). **BARNES, William** [US/US]; 16231 Crystal Creek
Ct., Spring, TX 77379 (US). **MARSHALL, Bennett, D.**
[US/US]; 911 River Crossing Dr., Conroe, TX 77384 (US).
KELLEY, Bruce, T. [US/US]; 1918 Driver Forest Dr.,
Porter, TX 77365 (US). **JOHNSON, Robert, A.** [US/US];
6161 Honey Hollow Rd., Doylestown, PA 18902 (US).

(74) Agent: **KNIGHT, Brent, R.** et al.; Exxonmobil Up-
stream Research Company, CORP-URC-E2.4A.296, 22777
Springwoods Village Parkway, Spring, TX 77389 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,
KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

(54) Title: APPARATUS AND SYSTEM FOR SWING ADSORPTION PROCESSES

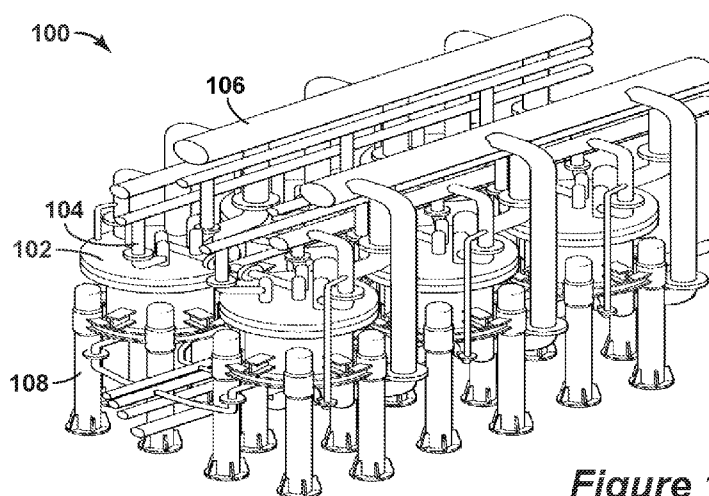


Figure 1

(57) Abstract: Provided are apparatus and systems for performing a swing adsorption process. This swing adsorption process may involve performing a startup mode process prior to beginning a normal operation mode process to remove contaminants from a gaseous feed stream. The startup mode process may be utilized for swing adsorption processes, such as TSA and/or PSA, which are utilized to remove one or more contaminants from a gaseous feed stream.



Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

APPARATUS AND SYSTEM FOR SWING ADSORPTION PROCESSES

CROSS-REFERENCE TO RELATED APPLICATION

- 5 [0001] This application claims the benefit of U.S. Provisional Patent Application 62/343,424, filed May 31, 2016, entitled APPARATUS AND SYSTEM FOR SWING ADSORPTION PROCESSES, the entirety of which is incorporated by reference herein.

FIELD

- 10 [0002] The present techniques relate to a method and system associated with swing adsorption processes used in conditioning streams for downstream processing. In particular, the method and system involve a startup mode process for a swing adsorption process, which is further utilized for starting up the downstream process.

BACKGROUND

- 15 [0003] Gas separation is useful in many industries and can typically be accomplished by flowing a mixture of gases over an adsorbent material that preferentially adsorbs one or more gas components while not adsorbing one or more other gas components. The non-adsorbed components are recovered as a separate product.
- 20 [0004] One particular type of gas separation technology is swing adsorption, such as temperature swing adsorption (TSA), pressure swing adsorption (PSA), partial pressure swing adsorption (PPSA), rapid cycle temperature swing adsorption (RCTSA), rapid cycle pressure swing adsorption (RCPSA), rapid cycle partial pressure swing adsorption (RCPPSA), and not limited to but also combinations of the fore mentioned processes, such as pressure and
- 25 temperature swing adsorption. As an example, PSA processes rely on the phenomenon of gases being more readily adsorbed within the pore structure or free volume of an adsorbent material when the gas is under pressure. That is, the higher the gas pressure, the greater the amount of readily-adsorbed gas adsorbed. When the pressure is reduced, the adsorbed component is released, or desorbed from the adsorbent material.
- 30 [0005] The swing adsorption processes (e.g., PSA and/or TSA) may be used to separate gases of a gas mixture because different gases tend to fill the micropore of the adsorbent material to different extents. For example, if a gas mixture, such as natural gas, is passed under

pressure through a vessel containing an adsorbent material that is more selective towards carbon dioxide than it is for methane, at least a portion of the carbon dioxide is selectively adsorbed by the adsorbent material, and the gas exiting the vessel is enriched in methane. When the adsorbent material reaches the end of its capacity to adsorb carbon dioxide, it is regenerated
5 by reducing the pressure, thereby releasing the adsorbed carbon dioxide. Then, the adsorbent material is typically purged and repressurized prior to starting another adsorption cycle.

[0006] The swing adsorption processes typically involve adsorbent bed units, which include adsorbent beds disposed within a housing and configured to maintain fluids at various pressures for different steps in a cycle within the unit. These adsorbent bed units utilize
10 different packing material in the bed structures. For example, the adsorbent bed units utilize checker brick, pebble beds or other available packing. As an enhancement, some adsorbent bed units may utilize engineered packing within the bed structure. The engineered packing may include a material provided in a specific configuration, such as a honeycomb, ceramic forms or the like.

15 [0007] Further, various adsorbent bed units may be coupled together with conduits and valves to manage the flow of fluids through the cycle. Orchestrating these adsorbent bed units involves coordinating the steps in the cycle for each of the adsorbent bed units with other adsorbent bed units in the system. A complete cycle can vary from seconds to minutes as it transfers a plurality of gaseous streams through one or more of the adsorbent bed units.

20 [0008] As may be appreciated, the removal of contaminants may result in the process operating in different modes, such as a startup mode and a normal operation mode. The startup mode may be utilized to prepare the equipment (e.g., the adsorbent bed and various stream) for the normal operation mode. The normal operation mode may be utilized when the process is receiving various streams, such as the gaseous feed stream, and removing contaminants from
25 the gaseous feed stream to provide a product stream, which may be referred to as steady state. For example, the conventional processes may operate in normal operation mode to treat hydrocarbon containing streams containing water (H₂O) or carbon dioxide (CO₂) to prepare the stream for downstream processing, such as natural gas liquid recovery (NGL) or liquefied natural gas (LNG) processing. The normal operation modes may be different for each of the
30 respective downstream processes based on the respective specifications that are involved for normal operational mode. For example, a typical LNG specification requires the CO₂ content to be less than 50 parts per million molar (ppm).

[0009] During the startup mode, the cycle may be different than the cycle utilized for

normal operation mode. Conventional systems may utilize a single heating step to regenerate the adsorbent material with high temperatures to remove any contaminants as the startup mode cycle. For example, a startup process involving a mole sieve unit may include heating the bed to temperatures in excess of 550°F.

- 5 [0010] Unfortunately, conventional startup mode processes have certain limitations. For example, the process in startup mode may involve merely heating the adsorbent material to high temperatures. The heating of the adsorbent material to high temperatures in the conventional approaches typically rely upon dedicated high-temperature startup heaters. These heaters are expensive, involve large capital expenditure and high operational costs. In addition, these heaters increase the weight and footprint of the facility. Further, the cycle time is typically longer than necessary to remove contaminants to ensure sufficient time is provided for downstream equipment to begin operations. In addition, the temperature that the adsorbent material are exposed to may lessen the operational life of the adsorbent material and may lessen the efficiency of the adsorbent material.
- 10
- 15 [0011] Accordingly, there remains a need in the industry for apparatus, methods, and systems that provided enhancements to the start-up processes associated with hydrocarbon recovery processes. In particular, a need exists for enhancements to startup mode processes for rapid cycle swing adsorption processes.

20

SUMMARY OF THE INVENTION

- [0012] In one embodiment, the present techniques describe a process for removing contaminants from a gaseous feed stream with a swing adsorption process. The process comprises passing a gaseous feed stream to a swing adsorption process that comprises a plurality of adsorbent bed units, each of the adsorbent bed units performs a swing adsorption cycle that includes an adsorption step and a regeneration step; wherein the swing adsorption cycle comprises: performing a first bed adsorption step for a first adsorbent bed unit of the plurality of adsorbent bed units that comprises passing a gaseous feed stream through the first adsorbent bed unit having a first adsorbent bed to separate one or more contaminants from the gaseous feed stream to form a first product stream; and performing a second bed regeneration step for a second adsorbent bed unit of the plurality of adsorbent bed units that comprises passing at least a portion of the first product stream through the second adsorbent bed unit having a second adsorbent bed to separate one or more contaminants from the second adsorbent bed to form a first purge product stream.
- 25
- 30

[0013] Further, in another embodiment, the present techniques describe a process for removing contaminants from a gaseous feed stream with a swing adsorption process. The process comprises: passing a gaseous feed stream to a swing adsorption process that comprises a plurality of adsorbent bed units, each of the adsorbent bed units performs a swing adsorption cycle that includes an adsorption step and a regeneration step; wherein the swing adsorption cycle comprises: performing a adsorption step for one of the plurality of adsorbent bed units that comprises passing a portion of the gaseous feed stream through the one of the plurality of adsorbent bed units to remove one or more contaminants from the gaseous feed stream and conduct away a product stream; and performing a regeneration step for the one of the plurality of adsorbent bed units that comprises passing at least a portion of a product stream from another of the plurality of adsorbent bed units through the one of the plurality of adsorbent bed units to remove one or more contaminants from the one of the plurality of adsorbent bed units and conduct away a purge product stream.

[0014] In yet another embodiment, a cyclical swing adsorption system is described. The system includes: a plurality of manifolds, wherein the plurality of manifolds comprise a feed manifold configured to pass a feed stream to the plurality of adsorbent bed units during an adsorption step, a product manifold configured to pass a product stream from the plurality of adsorbent bed units during the adsorption step, a purge manifold configured to pass a purge stream to the plurality of adsorbent bed units during a regeneration step, a purge product manifold configured to pass a purge product stream from the plurality of adsorbent bed units during the regeneration step, each manifold of the plurality of manifolds is associated with one swing adsorption process step of a plurality of swing adsorption process steps; a plurality of adsorbent bed units coupled to the plurality of manifolds, each of the adsorbent bed units comprising: a housing; an adsorbent material disposed within the housing; a plurality of valves, wherein at least one of the plurality of valves is associated with one of the plurality of manifolds and is configured to manage fluid flow along a flow path extending between the respective manifold and the adsorbent material; a startup mode bypass valve in fluid communication with purge manifold and the product manifold and configured to provide a flow passage between the product manifold and the purge manifold in a startup mode position and configured to block the flow passage between the product manifold and the purge manifold in a normal operation mode position.

[0015] In certain embodiments, the process and system may include some additional variations. The process may include: determining whether the first product stream is within a specification for a contaminant; if the first product stream is within the specification, passing

at least a portion of the first product stream to a downstream process; if the first product stream is not within the specification, performing a regeneration step for the first adsorbent bed unit that comprises passing a portion of a second product stream through the first adsorbent bed unit to separate one or more contaminants from the first adsorbent bed to form a second purge
5 product stream, wherein the second product stream is provided from another of the plurality of adsorbent bed units; and repeating the adsorbent step for the first adsorbent bed unit. Also, the process may include mixing a slip stream (e.g., an overhead stream) from the downstream process with the at least a portion of the first product stream prior to performing the second bed regeneration step; and/or adjusting the amount of at least a portion of the first product stream
10 utilized in the second bed regeneration step based on the amount of slip stream from the downstream process.

[0016] In other embodiments, the process and system may include additional features. The plurality of valves may comprise one or more poppet valves; the plurality of manifolds and/or the plurality of adsorbent bed units may be configured to operate at pressures between 0.1 bar
15 absolute (bara) and 100 bara; and/or wherein the plurality of manifolds may further comprise a blowdown manifold configured to pass a blowdown stream from the plurality of adsorbent bed units during a blowdown step. The cyclical swing adsorption system may further comprise a heating unit disposed upstream of the purge manifold and downstream of the product manifold, wherein the heating unit may be configured to heat the product stream to a
20 temperature in the range between 450 °F and the gaseous feed stream temperature; a separating unit may be disposed upstream of the purge manifold and downstream of the heating unit, wherein the separating unit may be configured to lessen the pressure of the product stream to a pressure in the range between 0.1 bar absolute (bara) and 100 bara, which is lower than the pressure within the product stream or which may lower the pressure by at least 10%, by at least
25 20% or at least 30% relative to the pressure of the product stream exiting the first adsorbent bed; a conditioning unit disposed downstream of the purge product manifold and upstream of the feed manifold, wherein the conditioning unit may be configured to remove one or more contaminants from the purge product stream; a liquefied natural gas process unit in fluid communication with the adsorbent bed unit and may be configured to receive the product
30 stream and separate the product stream into a final product stream and a flash fuel stream, wherein the flash fuel stream is passed to the purge manifold; and/or a cryogenic natural gas liquid recovery (NGL) process unit in fluid communication with the adsorbent bed unit and configured to receive the product stream and separate the product stream into a final product stream and a residue gas stream, wherein the residue gas stream is passed to the purge manifold.

BRIEF DESCRIPTION OF THE FIGURES

5 [0017] The foregoing and other advantages of the present disclosure may become apparent upon reviewing the following detailed description and drawings of non-limiting examples of embodiments.

[0018] Figure 1 is a three-dimensional diagram of the swing adsorption system with six adsorbent bed units and interconnecting piping in accordance with an embodiment of the present techniques.

10 [0019] Figure 2 is a diagram of a portion of an adsorbent bed unit having associated valve assemblies and manifolds in accordance with an embodiment of the present techniques.

[0020] Figure 3 is an exemplary flow chart for performing an external startup mode of a swing adsorption process in accordance with an embodiment of the present techniques.

[0021] Figure 4 is an exemplary flow chart for performing a recycle startup mode of a swing adsorption process in accordance with an embodiment of the present techniques.

15 [0022] Figure 5 is an exemplary diagram of a startup mode step in accordance with an embodiment of the present techniques.

[0023] Figures 6A and 6B are exemplary diagrams associated with another startup mode step in accordance with an embodiment of the present techniques.

20 [0024] Figure 7 is an exemplary diagram associated with yet another startup mode step in accordance with an embodiment of the present techniques.

[0025] Figure 8 is an exemplary diagram associated with the recycle startup mode step in accordance with an embodiment of the present techniques.

[0026] Figures 9A and 9B are exemplary diagrams associated with the recycle startup mode step in accordance with an embodiment of the present techniques.

25 [0027] Figure 10 is an exemplary diagram associated with another startup mode step in accordance with an embodiment of the present techniques.

[0028] Figure 11 is an exemplary diagram associated with still another startup mode step in accordance with an embodiment of the present techniques.

[0029] Figure 12 is an exemplary diagram associated with normal operation mode.

30

DETAILED DESCRIPTION OF THE INVENTION

[0030] Unless otherwise explained, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this disclosure pertains. The singular terms "a," "an," and "the" include plural referents unless the context clearly indicates otherwise. Similarly, the word "or" is intended to include "and" unless the context clearly indicates otherwise. The term "includes" means "comprises." All patents and publications mentioned herein are incorporated by reference in their entirety, unless otherwise indicated. In case of conflict as to the meaning of a term or phrase, the present specification, including explanations of terms, control. Directional terms, such as "upper," "lower," "top," "bottom," "front," "back," "vertical," and "horizontal," are used herein to express and clarify the relationship between various elements. It should be understood that such terms do not denote absolute orientation (e.g., a "vertical" component can become horizontal by rotating the device). The materials, methods, and examples recited herein are illustrative only and not intended to be limiting.

[0031] As used herein, "stream" refers to fluid (e.g., solids, liquid and/or gas) being conducted through various equipment. The equipment may include conduits, vessels, manifolds, units or other suitable devices.

[0032] As used herein, "conduit" refers to a tubular member forming a channel through which something is conveyed. The conduit may include one or more of a pipe, a manifold, a tube or the like.

[0033] The provided processes, apparatus, and systems of the present techniques may be used in swing adsorption processes that remove contaminants (CO₂, H₂O, and H₂S) from feed streams, such as hydrocarbon containing streams. As may be appreciated and as noted above, the hydrocarbon containing feed streams may have different compositions. For example, the gaseous feed stream may be a hydrocarbon containing stream having greater than one volume percent hydrocarbons based on the total volume of the feed stream. As another example, the hydrocarbon feed streams vary widely in amount of acid gas, such as from several parts per million acid gas to 90 volume percent (vol.%) acid gas. Non-limiting examples of acid gas concentrations from exemplary gas reserves sources include concentrations of approximately:

(a) 4 ppm H₂S, 2 vol.% CO₂, 100 ppm H₂O (b) 4 ppm H₂S, 0.5 vol.% CO₂, 200 ppm H₂O (c) 1 vol.% H₂S, 2 vol.% CO₂, 150 ppm H₂O, (d) 4 ppm H₂S, 2 vol.% CO₂, 500 ppm H₂O, and (e) 1 vol.% H₂S, 5 vol.% CO₂, 500 ppm H₂O. Further, in certain applications the hydrocarbon containing stream may include predominately hydrocarbons with specific amounts of CO₂

and/or water. For example, the hydrocarbon containing stream may have greater than 0.00005 volume percent CO₂ based on the total volume of the gaseous feed stream and less than 2 volume percent CO₂ based on the total volume of the gaseous feed stream; or less than 10 volume percent CO₂ based on the total volume of the gaseous feed stream. The processing of feed streams may be more problematic when certain specifications have to be satisfied.

[0034] The removal of contaminants may be performed by swing adsorption processes during normal operations to prepare the stream for further downstream processing, such as NGL processing and/or LNG processing. For example, natural gas feed streams for liquefied natural gas (LNG) applications have stringent specifications on the CO₂ content to ensure against formation of solid CO₂ at cryogenic temperatures. The LNG specifications may involve the CO₂ content to be less than or equal to 50 ppm. Such specifications are not applied on natural gas streams in pipeline networks, which may involve the CO₂ content up to 2 vol.% based on the total volume of the gaseous feed stream. As such, for LNG facilities that use the pipeline gas (e.g., natural gas) as the raw feed, additional treating or processing steps are utilized to further purify the stream. Further, the present techniques may be used to lower the water content of the stream to less than 0.1 ppm. Exemplary swing adsorption processes and configurations may include U.S. Patent Serial Nos. 62/213262; 62/213267; 62/213270; 62/213273; 62/246916; 62/246920; and 62/246922, which are each incorporated by reference herein.

[0035] The present techniques provide configurations and processes that are utilized to enhance the startup mode for the swing adsorption process and associated downstream processes. While the normal operation mode processes are described based on steady state operation, startup mode procedures involve different cycles until normal operation mode is begun. The present techniques describes different methods that may be utilized to transition the operation from startup mode to normal operation mode. In startup mode, each of the adsorbent beds utilized in the swing adsorption process is assumed to be in equilibrium with contaminants. For dehydration applications, the contaminant is water (H₂O), while for carbon dioxide (CO₂) applications, the contaminant is either H₂O (e.g., in equilibrium with atmosphere) or CO₂ (e.g., in case of a shutdown). Accordingly, the startup mode is utilized to remove contaminants to prepare the adsorbent beds for normal operation mode. In particular, the startup mode sequence may be used for swing adsorption processes (e.g., dehydration and low-level CO₂ removal) upstream or integrated with NGL and LNG applications.

[0036] A first startup mode process may involve the use of an external medium to remove

one or more contaminants from the adsorbent beds. In the external startup mode, an external medium is used to remove one or more contaminants from the adsorbent beds. The external medium may include the use of an external gas stream that is circulated through the adsorbent beds to remove the one or more contaminants from the adsorbent beds during a regeneration step (e.g., a purge step). The external gas stream may include nitrogen, dry methane or other non-reactive stream under process operating conditions. For example, the external stream may include predominately nitrogen or methane with less than 0.1 ppm of water, less than 1 ppm of water or less than 10 ppm of water.

[0037] For example, in dehydration applications, an external gas stream, such as dry nitrogen (e.g., nitrogen stream having less than 0.1 ppm of water, less than 1 ppm of water or less than 10 ppm of water), may be used to remove water from the adsorbent beds during the startup mode. When the dry nitrogen stream is introduced into each of the adsorbent beds, which is at equilibrium with ambient water, some of the water transfers from the adsorbent material in the adsorbent bed to the dry nitrogen stream. The startup mode sequence may involve providing feed to the adsorbent bed during an adsorption step and using the external stream to purge the adsorbent bed during a purge step. The startup mode cycle may continue to use the dry nitrogen until a sufficient amount of water is removed from each of the adsorbent beds and a desired bed profile is achieved for the adsorbent beds. Then, the resulting product stream from the adsorbent beds is within the desired specification (e.g., below the specific contaminant levels for the product stream). In addition, the startup mode may include maintaining the purge step with dry nitrogen to sufficient amounts of moisture, and then start the sequence described above. In such a configuration, the product stream may be within specification from the first cycle.

[0038] Once the product stream is within the desired specification, the product stream may be used in the startup mode process for the downstream processes, such as a demethanizer or a liquefaction train. As the downstream processes and units are being started, the adsorbent beds continue to regenerate using the external gas stream, such as the dry nitrogen stream. Alternatively, a heated slip stream from the product side may also be used to regenerate the spent adsorbent beds. As the downstream process begins producing a purge stream, this purge stream may be combined with the external gas stream and the amount of external gas stream utilized in the purge step may be adjusted. Once the downstream processes begin normal operations, the desired purge stream (e.g., within the desired specifications), such as a residue gas stream or fuel gas stream, is provided to the adsorbent bed as part of the normal operation mode. At this point, the adsorbent bed regeneration stream is transitioned from nitrogen to the

purge stream from the downstream process.

[0039] To facilitate rapid regeneration and minimize the amount of dry nitrogen being utilized during the external startup mode, the operating conditions may be adjusted to manage the removal of contaminants from the adsorbent bed. For example, the flow rate for the gaseous feed stream may be conducted within a flow rate range below the normal operation mode flow ranges (e.g., flow rate at turndown). For example, the flow rates in startup mode may be at about 25% of the normal operation mode flow rate, at about 50% of the normal operation mode flow rate, at about 75% of the normal operation mode flow rate, in a range between 25% and 90% of the normal operation flow rate, in a range between 50% and 90% of the normal operation flow rate, and in a range between 75% and 90% of the normal operation flow rate. Further, the regeneration of the adsorbent bed may be conducted within a pressure range near atmospheric pressure (e.g., in a pressure range between atmospheric pressure and fifty pounds per square inch gauge (psi) above atmospheric pressure) or may be within a pressure range near normal operation mode pressures (e.g., in a pressure range between 75% of normal operation mode pressure and 125% of normal operation mode pressure or at a pressure between atmospheric pressure and normal operating pressure or a pressure close to feed pressure). As an example, the regeneration of the adsorbent bed may be conducted in a pressure range from 300 pounds per square inch gauge (psi) to 650 psi. Also, the temperature of the external medium stream may be provided within a temperature range from (e.g., in a temperature range between 20° Celsius (C) above atmospheric temperature and 150° Celsius (C) above atmospheric temperature). Also, the temperature of the external stream may be in a range between 350°F and 550°F, in a range between 350°F and 550°F or in a range 450°F and 550°F in a range between 100°F and 550°F, in a range between 150°F and 450°F or in a range 250°F and 350°F.

[0040] In the second startup mode process, the startup cycle may include an adsorption step and a regeneration step (e.g., purge step). In this recycle startup mode sequence, at least a portion of the product stream from a first adsorbent bed may be recycled to a second adsorbent bed as the purge stream to progressively clean the adsorbent beds (e.g., lower the levels of contaminants in the adsorbent beds). Heat may be added to this stream to increase the temperature and yield a stream that is less saturated in the contaminants than the feed stream. As the adsorbent beds within a swing adsorption process may be performing different steps within the respective cycles, at least a portion of the product stream from an adsorbent bed in the adsorption step may be used as the purge stream for an adsorbent bed in the purge step. The resulting purge product stream may be flared, recycled to be mixed with the feed stream

after a contaminant knockout (e.g., water knockout), and/or provided to fuel. The recycle startup mode process may involve gradually lowering the levels of contaminants within the adsorbent beds until the level that satisfies a predetermined desired level for the adsorbent beds. The at least a portion of the first product stream is greater than 5 % of the product stream, greater than 50 % of the product stream or greater than 75 % of the product stream.

[0041] As an example, the recycle startup mode process may be used to remove water from two or more adsorbent beds in the swing adsorption process. Initially, the adsorbent beds may be saturated with water at the operating conditions. Then, a wet gas stream may be passed through the first adsorbent bed, which may result in water being removed from the wet gas stream. In this first cycle, the wet gas stream may not undergo dehydration or may undergo minimal dehydration because the adsorbent bed is saturated and it does not adsorb any more moisture from the stream. Then, the resulting product stream, which is a partially dehydrated gas stream may be heated to a high temperature using a startup heater. The temperatures may be in a range between 100°F and 550°F, in a range between 150°F and 450°F or in a range 250°F and 350°F. The startup heater may include a furnace, heat exchanger or other suitable heating unit. Next, the pressure of the heated stream may be lowered, resulting in a purge stream that is at a lower pressure and higher temperature than the partially dehydrated gas stream. This purge stream is used to purge a second or different adsorbent bed to remove a portion of the water within that adsorbent bed. In the second such cycle the adsorbent bed adsorbs some water resulting in a dryer product stream. The water removed from the stream is purged in the subsequent purge step because the purge has more moisture removal capability than the previous cycle (e.g., it is dryer than before). This cycle is continued for a certain duration, after which the purged adsorbent bed is provided a feed stream and the cycle repeated. The recycle startup process progressively purges each of the adsorbent beds and lessens the water present within the respective adsorbent beds. With each successive cycle, the water content of the partially dehydrated gas decreases, eventually bringing the product stream from the respective adsorbent bed to the specification.

[0042] For a dehydration application, the sequence of the cycle for the startup mode may be configured to lessen flaring of gas or completely eliminate flaring of gas. The recycle sequence may be initiated at turndown. The purge pressure is selected such that the purge product is at the suction pressure of the residue gas compressor. The residue gas compressor is then operated to compress the purge product and recombine with the feed stream either upstream or downstream of a triethylene glycol (TEG) based dehydration unit. Knockout drums may be necessary to remove the excess water gathered from the purge step.

[0043] As a specific example, the recycle startup process may be used for a cryogenic NGL recovery facility. The recycle startup process may include passing wet gas to the absorbent units at turndown. Then, the recycle startup process is utilized to clean the adsorbent beds. The process is continued until product stream is at specification and the desired water profile in the adsorbent bed is achieved. Next, the flow rate of the gas stream entering the adsorbent beds is increased for subsequent cycles. Then, a slip stream of the dry product stream is introduced to the cryogenic NGL recovery facility. The remaining product gas is used as purge stream. As necessary, the purge inlet temperature may be adjusted to achieve the necessary purge to remove the water in the adsorbent beds. The process may be similar to the external startup mode except a partially dehydrated purge stream is utilized instead of an external stream. With the product stream from the adsorbent beds, the startup sequence for the cryogenic NGL recovery facility is initiated. This cryogenic NGL facility may perform the startup mode in a recycle mode using the residue gas compressor to recycle the demethanizer column overhead product with the feed. Once the NGL recovery facility is approaching specification, a portion of the demethanizer overhead product is mixed with the purge stream from the adsorbent beds in swing adsorption process to increase the flow rate. The heat from the startup heater may be reduced as necessary. Eventually, the overhead product stream from the demethanizer is introduced to the adsorbent beds as a purge stream for the respective cycles and the portion of the product stream from the adsorbent bed being used as the purge stream is lessened and may be eliminated. The process eventually transitions to normal operation mode, which is a steady state with the adsorbent beds purge product gas being provided for sale.

[0044] Similarly, the above sequence may be used for the LNG process. However, a source of gas to compress the purge product to feed pressure may not be available with the LNG process during startup mode. As such, some of the purge stream may have to be flared. For the CO₂ removal processes, a similar recycle startup mode sequence may be used. Additionally, a loop heating step may be used to provide the necessary heat to the adsorbent beds.

[0045] One or more variants to the procedure noted above may be used to reduce the startup time of the process. The first variant includes heating adsorbent beds to reduce the amount of water in the adsorbent beds, which may be performed initially. In the heating step, the heated wet gas at low pressure is used as the purge stream for the adsorbent beds and removes a large amount of water already adsorbed in the adsorbent beds. A second variant involves performing one or more blowdown steps in the startup mode process to flare or rapidly decrease the partial pressure and reduce the amount of water adsorbed in the adsorbent beds. A third variant involves performing a purge step with dry nitrogen, which may be heated, if necessary, to dry

the adsorbent beds.

[0046] The present techniques provide a startup mode process that may be utilized to initiate the normal operation mode process for a swing adsorption process, and specifically a rapid cycle adsorption process. The present techniques may include some additional
5 equipment, such as one or more conduits and/or one or more manifolds that provide a fluid path for the external gas stream, an external gas storage tank, a heating unit (furnace and/or heat exchanger), one or more blowers and/or one or more compressors to fluidly communication with one or more adsorbent beds, and/or depressurizing equipment that may be utilized to facilitate the startup mode cycle. In addition, other components and
10 configurations may be utilized to provide the swing adsorption process, such as rapid cycle enabling hardware components (e.g., parallel channel adsorbent bed designs, rapid actuating valves, adsorbent bed configurations that integrate with other processes). Exemplary swing adsorption processes and configurations may also include U.S. Patent Serial Nos. 62/213262; 62/213267; 62/213270; 62/213273; 62/246916; 62/246920; and 62/246922, which are each
15 incorporated by reference herein.

[0047] Beneficially, the present techniques may be utilized to provide a startup process that does not involve an external drying process, involves minimal additional equipment for the startup process and may be operated in a no-flare configurations.

[0048] In one or more embodiment, a startup mode process for a swing adsorption process
20 may include using a recycle startup mode or an external startup mode. For the external startup mode, the present techniques comprise a process for removing contaminants from a gaseous feed stream with a swing adsorption process, which may be utilized with one or more downstream processes. The process comprising: a) performing a regeneration step (e.g., purge step), wherein the step comprises passing an external gas stream through an adsorbent bed unit
25 to remove contaminants from an adsorbent bed within a housing of the adsorbent bed unit to form a purge product stream; b) performing one or more adsorption steps, wherein each of the one or more adsorption steps comprise passing a gaseous feed stream through an adsorbent bed unit having an adsorbent bed to separate contaminants from the gaseous feed stream to form a product stream; c) determining whether the product stream is within a specification for at least
30 one contaminant; d) if the product stream is within the specification (e.g., is below a certain threshold), passing the product stream to a downstream process; and e) if the product stream is not within the specification (e.g., above a certain threshold), repeating the steps a) to d) for at least one additional cycle.

[0049] As another example for the external startup mode, a cyclical swing adsorption system may include a plurality of manifolds; a plurality of adsorbent bed units coupled to the plurality of manifolds, and an external gas bypass valve in fluid communication with purge manifold and configured to provide a flow passage for an external gas stream from an external gas storage vessel to the purge manifold in a startup mode position and configured to block the flow passage of the external gas stream from the external gas storage vessel to the purge manifold in a normal operation mode position. The plurality of manifolds comprise a feed manifold configured to pass a feed stream to the plurality of adsorbent bed units during an adsorption step, a product manifold configured to pass a product stream from the plurality of adsorbent bed units during the adsorption step, a purge manifold configured to pass a purge stream to the plurality of adsorbent bed units during a regeneration step, a purge product manifold configured to pass a purge product stream from the plurality of adsorbent bed units during the regeneration step. Each manifold of the plurality of manifolds is associated with one swing adsorption process step of a plurality of swing adsorption process steps. Each of the adsorbent bed units comprising a housing; an adsorbent material disposed within the housing; a plurality of valves, wherein at least one of the plurality of valves is associated with one of the plurality of manifolds and is configured to manage fluid flow along a flow path extending between the respective manifold and the adsorbent material.

[0050] In addition, the system or method may include certain features to enhance the operation of the system or method. For example, the plurality of valves may comprise one or more poppet valves; the plurality of manifolds and/or the plurality of adsorbent bed units may be configured to operate at pressures between 0.1 bar absolute (bara) and 100 bara; the system may include a heating unit disposed upstream of the purge manifold and downstream of the external gas storage vessel, wherein the heating unit is configured to heat the external gas stream to a temperature in the range between a temperature in the range between 450 °F and the gaseous feed stream temperature or between a temperature in the range between 450 °F and greater than 100 °F of the gaseous feed stream temperature; the system may include a conditioning unit disposed downstream of the purge product manifold and upstream of the external gas storage vessel, wherein the conditioning unit is configured to remove one or more contaminants from the purge product stream; the plurality of manifolds may further comprise a blowdown manifold configured to pass a blowdown stream from the plurality of adsorbent bed units during a blowdown step; and the system may include a liquefied natural gas process unit in fluid communication with the adsorbent bed unit and configured to receive the product stream and separate the product stream into a final product stream and a flash fuel stream,

wherein the flash fuel stream is passed to the purge manifold. Further, the external gas stream comprises a nitrogen stream comprising predominately nitrogen with less than 0.1 ppm of water, or may comprise a nitrogen stream comprising predominately nitrogen with less than 10 ppm of water. The external gas stream may be a nitrogen containing stream having greater
5 than one volume percent nitrogen based on the total volume of the feed stream.

[0051] For the external startup mode, the present techniques describe a process for removing contaminants from a gaseous feed stream with a swing adsorption process. The process comprises passing a gaseous feed stream to a swing adsorption process that comprises a plurality of adsorbent bed units, each of the adsorbent bed units performs a swing adsorption
10 cycle that includes an adsorption step and a regeneration step; wherein the swing adsorption cycle comprises: performing a first bed adsorption step for a first adsorbent bed unit of the plurality of adsorbent bed units that comprises passing a gaseous feed stream through the first adsorbent bed unit having a first adsorbent bed to separate one or more contaminants from the gaseous feed stream to form a first product stream; and performing a second bed regeneration
15 step for a second adsorbent bed unit of the plurality of adsorbent bed units that comprises passing at least a portion of the first product stream through the second adsorbent bed unit having a second adsorbent bed to separate one or more contaminants from the second adsorbent bed to form a first purge product stream.

[0052] Further, in one or more embodiments, the present techniques describe a process for removing contaminants from a gaseous feed stream with a swing adsorption process. The process comprising: passing a gaseous feed stream to a swing adsorption process that comprises a plurality of adsorbent bed units, each of the adsorbent bed units performs a swing adsorption
20 cycle that includes an adsorption step and a regeneration step; wherein the swing adsorption cycle comprises: performing a adsorption step for one of the plurality of adsorbent bed units that comprises passing a portion of the gaseous feed stream through the one of the plurality of adsorbent bed units to remove one or more contaminants from the gaseous feed stream and conduct away a product stream; and performing a regeneration step for the one of the plurality
25 of adsorbent bed units that comprises passing at least a portion of a product stream from another of the plurality of adsorbent bed units through the one of the plurality of adsorbent bed units to
30 remove one or more contaminants from the one of the plurality of adsorbent bed units and conduct away a purge product stream.

[0053] In yet another embodiment, a cyclical swing adsorption system is described. The system includes: a plurality of manifolds, wherein the plurality of manifolds comprise a feed

manifold configured to pass a feed stream to the plurality of adsorbent bed units during an adsorption step, a product manifold configured to pass a product stream from the plurality of adsorbent bed units during the adsorption step, a purge manifold configured to pass a purge stream to the plurality of adsorbent bed units during a regeneration step, a purge product manifold configured to pass a purge product stream from the plurality of adsorbent bed units during the regeneration step, each manifold of the plurality of manifolds is associated with one swing adsorption process step of a plurality of swing adsorption process steps; a plurality of adsorbent bed units coupled to the plurality of manifolds, each of the adsorbent bed units comprising: a housing; an adsorbent material disposed within the housing; a plurality of valves, wherein at least one of the plurality of valves is associated with one of the plurality of manifolds and is configured to manage fluid flow along a flow path extending between the respective manifold and the adsorbent material; a startup mode bypass valve in fluid communication with purge manifold and the product manifold and configured to provide a flow passage between the product manifold and the purge manifold in a startup mode position and configured to block the flow passage between the product manifold and the purge manifold in a normal operation mode position.

[0054] In certain embodiments, the process and system may include some additional variations. For example, the process may include: determining whether the first product stream is within a specification for a contaminant; if the first product stream is within the specification, passing at least a portion of the first product stream to a downstream process; if the first product stream is not within the specification, performing a regeneration step for the first adsorbent bed unit that comprises passing a portion of a second product stream through the first adsorbent bed unit to separate one or more contaminants from the first adsorbent bed to form a second purge product stream, wherein the second product stream is provided from another of the plurality of adsorbent bed units; and repeating the adsorbent step for the first adsorbent bed unit. As another example, the process may include mixing a slip stream (e.g., an overhead stream, such as overhead stream from NGL or fuel from LNG) from the downstream process with the at least a portion of the first product stream prior to performing the second bed regeneration step; and/or adjusting the amount of at least a portion of the first product stream utilized in the second bed regeneration step based on the amount of slip stream (e.g., overhead stream) from the downstream process. Also, the method may further comprise separating one or more contaminants from the at least the portion of the first product stream prior to passing the at least the portion of the first product stream through the second adsorbent bed unit; and/or wherein the separating further comprises reducing the pressure of the at least the portion of the

first product stream by at least 10% relative to the pressure of the stream prior to the separating the one or more contaminants. By way of example, the feed stream may include CO₂ and water. The adsorbent bed units may be configured to remove the water in a first group of adsorbent beds and then pass the resulting product stream to remove CO₂ in a second group of adsorbent beds. Alternatively, a portion of the product stream from one adsorbent bed may be conditioned to remove contaminants prior to passing the portion of the product stream to a second adsorbent bed. The conditioning may include flash separation, pressure reduction, external contaminant removal process or similar removal processes.

[0055] In other embodiments, the process and system may include additional features. For example, the plurality of valves comprise one or more poppet valves; the plurality of manifolds and/or the plurality of adsorbent bed units are configured to operate at pressures between 0.1 bar absolute (bara) and 100 bara; and/or wherein the plurality of manifolds further comprise a blowdown manifold configured to pass a blowdown stream from the plurality of adsorbent bed units during a blowdown step. The cyclical swing adsorption system may further comprising a heating unit disposed upstream of the purge manifold and downstream of the product manifold, wherein the heating unit is configured to heat the product stream to a temperature in the range between 450 °F and greater than 100 °F of the gaseous feed stream temperature or in the range between 450 °F and the gaseous feed stream temperature; a separating unit disposed upstream of the purge manifold and downstream of the heating unit, wherein the separating unit is configured to lessen the pressure of the product stream to a pressure in the range between 0.1 bar absolute (bara) and 100 bara, which is lower than the pressure within the product stream or which may lower the pressure by at least 10%, by at least 20% or at least 30% relative to the pressure of the product stream exiting the adsorbent bed (e.g., lower the pressure of the product stream prior to the separating or at the exit of the adsorbent bed); may further comprise a conditioning unit disposed downstream of the purge product manifold and upstream of the feed manifold, wherein the conditioning unit is configured to remove one or more contaminants from the purge product stream; and/or may further comprise a liquefied natural gas process unit in fluid communication with the adsorbent bed unit and configured to receive the product stream and separate the product stream into a final product stream and a flash fuel stream, wherein the flash fuel stream is passed to the purge manifold.

[0056] In other certain embodiments, the startup mode for the swing adsorption process may be integrated with downstream equipment and processes. The downstream equipment and processes may include control freeze zone (CFZ) applications, nitrogen removal unit (NRU), cryogenic NGL recovery applications, LNG applications, and other such applications. Each of

these different applications may include different specifications for the feed stream in the respective process. For example, the startup process may involve dehydration upstream of a cryogenic NGL process or an LNG process and may be integrated with the respective downstream equipment. As another example, the startup process may involve CO₂ removal upstream of a cryogenic NGL process or the LNG process and may be integrated with respective downstream equipment. Other embodiments may involve a combination of the two startup mode processes. The startup method may include using an external medium as part of the process, which may be a dry nitrogen stream. Also, the startup method may involve progressively dehydrating and/or cleaning the adsorbent beds by passing the product stream through one or more adsorbent beds. Further, the startup mode may be integrated with downstream processes, such as cryogenic NGL processes and/or LNG processes. In addition, the startup mode process may involve performing the startup mode cycle with minimal flaring or no flaring.

[0057] In certain embodiments, the system utilizes a combined swing adsorption process, which combines TSA and PSA, for treating of pipeline quality natural gas to remove contaminants for the stream to satisfy LNG specifications. The swing adsorption process, which may be a rapid cycle process, is used to treat natural gas that is at pipeline specifications (e.g., a feed stream of predominately hydrocarbons along with less than or equal to about 2% volume CO₂ and/or less than or equal to 4 ppm H₂S) to form a stream satisfying the LNG specifications (e.g., less than 50 ppm CO₂ and less than about 4 ppm H₂S). The product stream, which may be the LNG feed stream, may have greater than 98 volume percent hydrocarbons based on the total volume of the product stream, while the CO₂ and water content are below certain thresholds. The LNG specifications and cryogenic NGL specifications may involve the CO₂ content to be less than or equal to 50 ppm, while the water content of the stream may be less than 0.1 ppm.

[0058] Further, the gaseous feed stream may include various components. For example, the gaseous feed stream may be a hydrocarbon containing stream having greater than one volume percent hydrocarbons based on the total volume of the feed stream. In addition, the gaseous feed stream may comprise hydrocarbons and CO₂, wherein the CO₂ content is in the range of two hundred parts per million volume and less than or equal to about 2% volume of the gaseous feed stream. Further, the swing adsorption process may be configured to lower the carbon dioxide (CO₂) level to less than 50 parts per million. As another example, the gaseous feed stream may include hydrocarbons and H₂O. For example, the gaseous feed stream may be that the H₂O is in the range of 0.2 parts per million volume to saturation levels in the

gaseous feed stream or the H₂O is in the range of 100 parts per million volume to 1500 parts per million volume.

[0059] In certain aspects, as described further below, the present techniques may involve using a high temperature stream that is provided to the adsorbent beds as part of the purge step to heat the adsorbent bed. The stream, which may be referred to as the purge stream (e.g., the external stream or a portion of the product stream), may be heated to temperature may be less than 550°F, may be less than 500 °F, less than 450 °F or may be less than 350 °F, and may be the gaseous feed stream temperature, greater than 50 °F of the gaseous feed stream temperature, greater than 100°F of the gaseous feed stream temperature or greater than 250 °F of the gaseous feed stream temperature. For example, the stream used during the purge step of the startup mode cycle may be a temperature in the range between 500°F and greater than 50 °F of the gaseous feed stream temperature, in the range between 450°F and the gaseous feed stream temperature, in the range between 450°F and greater than 100 °F of the gaseous feed stream temperature or 400°F and greater than 200 °F of the gaseous feed stream temperature. The stream (purge stream or external stream) pressure may be in the range between 0.01 bara and 100 bara, between 1 bara and 80 bara, or between 2 bara and 50 bara.

[0060] Further, the present techniques may not remove all of the contaminant (e.g., H₂O and CO₂) adsorbed in the bed during the purge step of the startup mode process, but remove a portion of the contaminants such that the product end of the adsorbent bed has a contaminant loading sufficiently low to provide a product stream with less than specifications. Accordingly, the product end of the adsorbent bed may be maintained nearly free of contaminants (e.g., the CO₂ loading for the region near the product end is less than 1 millimole per gram (mmol/g), less than 0.5 mmol/g or less than 0.1 mmol/g). The loading level of contaminant may be lower on the feed side of the adsorbent bed during the purge step, but the length of adsorbent bed that contains contaminants is reduced during the purge step. For example, a feed region may be a specific portion of the adsorbent bed from the feed end of the adsorbent bed to 10% of the bed length, from the feed end of the adsorbent bed to 25% of the bed length or from the feed end of the adsorbent bed to 40% of the bed length. The product region may be a specific portion of the adsorbent bed from the product end of the adsorbent bed to 10% of the bed length, from the product end of the adsorbent bed to 25% of the bed length or from the product end of the adsorbent bed to 40% of the bed length. The movement of the contaminants front back during purge step and forward during the adsorption step is the basis of the swing capacity of the process. In part, this is achieved by using a limited, cost effective quantity of purge gas in the purge steam along with the heating of the adsorbent bed in this process and configuration.

[0061] The present techniques may involve using two or more adsorbent beds, which are operated on similar cycle that are performing different steps of the cycles (e.g., not synchronized with each other) to maintain a steady flow of fluids for the various streams (e.g., feed stream, product stream, heating stream, and purge stream).

5 [0062] Further, in other embodiments, the pressure of the different streams may be varied. For example, the feed stream may involve a feed pressure that is within the in the range between 0.01 bara and 100 bara, between 1 bara and 80 bara, or between 2 bara and 50 bara, but is not necessarily limited to this range. The feed temperature may be in the range between 0 °F and 200 °F, in the range between 20 °F and 175 °F or in the range between 40 °F and 150 °F. The
10 blowdown pressure, heating pressure, and purge pressure may be adjusted depending on the cycle, may depend upon the adsorbent material being utilized and/or may range from vacuum to feed pressure. For example, if the adsorbent material is zeolite 4A, the blowdown pressure range may be between 0.01 bara to 50 bara, or more preferably in a range between 1 bara and 15 bara. This example may depend on the feed concentration of CO₂. Also, in other
15 embodiments, the depressurization steps may be adjusted such that the pressure swing is achieved in stages to vary the amount of methane desorbing during each step, if any. Additionally, a heating loop may be introduced and the heating pressure in the heating loop may be operated at a pressure different from the purge pressure or blowdown pressure in the respective steps. Also, certain embodiments may include no pressure swing, but may rely upon
20 temperature swing for the regeneration step. Similarly, in the other embodiments, no temperature swing may be performed and the regeneration step may be performed by pressure swing.

[0063] Furthermore, the above process may be used for startup mode processes that separate two or more contaminants from the feed stream (e.g., two swing adsorption processes
25 operated in series with each other). For example, the feed stream may subjected to a dehydration swing adsorption process, then a CO₂ removal swing adsorption process, and the resulting product may be subjected to a downstream process, such as cryogenic NGL or LNG recovery. The startup mode for the dehydration and the CO₂ removal processes may involve the recycle startup process and/or the external startup process. As one example, the dehydration
30 process may involve the external startup process. Then, once the product stream satisfies the desired specification for water removal, the product stream may be used by the CO₂ removal as part of the external startup stream. Alternatively, the dehydration process may involve the external startup process and the CO₂ removal process may perform the recycle process and may mix the purge stream with the feed stream to the dehydration process.

[0064] In certain configurations, an integrated rapid cycle adsorption system may be utilized to remove multiple contaminants (e.g., water and CO₂). Suitable adsorbent material or adsorbent layers may be utilized to provide the dehydration, which may be the same or different from the adsorbent material used to in the removal of other contaminants, such as CO₂.

5 [0065] Moreover, the present techniques may include a specific process flow during normal operation mode to remove contaminants, such as CO₂ and/or water. For example, the process may include an adsorbent step and a regeneration step, which form the cycle. The adsorbent step may include passing a gaseous feed stream at a feed pressure and feed temperature through an adsorbent bed unit to separate one or more contaminants from the
10 gaseous feed stream to form a product stream. The feed stream may be passed through the adsorbent bed in a forward direction (e.g., from the feed end of the adsorbent bed to the product end of the adsorbent bed). Then, the flow of the gaseous feed stream may be interrupted for a regeneration step. The regeneration step may include one or more depressurization steps, one or more heating steps, and/or one or more purge steps. The depressurization steps, which may
15 be or include a blowdown step, may include reducing the pressure of the adsorbent bed unit by a predetermined amount for each successive depressurization step, which may be a single step and/or multiple steps. The depressurization step may be provided in a forward direction or may preferably be provided in a countercurrent direction (e.g., from the product end of the adsorbent bed to the feed end of the adsorbent bed). The heating step may include passing a
20 heating stream into the adsorbent bed unit, which may be a recycled stream through the heating loop and is used to heat the adsorbent material. The purge step may include passing a purge stream into the adsorbent bed unit, which may be a once through purge step and the purge stream may be provided in countercurrent flow relative to the feed stream. The purge stream may be provided at a purge temperature and purge pressure, which may include the purge
25 temperature and purge pressure being similar to the heating temperature and heating pressure used in the heating step. Then, the cycle may be repeated for additional streams. Additionally, the process may include one or more re-pressurization steps after the purge step and prior to the adsorption step. The one or more re-pressurization steps may be performed, wherein the pressure within the adsorbent bed unit is increased with each re-pressurization step by a
30 predetermined amount with each successive re-pressurization step. The cycle duration for normal operation mode may be for a period greater than 1 second and less than 600 seconds, for a period greater than 2 second and less than 300 seconds, for a period greater than 2 second and less than 180 seconds, for a period greater than 5 second and less than 150 seconds or for a period greater than 5 second and less than 90 seconds.

[0066] In other configurations, the startup mode may involve lower flow rates and longer cycles. For example, the initial flow rate may be 25% of the normal flow rate utilized during normal operation mode, which may have a startup mode cycle time of four times the normal operation model cycle time. This initial flow rate may be increased in a steady manner or in
5 various increments until the normal operation mode is reached. By way of example, the startup mode cycle duration may be for a period greater than 1 second and less than 2400 seconds, for a period greater than 1 second and less than 1500 seconds, for a period greater than 1 second and less than 1000 seconds, for a period greater than 1 second and less than 600 seconds, for a period greater than 2 second and less than 800 seconds, for a period greater than 2 second and
10 less than 400 seconds, for a period greater than 5 second and less than 150 seconds or for a period greater than 5 second and less than 90 seconds.

[0067] In yet other configurations, the startup mode may involve installation of adsorbent beds that are partially or completely devoid of the contaminant being removed. By way of example, if the swing adsorption process is primarily configured to remove water, then a
15 partially or totally dehydrated adsorbent bed may be installed in the system. During the start mode, a feed stream is passed to the adsorbent bed, which may be as a wet gas, and a product stream, which may be a dry stream, is conducted away and may be used as a purge stream to a different adsorbent bed. Alternatively, another method may involve installation of an adsorbent bed in the swing adsorption process that is treated or conditioned such that the
20 contaminant replaces a different molecule that is already adsorbed on the adsorbent bed. By way of example, if the swing adsorption process is primarily configured to remove CO₂, then the adsorbent bed may include adsorbed particles, such as water, which may be installed in the system. During the start mode, a feed stream is passed to the adsorbent bed, which may include the CO₂ contaminants, and a product stream may be conducted away and may be used as a
25 purge stream to a different adsorbent bed.

[0068] In one or more embodiments, the present techniques can be used for any type of swing adsorption process. Non-limiting swing adsorption processes for which the present techniques may be used include pressure swing adsorption (PSA), vacuum pressure swing adsorption (VPSA), temperature swing adsorption (TSA), partial pressure swing adsorption
30 (PPSA), rapid cycle pressure swing adsorption (RCPSA), rapid cycle thermal swing adsorption (RCTSA), rapid cycle partial pressure swing adsorption (RCPPSA), as well as combinations of these processes. For example, the preferred swing adsorption process may include a combined pressure swing adsorption and temperature swing adsorption, which may be performed as a rapid cycle process. Exemplary swing adsorption processes are further

described in U.S. Patent Serial Nos. 62/213262; 62/213267; 62/213270; 62/213273; 62/246916; 62/246920; and 62/246922 and U.S. Patent Application Publication Nos. 2008/0282892, 2008/0282887, 2008/0282886, 2008/0282885, 2008/0282884 and 20140013955, which are each herein incorporated by reference in their entirety.

5 **[0069]** In other configurations, the present techniques may involve various variations. The method may include mixing a slip stream from the downstream process with the at least a portion of the first product stream prior to performing the second bed regeneration step; heating the at least a portion of the first product stream prior to passing the at least the portion of the first product stream through the second adsorbent bed unit, wherein the at least a portion of the first product stream is heated to a temperature in the range between a temperature in the range
10 between 450 °F and the gaseous feed stream temperature; heating the purge product stream, wherein the purge product stream is heated to a temperature 10°F greater than the dew point of the purge product stream; separating one or more contaminants from the purge product stream to form conditioned purge product stream and mixing the conditioned purge product stream
15 with the gaseous feed stream upstream of the swing adsorption process; wherein the downstream process is a liquefied natural gas (LNG) process that comprises an LNG process unit and separating a flash fuel stream from the LNG process unit to mixed with the at least a portion of the first product stream prior to the second adsorbent bed unit; wherein the downstream process is a cryogenic natural gas liquid recovery (NGL) process having a NGL
20 process unit; and further comprising separating an overhead stream from the NGL process unit to be utilized as at least a portion of the purge stream; providing an external gas stream and mixing the external gas stream with the portion of the first product stream, wherein the external gas stream is a nitrogen containing stream having greater than one volume percent nitrogen based on the total volume of the external stream; and/or a separating unit disposed upstream of
25 the purge manifold and downstream of the heating unit, wherein the separating unit is configured to lessen the pressure of the product stream by at least 10% as compared to the pressure of the product stream upstream of the separating unit.

[0070] Further still, in one or more embodiments, a variety of adsorbent materials may be used to provide the mechanism for the separations. Examples include zeolite 3A, 4A, 5A, ZK4
30 and MOF-74. However, the process is not limited to these adsorbent materials, and others may be used as well. The present techniques may be further understood with reference to the Figures 1 to 12 below.

[0071] Figure 1 is a three-dimensional diagram of the swing adsorption system **100** having

six adsorbent bed units and interconnecting piping. While this configuration is a specific example, the present techniques broadly relate to adsorbent bed units that can be deployed in a symmetrical orientation, or non-symmetrical orientation and/or combination of a plurality of hardware skids. Further, this specific configuration is for exemplary purposes as other configurations may include different numbers of adsorbent bed units.

[0072] In this system, the adsorbent bed units, such as adsorbent bed unit **102**, may be configured for a cyclical swing adsorption process for removing contaminants from feed streams (e.g., fluids, gaseous or liquids). For example, the adsorbent bed unit **102** may include various conduits (e.g., conduit **104**) for managing the flow of fluids through, to or from the adsorbent bed within the adsorbent bed unit **102**. These conduits from the adsorbent bed units **102** may be coupled to a manifold (e.g., manifold **106**) to distribute the flow to, from or between components. The adsorbent bed within an adsorbent bed unit may separate one or more contaminants from the feed stream to form a product stream. As may be appreciated, the adsorbent bed units may include other conduits to control other fluid streams as part of the process, such as purge streams, depressurizations streams, and the like. In particular, the adsorbent bed units may include startup mode equipment, such as one or more heating units (not shown), one or more external gas source manifolds, which may be one of the manifolds **106**) and one or more expanders, as noted further below, which is used as part of the startup mode for the adsorbent beds. Further, the adsorbent bed unit may also include one or more equalization vessels, such as equalization vessel **108**, which are dedicated to the adsorbent bed unit and may be dedicated to one or more step in the swing adsorption process. The equalization vessel **108** may be used to store the external stream, such as nitrogen for use in the startup mode cycle.

[0073] As an example, which is discussed further below in Figure 2, the adsorbent bed unit **102** may include a housing, which may include a head portion and other body portions, that forms a substantially gas impermeable partition, an adsorbent bed disposed within the housing and a plurality of valves (e.g., poppet valves) providing fluid flow passages through openings in the housing between the interior region of the housing and locations external to the interior region of the housing. Each of the poppet valves may include a disk element that is seatable within the head or a disk element that is seatable within a separate valve seat inserted within the head (not shown). The configuration of the poppet valves may be any variety of valve patterns or configuration of types of poppet valves. As an example, the adsorbent bed unit may include one or more poppet valves, each in flow communication with a different conduit associated with different streams. The poppet valves may provide fluid communication

between the adsorbent bed and one of the respective conduits, manifolds or headers. The term "in direct flow communication" or "in direct fluid communication" means in direct flow communication without intervening valves or other closure means for obstructing flow. As may be appreciated, other variations may also be envisioned within the scope of the present techniques.

[0074] The adsorbent bed comprises a solid adsorbent material capable of adsorbing one or more components from the feed stream. Such solid adsorbent materials are selected to be durable against the physical and chemical conditions within the adsorbent bed unit **102** and can include metallic, ceramic, or other materials, depending on the adsorption process. Further examples of adsorbent materials are noted further below.

[0075] Figure 2 is a diagram of a portion of an adsorbent bed unit **200** having valve assemblies and manifolds in accordance with an embodiment of the present techniques. The portion of the adsorbent bed unit **200**, which may be a portion of the adsorbent bed unit **102** of Figure 1, includes a housing or body, which may include a cylindrical wall **214** and cylindrical insulation layer **216** along with an upper head **218** and a lower head **220**. An adsorbent bed **210** is disposed between an upper head **218** and a lower head **220** and the insulation layer **216**, resulting in an upper open zone, and lower open zone, which open zones are comprised substantially of open flow path volume. Such open flow path volume in adsorbent bed unit contains gas that has to be managed for the various steps. The housing may be configured to maintain a pressure from 0 bara (bar absolute) to 150 bara within the interior region.

[0076] The upper head **218** and lower head **220** contain openings in which valve structures can be inserted, such as valve assemblies **222** to **240**, respectively (e.g., poppet valves). The upper or lower open flow path volume between the respective head **218** or **220** and adsorbent bed **210** can also contain distribution lines (not shown) which directly introduce fluids into the adsorbent bed **210**. The upper head **218** contains various openings (not shown) to provide flow passages through the inlet manifolds **242** and **244** and the outlet manifolds **248**, **250** and **252**, while the lower head **220** contains various openings (not shown) to provide flow passages through the inlet manifold **254** and the outlet manifolds **256**, **258** and **260**. Disposed in fluid communication with the respective manifolds **242** to **260** are the valve assemblies **222** to **240**. If the valve assemblies **222** to **240** are poppet valves, each may include a disk element connected to a stem element which can be positioned within a bushing or valve guide. The stem element may be connected to an actuating means, such as actuating means (not shown), which is configured to have the respective valve impart linear motion to the respective stem.

As may be appreciated, the actuating means may be operated independently for different steps in the process to activate a single valve or a single actuating means may be utilized to control two or more valves. Further, while the openings may be substantially similar in size, the openings and inlet valves for inlet manifolds may have a smaller diameter than those for outlet manifolds, given that the gas volumes passing through the inlets may tend to be lower than product volumes passing through the outlets.

[0077] In swing adsorption processes, the cycle involves two or more steps that each has a certain time interval, which are summed together to be the cycle time or cycle duration. These steps include regeneration of the adsorbent bed following the adsorption step using a variety of methods including pressure swing, vacuum swing, temperature swing, purging (via any suitable type of purge fluid for the process), and combinations thereof. As an example, a PSA cycle may include the steps of adsorption, depressurization, purging, and re-pressurization. When performing the separation at high pressure, depressurization and re-pressurization (which may be referred to as equalization) may be performed in multiple steps to reduce the pressure change for each step and enhance efficiency. In some swing adsorption processes, such as rapid cycle swing adsorption processes, a substantial portion of the total cycle time is involved in the regeneration of the adsorbent bed. Accordingly, any reductions in the amount of time for regeneration results in a reduction of the total cycle time. This reduction may also reduce the overall size of the swing adsorption system.

[0078] Further, in startup mode for the swing adsorption process, one or more of the manifolds and associated valves may be utilized as a dedicated flow path for one or more startup streams. For example, during the adsorption or feed step, the manifold **242** and valve assembly **222** may be utilized to pass the feed gas stream to the adsorbent bed **210**, while the valve assembly **236** and manifold **256** may be used to conduct away the product stream from the adsorbent bed **210**. During the regeneration or purge step, the manifold **244** and valve assembly **224** may be utilized to pass the external gas stream or recycle stream to the adsorbent bed **210**, while the valve assembly **236** and manifold **256** may be used to conduct away the purge product stream from the adsorbent bed **210**. Accordingly, the manifold **244** and valve assembly **224** may be utilized for startup mode processes, but remain inactive during normal operation mode. As may be appreciated, the purge stream may be configured to flow counter current to the feed stream in other embodiments.

[0079] Alternatively, the startup mode for the swing adsorption process may involve sharing one or more of the manifolds and associated valves during the normal operation mode

and during startup mode. For example, the manifold **242** and valve assembly **222** may be utilized to feed the gaseous feed stream to the adsorbent bed **210** during startup mode and during normal operations, while the valve assembly **236** and manifold **256** may be used to conduct away the product stream from the adsorbent bed **210** may be used to conduct away the product stream during startup mode and during normal operation mode. During the regeneration or purge step, the manifold **254** and valve assembly **232** may be utilized to pass the external gas stream or recycle stream to the adsorbent bed **210** for startup mode and to pass the purge stream to the adsorbent bed **210** for normal operation mode, while the valve assembly **226** and manifold **248** may be used to conduct away the purge product stream from the adsorbent bed **210** during startup mode and normal operation mode. Beneficially, this configuration may be utilized to lessen any additional valves or connections for startup mode for adsorbent bed unit configurations that are subject to space limitations on the respective heads.

[0080] During normal operation mode, a gaseous feed stream may be subject to various processes to form a NGL stream or a LNG stream. For example, the process may include a mercury removal unit to remove mercury from an input stream; a filter to remove both particular and liquid droplets; a swing adsorption unit to remove one or more contaminants, such as H₂O, CO₂ and sulfur containing species; a LNG process unit or NGL process unit to process the resulting stream into a final product that may be used for sales, shipment or storage. In addition, the configuration may include one or more of a heating loop, a compressor, a heating unit and/or a storage vessel.

[0081] As noted above, the present techniques include various procedures that may be utilized for the startup mode of the swing adsorption process. The startup mode may include an external startup mode. The external startup mode may include performing an adsorption step and then a regeneration step for each of the adsorbent beds. The adsorption step may include passing a gaseous feed stream through the adsorbent bed to adsorb one or more contaminants from the gaseous feed stream and conducting away the resulting product stream from the adsorbent bed unit. The resulting product stream may be passed to downstream processing equipment and/or may be recycled to the adsorbent bed or another adsorbent bed unit as the gaseous feed stream. The regeneration step may include passing an external stream through the adsorbent bed to remove one or more contaminants from the adsorbent bed unit (e.g., a portion of the contaminants within the adsorbent bed unit or within the voids of the adsorbent bed) and conduct away the purge product stream from the adsorbent bed unit. The purge product stream may be set to flare or may be combined with fuel gas.

[0082] As an example, Figure 3 is an exemplary flow chart for performing an external startup mode of a swing adsorption process in accordance with an embodiment of the present techniques. In this flow chart **300**, the startup mode process may involve the use of an external gas stream to remove one or more contaminants from the adsorbent beds as part of the startup mode cycle. Further, the startup mode process may include operating two or more adsorbent bed units, which may each be performing different steps in the startup mode cycle. For each of the adsorbent bed units, the swing adsorption process involves a startup mode process using an external stream, as shown in blocks **302** to **308**, which is described as being performed for a single adsorbent bed unit for simplicity. Then, the adsorbent bed units may be used with the downstream equipment, as shown in blocks **310** to **316**, and normal operations mode are begun, as shown in block **318**. The external gas stream may include nitrogen and/or methane, as noted above. The external stream may comprise predominately nitrogen and/or methane with less than 0.1 ppm of water, or less than 10 ppm of water. The external gas stream may be a nitrogen containing stream having greater than one volume percent nitrogen based on the total volume of the feed stream.

[0083] The process begins by performing the startup mode process for the adsorbent bed units of the swing adsorption process, as shown in blocks **302** to **308**. At block **302**, a regeneration step is performed for the adsorbent bed with an external stream. The external stream may include nitrogen or methane and may be a dry stream (e.g., less than 10 ppm of water, less than 1 ppm of water, or less than 0.1 ppm of water). The regeneration step, which may be one or more purge steps may include passing the external stream through the adsorbent bed to create a purge product stream that is conducted away from the adsorbent bed unit. The product purge stream may include the external stream and a portion of the contaminants within the adsorbent bed. This product purge stream may be intermingled with a fuel gas stream or may be flared. Further, the external stream may be subjected to a heating step prior to being passed to the adsorbent bed. The heating step may heat the external stream to a temperature less than 550°F, less than 500 °F, less than 450 °F or less than 350 °F, and may be the gaseous feed stream temperature, greater than 50 °F of the gaseous feed stream temperature, greater than 100°F of the gaseous feed stream temperature or greater than 250 °F of the gaseous feed stream temperature. For example, the external stream used during the purge step may be a temperature in the range between 500°F and greater than 50 °F of the gaseous feed stream temperature, in the range between 450°F and the gaseous feed stream temperature, in the range between 450°F and greater than 100 °F of the gaseous feed stream temperature or 400°F and greater than 200 °F of the gaseous feed stream temperature. The heating of the external stream

may include passing the stream through a heat exchanger or similar heating unit to increase the temperature of the external stream. At block **304**, an adsorption step is performed for the adsorbent bed. The adsorption step may include passing a gaseous feed stream through the adsorbent bed to remove one or more contaminants from the gaseous feed stream and to create
5 a product stream that is conducted away from the adsorbent bed unit. At block **306**, the product stream may be measured. The product stream may be measured by taking samples, using a moisture analyzer, using a gas chromatograph or using another gas component analysis equipment. Then, at block 308, a determination may be made whether the product stream is within specification. This determination may include analyzing the product stream to
10 determine the level of one or more of the contaminants within the product stream. If the product stream is within specification (e.g., contaminants are at or below a specific threshold), the product stream may be passed to downstream processes. However, if the product stream is not within specifications (e.g., contaminants are above a specific threshold), the product stream may be recycled to be intermingled with the gaseous feed stream and utilized as part of the
15 adsorption step, as shown in block 304.

[0084] Once the adsorbent bed units are passing the product stream to the downstream process, the product stream may be used with the downstream equipment, as shown in blocks **310** to **316**. At block **310**, the startup mode for the downstream equipment may begin. The startup mode for the downstream equipment may involve various steps prior to the passing of
20 product stream to the downstream equipment or may begin once the product stream is passed to the downstream equipment. The downstream processes may include a CFZ process, a cryogenic NGL recovery process, or an LNG process, with the associated equipment for each. Further, during the downstream startup mode sequence, the adsorbent bed units may continue to utilize the external stream for the purge step. At block **312**, a purge stream may be passed
25 to the adsorbent bed units from the downstream process. The purge stream may include an overhead stream or a slip stream from the downstream process. By way of example, the purge stream from an NGL facility may be the demethanizer overhead, or the purge stream may be a fuel gas stream for an LNG facility. Then, at block **314**, the amount of external stream utilized in the purge step may be adjusted. The adjustment may be based on the amount of the purge
30 stream being provided to the adsorbent bed units. For example, the flow rate of the external stream may be lowered by 10%, 50%, or 90% based on the amount of purge stream from the downstream processes and the desired flow rate. At block **316**, the flow of the external stream may be interrupted. The flow of the external stream may be interrupted once the downstream process is producing a sufficient amount of purge stream at conditions close to steady operating

conditions.

[0085] Once the startup mode process is complete, the normal operation mode may begin, as shown in block 318. At block 318, normal operation mode is begun. The normal operation mode may include passing the gaseous feed stream is passed to the adsorbent bed units for the swing adsorption process to remove contaminants and pass the product stream to the downstream process. Then, the downstream process may pass the product stream through the various downstream equipment to produce a final product stream. The downstream process may also pass a purge stream to the swing adsorption process, which may be utilized during the regeneration step to remove contaminants from the adsorbent beds within the adsorbent bed units.

[0086] As a specific example, the feed stream may be a natural gas stream that predominately contains hydrocarbons, the external stream may be a nitrogen stream and the contaminants within the adsorbent bed may be water. During the purge step for the respective adsorbent bed, the nitrogen stream is passed through the adsorbent bed and water interacts with the nitrogen stream to form the purge product stream, which includes the nitrogen and the portion of the water removed from the adsorbent bed.

[0087] In addition, the product stream from the adsorbent bed units may be utilized in the startup mode process for one or more downstream units, such as a demethanizer or a liquefaction train. As the downstream processes and units are being started, the spent adsorbent beds may be regenerated using the dry nitrogen stream as the purge stream. The dry nitrogen stream may be heated. Alternatively, a heated slip stream from the product side may also be used to regenerate the adsorbent beds during the purge step. Once the downstream processes begin normal operation mode, the purge stream may be adjusted to be provided from a residue gas stream, a fuel gas stream or other suitable stream from one of the downstream processes.

[0088] In certain embodiments, the purge product stream may be subjected to processes to remove the contaminants from the external stream, such that the cleaned purge product stream may be recycled to the adsorbent bed units as the external stream or intermingled with the external stream. For example, if the external stream is a nitrogen stream and the contaminant is water, the purge product stream may be heated and then may be subjected to a pressure drop to separate the water from the nitrogen in the purge product stream. In this manner, the nitrogen may be regenerated and recycled to the adsorbent beds to remove additional water from the adsorbent beds during a subsequent purge step.

[0089] As further enhancements, the operating conditions may be adjusted during the

external startup mode to manage the removal of contaminants from the adsorbent beds. By way of example, flow rate may be in a range between 25 and 1000 million standard cubic feet per day (MSCFD) during normal operation mode, while the flow rate may be in the range between 6.25 and 500 MSCFD for startup mode. The flow rate may be increased during subsequent purge steps until normal operation mode flow rates are reached. Also, the pressure range of the external stream may be in a pressure range between atmospheric pressure and fifty psi above atmospheric pressure. In addition, the temperature of the external stream may be within a temperature range between 20° Celsius (C) above atmospheric temperature and 150°C above atmospheric temperature. Further, the temperature of the external stream may be less than 550°F, less than 500 °F, less than 450 °F or less than 350 °F, and may be the gaseous feed stream temperature, greater than 50 °F of the gaseous feed stream temperature, greater than 100°F of the gaseous feed stream temperature or greater than 250 °F of the gaseous feed stream temperature. For example, the external stream used during the purge step may be a temperature in the range between 500°F and greater than 50 °F of the gaseous feed stream temperature, in the range between 450°F and the gaseous feed stream temperature, in the range between 450°F and greater than 100 °F of the gaseous feed stream temperature or 400°F and greater than 200 °F of the gaseous feed stream temperature.

[0090] To support the external startup mode process, a configuration of the swing adsorption process may include additional bypass conduits and manifold to pass the external stream to the adsorbent bed units during the purge step. The external stream may be provided from an external source vessel through an external source conduit that is in fluid communication with purge manifold. In addition, the configuration may include one or more heating units that are upstream of the purge manifold and configured to heat the external stream prior to passing through the adsorbent bed units and/or that are downstream of the purge product manifold and configured to heat the purge product stream. The heating unit may include a heat exchanger, a furnace, or the like. The configuration may also include one or more separation units configured to separate one or more contaminants from the purge product stream. The separation units may be a flash separation vessel that is configured to lower the pressure of the stream to separate the contaminants from the remaining portion of the purge product stream or may be an adsorption unit that interacts with the contaminants to separates the contaminants from the remaining portion of the purge product stream. The contaminants may be conducted away from the process, while the remaining portion of the purge product stream may be passed to one or more regeneration units. The regeneration units may be utilized to further purify the remaining portion of the purge product stream and/or compress the

remaining portion of the purge product stream to form the external stream that is passed to the adsorbent beds.

[0091] As an alternative method, the startup mode may include a recycle startup mode. The recycle startup mode may include performing an adsorption step and then a regeneration
5 step for each of the adsorbent beds, which involves passing the product stream between adsorbent beds. The adsorption step may include passing a gaseous feed stream through the adsorbent bed to adsorb one or more contaminants from the gaseous feed stream and conducting away the resulting product stream from the adsorbent bed unit. The resulting
10 product stream may be passed another or second adsorbent bed that is performing the regeneration step. The product stream, which is utilized as the purge stream, may pass through the adsorbent bed to remove one or more contaminants from the adsorbent bed unit (e.g., a portion of the contaminants within the adsorbent bed unit or within the voids of the adsorbent bed) and conduct away the purge product stream from the adsorbent bed unit. The purge product stream may be set to flare or may be combined with a fuel gas stream.

15 [0092] As may be appreciated, multiple adsorbent bed units may be utilized in the process. Each of these adsorbent bed units may be performing the startup mode sequence, but be performing different steps. For example, some of the adsorbent bed units may be performing the adsorption step and others are performing the purge step at any instance.

[0093] As an example, Figure 4 is an exemplary flow chart for performing a recycle startup
20 mode of a swing adsorption process in accordance with an embodiment of the present techniques. In this flow chart 400, the startup mode process involves the use of the product stream from one adsorbent bed unit as the purge stream for another adsorbent bed unit performing a regeneration step. In this process, two or more adsorbent bed units are each performing different steps in the startup mode cycle. For each of the adsorbent bed units, the
25 swing adsorption process involves a startup mode process using the product stream as the purge stream, as shown in blocks 402 to 410, which is described as being performed for two adsorbent bed units for simplicity. Then, the adsorbent bed units may be used with the downstream equipment, as shown in blocks 412 to 418, and normal operations mode are begun, as shown in block 420.

30 [0094] The process begins by performing the startup mode process for the adsorbent bed units of the swing adsorption process, as shown in blocks 402 to 408. At block 402, an adsorption step is performed for a first adsorbent bed unit. The adsorption step may include passing a gaseous feed stream through the adsorbent bed to remove one or more contaminants

from the gaseous feed stream and to create a product stream that is conducted away from the adsorbent bed unit. At block **404**, the product stream may be measured. The product stream may be measured by taking samples, using a moisture analyzer, using a gas chromatograph or using another gas component analysis equipment. Then, at block **406**, a determination may be made whether the product stream is within specification. This determination may include analyzing the product stream to determine the level of one or more of the contaminants within the product stream. If the product stream is within specification (e.g., contaminants are at or below a specific threshold), the product stream may be passed to downstream processes. However, if the product stream is not within specifications (e.g., contaminants are above a specific threshold), a portion of the product stream is passed to a second adsorbent bed unit performing its regeneration step, as shown in block **408**. The least a portion of the product stream may be greater than 5 % of the product stream, greater than 50 % of the product stream or greater than 75 % of the product stream. The purge product stream from the second adsorbent bed unit may be flared or may be mixed with a fuel gas stream. At block **410**, a regeneration step for the first adsorbent bed unit using the product stream from another adsorbent bed unit is performed. The product stream from another adsorbent bed unit may be from the second adsorbent bed unit or one of the other adsorbent bed units in the swing adsorption process configuration that is performing its adsorption step. The product stream from another adsorbent bed unit may include passing the product stream as the purge stream through the first adsorbent bed unit to create a purge product stream that is conducted away from the first adsorbent bed unit. The product purge stream may include the product stream and a portion of the contaminants within the first adsorbent bed unit. This product purge stream may be intermingled with a fuel gas stream or may be flared.

[0095] Once the product stream is within specification, the product stream may be used with the downstream equipment, as shown in blocks **412** to **418**. At block **412**, the startup mode for the downstream equipment may begin. The startup mode for the downstream equipment may involve various steps prior to the passing of product stream to the downstream equipment or may begin once the product stream is passed to the downstream equipment. The downstream processes may include a CFZ process, a cryogenic NGL recovery process, or an LNG process, with the associated equipment for each. While the downstream process is beginning startup mode, the adsorbent bed units may use a portion of the product stream as the purge stream for the regeneration steps of the adsorbent bed units. At block **414**, a purge stream may be passed to the adsorbent bed units from the downstream process. The purge stream may include an overhead stream or a slip stream from the downstream process. By way of example,

the purge stream from an NGL facility may be the demethanizer overhead, or the purge stream may be a fuel gas stream for an LNG facility. Then, at block **416**, the amount of product stream utilized in the regeneration step may be adjusted. The adjustment may be based on the amount of the purge stream being provided to the adsorbent bed units. At block **418**, the diversion of flow of the product stream may be interrupted. The flow of the product stream may be lessened and interrupted once the downstream process is producing a sufficient amount of purge stream.

[0096] Once the startup mode process is complete, the normal operation mode may begin, as shown in block **420**. At block **420**, normal operation mode is begun. The normal operation mode may include passing the gaseous feed stream is passed to the adsorbent bed units for the swing adsorption process to remove contaminants and pass the product stream to the downstream process. Then, the downstream process may pass the product stream through the various downstream equipment to produce a final product stream. The downstream process may also pass a purge stream to the swing adsorption process, which may be utilized during the regeneration step to remove contaminants from the adsorbent beds within the adsorbent bed units.

[0097] As a specific example, the feed stream may be a natural gas stream that predominately contains hydrocarbons and the contaminants within the adsorbent bed may be water. During the regeneration step for the respective adsorbent bed unit, the product stream is passed through the adsorbent bed unit and water interacts with the product stream to form the purge product stream, which includes the product steam and the portion of the water removed from the respective adsorbent bed.

[0098] In addition, the product stream from the adsorbent bed units may be utilized in the startup mode process for one or more downstream units, such as a demethanizer or a liquefaction train. As the downstream processes and units are being started, the spent adsorbent bed units may be regenerated using a portion of the product stream as the purge stream. Alternatively, the portion of the product stream may be heated and then have the pressure lowered prior to being passed to the other adsorbent bed unit during its regeneration step. Once the downstream processes begin normal operation mode, the purge stream may be adjusted to be provided from a residue gas stream, a fuel gas stream or other suitable stream from one of the downstream processes.

[0099] In certain embodiments, the product stream may be further conditioned prior to being provided to the subsequent adsorbent bed unit during its regeneration step, as the purge stream. In particular, the product stream may be subjected to a heating step prior to being

- passed to the second adsorbent bed unit performing its regeneration step. The heating step may heat the product stream to a temperature less than 550°F, less than 500 °F, less than 450 °F or less than 350 °F, and may be the gaseous feed stream temperature, greater than 50 °F of the gaseous feed stream temperature, greater than 100°F of the gaseous feed stream temperature or greater than 250 °F of the gaseous feed stream temperature. For example, the product stream used during the purge step may be a temperature in the range between 500°F and greater than 50 °F of the gaseous feed stream temperature, in the range between 450°F and the gaseous feed stream temperature, in the range between 450°F and greater than 100 °F of the gaseous feed stream temperature or 400°F and greater than 200 °F of the gaseous feed stream temperature.
- The heating of the product stream may include passing the stream through a heat exchanger or similar heating unit to increase the temperature of the product stream. Further, the product stream may be subjected to a depressurization step prior to being passed to the second adsorbent bed unit performing its regeneration step. The depressurization step, which may be prior to the heating step or following the heating step, may lower the pressure of the product stream to a pressure in the range from between 0.1 bar absolute (bara) and 100 bara, which is lower than the pressure within the product stream. The pressure may be lowered by at least 10%, by at least 20% or at least 30 % relative to the pressure of the product stream exiting the adsorbent bed. The depressurizing of the product stream may include passing the stream through an expander or flash separation vessel to lower the pressure of the product stream.
- [0100]** As further enhancements, the operating conditions may be adjusted during the recycle startup mode to manage the removal of contaminants from the adsorbent bed units. By way of example, the flow rate may be in a range between 25 and 1000 million standard cubic feet per day (MSCFD) during normal operation mode, while the flow rate may be in the range between 6.25 and 500 MSCFD for startup mode. The flow rate may be increased during subsequent purge steps until normal operation mode flow rates are reached. Also, the pressure range of the product stream may be in a pressure range between atmospheric pressure and fifty psi above atmospheric pressure. In addition, the temperature of the product stream may be within a temperature range between 20° Celsius (C) above atmospheric temperature and 100° Celsius (C) above atmospheric temperature.
- [0101]** In yet other embodiment, the purge product stream may be subject to conditioning steps to recovery the hydrocarbons from the regeneration step. Then, the conditioned purge product stream may be recycled to the adsorbent bed units as the gaseous feed stream or intermingled with the gaseous feed stream. For example, the purge product stream may be heated or cooled and then may be subjected to a flash separation to separate the water from the

remaining portion of the purge product stream. The purge product stream may be heated to a temperature greater than 250°F, greater than 350°F or greater than 450°F. In other configurations, the purge product stream is heated to a temperature 5°F greater than the dew point of the purge product stream; 10°F greater than the dew point of the purge product stream; 5
or 20°F greater than the dew point of the purge product stream. By heating the purge product stream above the dew point, the heated purge product stream may be used in a subsequent process, such as a gas turbine. In this manner, the nitrogen may be regenerated and recycled to the adsorbent beds to remove additional water from the adsorbent beds during a subsequent purge step. In addition, the purge product may be cooled or compressed to remove
10 contaminants and may be recycled to be at least a portion of the feed stream or to be at least a portion of the product stream. For example, a flash separation may be utilized to remove contaminants.

[0102] To support the recycle startup mode process, a configuration of the swing adsorption process may include additional bypass conduits and manifold to pass the product
15 stream or a portion of the process stream to the other adsorbent bed units during their regeneration step. The configuration may also include one or more heating units that are upstream of the purge manifold and configured to heat the product stream prior to passing through the adsorbent bed units and/or that are downstream of the purge product manifold and configured to heat the purge product stream. The heating unit may include a heat exchanger,
20 a furnace, or the like. The configuration may also include one or more depressurization units configured to lower the pressure of the product stream. The depressurization units may include one or more expanders and/or one or more separation units. The separation units, which may be a flash separation vessel, may be configured to separate one or more contaminants from the product stream. Further, the configuration may include one or more regeneration units that are
25 configured to purify the purge product stream to remove contaminants from the purge product stream.

[0103] Exemplary embodiments of steps that may be performed in the startup mode process are shown in Figures 5 to Figure 12. Figure 5 is an exemplary diagram 500 of a startup mode step in accordance with an embodiment of the present techniques. In this diagram 500,
30 an adsorbent bed heating step is shown. In this heating step, a feed stream, which may be a wet gas stream, may be passed via conduit 502 to a heating unit 504. The heating unit 504 may be configured to heat the feed stream to a temperature less than 550°F, less than 500 °F, less than 450 °F or less than 350 °F, and may be the gaseous feed stream temperature, greater than 50 °F of the gaseous feed stream temperature, greater than 100°F of the gaseous feed stream

temperature or greater than 250 °F of the gaseous feed stream temperature. For example, the stream used during the purge step may be a temperature in the range between 500°F and 50 °F, in the range between 450°F and 100 °F or 400°F and 200 °F (e.g., at a temperature higher than the feed stream temperature). Then, the heated stream may be passed to a depressurization unit
5 506. The depressurization unit 506 may be configured to lower the pressure of the heated stream to a pressure in the range of 0.1 bar absolute (bara) and 100 bara, which is lower than the pressure within the stream prior to the depressurization unit 506 or which may lower the pressure by at least 10%, by at least 20% or at least 30% relative to the pressure of the stream prior to the depressurization unit 506. Then, the resulting purge stream is passed from the
10 depressurization unit 506 to the adsorbent bed unit 508 as a purge stream. The purge stream may be passed through the adsorbent bed unit to remove one or more contaminants from the adsorbent bed unit 508 and conducted away via conduit 510 as a purge product stream.

[0104] In this diagram 500, the adsorbent bed unit 508 may initially be at equilibrium with ambient conditions. Then, the feed stream is heated to remove contaminants, such as water.
15 The feed stream may also be replaced with an external feed, such as nitrogen if available.

[0105] Figures 6A and 6B are exemplary diagrams 600 and 620 associated with another startup mode step in accordance with an embodiment of the present techniques. In the diagram 600 of Figure 6A, a blowdown step is shown. In this blowdown step, a blowdown stream, which may be a portion of the gas within the adsorbent bed unit 602, may be passed via conduit
20 604 to a flare (not shown). The blowdown step may be utilized to remove a large amount of contaminants, such as water, from the adsorbent bed unit 602.

[0106] In Figure 6B, a diagram 620 of a pressure response 626 is shown along a adsorption axis 622 in moles per kilogram (mol/kg) with respect to a pressure axis 622 in bars. In this diagram 620, the response 626 shows equilibrium loading as a function of the partial pressure.
25 As pressure in the adsorbent bed is reduced, the partial pressure lowers resulting in a lower loading on the adsorbent material. This results in desorption of contaminant from the adsorbent bed which may be conducted away to flare.

[0107] Figure 7 is an exemplary diagram 700 associated with yet another startup mode step in accordance with an embodiment of the present techniques. In this diagram 700, an external
30 gas purge step is shown. In this external gas purge step, an external gaseous stream, which may be a predominately nitrogen stream, may be passed via conduit 702 to a heating unit 704. The heating unit 704 may be configured to heat the external gas stream to a temperature less than 550°F, less than 500 °F, less than 450 °F or less than 350 °F, and may be the gaseous feed stream temperature, greater than 50 °F of the gaseous feed stream temperature, greater than

100°F of the gaseous feed stream temperature or greater than 250 °F of the gaseous feed stream temperature. For example, the product stream used during the purge step may be a temperature in the range between 500°F and greater than 50 °F of the gaseous feed stream temperature, in the range between 450°F and the gaseous feed stream temperature, in the range between 450°F
5 and greater than 100 °F of the gaseous feed stream temperature or 400°F and greater than 200 °F of the gaseous feed stream temperature. Then, the heated external gas stream may be passed to the adsorbent bed unit 706 as a heated purge stream. The heated purge stream may be passed through the adsorbent bed unit 706 to remove one or more contaminants from the adsorbent bed unit 706 and conducted away via conduit 708 as a purge product stream. The purge product
10 stream may be subjected to conditioning and/or flared.

[0108] Figure 8 is an exemplary diagram 800 associated with the recycle startup mode step in accordance with an embodiment of the present techniques. In this diagram 800, two adsorbent bed units are shown performing different steps in the respective startup mode sequence. The first adsorbent bed unit 802 may be performing an adsorption step, while the
15 second adsorbent bed unit 804 may be performing a regeneration step (e.g., a purge step). In the adsorption step, a feed stream may be passed via conduit 806 to first adsorbent bed unit 802. The feed stream may interact with the adsorbent bed within the adsorbent bed unit 802 to remove one or more contaminants from the feed stream and the resulting stream may be conducted away via a conduit to a heating unit 808. The heating unit 808 may be configured
20 to heat the product stream to a temperature of less than 550°F, less than 500 °F, less than 450°F or less than 350 °F, and may be the gaseous feed stream temperature, greater than 50°F of the gaseous feed stream temperature, greater than 100°F of the gaseous feed stream temperature or greater than 250°F of the gaseous feed stream temperature. For example, the product stream used during the purge step may be a temperature in the range between 500°F and greater than
25 50°F of the gaseous feed stream temperature, in the range between 450°F and the gaseous feed stream temperature, in the range between 450°F and greater than 100°F of the gaseous feed stream temperature or 400°F and greater than 200°F of the gaseous feed stream temperature. Then, the heated product stream may be passed to a depressurization unit 810. The depressurization unit 810 may be configured to lower the pressure of the heated product stream
30 to a pressure in the range between 0.1 bar absolute (bara) and 100 bara, which is lower than the pressure within the stream prior to the depressurization unit 810 or which may lower the pressure by at least 10%, by at least 20% or at least 30% relative to the pressure of the stream prior to the depressurization unit 810. Then, the resulting stream is passed from the depressurization unit 810 to the second adsorbent bed unit 804 as a purge stream during the

regeneration step for the second adsorbent bed unit 804. The purge stream may be passed through the second adsorbent bed unit 804 to remove one or more contaminants from the adsorbent bed within the second adsorbent bed unit 804 and conducted away via conduit 812 as a purge product stream. The purge product stream may be intermingled with a fuel stream,
5 subject to additional conditioning and/or flared.

[0109] Beneficially, in this recycle startup mode step, the feed to the process is utilized to condition the adsorbent bed units within the process, which is a self-supporting conditioning process for the adsorbent bed units within the swing adsorption process. This process may continue until the product stream satisfies the predetermined specification for the downstream
10 process. Further, another enhancement the cycle timing, flow rates, pressures and temperatures may be adjusted as necessary for the process.

[0110] Figures 9A and 9B are exemplary diagrams 900 and 920 associated with the recycle startup mode step in accordance with an embodiment of the present techniques. These diagrams are associated with the configuration from Figure 8. In Figure 9A, a diagram 900 of
15 a contaminant response 908 is shown along a contaminant axis 902 in parts per million (ppm) with respect to a cycle axis 904 representing the number of cycles performed. In this diagram 900, the contaminant response 908 continues to decrease for each cycle performed with the adsorbent bed units, which are shown by the different dots that form the contaminant response 908. The specification or predetermined threshold 906 is shown as being set at 0.1 ppm. The
20 process using this startup mode sequence reaches the specification at the 10th cycle. This diagram 900 shows the concentration of water in the product stream after each subsequent cycle.

[0111] In Figure 9B, a diagram 920 of contaminant adsorption responses 930, 931, 932, 933, 934, 935, 936, 937 and 938 is shown along an adsorption axis 922 in mol/kg with respect
25 to an axial position in bed axis 924, which is a normalized location represent by the axial position divided by the length of the adsorbent bed. In this diagram 920, the response 930 is for the before the cycles begin, response 931 is for the first cycle, response 932 is for the second cycle, response 933 is for the fourth cycle, response 934 is for the sixth cycle, response 935 is for the eighth cycle, response 936 is for the tenth cycle, response 937 is for the twelfth cycle
30 and response 938 is for the fourteenth cycle. The contaminant adsorption responses 930, 931, 932, 933, 934, 935, 936, 937 and 938 continues to decrease for each cycle performed with the adsorbent bed units. This diagram 920 shows the adsorbent loading as a function of position in the adsorbent bed. Initially, the whole bed is in equilibrium with the ambient conditions. After the first cycle, the product end of the bed starts to become dehydrated. By the 10th cycle,

a desired adsorbent bed profile has been reached where the resulting product stream is at specification.

[0112] Figure 10 is an exemplary diagram 1000 associated with another startup mode step in accordance with an embodiment of the present techniques. In this diagram 1000, two
5 adsorbent bed units 1002 and 1004 are shown performing different steps in the respective recycle startup mode sequence after the product stream has reached a level that satisfies the predetermined threshold. This step would be performed in one or more cycles following performance of the cycles in Figure 8 and may be used to startup the downstream processes, such as an NGL system. The first adsorbent bed unit 1002 may be performing an adsorption
10 step, while the second adsorbent bed unit 1004 may be performing a regeneration step (e.g., a purge step). In the adsorption step, a feed stream may be passed via conduit 1006 to first adsorbent bed unit 1002. The feed stream may interact with the adsorbent bed within the first adsorbent bed unit 1002 to remove one or more contaminants from the feed stream and the resulting stream may be conducted away via a conduit to a splitter 1008. The splitter 1008 may
15 pass a first portion of the product stream to a downstream process via conduit 1010 and may pass a second portion of the product stream to a heating unit 1012 via conduit 1014. The splitter may be an adjustable valve or group of valves. The heating unit 1012 may be configured to heat the second portion of the product stream to a temperature greater than 250°F, greater than 350°F or greater than 450°F. Then, the heated stream may be passed to a depressurization unit
20 1016. The depressurization unit 1016 may be configured to lower the pressure of the heated stream to a pressure in the range between 0.1 bar absolute (bara) and 100 bara, which is lower than the pressure within the stream prior to the depressurization unit 1016 or which may lower the pressure by at least 10%, by at least 20% or at least 30% relative to the pressure of the stream prior to the depressurization unit 1016. Then, the resulting stream is passed from the
25 depressurization unit 1016 to the second adsorbent bed unit 1004 as a purge stream during the regeneration step for the second adsorbent bed unit 1004. The purge stream may be passed through the second adsorbent bed unit 1004 to remove one or more contaminants from the adsorbent bed within the second adsorbent bed unit 1004 and conducted away via conduit 1018 as a purge product stream. The purge product stream may be intermingled with a fuel stream,
30 subject to additional conditioning and/or flared.

[0113] Figure 11 is an exemplary diagram 1100 associated with still another startup mode step in accordance with an embodiment of the present techniques. In this diagram 1100, two adsorbent bed units 1002 and 1004 are shown performing different steps in the respective recycle startup mode sequence after the product stream has reached a level that satisfies the

predetermined threshold and after the downstream process is providing a purge stream to the adsorbent bed units 1002 and 1004. This step may be performed in one or more cycles following performance of the cycles in Figure 10, which may include similar reference numbers to Figure 10, and may be used to transition to normal operation for the swing adsorption process and/or the downstream processes. In this configuration, the splitter 1008 may be adjusted to increase the first portion of the product stream being provided to the downstream process via conduit 1010 and may lessen the second portion of the product stream being provided to the heating unit 1012 via conduit 1014 and the depressurization unit 1016. The adjustment may be based on the volume of overhead stream being provided from the downstream process via conduit 1102. The adjustment may include using a valve and/or control system in a cascaded configuration, adjusting the flow rate with a valve or blocking flow with one or more valves. This process may be utilized to transition the swing adsorption process from a RCTSA process to a RCPSA process. Also, this process may be used for the startup of an NGL process and/or LNG process.

15 **[0114]** Figure 12 is an exemplary diagram 1200 associated with normal operation mode. In this diagram 1200, two adsorbent bed units 1202 and 1204 are shown performing different steps in the respective normal operation mode sequence after the startup mode is complete. The first adsorbent bed unit 1202 may be performing an adsorption step, while the second adsorbent bed unit 1204 may be performing a regeneration step (e.g., a purge step). In the

20 adsorption step, a feed stream may be passed via conduit 1206 to first adsorbent bed unit 1202. The feed stream may interact with the adsorbent bed within the first adsorbent bed unit 1202 to remove one or more contaminants from the feed stream and the resulting stream may be conducted away via a conduit 1208 to a downstream process. For the regeneration step, the purge stream is passed via conduit 1210 from the downstream process to the second adsorbent

25 bed unit 1204. The purge stream may be passed through the second adsorbent bed unit 1204 to remove one or more contaminants from the adsorbent bed within the second adsorbent bed unit 1204 and conducted away via conduit 1212 as a purge product stream. The purge product stream may be intermingled with a fuel stream, provided to a residue gas compressor or other additional conditioning process.

30 **[0115]** As may be appreciated, the startup mode process may include various combination of steps to perform the startup mode process. The startup modes may be integrated together to form an integrated startup mode. For example, the startup process may utilize the external startup mode sequence for some initial cycles, then may transition to the recycle startup mode sequence. Further, the startup mode step of Figure 8 may be utilized after the startup mode

step of Figure 7 and/or after the startup mode step of Figure 3.

[0116] In one or more embodiments, the material may include an adsorbent material supported on a non-adsorbent support. The adsorbent materials may include alumina, microporous zeolites, carbons, cationic zeolites, high silica zeolites, highly siliceous ordered mesoporous materials, sol gel materials, aluminum phosphorous and oxygen (ALPO) materials (microporous and mesoporous materials containing predominantly aluminum phosphorous and oxygen), silicon aluminum phosphorous and oxygen (SAPO) materials (microporous and mesoporous materials containing predominantly silicon aluminum phosphorous and oxygen), metal organic framework (MOF) materials (microporous and mesoporous materials comprised of a metal organic framework) and zeolitic imidazolate frameworks (ZIF) materials (microporous and mesoporous materials comprised of zeolitic imidazolate frameworks). Other materials include microporous and mesoporous sorbents functionalized with functional groups. Examples of functional groups include primary, secondary, tertiary amines and other non protogenic basic groups such as amidines, guanidines and biguanides.

[0117] In one or more embodiments, the adsorbent bed unit may be utilized to separate contaminants from a feed stream during normal operation mode. The method may include passing a gaseous feed stream at a feed pressure through an adsorbent bed unit having an adsorbent contactor to separate one or more contaminants from the gaseous feed stream to form a product stream, wherein the adsorbent contactor has a first portion and a second portion; interrupting the flow of the gaseous feed stream; performing a depressurization step, wherein the depressurization step reduces the pressure within the adsorbent bed unit; performing an optional heating step, wherein the heating step increases the temperature of the adsorbent bed unit to form a temperature differential between the feed end of the adsorbent bed and the product end of the adsorbent bed; and performing a purge step, wherein the purge step reduces the pressure within the adsorbent bed unit; performing a re-pressurization step, wherein the re-pressurization step increases the pressure within the adsorbent bed unit; and repeating the steps a) to e) for at least one additional cycle.

[0118] Further, in one or more embodiments, the adsorbent bed unit may include an adsorbent bed that can be used for the separation of a target gas from a gaseous mixture. The adsorbent is usually comprised of an adsorbent material supported on a non-adsorbent support, or contactor. Such contactors contain substantially parallel flow channels wherein 20 volume percent, preferably 15 volume percent or less of the open pore volume of the contactor, excluding the flow channels, is in pores greater than about 20 angstroms. A flow channel is taken to be that portion of the contactor in which gas flows, if a steady state pressure difference

is applied between the point or place at which a feed stream enters the contactor and the point or place at which a product stream leaves the contactor. In the contactor, the adsorbent is incorporated into the wall of the flow channel.

[0119] In one or more embodiments, when using RCTSA or an integrated RCPSA and RCTSA process, the total cycle times for normal operation mode are typically less than 600 seconds, preferably less than 400 seconds, preferably less than 300 seconds, preferably less than 250 seconds, preferably less than 180 seconds, more preferably less than 90 seconds, and even more preferably less than 60 seconds. In other embodiment, the rapid cycle configuration may be operated at lower flow rates during startup mode as compared to normal operation mode, which may result in the cycle durations being longer than the cycle durations during normal operation mode. For example, the startup mode cycle duration may be for a period greater than 1 second and less than 2400 seconds, for a period greater than 1 second and less than 1500 seconds, for a period greater than 1 second and less than 1000 seconds, for a period greater than 1 second and less than 600 seconds, for a period greater than 2 second and less than 800 seconds, for a period greater than 2 second and less than 400 seconds, for a period greater than 5 second and less than 150 seconds or for a period greater than 5 second and less than 90 seconds.

[0120] In view of the many possible embodiments to which the principles of the disclosed invention may be applied, it should be recognized that the illustrative embodiments are only preferred examples of the invention and should not be taken as limiting the scope of the invention.

CLAIMS

What is claimed is:

1. A process for removing contaminants from a gaseous feed stream with a swing adsorption process, the process comprising:
 - 5 passing a gaseous feed stream to a swing adsorption process that comprises a plurality of adsorbent bed units, each of the adsorbent bed units performs a swing adsorption cycle that includes an adsorption step and a regeneration step; wherein the swing adsorption cycle comprises:
 - 10 performing a first bed adsorption step for a first adsorbent bed unit of the plurality of adsorbent bed units that comprises passing a gaseous feed stream through the first adsorbent bed unit having a first adsorbent bed to separate one or more contaminants from the gaseous feed stream to form a first product stream; and
 - 15 performing a second bed regeneration step for a second adsorbent bed unit of the plurality of adsorbent bed units that comprises passing at least a portion of the first product stream through the second adsorbent bed unit having a second adsorbent bed to separate one or more contaminants from the second adsorbent bed to form a first purge product stream.
2. The process of claim 1, further comprising:
 - 20 determining whether the first product stream is within a specification for a contaminant;
 - if the first product stream is within the specification, passing at least a portion of the first product stream to a downstream process;
 - if the first product stream is not within the specification, performing a regeneration step for the first adsorbent bed unit that comprises passing a portion of a second product stream
 - 25 through the first adsorbent bed unit to separate one or more contaminants from the first adsorbent bed to form a second purge product stream, wherein the second product stream is provided from another of the plurality of adsorbent bed units; and
 - repeating the adsorbent step for the first adsorbent bed unit.
3. The process of any one of claims 1 to 2, further comprising mixing a slip stream from the downstream process with the at least a portion of the first product stream prior to performing the second bed regeneration step.
- 30

4. The process of claim 3, further comprising adjusting the amount of at least a portion of the first product stream utilized in the second bed regeneration step based on the amount of slip stream from the downstream process.
- 5
5. The process of any one of claims 1 to 4, further comprising heating the at least a portion of the first product stream prior to passing the at least the portion of the first product stream through the second adsorbent bed unit, wherein the at least a portion of the first product stream is heated to a temperature in the range between a temperature in the range between 450 °F and the gaseous feed stream temperature.
- 10
6. The process of any one of claims 1 to 5, further comprising separating one or more contaminants from the at least the portion of the first product stream prior to passing the at least the portion of the first product stream through the second adsorbent bed unit.
- 15
7. The process of claim 6, wherein the separating further comprises reducing the pressure of the at least the portion of the first product stream by at least 10% relative to the pressure of the stream prior to the separating the one or more contaminants.
- 20
8. The process of any one of claims 1 to 7, further comprising heating the purge product stream, wherein the purge product stream is heated to a temperature 10°F greater than the dew point of the purge product stream.
9. The process of claim 8, further comprising:
- 25
- separating one or more contaminants from the purge product stream to form conditioned purge product stream; and
- mixing the conditioned purge product stream with the gaseous feed stream upstream of the swing adsorption process.
- 30
10. The process of any one of claims 1 to 9, wherein the cycle duration is for a period greater than 1 second and less than 2400 seconds.

11. The process of any one of claims 1 to 10, wherein the gaseous feed stream is a hydrocarbon containing stream having greater than one volume percent hydrocarbons based on the total volume of the feed stream.
- 5 12. The process of any one of claims 1 to 11, wherein the gaseous feed stream comprises hydrocarbons and CO₂, wherein the CO₂ content is in the range of two hundred parts per million volume and less than or equal to about 2% volume of the gaseous feed stream.
- 10 13. The process of any one of claims 1 to 12, wherein the swing adsorption process is configured to lower the carbon dioxide (CO₂) level to less than 50 parts per million.
14. The process of any one of claims 1 to 13, wherein the gaseous feed stream comprises hydrocarbons and H₂O, wherein the H₂O is in the range of 0.2 parts per million volume to saturation levels in the gaseous feed stream.
- 15 15. The process of any one of claims 1 to 13, wherein the gaseous feed stream comprises hydrocarbons and H₂O, wherein the H₂O is in the range of 100 parts per million volume to 1500 parts per million volume.
- 20 16. The process of any one of claims 1 to 15, wherein the downstream process is a liquefied natural gas (LNG) process that comprises an LNG process unit; and
separating a flash fuel stream from the LNG process unit to mixed with the at least a portion of the first product stream prior to the second adsorbent bed unit.
- 25 17. The process of any one of claims 1 to 15, wherein the downstream process is a cryogenic natural gas liquid recovery (NGL) process having a NGL process unit; and further comprising separating an overhead stream from the NGL process unit to be utilized as at least a portion of the purge stream.
- 30 18. The process of any one of claims 1 to 17, wherein the cycle duration is greater than 2 seconds and less than 800 seconds.

19. The process of any one of claims 1 to 18, further comprising providing an external gas stream and mixing the external gas stream with the portion of the first product stream, wherein the external gas stream is a nitrogen containing stream having greater than one volume percent nitrogen based on the total volume of the external stream.

5

20. The process of any one of claims 1 to 18 wherein the at least a portion of the first product stream is greater than 50 % of the product stream.

21. The process of any one of claims 1 to 18 wherein the at least a portion of the first
10 product stream is greater than 75 % of the product stream.

22. A cyclical swing adsorption system comprising:

15 a plurality of manifolds, wherein the plurality of manifolds comprise a feed manifold configured to pass a feed stream to the plurality of adsorbent bed units during an adsorption step, a product manifold configured to pass a product stream from the plurality of adsorbent
bed units during the adsorption step, a purge manifold configured to pass a purge stream to the plurality of adsorbent bed units during a regeneration step, a purge product manifold configured to pass a purge product stream from the plurality of adsorbent bed units during the regeneration
step, each manifold of the plurality of manifolds is associated with one swing adsorption
20 process step of a plurality of swing adsorption process steps;

a plurality of adsorbent bed units coupled to the plurality of manifolds, each of the adsorbent bed units comprising:

a housing;

an adsorbent material disposed within the housing;

25 a plurality of valves, wherein at least one of the plurality of valves is associated with one of the plurality of manifolds and is configured to manage fluid flow along a flow path extending between the respective manifold and the adsorbent material;

a startup mode bypass valve in fluid communication with purge manifold and the product manifold and configured to provide a flow passage between the product manifold and
30 the purge manifold in a startup mode position and configured to block the flow passage between the product manifold and the purge manifold in a normal operation mode position.

23. The cyclical swing adsorption system of claim 22, wherein the plurality of valves comprise one or more poppet valves.
- 5 24. The cyclical swing adsorption system of any one of claims 22 to 23, wherein the plurality of adsorbent bed units are configured to operate at pressures between 0.1 bar absolute (bara) and 100 bara.
- 10 25. The cyclical swing adsorption system of any one of the claims 22 to 24, further comprising a heating unit disposed upstream of the purge manifold and downstream of the product manifold, wherein the heating unit is configured to heat the product stream to a temperature in the range between 450 °F and the gaseous feed stream temperature.
- 15 26. The cyclical swing adsorption system of claim 25, further comprising a separating unit disposed upstream of the purge manifold and downstream of the heating unit, wherein the separating unit is configured to lessen the pressure of the product stream by at least 10% as compared to the pressure of the product stream upstream of the separating unit.
- 20 27. The cyclical swing adsorption system of any one of the claims 22 to 26, further comprising a conditioning unit disposed downstream of the purge product manifold and upstream of the feed manifold, wherein the conditioning unit is configured to remove one or more contaminants from the purge product stream.
- 25 28. The cyclical swing adsorption system of any one of the claims 22 to 27, wherein the plurality of manifolds further comprise a blowdown manifold configured to pass a blowdown stream from the plurality of adsorbent bed units during a blowdown step.
- 30 29. The cyclical swing adsorption system of any one of the claims 22 to 28, further comprising a liquefied natural gas process unit in fluid communication with the adsorbent bed unit and configured to receive the product stream and separate the product stream into a final

product stream and a flash fuel stream, wherein the flash fuel stream is passed to the purge manifold.

30. The cyclical swing adsorption system of any one of the claims 22 to 28, further
5 comprising a cryogenic natural gas liquid recovery (NGL) process unit in fluid communication with the adsorbent bed unit and configured to receive the product stream and separate the product stream into a final product stream and a residue gas stream, wherein the residue gas stream is passed to the purge manifold.

10 31. A process for removing contaminants from a gaseous feed stream with a swing adsorption process, the process comprising:



passing a gaseous feed stream to a swing adsorption process that comprises a plurality of adsorbent bed units, each of the adsorbent bed units performs a swing adsorption cycle that includes an adsorption step and a regeneration step; wherein the swing adsorption
15 cycle comprises:

performing a adsorption step for one of the plurality of adsorbent bed units that comprises passing a portion of the gaseous feed stream through the one of the plurality of adsorbent bed units to remove one or more contaminants from the gaseous feed stream and conduct away a product stream; and


20 performing a regeneration step for the one of the plurality of adsorbent bed units that comprises passing at least a portion of a product stream from another of the plurality of adsorbent bed units through the one of the plurality of adsorbent bed units to remove one or more contaminants from the one of the plurality of adsorbent bed units and conduct away a purge product stream.

25


1/7

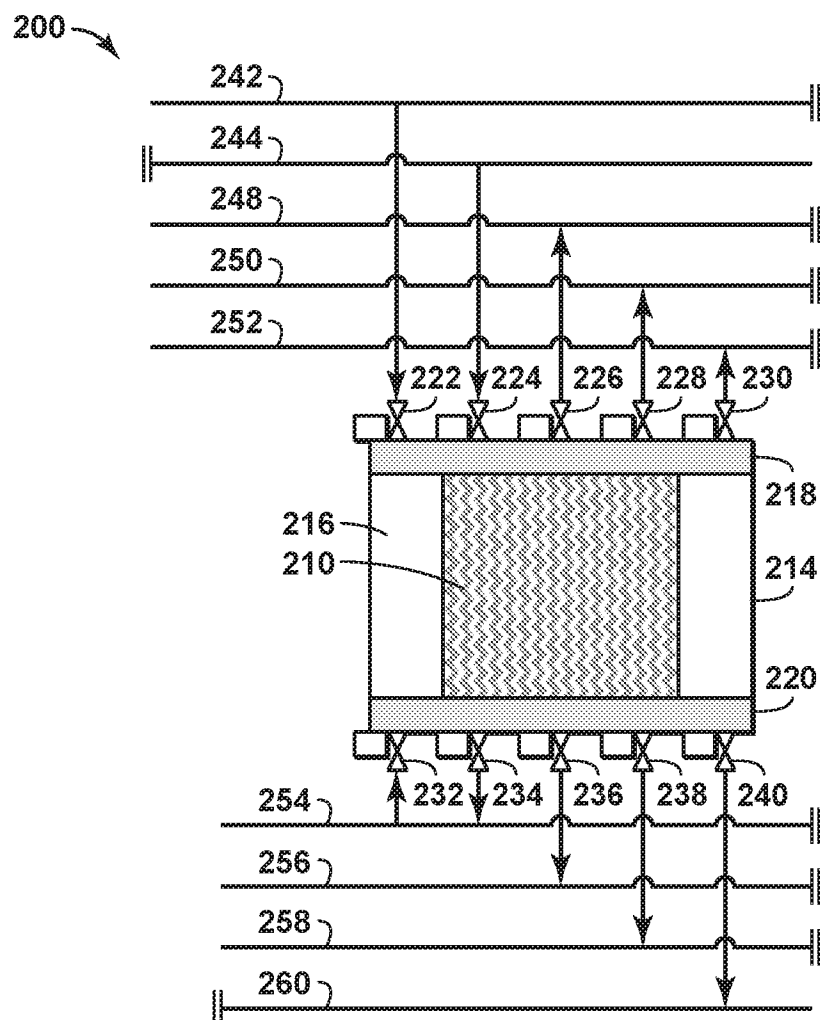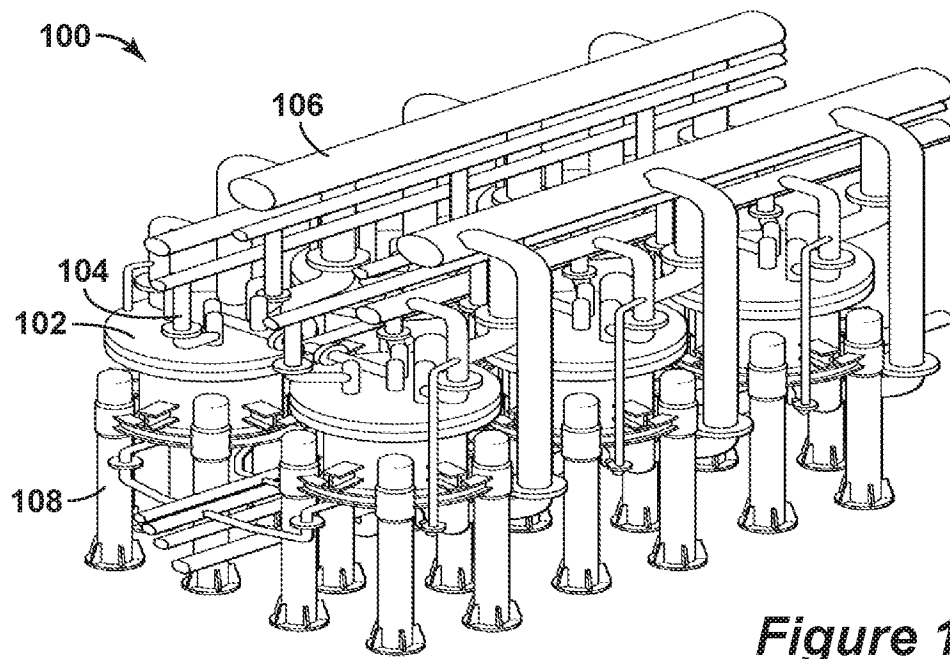

2/7

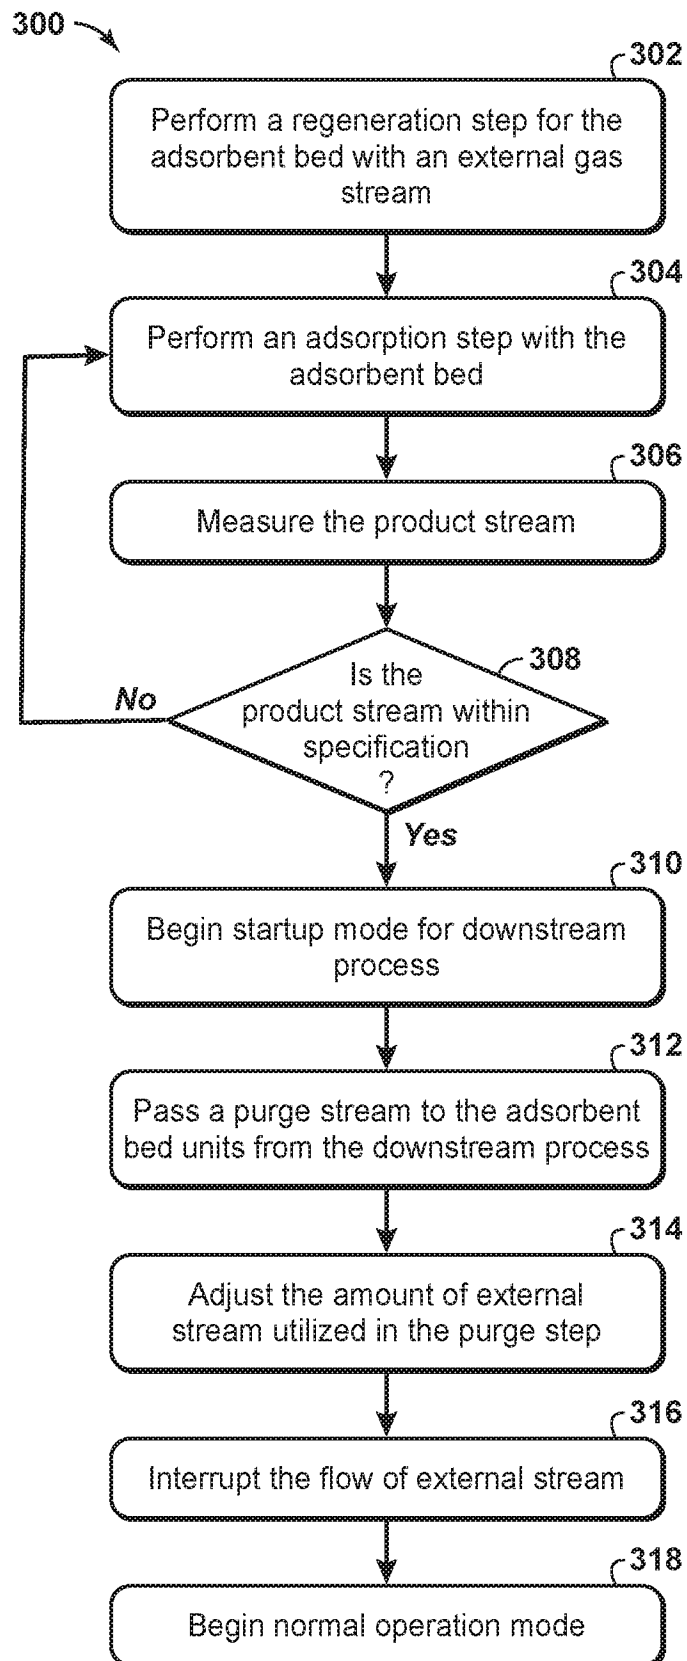**Figure 3**

3/7

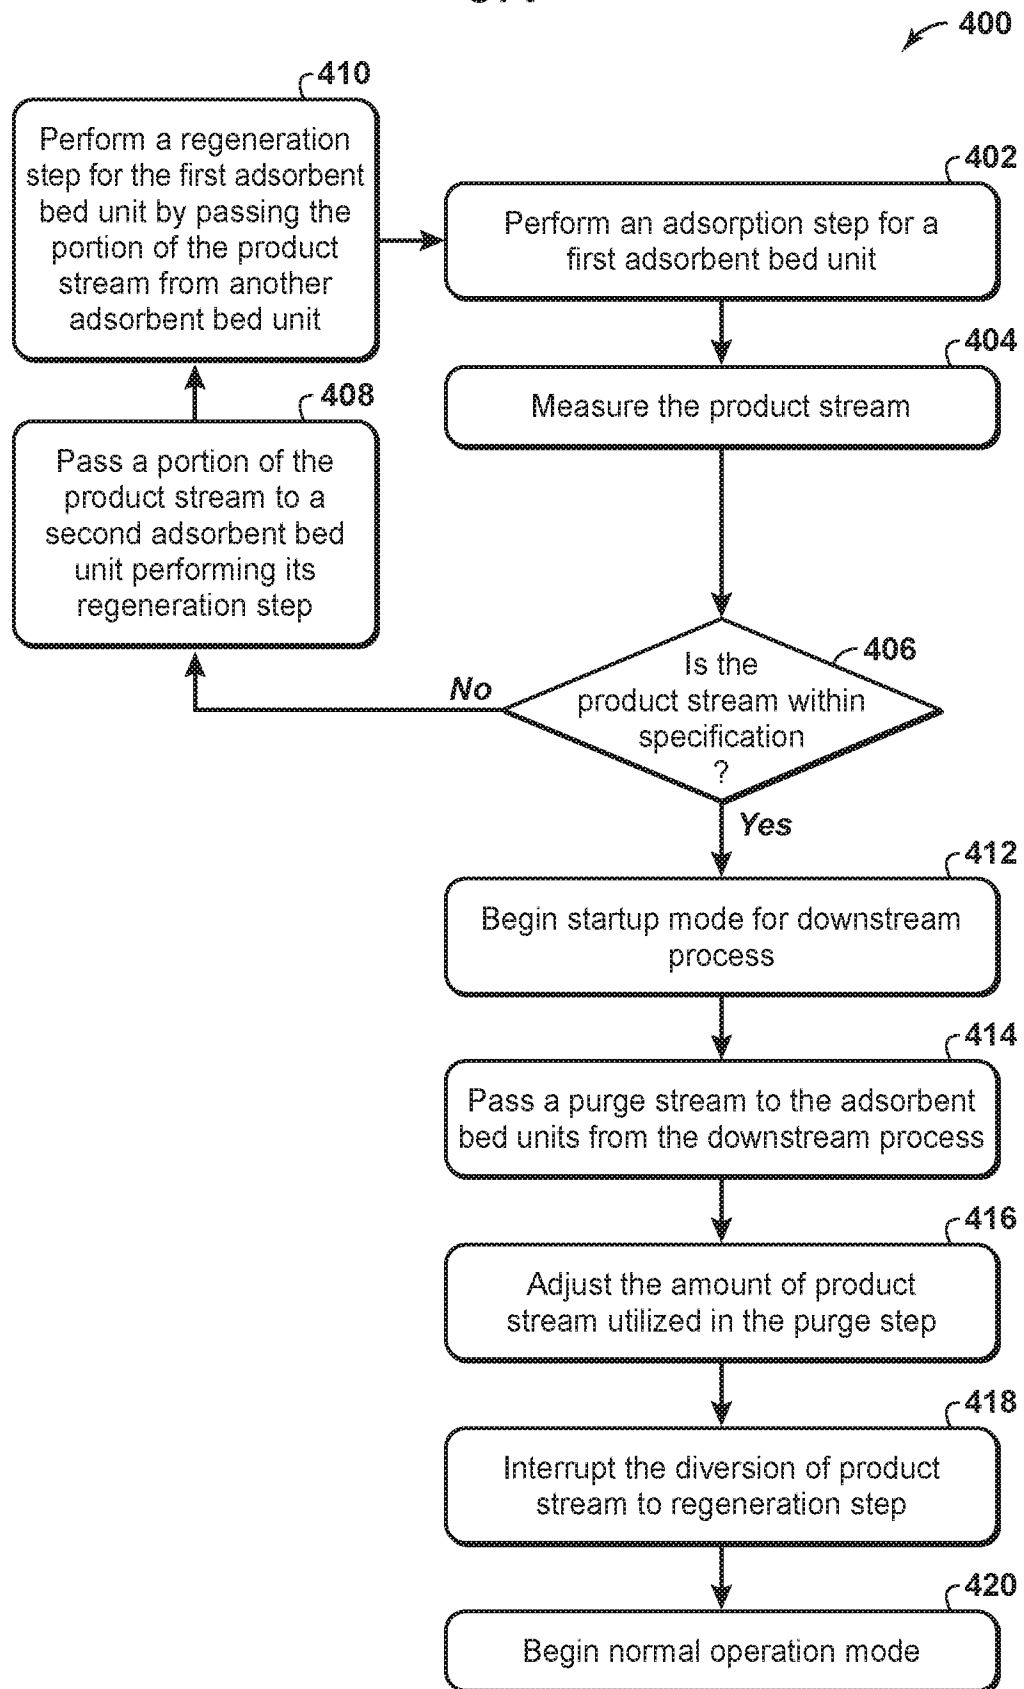**Figure 4**

4/7

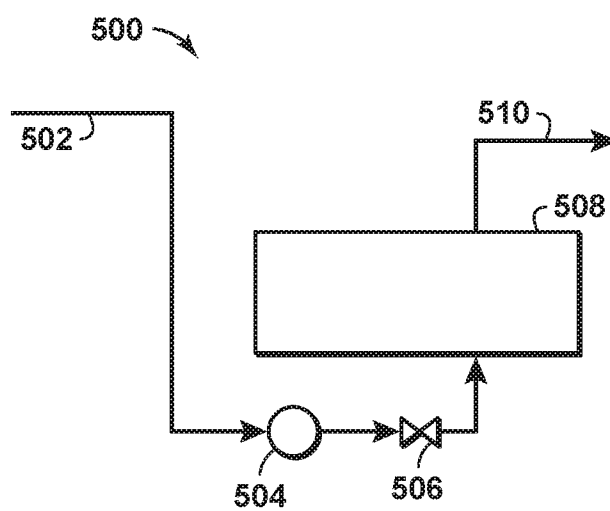


Figure 5

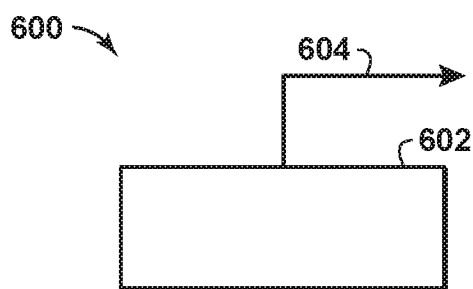


Figure 6A

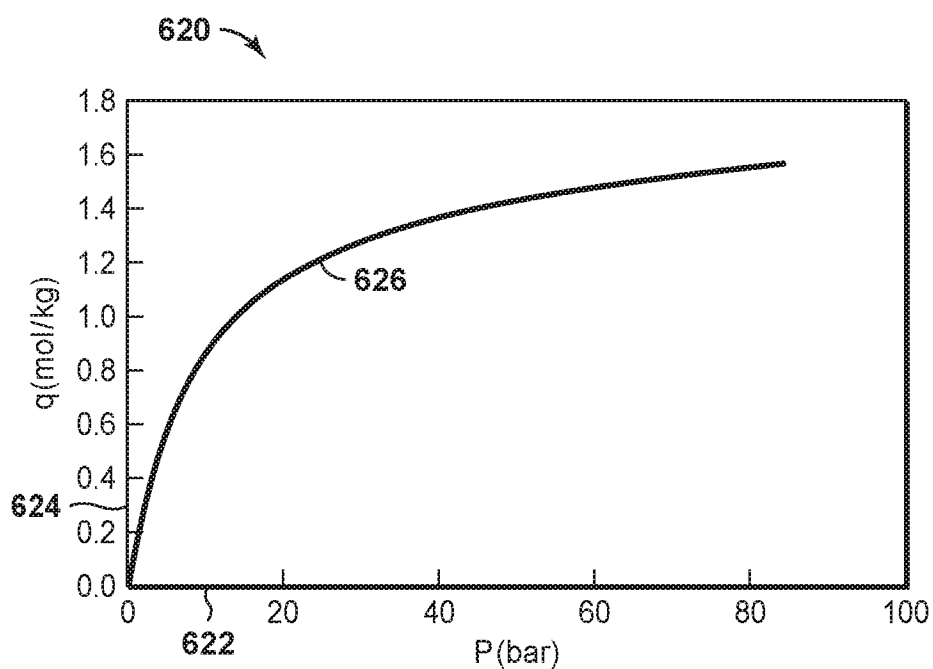
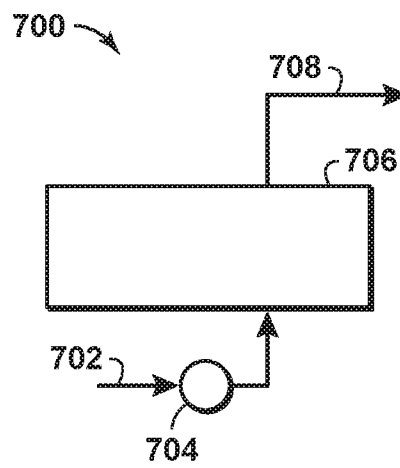
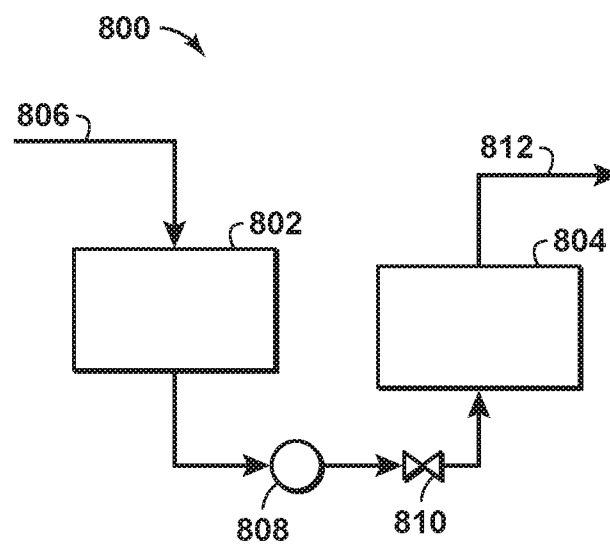
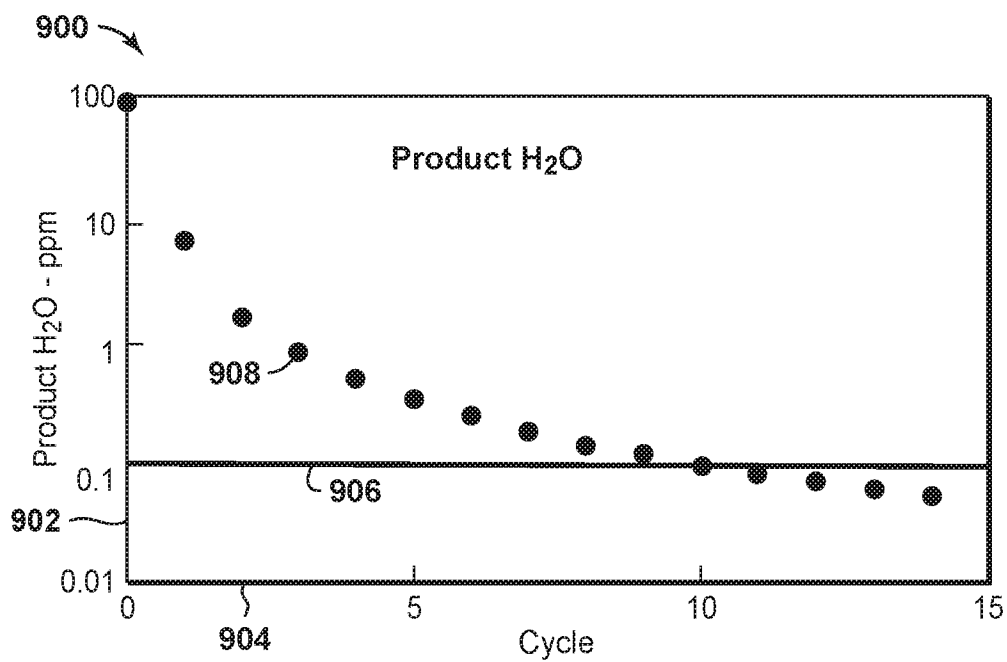
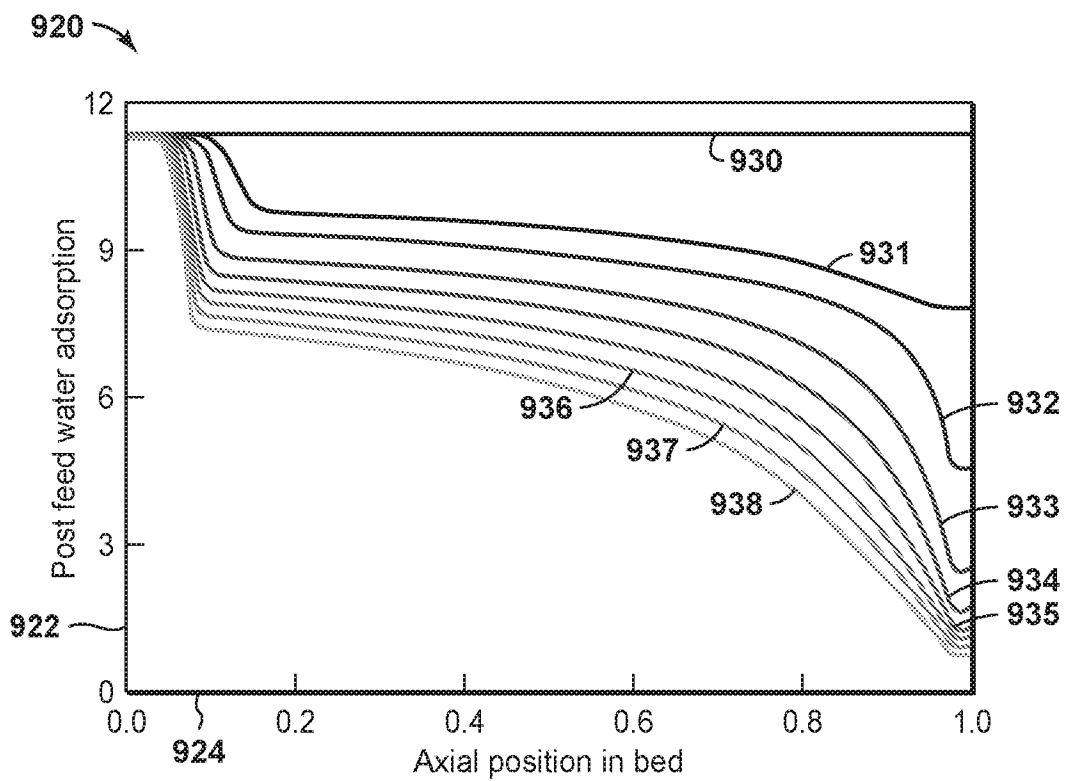


Figure 6B

5/7

*Figure 7**Figure 8*

6/7

**Figure 9A****Figure 9B**

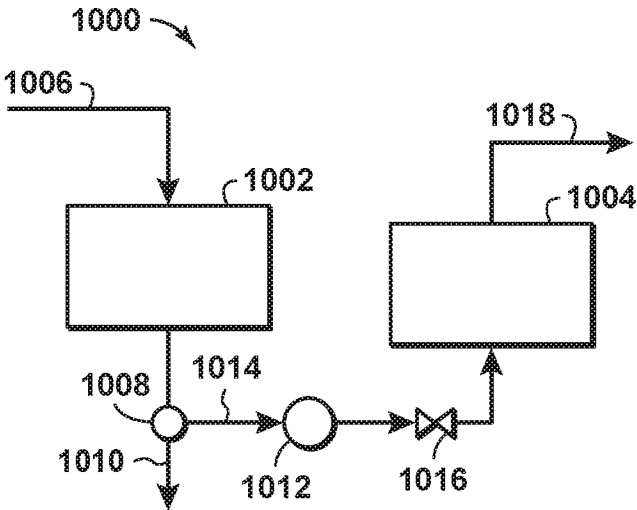


Figure 10

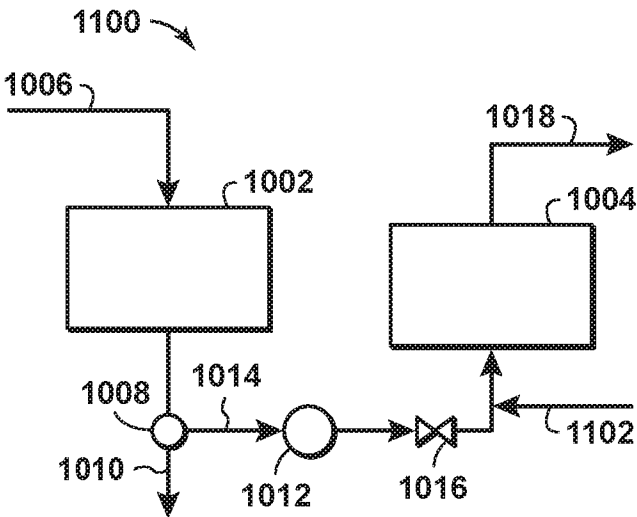


Figure 11

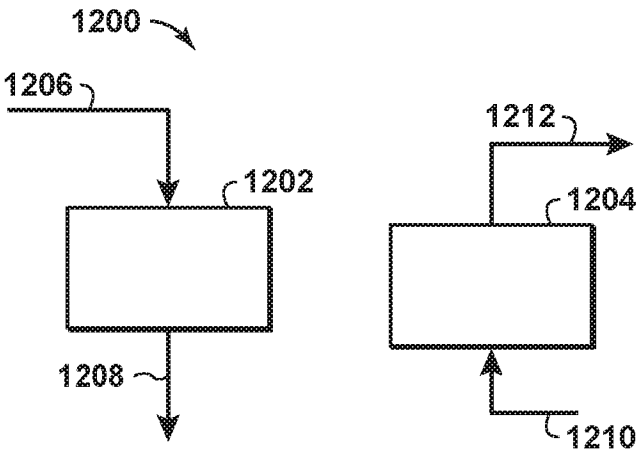


Figure 12

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2017/029344

A. CLASSIFICATION OF SUBJECT MATTER

INV. B01D53/047 B01D53/04
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 471 749 B1 (KAWAI MASATO [JP] ET AL) 29 October 2002 (2002-10-29) column 5, lines 5-27; figures 1,2 column 10, lines 12-52 -----	1-21,31
X	US 5 779 768 A (ANAND MADHU [US] ET AL) 14 July 1998 (1998-07-14) column 7, lines 1-9; figure 1 column 8, lines 49-65 -----	1-21,31
X	US 4 770 676 A (SIRCAR SHIVAJI [US] ET AL) 13 September 1988 (1988-09-13) column 14, lines 54-59; figures 1,2 column 16, lines 3-7 ----- -/--	1-6, 8-21,31

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 May 2017

Date of mailing of the international search report

09/08/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Gruber, Marco

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/029344

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 594 983 A (YEAROUT JAMES D) 27 July 1971 (1971-07-27) column 1, lines 4-21; figure 2 column 6, lines 36-47 -----	1,5,8, 11-15,31
X	US 4 693 730 A (MILLER GEOFFREY Q [US] ET AL) 15 September 1987 (1987-09-15) abstract figure 3 -----	1,31
X,P	WO 2017/039990 A1 (EXXONMOBIL UPSTREAM RES CO [US]; MARSHALL BENNETT D [US]; KELLEY BRUCE) 9 March 2017 (2017-03-09) the whole document -----	1,31

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2017/029344

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-21, 31

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-21, 31

A process for removing contaminants from a gaseous feed stream with a swing adsorption process

2. claims: 22-30

A cyclical swing adsorption system comprising a plurality of manifolds and inter alia a startup mode bypass valve in fluid communication with a purge manifold and the product manifold.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/029344

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 6471749	B1	29-10-2002	JP	4252668 B2		08-04-2009
			JP	2000317244 A		21-11-2000
			US	6471749 B1		29-10-2002

US 5779768	A	14-07-1998	NONE			

US 4770676	A	13-09-1988	CA	1312552 C		12-01-1993
			EP	0305919 A1		08-03-1989
			JP	H01127021 A		19-05-1989
			US	4770676 A		13-09-1988

US 3594983	A	27-07-1971	BE	751992 A1		16-11-1970
			CA	932272 A		21-08-1973
			DE	2029466 A1		07-01-1971
			FR	2052692 A5		09-04-1971
			GB	1311360 A		28-03-1973
			JP	S5123470 B1		16-07-1976
			NL	7008690 A		21-12-1970
			US	3594983 A		27-07-1971

US 4693730	A	15-09-1987	BR	8703326 A		15-03-1988
			CA	1301668 C		26-05-1992
			CN	87105154 A		03-02-1988
			DE	3761874 D1		19-04-1990
			EP	0254567 A2		27-01-1988
			GR	3000471 T3		28-06-1991
			GR	890300189 T1		31-10-1990
			IN	171193 B		15-08-1992
			JP	H0239929 B2		07-09-1990
			JP	S6388015 A		19-04-1988
			US	4693730 A		15-09-1987

WO 2017039990	A1	09-03-2017	NONE			
