



- (51) International Patent Classification:
A61F 2/30 (2006.01) *A61F 2/42* (2006.01)
- (21) International Application Number:
PCT/US2019/037914
- (22) International Filing Date:
19 June 2019 (19.06.2019)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
16/138,056 21 September 2018 (21.09.2018) US
- (71) Applicant: **WRIGHT MEDICAL TECHNOLOGY, INC.** [US/US]; 1023 Cherry Road, Memphis, TN 38117 (US).
- (72) Inventors: **SANDER, Elizabeth, J.**; 851 Creekside Drive, Apt. 2, Memphis, TN 38117 (US). **DHILLON, Braham, K.**; 6786 Fossil Creek Road, Memphis, TN 38120 (US). **ARMACOST, Scott, A.**; 2707 Brook Bridge Cove, Germantown, TN 38138 (US).

- (74) Agent: **APICELLI, Samuel, W.** et al.; Duane Morris LLP, 30 South 17th Street, Philadelphia, PA 19103 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

- (54) Title: TALAR BONE PLATE

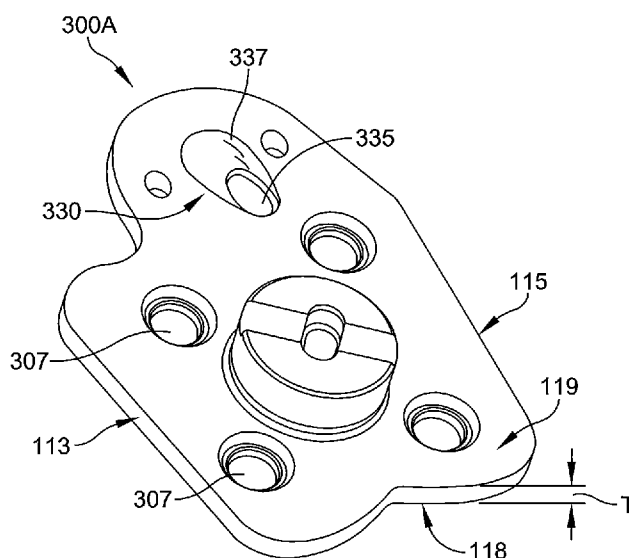


FIG. 1E

(57) Abstract: A talar bone plate for use with a multi-component ankle prosthesis is disclosed that has a body having a medial side, a lateral side, an upper surface, a lower surface, a medial-anterior end, a lateral-anterior end, a medial-anterior portion that extends out in anterior direction beyond the lateral-anterior side, and a posterior side, where a length between the medial-anterior end and the posterior side is greater than the length between the lateral-anterior end and the posterior side near the lateral side of the body, where the body having at least one elongated screw hole provided in the medial-anterior portion and a plurality of screw holes provided in the area between the at least one elongated screw hole and the posterior side.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

TALAR BONE PLATE

FIELD OF DISCLOSURE

[0001] Disclosed is a bone plate useful in orthopedic surgical applications.

BACKGROUND

[0002] Total joint replacements are orthopedic implants for repairing or replacing a natural joint. Examples of common joints that are replaced by a total joint replacement include, but are not limited to, hips, ankles, and shoulders. The ultimate goal with any total joint replacement is to approximate the function and structure of the natural, healthy structures that the implant or prosthesis is replacing.

SUMMARY

[0003] In some embodiments, a revision implant component comprises a body including an inner side and an outer side, tapered such that the width of a front side is greater than the width of a back side, the body defining a plurality of screw holes and having a tapered head configured to engage a talar dome component of a multi-component ankle prosthesis.

[0004] In some embodiments, a surgical method includes creating an incision in a patient, exposing a multi-component ankle prosthesis implanted in a patient, disassembling at least one component of the multi-component ankle prosthesis, affixing a revision implant component to non-damaged bone using screws, and coupling the revision implant component to a talar dome of the multi-component ankle prosthesis. The revision implant component has a body including a head configured to engage a feature of a component of the multi-component ankle prosthesis for coupling the revision implant component to the component of the multi-component ankle prosthesis.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIGs. 1A and 1B are top-down views of a left and right ankle talar plates, respectively, in accordance with some embodiments.

[0006] FIGs. 1C and 1D are top-down views of a left and right ankle talar plates, respectively, in accordance with additional embodiments.

[0007] FIGs. 1E and 1F are isometric views of the left and right ankle talar plates of FIGs. 1A and 1B, respectively.

[0008] FIGs. 2A and 2B are top-down views of a left and right ankle talar plates, respectively, in accordance with some other embodiments.

[0009] FIG. 3A is a schematic side-view of the placement of the talar plate in relation to a navicular-talus joint accordance with some embodiments.

[0010] FIG. 3B is a schematic side-view of the placement of the talar plate in relation to a talus bone with a fracture in the talar neck.

[0011] FIG. 4 is a flow diagram of a method in accordance with some embodiments.

DETAILED DESCRIPTION

[0012] This description of the exemplary embodiments is intended to be read in connection with the accompanying drawings, which are to be considered part of the entire written description. The drawing figures are not necessarily to scale and certain features may be shown exaggerated in scale or in somewhat schematic form in the interest of clarity and conciseness. In the description, relative terms such as "horizontal," "vertical," "up," "down," "top" and "bottom" as well as derivatives thereof (e.g., "horizontally," "downwardly," "upwardly," etc.) should be construed to refer to the orientation as then described or as shown in the drawing figure under discussion. These relative terms are for convenience of description and normally are not intended to require a particular orientation. Terms including "inwardly" versus "outwardly," "longitudinal" versus "lateral" and the like are to be interpreted relative to one another or relative to an axis of elongation, or an axis or center of rotation, as appropriate. Terms concerning attachments, coupling and the like, such as "connected" and "interconnected," refer to a relationship wherein structures are secured or attached to one another either directly or indirectly through intervening structures, as well as both movable or rigid attachments or relationships, unless expressly described otherwise. When only a single machine is illustrated, the term "machine" shall also be taken to include any collection of machines that individually or jointly execute a set (or multiple sets) of instructions to perform any one or more of the methodologies discussed herein. The term "operatively connected" is such an attachment, coupling or connection that allows the pertinent structures to operate as intended by virtue of that relationship. In the claims, means-plus-function clauses, if used, are intended to cover the

structures described, suggested, or rendered obvious by the written description or drawings for performing the recited function, including not only structural equivalents but also equivalent structures.

[0013] Bone plates are disclosed herein are designed to span across a navicular-talar joint and attach to the talar bone and the navicular bone for compressing the navicular-talar joint. The bone plates can also be positioned to span across a talar neck fracture in the talar bone and attach to the two portions of the talar bone on either side of the crack.

[0014] A combination of an elongated screw hole provided on the anterior portion of the bone plate and a plurality of screw holes provided on the remaining portion of the bone plate allow the use of the bone plate to reduce and stabilize the navicular bone and the talus bone of a navicular-talar joint or reduce and stabilize the two portions of a talar neck fracture. The elongated screw hole is configured to receive a screw such as a lag screw or a non-locking screw. The bone plates can be useful as part of a revision ankle implant system. The direction of the elongation for the elongated screw hole determines the direction of the bone or joint reduction. Thus, the elongated screw hole can be designed to have a desired elongation direction. In some embodiments, the elongated screw hole can be configured to further include a ramped or a sloped portion so that the elongated screw hole functions as a compression slot.

[0015] FIGS. 1A and 1B are top-down views of examples of the bone plates that are configured to be used in orthopedic treatment of talar bones. FIG. 1A shows a left ankle talar plate **100A** and FIG. 1B shows a right ankle talar plate **100B**. Because the left ankle talar plate **100A** and the corresponding right ankle talar plate **100B** are symmetrical and mirror images of each other, the following description of the left ankle talar plate **100A** is applicable to the right ankle version **100B**. The analogous structures in the talar plates are labeled using the same reference numbers.

[0016] The left ankle talar plate **100A** comprises a body **101** having a medial side **115**, a lateral side **113**, a medial-anterior end **103M** near the medial side, a lateral-anterior end **103L** near the lateral side **113**, posterior side **111**, an upper surface **119**, and a lower surface **118** (shown in FIGs. 1E and 1F). The length between the posterior side **111** of the body **101** to the medial-anterior end **103M** is greater than the length between the posterior side **111** of the body **101** to the lateral-anterior end **103L**. Thus, as shown in FIG. 1A, the left ankle talar plate **100A**

has a mitten shaped outline with a medial-anterior portion **103** that extends further out in the anterior direction beyond the lateral-anterior end **103L**.

[0017] The talar plate **100A** is provided with a plurality of screw holes **107** for receiving bone screws for securing the talar plate **100A** to a talus. The talar plate **100A** is shaped and dimensioned to substantially align with a top surface of a resected talus. The body **101** also includes a tapered head **109** protruding from the upper surface **119** for connecting to a talar dome implant **50** (see FIG. 3). In some embodiments, the body **101** is shaped and dimensioned to substantially align with a bottom surface of the talar dome implant **50**.

[0018] The medial-anterior portion **103** of the talar plates **100A** and **100B** is provided with an elongated screw hole **135** for securing the medial-anterior portion **103** to a navicular bone so that the talar plate **100A** can be used for reducing or compressing the navicular-talar joint.

[0019] In this embodiment, the elongated screw hole **135** is located on the medial-anterior portion **103** so that when the talar plate **110A** is positioned over a navicular-talar joint the elongated screw hole **135** is positioned over the navicular bone and the central axis **A** of the elongated screw hole **135** is generally oriented from the navicular bone toward the talus. The elongation direction of the elongated screw hole **135** allows a bone screw inserted through the elongated screw hole **135** and threaded into the navicular bone to compress the navicular bone toward the talus, thus reducing the navicular-talus joint.

[0020] The direction of the compression is represented by the central axis **A** of the elongated screw hole **135**. Therefore, a plurality of talar plates can be provided with each talar plate having the elongated screw hole **135** at different orientations and allow the surgeon to select a talar plate that will provide the necessary compression direction for a given patient. For example, FIGS. 1A, 1B and the FIGS. 1C, 1D show examples of talar plates **100A**, **100B**, having the elongated screw hole **135** oriented in different direction. The central axes **A** of the elongated screw hole **135** in the talar plates in FIGS. 1C, 1D are at a different angle with respect to the medial sides **115**, for example, compared to the central axes **A** of the elongated screw hole **135** in the talar plates shown in FIGS. 1A, 1B.

[0021] FIG. 3A is a schematic illustration showing a side-view of the talar plate **100A** positioned in place over a talus bone and a navicular bone across the navicular-talus joint. The elongated screw hole **135** is provided near the anterior side **103** of the talar plate **100A** and

presides over the navicular bone. The bone screw inserted through the elongated screw hole **135** and threaded into the navicular bone compresses the navicular bone in the direction represented by the arrow **C**, thus reducing the navicular-talus joint.

[0022] In other embodiments, the talar plates **100A**, **100B** can be used to stabilize a fractured talar neck. Referring to FIG. 3B, in this configuration, the talar plate **100A** is placed on a talus bone to span over a fracture in the talar neck. The talar plate **100A** is positioned over the fracture **F** in the talar neck so that the portion of the talar plate's body **101** having the plurality of screw holes **107** is positioned on one side of the fracture and the medial-anterior portion **130**, specifically the elongated screw hole **135** provided on the medial-anterior portion **130**, is positioned on the opposite side of the fracture. The talar plate is secured to the first side of the talar bone by inserting bone screws through the plurality of screw holes **107**. Then, the medial anterior portion **130** is secured to the talar neck on the opposite side of the fracture **F** by a bone screw threaded into the talar neck through the elongated screw hole **135**.

[0023] As shown in FIGS. 1A-1F, the elongated screw hole **135** can be provided with a ramped or a sloped portion **137** to further enhance the compression function of the elongated screw hole **135**. The sloped portion **137** slopes downward (*i.e.* sloped toward the lower surface **118** of the bone plate) starting from the upper surface **119** of the anterior end **130A** of the sloped portion **137** toward the elongated screw hole **135** at the posterior end **130P** of the sloped portion **137**.

[0024] In some embodiments, the shape of the body **101** of the talar plates **100A**, **100B** is configured to match the shape of the talar dome implant. In other embodiments, the shape of the body **101** is configured to match the shape of the talus. In the example talar plate **100A**, the anterior side **103** has a bulbous shape and the posterior side **111** has a sulcus or a groove **121**. The groove **121** is defined by a first convex curve **111A** and a second convex curve **111B**. In some embodiments of the talar plates, the posterior side **111** has a straight, curved, or bulbous edge shape **201** as shown in the talar plates **200A** and **200B** shown in FIGS. 2A and 2B. Similarly, in some embodiments anterior side **103** has a straight, curved, or grooved shape so as to match the shape of a talar dome implant or the talus.

[0025] The medial side **113** and the lateral side **115** are tapered from anterior side to the posterior side, such that the body **101** is narrower at the posterior side **111**. The taper of the

medial side **113** and the lateral side **115** is configured to fill the bone voids that may be present in some ankles and rest on the remaining talar bone in a revision ankle application.

[0026] In some embodiments, the screw holes **107** are non-locking type and can include polyaxial locking tabs as shown in the examples illustrated in FIGS. 1A-1D. In some embodiments, the screw holes **107** are locking type and are threaded to be used with locking screws having threaded heads. FIGS. 1E and 1F show examples of such threaded screw holes **307**.

[0027] In some embodiments, the body **101** defines at least one wire hole **105** for wires. The wire holes **105** assist in the proper placement of the revision talar plate during surgery. Wire holes **105** can be configured to receive k-wires or similar surgical tools to ensure that the revision talar plate is placed in the proper location as determined by a surgeon and as guided by surgical instrumentation.

[0028] The tapered head **109** has a tapered shape and is configured for engaging the talar dome implant **50**. In some embodiments, the tapered head **109** engages the talar dome implant **50** by an interference connection. A tapered recess in the talar dome implant would receive the tapered head **109**, and an impact connection is made between the talar dome implant and the tapered head **109**. In some embodiments, the taper on the tapered head **109** is a Morse taper. In some embodiments, the tapered head **109** additionally defines a recess **117**.

[0029] In still further embodiments, the tapered head **109** comprises “timed threads” that are configured such that when the threaded tapered head **109** and threaded talar dome implant are properly connected, a longitudinal passageway is in alignment. Traditional threaded connections accept varying amounts of torque and respond with varying alignments. The timed threads ensure a proper connection and a specific alignment so long as the applied torque is within a predetermined range.

[0030] Referring to FIG 1E, in some embodiments, the talar plate **100A** has a thickness **T**, as measured from the upper surface **119** to the substantially parallel lower surface **118**, is configured to match the thickness of bone loss. The thickness **T** is labeled in FIG. 1E. In other embodiments, the thickness of the talar plate **100A** is configured to match the thickness required for proper support of a talar dome implant. In other embodiments, the peripheral edge of the talar plate can be angled or tapered in a desired direction along the length of the talar plate.

[0031] FIGS. 1E and 1F are isometric views of left ankle and right ankle talar plates **300A** and **300B** according to some embodiments. The left ankle talar plate **300A** is substantially the same as the left ankle talar plate **100A** described above except that the talar plate **300A** is provided with a plurality of screw holes **307** that are locking type. In this embodiment, the screw holes **307** are threaded or include a deformable region adjacent to the holes designed to contact the threaded head of a locking screw. The talar plates **300A** and **300B** each has an elongated screw hole **335** that is similarly structured as the elongated screw hole **135** described above. The elongated screw hole **335** has an elongated shape with a central axis **A** and comprises a sloped portion **337** that slopes downward (i.e. sloped toward the lower surface **118**) starting from the anterior end **330A** of the sloped portion **337** and terminating with the elongated screw hole **335** at the posterior end **330P** of the sloped portion **337**. As with the right ankle talar plate **100B**, the right ankle talar plate **300B** is the mirror image of the talar plate **300A** and all of the remaining structures are the same.

[0032] FIGS. 2A and 2B illustrate left ankle and right ankle talar plates **200A** and **200B**, respectively, in accordance with some embodiments. FIG. 2A is a top view of talar plate **200A**. The left ankle talar plate **200A** and the right ankle talar plate **200B** are substantially the same as the left ankle talar plate **100A** described above. However, the talar plates **200A** and **200B** have a curved posterior side **201** rather than the grooved posterior sides **111**. The talar plates **200A** and **200B** each has an elongated screw hole **235** that is similarly structured as the elongated screw hole **135** described above. The elongated screw hole **235** has an elongated shape with a central axis **A** and comprises a sloped portion **237** that slopes downward (i.e. sloped toward the lower surface **118**) starting from the anterior end **230A** of the sloped portion **237** towards the elongated screw hole **235** at the posterior end **230P** of the sloped portion **237**.

[0033] Additionally, the tapered head **109** can have a notch **203** provided therein that is sized and configured to receive a screw driver or other elongate tool for removing the talar plate **200A**, **200B**. The talar plates **200A** and **200B** are mirror images of each other as they are for left ankle and right ankle applications, respectively.

[0034] FIG. 3B illustrates a second example of a revision implant component **300B** in accordance with some embodiments. Revision implant component **300B** is a mirror image of revision implant component **300A**, and is therefore configured for use with the right ankle joint of a patient.

[0035] In some embodiments, one or more of the bone plates of the present disclosure, such as the talar plate examples described above with reference to FIGS 1A-1F, 2A, 2B, and 3, are provided in a surgical kit. Each of the provided bone plates may have a varying shape or thickness (as measured from the upper surface to a substantially parallel back surface - see the thickness **T** in FIG. 1E). By providing varying shapes, thicknesses, and angles, the kit allows a surgeon to conduct an intraoperative determination of the best-fitting bone plate for use with a multi-component ankle prosthesis.

[0036] A surgical kit according to an embodiment, comprises one or more of the any of the embodiments of the bone plates described herein for use with a multi-component ankle prosthesis.

[0037] The talar bone plates described herein can be used in revision ankle systems or in primary ankle implant systems. The use of the talar bone plates of the present disclosure allows the bone fusion to be done at the same time as the revision.

[0038] Referring to FIG. 3A, in the example where the talar bone plate **100A** is applied to span across the navicular-talar joint, the compression bone screw used in the elongated screw hole **135** on the talar bone plate **100A** of the present disclosure can thread into and through the navicular bone and extend across the navicular-talus joint into the talus bone. The main body portion (the part of the talar bone plate **100A** other than the medial-anterior portion **103**) of the talar bone plate **100A** is secured to the talus bone by screws threaded through the plurality of screw holes **107**. Then, a compression bone screw is inserted into the elongated screw hole **135** provided on the medial-anterior portion **103** of the talar bone plate **100A** and threads into and through the navicular bone, across the navicular-talus joint and into the talus bone and either fuse the two bones together or reduce the navicular-talus joint space.

[0039] Referring to FIG. 3B, in the example where the talar bone plate **100A** is applied to the talar bone to span across a fracture **F** near the talar neck, the talar bone plate **100A** would be applied so that the medial-anterior portion **103** of the talar bone plate having the elongated screw hole **135** is on the talar neck side of the fracture **F**. The main body portion of the talar bone plate **100A** is secured to the talar bone by screws threaded through the plurality of screw holes **107** in the main body portion. Then, a compression bone screw is inserted into the elongated screw hole **135** provided on the medial-anterior portion **103** of the talar bone plate and threaded into the talar

neck portion to compress the two portions of the talar bone and reduce and stabilize the fracture **F**.

[0040] In some embodiments, each of the one or more talar bone plates provided in the surgical kit can further comprise a tapered head configured to engage a talar dome implant component of the multi-component ankle prosthesis, provided on the upper surface. The tapered head can be shaped and dimensioned as a Morse taper.

[0041] A surgical method of using the talar bone plate **100A** of the present disclosure is also disclosed. The method is summarized in the flow chart **400** of FIG. 4. At block **401**, the method includes making an incision in a patient in proximity of the patient's ankle. At block **402**, the multi-component ankle prosthesis which was previously installed in the patient is exposed through the incision. At block **403**, a first component or at least one component of the multi-component ankle prosthesis is disassembled and removed from the patient. During a revision procedure, a multi-component ankle prosthesis that was previously implanted in the patient may be partially or completely disassembled. For example, if the multi-component prosthesis is a talar prosthesis, then the talar dome can be decoupled from talar stem by disengaging the Morse taper coupling. When completely disassembled, the entire multi-component prosthesis is removed from the patient. At block **404**, the talar bone plate is affixed to the patient's talus using screws utilizing the screw holes such as **107**, **307** described above. At block **405**, the talar bone plate is affixed to the patient's navicular bone using a screw inserted through the at least one elongated screw hole **135**, **235**, **335** described above. The head of the screw engages with the sloped portion **137**, **237**, **337** of the elongated screw hole and applies compression force on the navicular bone to either reduce the navicular-talus joint or fuse the navicular bone and the talus bone.

[0042] According to some embodiments, the at least one elongated screw hole **135** on the talar bone plate **100A** is structured as described above and the affixing the talar bone plate to the patient's navicular bone using a screw inserted through the at least one elongated screw hole **135** includes threading the threaded shaft of the screw into the navicular bone through the elongated screw hole **135** while the screw is positioned at an angle so that the threaded shaft of the screw is aimed towards the patient's talus bone (see block **406**).

[0043] According to some embodiments, the talar bone plate further comprises the tapered head configured to engage a talar dome implant component of the multi-component ankle prosthesis and the surgical method further comprises coupling the talar bone plate to the talar dome implant by engaging the tapered head to the talar dome implant (see block **407**).

[0044] According to some embodiments of the surgical method, after affixing the main portion of the talar bone plate **100A** to the patient's talus using screws, the medial-anterior portion **103** of the talar bone plate is affixed to a talar neck portion of the talus on an opposite side of a talar neck fracture **F** using a screw inserted through the at least one elongated screw hole **135**.

[0045] Although the devices, kits, systems, and methods have been described in terms of exemplary embodiments, they are not limited thereto. Rather, the appended claims should be construed broadly, to include other variants and embodiments of the devices, kits, systems, and methods, which may be made by those skilled in the art without departing from the scope and range of equivalents of the devices, kits, systems, and methods.

We claim:

1. A talar bone plate for use with a multi-component ankle prosthesis, comprising:
a body having a medial side, a lateral side, an upper surface, a lower surface, a medial-anterior end, a lateral-anterior end, a medial-anterior portion that extends out in anterior direction beyond the lateral-anterior end, and a posterior side,
wherein a length between the medial-anterior end and the posterior side of the body is greater than the length between the lateral-anterior end and the posterior side;
wherein the body having at least one elongated screw hole provided in the medial-anterior portion and a plurality of screw holes provided in the area between the at least one elongated screw hole and the posterior side.
2. The talar bone plate of claim 1, wherein the at least one elongated screw hole has a sloped portion that has an elongated shape with an anterior end and a posterior end,
wherein the elongated screw hole is located at the posterior end, and
wherein sloped portion slopes downward starting from the upper surface at the anterior end towards the elongated screw hole.
3. The talar bone plate of claim 1, further comprising a tapered head configured to engage a talar dome implant component of the multi-component ankle prosthesis, provided on the upper surface.
4. The talar bone plate of claim 1, wherein the posterior side of the body has first and second convex curves with a groove therebetween.
5. The talar bone plate claim 1, wherein the body is tapered such that the width of a front side is greater than the width of a back side.
6. The talar bone plate of claim 3, wherein the tapered head is shaped and dimensioned as a Morse taper.

7. The talar bone plate of claim 3, wherein the tapered head defines a recess and a notch.
8. The talar bone plate of claim 3, wherein the body further defines at least one wire hole.
9. The talar bone plate of claim 1, wherein the body is shaped and dimensioned to substantially align with a top surface of a resected talus.
10. The talar bone of claim 1, wherein the body is asymmetrical.
11. The talar bone plate of claim 1, wherein the body is shaped and dimensioned to substantially align with a bottom surface of a talar dome.
12. A surgical kit comprising one or more talar bone plates for use with a multi-component ankle prosthesis, the one or more talar bone plate comprising:
 - a body having a medial side, a lateral side, an upper surface, a lower surface, a medial-anterior end, a lateral-anterior end, a medial-anterior portion that extends out in anterior direction beyond the lateral-anterior end, and a posterior side,
 - wherein a length between the medial-anterior end and the posterior side of the body is greater than the length between the lateral-anterior end and the posterior side;
 - wherein the body having at least one elongated screw hole provided in the medial-anterior portion and a plurality of screw holes provided in the area between the at least one elongated screw hole and the posterior side.
13. The surgical kit of claim 12, wherein the at least one elongated screw hole has a sloped portion that has an elongated shape with an anterior end and a posterior end,
 - wherein the elongated screw hole is located at the posterior end, and

wherein sloped portion slopes downward starting from the upper surface at the anterior end towards the elongated screw hole.

14. The surgical kit of claim 12, wherein each of the one or more talar bone plates further comprising a tapered head configured to engage a talar dome implant component of the multi-component ankle prosthesis, provided on the upper surface.

15. The surgical kit of claim 14, wherein the tapered head is shaped and dimensioned as a Morse taper.

16. The surgical kit of claim 12, wherein the posterior side of the body of at least one of the one or more talar bone plates has first and second convex curves with a groove therebetween.

17. The surgical kit of claim 12, wherein the body of at least one of the one or more talar bone plates is tapered such that the width of a front side is greater than the width of a back side.

18. A surgical method of using the talar bone plate of claim 1, comprising:
creating an incision in a patient in proximity of the patient's ankle;
exposing the multi-component ankle prosthesis implanted in the patient;
disassembling at least one component of the multi-component ankle prosthesis;
affixing the talar bone plate to the patient's talus using screws; and
affixing the medial-anterior portion of the talar bone plate to the patient's navicular bone using a screw inserted through the at least one elongated screw hole.

19. The surgical method of claim 18, wherein the talar bone plate further comprising a tapered head configured to engage a talar dome implant component of the multi-component ankle prosthesis and the surgical method further comprising: coupling the talar bone plate to the talar dome implant by engaging the tapered head to the talar dome implant.

20. A surgical method of using the talar bone plate of claim 1, comprising:
- creating an incision in a patient in proximity of the patient's ankle;
 - exposing the multi-component ankle prosthesis implanted in the patient;
 - disassembling at least one component of the multi-component ankle prosthesis;
 - affixing the talar bone plate to the patient's talus using screws; and
 - affixing the medial-anterior portion of the talar bone plate to a talar neck portion of the talus using a screw inserted through the at least one elongated screw hole.

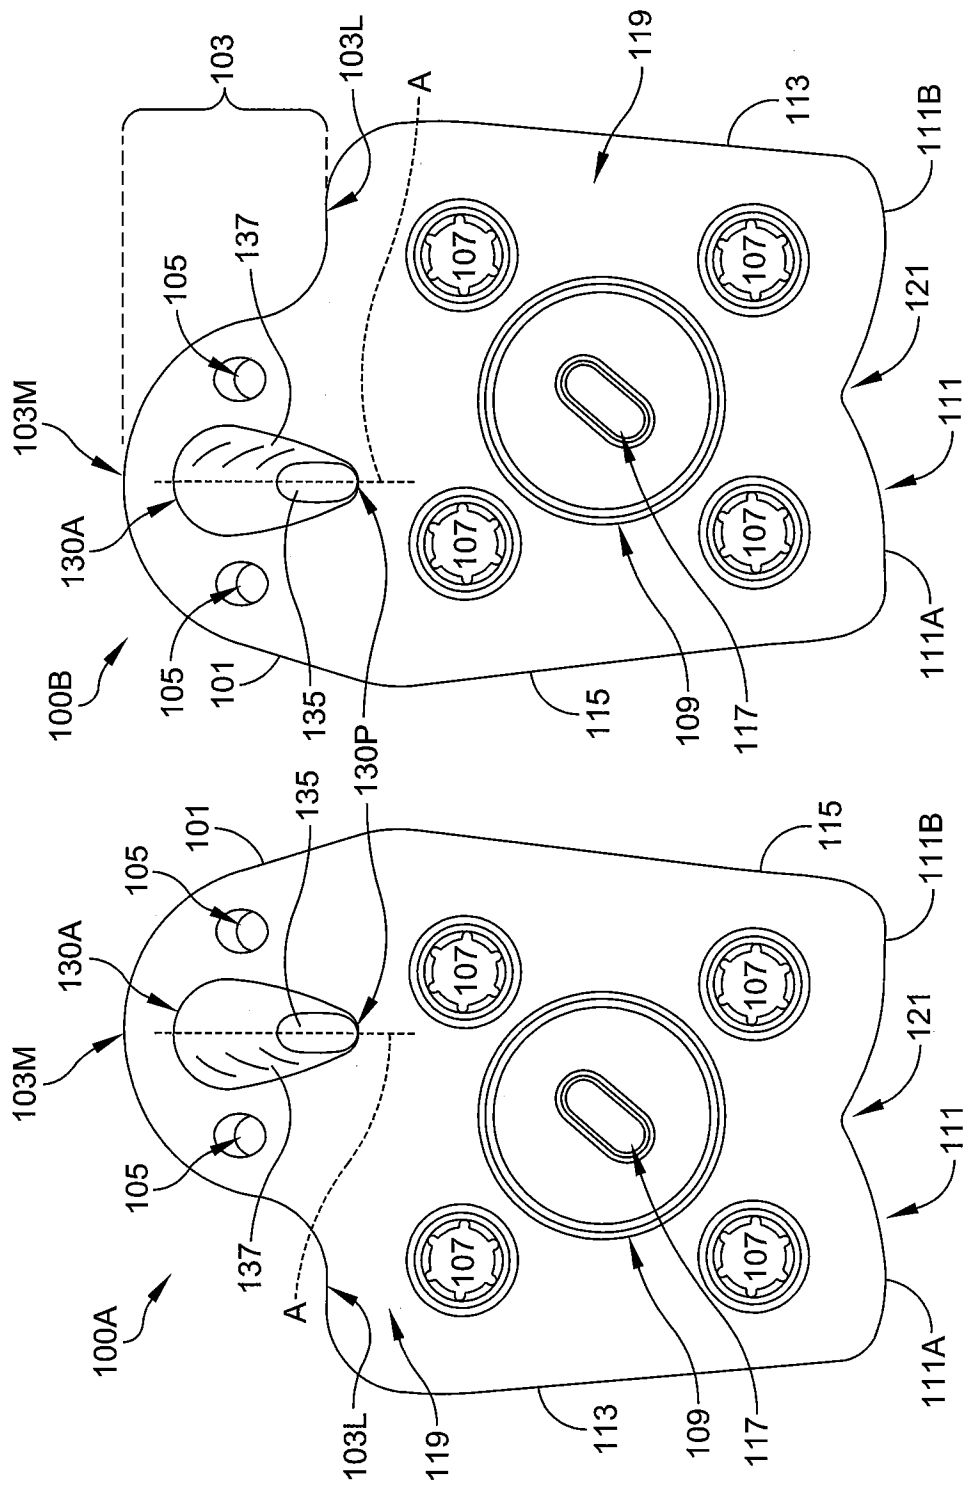


FIG. 1B

FIG. 1A

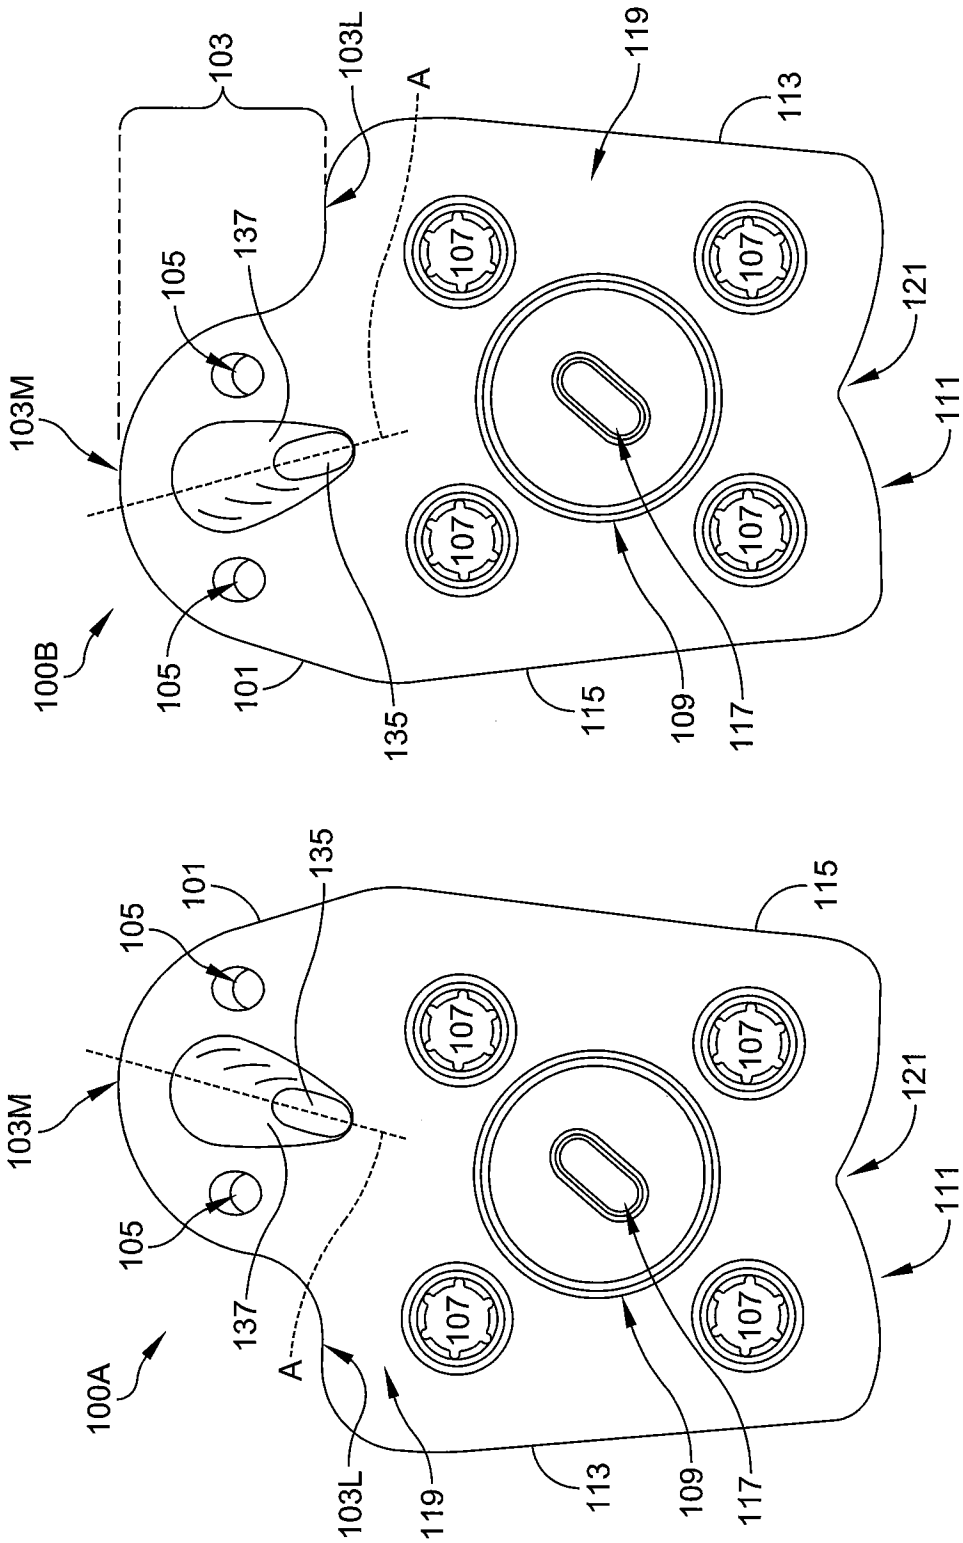


FIG. 1D

FIG. 1C

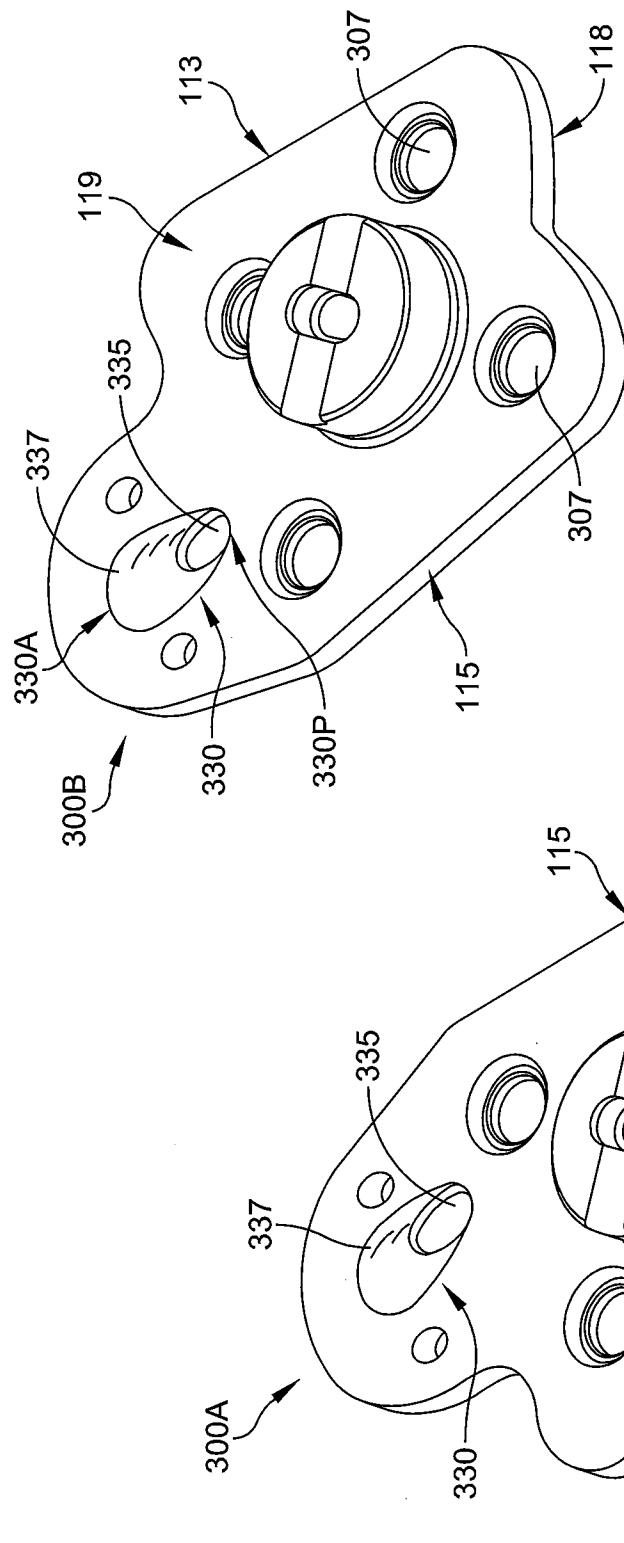


FIG. 1F

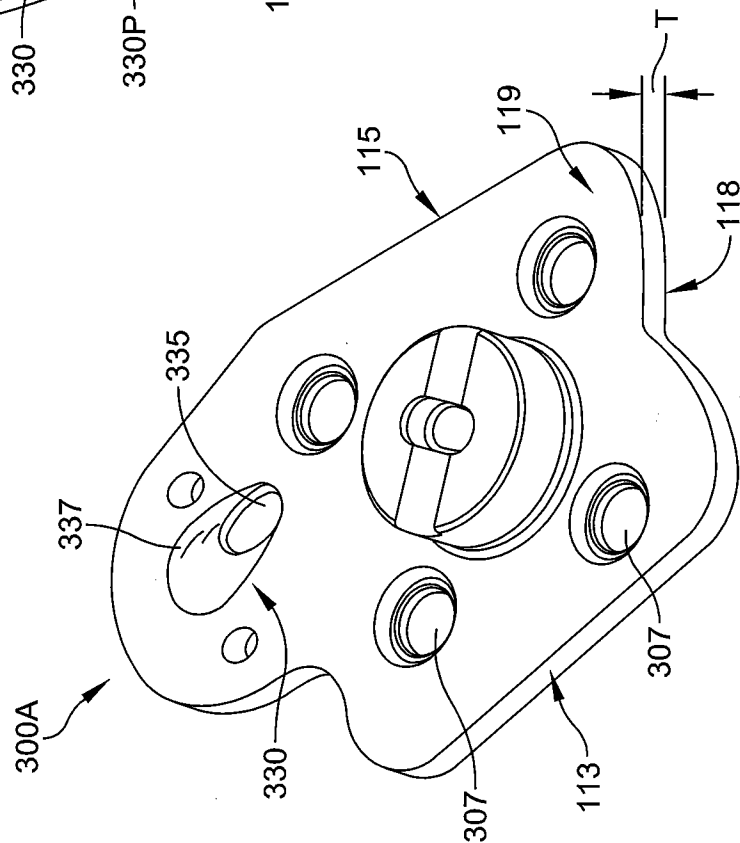


FIG. 1E

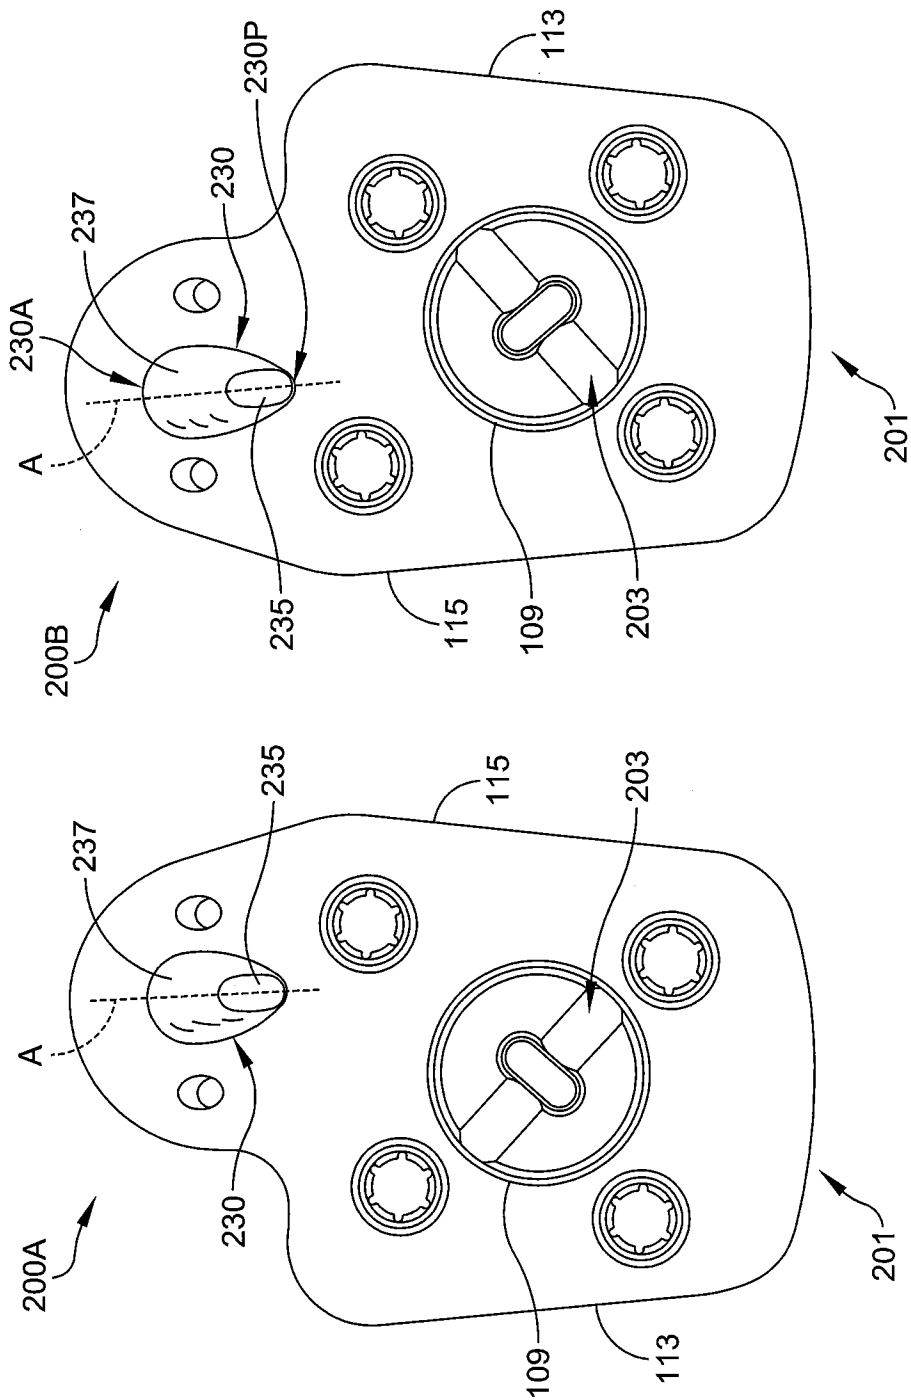


FIG. 2B

FIG. 2A

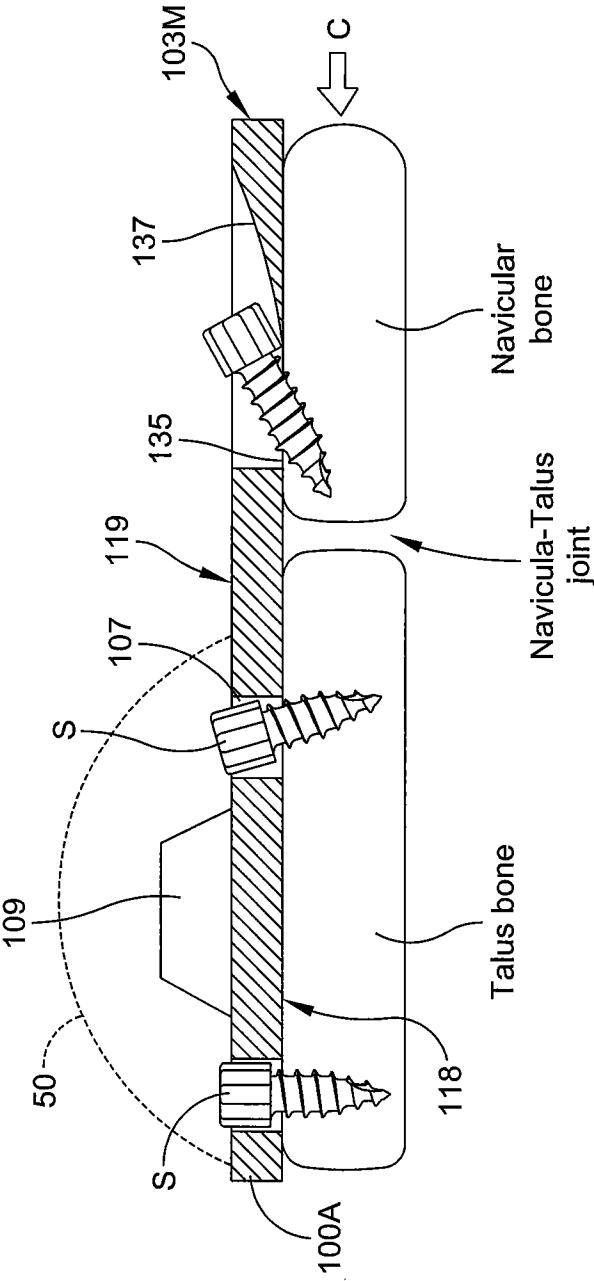


FIG. 3A

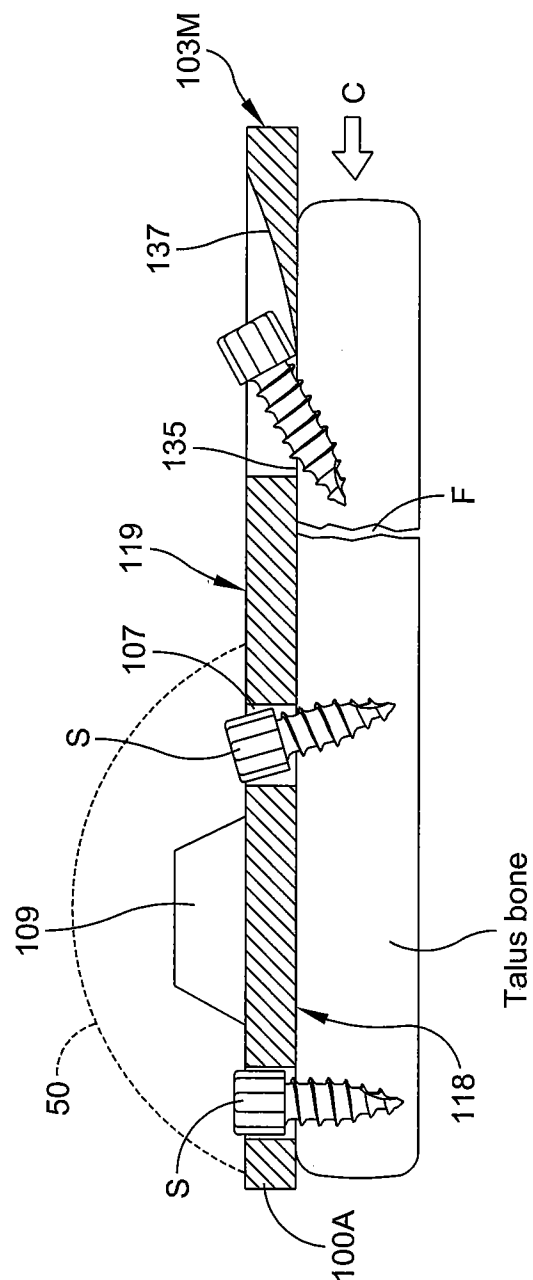


FIG. 3B

7/7

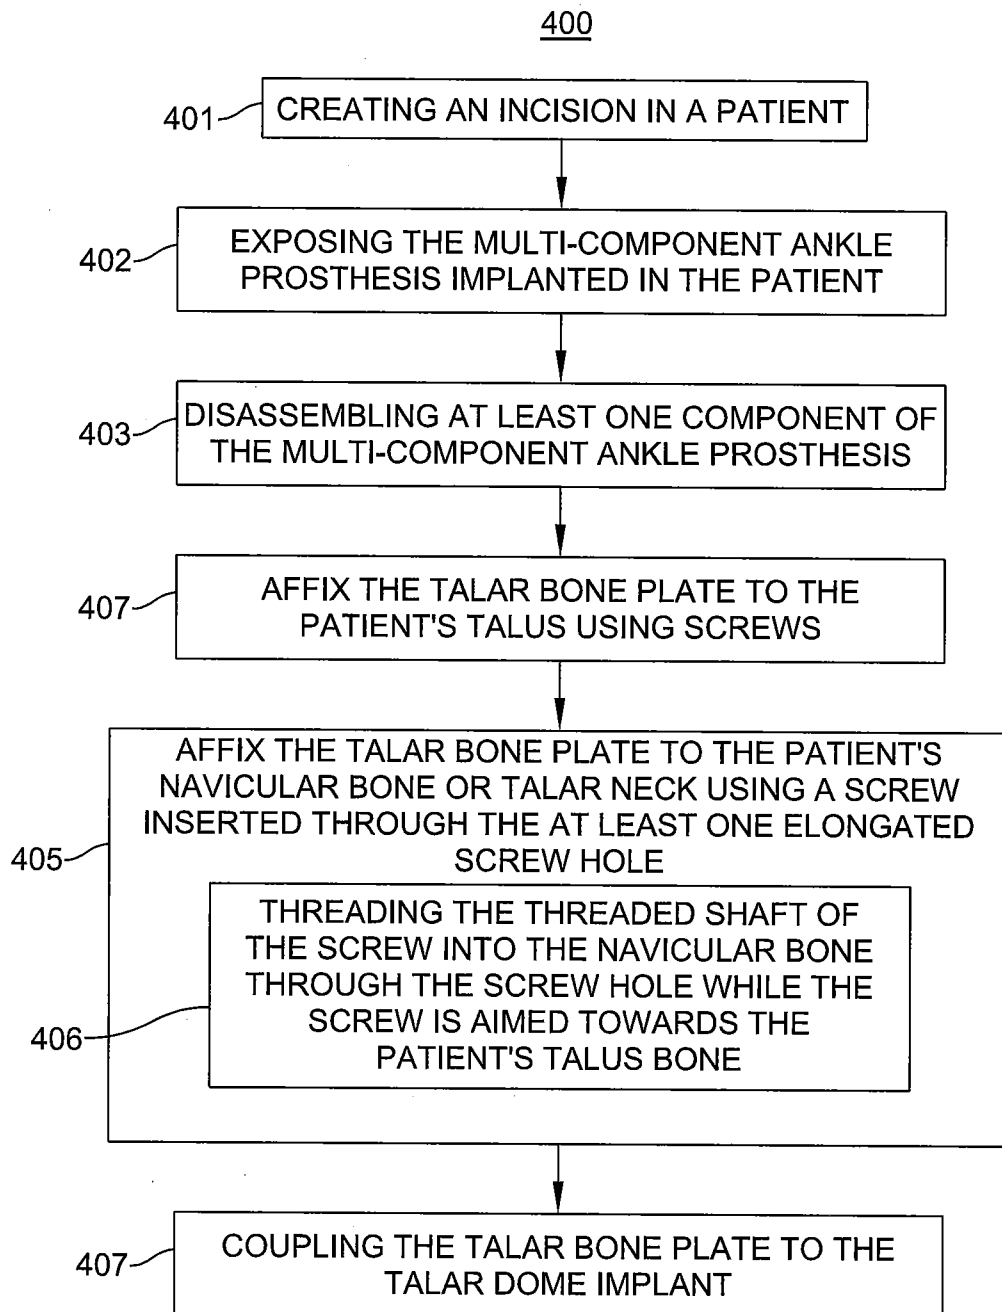


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 19/37914

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61F 2/30, A61F 2/42 (2019.01)

CPC - A61F 2/4202, A61B 17/808, A61B 17/8061, A61F 2002/4207, A61F 2002/30433

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History Document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History Document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History Document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	WO 2018/067143 A1 (Wright Medical Technology, Inc.) 12 April 2018 (12.04.2018), entire document	1-6, 8-17 --- 7
X --- Y	US 2018/0055648 A1 (Wright Medical Technology, Inc.) 1 March 2018 (01.03.2018), entire document	1, 18-20 --- 7
A	US 2006/0235396 A1 (Sanders et al.) 19 October 2006 (19.10.2006), entire document	1-20
A	US 2015/0366597 A1 (DePuy Synthes Products, LLC) 24 December 2015 (24.12.2015), entire document	1-20

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 AUGUST 2019

Date of mailing of the international search report

09 SEP 2019

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774