



(51) International Patent Classification:

G01V 3/18 (2006.01) G01V 3/20 (2006.01)
G01V 3/26 (2006.01) E21B 47/00 (2012.01)

(21) International Application Number:

PCT/US2011/059947

(22) International Filing Date:

9 November 2011 (09.11.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES, INC.** [US/US];
10200 Bellaire Boulevard, Houston, TX 77072 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BITTAR, Michael, S.** [US/US]; 3000 North Sam Houston Parkway East, Houston, TX 77032 (US). **WEAVER, Gary, E.** [US/US];
16548 Donwick Drive, Conroe, TX 77385 (US).

(74) Agent: **SMITH, Marlin, R.**; Smith IP Services, P.C., P.O. Box 997, Rockwall, TX 75087 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: INSTRUMENTED CORE BARRELS AND METHODS OF MONITORING A CORE WHILE THE CORE IS BEING CUT

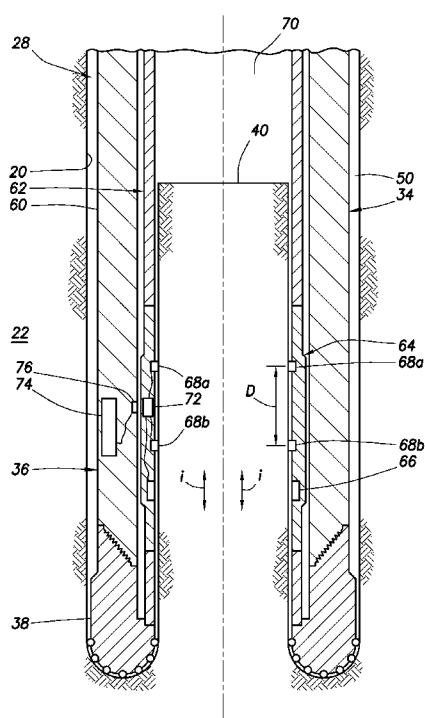


FIG. 2

(57) Abstract: A formation core analysis system can include an inner barrel and a toroidal electromagnetic antenna which transmits electromagnetic signals into a formation core when the core is received in the inner barrel. Another formation core analysis system can include an inner barrel and multiple longitudinally spaced apart electrodes which electrically contact a formation core when the core is received in the inner barrel. A speed of displacement of the core into the inner barrel may be indicated by differences between measurements taken via the electrodes as the core displaces into the inner barrel. A method of measuring resistivity of a formation core as the core is being cut can include transmitting electromagnetic signals into the core from a toroidal electromagnetic antenna as the core is being cut by a coring bit.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

— *of inventorship (Rule 4.17(iv))*

Declarations under Rule 4.17:

Published:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

— *with international search report (Art. 21(3))*

- 1 -

5

**INSTRUMENTED CORE BARRELS AND METHODS OF MONITORING
A CORE WHILE THE CORE IS BEING CUT**

10

TECHNICAL FIELD

This disclosure relates generally to equipment utilized and operations performed in conjunction with a subterranean well and, in one example described below, more particularly provides an instrumented core barrel and a method of monitoring a core while it is being cut.

BACKGROUND

The sampling of earth formations by coring operations can provide valuable insights into the characteristics of those formations. However, it is sometimes difficult to determine whether or how fast a core is being cut, whether the core is displacing properly into a core barrel assembly, the exact depth at which the core was cut, etc. It will, therefore, be readily appreciated that improvements are continually needed in the art of monitoring core cutting operations.

- 2 -

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a representative cross-sectional view of a well system and associated method which can embody principles of this disclosure.

FIG. 2 is a representative cross-sectional view of a formation core analysis system which can embody principles of this disclosure, and which may be used in the well system of FIG. 1.

FIG. 3 is a representative cross-sectional view of another configuration of the formation core analysis system.

FIG. 4 is a representative graph of core resistivity over time for spaced apart electrodes in the formation core analysis system.

DETAILED DESCRIPTION

Representatively illustrated in FIG. 1 is an example of a well system 10 and associated method which can embody principles of this disclosure. However, it should be understood that the scope of this disclosure is not limited at all to the details of the well system 10 and method described herein and/or depicted in the drawings, since a wide variety of different well systems and methods can incorporate the principles of this disclosure.

In the FIG. 1 example, a drilling derrick 12 is located at or near the earth's surface 14, for supporting a drill string 16. The drill string 16 extends through a rotary table 18 and into a borehole 20 that is being drilled through an earth formation 22. In other examples, the

- 3 -

derrick 12 may not be used, the surface 14 could be a sea floor or mudline, etc.

The drill string 16 may include a kelly 24 at its upper end, with drill pipe 26 coupled to the kelly 24. In other
5 examples, a top drive or coiled tubing drilling rig could be used. Thus, it will be appreciated that the scope of this disclosure is not limited to any particular type of drilling equipment, or to any particular location of the drilling equipment.

10 A bottom hole assembly 28 (BHA) is coupled to a distal end of the drill pipe 26. The BHA 28 may include drill collars 30, a telemetry module 32 and a formation core analysis system 34. The core analysis system 34 can include a core barrel assembly 36 and a coring bit 38.

15 In operation, the kelly 24, the drill pipe 26 and the BHA 28 may be rotated by the rotary table 18. In other examples, a downhole motor (such as a positive displacement motor or a turbine) may be used to rotate the bit 38.

Weight applied through the drill collars 30 to the
20 coring bit 38 causes the bit to drill through the formation 22 while generating a formation core 40 (see FIG. 2) that enters into the core barrel assembly 36. The core 40 is stored in the core barrel assembly 36, and may be retrieved from the borehole 20 for inspection at the surface 14.

25 During this coring operation, drilling fluid 42 (commonly referred to as "drilling mud") may be pumped from a mud pit 44 at the surface 14 by a pump 46, so that the drilling fluid flows through a standpipe 48, the kelly 24, through drill string 16, and to the coring bit 38. The
30 drilling fluid 42 is discharged from the coring bit 38 and functions to cool and lubricate coring bit, and to carry away earth cuttings made by the bit.

- 4 -

After flowing through the coring bit 38, the drilling fluid 42 flows back to the surface 14 through an annulus 50 between the drill string 16 and the borehole 20. The drilling fluid 42 is returned to the mud pit 44 for
5 filtering and conditioning.

In this example, the circulating column of drilling fluid 42 flowing through the drill string 16 may also function as a medium for transmitting pressure signals 52 carrying information from telemetry module tool 32 to the
10 surface 14. A pressure signal 52 travelling in the column of drilling fluid 42 may be detected at the surface 14 by a signal detector 54 employing a suitable pressure sensor 56.

The pressure signals 52 may be encoded binary representations of measurement data indicative of downhole
15 coring parameters discussed more fully below. The detected signals 52 may be decoded by a surface controller 58.

The surface controller 58 may be located proximate to or remote from the derrick 12. In one example, the controller 58 may be incorporated as part of a logging unit.

20 In other examples, the controller 58 (and/or any other elements of the core analysis system 34) may be positioned at a subsea location, in the wellbore 20, as part of the BHA 28, or at any other location. The scope of this disclosure is not limited to any particular location of elements of the
25 system 34.

Alternatively, other telemetry techniques, such as electromagnetic and/or acoustic techniques, or any other suitable technique, may be utilized. In one example, hard wired drill pipe (e.g., the drill pipe 26 having lines
30 extending in a wall thereof) may be used to communicate between the surface 14 and the BHA 28. In other examples, combinations of various communication techniques may be used

- 5 -

(e.g., short hop acoustic or electromagnetic telemetry with long hop electrical or optical communication, etc.).

Referring additionally now to FIG. 2, a more detailed example of the core analysis system 34 is representatively
5 illustrated. In this example, the core barrel assembly 36 includes an outer barrel 60 and an inner barrel 62 mounted substantially concentrically inside the outer barrel.

The coring bit 38 is attached to the distal end of the outer barrel 60. Bearings and seals (not shown) can be
10 provided to allow the outer barrel 60 to rotate relative to the formation 22 during the coring operation, while the inner barrel 62 remains substantially non-rotating with respect to the formation. Such bearing and seal arrangements are known in the art, and so are not further described here.

15 The inner barrel 62 may be substantially comprised of a conductive metallic material. The instrumented section 64 can be attached at a distal end of the inner barrel 62 (e.g., by welding or threading, etc.).

In the example depicted in FIG. 2, the instrumented
20 section 64 has an enlarged outer diameter as compared to an adjacent section of the inner barrel 62. The instrumented section 64 comprises a toroidal electromagnetic antenna 66 and longitudinally spaced apart sets of electrodes 68a,b to measure characteristics (e.g., voltage, current) indicative
25 of resistivity of the core 40.

The antenna 66 is mounted circumferentially around an inner bore 70 of the assembly 62 in which the core 40 is received. Electrodes 68a,b are longitudinally spaced apart to detect core 40 resistivity at the spaced apart locations.

30 Each set of electrodes 68a,b preferably includes multiple electrodes circumferentially spaced apart about the

- 6 -

bore 70. For example, there could be six or eight electrodes in each set, equally (or unequally) spaced apart encircling the bore 70. Only one electrode could be used, or any other number of electrodes may be used, in keeping with the scope
5 of this disclosure.

In one example, the electrodes 68a,b may be insulated from the instrumented section 64 by insulators (not shown). Alternatively, the instrumented section 64 could be substantially made of nonconductive material. The scope of
10 this disclosure is not limited to any particular materials used for elements of the core analysis system 34.

The antenna 66 transmits electromagnetic signals into the core 40 as it is being cut by the bit 38, thereby inducing current i in the core. The amount of current i
15 induced in the core 40 is related to the resistivity of the core between a particular electrode 68a,b and the antenna 66. The current i may be detected, for example, with a toroid electromagnetic signal detector (not shown) surrounding the electrode.

20 An electronics module 72 is mounted in the instrumented section 64, and electronic circuitry therein is electrically coupled to the antenna 66 using known techniques. The electronics module 72 may comprise circuits, components and processors for powering, interfacing with, and controlling
25 the antenna and receivers associated with instrumented section 64. The electronics module 72 may comprise hybrids and/or multi-chip modules to minimize space requirements and power consumption, and to improve reliability.

In the example of FIG. 2, the electronics module 72
30 also comprises a communications transmitter to transmit the measurement data to a separate controller 74 for retransmission of the data to the telemetry module 32. In

- 7 -

the depicted example, an inductive coupling 76 enables communication between the electronics module 72 and the controller 74. Alternatively, the electronics module 72 may communicate with the controller 74 via radio frequency, acoustic, or any other suitable technique.

In one example, the electronics module 72 and controller 74 are each powered by batteries included therewith. Alternatively, the controller 74 may provide power to the electronics module 72 via the inductive coupling 76, electrical power could be generated downhole, etc.

The multiple measurements taken circumferentially about the core 40 by each set of electrodes 68a,b may disclose circumferential variations in the core resistivity. An average of the measurements may provide a bulk resistivity of the core 40 at that location.

The data from the instrumented section 64 may be used to indicate continuous movement of the core 40 into the inner barrel 62. Assuming some variations in the resistivity measurements along the core 40, and by cross correlating the measurements from the two longitudinally spaced apart sets of electrodes 68a,b, the velocity of the core into the inner barrel 62 can be continuously determined (velocity = displacement/time) in real time.

Since the progress of the coring bit 38 through the formation 22 can be readily measured (for example, by measuring the advancement of the drill string 16 through the rotary table 18 at the surface 14, by use of downhole logging while drilling (LWD) or measurement while drilling (MWD) sensors, etc.), this can be compared to the velocity of the core 40 into the coring bit 38. If the core 40 is not advancing into the coring bit 38, but the coring bit is

- 8 -

advancing through the formation 22, this is an indication that the core is jammed, stuck or otherwise prevented from being received further into the inner barrel 62. If the core 40 is not advancing into the coring bit 38, and the coring bit is not advancing through the formation 22, this is an indication that the bottom hole assembly 28 is not drilling into the formation.

In another operational method, downhole depth (true vertical depth, or depth along the wellbore 20) may be tracked. As described, the measurements from the lower electrodes 68b may be computationally compared to the measurements made at the upper electrodes 68a as a function of a delay time.

When the measurements correlate, the upper electrodes 68a have moved a distance D between the electrodes 68a,b in the delay time. By tying these measurements to a previously determined benchmark position in the well, the depth of the core analysis system 34 past the benchmark can be determined. In substantially inclined boreholes, this may be a more accurate measurement than those presently used.

Referring additionally now to FIG. 3, another configuration of the core analysis system 34 is representatively illustrated. In this configuration, multiple instrumented sections 64 are interconnected in the inner barrel 62 at longitudinally spaced apart locations.

In the example depicted in FIG. 3, a single controller 74 is connected to the instrumented sections 64 via multiple inductive couplings 76. However, in other examples, a single inductive coupling 76 could be used, multiple controllers 74 could be used, etc. The scope of this disclosure is not limited to any particular number or arrangement of elements of the core analysis system 34.

- 9 -

Referring additionally now to FIG. 4, an example of how measurements made by the electrodes 68a,b can be used to determine a speed of displacement of the core 40 into the inner barrel 62 while the core is being cut is
5 representatively illustrated. In this example, graphs 78, 80 are depicted of resistivity measurements over time (resistivity along the vertical axis, and time along the horizontal axis).

The graph 78 measurements are taken by an electrode
10 68a, and the graph 80 measurements are taken by an electrode 68b. Note that the graphs 78, 80 are correlated by a delay time dt between the two graphs. The speed of the displacement of the core 40 into the bore 70 in this example is equal to the longitudinal distance L between the
15 electrodes 68a,b divided by the delay time dt .

Although the graphs 78, 80 are for resistivity over time, it is not necessary for the measurement data transmitted from the electrodes 68a,b to include resistivity measurements. In some examples, the measurement data may
20 include measurements of parameters (such as voltage, current, etc.) from which the resistivity of the core 40 can be derived.

It may now be fully appreciated that this disclosure provides significant benefits to the art of monitoring core
25 cutting operations. In examples described above, resistivity of the core 40 can be monitored at longitudinally spaced apart locations as the core is being cut. In some examples, the toroidal antenna 66 can be used to induce a current in the core 40 as it is being received in the inner barrel 62.

30 A formation core analysis system 34 for use in a subterranean well is provided to the art by this disclosure. In one example, the system 34 includes an inner barrel 62,

- 10 -

and a toroidal electromagnetic antenna 66 which transmits electromagnetic signals into a formation core 40 when the core 40 is received in the inner barrel 62.

5 The system 34 can include at least one electrode 68a,b which electrically contacts the core 40 when the core 40 is received in the inner barrel 62. Current i induced in the core 40 by the antenna 66 may flow between the core 40 and the electrode 68a,b.

10 The system 34 can include an inductive coupling 76 which transmits measurements taken via the electrode 68a,b.

The antenna 66 and the electrode 68a,b can be included in an instrumented section 64 of the inner barrel 62. A coring bit 38 which cuts the core 40 may rotate relative to the inner barrel 62. The inner barrel 62 can include
15 multiple longitudinally spaced apart instrumented sections 64.

Also described above is a formation core analysis system 34 which can include an inner barrel 62 and multiple longitudinally spaced apart electrodes 68a,b which
20 electrically contact a formation core 40 when the core 40 is received in the inner barrel 62. A speed of displacement of the core 40 into the inner barrel 62 can be indicated by differences between measurements taken via the electrodes 68a,b as the core 40 displaces into the inner barrel 62.

25 The system 34 can include a toroidal electromagnetic antenna 66 which transmits electromagnetic signals into the core 40 when the core 40 is received in the inner barrel 62.

The antenna 66 and the electrodes 68a,b may be included in an instrumented section 64 of the inner barrel 62. The
30 electrodes 68a,b can contact the core 40 as the core 40 displaces into the inner barrel 62.

- 11 -

A method of measuring resistivity of a formation core 40 as the core 40 is being cut in a subterranean well is also described above. In one example, the method can include transmitting electromagnetic signals into the core 40 from a toroidal electromagnetic antenna 66 as the core 40 is being cut by a coring bit 38.

The coring bit 38 may rotate relative to the toroidal antenna 66 as the core 40 is being cut.

The toroidal antenna 66 may be included in an inner barrel 62 which receives the core 40 as it is being cut. The coring bit 38 may rotate relative to the inner barrel 62.

The method can include at least one electrode 68a,b electrically contacting the core 40 as the core 40 is being cut.

The method can include current i induced in the core 40 by the antenna 66 flowing between the core 40 and the electrode 68a,b.

The method can include an inductive coupling 76 transmitting measurements taken via the electrode 68a,b.

The antenna 66 and the electrode 68a,b can be included in an instrumented section 64 of an inner barrel 62, and the inner barrel 62 can include multiple longitudinally spaced apart instrumented sections 64.

The method may include multiple longitudinally spaced apart electrodes 68a,b electrically contacting the core 40 as the core 40 is being cut.

The method can include current i induced in the core 40 by the antenna 66 flowing between the core 40 and each of the electrodes 68a,b.

- 12 -

The method may include comparing the speed of displacement of the core 40 into the inner barrel 62 to a speed of displacement of the coring bit 38 through an earth formation 22. The method can also include determining
5 whether the core 40 is jammed based on the comparing step.

A method of determining a speed of displacement of a formation core 40 into an inner barrel 62 as the core 40 is being cut can, in one example, include the steps of transmitting electromagnetic signals into the core 40 as the
10 core 40 is being cut, thereby inducing current i in the core 40; electrically contacting the core 40 with longitudinally spaced apart electrodes 68a,b; and determining the speed of displacement of the core 40 into the inner barrel 62, based on differences between measurements taken via the electrodes
15 68a,b as the core 40 is being cut.

Although various examples have been described above, with each example having certain features, it should be understood that it is not necessary for a particular feature of one example to be used exclusively with that example.
20 Instead, any of the features described above and/or depicted in the drawings can be combined with any of the examples, in addition to or in substitution for any of the other features of those examples. One example's features are not mutually exclusive to another example's features. Instead, the scope
25 of this disclosure encompasses any combination of any of the features.

Although each example described above includes a certain combination of features, it should be understood that it is not necessary for all features of an example to
30 be used. Instead, any of the features described above can be used, without any other particular feature or features also being used.

- 13 -

It should be understood that the various embodiments described herein may be utilized in various orientations, such as inclined, inverted, horizontal, vertical, etc., and in various configurations, without departing from the principles of this disclosure. The embodiments are described merely as examples of useful applications of the principles of the disclosure, which is not limited to any specific details of these embodiments.

In the above description of the representative examples, directional terms (such as "above," "below," "upper," "lower," etc.) are used for convenience in referring to the accompanying drawings. However, it should be clearly understood that the scope of this disclosure is not limited to any particular directions described herein.

The terms "including," "includes," "comprising," "comprises," and similar terms are used in a non-limiting sense in this specification. For example, if a system, method, apparatus, device, etc., is described as "including" a certain feature or element, the system, method, apparatus, device, etc., can include that feature or element, and can also include other features or elements. Similarly, the term "comprises" is considered to mean "comprises, but is not limited to."

Of course, a person skilled in the art would, upon a careful consideration of the above description of representative embodiments of the disclosure, readily appreciate that many modifications, additions, substitutions, deletions, and other changes may be made to the specific embodiments, and such changes are contemplated by the principles of this disclosure. Accordingly, the foregoing detailed description is to be clearly understood as being given by way of illustration and example only, the

- 14 -

spirit and scope of the invention being limited solely by the appended claims and their equivalents.

- 15 -

WHAT IS CLAIMED IS:

1. A formation core analysis system for use in a subterranean well, the system comprising:

5 an inner barrel; and

a toroidal electromagnetic antenna which transmits electromagnetic signals into a formation core when the core is received in the inner barrel.

10 2. The system of claim 1, further comprising at least one electrode which electrically contacts the core when the core is received in the inner barrel.

15 3. The system of claim 2, wherein current induced in the core by the antenna flows between the core and the electrode.

20 4. The system of claim 2, further comprising an inductive coupling which transmits measurements taken via the electrode.

25 5. The system of claim 2, wherein the antenna and the electrode are included in an instrumented section of the inner barrel, and wherein a coring bit which cuts the core rotates relative to the inner barrel.

6. The system of claim 5, wherein the inner barrel includes multiple longitudinally spaced apart instrumented sections.

- 16 -

7. The system of claim 1, further comprising multiple longitudinally spaced apart electrodes which electrically contact the core when the core is received in the inner
5 barrel.

8. The system of claim 7, wherein current induced in the core by the antenna flows between the core and each of the electrodes.

10

9. The system of claim 7, wherein the electrodes contact the core as the core displaces into the inner barrel.

15 10. The system of claim 9, wherein a speed of displacement of the core into the inner barrel is indicated by differences between measurements taken via the electrodes as the core displaces into the inner barrel.

- 17 -

11. A formation core analysis system for use in a subterranean well, the system comprising:

an inner barrel; and

multiple longitudinally spaced apart electrodes which
5 electrically contact a formation core when the core is received in the inner barrel, and wherein a speed of displacement of the core into the inner barrel is indicated by differences between measurements taken via the electrodes as the core displaces into the inner barrel.

10

12. The system of claim 11, further comprising a toroidal electromagnetic antenna which transmits electromagnetic signals into the core when the core is received in the inner barrel.

15

13. The system of claim 12, wherein the antenna and the electrodes are included in an instrumented section of the inner barrel, and wherein a coring bit which cuts the core rotates relative to the inner barrel.

20

14. The system of claim 13, wherein the inner barrel includes multiple longitudinally spaced apart instrumented sections.

25

15. The system of claim 12, wherein current induced in the core by the antenna flows between the core and each of the electrodes.

- 18 -

16. The system of claim 11, further comprising an inductive coupling which transmits measurements taken via the electrodes.

5 17. The system of claim 11, wherein the electrodes contact the core as the core displaces into the inner barrel.

- 19 -

18. A method of measuring resistivity of a formation core as the core is being cut in a subterranean well, the method comprising:

transmitting electromagnetic signals into the core from
5 a toroidal electromagnetic antenna as the core is being cut by a coring bit.

19. The method of claim 18, wherein the coring bit rotates relative to the toroidal antenna as the core is
10 being cut.

20. The method of claim 18, wherein the toroidal antenna is included in an inner barrel which receives the core as it is being cut, and wherein the coring bit rotates
15 relative to the inner barrel.

21. The method of claim 18, further comprising at least one electrode electrically contacting the core as the core is being cut.
20

22. The method of claim 21, further comprising current induced in the core by the antenna flowing between the core and the electrode.

25 23. The method of claim 21, further comprising an inductive coupling transmitting measurements taken via the electrode.

- 20 -

24. The method of claim 21, wherein the antenna and the electrode are included in an instrumented section of an inner barrel, and wherein the inner barrel includes multiple longitudinally spaced apart instrumented sections.

5

25. The method of claim 18, further comprising multiple longitudinally spaced apart electrodes electrically contacting the core as the core is being cut.

10

26. The method of claim 25, further comprising current induced in the core by the antenna flowing between the core and each of the electrodes.

15

27. The method of claim 25, further comprising the electrodes contacting the core as the core displaces into an inner barrel.

20

28. The method of claim 27, further comprising determining a speed of displacement of the core into the inner barrel, based on differences between measurements taken via the electrodes as the core is being cut.

25

29. The method of claim 18, further comprising comparing a speed of displacement of the core into the inner barrel to a speed of displacement of the coring bit through an earth formation.

30

30. The method of claim 29, further comprising determining whether the core is jammed based on the comparing.

- 21 -

31. A method of determining a speed of displacement of a formation core into an inner barrel as the core is being cut, the method comprising:

transmitting electromagnetic signals into the core as
5 the core is being cut, thereby inducing current in the core;

electrically contacting the core with longitudinally spaced apart electrodes; and

determining the speed of displacement of the core into the inner barrel, based on differences between measurements
10 taken via the electrodes as the core is being cut.

32. The method of claim 31, further comprising a toroidal electromagnetic antenna transmitting electromagnetic signals into the core as the core is being
15 cut.

33. The method of claim 32, wherein the antenna and the electrode are included in an instrumented section of the inner barrel, and further comprising a coring bit cutting
20 the core and rotating relative to the inner barrel.

34. The method of claim 33, wherein the inner barrel includes multiple longitudinally spaced apart instrumented sections.

25

35. The method of claim 32, further comprising current induced in the core by the antenna flowing between the core and each of the electrodes.

- 22 -

36. The method of claim 31, further comprising an inductive coupling transmitting measurements taken via the electrodes.

5 37. The method of claim 31, further comprising the electrodes contacting the core as the core is being cut.

38. The method of claim 31, further comprising
comparing the speed of displacement of the core into the
10 inner barrel to a speed of displacement of the coring bit
through an earth formation.

39. The method of claim 38, further comprising
determining whether the core is jammed based on the
15 comparing.

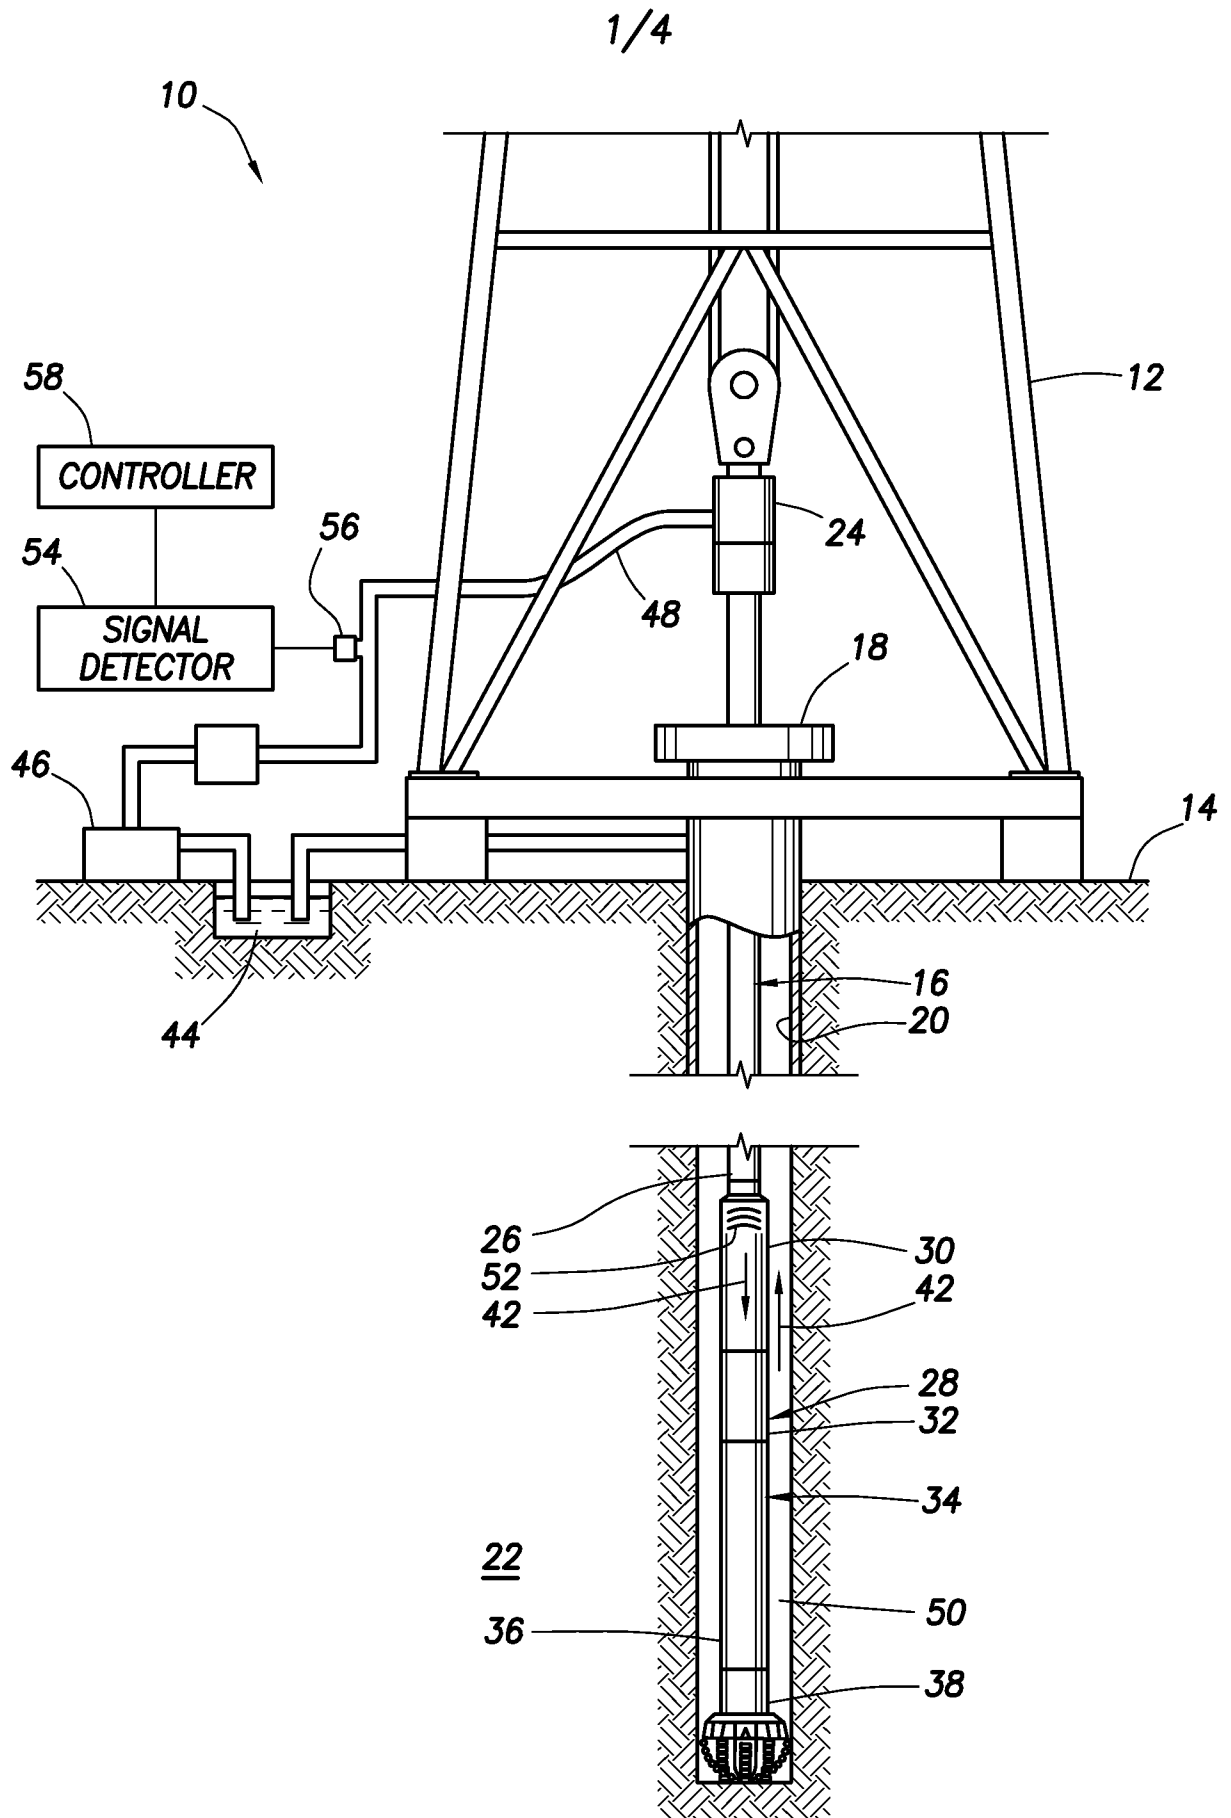


FIG. 1

2/4

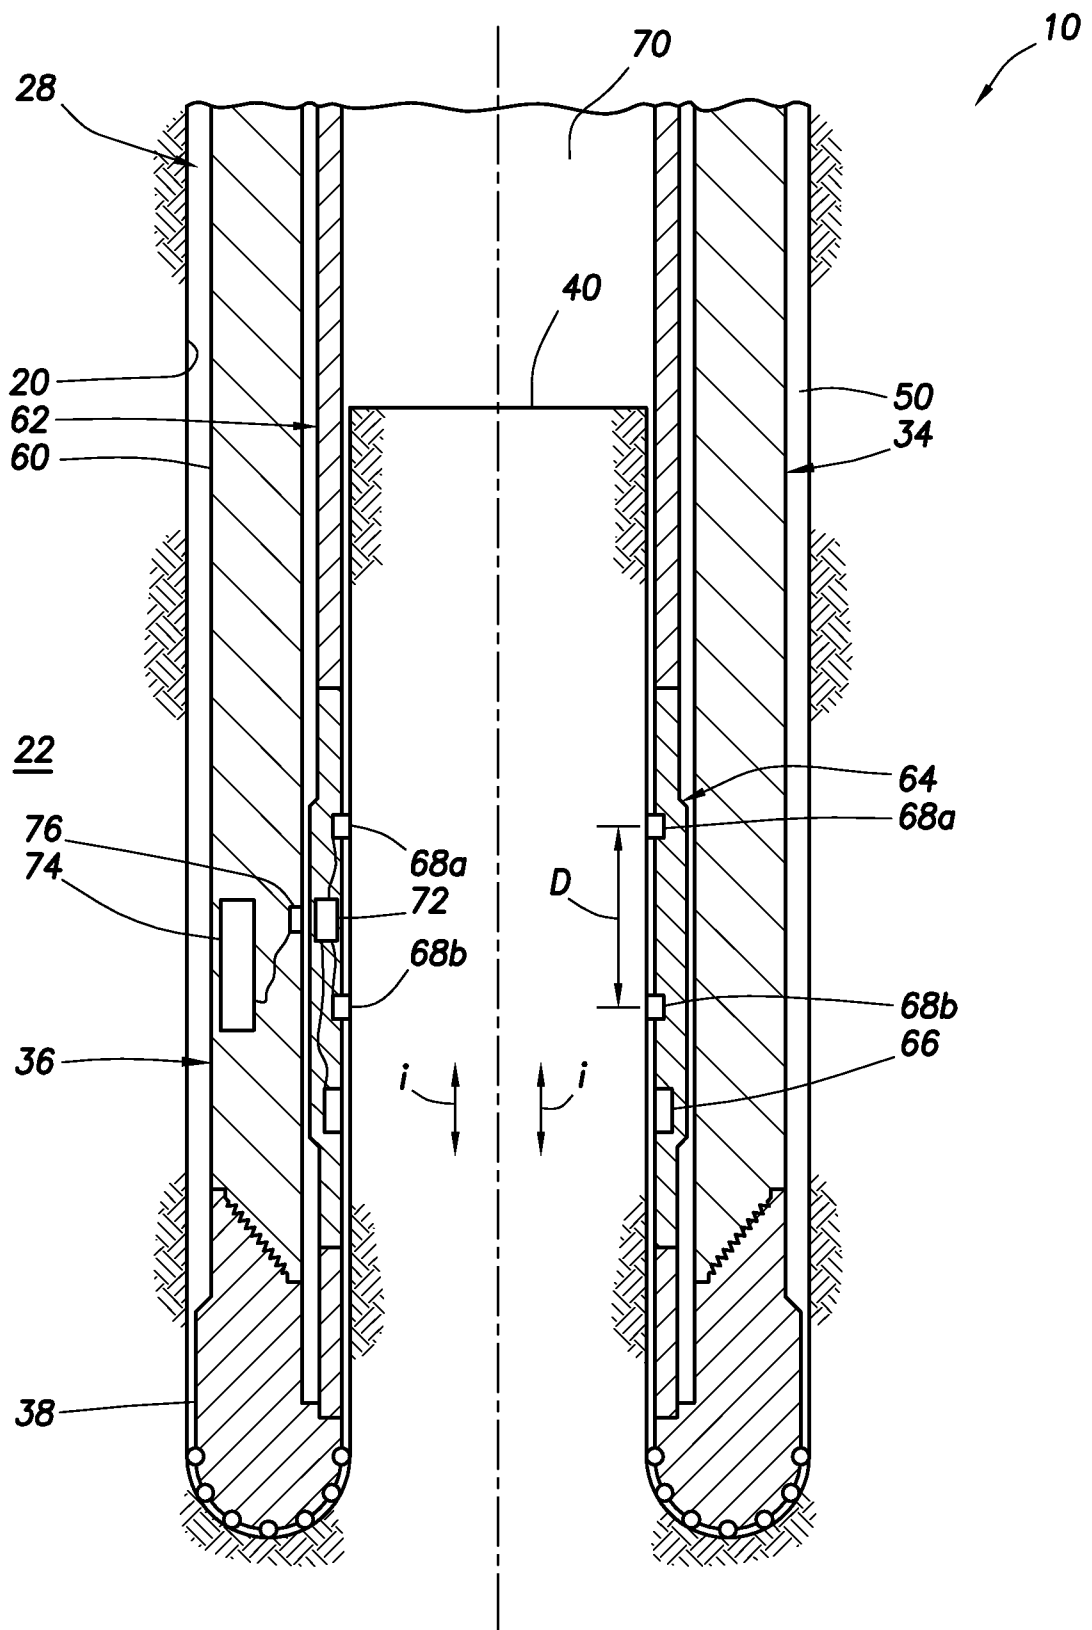


FIG.2

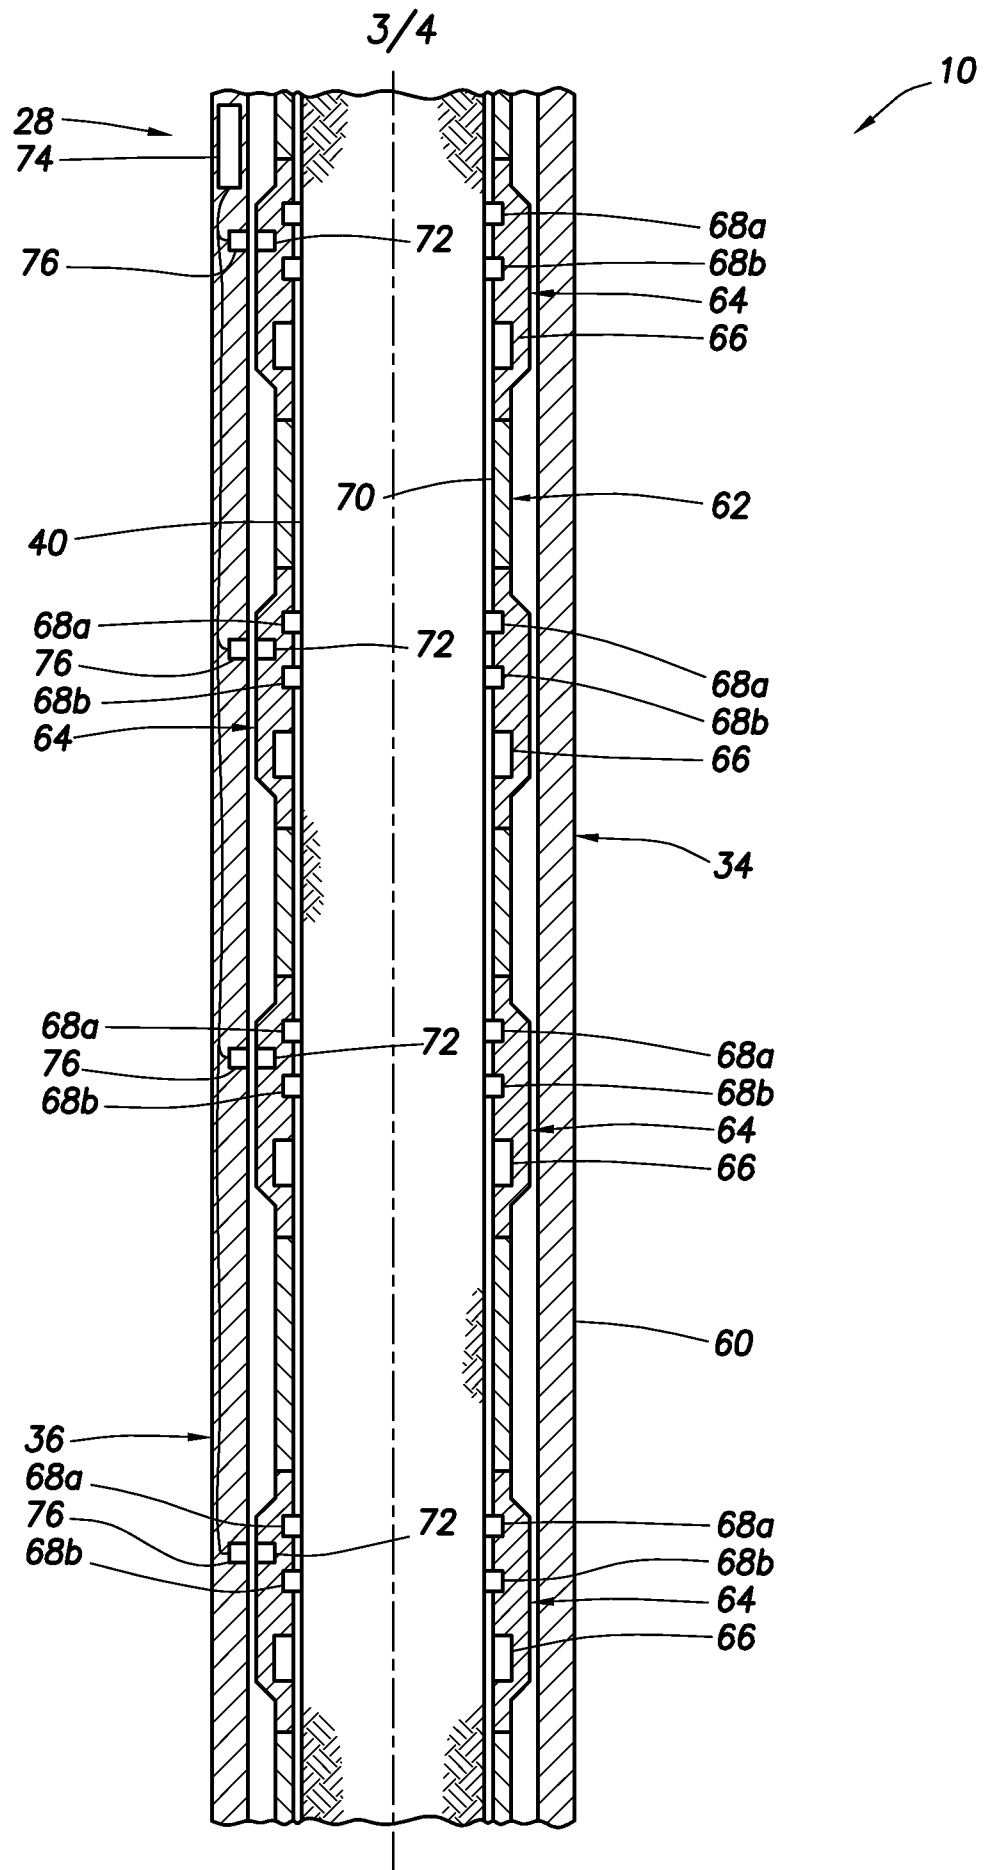


FIG.3

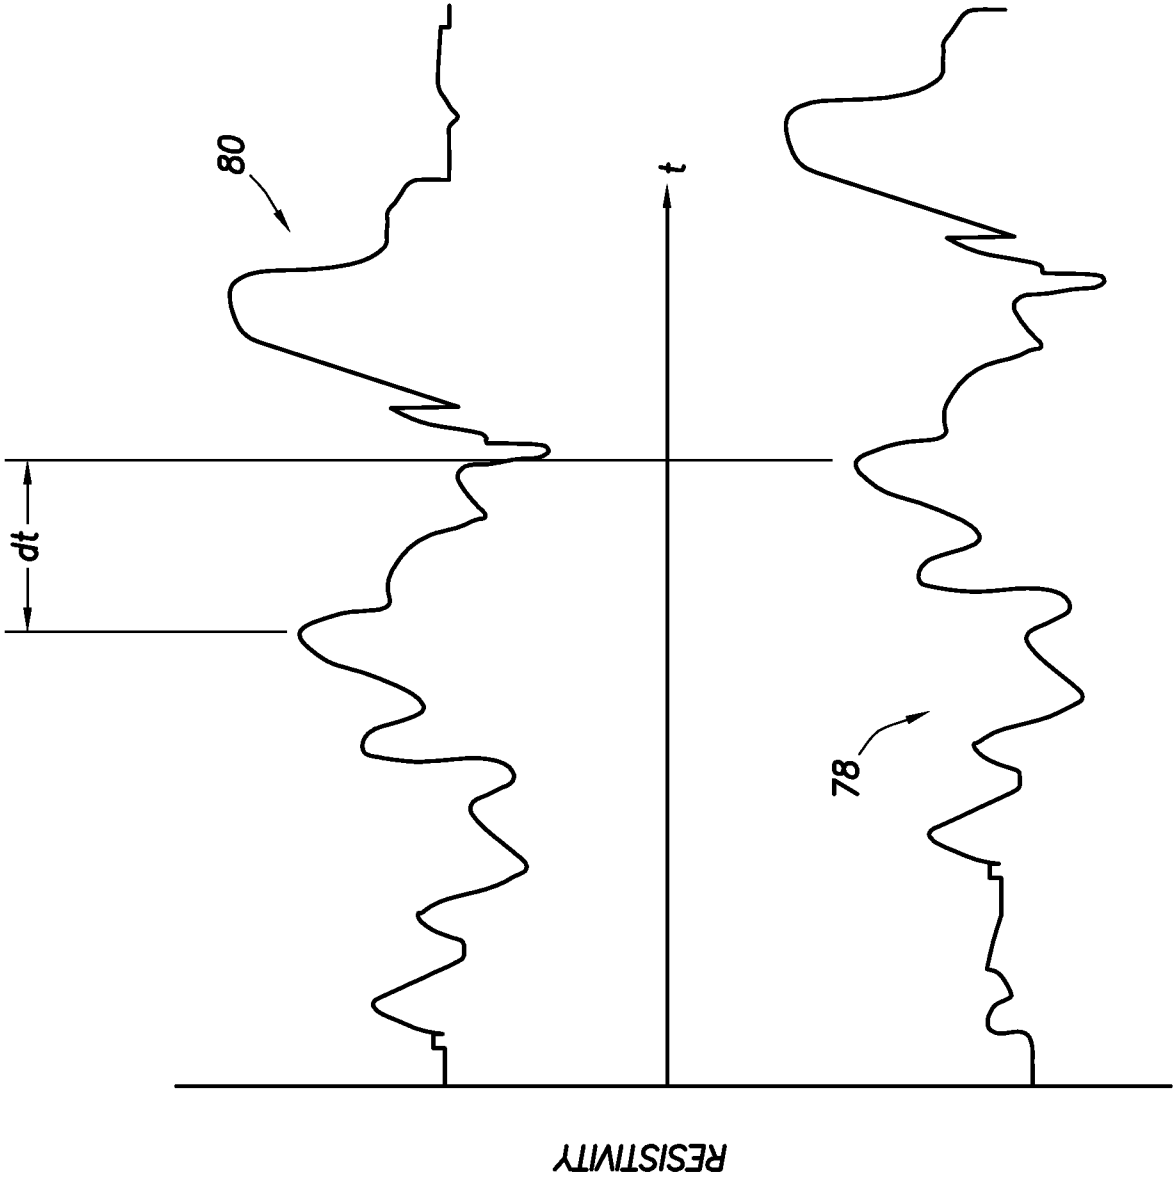


FIG.4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2011/059947**A. CLASSIFICATION OF SUBJECT MATTER***G01V 3/18(2006.01)i, G01V 3/26(2006.01)i, G01V 3/20(2006.01)i, E21B 47/00(2006.01)i*

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01V 3/18; E21B 49/02; E21B 47/00; G01V 3/02; E21B 47/12; E21B 25/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: coring, antenna, barrel, speed

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5339036 A (BRIAN CLARK et al.) 16 August 1994 See column 8, lines 11-32; claim 1 and figure 2.	1-39
A	US 7168508 B2 (DAVID S. GOLDBERG et al.) 30 January 2007 See column 5, line 36 - column 6, line 60 and figure 3.	1-39
A	US 5095273 A (W. DAVID KENNEDY et al.) 10 March 1992 See column 4, line 51 - column 5, line 7; claim 1 and figure 2.	1-39
A	US 6006844 A (LUC VAN PUymbroeck et al.) 28 December 1999 See column 10, lines 45-58; claim 1 and figure 7.	1-39



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 AUGUST 2012 (30.08.2012)

Date of mailing of the international search report

30 AUGUST 2012 (30.08.2012)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan
City, 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

YANG, Jeong Rok

Telephone No. 82-42-481-5709



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2011/059947

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5339036 A	16.08.1994	EP 0540425 A2 EP 0540425 B1 US 5235285 A US 5339037 A US 5359324 A	05.05.1993 25.09.1996 10.08.1993 16.08.1994 25.10.1994
US 7168508 B2	30.01.2007	US 2005-0199393 A1 US 2007-0107939 A1 US 7293613 B2	15.09.2005 17.05.2007 13.11.2007
US 5095273 A	10.03.1992	None	
US 6006844 A	28.12.1999	CA 2158903 C GB 2293395 A GB 2318372 A US 5568838 A	26.07.2005 27.03.1996 22.04.1998 29.10.1996