



- (51) International Patent Classification:
B64C 27/04 (2006.01)
- (21) International Application Number:
PCT/US2014/042232
- (22) International Filing Date:
13 June 2014 (13.06.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/871,071 28 August 2013 (28.08.2013) US
- (71) Applicant: **SIKORSKY AIRCRAFT CORPORATION**
[US/US]; 6900 Main Street, P.O. Box 9729, Stratford,
Connecticut 06615-9129 (US).
- (72) Inventors: **DARROW JR., David A.**; 7365 Main Street
#284, Stratford, Connecticut 06614-1300 (US). **MINER,
Frederick J.**; 9 Harness Drive, Barkhamsted, Connecticut
06063 (US).
- (74) Agent: **FOX, David A.**; Cantor Colburn LLP, 20 Church
Street, 22nd Floor, Hartford, Connecticut 06103 (US).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the
earlier application (Rule 4.17(iii))*
- *of inventorship (Rule 4.17(iv))*

[Continued on next page]

- (54) Title: COMPOSITE STIFFENED RIGID PROPELLER SHAPED MAIN ROTOR HUB

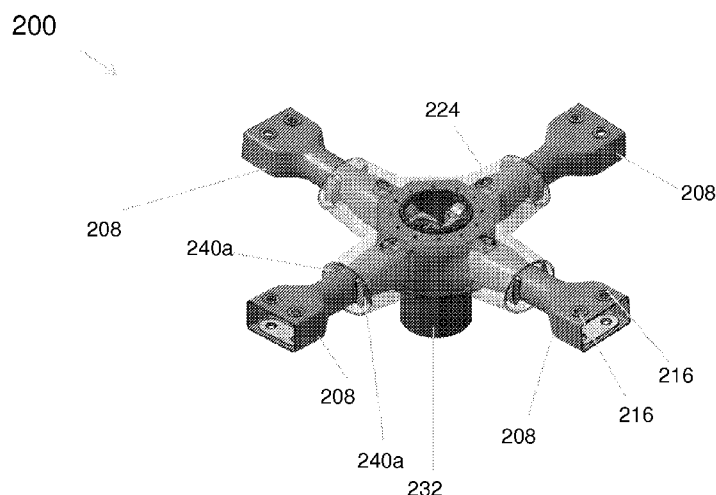


FIG. 2

- (57) Abstract: A rotor includes a blade retention cuff configured to receive a rotor blade; a yoke coupled to the blade retention cuff; and a rigid propeller shaped hub configured to enclose at least a portion of the blade retention cuff and at least a portion of the yoke.



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

COMPOSITE STIFFENED RIGID PROPELLER SHAPED MAIN ROTOR HUB

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 61/871,071, filed August 28, 2013, the contents of which are incorporated herein by reference.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH AND
DEVELOPMENT

[0002] This invention was made with government support under Technology Investment Agreement W911W6-13-2-0003 with the United States Army. The government has certain rights in this invention.

BACKGROUND

[0003] In aerospace applications it is beneficial to reduce the weight of an aircraft. At the same time, the integrity of the aircraft or the aircraft structure needs to be maintained. In this respect, in the context of a rotor design for a rotorcraft (e.g., a helicopter), a light-weight rotor is needed. A reduction in drag associated with the rotor or rotor blades relative to conventional designs would also help to improve efficiency.

[0004] In conventional rotor designs, loads imposed upon the rotor or rotor blades may serve to degrade the reliability and maintainability of the rotor. Improvements are needed to conventional rotor designs in terms of the handling of such loads in order to enhance the performance and sustainability of the rotor.

BRIEF SUMMARY

[0005] In accordance with an aspect of the invention, a rotor includes a blade retention cuff configured to receive a rotor blade; a yoke coupled to the blade retention cuff; and a rigid propeller shaped hub configured to enclose at least a portion of the blade retention cuff and at least a portion of the yoke.

[0006] In addition to one or more of the features described above, or as an alternative, in further embodiments the blade retention cuff is attached to the rotor blade using at least two pins.

[0007] In addition to one or more of the features described above, or as an alternative, in further embodiments the at least two pins are configured to be removed to enable the rotor blade to fold.

[0008] In addition to one or more of the features described above, or as an alternative, in further embodiments the yoke is made of titanium and is substantially horseshoe-shaped, and wherein the yoke is configured to be bolted to the blade retention cuff.

[0009] In addition to one or more of the features described above, or as an alternative, in further embodiments an inboard bearing is located in the interior of the yoke configured to restrain centrifugal force while enabling the yoke to pitch through an entire operating range.

[0010] In addition to one or more of the features described above, or as an alternative, in further embodiment an outboard bearing comprising a radial element is configured to contact a top-side of the blade retention cuff when the rotor blade is subjected to an upward force.

[0011] In addition to one or more of the features described above, or as an alternative, in further embodiment a hub spool is bolted to the propeller shaped hub.

[0012] In addition to one or more of the features described above, or as an alternative, in further embodiments the propeller shaped hub is made of a graphite epoxy composite material.

[0013] In addition to one or more of the features described above, or as an alternative, in further embodiments a second blade retention cuff is configured to receive a second rotor blade; and a second yoke coupled to the second blade retention cuff, wherein the propeller shaped hub is configured to enclose at least a portion of the second blade retention cuff and at least a portion of the second yoke.

[0014] In addition to one or more of the features described above, or as an alternative, in further embodiments, the rotor is included on an aircraft.

[0015] In accordance with an aspect of the invention, a method for fabricating a rotor includes coupling a blade retention cuff configured to receive a rotor blade to a yoke; and enclosing at least a portion of the blade retention cuff and at least a portion of the yoke using a rigid propeller shaped hub.

[0016] In addition to one or more of the features described above, or as an alternative, in further embodiments, the blade retention cuff is attached to the rotor blade using at least two pins.

[0017] In addition to one or more of the features described above, or as an alternative, in further embodiments, the method includes removing the at least two pins to enable the rotor blade to fold.

[0018] In addition to one or more of the features described above, or as an alternative, in further embodiments, the yoke is made of titanium and is substantially horseshoe-shaped, and wherein the yoke is bolted to the blade retention cuff using at least four bolts.

[0019] In addition to one or more of the features described above, or as an alternative, in further embodiments, the method includes coupling an inboard bearing to the yoke within the interior of the yoke, wherein the inboard bearing is configured to restrain centrifugal force while enabling the yoke to pitch through an entire operating range.

[0020] In addition to one or more of the features described above, or as an alternative, in further embodiments, the method includes coupling an outboard bearing comprising a radial element to the blade retention cuff, wherein the outboard bearing is configured to contact a top-side of the blade retention cuff when the rotor blade is subjected to an upward force during lift.

[0021] In addition to one or more of the features described above, or as an alternative, in further embodiments, the method includes bolting a hub spool to the propeller shaped hub.

[0022] In addition to one or more of the features described above, or as an alternative, in further embodiments, the propeller shaped hub is made of a graphite epoxy composite material.

[0023] In addition to one or more of the features described above, or as an alternative, in further embodiments, the method includes coupling a second blade retention cuff configured to receive a second rotor blade to a second yoke; and enclosing at least a portion of the second blade retention cuff and at least a portion of the second yoke.

[0024] In addition to one or more of the features described above, or as an alternative, in further embodiments, the method includes selecting a stiffness and mass for the rotor to satisfy a natural frequency criteria.

[0025] Technical function of the one or more features described above provides a lightweight rotor hub for an aircraft.

[0026] Other aspects, features, and techniques of the invention will become more apparent from the following description taken in conjunction with the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0027] The present disclosure is illustrated by way of example and not limited in the accompanying figures in which like reference numerals indicate similar elements.
- [0028] FIG. 1 is a general perspective side view of an exemplary aircraft;
- [0029] FIG. 2 is a top-perspective view of a rotor system;
- [0030] FIG. 3 is a side-perspective view of the rotor system of FIG. 2; and
- [0031] FIG. 4 illustrates a flow chart of an exemplary method.

DETAILED DESCRIPTION

[0032] It is noted that various connections are set forth between elements in the following description and in the drawings (the contents of which are included in this disclosure by way of reference). It is noted that these connections in general and, unless specified otherwise, may be direct or indirect and that this specification is not intended to be limiting in this respect. In this respect, a coupling between entities may refer to either a direct or an indirect connection.

[0033] Exemplary embodiments of apparatuses, systems, and methods are described regarding the design and use of a rotor. In some embodiments, blades associated with a rigid rotor may be folded while providing a high bending stiffness to meet rotor blade tip clearance criteria. A stiffness and mass for the rotor may be selected to meet or satisfy a natural frequency criteria. A rotor design in accordance with one or more embodiments may have repeatable manufacturing or fabrication quality. The weight of the rotor may be minimized. In some embodiments, one or more components or devices of the rotor may be fabricated or manufactured using composite materials, such as graphite epoxy. The rotor may be deployed on an aircraft.

[0034] Referring now to FIG. 1, a general perspective view of a helicopter 10 is shown. The helicopter 10 includes a coaxial rotor assembly 12 and tail propeller assembly 14. Although a particular helicopter configuration is illustrated and described in the disclosed embodiment, other configurations and/or machines (e.g., other aircraft configurations) may be used in connection with this disclosure. For example, in some embodiments a rotorcraft may include a single rotor or rotor system.

[0035] Turning to FIGS. 2-3, a rotor system 200 in accordance with one or more embodiments is shown. The rotor system 200 may correspond to a composite stiffened rigid propeller shaped main rotor hub used in the coaxial rotor assembly 12.

[0036] The rotor system 200 includes a number of blade retention cuffs 208. The embodiment of FIG. 2 includes four blade retention cuffs 208, however, any number of blade retention cuffs 208 may be used in a given embodiment.

[0037] The rotor system 200 or the blade retention cuffs 208 may be associated with a tube-within-a tube structure. Each of the blade retention cuffs 208 may be configured to receive or attach to a rotor blade (not shown in FIG. 2). Two pin locations 216 provided on each blade retention cuff 208 may be used in connection with respective pins to attach a blade to the blade retention cuff 208. The pins may be pulled out or removed to allow a rotor blade to move or transfer away from the center of the rotor system 200. Even when the pins are removed, the (weight of the) rotor blades may still be supported by the rotor system 200.

[0038] The blade retention cuffs 208 may be at least partially enclosed or encased by a propeller hub 224. The blade retention cuffs 208 may be received by or attached to a yoke 304 via one or more bolts. For example, in an embodiment four bolts may be used, where two bolts may be used on a first side of the yoke 304 to attach to a first side or portion (e.g., the top) of the blade retention cuff 208 and two bolts may be used on a second side of the yoke 304 to attach to a second side or portion (e.g., the bottom) of the blade retention cuff 208. In an embodiment, the yoke 304 may be substantially horseshoe-shaped as shown in FIG. 3.

[0039] The interior of the yoke 304 may include one or more thrust bearings 312. The thrust bearing 312 may be configured to restrain centrifugal force (CF) while enabling the yoke 304 to pitch through an entire operating range. For example, as a rotor blade tends to pull outward or away from the center of the rotor system 200, the bearing 312 may serve to hold or retain the rotor blade. In some embodiments, the bearing 312 may be cylindrically shaped. In some embodiments, the bearing 312 may be an elastomeric bearing.

[0040] In addition to coupling to the blade retention cuff 208, the yoke 304 may couple to, and be at least partially enclosed in, a hub spool 232. The hub spool 232 may provide support for the rotor system 200, such as when the rotor system 200 is driven or rotated. The propeller hub 224 may be bolted to the hub spool 232.

[0041] As a rotorcraft associated with the rotor system 200 is operated, a rotor blade bending moment may be present. For example, as the rotorcraft undergoes lift, the rotor blades may be subjected to an upward force. The blade retention cuffs 208 may include an outboard bearing 240. In an embodiment, the bearing 240 may be cylindrically shaped. In some embodiments, the bearing 240 may be an elastomeric bearing.

[0042] The bearing 240 may include one or more radial elements 240a that emerge from a blade retention cuff 208. The element 240a may pull upward and press against the top-side of the blade retention cuffs 208 as the rotor blades are subjected to the upward force. As the element 240a and corresponding rotor blade are urged upwards, the inboard bearing 312 may be restrained from a (reciprocal) downward motion via a metal cylinder.

[0043] In some embodiments, one or more materials may be used to fabricate the rotor system 200. For example, in some embodiments, one or more of the components or devices of the rotor system 200 may be made of composite materials, such as graphite epoxy.

[0044] Turning now to FIG. 4, a flow chart of an exemplary method 400 is shown. The method 400 may be executed in association with one or more systems, components, or devices, such as those described herein. The method 400 may be used to provide or fabricate a light-weight rotor system that has structural and functional integrity. The rotor system may be arranged such that loads are resolved in-plane of composite laminates, such that loading may be eliminated in a weak thru-thickness direction.

[0045] In block 402, a blade retention cuff may be coupled to yoke. For example, the blade retention cuff may be connected to the yoke using one or more bolts.

[0046] In block 404, one or more bearings may be coupled to the yoke or the blade retention cuff. For example, an inboard bearing may be located within an interior of the yoke and an outboard bearing may be located at least partially within the blade retention cuff.

[0047] In block 406, the yoke may be coupled to a hub spool of the rotor system.

[0048] In block 408, the hub spool may be coupled to (e.g., bolted to) a propeller hub. As part of block 408, the propeller hub may enclose at least a portion of the blade retention cuff and at least a portion of the yoke.

[0049] In block 410, a rotor blade may be coupled to the blade retention cuff. The coupling may occur using one or more pins. As part of block 410, the rotor blade may be folded by pulling out or removing the pins.

[0050] The method 400 is illustrative. In some embodiments, one or more of the blocks or operations (or a portion thereof) may be optional. In some embodiments, one or more additional blocks or operations not shown may be included. In some embodiments, the blocks or operations may execute in an order or sequence that is different from what is shown in FIG. 4. In some embodiments, one or more portions of the method 400 may be repeated. For example, portions of the method 400 may be repeated for each of a number of rotor blades included in a given embodiment.

[0051] Embodiments of the disclosure may include a rigid rotor composite structural configuration. A propeller hub shaped graphic epoxy shell may be combined an inner tubular graphic epoxy CF retention shaft. A graphic epoxy blade retention cuff may be connected to two hubs through elastomeric pitch and thrust bearings. A titanium yoke may restrain CF and bending on an inboard end of the cuff.

[0052] Embodiments of the disclosure may include composite structural elements or components that may be used to reduce weight compared to conventional rotor systems. The rotor may be configured such that loads are resolved in-plane of all composite laminates, thereby eliminating loading in a weak thru-thickness direction. Elastomeric bearings may be utilized for enhanced reliability and maintainability compared to past rigid rotors.

[0053] As described herein, in some embodiments various functions or acts may take place at a given location and/or in connection with the operation of one or more apparatuses, systems, or devices. For example, in some embodiments, a portion of a given function or act may be performed at a first device or location, and the remainder of the function or act may be performed at one or more additional devices or locations.

[0054] Aspects of the disclosure have been described in terms of illustrative embodiments thereof. Numerous other embodiments, modifications and variations within the scope and spirit of the appended claims will occur to persons of ordinary skill in the art from a review of this disclosure. For example, one of ordinary skill in the art will appreciate that the steps described in conjunction with the illustrative figures may be performed in other than the recited order, and that one or more steps illustrated may be optional.

CLAIMS

What is claimed is:

1. A rotor, comprising:
 - a blade retention cuff configured to receive a rotor blade;
 - a yoke coupled to the blade retention cuff; and
 - a rigid propeller shaped hub configured to enclose at least a portion of the blade retention cuff and at least a portion of the yoke.
2. The rotor of claim 1, wherein the blade retention cuff is attached to the rotor blade using at least two pins.
3. The rotor of claim 2, wherein the at least two pins are configured to be removed to enable the rotor blade to fold.
4. The rotor of claim 1, wherein the yoke is made of titanium and is substantially horseshoe-shaped, and wherein the yoke is configured to be bolted to the blade retention cuff.
5. The rotor of claim 1, further comprising:
 - an inboard bearing located in the interior of the yoke configured to restrain centrifugal force while enabling the yoke to pitch through an entire operating range.
6. The rotor of claim 1, further comprising:
 - an outboard bearing comprising a radial element configured to contact a top-side of the blade retention cuff when the rotor blade is subjected to an upward force.
7. The rotor of claim 1, further comprising:
 - a hub spool bolted to the propeller shaped hub.
8. The rotor of claim 1, wherein the propeller shaped hub is made of a graphite epoxy composite material.
9. The rotor of claim 1, further comprising:
 - a second blade retention cuff configured to receive a second rotor blade; and
 - a second yoke coupled to the second blade retention cuff,

wherein the propeller shaped hub is configured to enclose at least a portion of the second blade retention cuff and at least a portion of the second yoke.

10. The rotor of claim 1, wherein the rotor is included on an aircraft.

11. A method for fabricating a rotor, comprising:

coupling a blade retention cuff configured to receive a rotor blade to a yoke; and
enclosing at least a portion of the blade retention cuff and at least a portion of the yoke using a rigid propeller shaped hub.

12. The method of claim 11, wherein the blade retention cuff is attached to the rotor blade using at least two pins.

13. The method of claim 12, further comprising:

removing the at least two pins to enable the rotor blade to fold.

14. The method of claim 11, wherein the yoke is made of titanium and is substantially horseshoe-shaped, and wherein the yoke is bolted to the blade retention cuff using at least four bolts.

15. The method of claim 11, further comprising:

coupling an inboard bearing to the yoke within the interior of the yoke, wherein the inboard bearing is configured to restrain centrifugal force while enabling the yoke to pitch through an entire operating range.

16. The method of claim 11, further comprising:

coupling an outboard bearing comprising a radial element to the blade retention cuff, wherein the outboard bearing is configured to contact a top-side of the blade retention cuff when the rotor blade is subjected to an upward force during lift.

17. The method of claim 11, further comprising:

bolting a hub spool to the propeller shaped hub.

18. The method of claim 11, wherein the propeller shaped hub is made of a graphite epoxy composite material.

19. The method of claim 11, further comprising:

coupling a second blade retention cuff configured to receive a second rotor blade to a second yoke; and

enclosing at least a portion of the second blade retention cuff and at least a portion of the second yoke.

20. The method of claim 11, further comprising:

selecting a stiffness and mass for the rotor to satisfy a natural frequency criteria.

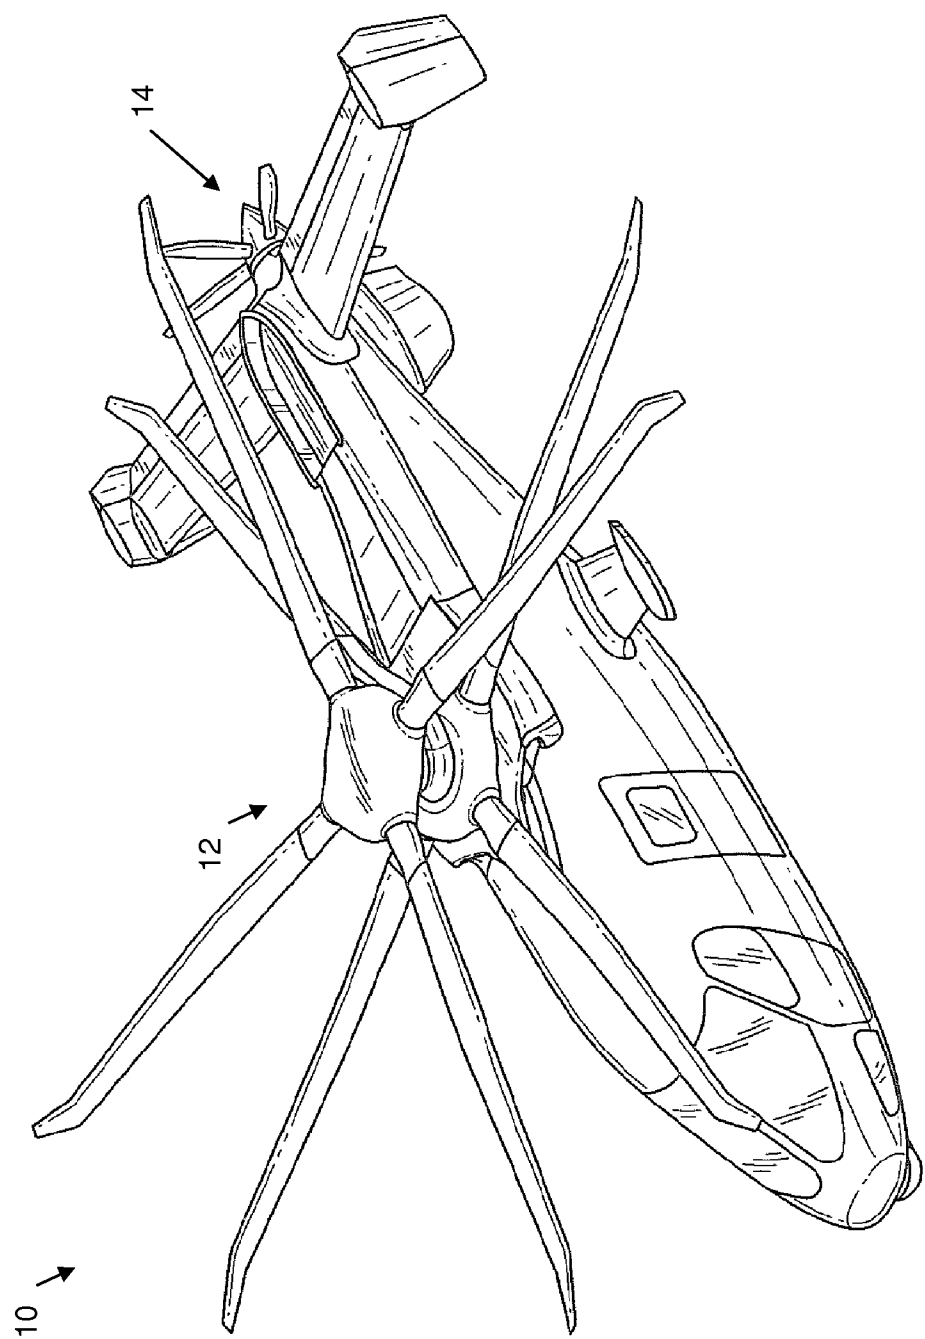


FIG. 1

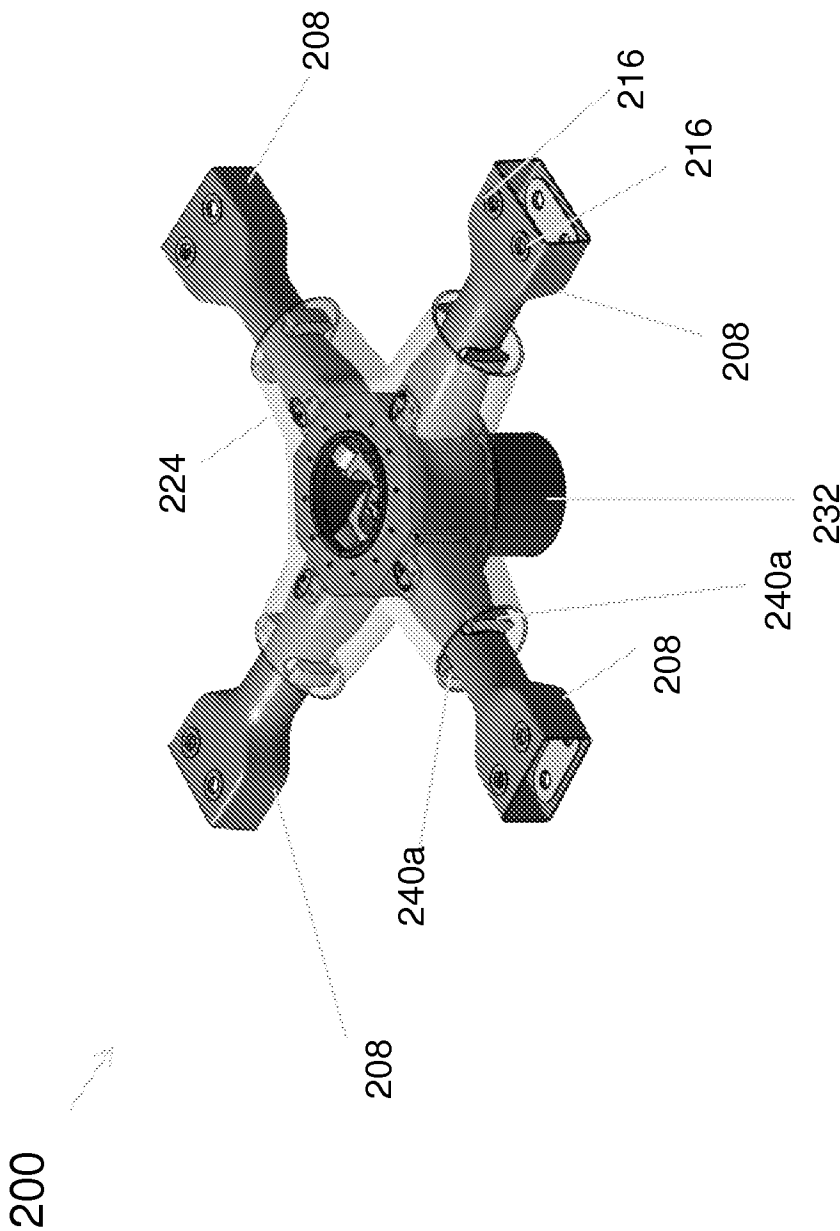


FIG. 2

200

232

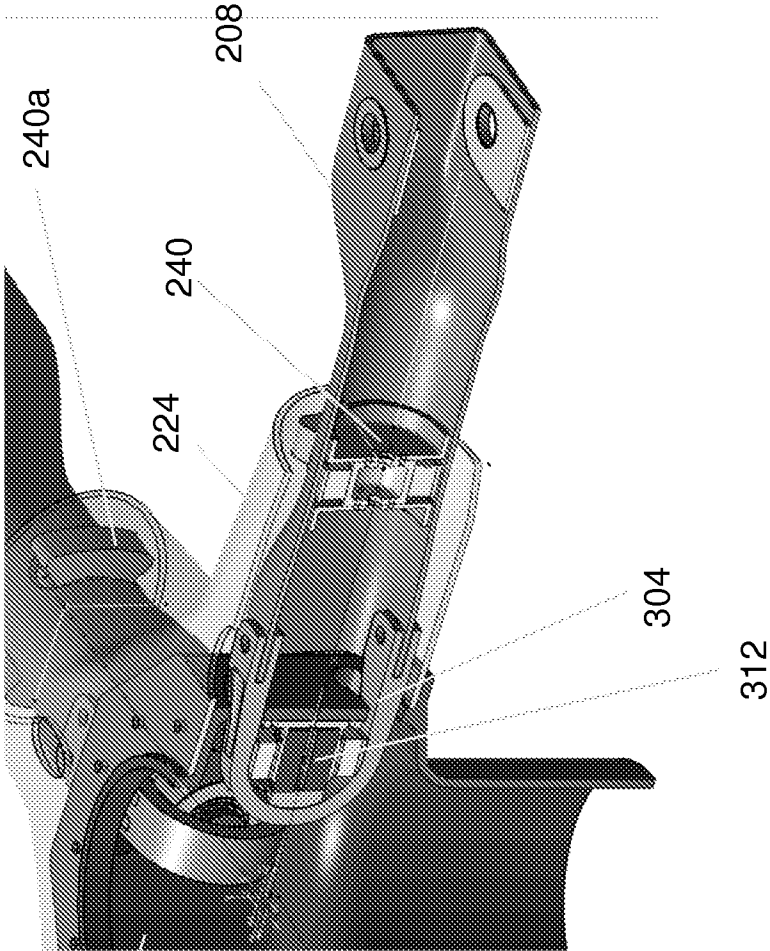


FIG. 3

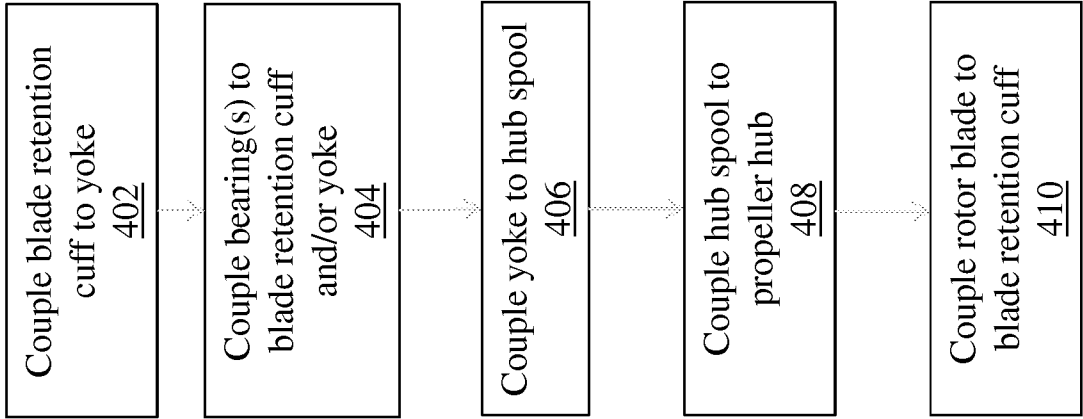


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 14/42232

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - B64C 27/04 (2015.01)

CPC - B64C 27/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - B64C 27/04 (2015.01)

CPC - B64C 27/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
IPC(8) - B64C 27/04, B64C 27/06, B64C 27/08, B64C 27/12, B64C 27/32, B64C 27/46 (2015.01)

CPC - B64C 27/04, B64C 27/06, B64C 27/08, B64C 27/10, B64C 27/12, B64C 27/32, B64C 27/46, (Search Terms Limited, See Below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
PatBase, Google Patents, Google Scholar. Search Terms Used: aircraft rotor, helicopter rotor, helicopter rotor hub, helicopter rotor assembly cover, helicopter rotor assembly bearings, rigid propeller shaped rotor hub, rotor* OR rotating mechanism, blade% or impeller% or vane% or oar% or propeller%, yoke% or coupling% or connector% or support%, hu

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4,212,588 A (Frandenburgh) 15 July 1980 (15.07.1980), entire document, especially Fig 1-2;	1-2, 7-12, 17-20
--	Col 2, ln 3-6, 25-27	-----
Y		1-5, 11-15
X	US 2009/0097973 A1 (Cabrera et al.) 16 April 2009 (16.04.2009), entire document, especially Fig 2, Fig 3A, Fig 3C	1, 6, 11, 16
Y	US 2007/0215749 A1 (Miner et al.) 20 September 2007 (20.09.2007), entire document, especially Fig. 1-4, Fig 8; para [0038]	1-4, 11-14
Y	US 3,759,632 A (Rybicki) 18 September 1973 (18.09.1973), entire document, especially Fig 2; Col 4, ln 47-52	5, 15
A	US 3,310,120 A (Vacca) 24 February 1966 (24.02.1966), entire document	1, 11

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

05 February 2015 (05.02.2015)

Date of mailing of the international search report

03 MAR 2015

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450
Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774