


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B02C 13/02, 13/28	A1	(11) International Publication Number: WO 00/07729 (43) International Publication Date: 17 February 2000 (17.02.00)
(21) International Application Number: PCT/US99/17445 (22) International Filing Date: 4 August 1999 (04.08.99) (30) Priority Data: 09/130,577 6 August 1998 (06.08.98) US (71) Applicant: THE MONEE GROUP, LTD. [US/US]; P.O. Box 8213, Missoula, MT 59807 (US). (72) Inventor: SCHALLER, Steven, M.; 700 Kluth Street, Priest River, ID 83856 (US). (74) Agent: PETERS, R., Jonathan; Suite 411, 77 West Washington Street, Chicago, IL 60602 (US).		(81) Designated States: AU, BA, BR, CA, CN, CU, CZ, ID, IL, IN, IS, JP, KP, KR, LK, MX, NO, NZ, PL, PT, RO, SG, TR, UA, VN, YU, Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.

(54) Title: IMPACT MEMBER FOR COMMINUTER

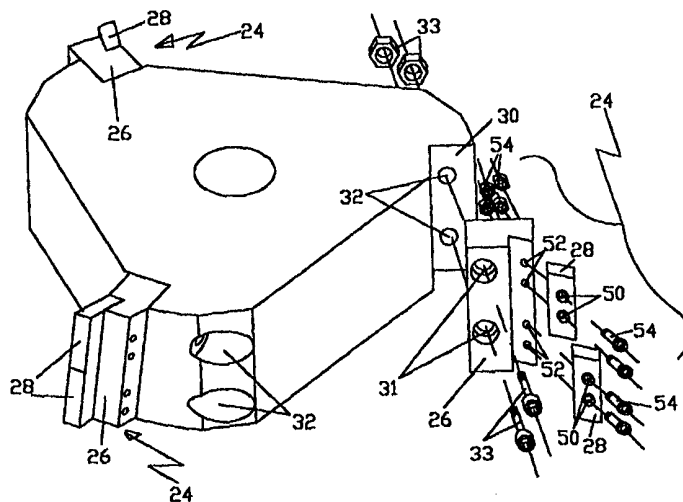

(57) Abstract

The invention provides an impact member (24) for assembly with a rotor (14) arranged in a comminuter (10) used for the size reduction of feed material. The impact member (24), disposed radially about the rotor (14), comprises a carrier (26) and a replaceable impact plate (28) both configured for complementary registration so as to be cantilevered from the carrier (26) and to provide an essentially locking arrangement. The carrier (26) has a forwardly disposed open recess (34) with first (36) and second facings (38) intersecting in an axial direction relative to the horizontal axis of the rotor (14), and defining an acute angle relative to the radial plane of the rotor (14). The first facing (36) is oriented in the general direction of rotation of the rotor (14) and terminates with a longitudinally extending marginal edge disposed axially relative to the horizontal axis of the rotor (14). The replaceable impact plate (28) is configured as a substantially non-right angled parallelogram as viewed in transverse profile, and has intersecting sides (38) for complementary registration with the first (36) and second facings (38) of the recess (34).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

IMPACT MEMBER FOR COMMINUTER

Field of the Invention

This invention relates to an impact member for a comminuter. In its more specific aspect, this invention relates to an impact member for assembly with a rotor mounted in a housing for comminuting or reducing input feed.

Background of the Invention and Prior Art

There is known in the art comminuting machines or apparatus utilizing an impact hammer for comminuting, crushing, pulverizing, shearing, or cutting various materials such as wood products, waste wood, ores, concrete, aggregate, soft metal, scrap, and the like. For this purpose, there are two types of comminuters; namely, the fixed or stationary comminuter, and the swinging hammer comminuter, and machines of both types have been in use for many years and are used extensively in commercial operations.

In general, a fixed comminuter comprises a housing with a reducing chamber having an inlet for feeding material to the reducing chamber and an outlet for discharging material of reduced size. An impact rotor is arranged in the reducing chamber, and is mounted on a horizontal drive shaft driven by a suitable motor. A plurality of hammers or strikers are mounted along the periphery of the rotor or radially of the rotor, and each hammer has a striking or impact surface oriented in the general direction of rotation of the rotor. The feed is directed against the striking or impact surface of the hammer and repelled with force against an anvil spaced from the hammers. The impact of the material against the hammers and anvil, and any ricocheting of the material in the chamber, reduces the size of the feed. That is, during each revolution of the rotor, the feed pieces are sheared, cut, ground, etc., during each revolution of the rotor.

A swinging hammer comminuter generally includes a hammer pivotally connected to a rotor, and the hammer is free to swing as the rotor revolves. The hammer has an impact or striking surface oriented in the direction of rotation of the rotor, and feed material is directed against the impact surface, thereby resulting in size reduction of the feed as explained above with reference to the stationary comminuter.

Although machines or apparatus of this type have been in common use for many years, a distinct disadvantage with the machine is that the hammer or striker is subject to wear and deterioration. The leading edge, sometimes referred to as the cutting edge or outboard edge, of the hammer performs most of the cutting action of the feed material, and therefore encounters most of the impact forces. As a consequence, the hammer must be replaced with frequency depending on such factors as the type of feed and the inertia of the rotor. Also, the hammer is fastened to the rotor with relatively large bolts capable of exhibiting a torque of about 1,600 pounds per inch or higher. As a result of the high impact forces created by the inertia of the rotor, the bolts become fatigued or distorted, and as a consequence fail, which can occur before the cutting edge of the impact hammer deteriorates. Hence, downtime of a machine is relatively frequent because of failure of the fastening bolts, or deterioration of the hammer, or both. In a typical comminuter for cutting wood product, sometimes referred to in the art as a wood hog, nine to twenty four hammers are arranged on a rotor. When a replacement of worn parts is required, to change, for example, nine hammers takes about nine man hours, which translates into downtime or idling of a machine and additional man hours lost by idling loaders and unloaders.

This invention has therefore as it purpose to provide an improved impact member requiring substantially less downtime to change as compared to the conventional hammer, and is very cost effective.

Summary of the Invention

In accordance with the present invention, there is provided an impact member for assembly with a rotor arranged in a comminuter used for the size reduction of feed material as by cutting, shearing, pulverizing, and the like. The impact member comprises a carrier and a replaceable impact plate both configured for complementary registration so as to be cantilevered from the carrier and to provide an essentially locking arrangement to withstand the impact forces without coming loose. The carrier is adaptable for extending substantially radially of the rotor and has a forwardly disposed open recess with first and second facings intersecting in an axial direction relative to the horizontal axis of the rotor.

The intersecting faces define an acute angle relative to the radial plane of the rotor, that is, when viewed in transverse profile. The first facing, preferably being substantially flat, is oriented in the general direction of rotation of the rotor and terminates with a longitudinally extending marginal edge disposed axially relative to the horizontal axis of the rotor. The replaceable impact plate is configured as a substantially non-right angled parallelogram as viewed in transverse profile, and has intersecting sides for complementary registration or matching registration with the first and second facings of the recess. Thus, when the replaceable impact plate is arranged in the recess with side walls matching the facings of the recess, the wear resistant member is cantilevered from the recess so as to project outwardly from the marginal edge. The impact plate includes a leading edge oriented in the general direction of rotation of the rotor. It thus will be observed that this complementary registration of the two members essentially locks the replaceable impact plate in the recess so as to withstand the resulting impact forces occurring during operation of the machine. A suitable fastening element, such as a relatively low torque bolt, holds or secures the wear resistant member in place on the carrier.

The recess of the carrier when viewed in transverse profile relative to the radial plane of the rotor defines an acute angle, as explained above. The first facing of the recess oriented in the general direction of the rotation of the rotor can be sloped forwardly relative to the radial plane of the rotor, or the slope can be substantially parallel to the radial plane, or the slope can be negative relative to the radial plane. It is preferable that the recess extend the full longitudinal length of the carrier, and that a plurality of replaceable impact plates are arranged axially and in abutting relationship in the recess. In an alternative embodiment, the carrier and impact plate for assembly with the rotor can be arranged in increasing radial angles in the axial direction of the rotor so as to create cutting edges having stepped surfaces. Also, where desired, one or both of the matching surfaces of the recess and the wear resistant member can be serrated. An additional advantage of my invention is that the leading edge or outboard edge of the wear resistant member assumes most of the impact and therefore when sufficiently worn to loose its effective action, this member can be turned or flip-flopped to expose an used edge.

Brief Description of the Drawings

Figure 1 is a side elevational view of the interior of a typical stationary comminuter embodying the impact member of the present invention.

Figure 2 is a perspective view of an impact rotor for a stationary comminuter showing the impact member of the present invention assembled on the rotor and includes an exploded view of the impact member for assembly with the rotor.

Figure 3 is an alternative embodiment of an impact rotor for a stationary comminuter showing the impact member in a stepped arrangement.

Figure 4 is a side elevational view of the impact member showing certain details embodying the features of the present invention.

Figure 5 is a perspective view of the impact member of Figure 4.

Figure 6 is an exploded perspective view of the impact member of Figure 5.

Figures 7A, 7B, and 7C show three different slopes for one of the facings of the recess for the carrier.

Figure 8 is a diagrammatic, fragmentary view of the comminuter of Figure 1 showing a piece of wood being cut to a reduced size.

Figures 9A and 9B are side elevational views of alternative embodiments of the impact member of the present invention.

Figure 10 is a perspective view of a swinging hammer comminuter utilizing the impact member of the present invention.

Figure 11 is view of the hammer of the comminuter of Figure 10 and showing in greater detail the impact member of the present invention.

Detailed Description of the Invention

Referring to the drawings wherein the same reference numerals refer to similar parts throughout the several views, there is shown as an embodiment of my invention an impact member for use in a fixed or stationary comminuter, such as a wood hog, designated in general by the numeral 10 (see Figures 1-3). Suitable or conventional comminuters or apparatus of this general type are illustrated in U. S. Patents 4,151,959; 5,165,611; and 5,273,218. The apparatus of this general type includes a feed input (not

shown) which opens to a reduction chamber 12 having mounted therein an input rotor 14 typically made of hard steel and measuring from about 18 to 60 inches or longer in length. The size (including both length and diameter) and composition of the rotor will depend largely on the type of material to be processed, and the desired inertia of the rotor as
5 determined by the size and speed or rotation (rpm). The rotor 14 is mounted on horizontal axle or shaft 16 extending transversely of the reduction chamber 12, and one end of the shaft is operatively connected to a motor (not shown) which provides rotational power to the shaft and in turn rotates the impact rotor, such as in a clockwise direction as indicated by the directional arrows in Figures 1 and 8. Anvil 18 and rear anvil or deflector
10 20 are positioned interiorly of the reduction chamber 12 to further act on the feed to effect size reduction by cutting, shearing, etc., and/or to deflect the feed back into the path of the impact rotor. A curved grate 21 is positioned below the rotor 14 and along the lower periphery of the reduction chamber 12, and is connected to the chamber housing as by bolts 22, for passing comminuted material of desired size.

15 Referring now in particular to Figures 2 - 6, there is shown in detail the impact member of the invention. The impact member, indicated generally by the numeral 24, comprises a carrier 26 and at least one impact plate 28, and is adaptable for extending substantially radially on the rotor 14 or about the periphery of the rotor. (See Figures 2 and 3.) The carrier and impact plate each are made as a single piece from a hard steel, and
20 the impact plate is sufficiently hard and strong to exhibit good wear resistance, which is determined by the feed material and the inertia of the rotor. It is understood by those skilled in the art that the rotor can be any desired shape such as essentially triangular as shown, or quadrangular or other shapes, and the positioning of the impact member on the rotor is governed accordingly so as to provide essentially a symmetrical arrangement.
25 Thus, the periphery of the rotor 14 is provided with a plurality of seats 30, preferably formed by an axially disposed shoulder and radially disposed neck substantially normal to the shoulder, as shown in Figure 2, and the seats are spaced symmetrically about the periphery of the rotor. As illustrated in Figure 2, the rotor is provided with spaced, peripheral seats to receive three impact members, that is, an impact member for each seat;
30 or as shown in the modified embodiment in Figure 3, the rotor can be provided with a

plurality of seats, each oriented in a stepped or angled arrangement. In order to attach the carrier to the rotor, both members are provided with aligned holes 31 and 32 for accommodating a suitable fastening element 33, such as a bolt threaded at the end for a tightening nut, as shown in the drawings.

5 The carrier 26 of the impact member is provided with a forwardly disposed open recess 34, as best shown in Figure 6. The recess 34, which preferably extends the complete longitudinal length of the carrier, is formed by first facing 36 and second facing 38 intersecting along line 40 in an axial direction relative to the horizontal axis of the rotor 14, thereby defining an acute angle relative to the radial plane of the rotor. Thus, first
10 facing 36 is sloped in the general direction of rotation of the rotor, and terminates with a longitudinal marginal edge 42 disposed axially relative to the rotor. The second facing 38 is essentially transverse to the general direction of rotation of the rotor. This acute angle defined by the facings is important in providing a locking system or assemblage of the impact plate with the carrier, as explained below in greater detail. This angle, though
15 always an acute angle, may vary depending largely upon such factors as the inertia of the rotor as determined by its size and speed of revolution, the size of the impact member, and the feed material being processed, but desirably is about $60^\circ \pm$ about 10° . The first and second facings 36 and 38, respectively, preferably are flat, but can be serrated at least over a portion of one or both facings, as described below.

20 The impact plate 28 is a unitary body and essentially a rectangular block having a non-right angled parallelogram profile as viewed transversely to the radial plane of the rotor. Thus, the intersecting sides 44 and 46 of the impact plate (see Figure 4) are configured for complementary engagement with the first and second facings 36 and 38, respectively, of the recess 34; and because the impact plate is a parallelogram, the sides
25 opposite to sides 44 and 46 are also configured for complementary engagement with the facings of the recess, which therefore makes it possible to reverse the impact plate when worn on one edge, as explained below. Thus, upon assembly of the impact plate with the carrier, the two sides 44 and 46 abut facings 36 and 38, respectively, and lie flush in matching engagement therewith. Further, the parallelogram is dimensioned so that the
30 length of side 44 is greater than the radial length of facing 36, and upon assembly of the

impact plate with the carrier 26, a portion of the impact plate protrudes beyond or outward from the longitudinal marginal edge 42. It will be observed, therefore, that the leading edge or cutting edge 48 of the impact plate is disposed outwardly from the carrier and is oriented in the general direction of rotation of the rotor. The distance the leading edge 48 protrudes outwardly from the marginal edge 42 can vary depending largely on the type of feed material and the inertia of the rotor, and as a general rule, this distance should be at least about one-eighth inch, and with a lower inertia the distance can be greater. The leading edge then strikes the material fed to the reduction chamber 12, such as shown in Figure 8 where a piece of wood has been cut into two pieces W_1 and W_2 . As shown in the modified embodiment of Figure 3, the carrier and impact plates are arranged in increasing radial angles in the axial direction of the rotor so as to create cutting edges having stepped surfaces. As explained above, the longitudinal length of the rotor can vary, and if the carrier is long, it may be desirable to provide two or more impact plates arranged axially and in abutting relation in the recess of the carrier, as shown in Figures 5 and 6.

Because the facings 36 and 38 define an acute angle and the sides 44 and 46 are in matching engagement with the facings, and because the leading edge 48 is oriented in the general direction or rotation of the rotor, the assemblage of the impact plate with the carrier provides a cantilever lock. That is, that portion of the impact plate that extends above the marginal edge of the carrier recess is unsupported by the carrier, and an impact at the leading edge will create an action of revolution about the fulcrum established by contact between the impact plate and the facings of the carrier. Thus, the impact plate is substantially locked or retained in place in the recess of the carrier, notwithstanding the rotation of the rotor and the cutting action of the impact plate. The unique configuration of the recess and impact plate and the complementary engagement of the surfaces provides a mounting retention or cantilever lock for the impact plate, thereby inhibiting any extended revolution from occurring. In order to insure the connection or assembly of the impact plate with the carrier, both are provided with holes 50 and 52, respectively, that align upon assembly for accommodating a suitable fastening element 54, such as a bolt, fastening pin, rivet, or the like. That is, the fastening element 54 helps in preventing the

impact plate from slipping or jarring loose, but it should be understood that the primary locking system of the impact plate with the carrier is achieved by reason of the unique configuration of the recess and impact plate exhibiting matching registration.

Still further, the major area of impact and wear for the impact plate occurs at or
5 along the leading edge 48. Therefore, when the leading edge is sufficiently worn so that its effective action is diminished, the impact plate, because it is a symmetrical parallelogram, can be turned to expose the diametrically opposite edge of the parallelogram to serve as the leading or cutting edge. In this manner, double use of the same impact plate is achieved before the plate needs to be machined and sharpened or be
10 replaced with a new impact plate.

As an additional advantage of the invention, the cantilever lock explained above reduces and limits the load on the fastening elements 54, e.g. bolts, used for securing the impact plate in place on the carrier. Also, the impact plate assumes most or nearly all of the wear and fatigue. Thus, these relatively small bolts characterized by a low torque, and
15 the relatively inexpensive impact plates are readily replaceable. This ease of replacement and low costs in both material and labor is in sharp contrast to the conventional comminuter utilizing a large hammer connected to the rotor with heavy bolts, as explained in the background section of this application. For example, replacing 30 impact plates of the present invention will take approximately 30 minutes, whereas to change nine
20 hammers in a conventional apparatus takes about nine man hours.

There is shown in Figures 7A, 7B, and 7C three possible slopes for the first facing
36 of the recess 34 relative to the radial plane of the rotor: namely, a positive slope, a neutral slope, and a negative slope. In these figures, each facing is oriented in the general direction of the rotation of the rotor. Figure 7A shows a positive slope of the facing as
25 being forward of the radial plane of the rotor; Figure 7B shows a facing with a neutral or parallel slope relative to the radial plane; and in Figure 7C the slope is negative, that is inclined rearwardly relative to the radial plane. Regardless of the slope, the angle defined by the two facings 36 and 38 is always an acute angle, and therefore the position of the second facing relative to the first facing will vary depending on the slope of the first
30 facing.

In a further modification of the present invention, the adjoining areas for the impact plate and carrier can be serrated at 56, as shown in Figures 9A and 9B. Thus, one or both facings 36 and 38 can be serrated for at least a portion of the facing, and matching surfaces 44 and 46 are serrated for complementary engagement with the facings. The
5 serrations can provide a more secure lock of the impact plate with the carrier.



The present invention can be useful also in a swinging hammer type comminuter, such as illustrated in Figures 10 and 11. According to this embodiment, the comminuter comprises a horizontally disposed rotor 12 made up of a plurality of spaced discs 60 rotated on a drive shaft or axle 62 driven by a suitable motor (not shown). A plurality of
10 carriers 26 are symmetrically arranged on the rotor, a single carrier being positioned between two discs of the rotor. A stationary or fixed shaft or bar 66 extends axially through the discs near the periphery of the discs, and each carrier is provided with an opening or hole 68 for pivotally mounting the carrier on the shaft. Each carrier 26 is provided with a recess having intersecting facings defining an acute angle, and two
15 surfaces of the impact plate 28, having a parallelogram profile, are arranged in matching registration with the recess facings such that the impact plate protrudes outwardly of the carrier, thereby providing a cantilever lock, substantially as described above. Thus, as the rotor revolves, the carriers 26 swing on the fixed shaft, and the leading edge 48 of each impact plate impinges on the feed material.


20 It will be observed that by reason of my invention numerous advantages are achieved in providing a replaceable impact plate that is cantilevered from a carrier mounted to a rotor and securely locked by reason of the configuration of the seat for the impact plate and the matching engagement of the two members. Further, it should be understood that the foregoing detailed description has been given for clearness of understanding only, and no unnecessary
25 limitations should be understood therefrom, as modifications will be obvious to those skilled in the art.

What is claimed is:

1. An impact member for assembly with a rotor for use in a comminuter, comprising:
 - (a) a carrier adaptable for extending substantially radially about the rotor and having a forwardly disposed open recess with first and second facings intersecting in an axial direction relative to the horizontal axis of the rotor to define an acute angle relative to the radial plane of the rotor, said first facing being oriented in the general direction of rotation of the rotor and terminating with a longitudinally extending marginal edge disposed axially relative to the rotor;
 - (b) a replaceable impact plate configured as a substantially non-right angled parallelogram as viewed in transverse profile having intersecting sides for complementary registration with said first and second facings of said recess and cantilevered from said recess so as to project outwardly from said marginal edge and having a leading edge oriented in the general direction of rotation of the rotor, whereby said complementary registration substantially locks said impact plate in said recess of said carrier; and
 - (c) means for securing said wear resistant member in place on said carrier.
2. An impact member for assembly with a rotor according to claim 1 wherein said recess extends the axial length of said carrier, and at least two wear resistant members are mounted axially in said recess and in abutting relationship.
3. An impact resistant member for assembly with a rotor according to claim 1 wherein said impact plate has a serrated cutting edge oriented in the direction of rotation of the rotor.
4. An impact member for assembly with a rotor according to claim 1 further including aligned holes in said carrier and said impact plate, and said securing means comprises bolts extending through said aligned holes.

5. An impact member for assembly with a rotor according to claim 1 wherein said first facing is inclined forwardly relative to the radial plane of the rotor.
6. An impact member for assembly with a rotor according to claim 1 wherein said first facing is substantially parallel to the radial plane of the rotor.
7. An impact member for assembly with a rotor according to claim 1 wherein said first facing is inclined rearwardly relative to the radial plane of the rotor.
- 10 8. An impact member for assembly with a rotor according to any one of claims 1-7 wherein said first and second facing are substantially flat.
9. An impact member for assembly with a rotor according to any one of claims 1-7 wherein at least a portion of said first and second facings are serrated and at least a portion of said intersecting sides of said parallelogram have matching serrations.

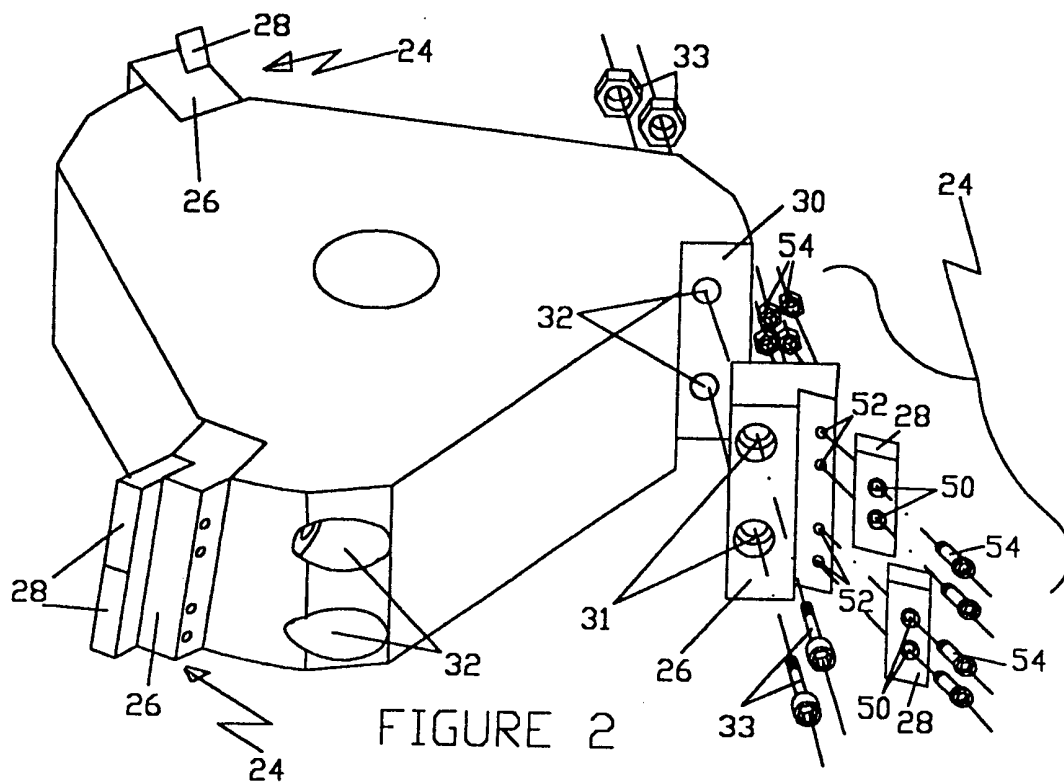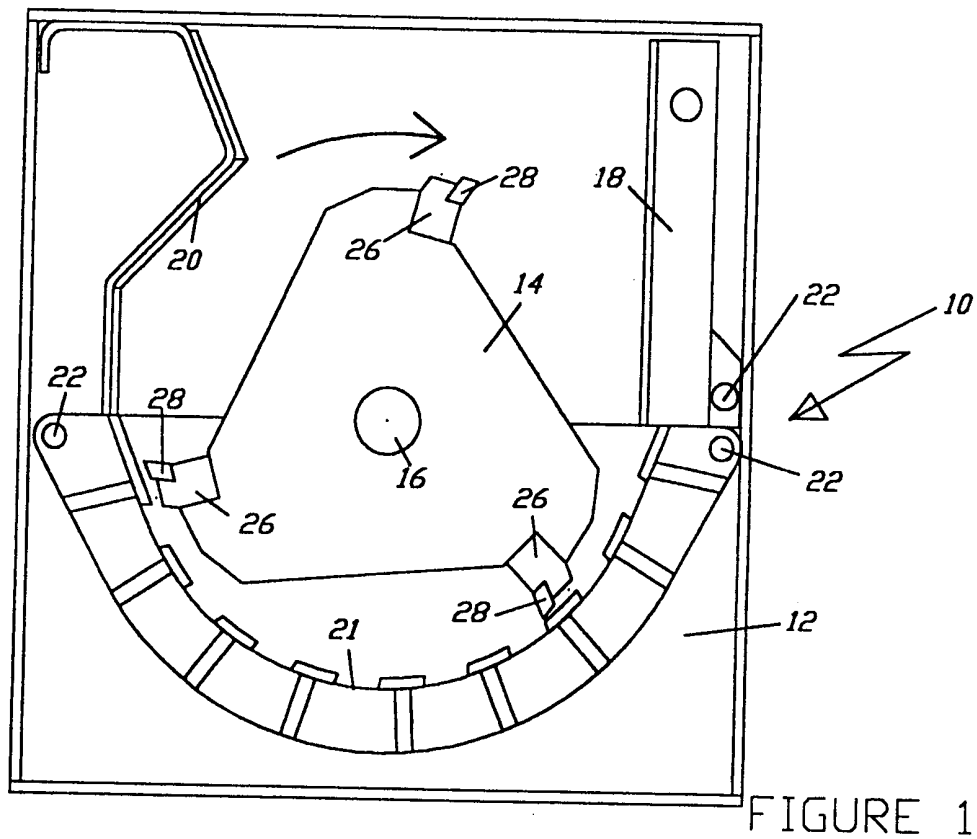

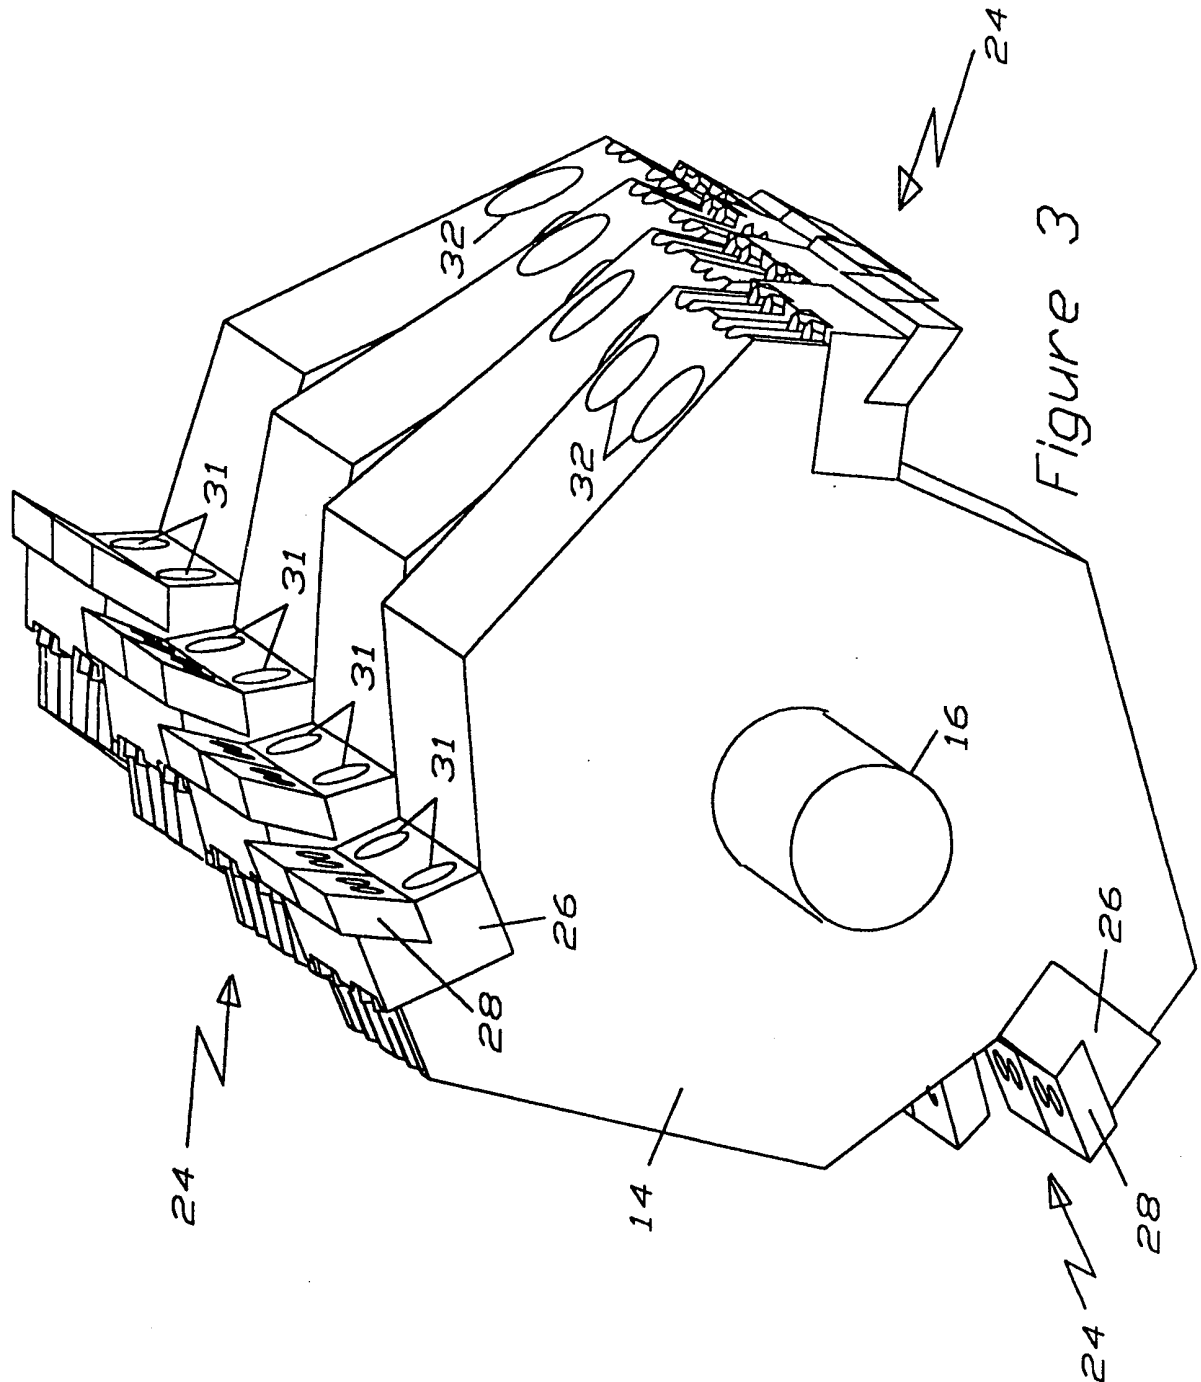

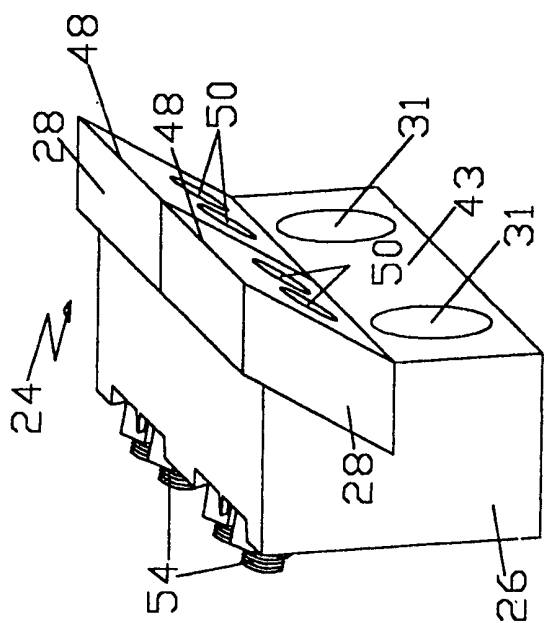


FIGURE 5

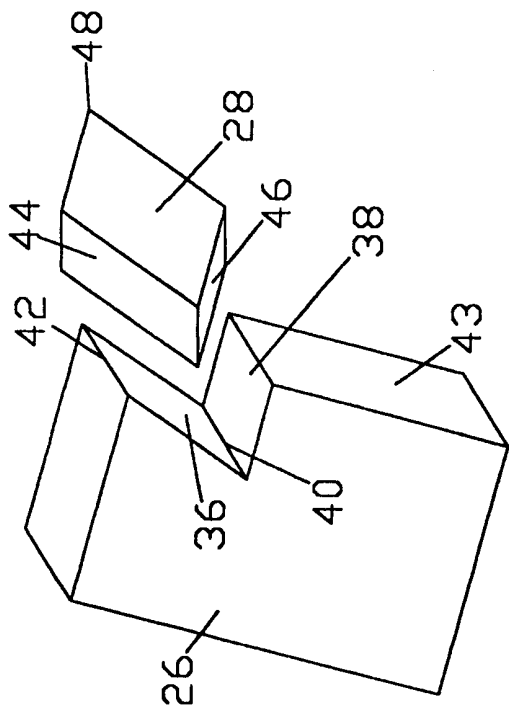


FIGURE 4

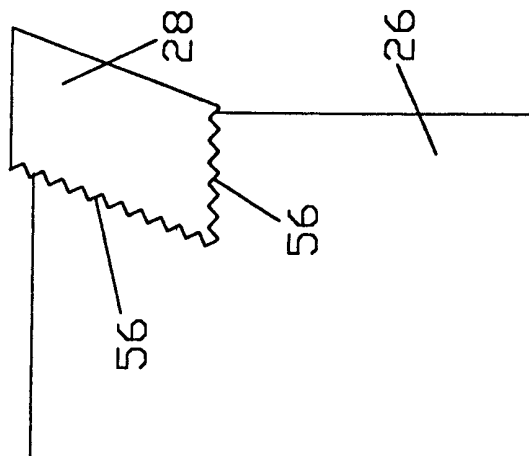


FIGURE 9A

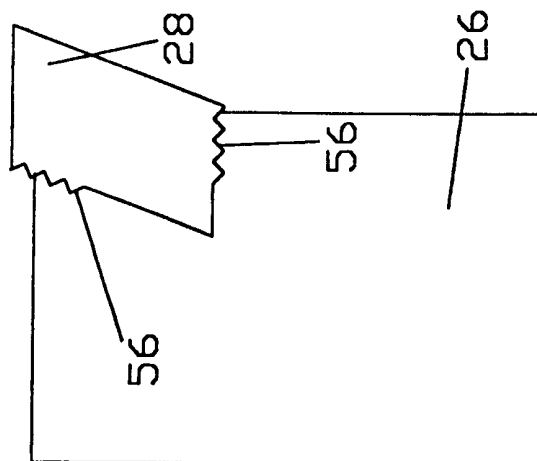


FIGURE 9B

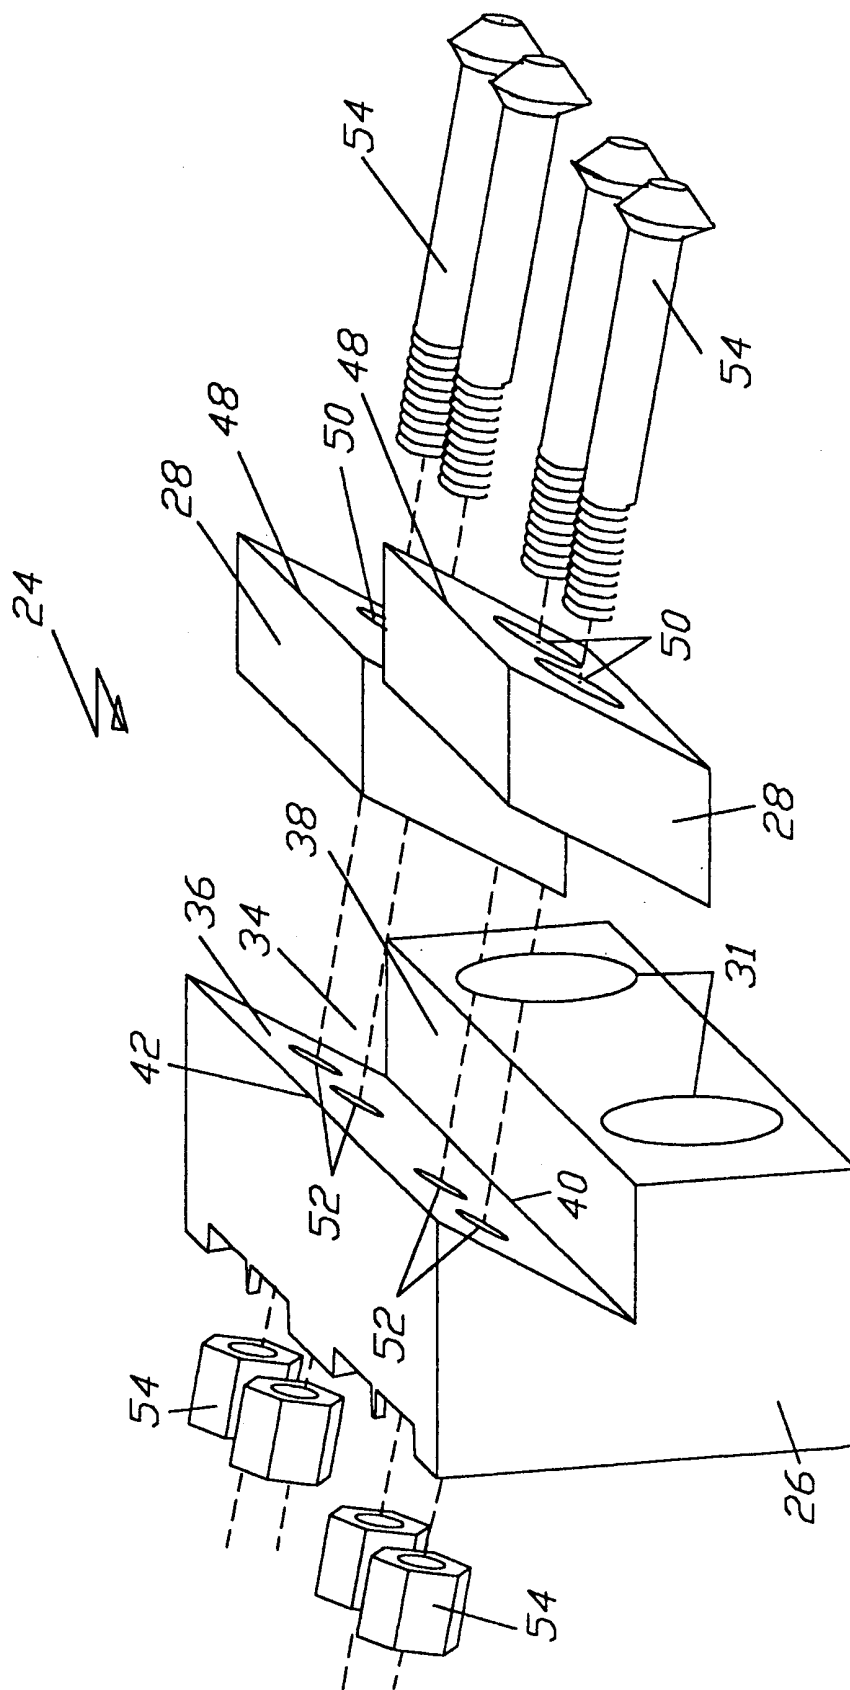


FIGURE 6

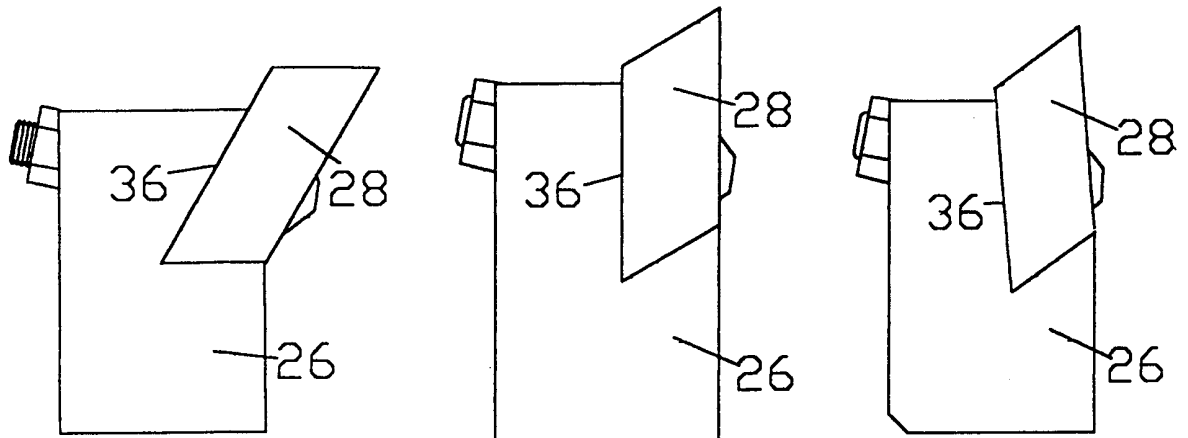


FIGURE 7A

FIGURE 7B

FIGURE 7C

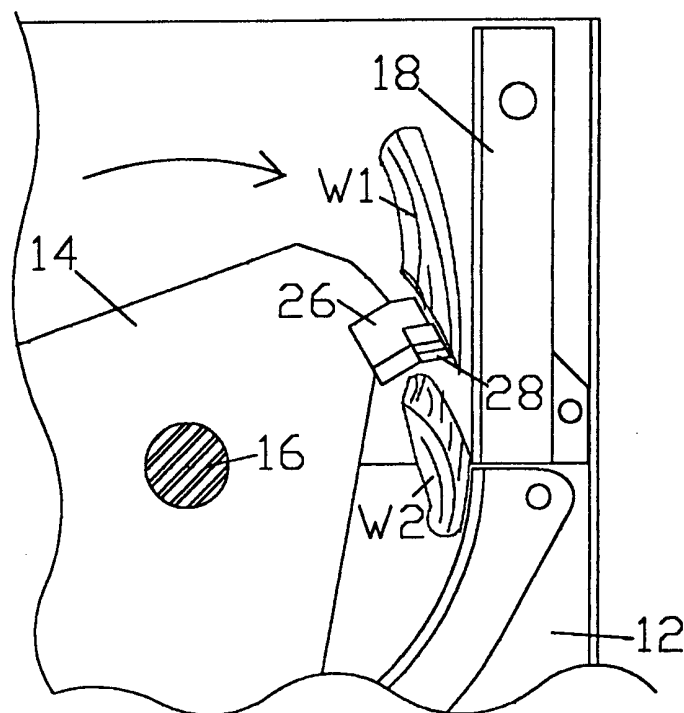


FIGURE 8

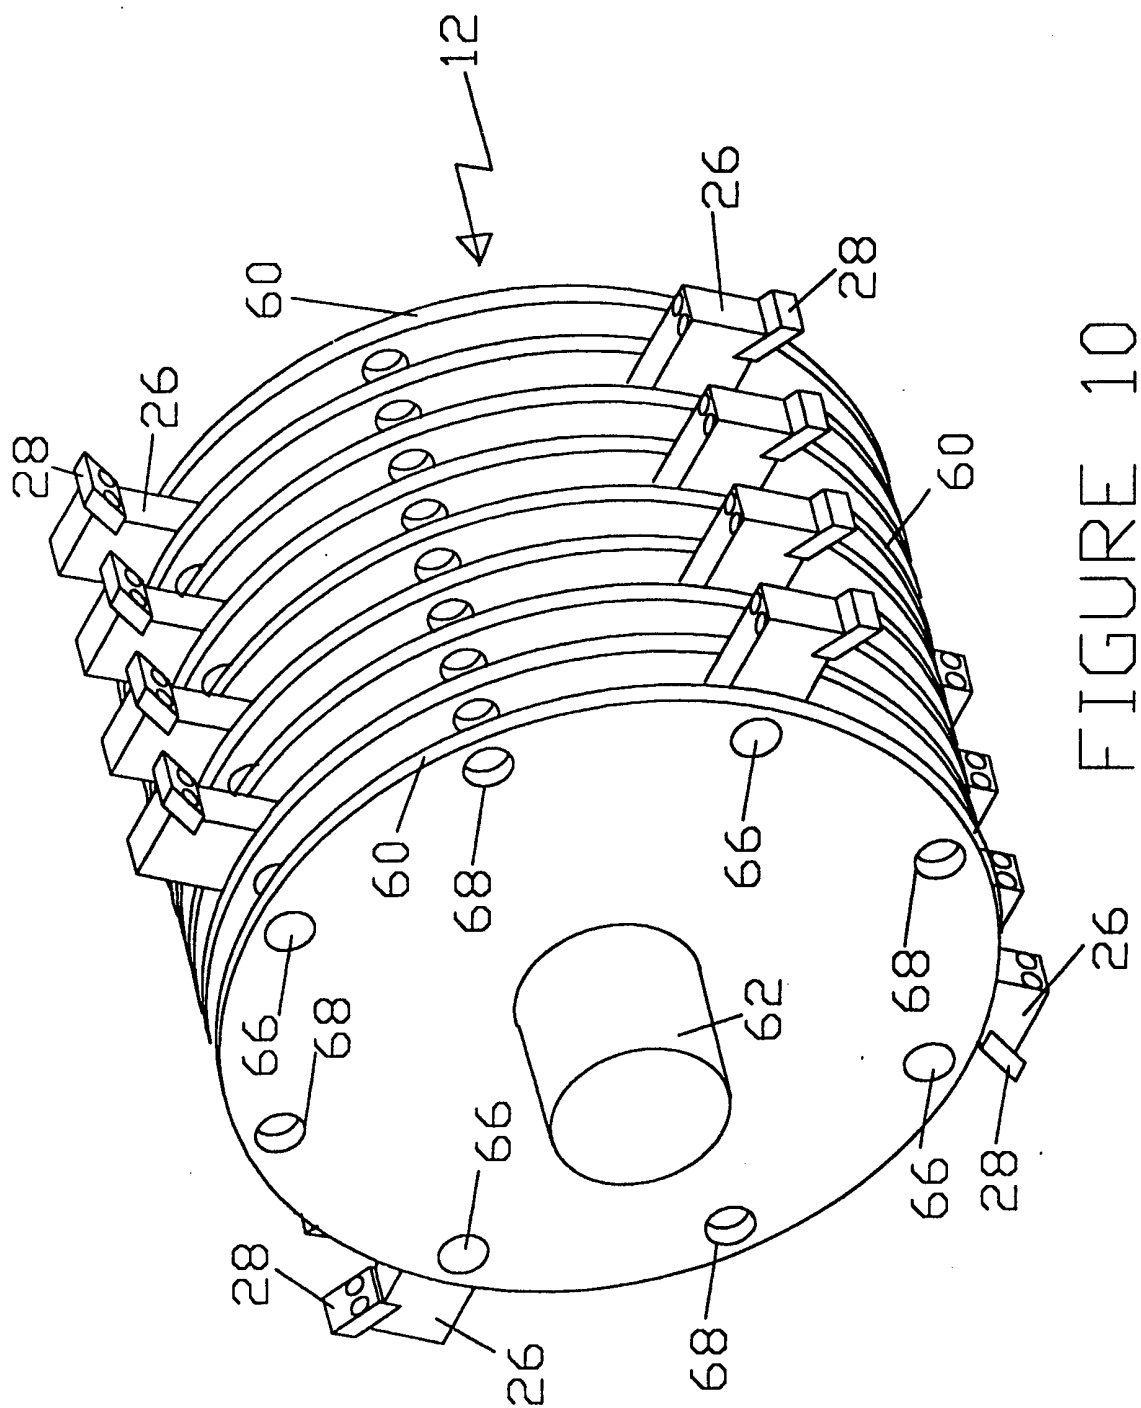


FIGURE 10

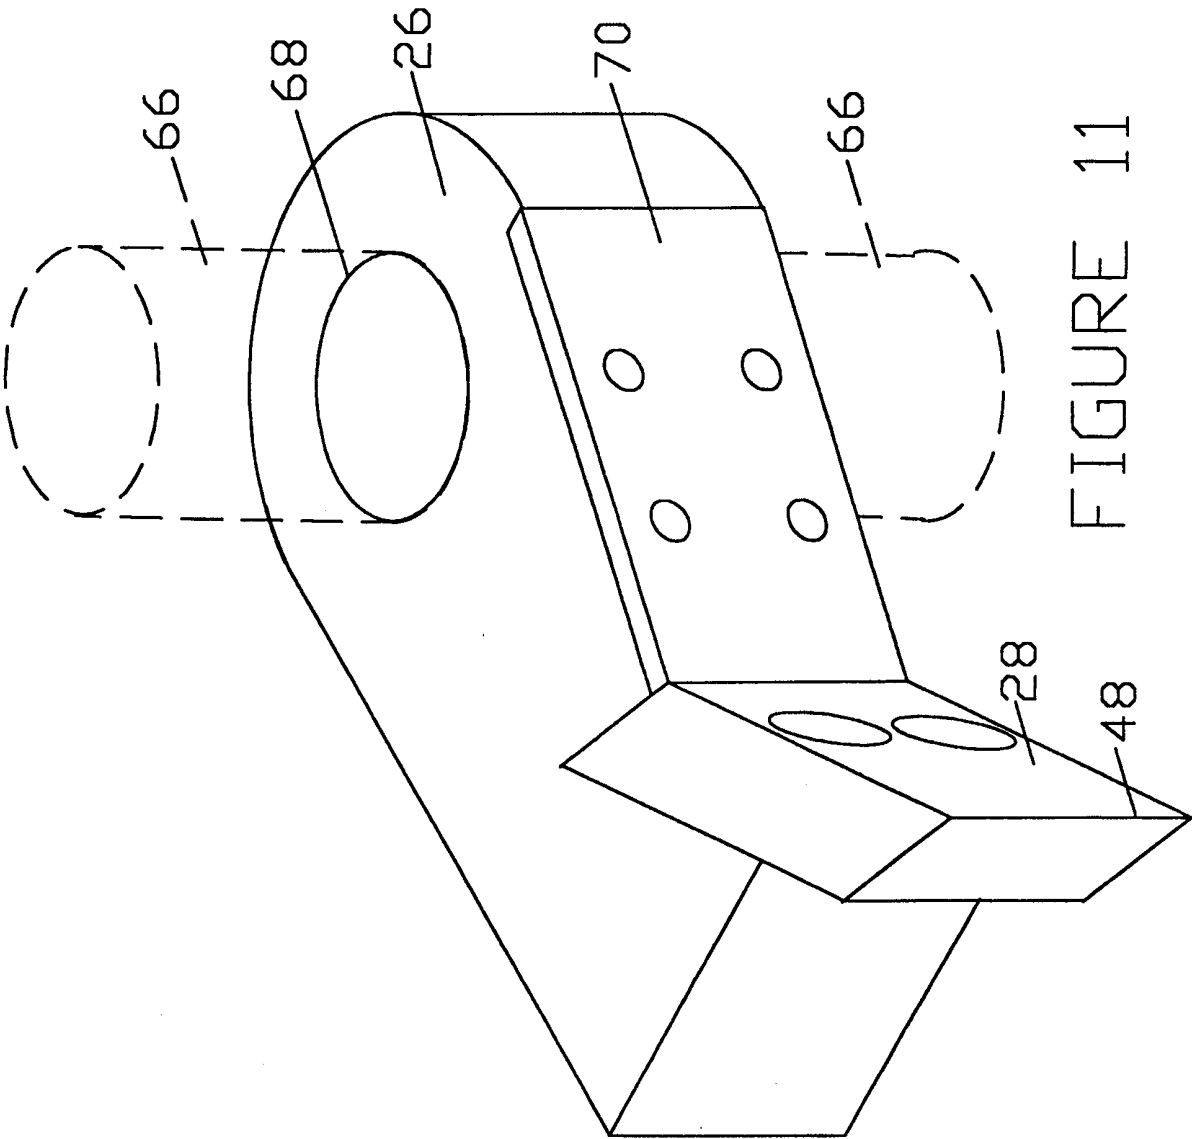


FIGURE 11

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/17445

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :BO2C 13/02, 13/28

US CL :241/189.1, 191, 197, 300

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 241/189.1, 191, 197, 293, 294, 300

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,273,218 A (BURNS) 28 December 1993.	1-9
A	US 5,165,611 A (RAGNARSSON) 24 November 1992.	1-9
A	US 5,044,570 A (MONTGOMERY, SR.) 03 September 1991.	1-9
A	US 4,151,959 A (DEISTER) 01 May 1979.	1-9
A	US 3,840,187 A (BREWER) 08 October 1974.	1-9
A	US 3,642,214 A (BLACKWELL, JR.) 15 February 1972.	1-9
A	US 2,467,865 A (SMITH) 19 April 1949.	1-9

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

15 SEPTEMBER 1999

Date of mailing of the international search report

21 OCT 1999

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

JOHN M. HUSAR

Telephone No. (703) 308-1790

Shella Vasey
Shella Vasey
Patent Specialist
Technology Center 3700