PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :
F24J 3/08, E21B 43/17

A1

(11) International Publication Number: **WO 98/22760**

(43) International Publication Date: 28 May 1998 (28.05.98)

(21) International Application Number: PCT/NO97/00314

(22) International Filing Date: 24 November 1997 (24.11.97)

(30) Priority Data:
964971 22 November 1996 (22.11.96) NO

(71)(72) Applicants and Inventors: MOE, Per, H. [NO/NO]; Amtmann Bangs Gate 7, N–3000 Drammen (NO). RABBEN, Kjell, M. [NO/NO]; Gravarslia 30, N–4300 Sandnes (NO).

(74) Agent: OSLO PATENTKONTOR AS; P.O. Box 7007 M, N–0306 Oslo (NO).

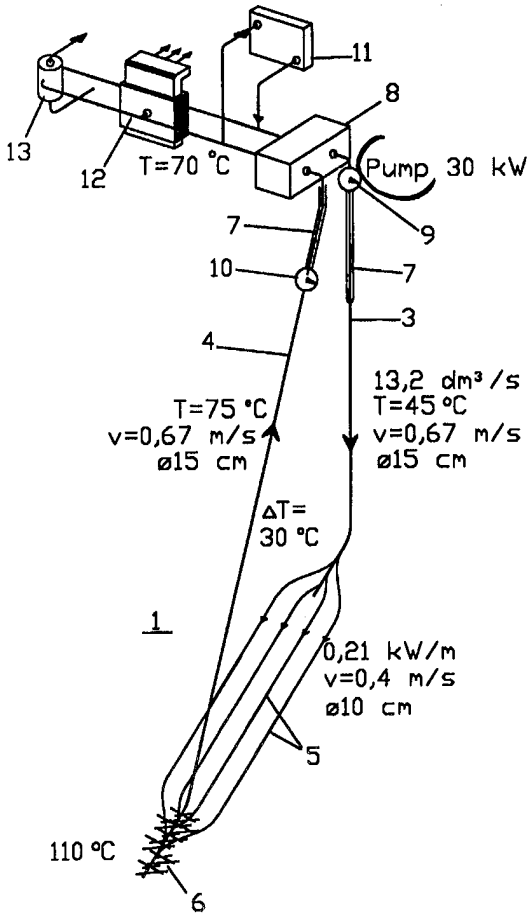
(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: A PLANT FOR EXPLOITING GEOTHERMAL ENERGY

(57) Abstract

A plant for exploiting geothermal energy by circulating water through a geological formation (1) at a substantial depth below the earth surface (2), comprises at least one supply hole (3) leading from the surface (2) down to said formation (1) and at least one return hole (4) for transporting heated water from the formation to the surface. The supply and return holes (3, 4) are interconnected by a plurality of heat absorbing holes (5) which are spaced more than 50 m apart. The heat absorbing holes (5) have a total length of many kilometres but a relatively small diameter in the order of 10 cm. A method for designing the plant involving determining the dimensions of the heat transfer holes (5) is also disclosed.



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	**ES**	Spain	**LS**	Lesotho	**SI**	Slovenia
AM	Armenia	**FI**	Finland	**LT**	Lithuania	**SK**	Slovakia
AT	Austria	**FR**	France	**LU**	Luxembourg	**SN**	Senegal
AU	Australia	**GA**	Gabon	**LV**	Latvia	**SZ**	Swaziland
AZ	Azerbaijan	**GB**	United Kingdom	**MC**	Monaco	**TD**	Chad
BA	Bosnia and Herzegovina	**GE**	Georgia	**MD**	Republic of Moldova	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagascar	**TJ**	Tajikistan
BE	Belgium	**GN**	Guinea	**MK**	The former Yugoslav Republic of Macedonia	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Greece			**TR**	Turkey
BG	Bulgaria	**HU**	Hungary	**ML**	Mali	**TT**	Trinidad and Tobago
BJ	Benin	**IE**	Ireland	**MN**	Mongolia	**UA**	Ukraine
BR	Brazil	**IL**	Israel	**MR**	Mauritania	**UG**	Uganda
BY	Belarus	**IS**	Iceland	**MW**	Malawi	**US**	United States of America
CA	Canada	**IT**	Italy	**MX**	Mexico	**UZ**	Uzbekistan
CF	Central African Republic	**JP**	Japan	**NE**	Niger	**VN**	Viet Nam
CG	Congo	**KE**	Kenya	**NL**	Netherlands	**YU**	Yugoslavia
CH	Switzerland	**KG**	Kyrgyzstan	**NO**	Norway	**ZW**	Zimbabwe
CI	Côte d'Ivoire	**KP**	Democratic People's Republic of Korea	**NZ**	New Zealand		
CM	Cameroon			**PL**	Poland		
CN	China	**KR**	Republic of Korea	**PT**	Portugal		
CU	Cuba	**KZ**	Kazakstan	**RO**	Romania		
CZ	Czech Republic	**LC**	Saint Lucia	**RU**	Russian Federation		
DE	Germany	**LI**	Liechtenstein	**SD**	Sudan		
DK	Denmark	**LK**	Sri Lanka	**SE**	Sweden		
EE	Estonia	**LR**	Liberia	**SG**	Singapore		

A PLANT FOR EXPLOITING GEOTHERMAL ENERGY

The present invention relates to a plant for exploiting geothermal energy by circulating water through a geological formation at least 1000 m below the earth surface, comprising at least one supply hole leading from the surface down to said formation, at least one return hole for the transport of heated water from said formation to the surface, and a heat absorbing arrangement connecting the supply and return holes, said arrangement comprising a heat transfer surface across which heat is transferred from said formation to said water.

An example of such a plant is disclosed in US-A-4.223.729, this publication and other patents mentioned therein being included by reference. US 4.223.729 relates to the exploitation of geothermal energy from hot dry rock (HDR) formations. Due to the low thermal conductivities of such formations, it has been the general belief that thermal energy could not be extracted at a useful rate without a very large heat transfer surface being available in the geological formation.

Up to now, in all known plants in HDR one has tried to obtain such very large heat transfer surface areas by creating fracture zones between the supply and return holes, either by expanding existing fracture zones, by blasting the rock between the holes using explosives, or by establishing a fracture system through the use of hydrostatic pressure and/or heat. Even if such fracture zones could be established, they provide rather unpredictable flow conditions for the water since the water tends to take the path of least resistance and therefore not flow through the narrower fissures of the fracture zone.

Quite contrary to the common belief, the present inventors have surprisingly realized that if a geothermal plant of

the type in question is to have any useful life, the magnitude of the heat transfer surface area is not a critical factor. Instead, the decisive factor is the availability of a large volume of rock in close proximity to the heat transfer surface. Thus, the inventors believe that a geothermal plant, e.g. designed for heating and hot water purposes, should have at least 15.000 m^3 of rock located within 50 m of the heat transfer surface for every kW the plant is to deliver. For smaller plants in unfavourable rock conditions, this volume may be more like 60.000 m^3/kW.

Consequently, in one aspect of the invention, it provides a plant for exploiting geothermal energy of the kind defined in the introductory paragraph above, the plant being characterized in that it has a given nominal power in MW defined as the heat to be absorbed by said arrangement after one year of operation, and in that the volume of said formation located within 50 m of said heat transfer surface, is at least about 10 x 10^6 m^3, preferably at least 20 x 10^6 m^3, multiplied by said nominal power.

These numbers represent a much larger mass of rock than contemplated by any prior art plant with an economically viable output.

The inventors have found that the most efficient way of establishing a sufficiently large volume of rock in close proximity to the heat transfer surface would be to use a drilled hole for said surface. However, such a hole would have to be quite long to penetrate the required volume of rock, and the drilling costs would appear prohibitive since one still had to assume that a substantial heat transfer surface, i.e. large diameter hole, would be necessary to provide the required heat flux from the rock to the water circulating through the hole.

Nevertheless, the inventors set out to calculate the heat transfer from a large cylinder of rock into water flowing in a central hole of the cylinder using the differential equation presented by H.S. Carslaw and J.C. Jaeger in "Conduction of Heat in Solids", Second Edition, Oxford, which is hereby included by reference, a task that to their knowledge nobody had done before. Surprisingly, they found that in the course of 30 - 40 years, the temperature in the rock at a distance of 100 m from the hole would hardly change at all. Even more surprisingly, they found that the available energy could be extracted over this time period with a hole which, from a heat transfer point of view, had a diameter as small as 10 cm and even less. Further analysis showed that increasing the hole diameter to 1 m, which would increase the heat transfer surface tenfold, would less than double the possible heat extraction rate, other conditions being held equal. However, the cross-sectional area of such a hole, and therefore the mass having to be removed to make the hole, would increase 100 times. Consequently, the most economical solution seemed to be to use the smallest hole diameter that could be drilled over long distances, which with the current technology is limited to about 10 cm.

However, the length of such a heat absorbing hole would normally exceed 5 km even for the smallest practical economical plant and, in addition, the supply and return holes could extend for much the same distance. Besides, the pressure drop and consequent pump losses could be too large for very long slender holes. To solve this problem, the inventors have suggested to divide the heat absorbing hole into a plurality of passes connected in parallel and being spaced sufficiently apart to have available a sufficient volume of rock to supply the desired heat through the required lifetime of the plant.

Thus, according to a second aspect, the invention provides

a plant for exploiting geothermal energy by circulating water through a geological formation at least 1000 m below the earth surface, comprising at least one supply hole leading from the surface down to said formation, at least one return hole for the transport of heated water from said formation to the surface, and a heat absorbing arrangement connecting the supply and return holes, the plant being characterized in that said heat absorbing arrangement comprises a plurality of heat absorbing holes connecting the supply and return holes in a parallel flow manner, a substantial part of each heat absorbing hole lying at least 50 m, preferably at least 100 m, from the nearest heat absorbing hole, the total length of the heat absorbing holes preferably exceeding 5000 m.

According to a further aspect of the present invention, a plant for exploiting geothermal energy of the type recited in the classifying part of the above paragraph is characterized in that said heat absorbing arrangement comprises a plurality of heat absorbing holes arranged in parallel flow relationship, said heat absorbing holes extending at an angle downwards from the supply hole to the return hole.

The sloping of the heat absorbing holes makes them simpler to drill, for instance by using a water driven percussion hammer and coiled tubing. The weight on the drill bit can more easily be controlled since the friction of the coiled tubing against the hole wall can substantially support the weight of the tubing. This may considerably increase drill bit life and reduce drilling costs.

Since the rock temperature increases with increasing depth, letting the water flow direction be downward through the sloping holes will permit the temperature increase in the water to follow the temperature increase in the surrounding rock, thus keeping the temperature difference between the rock and water substantially constant. This may be likened

to a countercurrent flow heat transfer arrangement and will allow for a shorter length of heat absorbing hole and an optimum absorption of heat from the rock. A countercurrent flow arrangement would be expected to produce heat from the same rock volume for 2 - 3 times longer than an equivalent co-current heat transfer arrangement.

The magnitude of the sloping angle will depend on several factors, for instance the temperature gradient in the rock, the length of the heat absorbing hole and the water flow rate. Calculating the angle will be well within the capabilities of the skilled person and will therefore not be detailed here. The angle would normally lie between 20° and 50°, preferably it will be about 40°.

Furthermore, in order to maximize the extraction of heat from a given volume of rock, at least substantial parts of the heat absorbing holes extend parallel to each other. More preferably, the heat absorbing holes are arranged in one layer or, if necessary, in a plurality of vertically spaced layers. Providing an array of vertically spaced layers, each layer having a plurality of heat absorbing holes, allows for increasing the capacity of the plant without spreading the holes over a wide area. This is of considerable importance if the volume of earth available for exploitation is not large.

Preferably the distance between adjacent holes in each layer is the same as the distance between adjacent vertically spaced holes, this distance being at least 50 m, preferably at least 100 m. On the other hand, the spacing should be less than about 150 m to limit the physical extent of the plant. A plant in accordance with the invention may have just a single supply hole and a single return hole. However, the plant may have a plurality of supply holes arranged, most preferably circumferentially equispaced, around a common return hole. In one particular

embodiment for example three supply holes may be arranged around a single return hole. It should be noted that the return hole may be a single drilled hole or a cluster of closely spaced, smaller diameter holes, which exhibit substantially the same heat loss characteristics as a larger diameter single hole.

Preferably the upper ends of the supply hole and the return hole may be arranged close to one another, with the holes diverting downwards so as to introduce a substantial spacing between the ends of the heat absorbing holes extending therebetween. Preferably this spacing is at least 500 m. Such a plant arrangement allows for a compact plant construction at the surface but at the same time permitting the necessary heat absorbing hole length to be obtained. Since the heat absorbing holes normally will be drilled starting from the supply hole, the supply hole may advantageously be made generally vertical, thus permitting the heat absorbing holes to reach the greatest possible depth (and temperature) permitted by a given maximum length of the drill string available for drilling the holes. Using a coiled tubing, the practical maximum length may be 6 - 8000 m.

As mentioned earlier, it has previous been considered necessary to have very large heat transfer surfaces to extract thermal energy, as exemplified by the large fracture surface attempted according to US 4.223.729. However, since the inventors very unexpectedly have found that heat can be extracted quite satisfactorily through heat absorbing holes having a diameter in the order of 10 cm or even less, this is in itself believed to be a novel arrangement, so that in accordance with a yet further aspect of the present invention, there is provided a plant of the type disclosed in the introductory paragraph, the plant being characterized by a heat absorbing arrangement comprising a plurality of heat absorbing holes having a diameter of less

than 14 cm, and preferably a nominal diameter of 10 cm.

The invention also provides a method for use in designing a geothermal plant, the method being defined in claim 15.

Further advantageous features of the invention are defined in the dependent claims.

It has come to the attention of the inventors that WO 96/23181 discloses an attempt to utilize abandoned offshore oil wells in extracting thermal energy, which in turn is supposed to be converted to electric power and supplied to a consumer. Here, two 3000 m deep wells are used for the supply and return holes, respectively, the wells being interconnected at their lower ends by a generally horizontally drilled loop which is 1000 m long and has a diameter of 21,5 cm. 700 m^3/h of water are circulated through the loop with an inlet temperature of 20°C. The publication simply assumes that the water will return at a temperature of 90°C, which is the temperature of the formation where the connecting loop is situated, and thus provide 40 MW of thermal power. This assumption is grossly inaccurate. Using their method referred to above, the inventors have found that the return water temperature would be just a few degrees above the supply temperature and that the loop would have to be more than 60 times longer in order to provide 40 MW. This clearly goes to show the usefulness, importance and surprising effect of the present invention.

For better understanding of the invention it will be described with reference to the exemplifying embodiments shown in the appended drawings, wherein:

Figure 1 is a schematic perspective view of a geothermal plant according to the invention,

Figure 2 is a schematic side view of the plant of Figure 1,

Figure 3 is a schematic plan view of a larger geothermal plant according to the invention, and

Figure 4 is a section along the line IV-IV in Figure 3.

In the two embodiments shown in the drawings, the same reference numerals have been used for similar parts.

The plant illustrated in Figures 1 and 2 is for the major parts located in a geological formation 1 below the earth surface 2. The formation has a heat conductivity of 3 W/m°C. The plant comprises a supply hole 3 with a diameter of 15 cm and a return hole 4 with a diameter of 15 cm. The supply and return holes 3, 4 are interconnected by four heat absorbing holes 5, each having a diameter of 10 cm and being approximately 2000 m long. The spacing between these holes 5 may be 100 - 150 m. They have been drilled starting out from the supply hole 3 and terminate at or near the return hole 4. A fracture zone 6 has been established in this area to provide flow communication between the holes 4 and 5 since it would be difficult to hit the return hole 4 directly when drilling the heat absorbing holes 5.

The upper parts of the supply and return holes 3, 4 are provided with a casing 7 extending about 300 m into the ground to seal the holes against the surrounding formation in this area.

On the surface, the supply and return holes 3, 4 are connected to one side of a separating heat exchanger 8, and a circulation pump 9 is provided in the supply line 3. An auxiliary pump 10 is located at the lower end of the casing 7 of the return hole 4, the purpose of which is to reduce the pressure in the return hole should water tend to leak from the holes out into the formation 1.

The other side of the separating heat exchanger 8 is in

flow communication with various heat consuming appliances exemplified by a radiator 11, a warm air heater 12 and a hot water tank 13.

For reasons of expediency, Figures 1 and 2 provide the various temperatures, flow velocities and flow rate and dimensions of the geothermal plant. Furthermore, Figure 1 indicates that the heat absorbing holes 5 absorb 0,21 kW/m. Considering that the total length of the heat absorbing holes is about 8000 m, they extract close to 1,7 MW from the rock. The same number can be had by multiplying the water flow rate and temperature difference between the supply and return holes. However, for a plant as small as this, the heat loss from the return hole 4 to the surroundings will not be negligible so that the net power of the plant would expectedly be about 1,5 MW.

Figure 2 shows that the supply hole 3 is vertical and nearly 3200 m long. The heat absorbing holes 5 extend downwards at an angle α equal to about 45° to the horizontal. Considering that they are 2000 m long and adding some length for the curved end portions, the heat absorbing holes could be drilled using a percussion hammer and coiled tubing about 5000 m long.

In determining the number 0,21 kW/m for the heat absorption holes, the inventors have used the result of their calculations mentioned in the introductory part of this specification. These calculations, including a few approximations of little practical importance, have yielded the following equation:

$$Q \cong K \cdot k^{0,93} \cdot D^{0,2} \, (0,12 + (t+1)^{-0,1}) \, (T_G - T_W) \cdot l \qquad (1)$$

where:

Q is the heat absorbed from the hole in W

K is a constant between 1,7 and 2,0

k is the heat conductivity of the rock in W/m°C, typically about 3 for dense rock

T_G is the initial average temperature of the geological formation along the heat absorbing hole

T_W is the average water temperature flowing through the heat absorbing hole

D is the diameter of the hole in meters

l is the length of the hole in meters

t is the plant operating time in years

Equation (1) assumes a countercurrent type heat exchange and would not be accurate in a co-current situation. The small exponent 0,2 for the diameter D indicates the low influence of the diameter on the heat absorption, while the exponent -0,1 related to the operating time results in the plant losing about 1% of power per year after one year of operation.

The equation can also be used to calculate the heat loss from the return hole 4 with a fair degree of accuracy.

Since equation (1) i.a. shows that the effect of the diameter is quite small and that for economical reasons, the diameter will be held quite low, and since the depletion of the heat in the rock available will proceed quite slowly, equation (1) can be further simplified to the following form:

$$Q \cong C \cdot (T_G - T_W) \cdot k \cdot l \qquad (2)$$

where:

C is a constant between 0,6 and 2,4, the low side

being for smaller plants and low temperature gradients in the rock and the high side for larger plants and high temperature gradients.

The embodiment in Figures 3 and 4 is a geothermal plant designed for a nominal power of 50 MW and 40 MW average power over 240000 hours of use (60 years at 4000 hours per year). The supply water temperature is 40°C and the return temperature 100°C, with a water flow rate of about 200 kg/sec. The geological formation 1 consists of granite having a heat conductivity of 4 W/m°C and the temperature gradient is 30°C/km.

In order to obtain the necessary total length of the heat absorbing holes 5, they have been arranged in three sets 120° apart and feeding into a common return hole 4. Each set of heat absorbing holes 5 consisting of seven layers 14 of heat absorbing holes 5, the layers containing three essentially parallel heat absorbing holes. The spacing between the holes 5 is about 100 m in the horizontal direction and 100 - 150 m in the vertical direction. Each hole has a diameter of 10 cm and is about 2300 m long. It forms an angle α with the horizontal of about 40°. The supply hole 3 feeding each set of heat absorbing holes has a diameter of 25 cm, and the diameter of the return hole 4 is about 40 cm. This means that the water velocity in the return hole 4 is four times the velocity in the heat absorbing holes 5.

For simplicity, the equipment on the earth surface 2 for utilizing the heat produced by the plant has not been shown. If, after many years of operation the heat in the rock around the heat absorbing holes 5 has been depleted, new heat absorbing holes can be drilled in the sectors between the existing sets, or they may be drilled below the existing holes. Drilling new holes below the existing ones will also be the natural way of increasing or renewing the

capacity of the plant shown in Figures 1 and 2.

It will be noted that the heat absorbing holes 5 in the Figure 3 and 4 embodiment has a total length of bout 145 km. Yet it has about the same thermal power as expected from one km heat absorbing hole in WO 96/23181.

It will be understood that the invention is not limited in any way by the exemplifying embodiments described above, but may be varied and modified in a number of ways without departing from the spirit of the invention and scope of the appended claims.

C L A I M S

1. A plant for exploiting geothermal energy by circulating water through a geological formation (1) at least 1000 m below the earth surface (2), comprising at least one supply hole (3) leading from the surface (2) down to said formation (1), at least one return hole (4) for the transport of heated water from said formation to the surface, and a heat absorbing arrangement (5) connecting the supply and return holes (3,4), said arrangement comprising a heat transfer surface across which heat is transferred from said formation to said water,
characterized in that it has a given nominal power in MW defined as the heat to be absorbed by said arrangement after one year of operation, and in that the volume of said formation located within 50 m of said heat transfer surface, is at least about 10×10^6 m^3, preferably at least 20×10^6 m^3, multiplied by said nominal power.

2. A plant for exploiting geothermal energy by circulating water through a geological formation (1) at least 1000 m below the earth surface (2), comprising at least one supply hole (3) leading from the surface down to said formation, at least one return hole (4) for the transport of heated water from said formation to the surface, and a heat absorbing arrangement (5) connecting the supply and return holes, characterized in that said heat absorbing arrangement comprises a plurality of heat absorbing holes (5) connecting the supply and return holes (3,4) in a parallel flow relationship, a substantial part of each heat absorbing hole (5) lying at least 50 m, preferably at least 100 m, from the nearest heat absorbing hole (5), the total length of the heat absorbing holes preferably exceeding 5000 m.

3. A plant for exploiting geothermal energy by circulating water through a geological formation at least 1000 m

below the earth surface (2), comprising at least one supply hole (3) leading from the surface down to said formation, at least one return hole (4) for the transport of heated water from said formation to the surface, and a heat absorbing arrangement (5) connecting the supply and return holes, characterized in that said heat absorbing arrangement comprises a plurality of heat absorbing holes (5) arranged in parallel flow relationship, said heat absorbing holes (5) extending at an angle (α) downwards from the supply hole (3) to the return hole (4).

4. A plant according to claim 3, characterized in that said angle (α) is between about 20° and 50°, preferably about 40°.

5. A plant according to any one of claims 2 - 4, characterized in that at least a substantial part of the heat absorbing holes (5) extend parallel to each other.

6. A plant according to any one of claims 2 - 5, characterized in that the heat absorbing holes (5) are arranged in one layer (14) or in more than one vertically spaced layers (14).

7. A plant according to claim 6, characterized in that the distance between adjacent holes (5) in each layer (14) is about the same as the distance between adjacent vertical holes (5).

8. A plant according to claim 6 or 7, characterized in that the said distance between said layers (14) is less than about 150 m, preferably about 100 m.

9. A plant according to any one of claims 2 - 8, characterized in that a plurality of supply holes (3) are arranged around a common return hole (4).

10. A plant according to any preceding claim, characterized in that the upper ends of said supply hole (3) and said return hole (4) are arranged closely to one another, one of said holes extending generally vertically and the other deviating from the vertical, so as to introduce a substantial spacing between the ends of the heat absorbing holes.

11. A plant according to claim 10 wherein the said spacing is at least 500 m and preferably more than 1 km.

12. A plant according to any one of claims 2 - 11, characterized in that the heat absorbing holes (5) have a diameter of less than 18 cm, preferably less than 12 cm.

13. A plant for exploiting geothermal energy by circulating water through a geological formation (1) at least 1000 m below the earth surface (2), comprising at least one supply hole (3) leading from the surface (2) down to said formation (1), at least one return hole (4) for the transport of heated water from said formation (1) to the surface (2), characterized in that a plurality of heat absorbing holes (5) connect the supply and return holes (3,4), the diameter of said holes being less than 14 cm.

14. A plant according to claim 12 or 13 wherein the holes (5) are of a nominal 4" (10cm) diameter.

15. A method for use in constructing a plant for exploiting geothermal energy by circulating water through a geological formation (1) at least 1000 m below the earth surface (2), said plant comprising at least one supply hole (3) leading from the surface (2) down to said formation (1), at least one return hole (4) for the transport of heated water from said formation (1) to the surface (2), and at least one heat absorbing hole (5) connecting the supply and return holes (3,4), characterized by forming

said heat absorbing hole (5) as a plurality of heat absorbing holes (5) arranged in a parallel flow relationship.

16. A method according to claim 15, characterized by dimensioning said heat absorbing holes (5) in accordance with a solution of the differential equation for heat transfer from a cylinder of homogeneous rock material into water flowing through a central hole in said cylinder and using said solution in dimensioning said heat absorbing holes (5).

17. A method according to claim 16, characterized by using the formula

$$Q \cong K \cdot k^{0,93} \cdot D^{0,2} \, (0,12 + (t + 1)^{-0,1}) \, (T_G - T_W) \cdot l \qquad (1)$$

as an approximation to said solution, the factors of the formula (1) having been defined elsewhere in this specification.

18. A method according to claim 16, characterized by using the formula

$$Q \cong C \cdot (T_G - T_W) \cdot k \cdot l \qquad (2)$$

as an approximation to said solution, the factors of the formula (2) having been defined elsewhere in this specification.

19. A method according to claim 15, 16, 17 or 18, characterized in that at least the major parts of the heat absorbing holes (5) are drilled by using a percussion hammer and a coiled tubing drill string.

20. A method for use in constructing a plant for exploiting geothermal energy by circulating water through a

geological formation (1) at least 1000 m below the earth surface (2), said plant comprising at least one supply hole (3) leading from the surface (2) down to said formation (1), at least one return hole (4) for the transport of heated water from said formation (1) to the surface (2), and at least one heat absorbing hole (5) connecting the supply and return holes (3,4), characterized by forming said heat absorbing hole (5) as a plurality of heat absorbing holes (5) arranged in a parallel flow relationship, said heat absorbing holes (5) being dimensioned in accordance with the formula

$$Q \cong K \cdot k^{0,93} \cdot D^{0,2} (0,12 + (t + 1)^{-0,1}) (T_G - T_W) \cdot l \qquad (1)$$

the factors of the formula (1) having been defined elsewhere in this specification.

21. A method for use in constructing a plant for exploiting geothermal energy by circulating water through a geological formation (1) at least 1000 m below the earth surface (2), said plant comprising at least one supply hole (3) leading from the surface (2) down to said formation (1), at least one return hole (4) for the transport of heated water from said formation (1) to the surface (2), and at least one heat absorbing hole (5) connecting the supply and return holes (3,4), characterized by forming said heat absorbing hole (5) as a plurality of heat absorbing holes (5) arranged in a parallel flow relationship, said heat absorbing holes (5) being dimensioned in accordance with the formula

$$Q \cong C \cdot (T_G - T_W) \cdot k \cdot l \qquad (2)$$

the factors of the formula (2) having been defined elsewhere in this specification.

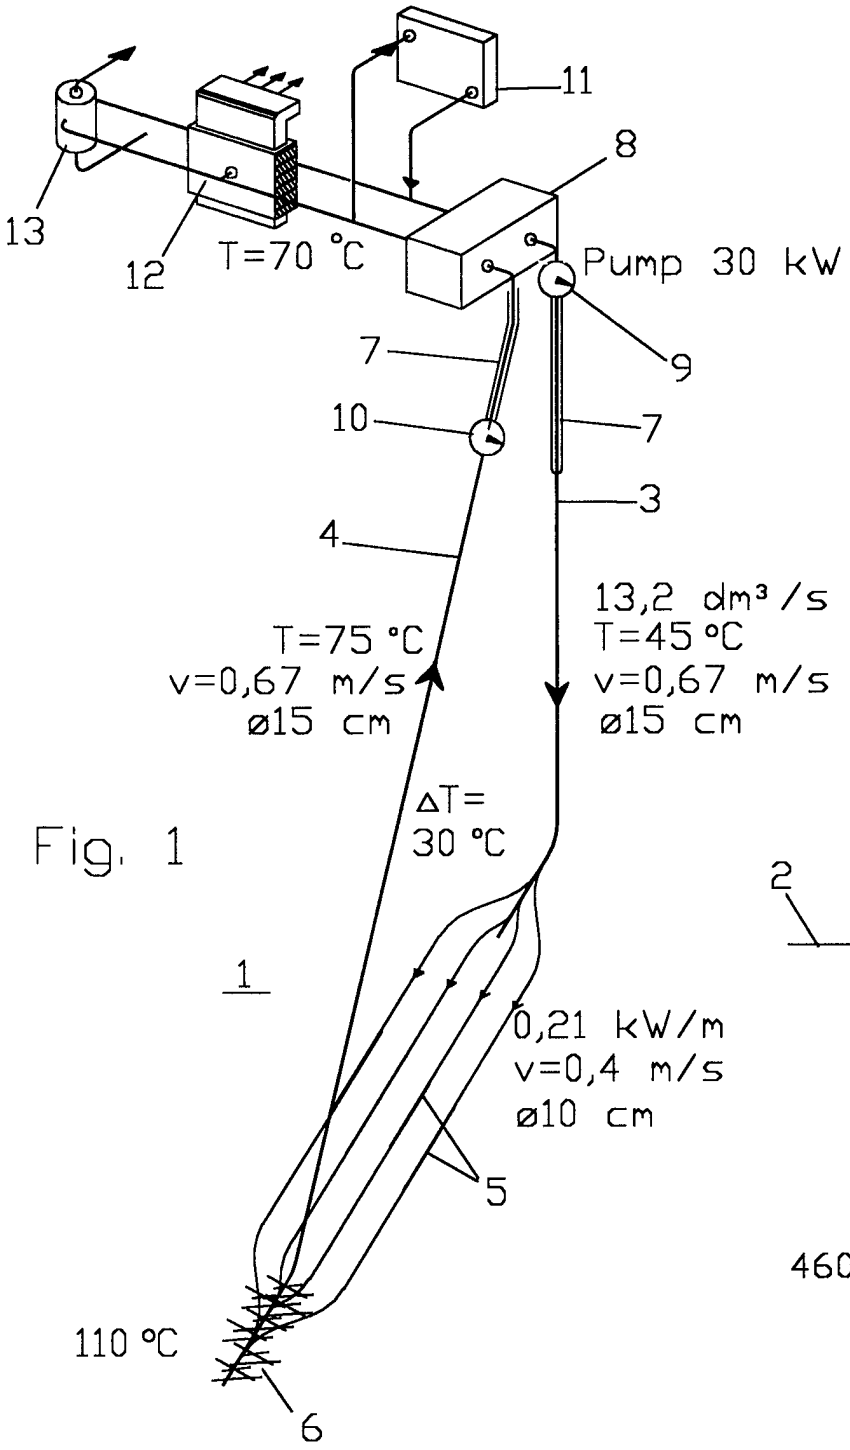

11
8
13
12
T=70 °C
Pump 30 kW
7
9
10
7
3
4
13,2 dm³/s
T=45 °C
v=0,67 m/s
ø15 cm
T=75 °C
v=0,67 m/s
ø15 cm
ΔT=
30 °C
1
0,21 kW/m
v=0,4 m/s
ø10 cm
5
110 °C
6

Fig. 1

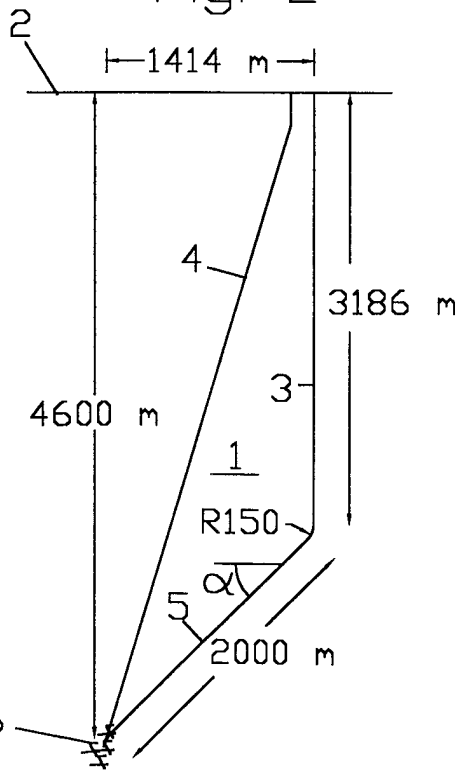

2
1414 m
4
3186 m
3
4600 m
1
R150
α
5
2000 m
6

Fig. 2

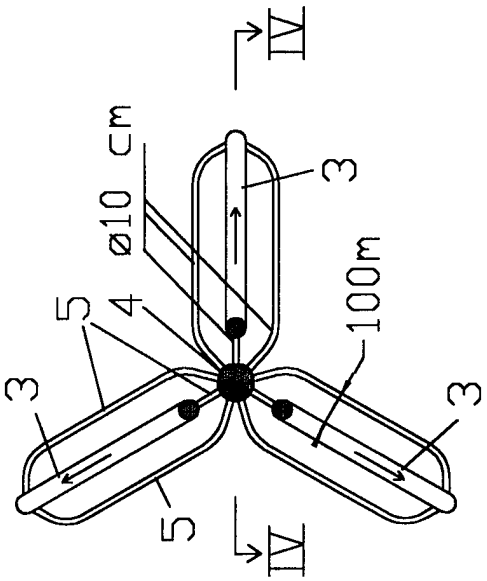

IV
ø10 cm
3
5
4
100m
3
3
5
IV

Fig. 3

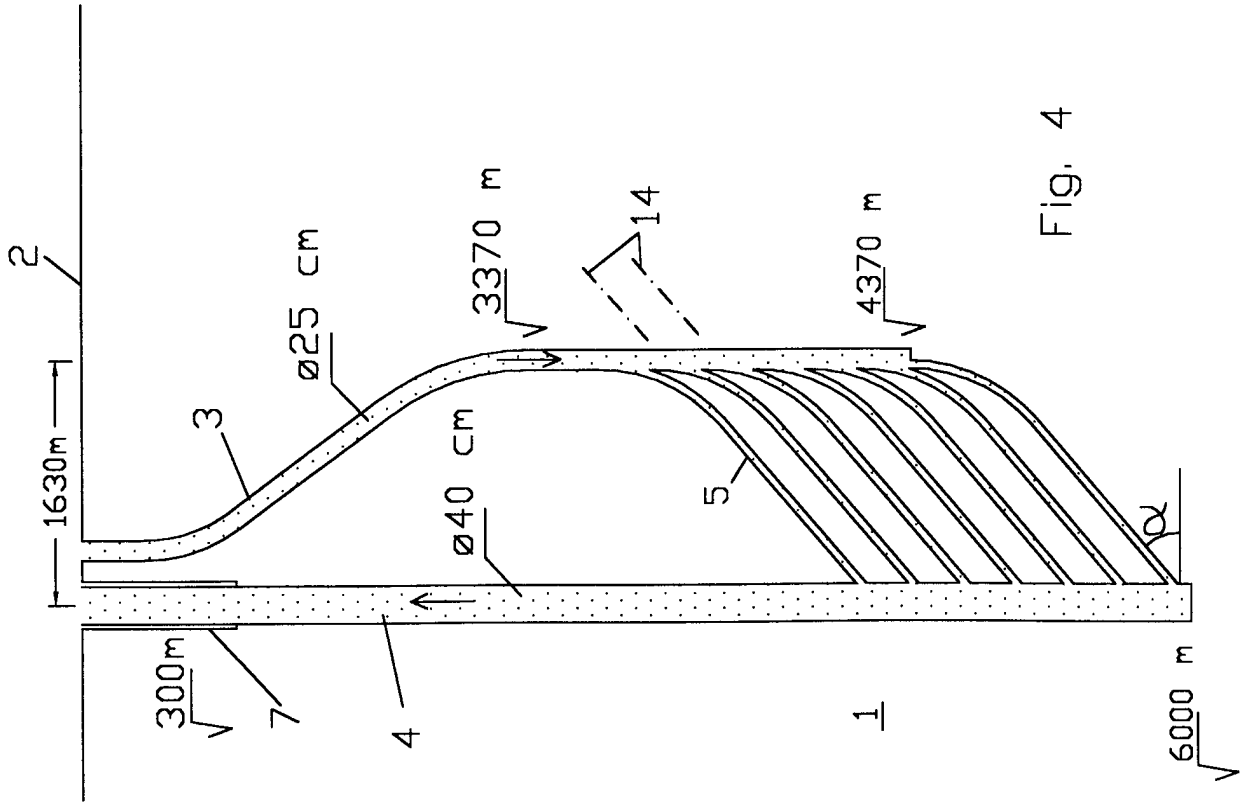

2
1630m
3
ø25 cm
3370 m
14
4370 m
ø40 cm
5
α
300m
7
4
1
6000 m

Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/NO 97/00314

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: F24J 3/08, E21B 43/17
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: F24J, E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3863709 A (FITCH), 4 February 1975 (04.02.75), Fig. 4 and adherent text	1,2,15,20,21
	--	
X	FR 2318396 A1 (KERUZORE FRANCOIS), 11 February 1977 (11.02.77)	1
Y		13
	--	
X	US 4223729 A (FOSTER), 23 Sept 1980 (23.09.80), column 3, line 10 - column 7, line 15, figure 1	1-3,15,20
Y		13
	--	

[X] Further documents are listed in the continuation of Box C. [X] See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" erlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
6 March 1998	09 -03- 1998
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Inger Löfving Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/NO 97/00314

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 4229185 A1 (KIESLINGER, HANS), 3 March 1994 (03.03.94) --	1-21
A	WO 9103690 A1 (TECHNOLOGIE TRANSFER ESTABLISHMENT), 21 March 1991 (21.03.91) --	1-21
A	WO 9623181 A1 (ELI A/S), 1 August 1996 (01.08.96) --	1-21
A	Derwent's abstract, No 97-144168/13, week 9713, ABSTRACT OF RU, 2064141 (FELDMAN B YA), 20 July 1996 (20.07.96) --	1-21

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/NO 97/00314

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3863709 A	04/02/75	NONE	
FR 2318396 A1	11/02/77	NONE	
US 4223729 A	23/09/80	BE 883014 A	18/08/80
		BR 8000198 A	23/09/80
		DE 3000836 A	24/07/80
		FR 2470240 A	29/05/81
		GB 2041041 A	03/09/80
DE 4229185 A1	03/03/94	NONE	
WO 9103690 A1	21/03/91	AT 139329 T	15/06/96
		AU 648749 B	05/05/94
		AU 6285790 A	08/04/91
		CA 2041637 A	12/03/91
		DE 3930232 A	14/03/91
		DE 59010377 D	00/00/00
		EP 0444170 A,B	04/09/91
		NO 179055 B,C	15/04/96
		OA 9496 A	15/11/92
		RU 2068530 C	27/10/96
		US 5253926 A	19/10/93
WO 9623181 A1	01/08/96	AU 4635396 A	14/08/96
		CA 2211366 A	01/08/96
		EP 0804709 A	05/11/97
		NO 950306 A	29/07/96