



(22) Date de dépôt/Filing Date: 2002/07/08

(41) Mise à la disp. pub./Open to Public Insp.: 2003/01/09

(45) Date de délivrance/Issue Date: 2007/01/09

(30) Priorité/Priority: 2001/07/09 (US09/902,083)

(51) Cl.Int./Int.Cl. *B29C 49/36* (2006.01),
B29C 49/24 (2006.01), *B29C 49/04* (2006.01)


(72) Inventeurs/Inventors:
DUNLAP, RICHARD L., US;
SANFORD, EDWARD L., US;
AMIRAUULT, DAVID M., US

(73) Propriétaire/Owner:
PLASTIPAK PACKAGING, INC., US

(74) Agent: SMART & BIGGAR

(54) Titre : SYSTEME ROTATIF DE MOULAGE PAR SOUFFLAGE DE MATIERES PLASTIQUES PERMETTANT
L'ETIQUETAGE DANS LE MOULE

(54) Title: ROTARY PLASTIC BLOW MOLDING SYSTEM HAVING IN-MOLD LABELING

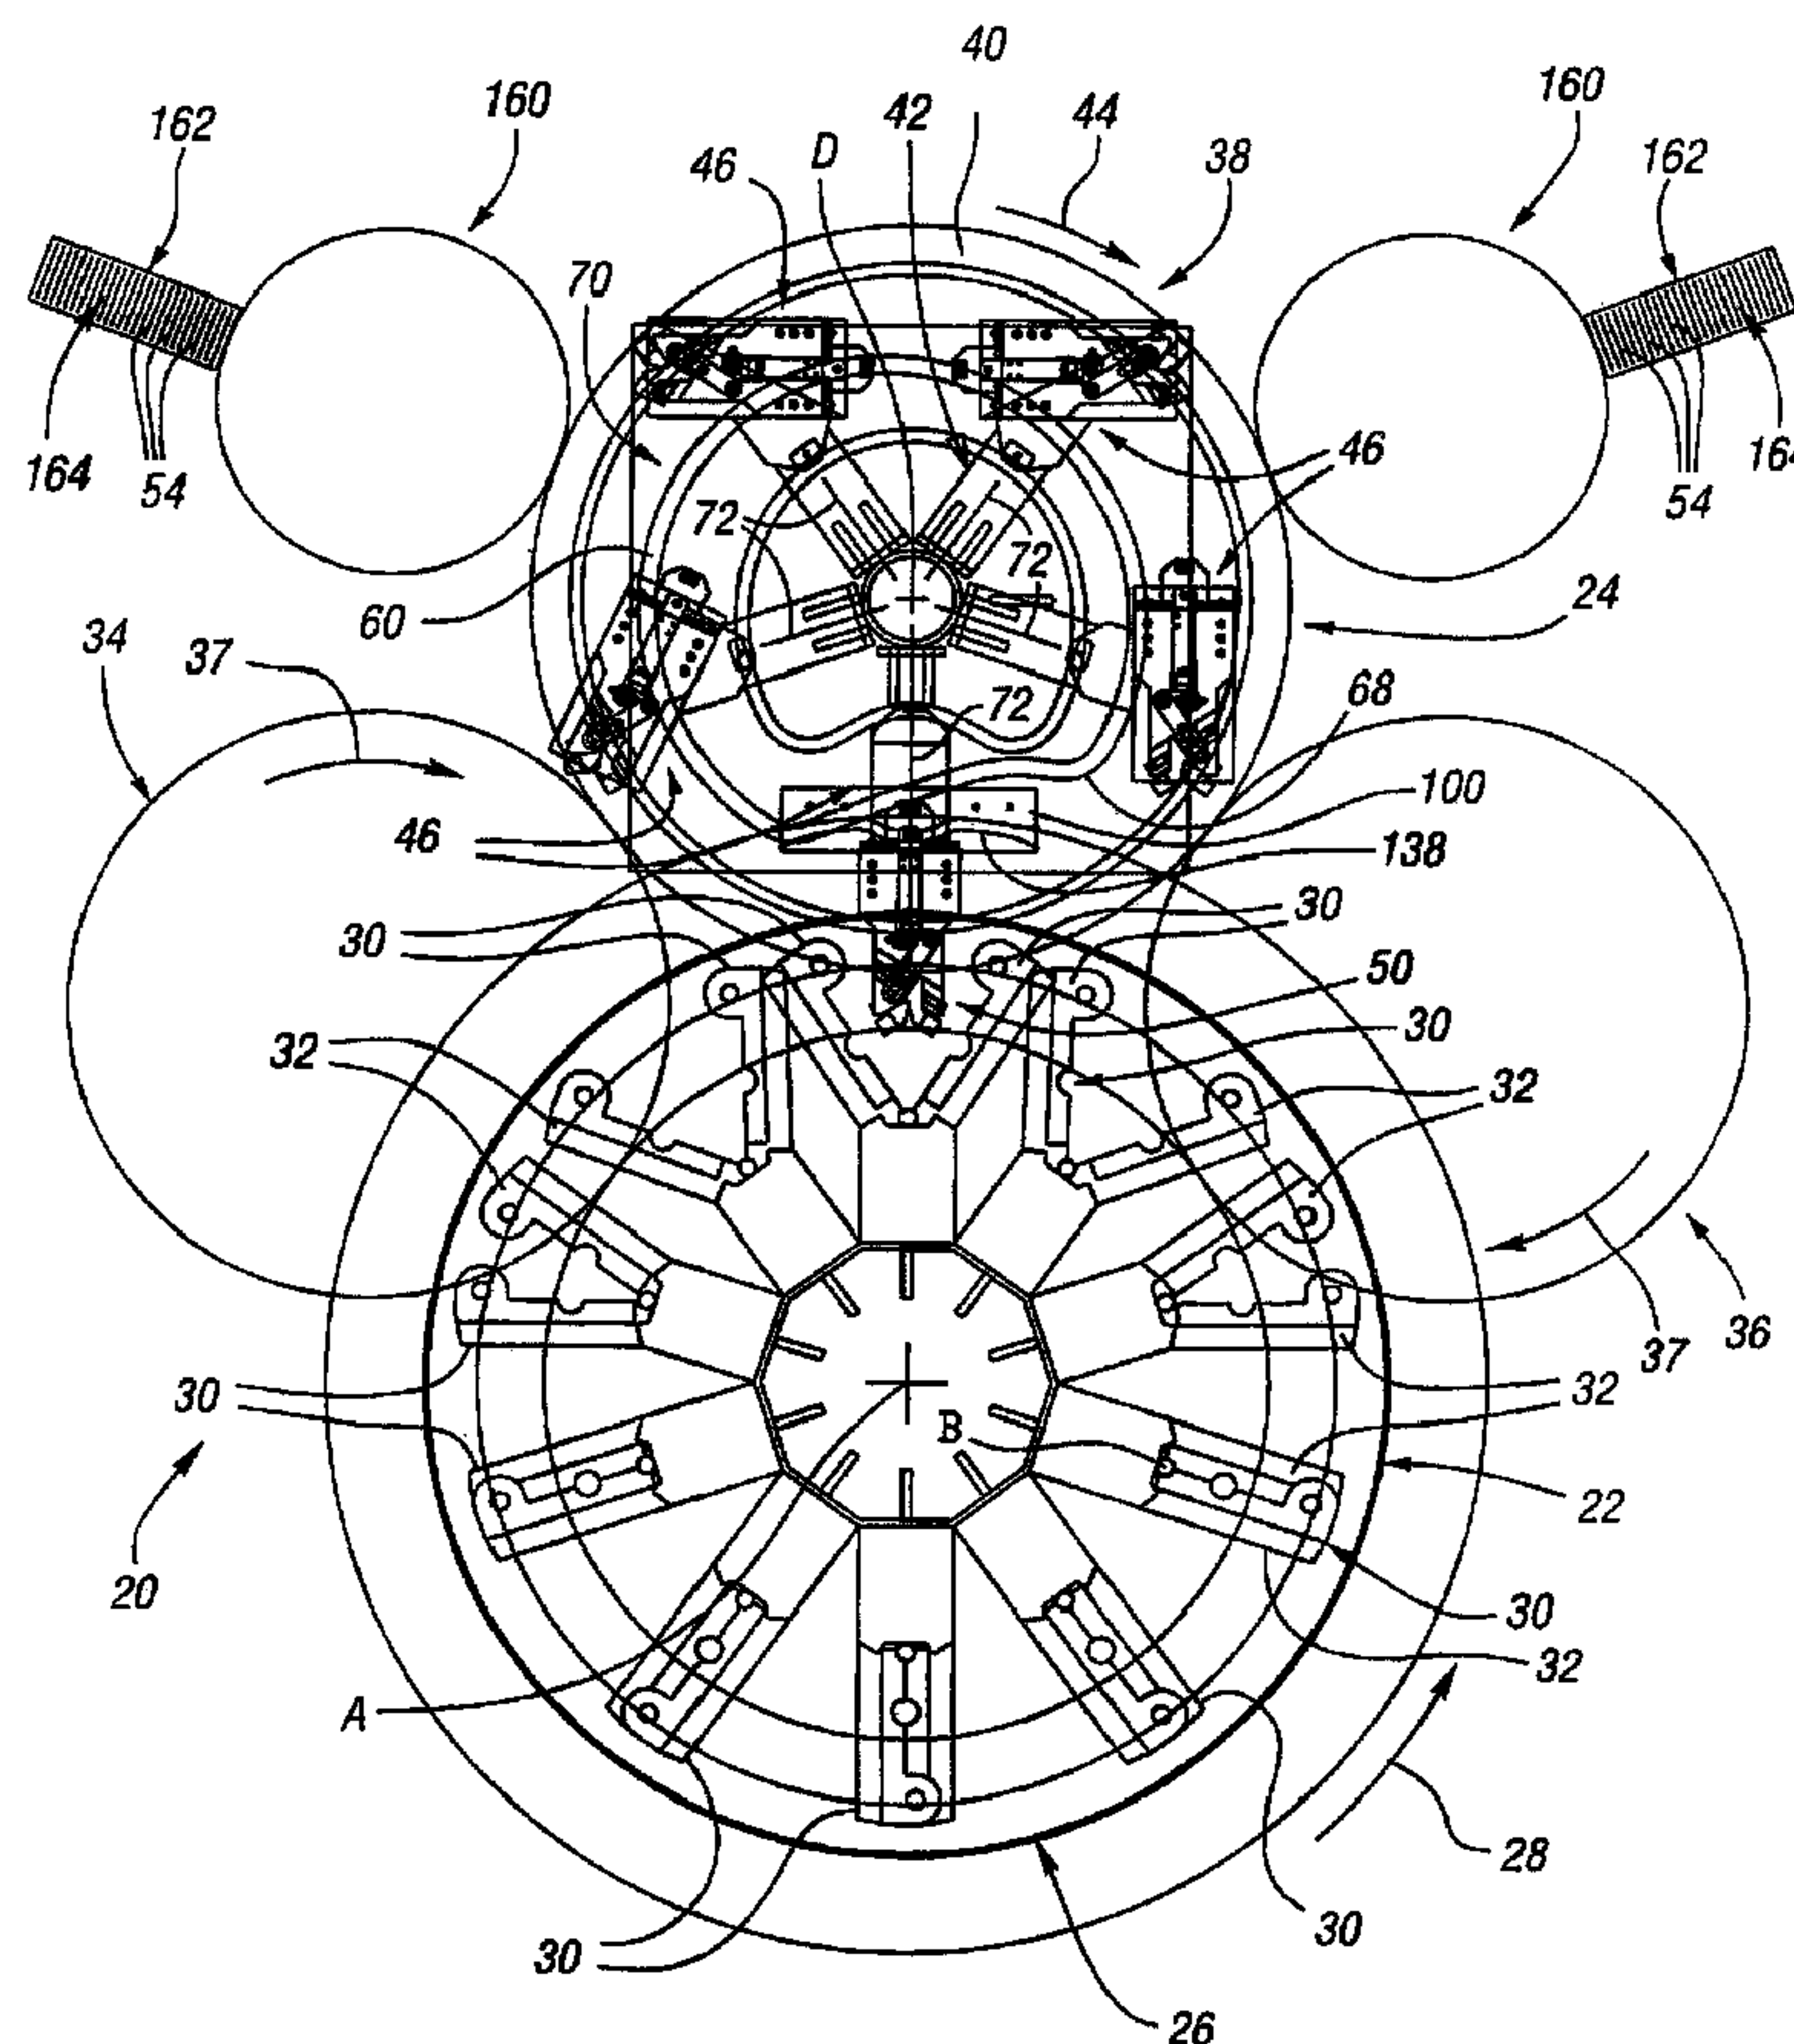

(57) Abrégé/Abstract:

A plastic blow molding system (20) and a method for blow molding utilize an in-mold labeler (24) and a method for in-mold labeling a rotary plastic blow molding machine (22) includes a dispensing assembly (38) having a dispensing wheel (42) that is rotatably



(57) **Abrégé(suite)/Abstract(continued):**

mounted on a base (40) and supports a plurality of dispensing head assemblies (46) each of which includes a support (48) and a dispensing head (50). An actuator (56) including first and second cam mechanisms (58, 64) moves the support (48) of each dispensing head assembly (46) along the rotary path of movement of an adjacent open mold (30) of the blow molding machine and angularly positions the support in alignment with a moving mold parting plane of the adjacent open mold in a manner that permits high speed operation of the in-mold labeling. Label transfer apparatus (160) provides high speed labeling of the dispensing assembly.

ABSTRACT OF THE DISCLOSURE

A plastic blow molding system (20) and a method for blow molding utilize an in-mold labeler (24) and a method for in-mold labeling a rotary plastic blow molding machine (22) includes a dispensing assembly (38) having a dispensing
5 wheel (42) that is rotatably mounted on a base (40) and supports a plurality of dispensing head assemblies (46) each of which includes a support (48) and a dispensing head (50). An actuator (56) including first and second cam mechanisms (58, 64) moves the support (48) of each dispensing head assembly (46) along the rotary path of movement of an adjacent open mold (30) of the blow molding
10 machine and angularly positions the support in alignment with a moving mold parting plane of the adjacent open mold in a manner that permits high speed operation of the in-mold labeling. Label transfer apparatus (160) provides high speed labeling of the dispensing assembly.

ROTARY PLASTIC BLOW MOLDING SYSTEM HAVING IN-MOLD LABELING

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

This invention relates to a system and a method for rotary plastic blow molding with in-mold labeling.

2. Background Art

10 In-mold labeling has previously been performed with rotary wheel type blow molding machines as disclosed by United States Patents: 4,479,770 Slat et al.; 4,639,207 Slat et al; 4,680,000 Nowicki et al.; 4,834,641 Keyser; 4,909,723 Slat et al.; 4,973,241 Keyser; 5,044,922 Plenzler et al.; 5,104,306 Gordon et al.; and 5,266,149 Collette et al.

15 Such in-mold labeling is performed by inserting a label within an open mold as the open mold is moved with other molds on a rotary wheel prior to the mold closing about an extruded plastic tube or about a hot plastic preform, whereupon blow molding of the extruded plastic tube or the preform bonds the label within the mold to the plastic and provides a smooth transition between the label and the adjacent blow molded surface. In addition to strengthening the blow molded
20 container that results from this process, the more conventional post blow molding label application operation is eliminated.

In certain rotary blow molding machines, the production is very high, e.g., thousands of containers per hour and some as high as more than fifty thousand containers per hour with injection stretch blow molding machines that blow mold
25 preforms as opposed to the extruded parison type of blow molding. Such high production rates make it difficult to place a label within the mold prior to the blow

71087-685

molding since there is little time to do so during the fraction of a second available to deposit the label within the mold.

Also, rapid in-mold labeling is made more difficult
5 because label magazines in which the labels are stored normally are not capable of delivering the labels at a greater rate than about 60 to 70 labels per minute. Label stacks in which the labels are stored prior to being removed by vacuum pickup dispensing heads do not allow the labels to
10 move away from the stack at a greater rate because air cannot normally move behind the labels fast enough to permit removal of more than 60 to 70 or so labels per minute.

Other prior art label systems noted during an investigation conducted in connection with the invention
15 include United States Patents 3,575,409 Calvert and 4,293,365 Geyser et al.

SUMMARY OF THE INVENTION

An object of the present invention is to provide an improved system for rotary plastic blow molding with in-mold
20 labeling.

According to one aspect of the invention there is provided a system for plastic blow molding comprising: (a) a plastic blow molding machine including: a rotary mold wheel that supports a plurality of molds for rotary movement
25 along a rotary path about a mold wheel axis and for concomitant pivotal movement of mold sections of the molds between open and closed positions about associated mold axes that extend parallel with the mold wheel axis and with the mold sections opening in an outward direction from the mold
30 wheel axis and symmetrically about associated mold parting planes that extend from the mold wheel axis through the

71087-685

associated mold axes; (b) an in-mold labeler including: a dispensing assembly having a base and a dispensing wheel that is rotatably mounted on the base about a dispensing wheel axis that extends parallel to the mold wheel axis, the
5 dispensing wheel including a plurality of dispensing head assemblies each of which includes a support and a dispensing head mounted on the support for movement along a dispensing head axis of the support between pick and place positions, and each dispensing head including at least one label
10 carrier for receiving a label in the pick position thereof and for transferring the label in the place position thereof to an adjacent open mold of the blow molding machine; an actuator for moving the support of each dispensing head assembly during a label depositing operation along the
15 rotary path of the adjacent open mold about the mold wheel axis and for angularly positioning the support of the dispensing head assembly about a support axis such that the dispensing head axis moves in alignment with the moving mold parting plane of the adjacent open mold as the dispensing
20 head is moved on the support during the label depositing operation from the pick position to the place position to deposit the label within the adjacent open mold in a manner that permits high speed operation of the in-mold labeling; and (c) label transfer apparatus for transferring labels
25 from a label magazine to the in-mold labeler, the label transfer apparatus including: a transfer head that is movable adjacent the label magazine which stores a stack of labels with an exposed end from which the labels are sequentially dispensed; the transfer head including a vacuum
30 opening through which a vacuum is supplied; and an actuator for moving the transfer head with a rolling motion to engage the vacuum opening with the label at the exposed end of the label magazine and to initially pull an extremity of that label away from the label stack and thereby permit air to

71087-685

move behind the label, to subsequently pull an intermediate portion of the label away from the label stack and thereby permit more air to move behind the label, and to finally pull an opposite extremity of the label away from the label stack in a manner that permits high speed labeling as the label is subsequently transferred from the transfer head to the in-mold labeler for the in-mold labeling of the plastic blow molding machine.

According to another aspect the invention provides a system for plastic blow molding comprising: (a) a plastic blow molding machine having a rotary mold wheel that supports a plurality of molds for rotary movement along a rotary path about a mold wheel axis and for concomitant pivotal movement of mold sections of the molds between open and closed positions about associated mold axes that extend parallel with the mold wheel axis and with the mold sections opening in an outward direction from the mold wheel axis and symmetrically about associated mold parting planes that extend from the mold wheel axis through the associated mold axes; (b) an in-mold labeler including: a dispensing assembly having a base and a dispensing wheel that is rotatably mounted on the base about a dispensing wheel axis that extends parallel to the mold wheel axis, the dispensing wheel including a plurality of dispensing head assemblies each of which includes a support and a dispensing head mounted on the support for movement along a dispensing head axis of the support between pick and place positions, and each dispensing head including a pair of label carriers for receiving labels in the pick position thereof and for transferring the labels in the place position thereof to an adjacent open mold of the blow molding machine; and an actuator including a first cam mechanism that moves the support of each dispensing head assembly during a label

71087-685

depositing operation along the rotary path of the adjacent open mold about the mold wheel axis, and the actuator including a second cam mechanism for angularly positioning the support of the dispensing head assembly about a support axis such that the dispensing head axis moves in alignment with the moving mold parting plane of the adjacent open mold as the dispensing head is moved on the support during the label depositing operation from the pick position to the place position to deposit the labels within the adjacent open mold in a manner that permits high speed operation of the in-mold labeling; and (c) label transfer apparatus for transferring labels from a label magazine to the in-mold labeler, the label transfer apparatus including: a rotary table; a plurality of transfer heads each of which is mounted on the rotary table for movement thereof adjacent the label magazine which stores a stack of labels with an exposed end from which the labels are sequentially dispensed; each transfer head including a pair of vacuum openings through which a vacuum is supplied; and an actuator for moving the transfer heads relative to the table with a rolling motion to engage one of the vacuum openings with the label at the exposed end of the label magazine and to initially pull an extremity of that label away from the label stack and thereby permit air to move behind the label, to subsequently pull an intermediate portion of the label away from the label stack and thereby permit more air to move behind the label, and to finally engage the other vacuum opening with the label to pull an opposite extremity of the label away from the label stack in a manner that permits high speed labeling as the labels are subsequently transferred to the in-mold labeler for the in-mold labeling of the plastic blow molding machine.

71087-685

According to another aspect the invention provides a system for plastic blow molding, comprising: (a) a plastic blow molding machine having a rotary mold wheel that supports a plurality of molds for rotary movement along a rotary path about a mold wheel axis and for concomitant pivotal movement of mold sections of the molds between open and closed positions about associated mold axes that extend parallel with the mold wheel axis and with the mold sections opening in an outward direction from the mold wheel axis and symmetrically about associated mold parting planes that extend from the mold wheel axis through the associated mold axes; (b) an in-mold labeler including: a dispensing assembly having a base and a dispensing wheel that is rotatably mounted on the base about a dispensing wheel axis that extends parallel to the mold wheel axis, the dispensing wheel including a plurality of tracks that extend radially from the dispensing wheel axis, the dispensing wheel also including a plurality of dispensing head assemblies each of which has a support, the supports of the dispensing head assemblies being respectively mounted by the tracks for radially movement with respect to the dispensing wheel axis, each dispensing head assembly including a dispensing head mounted on its support for movement along a dispensing head axis of the support between pick and place positions, each dispensing head including a pair of label carriers for receiving labels in the pick position thereof and for transferring the labels in the place position thereof to an adjacent open mold of the blow molding machine, and each dispensing head assembly including a pivotal mount that mounts its support for angular movement about a support axis with respect to the dispensing wheel; an actuator including a first cam mechanism that moves the support of each dispensing head assembly during a label depositing operation along the rotary path of the adjacent open mold about the

71087-685

mold wheel axis, and the actuator including a second cam mechanism for angularly positioning the support of the dispensing head assembly about the support axis of its pivotal mount such that the dispensing head axis moves in alignment with the moving mold parting plane of the adjacent open mold as the dispensing head is moved on the support during the label depositing operation from the pick position to the place position to deposit the labels within the adjacent open mold in a manner that permits high speed operation of the in-mold labeling; and a third cam mechanism including an operator for moving each dispensing head with its label carriers thereon between the pick position and the place position where the label carrier are positioned within the adjacent open mold to transfer the labels carried thereby to the mold; and (c) label transfer apparatus for transferring labels from a label magazine to the in-mold labeler, the label transfer apparatus including: a rotary table; a plurality of transfer heads each of which is mounted on the rotary table for movement thereof adjacent the label magazine which stores a stack of labels with an exposed end from which the labels are sequentially dispensed; each transfer head including a pair of vacuum openings through which a vacuum is supplied; and an actuator including a rotary actuator member for moving the transfer heads relative to the table with a rolling motion to engage one of the vacuum openings with the label at the exposed end of the label magazine and to initially pull an extremity of that label away from the label stack and thereby permit air to move behind the label, to subsequently pull an intermediate portion of the label away from the label stack and thereby permit more air to move behind the label, and to finally engage the other vacuum opening with the label to pull an opposite extremity of the label away from the label stack in a manner that permits high speed labeling as the

71087-685

label is subsequently transferred from the transfer head to the in-mold labeler for the in-mold labeling of the plastic blow molding machine.

According to another aspect of the present invention there is provided a method for blow molding comprising: rotating a mold wheel of a plastic blow molding machine with the mold wheel supporting a plurality of molds for rotary movement along a rotary path about a mold wheel axis and for concomitant pivotal movement of mold sections of the molds between open and closed positions about associated mold axes that extend parallel with the mold wheel axis and with the mold sections opening in an outward direction from the mold wheel axis and symmetrically about associated mold parting planes that extend from the mold wheel axis through the associated mold axes; rotating a dispensing wheel of a dispensing assembly of an in-mold labeler about a dispensing wheel axis that extends parallel to the mold wheel axis, with the dispensing wheel including a plurality of dispensing head assemblies each of which includes a support and a dispensing head mounted on the support for movement along a dispensing head axis of the support between pick and place positions, and with each dispensing head including at least one label carrier for receiving a label in the pick position thereof and for transferring the label in the place position thereof to an adjacent open mold of the blow molding machine; moving the support of each dispensing head assembly during a label depositing operation along the rotary path of the adjacent open mold about the mold wheel axis and angularly positioning the support of the dispensing head assembly about a support axis such that the dispensing head axis moves in alignment with the moving mold parting plane of the adjacent open mold as the dispensing head is moved on the

71087-685

support during the label depositing operation from the pick position to the place position to deposit the label within the adjacent open mold in a manner that permits high speed operation of the in-mold labeling; and transferring labels
5 from a label magazine to the dispensing assembly by: moving a transfer head adjacent the label magazine which stores a stack of labels with an exposed end from which the labels are sequentially dispensed; drawing a vacuum through a vacuum opening of the transfer head; and moving the transfer
10 head with a rolling motion to engage the vacuum opening with the label at the exposed end of the label magazine and to initially pull an extremity of that label away from the label stack and thereby permit air to move behind the label, to subsequently pull an intermediate portion of the label
15 away from the label stack and thereby permit more air to move behind the label, and to finally pull an opposite extremity of the label away from the label stack in a manner that permits high speed labeling as the label is subsequently transferred from the transfer head to the
20 in-mold labeler for the in-mold labeling of the plastic blow molding machine.

According to another aspect the invention provides a method for blow molding comprising: rotating a mold wheel of a plastic blow molding machine with the mold wheel
25 supporting a plurality of molds for rotary movement along a rotary path about a mold wheel axis and for concomitant pivotal movement of mold sections of the molds between open and closed positions about associated mold axes that extend parallel with the mold wheel axis and with the mold sections
30 opening in an outward direction from the mold wheel axis and symmetrically about associated mold parting planes that extend from the mold wheel axis through the associated mold axes; rotating a dispensing wheel of a dispensing assembly

71087-685

of an in-mold labeler about a dispensing wheel axis that extends parallel to the mold wheel axis, with the dispensing wheel including a plurality of dispensing head assemblies each of which includes a support and a dispensing head mounted on the support for movement along a dispensing head axis of the support between pick and place positions, and with each dispensing head including a pair of label carriers for receiving associated labels in the pick position thereof and for transferring the labels in the place position thereof to an adjacent open mold of the blow molding machine; moving the support of each dispensing head assembly by a first cam mechanism during a label depositing operation along the rotary path of the adjacent open mold about the mold wheel axis and angularly positioning the support of the dispensing head assembly by a second cam mechanism such that the dispensing head axis moves in alignment with the moving mold parting plane of the adjacent open mold as the dispensing head is moved on the support during the label depositing operation from the pick position to the place position to deposit the labels within the adjacent open mold in a manner that permits high speed operation of the in-mold labeling; and transferring labels from a label magazine to the dispensing assembly by: moving a plurality of transfer heads on a rotary table so as to pass sequentially adjacent the label magazine which stores a stack of labels with an exposed end from which the labels are sequentially dispensed; drawing a vacuum through vacuum openings of the transfer head; and rotating the transfer heads by a rotary actuator with a rolling motion to engage the vacuum openings with the label at the exposed end of the label magazine and to initially pull an extremity of that label away from the label stack and thereby permit air to move behind the label, to subsequently pull an intermediate portion of the label away from the label stack and thereby permit more air to

71087-685

move behind the label, and to finally pull an opposite extremity of the label away from the label stack in a manner that permits high speed labeling as the label is subsequently transferred from the transfer head to the
5 in-mold labeler for the in-mold labeling of the plastic blow molding machine.

According to yet another aspect the invention provides a method for blow molding comprising: rotating a mold wheel of a plastic blow molding with the mold wheel
10 supporting a plurality of molds for rotary movement along a rotary path about a mold wheel axis and for concomitant pivotal movement of mold sections of the molds between open and closed positions about associated mold axes that extend parallel with the mold wheel axis and with the mold sections
15 opening in an outward direction from the mold wheel axis and symmetrically about associated mold parting planes that extend from the mold wheel axis through the associated mold axes; rotating a dispensing wheel of a dispensing assembly of an in-mold labeler about a dispensing wheel axis that
20 extends parallel to the mold wheel axis, with the dispensing wheel including a plurality of dispensing head assemblies each of which includes a support and a dispensing head mounted on the support for movement along a dispensing head axis of the support between pick and place positions, and
25 with each dispensing head including a pair of label carriers for receiving associated labels in the pick position thereof and for transferring the labels in the place position thereof to an adjacent open mold of the blow molding machine; moving the support of each dispensing head assembly
30 by a first cam mechanism during a label depositing operation along the rotary path of the adjacent open mold about the mold wheel axis and angularly positioning the support of the dispensing head assembly by a second cam mechanism such that

71087-685

the dispensing head axis moves in alignment with the moving mold parting plane of the adjacent open mold; camming the dispensing head on the support by a third cam mechanism during the label depositing operation between the pick
5 position and the place position and camming the label carriers between retracted and label transfer positions to deposit the label within the adjacent open mold in a manner that permits high speed operation of the in-mold labeling; and transferring labels from a label magazine to the
10 dispensing assembly by: moving a plurality of transfer heads on a rotary table so as to pass sequentially adjacent the label magazine which stores a stack of labels with an exposed end from which the labels are sequentially dispensed; drawing a vacuum through vacuum openings of the
15 transfer head; and rotating the transfer heads by a rotary actuator with a rolling motion to engage the vacuum openings with the label at the exposed end of the label magazine and to initially pull an extremity of that label away from the label stack and thereby permit air to move behind the label,
20 to subsequently pull an intermediate portion of the label away from the label stack and thereby permit more air to move behind the label, and to finally pull an opposite extremity of the label away from the label stack in a manner that permits high speed labeling as the label is
25 subsequently transferred from the transfer head to the in-mold labeler for the in-mold labeling of the plastic blow molding machine.

The objects, features and advantages of the present invention are readily apparent from the following
30 detailed description of the preferred embodiment when taken in connection with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a top plan view of a plastic blow molding system that embodies the present invention.

5 FIGURE 2 is a partially sectioned view taken along the direction of line 2-2 in Figure 1 to illustrate an in-mold labeler of the system.

10 FIGURE 3 is a partial plan view that illustrates the manner in which a support of a label dispensing head assembly is moved along the rotary path of a mold wheel during a label depositing operation with two label head assemblies illustrated shown at the beginning and end of the rotary movement of the label depositing operation.

FIGURE 4 is a view similar to Figure 3 showing one of the label head dispensing assemblies with its dispensing head moved inwardly to an adjacent open mold to provide the label depositing operation to transfer labels to the open mold.

15 FIGURE 5 is an enlarged top plan view taken along the direction of line 5-5 in Figure 2 to illustrate the construction of the label dispensing head and label carriers thereof that are moved from retracted solid line indicated positions to phantom line indicated label transfer positions to provide the label depositing operation.

20 FIGURE 6 is a sectional view taken along the direction of line 6-6 in Figure 5 to illustrate the construction of the dispensing head and cam followers thereof that control its operation.

25 FIGURE 7 is a view taken generally in the same direction as Figure 6 to further illustrate the construction of a lock mechanism that locks the dispensing head against movement along a support of the dispensing head assembly.

FIGURE 8 is an elevational view taken in the direction of line 8-8 in Figure 7 to further illustrate the construction of the lock mechanism.

FIGURE 9 is a somewhat schematic perspective view illustrating a portion of a dispensing wheel of the in-mold labeler of the blow molding system and shows the dispensing head assembly and its support and label dispensing head.

FIGURE 10 is a perspective view that illustrates label transfer apparatus of the blow molding system for use in transferring labels from a label magazine to the plastic blow molding machine of the system for in-mold labeling prior to blow molding.

FIGURE 11 is a partial view illustrating the manner in which a dispensing head of the label transfer apparatus is actuated to execute a rolling motion upon initially removing a label from the adjacent label magazine.

FIGURES 12 and 13 are partial views that illustrate the label transfer apparatus at progressively later stages of the label removal operation.

FIGURE 14 is a top plan view illustrating another construction of the dispensing head of the label transfer apparatus.

FIGURE 15 is a view taken along the direction of line 15-15 in Figure 14 to further illustrate the construction of the dispensing head of the label transfer apparatus.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

With reference to Figure 1, a plastic blow molded system generally indicated by 20 embodies the present invention and includes a rotary plastic blow molding machine 22 and an in-mold labeler 24 for providing labels to the blow molding machine prior to blow molding as is hereinafter more fully described. The apparatus of the blow molding system 20 and its method of operation will be

described in an integrated manner to facilitate an understanding of all aspects of the invention.

Blow molding machine 22 illustrated in Figure 1 includes a rotary mold wheel 26 that is rotatable about a mold wheel axis A in a counterclockwise direction as illustrated by arrow 28. A plurality of molds 30 (ten as shown) are supported on the mold wheel 26 for counterclockwise rotary movement about the mold wheel axis A and mold sections 32 of the molds are movable about associated mold axes B between closed positions as shown at the lower portion of Figure 1 and open positions as shown at the upper portion adjacent the in-mold labeler 24. During such opening and closing movements, the mold sections 32 are positioned symmetrically about mold parting planes C that extend from the mold wheel axis A through the associated mold axes B.

With continuing reference to Figure 1, the blow molding system 20 includes a supply station 34 where heated plastic preforms are cyclically supplied to the adjacent open molds 30 which then close for the blow molding operation as the mold wheel 26 continues its counterclockwise rotation. After the mold closing and the blow molding, the blow molded container cools and the mold wheel continues to rotate counterclockwise to a delivery station 36 where the molds open to permit removal of the blow molded container. As the mold wheel continues to rotate counterclockwise, each open mold leaving the delivery station 36 is supplied one or more labels by the in-mold labeler 24 as is hereinafter more fully described prior to moving to the supply station 34 where the next heated plastic preform is supplied to the open mold prior to its closing as the cycles continue. Both the supply station 34 and the delivery station 36 operate in a conventional rotary manner with supply and delivery wheels rotating clockwise as shown by arrows 37 to supply the preforms and receive the blow molded containers which can be at a very high production rate of thousands and even ten thousands of containers per hour. As is hereinafter more fully described, the in-mold labeler 24 is constructed and operates to provide high speed supply of the labels to the molds even at these relatively high production rates where they may be only a second or a fraction of a second to perform the in-mold labeling operation.

With combined reference to Figures 1 and 2, the in-mold labeler 24 includes a dispensing assembly 38 having a base 40 and a dispensing wheel 42 that rotates clockwise as shown by arrow 44 in Figure 1 about a dispensing wheel axis D that extends parallel to the mold wheel axis A. The dispensing wheel 42 includes a plurality of dispensing head assemblies 46, as shown in Figure 1, each of which as shown in Figure 2 includes a support 48 and a dispensing head 52 mounted on the support for movement along a dispensing head axis E of the support between a pick position shown in Figure 2 and a place position shown at the six o'clock location of the dispensing wheel 42 in Figure 1. Each dispensing head 46 as illustrated in Figures 2 and 5 includes at least one label carrier 52 for carrying an associated label 54 to be deposited within an associated mold section 32 of the adjacent open mold 30 to perform the in-mold labeling operation. As illustrated, each dispensing head 50 includes a pair of the label carriers 52 so that a pair of labels 54 can be provided to the adjacent open mold such that labels will be provided to opposite sides of the blow molded container. In accordance with conventional in-mold labeling operation, each label carrier 52 is supplied a vacuum for securing the label 54 until being transferred to the mold 30 whereupon the label carrier vacuum is terminated and a vacuum drawn at the mold secures the label in position in preparation for the blow molding operation.

With reference to Figure 2, the in-mold labeler 24 includes an actuator 56 for moving the support 48 of each dispensing head assembly 38 during the label depositing operation along the rotary path 30_p (Figure 1) of the adjacent open mold about the mold wheel axis A. The actuator 56 shown in Figure 2 also angularly positions the support 48 of the dispensing head assembly about a support axis F during the label depositing operation illustrated in Figures 3 and 4 such that the dispensing head axis E (Figure 2) moves in alignment with the moving mold parting plane C of the adjacent open mold as the dispensing head 50 is moved between the pick position shown in Figure 3 and the place position within the open mold as shown in Figure 4 where the label depositing takes place in the adjacent open mold. The movement of the dispensing head support 48 and hence the dispensing head 50 thereon along the rotary path of the adjacent open mold and the angular alignment of the support and the dispensing head along the mold parting

plane provide a greater time for the label depositing to take place and also provide the proper angular alignment so the labels can be deposited at the proper orientation during the in-mold labeling.

With reference back to Figures 1 and 2, the actuator 56 that controls
5 the movement of the dispensing head assembly supports 48 includes a first cam mechanism 58 that moves each dispensing head during the label depositing operation along the rotary path of the adjacent open mold. This first cam mechanism 58 includes a cam follower 60 (Figure 2) of each dispensing head assembly 46 and a continuous cam 62 that is on the base 40 and extends as shown in Figure 1 about the
10 dispensing wheel axis D. As shown in Figure 2, the cam 62 receives the cam follower 60 so as to provide the movement of the associated support 48 along the rotary path of the adjacent open mold of the mold wheel. The actuator 56 also includes a second cam mechanism 64 that angularly positions the support 48 of the dispensing head assembly 38 about the support axis F such that the dispensing head
15 axis E of the support moves in alignment with the mold parting plane of the adjacent open mold as the label carriers 52 are moved on the support by the dispensing head during the label depositing operation from the pick position to the place position to deposit the label within the adjacent open mold. As previously mentioned, the movement of the support 48 along the rotary path of the adjacent open mold and the
20 angular positioning of the support so that the dispensing head axis E moves in alignment with the mold parting plane provide increased time for the label deposition operation and also provide proper alignment thereof as the labels are deposited. The second cam mechanism includes a second cam follower 66 shown in Figures 2 and 9 and a continuous cam 68 that extends around the dispensing
25 wheel axis D as shown in Figure 1. Both the continuous cam 62 of the first cam mechanism 58 and the continuous cam 68 of the second cam mechanism 64 are illustrated in Figure 2 as being defined within a single cam member 70 mounted on the base 40 of the dispensing assembly 38; however, it should be appreciated that these continuous cams could be provided on separate cam members mounted on the
30 base instead of a single cam member. The complete operation of the angular positioning of the support 48 by the second cam member 64 is hereinafter more fully described.

As illustrated in Figure 1, the dispensing wheel 42 of the in-mold labeler 24 includes a plurality of tracks 72, five as illustrated, that extend radially from the dispensing wheel axis D and are respectively associated with the dispensing head assemblies 46. Each dispensing head assembly 46 as shown in Figure 2 has lower and upper slide mounts 74 and 76 that support the dispensing head assembly for movement along the associated dispensing wheel track 72 in a radial direction with respect to the dispensing wheel axis D. The first cam mechanism 58 including its cam follower 60 and base mounted cam 62 provide movement of the dispensing head assembly 46 along the dispensing wheel track 72 radially with respect to the dispensing wheel axis D in order to position the dispensing head assembly such that its support axis F moves along the rotary path of the adjacent open mold about the mold wheel axis A as the label depositing takes place. A pivotal mount 78 pivotally mounts the support 48 of each dispensing head assembly 46 on the lower and upper slide mounts 74 and 76 for angular movement about the support axis F. The pivotal mount 78 includes a vertical shaft 80 whose upper end is pivotally fixed to the support 48 and whose lower end is fixed to a gear 82 that as shown in Figure 9 is meshed with a second gear 84 which is rotatively mounted on a connection member 86 that is secured to the lower track member 74 as shown in Figure 2. The connection member 86 also mounts the first cam follower 60 of the first cam mechanism 58. An arm 87 fixed on gear 84 mounts the second cam follower 66. The positioning of the second cam follower 66 within the second cam 68 thus controls the rotary position of the gear 84 whose meshing with the gear 82 on the vertical shaft 80 controls the angular positioning of the dispensing head support 48 about support axis F so as to thereby control the location of its dispensing head axis E along which the dispensing head 50 moves between the pick and place positions previously described.

As illustrated in Figure 2, the in-mold labeler 24 includes a third cam mechanism 88 having an operator 90 such as an electric servomotor or an air cylinder, etc. for moving each dispensing head 50 with its label carriers 52 thereon on the associated support 48 between the pick position and the place position as shown in Figure 5 where the label carriers are positioned within the adjacent open mold 30 to transfer the labels 54 carried thereby to the mold. More specifically, the

operator 90 is mounted by a suitable connector 92 to an upper portion 94 of the dispensing wheel base. The operator 90 has a movable piston connecting rod 96 that is suitably connected to an upper cam portion 98 of a cam member 100 that also includes a lower cam portion 102. A slideway 104 supports the cam member 100 and its upper and lower cam portions 98 and 102 for movement along a direction aligned with the mold wheel and dispensing wheel axes A and B (Figure 1). More specifically, the slideway 104 includes mounts 106 on the upper base portion and a slidable rod 108 received by these mounts supports hangers 110 (only one shown) that support a connection member 112 on which the cam member 100 is supported at its upper cam portion 98.

As illustrated in Figure 2, each dispensing head 50 includes a dispensing head cam follower 114 and the lower portion 102 of the cam member 100 includes a dispensing head cam surface 116. As each dispensing head 50 is moved clockwise on the dispensing wheel toward the fixed base mounted cam 100 as illustrated in Figure 1, the dispensing head cam follower 114 shown in Figure 2 moves into engagement with the dispensing cam surface 116 which extends along the entire length of the cam. The dispensing head 50 is mounted on the dispensing head support 48 by a slideway 118 for movement along the dispensing head axis E. The engagement of the dispensing head cam follower 114 with the dispensing head cam surface 116 of the lower portion 102 of cam member 100 provides control of the movement of the dispensing head 50 under impetus of the operator 90. More specifically, the operator 90 moves the dispensing head from the pick position to its place position which is illustrated in Figure 1 at the six o'clock location where the in-mold labeling operation is performed. The operator 90 illustrated in Figure 2 then moves the cam member 100 back to again position the dispensing head 50 in the pick position. After continued clockwise movement, the dispensing head 50 then has its dispensing head cam follower 114 disengaged with the dispensing head cam surface 116 of the cam member 100.

With combined reference to Figures 2 and 5, each of the label carriers 52 is mounted on the dispensing head 50 by an associated track 120 for movement between the solid line indicated retracted position and the phantom line

indicated extended position where the label 54 carried thereby is transferred to the adjacent mold 30 at one of its mold sections 32 as previously described. Each dispensing head 50 includes a label carrier cam follower 122 mounted on one end of a connection member 124 whose other end supports a link cam 126 that is received by a slot 128 in an actuator link 130 that is pivotally supported on the dispensing head 50 by a pivotal connection 132 and which is pivotally fixed to an actuating link 134 that has a slot 135 that receives an actuating cam 136 mounted on the adjacent label carrier 52.

As illustrated in Figure 2, the upper portion 98 of the cam member 100 includes a label carrier cam surface 138 that receives the label carrier cam follower 122 as the dispensing head is moved on the dispensing wheel clockwise as illustrated in Figure 1 toward the cam member 100. This label carrier cam surface 138 adjacent the six o'clock position of Figure 1 is contoured to move the label carrier cam follower 122 shown in Figure 2 in a radial outward direction with respect to the dispensing wheel and through the connection member 124 illustrated in Figure 5 and the actuating links 130 and 134 and the actuating cams 126 and 136 moves the label carriers 52 between the retracted and label transfer positions previously described to perform the in-mold labeling operation. After the mold 30 receives the labels 54 as illustrated in Figure 5, the label carrier cam follower 122 is cammed back to thereby move the label carriers 52 back to the retracted positions as the operator 90 shown in Figure 2 concomitantly moves the dispensing head 50 back from the place position shown in Figure 1 to the pick position where the labels are supplied to the label carriers as is hereinafter more fully described.

With reference to Figure 1, as each dispensing head assembly 46 moves clockwise from the cam member 100 at the lower six o'clock position, a lock mechanism 140 illustrated in Figures 6-8 locks the dispensing head 50 from movement on the support 48 and also locks the connection members 124 from movement so as to thereby prevent movement of the label carriers under the operation of the actuating cams and actuating links as previously described. More specifically, the lock mechanism 140 includes an unlocking cam follower 142 that is mounted on a member 144 which, as shown in Figure 8, supports a pair of rods

146 that extend downwardly through the dispensing head 50 and have lower ends connected by springs 148 to a pair of first lock members 150. When the unlocking cam follower 142 is disengaged from the cam 100 shown in Figure 1, the pair of first lock members 150 shown in Figure 8 extend downwardly and are received by
5 holes in the support 48 of the dispensing head assembly so as to prevent the movement of the dispensing head 50 along the support between the pick and place positions as previously described.

The lock mechanism 140 illustrated in Figures 6-8 also includes a single second lock member 152 that extends downwardly from the member 144 and
10 is received within a hole in the lower connection member 124 as shown in Figure 6. Since both lower and upper connection members 124 are secured to each other by bolts 154 threaded into a connection member extension 156 on which the actuating cams 126 are mounted, the positioning of the second lock member 152 within the hole of the lower connection member 124 secures both of these
15 connection members and thereby prevents the cam and actuating link movement that moves the label carriers. As such, the label carriers 52 are then secured in their retracted position which is illustrated by solid line representation in Figure 5.

With reference to Figure 2, the lower portion 102 of the cam member 100 includes an unlocking cam surface 158 which is engaged by the unlocking cam
20 follower 142 to provide unlocking actuation of the lock mechanism 140 when the dispensing head 50 moves clockwise toward the cam 100 at its six o'clock position shown in Figure 1. This engagement of the unlocking cam follower 142 with the unlocking cam surface 158 of cam 100 moves the member 144 shown in Figures 6-7 upwardly so as to move the pair of first lock members 150 out of engagement with
25 the support 48 and to also move the single second lock member 152 out of engagement with the lower connection member 124. At the same time that this unlocking takes place, the dispensing head cam follower 114 and the label carrier cam follower 122 shown in Figure 2 move into engagement with the dispensing head cam surface 116 and the label carrier cam surface 138, respectively, so as to control
30 the positioning of the dispensing head 50 and the movement of the label carriers 52 in the manner previously described.

With reference to Figure 1, schematically illustrated a pair of label transfer mechanisms 160 are positioned adjacent the in-mold labeler 24 and each is located adjacent an associated label magazine 162 that holds a stack 164 of labels 54. As is hereinafter more fully described, the labels 54 are transferred by the transfer mechanism 160 from the label magazine 162 and move to a generally diametrically opposite location of the transfer mechanism where the labels are then transferred to one of the label carriers of an adjacent dispensing head as it rotates on the dispensing wheel 42 past the label transfer mechanism. During such movement, the first and second cam mechanisms 58 and 62 position the adjacent dispensing head 50 so that the label carrier is properly positioned for receiving the label from the label transfer mechanism 160. More specifically, the cam mechanisms initially position the dispensing head so that one of the label carriers receives a label from the left label transfer mechanism 160 illustrated. After continued clockwise rotation the dispensing head is moved angularly so its other label carrier receives the label from the right label transfer mechanism 160. After receiving the pair of labels, the dispensing head 50 then continues to rotate clockwise on the dispensing wheel 42 for the in-mold label depositing operation as previously described with respect to the blow molding machine 22.

With reference to Figure 10, each of the label transfer mechanisms 160 is constructed as illustrated and includes at least one transfer head 168. Actually as illustrated, there are three of the transfer heads 168 so as to have the capability of a greater speed of label transfer.

As illustrated in Figures 11-13, the label transfer mechanism 160 moves each transfer head 168 as shown by arrow 170 adjacent the associated label magazine 162 adjacent an exposed end 172 of the label stack 164. The transfer head as shown in Figure 10 includes at least one vacuum opening 174 and preferably as illustrated includes a pair of the vacuum openings 174. The label transfer mechanism 160 that supports the transfer heads 168 includes an actuator collectively indicated by 176 for moving the transfer head with a rolling motion as shown by arrow 178 in Figures 11-13. This rolling motion is in the opposite direction as the general movement of the transfer head as illustrated by arrow 170 and causes the

transfer head to initially pull an extremity 180 of the exposed label 54 away from the label stack 164 and thereby permits air to move behind that label. Thereafter as illustrated in Figure 12, the transfer head 168 continues its rolling movement and subsequently pulls an intermediate portion 182 of the label away from the label stack and permits more air to move behind the label. The continued rolling movement of the transfer head 168 as shown in Figure 13 finally pulls an opposite extremity 184 of the label 54 away from the label stack 164. This rolling motion of the transfer head 168 and the manner in which the label is pulled from the stack first at one extremity, then at the intermediate portion, and finally at the opposite extremity permits air to rapidly move behind the label and thereby permits high speed label transferring from the label magazine 162.

With reference to Figure 10, the label transfer mechanism 160 includes a rotary table 186 that supports each of the label transfer heads 168 for rotary movement with the table about a central axis G in order to support the transfer heads for rotary movement with the table along the direction of arrow 170 illustrated in Figures 12-13. Furthermore, each transfer head 168 rotates with respect to the table about an associated rotary axis H. Thus, the rotation of the table 186 moves the transfer heads 168 laterally past the label stack 164 and the transfer heads rotate with respect to the table as the labels are pulled from the label magazine 162.

The label transfer mechanism 160 illustrated in Figure 10 includes a suitable rotary motor 188 that rotates the rotary table 186 and also includes a rotary motor 190 that rotates a rotary actuator member 192 about the table axis G but independently of the rotary table 186. Furthermore, the actuator 176 includes an endless belt 194 that extends from the rotary actuator member 192 to the label transfer heads 168 to provide rotation thereof with respect to the rotary table as previously described in connection with Figures 12-13. Furthermore, the label transfer mechanism 160 also includes at least one tension wheel 196 mounted for rotation on the rotary table 186 with the belt 194 extending thereover to provide proper tensioning of the belt. More specifically, there are actually a pair of the tension wheels 196 mounted for rotation on the rotary table 186 adjacent the rotary

actuator member 192 with the belt 194 extending over the tension wheels to provide tensioning of the belt.

Although the label transfer heads 168 can theoretically function with only a single vacuum opening to pull the labels from the label stack 164 in the manner described above first at an extremity, then at the intermediate portion and finally at the opposite extremity, it is preferable to have a pair of the vacuum openings 174 as described to provide greater control of the label removal operation by the rolling motion involved.

As illustrated in Figures 14 and 15, each label transfer head 168' can also have vacuum openings 174 spaced axially along the direction of the rotary axis H about which rotation takes place with respect to the table in order to provide greater securement of the labels along that dimension. Suitable vacuum inlets 198 are communicated with the vacuum openings 174 through the label transfer head 168' to provide the label procurement during the transfer of the labels from the associated label transfer head to the dispensing head of the in-mold labeler previously described.

It should be appreciated that the in-mold labeler 24 is most operable to provide its high speed in-mold labeling operation when utilized with the type of transfer mechanisms 160 illustrated for supplying the initial transfer of the labels from the label magazines to the dispensing heads for the eventual transfer to the molds. However, it is also possible for the in-mold labeler 24 to have its label carriers receive the labels directly from label magazines even though the use of the intermediate transfer mechanisms is preferred as mentioned. Likewise, while the transfer mechanisms 160 are disclosed as transferring the labels from the label magazines to the dispensing heads for the subsequent in-mold label operation, other adaptations could also be provided where the labels are transferred by the transfer mechanisms from the label magazines directly to the molds.

Thus, while the preferred embodiment and operation thereof have been described in detail, those familiar with the art to which this invention relates

PPI 0329 PCA

will recognize various alternative designs and embodiments for practicing the invention as defined by the following claims.

71087-685

CLAIMS:

1. A method for blow molding comprising:

rotating a mold wheel of a plastic blow molding machine with the mold wheel supporting a plurality of molds
5 for rotary movement along a rotary path about a mold wheel axis and for concomitant pivotal movement of mold sections of the molds between open and closed positions about associated mold axes that extend parallel with the mold wheel axis and with the mold sections opening in an outward
10 direction from the mold wheel axis and symmetrically about associated mold parting planes that extend from the mold wheel axis through the associated mold axes;

rotating a dispensing wheel of a dispensing assembly of an in-mold labeler about a dispensing wheel axis
15 that extends parallel to the mold wheel axis, with the dispensing wheel including a plurality of dispensing head assemblies each of which includes a support and a dispensing head mounted on the support for movement along a dispensing head axis of the support between pick and place positions,
20 and with each dispensing head including at least one label carrier for receiving a label in the pick position thereof and for transferring the label in the place position thereof to an adjacent open mold of the blow molding machine;

moving the support of each dispensing head
25 assembly during a label depositing operation along the rotary path of the adjacent open mold about the mold wheel axis and angularly positioning the support of the dispensing head assembly about a support axis such that the dispensing head axis moves in alignment with the moving mold parting
30 plane of the adjacent open mold as the dispensing head is moved on the support during the label depositing operation

71087-685

from the pick position to the place position to deposit the label within the adjacent open mold in a manner that permits high speed operation of the in-mold labeling; and

transferring labels from a label magazine to the
5 dispensing assembly by:

moving a transfer head adjacent the label magazine which stores a stack of labels with an exposed end from which the labels are sequentially dispensed;

drawing a vacuum through a vacuum opening of the
10 transfer head; and

moving the transfer head with a rolling motion to engage the vacuum opening with the label at the exposed end of the label magazine and to initially pull an extremity of that label away from the label stack and thereby permit air
15 to move behind the label, to subsequently pull an intermediate portion of the label away from the label stack and thereby permit more air to move behind the label, and to finally pull an opposite extremity of the label away from the label stack in a manner that permits high speed labeling
20 as the label is subsequently transferred from the transfer head to the in-mold labeler for the in-mold labeling of the plastic blow molding machine.

2. A method for blow molding as in claim 1 wherein a first cam mechanism moves each dispensing head during the
25 label depositing operation along the rotary path of the adjacent open mold, a second cam mechanism angularly positioning the support of the dispensing head assembly about the support axis such that the dispensing head axis thereof moves in alignment with the moving mold parting
30 plane of the adjacent open mold as the label carrier is

71087-685

moved on the support during the label depositing operation from the pick position to the place position to deposit the label within the adjacent open mold in a manner that permits the high speed operation of the in-mold labeling, and the
5 label transfer head being supported and moved on a rotary table for movement therewith adjacent the label magazine and for rotary movement with respect to the table to provide the rolling motion that pulls the label from the label magazine and subsequently transfers the label to one of the
10 dispensing heads.

3. A method for blow molding as in claim 2 wherein the support of each dispensing head assembly is mounted on an associated one of a plurality of tracks that extend radially from the dispensing wheel axis, each dispensing
15 head being controlled by the first cam mechanism, and a pivotal mount of each dispensing head assembly mounting the support of the associated dispensing head for pivotal movement about an associated vertical axis under the control of the second cam mechanism, and wherein a plurality of the
20 label transfer heads are supported and moved on a rotary table for movement therewith adjacent the label magazine and for rotary movement with respect to the table to provide the rolling motion that pulls each label from the label magazine.

25 4. A method for blow molding as in claim 3 wherein a third cam mechanism including an operator moves each dispensing head with its label carrier thereon between the pick position and the place position where the label carrier is positioned within the adjacent open mold to transfer the
30 label carried thereby to the mold, and wherein the label transfer heads are rotated with respect to the rotary table by a rotary actuator member that rotates about a central

71087-685

rotary axis of the rotary table and by an endless belt that extends from the rotary actuator member to the label transfer heads.

5. A method for blow molding as in claim 4 wherein
5 the label carrier of each dispensing head moves on the dispensing head between a retracted position and a label transfer position, an operator moves a cam member of the third cam mechanism on the dispensing assembly base toward and away from the blow molding machine, a dispensing head
10 cam follower of each dispensing head is engaged by a dispensing head cam surface of the cam member of the third cam mechanism to move the dispensing head between the pick and place positions, a label carrier cam follower of each dispensing head is engaged by a label carrier cam surface of
15 the cam member of the third cam mechanism to move the label carrier between its retracted and label transfer positions with the dispensing head in its place position to transfer the label to the adjacent open mold, and wherein the endless belt is tensioned by a tension wheel rotatably mounted on
20 the rotary table.

6. A method for blow molding as in claim 5 wherein a lock mechanism locks the dispensing head from movement on the support of the dispensing head assembly and locks the label carrier in its retracted position, an unlocking cam
25 follower is actuated to release the lock mechanism, an unlocking cam surface engages the unlocking cam follower of the lock mechanism to provide the actuation thereof that releases the lock mechanism and permit movement of the dispensing head on the support between the pick and place
30 positions under the impetus of the operator as well as permitting the movement of the label carrier between the retracted and label transfer positions, and wherein a first

71087-685

vacuum opening of the transfer head initially engages the label adjacent its first mentioned extremity to initially pull the label away from the label stack and wherein another vacuum opening subsequently engages the label adjacent its
5 opposite extremity to complete the pulling of the label away from the label stack.

7. A method for blow molding as in claim 6 wherein a pair of label carriers are supported for movement on each dispensing head between the retracted and label transfer
10 positions.

8. A method for blow molding comprising:

rotating a mold wheel of a plastic blow molding machine with the mold wheel supporting a plurality of molds for rotary movement along a rotary path about a mold wheel
15 axis and for concomitant pivotal movement of mold sections of the molds between open and closed positions about associated mold axes that extend parallel with the mold wheel axis and with the mold sections opening in an outward direction from the mold wheel axis and symmetrically about
20 associated mold parting planes that extend from the mold wheel axis through the associated mold axes;

rotating a dispensing wheel of a dispensing assembly of an in-mold labeler about a dispensing wheel axis that extends parallel to the mold wheel axis, with the
25 dispensing wheel including a plurality of dispensing head assemblies each of which includes a support and a dispensing head mounted on the support for movement along a dispensing head axis of the support between pick and place positions, and with each dispensing head including a pair of label
30 carriers for receiving associated labels in the pick position thereof and for transferring the labels in the

71087-685

place position thereof to an adjacent open mold of the blow molding machine;

moving the support of each dispensing head assembly by a first cam mechanism during a label depositing operation along the rotary path of the adjacent open mold about the mold wheel axis and angularly positioning the support of the dispensing head assembly by a second cam mechanism such that the dispensing head axis moves in alignment with the moving mold parting plane of the adjacent open mold as the dispensing head is moved on the support during the label depositing operation from the pick position to the place position to deposit the labels within the adjacent open mold in a manner that permits high speed operation of the in-mold labeling; and

transferring labels from a label magazine to the dispensing assembly by:

moving a plurality of transfer heads on a rotary table so as to pass sequentially adjacent the label magazine which stores a stack of labels with an exposed end from which the labels are sequentially dispensed;

drawing a vacuum through vacuum openings of the transfer head; and

rotating the transfer heads by a rotary actuator with a rolling motion to engage the vacuum openings with the label at the exposed end of the label magazine and to initially pull an extremity of that label away from the label stack and thereby permit air to move behind the label, to subsequently pull an intermediate portion of the label away from the label stack and thereby permit more air to move behind the label, and to finally pull an opposite

71087-685

extremity of the label away from the label stack in a manner that permits high speed labeling as the label is subsequently transferred from the transfer head to the in-mold labeler for the in-mold labeling of the plastic blow
5 molding machine.

9. A method for blow molding comprising:

rotating a mold wheel of a plastic blow molding with the mold wheel supporting a plurality of molds for rotary movement along a rotary path about a mold wheel axis
10 and for concomitant pivotal movement of mold sections of the molds between open and closed positions about associated mold axes that extend parallel with the mold wheel axis and with the mold sections opening in an outward direction from the mold wheel axis and symmetrically about associated mold
15 parting planes that extend from the mold wheel axis through the associated mold axes;

rotating a dispensing wheel of a dispensing assembly of an in-mold labeler about a dispensing wheel axis that extends parallel to the mold wheel axis, with the
20 dispensing wheel including a plurality of dispensing head assemblies each of which includes a support and a dispensing head mounted on the support for movement along a dispensing head axis of the support between pick and place positions, and with each dispensing head including a pair of label
25 carriers for receiving associated labels in the pick position thereof and for transferring the labels in the place position thereof to an adjacent open mold of the blow molding machine;

moving the support of each dispensing head
30 assembly by a first cam mechanism during a label depositing operation along the rotary path of the adjacent open mold

71087-685

about the mold wheel axis and angularly positioning the support of the dispensing head assembly by a second cam mechanism such that the dispensing head axis moves in alignment with the moving mold parting plane of the adjacent
5 open mold;

camming the dispensing head on the support by a third cam mechanism during the label depositing operation between the pick position and the place position and camming the label carriers between retracted and label transfer
10 positions to deposit the label within the adjacent open mold in a manner that permits high speed operation of the in-mold labeling; and

transferring labels from a label magazine to the dispensing assembly by:

15 moving a plurality of transfer heads on a rotary table so as to pass sequentially adjacent the label magazine which stores a stack of labels with an exposed end from which the labels are sequentially dispensed;

drawing a vacuum through vacuum openings of the
20 transfer head; and

rotating the transfer heads by a rotary actuator with a rolling motion to engage the vacuum openings with the label at the exposed end of the label magazine and to initially pull an extremity of that label away from the
25 label stack and thereby permit air to move behind the label, to subsequently pull an intermediate portion of the label away from the label stack and thereby permit more air to move behind the label, and to finally pull an opposite extremity of the label away from the label stack in a manner
30 that permits high speed labeling as the label is

71087-685

subsequently transferred from the transfer head to the in-mold labeler for the in-mold labeling of the plastic blow molding machine.

10. A system for plastic blow molding comprising:

5 (a) a plastic blow molding machine including:

a rotary mold wheel that supports a plurality of molds for rotary movement along a rotary path about a mold wheel axis and for concomitant pivotal movement of mold sections of the molds between open and closed positions
10 about associated mold axes that extend parallel with the mold wheel axis and with the mold sections opening in an outward direction from the mold wheel axis and symmetrically about associated mold parting planes that extend from the mold wheel axis through the associated mold axes;

15 (b) an in-mold labeler including:

a dispensing assembly having a base and a dispensing wheel that is rotatably mounted on the base about a dispensing wheel axis that extends parallel to the mold wheel axis, the dispensing wheel including a plurality of
20 dispensing head assemblies each of which includes a support and a dispensing head mounted on the support for movement along a dispensing head axis of the support between pick and place positions, and each dispensing head including at least one label carrier for receiving a label in the pick position
25 thereof and for transferring the label in the place position thereof to an adjacent open mold of the blow molding machine;

an actuator for moving the support of each dispensing head assembly during a label depositing operation
30 along the rotary path of the adjacent open mold about the

71087-685

mold wheel axis and for angularly positioning the support of the dispensing head assembly about a support axis such that the dispensing head axis moves in alignment with the moving mold parting plane of the adjacent open mold as the

5 dispensing head is moved on the support during the label depositing operation from the pick position to the place position to deposit the label within the adjacent open mold in a manner that permits high speed operation of the in-mold labeling; and

10 (c) label transfer apparatus for transferring labels from a label magazine to the in-mold labeler, the label transfer apparatus including:

a transfer head that is movable adjacent the label magazine which stores a stack of labels with an
15 exposed end from which the labels are sequentially dispensed;

the transfer head including a vacuum opening through which a vacuum is supplied; and

an actuator for moving the transfer head with
20 a rolling motion to engage the vacuum opening with the label at the exposed end of the label magazine and to initially pull an extremity of that label away from the label stack and thereby permit air to move behind the label, to subsequently pull an intermediate portion of the label away
25 from the label stack and thereby permit more air to move behind the label, and to finally pull an opposite extremity of the label away from the label stack in a manner that permits high speed labeling as the label is subsequently transferred from the transfer head to the in-mold labeler
30 for the in-mold labeling of the plastic blow molding machine.

71087-685

11. A system for plastic blow molding as in claim 10 wherein the actuator of the in-mold labeler includes a first cam mechanism that moves each dispensing head during the label depositing operation along the rotary path of the adjacent open mold, and the actuator of the in-mold labeler also including a second cam mechanism that angularly positions the support of the dispensing head assembly about the support axis such that the dispensing head axis thereof moves in alignment with the moving mold parting plane of the adjacent open mold as the dispensing head is moved on the support during the label depositing operation from the pick position to the place position to deposit the label within the adjacent open mold in a manner that permits the high speed operation of the in-mold labeling, and transfer apparatus including a rotary table that supports the label transfer head for rotary movement with the table adjacent the label magazine and for rotary movement with respect to the table under the impetus of the label transfer actuator to provide the rolling motion that pulls the label from the label magazine.

12. A system for plastic blow molding as in claim 11 wherein the dispensing wheel of the in-mold labeler includes a plurality of tracks that extend radially from the dispensing wheel axis and are respectively associated with the dispensing head assemblies of the in-mold labeler, each dispensing head assembly being mounted on the associated track for movement under control of the first cam mechanism of the in-mold labeler, each dispensing head assembly including a pivotal mount that mounts the support thereof for pivotal movement about an associated vertical axis under the control of the second cam mechanism of the in-mold labeler, and the label transfer apparatus including a plurality of the label transfer heads supported on the

71087-685

rotary table for rotary movement on the table adjacent the label magazine and for rotary movement with respect to the table under the impetus of the label transfer actuator.

13. A system for plastic blow molding as in claim 12
5 wherein the in-mold labeler includes a third cam mechanism having an operator for moving each dispensing head with its label carrier on the associated support between the pick position and the place position where the label carrier is positioned within the adjacent open mold to transfer the
10 label carried thereby to the mold, and the label transfer apparatus including a rotary actuator member that rotates about a central rotary axis of the rotary table and also includes an endless belt that extends from the rotary actuator member to the label transfer heads to provide the
15 rotation thereof with respect to the rotary table.

14. A system for plastic blow molding as in claim 13 wherein the label carrier of each dispensing head is mounted on the dispensing head for movement between a retracted position and a label transfer position, the third cam
20 mechanism including a cam member that is mounted on the base of the dispensing assembly and also including an operator that is operable to move the cam member toward and away from the blow molding machine, the cam member of the third cam mechanism including a dispensing head cam surface and also
25 including a label carrier cam surface, each dispensing head including a dispensing head cam follower that is engaged by the dispensing head cam surface of the cam member of the third cam mechanism to move the dispensing head on the associated support between the pick and place positions,
30 each dispensing head including a label carrier cam follower that is engaged by the label carrier cam surface of the cam member of the third cam mechanism to move the label carrier

71087-685

between its retracted and label transfer positions with the dispensing head in its place position to transfer the label to the adjacent open mold, and the label transfer apparatus including at least one tension wheel mounted for rotation on the rotary table with the belt extending thereover to provide tensioning of the belt.

15. A system for plastic blow molding as in claim 14 further including a lock mechanism for locking the dispensing head from movement on the support of the dispensing head assembly and for locking the label carrier in its retracted position, the lock mechanism including an unlocking cam follower for releasing the lock mechanism, and the cam member of the third cam mechanism including an unlocking cam surface for engaging the unlocking cam follower of the lock mechanism to release the lock mechanism and permit movement of the dispensing head on the support between the pick and place positions under the impetus of the operator and to also permit movement of the label carrier between the retracted and label transfer positions, and each label transfer head on the rotary table including a pair of vacuum openings one of which engages the label adjacent its first mentioned extremity to initially pull the label away from the label stack and the other of which engages the label adjacent its opposite extremity to finally complete the pulling of the label away from the label stack.

16. A system for plastic blow molding as in claim 15 wherein each dispensing head includes a pair of label carriers mounted on the dispensing head for movement between retracted and label transfer positions.

71087-685

17. A system for plastic blow molding comprising:

(a) a plastic blow molding machine having a rotary mold wheel that supports a plurality of molds for rotary movement along a rotary path about a mold wheel axis and for
5 concomitant pivotal movement of mold sections of the molds between open and closed positions about associated mold axes that extend parallel with the mold wheel axis and with the mold sections opening in an outward direction from the mold wheel axis and symmetrically about associated mold parting
10 planes that extend from the mold wheel axis through the associated mold axes;

(b) an in-mold labeler including:

a dispensing assembly having a base and a dispensing wheel that is rotatably mounted on the base about
15 a dispensing wheel axis that extends parallel to the mold wheel axis, the dispensing wheel including a plurality of dispensing head assemblies each of which includes a support and a dispensing head mounted on the support for movement along a dispensing head axis of the support between pick and
20 place positions, and each dispensing head including a pair of label carriers for receiving labels in the pick position thereof and for transferring the labels in the place position thereof to an adjacent open mold of the blow molding machine; and

25 an actuator including a first cam mechanism that moves the support of each dispensing head assembly during a label depositing operation along the rotary path of the adjacent open mold about the mold wheel axis, and the actuator including a second cam mechanism for angularly
30 positioning the support of the dispensing head assembly about a support axis such that the dispensing head axis

71087-685

moves in alignment with the moving mold parting plane of the adjacent open mold as the dispensing head is moved on the support during the label depositing operation from the pick position to the place position to deposit the labels within
5 the adjacent open mold in a manner that permits high speed operation of the in-mold labeling; and

(c) label transfer apparatus for transferring labels from a label magazine to the in-mold labeler, the label transfer apparatus including:

10 a rotary table;

a plurality of transfer heads each of which is mounted on the rotary table for movement thereof adjacent the label magazine which stores a stack of labels with an exposed end from which the labels are sequentially
15 dispensed;

each transfer head including a pair of vacuum openings through which a vacuum is supplied; and

an actuator for moving the transfer heads relative to the table with a rolling motion to engage one of
20 the vacuum openings with the label at the exposed end of the label magazine and to initially pull an extremity of that label away from the label stack and thereby permit air to move behind the label, to subsequently pull an intermediate portion of the label away from the label stack and thereby
25 permit more air to move behind the label, and to finally engage the other vacuum opening with the label to pull an opposite extremity of the label away from the label stack in a manner that permits high speed labeling as the labels are subsequently transferred to the in-mold labeler for the
30 in-mold labeling of the plastic blow molding machine.

71087-685

18. A system for plastic blow molding, comprising:

(a) a plastic blow molding machine having a rotary mold wheel that supports a plurality of molds for rotary movement along a rotary path about a mold wheel axis and for
5 concomitant pivotal movement of mold sections of the molds between open and closed positions about associated mold axes that extend parallel with the mold wheel axis and with the mold sections opening in an outward direction from the mold wheel axis and symmetrically about associated mold parting
10 planes that extend from the mold wheel axis through the associated mold axes;

(b) an in-mold labeler including:

a dispensing assembly having a base and a dispensing wheel that is rotatably mounted on the base about
15 a dispensing wheel axis that extends parallel to the mold wheel axis, the dispensing wheel including a plurality of tracks that extend radially from the dispensing wheel axis, the dispensing wheel also including a plurality of dispensing head assemblies each of which has a support, the
20 supports of the dispensing head assemblies being respectively mounted by the tracks for radially movement with respect to the dispensing wheel axis, each dispensing head assembly including a dispensing head mounted on its support for movement along a dispensing head axis of the
25 support between pick and place positions, each dispensing head including a pair of label carriers for receiving labels in the pick position thereof and for transferring the labels in the place position thereof to an adjacent open mold of the blow molding machine, and each dispensing head assembly
30 including a pivotal mount that mounts its support for

71087-685

angular movement about a support axis with respect to the dispensing wheel;

an actuator including a first cam mechanism that moves the support of each dispensing head assembly during a label depositing operation along the rotary path of the adjacent open mold about the mold wheel axis, and the actuator including a second cam mechanism for angularly positioning the support of the dispensing head assembly about the support axis of its pivotal mount such that the dispensing head axis moves in alignment with the moving mold parting plane of the adjacent open mold as the dispensing head is moved on the support during the label depositing operation from the pick position to the place position to deposit the labels within the adjacent open mold in a manner that permits high speed operation of the in-mold labeling; and

a third cam mechanism including an operator for moving each dispensing head with its label carriers thereon between the pick position and the place position where the label carrier are positioned within the adjacent open mold to transfer the labels carried thereby to the mold; and

(c) label transfer apparatus for transferring labels from a label magazine to the in-mold labeler, the label transfer apparatus including:

a rotary table;

a plurality of transfer heads each of which is mounted on the rotary table for movement thereof adjacent the label magazine which stores a stack of labels with an

71087-685

exposed end from which the labels are sequentially dispensed;

each transfer head including a pair of vacuum openings through which a vacuum is supplied; and

5 an actuator including a rotary actuator member for moving the transfer heads relative to the table with a rolling motion to engage one of the vacuum openings with the label at the exposed end of the label magazine and to initially pull an extremity of that label away from the
10 label stack and thereby permit air to move behind the label, to subsequently pull an intermediate portion of the label away from the label stack and thereby permit more air to move behind the label, and to finally engage the other vacuum opening with the label to pull an opposite extremity
15 of the label away from the label stack in a manner that permits high speed labeling as the label is subsequently transferred from the transfer head to the in-mold labeler for the in-mold labeling of the plastic blow molding machine.

SMART & BIGGAR
OTTAWA, CANADA

PATENT AGENTS

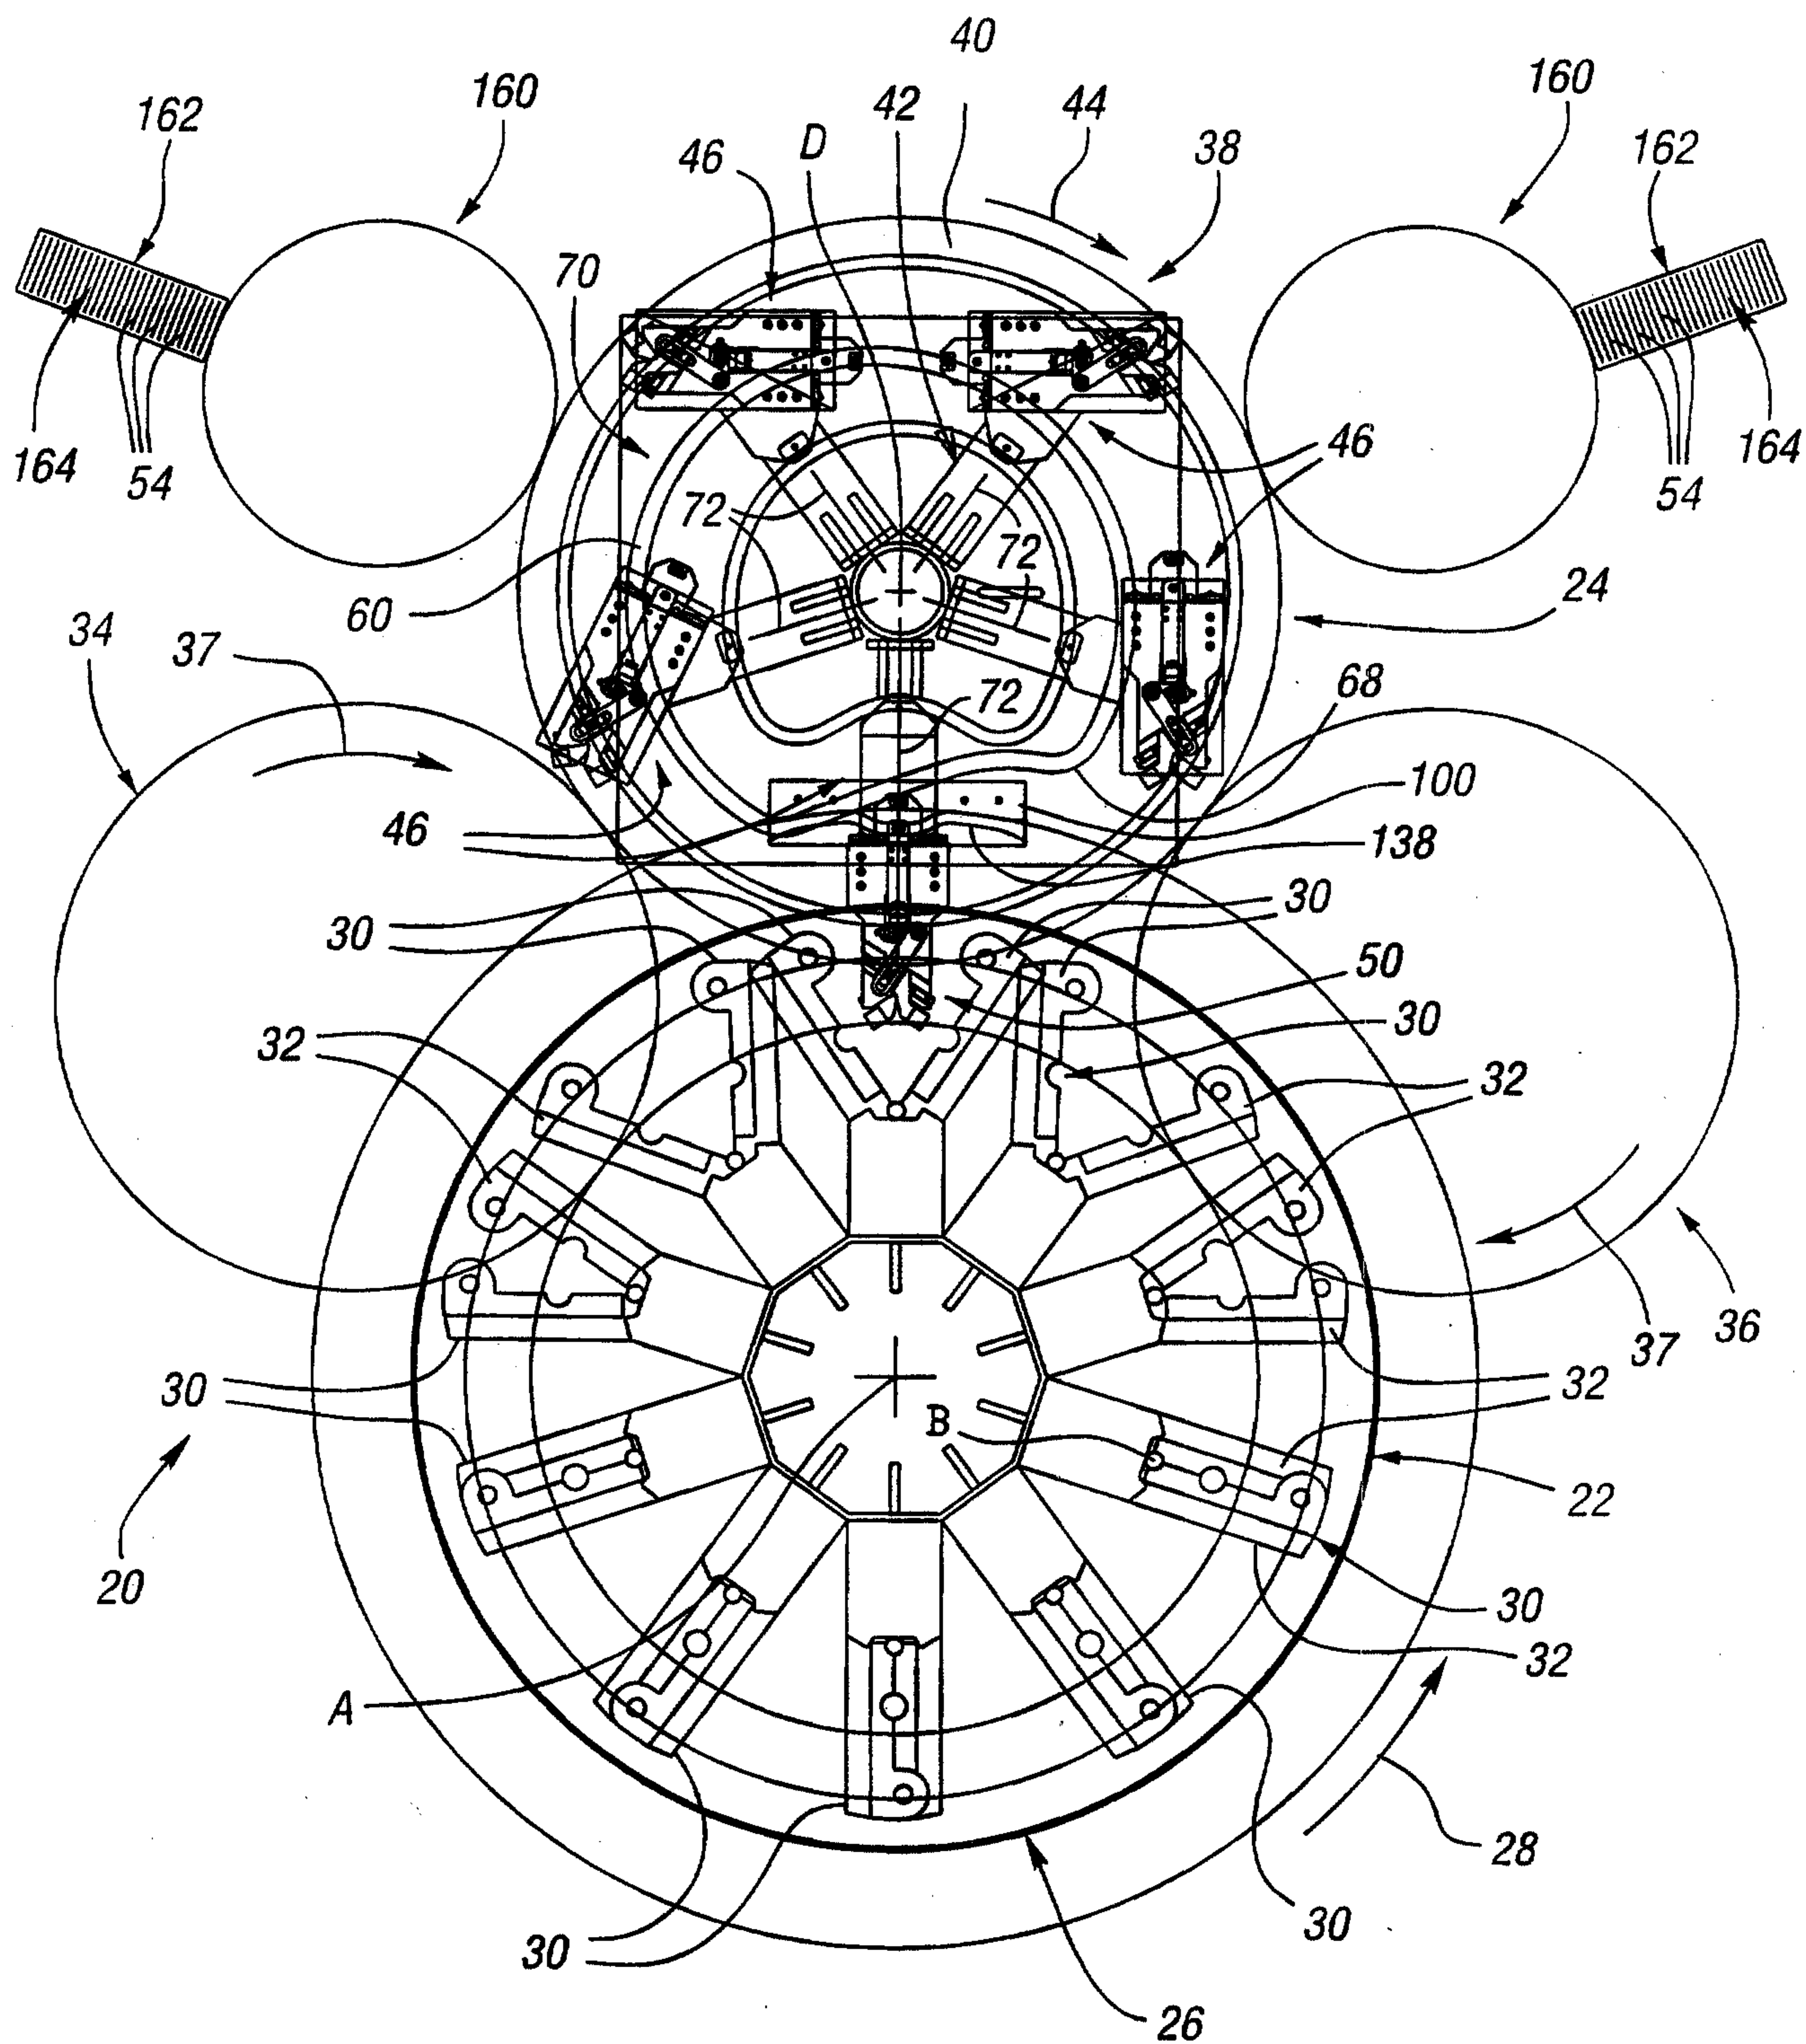


Fig. 1

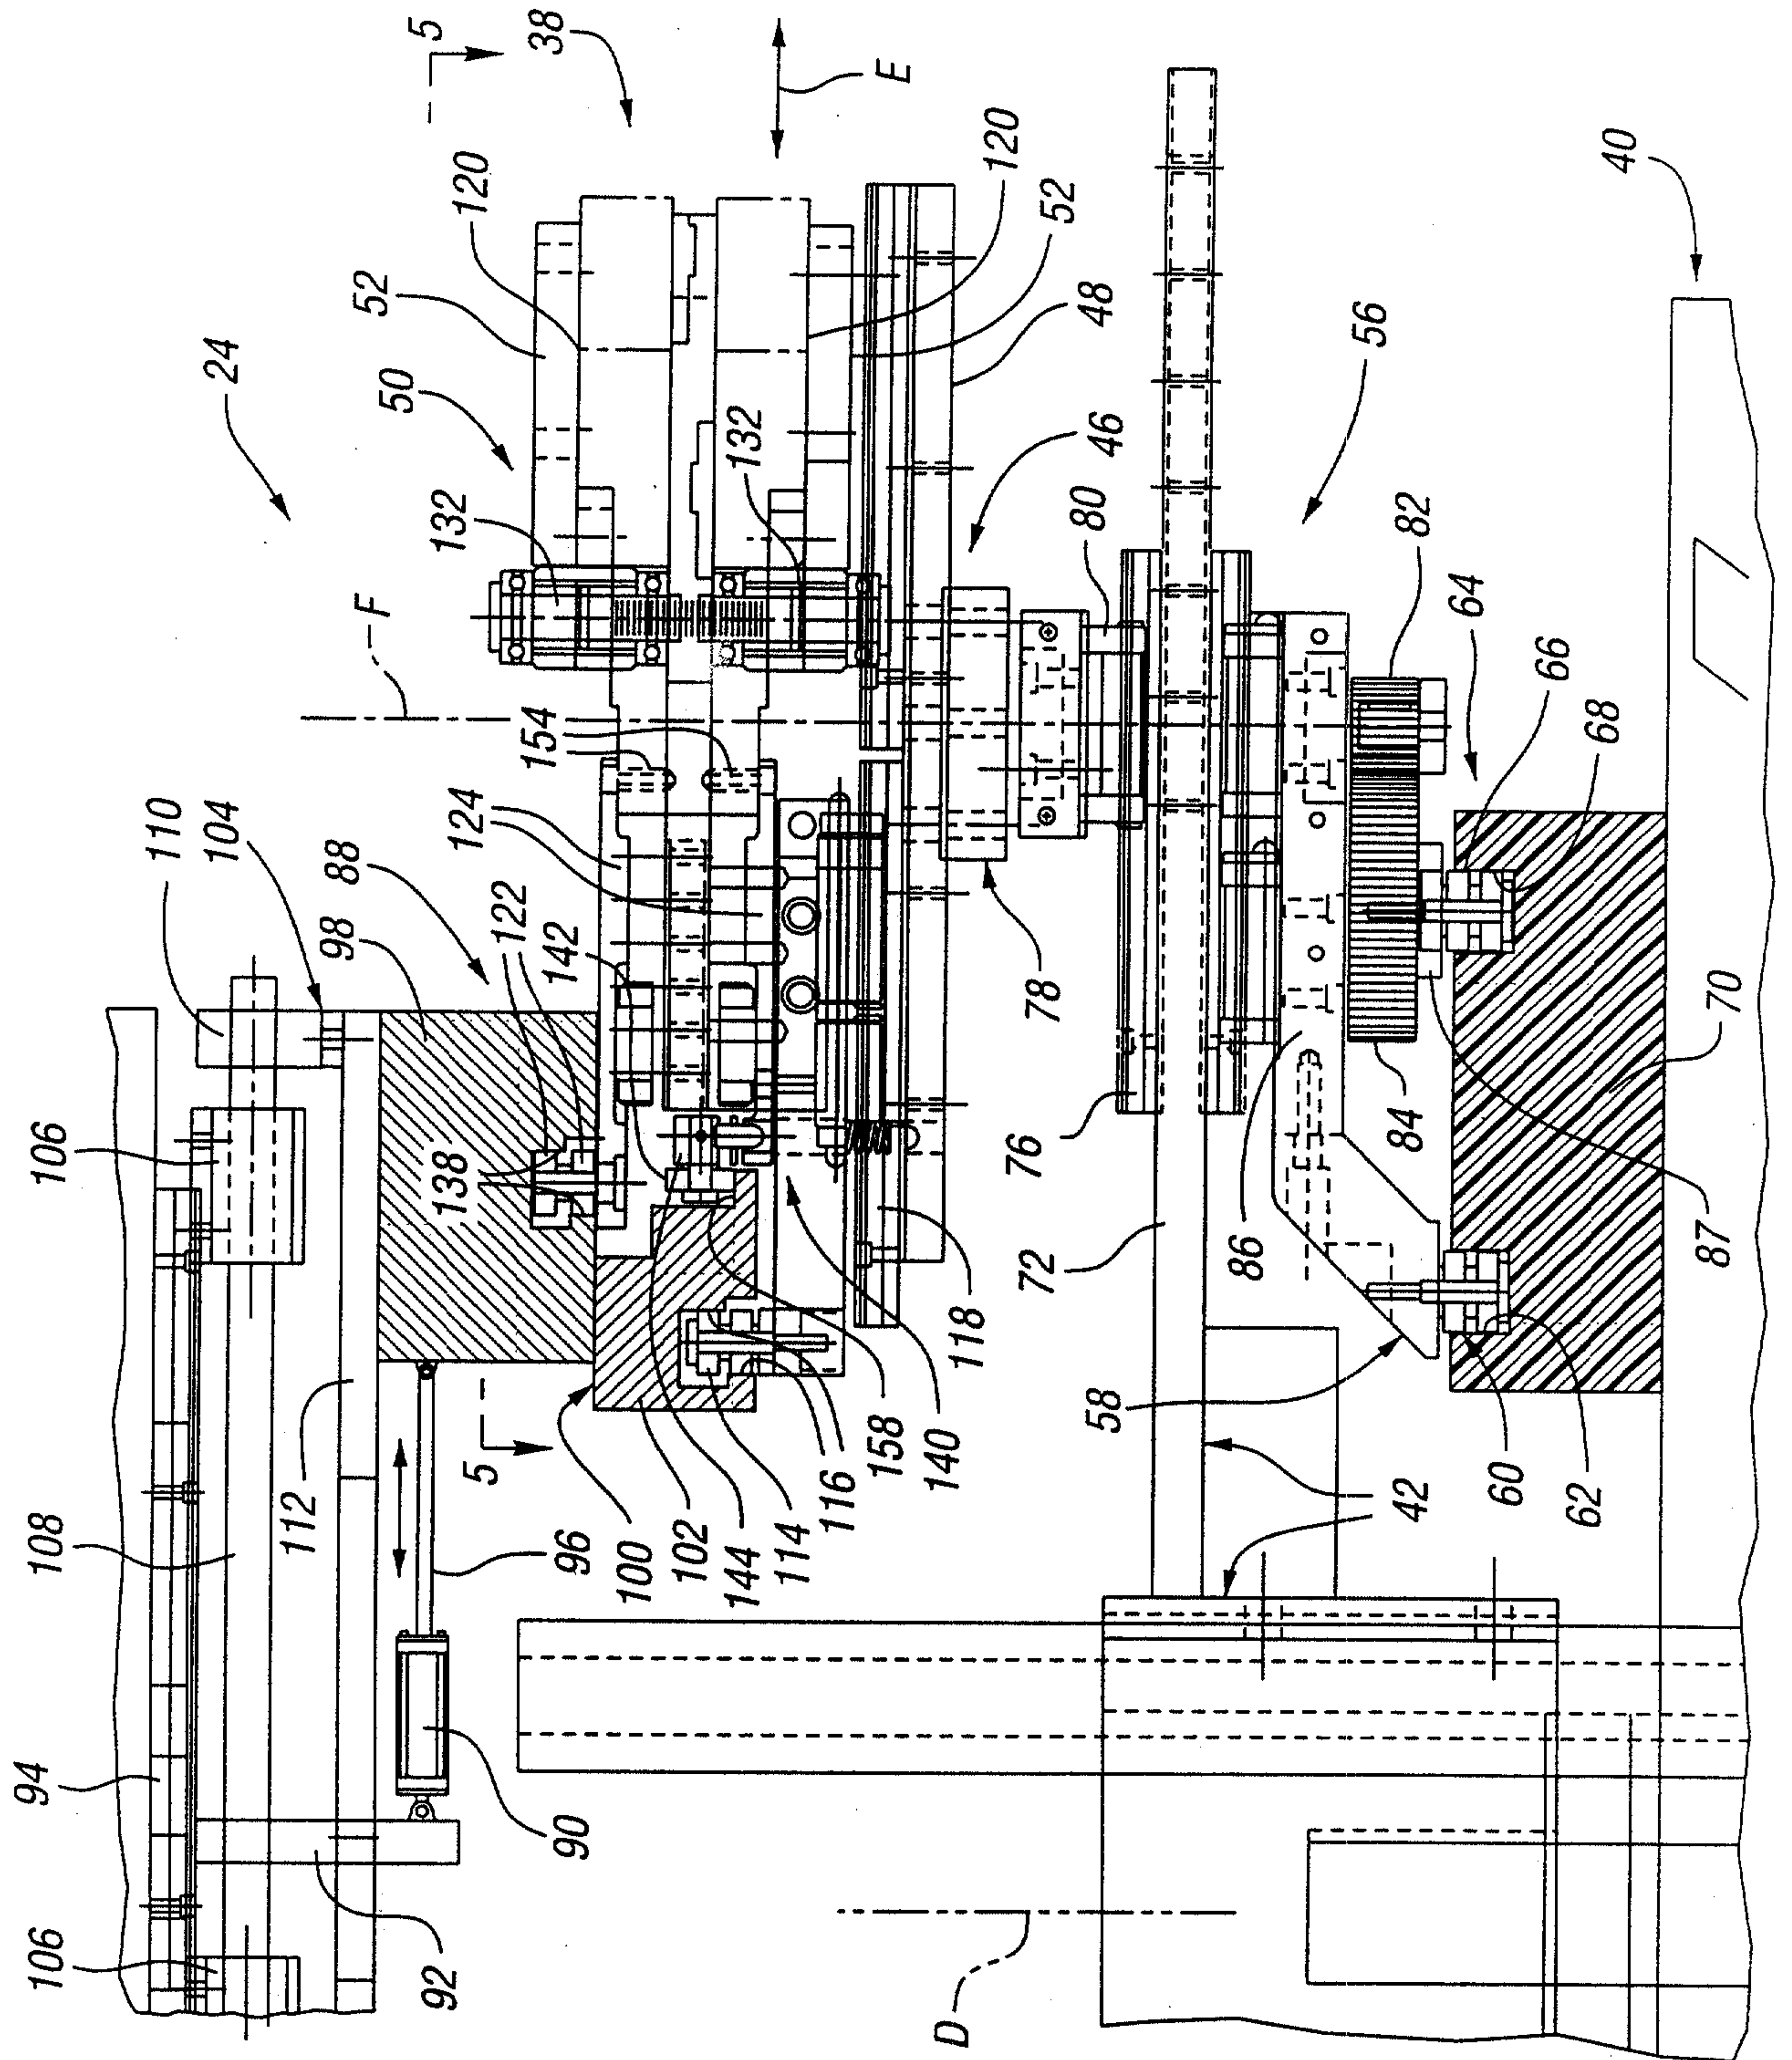
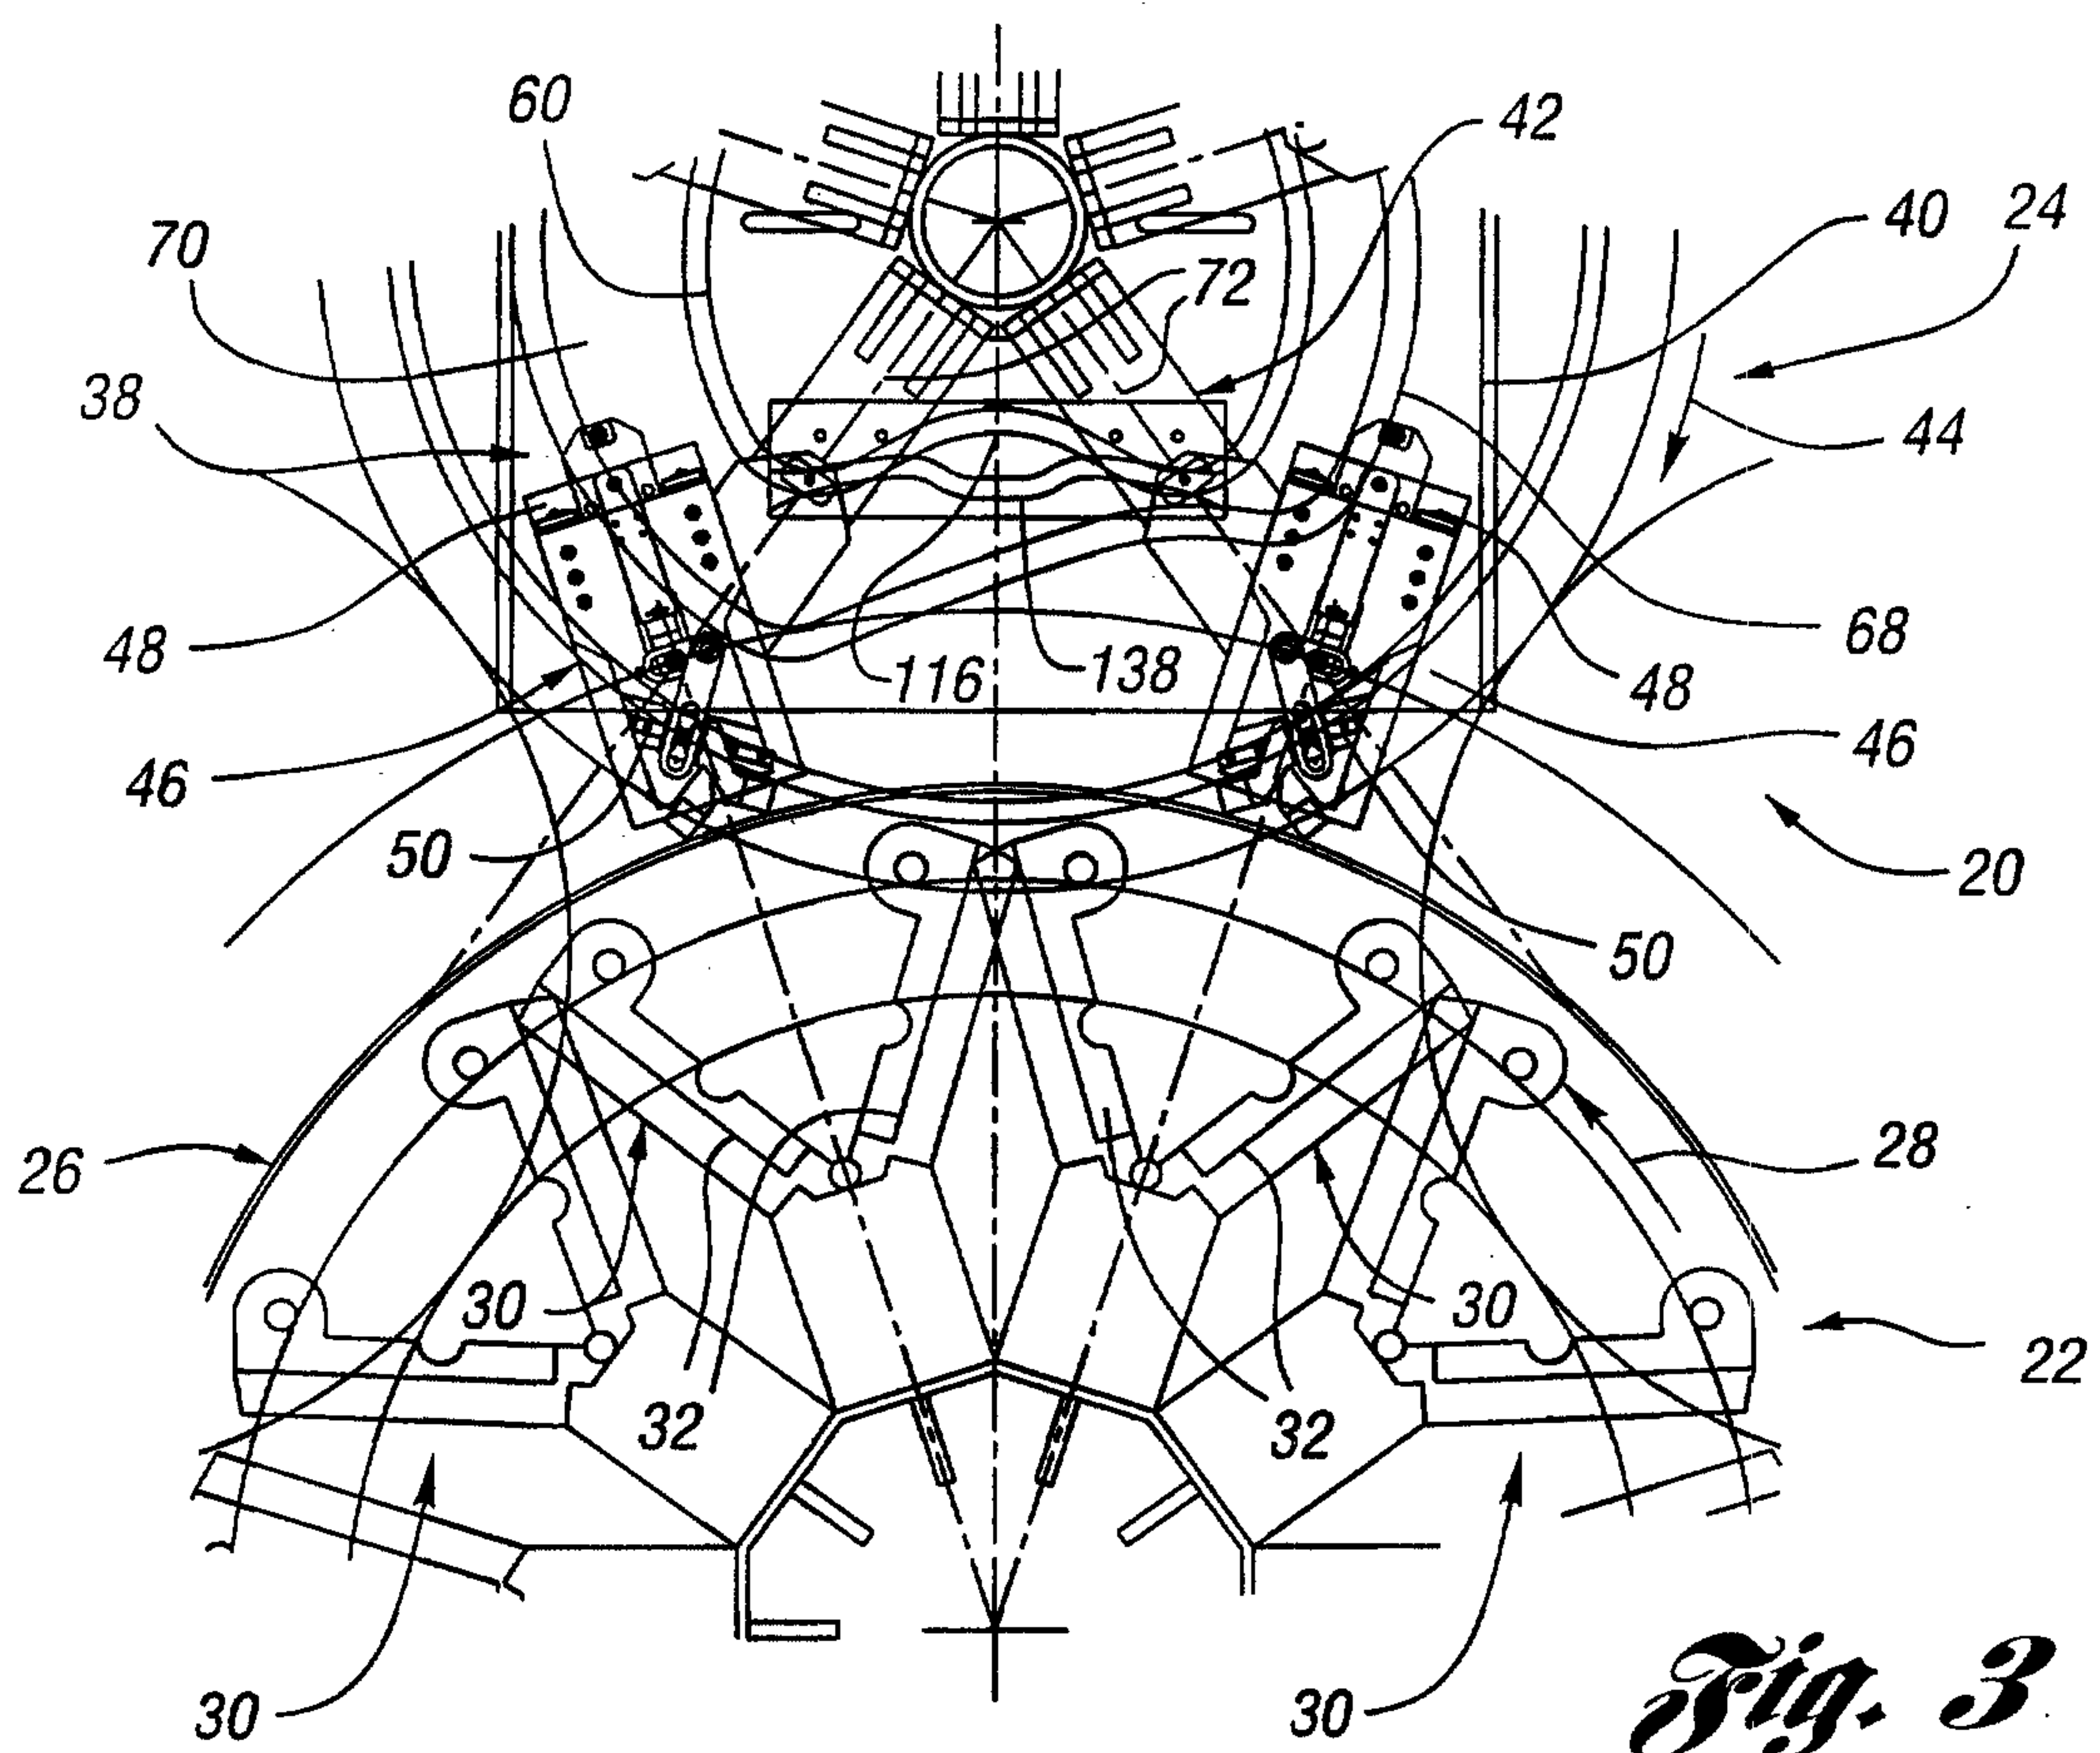
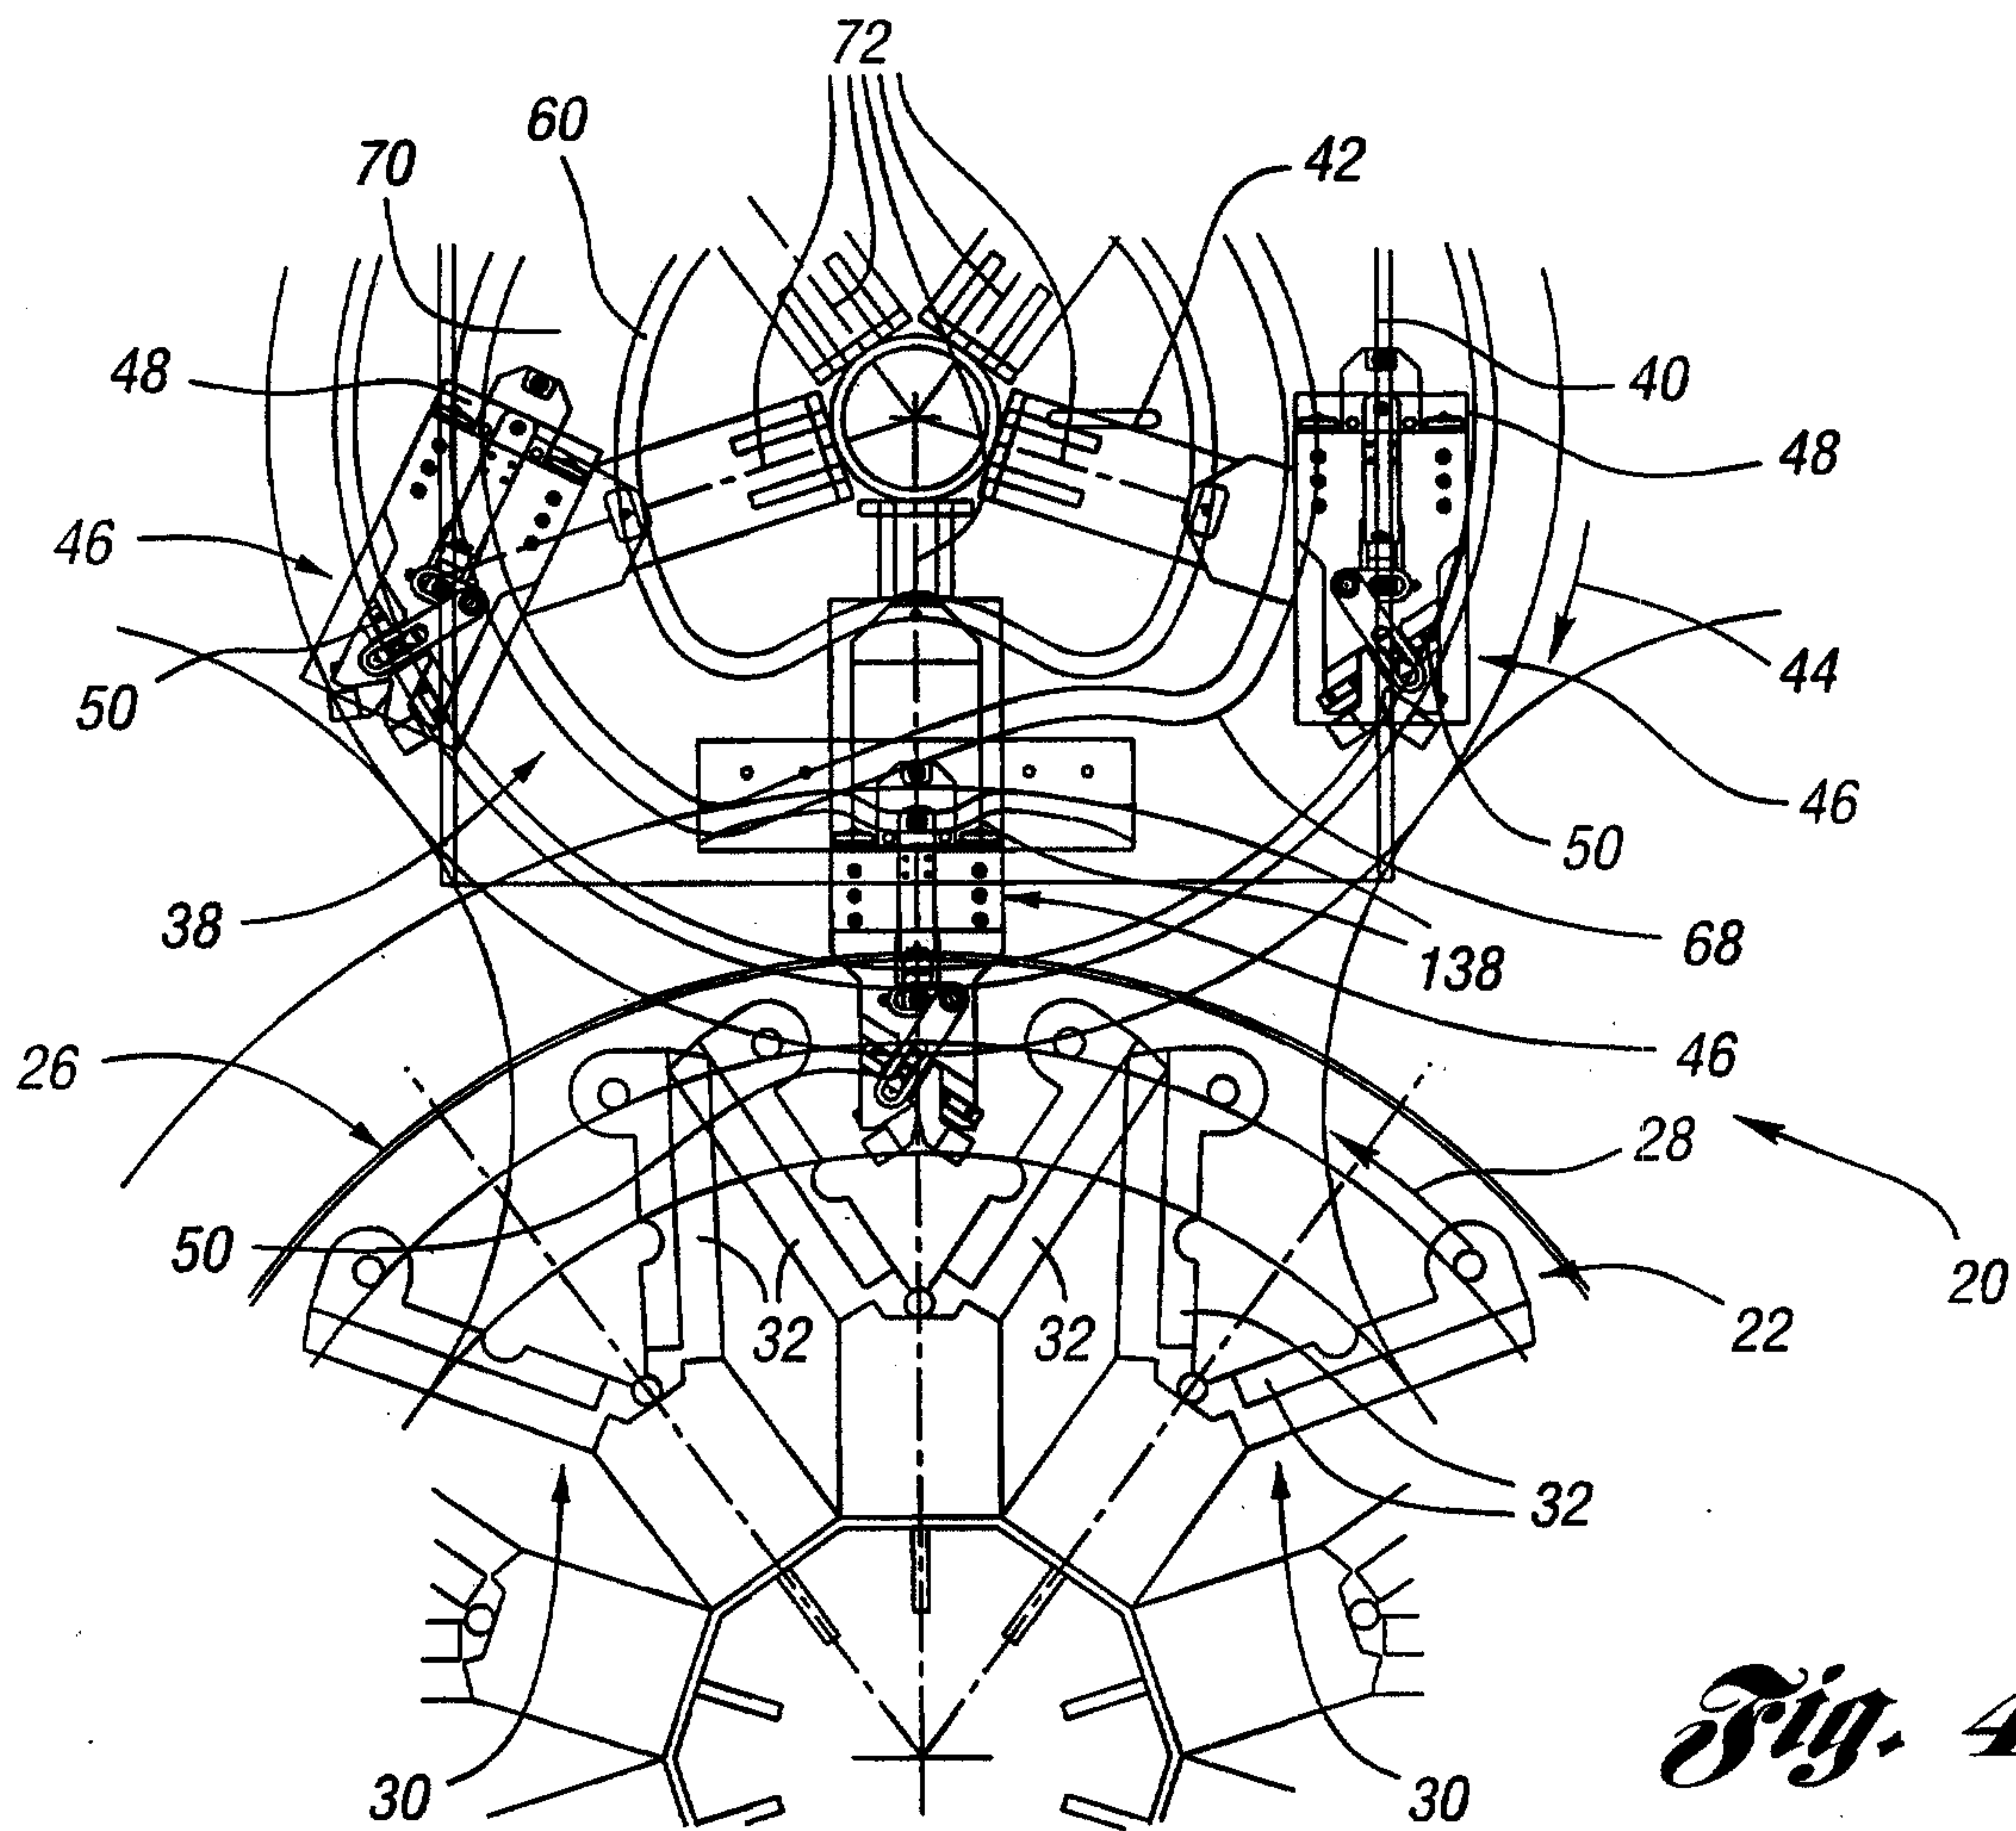


Fig. 2

*Fig. 3**Fig. 4*

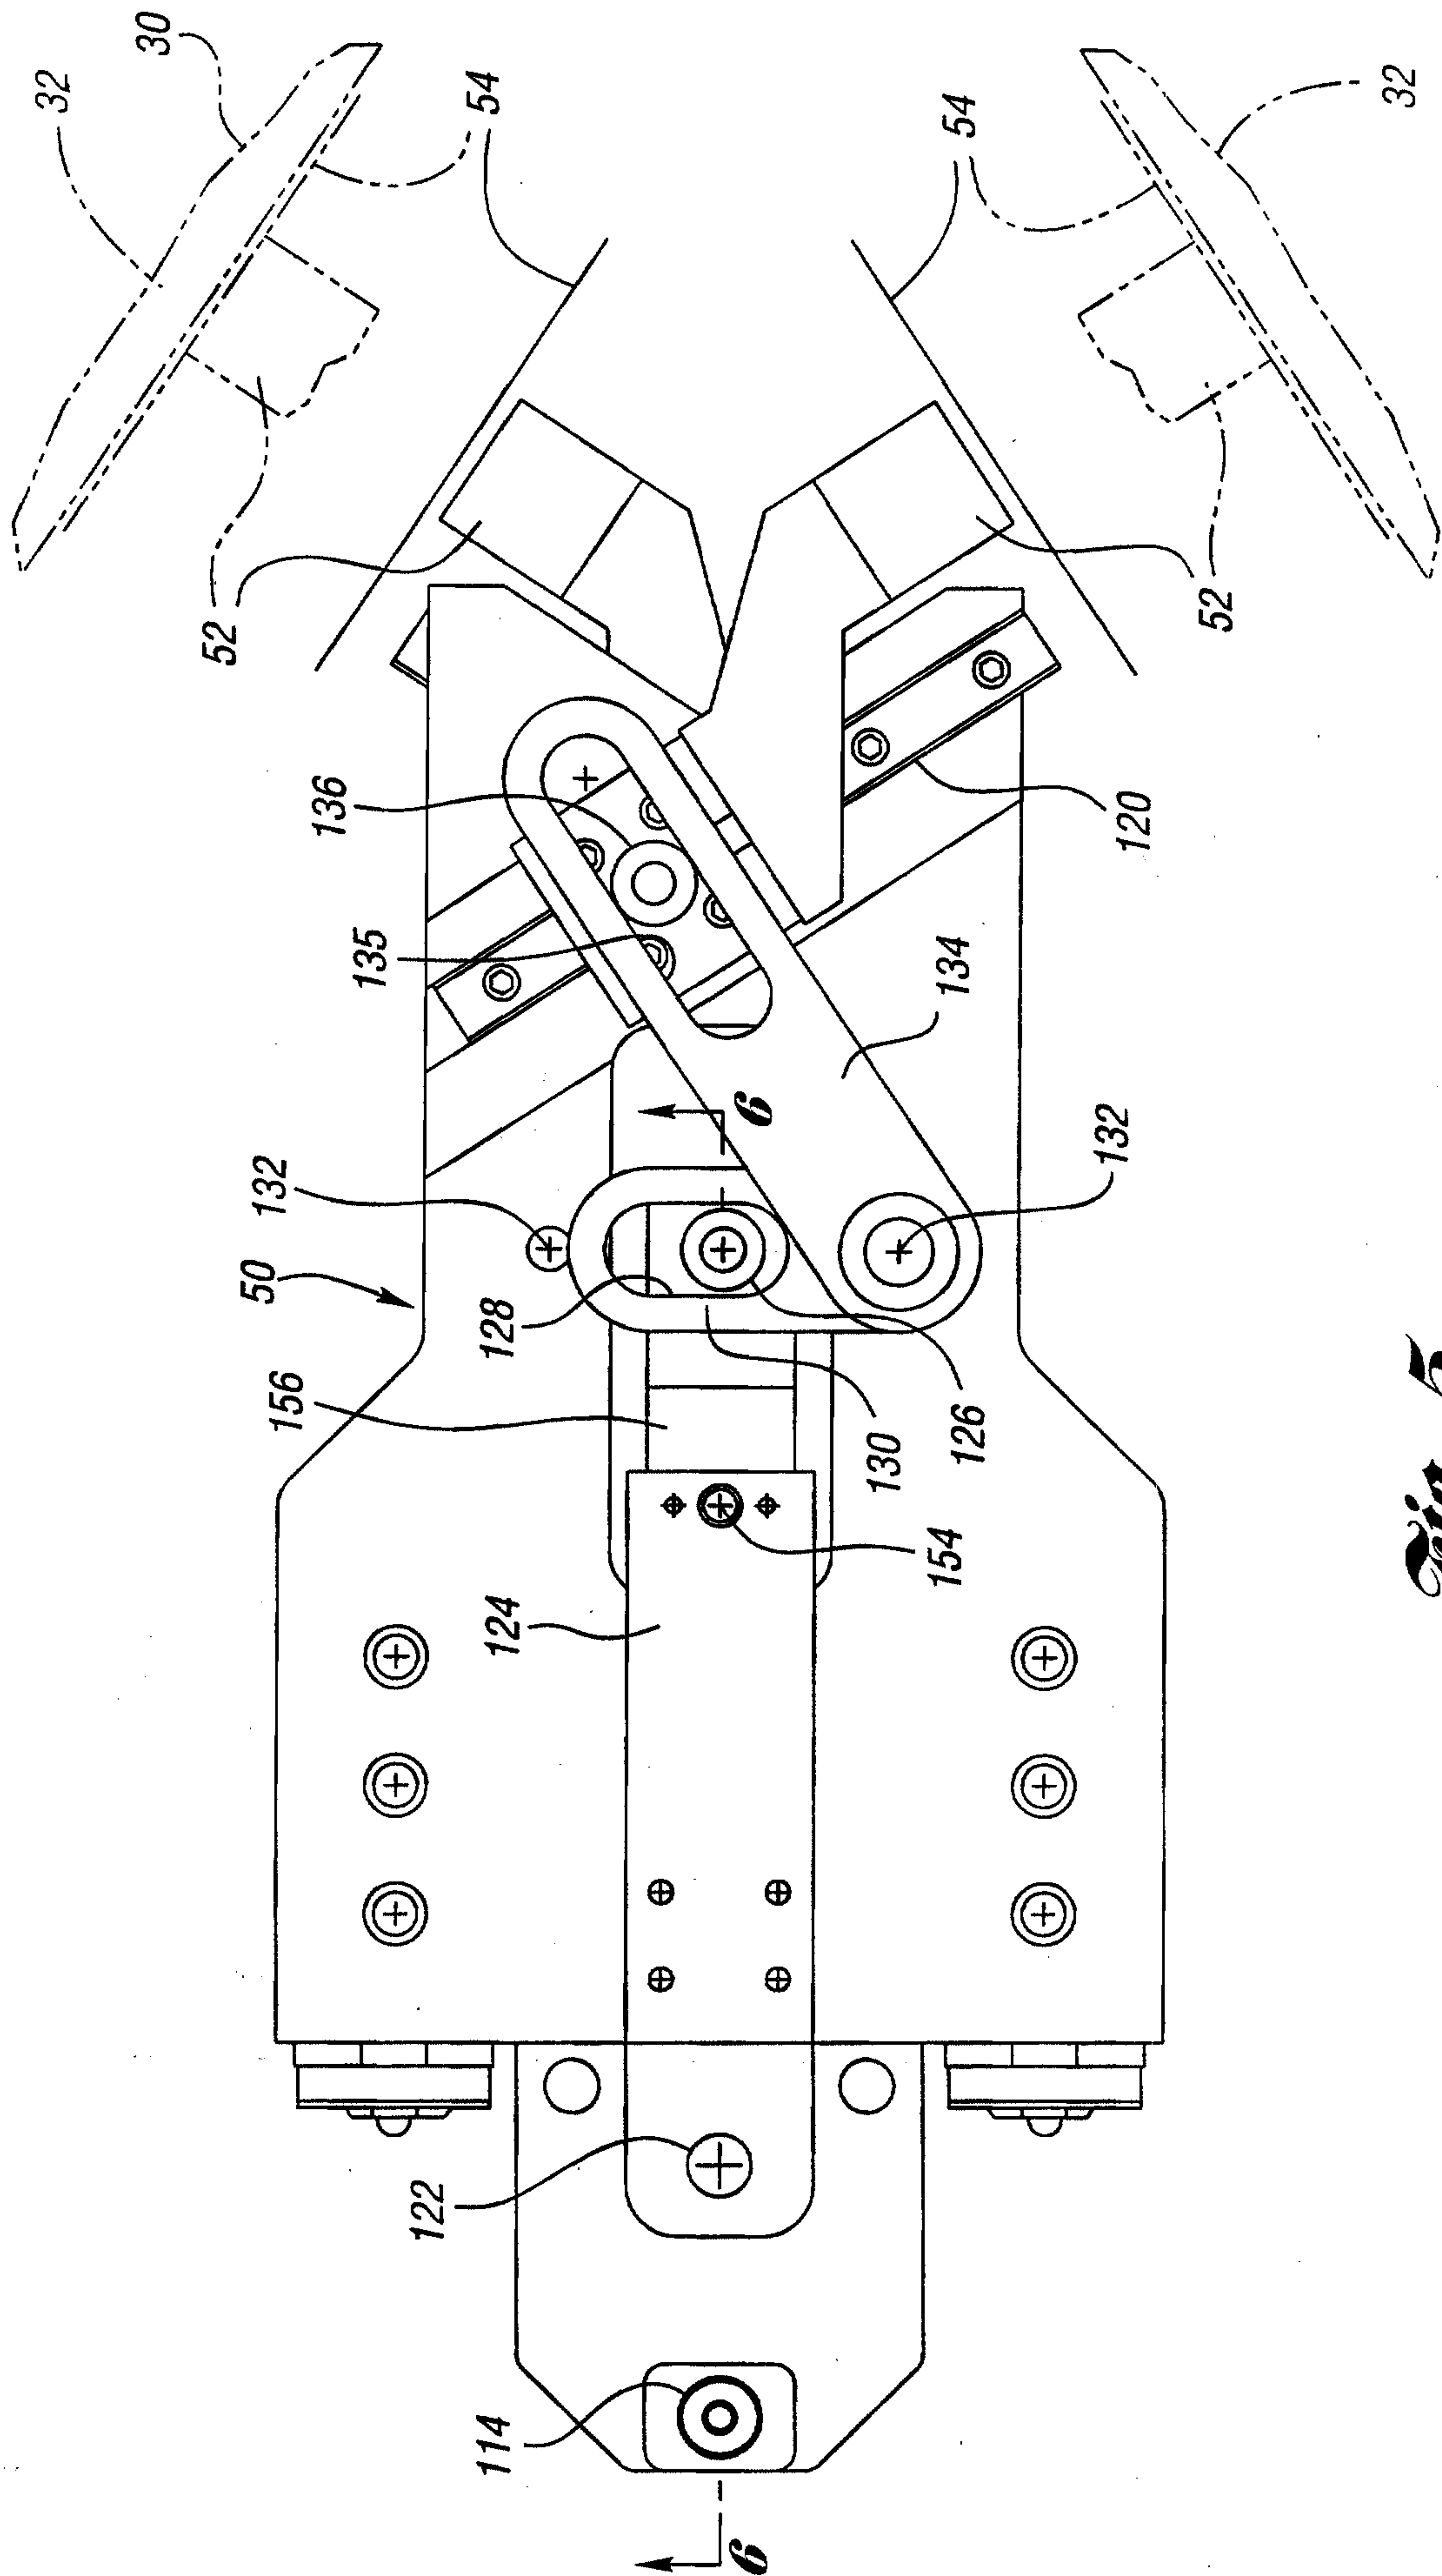


Fig. 5

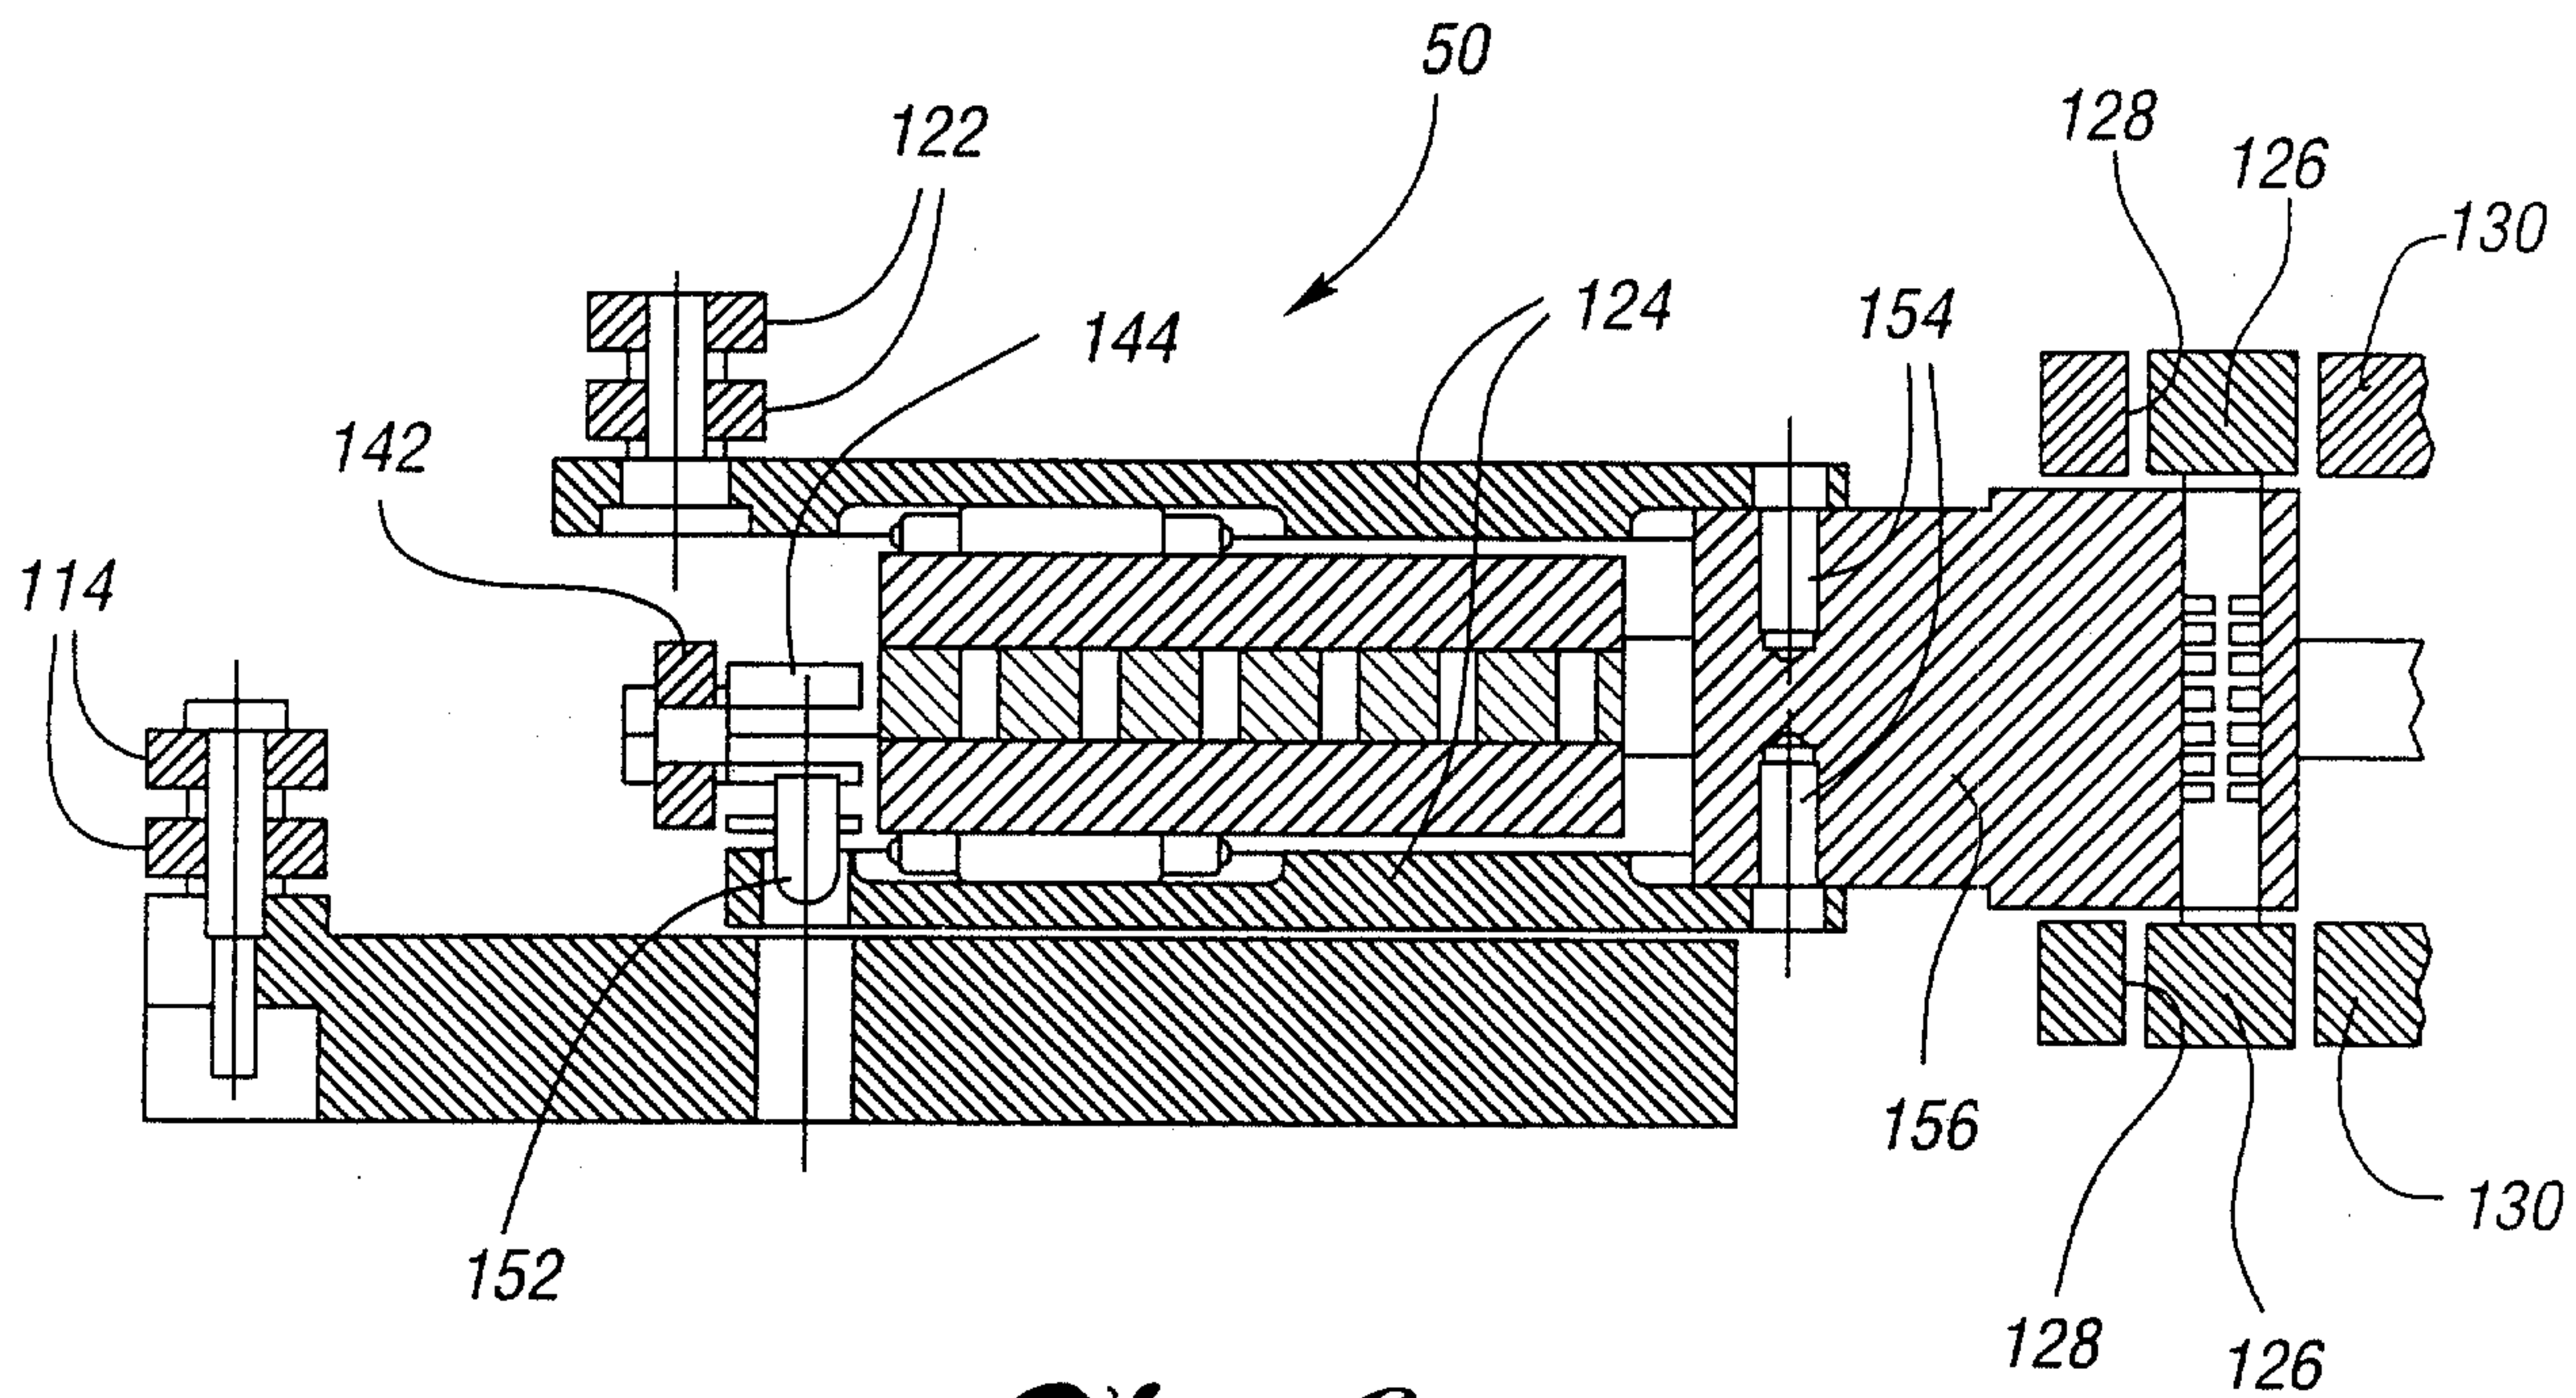


Fig. 6

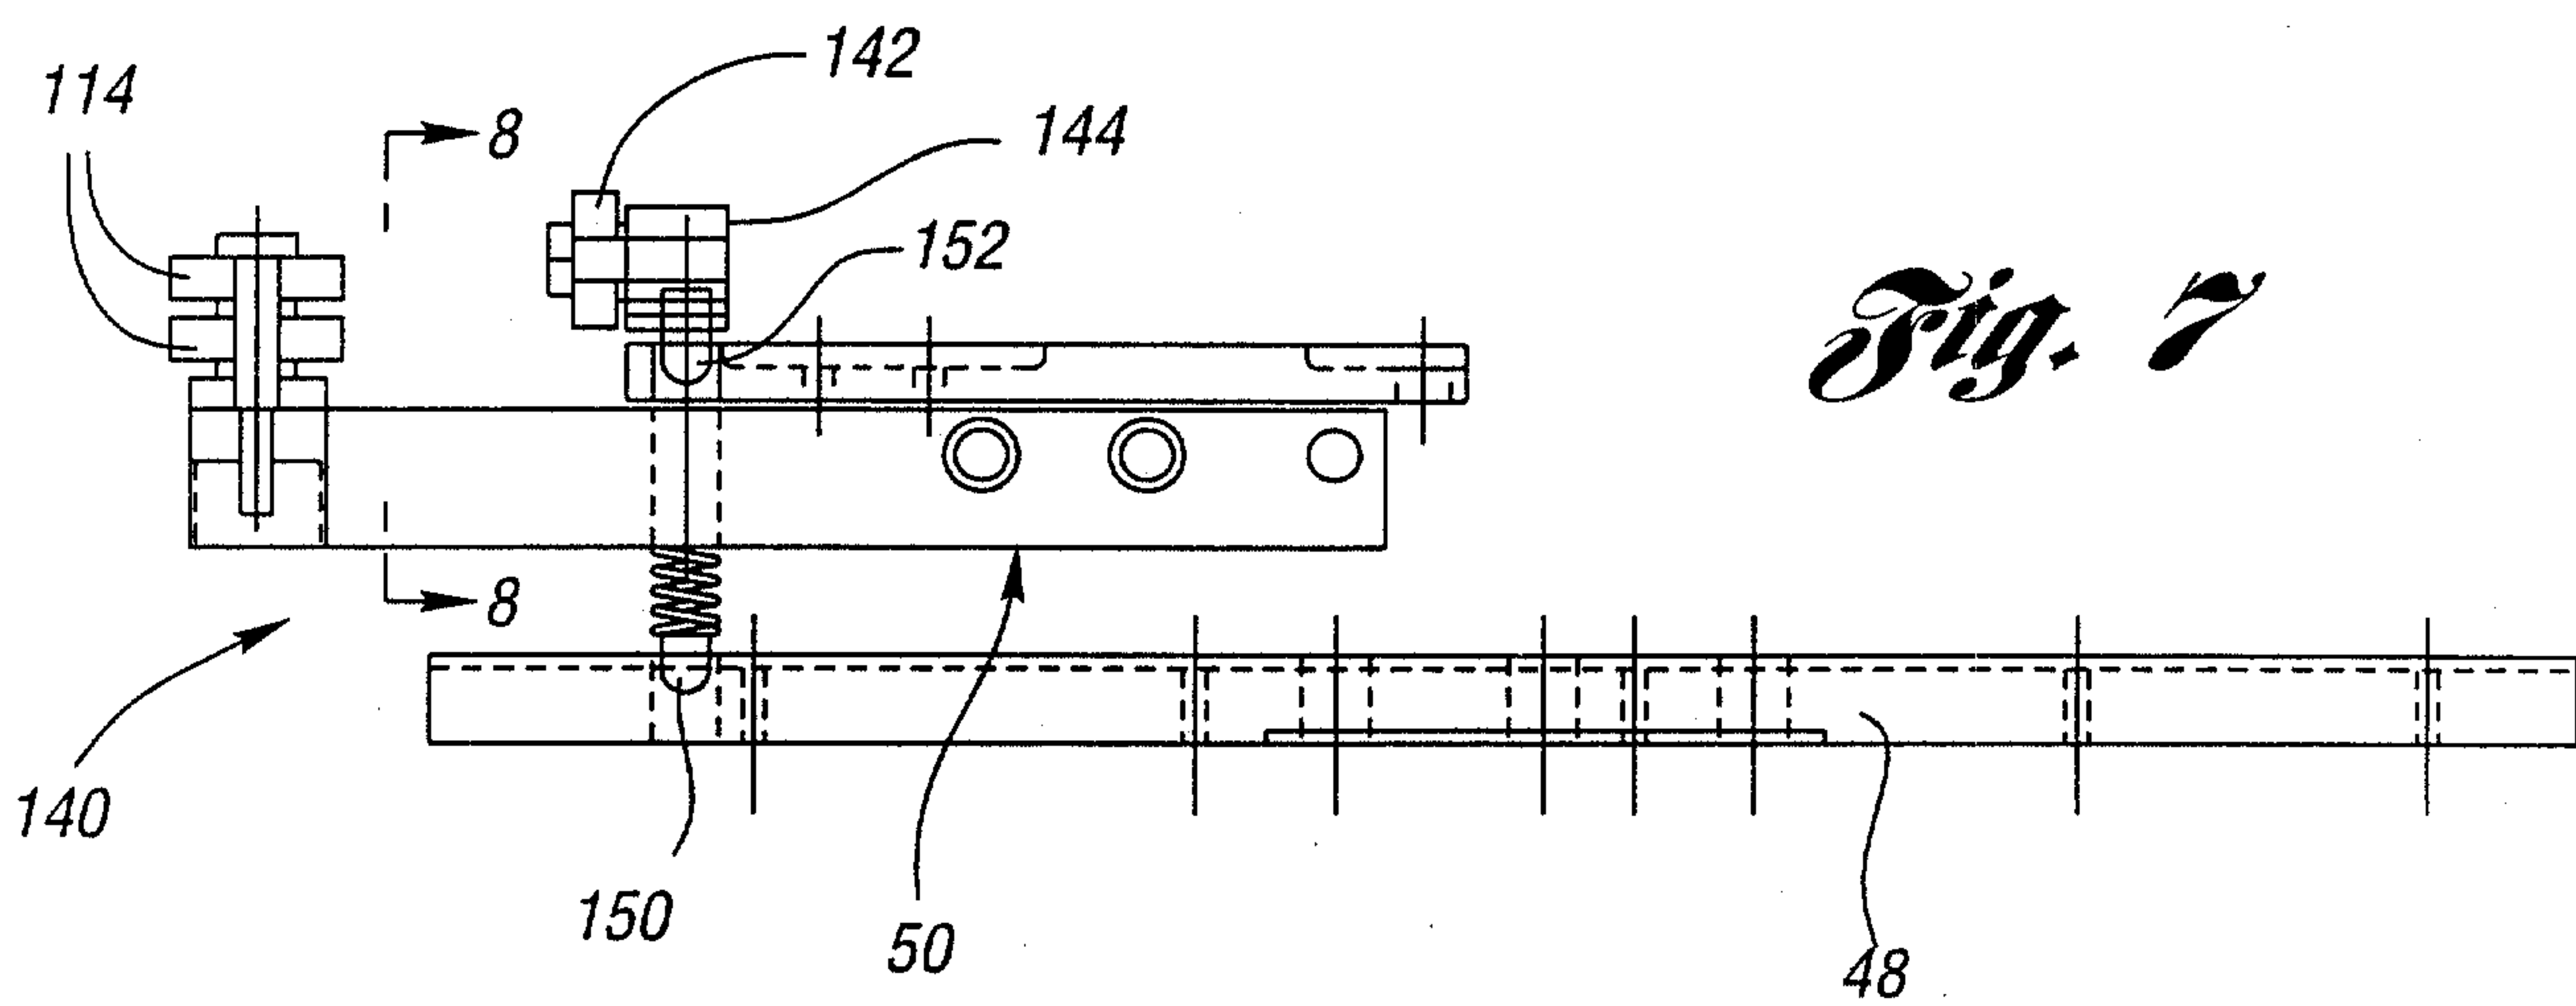


Fig. 7

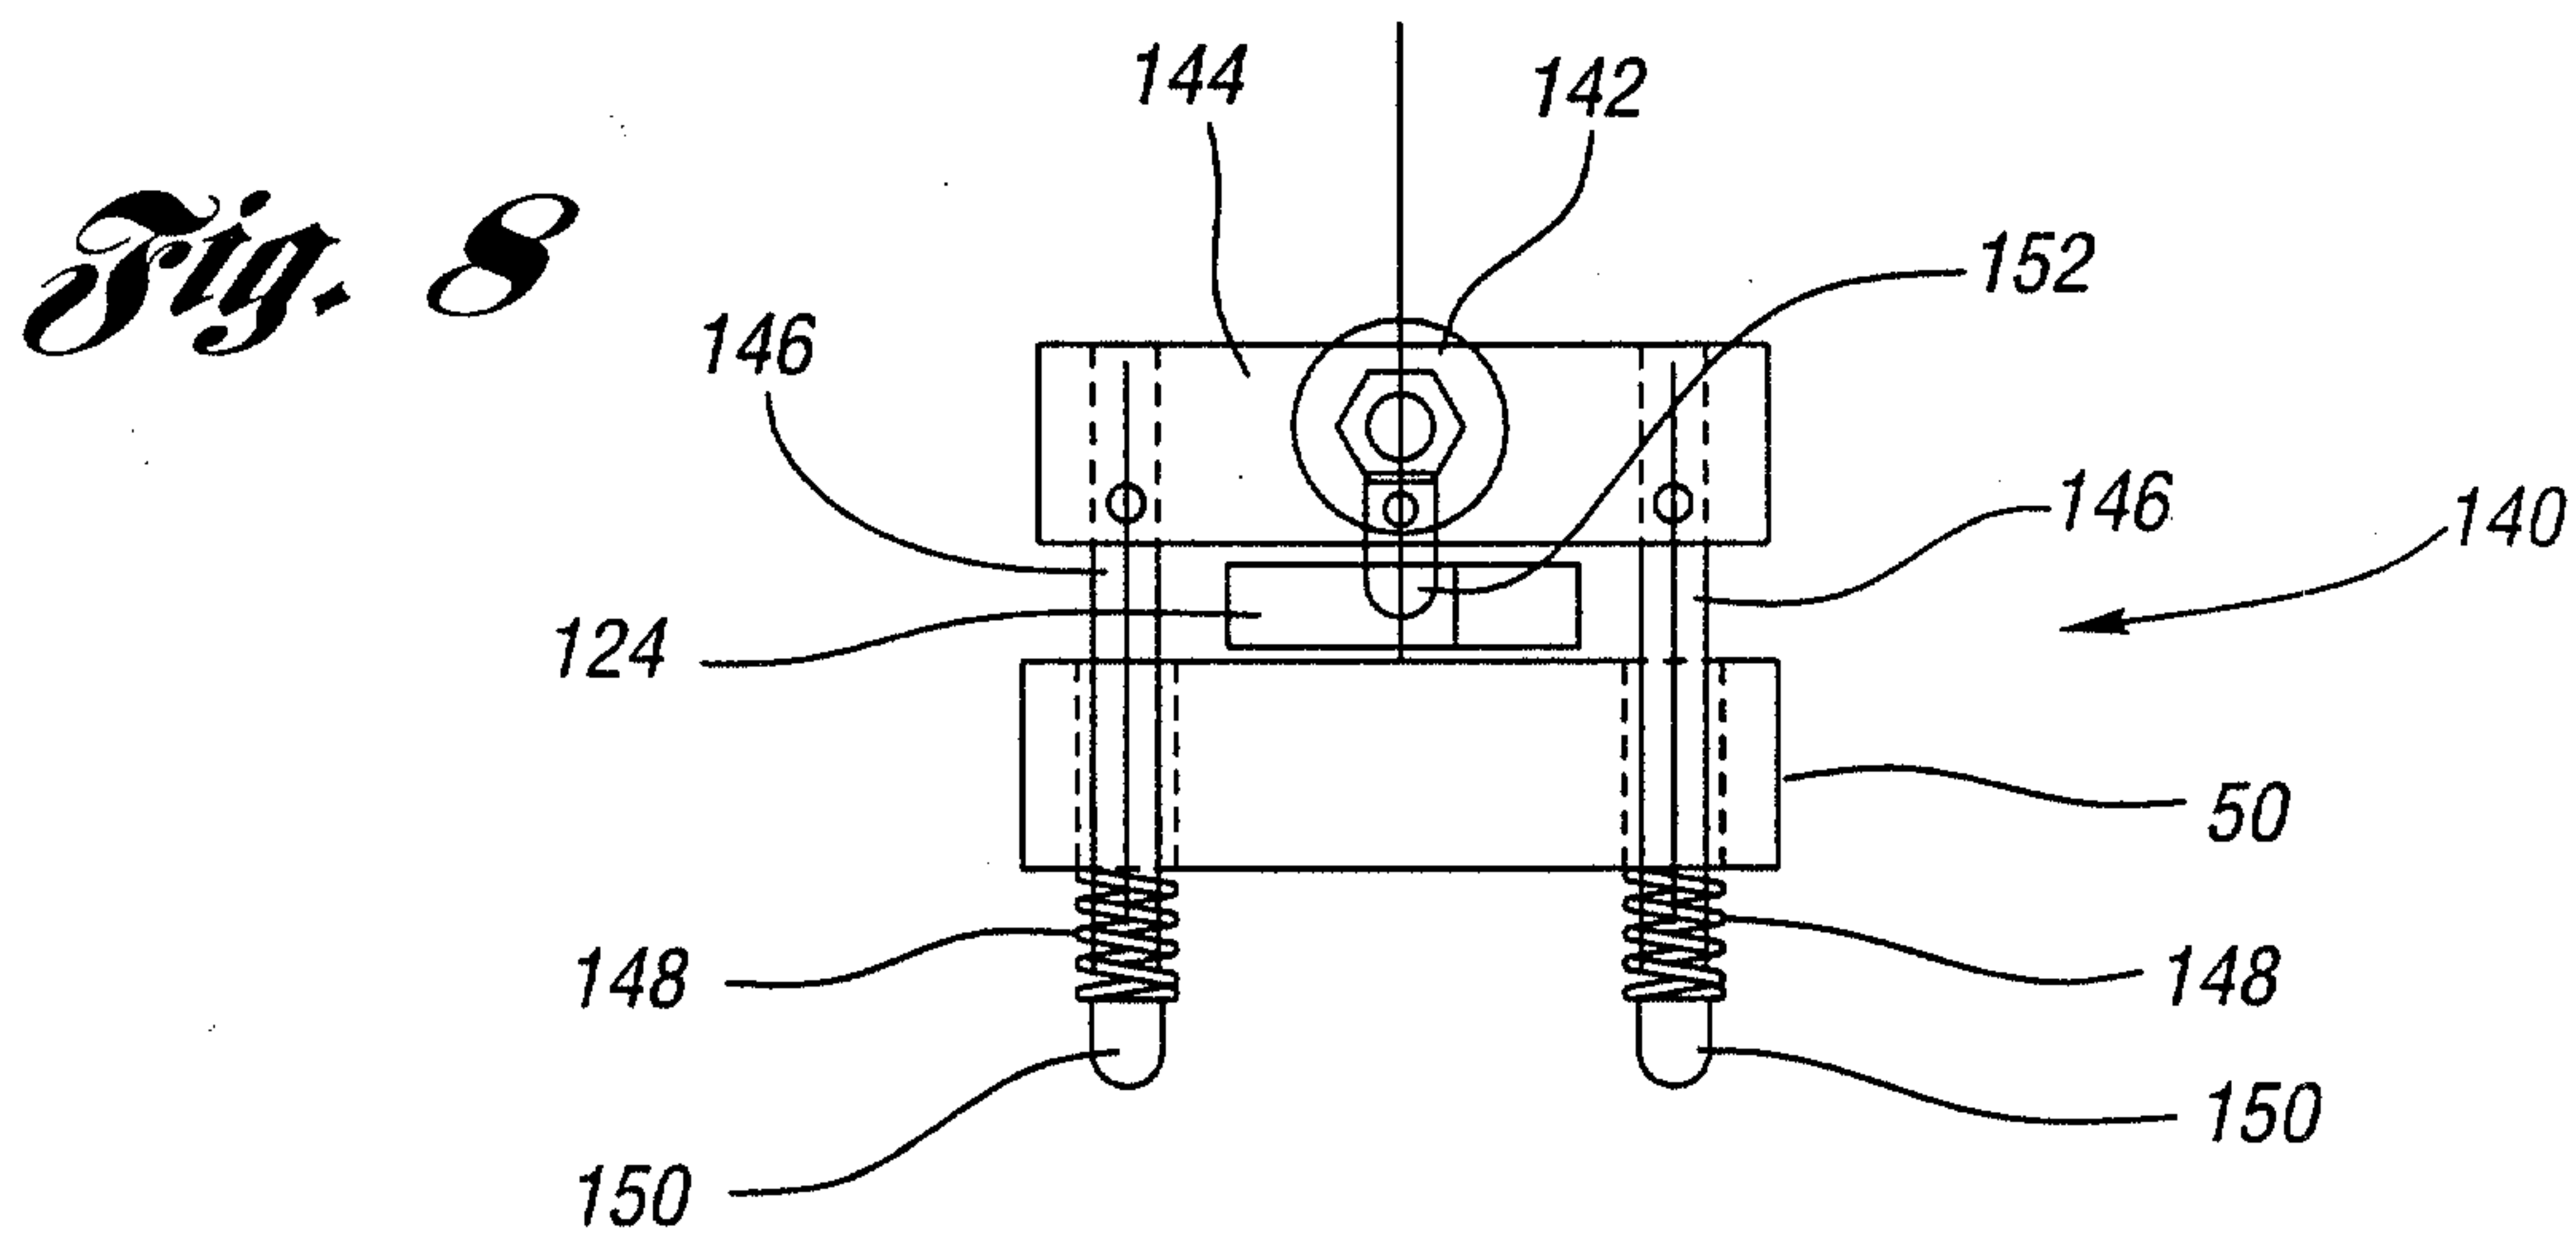


Fig. 8

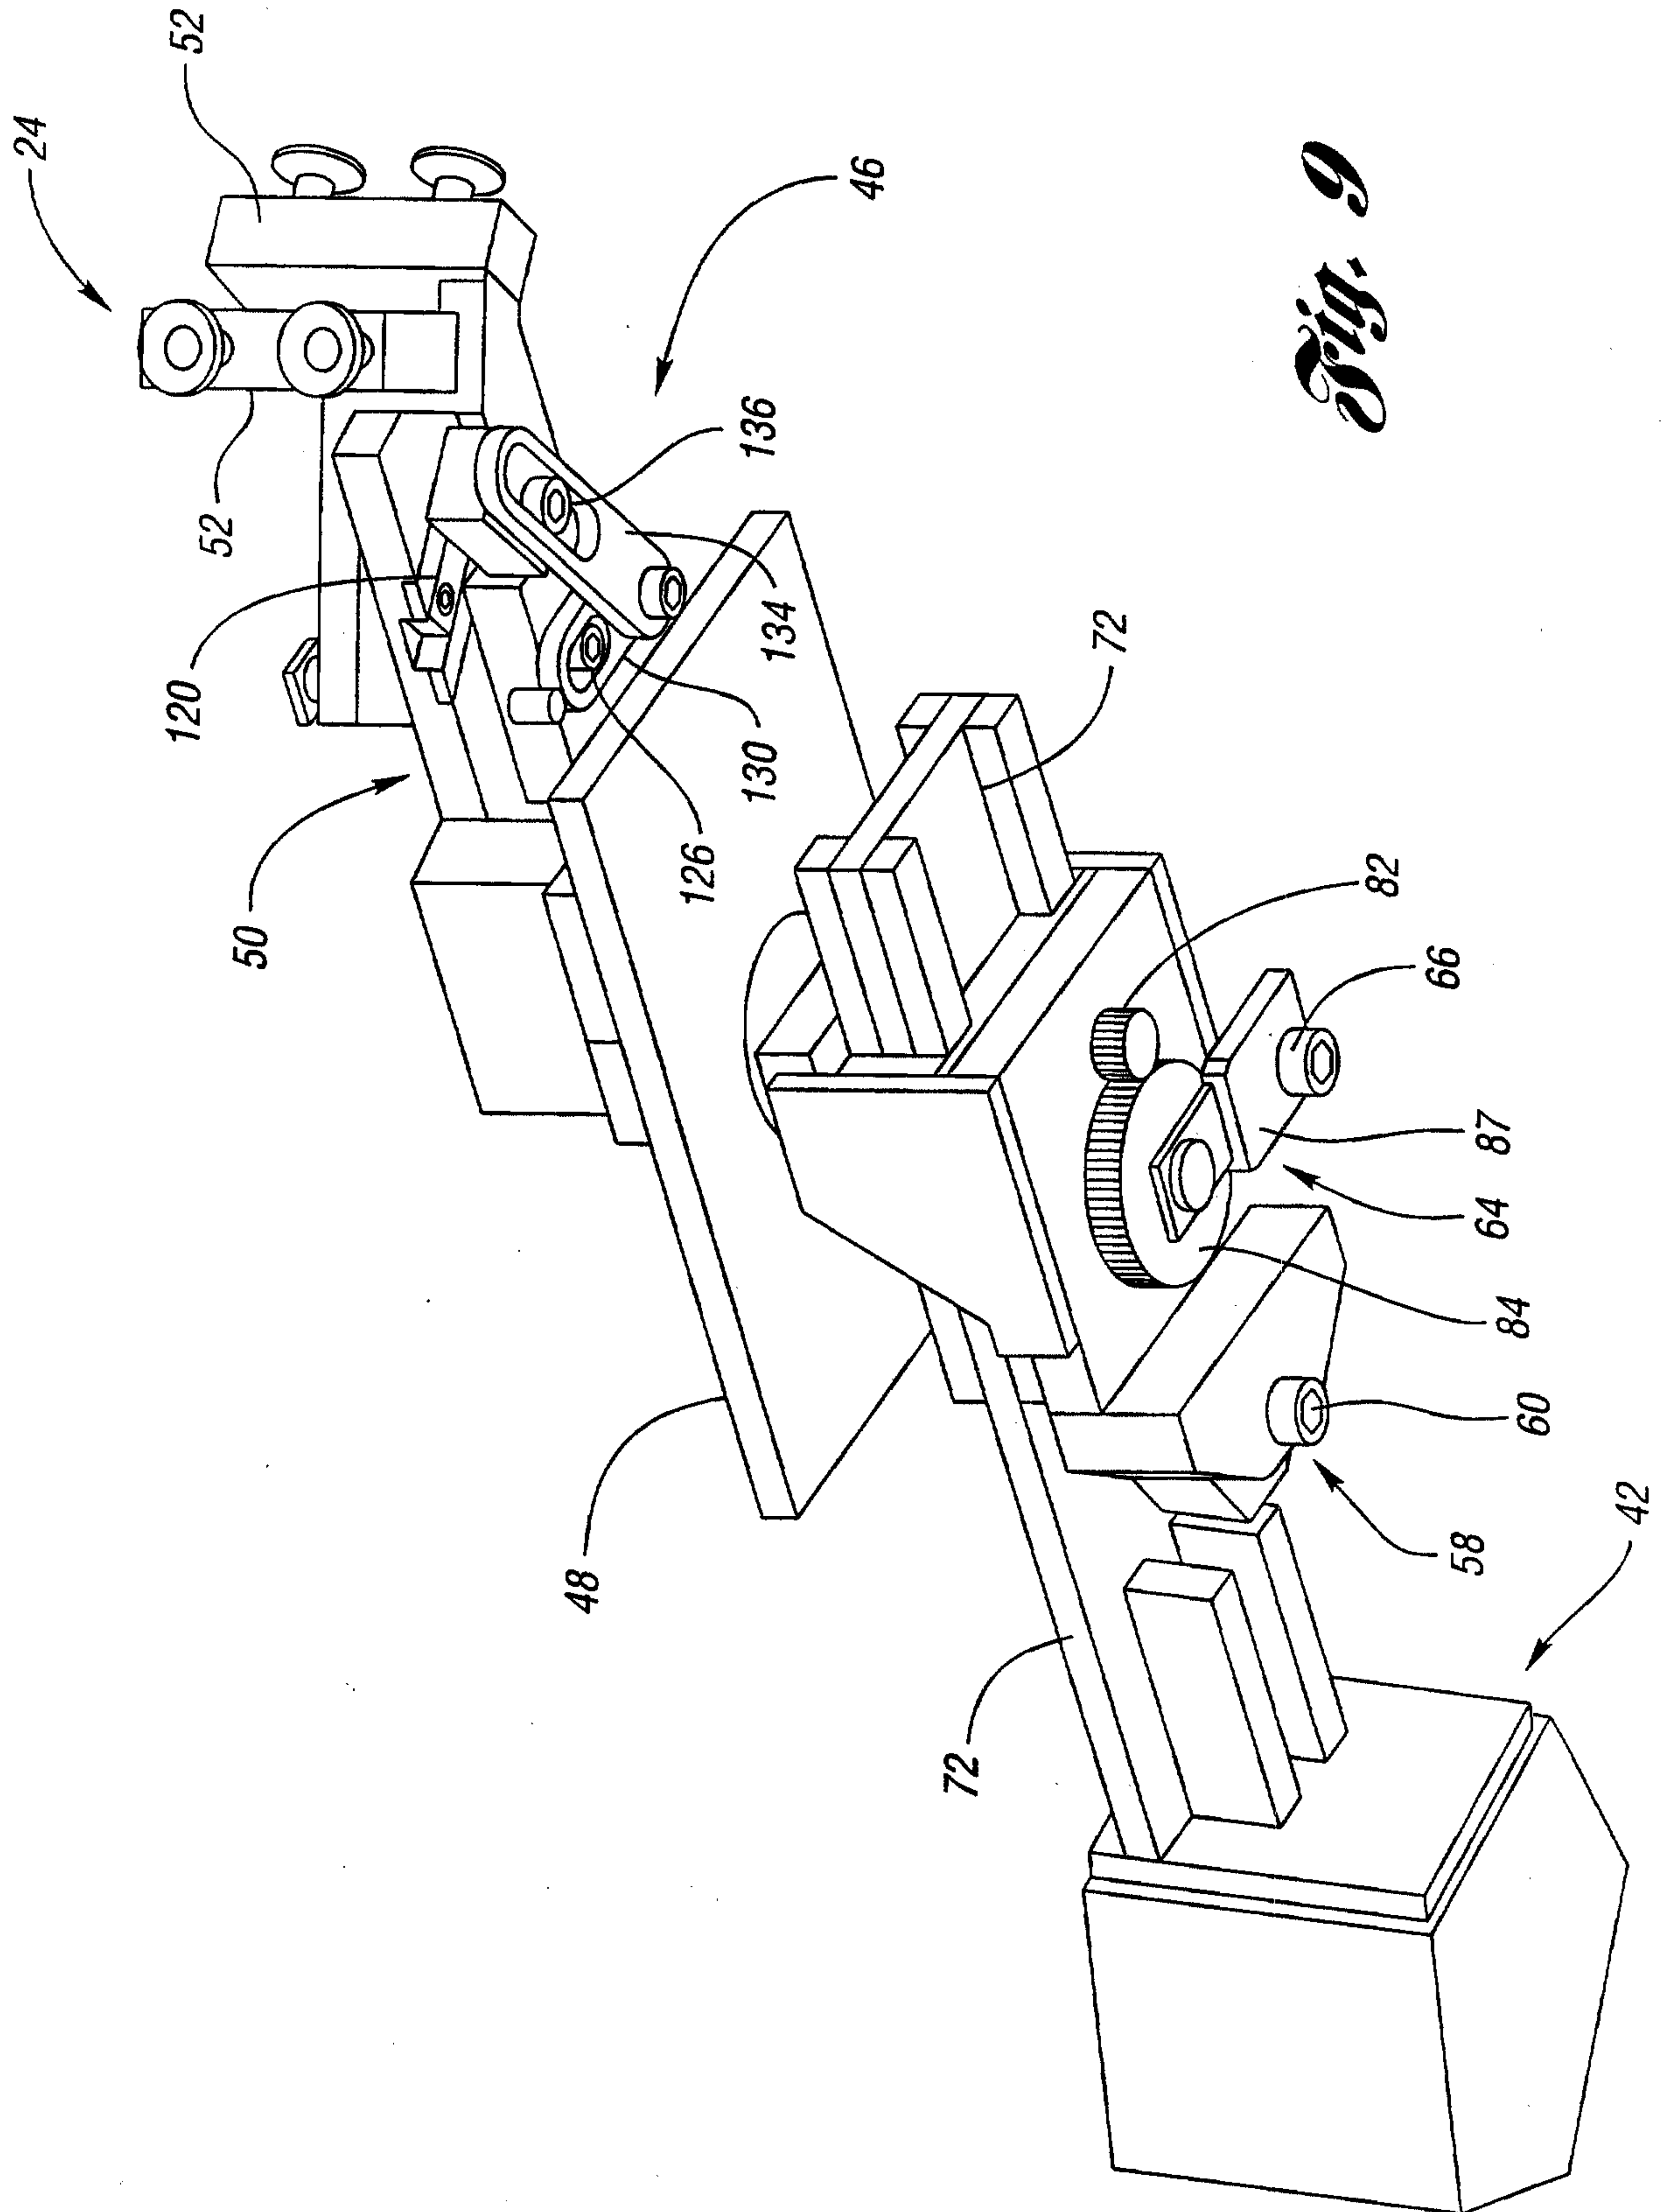


Fig. 9

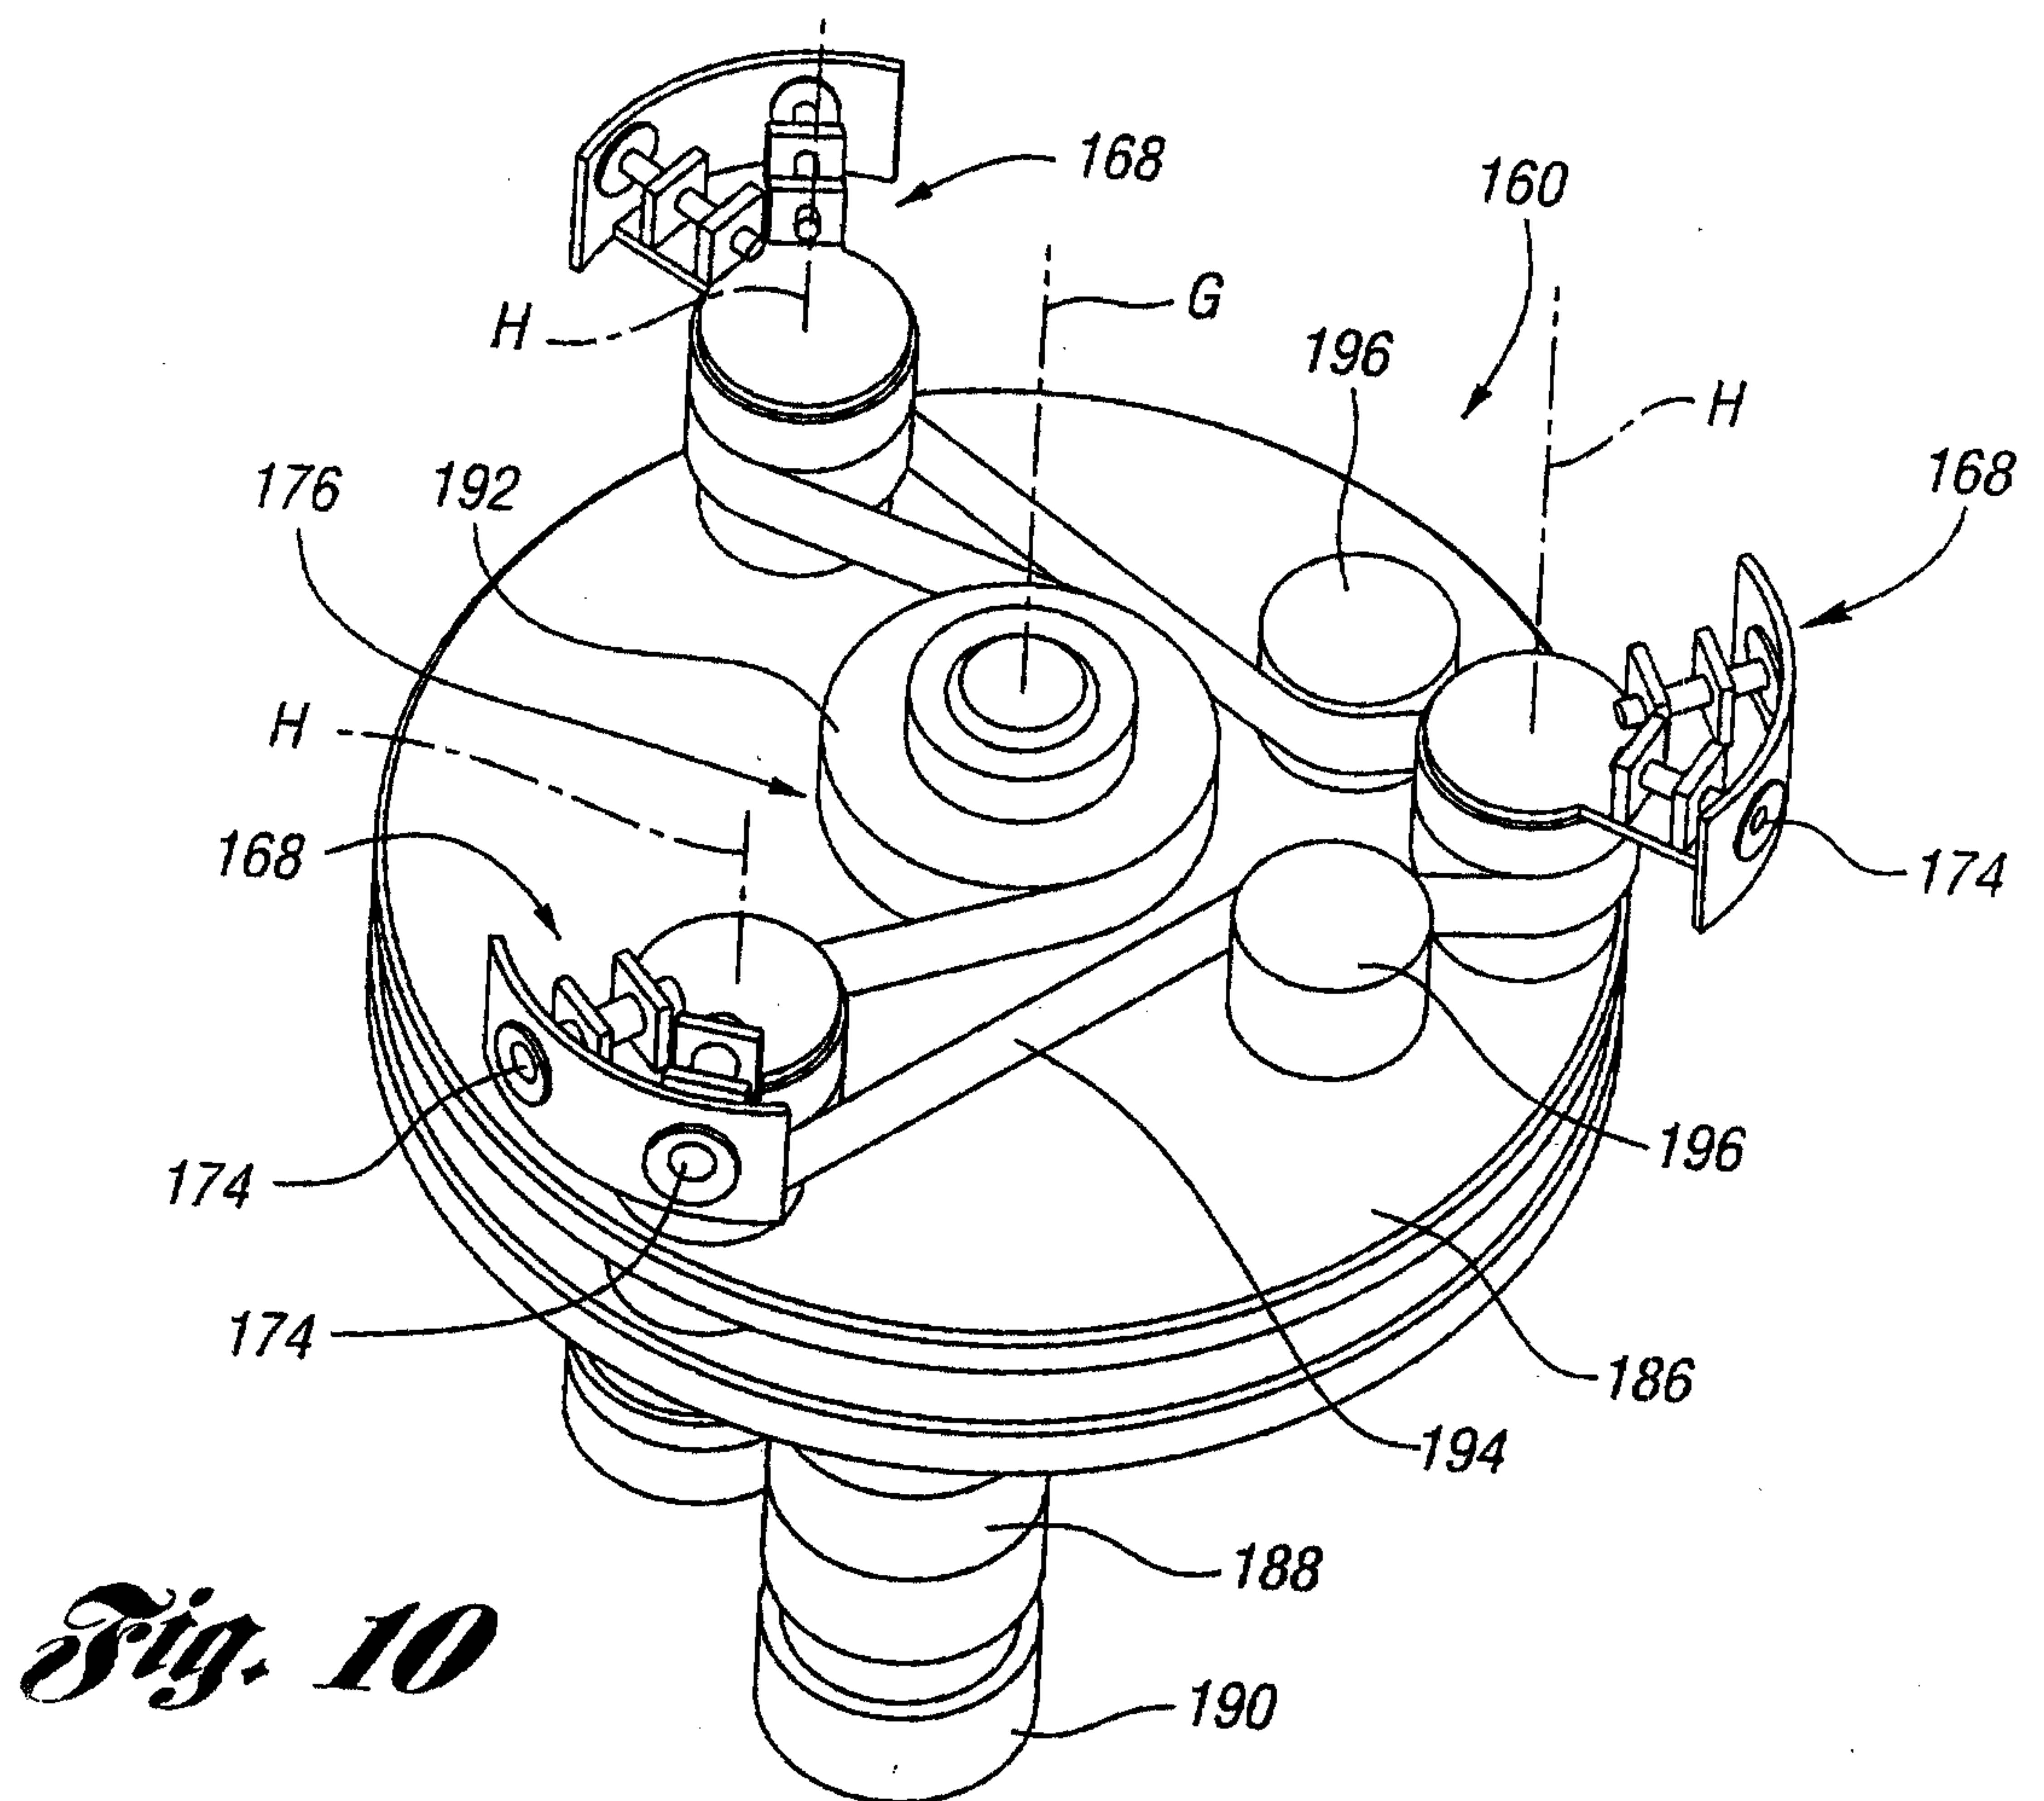


Fig. 10

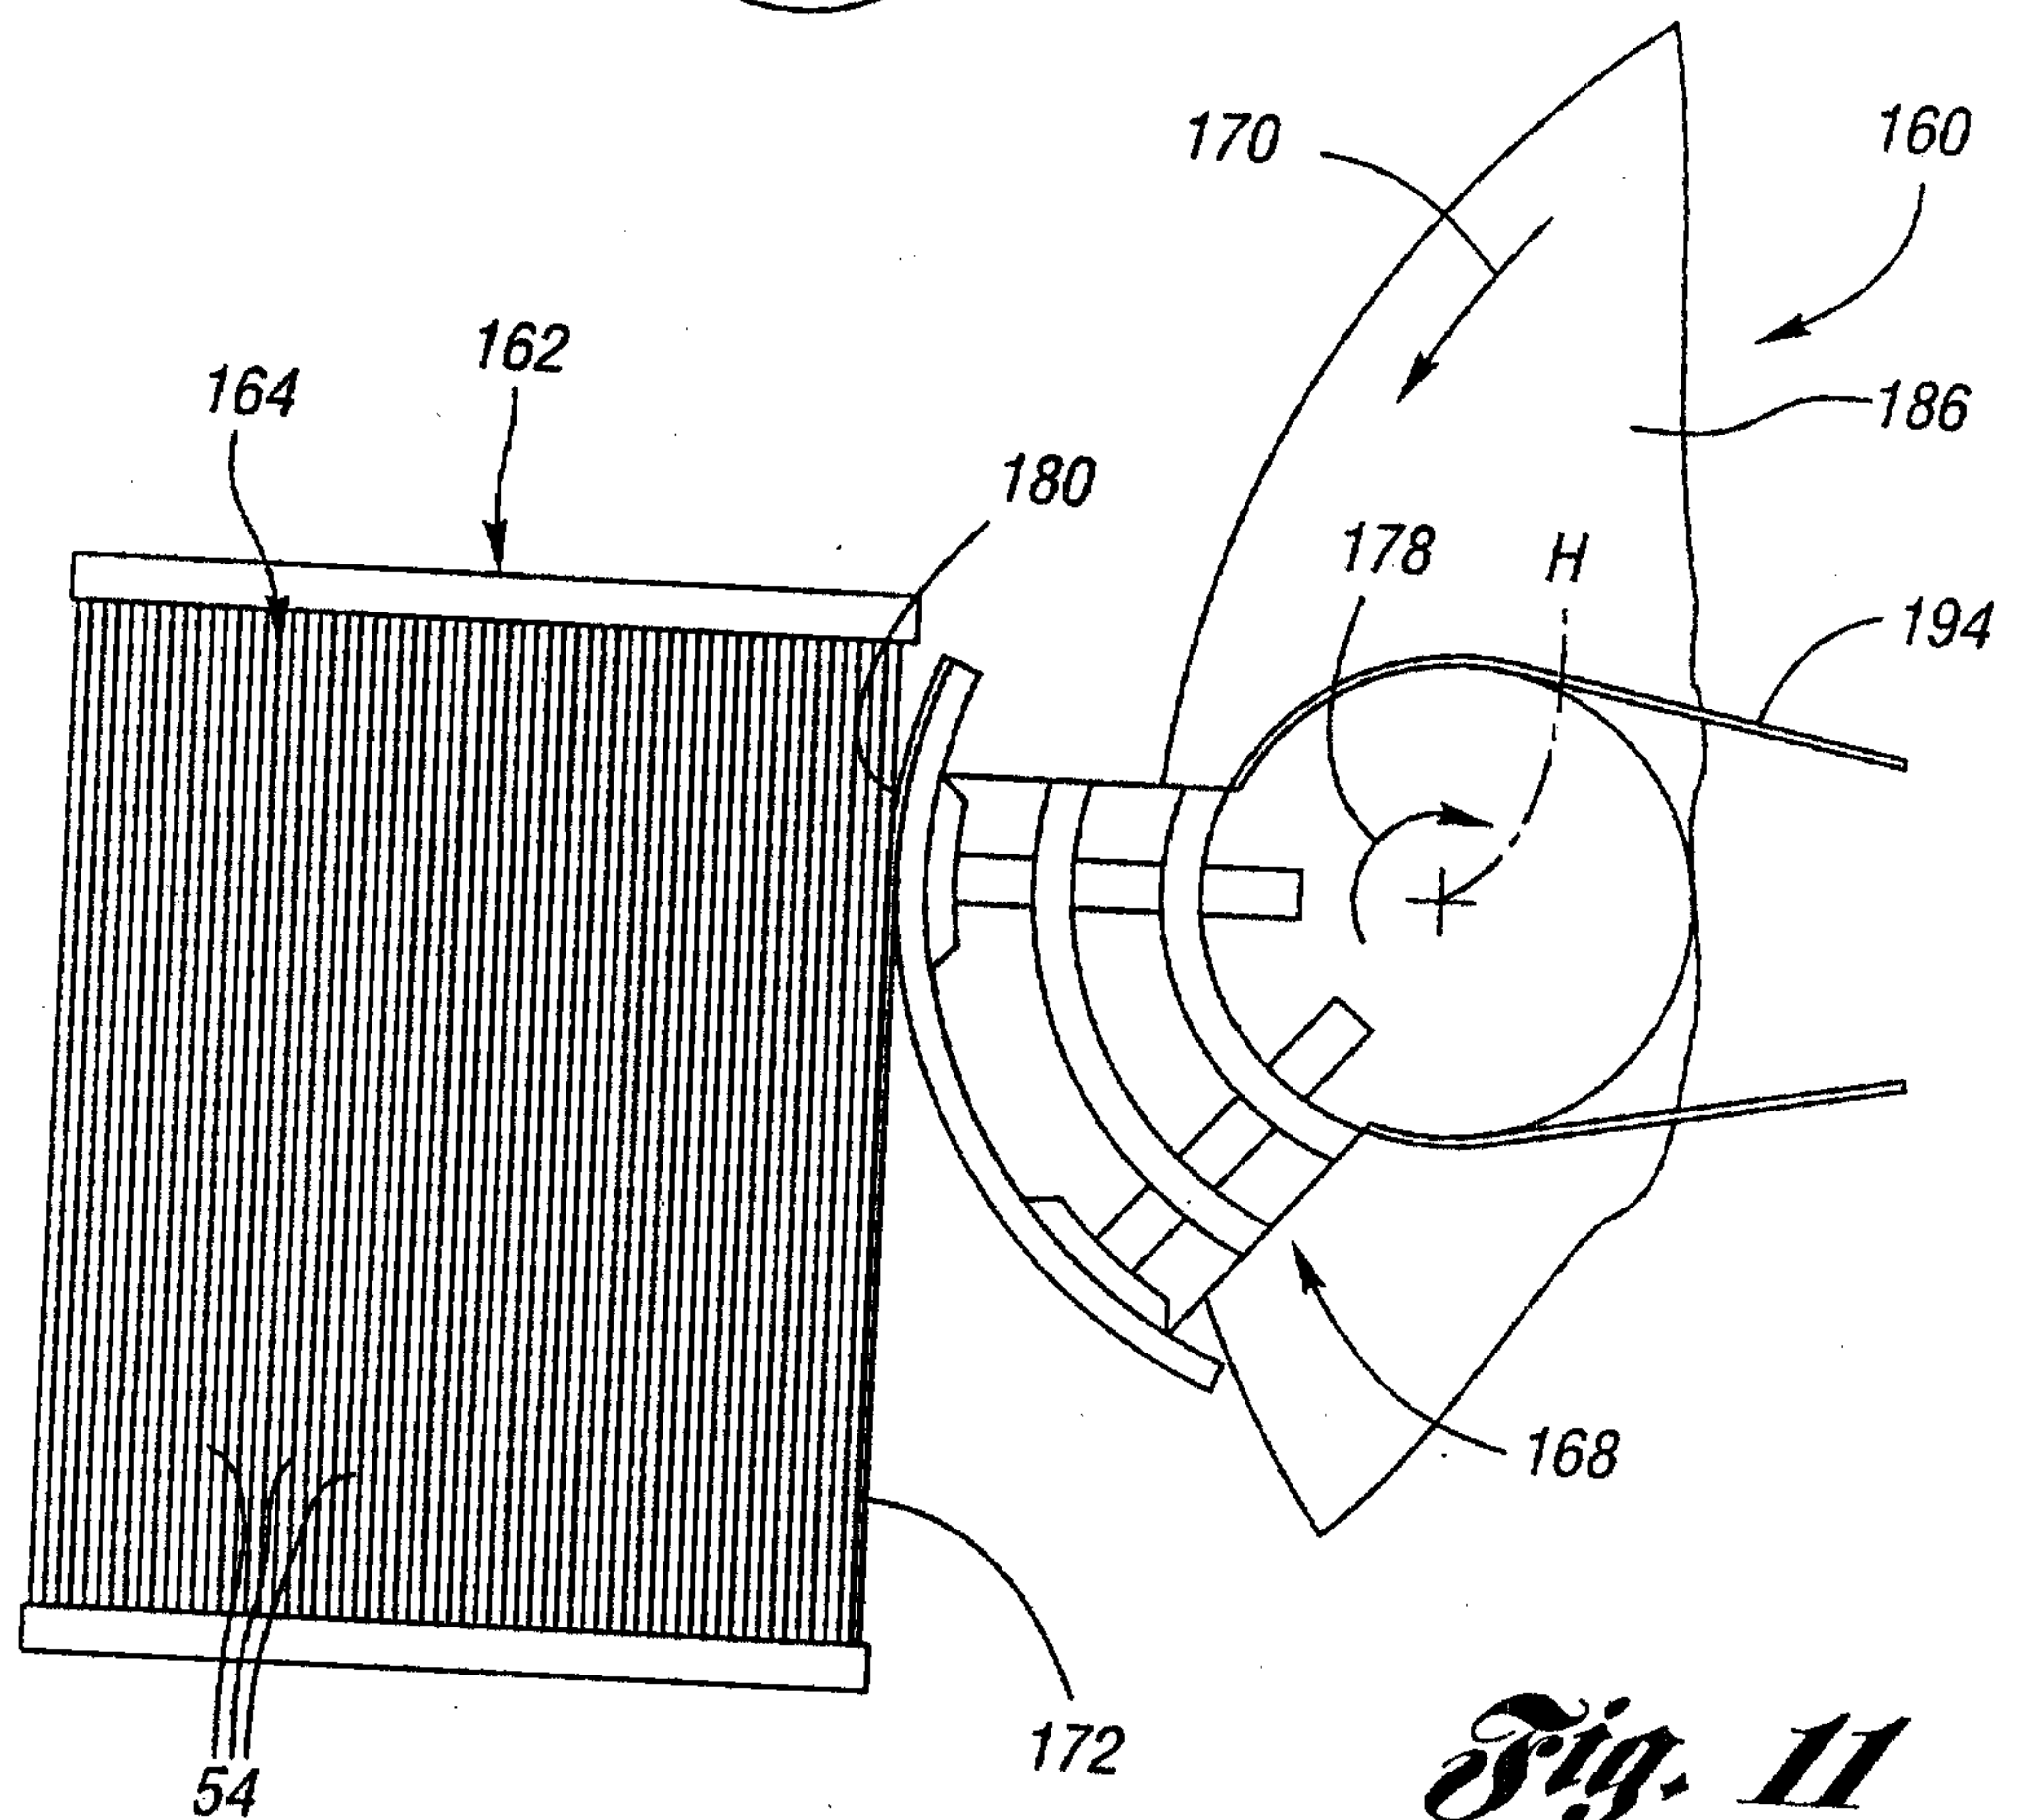
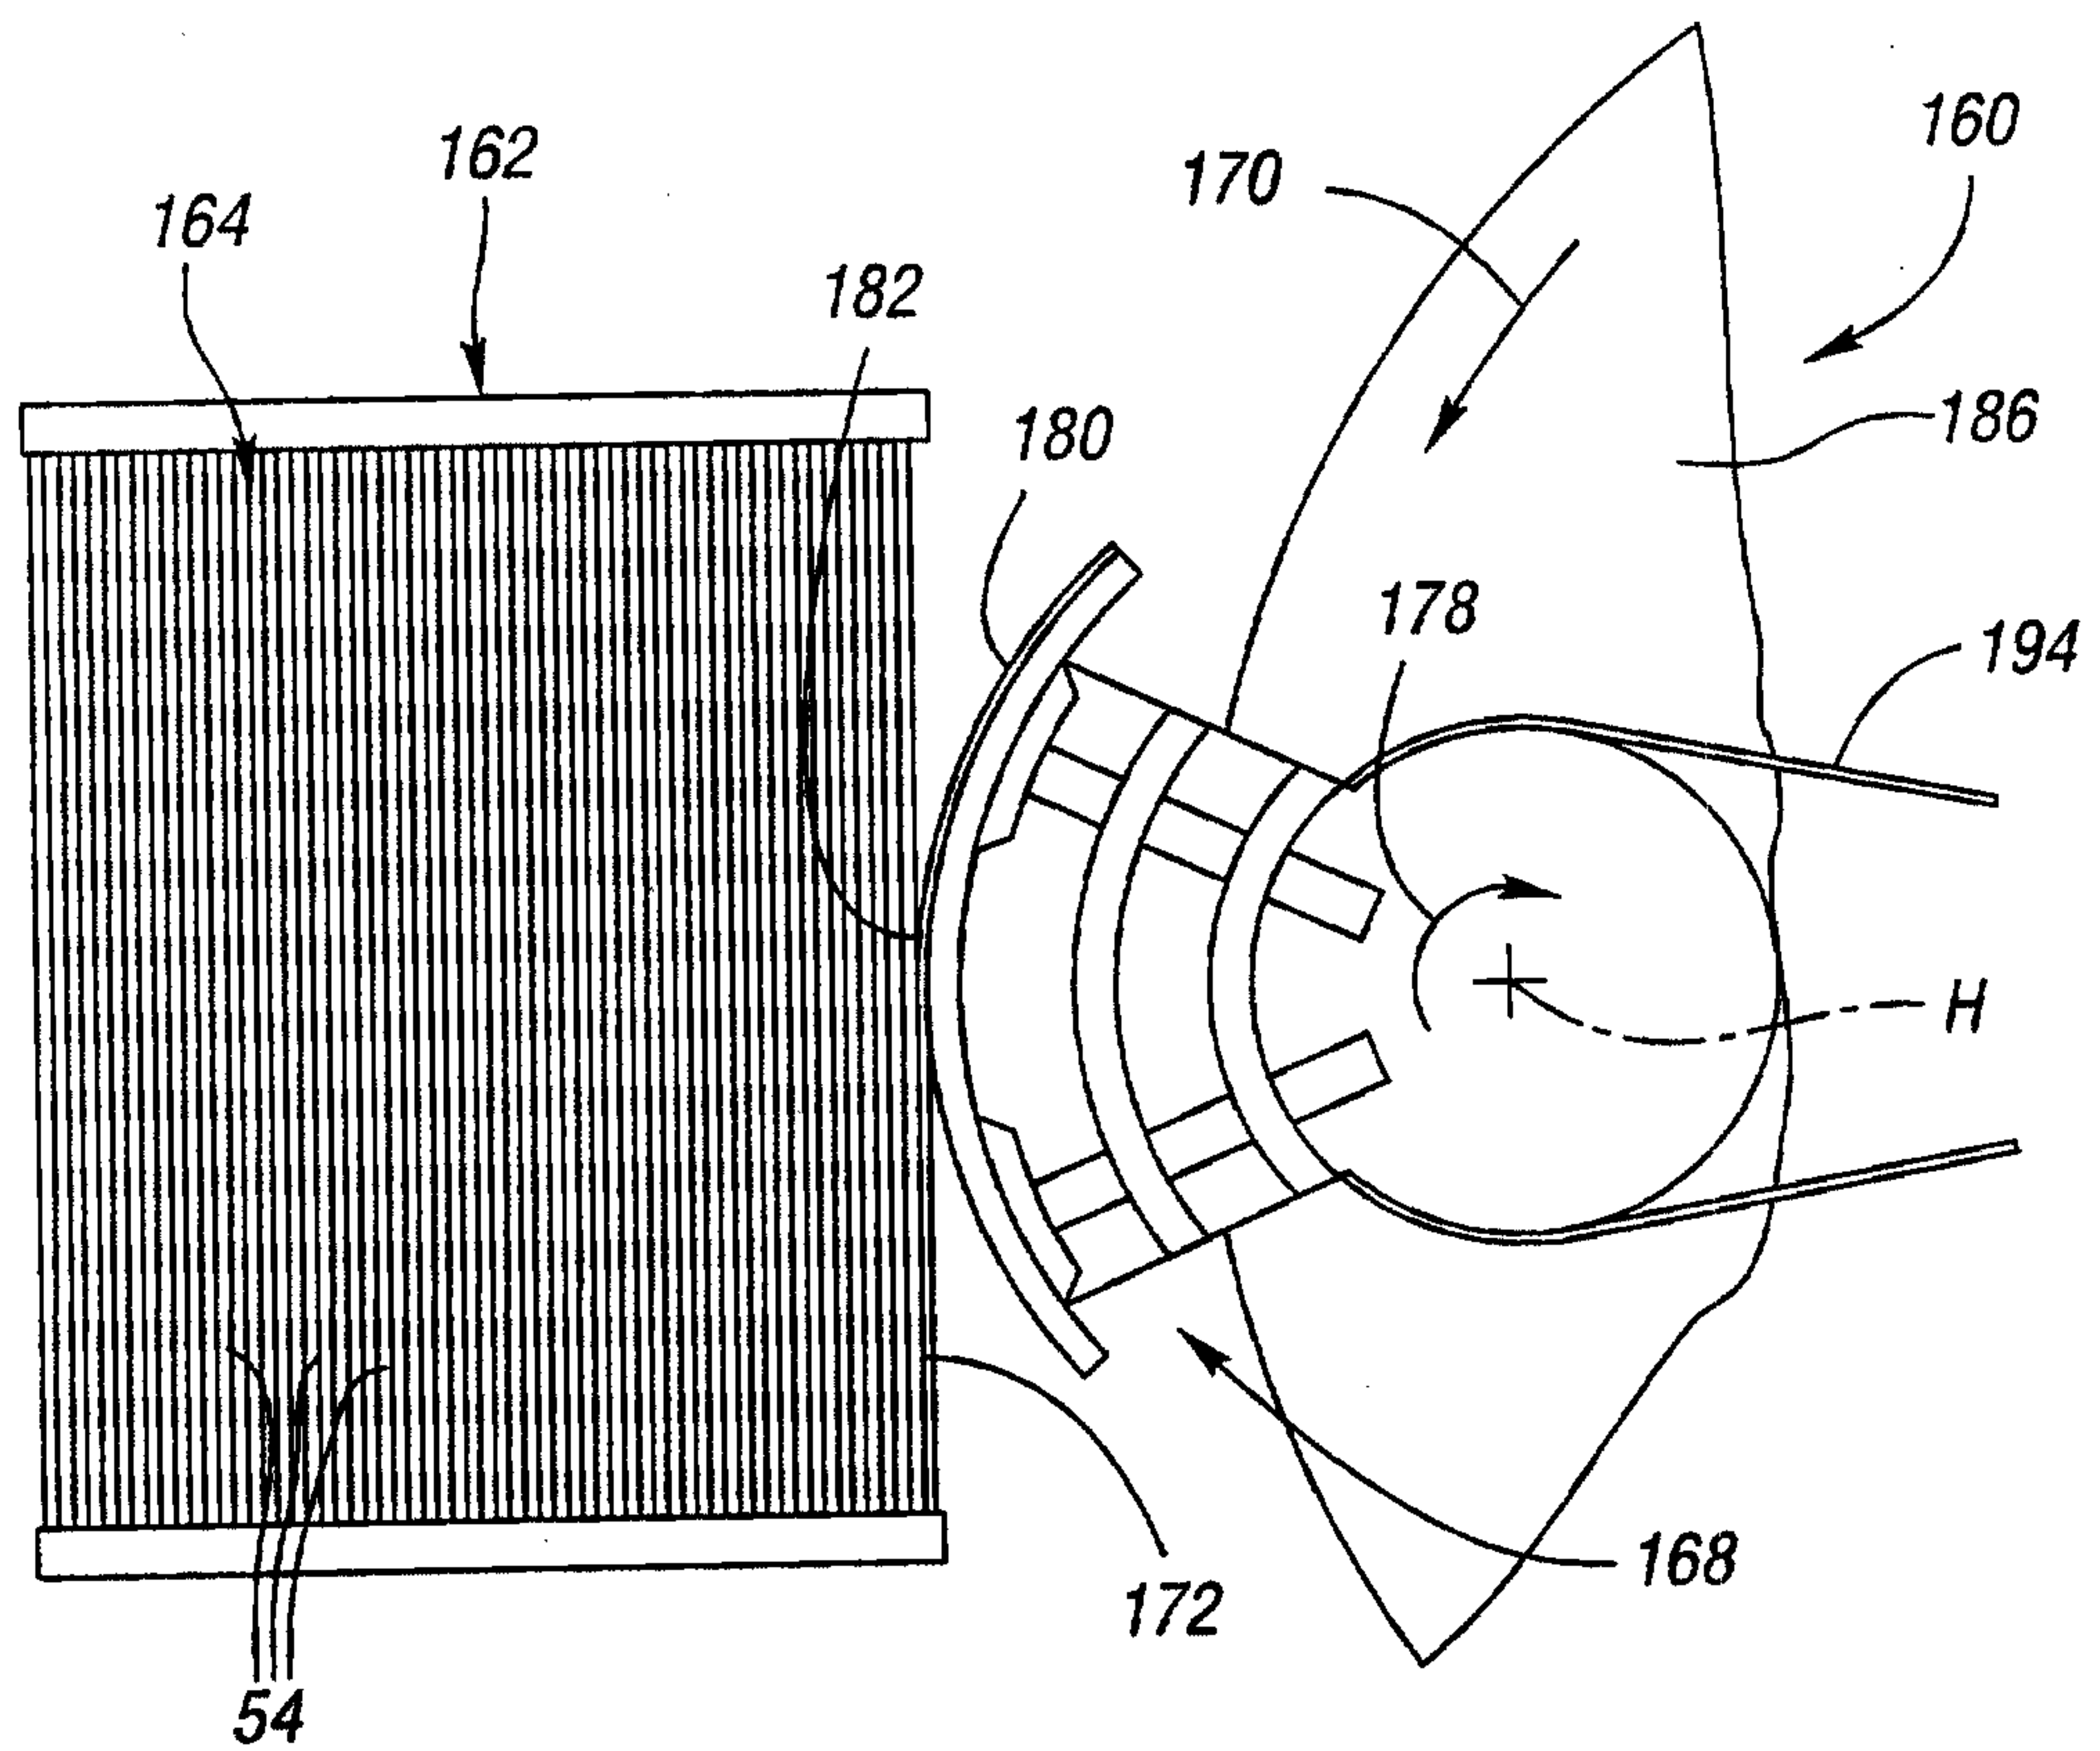
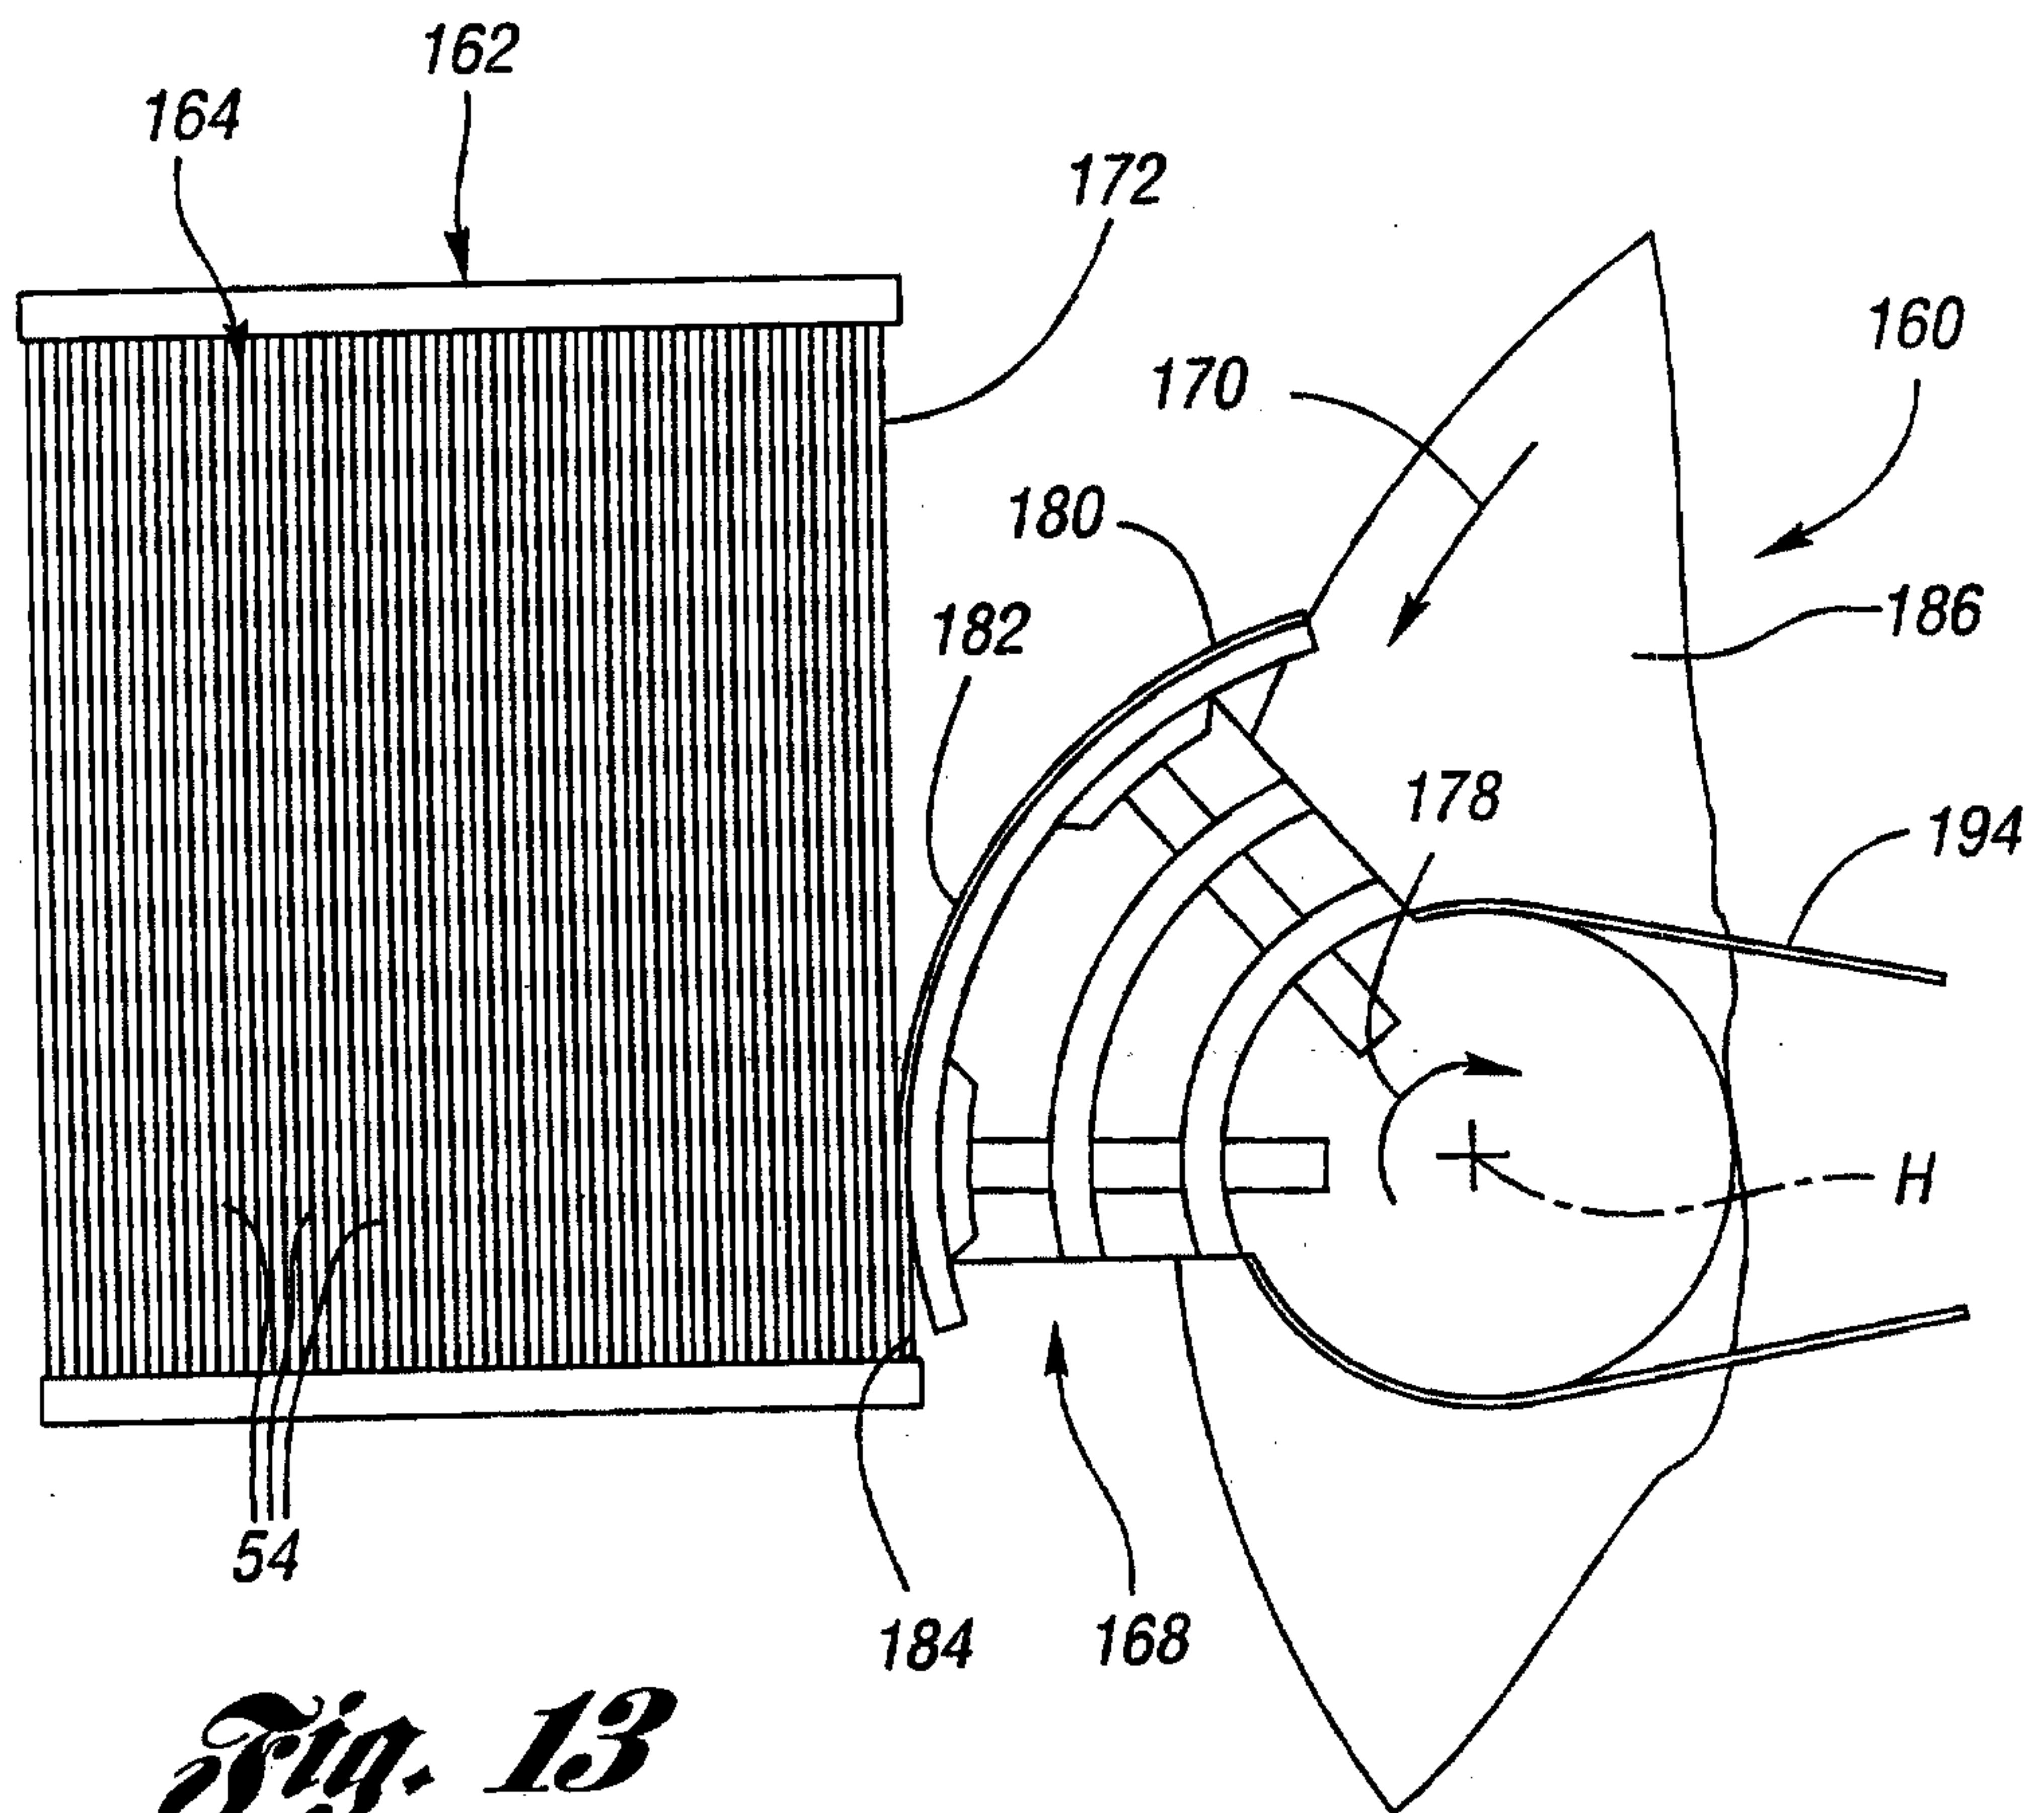


Fig. 11

*Fig. 12**Fig. 13*

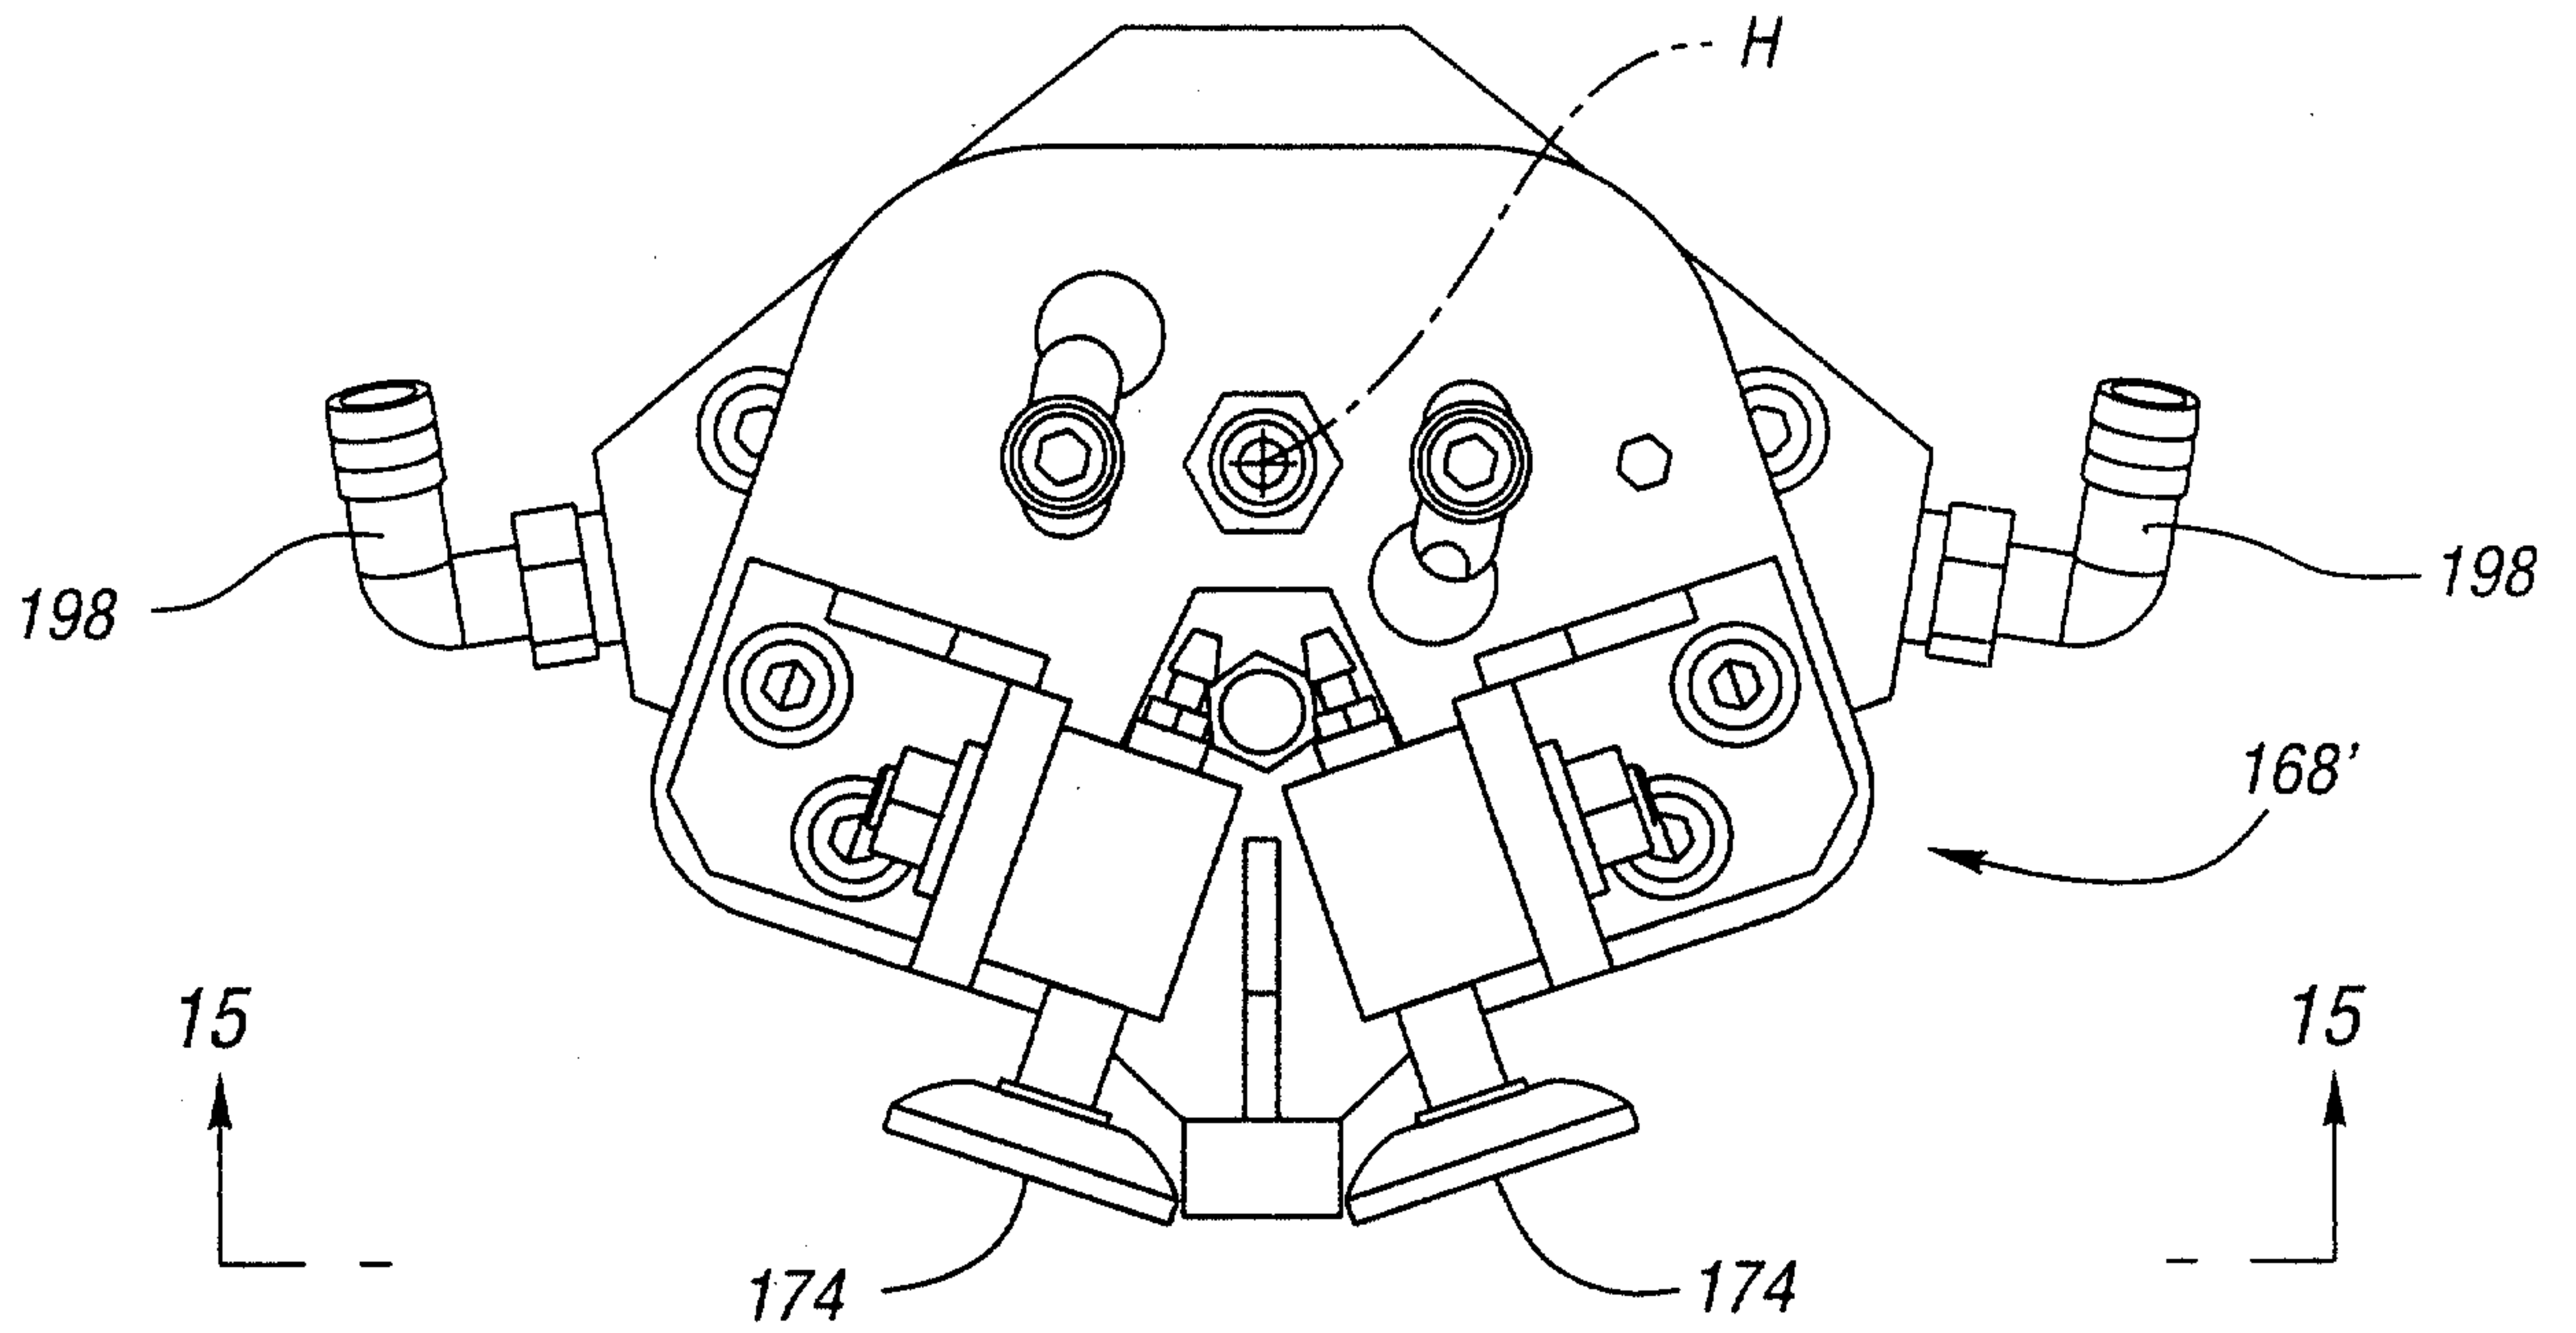


Fig. 14

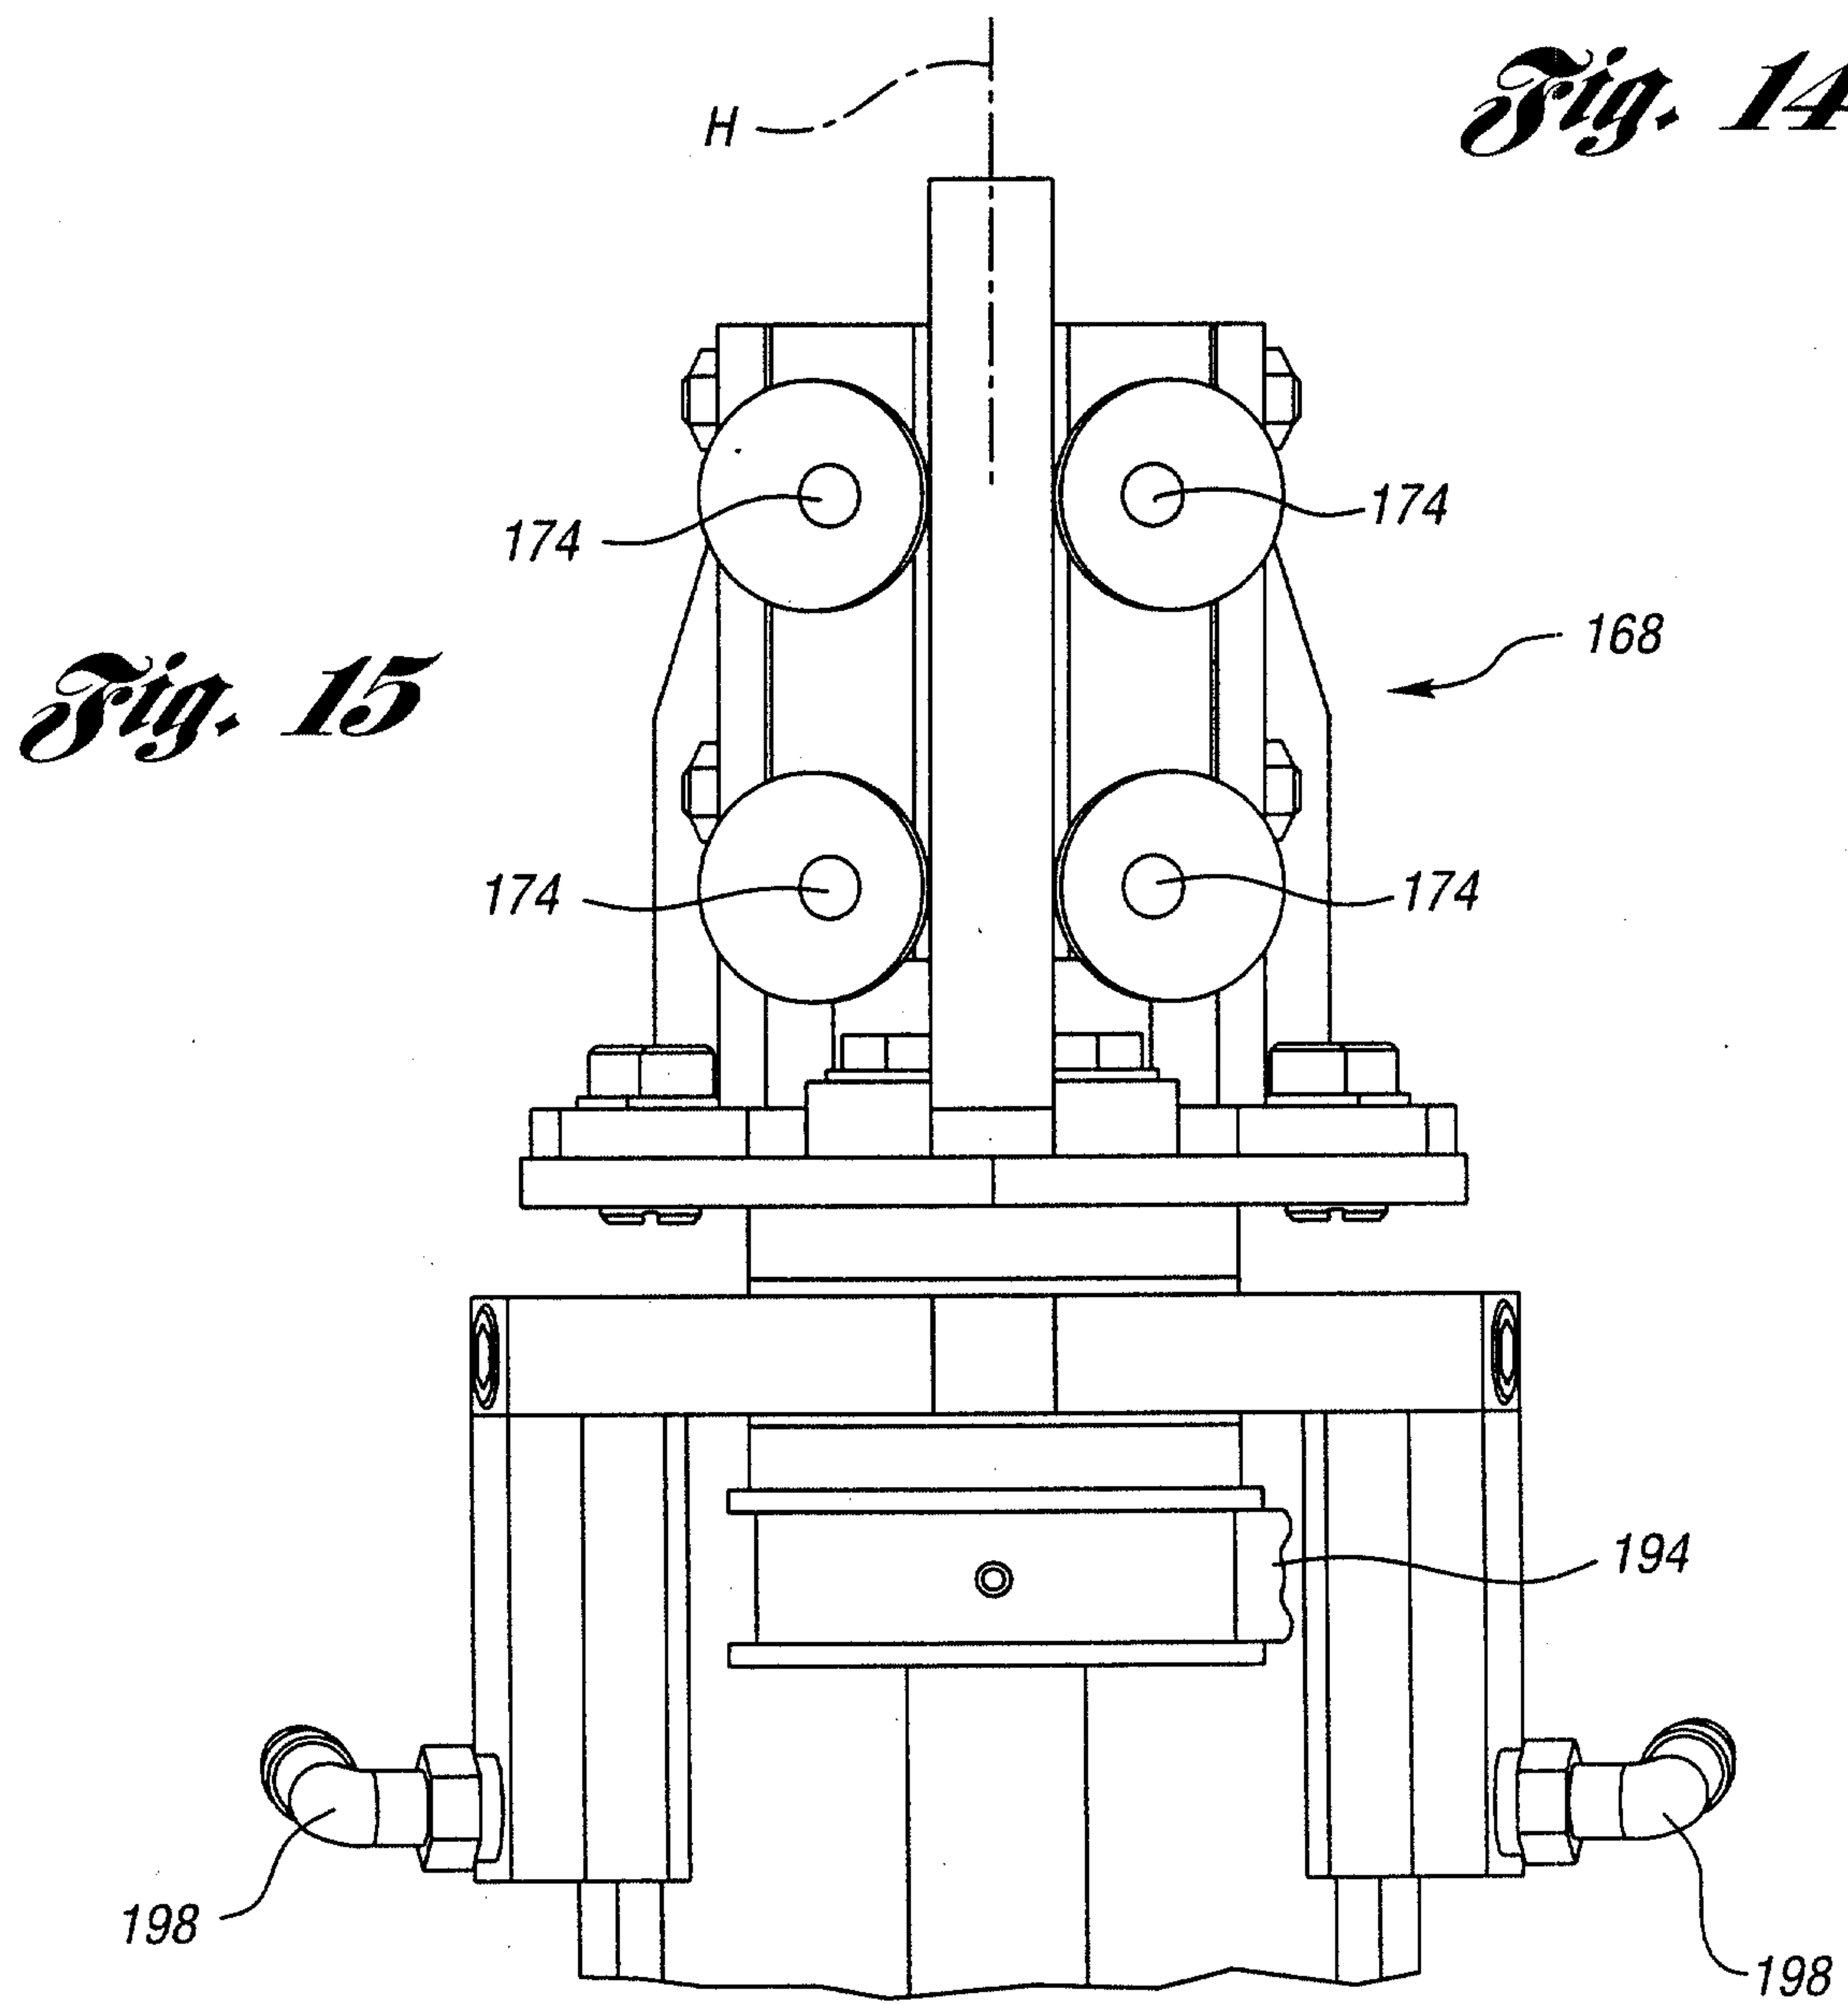


Fig. 15

