




- (51) **International Patent Classification:**
H01L 21/66 (2006.01) *H01L 21/027* (2006.01)
- (21) **International Application Number:**
PCT/US2017/028983
- (22) **International Filing Date:**
21 April 2017 (21.04.2017)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/326,653 22 April 2016 (22.04.2016) US
15/275,726 26 September 2016 (26.09.2016) US
- (71) **Applicant:** KLA-TENCOR CORPORATION [US/US];
Legal Department, One Technology Drive, Milpitas, California 95035 (US).
- (72) **Inventors:** HAQUE, Noashin; 2735 Valley Oak Loop, San Jose, California 95135 (US). PARK, Allen; 1433 Tarring-ton Court, San Jose, California 95120 (US). GUPTA, Ajay;
- (74) **Agent:** MCANDREWS, Kevin et al.; KLA-Tencor Corp., Legal Department, One Technology Drive, Milpitas, California 95035 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) **Title:** COMPUTER ASSISTED WEAK PATTERN DETECTION AND QUANTIFICATION SYSTEM

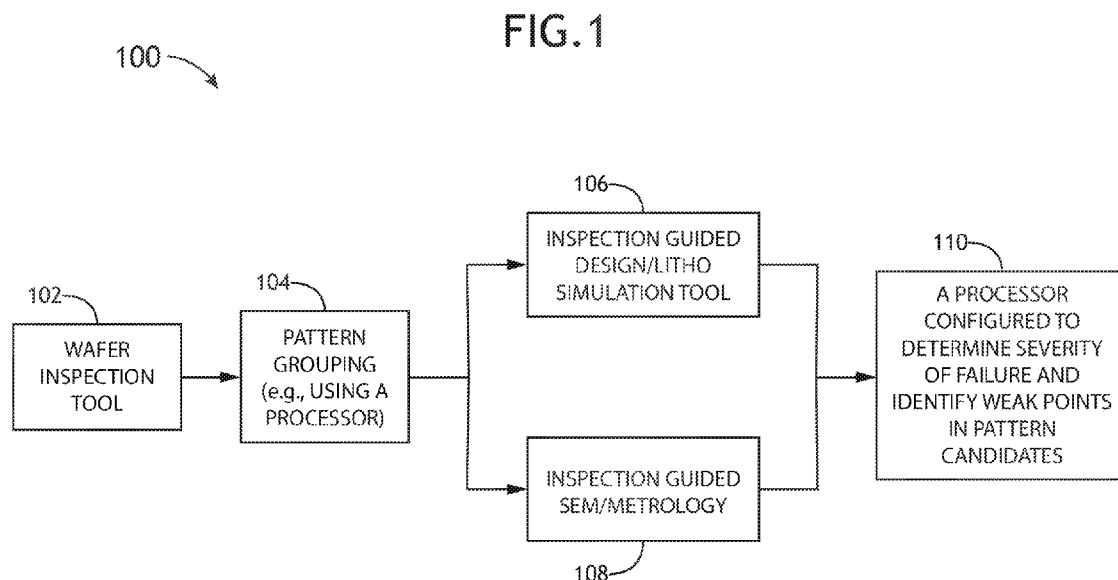

(57) **Abstract:** Methods and systems for providing weak pattern (or hotspot) detection and quantification are disclosed. A weak pattern detection and quantification system may include a wafer inspection tool configured to inspect a wafer and detect defects present on the wafer. The system may also include at least one processor in communication with the wafer inspection tool. The at least one processor may be configured to: perform pattern grouping on the detected defects based on design of the wafer; identify regions of interest based on the pattern grouping; identify weak patterns contained in the regions of interest identified, the weak patterns being patterns deviating from the design by an amount greater than a threshold; validate the weak patterns identified; and report the validated weak patterns or facilitate revision of the design of the wafer based on the validated weak patterns.

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

**COMPUTER ASSISTED WEAK PATTERN DETECTION AND
QUANTIFICATION SYSTEM**

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims the benefit under 35 U.S.C. § 119(e) of U.S. Provisional Application Serial No. 62/326,653, filed April 22, 2016. Said U.S. Provisional Application Serial No. 62/326,653 is hereby incorporated by reference in its entirety.

TECHNICAL FIELD

[0002] The disclosure generally relates to the field of inspection, and particularly to wafer inspection.

BACKGROUND

[0003] Thin polished plates such as silicon wafers and the like are a very important part of modern technology. A wafer, for instance, may refer to a thin slice of semiconductor material used in the fabrication of integrated circuits and other devices. Other examples of thin polished plates may include magnetic disc substrates, gauge blocks and the like. While the technique described here refers mainly to wafers, it is to be understood that the technique also is applicable to other types of polished plates as well. The term wafer and the term thin polished plate may be used interchangeably in the present disclosure.

[0004] Wafers are subjects to defect inspections. Defects can be random or systematic. Systematic defects may occur on certain design patterns and may be referred to as hotspots (i.e., weak patterns, or patterns produced on a wafer that deviated from the design). One of the objectives of defect

inspection is to detect and quantify these hotspots. For instance, an inspection process may utilize an inspection tool to scan a wafer and bin the detected defects using design based grouping (DBG). The defects may be sampled and reviewed using a scanning electron microscope (SEM) and manually classified to determine the presence of hotspots. Simulations may be utilized to help predict patterns or sites that are susceptible to failures, which may in turn be used to help users place inspection care in areas that may contain such patterns or sites.

[0005] It is noted that while the inspection process described above can be helpful, this inspection process is also associated with some disadvantages. For example, this inspection process relies on human eyes to determine the presence of defects, which means this inspection process is only capable of processing small sample sizes and lacks validation. In practice, systematic defects that are detected with critical dimension (CD) changes of about 20-30% may be discarded. In addition, since there is no automation and all classification must be done by a human, the sample size is typically limited to no more than about 5 thousand defects and is prone to error due to sampling and fatigue. With explosion of data volume resulting from increased detection sensitivity, effectiveness of sampling can be limited unless an automated approach is developed. Furthermore, simulations help predict risky sites but they do not help user to identify if the sites actually fail post processing.

[0006] Therein lies a need for providing methods and systems for weak pattern detection and quantification without the aforementioned shortcomings.

SUMMARY

[0007] The present disclosure is directed to a system. The system may include a wafer inspection tool configured to inspect a wafer and detect defects present on the wafer. The system may also include at least one processor in communication with the wafer inspection tool. The at least one processor may be configured to: perform pattern grouping on the detected defects based on design of the wafer; identify regions of interest based on the pattern grouping; identify weak patterns contained in the regions of interest identified, the weak patterns being patterns deviating from the design by an amount greater than a threshold; validate the weak patterns identified; and report the validated weak patterns or facilitate revision of the design of the wafer based on the validated weak patterns.

[0008] A further embodiment of the present disclosure is directed to a system. The system may include a wafer inspection tool configured to inspect a wafer and detect defects present on the wafer. The system may also include at least one processor in communication with the wafer inspection tool. The at least one processor may be configured to: perform pattern grouping on the detected defects based on design of the wafer; simulate effects of a wafer process tool on the wafer; identify regions of interest where patterns deviated from the design of the wafer; identify weak patterns contained in the regions of interest identified, the weak patterns being patterns deviating from the design by an amount greater than a threshold; validate the weak patterns identified; and report the validated weak patterns or facilitate revision of the design of the wafer based on the validated weak patterns.

[0009] An additional embodiment of the present disclosure is directed to a system. The system may include a wafer inspection tool configured to

inspect a wafer and detect defects present on the wafer. The system may also include at least one processor in communication with the wafer inspection tool. The at least one processor may be configured to: perform pattern grouping on the detected defects based on design of the wafer; obtain scanning electron microscope (SEM) images of the wafer; align the SEM images of the wafer against the design of the wafer; identify regions of interest based on alignment of the SEM images of the wafer and the design of the wafer; obtain metrology of the wafer in the regions of interest identified; measure pattern variations in the regions of interest identified based on the metrology obtained; identify weak patterns based on the pattern variations, the weak patterns being patterns deviating from the design by an amount greater than a threshold; validate the weak patterns identified; and report the validated weak patterns or facilitate revision of the design of the wafer based on the validated weak patterns.

[0010] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not necessarily restrictive of the present disclosure. The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate subject matter of the disclosure. Together, the descriptions and the drawings serve to explain the principles of the disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The numerous advantages of the disclosure may be better understood by those skilled in the art by reference to the accompanying figures in which:

FIG. 1 is an illustration depicting an inspection system configured in accordance with an embodiment of the present disclosure;

FIG. 2 is an illustration depicting a simulation based hotspot detection and quantification process configured in accordance with an embodiment of the present disclosure;

FIG. 3 is an illustration depicting a layout based hotspot detection and quantification process configured in accordance with an embodiment of the present disclosure; and

FIG. 4 is an illustration depicting a plurality of identified regions of interest on a wafer.

DETAILED DESCRIPTION

[0012] Reference will now be made in detail to the subject matter disclosed, which is illustrated in the accompanying drawings.

[0013] Embodiments in accordance with the present disclosure are directed to methods and systems for providing weak pattern (or hotspot) detection and quantification. More specifically, computer-driven design-to-hotspot detection and validation systems that enable use of computer assists to automatically discover and quantify hotspots on wafers are disclosed. In some embodiments, systems configured in accordance with the present disclosure may be configured to enable an automatic identification of weak points within a hotspot. In some embodiments, systems configured in accordance with the present disclosure may be further configured to take an algorithmic approach to separate and bin hotspots based on severity (or marginality) of pattern variations. It is contemplated that methods and systems configured in accordance with the present disclosure may provide significant improvements in both efficiency and accuracy over existing hotspot inspection methods and systems.

[0014] Referring now to FIG. 1, an illustration depicting an exemplary inspection system 100 configured in accordance with an embodiment of the present disclosure is shown. The inspection system 100 may include an inspection tool 102 (e.g., a broadband plasma inspection tool, a metrology inspection tool, an electron beam inspection tool, with or without output from simulations provided by design rule check (DRC), optical rule check (ORC) or the like). The inspection tool 102 may be configured to inspect a wafer (e.g., a patterned wafer) and detect defects present on that wafer. The detected defects may be provided to one or more processors 104 (e.g., dedicated processing units, application-specific integrated circuits (ASICs), field-programmable gate arrays (FPGAs) or various other types of processors or processing units), which may be configured to perform a single-step or a multi-step pattern grouping based on design. In some embodiments, the pattern grouping may be performed utilizing a technique commonly referred to as design based binning (may also be referred to as design based grouping or classification). Design based binning may integrate design information and defect inspection results to group the detected defects into different groups/bins based on their pattern types.

[0015] Potential hotspots may be identified upon completion of pattern grouping. In some embodiments, a simulation based identification process 106 may be utilized to simulate a design or a wafer process (e.g., a lithography) to search for regions of interest that may contain potential hotspots. Regions of interest may be placed automatically for each pattern type (e.g. in accordance with pattern grouping/binning) with high accuracy to automatically evaluate local CD and other pattern variations such as line-end shortening and corner rounding. Alternatively and/or additionally, a layout based identification process 108 may be utilized to automatically identify regions of interest for the defective sites identified by the

inspection tool 102. Regardless of which identification process (simulation based 106 or layout based 108) is utilized, it is noted that a filtering process 110 may be engaged to help determine the severity of the failures occurring in the identified regions of interest and filter out some of the identified regions based the severity of the failures. The remaining regions may be reported as regions containing potential hotspots, which may then be validated using processes that will be described in details below.

[0016] Referring now to FIG. 2, a more detailed illustration depicting an exemplary implementation of a simulation based hotspot detection and quantification process is shown. It is noted that because the simulation based hotspot detection and quantification process is an automated process (i.e., the identification process does not rely on human eyes to determine the presence of defects), the defect sample size is no longer restricted by human abilities. In other words, it is contemplated that the defect sample size may be increased (step 106A) as needed to help increase the accuracy of the hotspot detection and quantification process.

[0017] With the samples selected, one or more simulators (e.g., implemented using one or more processors) may be engaged to carry out one or more simulation programs running thereon to simulate effects of wafer process tools such as lithography, chemical-mechanical planarization, etch or the like in a simulation step 106B. It is contemplated that the simulation is able to show how certain regions change across different focus and offset conditions without having to scan the wafer. The result of the simulation may be processed in an identification step 106C to search for local changes and to identify regions where local patterns may fail (e.g., deviated from the design). A filtering step 110 may then be utilized to filter out some of the identified regions based on one or more threshold

values established for one or more measurement metric (e.g., regions with CD changes below a certain threshold may be filtered out). The filtering step 110 may automatically identify pattern failures based on the threshold value(s) and/or based on outlier(s) that exhibit more than typical amount of variations. It is noted that the threshold value(s) used in this manner can help determine the severity of the failures and quantify weak points based on required specifications. The remaining regions (i.e., regions where local patterns may have deviated from the design by an amount greater than the threshold) may then be reported as regions containing potential hotspots, which may need to be validated by a validation process.

[0018] The validation process may be carried out in various ways. In some embodiments, for instance, a pattern search step 112 may be invoked to help define hotspot care areas (may also be referred to as inspection care areas) around the reported potential hotspots. An inspection tool capable of sampling and providing scanning electron microscope (SEM) review of the defined inspection care areas may then be utilized to help confirm the validity of the hotspots in a validation step 114. In some embodiments, if the inspection tool 102 is capable of sampling and providing SEM reviews, the same inspection tool 102 may be utilized to carry out the validation step 114. Otherwise, a second inspection tool may be utilized to carry out the validation step 114. The validated hotspots (i.e., patterns that are confirmed to be weak patterns) may then be reported to a user (e.g., a wafer engineer or a designer) or provided to facilitate revision of the design of the wafer (e.g., in an effort to reduce or eliminate weak patterns).

[0019] In some embodiments, pattern fidelity measurements may be taken (e.g., to measure the CD variations) to help confirm the validity of the hotspots in the validation step 114. Pattern fidelity measurements may

indicate pattern variations and/or deviations from intended pattern morphology. In some embodiments, the pattern fidelity measurements may be taken utilizing techniques similar to that disclosed in U.S. Patent Application Number 14/918,394, entitled "Automated Pattern Fidelity Measurement Plan Generation," which is hereby incorporated by reference in its entirety. It is to be understood that other pattern fidelity measurement techniques may also be utilized without departing from the spirit and the scope of the present disclosure.

[0020] It is also to be understood that the validation process described above is merely exemplary and is not meant to be limiting. In some embodiments, for example, the pattern fidelity measurements may be taken prior to the pattern search to automatically confirm the hotspots. The pattern search may then be executed (to help define inspection care areas), but the search may be limited to only the confirmed hotspots. The wafer with inspection care areas defined may then be inspected, sampled and SEM reviewed. If needed, pattern fidelity measurements may be taken again to measure the CD variations in these hotspots.

[0021] As will be appreciated from the above, the hotspot detection and quantification process can be automated in various ways to help increase the efficiency and accuracy of the process. It is also noted that because the hotspot detection and quantification process can be carried out in various ways, it is possible to allow different layers to use different hotspot detection and quantification processes. For example, one particular hotspot detection and quantification process may be well suited for identifying hotspots in an after-develop inspection (ADI) layer while a slightly different hotspot detection and quantification process (e.g., with processing steps performed in a slightly different order) may be better

suited for identifying hotspots in a different (e.g., a post-etch) layer. It is therefore contemplated that hotspot detection and quantification processes configured in accordance with the present disclosure may be implemented differently for different purposes without departing from the spirit and the scope of the present disclosure.

[0022] Referring now to FIG. 3, a more detailed illustration depicting an exemplary implementation of a layout based hotspot detection and quantification process is shown. The layout based hotspot detection and quantification process configured in this manner may use design layout to identify regions of interest automatically for the defective sites identified by the inspection tool 102. More specifically, as shown in FIG. 3, the wafer may be sampled and SEM images of the wafer may be collected in an SEM imaging step 108A. The SEM images may then be aligned against the design in an alignment step 108B and regions of interest may be identified automatically (e.g., at the end of the lines, corners, minimum CD areas or the like, as shown in FIG. 4) in a step 108C. Subsequently, metrology may be performed to look for potential bias only in the identified regions of interest in a step 108D and pattern variations (e.g., in terms of pinching, protrusion or the like) in the identified regions of interest may be measured in a step 108E.

[0023] A filtering step 110 may then be utilized to filter out some of the identified regions based on one or more threshold values established for one or more measurement metric. In some embodiments, pattern fidelity measurements may be taken on these regions (e.g., to measure the CD variations) and potential hotspots may be determined based on the severity of the CD variations (e.g., either as absolute or relative changes). These potential hotspots may then be validated by a validation process similar to

that described above. For example, the potential hotspots may be validated by running pattern search for the entire wafer, inspecting the wafer inspection care areas on the inspection tool, sampling and reviewing SEM defects, and again running pattern fidelity measurements to measure the CD variations.

[0024] It is noted that the hotspot detection and quantification processes configured in accordance with the present disclosure use process simulations and/or layout based approaches to effectively determine hotspots automatically, not as prediction before inspection but as tools to identify and assess failure algorithmically. It is noted that hotspot detection and quantification processes (both simulation based and layout based) configured in accordance with the present disclosure are capable of discovering more hotspots compared to existing methods by increasing sampling through automated assessment of pre-SEM data. It is also noted that hotspot detection and quantification processes configured in accordance with the present disclosure can enable automatic placement of regions of interest for each pattern type (e.g., each bin as determined based on design based binning) with high accuracy to automatically evaluate local CD and other pattern variations such as line-end shortening and corner rounding.

[0025] It is further noted that hotspot detection and quantification processes configured in accordance with the present disclosure can also eliminate human subjectivity in determining pattern variations and severity of failures. In addition, hotspot detection and quantification processes configured in accordance with the present disclosure can enable complete automated flow for hotspot discovery including identification and quantification of failed sites, which in turn can provide time saving as

automated metrology and simulation throughput increase. Furthermore, it is noted that hotspot detection and quantification processes configured in accordance with the present disclosure do not require simulation ahead of time for all pattern types. In other words, hotspot detection and quantification processes configured in accordance with the present disclosure has no dependency on predicting hotspots either on the design, wafer or reticle.

[0026] It is to be understood that the threshold value(s) referenced in the examples above may be user-defined or system-defined. A user may, for example, define an amount of deviation from an intended or nominal value as a threshold value. A system configured in accordance with the present disclosure may also define the threshold value(s). The system may, for example, define deviation amount where weak pattern is identified if certain location exceeds certain value from typical amount of variation. It is to be understood that the methods and systems described in the present disclosure may be implemented to support both user-defined and/or system-defined threshold values without departing from the spirit and scope of the present disclosure.

[0027] It is also to be understood that while the examples above referred to wafers, the systems and methods in accordance with the present disclosure are applicable to other types of polished plates as well without departing from the spirit and scope of the present disclosure. The term wafer used in the present disclosure may include a thin slice of semiconductor material used in the fabrication of integrated circuits and other devices, as well as other thin polished plates such as magnetic disc substrates, gauge blocks and the like.

[0028] It is contemplated that the methods and systems described in the present disclosure may be implemented as standalone products or as components of various wafer measurement, inspection, and/or hotspot discovery tools. It is understood that the specific order or hierarchy of steps in the methods disclosed are examples of exemplary approaches. Based upon design preferences, it is understood that the specific order or hierarchy of steps in the method can be rearranged while remaining within the scope and spirit of the disclosure. It is also understood that the various blocks depicted in the figures are presented separately for illustrative purposes. It is contemplated that while the various blocks depicted in the figures may be implemented as separate (and communicatively coupled) devices and/or processing units, they may also be integrated together without departing from the spirit and the scope of the present disclosure.

[0029] It is believed that the system and the apparatus of the present disclosure and many of its attendant advantages will be understood by the foregoing description, and it will be apparent that various changes may be made in the form, construction and arrangement of the components without departing from the disclosed subject matter or without sacrificing all of its material advantages. The form described is merely explanatory.

CLAIMS

What is claimed is:

1. A system, comprising:
 - a wafer inspection tool configured to inspect a wafer and detect defects present on the wafer; and
 - at least one processor in communication with the wafer inspection tool, the at least one processor configured to:
 - perform pattern grouping on the detected defects based on design of the wafer;
 - identify regions of interest based on the pattern grouping;
 - identify weak patterns contained in the regions of interest identified, the weak patterns being patterns deviating from the design by an amount greater than a threshold;
 - validate the weak patterns identified; and
 - report the validated weak patterns or facilitate revision of the design of the wafer based on the validated weak patterns.
2. The system of claim 1, wherein the at least one processor is configured to identify the weak patterns by:
 - simulate effects of a wafer process tool on the wafer;
 - identify regions of interest where patterns deviated from the design of the wafer; and
 - identify the weak patterns contained in the regions of interest identified.
3. The system of claim 2, wherein the at least one processor is configured to validate the weak patterns identified by:

define at least one inspection care area around the weak patterns identified based on a pattern search; and

facilitate sampling and scanning electron microscope (SEM) reviewing of the at least one inspection care area to validate the weak patterns.

4. The system of claim 3, wherein the at least one processor is further configured to take pattern fidelity measurements to validate the weak patterns.

5. The system of claim 4, wherein the pattern fidelity measurements include measurements of local critical dimension variations.

6. The system of claim 2, wherein the at least one processor is configured to:

validate the weak patterns identified based on pattern fidelity measurements;

pattern search only the validated weak patterns to define at least one inspection care area around the validate weak patterns; and

facilitate sampling and SEM reviewing of the at least one inspection care area.

7. The system of claim 1, wherein the at least one processor is configured to identify the weak patterns by:

obtain SEM images of the wafer;

align the SEM images of the wafer against the design of the wafer;

identify regions of interest based on alignment of the SEM images of the wafer and the design of the wafer;

obtain metrology of the wafer in the regions of interest identified;

measure pattern variations in the regions of interest identified based on the metrology obtained; and
identify the weak patterns based on the pattern variations.

8. The system of claim 7, wherein the at least one processor is configured to validate the weak patterns identified by:

define at least one inspection care area around the weak patterns identified based on pattern search; and

facilitate sampling and scanning electron microscope (SEM) reviewing of the at least one inspection care area to validate the weak patterns.

9. The system of claim 8, wherein the at least one processor is further configured to take pattern fidelity measurements to validate the weak patterns.

10. The system of claim 9, wherein the pattern fidelity measurements include measurements of local critical dimension variations.

11. The system of claim 1, wherein weak patterns identified with local critical dimension variations greater than the threshold are confirm as valid weak patterns.

12. A system, comprising:

a wafer inspection tool configured to inspect a wafer and detect defects present on the wafer; and

at least one processor in communication with the wafer inspection tool, the at least one processor configured to:

perform pattern grouping on the detected defects based on design of the wafer;

- simulate effects of a wafer process tool on the wafer;
- identify regions of interest where patterns deviated from the design of the wafer;
- identify weak patterns contained in the regions of interest identified, the weak patterns being patterns deviating from the design by an amount greater than a threshold;
- validate the weak patterns identified; and
- report the validated weak patterns or facilitate revision of the design of the wafer based on the validated weak patterns.

13. The system of claim 12, wherein the at least one processor is configured to validate the weak patterns identified by:

- define at least one inspection care area around the weak patterns identified based on a pattern search; and
- facilitate sampling and scanning electron microscope (SEM) reviewing of the at least one inspection care area to validate the weak patterns.

14. The system of claim 13, wherein the at least one processor is further configured to take pattern fidelity measurements to validate the weak patterns.

15. The system of claim 14, wherein the pattern fidelity measurements include measurements of local critical dimension variations.

16. The system of claim 12, wherein the at least one processor is configured to:

- validate the weak patterns identified based on pattern fidelity measurements;

pattern search only the validated weak patterns to define at least one inspection care area around the validate weak patterns; and
facilitate sampling and SEM reviewing of the at least one inspection care area.

17. The system of claim 12, wherein weak patterns identified with local critical dimension variations greater than the threshold are confirm as valid weak patterns.

18. A system, comprising:

a wafer inspection tool configured to inspect a wafer and detect defects present on the wafer; and

at least one processor in communication with the wafer inspection tool, the at least one processor configured to:

perform pattern grouping on the detected defects based on design of the wafer;

obtain scanning electron microscope (SEM) images of the wafer;

align the SEM images of the wafer against the design of the wafer;

identify regions of interest based on alignment of the SEM images of the wafer and the design of the wafer;

obtain metrology of the wafer in the regions of interest identified;

measure pattern variations in the regions of interest identified based on the metrology obtained;

identify weak patterns based on the pattern variations, the weak patterns being patterns deviating from the design by an amount greater than a threshold;

validate the weak patterns identified; and

report the validated weak patterns or facilitate revision of the design of the wafer based on the validated weak patterns.

19. The system of claim 18, wherein the at least one processor is configured to validate the weak patterns identified by:

define at least one inspection care area around the weak patterns identified based on pattern search; and

facilitate sampling and scanning electron microscope (SEM) reviewing of the at least one inspection care area to validate the weak patterns.

20. The system of claim 19, wherein the at least one processor is further configured to take pattern fidelity measurements to validate the weak patterns.

21. The system of claim 20, wherein the pattern fidelity measurements include measurements of local critical dimension variations.

22. The system of claim 21, wherein weak patterns identified with local critical dimension variations greater than the threshold are confirm as valid weak patterns.

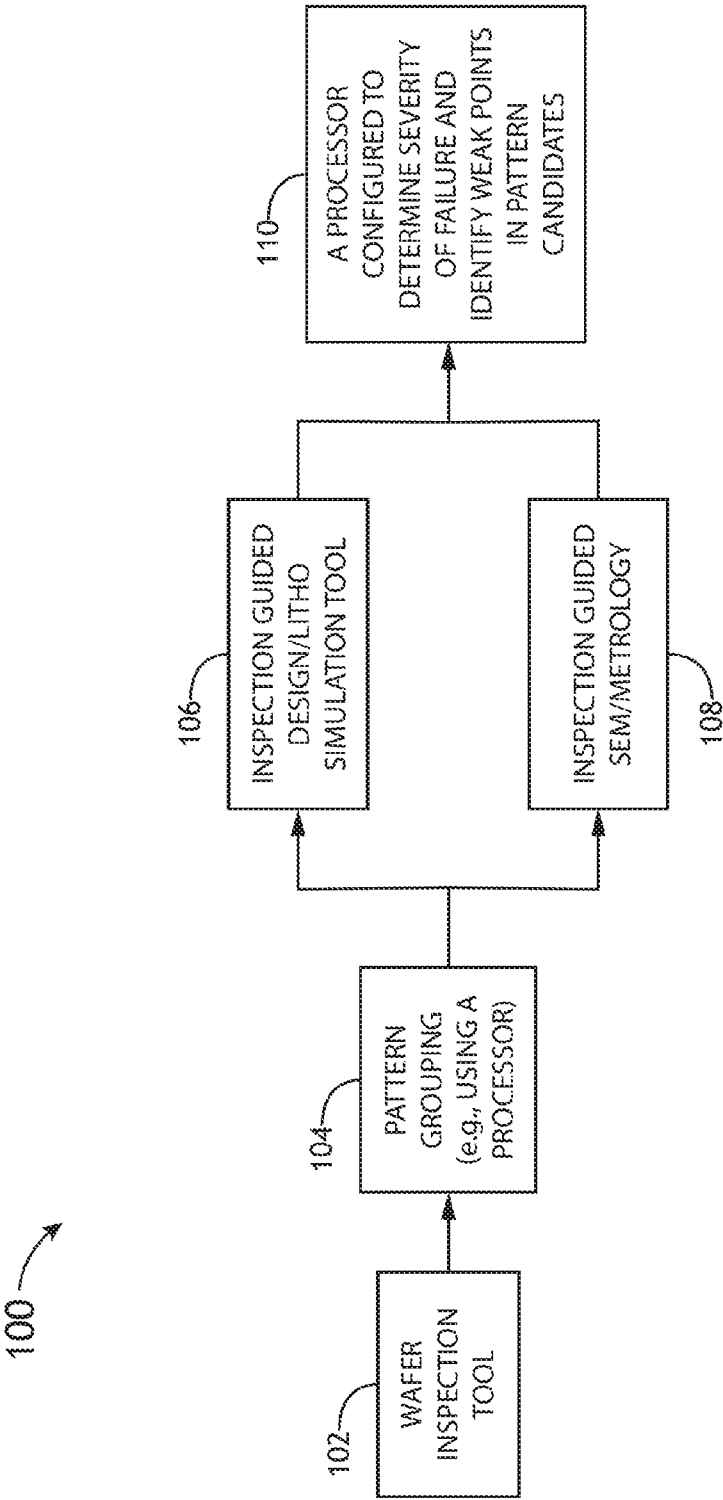


FIG.1

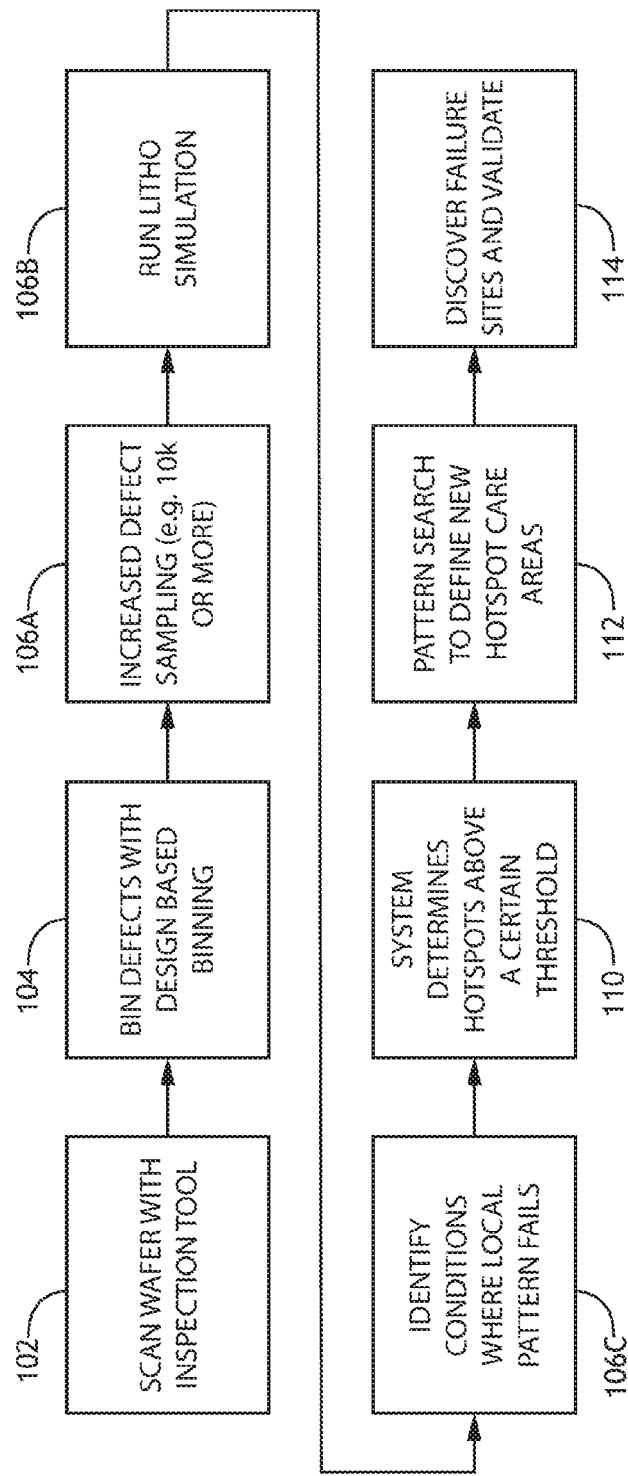


FIG.2

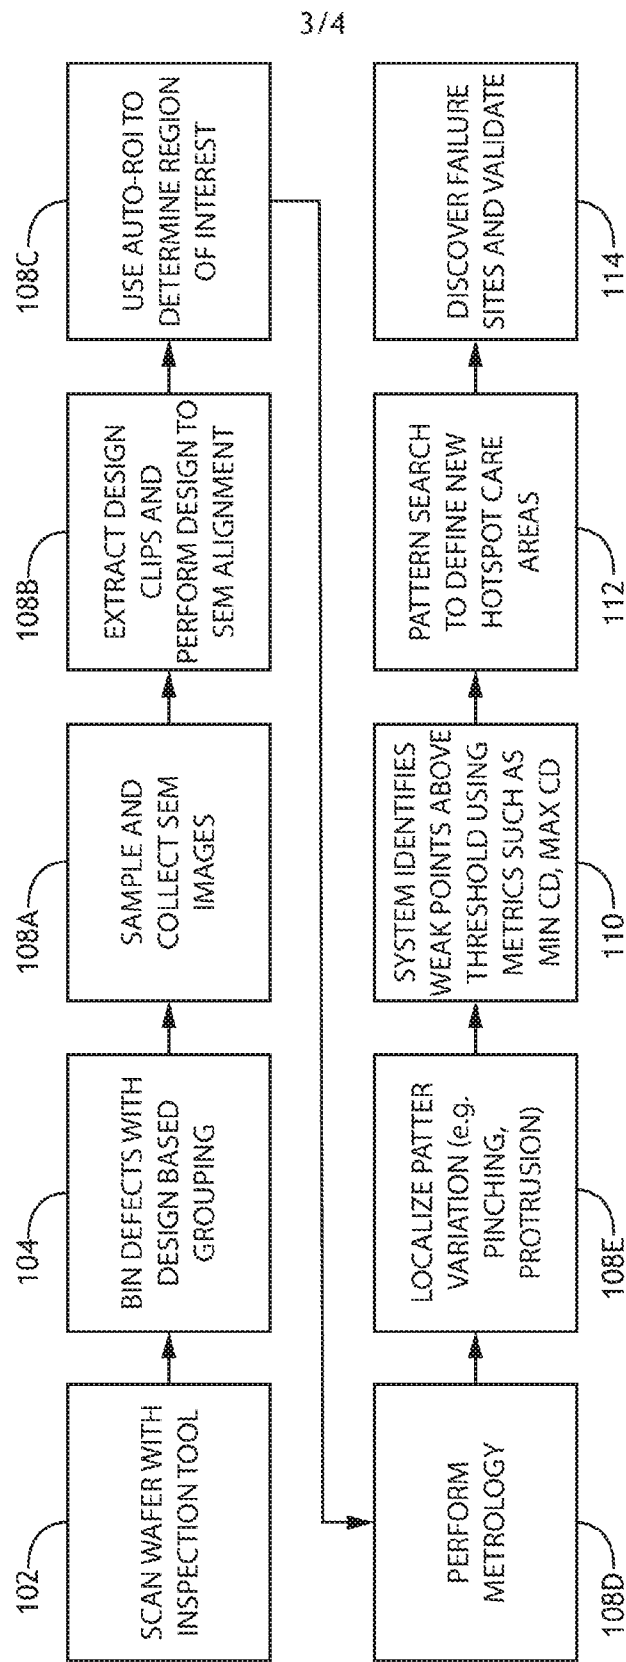


FIG.3

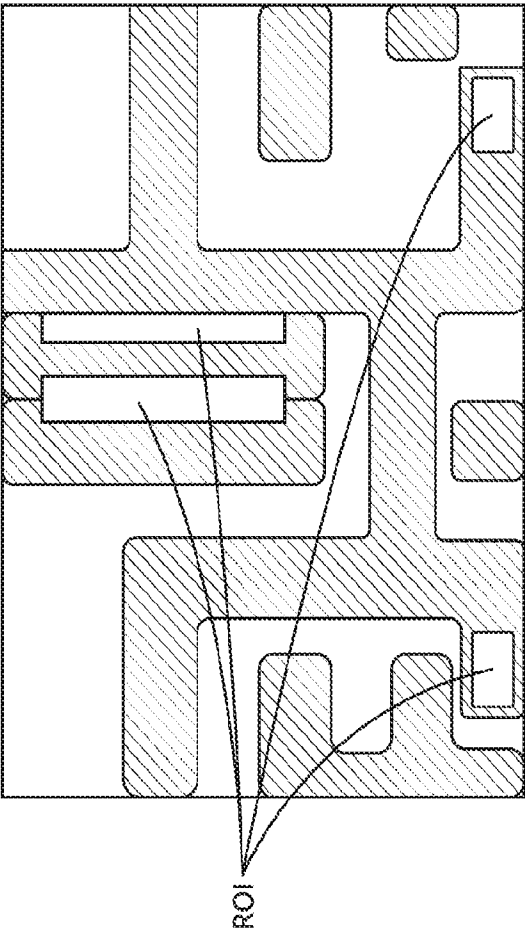


FIG. 4

A. CLASSIFICATION OF SUBJECT MATTER**H01L 21/66(2006.01)i, H01L 21/027(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
H01L 21/66; H01L 27/02; G02B 21/00; G06F 17/50; G01N 21/00; G01N 21/95; H01L 21/027Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: inspection, defect, interest, weak pattern, processor**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2015-0012900 A1 (KLA-TENCOR CORPORATION) 08 January 2015 See claims 1, 7, 20 and figure 6.	1-22
A	US 2011-0170091 A1 (ELLIS CHANG et al.) 14 July 2011 See claim 17 and figures 1-3.	1-22
A	US 2014-0343884 A1 (ELITETECH TECHNOLOGY CO., LTD.) 20 November 2014 See claim 1 and figures 1, 4.	1-22
A	US 2007-0105245 A1 (TOMOHIRO FUNAKOSHI et al.) 10 May 2007 See claim 1 and figure 2.	1-22
A	US 2015-0022654 A1 (APPLIED MATERIALS ISRAEL LTD.) 22 January 2015 See claim 1 and figures 1-2.	1-22



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 July 2017 (31.07.2017)

Date of mailing of the international search report

31 July 2017 (31.07.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

CHOI, Sang Won

Telephone No. +82-42-481-8291



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/028983

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2015-0012900 A1	08/01/2015	KR 10-2016-0029088 A TW 201511157 A US 9355208 B2 WO 2015-006230 A1	14/03/2016 16/03/2015 31/05/2016 15/01/2015
US 2011-0170091 A1	14/07/2011	KR 10-1717268 B1 KR 10-2012-0125273 A TW 201203416 A TW I546873 B US 8559001 B2 US 9170209 B1 WO 2011-085255 A2 WO 2011-085255 A3	17/03/2017 14/11/2012 16/01/2012 21/08/2016 15/10/2013 27/10/2015 14/07/2011 10/11/2011
US 2014-0343884 A1	20/11/2014	CN 104183517 A CN 104183517 B TW 201445347 A TW I534646 B	03/12/2014 12/04/2017 01/12/2014 21/05/2016
US 2007-0105245 A1	10/05/2007	JP 2007-134498 A JP 4699873 B2 US 2011-0211060 A1 US 8209135 B2	31/05/2007 15/06/2011 01/09/2011 26/06/2012
US 2015-0022654 A1	22/01/2015	JP 2015-029094 A KR 10-2015-0011329 A TW 201507048 A	12/02/2015 30/01/2015 16/02/2015