




(86) Date de dépôt PCT/PCT Filing Date: 2014/12/02
(87) Date publication PCT/PCT Publication Date: 2015/06/11
(45) Date de délivrance/Issue Date: 2022/03/15
(85) Entrée phase nationale/National Entry: 2016/05/27
(86) N° demande PCT/PCT Application No.: EP 2014/076198
(87) N° publication PCT/PCT Publication No.: 2015/082445
(30) Priorités/Priorities: 2013/12/02 (NL2011880);
2014/04/07 (NL2012579)

(51) Cl.Int./Int.Cl. *E02F 3/88* (2006.01),
E21C 50/00 (2006.01)
(72) Inventeurs/Inventors:
HEILER, JOHAN, BE;
LUCIEER, PIETER ABRAHAM, NL;
DE BRUYNE, KRIS, BE;
STOFFERS, HARMEN DERK, NL
(73) Propriétaire/Owner:
DEEPTech NV, BE
(74) Agent: SMART & BIGGAR IP AGENCY CO.

(54) Titre : VEHICULE MINIER SOUTERRAIN, ET PROCEDE POUR COLLECTER DES DEPOTS MINERAUX D'UN FOND MARIN A DE GRANDES PROFONDEURS ET TRANSPORTER LESDITS DEPOTS VERS UN VAISSEAU FLOTTANT
(54) Title: SUBSURFACE MINING VEHICLE AND METHOD FOR COLLECTING MINERAL DEPOSITS FROM A SEA BED AT GREAT DEPTHS AND TRANSPORTING SAID DEPOSITS TO A FLOATING VESSEL

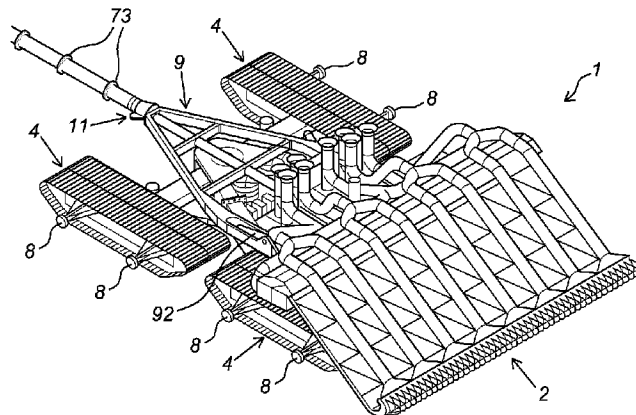

(57) **Abrégé/Abstract:**

Described is a subsurface mining vehicle and a method for collecting mineral deposits from a sea bed at great depths and transporting said deposits to a floating vessel. The vehicle comprises a load-bearing structure having means for advancing the vehicle on the sea bed, and a pick-up unit for the deposits. A lifting frame is also provided and at one end equipped with a connector to connect to a suspension cable provided between the floating vessel and the vehicle. The lifting frame is at another end connected to the load-bearing structure by a hinged connection, that is actuated by actuating means such that the angular position of the load-bearing structure can be fixed in a number of different angular positions relative to the lifting frame while the vehicle is suspended from the suspension means. The lifting frame allows to launch and position the submarine vehicle in a controlled manner.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2015/082445 A1

(43) International Publication Date
11 June 2015 (11.06.2015)

- (51) International Patent Classification:
E02F 3/88 (2006.01) *E21C 50/00* (2006.01)
- (21) International Application Number:
PCT/EP2014/076198
- (22) International Filing Date:
2 December 2014 (02.12.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2011880 2 December 2013 (02.12.2013) NL
2012579 7 April 2014 (07.04.2014) NL
- (71) Applicant: **OCEANFLORE B.V.** [NL/NL]; Smitweg 6, NL-2961 AW Kinderdijk (NL).
- (72) Inventors: **HEILER, Johan**; Gagelhoflaan 37, B-2980 Zoersel (BE). **LUCIEER, Pieter Abraham**; Statensingel 119C, NL-3039 LH Rotterdam (NL). **DE BRUYNE, Kris**; Haviklaan 57, B-2100 Deurne (BE). **STOFFERS, Harmen Derk**; Boschstraat 28H, NL-4811 GH Breda (NL).
- (74) Agent: **BROUWER, Hendrik Rogier**; Bezuidenhoutseweg 57, NL-2594 AC Den Haag (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SUBSURFACE MINING VEHICLE AND METHOD FOR COLLECTING MINERAL DEPOSITS FROM A SEA BED AT GREAT DEPTHS AND TRANSPORTING SAID DEPOSITS TO A FLOATING VESSEL

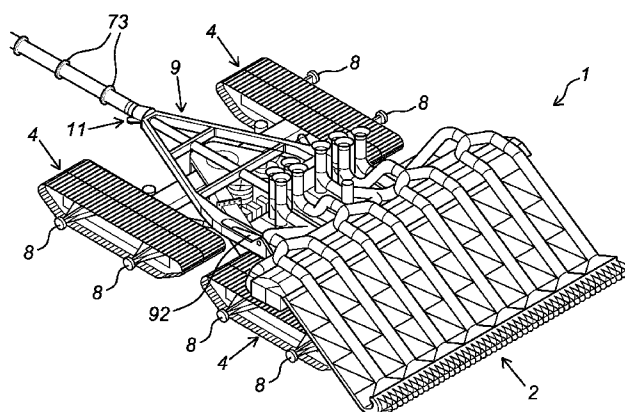


Fig. 1

(57) Abstract: Described is a subsurface mining vehicle and a method for collecting mineral deposits from a sea bed at great depths and transporting said deposits to a floating vessel. The vehicle comprises a load-bearing structure having means for advancing the vehicle on the sea bed, and a pick-up unit for the deposits. A lifting frame is also provided and at one end equipped with a connector to connect to a suspension cable provided between the floating vessel and the vehicle. The lifting frame is at another end connected to the load-bearing structure by a hinged connection, that is actuated by actuating means such that the angular position of the load-bearing structure can be fixed in a number of different angular positions relative to the lifting frame while the vehicle is suspended from the suspension means. The lifting frame allows to launch and position the submarine vehicle in a controlled manner.

WO 2015/082445 A1

Subsurface mining vehicle and method for collecting mineral deposits from a sea bed at great depths and transporting said deposits to a floating vessel

BACKGROUND OF THE INVENTION

5

The present invention relates to a subsurface mining vehicle for collecting mineral deposits from a sea bed at great depths and transporting them to a floating vessel. The invention further relates to a method for collecting mineral deposits from a sea bed at great depths and transporting them to a floating vessel.

10

Deep sea mining involves collecting mineral deposits, such as polymetallic nodules, diamonds, gold, and rare soils from (below) the sea floor 4,000 - 6,000 m. Polymetallic nodules may for instance comprise nickel, copper, cobalt and manganese nodules. In deep sea mining, the sea floor may be a distance of up to 5000 m and more away from the sea surface, and developing equipment for deep sea mining imposes many challenges.

15

Deep sea mining vessels need to bring subsurface mining equipment to the sea floor and recover the same from the sea floor after termination of a mining operation. Typical vessels thereto comprise some type of launching and docking device that is operated from a docking well. Such docking well passes through and is enclosed by the vessel hull, and opens to the sea at its bottom side defining a so-called splash zone of the docking well. The docking well may be closable across the bottom by movable gates if desired. A deep sea mining vessel further typically comprises pumping equipment for bringing mined mineral deposits from the sea floor to a vessel storage hold through a transport pipe system. A riser string extends from the vessel to the mining equipment to convey the mined mineral nodules towards the sea surface. A lift system is usually operational in raising and launching the riser string.

20

25

30

US 4,232,903 discloses a subsurface mining vehicle for collecting mineral deposits from a sea bed and transport said deposits to a floating vessel. The mining vehicle comprises a load-bearing structure provided with propelling means for advancing the vehicle on the sea bed. The vehicle is equipped with a pick-up unit and with a frame that is used to attach the vehicle to a towing cable. During deployment of the vehicle,

the frame remains in a vertical position in line with the cables from which it is suspended. When the vehicle is resting on the sea floor, the frame is dropped over to a more horizontal drag or tow position.

5 WO 2012/134275 A2 discloses a mining or dredging vehicle. The vehicle can be suspended from cables and a riser to mine or dredge materials from a sea bottom. The vehicle comprises a sledge construction with a support surface, the orientation of which is adjustable by hydraulic cylinders relative to a frame of the vehicle. A suction height controller is provided to control the height of an excavating head and thereby switch
10 between a 'sledge mode' and a 'gliding mode'. The vehicle is further provided with an adjustable suspension arranged to mechanically connect to a towing cable. The adjustable suspension allows controlling the angle under which the towing cable exerts a towing force on the vehicle during movement along the sea bed and to achieve a better trim control.

15

WO 2012/158028 A1 discloses a generally known suction dredging vessel, provided with a suction pipe, to which suction pipe is attached a remotely controlled mining or dredging vehicle. The connection is through a flexible riser.

20 In launching subsurface mining equipment, the maximum environmental circumstances are often limited to certain wave heights, and considerable time is lost while waiting for a weather window for deploying or recovering the equipment. Further, most damages to subsea mining equipment occur during launching and recovery. Given the size, complexity and cost of a mining vehicle, this is unacceptable.

25

The above described disadvantages occur to an even higher extent in launching and recovering subsurface mining equipment. Indeed, deep sea mining equipment preferably has a relatively low weight, which makes it difficult to control such equipment when suddenly contacting a moving mass of water. The risk for collision with parts of the
30 vessel or other structures is high.

Therefore, an aim of the present invention is to provide a device and method for launching subsurface mining equipment into a water mass from a docking well of a

floating vessel, and recover said equipment from the water mass in a more controlled manner.

BRIEF SUMMARY OF THE INVENTION

5

The invention thereto provides a subsurface mining vehicle for collecting mineral deposits from a sea bed at great depths and transporting said deposits to a floating vessel, the vehicle comprising a load-bearing structure provided with means for advancing the vehicle on the sea bed, and with a pick-up unit for the deposits, the
10 vehicle further comprising a lifting frame that is at one end provided with a suspension connector to connect to a suspension means provided between the floating vessel and the vehicle, and at another end connected to the load-bearing structure by a hinged connection, that is actuated by actuating means such that the angular position of the load-bearing structure relative to the lifting frame can be fixed in different angular
15 positions while the vehicle is suspended from the suspension means. According to the invention, the lifting frame and actuating means are adapted to change the angular position of the vehicle frame with respect to a cable from which the vehicle is suspended. By providing the vehicle in accordance with the invention with a lifting frame that allows to rotate the load-bearing structure around a substantially horizontal
20 axis (an axis about parallel to the sea bed) and fixate it in substantially any angular position while it is hanging in a suspension cable, it becomes possible to launch and recover a mining vehicle in about any angular position, and preferably in a substantially vertical position. This has proven to increase the controllability of the launching and recovery operation.

25

A useful embodiment of the invention provides an embodiment of the device further comprising a connector for connecting to a deposit transporting system provided between the vehicle and the floating vessel.

30 In another embodiment of the invention, a device is provided wherein the lifting frame is equipped with transporting means for picked-up deposits, which transporting means is at one end provided with the connector and at another end connects to the pick-up device. The transporting means provided on the lifting frame may for instance comprise

a rigid conveying tube that is attached to a frame member of the lifting frame, and connects with the deposit transporting system through the connector.

5 In an embodiment of the invention, a subsurface mining vehicle is provided wherein the actuating means comprise hydraulic cylinders extending between the frame and the load-bearing structure.

10 Yet another embodiment of the invention provides a subsurface mining vehicle wherein the vehicle has a center of gravity and the hinged connection is positioned such that a pivot line between the frame and the load-bearing structure runs substantially through the center of gravity when the vehicle is totally submerged. The wording 'substantially' in the context of the present application means within 1.5 m, more preferably within 1 m, and most preferably within 0,5 m.

15 According to another embodiment of the invention, a subsurface mining vehicle is provided comprising buoyancy means, preferably in the form of a plurality of buoyancy elements, most preferably arranged onto parts of the vehicle. Suitable buoyancy elements need to be able to withstand the high pressures at a sea bottom, preferably more than 500 bar.

20 Another embodiment of the invention provides a subsurface mining vehicle wherein the load-bearing structure and/or the lifting frame are substantially planar.

25 In a particular embodiment of the subsurface mining vehicle according to the invention, the load-bearing structure comprises a fork-shaped frame of longitudinal beam members that join in a root of the fork-shaped frame, and transverse beam members spanning the distance between the longitudinal beam members at a distance from the root of the fork-shaped frame.

30 A useful embodiment of the subsurface mining vehicle is characterized in that a transverse member is pivotally connected to the root of the fork-shaped frame.

Another embodiment of the subsurface mining vehicle according to the invention comprises at least one propelling means at each side of the vehicle.

The propelling means may be any means known in the art but in a preferred embodiment comprise a track assembly.

- 5 Another particularly useful embodiment of the subsurface mining vehicle according to the invention comprises a suspension connector for the suspension means that is adapted to allow free rotation of the vehicle when suspended from the suspension means around an axis parallel to a suspension means axis. Suitable suspension means comprise a suspension cable.

10

According to another embodiment of the invention, the suspension connector of the subsurface mining vehicle comprises a slewing ring that is attachable to the suspension means and comprises a turning gland.

- 15 The invention further relates to a method for collecting mineral deposits from a sea bed at great depths and transporting said deposits to a floating vessel. The method in accordance with the invention comprises the consecutive steps of providing a subsurface mining vehicle in accordance with the invention, connecting the lifting frame of said mining vehicle to a suspension cable provided between the floating vessel
20 and the vehicle, lowering the vehicle towards a sea bed with the load-bearing structure in a first angular position, actuate the hinged connection between the lifting frame and the load-bearing structure to fixate the load-bearing structure in a second angular position that differs from the first angular position of the load-bearing structure relative to the lifting frame, position the vehicle on the sea bed and advance the vehicle on the
25 sea bed to pick-up the mineral deposits.

- The mining vehicle is in an embodiment connected to a deposit transporting system provided between the vehicle and a floating vessel. The deposit transporting system may be configured in accordance with any system known in the art and preferably
30 comprises a riser string of interconnected rigid pipe sections, provided between the vehicle and the floating vessel.

A particularly preferred embodiment of the method is characterized in that the first angular position is parallel to the vertical direction. More preferably, the second angular position makes an angle of 90° or more with respect to the vertical direction.

- 5 In yet another embodiment of the method according to the invention, the second angular position makes an angle of more than 90° with respect to the vertical direction, such that the vehicle contacts the sea bed first with a rear end thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

10

The invention will now be elucidated in more detail with reference to the accompanying figures, without otherwise being limited thereto. In the figures:

Fig. 1 is a perspective view of an embodiment of a subsurface mining vehicle of the present invention;

- 15 Fig. 2 is a perspective view of an assembly of the subsurface mining vehicle of figure 1 and a flexible riser to which it is attached;

Fig. 3 is a perspective view of a vehicle showing the load-bearing structure and the lifting frame in disconnected state in accordance with an embodiment of the invention;

Fig. 4 is a perspective view of the load-bearing structure provided with propelling

- 20 means of the vehicle of figure 1;

Fig. 5 is a top view of the load-bearing structure provided with propelling means and lifting frame of the vehicle of figure 1;

Fig. 6 is a perspective view of a ; and

Fig. 7A, 7B and 7C are transverse views of a vehicle in accordance with an embodiment

- 25 of the invention in different angular positions.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

- A general arrangement of an embodiment of a mining vehicle 1 that is readily
30 launchable and recoverably by a docking device on a floating vessel is shown in figure 1. The mining vehicle 1 comprises on a front side thereof a collector 2. The “hydraulic” collector 2 of the embodiment shown is only one example of a suitable collector and other collectors may be used as well within the scope of the invention. The vehicle 1 further comprises a load-bearing structure 3 (see figure 3) provided with propelling

means in the form of four track assemblies 4. A pair of track assemblies 4 moves independently from each other at one side of the vehicle 1, while another pair of track assemblies 4 moves at an opposite side of the vehicle 1. Rotating the track assemblies 4 will advance the vehicle 1 over a sea bed 5.

5

The load-bearing structure 3 further accommodates pumps, electrical equipment, hydraulic equipment and the like, and a hinged lifting frame 6 that connects the vehicle 1 to an interconnection hose assembly 7 of a riser. Four vehicle guiding brackets 8 are mounted on each side of the vehicle 1 and are intended to guide the vehicle 1 through
10 guiding rails (not shown) provided in a docking device on a vessel during deployment. The brackets 8 are mounted on the foundations of the track assemblies 4, two per track assembly.

In order to reduce the submerged weight of the vehicle 1 and the soil bearing force of
15 the track assemblies 4, is added in one embodiment in the form of pressure resistant buoyancy elements (not shown) with a density of around 300- 700 kg/m³. The buoyancy is preferably equally distributed on the vehicle 1 and reduces the adherent water in the main load-bearing structure 3. The collector 2 on the front of the vehicle 1 may be neutrally compensated by buoyancy elements placed around it. Adequate
20 positioning of a number of buoyancy elements provides a center of gravity of the complete vehicle 1 that is almost in the middle of the vehicle 1. All buoyancy elements or blocks are preferably positioned on or at a beam of the load-bearing structure 3.

The interconnection hose assembly 7 to which the vehicle 1 connects is schematically
25 shown in figure 2. The assembly 7 comprises a flexible submarine hose 70 that is adapted to transport mineral nodules collected by the vehicle 1 to a rigid riser 8. The flexible hose 70 itself comprises a plurality of hose units of 10-15 m long for instance, interconnected by bolted flanges. When the mining vehicle 1 is not operational, the complete hose 70 is preferably stored on a reel provided on the floating vessel.

30

In an embodiment, a number of buoyancy elements or blocks 71 is divided over one or more hoses 70, over an equivalent length of about 50 m for instance. Each buoyancy block preferably weighs between 500 and 1000 kg, or even higher, may have a height of about 1 m and a diameter of about 1.6 m. The total length of the flexible hose 70 may be

chosen within a large range and may for instance be around 150 m, and shaped like a lazy-S to decouple both vertical movements of the end of the riser 8 (due to heave for instance) as well as horizontal movements of the vehicle 1. Buoyancy blocks 71 generating an upward force in a part of the hose 70 may be used to create the S-shape.

5

In order to support the vehicle 1 during launching or recovery, steel lifting cables, preferably two separate lifting wires 72, are attached to the vehicle 1 to create sufficient longitudinal strength and provide lifting capacity. The steel lifting wires 72 are running along the hose 70 and are designed to be slightly shorter than the hose 70 itself, to ensure that they take most of the longitudinal stresses. The steel wires 72 are preferably not fixed to the hose 70, but are bundled with the hose 70 into a package. Hose clamps 73 or buoyancy blocks 71 take care of the bundling. The steel wires 72 are at one end connected to a top flange of the interconnection hose 70, the flange being suitable to transfer the large forces.

10
15

An umbilical wire is provided along the interconnection hose 70 to provide power and transmit signals between a floating vessel and electronic equipment installed on the vehicle 1. It is conveniently part of the package and held by the clamps 73. The required power is generally generated on the floating mining vessel and conducted through the umbilical wire to the vehicle. Moreover, fibre optic elements (for PLC's) and wires for survey equipment (submerged cameras, sensors, lighting...) may also be included in the umbilical wire.

20

A flange or coupling is also provided on the lower end of the riser 8, to which the interconnection hose assembly 70 may be connected. A waterproof junction of umbilicals is also provided for connecting the relatively short umbilical wire of the interconnecting hose assembly 70 to the relatively long (for instance 2000-5000 m) umbilical wire that is attached to the riser string 8 and leads to the vessel.

25

A shown in figure 3 (exploded view), steel box beam elements out of high tensile steel (e.g. RQT701) are used in an embodiment to build up a substantially planar load-bearing structure 3 of the mining vehicle 1. Alternatively the structural elements could be fabricated out of carbon fibre reinforced composites. The load-bearing structure 3 has a fork-like shape with two longitudinal beams (3a, 3b) that join in a root of the fork-

30

shaped frame, and two transversal beams (3c, 3d) running in between and rigidly connected to the longitudinal beams (3a, 3b). The transversal beams (3c, 3d) carry the collector 2.

- 5 The load-bearing structure 3 further carries transverse beams (8a, 8b) to which aft and fore track assemblies 4 can be mounted respectively. The transverse beam 8a at the back of the vehicle 1 is pivotable around pivot 30 that is incorporated in the root of the fork-shaped frame. Pivot part 30 at the back of the vehicle 1 is connected by flanges 31 to the load-bearing structure, which offers a relatively easy exchange of components in case of
10 failure or damage.

The lifting frame 9 is a steel structure that is connected to the main load bearing structure 3 via two hinge connections (90a, 90b). While deploying or recovering the vehicle 1, it will be suspended from the lifting frame 9. The flexible hose 70 and steel
15 cable 72 assembly that interconnects the riser 8 with the vehicle 1 is thereto connected to the lifting frame 9. The lifting frame 9 in the embodiment shown guides piping 91 that connects the flexible hose 70 to the nodule collector 2.

While on deck or during launch and recovery, the lifting frame 9 preferably extends
20 parallel to the substantially planar main load-bearing chassis 3 (figure 7A). When the vehicle 1 is relatively close to the seafloor 5, two hydraulic cylinders 92 (see figure 1) in a preferred embodiment lift the frame 9 to an angle 100 of up to 105° for instance (figure 7B), such that the vehicle lands on its rear part on the seafloor 5. After landing on the seafloor 5, the frame 9 is preferably kept upright at an angle 100 of about 90° to
25 the main chassis 3 (figure 7C).

Referring to figure 4, suitable propelling means comprise an undercarriage provided with four separate track drives 4, which are preferably independently speed controlled. As shown in figure 5, such propelling means 4 offer improved manoeuvrability and
30 higher tractive effort compared to conventional track systems. A number of independent tracks 4 may also offer advantages in case of inhomogeneous soils. A benefit of the propelling means of the present embodiment is that its four independent tracks 4 allow to use a steering mechanism, thereby avoiding additional soil disturbance. A pivot point at the back of the vehicle 1 (see figure 5) allows for smooth steering and minimizes

disturbance of the soft seafloor. A turning radius of about 160 m and less may be achieved. In the embodiment shown, the articulation is actuated by two hydraulic cylinders 40, that are equipped with an internal spring in order to automatically reposition the steering beam to the center if a mechanical failure would occur. The pivot point is located at the back rather than in the middle of the vehicle, as it simplifies the vehicle lay-out, and has no adverse consequences on steering. The steering capacity of the vehicle is sufficient because the inertia of the vessel and riser do not allow for fast direction changes and the vehicle will typically run in long straight lanes. A steady state turn may be performed by imposing a speed difference on the left and right side of the undercarriage. Due to the long rectangular shape of the vehicle, high lateral forces may be created on the track chain and a bulldozer effect may occur.

With reference to figure 6, a top end of the lifting frame 9 in a preferred embodiment comprises a connection 11 comprising a turning gland 110 with a slewing ring 111 provided around it. This combination allows rotational freedom of the vehicle 1 around a substantially vertical axis 112. The turning gland 110 provides a connection between the rigid piping 91 on the lifting frame 9 and the flexible interconnection hose 70 which has full rotational freedom. The lifting frame 9 is connected to the steel wires 72 by ear pieces 112 provided on the slewing ring 111. In this way, the forces can be guided through the slewing ring 111 instead of through the turning gland 110.

The slewing ring is based on slide bearing between steel on steel or plastic on steel surfaces. The slewing ring can be mechanically coupled to the turning gland to ensure parallel rotations of both. Such an arrangement may avoid entangling of umbilical and lifting wire. The flexible hose further preferably has a flanged connection to the turning gland. In this embodiment, the total rotational freedom is limited to 270° due to the umbilical that runs alongside the flexible interconnection hose.

The invention is not limited to the embodiments described and represented hereinbefore and various modifications can be made thereto without passing beyond the scope of the invention.

CLAIMS:

1. Subsurface mining vehicle for collecting mineral deposits from a sea bed at great depths and transport said deposits to a floating vessel, the vehicle comprising a load-bearing structure provided with means for advancing the vehicle on the sea bed and with a pick-up unit for the deposits, the vehicle further comprising a connector for connecting to a deposit transporting system provided between the vehicle and the floating vessel, as well as a lifting frame that is at one end provided with a suspension connector to connect to a suspension means provided between the floating vessel and the vehicle, and at another end connected to the load-bearing structure by a hinged connection, that is actuated by actuating means such that an angular position of the load-bearing structure relative to the lifting frame can be fixed in different angular positions while the vehicle is suspended from the suspension means.
2. Subsurface mining vehicle according to claim 1, wherein the lifting frame is equipped with transporting means for picked-up deposits, and the transporting means is at one end provided with the connector and at another end connects to a pick-up device.
3. Subsurface mining vehicle according to any one of claims 1-2, wherein the actuating means comprise hydraulic cylinders extending between the frame and the load-bearing structure.
4. Subsurface mining vehicle according to any one of claims 1-3, wherein the vehicle has a center of gravity and the hinged connection is positioned such that a pivot line between the frame and the load-bearing structure runs substantially through the center of gravity when the vehicle is totally submerged.
5. Subsurface mining vehicle according to any one of claims 1-4, comprising buoyancy means.

6. Subsurface mining vehicle according to claim 5, wherein the buoyancy means comprise a plurality of buoyancy elements.

5 7. Subsurface mining vehicle according to any one of claims 1-6, wherein the load-bearing structure and/or the lifting frame are substantially planar.

8. Subsurface mining vehicle according to claim 7, wherein the load-bearing structure comprises a fork-shaped frame of longitudinal beam members that join in a root of
10 the fork-shaped frame, and transverse beam members spanning the distance between the longitudinal beam members at a distance from the root of the fork-shaped frame.

9. Subsurface mining vehicle according to claim 8, wherein a transverse member is pivotally connected to the root of the fork-shaped frame.

15 10. Subsurface mining vehicle according to any one of claims 1-9, comprising at least one propelling means at each side of the vehicle.

11. Subsurface mining vehicle according to claim 10, wherein the at least one
20 propelling means comprise a track assembly.

12. Subsurface mining vehicle according to any one of claims 1-11, wherein the suspension connector for the suspension means is adapted to allow free rotation of the vehicle when suspended from the suspension means around an axis parallel to a suspension means
25 axis.

13. Subsurface mining vehicle according to claim 12, wherein the suspension connector comprises a slewing ring that is attachable to the suspension means and comprises a turning gland.

14. Method for collecting mineral deposits from a sea bed at great depths and transporting said deposits to a floating vessel, the method comprising the consecutive steps of providing a subsurface mining vehicle in accordance with any one of claims 1-13, connecting the lifting frame of said mining vehicle to a suspension cable provided between the floating
5 vessel and the vehicle, lowering the vehicle towards a sea bed with the load-bearing structure in a first angular position, actuate the hinged connection between the lifting frame and the load-bearing structure to fixate the load-bearing structure in a second angular position that differs from the first angular position of the load-bearing structure with respect to the lifting frame, position the vehicle on the sea bed and advance the vehicle on the sea bed to pick-up
10 the mineral deposits, wherein the first angular position is parallel to the vertical direction.

15. Method according to claim 14, wherein the second angular position makes an angle of 90° or more with respect to the vertical direction.

15 16. Method according to claim 15, wherein the second angular position makes an angle of more than 90° with respect to the vertical direction, such that the vehicle contacts the sea bed first with a rear end thereof.

17. Method according to any one of claims 13-16, wherein the mining vehicle is
20 connected to the deposit transporting system provided between the vehicle and the floating vessel.

1/5

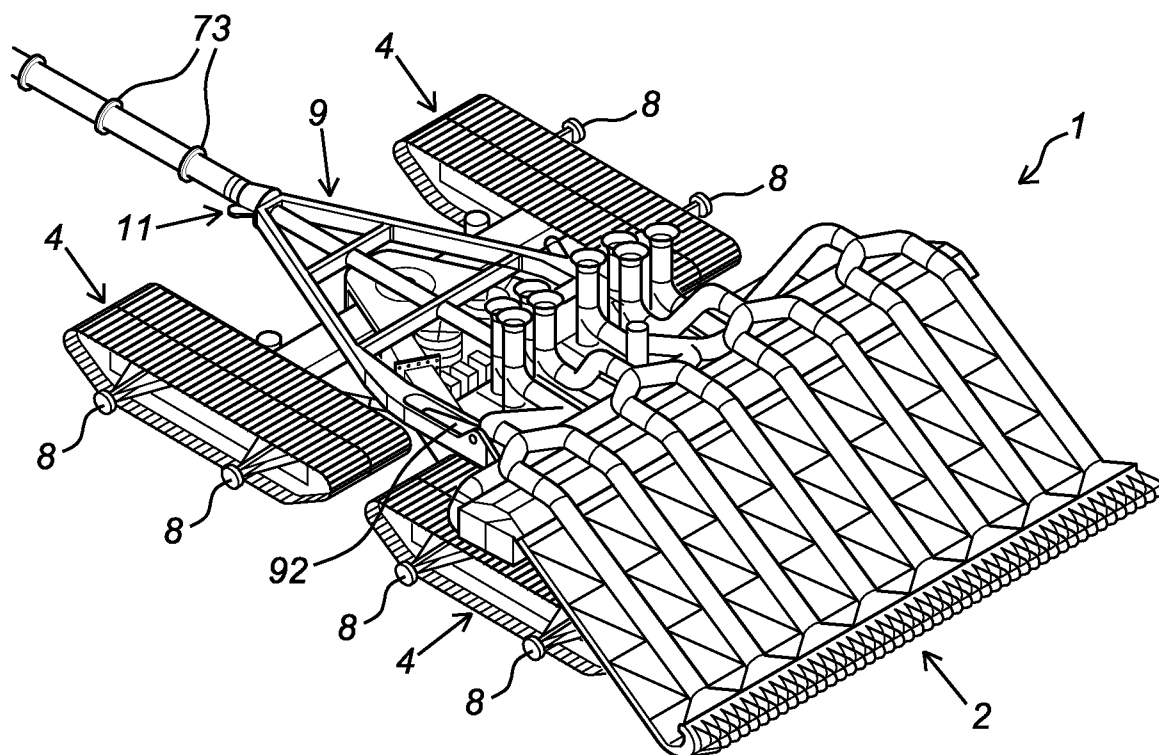


Fig. 1

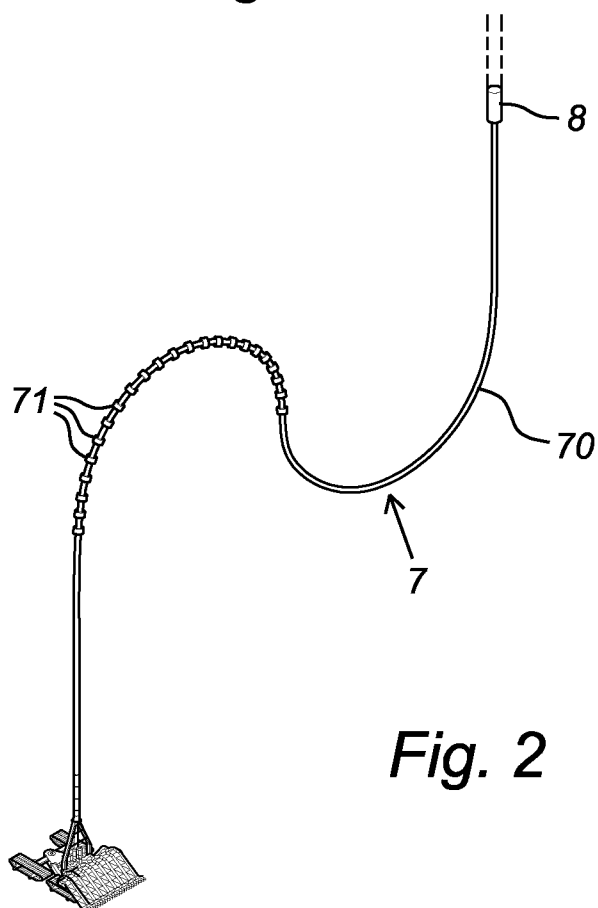
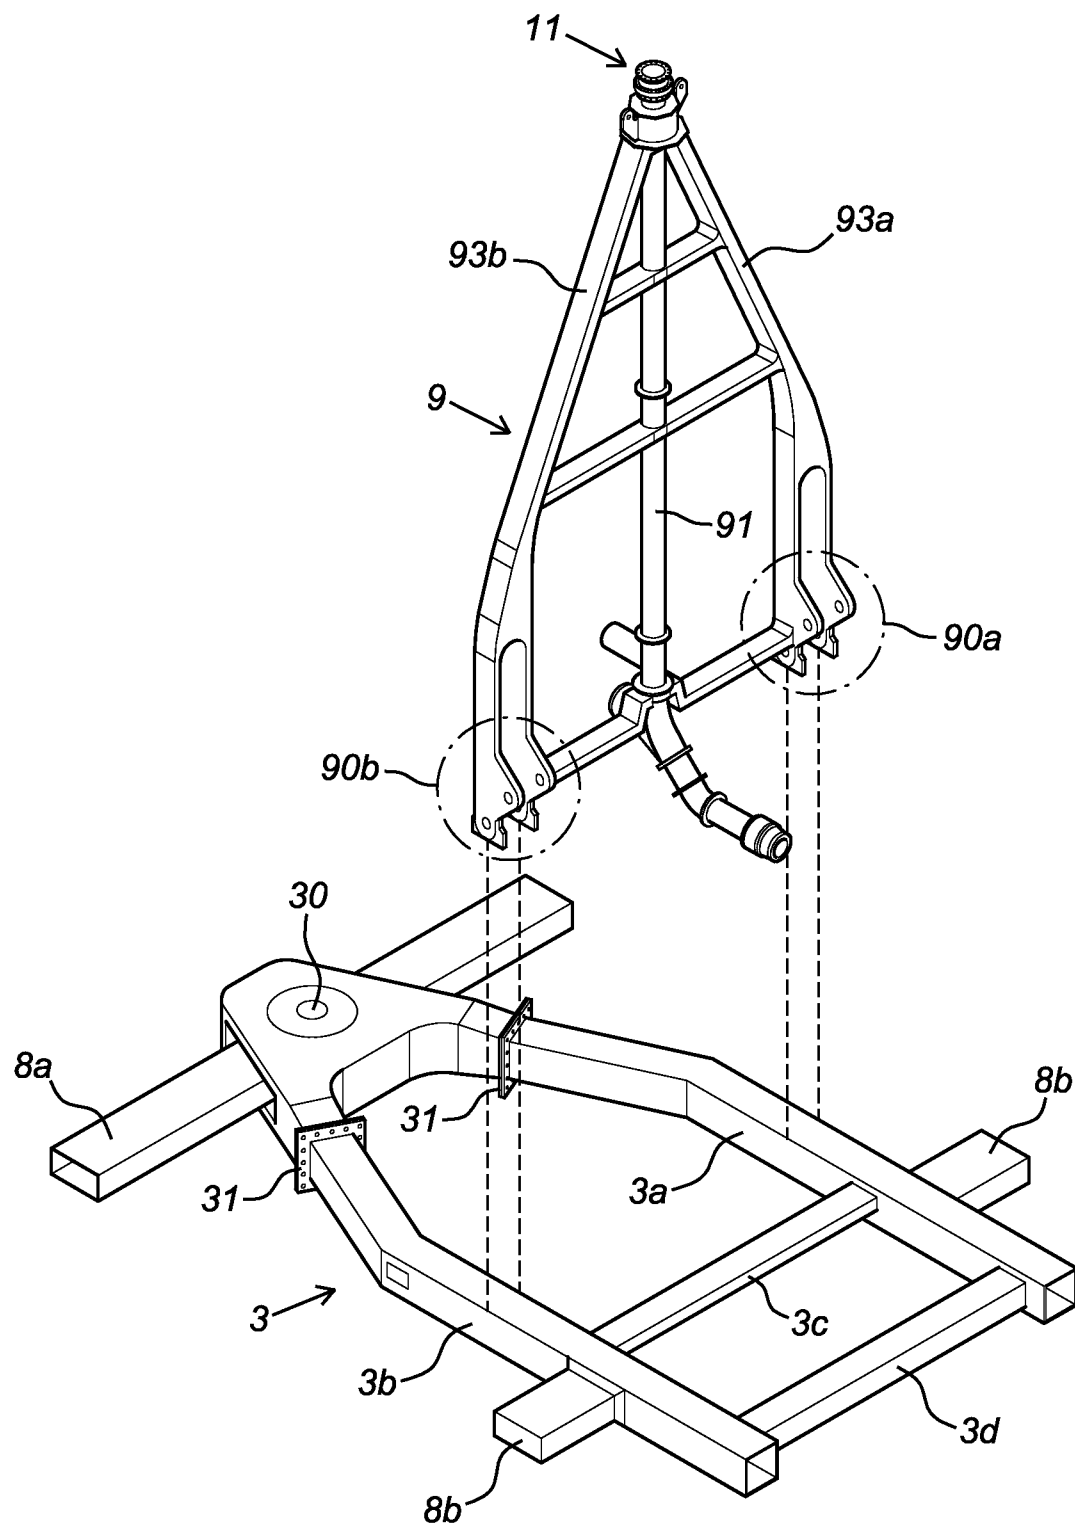
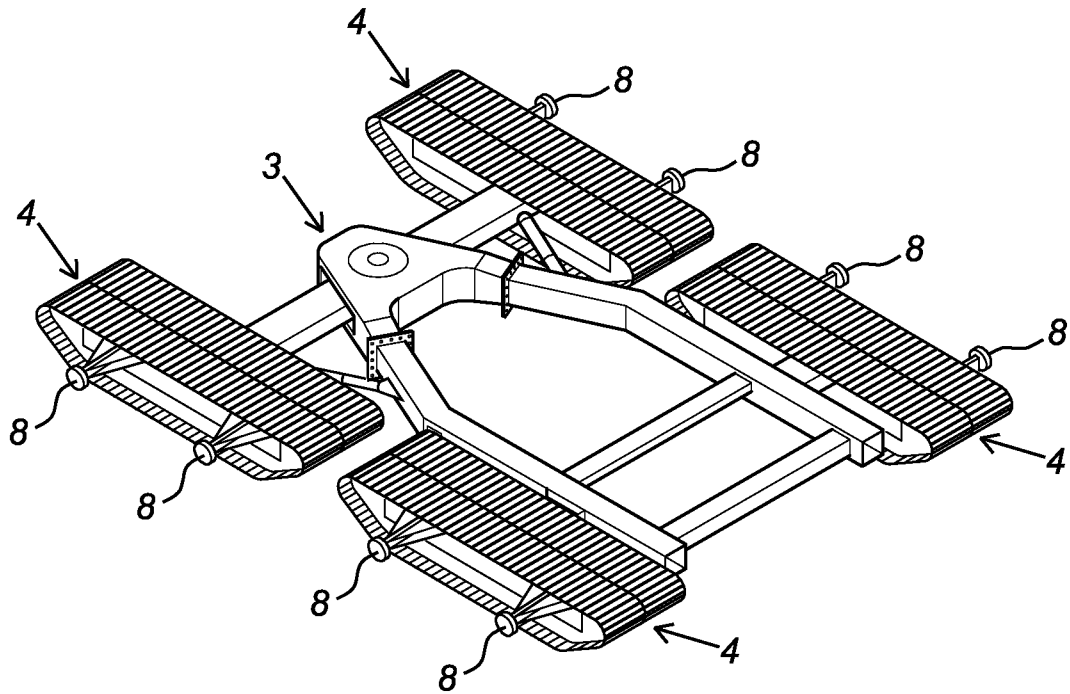
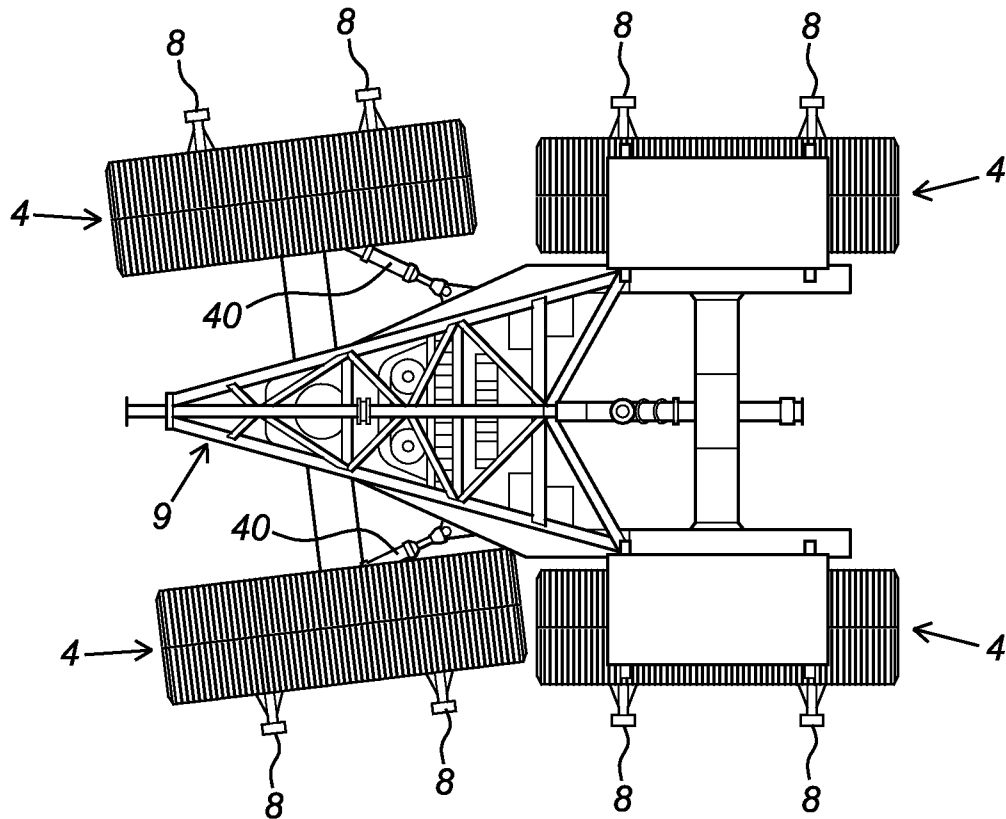


Fig. 2

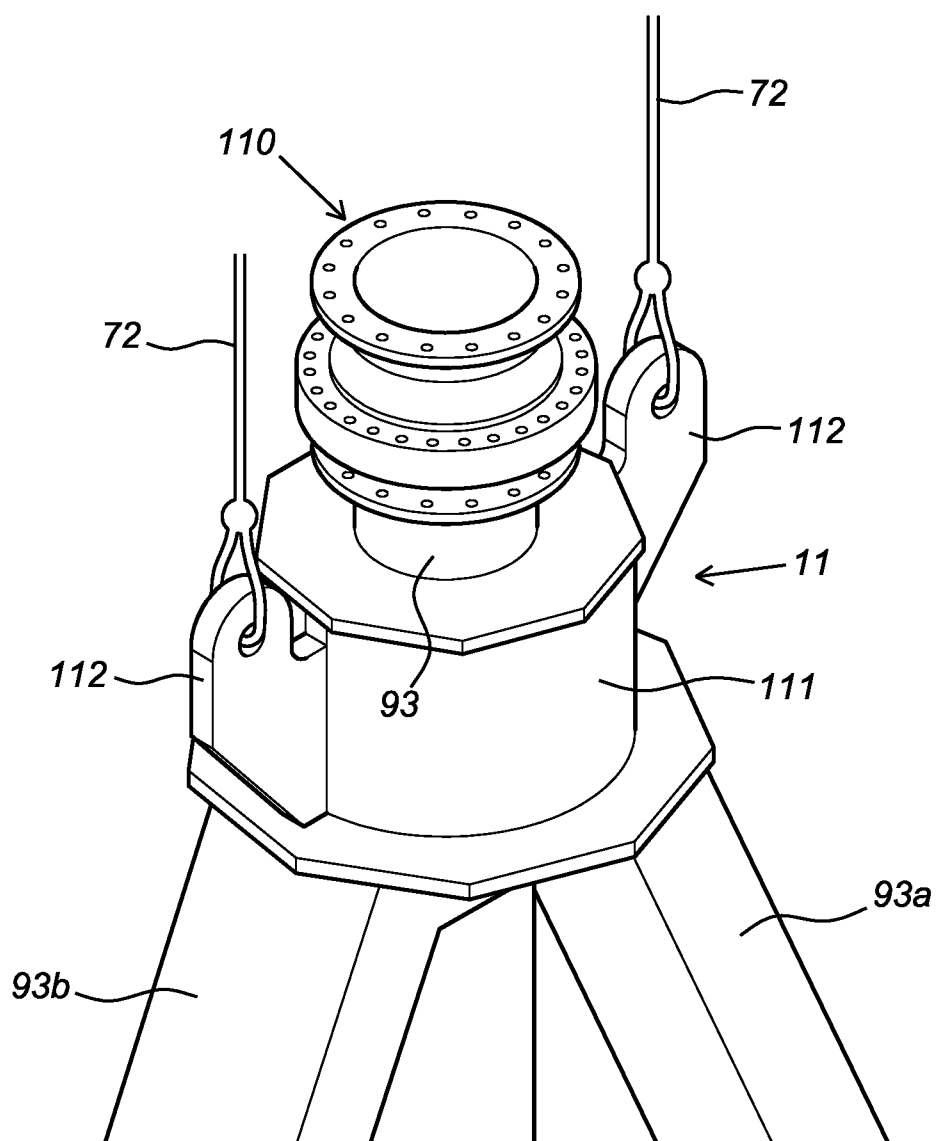
2/5

*Fig. 3*

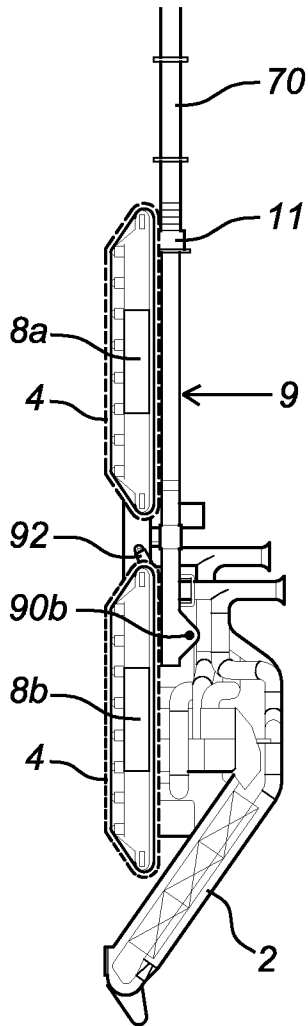
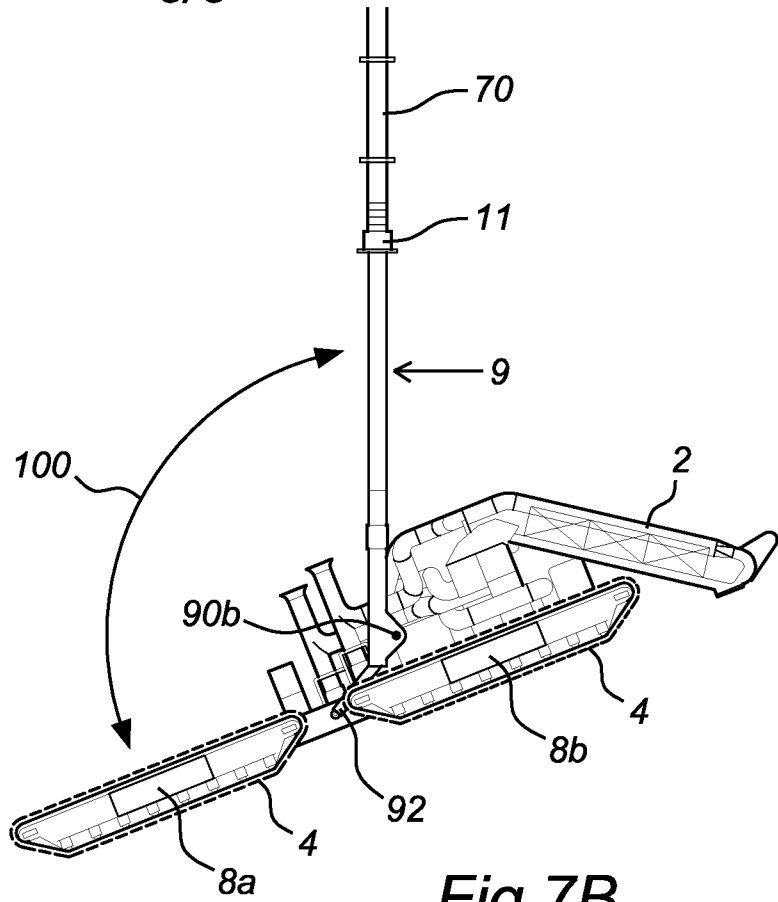
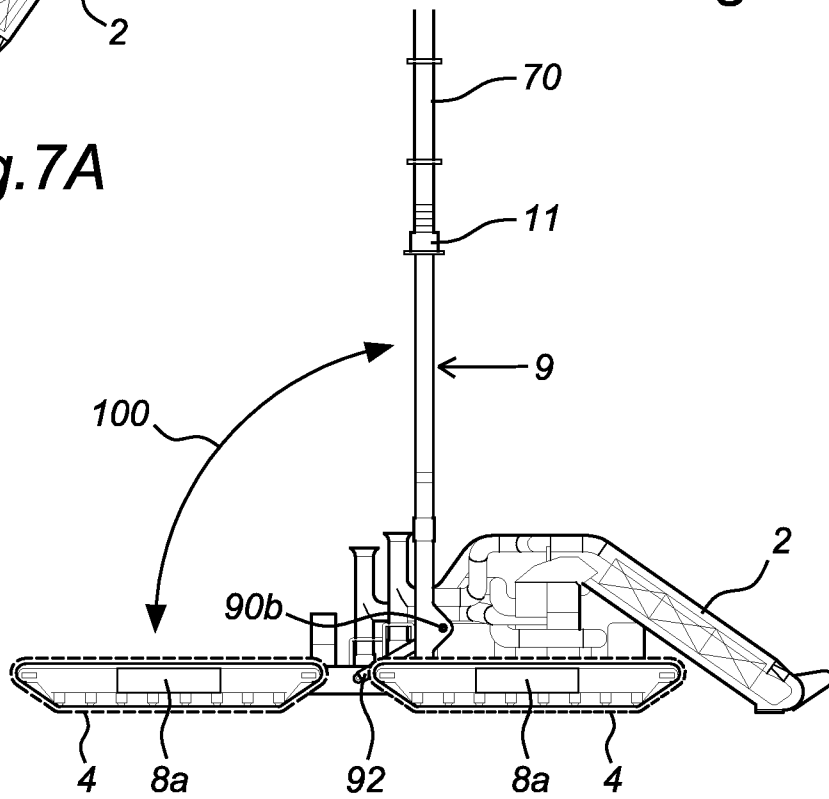
3/5

*Fig. 4**Fig. 5*

4/5

*Fig. 6*

5/5

*Fig. 7A**Fig. 7B**Fig. 7C*

