



(22) Date de dépôt/Filing Date: 2010/01/12

(41) Mise à la disp. pub./Open to Public Insp.: 2010/08/05

(30) Priorité/Priority: 2009/02/05 (US12/366,121)

(51) Cl.Int./Int.Cl. *E06B 3/46* (2006.01),
E06B 7/16 (2006.01)


(71) Demandeur/Applicant:
ALCOA INC., US

(72) Inventeur/Inventor:
MCDANIEL, KYLE A., US

(74) Agent: BERESKIN & PARR LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : SYSTÈME DE VERROUILLAGE DE PORTE COULISSANTE

(54) Title: SLIDING DOOR INTERLOCKING SYSTEM

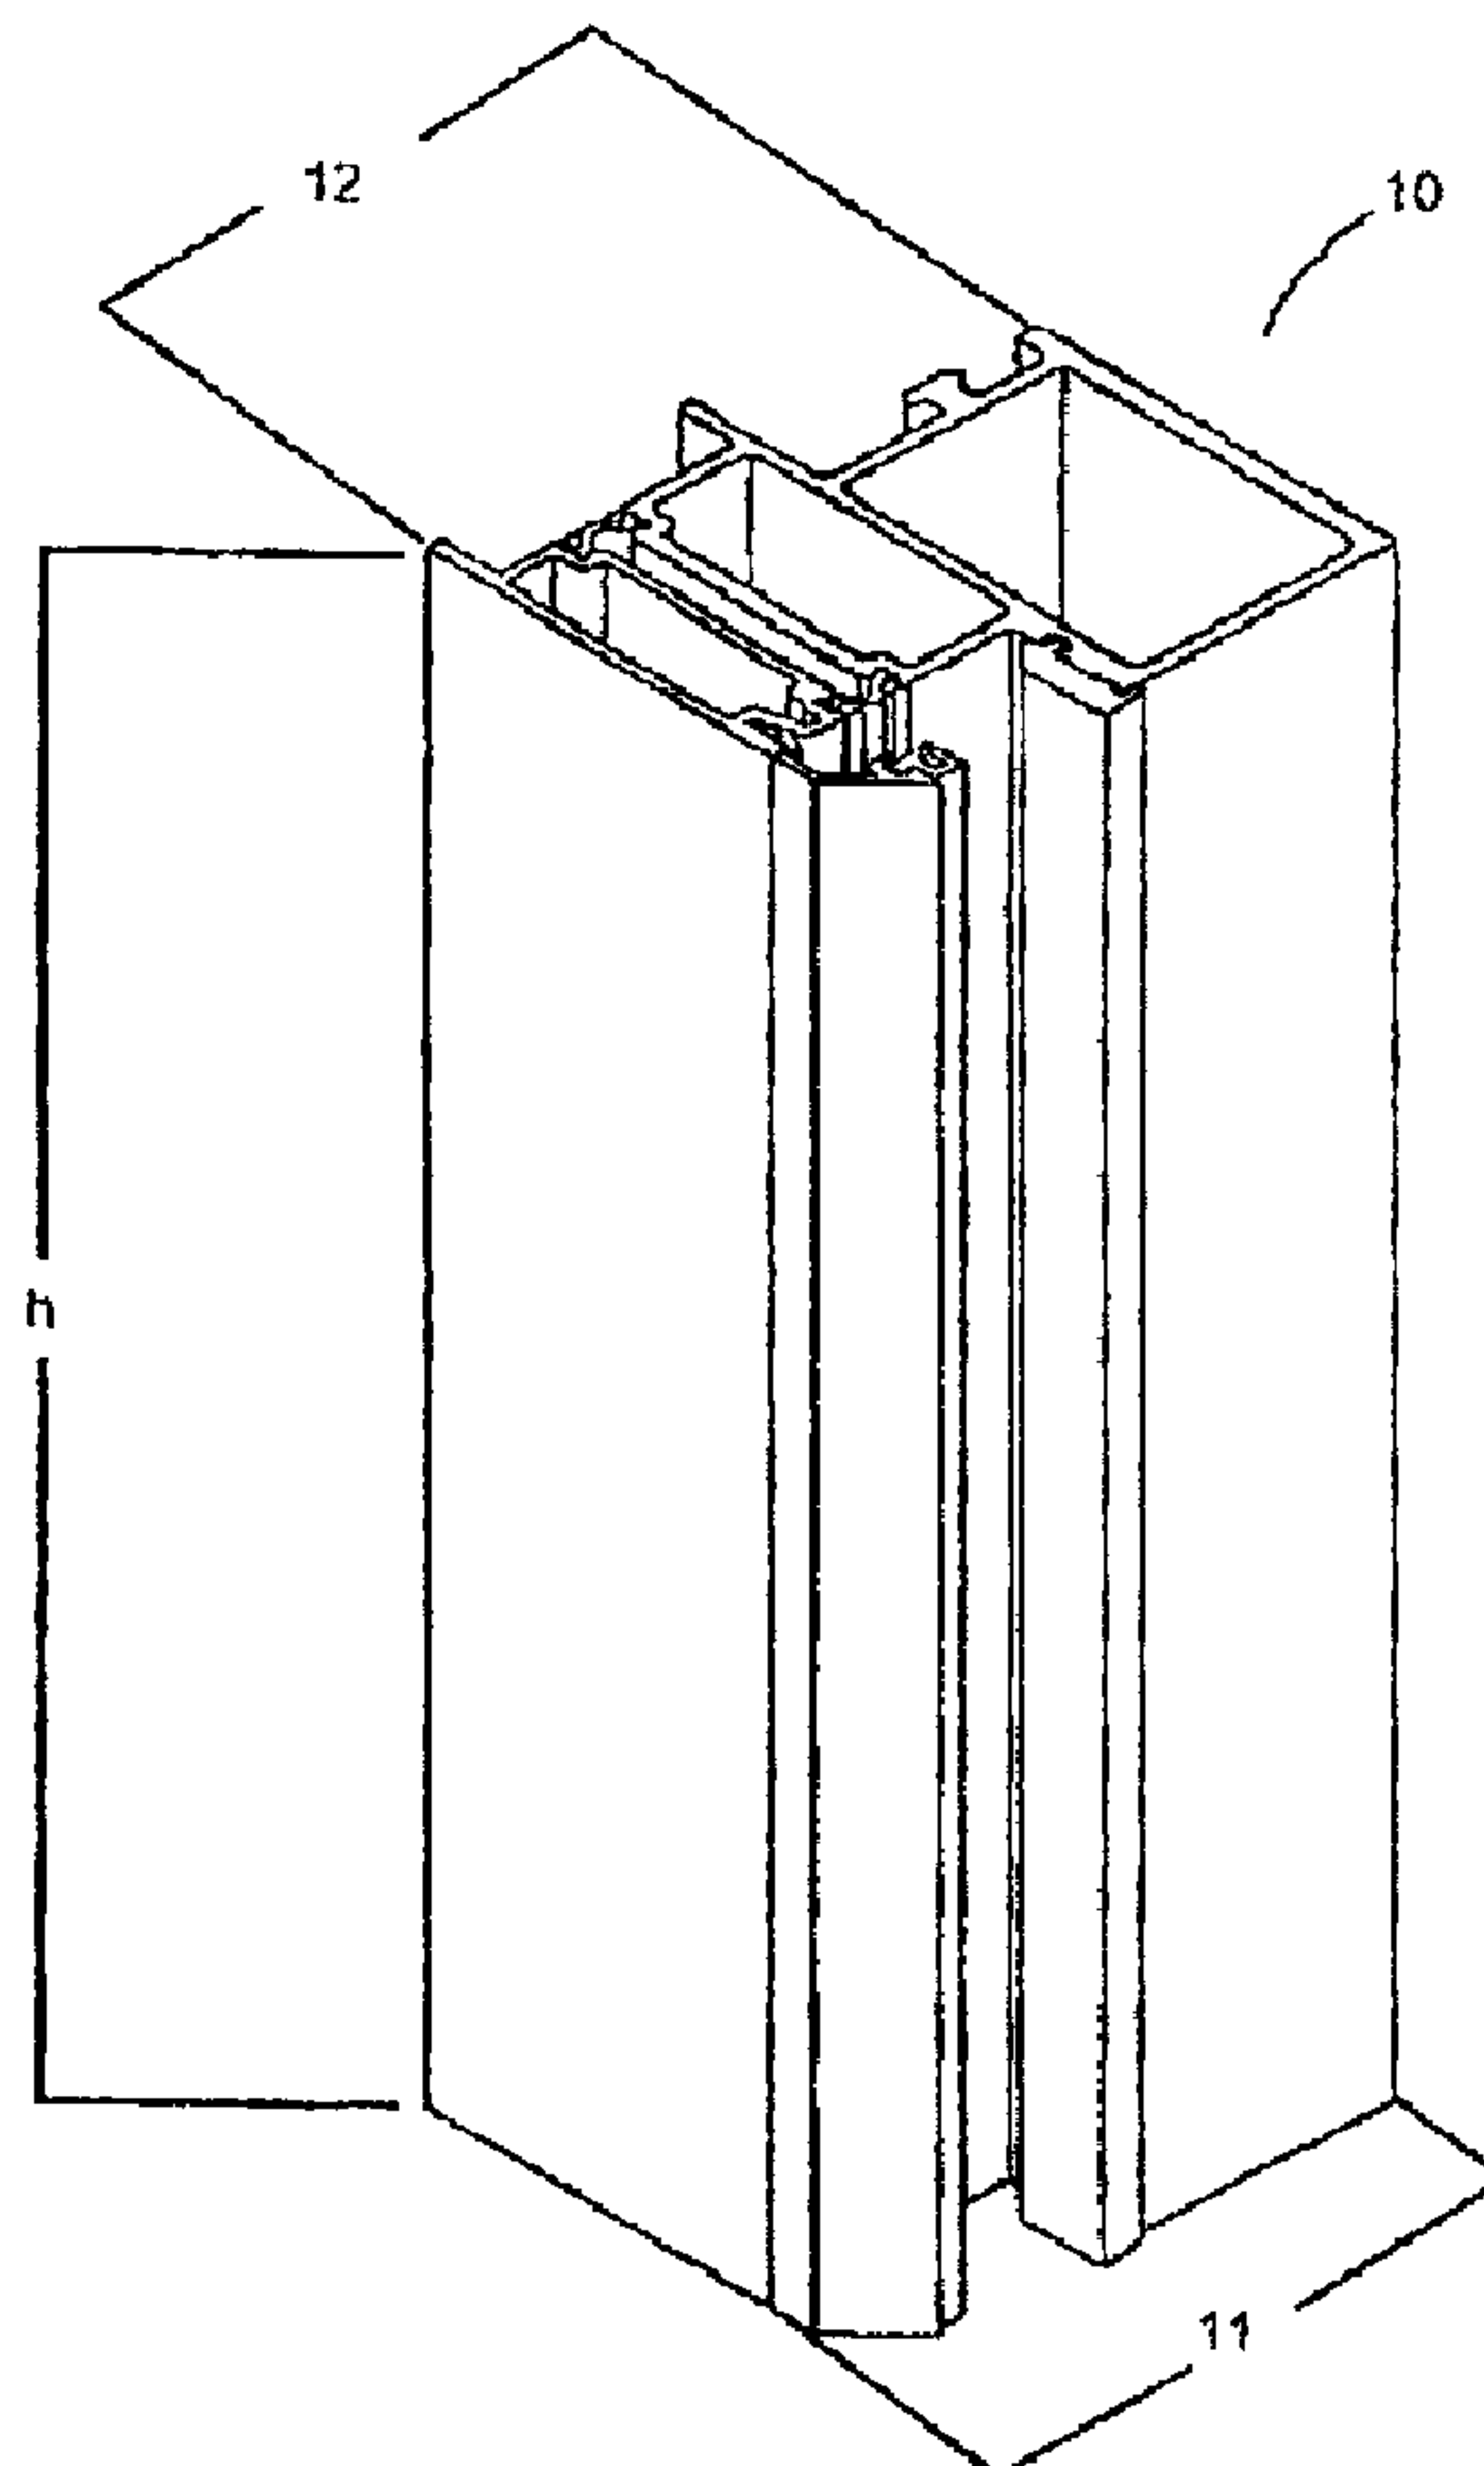

(57) Abrégé/Abstract:

A pair of interlocking bi-parting sliding doors includes a first sliding door and a second sliding door, wherein the first sliding door has a first meeting stile that includes a first side portion for maintaining a door glass panel and a first mating side portion for engaging

(57) **Abrégé(suite)/Abstract(continued):**

the second sliding door, wherein the first mating side portion includes a plurality of recessed zones, and wherein the second sliding door has a second meeting stile that includes a second side portion for maintaining a door glass panel and a second mating side portion for engaging the first mating side portion of the first sliding door, wherein the second mating side portion includes a plurality of extensions, wherein when the first sliding door and the second sliding door are in a closed position, the plurality of extensions interlock with the plurality of recessed zones.

SLIDING DOOR INTERLOCKING SYSTEM

ABSTRACT

A pair of interlocking bi-parting sliding doors includes a first sliding door and a second sliding door, wherein the first sliding door has a first meeting stile that includes a first side portion for maintaining a door glass panel and a first mating side portion for engaging the second sliding door, wherein the first mating side portion includes a plurality of recessed zones, and wherein the second sliding door has a second meeting stile that includes a second side portion for maintaining a door glass panel and a second mating side portion for engaging the first mating side portion of the first sliding door, wherein the second mating side portion includes a plurality of extensions, wherein when the first sliding door and the second sliding door are in a closed position, the plurality of extensions interlock with the plurality of recessed zones.

TITLE

SLIDING DOOR INTERLOCKING SYSTEM

BACKGROUND

[001] A common problem with sliding door assemblies in which normally one or more panels are moveable and one or more panels are fixed is that wind loads often cause one sliding door to separate from another sliding door, or from the side door jamb. For example, sliding doors that are built in an OXXO configuration create a condition that is generally weaker than the adjacent intermediate verticals. Each door is expected to carry only a portion of the wind load that is applied to the unit. As the doors begin to deflect under these loads, the meeting stiles will pull away from each other. The only mechanical device used to keep the doors together are the locking hardware installed in the mating door stiles. Depending on the performance requirements, it may be necessary to install multiple locks. The performance of the meeting stile is thereby limited by the strength of the locks and not by the structural properties of the door stiles.

SUMMARY

[002] According to an embodiment of the present invention, there is disclosed a door stile that includes a side edge for engaging with a door glass panel; and a mating edge for interlocking with a mating side of a door jamb or a second door stile, wherein the mating edge of the door stile has a three-dimensional surface topography consistent along a vertical height of the door stile for interlocking with the mating side of the door jamb or the second door stile.

[003] According to an embodiment of the present invention, there is disclosed a sliding door that includes a door glass panel; a pair of rails engaging the door glass panel; and a pair of stiles engaging the door glass panel, wherein at least one of the stiles includes a mating edge for interlocking with a mating side of a door jamb or a second door stile, wherein the mating edge of the door stile has a three-dimensional surface topography consistent along a vertical height of the door stile for interlocking with the mating side of the door jamb or the second door stile.

[004] According to an embodiment of the present invention, there is disclosed a pair of interlocking bi-parting sliding doors that includes a first sliding door and a second sliding door, wherein the first sliding door has a first top rail, a first bottom rail, a first end stile, and a first meeting stile, the first meeting stile including a first side portion for maintaining a door glass panel and a first mating side portion for engaging at least a portion of the second sliding door, wherein the first mating side portion includes a plurality of recessed zones running vertically along at least a portion of a vertical height of the first mating side portion of the first sliding door; and wherein the second sliding door has a second top rail, a second bottom rail, a second end stile, and a second meeting stile, the second meeting stile including a second side portion for maintaining a door glass panel and a second mating side portion for engaging the first mating side portion of the first sliding door, wherein the second mating side portion includes a plurality of extensions running vertically along at least a portion of a vertical height of the second mating side portion of the second sliding door, wherein when the first sliding door and the second sliding door are in a closed position, the plurality of extensions interlock with the plurality of recessed zones.

BRIEF DESCRIPTION OF THE DRAWINGS

[005] The present invention will be further explained with reference to the attached drawings, wherein like structures are referred to by like numerals throughout the several views. The drawings shown are not necessarily to scale, with emphasis instead generally being placed upon illustrating the principles of the present invention.

[006] FIGS. 1A and 1B illustrate an embodiment of a door stile of the present invention. FIG. 1A is an isometric view of the door stile. FIG. 1B is a top plan view of the door stile;

[007] FIGS. 2A and 2B illustrate an embodiment of a door stile of the present invention. FIG. 2A is an isometric view of the door stile. FIG. 2B is a top plan view of the door stile;

[008] FIG. 3 is a fragmentary isometric front view of an illustrative embodiment of a sliding door assembly of the present invention that includes a pair of interlocking bi-parting sliding doors. FIG. 3 shows the sliding doors in an open position. One of the sliding doors includes the door stile of FIG. 1, and one of the sliding doors includes the door stile of FIG. 2;

[009] FIG. 4 is a fragmentary isometric front view of the sliding door assembly of FIG. 3, with the sliding doors in a closed position;

[0010] FIG. 5 is a fragmentary isometric back view of the sliding door assembly of FIG. 3, with the sliding doors in a closed position;

[0011] FIG. 6 is a top plan close-up view of the interlocking bi-parting doors of FIG. 4. The door rails and glass panels of each sliding door have been removed;

[0012] FIG. 7 is a top plan close-up view of a pair of interlocking door stiles of the present invention.

[0013] While the above-identified drawings set forth presently disclosed embodiments, other embodiments are also contemplated, as noted in the discussion. This disclosure presents illustrative embodiments by way of representation and not limitation. Numerous other modifications and embodiments can be devised by those skilled in the art which fall within the scope and spirit of the principles of the present invention.

DETAILED DESCRIPTION

[0014] Door stiles, sliding doors including the door stiles, and sliding door assemblies having the sliding doors are disclosed herein. A sliding door assembly of the present invention creates an interlocking system of two sliding doors, wherein the structural properties of each door stile are combined to create an assembly for withstanding the positive and negative pressures applied by a wind load.

[0015] As used herein, the term “door stile” refers to a vertical structural member of a door. The door stiles of the present invention include a mating edge for interlocking with a mating side of a door jamb or a second door stile. The mating edge of any of the door stiles of the present invention have a three-dimensional surface topography consistent along a vertical height of the door stile for interlocking with the mating side of the door jamb or the second door stile.

[0016] As used herein, the term “side door jamb” refers to the vertical portion of a door frame onto which a door is secured.

[0017] As used herein, the term “interlocking” refers to a door stile of the present invention that can engage, by fitting together, with another door stile or a side door jamb.

[0018] As used herein, the term “topography” refers to the surface features of a mating edge of a door stile of the present invention. The surface features can include, for example, depressions, protrusions, hooking features and/or catching features.

[0019] As used herein, the term “engage”, “engaging” or “engaged” refers to contacting or to make contact with something.

[0020] As used herein, the term “maintained” refers to be kept in a steady or stationary position.

[0021] As used herein, the term “consistent” refers to uniform, unchanging.

[0022] As used herein, the term “wind load” refers to the load caused by the wind blowing from any horizontal direction. The wind load can create a positive or negative pressure on a sliding door installed in a building.

[0023] As used herein, the term “structural properties” refers to the design strength of a sliding door having a door stile of the present invention.

[0024] FIGS. 1A and 1B illustrate an embodiment of a door stile **10** of the present invention. The door stile **10** includes a side edge (or surface) **11** for engaging with a door panel, for example, a glass door panel, and a mating edge (or surface) **12** for interlocking with a mating surface of a side door jamb or a second door stile. The mating edge **12** has a unique three-dimensional surface topography consistent along a vertical height “h” of the door stile **10** that allows the door stile **10** to interlock along the vertical height with a mating surface of a side door jamb or a second door stile. If a person’s flat hand is placed on the mating edge **12**, and moved down the vertical height of the mating edge **12**, only a portion (illustrated as extension **13a** and extension **13c**) of the mating edge **12** will be in contact with the hand. Extensions **13a** and **13c** are separated by a substantially flat recessed area **13b**. A hooking feature **15a** and an extension **15c** are separated by a substantially flat recessed area **15b**. Between the extension **13c** and the hooking feature **15a** is a substantially flat recessed surface **14**. The three-dimensional surface topography of the mating edge **12** includes the extensions, the hooking feature, and the recessed surfaces, thus forming a non-flat mating surface **12**. In an embodiment, the mating surface **12** of

the door stile **10** can be described as including vertical regions of depression **13b**, **14**, and **15b**, forming a non-flat surface, the regions of depression **13b**, **14**, and **15b**, capable of interlocking with a side door jamb or a second door stile. In an embodiment, the mating surface **12** of the door stile **10** can be described as having a horizontal width “w” and vertical height “h”, wherein the width of the mating edge **12** includes a plurality of flat surfaces **13b**, **14**, and **15b**, each offset and connected to each other forming substantially flat recessed areas. In an embodiment, the door stile **10** of the present invention can be part of a sliding door of the present invention. A sliding door of the present invention can include a glass panel, a pair of rails engaging the glass panel; and a pair of stiles engaging the glass panel, wherein at least one of the stiles is stile **10** and includes a mating edge **12** having a horizontal width and a vertical height, wherein along the width of the mating edge **12** and running along at least a portion of the height there includes a plurality of flat surfaces **13b**, **14**, and **15b**, offset and connected to each other forming recessed areas. The mating edge **12** described in FIGS. 1A and 1B illustrate a door stile **10** of the present invention. However, the topography of the mating edge **12**, including the various extensions and depressions, can also be constructed onto a side door jamb, to create a side door jamb having the mating edge **12** topography as detailed above.

[0025] FIGS. 2A and 2B illustrate an embodiment of a door stile **20** of the present invention. The door stile **20** includes a side edge (or surface) **21** for engaging with a door panel, for example, a glass door panel, and a mating edge (or surface) **22** for interlocking with a mating edge of a side door jamb or a second door stile. The mating edge **22** has a unique three-dimensional surface topography that allows the door stile **20** to interlock along a vertical height “h” with a mating edge of a side door jamb or a second door stile. If a person’s flat hand is placed on the mating edge **22**, and moved down the vertical height of the mating edge **22**, only a portion (illustrated as flat area **26** and extension **23**) of the mating edge **22** will be in contact with the hand. Inner surface **23a** of extension **23** and inner surface **23e** of extension **24** are separated from each other by channel **23b**, flat recessed surface **23c**, and channel **23d**. In an embodiment, extension **23** is about one inch wide and conceals a joint between a pair of sliding doors having a door stile of the present invention. In an embodiment, the extension **23** includes a relief “reglet” **27** that is capable of receiving a weather strip gasket. A catching feature including catch **25a**, catch **25c**, and recessed surface **25b**, is capable of catching a hooking feature of a second door stile or a door jamb. Inner surface **25d**, flat recessed surface **25e**, and inner surface **25f**, are

capable of interlocking with an extension of a second door stile or a door jamb. The extensions, catching feature, and recessed surfaces form a non-flat mating surface **22**. In an embodiment, the mating surface **22** of the door stile **20** includes vertical regions of depression **23b**, **23d**, **25b** and **25e**, forming a non-flat surface, the regions of depression **23b**, **23d**, **25b** and **25e**, capable of interlocking and hooking with a side door jamb or a second door stile. In an embodiment, the mating surface **22** of the door stile **20** can be described as having a horizontal width “w” and vertical height “h”, wherein the width of the mating edge **22** includes a plurality of flat surfaces **23b**, **23d**, **25b** and **25e**, each offset and connected to each other forming recessed areas. In an embodiment, the door stile **20** of the present invention can be part of a sliding door of the present invention. A sliding door of the present invention can include a glass panel, a pair of rails engaging the glass panel; and a pair of stiles engaging the glass panel, wherein at least one of the stiles is stile **20** and includes a mating edge **22** having a horizontal width and a vertical length, wherein along the horizontal width of the mating edge **22** and running along at least a portion of the vertical length there includes a plurality of flat surfaces **23b**, **23d**, **25b** and **25e**, offset and connected to each other forming recessed areas. The mating edge **22** described in FIGS. 2A and 2B illustrate a door stile **20** of the present invention. However, the topography of the mating edge **22**, including the various extensions and depressions, can also be constructed onto a side door jamb, to create a side door jamb having the mating edge **22** topography as detailed above.

[0026] FIGS. 3-5 are fragmentary isometric views of an illustrative embodiment of a pair of interlocking bi-parting sliding doors **30** and **35** of the present invention positioned in a door frame assembly in an OXXO configuration. The interlocking bi-parting sliding doors **30** and **35** are fabricated to include the door stiles **20** and **10**, respectively. FIG. 3 shows the sliding doors **30** and **35** in an open position. FIG. 4 shows the sliding doors **30** and **35** in a closed position. FIG. 5 shows the sliding doors **30** and **35** in a closed position, as viewed from the back. The door frame assembly includes a head component (not shown) including an operable head for engaging the sliding doors **30** and **35**, and a fixed head for engaging a first fixed-panel door and a second fixed-panel door (fixed-panel doors are not illustrated). The door frame assembly also includes a bottom sill component **41** including an operable sill **42** for engaging the sliding doors **30** and **35**, and a fixed sill **43** for engaging the first fixed-panel door and the second fixed-panel door. A first fixed door jamb **44** is used to secure the first fixed-panel door, and a second fixed door jamb **45** is used to secure the second fixed-panel door. Sliding door **30** has a top rail **31**, a bottom rail **32**,

an end stile **33**, and the stile **20** (also referred to herein as a meeting stile). The stile **20** includes the side edge **21** for maintaining a door glass panel **34** and the mating edge **22** for engaging the stile **10** of sliding door **35**. The mating edge **22** of the meeting stile **20** includes a plurality of recessed zones **23b**, **23d**, **25b** and **25e**. Similarly, sliding door **35** has a top rail **36**, a bottom rail **37**, an end stile **38**, and the stile **10** (also referred to herein as a meeting stile). The stile **10** includes the side edge **11** for maintaining a door glass panel **39** and the mating edge **12** for engaging the mating edge **22** of the sliding door **30**. The mating edge **12** of the meeting stile **10** includes a plurality of protrusion members **13a**, **13c**, and **15c**. When the first sliding door **30** and the second sliding door **35** are in a closed position, the plurality of protrusion members **13a**, **13c**, and **15c** interlock with the plurality of recessed zones **23b**, **23d** and **25e**, respectively. The door stiles **10** and **20**, include an integral feature that enables the sliding doors **30** and **35** to hook together when loads are applied to the unit (the combination of the sliding doors **30** and **35** in a closed position). The hooking feature **15a** is positioned within catching feature **25a**, **25b**, and **25c**, forming the integral feature. This engagement feature runs the full vertical length of the door stiles thereby enabling the door stiles to act as one. One of the sliding doors is designed to be weaker than the other sliding door, so that as a wind load is applied to the unit, the weaker sliding door will deflect first and engage into the second sliding door. For example, in an embodiment, sliding door **35** having the door stile **10** is weaker than sliding door **30** having the door stile **20**. Locks that can be installed on the sliding doors **30** and **35** for building security are not relied upon to keep the sliding doors **30** and **35** together under the positive and negative pressures produced by the wind load. The meeting door stiles are able to perform at the same level as the other intermediate vertical members, for example, the mullions. Although the door frame assembly illustrated in FIGS. 3, 4, and 5, are shown as having an OXXO configuration, the sliding doors of the present invention are not limited to being used in a sliding door frame assembly having a OXXO configuration. In an embodiment, the sliding doors **30** and **35** can be used in a door frame assembly having an OOXO configuration. In an embodiment, the sliding doors **30** and **35** can be used in a door frame assembly having an OOOXXO configuration.

[0027] FIG. 6 is a top plan close-up view of the pair of interlocking bi-parting sliding doors **30** and **35** of FIG. 4 with the door glass panels **34** and **39** removed. FIG. 6 shows how the door stiles **20** and **10** interlock in the closed position. As illustrated in FIG. 6, there are at least four areas (illustrated as dashed boxes) where the two door stiles **20** and **10** interlock with one

another. When the two sliding doors **30** and **35** are in the closed position and are subjected to a wind load (see arrow), the hooking feature **15a** can interlock catching features **25a**, **25b** and **25c**, keeping the two doors **30** and **35** hooked together. Multiple points of contact between the two door stiles **20** and **10**, keep the two sliding doors **30** and **35** hooked together and produce the required structural properties (strength) to counter the wind load force being applied to the two sliding doors **30** and **35**. Along the vertical height of the mating edge **22** of the door stile **20**, and along the vertical height of the mating edge **12** of the door stile **10**, channel **23b** surrounds extension **13a**, channel **23d** surrounds extension **13c**, and channel **25d** surrounds extension **15c**. Flat surfaces **14** and **24** run approximately parallel with each other. The horizontal width of the various channels is larger than the horizontal width of the various extensions, therefore when a wind load is placed on the sliding doors **30** and **35**, the extensions can move horizontally within the channels along the entire vertical height of the door stiles **20** and **10**, respectively. Hooking feature **15a** can engage catching features **25a**, **25b** and **25c**. This engagement happens when a positive or negative wind load is applied to the sliding doors **30** and **35**. The hook engagement enables the mating stiles **20** and **10** to stay together as they deflect due to the wind load. The structural properties of each stile **20** and **10** are combined together to create a stronger assembly. Without the hooking/catching feature, the sliding doors can disengage under a wind load.

[0028] FIG. 7 is a top plan close-up view of a pair of interlocking door stiles **60** and **50** of the present invention. As illustrated in FIG. 7, there are at least three areas (illustrated as dashed boxes) where the two door stiles **60** and **50** can interlock with one another. When two sliding doors having the door stiles **60** and **50** are in the closed position and are subjected to a wind load force, hooking feature **55a** can interlock catching features **65a**, **65b** and **65c**, keeping the two doors hooked together. Multiple points of contact between the two door stiles **60** and **50**, keep the two sliding doors hooked together and produce the required structural properties (strength) to counter the wind load force being applied to the two sliding doors. Along the vertical height of a mating edge of the door stile **60**, and along the vertical height of a mating edge of the door stile **50**, channel **63b** surrounds extension **53a**, and channel **63d** surrounds extension **53c**. Flat surfaces **63c** and **53b** run parallel with each other. The horizontal width of the various channels is larger than the horizontal width of the various extensions, therefore when a wind load is placed on the sliding doors, the extensions can move horizontally within the channels along the entire vertical height of the door stiles **60** and **50**, respectively. Hooking feature **55a** can engage

catching features **65a** and **65c**. This engagement happens when a positive or negative wind load is applied to the sliding doors. The hook engagement enables the mating stiles **60** and **50** to stay together as they deflect due to the wind load. The structural properties of each stile **60** and **50** are combined together to create a stronger assembly. Without the hooking/catching feature, the sliding doors can disengage under a wind load.

[0029] While illustrative embodiments of the invention are disclosed herein, it will be appreciated that numerous modifications and other embodiments may be devised by those skilled in the art. Therefore, it will be understood that the appended claims are intended to cover all such modifications and embodiments that come within the spirit and scope of the present invention.

CLAIMS

What is claimed is:

1. A door stile comprising:

a side edge for engaging with a door glass panel; and

a mating edge for interlocking with a mating side of a door jamb or a second door stile,

wherein the mating edge of the door stile has a three-dimensional surface topography consistent along a vertical height of the door stile for interlocking with the mating side of the door jamb or the second door stile.
2. The door stile of claim 1 wherein the three-dimensional surface topography of the mating edge includes vertical regions of depression forming a non-flat surface, the regions of depression capable of interlocking with the mating side of the door jamb or the second door stile.
3. The door stile of claim 2 wherein the vertical regions of depression run along an entire vertical height of the mating edge.
4. The door stile of claim 1 wherein the three-dimensional surface topography of the mating edge includes a horizontal width and a vertical height,

wherein the horizontal width of the mating edge includes a plurality of flat surfaces each offset and connected to each other forming recessed areas.
5. The door stile of claim 4 wherein the recessed areas run along at least a portion of the vertical height of the mating edge.
6. The door stile of claim 4 wherein the recessed areas run along an entire portion of the vertical height of the mating edge.
7. A sliding door comprising:

a door glass panel;

a pair of rails engaging the door glass panel; and

a pair of stiles engaging the door glass panel, wherein at least one of the stiles includes a mating edge for interlocking with a mating side of a door jamb or a second door stile,

wherein the mating edge of the door stile has a three-dimensional surface topography consistent along a vertical height of the door stile for interlocking with the mating side of the door jamb or the second door stile.

8. The sliding door of claim 7 wherein the three-dimensional surface topography of the mating edge includes vertical regions of depression forming a non-flat surface, the regions of depression capable of interlocking with the mating side of the door jamb or the second door stile.

9. The sliding door of claim 7 wherein the three-dimensional surface topography of the mating edge includes a horizontal width and a vertical height,

wherein the horizontal width of the mating edge includes a plurality of flat surfaces each offset and connected to each other forming recessed areas.

10. The sliding door of claim 9 wherein the recessed areas run along an entire portion of the vertical height of the mating edge.

11. A pair of interlocking bi-parting sliding doors comprising:

a first sliding door and a second sliding door,

wherein the first sliding door has a first top rail, a first bottom rail, a first end stile, and a first meeting stile, the first meeting stile including a first side portion for maintaining a door glass panel and a first mating side portion for engaging at least a portion of the second sliding door,

wherein the first mating side portion includes a plurality of recessed zones running vertically along at least a portion of a vertical height of the first mating side portion of the first sliding door; and

wherein the second sliding door has a second top rail, a second bottom rail, a second end stile, and a second meeting stile, the second meeting stile including a second side portion for maintaining a door glass panel and a second mating side portion for engaging the first mating side portion of the first sliding door,

wherein the second mating side portion includes a plurality of extensions running vertically along at least a portion of a vertical height of the second mating side portion of the second sliding door,

wherein when the first sliding door and the second sliding door are in a closed position, the plurality of extensions interlock with the plurality of recessed zones.

12. The sliding doors of claim 11 wherein when the first sliding door and the second sliding door are in a closed position, a catching feature of the first mating side portion interlocks with a hooking feature of the second mating side portion.

13. The sliding doors of claim 11 wherein when a positive wind load is applied to the sliding doors in the closed position, the first mating side of the first meeting stile maintains interlocked with the second mating side of the second meeting stile.

14. The sliding doors of claim 11 wherein when a negative wind load is applied to the sliding doors in the closed position, the first mating side of the first meeting stile maintains interlocked with the second mating side of the second meeting stile.

15. The sliding doors of claim 11 wherein the plurality of protrusion members interlock with the plurality of recessed zones at four locations.

16. The sliding doors of claim 11 wherein the plurality of protrusion members interlock with the plurality of recessed zones at three locations.

17. The sliding doors of claim 11 for use in a sliding door frame assembly having an OXXO configuration.

18. The sliding doors of claim 17 wherein the door frame assembly comprises:

a first fixed-panel door maintained in a stationary position;

a second fixed-panel door maintained in a stationary position;

a head component including an operable head for engaging the first sliding door and the second sliding door, and a fixed head for engaging the first fixed-panel door and the second fixed-panel door;


a bottom sill component including an operable sill for engaging the first sliding door and the second sliding door, and a fixed sill for engaging the first fixed-panel door and the second fixed-panel door;



a first fixed jamb for securing the first fixed-panel door; and

a second fixed jamb for securing the second fixed-panel door.

19. The sliding doors of claim 11 for use in a door frame assembly having an OOXXO configuration.

20. The sliding doors of claim 11 for use in a door frame assembly having an OOOXXO configuration.

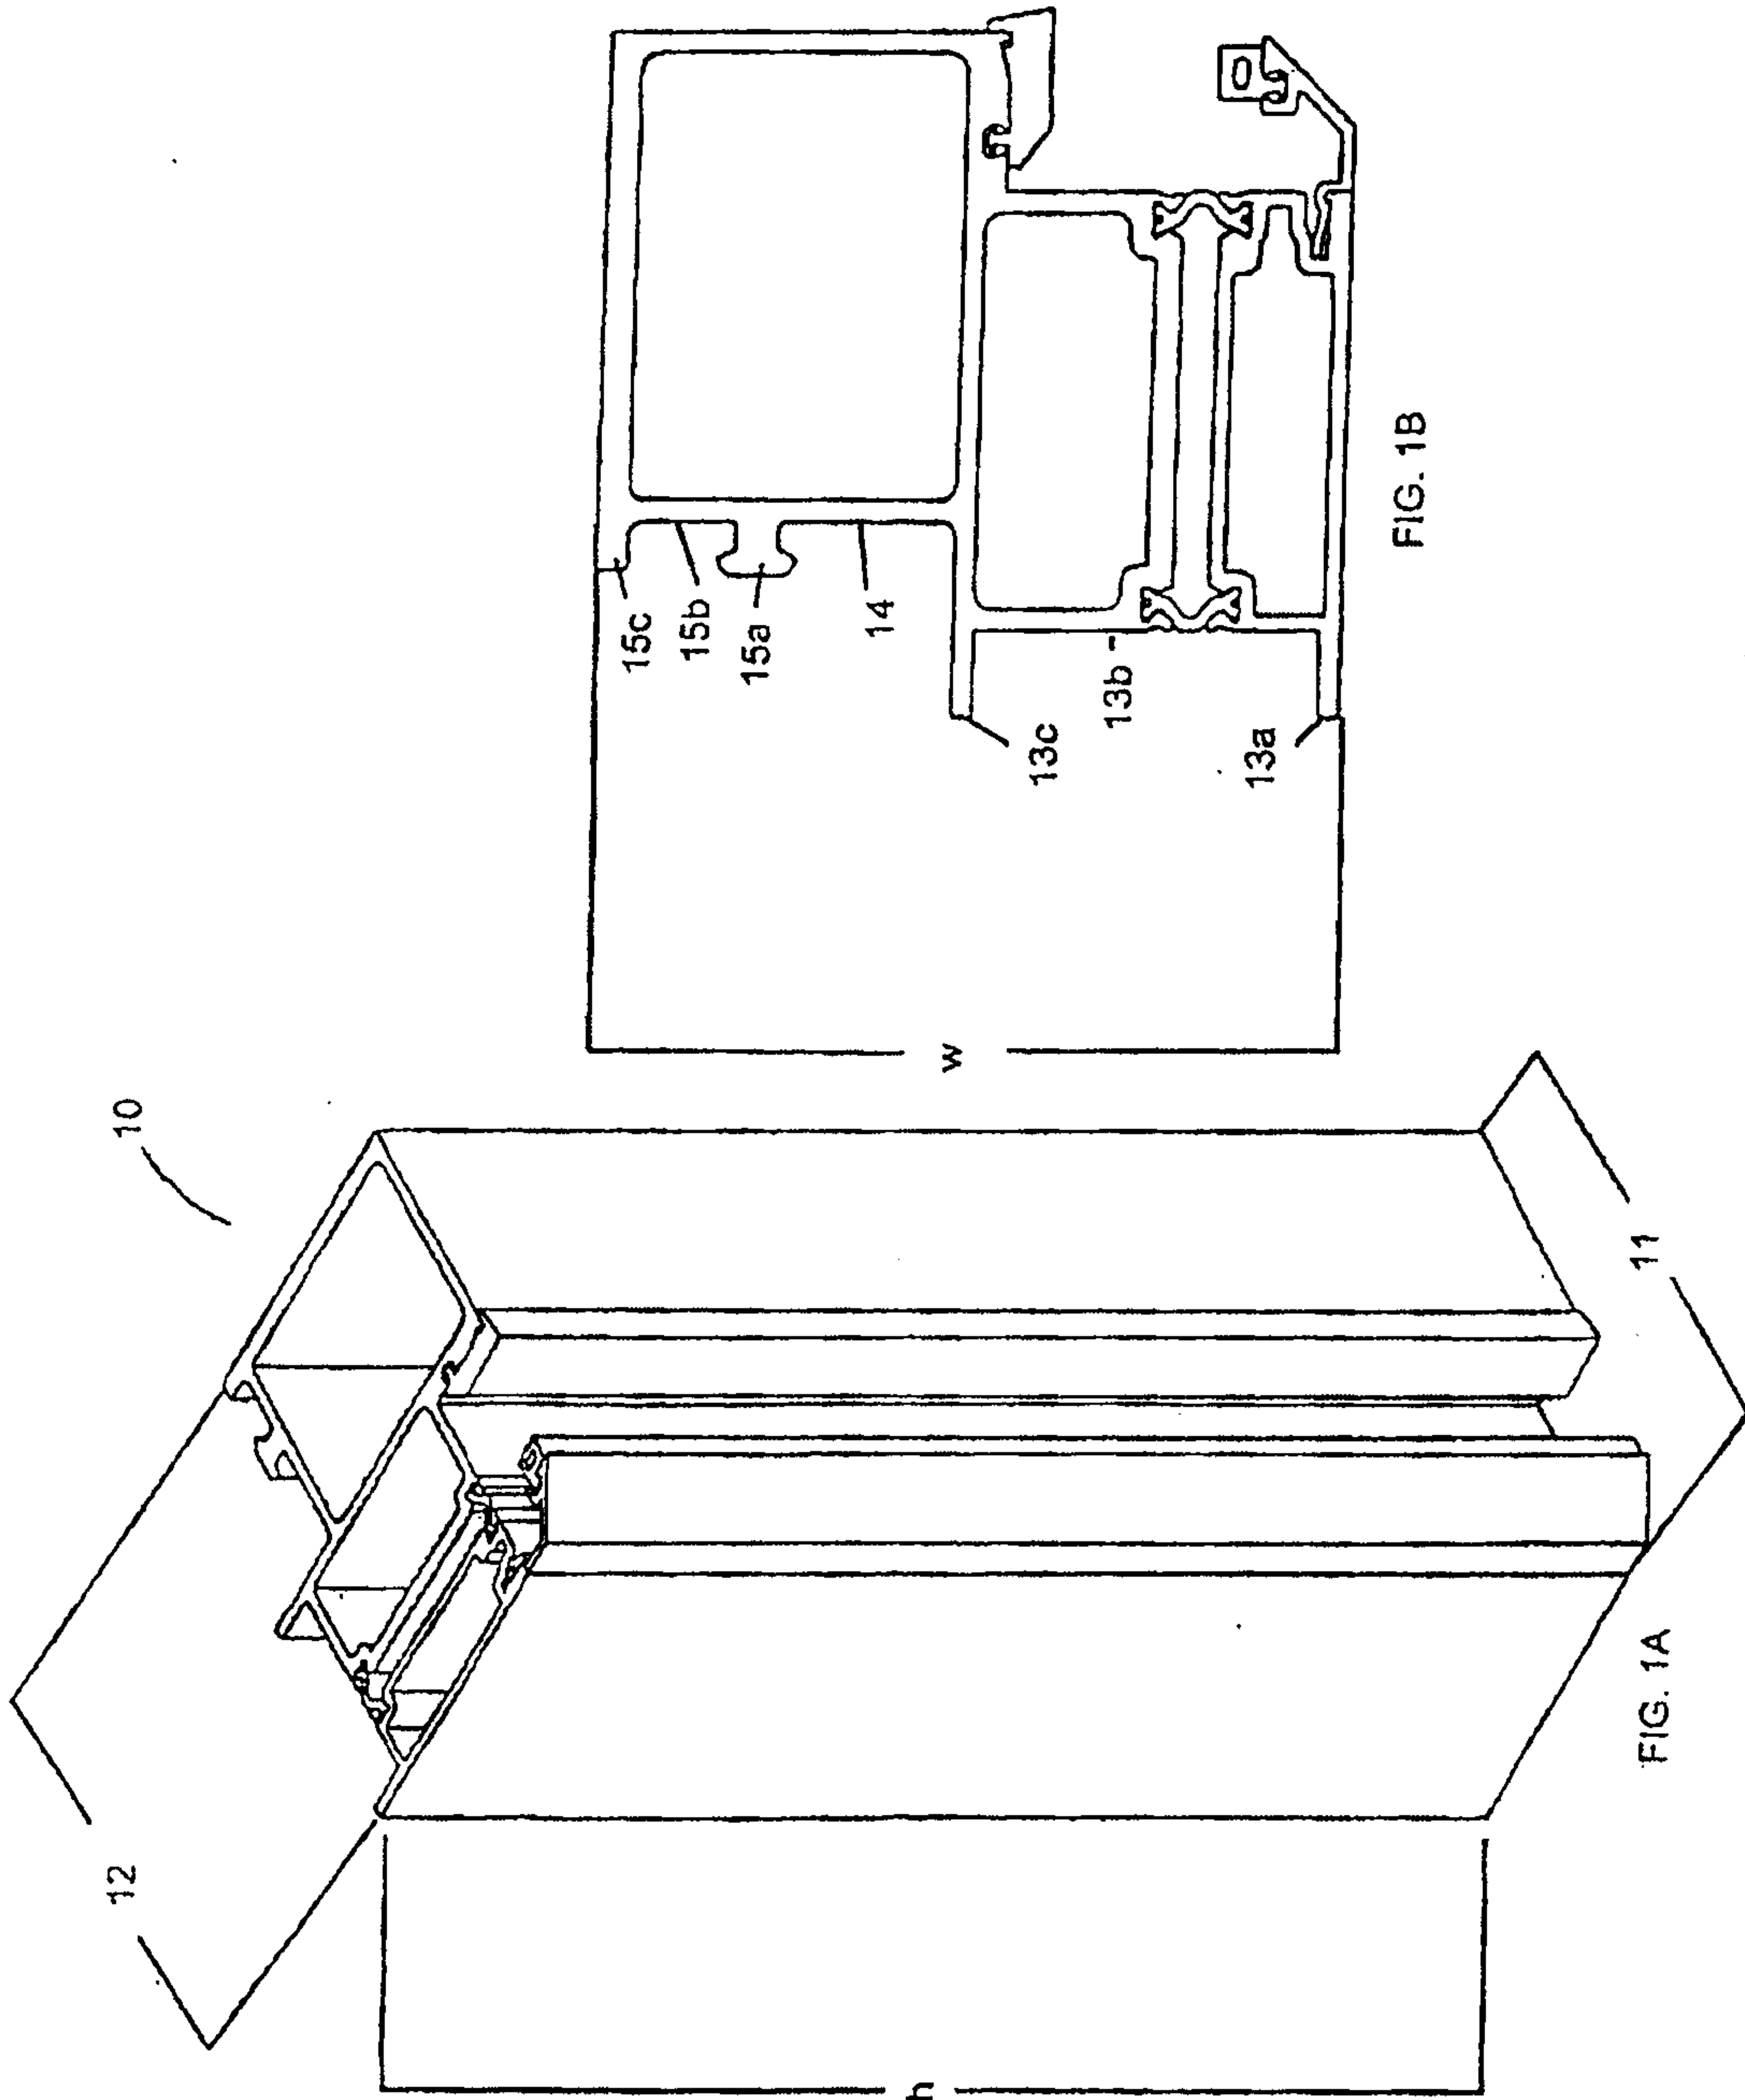

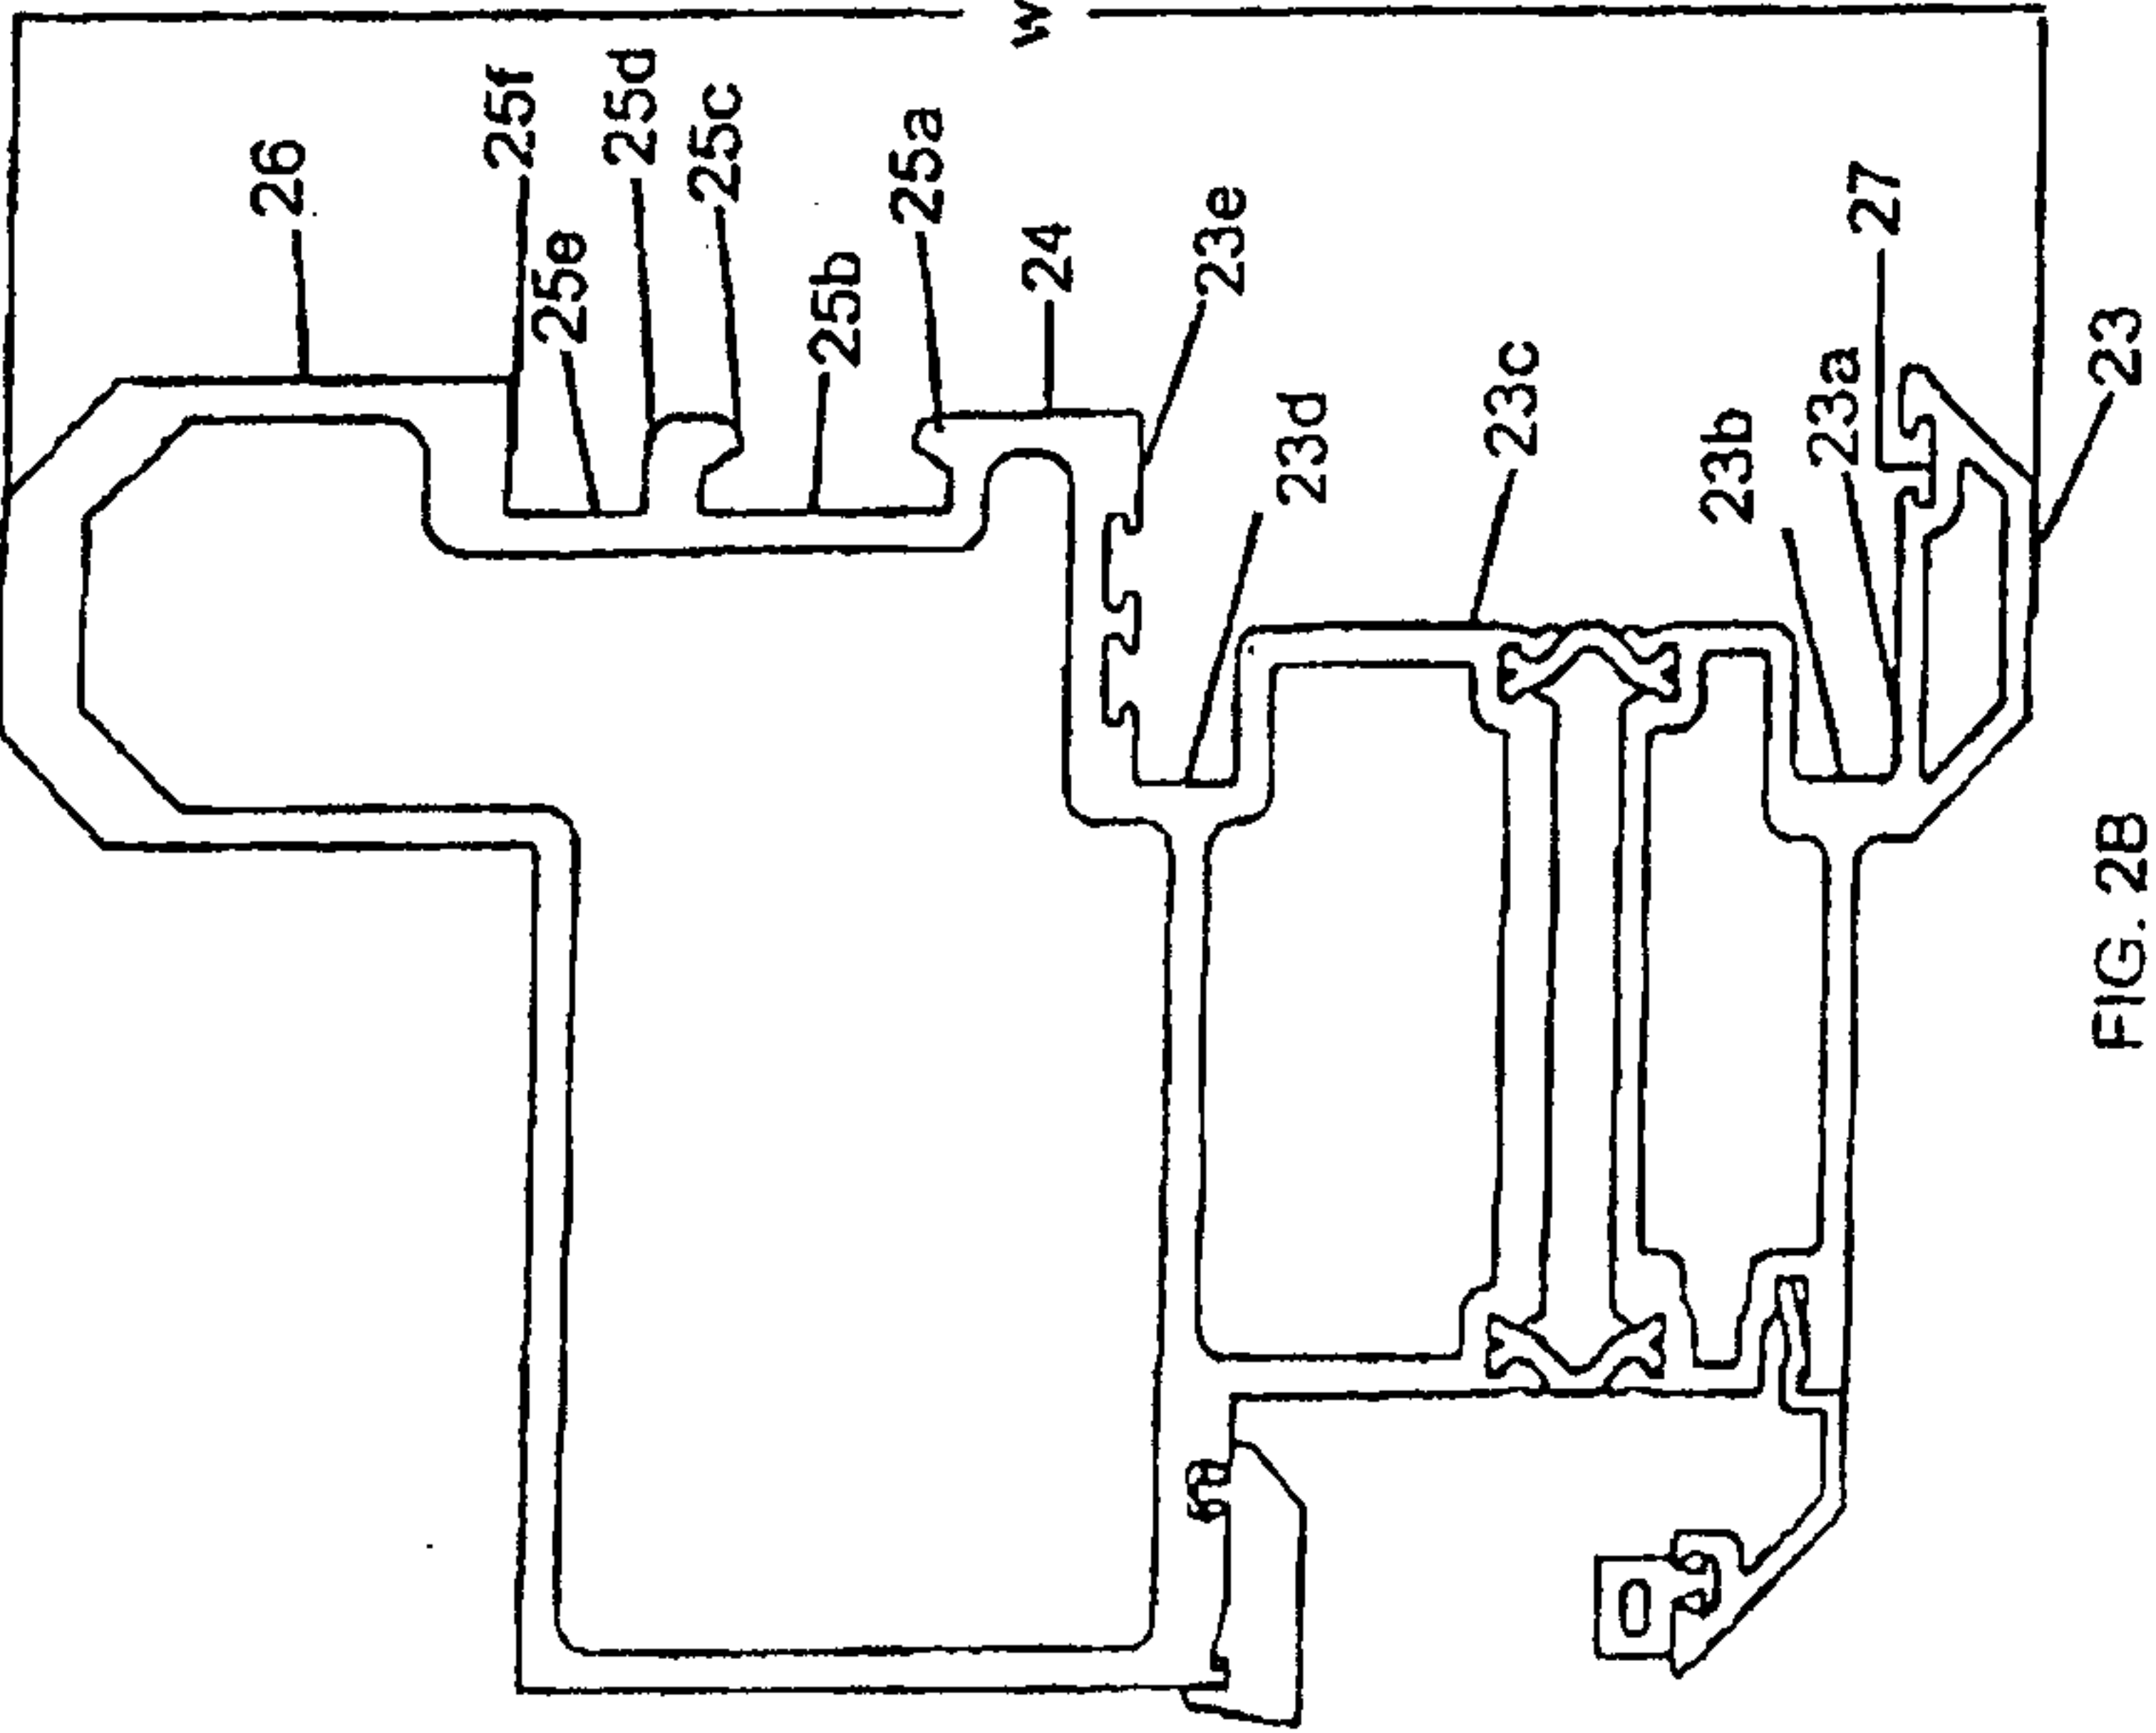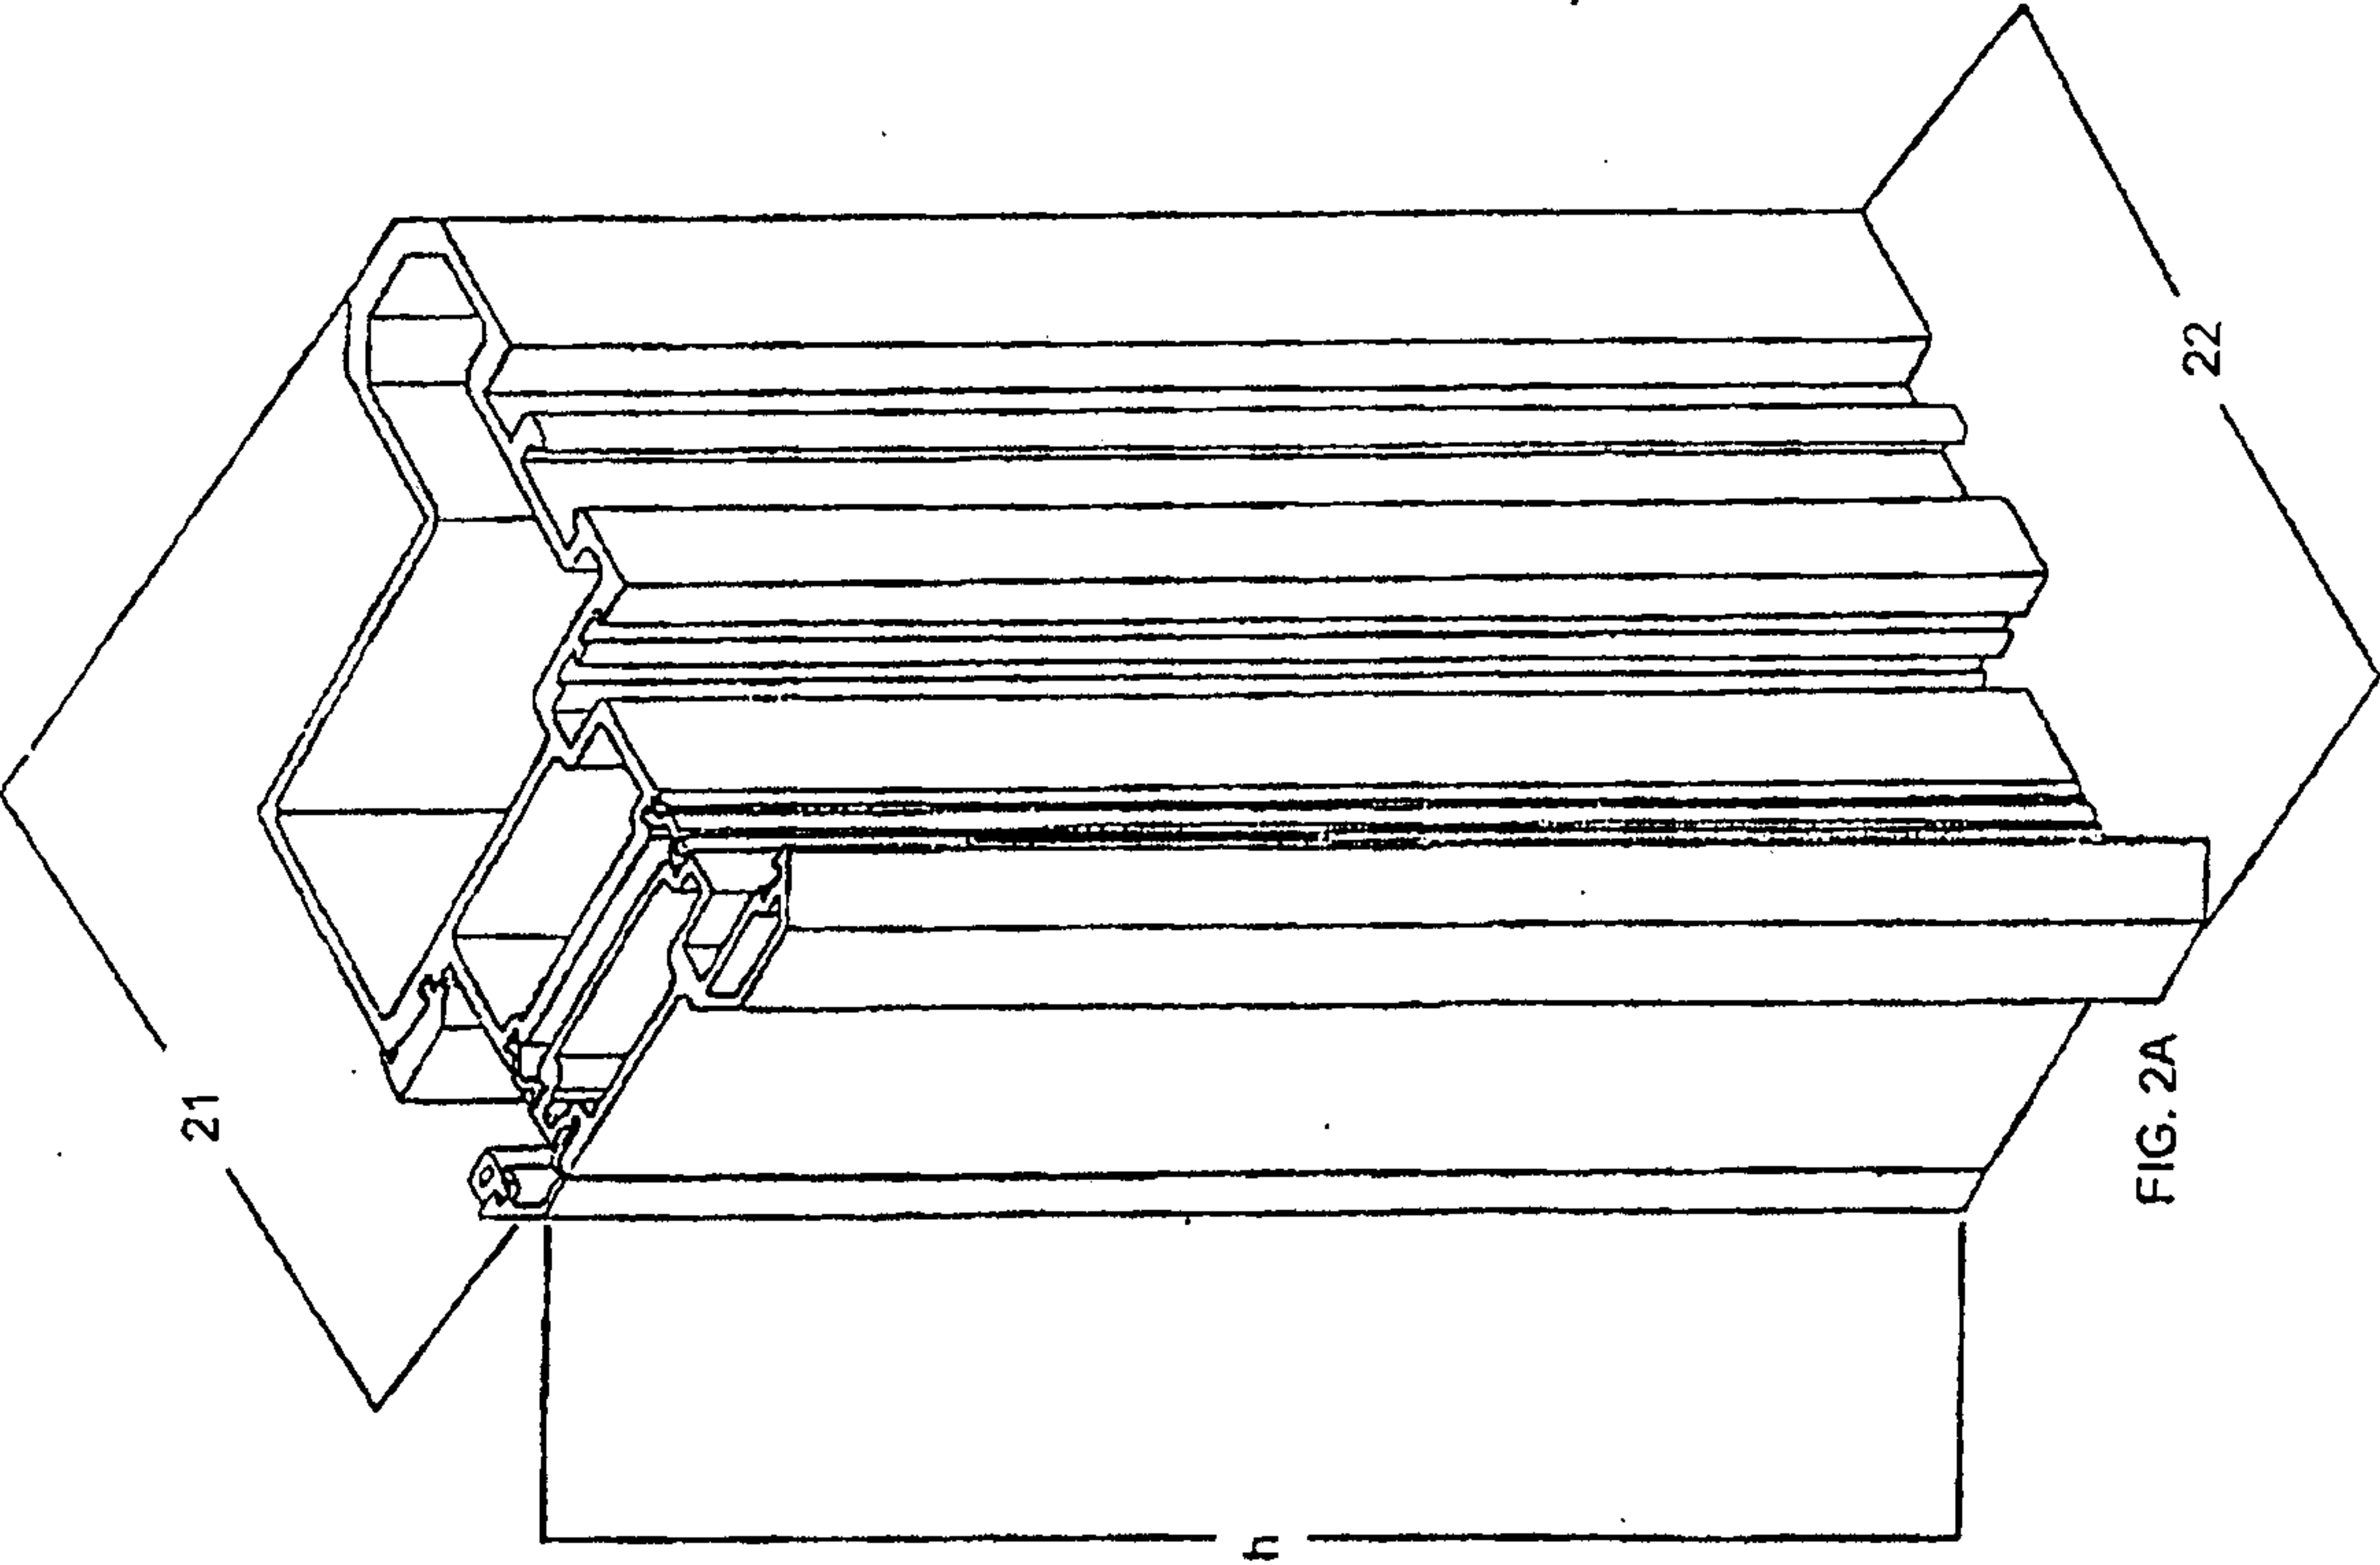

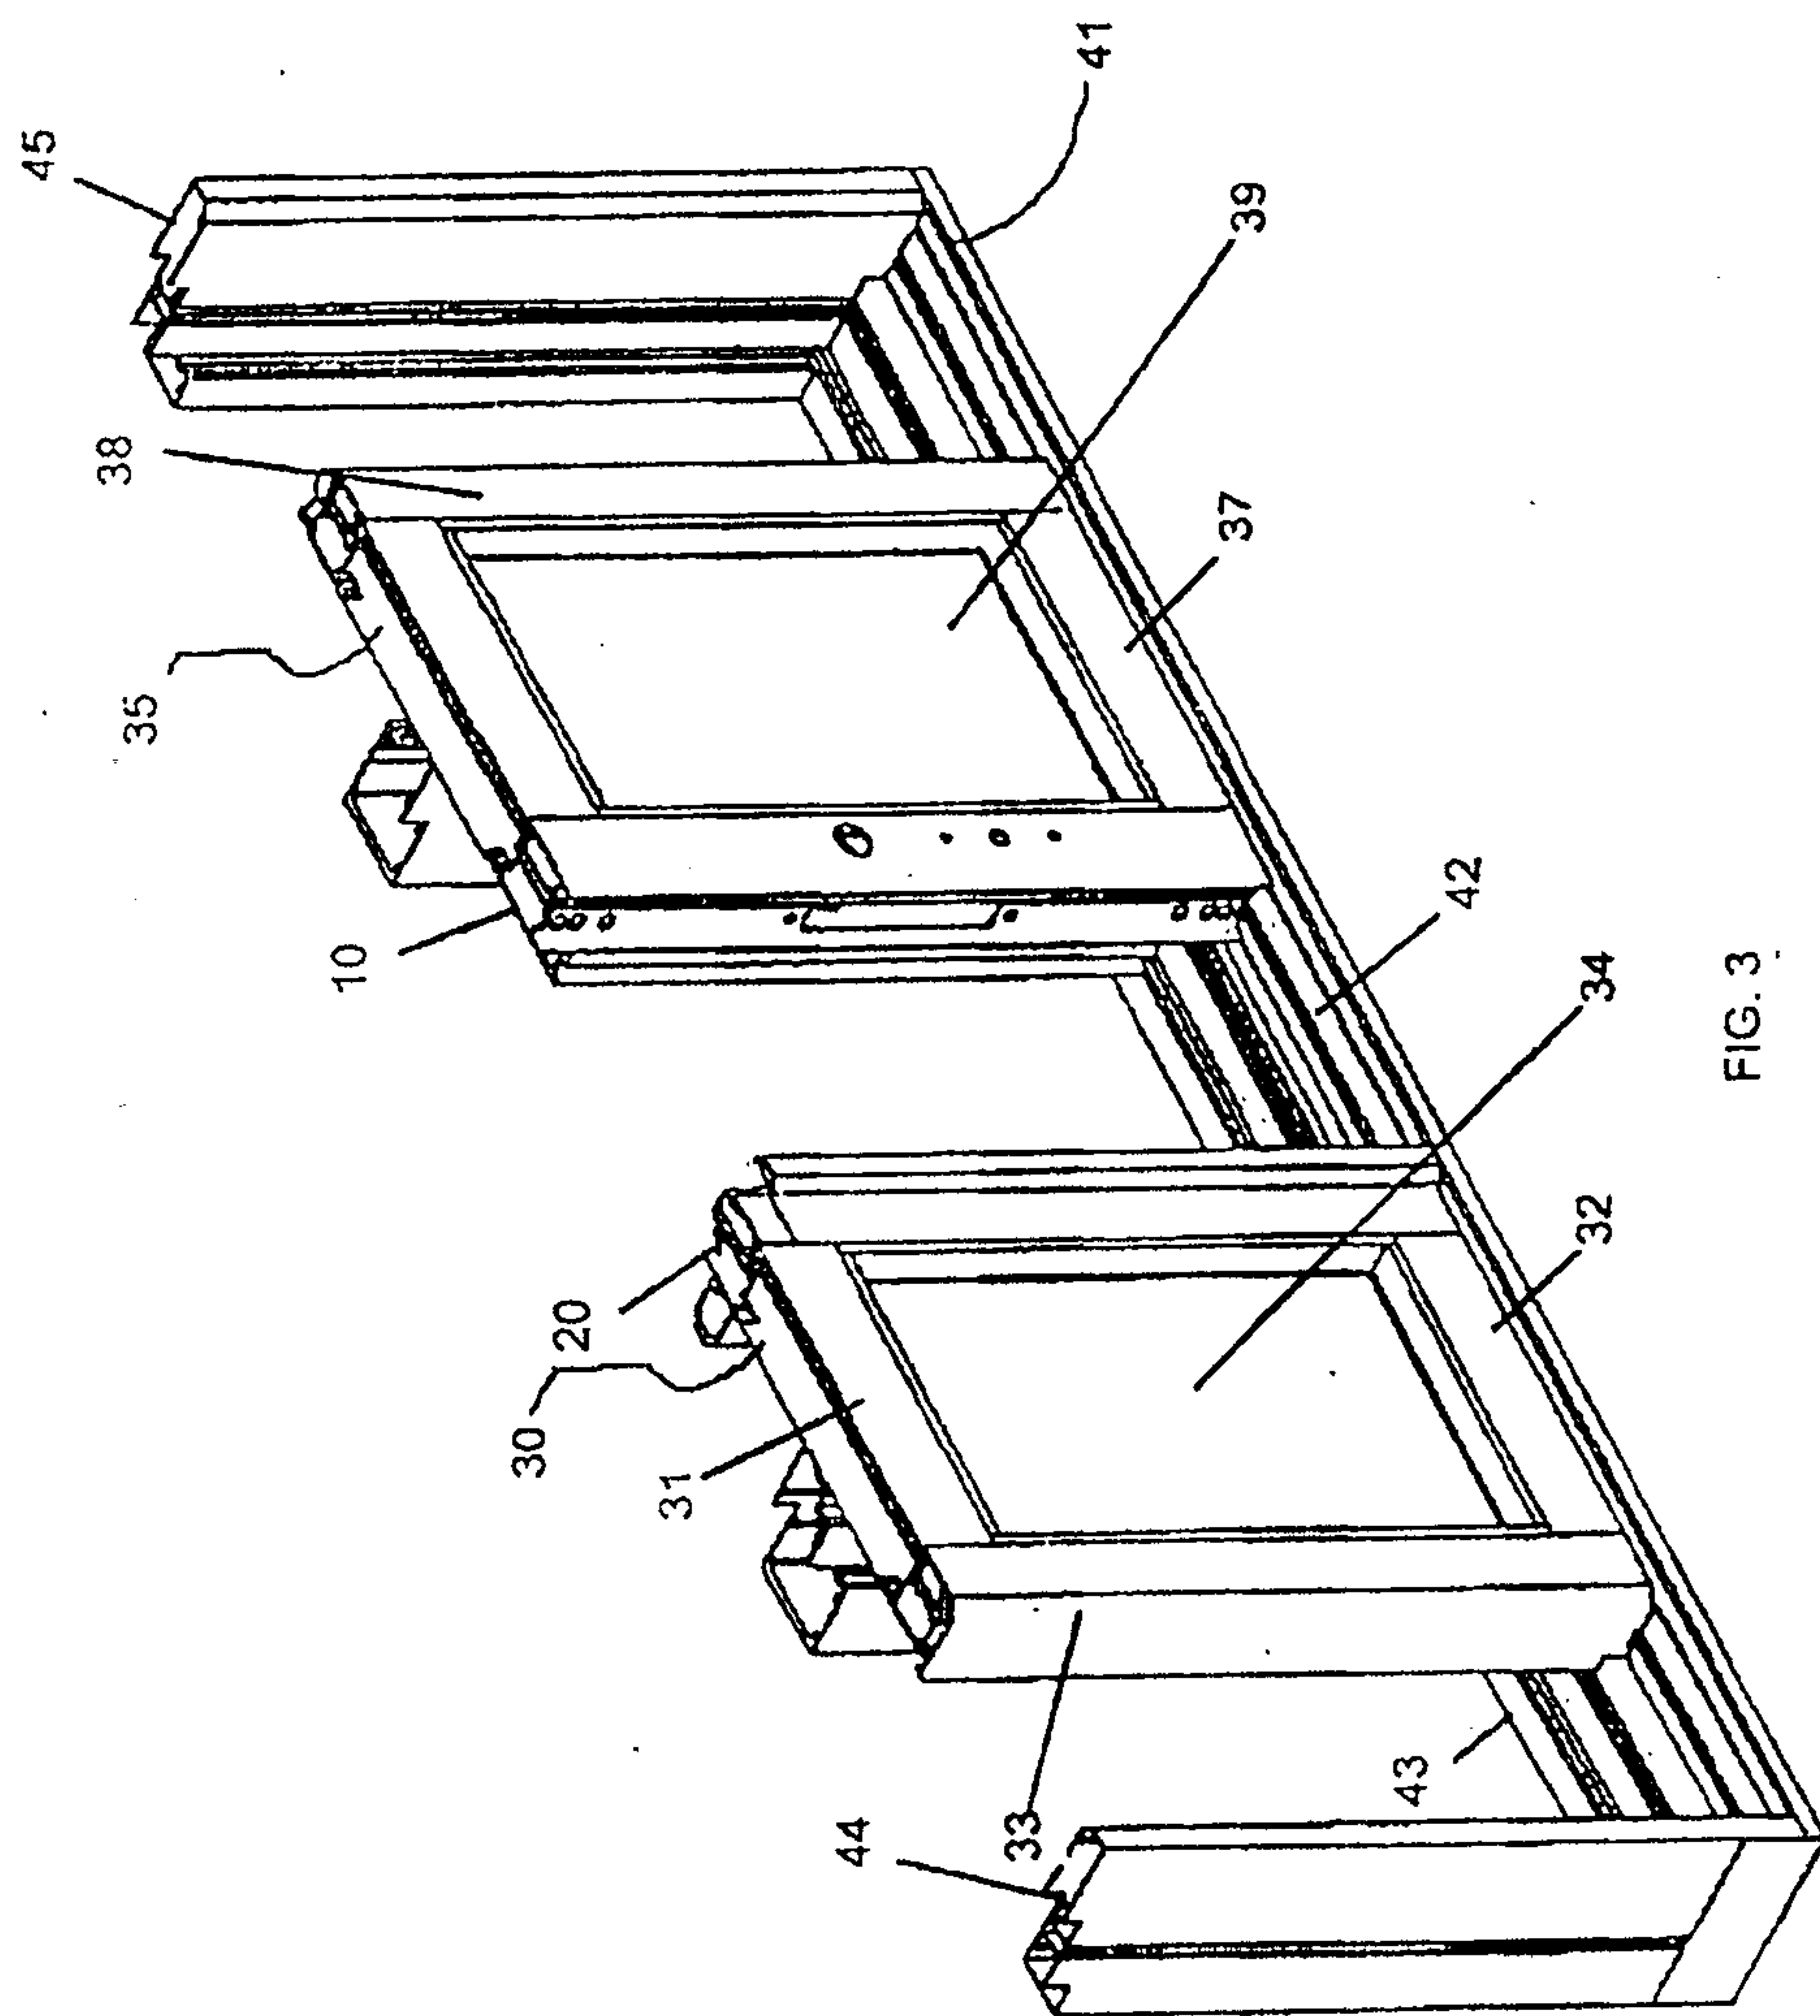


FIG. 3

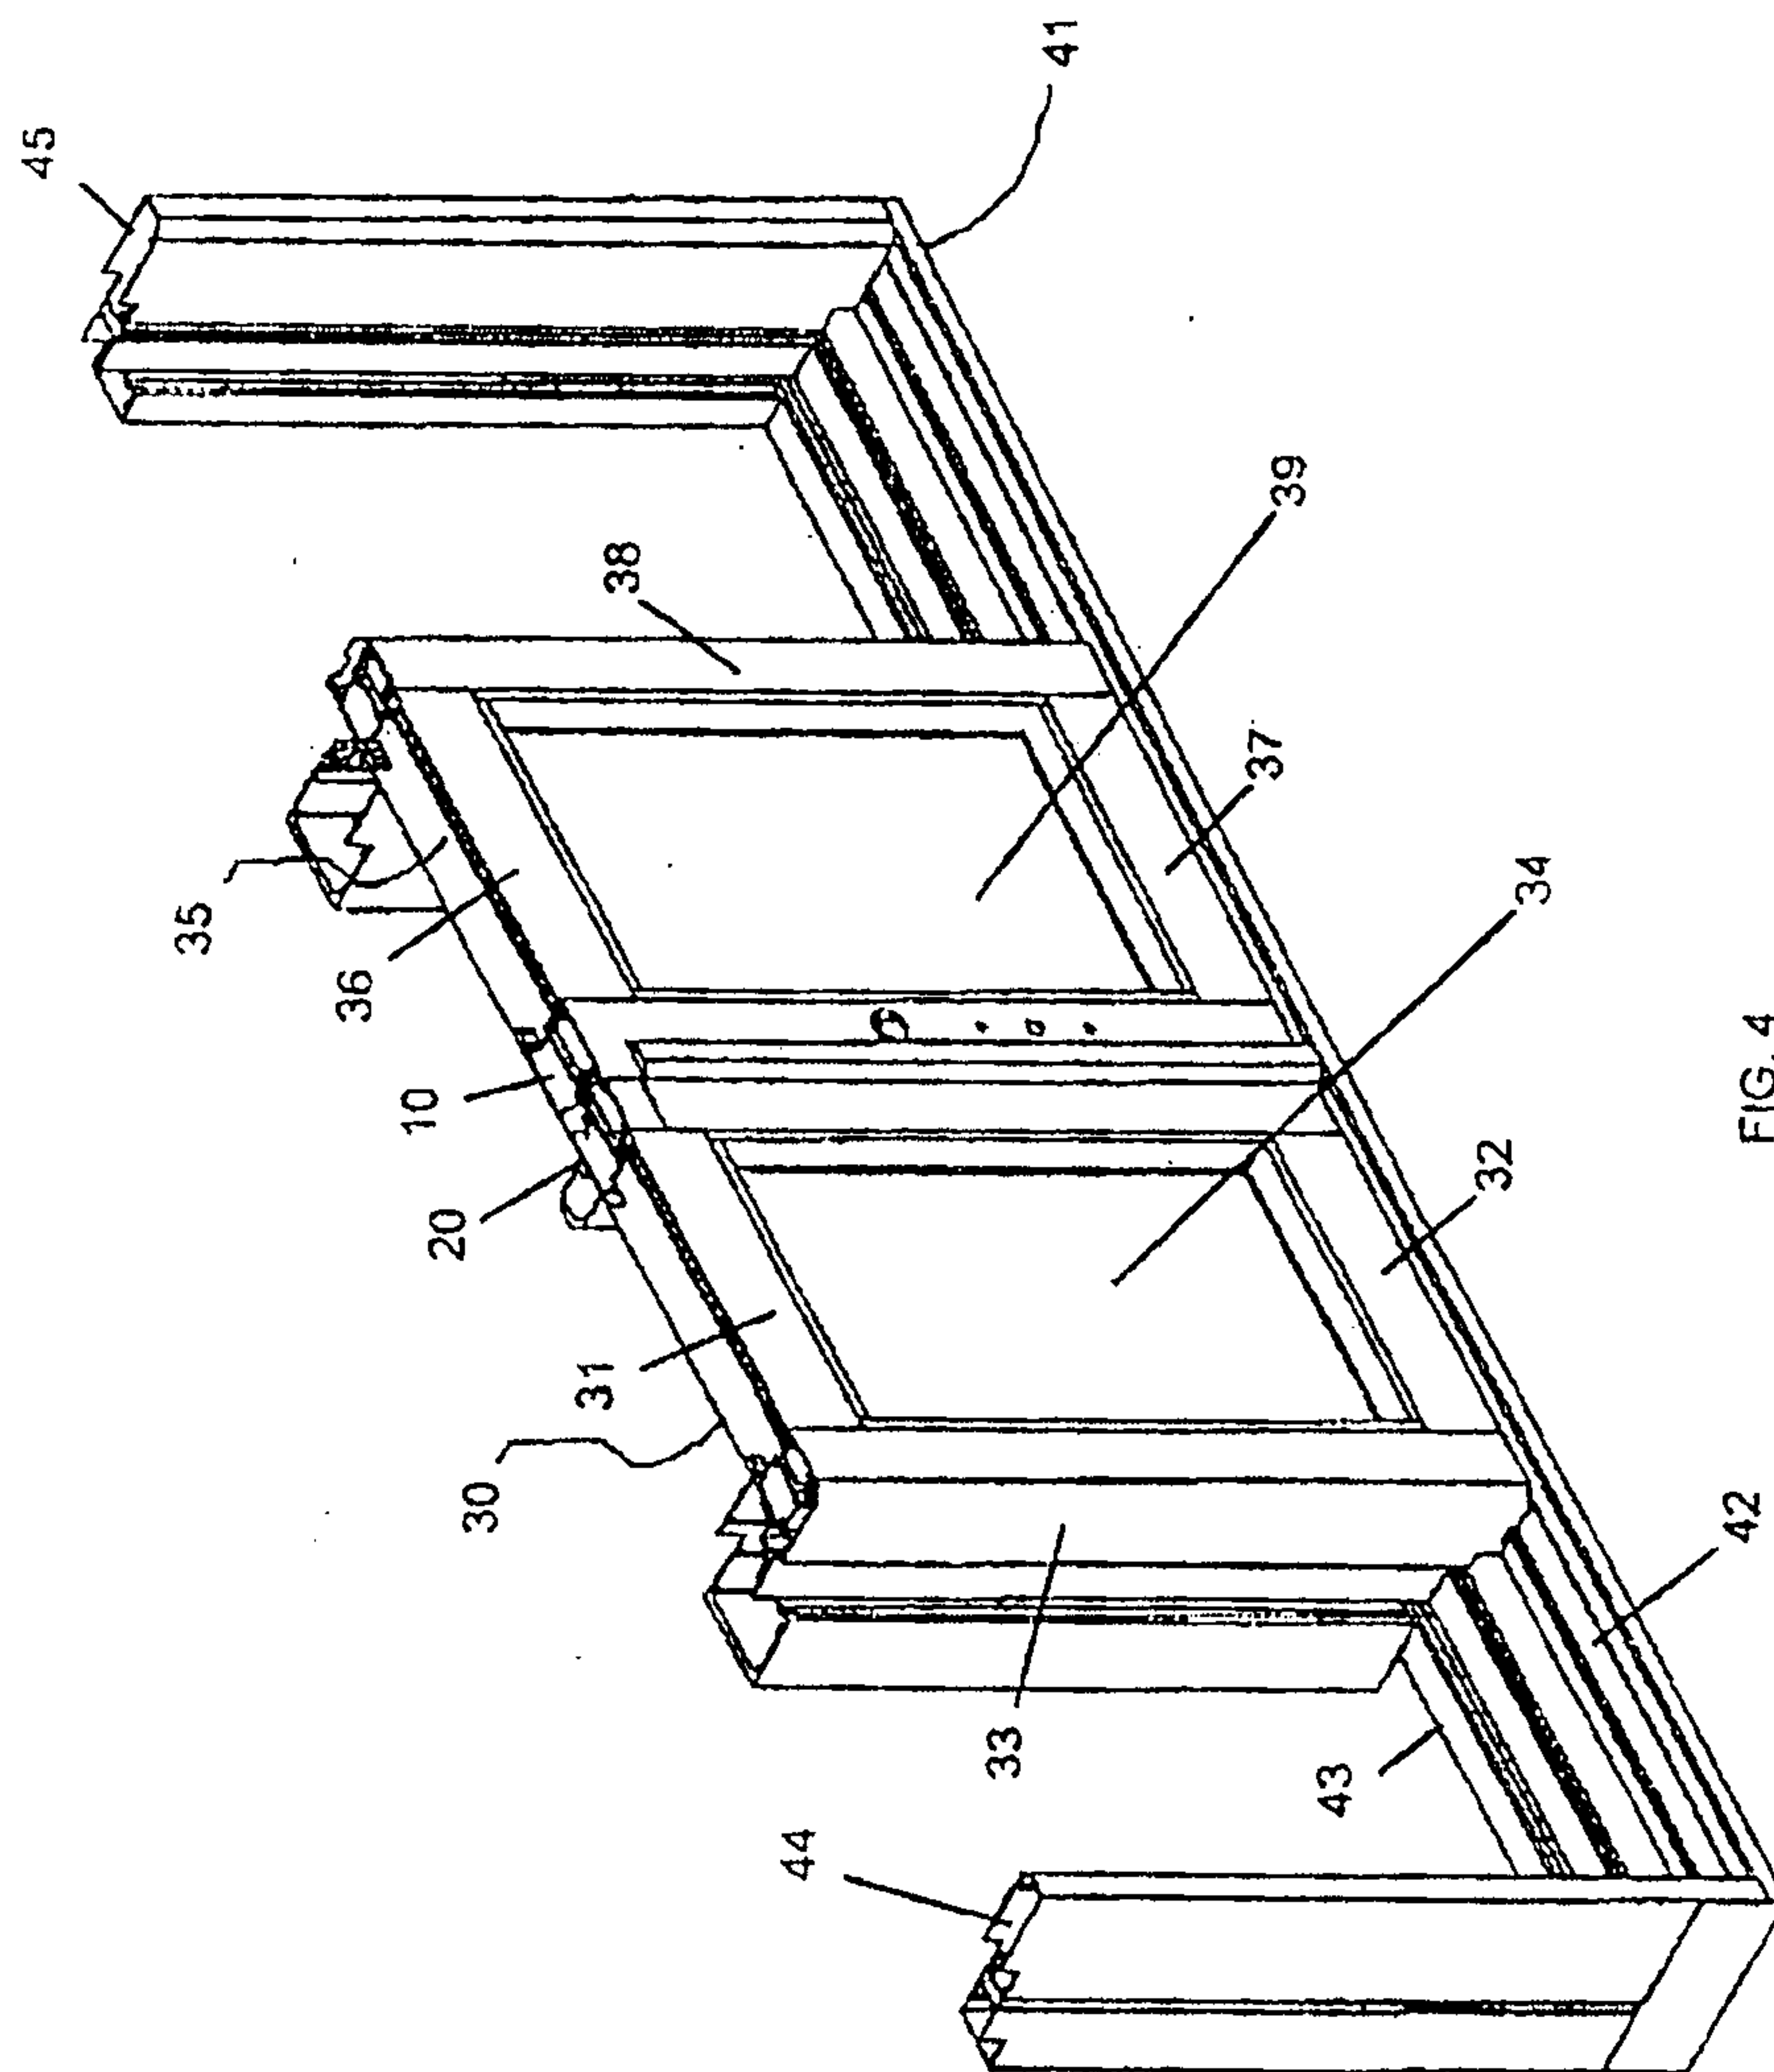


FIG. 4

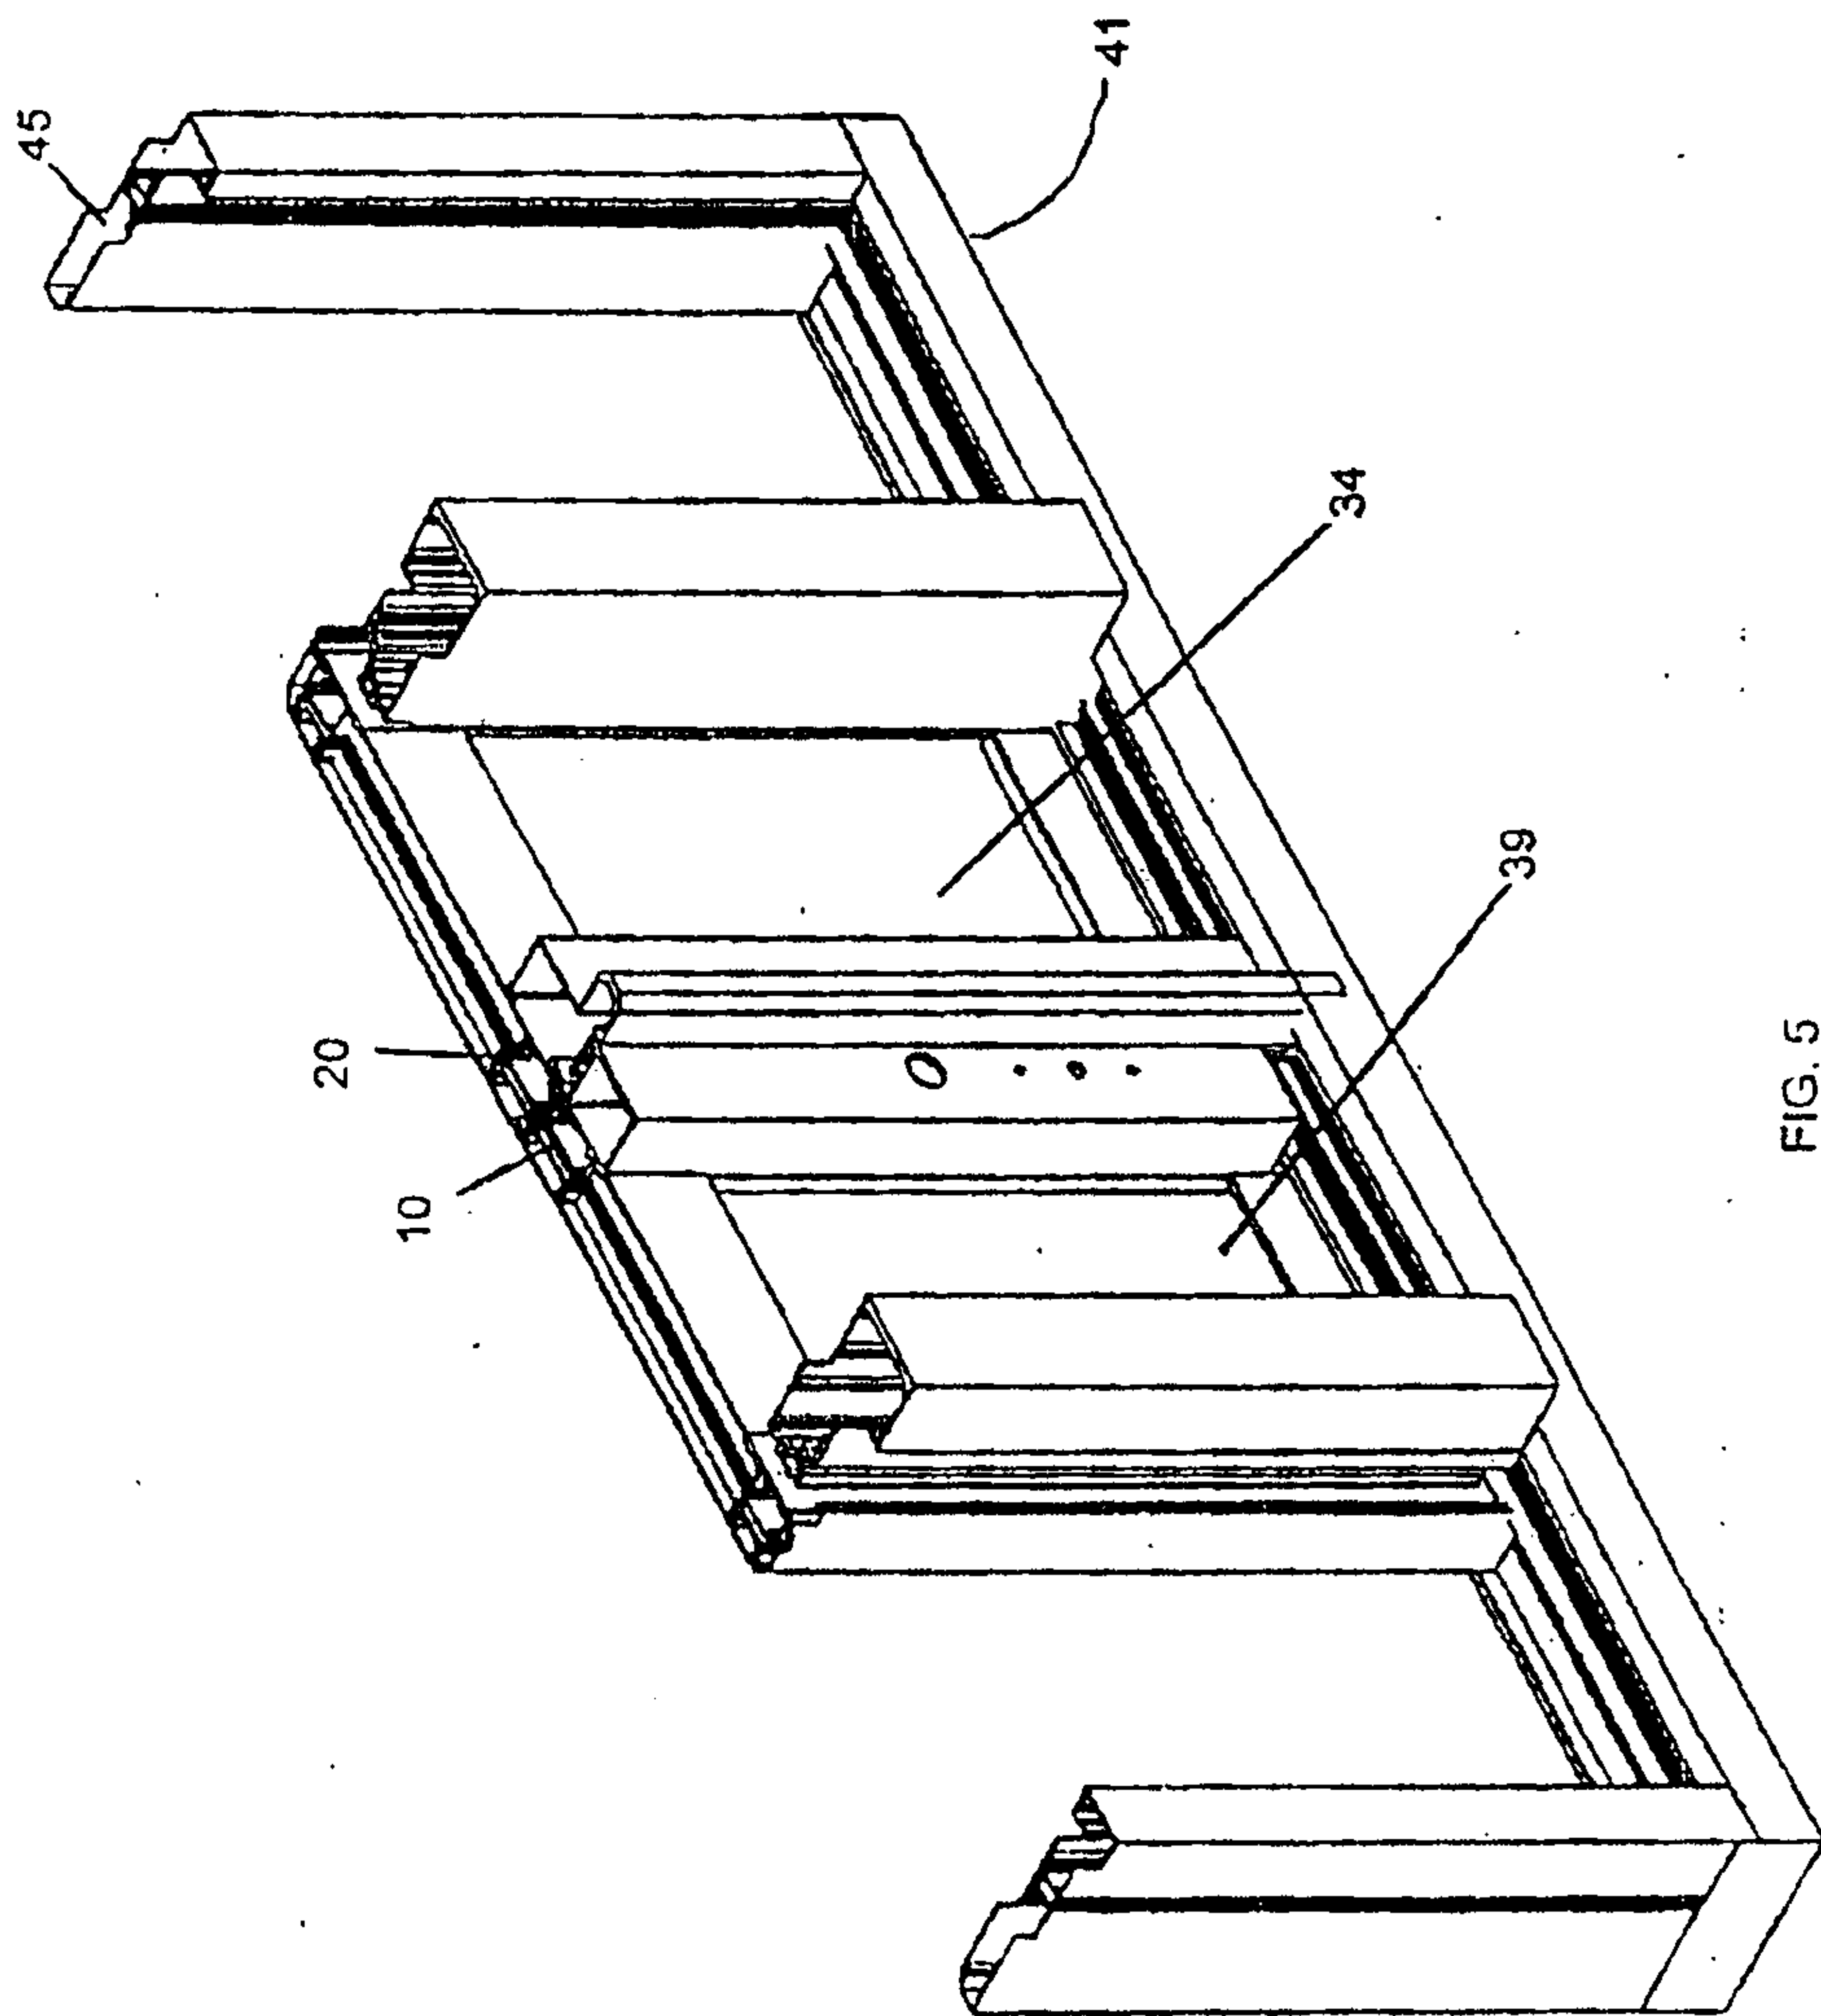
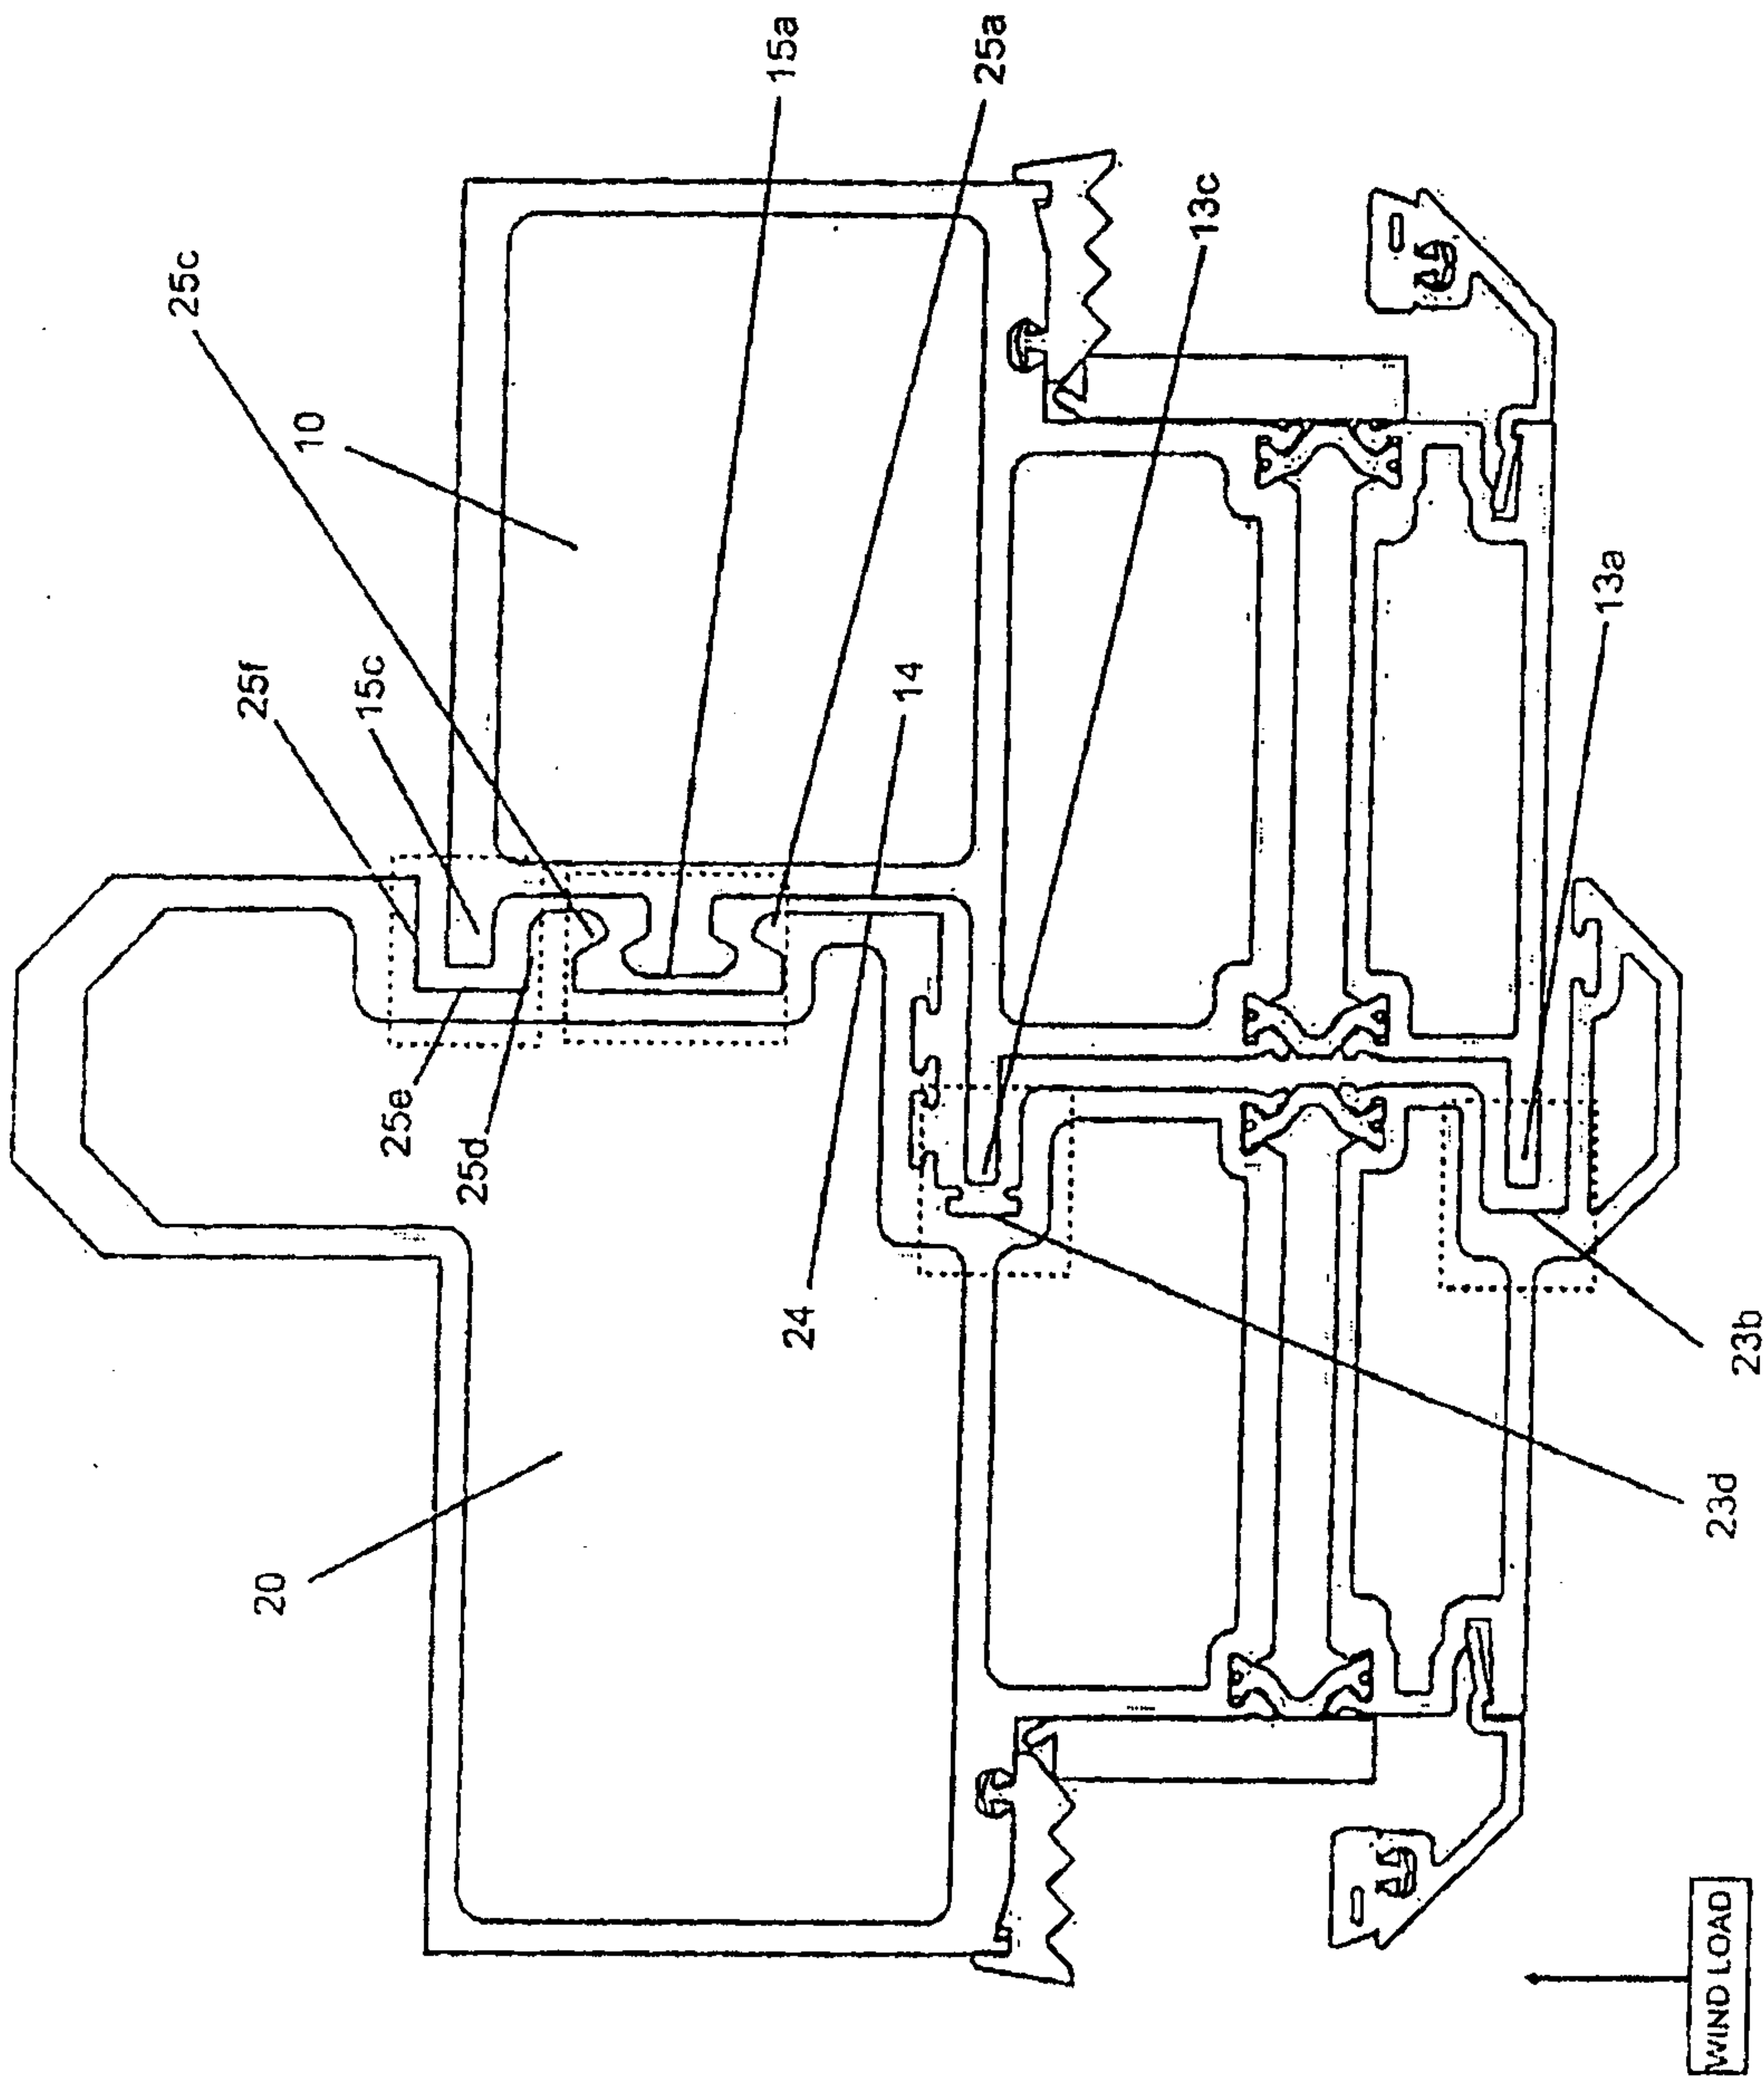


FIG. 5



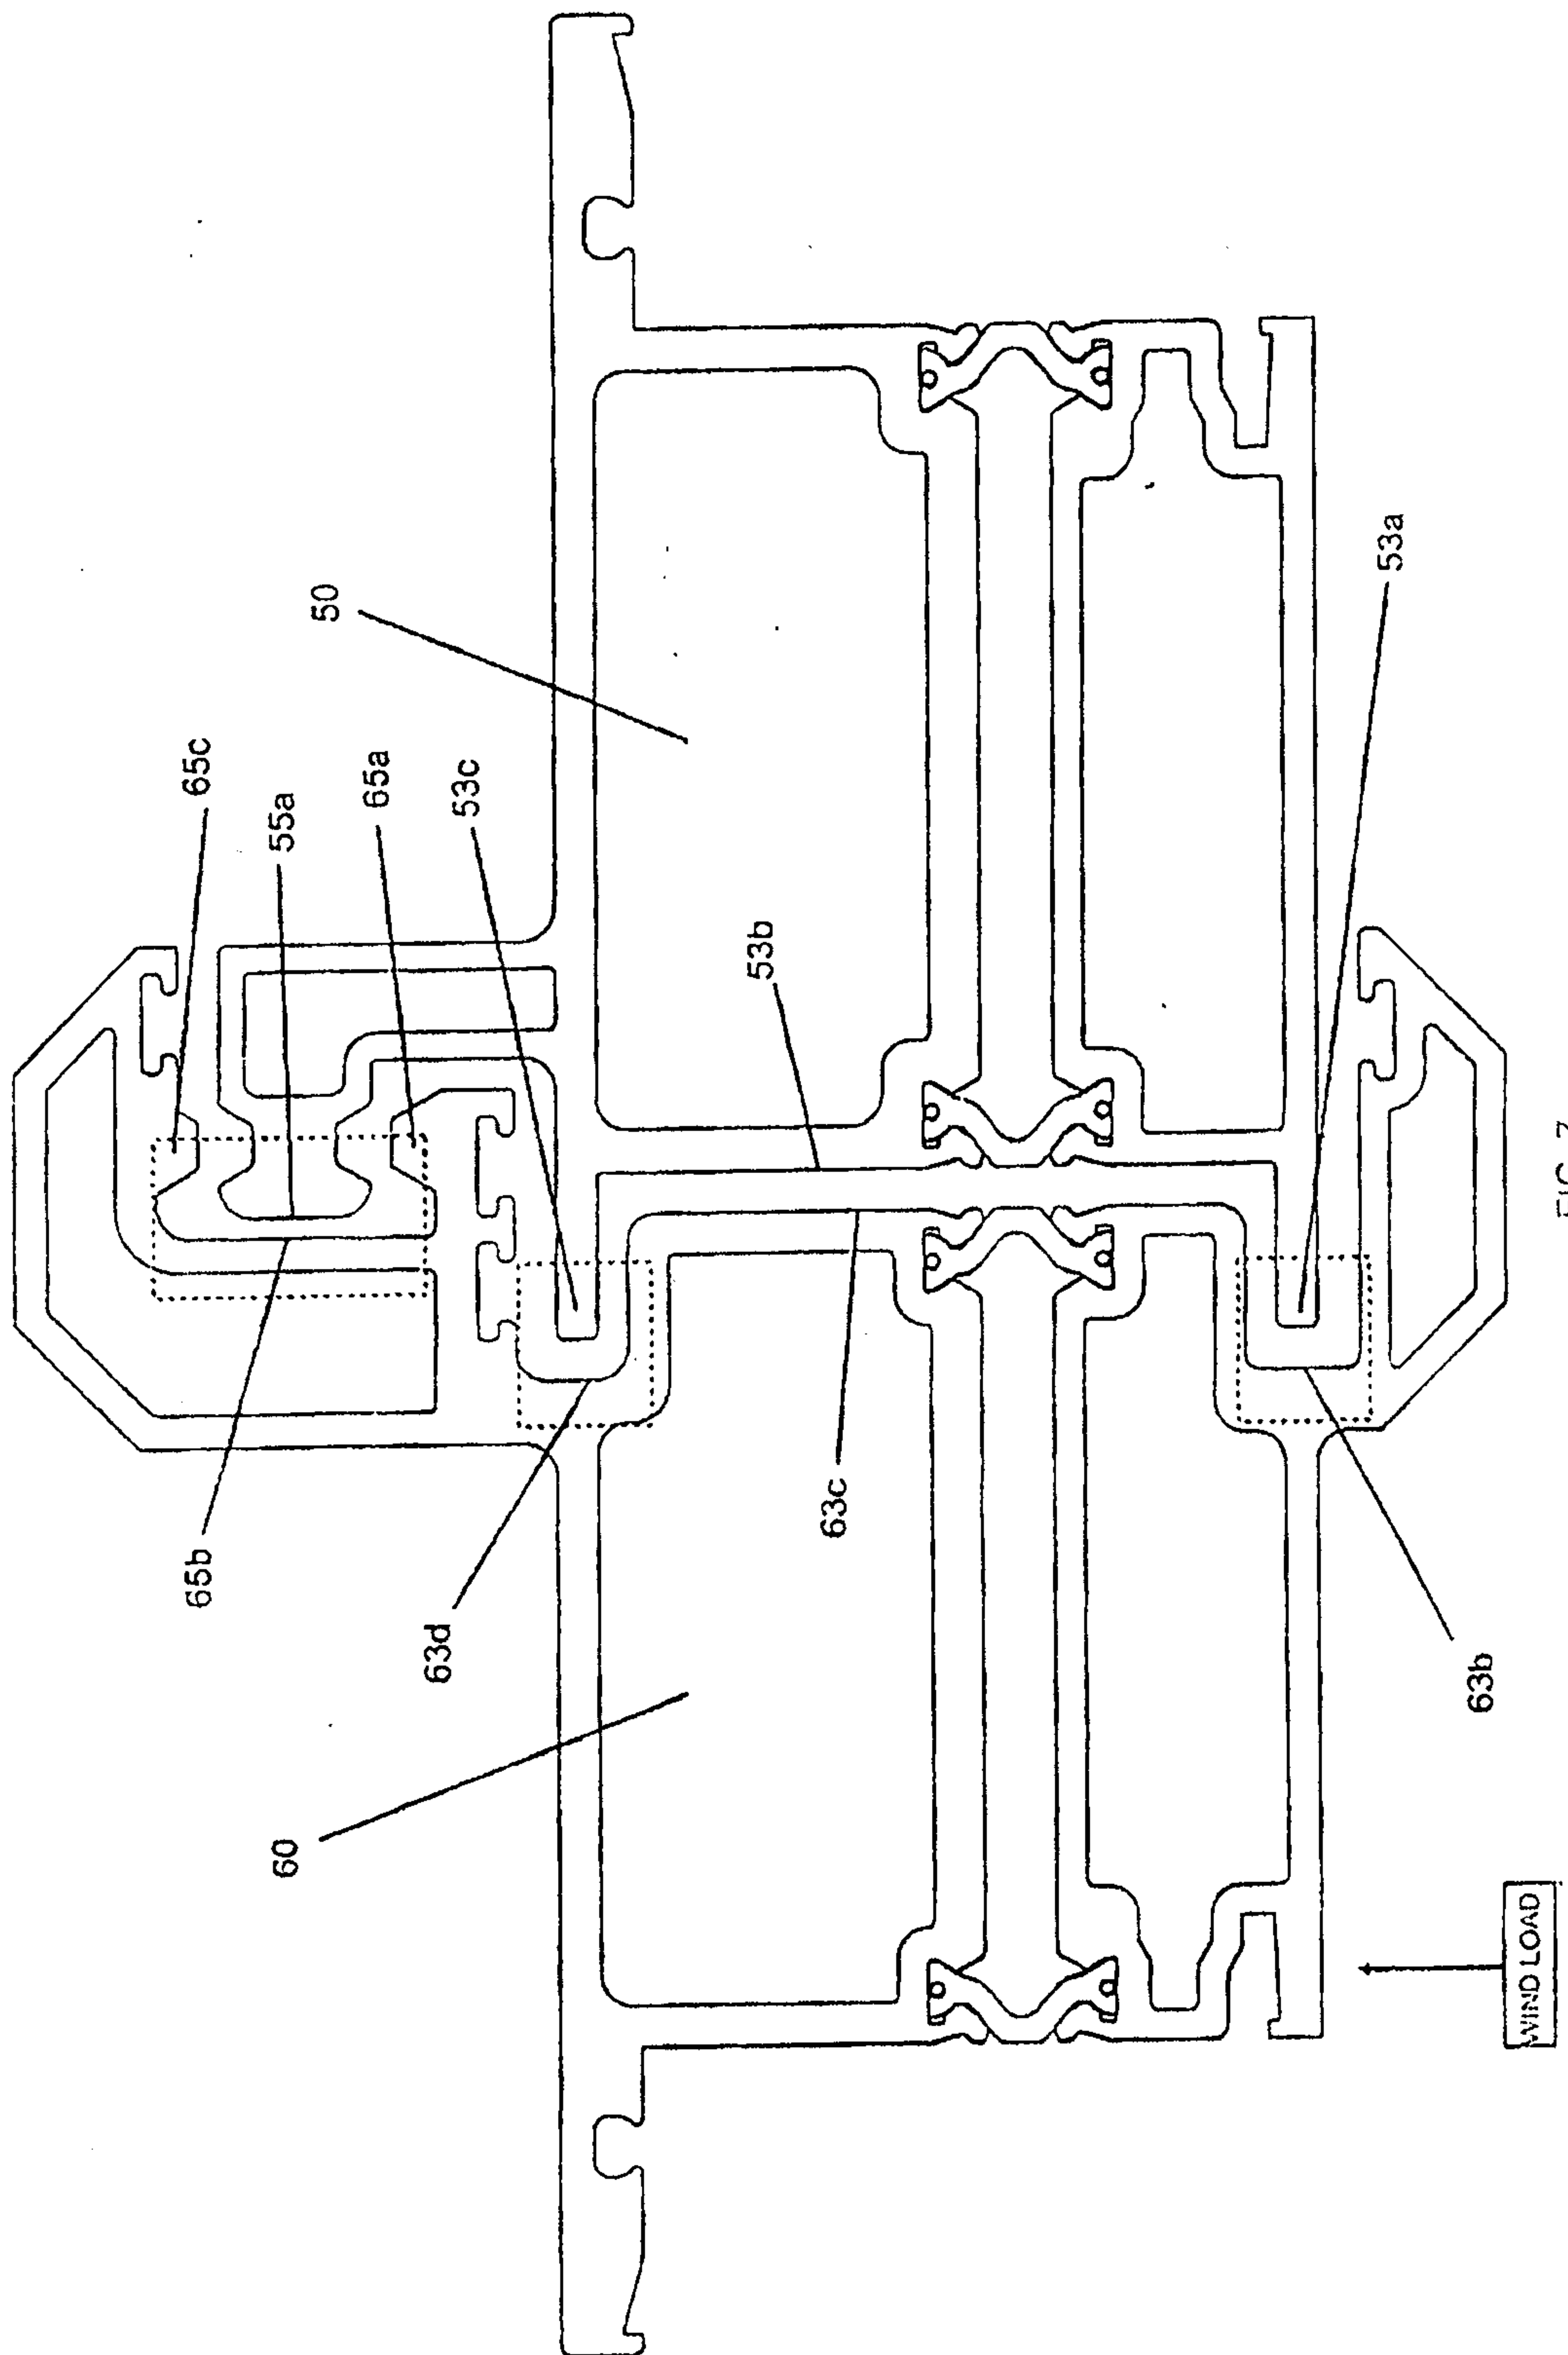


FIG. 2

