



(51) International Patent Classification:

G03F 1/54 (2012.01) C23C 14/14 (2006.01)
G03F 1/22 (2012.01) C23C 14/34 (2006.01)

(21) International Application Number:

PCT/US2022/011544

(22) International Filing Date:

07 January 2022 (07.01.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17/145,592 11 January 2021 (11.01.2021) US

(71) Applicant: **APPLIED MATERIALS, INC.** [US/US];
3050 Bowers Avenue, Santa Clara, California 95054 (US).

(72) Inventors: **LIU, Shiyu**; 3050 Bowers Avenue, Santa Clara,
California 95054 (US). **LIU, Shuwei**; 3050 Bowers Avenue,
Santa Clara, California 95054 (US). **JINDAL, Vibhu**;
3050 Bowers Avenue, Santa Clara, California 95054 (US).

(74) Agent: **SERVILLA, Scott S.**; SERVILLA WHITNEY
LLC, 33 Wood Avenue South, Suite 830, Iselin, New Jersey
08830 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

(54) Title: EXTREME ULTRAVIOLET MASK ABSORBER MATERIALS

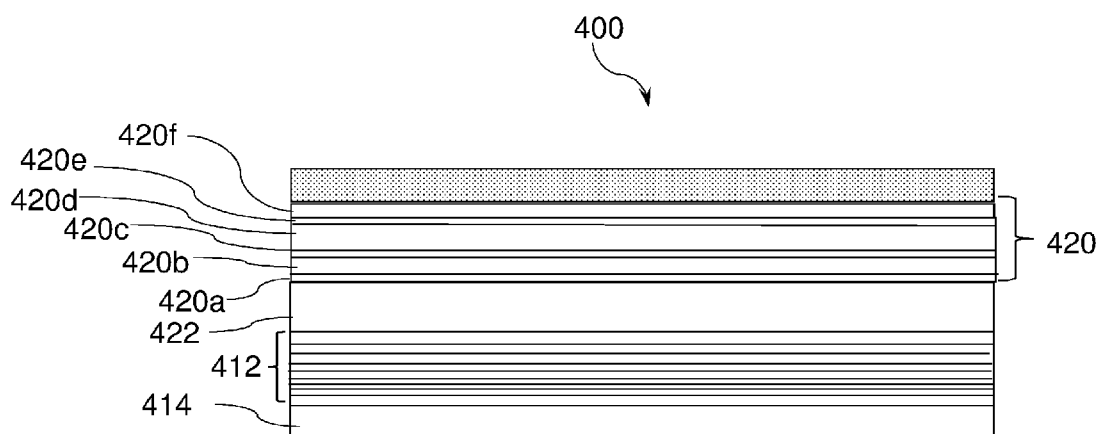


FIG. 5

(57) Abstract: Extreme ultraviolet (EUV) mask blanks, methods for their manufacture and production systems therefor are disclosed. The EUV mask blanks comprise a substrate; a multilayer stack of reflective layers on the substrate; a capping layer on the multilayer stack of reflecting layers; and an absorber layer on the capping layer, the absorber layer comprising an alloy selected from an alloy of ruthenium (Ru) and silicon (Si); an alloy tantalum (Ta) and platinum (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

EXTREME ULTRAVIOLET MASK ABSORBER MATERIALS

TECHNICAL FIELD

[0001] The present disclosure relates generally to extreme ultraviolet lithography, and more particularly extreme ultraviolet mask blanks with an alloy absorber and methods of manufacture.

BACKGROUND

[0002] Extreme ultraviolet (EUV) lithography, also known as soft x-ray projection lithography, is used for the manufacture of 0.0135 micron and smaller minimum feature size semiconductor devices. However, extreme ultraviolet light, which is generally in the 5 to 100 nanometer wavelength range, is strongly absorbed in virtually all materials. For that reason, extreme ultraviolet systems work by reflection rather than by transmission of light. Through the use of a series of mirrors, or lens elements, and a reflective element, or mask blank, coated with a non-reflective absorber mask pattern, the patterned actinic light is reflected onto a resist-coated semiconductor substrate.

[0003] The lens elements and mask blanks of extreme ultraviolet lithography systems are coated with reflective multilayer coatings of materials such as molybdenum (Mo) and silicon (Si). Reflection values of approximately 65% per lens element, or mask blank, have been obtained by using substrates that are coated with multilayer coatings that strongly reflect light within an extremely narrow ultraviolet bandpass, for example, 12.5 to 14.5 nanometer bandpass for 13.5 nanometer ultraviolet light.

[0004] FIG. 1 shows a conventional EUV reflective mask 10, which is formed from an EUV mask blank, which includes a reflective multilayer stack 12 on a substrate 14, which reflects EUV radiation at unmasked portions by Bragg interference. Masked (non-reflective) areas 16 of the conventional EUV reflective mask 10 are formed by etching buffer layer 18 and absorbing layer 20. The absorbing layer typically has a thickness in a range of 51 nm to 77 nm. A capping layer 22 is formed over the reflective multilayer stack 12 and protects the reflective multilayer stack 12 during the etching process. As will be discussed further below, EUV mask blanks are made on a low thermal expansion material substrate coated with multilayers, a capping layer and

an absorbing layer, which is then etched to provide the masked (non-reflective) areas 16 and reflective areas 24.

[0005] The International Technology Roadmap for Semiconductors (ITRS) specifies a node's overlay requirement as some percentage of a technology's minimum half-pitch feature size. Due to the impact on image placement and overlay errors inherent in all reflective lithography systems, EUV reflective masks will need to adhere to more precise flatness specifications for future production. Additionally, EUV blanks have a very low tolerance to defects on the working area of the blank. Furthermore, while the absorbing layer's role is to absorb light, there is also a phase shift effect due to the difference between the absorber layer's index of refraction and vacuum's index of refraction ($n=1$), and this phase shift that accounts for the 3D mask effects. There is a need to provide EUV mask blanks having a thinner absorber to mitigate 3D mask effects.

SUMMARY

[0006] One or more embodiments of the disclosure are directed to a method of manufacturing an extreme ultraviolet (EUV) mask blank comprising forming on a substrate a multilayer stack which reflects EUV radiation, the multilayer stack comprising a plurality of reflective layer pairs; forming a capping layer on the multilayer stack; and forming an absorber layer on the capping layer, the absorber layer selected from an alloy selected from the group consisting of an alloy selected from an alloy of ruthenium (Ru) and silicon (Si); an alloy of tantalum (Ta) and platinum (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo).

[0007] Additional embodiments of the disclosure are directed to an EUV mask blank comprising a substrate; a multilayer stack which reflects EUV radiation, the multilayer stack comprising a plurality of reflective layer pairs; a capping layer on the multilayer stack of reflecting layers; and an absorber layer on the capping layer, the absorber layer selected from the group consisting of an alloy selected from an alloy of ruthenium (Ru) and silicon (Si); an alloy of tantalum (Ta) and platinum (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo).

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] So that the manner in which the above recited features of the present disclosure can be understood in detail, a more particular description of the disclosure, briefly summarized above, may be had by reference to embodiments, some of which are illustrated in the appended drawings. It is to be noted, however, that the
5 appended drawings illustrate only typical embodiments of this disclosure and are therefore not to be considered limiting of its scope, for the disclosure may admit to other equally effective embodiments.

[0009] FIG. 1 schematically illustrates a background art EUV reflective mask employing a conventional absorber;

10 [0010] FIG. 2 schematically illustrates an embodiment of an extreme ultraviolet lithography system;

[0011] FIG. 3 illustrates an embodiment of an extreme ultraviolet reflective element production system;

15 [0012] FIG. 4 illustrates an embodiment of an extreme ultraviolet reflective element such as an EUV mask blank;

[0013] FIG. 5 illustrates an embodiment of an extreme ultraviolet reflective element such as an EUV mask blank; and

[0014] FIG. 6 illustrates an embodiment of a multi-cathode physical deposition chamber.

20 DETAILED DESCRIPTION

[0015] Before describing several exemplary embodiments of the disclosure, it is to be understood that the disclosure is not limited to the details of construction or process steps set forth in the following description. The disclosure is capable of other embodiments and of being practiced or being carried out in various ways.

25 [0016] The term "horizontal" as used herein is defined as a plane parallel to the plane or surface of a mask blank, regardless of its orientation. The term "vertical" refers to a direction perpendicular to the horizontal as just defined. Terms, such as "above", "below", "bottom", "top", "side" (as in "sidewall"), "higher", "lower", "upper", "over", and "under", are defined with respect to the horizontal plane, as shown in the
30 figures.

[0017] The term "on" indicates that there is direct contact between elements. The term "directly on" indicates that there is direct contact between elements with no intervening elements.

[0018] Those skilled in the art will understand that the use of ordinals such as "first" and "second" to describe process regions do not imply a specific location within the processing chamber, or order of exposure within the processing chamber.

[0019] As used in this specification and the appended claims, the term "substrate" refers to a surface, or portion of a surface, upon which a process acts. It will also be understood by those skilled in the art that reference to a substrate refers to only a portion of the substrate, unless the context clearly indicates otherwise. Additionally, reference to depositing on a substrate means both a bare substrate and a substrate with one or more films or features deposited or formed thereon.

[0020] Referring now to FIG. 2, an exemplary embodiment of an extreme ultraviolet lithography system 100 is shown. The extreme ultraviolet lithography system 100 includes an extreme ultraviolet light source 102 for producing extreme ultraviolet light 112, a set of reflective elements, and a target wafer 110. The reflective elements include a condenser 104, a EUV reflective mask 106, an optical reduction assembly 108, a mask blank, a mirror, or a combination thereof.

[0021] The extreme ultraviolet light source 102 generates the extreme ultraviolet light 112. The extreme ultraviolet light 112 is electromagnetic radiation having a wavelength in a range of 5 to 50 nanometers (nm). For example, the extreme ultraviolet light source 102 includes a laser, a laser produced plasma, a discharge produced plasma, a free-electron laser, synchrotron radiation, or a combination thereof.

[0022] The extreme ultraviolet light source 102 generates the extreme ultraviolet light 112 having a variety of characteristics. The extreme ultraviolet light source 102 produces broadband extreme ultraviolet radiation over a range of wavelengths. For example, the extreme ultraviolet light source 102 generates the extreme ultraviolet light 112 having wavelengths ranging from 5 to 50 nm. In one or more embodiments, the extreme ultraviolet light source 102 produces the extreme ultraviolet light 112 having a narrow bandwidth. For example, the extreme ultraviolet light source 102

generates the extreme ultraviolet light 112 at 13.5 nm. The center of the wavelength peak is 13.5 nm.

[0023] The condenser 104 is an optical unit for reflecting and focusing the extreme ultraviolet light 112. The condenser 104 reflects and concentrates the extreme ultraviolet light 112 from the extreme ultraviolet light source 102 to illuminate the EUV reflective mask 106.

[0024] Although the condenser 104 is shown as a single element, it is understood that the condenser 104 in some embodiments includes one or more reflective elements such as concave mirrors, convex mirrors, flat mirrors, or a combination thereof, for reflecting and concentrating the extreme ultraviolet light 112. For example, the condenser 104 in some embodiments is a single concave mirror or an optical assembly having convex, concave, and flat optical elements.

[0025] The EUV reflective mask 106 is an extreme ultraviolet reflective element having a mask pattern 114. The EUV reflective mask 106 creates a lithographic pattern to form a circuitry layout to be formed on the target wafer 110. The EUV reflective mask 106 reflects the extreme ultraviolet light 112. The mask pattern 114 defines a portion of the circuitry layout.

[0026] The optical reduction assembly 108 is an optical unit for reducing the image of the mask pattern 114. The reflection of the extreme ultraviolet light 112 from the EUV reflective mask 106 is reduced by the optical reduction assembly 108 and reflected on to the target wafer 110. The optical reduction assembly 108 in some embodiments includes mirrors and other optical elements to reduce the size of the image of the mask pattern 114. For example, the optical reduction assembly 108 in some embodiments includes concave mirrors for reflecting and focusing the extreme ultraviolet light 112.

[0027] The optical reduction assembly 108 reduces the size of the image of the mask pattern 114 on the target wafer 110. For example, the mask pattern 114 in some embodiments is imaged at a 4:1 ratio by the optical reduction assembly 108 on the target wafer 110 to form the circuitry represented by the mask pattern 114 on the target wafer 110. The extreme ultraviolet light 112 in some embodiments scans the EUV reflective mask 106 synchronously with the target wafer 110 to form the mask pattern 114 on the target wafer 110.

[0028] Referring now to FIG. 3, an embodiment of an extreme ultraviolet reflective element production system 200 is shown. The extreme ultraviolet reflective element includes a EUV mask blank 204, an extreme ultraviolet mirror 205, or other reflective element such as an EUV reflective mask 106.

5 **[0029]** The extreme ultraviolet reflective element production system 200 in some embodiments produces mask blanks, mirrors, or other elements that reflect the extreme ultraviolet light 112 of FIG. 2. The extreme ultraviolet reflective element production system 200 fabricates the reflective elements by applying thin coatings to source substrates 203.

10 **[0030]** The EUV mask blank 204 is a multilayered structure for forming the EUV reflective mask 106 of FIG. 2. The EUV mask blank 204 in some embodiments is formed using semiconductor fabrication techniques. The EUV reflective mask 106 in some embodiments has the mask pattern 114 of FIG. 2 formed on the EUV mask blank 204 by etching and other processes.

15 **[0031]** The extreme ultraviolet mirror 205 is a multilayered structure reflective in a range of extreme ultraviolet light 112. The extreme ultraviolet mirror 205 in some embodiments is formed using semiconductor fabrication techniques. The EUV mask blank 204 and the extreme ultraviolet mirror 205 in some embodiments are similar structures with respect to the layers formed on each element, however, the extreme
20 ultraviolet mirror 205 does not have the mask pattern 114.

[0032] The reflective elements are efficient reflectors of the extreme ultraviolet light 112. In an embodiment, the EUV mask blank 204 and the extreme ultraviolet mirror 205 has an extreme ultraviolet reflectivity of greater than 60%. The reflective elements are efficient if they reflect more than 60% of the extreme ultraviolet light 112.

25 **[0033]** The extreme ultraviolet reflective element production system 200 includes a wafer loading and carrier handling system 202 into which the source substrates 203 are loaded and from which the reflective elements are unloaded. An atmospheric handling system 206 provides access to a wafer handling vacuum chamber 208. The wafer loading and carrier handling system 202 in some embodiments includes
30 substrate transport boxes, loadlocks, and other components to transfer a substrate from atmosphere to vacuum inside the system. Because the EUV mask blank 204 is used to form devices at a very small scale, the source substrates 203 and the EUV

mask blank 204 are processed in a vacuum system to prevent contamination and other defects.

[0034] The wafer handling vacuum chamber 208 in some embodiments contains two vacuum chambers, a first vacuum chamber 210 and a second vacuum chamber 212. The first vacuum chamber 210 includes a first wafer handling system 214 and the second vacuum chamber 212 includes a second wafer handling system 216. Although the wafer handling vacuum chamber 208 is described with two vacuum chambers, it is understood that the system in some embodiments has any number of vacuum chambers.

[0035] The wafer handling vacuum chamber 208 in some embodiments has a plurality of ports around its periphery for attachment of various other systems. The first vacuum chamber 210 has a degas system 218, a first physical vapor deposition system 220, a second physical vapor deposition system 222, and a pre-clean system 224. The degas system 218 is for thermally desorbing moisture from the substrates. The pre-clean system 224 is for cleaning the surfaces of the wafers, mask blanks, mirrors, or other optical components.

[0036] The physical vapor deposition systems, such as the first physical vapor deposition system 220 and the second physical vapor deposition system 222, in some embodiments are used to form thin films of conductive materials on the source substrates 203. For example, the physical vapor deposition systems in some embodiments includes vacuum deposition system such as magnetron sputtering systems, ion sputtering systems, pulsed laser deposition, cathode arc deposition, or a combination thereof. The physical vapor deposition systems, such as the magnetron sputtering system, form thin layers on the source substrates 203 including the layers of silicon, metals, alloys, compounds, or a combination thereof.

[0037] The physical vapor deposition system forms reflective layers, capping layers, and absorber layers. For example, the physical vapor deposition systems in some embodiments forms layers of silicon, molybdenum, ruthenium, tantalum, antimony, titanium oxide, titanium dioxide, ruthenium oxide, niobium oxide, iridium, iridium oxide, ruthenium tungsten, ruthenium molybdenum, ruthenium niobium, chromium, platinum, iron, copper, boron, nickel, bismuth, tellurium, hafnium, tantalum, nitrides, compounds, or a combination thereof. Although some compounds are

described as an oxide, it is understood that the compounds in some embodiments include oxides, dioxides, atomic mixtures having oxygen (O) atoms, or a combination thereof.

[0038] The second vacuum chamber 212 has a first multi-cathode source 226, a chemical vapor deposition system 228, a cure chamber 230, and an ultra-smooth deposition chamber 232 connected to it. For example, the chemical vapor deposition system 228 in some embodiments includes a flowable chemical vapor deposition system (FCVD), a plasma assisted chemical vapor deposition system (CVD), an aerosol assisted CVD system, a hot filament CVD system, or a similar system. In another example, the chemical vapor deposition system 228, the cure chamber 230, and the ultra-smooth deposition chamber 232 in some embodiments are in a separate system from the extreme ultraviolet reflective element production system 200.

[0039] The chemical vapor deposition system 228 in some embodiments forms thin films of material on the source substrates 203. For example, the chemical vapor deposition system 228 in some embodiments is used to form layers of materials on the source substrates 203 including mono-crystalline layers, polycrystalline layers, amorphous layers, epitaxial layers, or a combination thereof. The chemical vapor deposition system 228 in some embodiments forms layers of silicon, silicon oxides, silicon oxycarbide, tantalum, tellurium, antimony, platinum, iridium, hafnium, iron, copper, boron, nickel, tungsten, bismuth silicon carbide, silicon nitride, titanium nitride, metals, alloys, and other materials suitable for chemical vapor deposition. For example, the chemical vapor deposition system 228 in some embodiments forms planarization layers.

[0040] The first wafer handling system 214 is capable of moving the source substrates 203 between the atmospheric handling system 206 and the various systems around the periphery of the first vacuum chamber 210 in a continuous vacuum. The second wafer handling system 216 is capable of moving the source substrates 203 around the second vacuum chamber 212 while maintaining the source substrates 203 in a continuous vacuum. The extreme ultraviolet reflective element production system 200 in some embodiments transfers the source substrates 203 and the EUV mask blank 204 between the first wafer handling system 214, the second wafer handling system 216 in a continuous vacuum.

[0041] Referring now to FIG. 4, an embodiment of an extreme ultraviolet reflective element 302 is shown. In one or more embodiments, the extreme ultraviolet reflective element 302 is the EUV mask blank 204 of FIG. 3 or the extreme ultraviolet mirror 205 of FIG. 3. The EUV mask blank 204 and the extreme ultraviolet mirror 205 are structures for reflecting the extreme ultraviolet light 112 of FIG. 2. The EUV mask blank 204 in some embodiments is used to form the EUV reflective mask 106 shown in FIG. 2.

[0042] The extreme ultraviolet reflective element 302 includes a substrate 304, a multilayer stack 306 of reflective layers, and a capping layer 308. In one or more embodiments, the extreme ultraviolet mirror 205 is used to form reflecting structures for use in the condenser 104 of FIG. 2 or the optical reduction assembly 108 of FIG. 2.

[0043] The extreme ultraviolet reflective element 302, which in some embodiments is a EUV mask blank 204, includes the substrate 304, the multilayer stack 306 of reflective layers, the capping layer 308, and an absorber layer 310. The extreme ultraviolet reflective element 302 in some embodiments is a EUV mask blank 204, which is used to form the EUV reflective mask 106 of FIG. 2 by patterning the absorber layer 310 with the layout of the circuitry required.

[0044] In the following sections, the term for the EUV mask blank 204 is used interchangeably with the term of the extreme ultraviolet mirror 205 for simplicity. In one or more embodiments, the EUV mask blank 204 includes the components of the extreme ultraviolet mirror 205 with the absorber layer 310 added in addition to form the mask pattern 114 of FIG. 2.

[0045] The EUV mask blank 204 is an optically flat structure used for forming the EUV reflective mask 106 having the mask pattern 114. In one or more embodiments, the reflective surface of the EUV mask blank 204 forms a flat focal plane for reflecting the incident light, such as the extreme ultraviolet light 112 of FIG. 2.

[0046] The substrate 304 is an element for providing structural support to the extreme ultraviolet reflective element 302. In one or more embodiments, the substrate 304 is made from a material having a low coefficient of thermal expansion (CTE) to provide stability during temperature changes. In one or more embodiments, the substrate 304 has properties such as stability against mechanical cycling, thermal cycling, crystal formation, or a combination thereof. The substrate 304 according to

one or more embodiments is formed from a material such as silicon (Si), glass, oxides, ceramics, glass ceramics, or a combination thereof.

5 [0047] The multilayer stack 306 is a structure that is reflective to the extreme ultraviolet light 112. The multilayer stack 306 includes alternating reflective layers of a first reflective layer 312 and a second reflective layer 314.

[0048] The first reflective layer 312 and the second reflective layer 314 form a reflective pair 316 of FIG. 4. In a non-limiting embodiment, the multilayer stack 306 includes a range of 20-60 of the reflective pairs 316 for a total of up to 120 reflective layers.

10 [0049] The first reflective layer 312 and the second reflective layer 314 in some embodiments are formed from a variety of materials. In an embodiment, the first reflective layer 312 and the second reflective layer 314 are formed from silicon (Si) and molybdenum (Mo), respectively. Although the layers are shown as silicon (Si) and molybdenum (Mo), it is understood that the alternating layers in some embodiments
15 are formed from other materials or have other internal structures.

[0050] The first reflective layer 312 and the second reflective layer 314 in some embodiments have a variety of structures. In an embodiment, both the first reflective layer 312 and the second reflective layer 314 are formed with a single layer, multiple layers, a divided layer structure, non-uniform structures, or a combination thereof.

20 [0051] Because most materials absorb light at extreme ultraviolet wavelengths, the optical elements used are reflective instead of the transmissive as used in other lithography systems. The multilayer stack 306 forms a reflective structure by having alternating thin layers of materials with different optical properties to create a Bragg reflector or mirror.

25 [0052] In an embodiment, each of the alternating layers has dissimilar optical constants for the extreme ultraviolet light 112. The alternating layers provide a resonant reflectivity when the period of the thickness of the alternating layers is one half the wavelength of the extreme ultraviolet light 112. In an embodiment, for the extreme ultraviolet light 112 at a wavelength of 13 nm, the alternating layers are about
30 6.5 nm thick. It is understood that the sizes and dimensions provided are within normal engineering tolerances for typical elements.

[0053] The multilayer stack 306 in some embodiments is formed in a variety of ways. In an embodiment, the first reflective layer 312 and the second reflective layer 314 are formed with magnetron sputtering, ion sputtering systems, pulsed laser deposition, cathode arc deposition, or a combination thereof.

5 **[0054]** In an illustrative embodiment, the multilayer stack 306 is formed using a physical vapor deposition technique, such as magnetron sputtering. In an embodiment, the first reflective layer 312 and the second reflective layer 314 of the multilayer stack 306 have the characteristics of being formed by the magnetron sputtering technique including precise thickness, low roughness, and clean interfaces
10 between the layers. In an embodiment, the first reflective layer 312 and the second reflective layer 314 of the multilayer stack 306 have the characteristics of being formed by the physical vapor deposition including precise thickness, low roughness, and clean interfaces between the layers.

[0055] The physical dimensions of the layers of the multilayer stack 306 formed
15 using the physical vapor deposition technique in some embodiments are precisely controlled to increase reflectivity. In an embodiment, the first reflective layer 312, such as a layer of silicon (Si), has a thickness of 4.1 nm. The second reflective layer 314, such as a layer of molybdenum (Mo), has a thickness of 2.8 nm. The thickness of the layers dictates the peak reflectivity wavelength of the extreme ultraviolet reflective
20 element. If the thickness of the layers is incorrect, the reflectivity at the desired wavelength 13.5 nm in some embodiments is reduced.

[0056] In an embodiment, the multilayer stack 306 has a reflectivity of greater than 60%. In an embodiment, the multilayer stack 306 formed using physical vapor deposition has a reflectivity in a range of 66%-67%. In one or more embodiments,
25 forming the capping layer 308 over the multilayer stack 306 formed with harder materials improves reflectivity. In some embodiments, reflectivity greater than 70% is achieved using low roughness layers, clean interfaces between layers, improved layer materials, or a combination thereof.

[0057] In one or more embodiments, the capping layer 308 is a protective layer
30 allowing the transmission of the extreme ultraviolet light 112. In an embodiment, the capping layer 308 is formed directly on the multilayer stack 306. In one or more embodiments, the capping layer 308 protects the multilayer stack 306 from

contaminants and mechanical damage. In one embodiment, the multilayer stack 306 is sensitive to contamination by oxygen (O), tantalum (Ta), hydrotantalums, or a combination thereof. The capping layer 308 according to an embodiment interacts with the contaminants to neutralize them.

- 5 **[0058]** In one or more embodiments, the capping layer 308 is an optically uniform structure that is transparent to the extreme ultraviolet light 112. The extreme ultraviolet light 112 passes through the capping layer 308 to reflect off of the multilayer stack 306. In one or more embodiments, the capping layer 308 has a total reflectivity loss of 1% to 2%. In one or more embodiments, each of the different materials has a
10 different reflectivity loss depending on thickness, but all of them will be in a range of 1% to 2%.

- [0059]** In one or more embodiments, the capping layer 308 has a smooth surface. For example, the surface of the capping layer 308 in some embodiments has a roughness of less than 0.2 nm RMS (root mean square measure). In another
15 example, the surface of the capping layer 308 has a roughness of 0.08 nm RMS for a length in a range of 1/100 nm and 1/1 μ m. The RMS roughness will vary depending on the range it is measured over. For the specific range of 100 nm to 1 micron that roughness is 0.08 nm or less. Over a larger range the roughness will be higher.

- [0060]** The capping layer 308 in some embodiments is formed in a variety of
20 methods. In an embodiment, the capping layer 308 is formed on or directly on the multilayer stack 306 with magnetron sputtering, ion sputtering systems, ion beam deposition, electron beam evaporation, radio frequency (RF) sputtering, atomic layer deposition (ALD), pulsed laser deposition, cathode arc deposition, or a combination thereof. In one or more embodiments, the capping layer 308 has the physical
25 characteristics of being formed by the magnetron sputtering technique including precise thickness, low roughness, and clean interfaces between the layers. In an embodiment, the capping layer 308 has the physical characteristics of being formed by the physical vapor deposition including precise thickness, low roughness, and clean interfaces between the layers.

- 30 **[0061]** In one or more embodiments, the capping layer 308 is formed from a variety of materials having a hardness sufficient to resist erosion during cleaning. In one embodiment, ruthenium (Ru) is used as a capping layer material because it is a good

etch stop and is relatively inert under the operating conditions. However, it is understood that other materials in some embodiments are used to form the capping layer 308. In specific embodiments, the capping layer 308 has a thickness in a range of 2.5 and 5.0 nm.

5 **[0062]** In one or more embodiments, the absorber layer 310 is a layer that absorbs the extreme ultraviolet light 112. In an embodiment, the absorber layer 310 is used to form the pattern on the EUV reflective mask 106 by providing areas that do not reflect the extreme ultraviolet light 112. The absorber layer 310, according to one or more
10 embodiments, comprises a material having a high absorption coefficient for a particular frequency of the extreme ultraviolet light 112, such as about 13.5 nm. In an embodiment, the absorber layer 310 is formed directly on the capping layer 308, and the absorber layer 310 is etched using a photolithography process to form the pattern of the EUV reflective mask 106.

15 **[0063]** According to one or more embodiments, the extreme ultraviolet reflective element 302, such as the extreme ultraviolet mirror 205, is formed with the substrate 304, the multilayer stack 306, and the capping layer 308. The extreme ultraviolet mirror 205 has an optically flat surface and in some embodiments efficiently and uniformly reflects the extreme ultraviolet light 112.

20 **[0064]** According to one or more embodiments, the extreme ultraviolet reflective element 302, such as the EUV mask blank 204, is formed with the substrate 304, the multilayer stack 306, the capping layer 308, and the absorber layer 310. The mask blank 204 has an optically flat surface and in some embodiments efficiently and uniformly reflects the extreme ultraviolet light 112. In an embodiment, the mask pattern 114 is formed with the absorber layer 310 of the EUV mask blank 204.

25 **[0065]** According to one or more embodiments, forming the absorber layer 310 over the capping layer 308 increases reliability of the EUV reflective mask 106. The capping layer 308 acts as an etch stop layer for the absorber layer 310. When the mask pattern 114 of FIG. 2 is etched into the absorber layer 310, the capping layer 308 beneath the absorber layer 310 stops the etching action to protect the multilayer
30 stack 306. In one or more embodiments, the absorber layer 310 is etch selective to the capping layer 308. In some embodiments, the capping layer 308 comprises ruthenium (Ru), and the absorber layer 310 is etch selective to ruthenium (Ru).

[0066] In an embodiment, the absorber layer 310 comprises an alloy of ruthenium (Ru) and silicon (Si); an alloy of tantalum (Ta) and platinum (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo). In some embodiments the absorber has a thickness of less than about 100 nm. In some embodiments, the absorber layer has a thickness of less than about 65 nm, including less than about 60 nm, less than about 55 nm, less than about 50 nm, less than about 45 nm, less than about 40 nm, or less than about 35 nm. In other embodiments, the absorber layer 310 has a thickness in a range of from about 0.5 nm to about 100 nm, from about 0.5 nm to about 85 nm, from about 0.5 nm to about 75 nm, from about 0.5 nm to about 65 nm, including a range of from about 1 nm to about 100 nm, from about 1 nm to about 90 nm, from about 1 nm to about 80 nm, from about 1 nm to about 70 nm, from about 1 nm to about 60 nm, 1 nm to about 55 nm, and 15 nm to about 50 nm.

[0067] Simulated testing of absorbers comprising an alloy selected from an alloy of ruthenium (Ru) and silicon (Si); an alloy of tantalum (Ta) and platinum (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo) showed better lithography performance compared to a tantalum nitride (Ta₃N₅) absorber. The alloy absorbers described herein showed better Depth of Focus (DOF), Normalized Image Log-Slope (NILS) and Telecentricity error (TCE) compared to a Ta₃N₅ absorber. In one or more embodiments, the alloy absorbers described herein showed phase shift of π to 1.3π with thinner thickness than traditional EUV absorber materials such as Ta₃N₅.

[0068] In one or more embodiments, the absorber layer comprises an alloy of ruthenium (Ru) and silicon (Si), and the alloy comprises from about 78.3 wt.% to about 98.6 wt.% ruthenium (Ru) and from about 1.4 wt.% to about 21.7 wt.% silicon (Si) based upon the total weight of the alloy. In one or more embodiments, the alloy comprises from about 68.3 wt.% to about 88.6 wt.% ruthenium (Ru) and from about 11.4 wt.% to about 31.7 wt.% silicon (Si) based upon the total weight of the alloy. In one or more embodiments, the alloy comprises from about 58.3 wt.% to about 78.6 wt.% ruthenium (Ru) and from about 21.4 wt.% to about 41.7 wt.% silicon (Si) based upon the total weight of the alloy. In one or more embodiments, the alloy of ruthenium (Ru) and silicon (Si) is a single-phase alloy.

[0069] In one or more embodiments, the alloy of tantalum (Ta) and platinum (Pt) comprises from about 9.3 wt.% to about 89.3 wt.% tantalum (Ta) and from about 10.7

wt.% to about 90.7 wt.% platinum (Pt) based upon the total weight of the alloy. In one or more embodiments, the alloy of tantalum (Ta) and platinum (Pt) comprises from about 19.3 wt.% to about 79.3 wt.% tantalum (Ta) and from about 20.7 wt.% to about 80.7 wt.% platinum (Pt) based upon the total weight of the alloy. In one or more
5 embodiments, the alloy of tantalum (Ta) and platinum (Pt) comprises from about 29.3 wt.% to about 69.3 wt.% tantalum (Ta) and from about 30.7 wt.% to about 70.7 wt.% platinum (Pt) based upon the total weight of the alloy. In one or more embodiments, the alloy of tantalum (Ta) and platinum (Pt) is a single-phase alloy.

[0070] In one or more embodiments, the absorber layer comprises an alloy of
10 ruthenium (Ru) and molybdenum (Mo), and the alloy comprises from about 10.5 wt.% to about 90.4 wt.% ruthenium (Ru) and from about 9.6 wt.% to about 89.5 wt.% molybdenum (Mo). In one or more embodiments, the alloy comprises from about 20.5 wt.% to about 80.4 wt.% ruthenium (Ru) and from about 19.6 wt.% to about 79.5 wt.% molybdenum (Mo) based upon the total weight of the alloy. In one or more
15 embodiments, the alloy comprises from about 30.5 wt.% to about 70.4 wt.% ruthenium (Ru) and from about 29.6 wt.% to about 69.5 wt.% molybdenum (Mo) based upon the total weight of the alloy. In one or more embodiments, the alloy of ruthenium (Ru) and molybdenum (Mo) is a single-phase alloy.

[0071] In one or more embodiments, the alloy of ruthenium (Ru) and silicon (Si),
20 the alloy of tantalum (Ta) and platinum (Pt) or the alloy of ruthenium (Ru) and molybdenum (Mo) comprises a dopant. The dopant may be selected from one or more of nitrogen (N) or oxygen (O). In an embodiment, the dopant comprises oxygen (O). In an alternative embodiment, the dopant comprises nitrogen (N). In an embodiment, the dopant is present in the alloy in an amount in the range of about 0.1
25 wt.% to about 5 wt.%, based on the weight of the alloy. In other embodiments, the dopant is present in the alloy in an amount of about 0.1 wt.%, 0.2 wt.%, 0.3 wt.%, 0.4 wt.%, 0.5 wt.%, 0.6 wt.%, 0.7 wt.%, 0.8 wt.%, 0.9 wt. %, 1.0 wt.%, 1.1 wt.%, 1.2 wt.%, 1.3 wt.%, 1.4 wt.%, 1.5 wt.%, 1.6 wt.%, 1.7 wt.%. 1.8 wt.%, 1.9 wt. %, 2.0 wt.% 2.1 wt.%, 2.2 wt.%, 2.3 wt.%, 2.4 wt.%, 2.5 wt.%, 2.6 wt.%, 2.7 wt.%. 2.8 wt.%, 2.9 wt. %, 3.0 wt.%, 3.1 wt.%, 3.2 wt.%, 3.3 wt.%, 3.4 wt.%, 3.5 wt.%, 3.6 wt.%, 3.7 wt.%. 3.8 wt.%, 3.9 wt. %, 4.0 wt.%, 4.1 wt.%, 4.2 wt.%, 4.3 wt.%, 4.4 wt.%, 4.5 wt.%, 4.6 wt.%,
30 4.7 wt.%. 4.8 wt.%, 4.9 wt. %, or 5.0 wt.%.

[0072] In one or more embodiments, the alloy of the absorber layer is a co-sputtered alloy absorber material formed in a physical deposition chamber using multiple targets comprising each of the metal components of the alloy, which in some embodiments provides much thinner absorber layer thickness (e.g., less than 100 nm, less than 90 nm, less than 80 nm, less than 70 nm, less than 60 nm, less than 50 nm, less than 40 nm or less than 30 nm) while achieving less than 2% reflectivity and suitable etch properties. In one or more embodiments, the alloy of the absorber layer is co-sputtered with gases selected from one or more of argon (Ar), oxygen (O₂), or nitrogen (N₂). In an embodiment, the alloy of the absorber layer in some embodiments is co-sputtered by a mixture of argon and oxygen gases (Ar + O₂). In some embodiments, co-sputtering in a mixture of argon and oxygen gases (Ar + O₂) forms an oxide of ruthenium (Ru) and/or an oxide of silicon (Si) for an alloy of ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, an oxide of tantalum (Ta) and/or an oxide of platinum (Pt), or for an alloy of ruthenium (Ru) and molybdenum (Mo), an oxide of ruthenium (Ru) and/or an oxide of molybdenum (Mo). In other embodiments, co-sputtering by a mixture of argon and oxygen gases (Ar + O₂) does not form an oxide of one or more the components of each of the alloys disclosed herein. In an embodiment, the alloy of the absorber layer in some embodiments is co-sputtered in a mixture of argon and nitrogen gases (Ar + N₂). In some embodiments, co-sputtering in a mixture of argon and nitrogen gases (Ar + N₂) forms a nitride of ruthenium (Ru) and/or a nitride of silicon (Si) for an alloy of ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, a nitride of tantalum (Ta) and/or a nitride of platinum (Pt), or for an alloy of ruthenium (Ru) and molybdenum (Mo), a nitride of ruthenium (Ru) and/or a nitride of molybdenum (Mo). In other embodiments, co-sputtering in a mixture of argon and nitrogen gases (Ar + N₂) does not form a nitride of one or more of the components of the alloys disclosed herein. In an embodiment, the alloy of the absorber layer in some embodiments is co-sputtered in a mixture of argon and oxygen and nitrogen gases (Ar + O₂ + N₂). In some embodiments, co-sputtering in a mixture of argon and oxygen and nitrogen gases (Ar + O₂ + N₂) forms an oxide and/or nitride of ruthenium (Ru) and/or an oxide and/or nitride of silicon (Si) for an alloy of ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, an oxide and/or nitride of tantalum (Ta) and/or

an oxide and/or nitride of platinum (Pt), or for an alloy of ruthenium (Ru) and molybdenum (Mo), an oxide and/or nitride of ruthenium (Ru) and/or an oxide and/or nitride of molybdenum (Mo). In other embodiments, co-sputtering in a mixture of argon and oxygen and nitrogen gases ($\text{Ar} + \text{O}_2 + \text{N}_2$) does not form an oxide or a nitride of one or more of the components of the alloys described herein. In an embodiment, the etch properties and/or other properties of the absorber layer in some embodiments is tailored to specification by controlling the alloy percentage(s), as discussed above. In an embodiment, the alloy percentage(s) in some embodiments is precisely controlled by operating parameters such voltage, pressure, flow, etc., of the physical vapor deposition chamber. In an embodiment, a process gas is used to further modify the material properties, for example, N_2 gas is used to form nitrides of one or more components of the alloy of ruthenium (Ru) and silicon (Si), the alloy of tantalum (Ta) and platinum (Pt), or the alloy of ruthenium (Ru) and molybdenum (Mo).

[0073] In one or more embodiments, as used herein "co-sputtering" means that at least two targets, a first target comprising ruthenium (Ru) and a second target comprising silicon (Si) for an alloy of ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, a first target comprising tantalum (Ta) and a second target comprising platinum (Pt), or for a ruthenium (Ru) and molybdenum (Mo) alloy, a first target comprised of ruthenium (Ru) and a second target comprised of molybdenum (Mo) are sputtered at the same time using one or more gas selected from argon (Ar), oxygen (O_2), or nitrogen (N_2) to deposit/form an absorber layer selected from an alloy of ruthenium (Ru) and silicon (Si); an alloy of tantalum (Ta) and platinum (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo).

[0074] In other embodiments, the alloy of ruthenium (Ru) and silicon (Si), the alloy of tantalum (Ta) and platinum (Pt) or the alloy of ruthenium (Ru) and molybdenum (Mo) is deposited layer by layer as a laminate of ruthenium (Ru) and silicon (Si) layers, a laminate of tantalum (Ta) and platinum (Pt) layers or a laminate of ruthenium (Ru) and molybdenum (Mo) layers using gases selected from one or more of argon (Ar), oxygen (O_2), or nitrogen (N_2). In an embodiment, the alloy of the absorber layer in some embodiments is deposited layer by layer as a laminate of ruthenium (Ru) and silicon (Si) layers, a laminate of tantalum (Ta) and platinum (Pt) layers or a laminate of ruthenium (Ru) and molybdenum (Mo) layers using a mixture of argon and oxygen

gases (Ar + O₂). In some embodiments, layer by layer deposition using a mixture of argon and oxygen gases (Ar + O₂) forms an oxide of ruthenium (Ru) and/or an oxide of silicon (Si) for an alloy of ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, an oxide of tantalum (Ta) and/or an oxide of platinum (Pt), or for an alloy of ruthenium (Ru) and molybdenum (Mo), an oxide of ruthenium (Ru) and/or an oxide of molybdenum (Mo). In other embodiments, layer by layer deposition using a mixture of argon and oxygen gases (Ar + O₂) does not form an oxide of the metals that make up these laminates. In an embodiment, the alloy of the absorber layer in some embodiments is deposited layer by layer as a laminate of ruthenium (Ru) and silicon (Si) layer for an alloy of ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, tantalum (Ta) and platinum (Pt) layers, or for an alloy of ruthenium (Ru) and molybdenum (Mo), ruthenium (Ru) and molybdenum (Mo) layers using a mixture of argon and nitrogen gases (Ar + N₂). In some embodiments, layer by layer deposition using a mixture of argon and nitrogen gases (Ar + N₂) forms a nitride of ruthenium (Ru) and/or a nitride of silicon (Si) for an alloy of ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, a nitride of tantalum (Ta) and/or a nitride of platinum (Pt), or for an alloy of ruthenium (Ru) and molybdenum (Mo), a nitride of ruthenium (Ru) and/or a nitride of molybdenum (Mo). In other embodiments, layer by layer deposition using a mixture of argon and nitrogen gases (Ar + N₂) does not form a nitride of the metals that make up each of these laminates. In an embodiment, the alloy of the absorber layer in some embodiments is deposited layer by layer as a laminate of ruthenium (Ru) and silicon (Si) layer for an alloy of ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, tantalum (Ta) and platinum (Pt) layers, or for an alloy of ruthenium (Ru) and molybdenum (Mo), ruthenium (Ru) and molybdenum (Mo) layers using a mixture of argon and oxygen and nitrogen gases (Ar + O₂ + N₂). In some embodiments, layer by layer depositing using a mixture of argon and oxygen and nitrogen gases (Ar + O₂ + N₂) forms an oxide and/or nitride of ruthenium (Ru) and/or an oxide and/or nitride of silicon (Si) for an alloy of ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, an oxide and/or a nitride of tantalum (Ta) and/or an oxide and/or nitride of platinum (Pt), or for an alloy of ruthenium (Ru) and molybdenum (Mo), an oxide and/or a nitride of ruthenium (Ru) and/or an oxide and/or a nitride of molybdenum (Mo). In

other embodiments, layer by layer deposition using a mixture of argon and oxygen and nitrogen gases ($\text{Ar} + \text{O}_2 + \text{N}_2$) does not form an oxide or a nitride of one or more components of these laminates.

[0075] In one or more embodiments, bulk targets of the alloy compositions
5 described herein may be made by normal sputtering using gases selected from one or more of argon (Ar), oxygen (O_2), or nitrogen (N_2). In one or more embodiments, the alloy is deposited using a bulk target having the same composition of the alloy and is sputtered using a gas selected from one or more of argon (Ar), oxygen (O_2), or nitrogen (N_2) to form the absorber layer. In an embodiment, the alloy of the absorber
10 layer in some embodiments is deposited using a bulk target having the same composition of the alloy and is sputtered using a mixture of argon and oxygen gases ($\text{Ar} + \text{O}_2$). In some embodiments, bulk target deposition using a mixture of argon and oxygen gases ($\text{Ar} + \text{O}_2$) forms an oxide of ruthenium (Ru) and/or an oxide of silicon (Si) for an alloy of ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, an oxide of tantalum (Ta) and/or an oxide of platinum (Pt), or for an alloy of
15 ruthenium (Ru) and molybdenum (Mo), an oxide of ruthenium (Ru) and/or an oxide of molybdenum (Mo). In other embodiments, bulk target deposition using a mixture of argon and oxygen gases ($\text{Ar} + \text{O}_2$) does not form an oxide of each of the metals of these laminates. In an embodiment, the alloy of the absorber layer in some
20 embodiments is deposited using a bulk target having the same composition of the alloy and is sputtered using a mixture of argon and nitrogen gases ($\text{Ar} + \text{N}_2$). In some embodiments, bulk target deposition using a mixture of argon and nitrogen gases ($\text{Ar} + \text{N}_2$) forms a nitride of ruthenium (Ru) and/or a nitride of silicon (Si) for an alloy of ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, a nitride
25 of tantalum (Ta) and/or a nitride of platinum (Pt), or for an alloy of ruthenium (Ru) and molybdenum (Mo), a nitride of ruthenium (Ru) and/or a nitride of molybdenum (Mo). In other embodiments, bulk target deposition using a mixture of argon and nitrogen gases ($\text{Ar} + \text{N}_2$) does not form a nitride of one or more of the components of the alloys. In an embodiment, the alloy of the absorber layer in some embodiments is
30 deposited using a bulk target having the same composition of the alloy and is sputtered using a mixture of argon and oxygen and nitrogen gases ($\text{Ar} + \text{O}_2 + \text{N}_2$). In some embodiments, bulk target depositing using a mixture of argon and oxygen and

nitrogen gases ($\text{Ar} + \text{O}_2 + \text{N}_2$) forms an oxide and/or nitride of ruthenium (Ru) and/or an oxide and/or nitride of silicon (Si) for an alloy of ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, an oxide and/or nitride of tantalum (Ta) and/or an oxide and/or nitride of platinum (Pt), or for an alloy of ruthenium (Ru) and molybdenum (Mo), an oxide and/or nitride of ruthenium (Ru), and/or an oxide and/or nitride of molybdenum (Mo). In other embodiments, bulk target deposition using a mixture of argon and oxygen and nitrogen gases ($\text{Ar} + \text{O}_2 + \text{N}_2$) does not form an oxide or a nitride of one or more components of the alloy. In some embodiments, the alloy of ruthenium (Ru) and silicon (Si), the alloy of tantalum (Ta) and platinum (Pt), or the alloy of ruthenium (Ru) and molybdenum (Mo) is doped with one or more of nitrogen (N) or oxygen (O) in a range of from 0.1 wt.% to 5 wt.%.

[0076] The EUV mask blank in some embodiments is made in a physical deposition chamber having a first cathode comprising a first absorber material, a second cathode comprising a second absorber material, a third cathode comprising a third absorber material, a fourth cathode comprising a fourth absorber material, and a fifth cathode comprising a fifth absorber material, wherein the first absorber material, second absorber material, third absorber material, fourth absorber material and fifth absorber materials are different from each other, and each of the absorber materials have an extinction coefficient that is different from the other materials, and each of the absorber materials have an index of refraction that is different from the other absorber materials.

[0077] Referring now to FIG. 5, an extreme ultraviolet mask blank 400 is shown as comprising a substrate 414, a multilayer stack of reflective layers 412 on the substrate 414, the multilayer stack of reflective layers 412 including a plurality of reflective layer pairs. In one or more embodiments, the plurality of reflective layer pairs are made from a material selected from a molybdenum (Mo) containing material and silicon (Si) containing material. In some embodiments, the plurality of reflective layer pairs comprises alternating layers of molybdenum (Mo) and silicon (Si). The extreme ultraviolet mask blank 400 further includes a capping layer 422 on the multilayer stack of reflective layers 412, and there is a multilayer stack 420 of absorber layers on the capping layer 422. In one or more embodiment, the plurality of reflective layers 412

are selected from a molybdenum (Mo) containing material and a silicon (Si) containing material and the capping layer 422 comprises ruthenium (Ru).

[0078] The multilayer stack 420 of absorber layers including a plurality of absorber layer pairs 420a, 420b, 420c, 420d, 420e, 420f, each pair (420a/420b, 420c/420d, 5 420e/420f) selected from an alloy of ruthenium (Ru) and silicon (Si). In some 420a/420b/420c and 420d/420e/420f each comprises an alloy of tantalum (Ta) and platinum (Pt). In some 420a/420b/420c and 420d/420e/420f each comprises an alloy of ruthenium (Ru) and molybdenum (Mo).

[0079] In one example, absorber layer 420a is made from ruthenium (Ru) and the 10 material that forms absorber layer 420b is silicon (Si). Likewise, absorber layer 420c is made from ruthenium (Ru) and the material that forms absorber layer 420d is silicon (Si), and absorber layer 420e is made from ruthenium (Ru) material and the material that forms absorber layer 420f is silicon (Si). In another example, absorber layer 420a 15 is made from tantalum (Ta) and the material that forms absorber layer 420b is platinum (Pt). Likewise, absorber layer 420c is made from tantalum (Ta) and the material that forms absorber layer 420d is platinum (Pt), and absorber layer 420e is made from tantalum (Ta) and the material that forms absorber layer 420f is platinum (Pt). In another example, absorber layer 420a is made from ruthenium (Ru) and the material that forms absorber layer 420b is molybdenum (Mo). Likewise, absorber layer 20 420c is made from ruthenium (Ru) material and the material that forms absorber layer 420d is molybdenum (Mo), and absorber layer 420e is made from ruthenium (Ru) and the material that forms absorber layer 420f is molybdenum (Mo).

[0080] In an embodiment, the absorber layer 310 is made from an alloy selected from an alloy of ruthenium (Ru) and silicon (Si); an alloy of tantalum (Ta) and platinum 25 (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo). In one or more embodiments, the absorber layer comprises an alloy of ruthenium (Ru) and silicon (Si), and the alloy comprises from about 78.3 wt.% to about 98.6 wt.% ruthenium (Ru) and from about 1.4 wt.% to about 21.7 wt.% silicon (Si) based upon the total weight of the alloy. In one or more embodiments, the alloy comprises from about 68.3 wt.% to 30 about 88.6 wt.% ruthenium (Ru) and from about 11.4 wt.% to about 31.7 wt.% silicon (Si) based upon the total weight of the alloy. In one or more embodiments, the alloy comprises from about 58.3 wt.% to about 78.6 wt.% ruthenium (Ru) and from about

21.4 wt.% to about 41.7 wt.% silicon (Si) based upon the total weight of the alloy. In one or more embodiments, the alloy of ruthenium (Ru) and silicon (Si) is a single-phase alloy.

[0081] In one or more embodiments, the alloy of tantalum (Ta) and platinum (Pt) comprises from about 9.3 wt.% to about 89.3 wt.% tantalum (Ta) and from about 10.7 wt.% to about 90.7 wt.% platinum (Pt) based upon the total weight of the alloy. In one or more embodiments, the alloy of tantalum (Ta) and platinum (Pt) comprises from about 19.3 wt.% to about 79.3 wt.% tantalum (Ta) and from about 20.7 wt.% to about 80.7 wt.% platinum based upon the total weight of the alloy. In one or more
5
10
embodiments, the alloy of tantalum (Ta) and platinum (Pt) comprises from about 29.3 wt.% to about 69.3 wt.% tantalum (Ta) and from about 30.7 wt.% to about 70.7 wt.% platinum (Pt) based upon the total weight of the alloy. In one or more embodiments, the alloy of tantalum (Ta) and platinum (Pt) is a single-phase alloy.

[0082] In one or more embodiments, the absorber layer comprises an alloy of ruthenium (Ru) and molybdenum (Mo), and the alloy comprises from about 10.5 wt.% to about 90.4 wt.% ruthenium (Ru) and from about 9.6 wt.% to about 89.5 wt.% molybdenum (Mo). In one or more embodiments, the alloy comprises from about 20.5 wt.% to about 80.4 wt.% ruthenium (Ru) and from about 19.6 wt.% to about 79.5 wt.% molybdenum (Mo) based upon the total weight of the alloy. In one or more
15
20
embodiments, the alloy comprises from about 30.5 wt.% to about 70.4 wt.% ruthenium (Ru) and from about 29.6 wt.% to about 69.5 wt.% molybdenum (Mo) based upon the total weight of the alloy. In one or more embodiments, the alloy of ruthenium (Ru) and molybdenum (Mo) is a single-phase alloy.

[0083] According to one or more embodiments, the absorber layer pairs comprise a first layer (420a, 420c, 420e) and a second absorber layer (420b, 420d, 420f) each of the first absorber layers (420a, 420c, 420e) and second absorber layer (420b, 420d, 420f) have a thickness in a range of 0.1 nm and 10 nm, for example in a range of 1 nm and 5 nm, or in a range of 1 nm and 3 nm. In one or more specific
25
embodiments, the thickness of the first layer 420a is 0.5 nm, 0.6 nm, 0.7 nm, 0.8 nm, 0.9 nm, 1 nm, 1.1 nm, 1.2 nm, 1.3 nm, 1.4 nm, 1.5 nm, 1.6 nm, 1.7 nm, 1.8 nm, 1.9 nm, 2 nm, 2.1 nm, 2.2 nm, 2.3 nm, 2.4 nm, 2.5 nm, 2.6 nm, 2.7 nm, 2.8 nm, 2.9 nm, 3 nm, 3.1 nm, 3.2 nm, 3.3 nm, 3.4 nm, 3.5 nm, 3.6 nm, 3.7 nm, 3.8 nm, 3.9 nm, 4 nm,
30

- 4.1 nm, 4.2 nm, 4.3 nm, 4.4 nm, 4.5 nm, 4.6 nm, 4.7 nm, 4.8 nm, 4.9 nm, and 5 nm. In one or more embodiments, the thickness of the first absorber layer and second absorber layer of each pair is the same or different. For example, the first absorber layer and second absorber layer have a thickness such that there is a ratio of the first absorber layer thickness to second absorber layer thickness of 1:1, 1.5:1, 2:1, 2.5:1, 3:1, 3.5:1, 4:1, 4.5:1, 5:1, 6:1, 7:1, 8:1, 9:1, 10:1, 11:1, 12:1, 13:1, 14:1, 15:1, 16:1, 17:1, 18:1, 19:1, or 20:1, which results in the first absorber layer having a thickness that is equal to or greater than the second absorber layer thickness in each pair. Alternatively, the first absorber layer and second absorber layer have a thickness such that there is a ratio of the second absorber layer thickness to first absorber layer thickness of 1.5:1, 2:1, 2.5:1, 3:1, 3.5:1, 4:1, 4.5:1, 5:1, 6:1, 7:1, 8:1, 9:1, 10:1, 11:1, 12:1, 13:1, 14:1, 15:1, 16:1, 17:1, 18:1, 19:1, or 20:1 which results in the second absorber layer having a thickness that is equal to or greater than the first absorber layer thickness in each pair.
- [0084]** According to one or more embodiments, the different absorber materials and thickness of the absorber layers are selected so that extreme ultraviolet light is absorbed due to absorbance and due to a phase change caused by destructive interference with light from the multilayer stack of reflective layers. While the embodiment shown in FIG. 5 shows three absorber layer pairs, 420a/420b, 420c/420d and 420e/420f, the claims should not be limited to a particular number of absorber layer pairs. According to one or more embodiments, the EUV mask blank 400 in some embodiments includes in a range of 5 and 60 absorber layer pairs or in a range of 10 and 40 absorber layer pairs.
- [0085]** According to one or more embodiments, the absorber layers have a thickness which provides less than 2% reflectivity and other etch properties. A supply gas in some embodiments is used to further modify the material properties of the absorber layers, for example, nitrogen (N₂) gas in some embodiments is used to form nitrides of the materials provided above. The multilayer stack of absorber layers according to one or more embodiments is a repetitive pattern of individual thickness of different materials so that the EUV light not only gets absorbed due to absorbance but by the phase change caused by multilayer absorber stack, which will destructively

interfere with light from multilayer stack of reflective materials beneath to provide better contrast.

[0086] Another aspect of the disclosure pertains to a method of manufacturing an extreme ultraviolet (EUV) mask blank comprising forming on a substrate a multilayer stack of reflective layers on the substrate, the multilayer stack including a plurality of reflective layer pairs, forming a capping layer on the multilayer stack of reflective layers, and forming absorber layer on the capping layer, the absorber layer selected from the group consisting of an alloy selected from an alloy of ruthenium (Ru) and silicon (Si); an alloy of tantalum (Ta) and platinum (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo).

[0087] The EUV mask blank in some embodiments has any of the characteristics of the embodiments described above with respect to FIG. 4 and FIG. 5, and the method in some embodiments is performed in the system described with respect to FIG. 3.

[0088] Thus, in an embodiment, the plurality of reflective layers are selected from molybdenum (Mo) containing material and silicon (Si) containing material and the absorber layer is an alloy selected from an alloy of ruthenium (Ru) and silicon (Si); an alloy of tantalum (Ta) and platinum (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo).

[0089] In another specific method embodiment, the different absorber layers are formed in a physical deposition chamber having a first cathode comprising a first absorber material and a second cathode comprising a second absorber material. Referring now to FIG. 6 an upper portion of a multi-cathode chamber 500 is shown in accordance with an embodiment. The multi-cathode chamber 500 includes a base structure 501 with a cylindrical body portion 502 capped by a top adapter 504. The top adapter 504 has provisions for a number of cathode sources, such as cathode sources 506, 508, 510, 512, and 514, positioned around the top adapter 504.

[0090] In one or more embodiments, the method forms an absorber layer that has a thickness in a range of 5 nm and 60 nm. In one or more embodiments, the absorber layer has a thickness in a range of 51 nm and 57 nm. In one or more embodiments, the materials used to form the absorber layer are selected to effect etch properties of the absorber layer. In one or more embodiments, the alloy of the absorber layer is

formed by co-sputtering an alloy absorber material formed in a physical deposition chamber, which in some embodiments provides much thinner absorber layer thickness than a TaN absorber layer and achieving less than 2% reflectivity and desired etch properties. In an embodiment, the etch properties and other desired

5 properties of the absorber layer in some embodiments are tailored to specification by controlling the alloy percentage of each absorber material. In an embodiment, the alloy percentage in some embodiments is precisely controlled by operating parameters such voltage, pressure, flow etc., of the physical vapor deposition chamber. In an embodiment, a process gas is used to further modify the material

10 properties, for example, nitrogen (N₂) gas is used to form nitrides of ruthenium (Ru) and/or nitrides of silicon (Si) for an alloy ruthenium (Ru) and silicon (Si), or for a tantalum (Ta) and platinum (Pt) alloy, nitrides of tantalum (Ta) and/or nitrides of platinum (Pt), or for an alloy of ruthenium (Ru) and molybdenum (Mo), nitrides of ruthenium (Ru) and/or nitrides of molybdenum (Mo).

15 **[0091]** The multi-cathode source chamber 500 in some embodiments is part of the system shown in FIG. 3. In an embodiment, an extreme ultraviolet (EUV) mask blank production system comprises a substrate handling vacuum chamber for creating a vacuum, a substrate handling platform, in the vacuum, for transporting a substrate loaded in the substrate handling vacuum chamber, and multiple sub-chambers,

20 accessed by the substrate handling platform, for forming an EUV mask blank, including a multilayer stack of reflective layers on the substrate, the multilayer stack including a plurality of reflective layer pairs, a capping layer on the multilayer stack of reflective layers, and an absorber layer on the capping layer, the absorber layer made from an alloy selected from an alloy of ruthenium (Ru) and silicon (Si); an alloy of

25 tantalum (Ta) and platinum (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo). The system in some embodiments is used to make the EUV mask blanks shown with respect to FIG. 4 or FIG. 5 and have any of the properties described with respect to the EUV mask blanks described with respect to FIG. 4 or FIG. 5 above.

[0092] Processes may generally be stored in the memory as a software routine

30 that, when executed by the processor, causes the process chamber to perform processes of the present disclosure. The software routine may also be stored and/or executed by a second processor (not shown) that is remotely located from the

hardware being controlled by the processor. Some or all of the method of the present disclosure may also be performed in hardware. As such, the process may be implemented in software and executed using a computer system, in hardware as, e.g., an application specific integrated circuit or other type of hardware implementation, or
5 as a combination of software and hardware. The software routine, when executed by the processor, transforms a general purpose computer into a specific purpose computer (controller) that controls the chamber operation such that the processes are performed.

[0093] Reference throughout this specification to "one embodiment," "certain
10 embodiments," "one or more embodiments" or "an embodiment" means that a particular feature, structure, material, or characteristic described in connection with the embodiment is included in at least one embodiment of the disclosure. Thus, the appearances of the phrases such as "in one or more embodiments," "in certain
15 embodiments," "in one embodiment" or "in an embodiment" in various places throughout this specification are not necessarily referring to the same embodiment of the disclosure. Furthermore, the particular features, structures, materials, or characteristics may be combined in any suitable manner in one or more embodiments.

[0094] Although the disclosure herein has been described with reference to particular embodiments, it is to be understood that these embodiments are merely
20 illustrative of the principles and applications of the present disclosure. It will be apparent to those skilled in the art that various modifications and variations can be made to the method and apparatus of the present disclosure without departing from the spirit and scope of the disclosure. Thus, it is intended that the present disclosure include modifications and variations that are within the scope of the appended claims
25 and their equivalents.

What is claimed is:

1. A method of manufacturing an extreme ultraviolet (EUV) mask blank comprising:
 - 5 forming on a substrate a multilayer stack which reflects EUV radiation, the multilayer stack comprising a plurality of reflective layer pairs;
 - forming a capping layer on the multilayer stack; and
 - forming an absorber layer on the capping layer, the absorber layer selected from the group consisting of an alloy selected from an alloy of
10 ruthenium (Ru) and silicon (Si); an alloy of tantalum (Ta) and platinum (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo).
2. The method of claim 1, wherein the absorber layer comprises an alloy of ruthenium (Ru) and silicon (Si), and the alloy comprises from about 78.3 wt.%
15 to about 98.6 wt.% ruthenium (Ru) and from about 1.4 wt.% to about 21.7 wt.% silicon (Si).
3. The method of claim 1, wherein the absorber layer comprises an alloy of tantalum (Ta) and platinum (Pt), and the alloy comprises from about 9.3 wt.% to
20 about 89.3 wt.% tantalum (Ta) and from about 10.7 wt.% to about 90.7 wt.% platinum (Pt).
4. The method of claim 1, wherein the absorber layer comprises an alloy of ruthenium (Ru) and molybdenum (Mo), and the alloy comprises from about
25 10.5 wt.% to about 90.4 wt.% ruthenium (Ru) and from about 9.6 wt.% to about 89.5 wt.% molybdenum (Mo).
5. The method of claim 1, wherein the alloy is amorphous.
- 30 6. The method of claim 2, wherein the alloy is formed by co-sputtering separate ruthenium (Ru) and silicon (Si) targets with a gas selected from one or more of argon (Ar), oxygen (O₂), or nitrogen (N₂) to form the absorber layer.

7. The method of claim 3, wherein the alloy is formed by co-sputtering separate tantalum (Ta) and platinum (Pt) targets with a gas selected from one or more of argon (Ar), oxygen (O₂), or nitrogen (N₂) to form the absorber layer.
- 5 8. The method of claim 4, wherein the alloy is formed by co-sputtering separate ruthenium (Ru) and molybdenum (Mo) targets with a gas selected from one or more of argon (Ar), oxygen (O₂), or nitrogen (N₂) to form the absorber layer.
- 10 9. The method of claim 1, wherein the alloy is deposited layer by layer as a laminate of alternate layers selected from the group consisting of ruthenium (Ru) and silicon (Si) layers, tantalum (Ta) and platinum (Pt) layers, and ruthenium (Ru) and molybdenum (Mo) layers using a gas selected from one or more of argon (Ar), oxygen (O₂), or nitrogen (N₂) to form the absorber layer.
- 15 10. The method of claim 1, wherein the alloy is deposited using a bulk target having a same composition as the alloy and is sputtered using a gas selected from one or more of argon (Ar), oxygen (O₂), or nitrogen (N₂) to form the absorber layer.
- 20 11. The method of claim 10, wherein the alloy is doped with one of more of nitrogen (N) or oxygen (O) in a range of from 0.1 wt.% to 5 wt.%.
12. An extreme ultraviolet (EUV) mask blank comprising:
- 25 a substrate;
- a multilayer stack which reflects EUV radiation, the multilayer stack comprising a plurality of reflective layer pairs;
- a capping layer on the multilayer stack of reflecting layers; and
- an absorber layer selected from the group consisting of an alloy selected from an alloy selected from an alloy of ruthenium (Ru) and silicon (Si); an alloy of tantalum (Ta) and platinum (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo).
- 30

13. The extreme ultraviolet (EUV) mask blank of claim 12, wherein the absorber layer comprises an alloy of ruthenium (Ru) and silicon (Si), and the alloy comprises from about 78.3 wt.% to about 98.6 wt.% ruthenium (Ru) and from about 1.4 wt.% to about 21.7 wt.% silicon (Si).
- 5
14. The extreme ultraviolet (EUV) mask blank of claim 12, wherein the absorber layer comprises an alloy of tantalum (Ta) and platinum (Pt), and the alloy comprises from about 9.3 wt.% to about 89.3 wt.% tantalum (Ta) and from about 10.7 wt.% to about 90.7 wt.% platinum (Pt).
- 10
15. The extreme ultraviolet (EUV) mask blank of claim 12, wherein the absorber layer comprises an alloy of ruthenium (Ru) and molybdenum (Mo), and the alloy comprises from about 10.5 wt.% to about 90.4 wt.% ruthenium (Ru) and from about 9.6 wt.% to about 89.5 wt.% molybdenum (Mo).
- 15
16. The extreme ultraviolet (EUV) mask blank of claim 12, wherein the alloy is amorphous.
- 20
17. The extreme ultraviolet (EUV) mask blank of claim 12, wherein the absorber layer has a thickness of less than 60 nm.
18. The extreme ultraviolet (EUV) mask blank of claim 12, wherein the absorber layer further comprises a range of from about 0.1 wt.% to about 5 wt.% of a dopant selected from one or more of nitrogen (N) or oxygen (O).
- 25
19. The extreme ultraviolet (EUV) mask blank of claim 18, wherein the absorber layer has a thickness of less than 60 nm.
- 30
20. An extreme ultraviolet (EUV) mask blank comprising:
a substrate;

a multilayer stack which reflects EUV radiation, the multilayer stack comprising a plurality of reflective layer pairs including molybdenum (Mo) and silicon (Si);

a capping layer on the multilayer stack of reflecting layers; and

- 5 an absorber layer selected from the group consisting of an alloy selected from an alloy selected from an alloy of ruthenium (Ru) and silicon (Si); an alloy of tantalum (Ta) and platinum (Pt); and an alloy of ruthenium (Ru) and molybdenum (Mo).

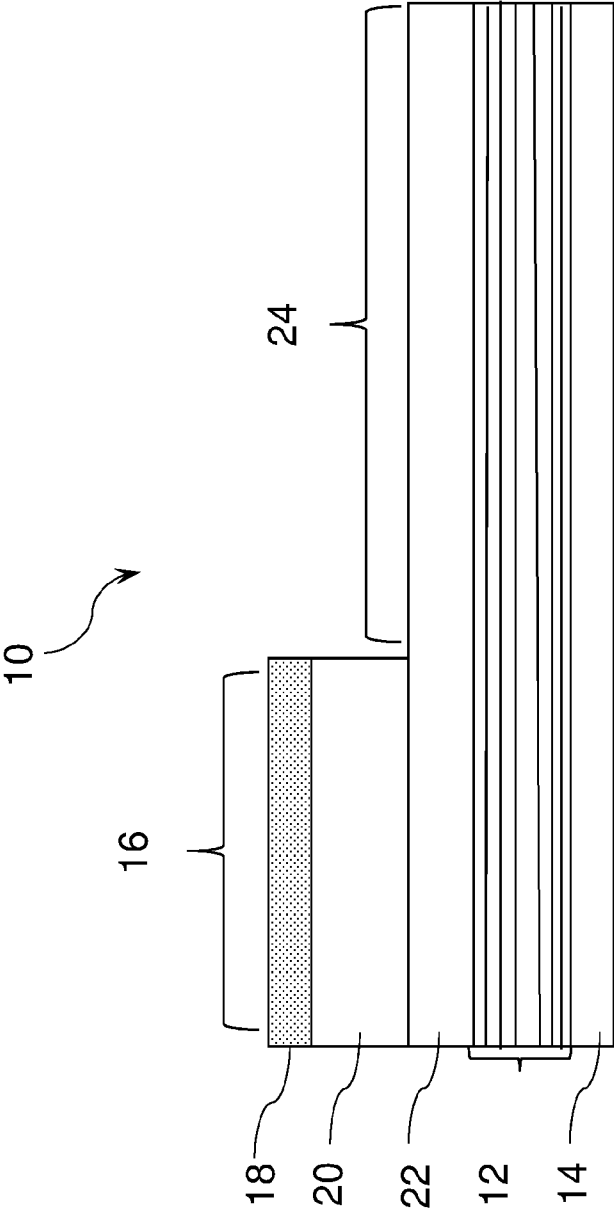


FIG. 1 (Prior Art)

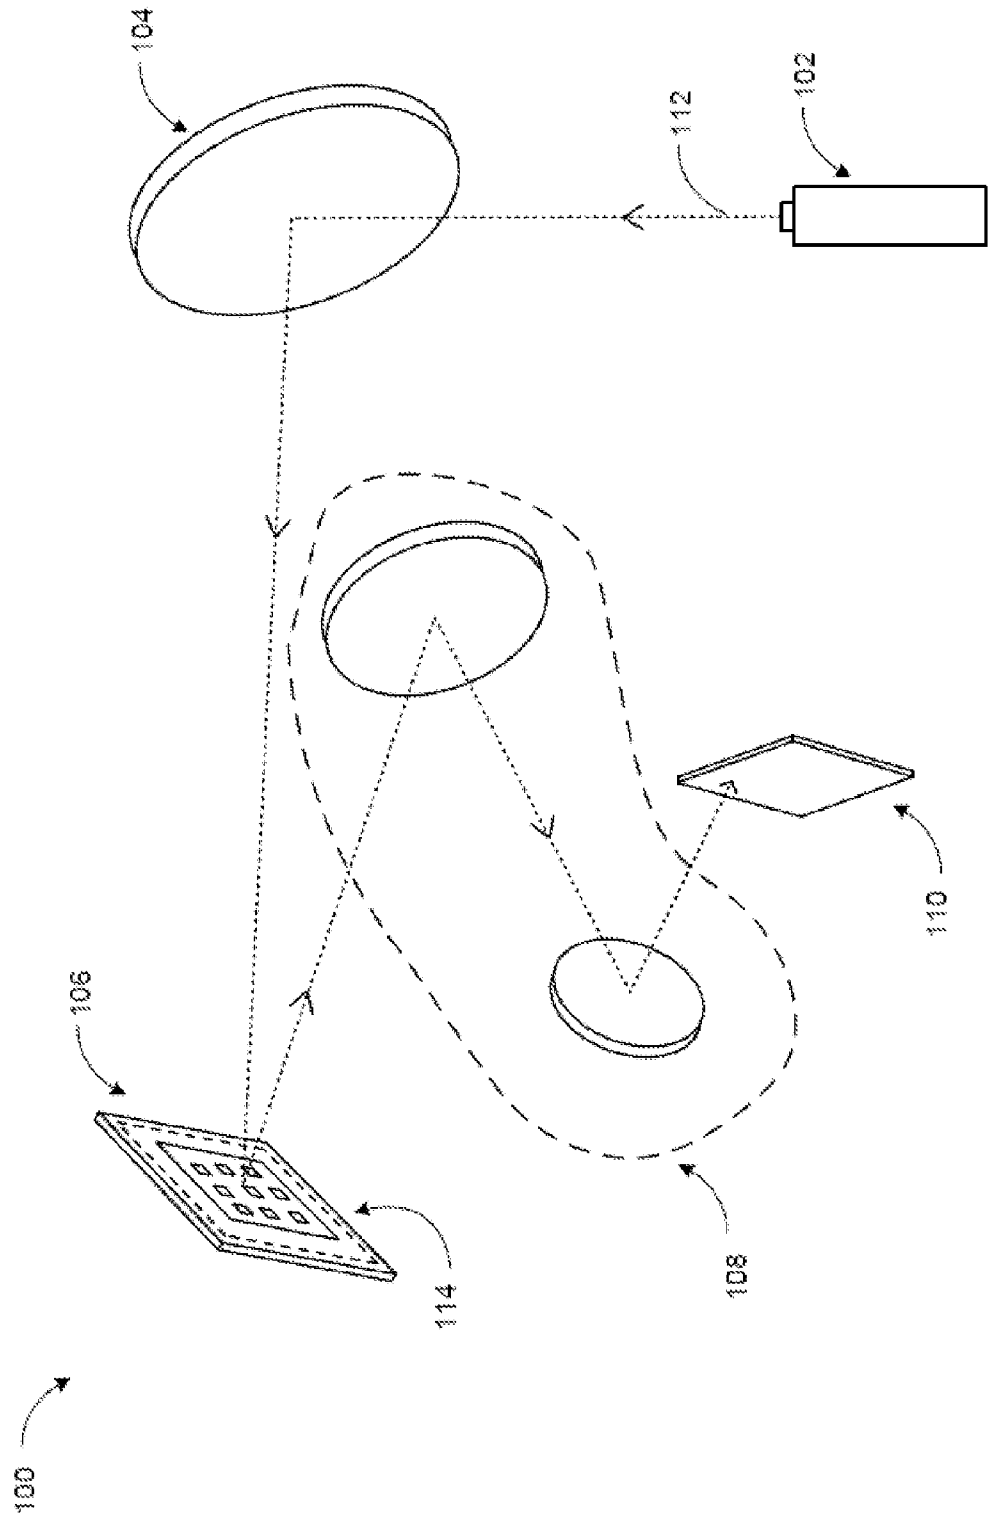


FIG. 2

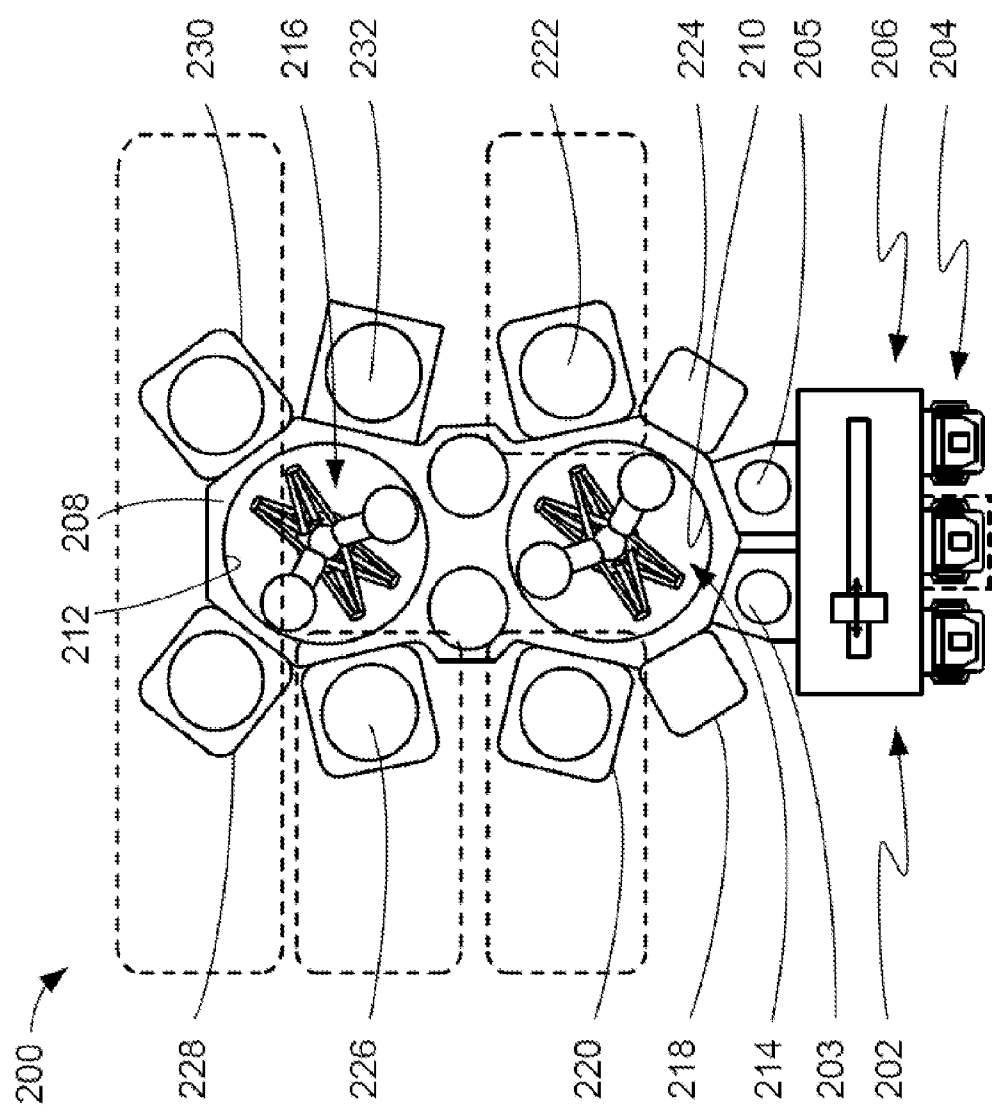


FIG. 3

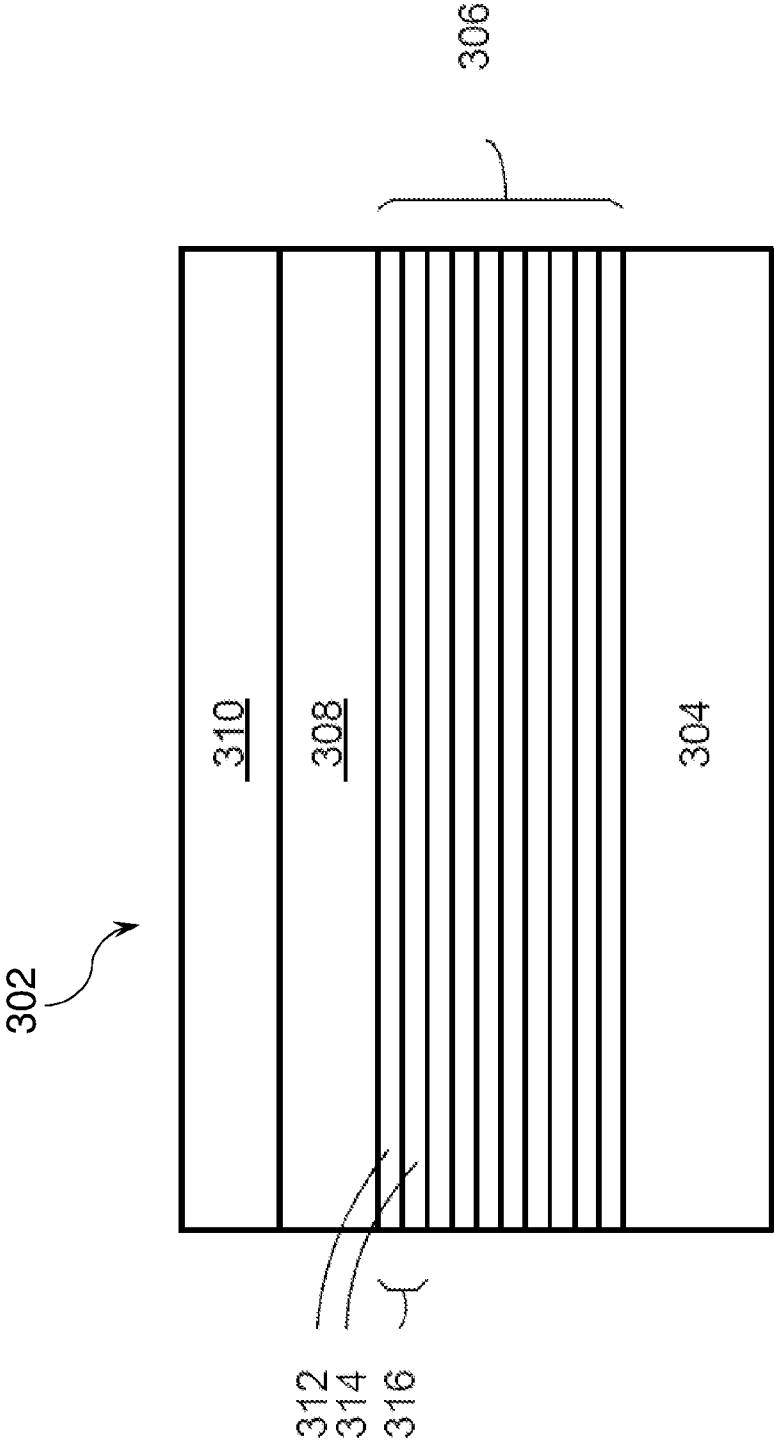


FIG. 4

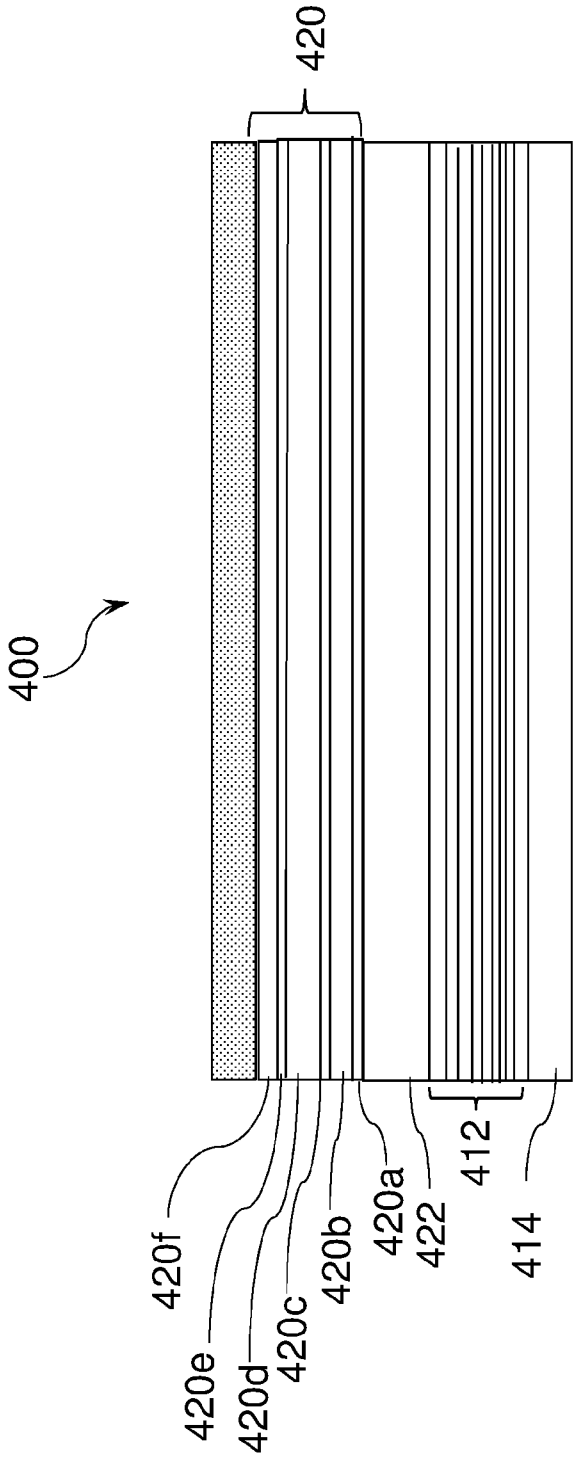


FIG. 5

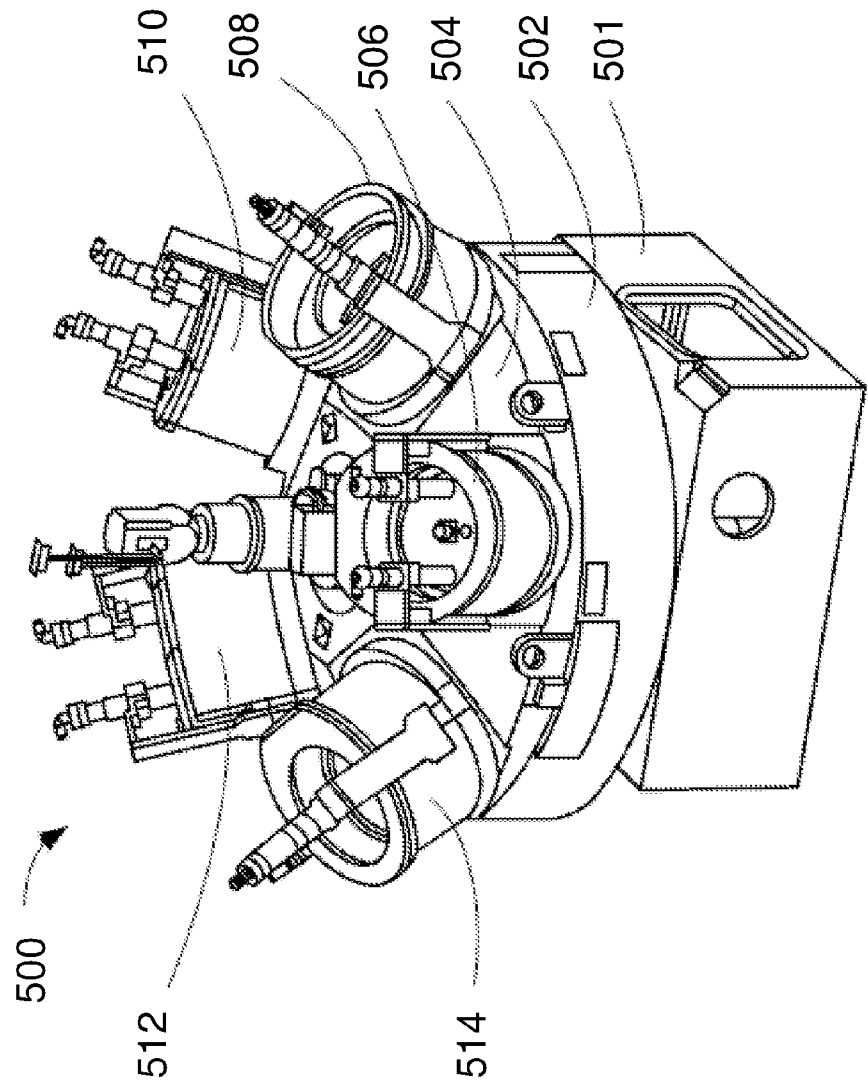


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2022/011544

A. CLASSIFICATION OF SUBJECT MATTER**G03F 1/54**(2012.01)i; **G03F 1/22**(2012.01)i; **C23C 14/14**(2006.01)i; **C23C 14/34**(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G03F 1/54(2012.01); G03F 1/16(2006.01); G03F 1/22(2012.01); G03F 1/50(2012.01); G03F 1/52(2012.01);
G03F 1/58(2012.01); H01L 21/027(2006.01); H01L 21/033(2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models
Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: EUV, mask, reflective layer, absorber layer, ruthenium (Ru), silicon (Si), tantalum (Ta), platinum (Pt), molybdenum (Mo)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	KR 10-2017-0021191 A (S&STECH CO., LTD.) 27 February 2017 (2017-02-27) paragraphs [0031]-[0046], claims 1-7 and figure 3	1,3,7,10-12,14,17-20 2,4-6,8-9,13,15-16
X	KR 10-2016-0002332 A (S&STECH CO., LTD.) 07 January 2016 (2016-01-07) claims 1,4-5	1,3,12,14
X	JP 2007-273678 A (HOYA CORP.) 18 October 2007 (2007-10-18) claim 1	1,12
A	KR 10-2018-0127197 A (S&STECH CO., LTD.) 28 November 2018 (2018-11-28) the entire document	1-20
A	US 2018-0031964 A1 (APPLIED MATERIALS, INC.) 01 February 2018 (2018-02-01) the entire document	1-20

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“D” document cited by the applicant in the international application

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

04 May 2022

Date of mailing of the international search report

04 May 2022

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon
35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

PARK, Hye Lyun

Telephone No. +82-42-481-3463

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2022/011544

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
KR	10-2017-0021191	A	27 February 2017	TW	201725440	A	16 July 2017
				TW	I623805	B	11 May 2018
KR	10-2016-0002332	A	07 January 2016	TW	201600919	A	01 January 2016
				TW	I620977	B	11 April 2018
JP	2007-273678	A	18 October 2007	JP	4926523	B2	09 May 2012
KR	10-2018-0127197	A	28 November 2018	None			
US	2018-0031964	A1	01 February 2018	JP	2019-525240	A	05 September 2019
				SG	11201811396	A	27 February 2019
				TW	201812434	A	01 April 2018
				TW	I730139	B	11 June 2021
				US	10747102	B2	18 August 2020
				US	11022876	B2	01 June 2021
				US	2020-0218145	A1	09 July 2020
				WO	2018-022371	A1	01 February 2018