



(86) Date de dépôt PCT/PCT Filing Date: 2001/02/01
(87) Date publication PCT/PCT Publication Date: 2001/08/16
(45) Date de délivrance/Issue Date: 2008/06/10
(85) Entrée phase nationale/National Entry: 2002/07/12
(86) N° demande PCT/PCT Application No.: IT 2001/000048
(87) N° publication PCT/PCT Publication No.: 2001/058621
(30) Priorité/Priority: 2000/02/10 (ITTO2000A000130)


(51) Cl.Int./Int.Cl. *B22D 19/00* (2006.01),
F02F 1/10 (2006.01), *F02F 1/16* (2006.01)

(72) Inventeurs/Inventors:
FUGANTI, ANTONIO, IT;
MERLO, EZIO, IT;
PLANO, STEFANO, IT;
BARBAN, PAOLO, IT

(73) Propriétaire/Owner:
C.R.F. SOCIETA CONSORTILE PER AZIONI, IT

(74) Agent: MACRAE & CO.

(54) Titre : PROCEDE DE PRODUCTION D'UN BLOC-CYLINDRES POUR UN MOTEUR A COMBUSTION INTERNE
(54) Title: A METHOD FOR PRODUCING A CYLINDER BLOCK FOR AN INTERNAL COMBUSTION ENGINE

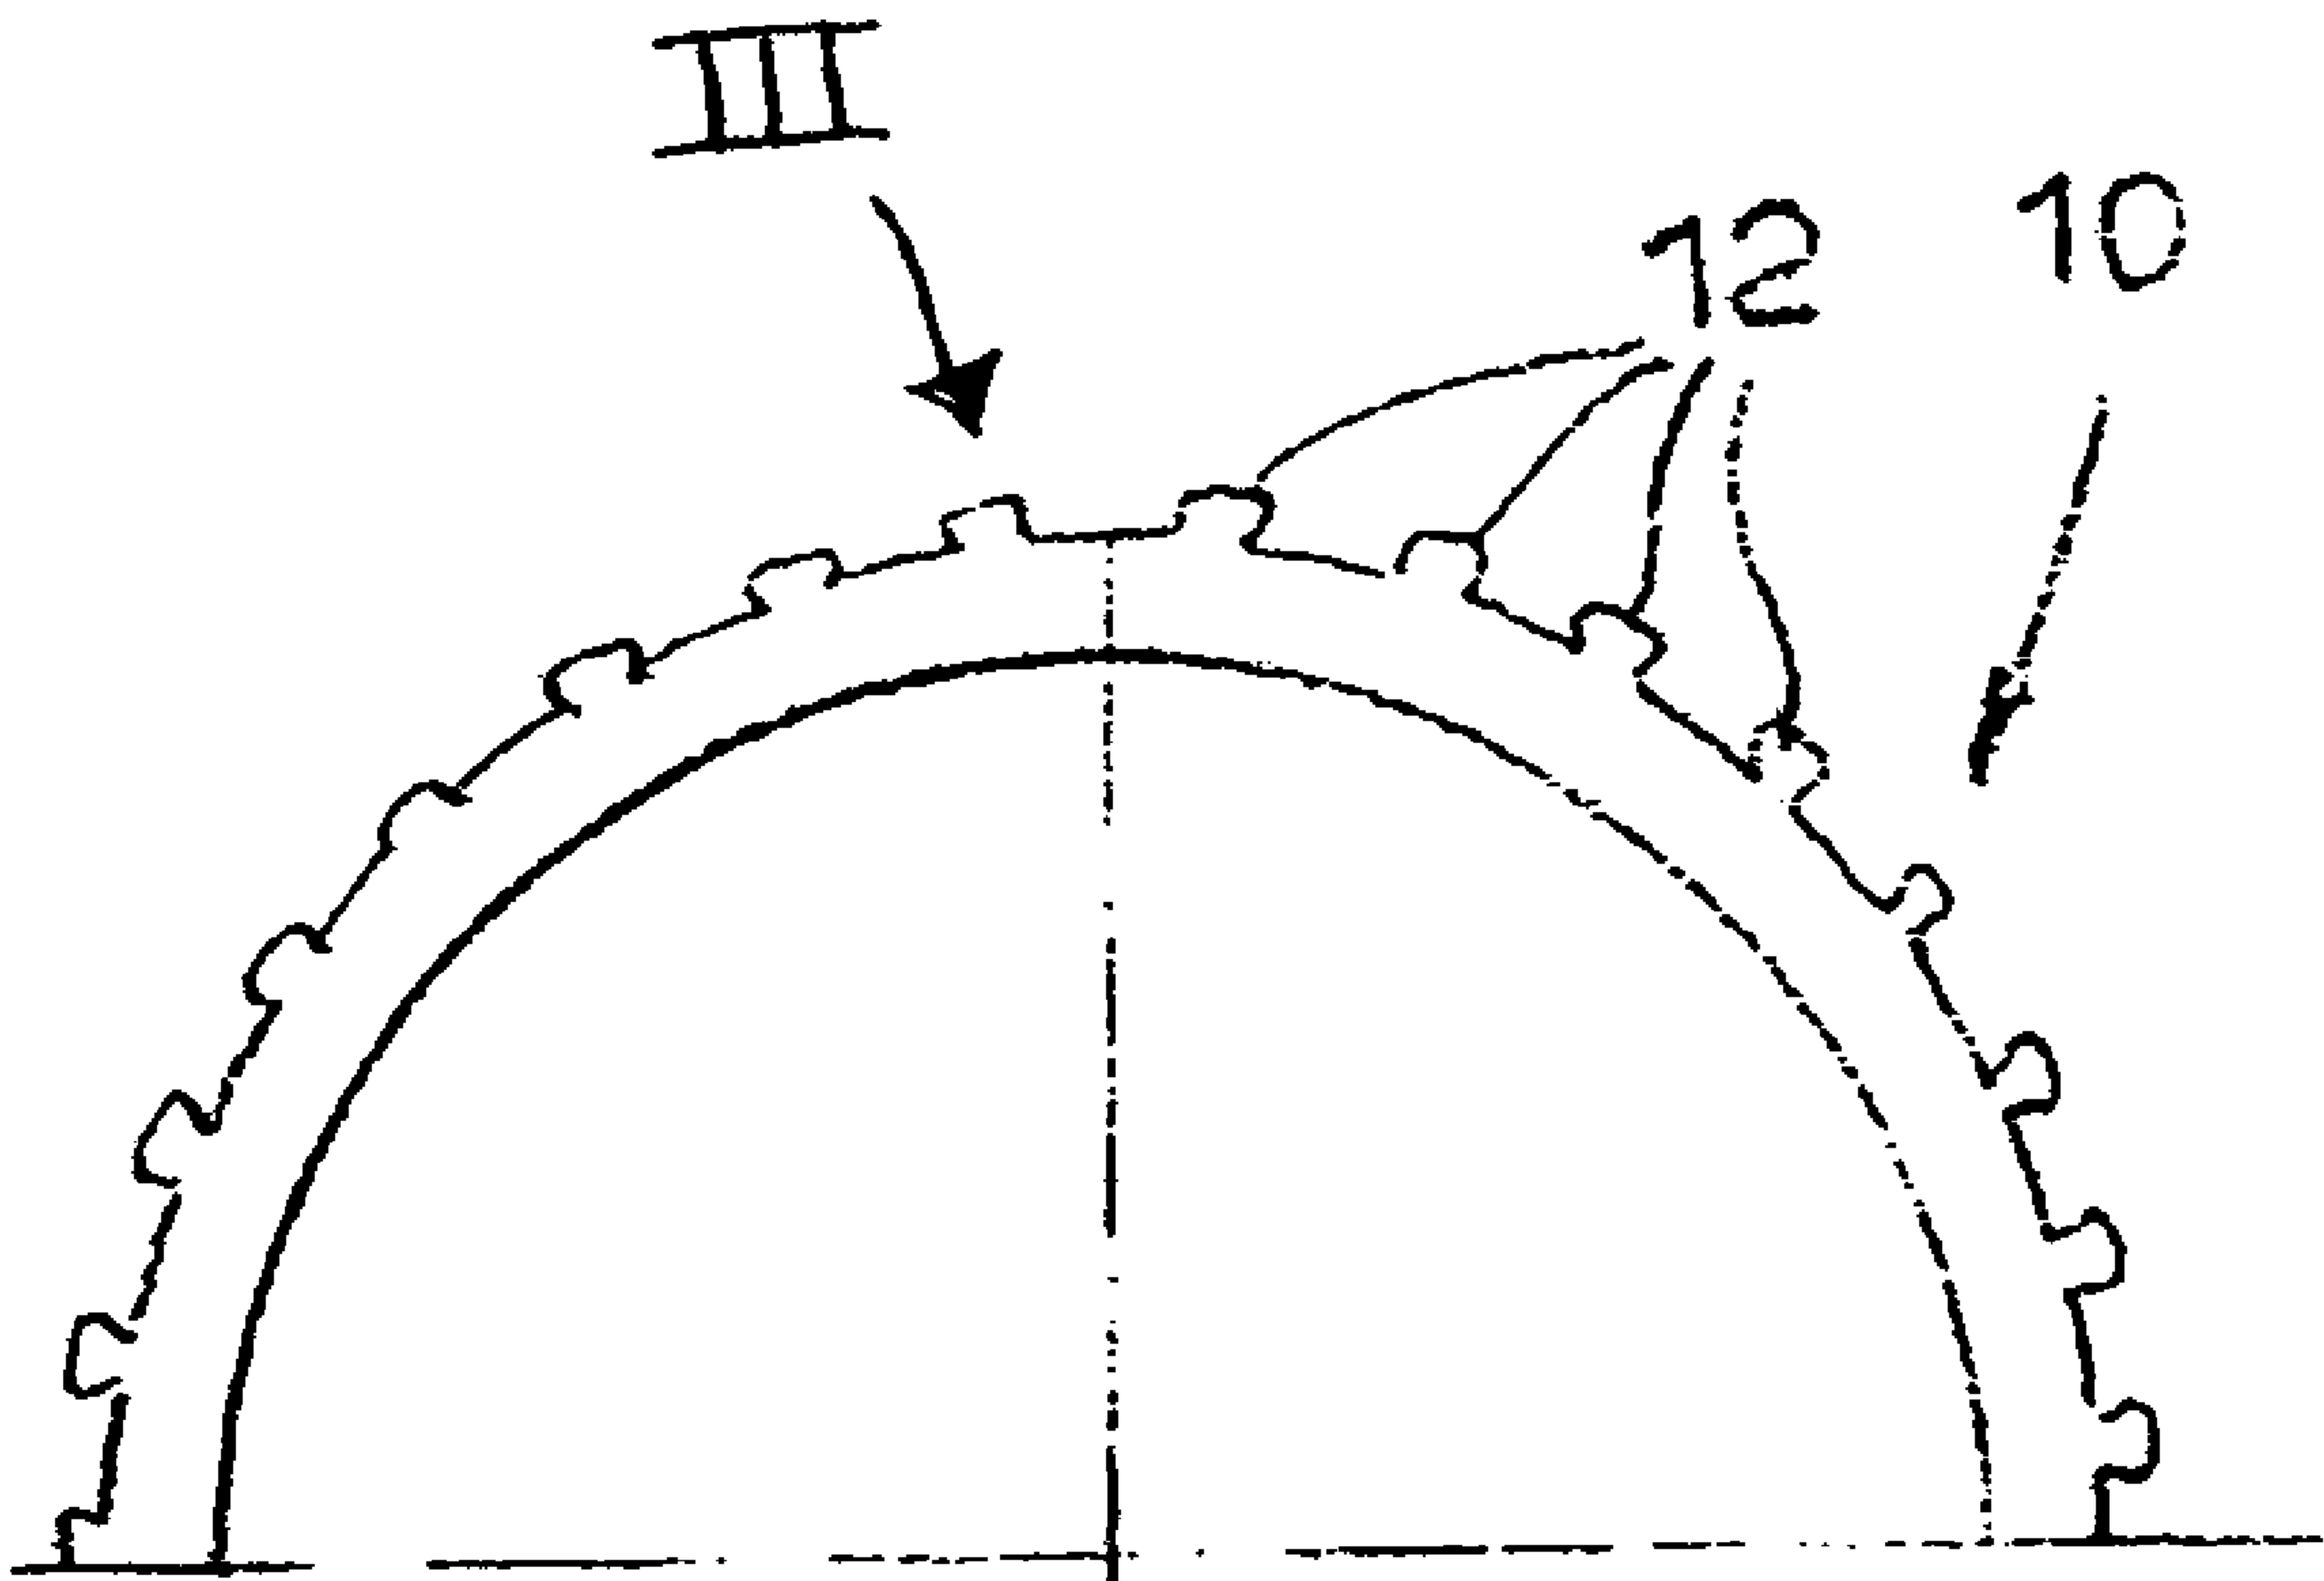

(57) Abrégé/Abstract:

Method for making a cylinder block for internal combustion engine, in which at least one cylinder liner (10) is arranged inside a mould and aluminium-based material is cast into the mould and cooled, so that the cylinder liner (10) is incorporated in the cylinder block. The cylinder liner (10) is made of aluminium-based material and has protuberances destined to melt in contact with the molten material cast into the mould arranged on its external surface.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
16 August 2001 (16.08.2001)

PCT

(10) International Publication Number
WO 01/58621 A1(51) International Patent Classification⁷: **B22D 19/00**,
F02F 1/16, F16J 10/04[IT/IT]; C.R.F. Società Consortile per Azioni, Strada
Torino, 50, I-10043 Orbassano (IT).

(21) International Application Number: PCT/IT01/00048

(74) Agents: **MARCHITELLI, Mauro** et al.; Buzzi, Notaro
& Antonielli d'Oulx Srl, Corso Fiume, 6, I-10133 Torino
(IT).

(22) International Filing Date: 1 February 2001 (01.02.2001)

(25) Filing Language:

Italian

(81) Designated States (*national*): CA, MX, US.

(26) Publication Language:

English

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

(30) Priority Data:

TO2000A000130 10 February 2000 (10.02.2000) IT

Published:


- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(71) Applicant (*for all designated States except US*): **C.R.F.
SOCIETA CONSORTILE PER AZIONI** [IT/IT]; Strada
Torino, 50, I-10043 Orbassano (IT).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **FUGANTI, Anto-
nio** [IT/IT]; C.R.F. Società Consortile per Azioni, Strada
Torino, 50, I-10043 Orbassano (IT). **BARBAN, Paolo**For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A METHOD FOR PRODUCING A CYLINDER BLOCK FOR AN INTERNAL COMBUSTION ENGINE

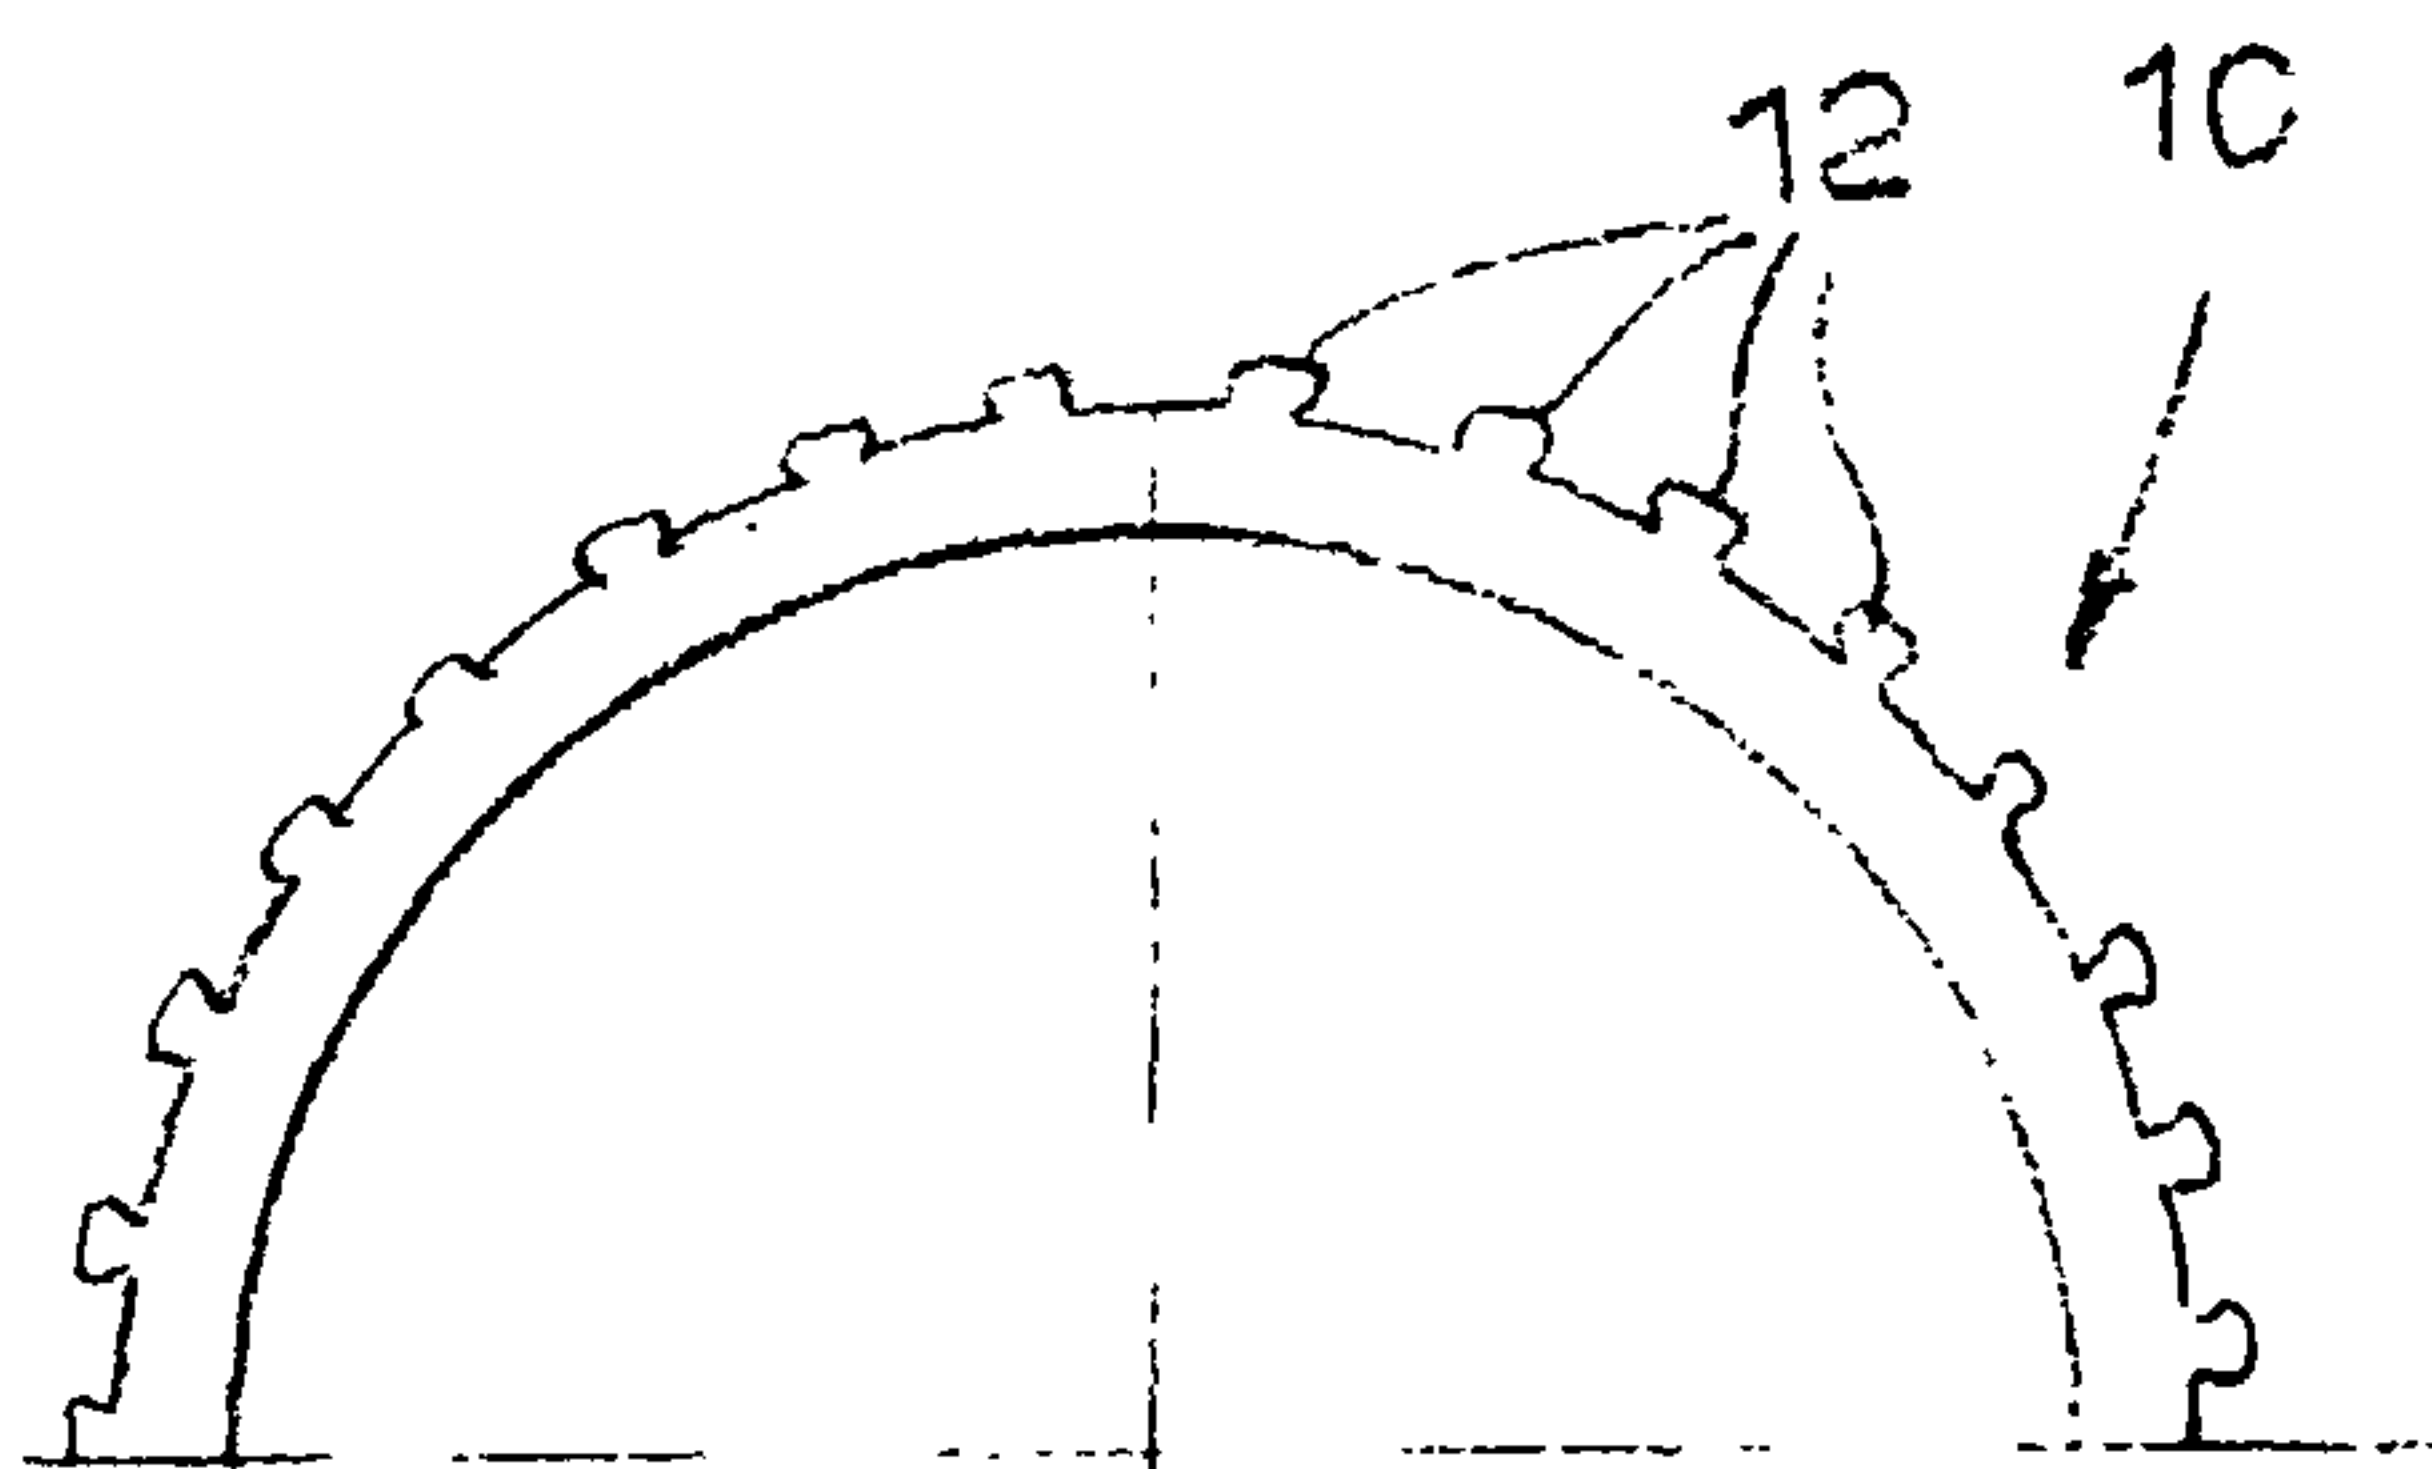(57) Abstract: Method for making a cylinder block for
internal combustion engine, in which at least one cylinder
liner (10) is arranged inside a mould and aluminium-based
material is cast into the mould and cooled, so that the
cylinder liner (10) is incorporated in the cylinder block.
The cylinder liner (10) is made of aluminium-based
material and has protuberances destined to melt in contact
with the molten material cast into the mould arranged on
its external surface.

WO 01/58621 A1

"A method for producing a cylinder block for an internal combustion engine"

* * *

DESCRIPTION

5 This invention relates to a method for the production of a cylinder block for an internal combustion engine for motor vehicle. More precisely, this invention relates to a method in which at least one cylinder liner is arranged in a mould and
10 aluminium-based material is cast into the mould and cooled so that the cylinder liner is incorporated in the cylinder block.

 In a known solution, the cylinder liners are made of cast iron, or other material, which melting point is
15 considerably higher than that of the aluminium-based material forming the cylinder block. In this case, there is no risk of damaging the cylinder liners while casting the material destined, once solidified, to form the cylinder block.

20 Technically more advanced solutions envisage the use of cylinder liners made of aluminium-based material, such as, for example, hypereutectic aluminium alloys or composite aluminium alloys reinforced with ceramic particles (silicon carbide, alumina, ceramic
25 fibres, etc.). With reference to cast iron cylinder liners, aluminium liners present the advantage of being lighter in weight and permitting the construction of an engine which consumes less oil, because the aluminium liners have an expansion coefficient which is much
30 closer to that of the aluminium pistons. For this reason, during operation of an internal combustion engine fitting aluminium liners, the variation in play between the piston and the internal surface of the respective cylinder liner is lower.

35 The production of cylinder blocks with cylinder

liners incorporated by casting poses various problems. The cylinder liners usually produced by extrusion normally present an external layer of alumina due to the oxidation of the aluminium-based material in the presence of oxygen. A metallurgic bond between the cylinder liners and the cylinder block cannot be obtained if cylinder liners coated with a layer of alumina are incorporated in the molten material which is destined to form the cylinder block, because the alumina layer (which fusion temperature is considerably higher than that of the aluminium alloys) forms a barrier between the cylinder liners and the material forming the cylinder block. With the alumina barrier, the bond between the cylinder liner and the cylinder block is only mechanical, while a metallurgical bond concerning at least of a part of the contact surface between cylinder liner and cylinder block would be desirable.

The applicant experimented a method consisting in removing the alumina layer by turning immediately before arranging the cylinder liners in the mould. However, this method introduces an additional cost related to the turning process. Furthermore, experimental experience demonstrates that without the alumina layer the cylinder liners can be damaged when the molten material destined to form the cylinder block is cast. Specifically, the formation of localised fusion of the cylinder liners was found near the mould casting channels.

The purpose of this invention is to describe a method for the production of a cylinder block with aluminium liners which are not effected by said problems and which permits the creation of a metallurgic bond along at least a part of the contact surface between liner and cylinder block.

According to this invention, this purpose is reached by means of a method which characteristics are described herein.

5 This invention will be better explained by the following detailed descriptions with reference to the accompanying figure as non-limiting example, whereas:

- figure 1 is a schematic lateral view of a cylinder liner according to this invention,

- figure 2 is a partial view according to arrow
10 II in figure 1,

- figure 3 is a detail on a larger scale of the part indicated by arrow III in figure 2, and

- figure 4 is a schematic cross-section illustrating a part of the cylinder liner according to
15 this invention incorporated in a cylinder block.

With reference to the figures, number 10 indicates a cylinder liner according to this invention. The liner 10 is made of aluminium-based material, such as, for example, hypereutectic aluminium alloy, aluminium-based
20 metallic matrix composite material, for example reinforced with ceramic particles or fibres.

A plurality of protuberances 12, which extend in the longitudinal direction for the entire length of the liner, forming respectively parallel and equidistant
25 ribbings, are formed on the external surface of the liner 10. The liner 10 is obtained by means of extrusion according to a known method.

The shape and dimensions of the protuberances 12 are determined in such as fashion to melt when they
30 come into contact with the molten aluminium at casting temperature ($\approx 730^{\circ}\text{C}$). Preferably, each protuberance 12 presents an undercut shape with a narrower section near the external surface of the liner 10. The purpose of this narrower section is to form a preferential fusion
35 area from where the fusion of the projecting parts

starts. The external surface of the liner 10 is covered by a layer of aluminium oxide which is formed spontaneously following contact with oxygen. The layer of aluminium oxide forms a thermal barrier which protects the liner 10 from the risk of being damaged during the fusion of aluminium-based material in liquid state which is destined to form the cylinder block. The layer of alumina on the protuberances does not prevent the fusion of the protuberances because the contact surface of each protuberance with the molten material is extended and presents a fusion starting point which thickness is limited. When the protuberances 12 are melted by the liquid material cast around the liner 10, the portion of the root, indicated with number 14 in figure 3, is without the alumina layer and in correspondence to said areas a metallurgic bond is created between the liner 10 and the aluminium-based material forming the cylinder block, indicated by number 10 in figure 4.

Figure 4 schematically illustrates the contact area between a liner 10 and the material forming the cylinder block after casting and solidification of said material. The protuberances 12 are indicated with a dotted line because the protuberances have melted in contact with the cast material. The dotted line indicated by number 18 in figure 4 schematically represents the layer of alumina forming a protective thermal barrier between the liner 10 and the material 16. A mechanical bond will be formed between the cylinder liner 10 and the cylinder block 16, with an air gap which is smaller than 20 microns, in the area where an alumina layer 10 is present. Conversely, a metallurgic bond without gap providing tight co-penetration of material is created in the areas where the protuberances 12 were present.

The objective is to obtain a metallurgic bond between the cylinder liner and the engine crankcase during the casting process.

The geometry of the protuberances is such to ensure that when the protuberances come into contact with the molten aluminium they soften and deform. The aluminium oxide (alumina) present on the surface of the protuberances is fragile and cannot be deformed. Consequently, the alumina cracks and detaches by effect of this deformation. Consequently, the molten aluminium comes into contact with the aluminium alloy of the liner (underneath the oxide) which favours the formation of a metallurgic bond.

Preferably, the overall surface of the areas in which the formation of a metallurgic bond is required is in the range from 5% to 50% of the overall external surface of the liner 10. Preferably, to facilitate fusion of protuberances 12, said protuberances have a height h included in the range from 30% to 60% of the thickness S of the liner 10 and a narrower section which thickness t is included in the range from 40% to 80% of height h . The undercut shape of the protuberances 12 is advantageous because a mechanical anchoring between the liner 10 and the cylinder block 16 is obtained if the fusion of the protuberances 12 does not occur.

- 6 -

CLAIMS

1. Method for making a cylinder block for internal combustion engine, in which at least one cylinder liner (10) is arranged inside a mould and aluminium-based material is cast into the mould and cooled, so that the cylinder liner (10) is incorporated in the cylinder block and said cylinder liner (10) is made of aluminium-based material and has protuberances (12) which melt in contact with the molten material cast into the mould arranged on its external surface,

characterised in that said protuberances (12) are shaped as longitudinal ribbings.

2. Method according to claim 1, characterised in that said protuberances (12) have an undercut profile.

3. Method according to claim 1, characterised in that each of said protuberances (12) has a height h which value is included in the range from 30% to 60% of the thickness (S) of the cylinder liner (10).

4. Method according to claim 1, characterised in that each of said protuberances (12) has a root section (14) which thickness (t) is included in the range from 40% to 80% of the height (h) of the protuberance.

1/1

Fig. 1

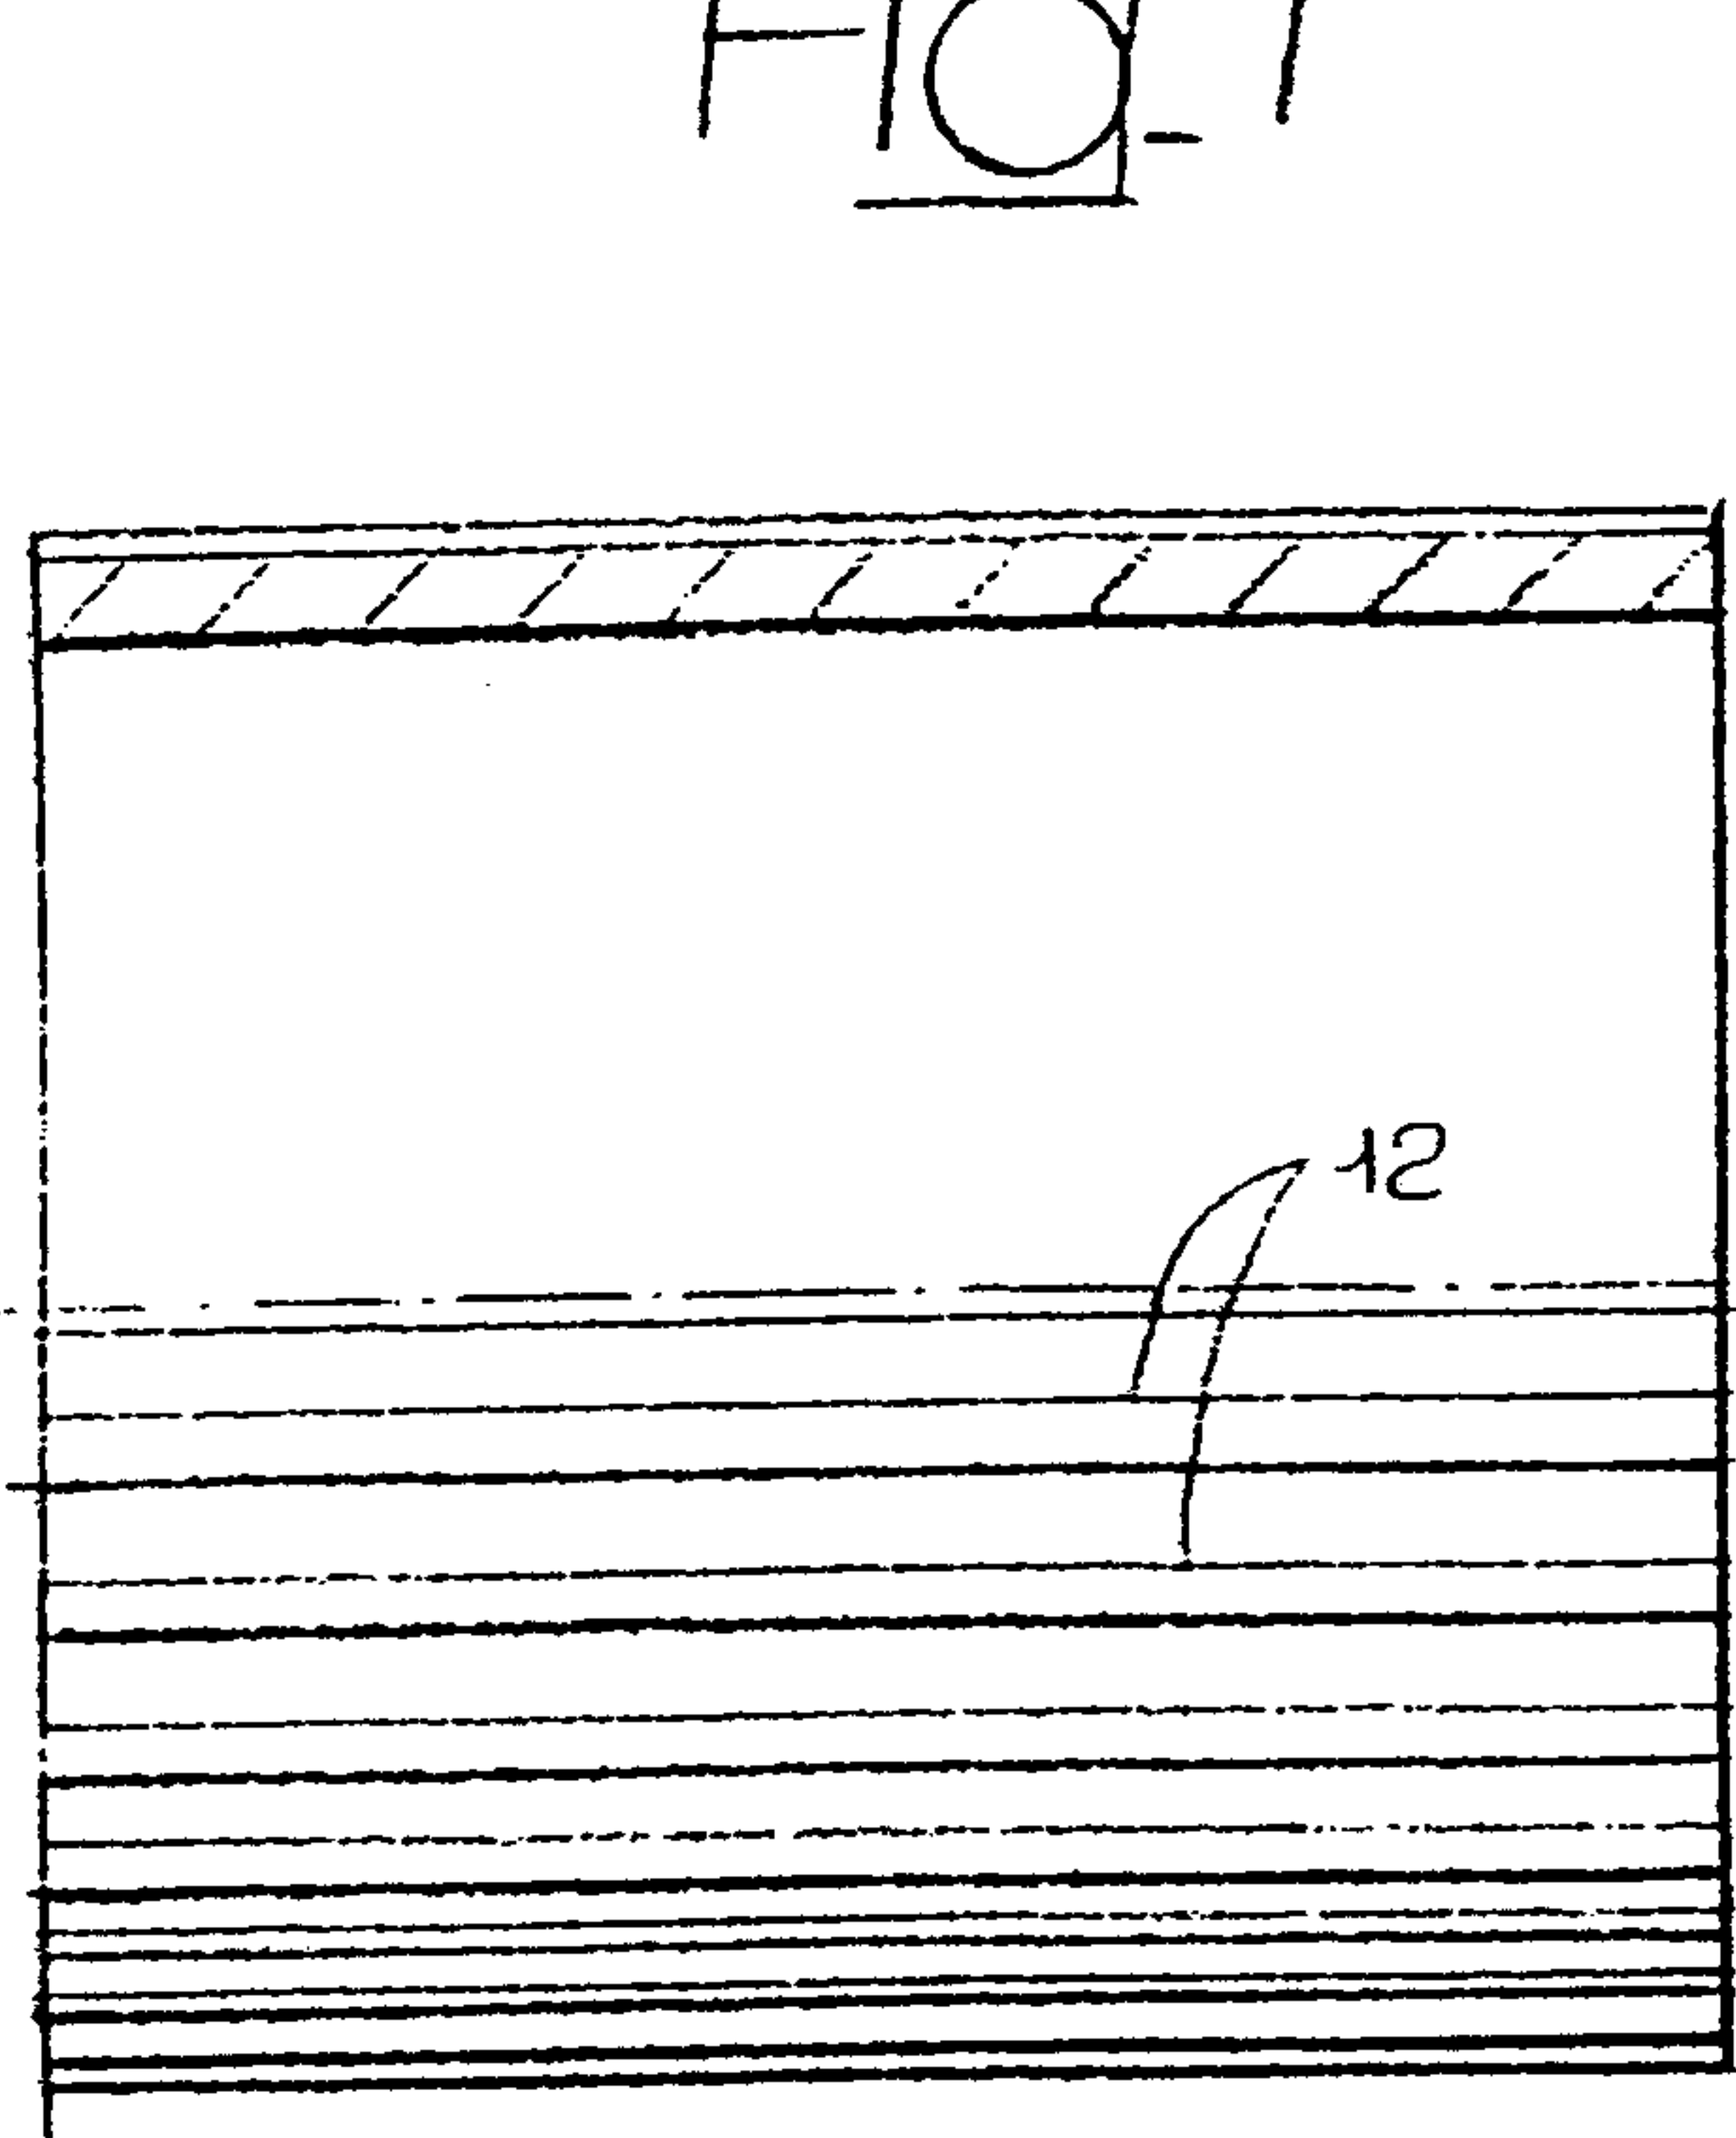


Fig. 2

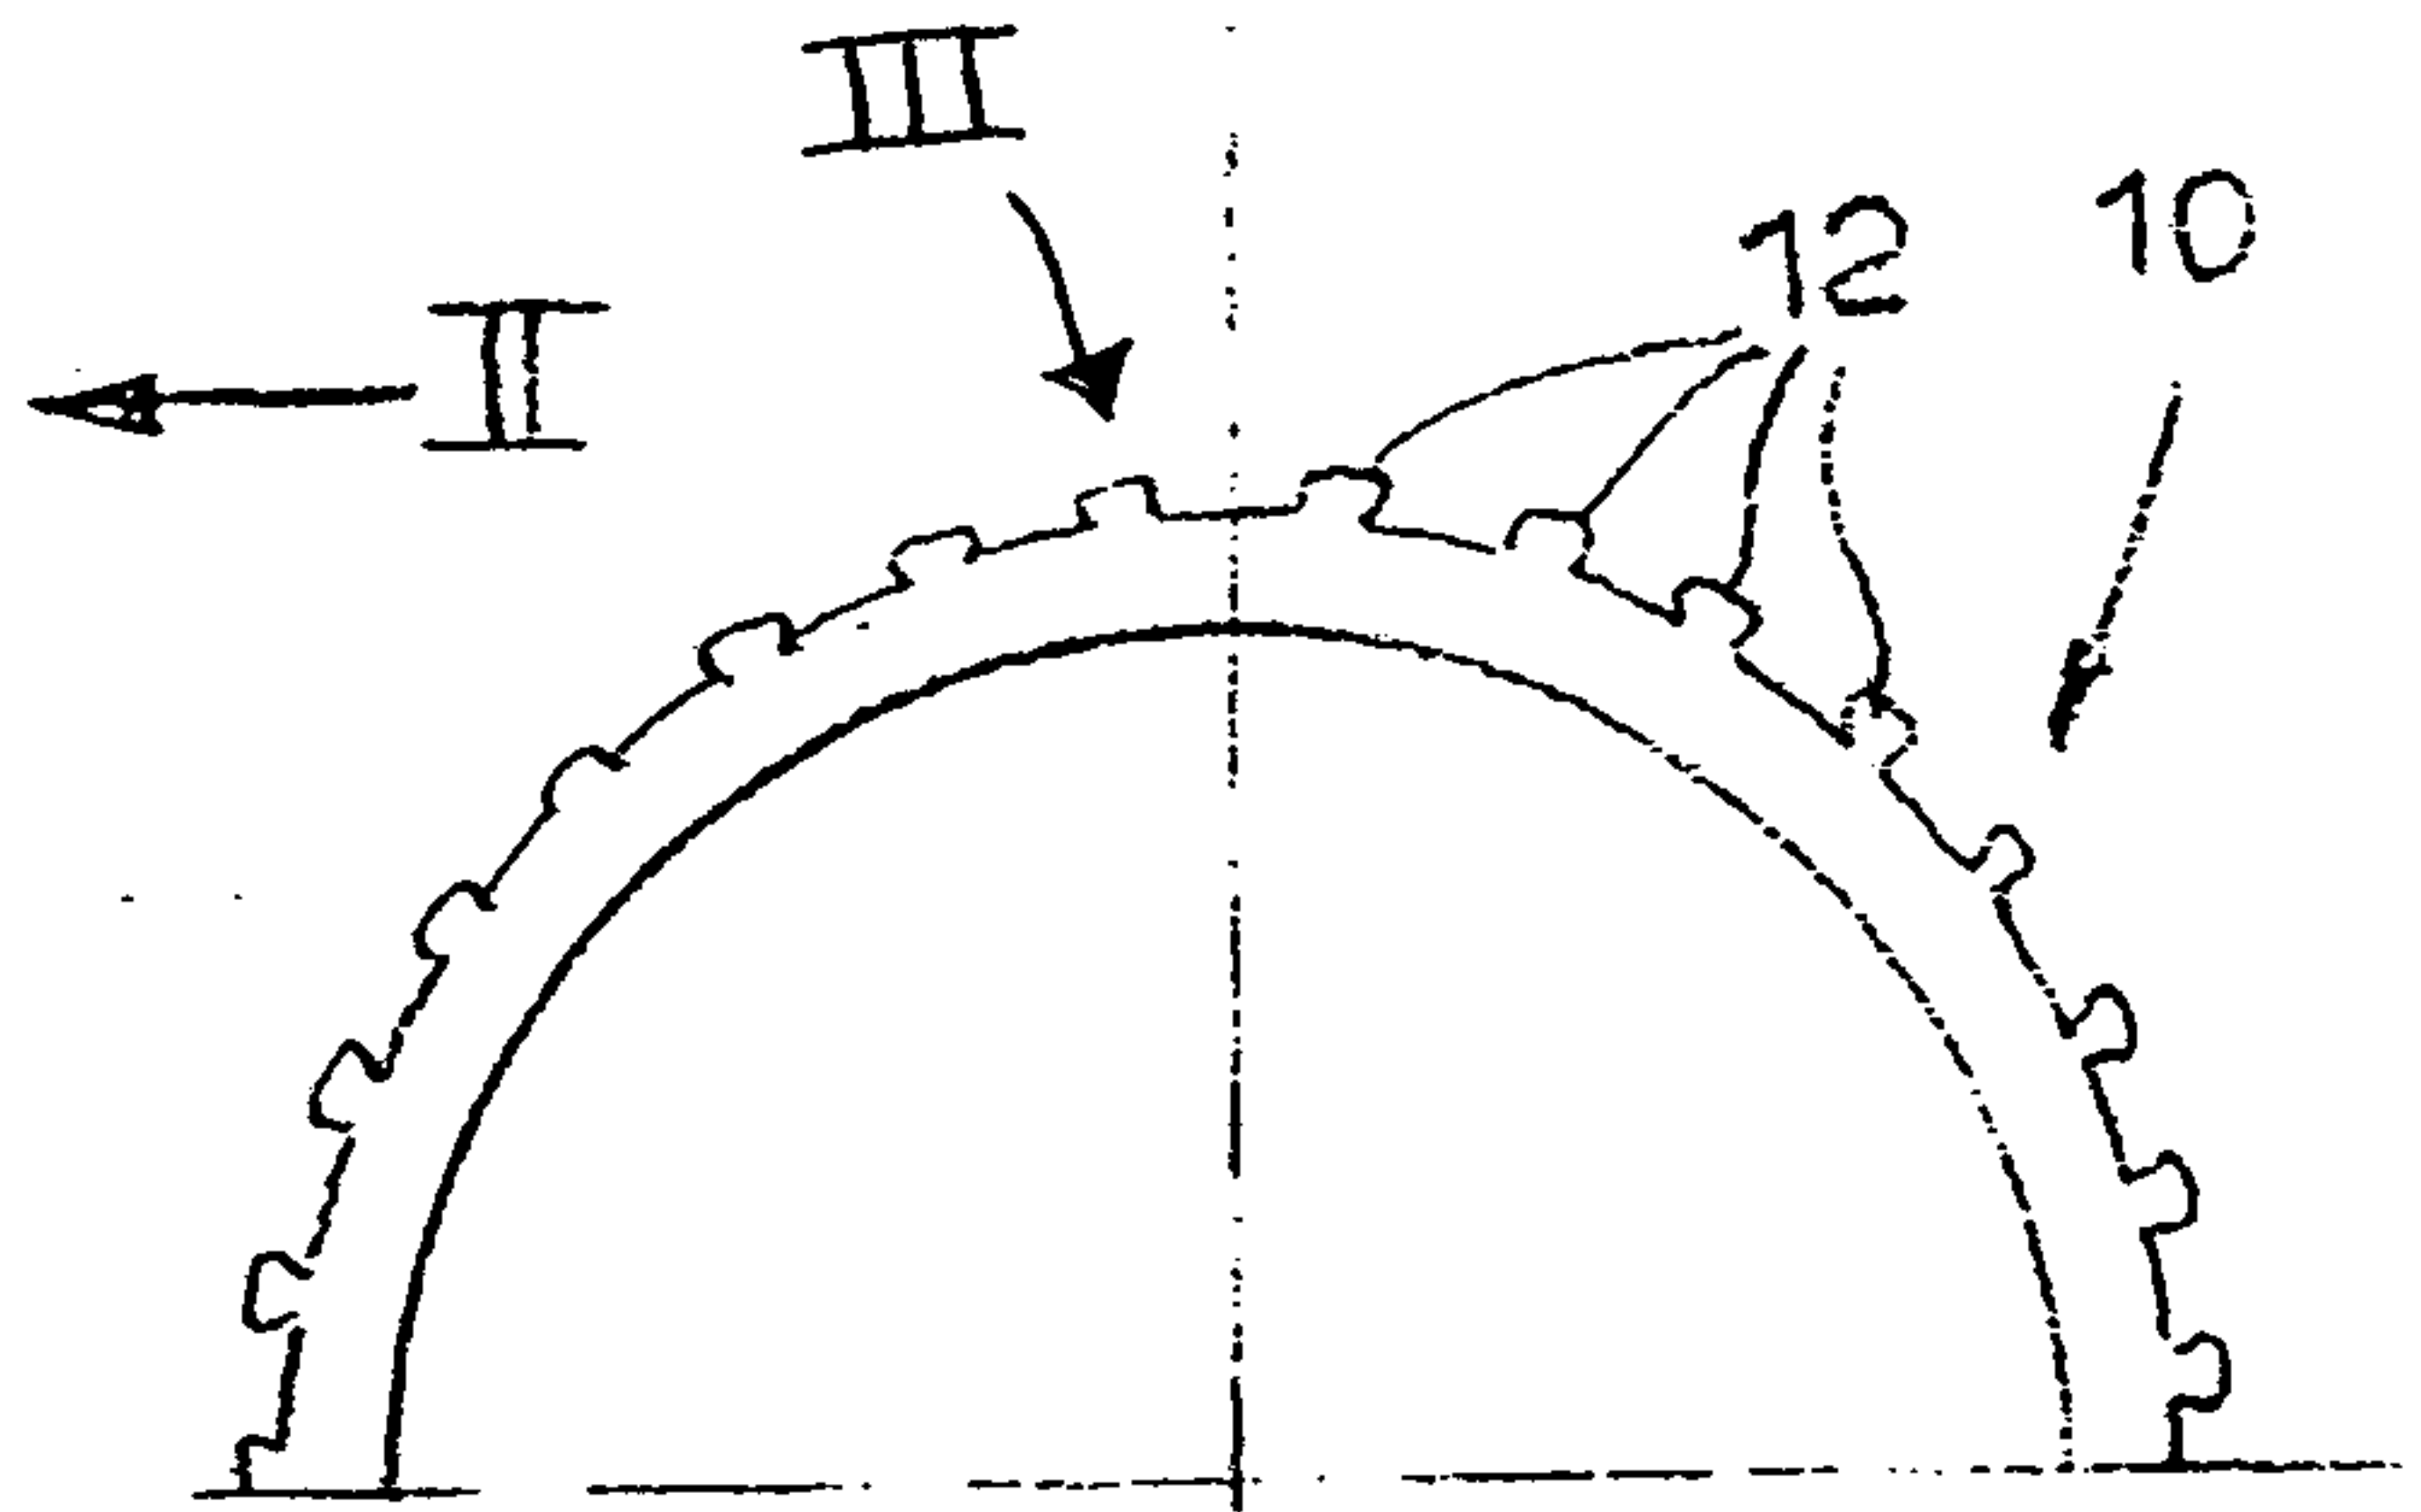


Fig. 3


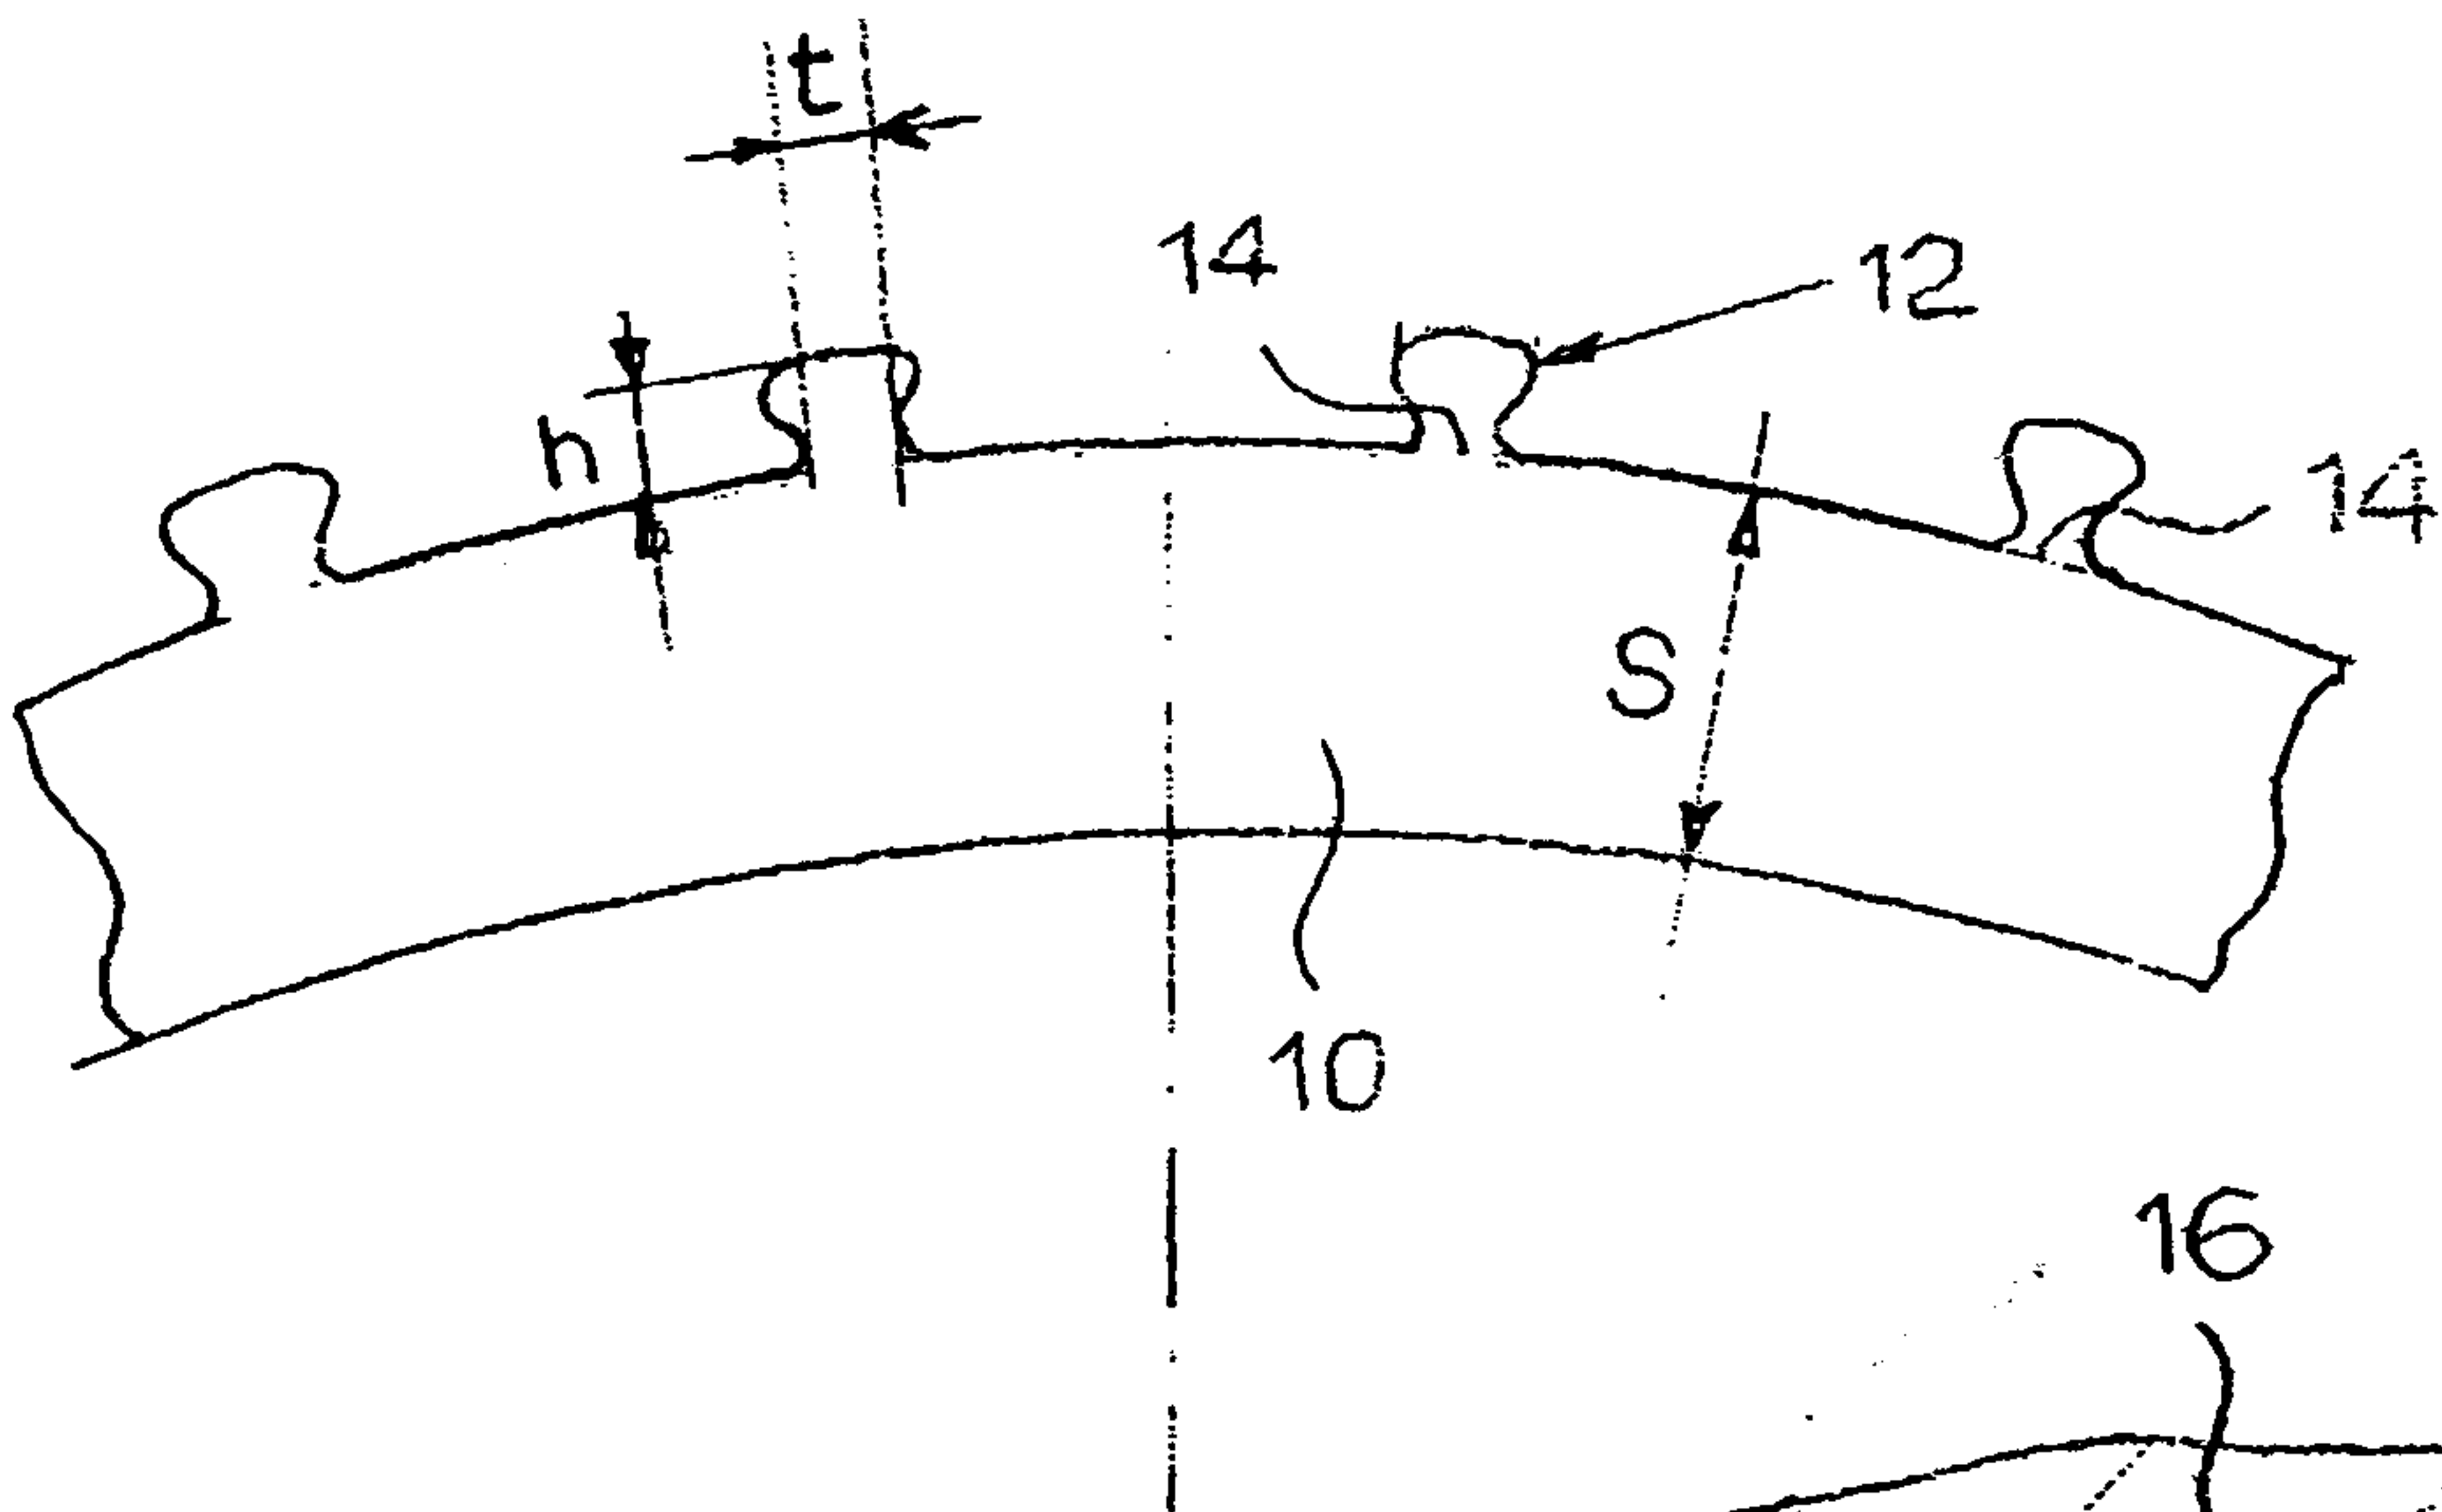


Fig. 4



III

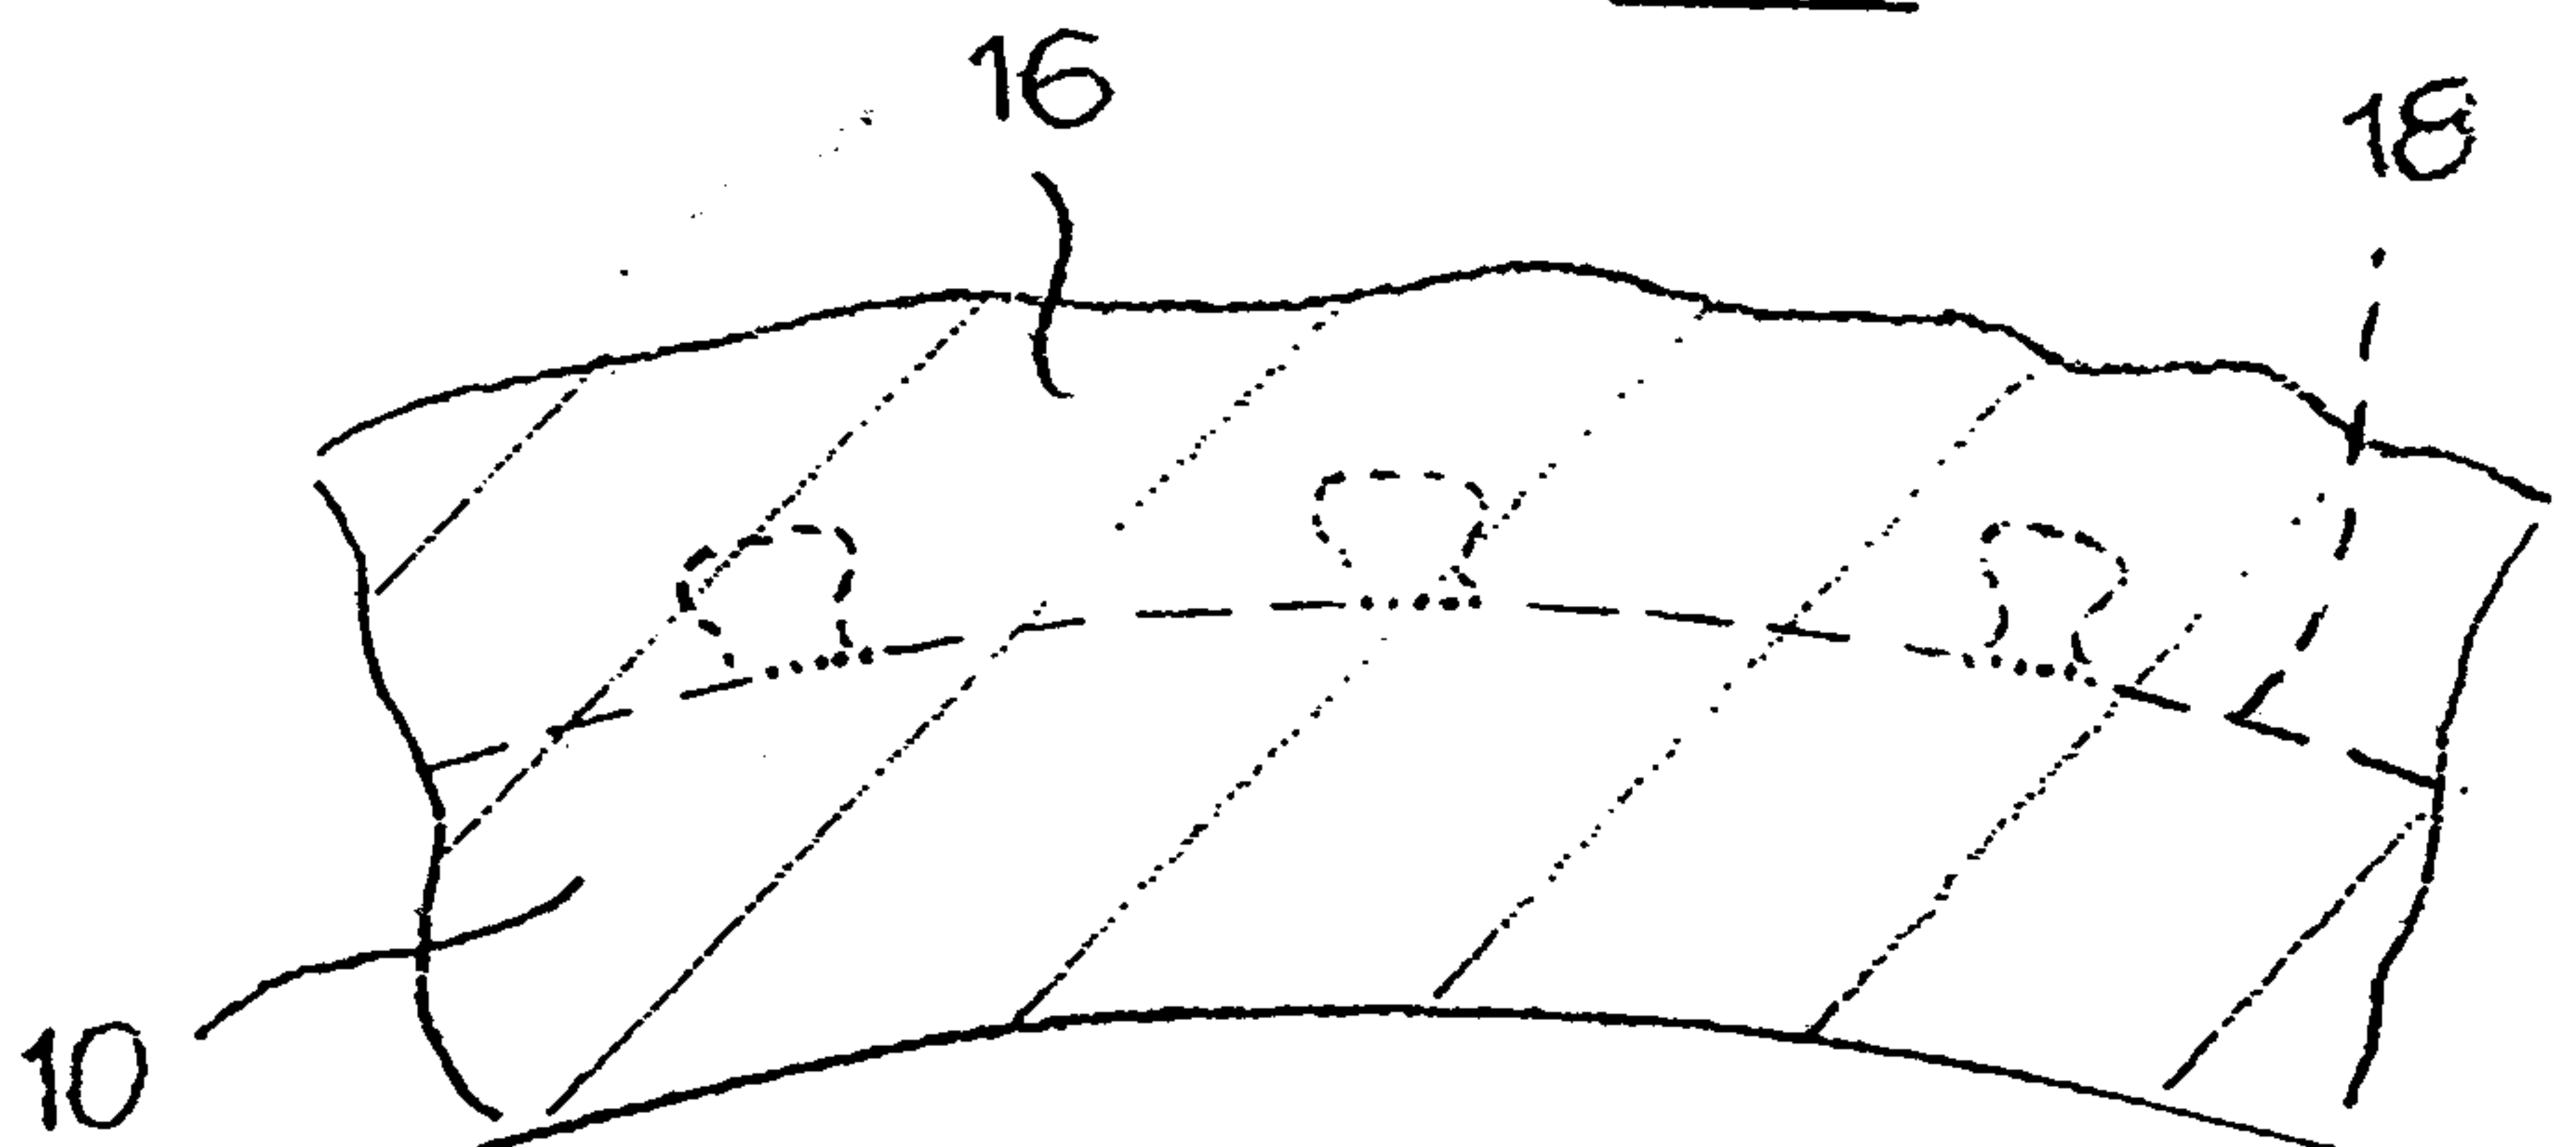

12

10

