

(19) **DANMARK**

(10) **DK/EP 3568053 T3**



Patent- og
Varemærkestyrelsen

(12) Oversættelse af
europæisk patentskrift

-
- (51) Int.Cl.: **A 47 L 21/02 (2006.01)** **A 47 L 15/00 (2006.01)** **A 47 L 15/42 (2006.01)**
A 47 L 19/00 (2006.01)
- (45) Oversættelsen bekendtgjort den: **2023-09-11**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2023-06-14**
- (86) Europæisk ansøgning nr.: **17890930.5**
- (86) Europæisk indleveringsdag: **2017-12-22**
- (87) Den europæiske ansøgnings publiceringsdag: **2019-11-20**
- (86) International ansøgning nr.: **AU2017051445**
- (87) Internationalt publikationsnr.: **WO2018129579**
- (30) Prioritet: **2017-01-10 AU 2017900049**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **MT Innovations PTY Ltd, Ground Floor, 1 Collins Street, Melbourne, Victoria 3000, Australien**
- (72) Opfinder: **Porcelli, Tommaso, Via degli Ulivi 38, Ventimiglia, IM, 18039, Italien**
- (74) Fuldmægtig i Danmark: **Plougmann Vingtoft A/S, Strandvejen 70, 2900 Hellerup, Danmark**
- (54) Benævnelse: **INDRETNING TIL TØRRING OG POLERING AF GENSTANDE SÅSOM GLAS OG BESTIK**
- (56) Fremdragne publikationer:
WO-A2-03/009965
CN-B- 103 272 810
CN-Y- 201 333 018
US-A- 872 702
US-A- 3 516 108
US-A1- 2014 259 515
US-B1- 8 506 360
US-B1- 9 451 863

DESCRIPTION

FIELD OF THE INVENTION

[0001] The present invention relates to a device for drying and/or polishing items such as glasses and cutlery.

BACKGROUND OF THE INVENTION

[0002] Drying and polishing cutlery and glasses is a necessary part of hospitality as streaks and spots are commonly present after cleaning, particularly by a dishwasher. Due to a lack of an effective commercial solution, drying and polishing cutlery is commonly performed manually with a rag, by engaging the item by hand and wiping it with the rag, which can be time consuming and also creates potential hygiene issues if not performed carefully and diligently.

[0003] Devices for drying and polishing items such as glasses and cutlery have previously been proposed but have generally been ineffective, complicated and generally inconvenient to use. For example, the device disclosed in EP1532921 can only handle cutlery and not glasses. US6907893 is configured for cleaning bottles within a sealed enclosure and would not be appropriate for use in rapidly drying and polishing glasses and cutlery, neither would US7604012, which also includes means for washing the items. US 9,451,863 B1 discloses a wine-glass polisher includes a housing having at least one cleaning chamber defined by a bottom wall and at least one sidewall. Extending from the sidewall is a wine-glass holder including a horizontal arm having a C-shaped gripping member at a distal end for holding the stem of an inverted wine glass. Immediately above the gripping member there is a motorized disc for engaging the base of a wine glass to rotate it during a cleaning and drying cycle. Mounted on the sidewall, below the wine-glass holder, is an upper dispensing nozzle for projecting either drying air or steam onto the exterior surface of a wine glass. Upwardly extending from the bottom wall of the cleaning chamber is a lower dispensing nozzle for projecting drying air or hot water onto the interior surface of a wine glass. Hot water and air are sequentially delivered to the nozzles to clean and subsequently dry a wine glass.

[0004] Furthermore, previous devices have suffered from a lack of control of steam within the devices and appropriate safety features to enable widespread commercial use.

[0005] Examples of the invention seek to solve, or at least ameliorate, one or more disadvantages of previous devices for drying and polishing items such as glasses and cutlery, or at least provide a useful alternative.

SUMMARY OF THE INVENTION

[0006] According to one aspect of the invention there is provided a device for drying and polishing items such as glasses and cutlery, according to claim 1.

[0007] According to a preferred embodiment, the cleaning elements are rotatable for cleaning or polishing the items. Preferably, the steam distribution system is operable by applying pressure to the cleaning elements axially along their axis of rotation.

[0008] At least one of the cleaning elements is preferably mounted on a rotatable shaft, the shaft rotating around a steam pipe extending through the shaft and terminating at a steam nozzle formed by apertures in the shaft intermediate of its length. A conical diffuser can be disposed at an end of the steam pipe to direct steam radially outwardly from the steam pipe and into the cleaning element.

[0009] According to another aspect of the invention there is provided a device for drying and polishing items such as glasses and cutlery, according to claim 5.

[0010] Preferably, with this aspect the steam distribution system is operable by applying pressure to the cleaning elements axially along their axis of rotation.

[0011] According to preferred embodiments of either one of the above aspects, at least one rotatable shaft is axially movable with respect to a corresponding steam pipe to operate the steam distribution system. Preferably, the rotatable shaft is resiliently biased upwardly and movable downwardly to operate the steam distribution system.

[0012] The steam distribution system may be operable upon an end of one of said items being brought into contact with at least one cleaning element. Preferably, the steam distribution system is operable on applying pressure to at least one of the cleaning elements via applying pressure to the item once inserted within the enclosure.

[0013] Preferably, the device has an openable cover in which the apertures are formed, the device being configured to cease operation on opening of the cover.

[0014] The device can further include a programmable microprocessor, wherein the microprocessor is configured to record usage history and provide alerts for replacement of the cleaning elements once a predetermined number of cycles have passed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] Preferred embodiments of the invention will be further described, by way of nonlimiting example only, with reference to the accompanying drawings in which:

Figure 1 is a perspective view of a device of one embodiment of the invention; and

Figure 2 is a perspective view of the device with an enclosure cover opened;

Figure 3 is a side view of the device with the cover removed;

Figure 4 is a plan view of the device with the cover removed;

Figure 5 is a perspective view of a rotating assembly removed from the device;

Figure 6 is an underneath view of the rotating assembly;

Figure 7 is a perspective view of the internal components of the device;

Figure 8 is a plan view of the internal components of the device;

Figure 9 is a schematic layout drawing of a steam generation system of the device;

Figure 10 is a detailed layout drawing of the steam generation system;

Figure 11 is a side sectional view of a shaft for supporting a cleaning element;

Figure 12 is a side sectional view of another shaft;

Figure 13 is a side sectional view of a base of a shaft for supporting a cleaning element;

Figure 14 is a side sectional view of another base; and

Figure 15 is a bottom view of the base.

DETAILED DESCRIPTION

[0016] With reference to Figure 1, there is shown a device 10 for drying and polishing items such as glasses and cutlery according to a preferred embodiment of the invention.

[0017] The device includes an enclosure 12 having apertures 14a, 14b through which an end of the items can be inserted, a plurality of movable cleaning elements 16 within the enclosure 12 for drying and/or polishing the items, and a selectively operable steam distribution system 34 (to be described further below) for applying steam within the enclosure 12 to at least one of the cleaning elements 16 and/or the items, whereby the cleaning elements 16 dry and/or polish the items.

[0018] The enclosure 12 is fitted with an operation switch 18 and a display screen 20, which may be in the form of a LCD screen. The enclosure 12 also includes a lid 22, openable, as illustrated in Figure 2, for access to an internal area of the device 10 and the cleaning elements 16. The device 10 is preferably configured to cease operation on opening of the lid

22. To facilitate cleaning, a removable rubber tray 17 is received in a base of the enclosure 12 for collecting debris.

[0019] Figures 5 and 6 illustrate a rotating assembly 32 of the device 10 in more detail. In the embodiment illustrated, the cleaning elements 16 are driven from two electric drives 24, which may take any commercially available form. As shown in Figure 6, a first electric drive is configured for driving a first set of cleaning elements 16a, 16b, 16c, 16d, 16e configured for drying/polishing glasses, and a second electric drive is configured for driving a second set of cleaning elements 16f, 16g configured for drying/polishing cutlery. Of the first set of cleaning elements, cleaning element 16a is centrally disposed and configured for cleaning an internal area of a glass, while cleaning elements 16b, 16c, 16d, 16e are configured for cleaning an external area. It should be noted that in Figures 1 to 5, 7 and 8, central cleaning element 16a has been removed for clarity. Also, in an alternative configuration, a single electric drive may be used in conjunction with a system for selectively engaging the first and second sets of cleaning elements as required.

[0020] The electric drives 24 rotate pulleys 26 which, via belts 28, causes rotation of the shafts on which the cleaning elements 16 are mounted. Idlers 30 may be provided for guiding/directing the belt. Preferably, some of the cleaning elements 16 within the first and second sets are configured for counter rotation to improve drying/polishing of the glasses/cutlery. To achieve this, gears may be used to couple cleaning elements or other components within the rotating elements and transfer rotational direction as required.

[0021] It will be appreciated that not all of the cleaning elements 16 need be directly rotated by belts 28 and that some of the cleaning elements, such as cleaning elements 16f, 16g illustrated, may instead be coupled to a driven cleaning element by gears to enable rotation and to transfer the direction of rotational motion from one cleaning element to the next.

[0022] Figures 7 and 8 illustrate the rotating assembly 32 with a steam distribution system 34 fitted thereto. The steam distribution system 34 includes a water reservoir 36, though in other embodiments, such as that shown in Figure 10, a mains water connection 37 may be provided. The steam distribution system 34 includes a boiler 38 for heating the water, a pump 42, and valves for distributing the steam and maintaining a required pressure in the system.

[0023] Figures 9 and 10 schematically illustrate the interaction between the steam distribution system 34 and the cleaning elements 16. It can be seen that each cleaning element is in communication with the boiler 38 via conduits 40 so that steam can be distributed onto the cleaning element 16 or directly onto the item to be dried/polished. In other embodiments, not every cleaning element may be in communication with the boiler 38 for the distribution of steam. In such examples, cleaning elements may be steam free, or a steam nozzle may be disposed proximal to a number of cleaning elements and provide steam either onto the cleaning elements or directly onto the item.

[0024] A pump 42 is provided for distributing the steam. Control valves 44a, 44b are also

provided to control distribution of steam between cleaning elements configured for use with cutlery and cleaning elements for use with glasses.

[0025] For safety, a pressure reducer 46 is provided on a mains water intake, with one way valves 48 used to control flow of water from the reservoir 36 (or water intake) and to the pressure reducer 46. Also, a flow limiter may be provided to limit the amount of steam that can be applied within the enclosure 12.

[0026] The steam distribution system 34 is operable on detection of an end of said items being inserted into the enclosure 12. In some embodiments, sensors may be used to detect an end of said items being inserted into the enclosure 12. In the illustrated embodiment, the steam distribution system 34 is operable upon an end of one of said items being brought into contact with at least one cleaning element 16. In this regard, the steam distribution system 34 is operable on applying pressure to at least one of the cleaning elements 16 via applying pressure to the item once inserted within the enclosure 12, for example by pressing an upturned glass downwardly onto a cleaning element.

[0027] Within the cleaning elements for use with glasses, only some of the rotating elements may be configured as "switchable", i.e. configured so that by applying pressure thereto causes activation of the steam distribution system 34. In the illustrated example, only internal cleaning element 16a, which is configured for cleaning the inside of a glass, and external cleaning element 16c, which is configured for cleaning an external area of the glass are so configured, with cleaning elements 16b, 16d, 16e being provided without a switch. Exerting pressure on either cleaning element 16a or 16c will result in steam being applied to all of the cleaning elements in the first set, i.e. 16a, 16b, 16c, 16d and 16e, resulting in both external and internal cleaning of the glass.

[0028] With "unswitched" cleaning elements 16b, 16d, 16e steam can still be applied to those cleaning elements, though the steam is only applied on operation of the switches associated with cleaning elements 16a, 16c. Such an arrangement can reduce manufacturing costs and complexity without adversely affecting performance.

[0029] Figure 11 illustrates unswitched cleaning element 16b in further detail. It will be appreciated that cleaning elements 16d, 16e may be similarly configured. Cleaning element 16b includes a cleaning head 50 for engaging the item to be polished, in this case a glass. The cleaning head 50 is formed of flexible filaments, which may be cotton, that are urged outwardly during rotation. In other embodiments, the cleaning elements may be formed of other materials, such as plastic foams for example. The cleaning head 50 is mounted on a shaft 52 that rotates about steam pipe 54. A bearing 56 may be provided to support the shaft 52.

[0030] At the top of the steam pipe 54 is a nozzle 58 that directs steam onto a conical diffuser 60, which rotates with the cleaning head 50, for directing steam radially outwardly along path A from the steam pipe 54 via apertures 62 formed in shaft 52. Steam flows through apertures 62 and into cleaning head 50 to facilitate drying and polishing of the glass. The apertures are

preferably two apertures offset 180 degrees around the shaft, i.e. on opposite sides of the shaft, though they may also be otherwise configured with a single aperture or more than two apertures. Although a single set of apertures is provided at a mid point of the cleaning element, it will be appreciated that they may be offset from the mid point, and that more than one set of apertures may be provided.

[0031] On activation of the steam distribution system 34, steam flows from the boiler 38, via the conduit 40, into steam pipe 54 and upwardly along path B, as illustrated in Figure 13.

[0032] Figure 12 illustrates a switched cleaning element 16a in further detail. It will be appreciated that cleaning element 16c may be similarly configured. Again, cleaning element 16a includes a cleaning head 50 for engaging the item to be polished, in this case a glass. The cleaning head 50 is formed of flexible filaments, which may be cotton, that are urged outwardly during rotation. In other embodiments, the cleaning elements may be formed of other materials, such as plastic foams for example. The cleaning head 50 is mounted on a shaft 52 that rotates about steam pipe 54. A bearing 56 may be provided to support the shaft 52.

[0033] Again, at the top of the steam pipe 54 is a nozzle 58 that directs steam onto a conical diffuser 60, which rotates with the cleaning head 50, for directing steam radially outwardly along path A from the steam pipe 54 via apertures 62 formed in the steam pipe 54. Steam flows through apertures 62 and into cleaning head 50 to facilitate drying and polishing of the glass. Although a single set of apertures is provided at a mid point of the cleaning element, it will be appreciated that they may be offset from the mid point, and that more than one set of apertures may be provided.

[0034] With switched cleaning elements 16a, 16c, the steam distribution system 34 is operable by applying pressure to the cleaning element 16a via the cleaning head 50 axially along the axis of rotation of the cleaning element 16a to trigger steam flow to all of the cleaning elements in the first set, i.e. 16a, 16b, 16c, 16d, 16e. Figures 14 and 15 illustrate how this is achieved. In this regard, a base plate 64 is provided, the base plate 64 being movable axially along the steam pipe 54 when shaft 52 is depressed. A switch 66 is provided between the base plate 64 and a base of the device 10, whereby applying pressure to the cleaning head 50 causes depression of a switch arm 68 and activation of switch 66, triggering control valve 44b to be opened so that steam can flow toward cleaning elements 16a, 16b, 16c, 16d, 16e.

[0035] A spring 70 is provided to resiliently bias the base plate 64 and thus the shaft 52 and cleaning head 50 upwardly, though allow it to be movable downwardly to operate the steam distribution system. A bolt 72 is provided for guiding movement of the brush.

[0036] Cleaning elements 16f, 16g, which are configured to dry and polish cutlery, may be unswitched cleaning elements and configured in accordance with cleaning elements 16b, 16d, 16e, as described above. Operation of the steam distribution system 34 for flow of steam to cleaning elements 16f, 16g via control valve 44a may be via a further sensor within the enclosure, such as a proximity sensor to detect the insertion of cutlery, to provide autonomous

activation of steam once a piece of cutlery is inserted to hygienically clean/polish the piece of cutlery prior to use. Alternatively, an external switch on or remote from the device 10 may be provided.

[0037] The device 10 also includes a programmable microprocessor that can control operation, monitor performance parameters, and log usage data. In one example, the microprocessor can record usage history and provide alerts for replacement of the cleaning elements 16 once a predetermined number of cycles have passed. In other examples, the microprocessor may accept signals from sensors fitted to the device, such as vibration sensors to alert to damage of cleaning elements, which could shut down or limit operation of the device, or moisture sensors to alert to excessive use of steam, which could trigger operation of a heater provided within the enclosure for drying the cleaning elements.

[0038] The embodiments have been described by way of example only and modifications are possible within the scope of the invention disclosed as defined by the appended claims. For example, in the illustrated embodiments, the cleaning elements 16 are rotatable for cleaning or polishing the items. In other embodiments, the direction of motion may change rapidly with the cleaning elements 16 oscillating. In other embodiments, the cleaning elements may also demonstrate axial movement, or combinations of rotation, oscillation and axial translation. Furthermore, although the cleaning elements are described as being formed of flexible filaments that are urged outwardly during rotation, they may also be formed of other materials, such as plastic foams for example.

REFERENCES CITED IN THE DESCRIPTION

Cited references

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [EP1532921A \[0003\]](#)
- [US6907893B \[0003\]](#)
- [US7604012B \[0003\]](#)
- [US9451863B1 \[0003\]](#)

Patentkrav

1. Indretning (10) til tørring og polering af genstande såsom glas og bestik, hvilken indretning (10) omfatter:

5 et rum (12) med åbninger (14a, 14b), gennem hvilke en ende af genstandene kan indsættes; og
et selektivt operativt dampfordelingssystem (34),
hvor dampfordelingssystemet (34) kan betjenes ved indsættelse af en ende af genstandene i rummet (12),
kendetegnet ved, at indretningen (10) yderligere omfatter en flerhed af
10 bevægelige rengøringselementer (16) inden i rummet (12) til tørring og/eller polering af genstandene, idet dampfordelingssystemet (34) påfører damp inden i rummet (12) til mindst et af rengøringselementerne (16) og/eller genstandene, hvorved rengøringselementerne (16) tørrer eller polerer genstandene.

15

2. Indretning (10) ifølge krav 1, hvor rengøringselementerne (16) er drejelige til rengøring eller polering af genstandene.

3. Indretning (10) ifølge krav 2, hvor mindst et af rengøringselementerne (16) er
20 monteret på en roterbar aksel (52), hvor akslen (52) roterer omkring et damprør (54), der strækker sig gennem akslen (54) og afsluttes ved en dampdyse (58) dannet af åbninger (62) i akslen (52) i midten af dens længde.

4. Indretning (10) ifølge krav 3, hvor en konisk diffusor (60) er anbragt ved en
25 ende af damprøret (54) for at lede damp radialt udad fra damprøret (54) og ind i rengøringselementet (16).

5. Indretning (10) til tørring og polering af genstande såsom glas og bestik, hvilken indretning (10) omfatter:

30 et rum (12) med åbninger (14a, 14b), gennem hvilke en ende af genstandene kan indsættes; og
et selektivt operativt dampfordelingssystem (34),
kendetegnet ved, at indretningen (10) yderligere omfatter en flerhed af bevægelige rengøringselementer (16) inden i rummet (12) til tørring

og/eller polering af genstandene, idet dampfordelingssystemet (34) påfører damp inden i rummet (12) til mindst et af rengøringsselementerne (16) og/eller genstandene, hvorved rengøringsselementerne (16) tørrer eller polerer genstandene,

5 hvor mindst et af rengøringsselementerne (16) er monteret på en roterbar aksel (52), hvor akslen (52) roterer omkring et damprør (54), der strækker sig gennem akslen (54) og slutter ved en dampdyse (58) dannet af åbninger (62) i akslen (52) i midten af dens længde, og hvor en konisk diffusor (60) er anbragt ved enden af damprøret (54) og inden i

10 rengøringsselementet (16) for at lede damp radialt udad fra damprøret (54) og ind i rengøringsselementet (16).

6. Indretning (10) ifølge krav 2 eller 5, hvor dampfordelingssystemet (34) kan betjenes ved at påføre tryk på rengøringsselementerne (16) aksialt langs deres

15 rotationsakse.

7. Indretning (10) ifølge et hvilket som helst af kravene 3 til 5, hvor mindst en roterbar aksel (52) er aksialt bevægelig i forhold til et tilsvarende damprør (54) for at drive dampfordelingssystemet (34).

20

8. Indretning (10) ifølge krav 7, hvor den roterbare aksel (52) er fjedrende forspændt opad og bevægelig nedad for at drive dampfordelingssystemet (34).

9. Indretning (10) ifølge et hvilket som helst af de foregående krav, hvor

25 dampfordelingssystemet (34) kan betjenes, når en ende af en af genstandene bringes i kontakt med mindst et rengøringsselement (16).

10. Indretning (10) ifølge et hvilket som helst af de foregående krav, hvor dampfordelingssystemet (34) kan betjenes ved at påføre tryk på mindst et af

30 rengøringsselementerne (16) ved at påføre tryk på genstanden, når den først er indsat i rummet (12).

11. Indretning (10) ifølge et hvilket som helst af de foregående krav, med en låge, som kan åbnes, hvori åbningerne er dannet, idet indretningen (10) er

konfigureret til at standse driften ved åbning af lågen.

12. Indretning (10) ifølge et hvilket som helst af de foregående krav, yderligere omfattende en strømningsbegrænser til at begrænse mængden af damp, der kan
5 påføres inden i rummet (12).

13. Indretning (10) ifølge et hvilket som helst af de foregående krav, yderligere omfattende et varmelegeme inden i rummet (12) til tørring af rengørings-
elementerne (16).
10

14. Indretning (10) ifølge et hvilket som helst af de foregående krav, hvor åbningerne (14a, 14b), gennem hvilke en ende af genstandene kan indsættes, omfatter en første åbning til modtagelse af glasartikler og en anden åbning til modtagelse af bestik.

15

15. Indretning (10) ifølge et hvilket som helst af de foregående krav, hvor flerheden af bevægelige rengøringsselementer (16) omfatter et første sæt rengøringsselementer (16a, 16b, 16c, 16d, 16e) til tørring og/eller polering af glasartikler, og et andet sæt rengøringsselementer (16e, 16f) til tørring og/eller

20 polering af bestik.

DRAWINGS

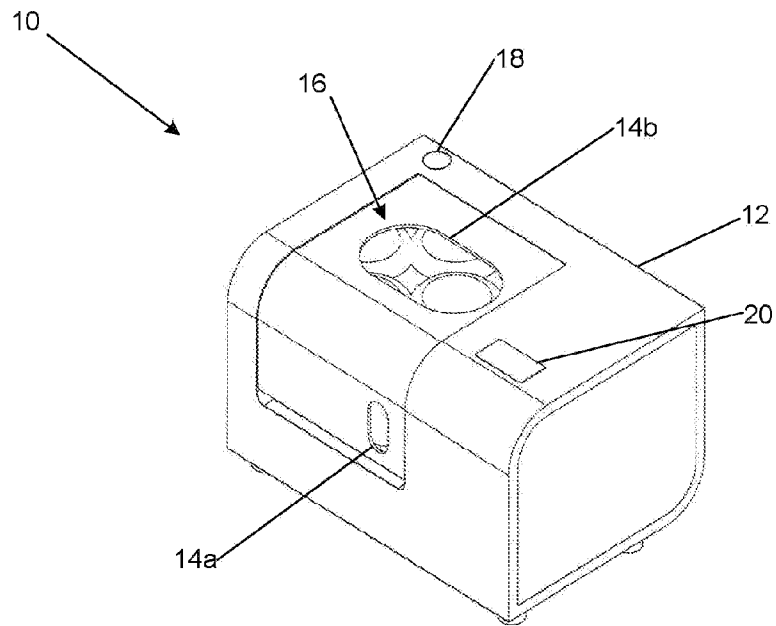


Figure 1

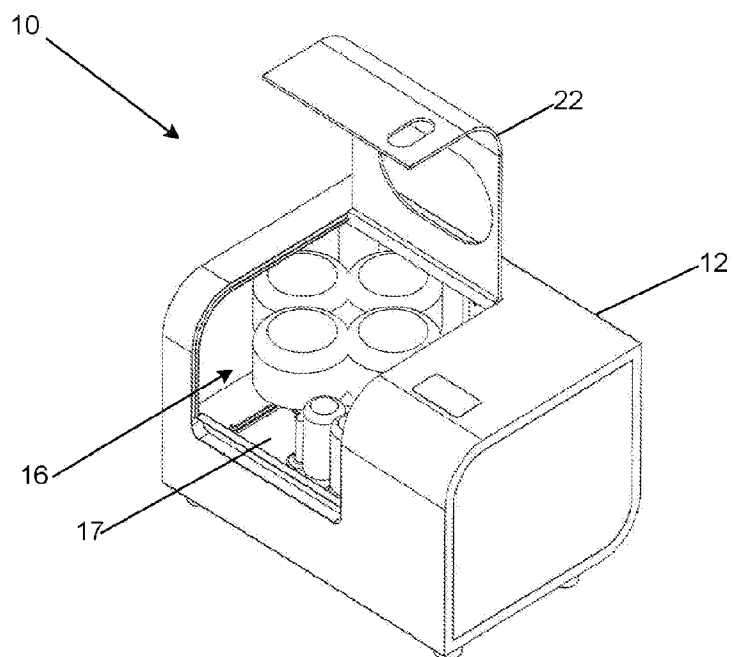


Figure 2

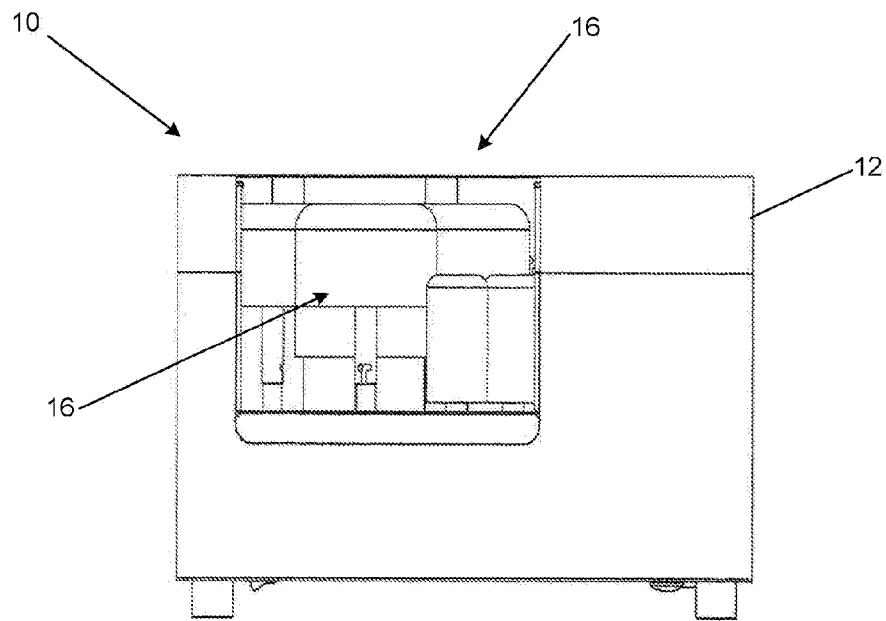


Figure 3

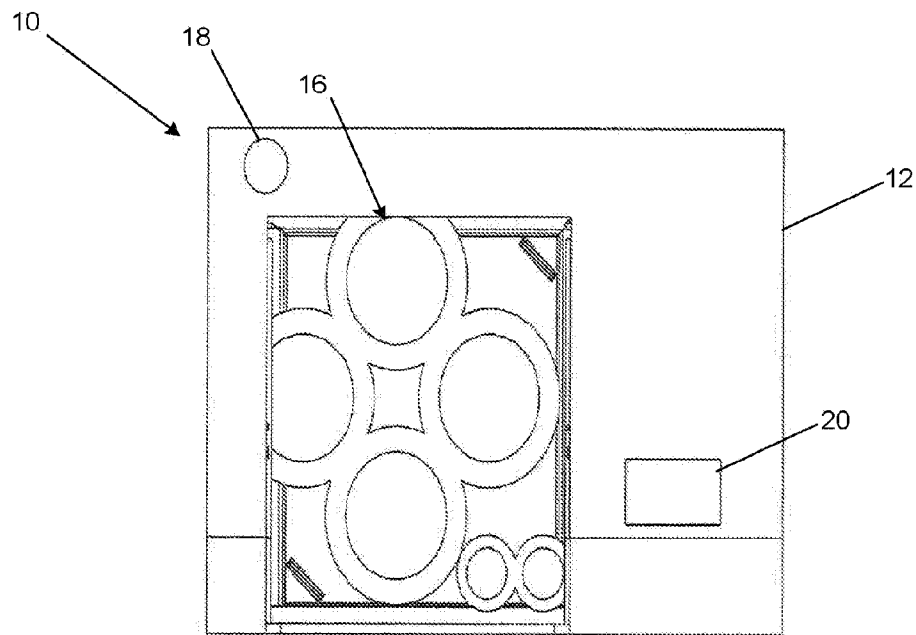
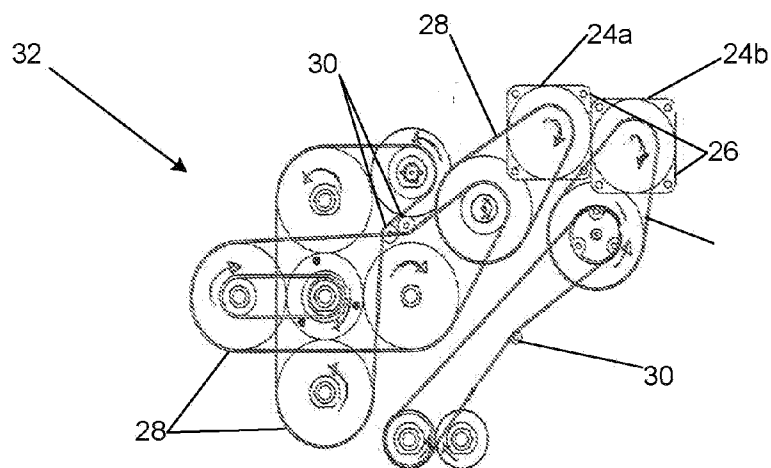
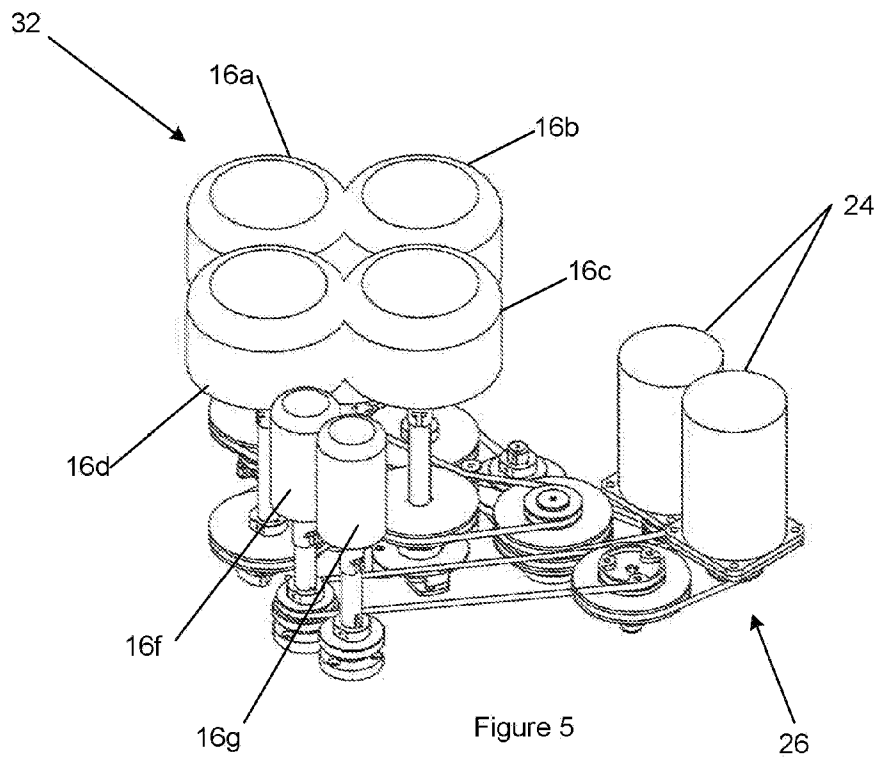


Figure 4



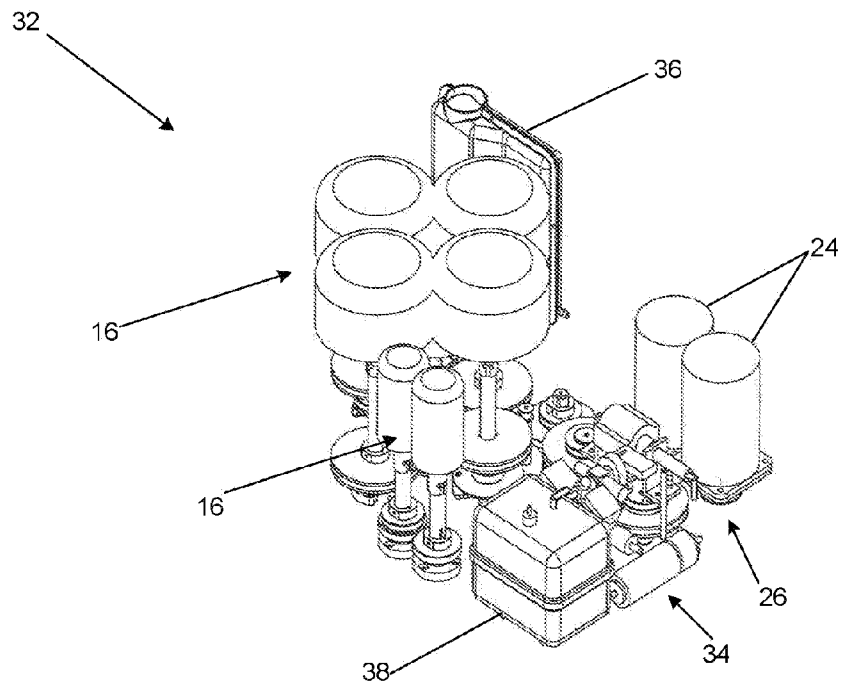


Figure 7

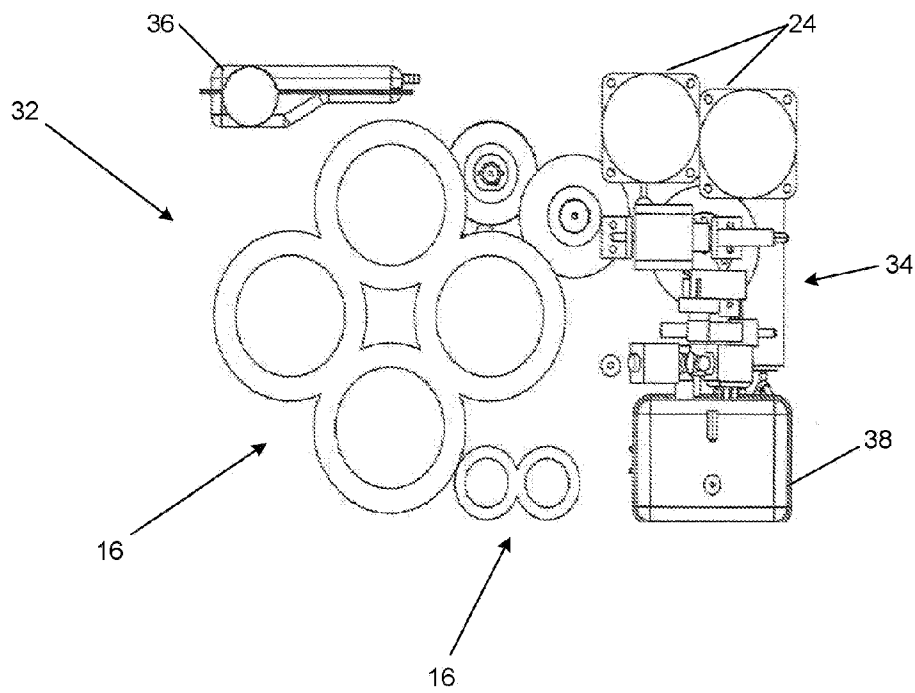


Figure 8

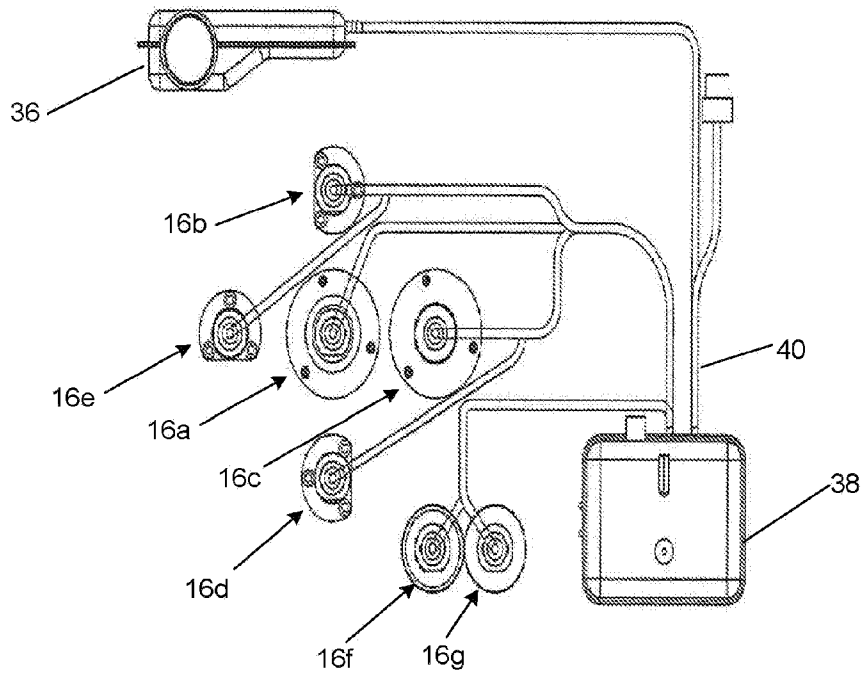


Figure 9

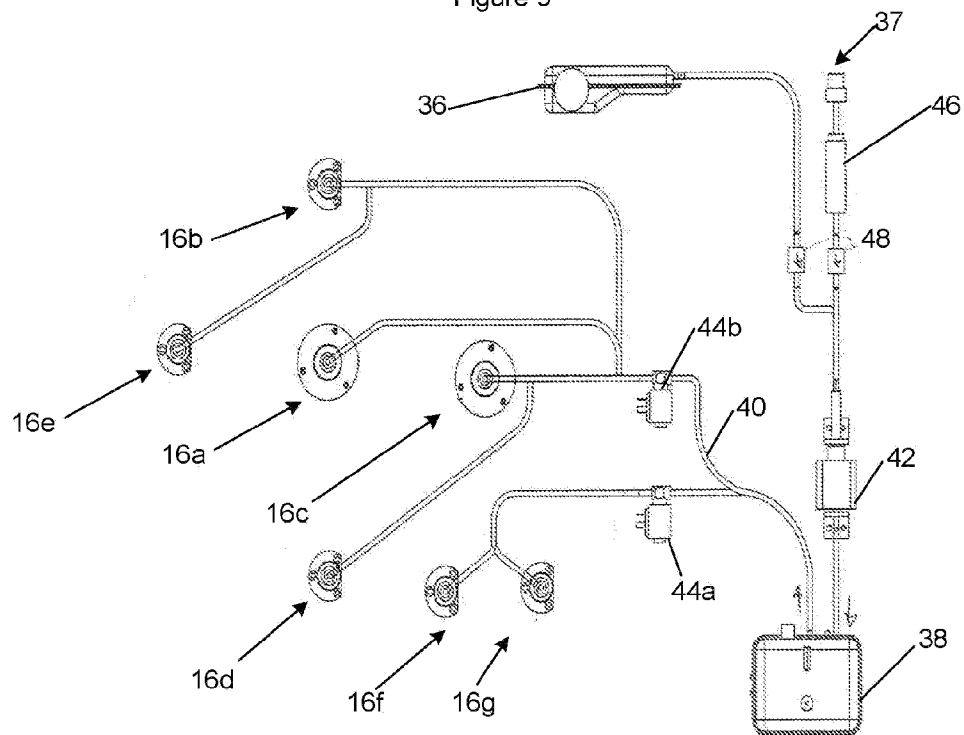


Figure 10

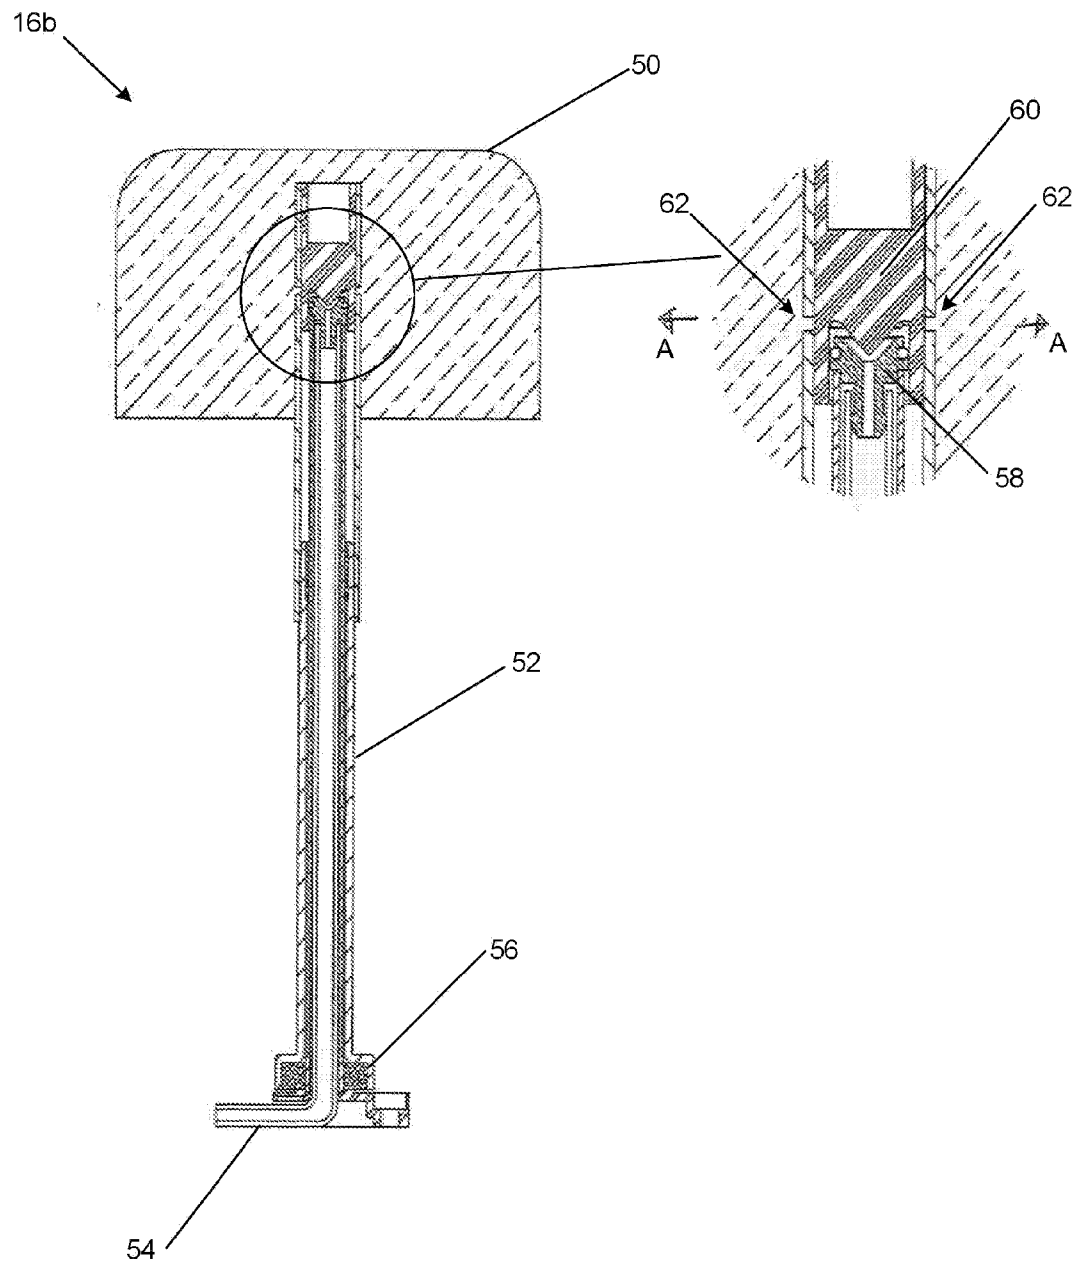


Figure 11

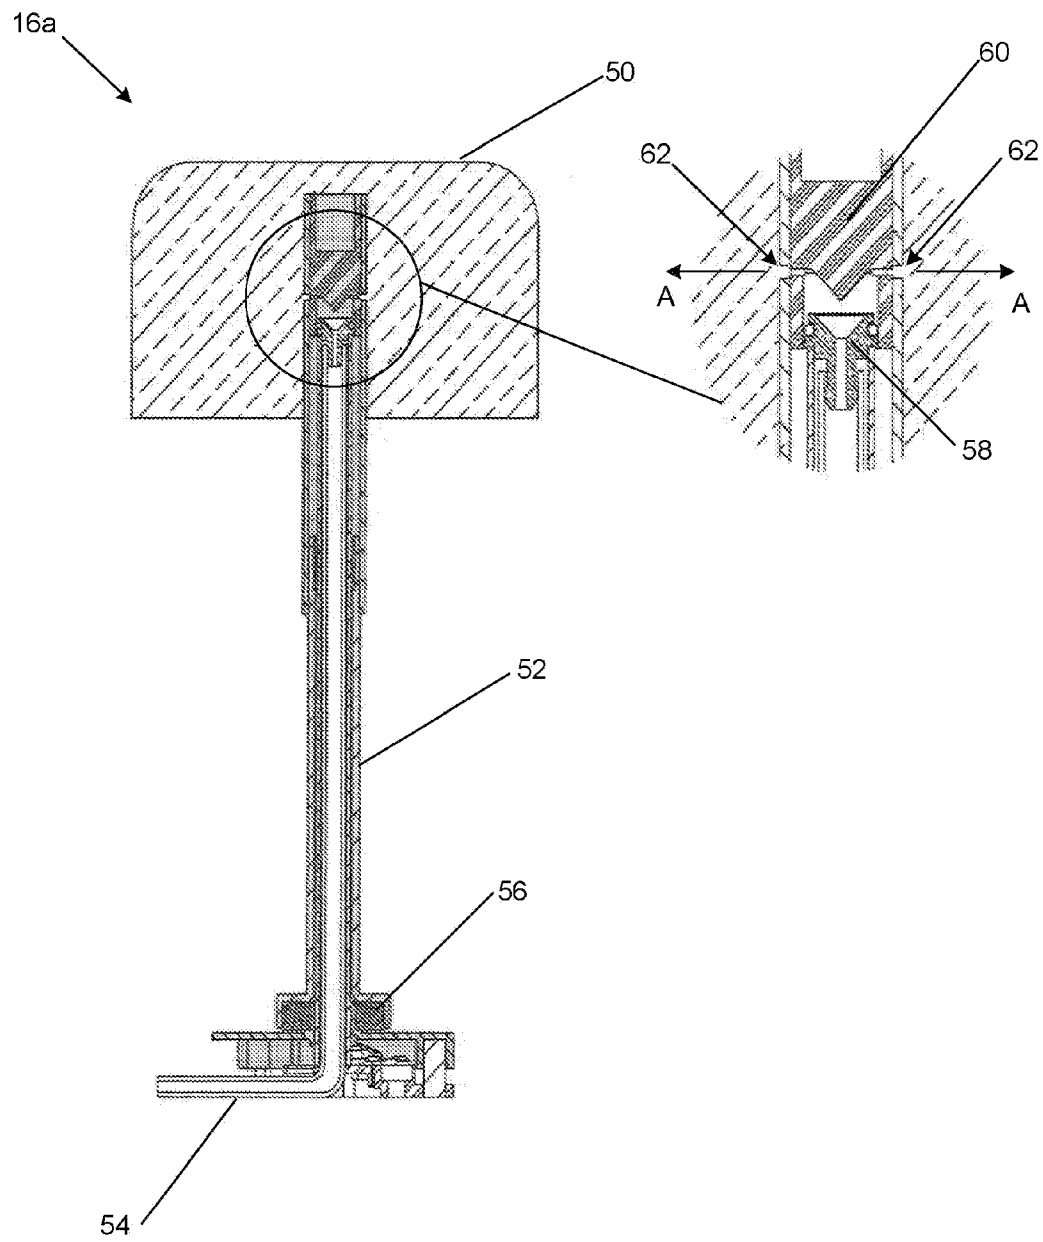


Figure 12




Figure 13

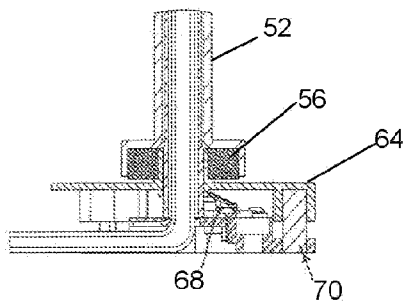


Figure 14

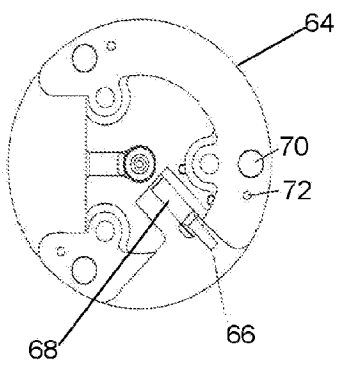


Figure 15