

18



Europäisches Patentamt
European Patent Office
Office européen des brevets

11 Publication number:

**0 168 511
B1**

12

EUROPEAN PATENT SPECIFICATION

46 Date of publication of patent specification: **04.11.87**

51 Int. Cl.⁴: **B 22 D 19/00**

21 Application number: **84108348.8**

22 Date of filing: **16.07.84**

54 **Method of manufacturing a combustor nozzle.**

43 Date of publication of application:
22.01.86 Bulletin 86/04

45 Publication of the grant of the patent:
04.11.87 Bulletin 87/45

84 Designated Contracting States:
DE GB NL

58 References cited:
**DE-C- 548 717
FR-A-1 577 979
US-A-4 352 675**

73 Proprietor: **MITSUBISHI JUKOGYO KABUSHIKI
KAISHA
5-1, Marunouchi 2-chome Chiyoda-ku
Tokyo 100 (JP)**

72 Inventor: **Tsunoi, Makoto Hiroshima Technical
Institute
Mitsubishi Jukogyo K.K. 4-6-22, Kan'on-
Shinmachi
Nishi-ku Hiroshima-shi Hiroshima-ken (JP)
Inventor: Kai, Toshio Hiroshima Technical
Institute
Mitsubishi Jukogyo K.K. 4-6-22, Kan'on-
Shinmachi
Nishi-ku Hiroshima-shi Hiroshima-ken (JP)
Inventor: Shozen, Daisaku Hiroshima Technical
Institute
Mitsubishi Jukogyo K.K. 4-6-22, Kan'on-
Shinmachi
Nishi-ku Hiroshima-shi Hiroshima-ken (JP)
Inventor: Morimoto, Tatsuo Hiroshima
Technical Institute
Mitsubishi Jukogyo K.K. 4-6-22, Kan'on-
Shinmachi
Nishi-ku Hiroshima-shi Hiroshima-ken (JP)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

EP 0 168 511 B1

- ⑦② Inventor: Inoue, Ikuo Hiroshima Technical
Institute
Mitsubishi Jukogyo K.K. 4-6-22, Kan'on-
Shinmachi
Nishi-ku Hiroshima-shi Hiroshima-ken (JP)
Inventor: Jindo, Katsuo c/o Yokkaichi Divison
Mitsubishi Petrochemical Co., Ltd 1, Toho-cho
Yokkaichi-shi Mie-ken (JP)
Inventor: Sato, Tetsuya c/o Yokkaichi Division
Mitsubishi Petrochemical Co., Ltd 1, Toho-cho
Yokkaichi-shi Mie-ken (JP)
- ⑦④ Representative: Henkel, Feiler, Hänzel & Partner
Möhlstrasse 37
D-8000 München 80 (DE)

Description

1. Field of the invention:

This invention relates to a method of manufacturing a combustor nozzle with a layer of corrosion
5 resistant alloy at the nose of the nozzle body.

2. Description of the prior art:

A combustor in, for example, a gasifying plant for producing hydrogen by the partial oxidation of hydrocarbon has a nose covered by a heat resistant alloy, since it is exposed to a high temperature up to, say, 800°C and liable to wear by gas or dust, or corrosion by impurities in fuel. A typical nose construction is shown in Figure 1. A nose 1 terminates in a covering layer 2. A nozzle gun 3 is provided for supplying hydrocarbon. The nose 1 and the gun 3 defines therebetween a clearance 4 through which oxygen is supplied for the partial oxidation of the hydrocarbon. The nose 1 is provided with a water cooler 5. The covering layer 2 has hitherto been formed by one of the following methods:

A. Welding

A plurality of layers of, for example, a nickel-based corrosion resistant alloy such as Hastelloy X or a cobalt-based corrosion resistant alloy such as Stellite are welded to the nose and machined appropriately.

B. Spray coating

A heat resistant ceramic material is spray coated on the tip of the nose.

C. No such covering layer is provided, but the heat resistance of the nose *per se* is improved.

These methods have, however, their own drawbacks as will hereinafter be pointed out.

A. Welding

(1) The nose material melts into the alloy during its welding, and brings about a change in its composition. This brings about a reduction in its mechanical properties and corrosion resistance at a high temperature, and the alloy is, therefore, liable to corrosion at a high temperature or cracking due to fatigue.

(2) The nickel- or cobalt-based alloy is lower in thermal conductivity than the nose material, which is low alloy steel, such as Cr-Mo steel. The covering layer should, therefore, be small in thickness in view of its cooling effect and thermal fatigue resistance. No satisfactorily thin covering layer can be formed by welding, since it is impossible to reduce satisfactorily the thickness of an interfacial diffusion layer between the nose material and the alloy.

(3) The alloy is so likely to melt into the nose material that no clear structural boundary can be obtained between the covering layer and the nose material. It is, therefore, very likely that a crack formed on the surface of the covering layer by corrosion, fatigue or thermal impact may propagate through the nose material.

B. Spray coating

The ceramics are greatly lower than the nose material and inferior in resistance to thermal impact. It is, therefore, likely that the covering layer may quickly crack and peel off the nose material.

C. The low alloy steel is lower in hardness at a high temperature than the nickel- or cobalt-based heat resistant alloy. If no covering layer is provided, therefore, the nose is liable to wear by fuel gas or dust.

In US—A—4 352 675 a coal gasification reactor is described comprising a vortex burner with a mouthpiece on which a conical lining is provided for preventing wear. This conical lining has the form of a funnel and is attached to the mouthpiece by welding or by means of pins. The disadvantages of the welding method are already described above. Concerning the attachment by means of pins, a sufficient fixation is not achieved if the lining is not received in a form-locking way within the conical mouthpiece.

The nose of a combustor is easily influenced by a temperature change which may result from a change in the supply of fuel and the shape of the flame thereby formed. It is liable to wear or corrosion by the dust in the fuel or the fuel gas itself. Moreover, insofar as it is one of the essential members of an integral plant, it is required to have a certain length of guaranteed life (e.g. six months), since any trouble that it may have between regular inspections or repairs interrupts the operation of the plant and brings about a reduction in production. Under these circumstances, the following characteristics are, among others, required of the nose of the combustor:

(1) High resistance to thermal fatigue and impact;

(2) Good oxidation resistance at a high temperature;

(3) Good resistance to wear and corrosion at a high temperature; and

(4) Stability in the performance of the product.

None of the conventional methods for protecting the nose, however, satisfies these requirements.

Summary of the invention

It is an object of this invention to provide a method which eliminates the drawbacks of the conventional

methods and makes it possible to manufacture a combustor nozzle which satisfies the requirements listed at (1) to (4) above.

This object is attained by a method which is characterized by preparing a mold from a material that is to form a nozzle body casting an alloy into said mold to form a covering layer, and machining the resulting combination of said material and said alloy into a predetermined nozzle shape in which said covering layer covers the nose of said nozzle body.

The method of this invention provides the following advantages, among others:

(1) A diffusion layer having only a very small thickness of, say, 0.1 mm is formed between the nose material and the covering layer, and neither the nose material nor the covering layer undergoes any substantial change in composition. There is, therefore, no reduction in the heat or corrosion resistance of the covering layer.

(2) The nose material and the covering layer are clearly different from each other in structure; therefore, even if any crack may form in the covering layer, it hardly propagates through the nose material.

(3) The conditions of manufacture are easy to control to ensure the manufacture of a product of high performance at any time.

The method of this invention is applicable to the manufacture of not only the nose of a combustor for a hydrogen producing plant, but also for the noses of a variety of other types of combustor nozzles.

Brief description of the drawings

Figure 1 is a schematic front elevational view, partly in section, of the nose of a conventionally known combustor for a hydrogen producing plant; and

Figures 2A to 2C are schematic front elevational views, partly in section, illustrating a method embodying this invention.

Detailed description of the invention

Referring to Figures 2A to 2C of the drawings, there are shown a series of steps for manufacturing in accordance with this invention the nose of a combustor for a hydrogen producing plant. A mold 11 is preheated in an electric furnace 13 in the presence of a reducing molten flux 12 which prevents the oxidation of the inner surface of the mold 11, as shown in Figure 2A. Anhydrous sodium borate may be used as the flux. A heat resistant alloy 15, which is used to form a covering layer, is melted in a high frequency induction furnace 14, and the molten alloy is poured into the mold 11, as shown in Figure 2B. The mold 11 may be formed from 1.25Cr-0.5Mo steel, and the alloy 15 may be a nickel-based heat resistant alloy. After the alloy 15 has solidified, the assembly of the mold 11 and the alloy 15 is machined into a predetermined shape to yield a product 17 carrying a covering layer 17A composed of the heat resistant alloy, as shown in Figure 2C. As is obvious therefrom, the product 17 is obtained by removing the alloy from an area 16 and the mold material from areas 18.

Table 1 compares in chemical composition several noses made by a conventional welding method and several noses made by the method of this invention which is shown in Figures 2A to 2C. It is obvious from Table 1 that the products of this invention showed a normal range of composition at a distance of only 0.1 mm from the interface between the nose body and the covering layer, while the conventionally welded products showed a change in composition at a depth up to about 2 mm.

0 168 511

TABLE 1

Composition of the covering alloy (Hastelloy C₄)

	Distance from interface (mm)		Cr	Mo	Fe
			14.0/18.0	14.0/17.0	Less than 3.0
5	0.05	Welded product	3.0	4.8	67.8
		Product of the invention	8.4	6.8	50.3
10	0.1	Welded product	7.5	5.1	43.3
		Product of the invention	14.2	15.8	3.2
15	0.5	Welded product	10.9	8.9	5.4
		Product of the invention	14.3	16.3	2.3
20	1.0	Welded product	12.5	14.3	3.0
		Product of the invention	14.8	16.1	2.4
25	2.0	Welded product	14.4	16.2	3.1
		Product of the invention	14.0	16.4	2.0

30 The products were also tested for oxidation resistance. The covering layer was partly removed to leave a thickness of 1 mm from the interface, and heated at 1000°C for 400 hours intermittently on a cycle of 15 hours of heating and five hours of cooling. The products were, then, tested for loss by corrosion. A bare product not having any covering layer was also tested in the same way. The results are shown in Table 2.
 35 As is obvious therefrom, the product of this invention showed a drastically smaller amount of loss by corrosion than the conventional products.

TABLE 2

	Conventional products	Loss by corrosion (mg/cm ²)		
		100 h	200 h	400 h
40	Bare (2.25Cr-1Mo)	-100	—	—
	Welded	0	2	21
45	Product of this invention	0	0	0

50 The same products were also tested for tensile strength and hardness at a high temperature. The results are shown in Table 3. As is obvious therefrom, the welded product showed a drastic reduction in hardness with a rise in temperature, and the bare material also showed a very low degree of hardness at a high temperature. The product of this invention was superior to the conventional products both in tensile strength at a high temperature and in hardness at a high temperature.

TABLE 3

	Conventional products	Tensile strength at a high temp. (kg/mm ²)			Hardness at a high temp.		
		600°C	700°C	800°C	600°C	700°C	800°C
60	Bare (2.25Cr-1Mo)	30.1	15.2	6.4	130	110	80
	Welded	45.3	29.8	10.3	180	171	164
65	Product of the invention	47.2	40.1	36.5	190	176	168

Claims

1. A method of manufacturing a combustor nozzle with a layer (17A) of corrosion resistant alloy at the nose (1) of the nozzle body, characterized by preparing a mold (11) from a material that is to form a nozzle body (17), casting an alloy (15) into said mold to form a covering layer (17A), and machining the resulting combination of said material and said alloy (15) into a predetermined nozzle shape in which said covering layer (17A) covers the nose (1) of said nozzle body.
2. A method as set forth in claim 1, wherein said material is steel containing 1.25% Cr and 0.5% Mo, while said alloy (15) is selected from the group consisting of nickel- and cobalt-based heat resistant alloys.
3. A method as set forth in claim 2, wherein said alloy (15) is Hastelloy C₄.
4. A method as set forth in claim 3, further including preheating said mold (11) in the presence of a reducing flux.
5. A method as set forth in claim 4, wherein said flux is anhydrous sodium borate.

15 Patentansprüche

1. Verfahren zur Herstellung einer Verbrennerdüse mit einer Schicht (17A) aus einer korrosionsbeständigen Legierung an der Spitze (1) des Düsenkörpers, dadurch gekennzeichnet, daß eine Gießform oder Kokille (11) aus einem Werkstoff zur Bildung eines Düsenkörpers (17) angefertigt wird, in die Gießform oder Kokille eine Legierung (15) zur Bildung einer Überzugsschicht (17A) eingegossen wird und der erhaltene Formling aus dem Werkstoff und der Legierung (15) durch spanabhebende Bearbeitung in eine vorbestimmte Düsenform gebracht wird, bei welcher die Überzugsschicht (17A) die Spitze (1) des Düsenkörpers bedeckt.
2. Verfahren nach Anspruch 1, dadurch gekennzeichnet, daß der genannte Werkstoff Stahl mit 1,25% Cr und 0,5% Mo ist, während die Legierung (15) ausgewählt ist aus der Gruppe warmfester Legierungen auf Nickel- und Kobaltbasis.
3. Verfahren nach Anspruch 2, dadurch gekennzeichnet, daß die Legierung (15) Hastelloy C₄ ist.
4. Verfahren nach Anspruch 3, dadurch gekennzeichnet, daß die Gießform oder Kokille (11) in Gegenwart eines reduzierenden Flußmittels vorgewärmt wird.
5. Verfahren nach Anspruch 4, dadurch gekennzeichnet, daß das Flußmittel wasserfreies Natriumborat ist.

Revendications

1. Un procédé de fabrication d'une buse de combustion présentant une couche (17A) d'alliage résistant à l'usure à la pointe (1) du corps de buse, caractérisé par la préparation d'un moule (11) à partir d'une matière qui doit former un corps de buse (17), le moulage d'un alliage (15) dans ledit moule pour former une couche (17A) de revêtement, et l'usinage de la combinaison résultante de ladite matière et dudit alliage (15) dans une forme prédéterminée de buse dans laquelle ladite couche (17A) de revêtement recouvre la pointe (1) dudit corps de buse.
2. Un procédé selon la revendication 1, dans lequel ladite matière est de l'acier contenant 1,25% de Cr et 0,5% de Mo, tandis que ledit alliage (15) est sélectionné dans le groupe consistant en des alliages à base de nickel et de cobalt résistants à la chaleur.
3. Un procédé selon la revendication 2, dans lequel ledit alliage (15) est de l'Hastelloy C₄.
4. Un procédé selon la revendication 3, comportant en outre le préchauffage dudit moule (11) en présence d'un flux réducteur.
5. Un procédé selon la revendication 4, dans lequel ledit flux est du borate de sodium anhydre.

FIG.1

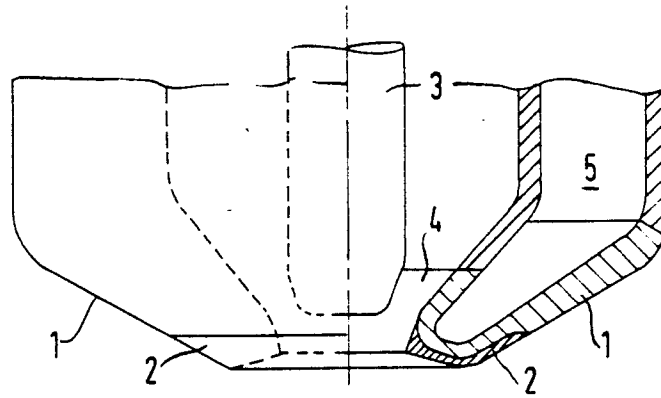


FIG.2A

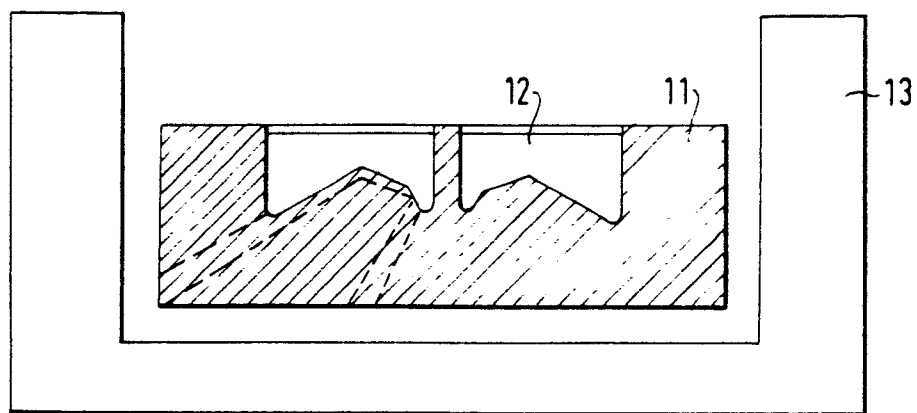


FIG.2B

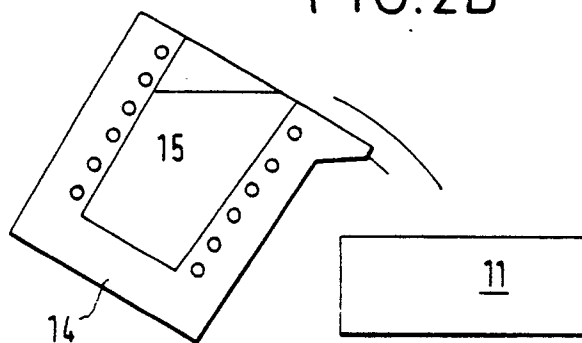


FIG.2C

