



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>F01B 13/04, 13/06, F02B 57/00, 57/08</b>		A1	(11) International Publication Number: <b>WO 95/22683</b> (43) International Publication Date: 24 August 1995 (24.08.95)
(21) International Application Number: PCT/NZ95/00015 (22) International Filing Date: 15 February 1995 (15.02.95)			(81) Designated States: AU, CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(30) Priority Data: 250,922 18 February 1994 (18.02.94) NZ			Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(71) Applicant (for all designated States except US): CONTINUOUS CYCLE ENGINE DEVELOPMENT COMPANY LIMITED [NZ/NZ]; Level 2, 611 Gt South Road, Manukau City 1702 (NZ).			
(72) Inventor; and (75) Inventor/Applicant (for US only): SMITH, Roger, John [NZ/NZ]; 423 Gt South Road, Papakura 1703 (NZ).			
(74) Agent: KRAEMER, Michael, Hermann; P.O. Box 874, Papakura 1730 (NZ).			
(54) Title: ROTARY TYPE INTERNAL COMBUSTION MOTOR			
(57) Abstract			
<p>An internal combustion motor comprising at least two reciprocable pistons (2, 4) in their respective cylinders arranged radially in a rotatable crankcase (25) having an axis of rotation (26), a stepdriver element (10) connected to the pistons (2, 4) via their respective connecting rods (6, 8), an axis of rotation (12) of the stepdriver element (10) being offset from the axis of rotation (26) of the crankcase (25), the crankcase (25) and the cylinders in use rotating around the stepdriver element (10) while the pistons (2, 4) reciprocate in the respective cylinders, link assembly means (14, 16) connecting the stepdriver element (10) to the crankcase (25) and means to take power from the rotatable crankcase (25).</p>			

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## ROTARY TYPE INTERNAL COMBUSTION MOTOR

TECHNICAL FIELD

This invention concerns internal combustion motors of the piston in cylinder type.

5 BACKGROUND ART

The operation of such motors whether Diesel or spark ignition has changed little in a century despite numerous proposals. One disadvantage of the Otto-cycle is the sequence which surrounds top dead centre (TDC). As the piston rises toward TDC, a spark is generated, ignition begins and the piston continues to rise completing compression and resisting the expansion of that part of the charge which has already ignited and is expanding. At TDC the connecting rod and the crankshaft are aligned so that in theory the burning expanding gases have no space in which to expand. The available space for these combustion gases does not increase until TDC is passed and the connecting rod is once more inclined to the piston axis and the inclination of the connecting rod once more offers mechanical advantage to the piston.

The provision of a spark before TDC tends to reverse the rotation of the motor. Were it not for the flywheel carrying the piston past TDC, pulsation reversion would act to arrest and reverse the motor's rotation.

25 This small sector of cycle illustrates what is lacking in

the concept and present application of the Otto-cycle.

Petrol engines utilising the Otto-cycle require a high ratio of fuel to air. Incomplete combustion and the internal deposition of carbon is therefore common.  
5 Unfavourable emissions are also a consequence of these ratios.

#### SUMMARY OF THE INVENTION

The multi-cylinder aspect of the invention provides an internal combustion motor of the piston in cylinder type  
10 wherein the or each piston may exert drive through linkage which permits a phase difference between piston movement and the drive take-off whereby in use the working stroke may begin at or after the highest compression point (HCP). Such a motor may have pistons reciprocable in cylinders, arranged radially in a rotatable crankcase having an axis  
15 of rotation, a stepdriver element connected to the pistons, the axis of rotation of the stepdriver element being offset from the axis of rotation of the crankcase, the crankcase and cylinders in use rotating around the stepdriver element while the pistons reciprocate, and means  
20 to take power from the rotatable crankcase.

Much of the chemical energy of fuel appears as heat. It appears that some of the heat is the result of work done needlessly by a motor through poor design of the capture of

reciprocating motion. Preferably the connecting rods may be connected to the stepdriver element so as to take mechanical advantage by inclination of the rods to the piston travel axis, which advantage is maintained through 5 substantially half the power stroke by simultaneous rotation of the crankcase and cylinders.

The stepdriver element may be connected to the pistons such that in use the working stroke begins when the connecting rod is inclined to the piston travel axis after 10 (HPC) rather than at alignment or before alignment as in conventional motor operation.

This is achieved by arranging the axes of the links to be other than parallel to the piston travel axis at HCP. Even small inclinations of the linkage ease the position where 15 the linkage directly opposes the descending piston.

The pistons may be in opposed pairs. When there are two or more pairs of pistons the piston and cylinder assemblies may be arranged radially on the crankcase. Alternatively there may be an uneven number of cylinders but whatever the 20 number it is preferable that the cylinders are disposed evenly around the crankcase. The pistons may rotate a stepdriver in the crankcase through conventional connecting rods. The rotational centre of the stepdriver may be offset from the corresponding rotational centre of the crankcase 25 by half the length of the piston stroke. The stepdriver may

drive the crankcase at the same rpm through a link assembly such as a trio of links or pairs of links or a mechanical equivalent.

5 The crankcase and associated cylinders are free to rotate about a stationary shaft which is supported on motor mounts. The motor is suited to air cooling and may run inside a housing with air vents or passages to promote heat exchange. The gearbox input shaft may be driven from a take-off shaft or a gear fixed to the crankcase coaxially with the support shaft axis. A starter ring may be bolted 10 to the crankcase to permit conventional starting.

15 The above geometry makes it possible for four cylinders to be fixed at NSEW positions wherein the pistons both drive a stepdriver while simultaneously rotating about the stepdriver each requiring only an aliquot crank angle allowing the stepdriver position in the crankcase to remain constant while the stepdriver drives the crankcase about the crankcase rotational axis through the link assembly.

20 The stepdriver may be a circular or polygonal, a spider or other mechanical equivalent. When circular or polygonal the stepdriver diameter may be 60-70% of the crankcase diameter.

Two novel motions are provided by this geometry. In the invention a pair of opposed cylinder and piston assemblies,

the centre of the stepdriver, the big ends of the two connecting rods and the rotational axes of a pair of the parallel links may all be in alignment. This causes the connecting rod to lie on the hypotenuse of a 90\60\30 degree triangle namely at 30 degrees to piston travel at HPC. The subsequent displacement of the connecting rod from the piston axis during the working stroke maximises the conversion of gas expansion to rotational motion.

Secondly the progress of the crankcase carries the assemblies to positions in which the individual motion of the connecting rod cluster do not mutually interfere even though they work in the same plane. Thus the stepdriver shaft may remain static while stepdriver and the radial assemblies all rotate about the stepdriver shaft.

When there are four cylinders and four links, the big ends of one pair of connecting rods may lie on the line joining the stepdriver axis with the axes of one pair of links. The remaining pair of big ends and the remaining link axes lie perpendicular to the first pair. The links are thus parallel with a line joining the axis of the crankcase and stepdriver. This allows the piston 180 degrees of advancement in expansion, rotating the stepdriver from 3 o'clock to 9 o'clock. The links move from 12 o'clock to 6 o'clock. This operation occurs four times per crankcase revolution.

For the four cylinder layout referred to above the links connecting the stepdriver to the crankcase assist the balance of the couple generated by the rotation of the assembly. Stepdriver balance is achieved by the addition of 5 balance weights to one or more, usually all four of the links. The rim speed of the crankcase clearly exceeds that of the smaller stepdriver.

Air intake and exhaust output may be via passages between the crankcase and the cylinder. Side valve, o h valve and 10 o h c arrangements are possible. When the motor operates as Diesel an injector supplies fuel. When spark ignition is utilised fuel injection may supply the fuel. A carburettor and crankcase induction may be substituted.

A dry sump keeps the crankcase free from liquid. A small 15 dosing pump provides the crankcase interior with oil mist. This reaches the cylinder walls, small ends and the links.

Ignition is preferably by Diesel injector but coil ignition and electronic spark generators are operable. A rare earth magnet fixed to the motor may activate a stationary field 20 detector which switches on a transistor. The transistor directs coil discharge to a spark plug. The stationary spark plug may be mounted in the housing which encircles the path of the cylinders but is separated by an air gap. The Hall effect produces the supply of inductive signals to 25 the electronic switch.

BRIEF DESCRIPTION OF THE DRAWINGS

Certain embodiments are now described with reference to the accompanying drawings in which

5 Fig 1 is a sectional diagram of an opposed twin cylinder motor;

Fig 2 is a sectional diagram of a 3-cylinder motor;

Fig 3 is a diagrammatic section of Fig 1 from "A" showing the stepdrive and links connection to crankcase;

10 Fig 4 is a diagram of a six cylinder motor with two cylinders in the optimum drive position over a 100 angle of crankcase rotation;

Fig 5 is a diagram of a 3-cylinder OHV motor

15 Fig 6 is a diagram of an spark ignition setup for the motor.

BEST MODE OF CARRYING OUT THE INVENTION

In Fig 1 the opposed pistons 2,4 are connected by connecting rods 6,8 to stepdriver 10. Stepdriver 10 rotates around centre 12. Links 14,16 are connected to the stepdriver at centres 18, 20 and to the crankcase at centre 22,24. The crankcase rotates about axis 26. Only half the links are shown in this Figure for clarity. The big end 28, 30 link axes 18, 20 and stepdriver centre 12 are aligned when piston 2 is at HCP and piston 4 is at LCP.

It will be seen that the assembly is balanced at this position. Link 6 is inclined to the piston travel axis and the axis 30 is at 90 degrees to the piston travel axis. Likewise the links lie at 90 degrees to the connecting rod 5 alignment axis.

In Figs 2,3 more motor parts are shown. Two cylinder pairs as shown in Fig 2 are assembled radially. The four cylinders 32 are secured to the crankcase by bolts 34 which pass through the cylinder walls. Motor housing 36 has a cylindrical race 38 in which the motor revolves. Louvres 40 in the housing provide gas exchange for cooling. Each cylinder has a conventional spark plug 42. The disposition of balance weights 44, 46 on two of the three pistons is shown. These compensate the off-centre weight distribution 10 of the pistons during running. 15

In Fig 3 the drive linkage of a pair of cylinders is shown. The crankcase revolves around a splined motor support shaft 52 extending from bearings 54 and stationary hollow shaft 56 which is part of the assembly. The assembly 58 turns on 20 bearing 50. Seal 62 keeps the crankcase gastight. Shaft 52 engages the coupling of a transmission gearbox (not shown)

The crankcase interior is charged by a Roots blower (not shown) at 1.5psi with air\fuel mix through hollow shaft 56. A pressed metal engine mount (not shown) is bolted within 25 the engine compartment in order to support the engine

adjacent the gearbox. The mount is movable away from the motor to release it for repair. The blower feeds hollow shaft 56 through an aperture in the mount.

5 The manifold 64 registers with a ring of circular ports 66 in the crankcase wall. The revolving links 14,16 do not impede the entering fuel\air mixture. The cylinders exhaust directly into the housing.

10 In Fig 5 a coaxial pump (not shown) injects fuel into the cylinders via lines (not shown). O H valves 68 are worked by pushrods 70 from a central cam 72. Fan blades 74 extend from the side of the crankcase.

15 In Fig 6 samarium-cobalt magnets 76 are fixed to the crankcase at NSEW locations. The magnets excite a detector 78 and send signals to an electronic ignition circuit 80. The circuit contains a switching transistor which controls the supply of low voltage pulses to a conventional coil 82. An insulated plate 84 is fixed to the static housing 36. A conducting pole 88 in the plate 84 receives high voltage pulses from the coil 82. The spark jumps the air gap as the 20 spark plug 42 passes the plate 84.

The operation is as follows. The crankshaft rotation is anticlockwise. The power stroke occupies 195 degrees. The sequence is best seen from Fig 4. The cylinder 2 is ready to fire. The big end of the connecting rod is at 90

degrees to the stepdriver centre in relation to the piston travel axis .

In the corresponding position in an Otto-cycle motor the gudgeon, connecting rod and crank would be aligned. The 5 diagram shows that as the piston executes its stroke the crankcase rotation keeps pace so that the piston has the same mechanical advantage 100 degrees later. This favourable angle B is shown. The links ensure the rpm of the stepdriver and crankcase are equal. The piston stroke 10 extends for about 195 degrees of crankcase rotation. Thus about half of the power stroke is at favourable mechanical advantage. Rotation continues for a further 90 degrees during which exhaust occurs.

Intake begins. The same big end is still displaced by 90 15 degrees from the conventional position. At this halfway point that a symmetrical cylinder geometry is not possible. This is dealt with by adding weights to the links in order to restore dynamic balance to the assembly (see Fig 2). Crankcase pressure charges the cylinder and the cylinder 20 simultaneously the crankcase advances preserving the relative positions of the cluster of big ends. Compression rises quickly through a small arc placing the big end in the working stroke position ready for firing.

The data below shows the cranking arc for different phases 25 of piston movement wherein the swept stroke is 90mm; the

compression stroke is 75mm; the port depth is 15mm.

HCP to start of Exhaust port(EP)	162	45%
EP start to end of EP	90	25%
End of EP to HCP	108	30%

5 If the motor requires 135 or 37.5% of cranking arc then the following formula applies:

HCP to start of EP	139.5	38.75%
EP start to end of EP	135	37.5%
End of EP to HCP	85.5	23.75%

10 Regardless of port size which alters the crank degrees between start and end of EP the difference between HCP to EP and EP to HCP remains the same. The power stroke is 54 longer than the compression stroke.

15 We consider the advantages of the embodiment to be :

1 Ignition is synchronised with an advantageous arc of the stepdriver.

2 Although the linkage introduces imbalance, the linkage also affords assistance in the balancing of the rotating parts.

3 Low carbon fuels suffice because excess air is available for oxidation.

4 Driving the crankcase through a stepdrive enables the connecting rod to remain at a mechanically advantageous

position for about 100 degrees of the 195 degree working stroke instead of 3 degrees as in a conventional crank motor.

**CLAIMS**

- 1 An internal combustion motor with reciprocable pistons in cylinders, arranged radially in a rotatable crankcase having an axis of rotation, a stepdriver element connected to the pistons, the axis of rotation of the stepdriver element being offset from the axis of rotation of the crankcase, the crankcase and cylinders in use rotating around the stepdriver element while the pistons reciprocate, and means to take power from the rotatable crankcase.
- 2 An internal combustion motor as claimed in any one of claim 1 wherein the crankcase is driven by a link assembly connected between the crankcase and the stepdriver element.
- 15 3 An internal combustion motor as claimed in any one of claims 2 wherein the assembly is a trio or pairs of links.
- 4 An internal combustion motor as claimed in any one of claims 1-3 wherein the rotational axes of crankcase and stepdriver element are offset by half a piston stroke.

5 An internal combustion motor as claimed in any one of claims 1-4 wherein the crankcase rotates about a stationary shaft supported on motor mounts.

6 An internal combustion motor as claimed in any one of 5 claims 1-5 the crankcase and cylinders rotate inside a housing which promotes heat exchange.

7 An internal combustion motor as claimed in any one of claims 1-6 wherein the stepdrive element is circular, polygonal, a spider or mechanical equivalent.

10 8 An internal combustion motor as claimed in any one of claims wherein the stepdriver element size is 60-70% of the diameter of the crankcase.

9 An internal combustion motor as claimed in any one of claims 2-8 wherein a pair of opposed piston and cylinder 15 assemblies, the stepdriver element rotational axis, the big ends of the connecting rods and the rotational axis of the pair of parallel links are all in alignment.

10 10 An internal combustion motor as claimed in any one of claims 2-9 wherein four cylinders arranged in two opposed 20 pairs are connected to a stepdriver element by connecting rods and the big ends of the rods lie on an axis joining the stepdriver element axis with the axis of one pair of links and the remaining pair of links and big ends and link

axes lie perpendicular to the one pair of links so that the links are parallel with a line joining the rotational of the crankcase and stepdriver element.

11 An internal combustion motor as claimed in any one of  
5 claims 10 wherein when the piston advances, moving the  
stepdriver element from 3 o'clock to 9 o'clock the links  
move from 12 o'clock to 6 o'clock and such advance occurs  
four times each revolution.

12 An internal combustion motor as claimed in any one of  
10 claims 2-11 wherein a balance weight is attached to the or  
each link.

13 An internal combustion motor as claimed in any one of  
claims 5-12 wherein the cylinders are charged with a  
fuel\air mix by crankcase induction, the inlet chamber  
15 being arranged coaxially around one engine support shaft  
while the exhaust chamber is arranged coaxially around the  
opposite engine support shaft.

14 An internal combustion motor as claimed in any one of  
claims 1-13 wherein the cylinders have pushrod operated  
20 poppet valves and the pushrods are lifted by a cam  
revolving about the crankcase rotational axis.

15 An internal combustion motor as claimed in any one of  
the preceding claims wherein as the crankcase rotates

through 80-100° a piston moves through 45-55° of its working stroke.

16 An internal combustion motor with reciprocable pistons in cylinders arranged radially in a rotatable crankcase having an axis of rotation, a stepdriver element connected to the pistons, the rotational axis of which is offset from the crankcase axis, the connecting rods of the pistons being connected to the stepdriver element so as to take mechanical advantage by inclination of the connecting rods to the piston travel axis, which advantage is maintained through substantially half the power stroke by simultaneous rotation of the crankcase and cylinders.

17 An internal combustion motor as claimed in claim 16 wherein the advantage angle is 90-110 degrees.

15 18 An internal combustion motor as claimed in claim 16 wherein the angle corresponds to 45-55% of the power stroke.

20 19 An internal combustion motor constructed and adapted for use substantially as herein described with reference to and as illustrated in Fig 1 and 3 or as modified by Figs 2, 4, 5 and 6 of the accompanying drawings.

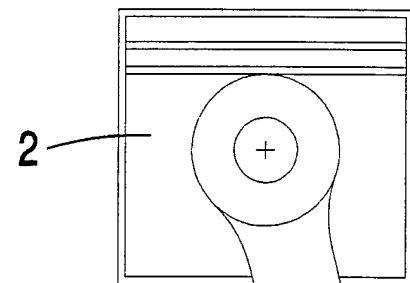


FIG 1


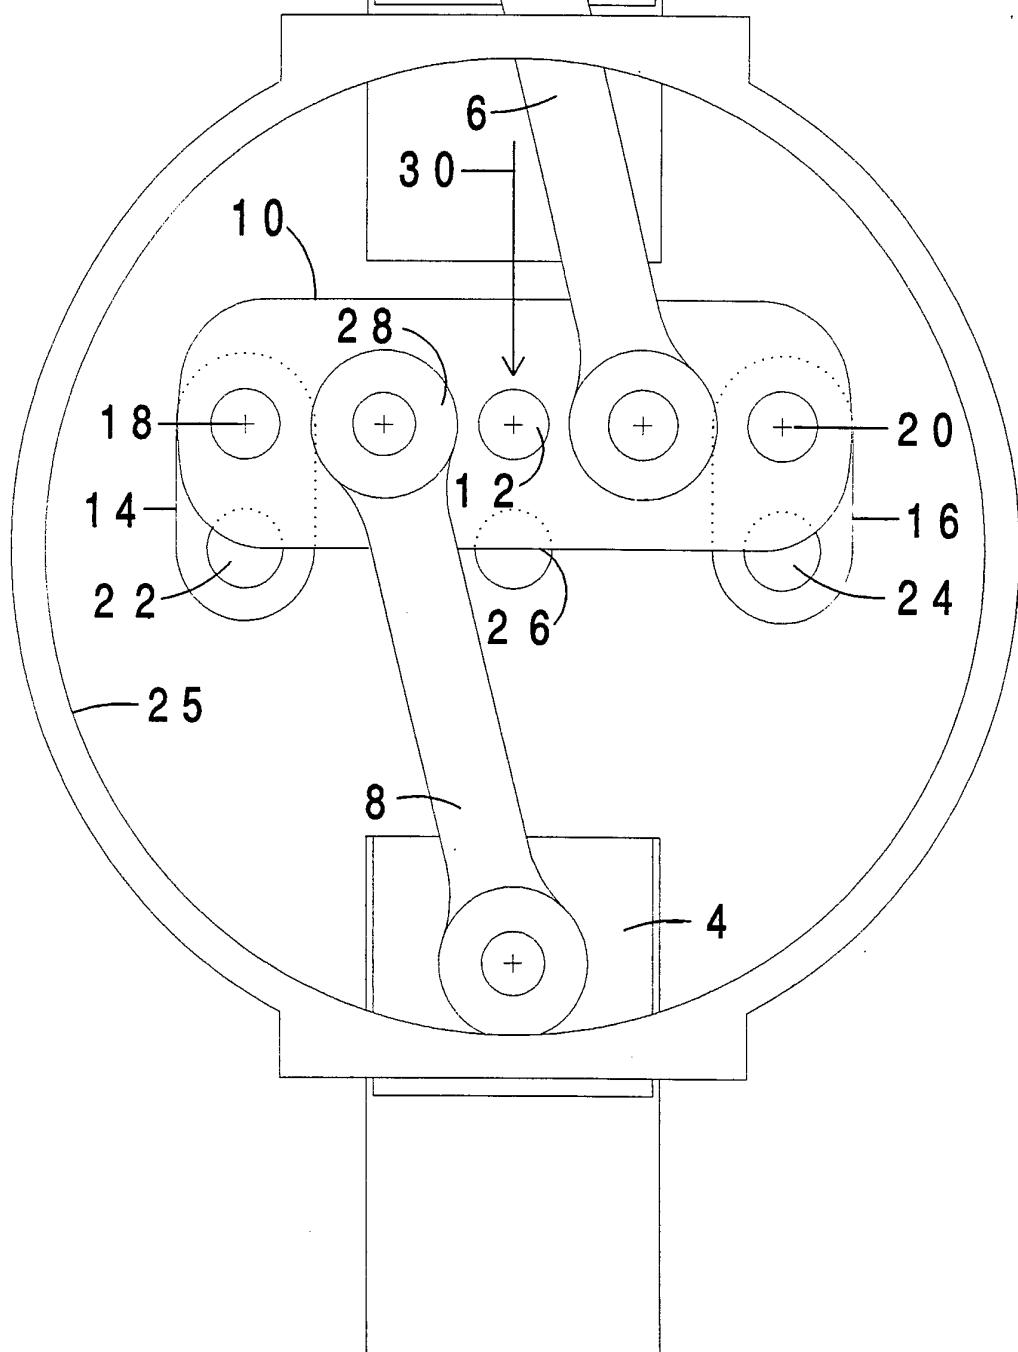


FIG 2

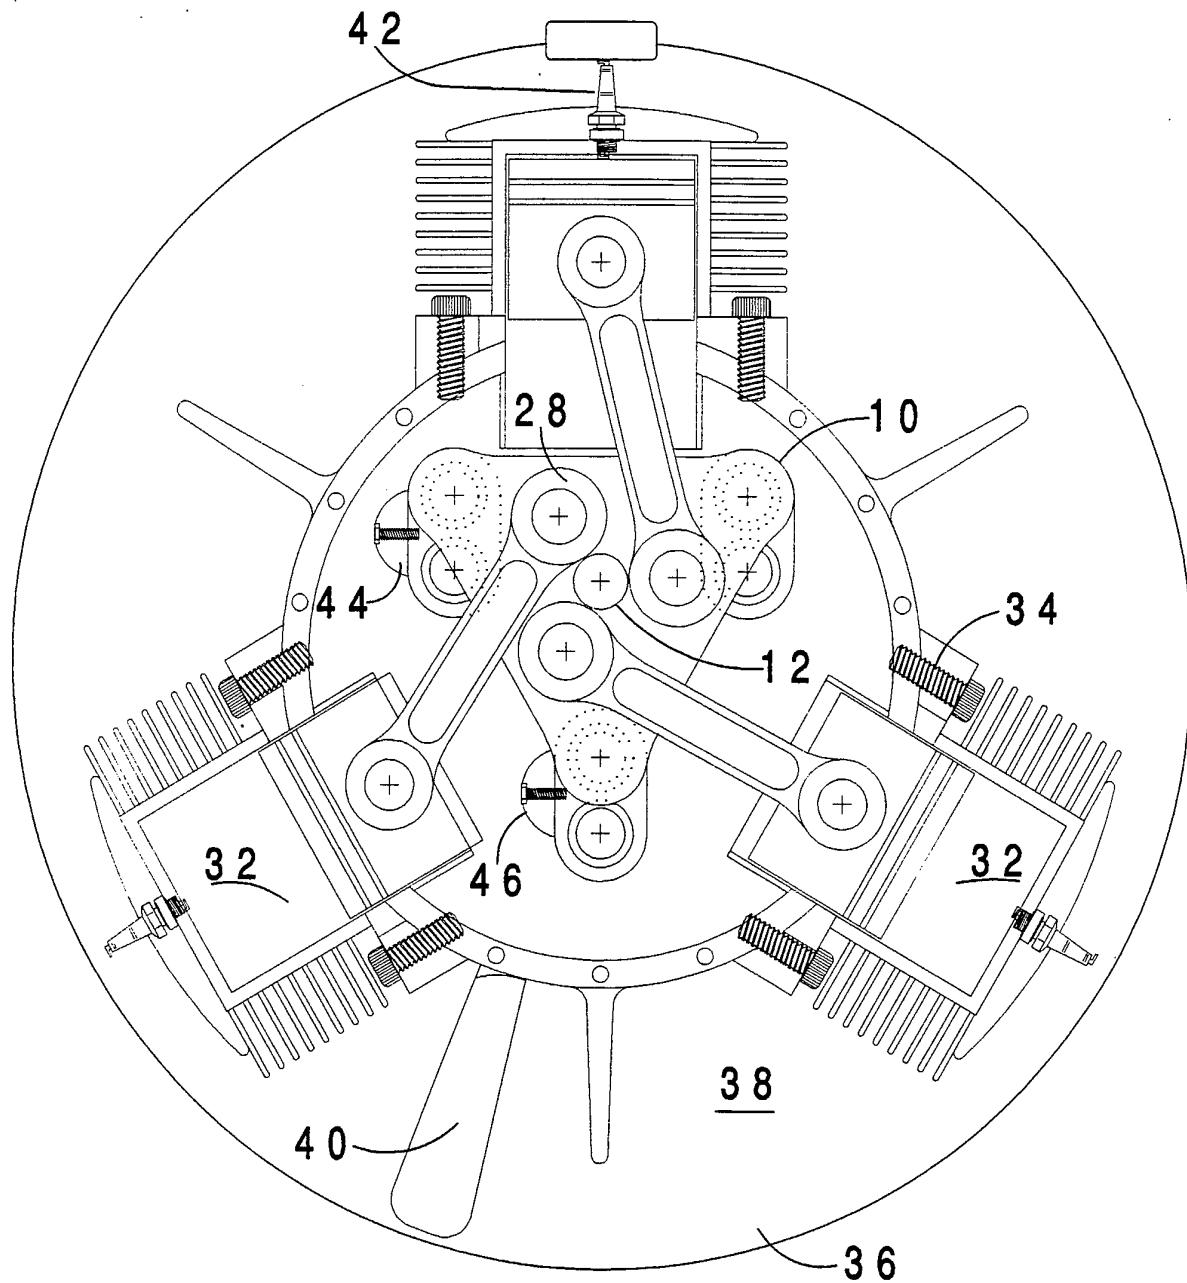

2 / 6

SUBSTITUTE SHEET

FIG 3

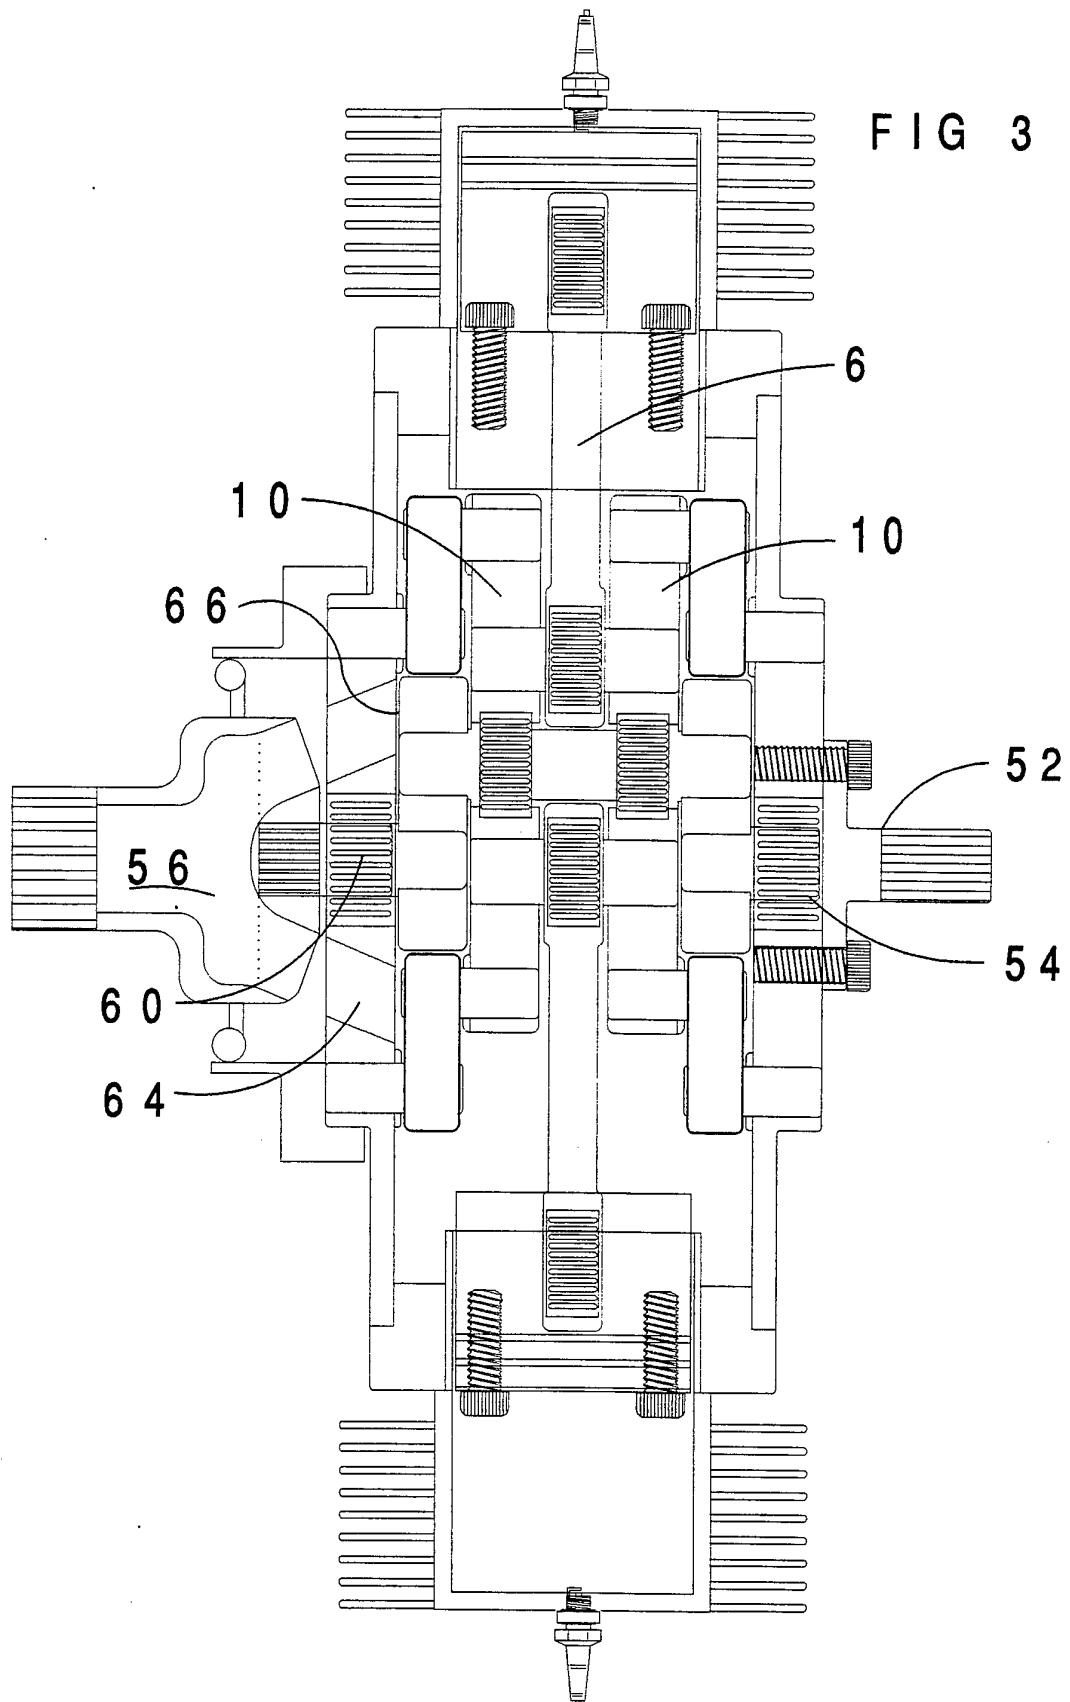


FIG 4

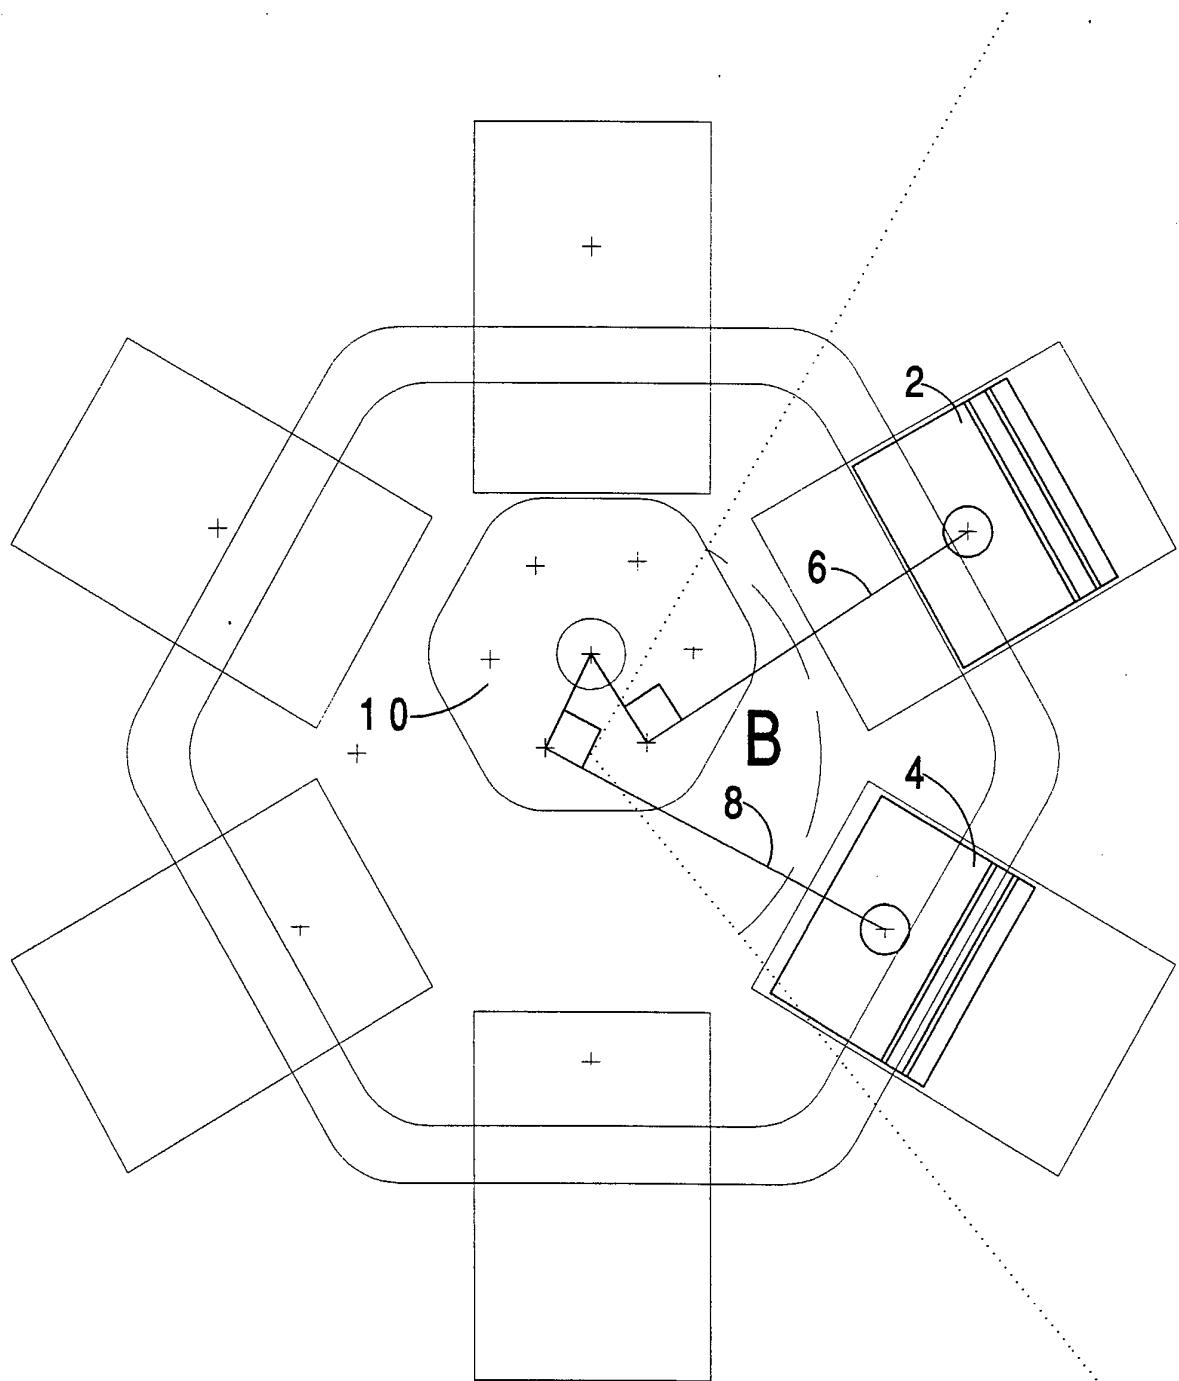


FIG 5


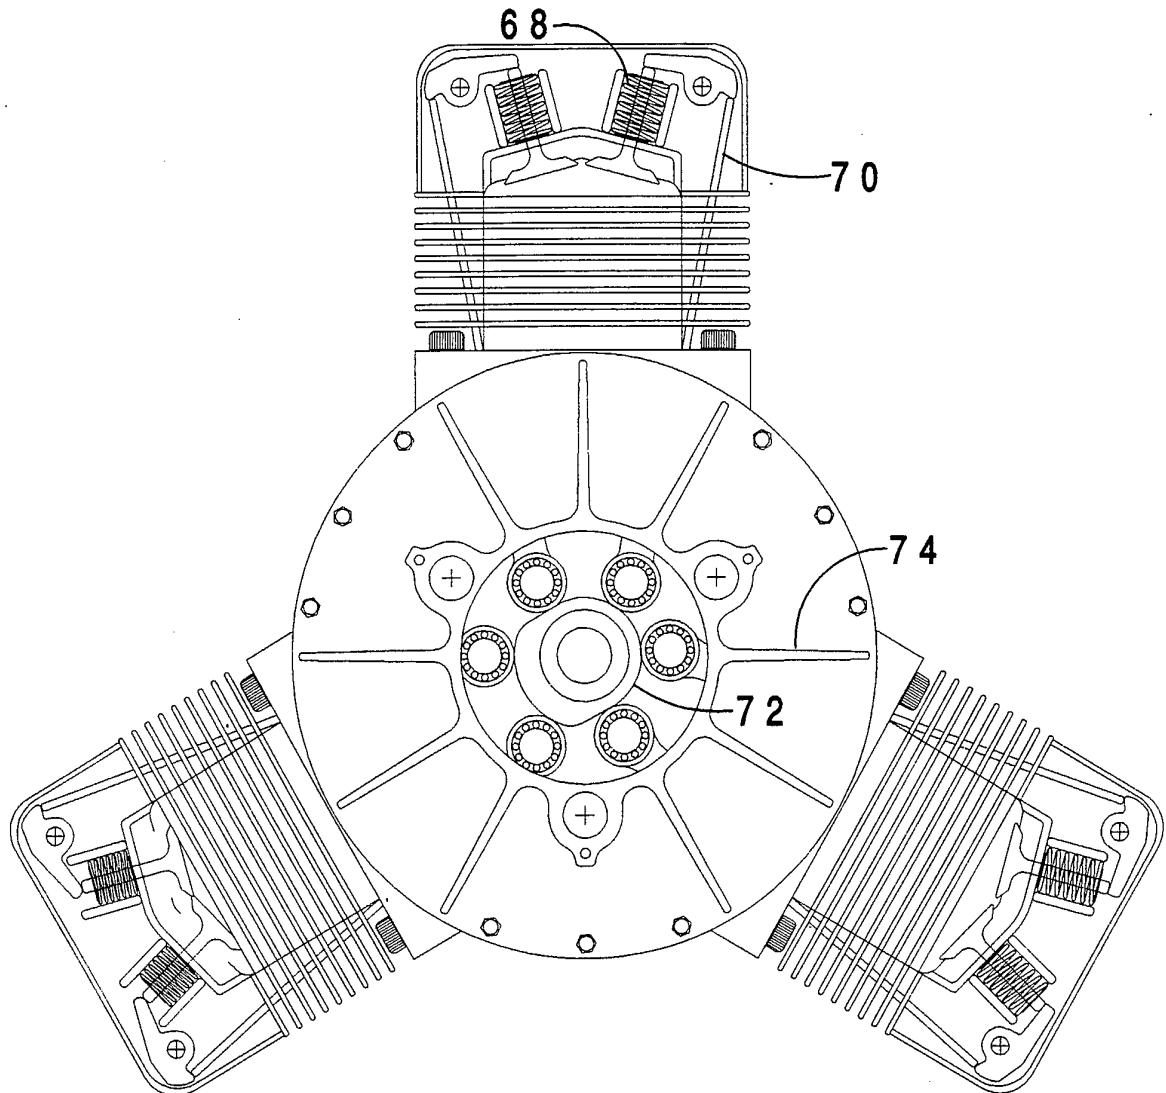


FIG 6

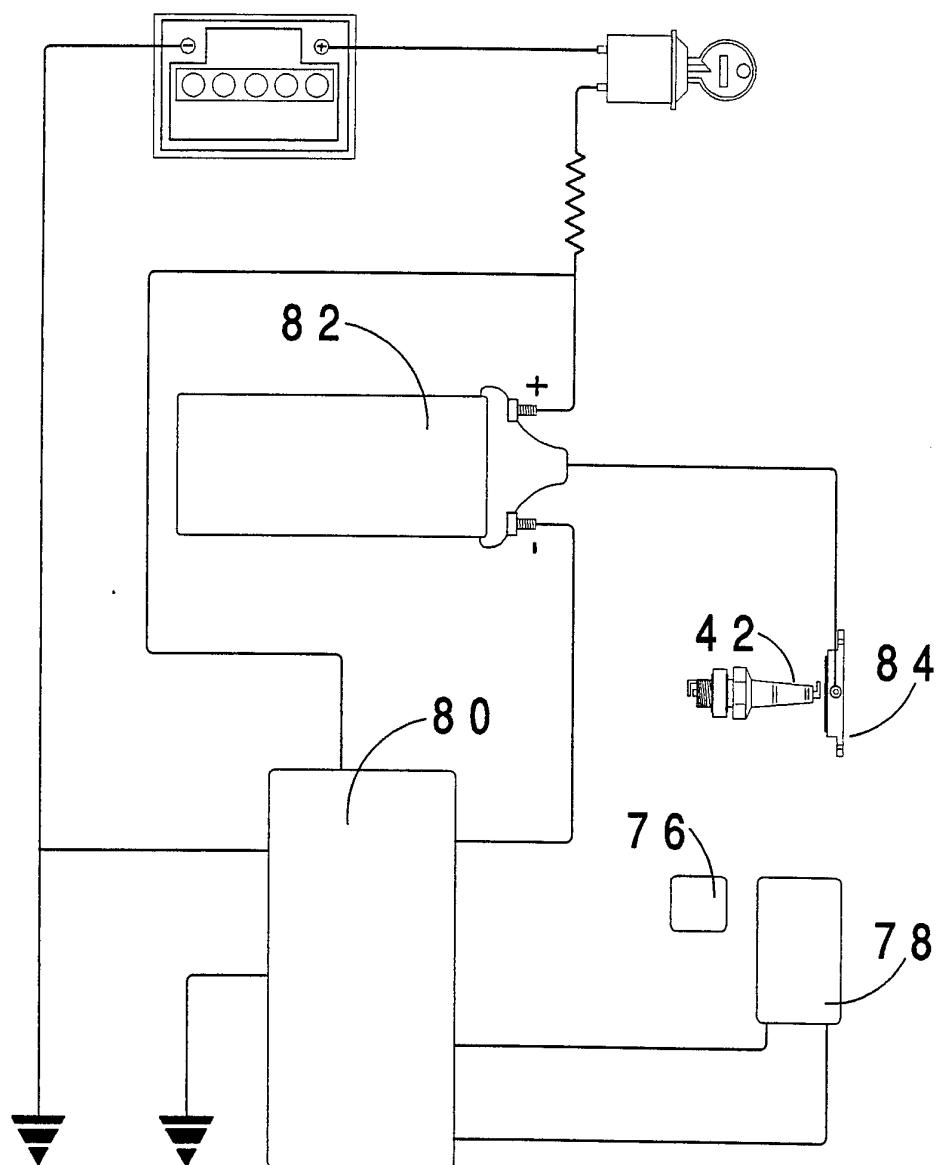

6 / 6

## **SUBSTITUTE SHEET**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NZ 95/00015

**A. CLASSIFICATION OF SUBJECT MATTER**  
Int. Cl. 6 F01B 13/04, 13/06; F02B 57/00, 57/08

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC: F01B 13/04, 13/06; F02B 57/00, 57/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
AU: IPC as above

Electronic data base consulted during the international search (name of data base, and where practicable, search terms used)  
DERWENT  
JAPIO

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
X	DE 2506888 A1 (STEINBORN) 2 September 1976 page 2, lines 15-22 and drawing figures 1-3	1,7
X	FR 1315555 A (SISLER) 10 December 1962 drawing figures 1 and 2	1,7
X	FR 609841 A (LOBY et al) 25 August 1926 page 2 and drawing figures 1 and 2	1,4-5,7,14
X	GB 1014764 A (CZIKE et al) 31 December 1965 page 5, lines 9-35	1,6-7

Further documents are listed  
in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier document but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art  
"&" document member of the same patent family

Date of the actual completion of the international search 17 May 1995	Date of mailing of the international search report 19 JUNE 1995 (19.06.95)
Name and mailing address of the ISA/AU AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No. 06 2853929	Authorized officer L.NAVARATNAM Telephone No. (06) 2832378

**INTERNATIONAL SEARCH REPORT**International application No.  
PCT/NZ 95/00015

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate of the relevant passages	Relevant to Claim No.
X	GB 153999 A (HEFFORD) 25 November 1920 page 2 lines 60-120	1,7-8
X	US 4249487 A (CHAMBERS) 10 February 1981 column 2, line 31- column 4, line 55 and drawing figures 1 and 2	1,5-7,14-15
P,X	US 5303679 A (GAMON) 19 April 1994 column 1, lines 38-42, column 4, lines 8-20, column 5, lines 1-18 and drawing figures 2, and 6, 6a-6e.	1,7,14-18

**INTERNATIONAL SEARCH REPORT**

Information on patent family membe

International application No.

PCT/NZ 95/00015

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report	Patent Family Member
US 5303679	WO 9505535

**END OF ANNEX**