



(72) MAKINO, YOSHIHIRO, JP
(72) SAKAKIBARA, YOSHITOMO, JP
(72) KOBAYASHI, YASUSHI, JP
(71) BRIDGESTONE CORPORATION, JP

(51) Int.Cl.⁶ B60C 23/00, F17C 5/06

(30) 1998/10/14 (10-292,365) JP

(30) 1998/10/14 (10-292,367) JP

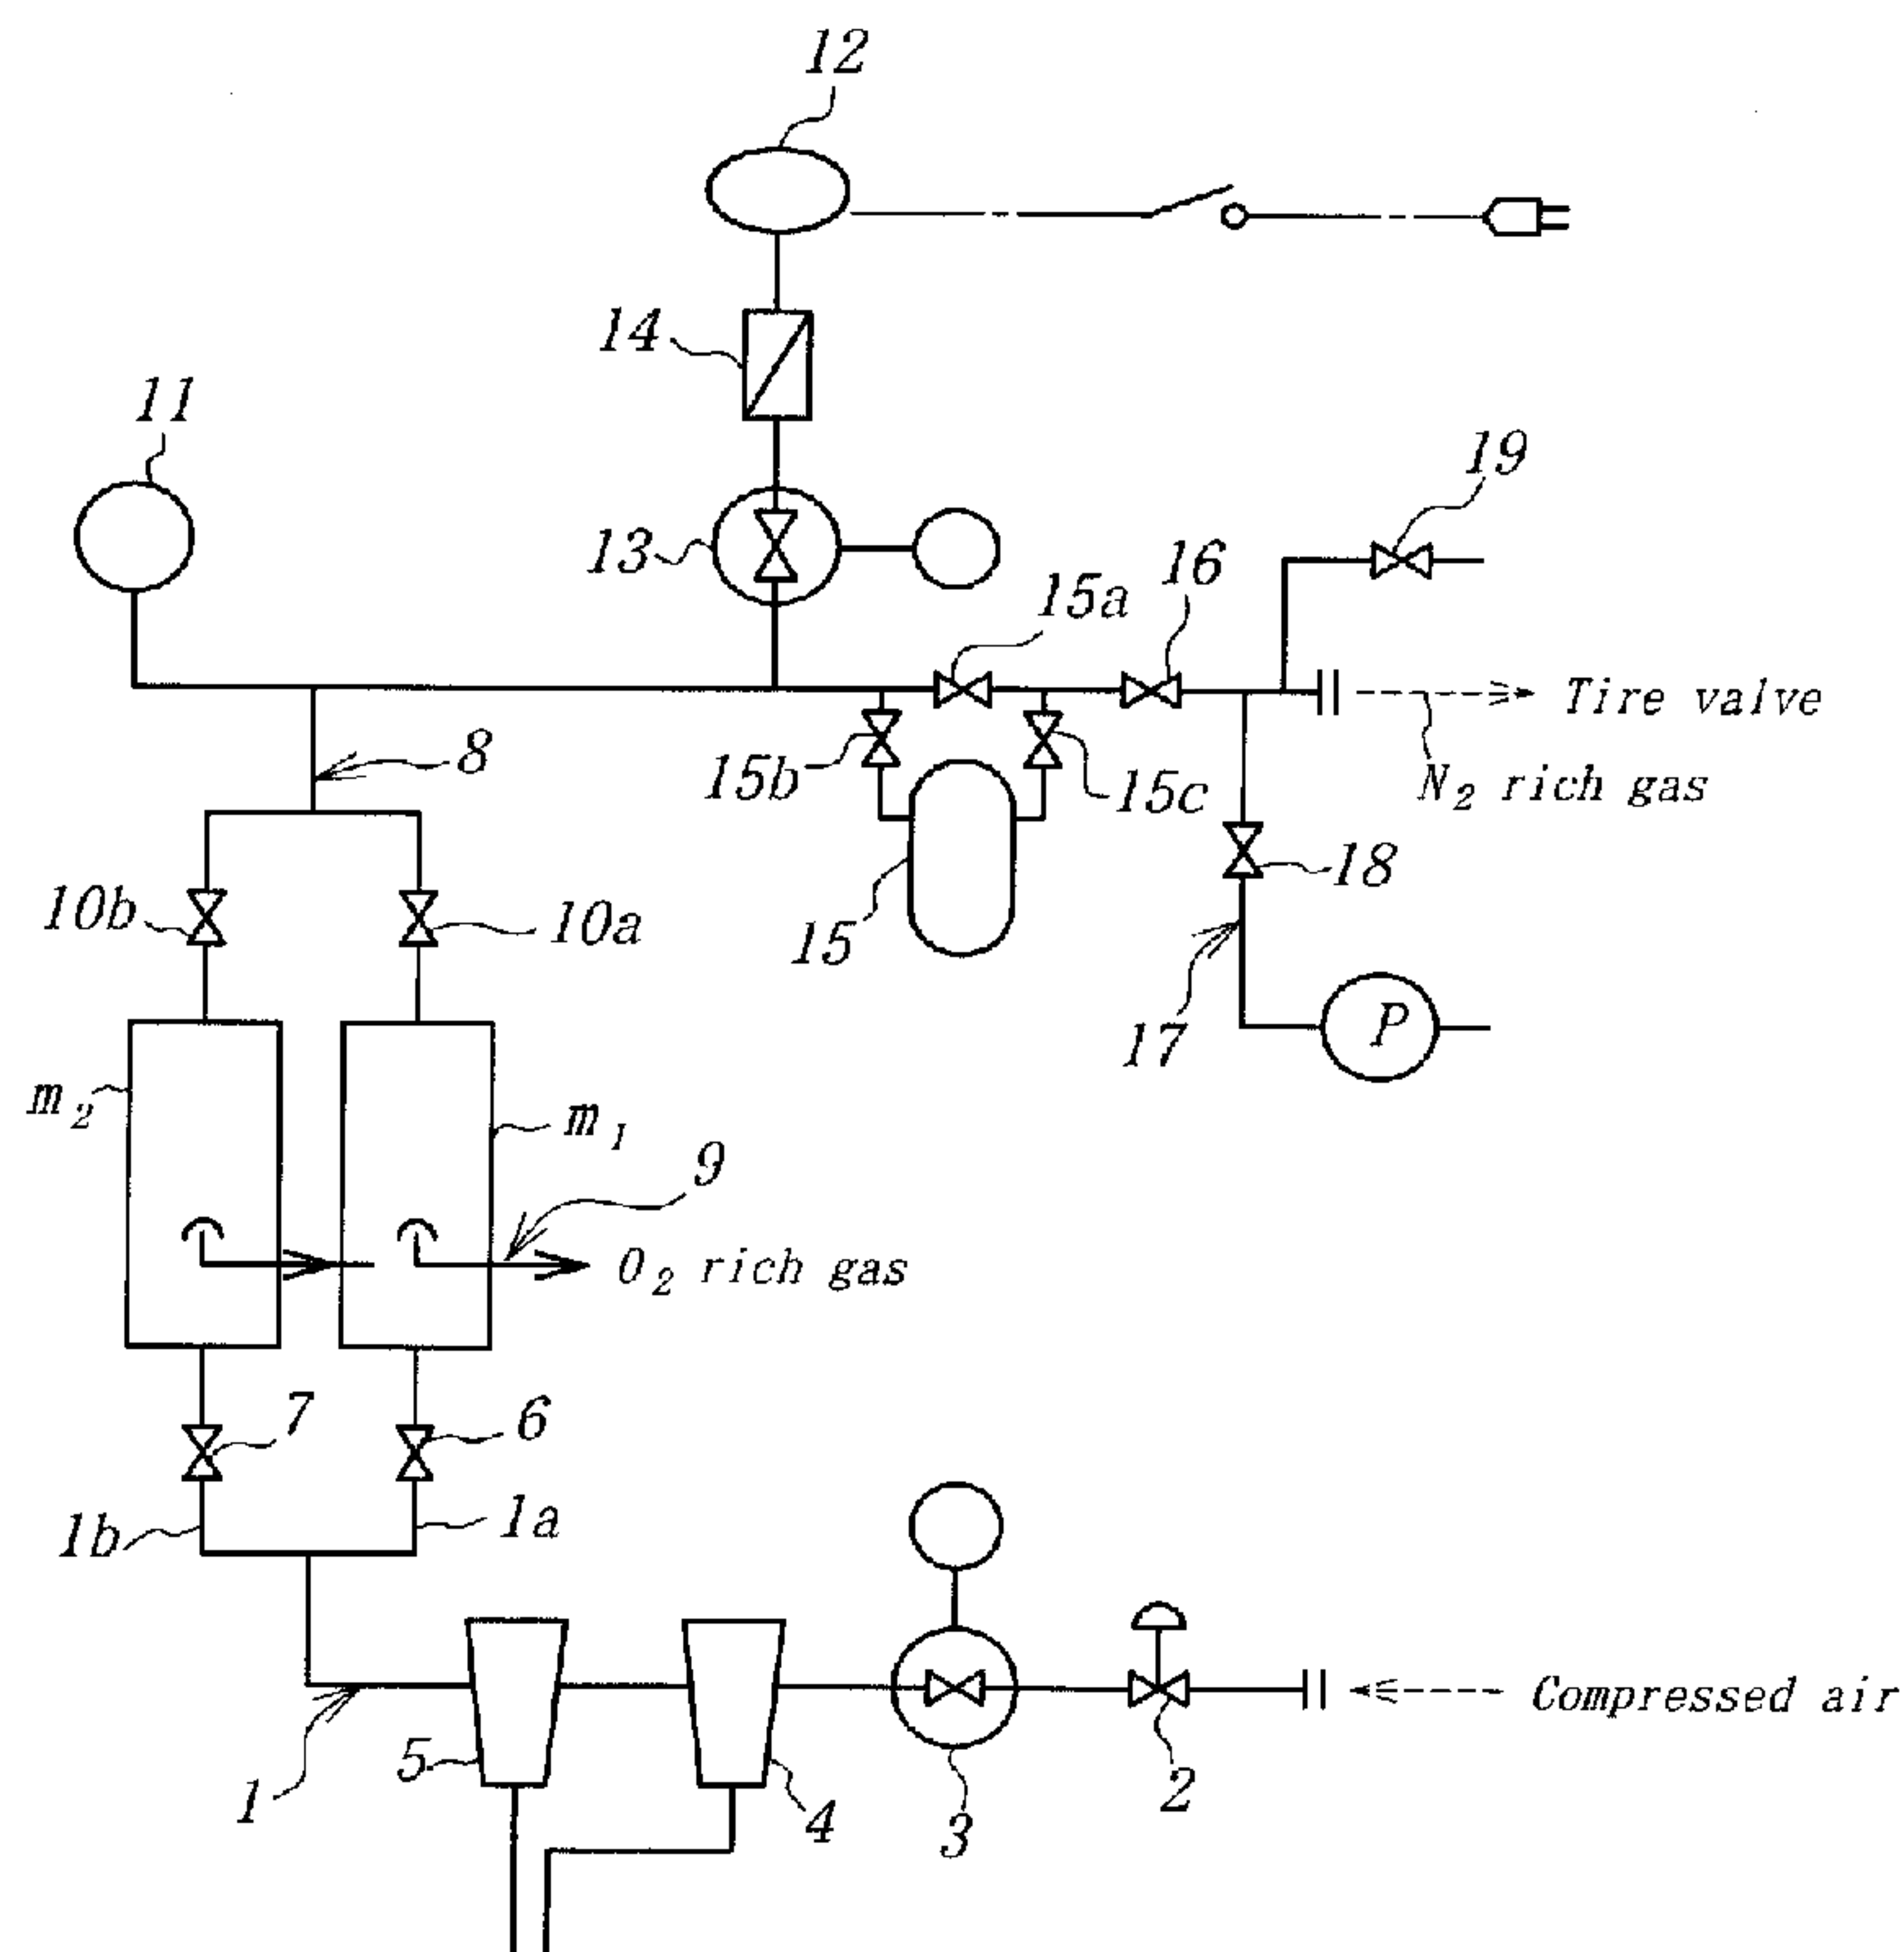
(30) 1998/10/14 (10-292,366) JP

(30) 1999/01/26 (11-17,087) JP

(30) 1999/01/27 (11-18,246) JP

(54) **PROCESSUS ET DISPOSITIF POUR REMPLIR UN PNEU
D'AZOTE MOLECULAIRE**

(54) **PROCESS AND APPARATUS FOR FILLING N₂ GAS INTO TIRE**



(57) A process for filling N₂ gas into a tire assembled onto a rim to hold a recommended internal pressure comprises discharging air inside the tire prior to the filling of N₂ gas to render the inside of the tire into a state lower than atmospheric pressure and filling N₂ gas into such a tire. An apparatus for carrying out the above process comprises a single inlet path, at least two outlet paths and a membrane module for separating air introduced through the inlet path into O₂ gas and N₂ gas and feeding these gases into respective outlet paths, wherein an outlet path for feeding N₂ gas in the outlet paths is connected at its top to a valve for inflating a tire assembled onto a rim under an internal pressure and a discharge path for discharging air inside the tire prior to the filling of N₂ gas is provided on the way of such an outlet path.



ABSTRACT OF DISCLOSURE

A process for filling N_2 gas into a tire assembled onto a rim to hold a recommended internal pressure comprises discharging air inside the tire prior to the filling of N_2 gas to render the inside of the tire into a state lower than atmospheric pressure and filling N_2 gas into such a tire. An apparatus for carrying out the above process comprises a single inlet path, at least two outlet paths and a membrane module for separating air introduced through the inlet path into O_2 gas and N_2 gas and feeding these gases into respective outlet paths, wherein an outlet path for feeding N_2 gas in the outlet paths is connected at its top to a valve for inflating a tire assembled onto a rim under an internal pressure and a discharge path for discharging air inside the tire prior to the filling of N_2 gas is provided on the way of such an outlet path.

PROCESS AND APPARATUS FOR FILLING N₂ GAS INTO TIRE

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to a process and an apparatus for filling N₂ gas into tires, and more particularly to a process and an apparatus for efficiently filling N₂ gas inclusive of N₂ rich gas having a high N₂ concentration into tires such as passenger car tires, large-size vehicle tires (for truck and bus) and the like regardless of the kind of the tire used.

2. Description of Related Art

Since N₂ gas is very durable to a temperature change, when N₂ gas is filled into a tire, even if the temperature of the tire is raised during the high-speed running, severe service running or the like, the change of internal pressure in the tire is small and it is possible to prevent the lowering of the running performances and it is advantageous to improve the ride comfort. Therefore, the filling of N₂ gas is adopted in special applications such as airplanes and F1 racing cars obliged to be run at a high speed.

Recently, it is generally and widely known that the filling of N₂ gas into the tire develops an effect of preventing the degradation of rubber or wheel and the like. Further, the filling of N₂ gas tends to be required by ordinary users with the advance of high tire performances. As a result, the filling of N₂ gas is particularly carried out as a part of service in car shops, oil depots and the like. For this end, it is demanded to develop means for efficiently filling N₂ gas into the tire with a relatively cheap filling cost.

As a filling system of N₂ gas, there are known a method of using a commercially available cylinder filled with N₂ gas for filling N₂ gas into the tire, a method wherein only N₂ gas is separated and purified with an industrial

activated carbon while feeding compressed air through an air compressor for filling N₂ gas, and a method of using a gas separation membrane wherein O₂ and N₂ are separated from air by utilizing a theory that permeation rates differ in accordance with a kind of gas components to thereby feed a high
5 concentration N₂ gas.

In the method of using the N₂ filled cylinder, however, much labor is required in inventory control, carrying-in, carrying-out and the like of the cylinder and also it is required to ensure a setting place of the cylinder, so that this method is disadvantageous in view of the running cost. In the method
10 using the industrial activated carbon, there is no inconvenience as mentioned above, but it is necessary that the activated carbon after the use over a certain time is subjected to a regeneration treatment for removing O₂ adsorbed on the activated carbon once and hence the maintenance is inevitable. Particularly, when the filling of N₂ gas is requested during the regeneration of the activated
15 carbon, there is an inconvenience that such a request is not satisfied. And also, the method using the activated carbon has an advantage of setting the concentration of N₂ gas to an arbitrary level, but when using the compressed air above 1000 kPa, a high pressure O₂ gas (active gas) is gathered in a tank of a high pressure gas installation in view of its structure, so that it is
20 disadvantageous to regulate a setting place of such an installation.

On the other hand, the method using the gas separation membrane does not cause the drawbacks as mentioned above and can relatively rapidly fill N₂ gas, if necessary. And also, it is not required to use a tank gathering a high pressure O₂ gas even when using a compressed air above 1000 kPa, so
25 that the method can advantageously be used in wider fields without subjecting to the regulation for the high pressure gas installation. In this method, however, it can not be avoid that about 7% of O₂ remains in a passenger car tire even when N₂ gas having a concentration of 100% is filled into the tire so

as to have an internal pressure of 200 kPa (even if air is merely taken out from the tire, air equal to atmospheric pressure is existent in the tire), so that it can not be said to more expect the effect by the filling of N₂ gas. This is true in the above two methods. Particularly, a recommended
5 internal pressure is higher in large size tires for truck and bus than that of the passenger car tire, so that a long time is unavoidably required in the filling of N₂ gas into such a large size tire at the present. For this end, it is strongly demanded to solve these problems.

SUMMARY OF THE INVENTION

10 It is, therefore, an object of the invention to provide a novel process and an apparatus capable of efficiently and rapidly filling N₂ gas or N₂ rich gas into the tire and visually grasping concentration of N₂ gas fed to the tire and concentration of N₂ gas in the tire after the filling.

According to a first aspect of the invention, there is the
15 provision of a process for filling N₂ gas into a tire assembled onto a rim to hold a recommended internal pressure, characterized in that air inside the tire is discharged prior to the filling of N₂ gas to render the inside of the tire into a state lower than atmospheric pressure and then N₂ gas is filled into such a tire. In this case, N₂ gas includes N₂ rich gas having a high N₂
20 concentration.

According to a second aspect of the invention, there is the provision of a process for filling N₂ gas into a tire assembled onto a rim to hold a recommended internal pressure, characterized in that an operation for discharging out a gas filled in the tire into the atmosphere is carried out
25 at least one times on the way of filling N₂ gas.

According to a third aspect of the invention there is a provision for a process for filling N₂ gas into a tire assembled onto a rim to hold a recommended internal pressure, characterized in that air inside the tire is discharged prior to the filling of N₂ gas to render the inside of the tire into a
30 state lower than atmospheric pressure and then N₂ gas is filled into such a tire, during which an operation for discharging out a gas filled in the tire into the atmosphere is carried out at least one times.

-4-

According to a fourth aspect of the invention, there is the provision of a process for filling N₂ gas into a tire assembled onto a rim to hold a recommended internal pressure, characterized in that when large size tires for use in trucks, busses and the like are used as the tire, N₂ gas to be filled into the tire is fed at a pressure exceeding 1000 kPa and then adjusted to a pressure higher by at least 100 kPa than the recommended internal pressure to fill into the tire.

In a preferable embodiment of the fourth aspect, N₂ gas is filled in a pressure not exceeding the feeding pressure of N₂ gas in the filling into the tire.

In the filling of N₂ gas into the large size tire, air inside the tire may be discharged prior to the filling of N₂ gas to render the inside of the tire into a state lower than atmospheric pressure, or an operation for discharging out a gas filled in the tire into the atmosphere may be carried out at least one times on the way of filling N₂ gas.

In any case, N₂ gas is filled by adjusting the feeding pressure of N₂ gas so as to fit into the recommended internal pressure of the tire assembled onto the rim.

According to a fifth aspect of the invention, there is the provision of an apparatus for filling N₂ gas into a tire, comprising a single inlet path, at least two outlet paths and a membrane module for separating air introduced through the inlet path into O₂ gas and N₂ gas and feeding these gases into respective outlet paths, wherein an outlet path for feeding N₂ gas in the outlet paths is connected at its top to a valve for inflating a tire assembled onto a rim under an internal pressure and a discharge path for discharging air inside the tire prior to the filling of N₂ gas is provided on the way of such an outlet path.

In a preferable embodiment of the apparatus according to the invention, at least two membrane modules are arranged side by side.

In another preferable embodiment of the apparatus, the air discharge path is connected to a vacuum pump and a holder storing N₂ gas fed from the
5 membrane module once is disposed in the outlet path located at an upstream side from a portion thereof connected to the air discharge path.

In the other preferable embodiment of the apparatus, a switch valve properly releasing the internal pressure of the tire is provided on the outlet path feeding N₂ gas and further a flow control valve adjusting a flow amount
10 of N₂ gas is arranged on the outlet path feeding N₂ gas.

In the apparatus according to the invention, a pressure adjusting means for setting pressure to a proper level in accordance with a recommended internal pressure of the tire may be arranged in the outlet path feeding N₂ gas. And also, means for indicating a concentration of N₂ gas
15 may be arranged, and further means for sucking and discharging the remaining air in the tire by utilizing pressure of compressed air fed into the membrane module may be arranged. A pressure reducing valve may be used as the pressure adjusting means.

The outlet path feeding N₂ gas through the membrane module is
20 divided into two branched pathways, one of which pathways being used as a pathway feeding N₂ gas at a higher pressure adaptable for a large-size tire used in vehicles such as truck, bus and the like and the other pathway being used as a pathway feeding N₂ gas at a relatively low pressure adaptable for a passenger car tire or the like. In this case, the term "relatively low pressure"
25 used herein means a pressure of about 200-550 kPa, and the term "higher pressure" means a pressure of about 550-1400 kPa.

According to the invention, when the recommended internal pressure is held in the tire assembled onto the rim by filling N₂ gas, it is favorable that

the concentration of N_2 gas fed into the tire is continuously measured by means of a sensor during the filling of N_2 gas to indicate the measured result through an indicating means at any time, or the concentration of N_2 gas in the tire after the completion of the filling of N_2 gas is measured to indicate the measured result through an indicating means. For this end, the apparatus according to the invention is provided with an indicating means for indicating at least one of the N_2 gas concentration fed into the tire during the filling of N_2 gas and the N_2 gas concentration in the tire after the completion of the filling of N_2 gas. In this case, an indicator indicating the measured value through the sensor for the measurement of N_2 gas concentration is used as the indicating means. In the invention, the indicator is favorable to be a digital indicator.

In the outlet path feeding N_2 gas may be arranged a discharge path for discharging a gas inside the tire. And also, a four-port valve used for measuring the N_2 gas concentration in the tire after the filling of N_2 gas may be arranged between a portion of the outlet path connected to the discharge path and the membrane module. Particularly, a valve of closed center system is favorably used as the four-port valve.

When the N_2 gas separated from the compressed air is filled into the tire assembled onto the rim, air remaining in the tire may be sucked and discharged by utilizing the pressure of the compressed air prior to the filling of N_2 gas to render the inside of the tire into a state lower than atmospheric pressure. In this case, the discharge of the remaining air is favorable to be carried out by using an ejector.

When a remaining air discharge means for sucking and discharging the remaining air from the inside of the tire by utilizing the pressure of the compressed air fed into the membrane module is arranged in the apparatus according to the invention, the membrane module is constructed with at least one inlet path introducing the compressed air and at least two outlet paths

flowing N₂ gas and O₂ gas, and the remaining air discharge means is arranged between the inlet path introducing the compressed air and the outlet flowing N₂ gas.

In this case, it is desirable that an ejector utilizing the pressure of the compressed air introduced into the membrane module is used as the remaining air discharge means, and a sensor measuring the N₂ gas concentration and an indicating means for indicating the measured value through the sensor are arranged in the outlet path feeding N₂ gas so as to visually confirm the N₂ gas concentration.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described with reference to the accompanying drawings, wherein:

Fig. 1 is a schematic view illustrating a first embodiment of the apparatus for filling N₂ gas according to the invention;

Fig. 2 is a diagrammatic view of T-type cock suitably used in the invention;

Fig. 3 is a schematic view illustrating a second embodiment of the apparatus for filling N₂ gas according to the invention;

Fig. 4 is a perspective view of the apparatus shown in Fig. 3;

Fig. 5 is a schematic view illustrating a third embodiment of the apparatus for filling N₂ gas according to the invention;

Fig. 6 is a schematic view illustrating a fourth embodiment of the apparatus for filling N₂ gas according to the invention;

Fig. 7 is a schematic view illustrating a fifth embodiment of the apparatus for filling N₂ gas according to the invention;

Fig. 8 is a diagrammatically section view of an ejector; and

Fig. 9 is a graph showing a relation between a concentration of N₂ gas and a filling pressure thereof.

DESCRIPTION OF PREFERRED EMBODIMENTS

In the invention, when N_2 gas inclusive of N_2 rich gas is filled into the tire, once air inside the tire is discharged prior to the filling of N_2 gas to render the inside of the tire into a state lower than atmospheric pressure, N_2 gas is filled into such a tire, so that air remaining in the tire, particularly O_2 gas becomes very small and hence it can be expected to more develop the effect by the filling of N_2 gas.

When the inside of the tire is rendered into a state lower than atmospheric pressure by discharging air from the tire prior to the filling of N_2 gas, or when N_2 gas is filled without discharging air from the inside of the tire up to a pressure lower than atmospheric pressure, an operation for discharging out a gas filled in the tire into the atmosphere is carried out at least one times on the way of filling N_2 gas, whereby it is possible to replace O_2 gas remaining in the tire with N_2 gas to increase the concentration of N_2 gas in the tire.

In this case, the amount of O_2 gas remaining in the tire can be made very small by repeating the above operation several times.

When N_2 gas is fed at a pressure exceeding 1000 kPa and then the pressure is adjusted to a level higher by at least 100 kPa than the recommended internal pressure in the filling of N_2 gas into the tire, N_2 gas can efficiently be filled up to the recommended internal pressure in tires for airplanes and the like.

Since the recommended internal pressure in the large-size tires for truck, bus and the like is usually about 600-900 kPa, when N_2 gas is filled into the large-size tire in the invention, N_2 gas is first fed at a pressure exceeding 1000 kPa (even if the pressure exceeds 1000 kPa in a first class gas such as N_2 gas defined in enforcement regulations of high pressure gas preservation law, the regulation is not applied when the pressure is not more than 5000 kPa) and then filled into the tire by adjusting the filling pressure of N_2 gas to a pressure

higher by at least 100 kPa than the recommended internal pressure for the tire without exceeding the feeding pressure of the N₂ gas, whereby N₂ gas can be filled up to the recommended internal pressure for a relatively short time.

In the passenger car tires or the large-size tires for truck and bus,
5 when the feeding pressure of N₂ gas is adjusted so as to match with the internal pressure for the tire assembled onto the rim, N₂ gas can efficiently be filled into the tire irrespectively of the kind of the tires.

When the N₂ gas concentration in the tire during the filling or the N₂ gas concentration in the tire after the filling is measured by a sensor for the
10 N₂ gas concentration and the measured value is indicated in the indicating means, the state of filling N₂ gas can be grasped by not only the operator but also the user, which contributes to enhance the reliability.

As the sensor may be used, for example, an O₂ sensor. In this case, the concentration of O₂ gas included in N₂ gas during the feeding or
15 retained in the tire is measured, from which the N₂ gas concentration can be calculated as (100 - O₂ gas concentration)%. And also, use may be made of a sensor capable of directly measuring the N₂ gas concentration.

When air remaining in the inside of the tire is sucked by utilizing the pressure of the compressed air introduced for the formation of N₂ gas, a
20 certain line for the utilization of the pressure of the compressed air may be added to the apparatus and also an operation therefor is basically carried out only by adjusting the pressure of the compressed air.

In Fig. 1 is shown a first embodiment of the apparatus for filling N₂ gas according to the invention provided with two membrane modules made of
25 a hollow fiber membrane or the like and arranged side by side. In Fig. 1, numeral 1 is an inlet path for feeding a compressed air from a compressor (not shown) into membrane modules m₁, m₂, wherein the inlet path 1 is divided into two pathways 1a, 1b in the vicinity of the membrane modules m₁, m₂.

And also, numeral 2 is a switch valve, numeral 3 a regulator provided with a pressure gauge (pressure reducing valve), numeral 4 an air filter removing contaminant from air, and numeral 5 a mist filter. The switch valve 2, regulator 3, air filter 4 and mist filter 5 are arranged in the inlet path 1 in this
5 order.

Further, numeral 6 is a switch valve arranged in the pathway 1a for the membrane module m_1 branched from the inlet path 1, and numeral 7 a switch valve arranged in the pathway 1b for the membrane module m_2 branched from the inlet path 1. These switch valves 6, 7 serve to feed the
10 compressed air into the membrane modules m_1 , m_2 and stop the feeding thereof through the on-off operation. Numerals 8, 9 are outlet paths from the membrane modules m_1 , m_2 , wherein the outlet path 8 is a path feeding N_2 gas and the outlet path 9 is a path discharging O_2 gas (including O_2 rich gas).

And also, numerals 10a, 10b are switch valves arranged in the
15 outlet path 8 for the membrane modules m_1 , m_2 , numeral 11 a pressure gauge measuring the pressure inside the outlet path 8, and numeral 12 an oxygen concentration measuring meter for measuring the concentration of O_2 gas in the outlet path 8. The meter 12 is connected to the outlet path 8 through a pressure reducing valve 13 provided with a pressure gauge and a flow control
20 valve 14.

Numeral 15 is a holder capable of storing N_2 gas fed from the membrane modules m_1 , m_2 , if necessary, and numeral 16 a switch valve having a function capable of adjusting a flow amount of N_2 gas in the outlet path 8. Numeral 17 is a discharge path connecting to the outlet path 8 at a
25 downstream side of the switch valve 16. In the discharge path 17 is arranged a switch valve 18 connecting to a vacuum pump P, whereby air inside the tire assembled onto the rim can be discharged through the discharge path 17 to render the inside of the tire into a state lower than atmospheric pressure.

Further, numeral 19 is a switch valve capable of discharging gas filled in the tire, if necessary.

Prior to the filling of internal pressure into the tire assembled onto the rim, air is existent in the inside of the tire and is comprised of about 80% N₂ and about 20% O₂. In case of the passenger car tire, the internal pressure is about 200 kPa, so that even when N₂ gas having a concentration of 100% is filled into the tire, the concentration of N₂ gas in the tire is about 93% and about 7% of O₂ gas is included in the tire. Therefore, in order to more develop the effect by the filling of N₂ gas, it is required to further reduce O₂ gas in the tire.

The filling of N₂ gas into the tire assembled onto the rim is carried out by using the apparatus of the above construction as follows.

1. In case of filling of N₂ gas once air inside the tire is discharged

At first, a top of the outlet path 8 is connected to a gas filling valve of the tire assembled onto the rim and then the switch valves 16 and 19 in the outlet path 8 are closed, while the switch valve 18 in the discharge path 17 is opened to discharge air in the tire under the working of the pump P. Then, the switch valve 18 is closed and at the same time the switch valve 16 is opened to fill N₂ gas fed from the membrane modules m₁, m₂ into the tire through the outlet path 8.

2. In case of filling N₂ gas without discharging air remaining in the tire and conducting an operation of discharging the filled gas toward atmosphere on the way of the filling at least one times

At first, a top of the outlet path 8 for N₂ gas is connected to a valve of the tire and the switch valve 16 is opened, while the switch valves 18 and 19 are closed to fill N₂ gas into the tire. At a time of reaching the internal pressure of the tire to a given pressure, or at a time of attaining a give filling time, the switch valve 16 is closed to stop the filling of N₂ gas, while the

switch valve 19 is opened to discharge the filled gas in the tire and then the switch valve 19 is closed and the switch valve 16 is again opened to fill N₂ gas into the tire so as to reach up to the recommended internal pressure.

The filling of N₂ gas and the discharge of the filled gas are repeated one time
5 or more, if necessary.

During the discharge of the filled gas in the tire, the valve of the tire is always connected to the top of the outlet path 8.

In the invention, the discharge of the filled gas and the filling of N₂ gas can be carried out by working the switch valve 15a and the switch valve
10 19, but such an operation may be conducted by using a T-shaped cock t as shown in Fig. 2.

The filling of N₂ gas is carried out as follows.

At first, the switch valves 2, 6, 7, 10a, 10b, 15a are opened, while the switch valves 15b, 15c, 16 and the regulator 3 are closed. Then,
15 compressed air is introduced from the compressor into the inlet path 1 and the pressure of the compressed air is gradually raised to a given value by adjusting the regulator 3.

As the membrane module arranged in the apparatus is used, for example, a separation membrane made of polyimide. By utilizing a
20 difference of permeation rate produced when the compressed air is passed through such a membrane, O₂ gas is removed, while a high concentration N₂ gas is obtained. The feeding pressure of N₂ gas is set to a given value by considering that the pressure in the outlet path for the membrane modules m₁, m₂ indicates a value lower by about 50-100 kPa than the pressure in the
25 regulator 3.

The accurate measurement of the concentration in the oxygen concentration meter 12 arranged in the outlet path 8 is carried out by the pressure adjustment through the pressure reducing valve 13 and the flowing

amount adjustment through the flow control valve 14, whereby the feeding of high concentration N_2 gas is confirmed to fill N_2 gas into the tire assembled onto the rim.

When the feeding pressure of N_2 gas is too low in the working of the apparatus, the switch valves 6 and 10a or the switch valves 7 and 10b are closed to use either one of the membrane modules because, when only the switch valve 6 or 7 is closed, the gas flows backward into the module so as not to raise the pressure.

According to the invention, when a half of air in the tire is discharged prior to the filling of N_2 gas and then N_2 gas is filled by using the above apparatus, the O_2 concentration after the filling up to the internal pressure is about 5%. Alternatively, after N_2 gas is filled into the tire assembled onto the rim so as to obtain an internal pressure of 200 kPa without discharging air in the tire, the filled gas is discharged toward atmosphere until the internal pressure of the tire is 100 kPa, and then N_2 gas is again filled up to a given internal pressure, whereby the O_2 concentration can be reduced to about 5% after the filling to the internal pressure.

When N_2 gas is filled into the tire assembled onto the rim so as to render the internal pressure into 400 kPa without discharging air in the tire and thereafter the filled gas is discharged toward atmosphere until the internal pressure of the tire is 0 kPa and then N_2 gas is again filled up to the internal pressure, the O_2 concentration is reduced to about 3% after the filling to the internal pressure.

When air in the tire is discharged prior to the filling of N_2 gas, it is required to conduct deaeration by using the vacuum pump, wherein O_2 can be rendered into substantially a free state in accordance with the discharging degree of air from the inside of the tire. On the other hand, the operation that N_2 gas is filled up to the internal pressure and the filled gas is discharged

into atmosphere and then N_2 gas is again filled up to the internal pressure is repeated several times, whereby it is possible to considerably reduce the concentration of O_2 remaining in the tire. Thus, the filling degree of N_2 gas can be increased even in these cases.

5 In the N_2 gas filling apparatus provided with the membrane modules, when the flow amount of N_2 gas per unit time is decreased by using, for example, the flow control function of the switch valve 16 as compared with the flow amount of the compressed air per unit time in the inlet path 1, the pressure in the membrane module rises with the decrease of the flow
10 amount of N_2 gas (pressure in the membrane module is not less than 1000 kPa, preferably not less than 1050 kPa) and hence the concentration of N_2 gas rises (though the separation into O_2 gas and N_2 gas takes a long time) to obtain N_2 gas more suitable for filling into the tire. In this case, however, it tends to prolong the time filling such N_2 gas into the tire. For this end, it is favorable
15 that in order to fill N_2 gas having a higher concentration, such N_2 gas previously stored in a holder 15 may be supplied from the holder 15 to the tire in accordance with the user's request.

When N_2 gas is charged into the holder 15, switch valves 15a and 15c are closed, while a switch valve 15b is opened.

20 A gas discharged through the outlet path 9 is O_2 rich gas having O_2 concentration of about 35%, so that it is particularly required to select a place separated away from fire, combustibles and the like and being well ventilated.

Although an embodiment of arranging two membrane modules m_1 , m_2 side by side is shown in Fig. 1, these modules may be arranged in series or
25 a single membrane module may be used. Particularly, the number of the membrane modules is not restricted.

Even in the large-size tires, N_2 gas can be filled in the same manner as mentioned above. In this case, the pressure of the compressed air in the

inlet path 1 is set to about 1100 kPa, and the pressure of N₂ gas in the outlet path 8 is set to about 970 kPa.

In Fig. 3 is shown a second embodiment of the N₂ gas filling apparatus according to the invention provided with a single membrane module, and an exterior appearance of the apparatus of Fig. 3 is shown in Fig. 4.

In the apparatus shown in Fig. 3, the outlet path 8 is divided at its downstream side into a pathways 8a feeding N₂ gas of a high pressure suitable for filling into tires for truck, bus and the like (TB) and a pathway 8b feeding N₂ gas of a low pressure suitable for filling into a tire for passenger car and the like (PS), wherein top portions of these pathways may be connected to gas filling valves (not shown) for the respective tires, respectively. In Fig. 3, numeral 20 is a pressure gauge arranged in the pathways 8a, numeral 21 a regulator arranged in the pathway 8b, and numeral 22 a pressure gauge arranged in the pathway 8b.

When N₂ gas is filled into a passenger car tire assembled onto a rim by using the apparatus of Fig. 3, the filling of N₂ gas is carried out by adjusting a pressure of N₂ gas fed from the membrane module m to a value corresponding to a recommended internal pressure of the tire through the regulator 21 arranged in the pathway 8b. In this case, the valve arranged at the top of the pathway 8a is closed.

When a high pressure N₂ gas is filled into a large-size tire assembled onto a rim, the filling of N₂ gas is carried out by feeding N₂ gas from the membrane module m through the pathway 8a and the valve arranged at its top into the tire. In this case, the valve arranged at the top of the pathway 8b is closed.

Although the outlet path 8 of the module m is divided into the pathway 8a for high pressure N₂ gas and the pathway 8b for low pressure N₂

gas shown in Fig. 3, the filling of N_2 gas may be carried out by arranging a pressure adjusting means in the outlet path without division and adjusting the filling pressure to a value corresponding to a recommended internal pressure of the respective tire.

5 In the apparatus of Fig. 3, a holder may be arranged in the outlet path 8 likewise the case of Fig. 1 and N_2 gas may be stored therein. Thus, it is possible to quickly cope with various kinds of the tires.

 When N_2 gas is filled into the tire at a higher concentration by decreasing air remaining in the tire, as shown in Fig. 5, discharge paths 23, 24
10 are separately arranged in the pathways 8a, 8b of the outlet path 8 shown in Fig. 3, whereby air remaining in the tire is discharged through vacuum pump (not shown) prior to the filling of N_2 gas to render the inside of the tire into a state lower than atmospheric pressure and then N_2 gas is filled into the tire. When N_2 gas is filled after air remaining in the tire is discharged once, the
15 switch valve 10 in the outlet path is closed and air remaining in the tire is discharged through the discharge path 23, 24 and the vacuum pump as shown in Fig. 5 and thereafter the switch valve 10 is opened to conduct the filling of N_2 gas.

 In order to more decrease air remaining in the tire without
20 conducting the operation of discharging air as mentioned above, it is favorable to discharge the gas filled in the tire into atmosphere at least one times on the way of the filling of N_2 gas. In this case, air remaining in the tire can be replaced with N_2 gas, so that the concentration of N_2 gas in the tire can be increased. Concretely, the top of the outlet path 8 is connected to the
25 valve for the tire to feed N_2 gas to the tire. At a time of arriving the internal pressure of the tire to a given value or taking a given feeding time, the feed of N_2 gas is stopped and the gas filled into the tire is discharged and then N_2 gas is again filled into the tire so as to obtain a pressure level corresponding to the

recommended internal pressure of the tire.

In case of using the apparatus shown in Figs. 3 and 5, the feeding of N₂ gas is carried out as follows.

The switch valve 2 is opened, while the regulator 3 is closed.

5 Then, compressed air is introduced into the inlet path 1 through the compressor, during which the regulator 3 is adjusted to gradually raise the feeding pressure to a given level.

In this case, the pressure in the outlet path 8 for the membrane module m indicates a value lower by about 50-100 kPa than the pressure in the regulator 3. Considering this fact, the feeding pressure of N₂ gas is set likewise the apparatus of Fig. 1.

Moreover, an oxygen concentration meter (not shown) is arranged in the outlet path 8 to confirm the concentration of N₂ gas passing through the outlet path 8 during the filling of N₂ gas into the tire assembled onto the rim.

15 Even in the apparatus shown in Fig. 3 or 5, the O₂ concentration after the filling up to the internal pressure can be rendered into about 5% by discharging a half of air from the inside of the tire prior to the filling of N₂ gas and then filling N₂ gas into the tire. Alternatively, after N₂ gas is filled into the tire assembled onto the rim so as to obtain an internal pressure of 200 kPa without discharging air in the tire, the filled gas is discharged toward
20 atmosphere until the internal pressure of the tire is 100 kPa, and then N₂ gas is again filled up to a given internal pressure, whereby the O₂ concentration can be reduced to about 5% after the filling to the internal pressure.

In the N₂ gas filling apparatus provided with the membrane module
25 as shown in Figs. 3 and 5, when the flow amount of N₂ gas per unit time is decreased by arranging, for example, a flow control valve in the outlet path 8 as compared with the flow amount of the compressed air per unit time in the inlet path 1, the pressure in the membrane module rises with the decrease of

the flow amount of N₂ gas (in case of the large-size tire for truck and bus, the feeding pressure is set to about 1000 kPa) and hence the concentration of N₂ gas rises (though the separation into O₂ gas and N₂ gas takes a long time) to obtain N₂ gas more suitable for filling into the tire. In case of conducting an
5 operation that the gas filled in the tire is discharged once on the way of filling the gas, it tends to prolong the time filling N₂ gas into the tire at a higher concentration up to a pressure corresponding to the recommended internal pressure of the tire. For this end, it is favorable that a holder may be arranged in the outlet path 8 even in the apparatus as shown in Fig. 3 or 5 so
10 as to fill N₂ gas having a higher concentration for a short time.

In Fig. 6 is shown a fourth embodiment of the apparatus for filling N₂ gas according to the invention provided with an indicating means for indicating the concentration of N₂ gas, wherein numeral 25 is an air dryer arranged in the inlet path 1, numeral 26 a pressure reducing valve arranged in
15 the outlet path 8 for adjusting the pressure of N₂ gas, numeral 27 a pressure gauge, numeral 28 a closed center valve (4 port valve), numeral 29 a compound pressure gauge, and numeral 30 a hand valve for conducting the feeding and stop of N₂ gas.

And also, numeral 31 is a discharge path connected to the outlet
20 path 8 and provided at its top with a vacuum pump (not shown) for discharging air remaining in the tire through the outlet path 8, numeral 32 a measuring path connected to the outlet path 8 likewise the discharge path 31 and used for measuring concentration of N₂ gas passing through the outlet path or N₂ gas in the tire after the filling into the tire. In the measuring path
25 32 are arranged a flow control valve 33, an O₂ sensor module 34, an amplifier 35 for amplifying a signal measured in the O₂ sensor module 32, and an indicator 36 indicating the amplified signal as a numerical value.

When N₂ gas is filled into the tire assembled onto the rim up to the

recommended internal pressure of the tire, the switch valve 2 arranged in the inlet path 1 is opened, while the hand valve 30 arranged in the outlet path 8 is closed and compressed air is introduced into the inlet path 1 through a compressor (not shown).

5 The compressed air introduced into the inlet path 1 is fed into the membrane module m through an air filter 4, an air dryer 25 and a mist filter 5. Then, O₂ gas separated in the membrane module m (oxygen rich gas) is discharged out through an outlet path 9. On the other hand, N₂ gas (N₂ rich gas) is set to a pressure higher by about 50-100 kPa than a recommended
10 internal pressure of a tire by a pressure reducing valve 26 arranged at a downstream side of the membrane module m and passed through the outlet path 8 to fill into the tire. In this case, the discharge path 31 is closed through a switch valve (not shown).

 During the N₂ gas filling, N₂ gas is also flowed into the measuring
15 path 32 to measure the concentration of O₂ gas included in N₂ gas by the O₂ sensor module 34, and the measured value is converted into the concentration of N₂ gas according to $N_2 = (100 - O_2)\%$ in such sensor module and digitally indicated in the indicator 36 through the amplifier 35. Since N₂ gas is always flowed into the measuring path 32 until the filling of N₂ gas is
20 completed, the flow control valve 33 is adjusted so as to flow N₂ gas in a slight amount and the measured gas is discharged out through an outlet port formed in the sensor module 34 into atmosphere.

 When the concentration of N₂ gas is measured in the apparatus shown in Fig. 6, the pressure inside the tire is somewhat decreased, but there
25 is caused no problem when N₂ gas is previously filled to a pressure slightly higher than the recommended internal pressure of the tire.

 Although the measurement of N₂ gas concentration is described by separately arranging the measuring path in the outlet path of the apparatus

shown in Fig. 6, the sensor module 34 and the like for measuring the N₂ gas concentration may directly be arranged in the outlet path 8.

In the N₂ gas filling apparatus as mentioned above, it is possible to accurately grasp the change of N₂ gas concentration in the tire during the
5 filling of N₂ gas and confirm the N₂ gas concentration inside the tire after the completion of the filling, so that a higher reliability can be given to a user requesting the filling of N₂ gas.

As the O₂ sensor module, use may be made of Fujikura oxygen sensor of linear voltage output type (FCX-MVL) and the like, while Omron
10 type K3NX digital panel meter and the like may be used as the indicator.

In order to more develop the effect by the filling of N₂ gas by removing air remaining in the tire, even in the apparatus shown in Fig. 6, there can be carried out an operation that air inside the tire is discharged prior to the filling of N₂ gas to render the inside of the tire into a state lower than
15 atmospheric pressure. If the inside of the tire can not be rendered into a state lower than atmospheric pressure by removing air in the tire, an operation that the gas filled in the tire is discharged into atmosphere on the way of filling N₂ gas and thereafter N₂ gas is again filled is carried out at least one times to replace O₂ remaining in the tire with N₂ gas, whereby it is possible to increase
20 the N₂ gas concentration inside the tire. By repeating the discharge of the filled gas and the filling of N₂ gas plural times can be further decreased the amount of O₂ gas remaining in the tire likewise the cases of Figs. 1, 3 and 5.

When air inside the tire is discharged once and N₂ gas is again filled in the apparatus shown in Fig. 6, the pressure reducing valve 26 is
25 closed on the way of the N₂ gas filling and air remaining in the tire is removed out through the discharge path 31, and thereafter the discharge path 31 is closed and the filling of N₂ gas is again carried out in the same manner as previously mentioned. On the other hand, when N₂ gas is filled without

discharging air remaining in the tire and the discharge of gas filled in the tire is discharged into atmosphere at least one times on the way of the N_2 gas filling, after the filling of N_2 gas is first carried out, the feeding of N_2 gas is stopped at a time of arriving the pressure inside the tire to a given value or at
5 a time of taking a given filling time and the discharge path is opened to discharge the filled gas (into atmosphere, if necessary) and then the discharge path 31 is closed and N_2 gas is again filled up to a pressure corresponding to the recommended internal pressure of the tire. The filling of N_2 gas and the discharge of the filled gas may be repeated two or more times, if necessary.

10 When N_2 gas is filled after a half of air inside the tire is discharged in the apparatus shown in Fig. 6, the O_2 concentration is about 3% after the filling into the recommended internal pressure. On the other hand, after N_2 gas is filled into the tire assembled onto the rim so as to obtain an internal pressure of 200 kPa without discharging air in the tire, the filled gas is
15 discharged toward atmosphere until the internal pressure of the tire is 100 kPa, and then N_2 gas is again filled up to a given internal pressure, whereby the O_2 concentration can be reduced to about 5% after the filling to the internal pressure.

Even in the N_2 gas filling apparatus provided with the membrane
20 module as shown in Fig. 6, when the flow amount of N_2 gas per unit time is decreased as compared with the flow amount of the compressed air per unit time in the inlet path 1, the pressure in the membrane module rises with the decrease of the flow amount of N_2 gas and hence the concentration of N_2 gas rises to obtain N_2 gas more suitable for filling into the tire likewise the cases
25 of Figs. 1 and 3. However, it tends to prolong the time filling N_2 gas into the tire up to a pressure corresponding to the recommended internal pressure of the tire. For this end, it is favorable that a holder previously storing N_2 gas is be arranged in the outlet path 8 for avoiding the prolonging of the filling time.

In the apparatus of Fig. 6, the relation between the pressure in the filling of N₂ gas and the N₂ gas concentration can be grasped with the lapse of time, so that it is possible to control the capacity of the membrane module m (capacity for separation of the gas) by always checking the relation between
5 pressure and concentration in the filling of N₂ gas.

In Fig. 7 is shown a fifth embodiment of the apparatus for filling N₂ gas according to the invention, wherein an air discharging means for sucking and discharging air remaining in the tire is provided on the apparatus shown in Fig. 6.

10 In Fig. 7, numeral 37 is a flow channel connected to the inlet path 1 for flowing the compressed air passed through the inlet path 1, numeral 38 a pressure reducing valve arranged in the channel 37, numeral 39 a hand valve arranged between the channel 37 and the discharge path 31, and numeral 40 an ejector discharging out air included in the tire by utilizing the pressure of
15 the compressed air.

In order to hold the inside of the tire assembled onto the rim at the recommended internal pressure by filling N₂ gas, the switch valve 2 arranged in the inlet path 1 is first opened, while the closed center valve 28 arranged in the outlet path 8 is closed and the compressed air is introduced into the inlet
20 path 1 through a compressor (not shown).

The compressed air is fed into the membrane module m to separate into O₂ gas and N₂ gas, while a part of the compressed air is passed through the channel 37 and discharged out from an outlet port of the ejector 40 through the pressure reducing valve 38 and hand valve 39 into atmosphere.

25 At this state, the hand valves 30 and 39 are opened to reduce the pressure in the outlet path 8 and the discharge path 31, whereby air remaining in the tire connected to the top of the outlet path 8 is sucked and discharged out from the ejector 40 through the outlet path 8 and the discharge path 31.

The degree of reducing the pressure differs in accordance with the kind of the tire to be filled with N_2 gas, so that the value of the reduced pressure is confirmed by the compound pressure gauge 29. If the pressure is reduced to an extent causing no rim chafing, a port of the hand valve 39
5 connecting to the discharge path 31 is closed. Then, the closed center valve 28 is opened to fill N_2 gas into the tire (N_2 gas is set to a pressure higher by about 50-100 kPa than the recommended internal pressure of the tire by the pressure reducing valve 26 arranged at the downstream side of the membrane module m).

10 Even in the illustrated embodiment, aromatic polyimide hollow fiber membrane is used, for example, as a separation membrane of the membrane module m and is set so as to withstand to a pressure of about 1400 kPa.

The flow control valve 33 is closed at the time of pressure
15 reduction or discharging out the remaining air from the tire and opened so as to pass N_2 gas in the filling of N_2 gas, whereby the O_2 concentration in N_2 gas is measured and converted into N_2 gas concentration according to $N_2 = (100 - O_2)\%$ by the O_2 sensor module 34 and amplified in the amplifier 35 and digitally or analogically indicated in the indicator 36.

20 In order to measure and indicate the concentration of N_2 gas in the tire after the filling of N_2 gas, the hand valve 30 is opened and the four port valve 28 is switched into an opening direction to discharge the gas in the outlet path into atmosphere to an extent of replacing with a gas and then the four port valve 28 is closed to introduce N_2 gas in the tire into the O_2 sensor
25 module 34, the measured value in the module is stably indicated by the indicator 36 and thereafter the hand valve 30 is closed.

Even when the concentration of N_2 gas is measured by the apparatus shown in Fig. 7, the pressure inside the tire is somewhat decreased

likewise the case of Fig. 6. In this case, it is sufficient that N_2 gas is previously filled to a pressure slightly higher than the recommended internal pressure of the tire. Further, the sensor module 34 measuring the N_2 gas concentration and the like may directly be arranged in the outlet path 8.

5 In Fig. 8 is sectionally shown the ejector shown in Fig. 7. The compressed air is powerfully blown from a portion a of the ejector 40 and discharged out from a portion b of the ejector 40 through a fine nozzle thereof, whereby a portion c of the ejector 40 is rendered into a vacuum state and hence air remaining in the tire is sucked out through the discharge path 31
10 connected to the portion c and the outlet path 8.

In order to more develop the effect of filling of N_2 gas by sucking and discharging the remaining air in the tire through the above manner, it is favorable that the gas filled in the tire is sucked by the ejector 40 at least one times on the way of filling N_2 gas, whereby O_2 remaining in the tire can be
15 decreased to a very small level to more enhance the effect by the filling of N_2 gas.

In the filling of N_2 gas, the operation of sucking the gas filled in the tire through the ejector 40 on the way of the N_2 gas filling and then filling N_2 gas can be naturally repeated several times. Even in this case, O_2
20 remaining in the tire is replaced with N_2 gas, so that the concentration of N_2 gas in the tire can be further increased.

In the apparatus shown in Fig. 7, when N_2 gas is filled after a half of air is discharged from the inside of the tire, the O_2 concentration is about 3% after the filling into the recommended internal pressure. On the other
25 hand, after N_2 gas is filled into the tire assembled onto the rim so as to obtain an internal pressure of 200 kPa without discharging air in the tire, the filled gas is discharged toward atmosphere until the internal pressure of the tire is 100 kPa, and then N_2 gas is again filled up to a given internal pressure,

whereby the O₂ concentration can be reduced to about 5% after the filling to the internal pressure.

Although a holder is not arranged in the apparatus of Fig. 7, when a time for filling N₂ gas is prolonged, it is possible to arrange the holder in the outlet path of the above apparatus for shortening the filling time. And also, two or more membrane modules may be arranged in order to realize the efficient filling of N₂ gas.

In the apparatus provided with a step of discharging out air included in the tire prior to the filling of N₂ gas, the line and devices for such a step are required and it can not be avoided to enlarge the apparatus itself and the filling operation becomes complicated. However, such inconveniences can be made to minimum by adopting the construction shown in Fig. 7.

The following examples are given in illustration of the invention and are not intended as limitations thereof.

Examples 1-3, Comparative Example 1

N₂ gas is filled into a passenger car tire having a tire size of 195/65R15 by using N₂ gas filling apparatus shown in Fig. 1. In this case, a state of changing a gas concentration inside the tire is measured by varying a feeding pressure of N₂ gas (300 kPa, 400 kPa, 500 kPa) to obtain results as shown in Table 1.

Table 1

Filling pressure	Filling time	N ₂ filling		Pressure reduction → N ₂ filling		A (N ₂ filling → discharge → N ₂ filling)		B (N ₂ filling → discharge → N ₂ filling)	
		Pressure (kPa)	N ₂ concentration (%)	Pressure (kPa)	N ₂ concentration (%)	Pressure (kPa)	N ₂ concentration (%)	Pressure (kPa)	N ₂ concentration (%)
500 kPa	20 sec	132	90.3	102	90.5	117	96.4	120	92.5
	40 sec	243	92.8	206	93.3	230	96.9	202	94.1
	60 sec	330	93.8	303	94.9	263	97.2	265	94.9
400 kPa	20 sec	105	88.2	75	89.6	110	95.1	110	92.6
	40 sec	197	91.0	152	92.8	190	95.9	194	94.1
	60 sec	264	92.5	229	94.1	247	96.2	280	95.2
300 kPa	20 sec	85	87.3	70	87.6	89	94.5	88	91.0
	40 sec	150	90.1	111	91.0	156	95.5	155	92.6
	60 sec	188	91.8	188	92.4	206	95.7	210	94.1
	80 sec	230	93.0	230	93.0			254	94.8

In Table 1, the term “N₂ filling” is a case that N₂ gas is filled without discharging out air included in the tire (Comparative Example 1), and the term “Pressure reduction → N₂ filling” is a case that N₂ gas is filled after about 30% of air included in the tire is discharged out (Example 1), and the
5 term “A. N₂ filling → Discharge → N₂ filling” is a case that N₂ gas is filled for 60 seconds without discharging air included in the tire and gas filled in the tire is discharged out and then N₂ gas is again filled (Example 2), and the term “B. N₂ filling → Discharge → N₂ filling” is a case that N₂ gas is filled for 10 seconds without discharging air included in the tire and gas filled in the
10 tire is discharged out and then N₂ gas is again filled (Example 3).

Fig. 9 is a graph showing a relation between pressure inside the tire and N₂ concentration based on the data of Table 1. As seen from Table 1 and Fig. 9, in Comparative Example 1 that N₂ gas is merely filled in the tire assembled onto the rim and containing air therein (atmospheric pressure
15 inside tire), the N₂ concentration becomes high as the filling pressure becomes high, but the value of the N₂ concentration is about 93% at maximum, while the N₂ concentration in all of Examples 1-3 is fairly higher than that of Comparative Example 1.

Example 4

20 In this example, N₂ gas is filled into a large-size tire for truck and bus having a tire size of 1000R20 by using N₂ gas filling apparatus shown in Fig. 1, wherein a feeding pressure of compressed air is set to 1150 kPa and a pressure of N₂ gas at a downstream side of a membrane module is set to 900 kPa. Then, a time filling N₂ gas up to a pressure corresponding to a
25 recommended internal pressure of the tire and a gas concentration in the tire at the recommended internal pressure are measured.

When about a half of air is discharged from the inside of the tire and then N₂ gas is filled up to the recommended internal pressure, the filling

time is 8 minutes and the concentration of N_2 gas in the tire is 97.5%.

When an operation that N_2 gas is filled without discharging air included in the tire and a gas filled in the tire is discharged and then N_2 gas is again filled up to the recommended internal pressure is repeated three times,
5 the filling time is 18 minutes and the concentration of N_2 gas in the tire is 98.5%.

Examples 5-7, Comparative Example 2

In this example, N_2 gas is filled into a passenger car tire (PS) having a tire size of 195/65R15 (recommended internal pressure: 240 kPa) or
10 a large size tire for truck and bus (TB) having a tire size of 1000R20 (recommended internal pressure: 725 kPa) by using N_2 gas filling apparatus shown in Fig. 3, wherein a feeding pressure of compressed air is set to 520 kPa (PS) or 1030 kPa (TB) and a pressure of N_2 gas at a downstream side of a membrane module is set to 500 kPa (PS) or 1000 kPa (TB), during which
15 the filling operability and concentration of N_2 gas in the tire are measured.

When N_2 gas is filled without discharging out air included in the tire (Comparative Example 2), the filling time is 40 seconds in case of PS and 6 minutes in case of TB, and the concentration of N_2 gas in the tire is 93% in case of PS and 95% in case of TB.

20 When about 30% of air included in the tire is discharged out and then N_2 gas is filled (Example 5), the filling time is 50 seconds in case of PS and 400 seconds in case of TB, and the concentration of N_2 gas in the tire is 94% in case of PS and 96% in case of TB.

When N_2 gas is filled for 40 seconds (PS) or 360 seconds (TB)
25 without discharging air included in the tire and a gas filled in the tire is discharged and then N_2 gas is again filled (Example 6), the filling time is 80 seconds in case of PS and 640 seconds in case of TB, and the concentration Of N_2 gas in the tire is 97% incase of PS and 98.5% in case of TB.

When N_2 gas is filled for 10 seconds without discharging air included in the tire and a gas filled in the tire is discharged and then N_2 gas is again filled (Example 7), the filling time is 60 seconds in case of PS and 480 seconds in case of TB, and the concentration Of N_2 gas in the tire is 95%
5 incase of PS and 97% in case of TB.

As mentioned above, according to the invention, it is possible to efficiently fill N_2 gas into a tire assembled onto a rim irrespectively of the kind of the tires having different recommended internal pressures such as passenger car tire, truck tire, bus tire and the like and also the ratio of air (O_2
10 gas) remaining in the tire can considerably be decreased, so that merits by the filling of N_2 gas can be utilized at maximum.

And also, according to the invention, air remaining in the tire can be sucked and discharged out by utilizing the compressed air used in the formation of N_2 gas, so that the filling operation of N_2 gas is very simple and
15 it is enough to add only a line passing the compressed air to the filling apparatus without enlarging the apparatus itself.

Furthermore, according to the invention, the change of N_2 gas concentration during the filling of N_2 gas into the tire or the N_2 gas concentration in the tire after the filling is visually confirmed, so that the
20 reliability to the users can considerably be enhanced.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A process for filling N₂ gas into a tire assembled onto a rim to hold a recommended internal pressure, characterized in that air inside the tire is discharged prior to the filling of N₂ gas to render the inside of the tire into a state lower than atmospheric pressure and then N₂ gas is filled into such a tire.

2. A process for filling N₂ gas into a tire assembled onto a rim to hold a recommended internal pressure, characterized in that an operation for discharging out a gas filled in the tire into the atmosphere is carried out at least one times on the way of filling N₂ gas.

3. A process for filling N₂ gas into a tire assembled onto a rim to hold a recommended internal pressure, characterized in that air inside the tire is discharged prior to the filling of N₂ gas to render the inside of the tire into a state lower than atmospheric pressure and then N₂ gas is filled into such a tire, during which an operation for discharging out a gas filled in the tire into the atmosphere is carried out at least one times.

4. A process for filling N₂ gas into a tire assembled onto a rim to hold a recommended internal pressure, characterized in that N₂ gas to be filled into the tire is fed at a pressure exceeding 1000 kPa and then adjusted to a pressure higher by at least 100 kPa than the recommended internal pressure to fill into the tire.

5. A process according to claim 4, wherein N₂ gas is filled in a pressure not exceeding the feeding pressure of N₂ gas in the filling into the tire.

6. An apparatus for filling N₂ gas into a tire, comprising a single inlet path, at least two outlet paths and a membrane module for separating air introduced through the inlet path into O₂ gas and N₂ gas and feeding these gases into respective outlet paths, wherein an outlet path for feeding N₂ gas in the outlet paths is connected at its top to a valve for inflating a tire assembled onto a rim under an internal pressure and a discharge path for discharging air inside the tire prior to the filling of N₂ gas is provided on the way of such an outlet path.

7. An apparatus according to claim 6, wherein at least two membrane modules are arranged side by side.

8. An apparatus according to claim 6, wherein the air discharge path is connected to a vacuum pump and a holder storing N₂ gas fed from the membrane module once is disposed in the outlet path located at an upstream side from a portion thereof connected to the air discharge path.

9. An apparatus according to claim 6, wherein a switch valve properly releasing the internal pressure of the tire is provided on the outlet path feeding N₂ gas and further a flow control valve adjusting a flow amount of N₂ gas is arranged on the outlet path feeding N₂ gas.

10. An apparatus according to claim 6, wherein a pressure adjusting means for setting pressure to a proper level in accordance with a recommended internal pressure of the tire is arranged in the outlet path feeding N₂ gas.

11. An apparatus according to claim 6, wherein the apparatus is further provided with means for indicating a concentration of N₂ gas and means for sucking and discharging the remaining air in the tire by utilizing pressure of compressed air fed into the membrane module.

FIG. 1

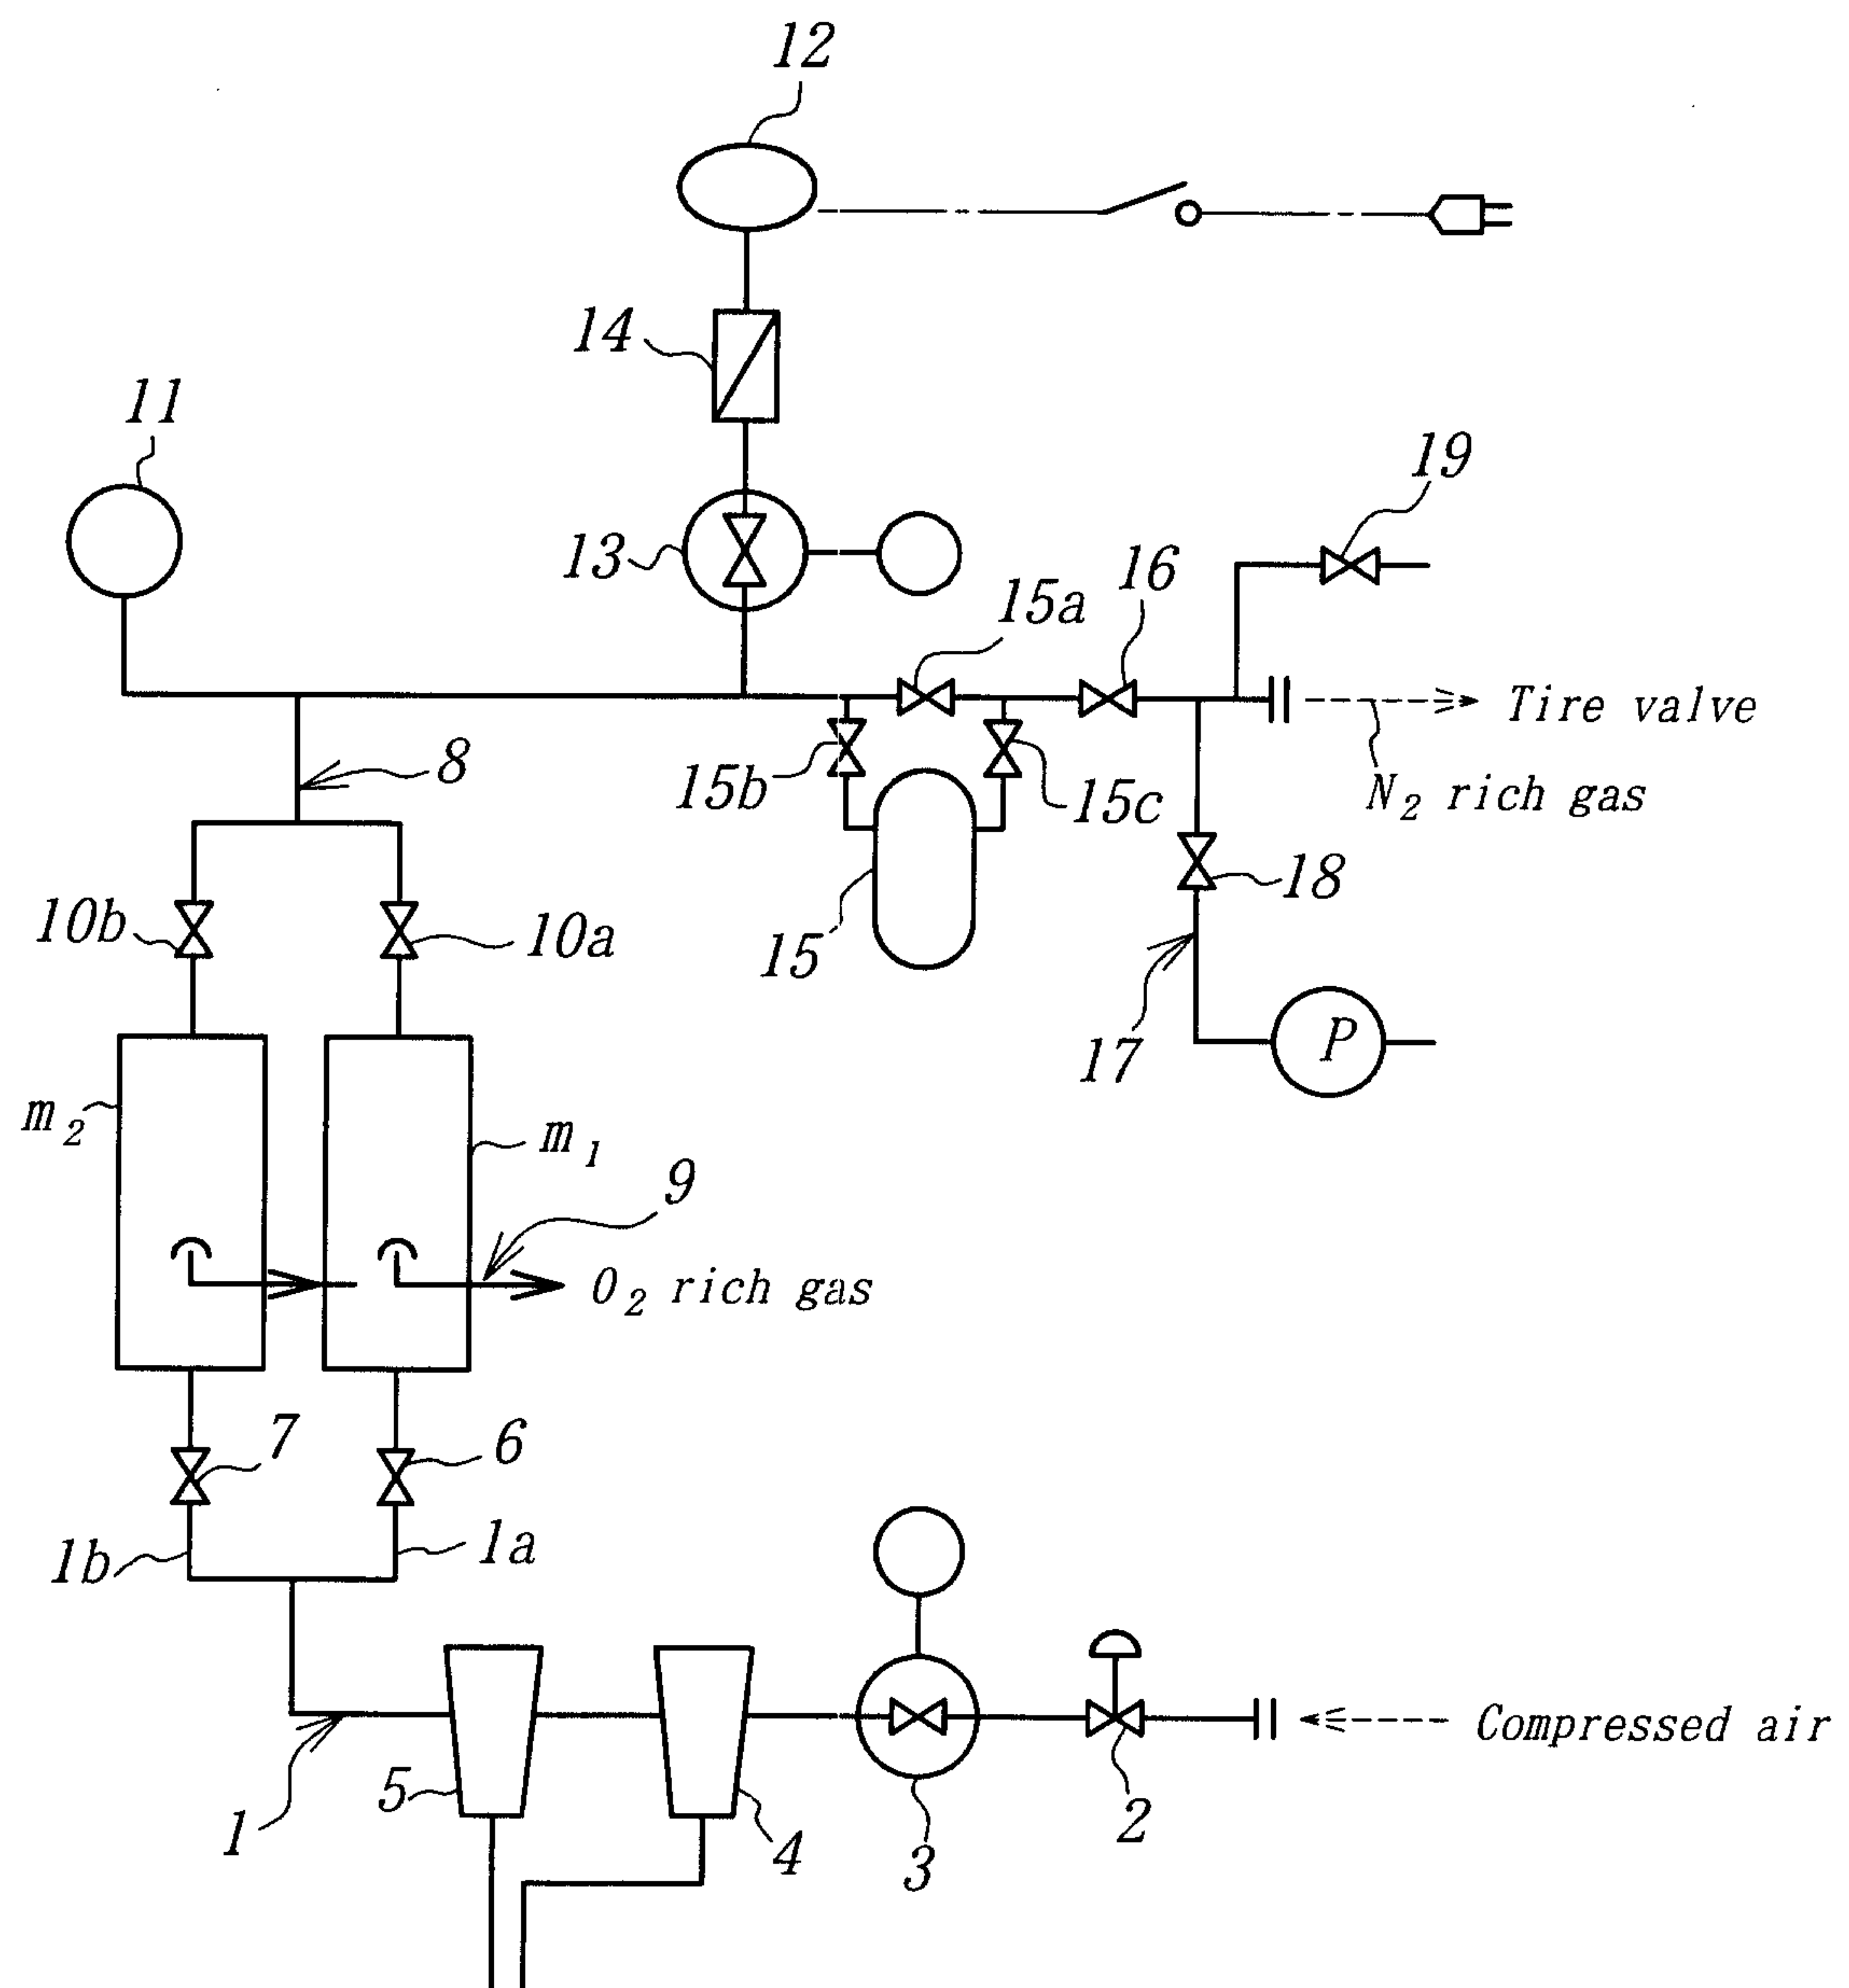


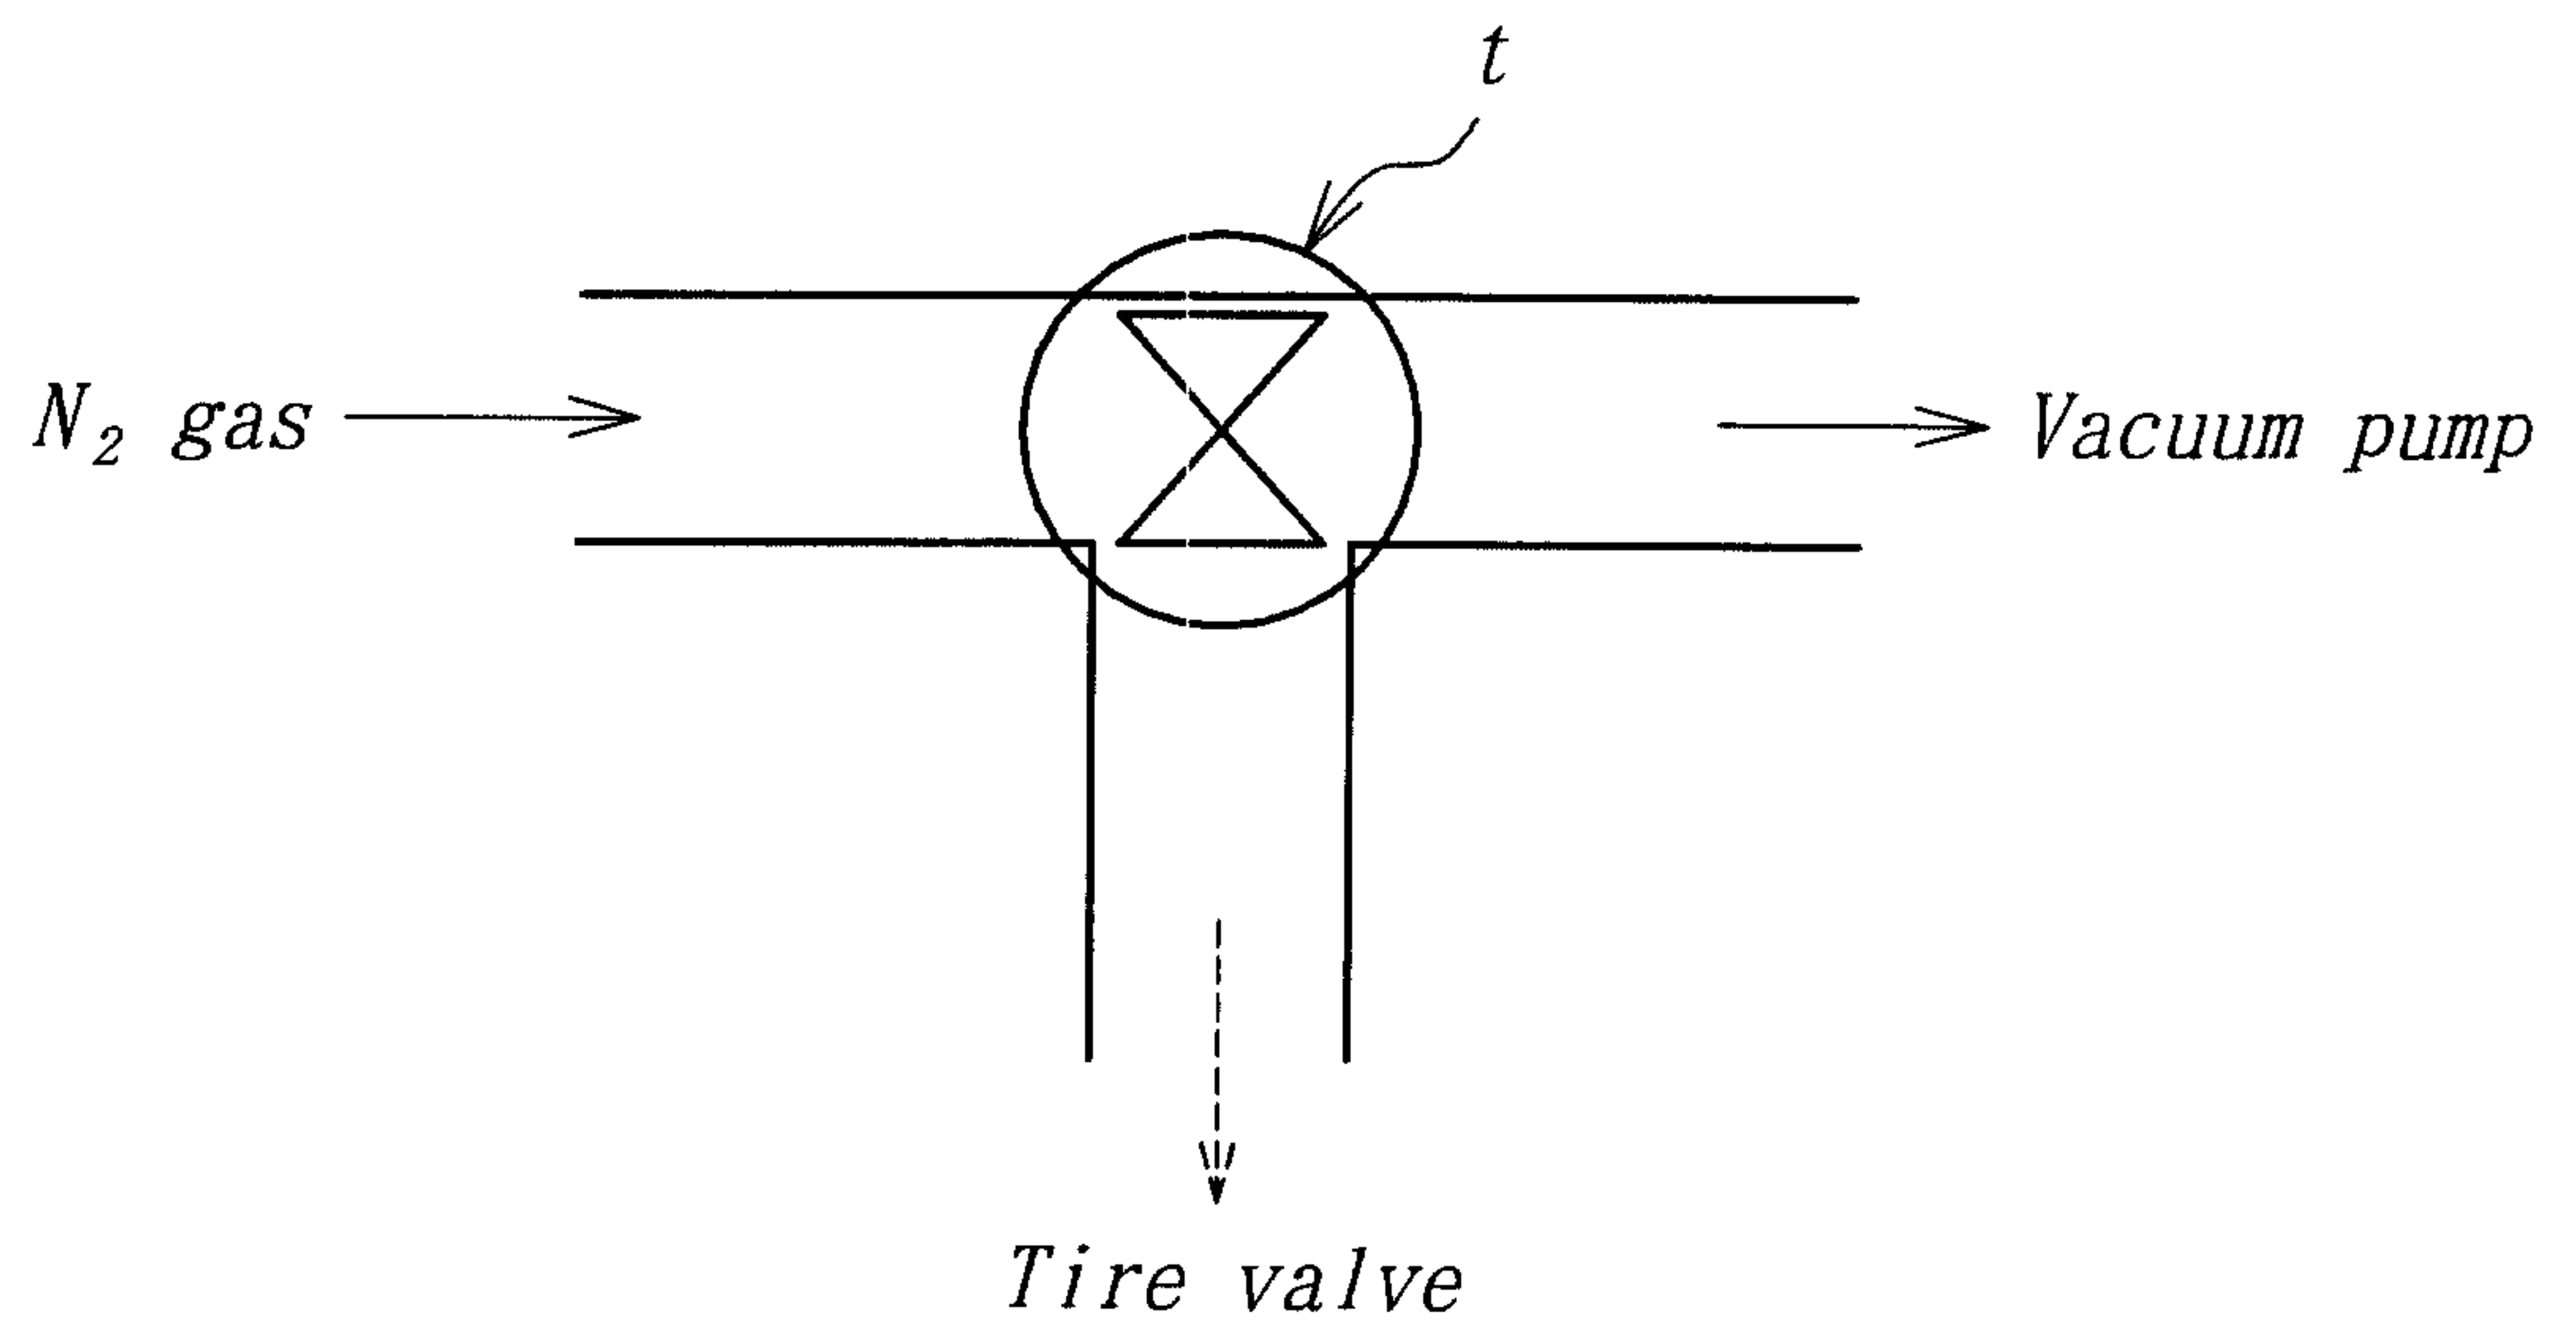
FIG. 2

FIG. 3

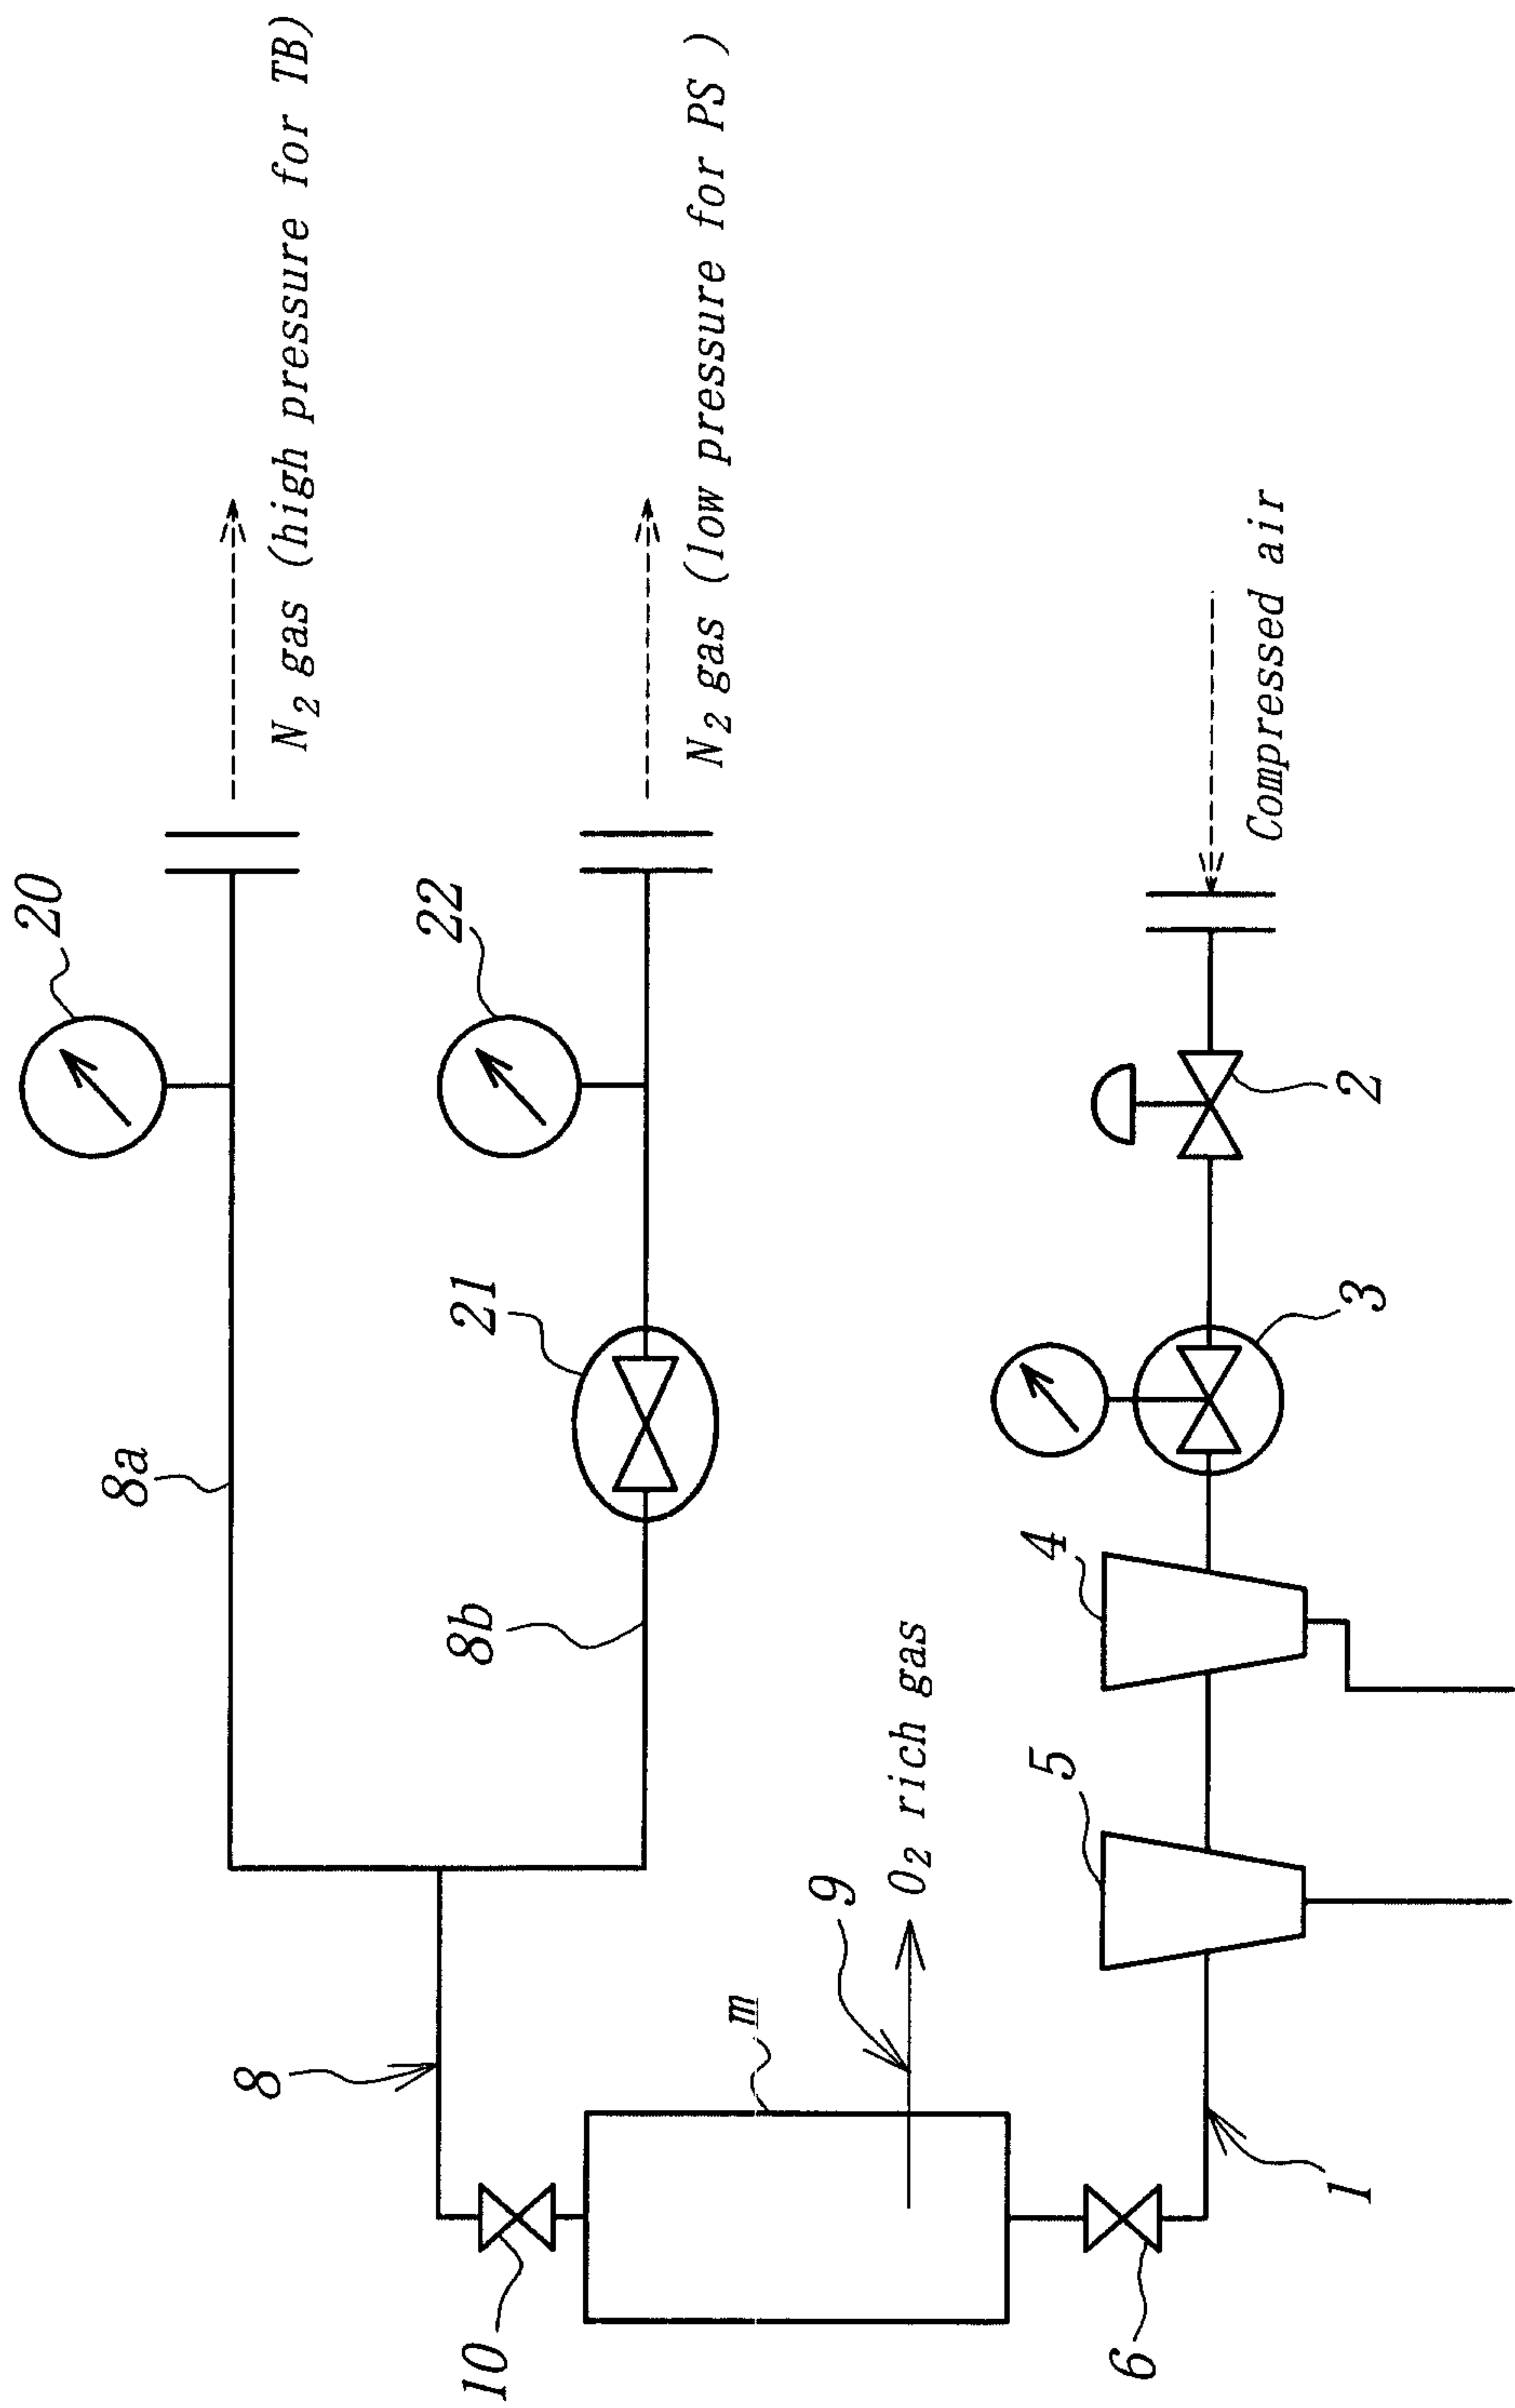
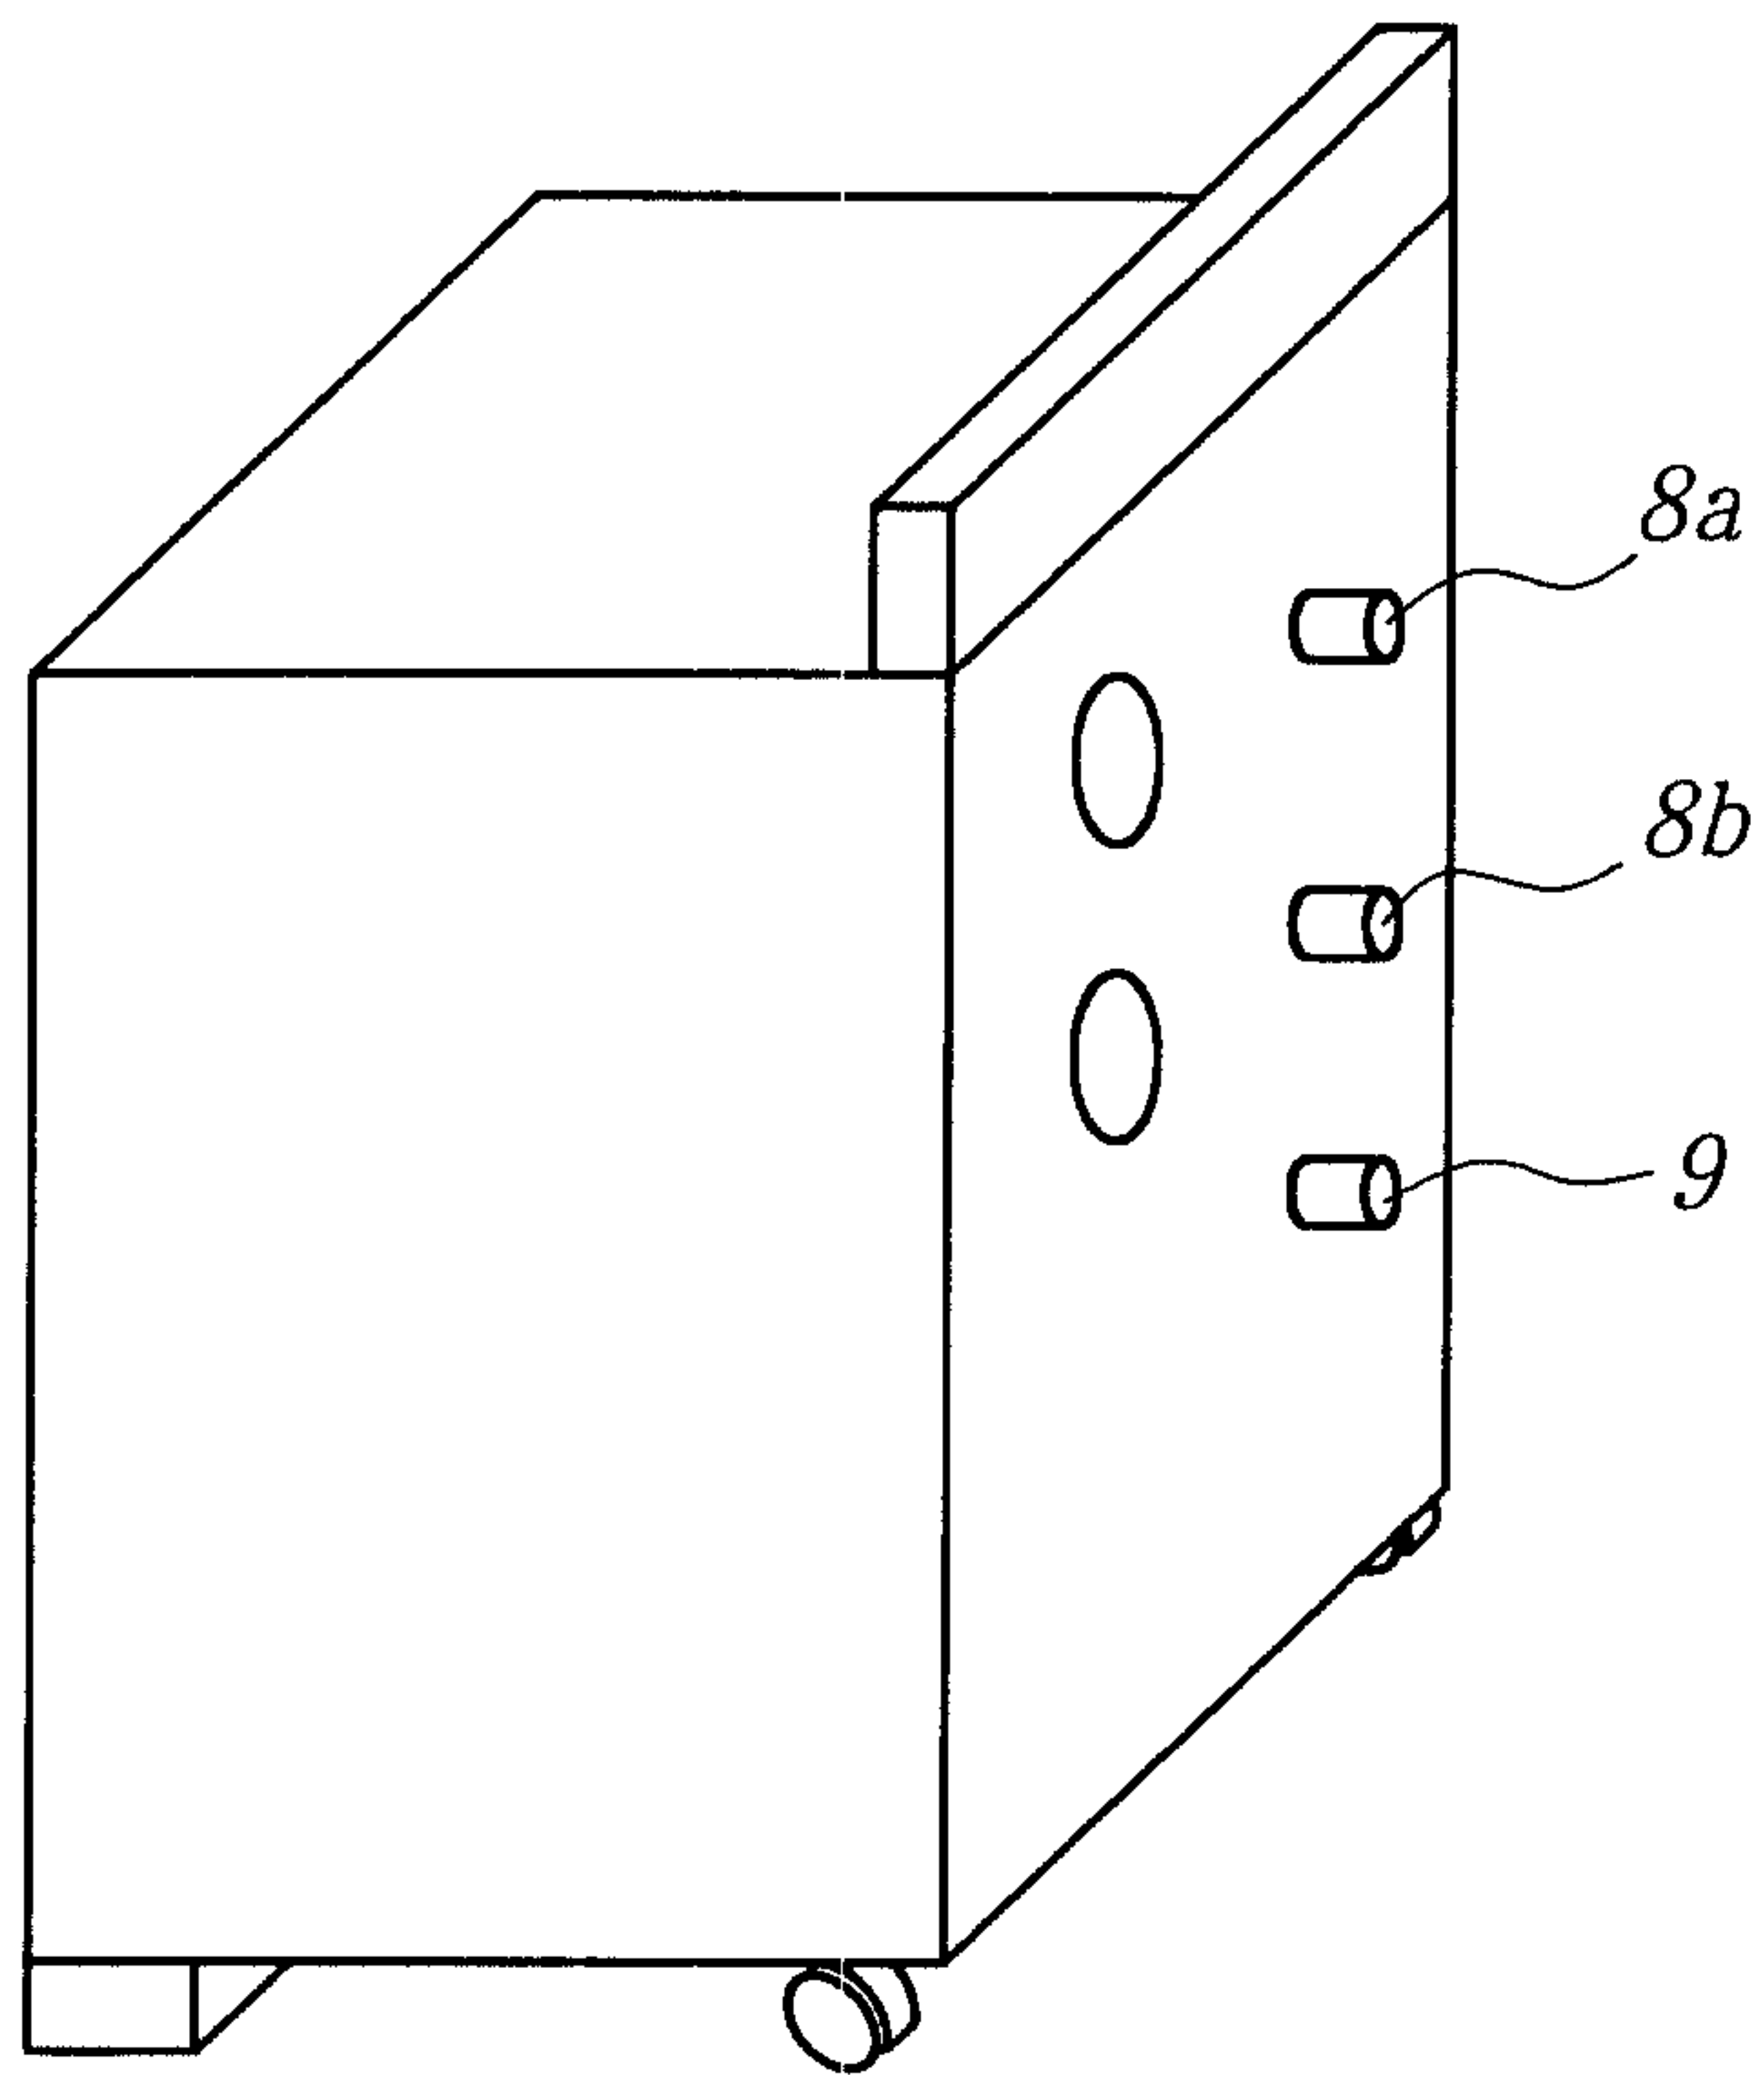


FIG. 4



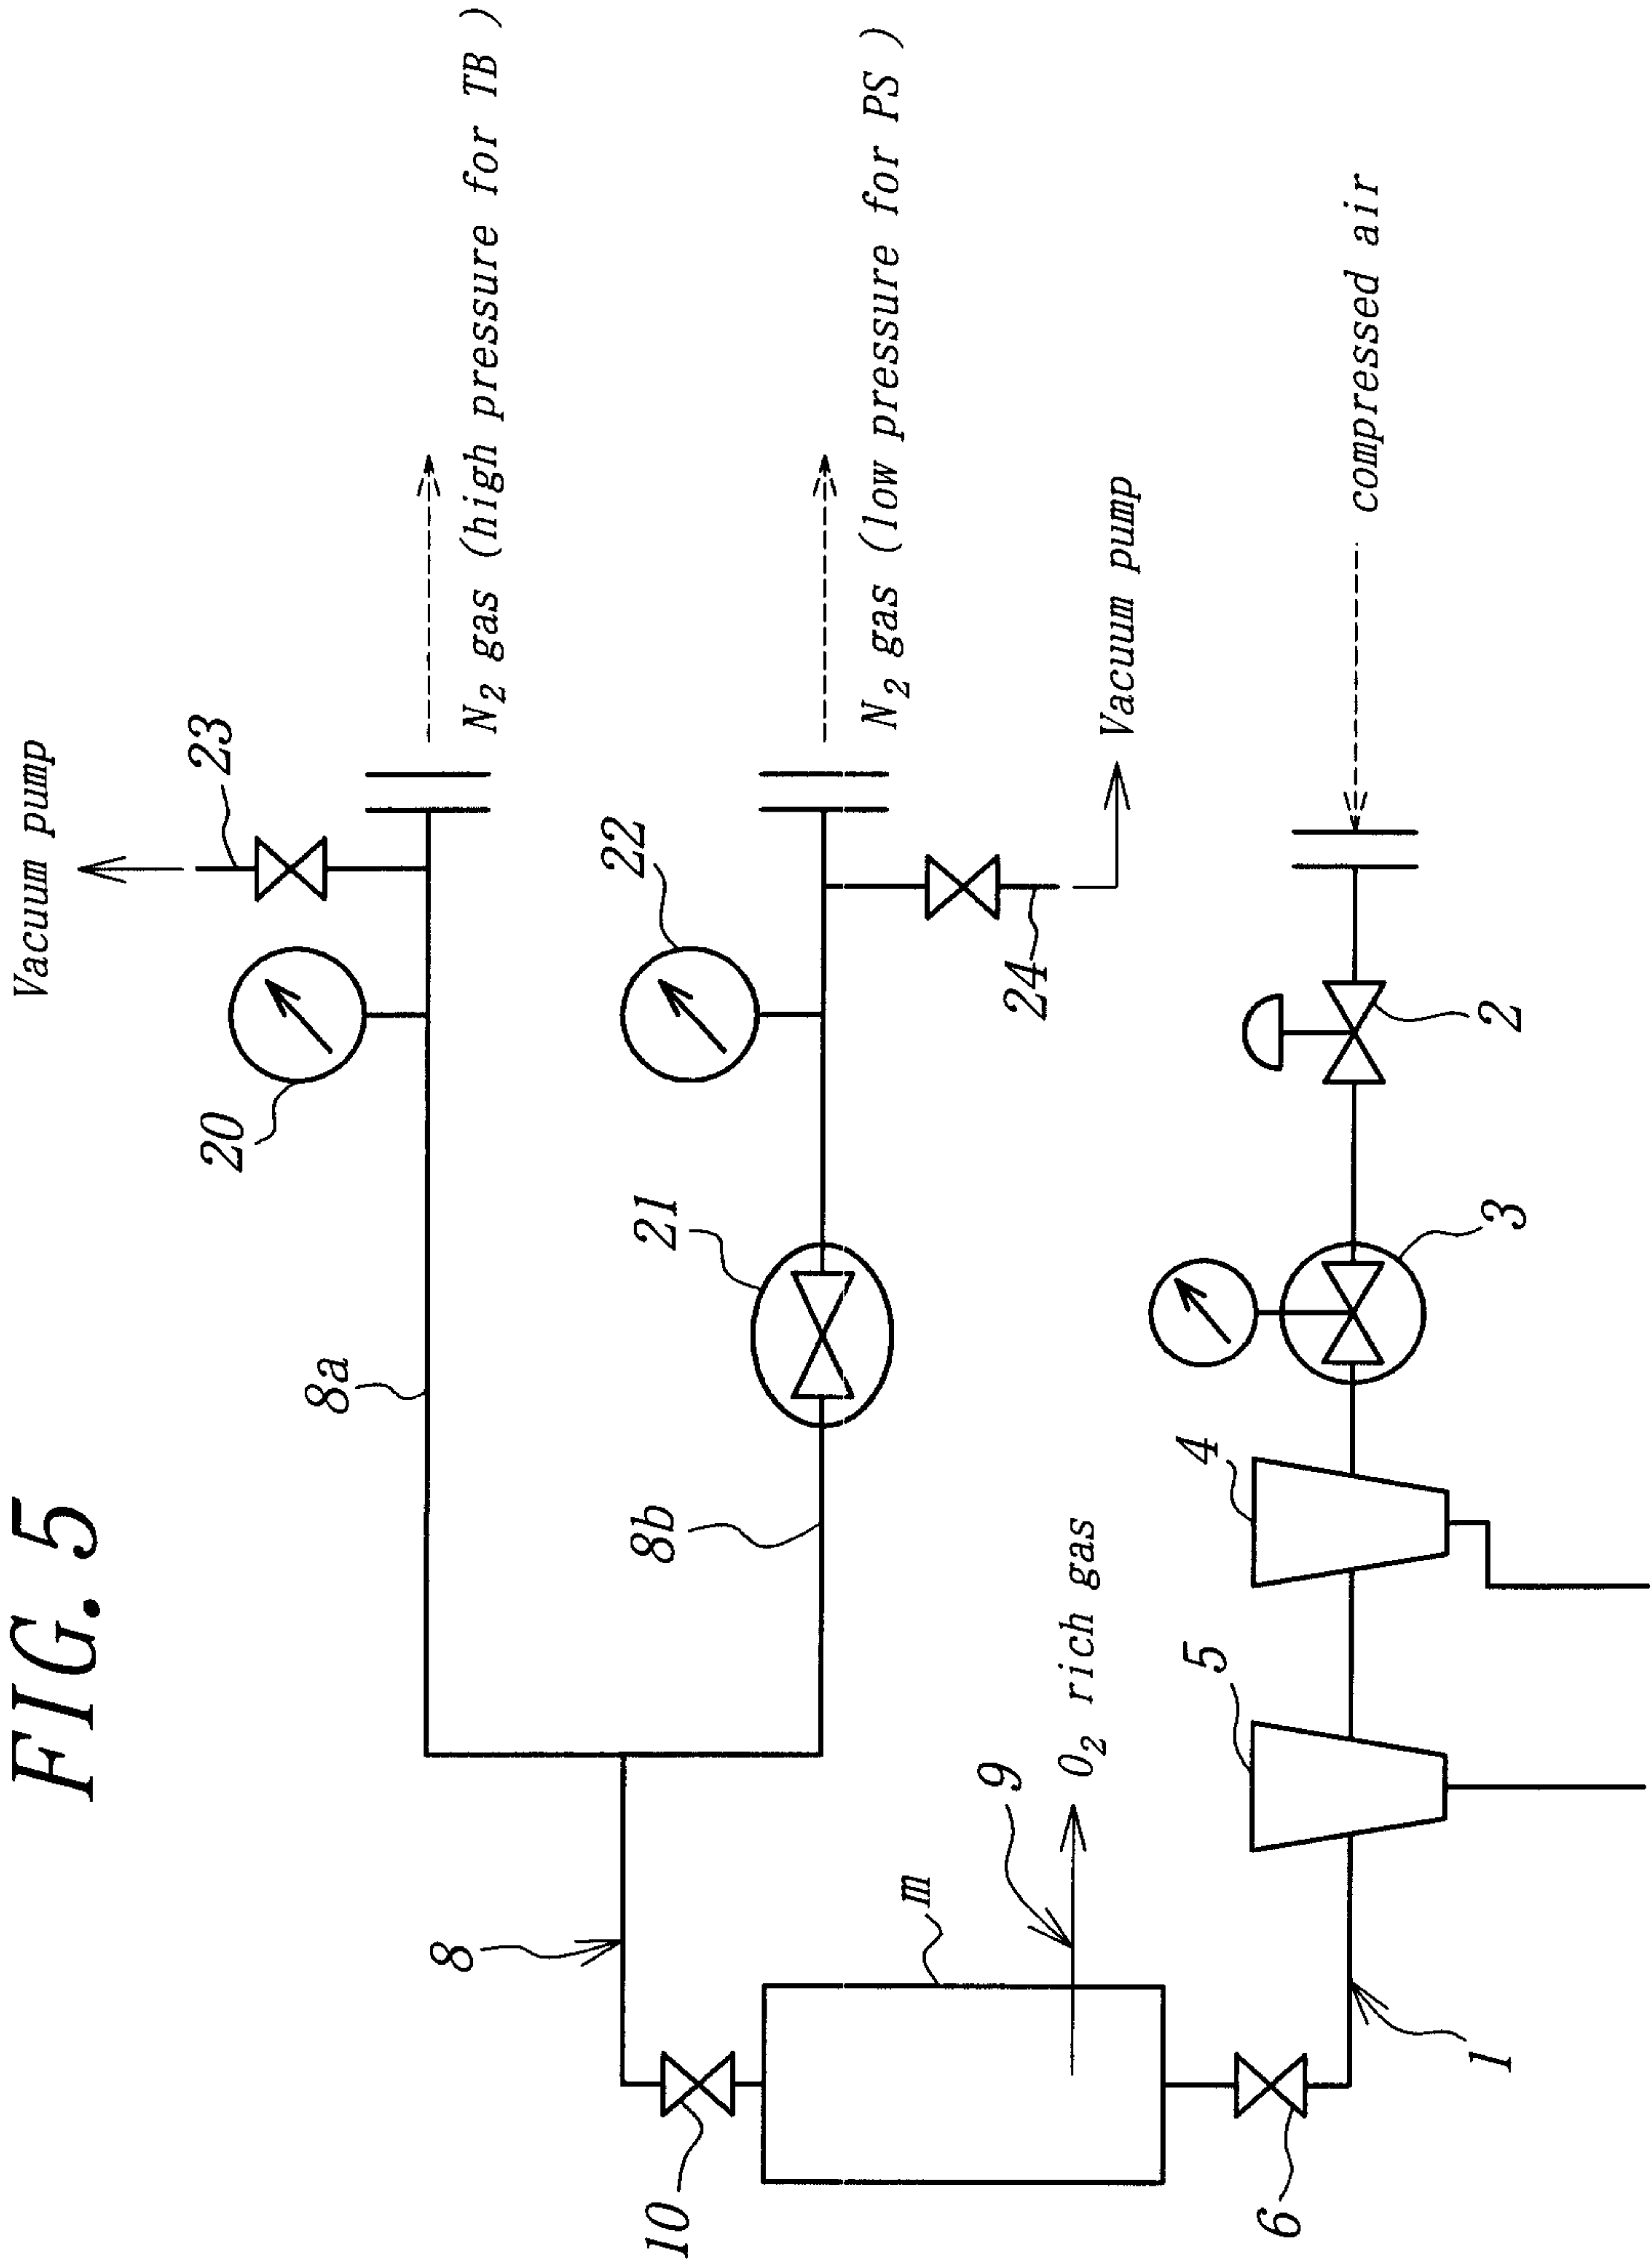


FIG. 6

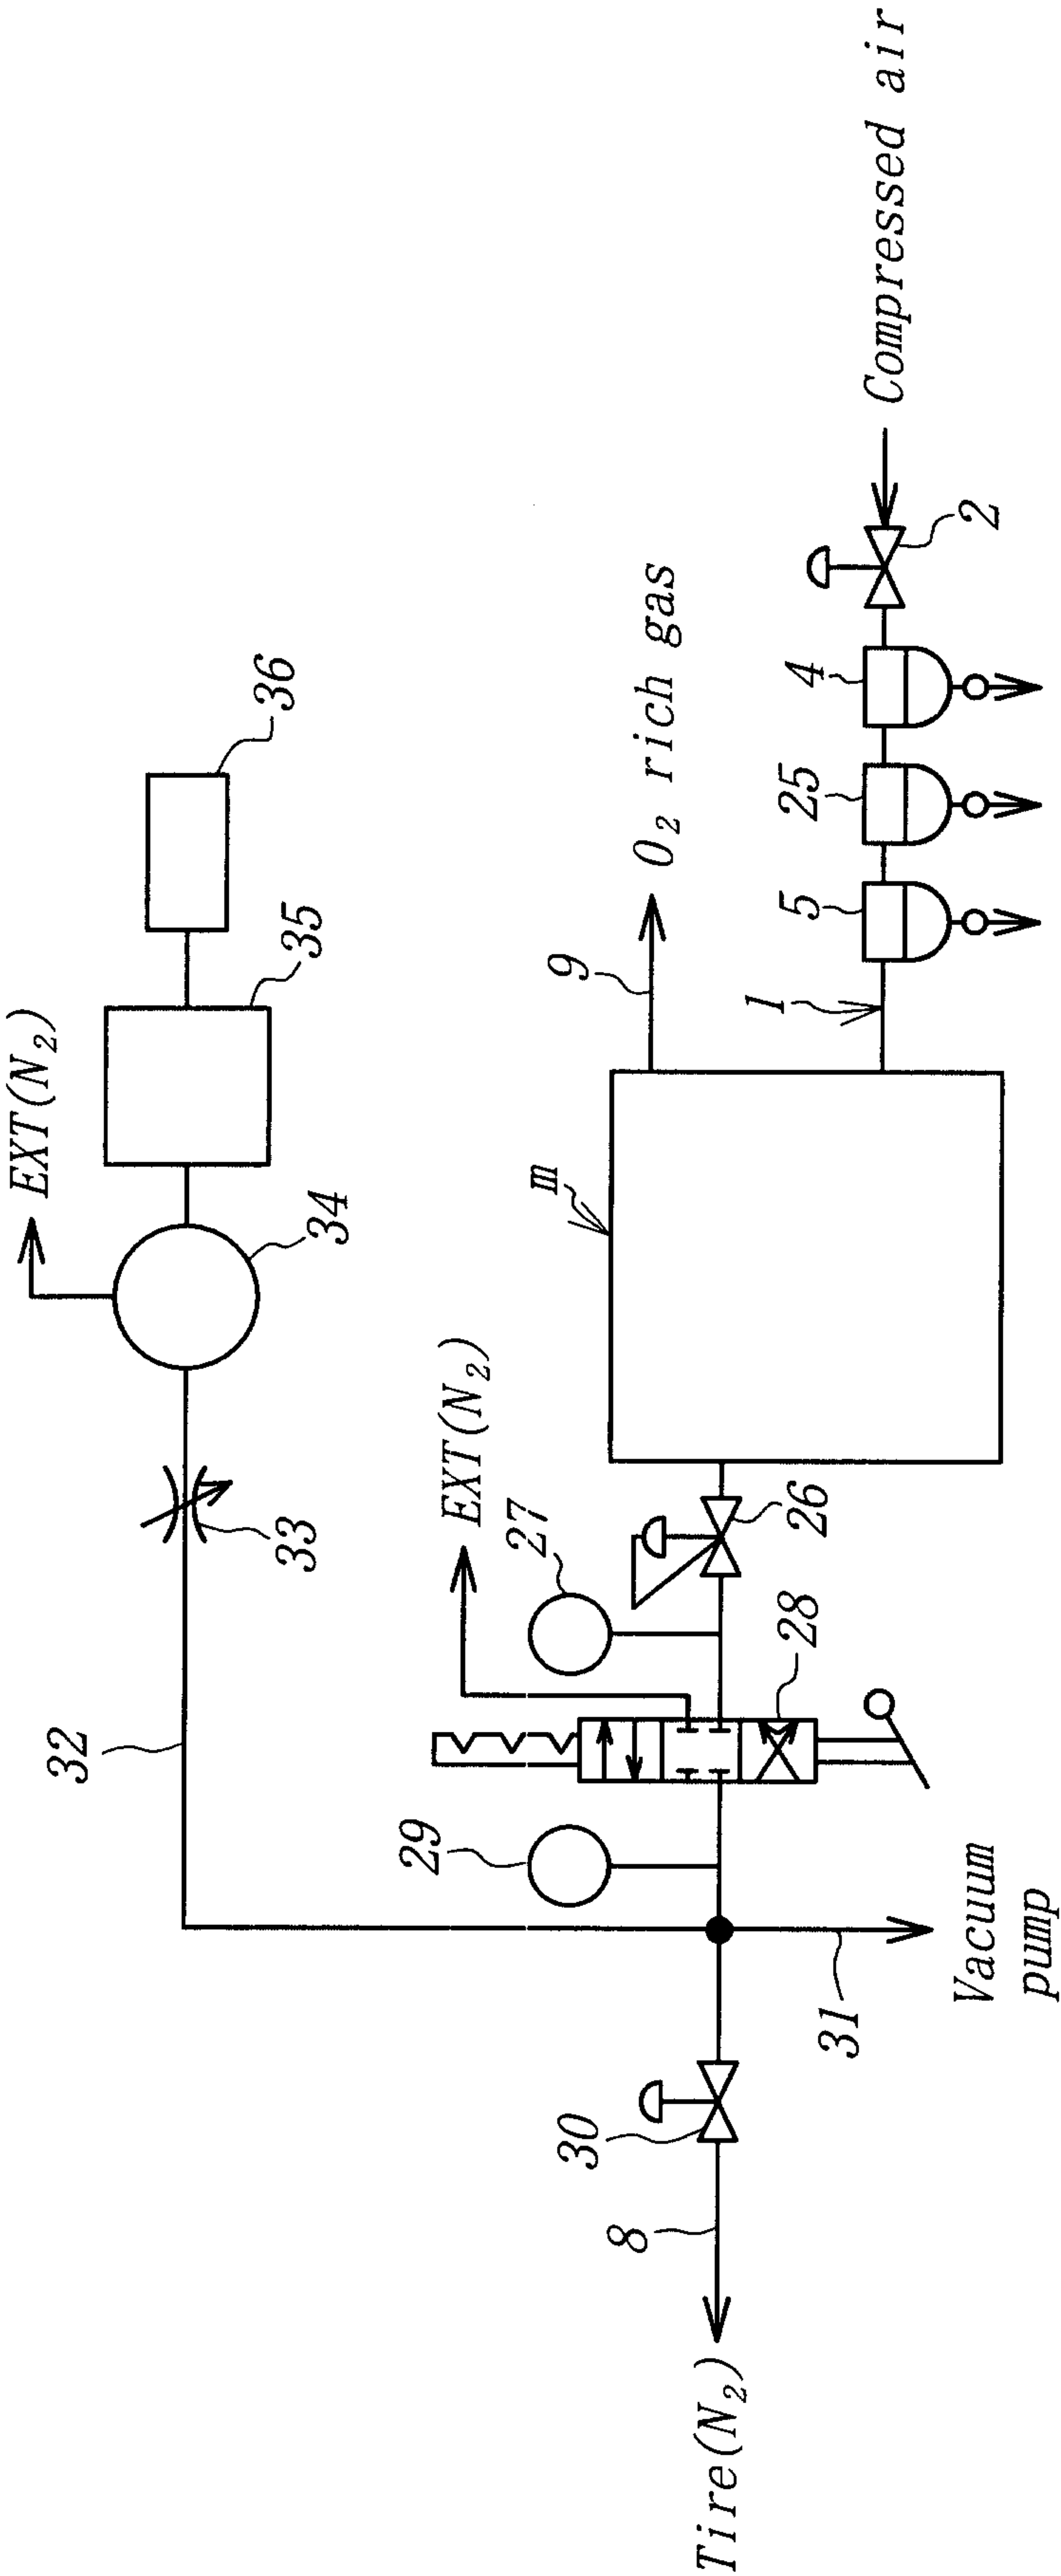
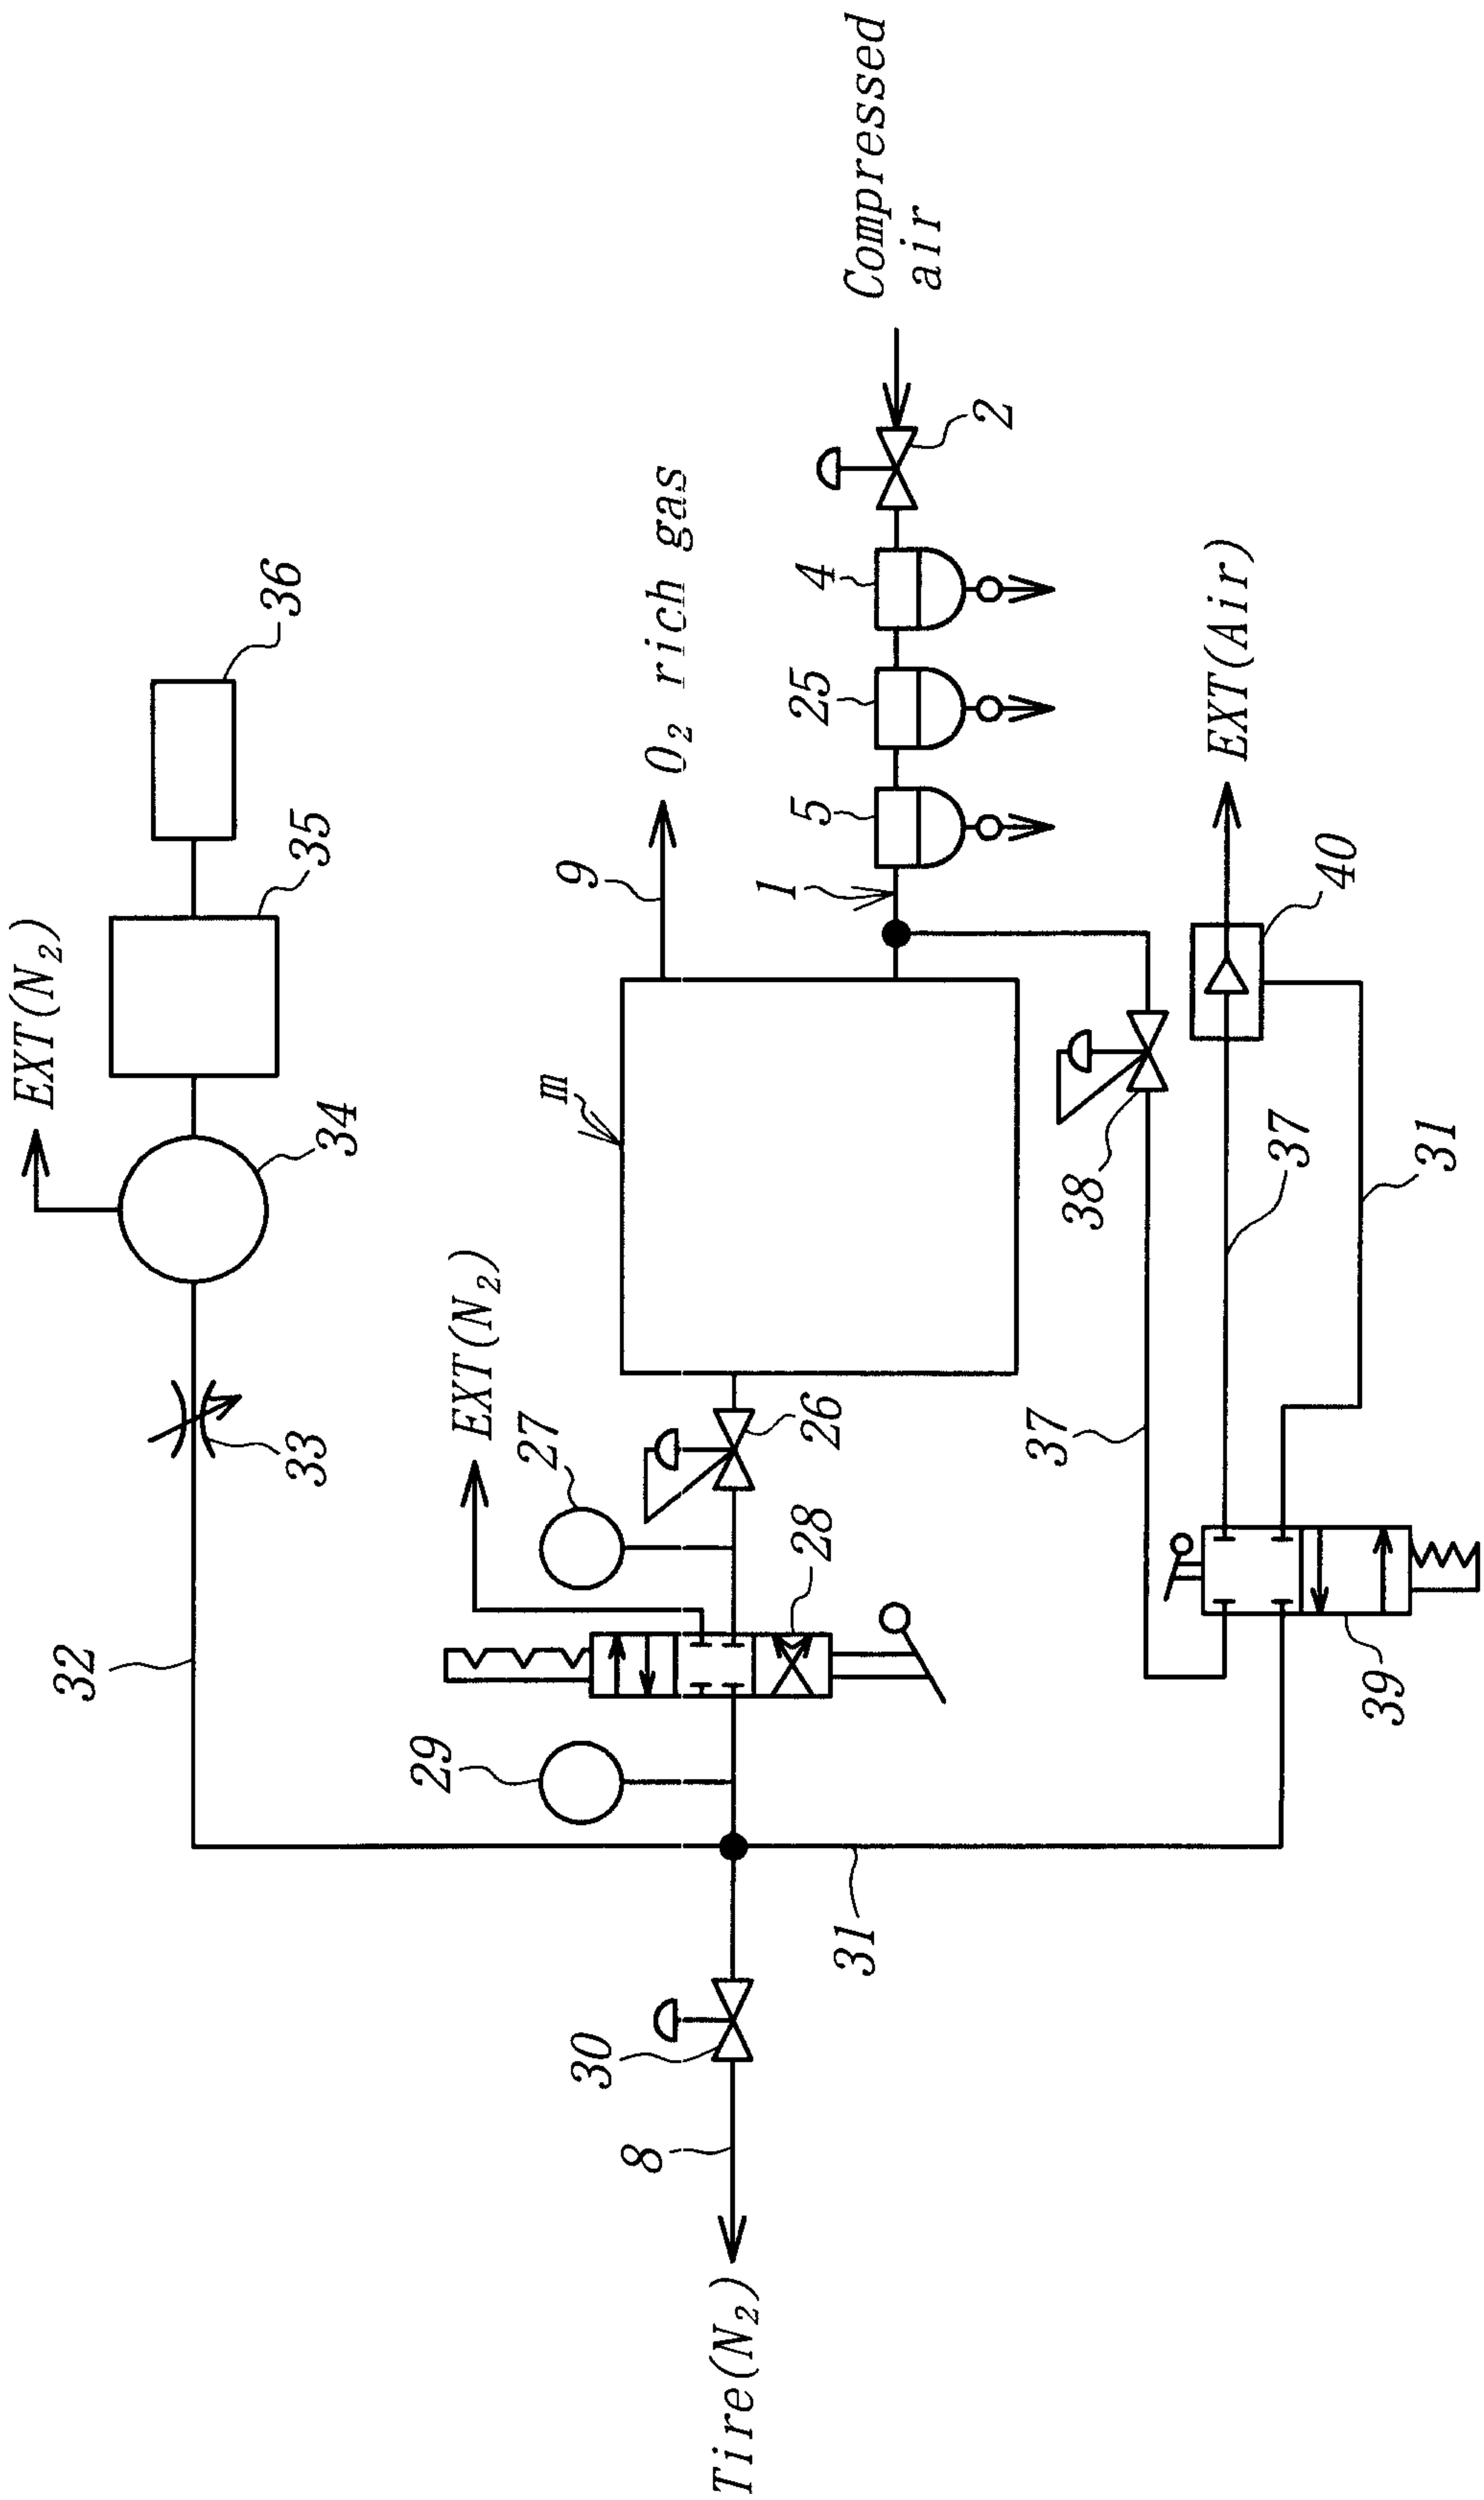


FIG. 7



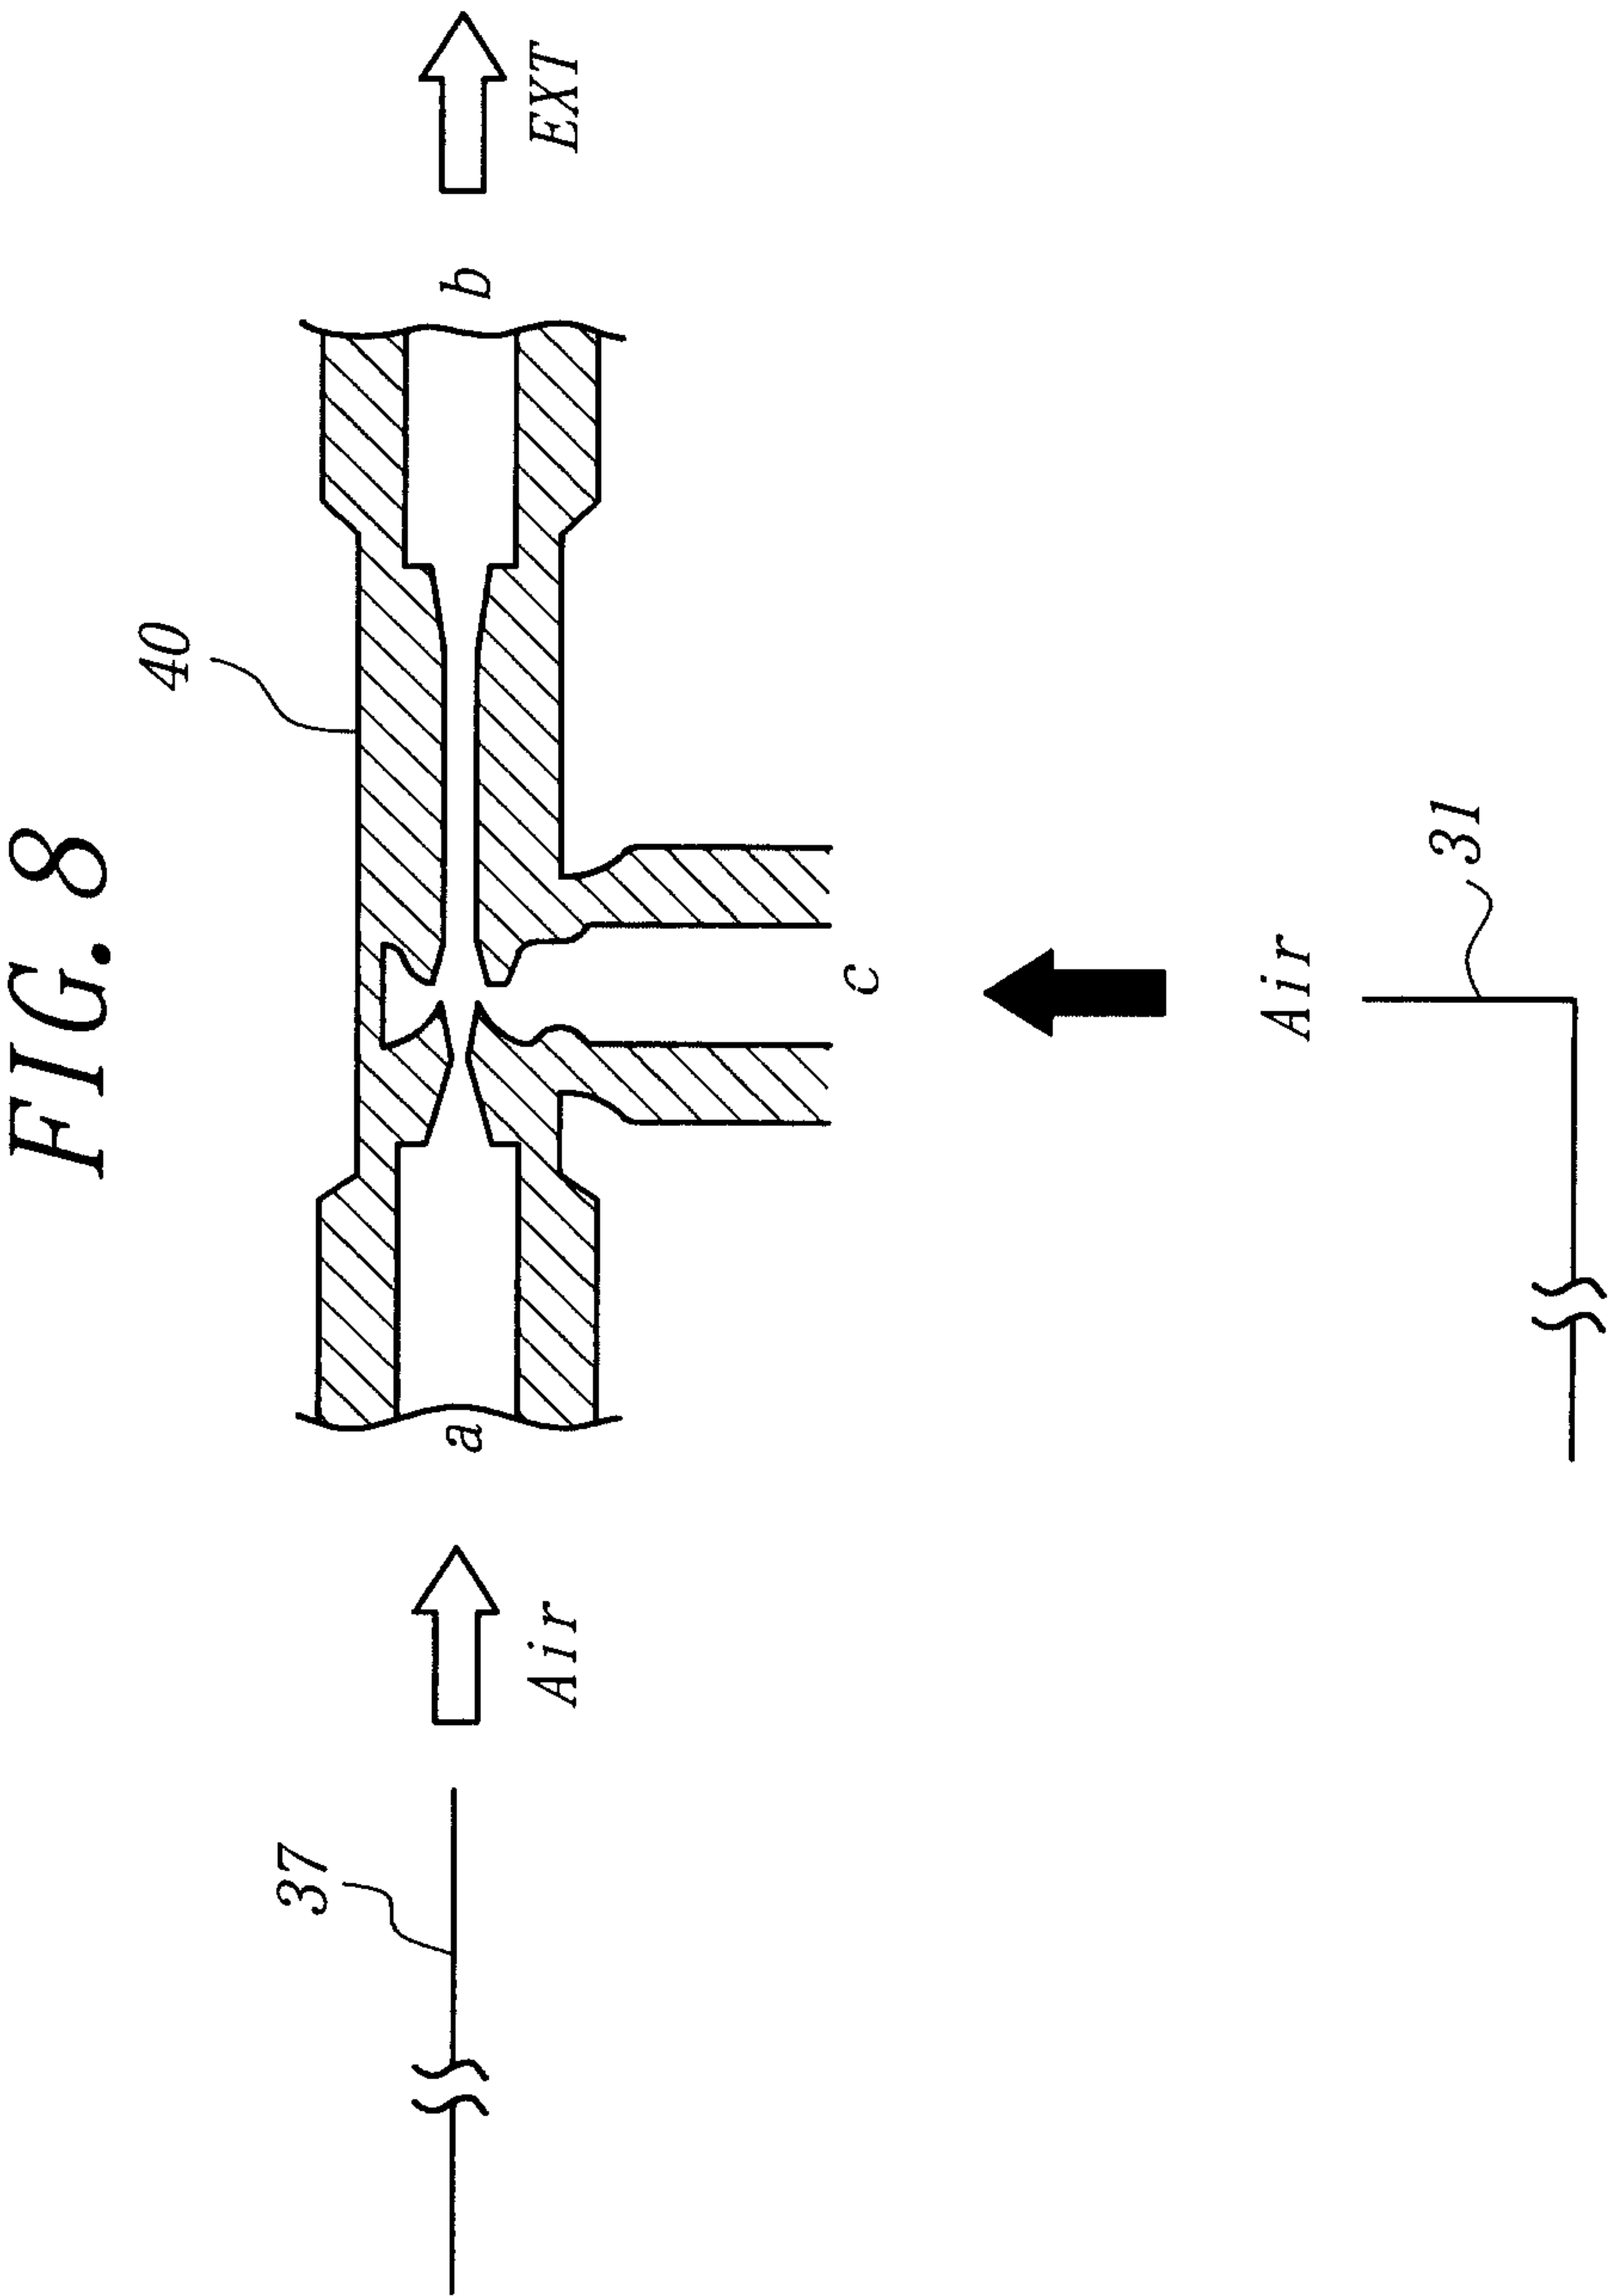


FIG. 9

