



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(22) Date de dépôt/Filing Date: 2016/08/26

(41) Mise à la disp. pub./Open to Public Insp.: 2018/02/26

(51) Cl.Int./Int.Cl. *C01D 5/02* (2006.01),
C01B 17/90 (2006.01), *C01D 5/00* (2006.01),
C01D 5/16 (2006.01), *C02F 1/04* (2006.01)


(71) Demandeur/Applicant:
NEMASKA LITHIUM INC., CA

(72) Inventeurs/Inventors:
MAGNAN, JEAN-FRANCOIS, CA;
BOURASSA, GUY, CA;
LAROCHE, NICOLAS, CA;
OUELLET, BERTIN, CA;
BRERETON, CLIVE, CA;
BUCHI, STEVEN, CA;
NAKA, TSUKI, CA...

(74) Agent: BERESKIN & PARR LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : PROCEDE DE TRAITEMENT DE COMPOSITIONS AQUEUSES COMPRENANT DU SULFATE DE LITHIUM
ET DE L'ACIDE SULFURIQUE

(54) Title: PROCESSES FOR TREATING AQUEOUS COMPOSITIONS COMPRISING LITHIUM SULFATE AND
SULFURIC ACID

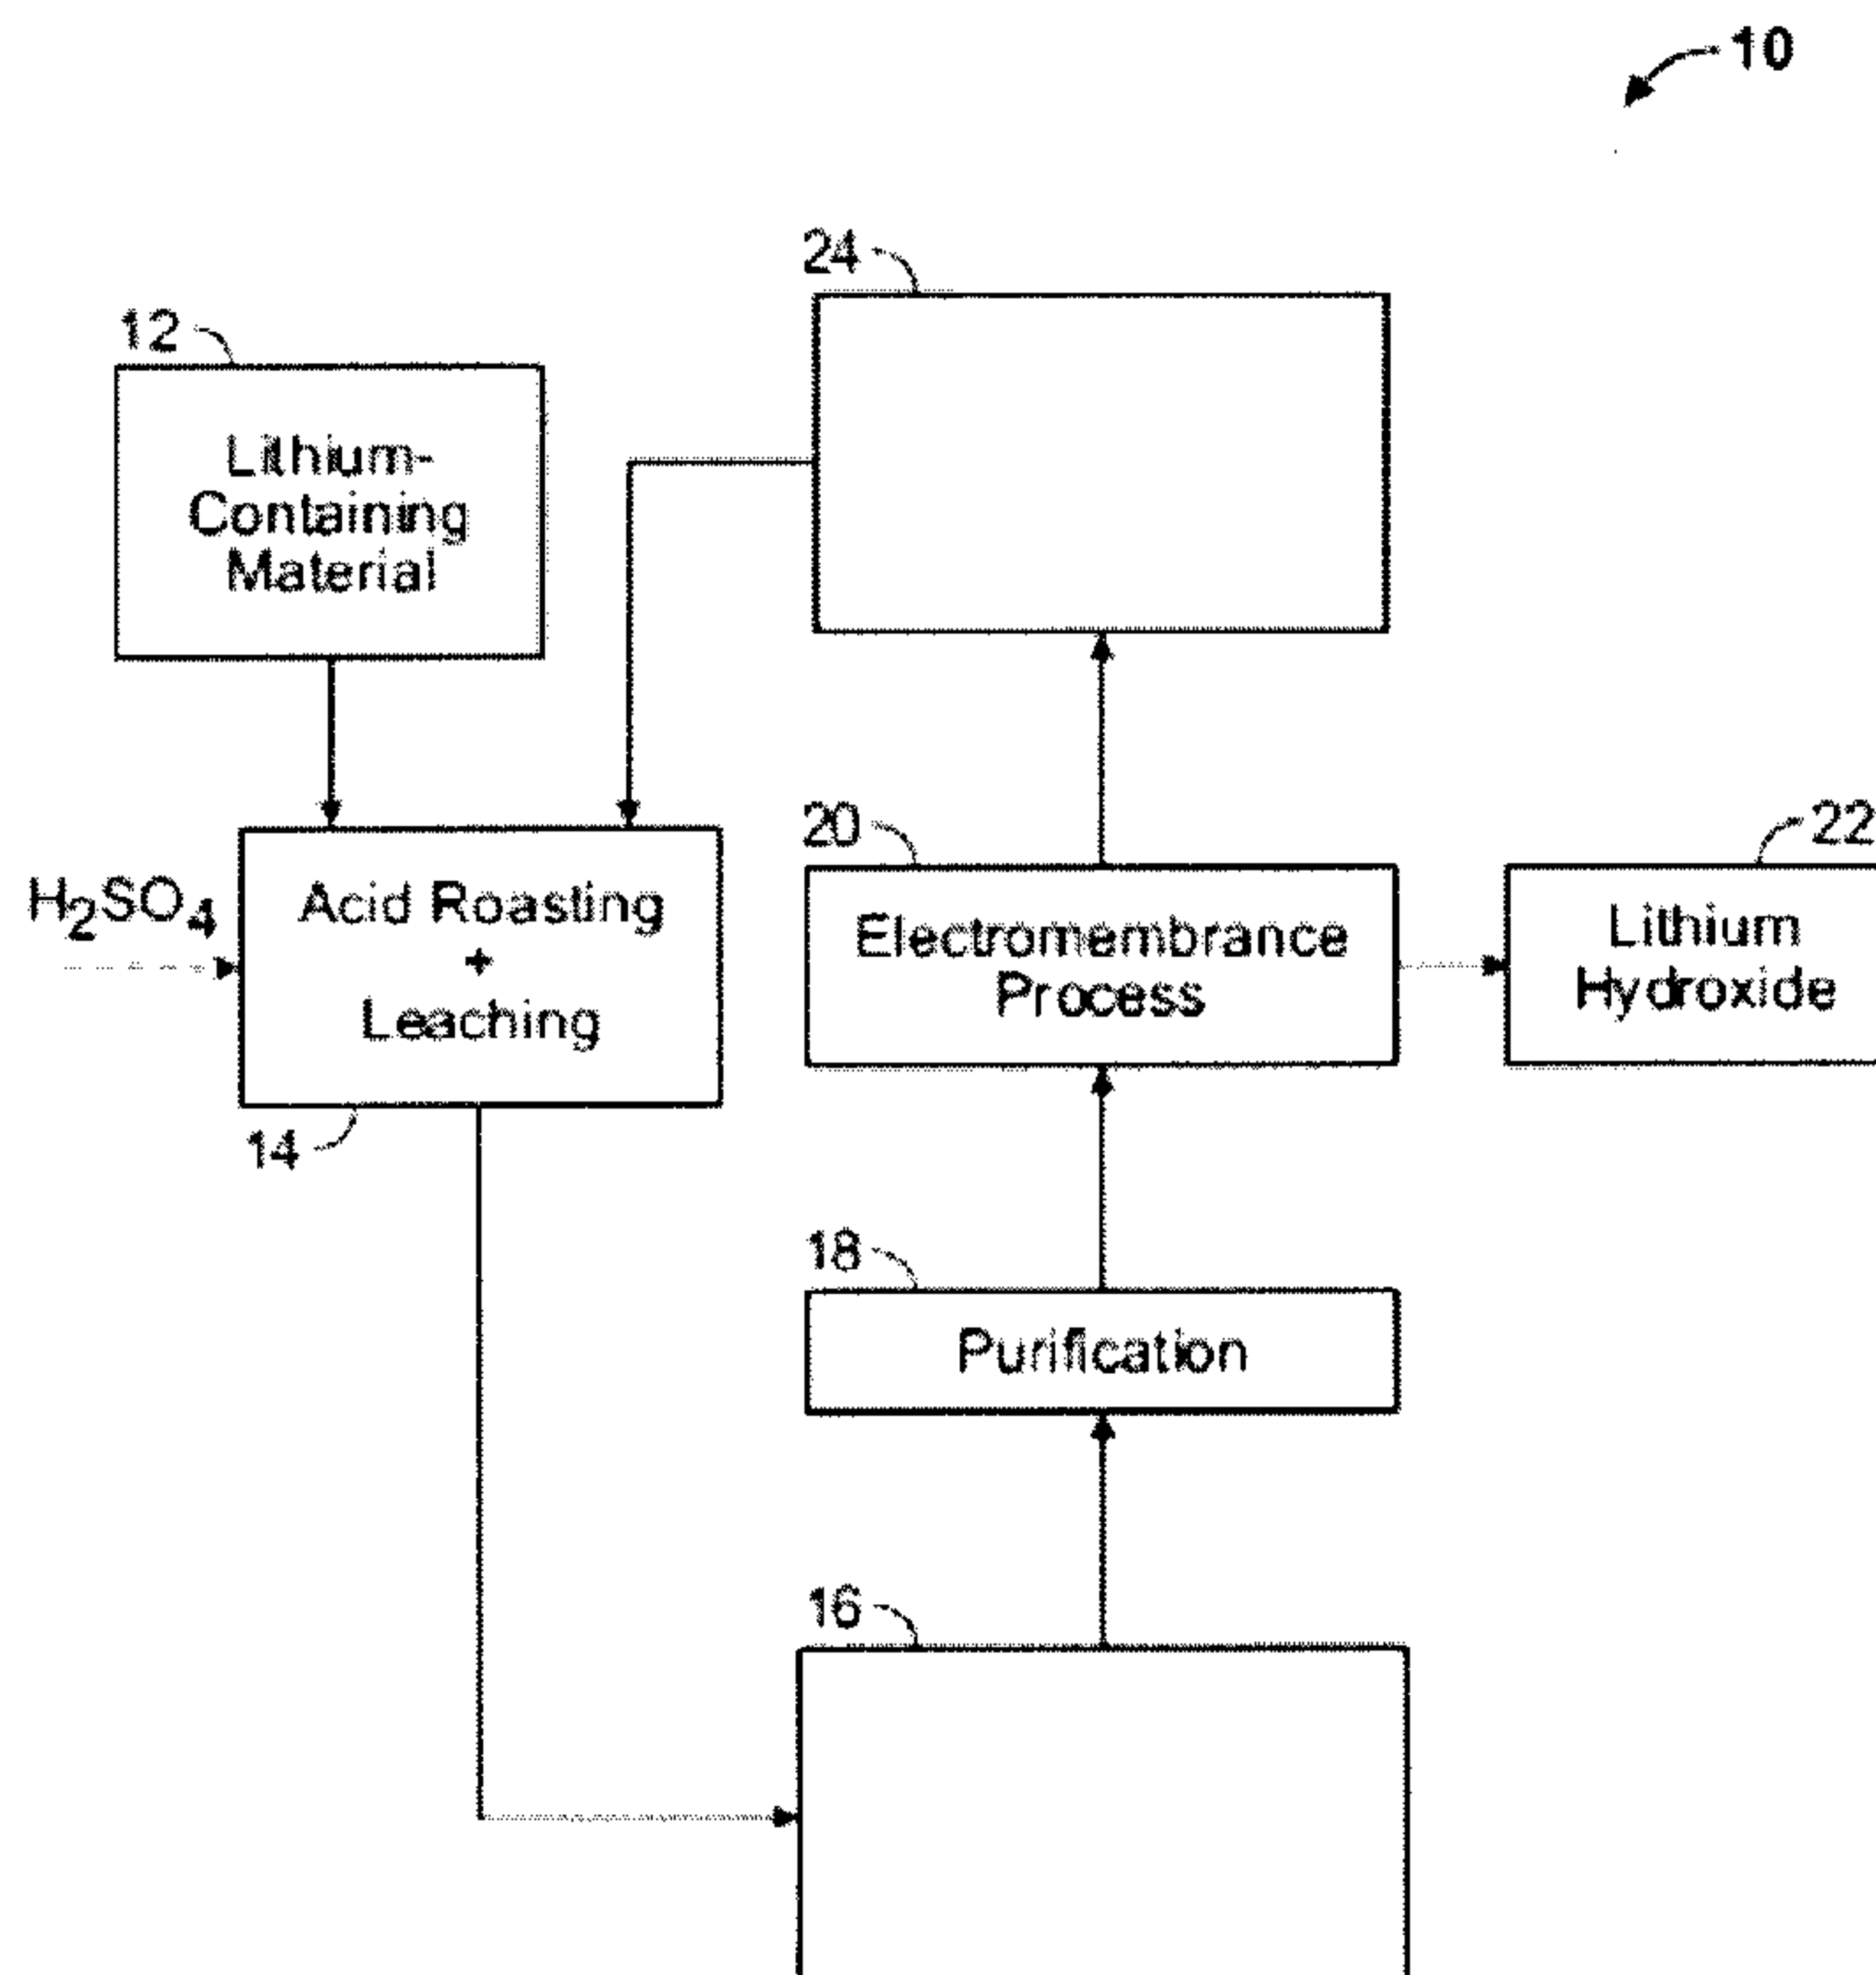

(57) Abrégé/Abstract:

The present disclosure relates to processes for treating an aqueous composition comprising lithium sulfate and sulfuric acid. The processes comprise evaporatively crystallizing the aqueous composition comprising lithium sulfate and sulfuric acid under

(57) **Abrégé(suite)/Abstract(continued):**

conditions to obtain crystals of lithium sulfate monohydrate and a lithium sulfate-reduced solution; and optionally separating the crystals of the lithium sulfate monohydrate from the lithium sulfate- reduced solution. The processes optionally further comprise concentrating the lithium sulfate-reduced solution under conditions to obtain an acidic condensate and a concentrate comprising sulfuric acid.

ABSTRACT

The present disclosure relates to processes for treating an aqueous composition comprising lithium sulfate and sulfuric acid. The processes comprise evaporatively crystallizing the aqueous composition comprising lithium sulfate and sulfuric acid under conditions to obtain crystals of lithium sulfate monohydrate and a lithium sulfate-reduced solution; and optionally separating the crystals of the lithium sulfate monohydrate from the lithium sulfate-reduced solution. The processes optionally further comprise concentrating the lithium sulfate-reduced solution under conditions to obtain an acidic condensate and a concentrate comprising sulfuric acid.

PROCESSES FOR TREATING AQUEOUS COMPOSITIONS COMPRISING LITHIUM SULFATE AND SULFURIC ACID

FIELD

[0001] The present disclosure relates to processes for treating aqueous solutions comprising lithium sulfate and sulfuric acid.

BACKGROUND

[0002] There have been some reports of the phase behavior of the binary lithium sulfate/water system and ternary lithium sulfate/sulfuric acid/water system in classic sources such as International Critical Tables and other older compilations. For example, Watts, "A Dictionary of Chemistry and the Allied Branches of Other Sciences, 1879, teaches that acid lithium sulphate, LiHSO_4 , crystallises in prisms from a solution of the normal salt in sulphuric acid of sp. gr. 1.6 to 1.7; from more dilute acid, the normal salt separates again; and the acid salt melts at 160° . For example, Critical Tables contains data on the lithium sulphate / water binary. (Volume 4, p 42., 1928). Dortmund Data Bank also has some data on bisulfate.

[0003] However, there remains a need for providing an alternative to the existing processes for treating solutions comprising lithium sulfate and sulfuric acid.

SUMMARY

[0004] According to an aspect of the present disclosure, there is provided a process for treating an aqueous composition comprising lithium sulfate and sulfuric acid, said process comprising:

treating the aqueous composition comprising lithium sulfate and sulfuric acid under conditions to obtain crystals of lithium sulfate monohydrate and a lithium sulfate-reduced solution; and

optionally separating the crystals of the lithium sulfate monohydrate from the lithium sulfate-reduced solution.

[0005] According to another aspect of the present disclosure, there is provided a process for treating an aqueous composition comprising lithium sulfate and sulfuric acid, said process comprising:

evaporatively crystallizing the aqueous composition comprising lithium sulfate and sulfuric acid under conditions to obtain crystals of lithium sulfate monohydrate and a lithium sulfate-reduced solution; and

optionally separating the crystals of the lithium sulfate monohydrate from the lithium sulfate-reduced solution.

[0006] According to another aspect of the present disclosure, there is provided a process for treating an aqueous composition comprising lithium sulfate and sulfuric acid, said process comprising:

evaporatively crystallizing the aqueous composition comprising lithium sulfate and sulfuric acid under conditions to obtain crystals of lithium sulfate monohydrate and a lithium sulfate-reduced solution; and

separating the crystals of the lithium sulfate monohydrate from the lithium sulfate-reduced solution.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] In the following drawings, which represent by way of example only, various embodiments of the disclosure :

[0008] Figure 1 is a schematic diagram of a process according to an example of the present disclosure;

[0009] Figure 2 is a schematic diagram of a process according to another example of the present disclosure;

[0010] Figure 3 shows a schematic of the ternary phase diagram for an example of the Li_2SO_4 / H_2SO_4 / H_2O system at 30°C;

[0011] Figure 4 is a plot of reported decomposition temperatures of the lithium sulphate monohydrate crystal as a function of pressure at boiling point;

[0012] Figure 5 is a plot showing the boiling temperatures of solutions of sulphuric acid, lithium and sodium sulphates as a function of concentration [wt%] according to an example of the present disclosure;

[0013] Figure 6 is a schematic diagram of a process according to another example of the present disclosure;

[0014] Figure 7 is a ternary phase diagram of a process according to another example of the present disclosure;

[0015] Figure 8 is a plot showing boiling point ($^{\circ}\text{C}$) as a function of total acid and salt in concentrate (wt%) at ambient pressure according to comparative examples BPR-1 (lower plot) and BPR-2 (upper plot) of the present disclosure;

[0016] Figure 9 is a plot showing boiling point ($^{\circ}\text{C}$) as a function of total acid and salts in concentrate (wt%) at a pressure of 17 kPa according to comparative example BPR-3 of the present disclosure;

[0017] Figure 10 is a plot showing boiling point ($^{\circ}\text{C}$) as a function of total acid and salts in concentrate (wt%) at a pressure of 3 kPa according to comparative example BPR-4 of the present disclosure;

[0018] Figure 11 is a plot showing boiling point ($^{\circ}\text{C}$) as a function of total acid and salts in concentrate (wt%) at ambient pressure (BPR-1; upper plot) and at a pressure of 17 kPa (BPR-3; lower plot) in the range from 30 wt% to 84 wt% total acid and salts according to comparative examples of the present disclosure;

[0019] Figure 12 shows photographs of (A) 40.6 wt% total acid and salts concentrate hot; (B) 40.6 wt% total acid and salts concentrate at room temperature; (C) 49 wt% total acid and salts concentrate at temperature; (D) 57 wt% total acid and salts concentrate at temperature; (E) 69 wt% total acid and salts concentrate at temperature; (F) 75 wt% total acid and salts concentrate at temperature; (G) 84 wt% total acid and salts concentrate at temperature; and (H) 84 wt% total acid and salts concentrate at room temperature according to comparative example BPR-1 of the present disclosure;

[0020] Figure 13 shows photographs of (A) solution 2 while heating; (B) 76 wt% total acid and salts concentrate at temperature; (C) 76 wt% total acid and salts concentrate at room temperature; (D) 93 wt% total acid and salts concentrate at temperature; and (E) 96 wt% total acid and salts concentrate at temperature according to comparative example BPR-2 of the present disclosure;

[0021] Figure 14 shows photographs of (A) 66 wt% total acid and salts concentrate at temperature; (B) 66 wt% total acid and salts concentrate at room temperature; (C) 83 wt% total acid and salts concentrate at temperature; and (D) 83 wt% total acid and salts concentrate at room temperature according to comparative example BPR-3 of the present disclosure;

[0022] Figure 15 shows photographs of (A) solution 2 under vacuum, degassing; (B) solution 2 heating under vacuum; (C) 69 wt% total acid and salts concentrate at temperature; (D) 88 wt% total acid and salts concentrate at temperature; (E) 88 wt% total acid and salts concentrate at room temperature; and (F) 96 wt% total acid and salts concentrate at temperature according to comparative example BPR-4 of the present disclosure;

[0023] Figure 16 shows photographs of the final concentrates of (A) BPR-1; (B-C) BPR-2; (D) BPR-3; (E) BPR-4; and (F) BPR-2 (right) and BPR-4 (left) according to comparative examples of the present disclosure;

[0024] Figure 17 shows photographs of (A) the final concentrate of stage 1 at temperature; (B) the final concentrate of stage 1 cooled to 30°C; (C) final concentrate of stage 2 at temperature; and (D) final concentrate of stage 2 at 30°C according to an example of a process of the present disclosure; and

[0025] Figure 18 shows photographs of (A) the hot 70% concentrate of stage 1; (B) the initial concentrate of stage 2; (C-D) large crystals in the concentrate of stage 2 after crystallizing at 30°C overnight; (E) concentrate of stage 2 after additional day at 30°C; and (F) concentrate of stage 2 re-heated to 99°C according to an example of a process of the present disclosure.

DETAILED DESCRIPTION

I. Definitions

[0026] Unless otherwise indicated, the definitions and examples described herein are intended to be applicable to all embodiments and aspects of the present disclosure herein described for which they are suitable as would be understood by a person skilled in the art.

[0027] In understanding the scope of the present disclosure, the term “comprising” and its derivatives, as used herein, are intended to be open ended terms that specify the presence of the stated features, elements, components, groups, integers, and/or steps, but do not exclude the presence of other unstated features, elements, components, groups, integers and/or steps. The foregoing also applies to words having similar meanings such as the terms, “including”, “having” and their derivatives. The term “consisting” and its derivatives, as used herein, are intended to be closed terms that specify the presence of the stated features, elements, components, groups, integers, and/or steps, but exclude the presence of other unstated features, elements, components, groups, integers and/or steps. The term “consisting essentially of”, as used herein, is intended to specify the presence of the stated features, elements, components, groups, integers, and/or steps as well as those that do not materially affect the basic and novel characteristic(s) of features, elements, components, groups, integers, and/or steps.

[0028] As used in this disclosure, the singular forms “a”, “an” and “the” include plural references unless the content clearly dictates otherwise. In examples comprising an “additional” or “second” component, the second component as used herein is different from the other components or first component. A “third” component is different from the other, first, and second components, and further enumerated or “additional” components are similarly different.

[0029] Terms of degree such as “about” and “approximately” as used herein mean a reasonable amount of deviation of the modified term such that the end result is not significantly changed. These terms of degree should be construed as

including a deviation of at least $\pm 5\%$ or at least $\pm 10\%$ of the modified term if this deviation would not negate the meaning of the word it modifies.

[0030] The term “electromembrane process” as used herein refers, for example to a process that uses ion-exchange membrane(s) and an electric potential difference as the driving force for ionic species. The electromembrane process can be, for example (a membrane) electrodialysis or (a membrane) electrolysis. For example, the electromembrane process can be a membrane electrolysis.

II. Processes

[0031] The below presented examples are non-limitative and are used to better exemplify the processes of the present disclosure.

[0032] In the processes for treating an aqueous composition comprising lithium sulfate and sulfuric acid of the present disclosure, the aqueous composition can have any suitable concentration of lithium sulfate and sulfuric acid. For example, the aqueous composition comprising lithium sulfate and sulfuric acid can comprise from about 1 wt% to about 40 wt%, about 1 wt% to about 35 wt%, about 10 wt% to about 30 wt%, about 10 wt% to about 35 wt%, about 10 wt% to about 25 wt%, about 15 wt% to about 25 wt%, about 15 wt% to about 30 wt%, about 15 wt% to about 35 wt%, about 18 wt% to about 22 wt% or about 20 wt% lithium sulfate, based on the total weight of the aqueous composition. For example, the aqueous composition comprising lithium sulfate and sulfuric acid can comprise from about 1 wt% to about 25 wt%, about 1 wt% to about 20 wt%, about 5 wt% to about 20 wt%, about 10 wt% to about 25 wt%, about 1 wt% to about 15 wt%, about 7 wt% to about 15 wt%, about 10 wt% to about 20 wt%, or about 12 wt% sulfuric acid, based on the total weight of the aqueous composition.

[0033] The aqueous composition comprising lithium sulfate and sulfuric acid can optionally further comprise other suitable sulfates such as other alkali metal sulfates e.g. sodium sulfate and/or potassium sulfate. For example, the aqueous composition comprising lithium sulfate and sulfuric acid can further comprise sodium sulfate in an amount of up to about 10 wt%, for example from about 0.1 wt% to about 5 wt%, about 1 wt% to about 5 wt%, about 2 wt% to

about 8 wt%, about 2 wt% to about 5 wt%, about 0.25 wt% to about 2.5 wt%, about 0.5 wt% to about 2 wt%, about 0.5 wt% to about 1.5 wt%, or about 1.3 wt%, based on the total weight of the aqueous composition. For example, the aqueous composition comprising lithium sulfate and sulfuric acid can further comprise potassium sulfate in an amount of up to about 10 wt%, for example from about 0.1 wt% to about 5 wt%, about 1 wt% to about 5 wt%, about 2 wt% to about 8 wt%, about 2 wt% to about 5 wt%, about 0.25 wt% to about 2.5 wt%, about 0.5 wt% to about 2 wt%, about 0.5 wt% to about 1.5 wt%, or about 1.3 wt%, based on the total weight of the aqueous composition. For example, the aqueous composition comprising lithium sulfate and sulfuric acid can further comprise sodium sulfate and/or potassium sulfate in an amount of up to about 10 wt%, for example from about 0.1 wt% to about 5 wt%, about 1 wt% to about 5 wt%, about 2 wt% to about 8 wt%, about 2 wt% to about 5 wt%, about 0.25 wt% to about 2.5 wt%, about 0.5 wt% to about 2 wt%, about 0.5 wt% to about 1.5 wt%, or about 1.3 wt%, based on the total weight of the aqueous composition.

[0034] For example, the aqueous composition comprising lithium sulfate and sulfuric acid can be from an electromembrane process for preparing lithium hydroxide. Exemplary flow diagrams for two examples of such electromembrane processes are shown in Figures 1 and 2.

[0035] Referring to Figure 1, the process 10 exemplified therein is for preparing lithium hydroxide. In the process exemplified therein, a lithium-containing material 12 such as a lithium-containing ore such as β -spodumene is subjected to acid roasting and leaching steps 14 under suitable conditions to obtain an aqueous composition comprising lithium sulfate. The aqueous composition comprising lithium sulfate 16 can then be purified 18, for example to remove at least a portion of a metal impurity or a non-metallic impurity (for example Si and derivatives thereof) that has leached into the aqueous composition comprising lithium sulfate 16. For example, purification 18 can be carried out as described in PCT Application WO 2013/159194 entitled "Processes for preparing lithium hydroxide". The aqueous composition comprising lithium sulfate then can be submitted to an electromembrane process

20 (such as a two-compartment monopolar or bipolar membrane electrolysis process, a three-compartment monopolar or bipolar membrane electrolysis process, or a combination of a two-compartment monopolar or bipolar membrane electrolysis process and a three-compartment monopolar or bipolar membrane electrolysis process) under suitable conditions for at least partial conversion of the lithium sulfate into lithium hydroxide 22 and to obtain an acidic lithium sulfate solution 24. For example, the acidic lithium sulfate solution 24 of process 10 of Figure 1 can be the aqueous composition comprising lithium sulfate and sulfuric acid which is treated in the processes of the present disclosure.

[0036] Referring to Figure 2, the process 110 exemplified therein is for preparing lithium hydroxide and is similar to the process 10 exemplified in Figure 1. Several steps in the method of Figure 2 (112, 114, 116, 118, 120, 122 and 124) are similar to those found in the process of Figure 1 (12, 14, 16, 18, 20, 22 and 24). With respect to the separation step 126, such step was found to be an alternative instead of simply reusing the acidic lithium sulfate solution 124 into the acid roasting step 114 (see the dotted line between step 124 and 114). In separation step 126, water is removed in order to obtain a more concentrated acidic composition 130. It was found that such a more concentrated acidic composition that comprises sulfuric acid was efficient to carry out the acid roasting step in 114. For example, the acidic lithium sulfate solution 124 of process 110 of Figure 2 can be the aqueous composition comprising lithium sulfate and sulfuric acid which is treated in the processes of the present disclosure. Accordingly, separation step 126 can comprise a process of the present disclosure whereby a more concentrated acidic composition 130 can be obtained which can be recycled back into the acid roasting step 114 as well as crystals of lithium sulfate monohydrate 128 recovered. The recovered lithium sulfate monohydrate can optionally be reused in electromembrane process 120.

[0037] The conditions for at least partial conversion of the lithium sulfate into lithium hydroxide may vary, and the selection of suitable conditions can be made by a person skilled in the art in light of their common general knowledge and with reference to the present disclosure. For example, processes for

preparing lithium hydroxide comprising submitting a composition comprising a lithium compound to an electromembrane process are disclosed in PCT Application WO 2014/138933 entitled "Processes for preparing lithium hydroxide"; PCT Application No. WO/2015/058288 entitled "Processes and systems for preparing lithium hydroxide"; and PCT Application WO 2013/159194 entitled "Processes for preparing lithium hydroxide"

[0038] In the studies of the present disclosure, it was observed that the use of lower temperatures as a result of using vacuum in the processes helped to prevent the decomposition of the lithium sulfate monohydrate and therefore may be beneficial for recovery. Accordingly, the processes of the present disclosure can be carried out under conditions whereby decomposition of lithium sulfate monohydrate can be inhibited, for example, decomposition of the lithium sulfate monohydrate can be at least substantially prevented.

[0039] For example, the conditions to obtain crystals of the lithium sulfate monohydrate and lithium sulfate-reduced solution can comprise evaporatively crystallizing the aqueous composition comprising lithium sulfate and sulfuric acid at a temperature of less than 100°C. For example, the evaporative crystallization can be carried out at a temperature of from about 40°C to 130°C, about 50°C to 100°C, about 40°C to about 95°C, about 45°C to about 85°C, about 50°C to about 85°C, about 60°C to about 90°C, about 60°C to about 95°C, about 75°C to about 85°C or about 82°C. For example, the conditions to obtain crystals of the lithium sulfate monohydrate and lithium sulfate-reduced solution can further comprise evaporatively crystallizing the aqueous composition comprising lithium sulfate and sulfuric acid at a pressure that is lower than atmospheric pressure. For example, the evaporative crystallization can be carried out at a pressure of from about 1 kPa to about 100 kPa, about 1 kPa to about 75 kPa, about 1 kPa to about 50 kPa, about 1 kPa to about 25 kPa, about 1 kPa to about 20 kPa, about 10 kPa to about 25 kPa, about 15 kPa to about 20 kPa or about 16 kPa.

[0040] The results of the studies of the present disclosure, suggest, while not wishing to be limited by theory, that it would be impractical to concentrate a

solution such as an anolyte solution directly to a high concentration of acid and salts because the viscous gel-like nature of the mixture would most likely be prone to freezing/plugging of equipment and piping and be difficult to handle. Accordingly, in the processes of the present disclosure, lithium sulphate monohydrate crystals are removed at a suitable intermediate concentration.

[0041] For example, the conditions to obtain crystals of the lithium sulfate monohydrate and lithium sulfate-reduced solution further comprise evaporatively crystallizing the aqueous composition comprising lithium sulfate and sulfuric acid for a time in which the lithium sulfate-reduced solution contains a concentration of sulfuric acid that is less than about 65 wt%, based on the total weight of the lithium sulfate-reduced solution. For example, the evaporative crystallization can be carried out until the lithium sulfate-reduced solution has a sulfuric acid concentration of from about 30 wt% to about 65 wt%, about 30 wt% to about 50 wt%, about 40 wt% to about 65 wt%, about 40 wt% to about 50 wt% or about 48 wt%, based on the total weight of the lithium sulfate-reduced solution.

[0042] The evaporative crystallizer can be any suitable evaporative crystallizer, the selection of which can be made by a person skilled in the art. For example, the evaporative crystallization can be carried out using a single effect evaporative crystallizer. For example, the evaporative crystallization can alternatively be carried out using a multiple effect evaporative crystallizer. For example, the evaporative crystallization can be carried out using a vapour recompression evaporator, for example, in which vapour from one effect can be used to evaporate further vapour in either a different effect, or in the same effect by either operating an additional effect at a different pressure, or compressing the vapour and recondensing in a steam chest in the same effect

[0043] In examples of the processes of the present disclosure wherein the crystals of the lithium sulfate monohydrate are separated from the lithium sulfate-reduced solution, the separation can be carried out by any suitable means for liquid/solid separation, the selection of which can be made by a person skilled in the art. For example, the separation can comprise gravity thickening,

hydrocyclones, filtration, centrifugation or combinations thereof. For example, the separation can comprise filtering a mixture of the crystals of lithium sulfate monohydrate and the lithium sulfate-reduced solution.

[0044] For example, the process can further comprise mechanically separating the lithium sulfate monohydrate from entrained lithium sulfate-reduced solution. For example, the process can further comprise washing the crystals of the lithium sulfate monohydrate. Suitable means and conditions for mechanical separation and washing can be selected by a person skilled in the art.

[0045] The results of the studies of the present disclosure, also suggest, while not wishing to be limited by theory, that while it would be impractical to concentrate a solution such as an anolyte solution directly to a high concentration, such a concentration can be carried out subsequent to the removal of lithium sulphate monohydrate crystals at the suitable intermediate concentration.

[0046] For example, the process can further comprise concentrating the lithium sulfate-reduced solution under conditions to obtain an acidic condensate and a concentrate comprising sulfuric acid.

[0047] For example, the conditions to obtain the acidic condensate and the concentrate comprising sulfuric acid can comprise concentrating the lithium sulfate-reduced solution at a temperature of from about 50°C to about 250°C, about 50°C to about 200°C, about 75°C to about 200°C, about 100°C to about 250°C, about 125°C to about 250°C, about 100°C to about 200°C, about 125°C to about 225°C about 150°C to about 250°C or about 190°C.

[0048] For example, the conditions to obtain the acidic condensate and the concentrate comprising sulfuric acid can further comprise concentrating the lithium sulfate-reduced solution at a pressure that is lower than atmospheric pressure. For example, the concentrating can be carried out at a pressure that is from about 1 kPa to about 100 kPa, 10 kPa to about 100 kPa, 1 kPa to about 50 kPa, 1 kPa to about 30 kPa, 1 kPa to about 20 kPa, about 0.5 kPa to about 25 kPa, about 0.5 kPa to about 20 kPa, about 1 kPa to about 10 kPa, about 1 kPa to about 5 kPa, about 0.5 kPa to about 5 kPa or about 2 kPa.

[0049] For example, the conditions to obtain the acidic condensate and the concentrate comprising sulfuric acid can further comprise concentrating the lithium sulfate-reduced solution until a total concentration of sulfuric acid, lithium sulfate and optionally sodium sulfate of greater than about 65 wt%, for example, about 65 wt% to about 99 wt%, about 85 wt% to about 98 wt%, about 75 wt% to about 95 wt%, about 90 wt% to about 98 wt%, about 80 wt% to about 98 wt%, about 90 wt% to about 97 wt% or about 96 wt% in the concentrate comprising sulfuric acid can be reached, based on the total weight of the concentrate.

[0050] For example, the concentrate comprising sulfuric acid can be recycled to an electromembrane process for preparing lithium hydroxide. Exemplary flow diagrams for two examples of such electromembrane processes are shown in Figures 1 and 2 and described hereinabove.

[0051] For example, the concentrate comprising sulfuric acid can be recycled to a process step (e.g. Figure 1: 14; Figure 2: 114) comprising leaching a lithium-containing material with the concentrate comprising sulfuric acid. The selection of suitable conditions for such a process step can be made by a person skilled in the art. For example, processes comprising roasting a lithium-containing material with an acid are disclosed in PCT Application WO 2013/159194 entitled "Processes for preparing lithium hydroxide".

[0052] For example, the lithium-containing material can be a lithium-containing ore. For example, the lithium-containing ore can comprise, consist essentially of or consist of α -spodumene, β -spodumene, lepidolite, pegmatite, petalite, eucryptite, amblygonite, hectorite, smectite, jadarite, a clay or mixtures thereof. For example, the lithium-containing ore can comprise, consist essentially of or consist of β -spodumene, jadarite or mixtures thereof. For example, the lithium-containing ore can comprise, consist essentially of or consist of β -spodumene. For example, the lithium-containing ore can be β -spodumene.

[0053] For example, the concentrate comprising sulfuric acid can be recycled to the electromembrane process for preparing lithium hydroxide without

further crystallization to obtain a further portion of crystals of lithium sulfate monohydrate. Alternatively, the process can further comprise:

cooling the concentrate comprising sulfuric acid under conditions to obtain a further portion of crystals of lithium sulfate monohydrate and a lithium sulfate-reduced concentrate comprising sulfuric acid; and

separating the crystals of the further portion of lithium sulfate monohydrate from the lithium sulfate-reduced concentrate comprising sulfuric acid.

[0054] For example, the conditions to obtain the further portion of crystals of lithium sulfate monohydrate and the lithium sulfate-reduced concentrate comprising sulfuric acid can comprise cooling the concentrate to a temperature of from about 5°C to about 130°C, about 20°C to about 130°C, about 15°C to about 130°C, about 15°C to about 50°C, about 25°C to about 75°C, about 25°C to about 35°C or about 30°C.

[0055] For example, the process can further comprise mechanically separating the further portion of lithium sulfate monohydrate from entrained lithium sulfate-reduced concentrate comprising sulfuric acid. For example, the process can further comprise washing the crystals of the further portion of lithium sulfate monohydrate with water. Suitable means and conditions for mechanical separation and washing can be selected by a person skilled in the art.

[0056] The following non-limiting examples are illustrative of the present disclosure:

EXAMPLES

Example 1: Crystallization of lithium sulphate monohydrate crystals from lithium sulphate / sulphuric acid solutions

[0057] An objective of the present example was to study at what points in an evaporation different forms of crystal, with different filtration characteristics, would be produced and to study how the system would behave under vacuum.

[0058] An existing process to produce lithium hydroxide from spodumene includes a step in which “concentrated” sulphuric acid is reacted with β -spodumene. The “roasting” reaction occurs in a modest temperature pug mill (200 – 300°C) and produces a solid from which lithium sulphate can be extracted by leaching into water. The extent of the conversion of lithium oxide in the spodumene to sulphate has been shown to depend strongly upon the acid strength used in the roast, which may advantageously be greater than approximately 90%.

[0059] After purification, to remove, for example silica and other elements which would be deleterious to the downstream lithium hydroxide recovery, the lithium sulphate solution from the leach is processed electrochemically in a salt splitting cell to produce lithium hydroxide and an acidic lithium sulphate solution.

[0060] As an alternative to continuously purging sulphuric acid as gypsum from the electrochemical process and continuously making up significant quantities of fresh sulphuric acid, an alternative is to recycle sulphuric acid re-generated in a downstream process to the electrochemical process.

[0061] The Examples of the present disclosure study the use of an evaporative crystallization process to recover unreacted lithium sulphate from the electrochemical process and recycle it, followed by a sulfuric acid reconcentration (SARC) process to remove water from sulphuric acid before it is recycled.

[0062] Criteria for the acid reconcentration are established, for example, by the need to provide a solution with less than approximately 10% water. It is also useful to understand the composition of the balance of the recycled acids, which will contain some dissolved lithium sulphate.

[0063] Accordingly, laboratory and pilot testing is pursued in support of a conceptual design of a sulphuric acid recycle system in which an initial sulphate crystallisation is followed by an acid re-concentration. The work is aimed, for example, at identifying how much water can be removed in each phase and the characteristics of the lithium sulphate crystallization and sulphuric acid/lithium sulphate re-concentration solutions.

[0064] Testing was conducted under vacuum in addition to atmospheric pressure as operation under vacuum may impact the form of the crystals produced. Both lithium sulphate monohydrate and the anhydrous form are known to exist, with the form, while not wishing to be limited by theory, believed to be dependent upon temperature and water content of the solution. The monohydrate, while not wishing to be limited by theory, is believed to be the more filterable of the two. Work under vacuum is advantageous, for example, because the re-concentration (SARC) step is advantageously operated under these conditions so as to allow an acceptable practical metallurgy.

[0065] The objective of the testing, which is the basis of Example, was, to perform some basic laboratory experiments to identify advantageous process conditions for crystallization of relatively easily recoverable lithium sulphate monohydrate crystals from lithium sulphate / sulphuric acid solutions. In addition to identifying such conditions for crystallization, the Example 1 testing was also intended, for example, to study the boiling point rise behaviour of sulphuric acid/lithium/sodium sulphate solutions. This is advantageous to the design of both the evaporative crystallization and SARC processes.

I. Introduction

(a) Li_2SO_4 / H_2SO_4 / H_2O Ternary Phase Diagram

[0066] Figure 3 shows an exemplary ternary phase diagram for the Li_2SO_4 / H_2SO_4 / H_2O System at 30°C (International Critical Tables of Numerical Data – Physics, Chemistry and Technology, Volume IV (1928) pages 353 & 391). Table 1 provides the equilibrium concentration data at 30°C for points in Figure 3.

Table 1

	Solid Phase	Liquid Phase	
		wt% H_2SO_4	wt% Li_2SO_4
A	$\text{Li}_2\text{SO}_4 \cdot \text{H}_2\text{O}$	0	25.10
B		5.05	22.74
C		16.6	19.10
D		32.7	13.37
E		48.0	10.20

F	$\text{Li}_2\text{SO}_4 \cdot \text{H}_2\text{O} + \text{Li}_2\text{SO}_4$	55.00	13.00
G	Li_2SO_4	56.30	13.87
H	$\text{Li}_2\text{SO}_4 + \text{Li}_2\text{SO}_4 \cdot \text{H}_2\text{SO}_4$	62.40	18.50
I	$\text{Li}_2\text{SO}_4 \cdot \text{H}_2\text{SO}_4$	69.40	13.75
J		78.23	11.64
K		83.43	15.65

[0067] The diagram in Figure 3 shows the saturation conditions at varying acid concentrations at 30°C. This data was compared to recovery results of previous testing and found to agree within 5% accuracy. While not wishing to be limited by theory, the phase diagram of Figure 3 shows that the maximum amount of lithium sulphate recovered at this temperature would be at a sulphuric acid concentration of 48 wt% (Point E). This gives the lowest solubility of lithium (10.2 wt%), while remaining in the zone where the monohydrate crystals are the stable form, which, from previous studies, has shown to provide the best separation. Higher concentrations will begin to re-dissolve the lithium and form anhydrous and subsequently bisulphate crystals. Once above a concentration of 69.4 wt% sulphuric acid, additional lithium can be recovered. However, it will be in the form of lithium bisulphate resulting in a loss of acid.

(b) Solubility

[0068] The solubility of lithium sulphate as a function of temperature has been disclosed for water. However, it is not well established in concentrations of sulphuric acid, with the exception of the 30°C points discussed above.

[0069] For water, the solubility of lithium sulphate has an inverse behavior in the temperature range of interest; see e.g. Critical Tables, IV, p 233. Prior to the present study it was unclear whether this also applied to the solubility in sulphuric acid solutions, which would directly influence the design operating temperature of the crystallizing/separation unit. Accordingly, tests were performed to study this solubility / temperature relationship in sulphuric acid.

(c) Decomposition of hydrate

[0070] The monohydrate form of lithium sulphate will decompose into the anhydrous form given enough energy:



[0071] Table 2 provides the decomposition conditions for lithium sulphate monohydrate (International Critical Tables of Numerical Data – Physics, Chemistry and Technology, Volume VII (1930) page 303).

Table 2

T [K]	P [atm]
333.1	0.029
353.1	0.080
373.1	0.242
381.1	0.347

[0072] Other sources are consistent in giving the decomposition temperature of the hydrate as 130°C, at atmospheric pressure. See Figure 4 for reported decomposition temperatures as a function of pressure at boiling point.

[0073] While the decomposition temperature is related to the decomposition of the crystal in solution, these parameters are thermodynamically related and one can be calculated from the other. The relative locations of the boiling point curve and the decomposition curve indicate whether the hydrated crystal, or the anhydrate, is likely stable in solution at a given composition and temperature. The stable crystal form may then change as the solution is cooled after evaporation. This has not previously been investigated experimentally. For example, the boiling point curve is a function of sulphuric acid to lithium sulphate ratio and must be developed for a specific mixture.

II. Overview of Experimental

(a) Solubility / Temperature Relationship Test

[0074] Lithium sulphate was slowly added to ~50 wt% sulphuric acid at 50°C to determine the solubility at this concentration/temperature condition. This

concentration was chosen to be close to conditions which can realistically be expected in the crystallizer step. The detailed procedure and results of this test can be found hereinbelow in Example 1, section IV.

[0075] The final composition of the saturated solution at 50°C was determined to be:

H ₂ SO ₄	43.3 wt%
H ₂ O	43.4 wt%
Li ₂ SO ₄	13.3 wt%

[0076] The lithium solubility is higher at 50°C than shown on the ternary phase diagram at 30°C of Figure 3 (13.3 wt% versus ~10.9 wt%). This indicates that unlike water, at this acid concentration the solubility is positively related to temperature (solubility increases as temperature increases). The solution was then heated to 70°C and subsequently cooled to 30°C to verify this phenomenon.

[0077] The data shows that at approximately 43 wt% sulphuric acid and between 30 and 50°C, the solubility of lithium drops by 0.12 wt% per °C.

[0078] While not wishing to be limited by theory, this implies that it is better to operate the crystallization portion of the evaporative crystallizer step as cold as possible (within normal operating ranges available with cooling water) to maximize lithium sulphate recovery. However, the energy used to cool the solution and then reheat it for subsequent concentration may not justify colder crystallizer temperatures for example, from a cost and/or efficiency standpoint.

(b) Boiling Point Rise

[0079] Varying concentrations of solutions were made up, based on the following lithium / sodium / sulphuric acid ratios: 19.5 wt% Li₂SO₄, 1.3 wt% Na₂SO₄, 12.2 wt% H₂SO₄ and 67.0 wt% H₂O; implies non-water portion of the solution to be 59.1 wt% Li₂SO₄, 3.9 wt% Na₂SO₄ and 37.0 wt% H₂SO₄. These solutions were then slowly boiled off and the condensate collected at varying pressures. The results of these tests are summarized in this section. The detailed procedure and

results of these tests can be found hereinbelow in Example 1, section V. See also Figure 5 for the boiling temperatures for each of these tests.

[0080] BPR-1 and BPR2: The first boiling point rise test (BPR-1) investigated a range from 30 wt% to 84 wt% sulphuric acid and salts and overlapped with the second test (BPR-2) which was from 65 wt% to 96 wt%. It was split up into two tests to ensure reproducibility and achieve a greater degree of accuracy especially at the higher concentration range. Both BPR-1 and BPR-2 were performed at ambient pressure. Crystallization was first observed at 107.8°C and a composition of 14.9 wt% H₂SO₄ and 23.9 wt% Li₂SO₄, which gives another saturation point for this system. When it reached ~70 wt% (combined acid and salts) the mixture became very thick and had a large amount of solids. By the time it reached the final concentration of 96 wt% acid and salts, the mixture was very viscous and gel-like and difficult to manage.

[0081] BPR-3: The third boiling point rise test (BPR-3) investigated a range from 30 wt% to 83 wt% sulphuric acid and salts and was performed at -25" of Hg (16.7 kPa absolute). This was intended to match the boiling point rise that would be seen in an evaporative crystallization step operating under vacuum. Crystallization was first observed at 69.8°C and a composition of 14.2 wt% H₂SO₄ and 22.7 wt% Li₂SO₄, another saturation point. By the time it reached a concentration of 51.5 wt% acid and salts, the mixture was a very thick slurry.

[0082] BPR-4: The fourth boiling point rise test (BPR-4) investigated a range from 65 wt% to 96 wt% sulphuric acid and salts and was performed at -29" of Hg (3.1 kPa absolute). This was intended to match the boiling point rise that would be seen in a SARC step which operates under deep vacuum. The data set from this test was corrupted by stopping overnight part-way through the run. Although this didn't seem to have an effect on previous tests, while not wishing to be limited by theory, it is believed that the high acid concentrations in combination with the low temperatures (i.e. below decomposition temperatures) may have caused the crystals to switch structures (i.e. bisulphate, sulphate or monohydrate) when cooled to room temperature and not reform to their previous

structure when reheated to continue with the test. This would cause the solution composition and hence the boiling point to change. However, it is unlikely that in operation the anolyte solution would be concentrated entirely in a single stage without separating crystal due to its viscous nature making it difficult to handle.

(c) Evaporative Crystallizer / Filtration / Concentration Tests

[0083] From the above-described Boiling Point Rise experiments it was shown that it would be impractical from an industrial process standpoint to concentrate the anolyte solution directly to 96 wt% acid and salts without first removing crystals at some intermediate concentration. This was due to the viscous, gel-like nature of the mixture. Therefore a second set of tests was performed in which the anolyte first underwent a separate evaporative crystallization stage to concentrate to 71 wt% acid and salts.

[0084] The mixture was then cooled to 30°C and the crystals were separated by filtration. The filtrate was then further concentrated under vacuum to a concentration of 96 wt% acid and salts in a final concentration stage.

[0085] This test was performed twice; once with the evaporative crystallizer running under vacuum and once at atmospheric pressure. In addition, a settling test was performed to quantify the settling characteristics of the monohydrate crystals. Lastly, a solids characterization test was conducted to attempt to determine the split fraction of lithium sulphate versus bisulphate crystal form. The results of all these tests are summarized in this section. The detailed procedure and results of these tests can be found in hereinbelow in Example 1, section VI.

[0086] **Test 1:** For this test the evaporative crystallizer was run at the same pressure as test BPR-3 (-25" of Hg). Approximately 81% of the salts were recovered from the simulated anolyte feed, following the initial concentration to 71 wt% acid and salts (stage 1). The crystals were needle-like and translucent, while not wishing to be limited by theory, indicating primarily the monohydrate form. An additional 2.5 to 5% of the salts were recovered following stage 2. It was not confirmed whether these crystals were in the sulphate or bisulphate form. While not wishing to be limited by theory, the expectation is that the

majority will be as bisulphate, which will result in lower lithium recovery and higher acid losses. As the solution cooled, a crystallization temperature was not recorded; however it was believed to be approximately 130°C.

[0087] Test 2: For this test, the evaporative crystallizer was run at atmospheric pressure (same as BPR-1). Depending on the assumed form of the crystals (anhydrous vs monohydrate), 76 to 89% of the salts were recovered from the simulated anolyte feed, following the initial concentration to 71 wt% acid and salts (stage 1). The crystals were a mixture of translucent/needle-like and white powdery solids, while not wishing to be limited by theory, if the visual appearance is an accurate indicator of the form, the actual recovery is most likely somewhere in between these two limits. An additional 1.3 to 2.7% of the salts were recovered following stage 2. The uncertainty in percent recovery is due to whether the crystals are in the sulphate or bisulphate form. While not wishing to be limited by theory, the expectation is that the majority will be as bisulphate, which will result in lower lithium recovery and higher acid losses.

[0088] Settling Test: The settling test was performed on the concentrate from test 1 after the first concentration stage, after it had been cooled to 30°C and before filtration. The test was done by agitating the mixture in a graduated cylinder and recording the solid level over time. The crystals settled relatively quickly and reached an equilibrium level after 10 to 20 minutes. However, it was found that the solids did not compact very well and only 30 mL of filtrate was recovered by separation. This was only ~22% of the filtrate, resulting in the crystals containing ~50 wt% filtrate. The filtrate can, for example, be recovered via some mechanical means (e.g. filter, centrifuge, etc.) to avoid large acid losses. Washing may also, for example be used in the process. These stages can be considered in the context of the overall water and acid balances.

[0089] Solid Characterization: The solids recovered from each filtration step were characterized by inspection and by re-dissolving the crystals into water and measuring the pH. Although the quantitative split between sulphate and bisulphate was not obtained via this method, some useful observations were made. The

crystals from Test 1 Stage 1 (performed at vacuum) were visually more similar to the monohydrate form than those of Test 2 Stage 1 (performed at atmospheric pressure). For Test 1 Stage 1, the final boiling temperature was 81.9°C, which is below the calculated decomposition temperature of 92°C at 17 kPa(a). In contrast, for Test 2 Stage 1, the final boiling temperature was 127.2°C, which is at the calculated decomposition temperature of 127°C at 101 kPa(a). This indicates that an advantage of operating under vacuum is that it helps to maintain the monohydrate crystal form when trying to maximize the lithium sulphate recovery. The crystal from Stage 2 (equivalent to the SARC) from both tests was a fine, chalky powder. While not wishing to be limited by theory, this, along with the lower pH when dissolved in water, indicates a large percentage of the crystals are in the bisulphate form, in line with these high acid concentrations.

III. Conclusions and conceptual flow diagram

[0090] The following are findings which may, while not wishing to be limited by theory, have an impact on the final design:

[0091] Based on observations in the present studies, it would be impractical to concentrate the anolyte solution directly to 96 wt% acid and salts as the viscous gel-like nature of the mixture would, while not wishing to be limited by theory, most likely be prone, for example, to freezing/plugging of equipment and piping and be difficult to handle. Therefore, removal of lithium sulphate crystals at an intermediate concentration is advantageous.

[0092] The minimum solubility of lithium sulphate occurs at ~48 wt% H₂SO₄ (58 wt% acid + salts), after which the crystals begin to switch to the anhydrous form and the solubility increases until the bisulphate crystals begin to form at ~ 62 wt% H₂SO₄ (~80 wt% acid and salts). Therefore, to maximize the recovery of lithium sulphate the evaporative crystallizer may, for example, concentrate to about 48 wt% H₂SO₄ in the solution. Based on the feed specification, the process may, for example, give a theoretical maximum lithium sulphate recovery of 87% (81% was measured in the lab).

[0093] Given the crystal properties and solution viscosities, a concentration of ~65 wt% H_2SO_4 in the crystallizer may, for example be used. While this doesn't give the optimum crystal recovery, if this concentration is useful in an initial extraction process of lithium from spodumene, it would avoid additional unit operations by eliminating the SARC system.

[0094] Concentrations higher than 65 wt% in the crystallizer are not efficiently performed in multiple effect evaporation due to the boiling point rise. While not wishing to be limited by theory, any concentration between 65 to 96 wt% would require the addition of a SARC following the crystallizer but the chosen initial and final concentrations may have a large effect on size/cost.

[0095] When the filtrate from the crystallizer (at 48 wt% H_2SO_4) is further concentrated in the SARC (to 96 wt% acid + salts), the resulting solution may, for example, be in single phase and clear of any solid crystal particles. Upon cooling, crystals will start to form and precipitate at an estimated temperature of 130°C. If allowed to cool to 30°C, another 2.5% of the initial amount of lithium sulfate can be recovered as lithium bisulphate; however this may, for example, result in acid losses. While not wishing to be limited by theory, it is useful from the view of complexity and cost to send the acid hot to the spodumene reactor

[0096] A benefit of operating the crystallizer under vacuum is that it appears to help the crystals remain as monohydrates rather than decomposing into the anhydrous form and allows the minimum solubility point to be reached.

[0097] Settling time was in the order of minutes. However, the crystals did not compact very well and had ~50 wt% liquid entrainment. Therefore an additional unit operation may, for example, be used to mechanically separate the entrained liquid. Also washing of the crystals may be used to minimize lithium hydroxide addition for pH adjustment due to acid carry-over. Care is used by the skilled person to ensure that the crystals are not re-dissolved.

[0098] Based on the experimental testing performed, the exemplary process flow diagram shown in Figure 6 was created. The process 200 exemplified therein is for treating an aqueous composition comprising lithium

sulfate and sulfuric acid. Referring to Figure 6, in the process exemplified therein, the aqueous composition comprising lithium sulfate and sulfuric acid 202 is evaporatively crystallized 204 under conditions to obtain crystals of lithium sulfate monohydrate 206 and a lithium sulfate-reduced solution (filtrate 208). For example, the evaporative crystallizer 204 can be either single or multiple effect and can, for example, be operated at a pressure of about 16 kPa and a temperature (T_f) of about 82°C. The crystals of the lithium sulfate monohydrate 206 are optionally separated from the lithium sulfate-reduced solution 208. The evaporative crystallization 204 also produces a first acidic condensate 210. The lithium sulfate-reduced solution 208 is optionally concentrated 212 under conditions to obtain a second acidic condensate 216 and a concentrate comprising sulfuric acid 218. For example, the concentrating can be carried out by a SARCTM process which is carried out at a pressure of about 2 kPa and a temperature (T_f) of about 190°C.

[0099] For example, in the process 200 shown in Figure 6, the aqueous composition comprising lithium sulfate and sulfuric acid 202 can be an anolyte feed comprising, on a 100 kg basis, about 19.5 wt% Li_2SO_4 , 1.3 wt% Na_2SO_4 , 12.2 wt% H_2SO_4 and 67.0 wt% H_2O . For example, about 19.7 kg of crystals of lithium sulfate monohydrate 206 can be obtained in such an example of process 200 (assuming, while not wishing to be limited by theory, an about 82% recovery and no entrainment of filtrate 208), optionally having a composition of about 94.6 wt% $\text{Li}_2\text{SO}_4 \cdot \text{H}_2\text{O}$ and about 1.3 wt% Na_2SO_4 . For example, about 26.9 kg of filtrate 208 can be obtained, optionally having a composition of about 13.1 wt% Li_2SO_4 , 0.9 wt% Na_2SO_4 , 45.2 wt% H_2SO_4 and 40.8 wt% H_2O . For example, about 53.4 kg of first acidic condensate 210 can be obtained which can, for example, have a pH of about 3. For example, about 10.3 kg of the second acidic concentrate 216 can be obtained which can, for example, have a pH of about 1. For example, about 16.6 kg of the concentrate comprising sulfuric acid 218 can be obtained which optionally has a composition of about 21.2 wt% Li_2SO_4 , about 1.4 wt% Na_2SO_4 , about 73.4 wt% H_2SO_4 and about 4.0 wt% H_2O .

[00100] Figure 7 shows a ternary phase diagram which was developed in accordance with the examples of the present disclosure.

IV. Solubility test – solubility of lithium sulfate in 50 wt% sulfuric acid

(a) Summary

[00101] The solubility of lithium sulfate in 50 wt% sulfuric acid was determined experimentally to be 13.29 – 13.32 wt% at 50°C. The behaviour of solubility with respect to temperature was tested by heating the saturated solution from 50°C to 70°C, followed by cooling to 30°C.

(b) Method

[00102] 50 g of 50 wt% H₂SO₄ was brought into a 100 mL round bottom flask (rbf) equipped with a stir bar and condenser and was heated to 50°C with a temperature-controlled water bath. Li₂SO₄ was then added in increments until saturated (solution turned cloudy); initially three 1 g portions were added then subsequent additions were added by spatula and weighed by difference. The cloudy solution was stirred at 50°C for ½ hour to confirm the saturation point had been reached then 50 wt% H₂SO₄ added dropwise until the solution cleared. The solution was then heated to 70°C and held at that temperature for ~ 1 hr with stirring, followed by no stirring for ½ hr. Finally, the solution was cooled to 30°C without stirring and held at that temperature for over 1 hr.

(c) Materials

[00103] Sulfuric acid solution was prepared by dilution as shown in Table 3 (analyzed by Anton Parr):

Table 3: Preparation of 50 wt% H₂SO₄

Initial concentration (wt%)	63.97
Final concentration (wt%)	49.97
Specific gravity	1.3973
Density (g/cm ³)	1.39475
Temperature (°C)	20.001

[00104] Lithium sulfate, anhydrous - ≥98.0%, was from Aldrich Chemistry, product # 62613-1KG, lot # BCBL6287V.

(d) Results/Observations

[00105] Results and observations are provided in Tables 4 and 5:

Table 4: Solubility of Li_2SO_4 in 50 wt% H_2SO_4 at 50°C

H_2SO_4 concentration (wt%)	49.97
Temperature (°C)	50.0
H_2SO_4 added (g)	51.24 – 51.38
Li_2SO_4 added (g)	7.8728
Solubility (wt%)	13.29 – 13.32

Table 5: Effect of temperature on Li_2SO_4 solubility in 50 wt% H_2SO_4

Temperature (°C)	Appearance	Conclusion
30	Colourless crystals form in the bottom of the beaker, with a clear and colourless supernatant	Past the point of saturation
50	Cloudy/clear solution	Saturated solution
70	Clear and colourless solution	Saturated or below saturation

[00106] The anhydrous lithium sulfate was a fine, white powder. The saturation point at 50°C was observed when the solution turned cloudy. The solution remained clear and colourless when heated to 70°C. Crystallization occurred when the solution was cooled to 30°C.

V. Boiling Point Rise Tests

(a) Summary

[00107] Four experiments were performed to measure the boiling point rise (BPR) of a synthetic anolyte solution containing lithium sulfate, sodium sulfate and sulfuric acid in the range of 30 – 96 wt% total acid and salts at atmospheric pressure and under vacuum. Table 6 contains a summary of these tests.

Table 6: Summary of BPR tests

Experiment	Pressure	Initial concentration	Final Concentration
BPR-1	Atmospheric	30 wt% total acid + salt 70 wt% water	84 wt% total acid + salt 16 wt% water

BPR-2	Atmospheric	65 wt% total acid + salt 35 wt% water	96 wt% total acid + salt 4 wt% water
BPR-3	17 kPa	30 wt% total acid + salt 70 wt% water	83 wt% total acid + salt 17 wt% water
BPR-4	3 kPa	65 wt% total acid + salt 35 wt% water	96 wt% total acid + salt 4 wt% water

(b) Materials

[00108] Lithium Sulfate, anhydrous - $\geq 98.0\%$, was from Aldrich Chemistry, product # 62613-1KG, lot # BCBL6287V. Sodium sulfate, anhydrous, granular, free-flowing, Redi-Dri™, ACS reagent, $\geq 99\%$, was from Sigma-Aldrich, product #798592-500g, lot # MKBV7489V. All solutions were prepared with deionized water. Sulfuric acid concentration and solution density measurements were determined using an Anton Paar DSA 5000 M Density and sound velocity meter.

(c) Equipment

[00109] A vacuum distillation apparatus was used to concentrate the solutions that was made up of a reflux condenser with a cold finger connected to a distillation condenser. Headspace temperature was measured by a thermometer before the vapours reached the cold finger. The reflux condenser and distillation condenser were connected with a kontes tap. The cold finger could be rotated to direct condensate towards the distillate collected or back towards the concentrate. Cooling water for the cold finger and distillation condenser was either tap water or was from a connected circulating, temperature-controllable water bath. The solutions were concentrated in round bottom flasks equipped with a thermometer or thermocouple. Condensate was collected into graduated bottles with ground glass necks. The solutions were heated with electric heating mantles.

(d) Experimental

[00110] Initial solutions for the experiments were prepared at 2 concentration levels with the same ratio of acid and salts. A bulk batch of solution 1 at 30 wt% acid and salts was prepared and used in tests BPR-1 and BPR-3. A fresh batch of solution 2, at 65 wt% acid and salts, was prepared directly in the flasks for each of

tests BPR-2 and BPR-4 as the salts were not fully soluble at the initial concentration at room temperature. Table 7 contains data on the compositions.

Table 7: Compositions of synthetic anolyte solutions¹

Composition	Solution 1	Solution 2 (BPR-2)	Solution 2 (BPR-4)
H ₂ O	70.01	35.11	35.11
H ₂ SO ₄	11.08	23.93	23.93
Li ₂ SO ₄	17.73	38.41	38.41
Na ₂ SO ₄	1.18	2.56	2.56
Acid + Salt Conc ²	29.99	64.89	64.89
Density (g/cm ³)	1.24	—	—

¹ Concentrations provided in wt%.

² Refers to the overall amount of H₂SO₄, Li₂SO₄, and Na₂SO₄ in the solutions. This was calculated based on the initial composition of the anolyte solutions.

(e) Basic Procedure

[00111] The solution was charged into a round bottom flask (rbf) and the flask was equipped with a thermometer or thermocouple, boiling chip or stir bar, and electric heating mantle. The flask was connected to distillation apparatus and brought to a boil, upon which the temperature was recorded, the timer was started and collecting the condensate was begun. For tests BPR-3 and BPR-4, the distillation apparatus was connected to the vacuum pump and the system was brought to the target vacuum pressure prior to heating. The water was slowly evaporated off and the time, temperature (solution and vapour) and volume of condensate accumulated was recorded. The point at which crystals began to form was also recorded.

[00112] Due to the slow evaporation rate, each experiment was completed over two or three days. Between days, the concentrates and equipment were cooled to room temperature at atmospheric pressure. Solutions were re-heated to reflux at the desired pressure prior to re-starting condensate collection. Table 8 contains an overview of the details and modifications for each test.

Table 8: Details and modifications for each test

Test	Equipment	Procedure Notes
BPR-1	1L, 2-neck rbf 2 x 250 mL bottles for condensate	Test was completed over 2 days. A boiling chip was only added for the second section of the test.
BPR-2	500 mL, 3-neck rbf 250 mL bottle for condensate	Test was completed over 2 days. Both magnetic stirrer and boiling chip used in solution.
BPR-3	1L, 3-neck rbf 2 x 250 mL bottles for condensate	Test was completed over 2 days. Boiling chip was added at the beginning of the test.
BPR-4	500 mL, 3-neck rbf 250 mL bottle for condensate	Test was completed over 3 days. Magnetic stirrer was used for test.

(f) Results

[00113] Table 9 highlights the compositions and boiling points of the solution at their initial and final compositions. The full data collected can be found in Table 10 (BPR-1), Table 11 (BPR-2), Table 12 (BPR-3) and Table 13 (BPR-4).

Table 9: Summary of BPR test results

Test	BPR-1		BPR-2		BPR-3		BPR-4	
Pressure	atmospheric		atmospheric		17 kPa		3 kPa	
Initial mass (g)	620.63		500.05		622.05		500.05	
Condensate volume (mL)	400		162		396		162	
Condensate mass (g)	397.23		160.87		393.2		160.71	
Composition (wt%)	Feed	Final	Feed	Final	Feed	Final	Feed	Final
H ₂ O	70.0%	15.6%	35.1%	4.0%	70.0%	17.5%	35.1%	4.0%
H ₂ SO ₄	11.1%	31.2%	23.9%	35.4%	11.1%	30.5%	23.9%	35.4%
Li ₂ SO ₄	17.7%	49.9%	38.4%	56.8%	17.7%	48.8%	38.4%	56.8%
Na ₂ SO ₄	1.2%	3.3%	2.6%	3.8%	1.2%	3.3%	2.6%	3.8%
Total Acid + Salts	30.0%	84.4%	64.9%	96.0%	30.0%	82.5%	64.9%	96.0%
Boiling Point	104°C	148.5°C	124.0°C	239.0°C	66.6°C	113.6 °C	53.4°C	163.0°C

Table 10: Data for BPR-1

Time	Temperature (°C)		Condensate	Concentrate composition (wt %)				
Minutes	Flask	Head space	Vol (mL)	Acid + salts	H ₂ O	H ₂ SO ₄	Li ₂ SO ₄	Na ₂ SO ₄
0	103.8	99.0	0	30.0%	70.0%	11.1%	17.7%	1.2%
20	104.3	100.0	20	31.0%	69.0%	11.5%	18.3%	1.2%
27	104.8	100.0	30	31.5%	68.5%	11.6%	18.6%	1.2%
35	104.8	100.0	40	32.1%	67.9%	11.8%	19.0%	1.3%
42	105.8	100.0	50	32.6%	67.4%	12.1%	19.3%	1.3%
48	105.8	100.0	60	33.2%	66.8%	12.3%	19.6%	1.3%
61	105.8	100.0	80	34.4%	65.6%	12.7%	20.4%	1.4%
115	106.3	101.0	100	35.8%	64.2%	13.2%	21.1%	1.4%

127	106.8	101.0	120	37.2%	62.8%	13.7%	22.0%	1.5%
138	107.8	101.0	140	38.7%	61.3%	14.3%	22.9%	1.5%
151	107.8	101.0	160	40.4%	59.6%	14.9%	23.9%	1.6%
153	107.8	101.0	162	40.6%	59.4%	15.0%	24.0%	1.6%
159	107.8	100.0	174	41.7%	58.3%	15.4%	24.6%	1.6%
164	107.8	100.0	182	42.4%	57.6%	15.7%	25.1%	1.7%
169	108.8	100.5	192	43.4%	56.6%	16.0%	25.7%	1.7%
175	108.8	100.5	202	44.5%	55.5%	16.4%	26.3%	1.8%
185	109.3	100.0	212	45.6%	54.4%	16.8%	26.9%	1.8%
193	109.8	100.0	222	46.7%	53.3%	17.3%	27.6%	1.8%
203	109.8	100.0	232	47.9%	52.1%	17.7%	28.3%	1.9%
211	110.8	100.0	242	49.2%	50.8%	18.2%	29.1%	1.9%
220	111.3	99.5	252	50.5%	49.5%	18.7%	29.8%	2.0%
228	111.8	100.0	262	51.9%	48.1%	19.2%	30.7%	2.0%
236	112.8	100.0	272	53.4%	46.6%	19.7%	31.6%	2.1%
245	113.8	100.0	284	55.3%	44.7%	20.4%	32.7%	2.2%
251	114.3	100.0	292	56.6%	43.4%	20.9%	33.5%	2.2%
261	115.3	100.0	302	58.4%	41.6%	21.6%	34.5%	2.3%
268	116.8	100.0	312	60.3%	39.7%	22.3%	35.7%	2.4%
273	117.3	100.0	318	61.5%	38.5%	22.7%	36.4%	2.4%
276	118.3	100.0	322	62.3%	37.7%	23.0%	36.8%	2.5%
280	118.8	100.0	327	63.4%	36.6%	23.4%	37.5%	2.5%
284	119.8	100.0	332	64.5%	35.5%	23.8%	38.1%	2.5%
289	121.8	100.0	337	65.6%	34.4%	24.3%	38.8%	2.6%
293	122.8	101.0	342	66.8%	33.2%	24.7%	39.5%	2.6%
297	123.8	101.5	347	68.0%	32.0%	25.1%	40.2%	2.7%
302	125.3	102.0	352	69.3%	30.7%	25.6%	41.0%	2.7%
287	125.3	101.0	357	70.6%	29.4%	26.1%	41.7%	2.8%
312	126.3	101.0	362	72.0%	28.0%	26.6%	42.5%	2.8%
317	127.8	102.0	367	73.4%	26.6%	27.1%	43.4%	2.9%
322	129.8	102.0	372	74.9%	25.1%	27.7%	44.3%	2.9%
326	131.3	101.0	374	75.5%	24.5%	27.9%	44.6%	3.0%
328	131.8	101.0	376	76.1%	23.9%	28.1%	45.0%	3.0%
330	132.8	102.0	378	76.7%	23.3%	28.4%	45.3%	3.0%
332	134.3	102.0	380	77.4%	22.6%	28.6%	45.7%	3.0%
334	135.3	102.5	382	78.0%	22.0%	28.8%	46.1%	3.1%
336	136.8	103.0	384	78.7%	21.3%	29.1%	46.5%	3.1%
338	137.8	103.0	386	79.3%	20.7%	29.3%	46.9%	3.1%
341	139.3	103.5	388	80.0%	20.0%	29.6%	47.3%	3.2%
343	140.8	103.5	390	80.7%	19.3%	29.8%	47.7%	3.2%
345	141.8	103.0	392	81.4%	18.6%	30.1%	48.1%	3.2%
347	143.3	103.0	394	82.1%	17.9%	30.4%	48.6%	3.2%
350	145.3	104.0	396	82.9%	17.1%	30.6%	49.0%	3.3%
353	147.8	104.0	398	83.6%	16.4%	30.9%	49.4%	3.3%
356	150.3	104.5	400	84.4%	15.6%	31.2%	49.9%	3.3%

Table 11: Data for BPR-2

Time	Temperature (°C)		Condensate	Concentrate composition (wt %)				
Minutes	Flask	Head space	Vol (mL)	Acid + salts	H ₂ O	H ₂ SO ₄	Li ₂ SO ₄	Na ₂ SO ₄
0	124.0	100.0	0	64.9%	35.1%	23.9%	38.4%	2.6%
29	125.4	100.0	10	66.2%	33.8%	24.4%	39.2%	2.6%
40	126.3	101.0	15	66.9%	33.1%	24.7%	39.6%	2.6%
52	127.6	101.0	20	67.6%	32.4%	24.9%	40.0%	2.7%
60	128.4	101.0	25	68.3%	31.7%	25.2%	40.4%	2.7%
71	128.7	102.0	30	69.0%	31.0%	25.5%	40.9%	2.7%
81	128.5	102.0	36	69.9%	30.1%	25.8%	41.4%	2.8%
88	128.4	102.0	40	70.5%	29.5%	26.0%	41.7%	2.8%
95	129.6	102.0	45	71.3%	28.7%	26.3%	42.2%	2.8%
105	130.3	102.0	50	72.1%	27.9%	26.6%	42.7%	2.8%
120	132.5	101.0	60	73.7%	26.3%	27.2%	43.6%	2.9%
146	134.9	101.0	70	75.5%	24.5%	27.8%	44.7%	3.0%
146	135.2	100.0	70	75.5%	24.5%	27.8%	44.7%	3.0%
179	138.9	101.0	80	77.3%	22.7%	28.5%	45.7%	3.0%
221	142.5	101.5	90	79.1%	20.9%	29.2%	46.8%	3.1%
237	145.0	102.0	95	80.1%	19.9%	29.5%	47.4%	3.2%
254	147.6	102.0	100	81.1%	18.9%	29.9%	48.0%	3.2%
290	154.0	102.5	110	83.2%	16.8%	30.7%	49.2%	3.3%
300	157.7	102.5	115	84.3%	15.7%	31.1%	49.9%	3.3%
317	161.9	102.0	120	85.4%	14.6%	31.5%	50.5%	3.4%
330	166.0	102.0	125	86.5%	13.5%	31.9%	51.2%	3.4%
345	171.8	102.0	130	87.7%	12.3%	32.3%	51.9%	3.5%
360	177.5	102.0	135	88.9%	11.1%	32.8%	52.6%	3.5%
378	185.4	102.0	140	90.1%	9.9%	33.2%	53.3%	3.6%
389	192.1	102.0	144	91.1%	8.9%	33.6%	53.9%	3.6%
398	196.4	101.0	146	91.7%	8.3%	33.8%	54.2%	3.6%
404	199.6	101.0	148	92.2%	7.8%	34.0%	54.6%	3.6%
411	204.0	101.0	150	92.7%	7.3%	34.2%	54.9%	3.7%
422	208.0	100.0	152	93.2%	6.8%	34.4%	55.2%	3.7%
429	212.0	100.0	154	93.8%	6.2%	34.6%	55.5%	3.7%
439	217.0	100.0	156	94.3%	5.7%	34.8%	55.8%	3.7%
449	223.0	98.0	158	94.9%	5.1%	35.0%	56.1%	3.7%
461	232.0	96.0	160	95.4%	4.6%	35.2%	56.5%	3.8%
474	239.0	96.0	162	96.0%	4.0%	35.4%	56.8%	3.8%

Table 12: Data for BPR-3

Time	Temperature (°C)		Condensate	Concentrate composition (wt %)				
Minutes	Flask	Head space	Vol (mL)	Acid + salts	H ₂ O	H ₂ SO ₄	Li ₂ SO ₄	Na ₂ SO ₄
3	66.6	61.0	0	30.0%	70.0%	11.1%	17.7%	1.2%
31	67.3	62.0	20	31.0%	69.0%	11.5%	18.3%	1.2%
47	67.5	62.0	30	31.5%	68.5%	11.6%	18.6%	1.2%
63	67.4	62.0	40	32.1%	67.9%	11.8%	18.9%	1.3%
79	67.8	62.0	50	32.6%	67.4%	12.1%	19.3%	1.3%

97	68.8	62.5	60	33.2%	66.8%	12.3%	19.6%	1.3%
112	69.1	62.5	70	33.8%	66.2%	12.5%	20.0%	1.3%
127	69.5	62.0	80	34.4%	65.6%	12.7%	20.3%	1.4%
142	69.5	62.5	90	35.1%	64.9%	13.0%	20.7%	1.4%
158	69.7	62.5	100	35.7%	64.3%	13.2%	21.1%	1.4%
171	70.0	62.5	110	36.4%	63.6%	13.5%	21.5%	1.4%
190	70.3	62.5	124	37.5%	62.5%	13.8%	22.1%	1.5%
205	69.8	60.5	136	38.4%	61.6%	14.2%	22.7%	1.5%
212	69.5	62.5	140	38.7%	61.3%	14.3%	22.9%	1.5%
225	69.6	63.0	150	39.5%	60.5%	14.6%	23.4%	1.6%
235	69.9	63.0	160	40.4%	59.6%	14.9%	23.9%	1.6%
245	70.1	63.5	170	41.3%	58.7%	15.3%	24.4%	1.6%
256	70.3	64.0	180	42.2%	57.8%	15.6%	24.9%	1.7%
266	70.5	64.0	190	43.2%	56.8%	16.0%	25.5%	1.7%
271	70.9	64.5	200	44.2%	55.8%	16.3%	26.1%	1.7%
548	71.2	64.5	210	45.3%	54.7%	16.7%	26.8%	1.8%
271	71.6	66.0	220	46.4%	53.6%	17.1%	27.4%	1.8%
271	72.0	66.0	230	47.6%	52.4%	17.6%	28.1%	1.9%
572	72.4	66.0	240	48.8%	51.2%	18.0%	28.9%	1.9%
271	72.9	66.0	250	50.1%	49.9%	18.5%	29.6%	2.0%
588	73.3	65.0	260	51.5%	48.5%	19.0%	30.5%	2.0%
596	74.0	65.0	270	53.0%	47.0%	19.6%	31.3%	2.1%
605	74.7	65.5	280	54.5%	45.5%	20.2%	32.2%	2.1%
613	75.6	65.0	290	56.2%	43.8%	20.8%	33.2%	2.2%
272	77.0	66.0	300	57.9%	42.1%	21.4%	34.2%	2.3%
630	78.3	67.0	310	59.8%	40.2%	22.1%	35.3%	2.4%
272	81.1	69.0	320	61.8%	38.2%	22.8%	36.5%	2.4%
272	83.0	69.0	330	63.9%	36.1%	23.6%	37.8%	2.5%
273	85.0	69.0	340	66.2%	33.8%	24.4%	39.1%	2.6%
266	87.8	66.0	350	68.6%	31.4%	25.3%	40.5%	2.7%
286	90.7	66.5	360	71.2%	28.8%	26.3%	42.1%	2.8%
296	93.5	68.0	370	74.0%	26.0%	27.4%	43.8%	2.9%
267	96.7	70.0	380	77.1%	22.9%	28.5%	45.6%	3.0%
312	101.9	71.0	386	79.0%	21.0%	29.2%	46.7%	3.1%
316	107.6	73.0	390	80.4%	19.6%	29.7%	47.5%	3.2%
321	111.6	74.0	394	81.8%	18.2%	30.2%	48.4%	3.2%
323	113.6	74.0	396	82.54%	17.46%	30.5%	48.8%	3.3%

Table 13: Data for BPR-4

Time Minutes	Temperature (°C)		Condensate Vol (mL)	Concentrate composition (wt %)				
	Flask	Head space		Acid + salts	H ₂ O	H ₂ SO ₄	Li ₂ SO ₄	Na ₂ SO ₄
0	53.4	35.0	0	64.9%	35.1%	23.9%	38.4%	2.6%
17	54.4	37.5	10	66.2%	33.8%	24.4%	39.2%	2.6%
33	55.0	38.5	20	67.6%	32.4%	24.9%	40.0%	2.7%
52	57.7	39.0	30	69.0%	31.0%	25.5%	40.9%	2.7%
76	63.7	42.0	40	70.5%	29.5%	26.0%	41.7%	2.8%
77	56.6	36.0	40	70.5%	29.5%	26.0%	41.7%	2.8%

100	59.7	39.5	50	72.1%	27.9%	26.6%	42.7%	2.8%
134	68.5	43.0	60	73.7%	26.3%	27.2%	43.6%	2.9%
145	70.0	43.5	65	74.6%	25.4%	27.5%	44.1%	2.9%
154	79.1	49.0	70	75.5%	24.5%	27.8%	44.7%	3.0%
171	79.9	50.5	80	77.3%	22.7%	28.5%	45.7%	3.0%
188	84.5	52.5	90	79.1%	20.9%	29.2%	46.8%	3.1%
206	93.2	54.0	100	81.1%	18.9%	29.9%	48.0%	3.2%
214	97.4	54.0	105	82.1%	17.9%	30.3%	48.6%	3.2%
222	101.3	55.0	110	83.2%	16.8%	30.7%	49.2%	3.3%
244	113.2	54.5	120	85.4%	14.6%	31.5%	50.5%	3.4%
264	129.2	60.0	130	87.7%	12.3%	32.3%	51.9%	3.5%
269	132.9	60.0	132	88.2%	11.8%	32.5%	52.2%	3.5%
271	94.4	44.0	134	88.6%	11.4%	32.7%	52.5%	3.5%
276	97.3	42.0	136	89.1%	10.9%	32.9%	52.8%	3.5%
288	106.9	42.0	140	90.1%	9.9%	33.2%	53.3%	3.6%
302	115.1	40.0	144	91.1%	8.9%	33.6%	53.9%	3.6%
314	122.3	39.5	148	92.2%	7.8%	34.0%	54.6%	3.6%
335	136.3	39.5	154	93.8%	6.2%	34.6%	55.5%	3.7%
343	143.4	39.0	156	94.3%	5.7%	34.8%	55.8%	3.7%
348	146.9	39.0	158	94.9%	5.1%	35.0%	56.1%	3.7%
357	155.4	37.5	160	95.4%	4.6%	35.2%	56.5%	3.8%
365	163.0	37.0	162	96.0%	4.0%	35.4%	56.8%	3.8%

[00114] The point at which crystals formed is only noted for test BPR-1 and BPR-3 as the other two tests contained undissolved solids at their initial composition level (Table 14). This point was determined as the concentration level at which point precipitation was first noted in the concentration flask. It can also be considered as a range between the measurement at which the solids were observed and the previous measurement taken.

Table 14: Crystallization point for tests BPR-1 and BPR-3

Test	BPR-1	BPR-3
Crystallization Temp (°C)	107.8	69.8
H ₂ O	59.6%	61.6%
H ₂ SO ₄	14.9%	14.2%
Li ₂ SO ₄	23.9%	22.7%
Na ₂ SO ₄	1.6%	1.5%
Total Acid + Salts	40.4%	38.4%

[00115] The graphs in Figures 8-11 show the rises in boiling points for each test (Figure 8: BPR-1 and BPR-2; Figure 9: BPR-3; Figure 10: BPR-4; Figure 11:

BPR-1 and BPR-3). The boiling point is the temperature measured in the solution or slurry which is denoted as the “flask temperature” in the data tables.

[00116] Table 15 contains data relating to pH measurements of the condensate obtained from tests BPR-1 to BPR-4.

Table 15: Condensate pH measurements

Test	fraction	mass (g)	volume (mL)	density (g/mL)	pH measured	Appearance
BPR-1	1	160.05	162	0.99	4.3	Clear, colourless
BPR-1	2	237.18	238	1.00	2.3	Clear, colourless
BPR-2	1	160.87	162	0.99	1.68	Clear, slightly yellow
BPR-3	1	248.68	250	0.99	3.77	Clear, colourless
BPR-3	2	144.52	146	0.99	2.42	Clear, colourless
BPR-4	1	160.71	162	0.99	1.58	Clear, slightly yellow

(g) Observations

[00117] The appearance of the solutions and point of crystal formation was observed for each of the tests. Due to the insulation required when heating the solution, constant observations were not made throughout the experiment.

[00118] BPR-1: The first part of the concentration was from 30-41% total acid and salts and no stir bar or boiling chips were used. The solution was clear and colourless initially and boiled smoothly. At 40.4% total acid and salts, the mixture began to bump and boiled more vigorously and crystals were observed in the concentrate. The crystals were clear, needle-like, and settled quickly to the bottom of the flask when the mixture was not agitated. The supernatant was clear and colourless. The first part of the concentration was stopped at 40.6% total acid and salts (Figure 12A) and cooled overnight. Additional crystals formed at room temperature with nice, crystalline structures (Figure 12B).

[00119] The second part of the concentration was from 41-84% total acid and salts. A boiling chip was added to the concentrating flask for the second part of the test. Some of the solids that had been present at room temperature re-dissolved when the mixture reached reflux. The mixture continued to boil quite vigorously and bump even with the boiling chip. From 40.6% to 56.6%, the appearance of the concentrate was very similar except for a slight increase in the

amount of solids visible (see, for example, Figure 12C which shows concentrate at 49% and Figure 12D which shows concentrate at 57%). The solids were fine, needle-like white crystals which settled as soon as the boiling stopped. The supernatant was clear and colourless. At 69.3%, a larger solids layer was visible in the concentrate as shown in Figure 12E. The solids appeared to be white and fine and the supernatant was slightly opaque and yellowed. Some solids were stuck to the walls of the flask. At 74.9%, the concentrate seemed quite viscous as shown in Figure 12F. The final concentrate contained 84.4% total acid and salts and had a large layer of white solids in the bottom with a supernatant that was clear and colourless once the solids had settled to the bottom of the flask as shown in Figure 12G. When cooled to room temperature, more solids precipitated with a very small layer of supernatant remaining as shown in Figure 12H.

[00120] BPR-2: The initial mixture was a thick, white slurry. The slurry was prepared using a magnetic stir plate, and the stirring was maintained for the test. The first part of the concentration was from 65-76% total acid and salts. Several hours of heating were required until the mixture reached reflux and condensate collection was started. Some of the initial solids dissolved with heating based on the visual appearance of the concentrate. However at no point did all of the solids go into solution (see, for example: Figure 13A). During the concentration, the mixture appeared to be a white, bubbling slurry. At 71.3% the mixture began to boil and bump very vigorously, so the heating was lowered slightly. At 75.5% the hot concentrate had a layer of white solids that settled to the bottom of the flask and a clear and slightly yellow supernatant (Figure 13B). The concentration was stopped at this point and cooled overnight. At room temperature (Figure 13C) the whole mixture had crystallized. There appeared to be two layers of solids. The bottom layer had finer, white solids. The top layer which appeared to correspond to the supernatant layer contained larger, white, needle-like crystals.

[00121] The second part of the concentration was from 76-96% total acid and salts. As the concentrate was heated to reflux, some of the crystals re-dissolved to form a slurry. The white slurry boiled mildly as it was concentrated. The appearance was quite consistent during the second part of the

concentration. At 92.7%, mostly white solids were visible in the flask with a small amount of clear, yellow supernatant (Figure 13D). At 96.0% concentrated, the test was stopped. The concentrate was a thick, white, bubbling slurry when hot. As the solids settled, but the mixture was still hot, a layer of slightly opaque and pale yellow supernatant was visible (see, for example: Figure 13E).

[00122] BPR-3: BPR-3 was the first test performed under vacuum. The cold finger and condenser were cooled using a circulation water bath set at 10°C instead of tap water which was used in the previous tests. The first part of the concentration was from 30-66% total acid and salts. The solution was clear, colourless and boiled mildly until 37.5%. At 38.4% the first solids were observed in the solution and they settled to the bottom of the flask when boiling stopped and were needle-like crystals. At 42.2%, the concentrate began to boil more vigorously. The receiving flask was switched at 50.1% concentration with the system being maintained at temperature and under vacuum. The amount of solids increased as the concentration proceeded. The supernatant was clear and colourless and the mixture boiled quite vigorously. At 66.2% total acid and salts the concentration was stopped (Figure 14A) and the system was brought to atmospheric pressure and cooled to room temperature (Figure 14B) overnight.

[00123] The second part of the concentration was from 66.2-82.5% total acid and salts (see Figure 14C for 83% concentrate at temperature). The system was put under vacuum and heated to reflux before collection was started. The final concentrate had a layer of white solids at the bottom of the flask with a supernatant layer that appeared viscous, slightly opaque and pale yellow (Figure 14D).

[00124] BPR-4: The initial slurry at 65% total acid and salts was very thick and sticky; the stir bar in the flask was not able to fully mix the system. A glass stir rod was used to assist in stirring while the solution was prepared. The slurry swelled significantly to almost fill the whole flask when first put under vacuum. The solution was then brought to the target vacuum of 3 kPa slowly to allow the swelling to subside. While not wishing to be limited by theory, the swelling was likely due to degassing of the slurry (Figure 15A). The slurry was then brought to

reflux under vacuum (Figure 15B) and the first part of the concentration was from 64.9-70.5% total acid and salts (see, for example 15C, showing 69% concentrate at temperature). While not wishing to be limited by theory, it is likely that stirring did not occur during this step due to how thick the slurry was throughout. There were no visible changes in the solution from room temperature to at reflux. The 70.5% concentrate was cooled to room temperature and left at atmospheric pressure overnight. At room temperature, three distinct layers were visible in the 70.5% concentrate. The bottom layer was a solid white mass, encompassing the stir bar, stuck to the bottom of the flask. The middle layer was the largest and contained slurried/suspended solids that appeared to be a mix of needle-like crystals and finer, white solids. At the top there was a very thin layer of clear, colourless supernatant visible. The top two layers were easily stirred. The bottom solid layer was not easily stirred and could not be broken into smaller pieces with a spatula.

[00125] The second stage of the concentration was from 70.5-88.2% total acid and salts (see: Figure 15D for 88% concentrate at temperature and Figure 5E for 88% concentrate at room temperature) . At reflux the solids mass did not dissolve or break up immediately. At approximately 75%, the boiling subsided and it took a while for reflux to resume. However, when the boiling and distilling resumed, the mixture appeared to be well-mixed and the stir bar was able to mix the solution. The distillation proceeded smoothly for the rest of the concentration.

[00126] The third stage of the concentration was from 88.2-96.0% total acid and salts. The solids appeared to fully disperse in the slurry at boiling. The final concentrate was a thick and opaque slurry (Figure 15F).

[00127] Comparison of final concentrates: The concentrate from BPR-1 contained crystal-like, translucent white crystals with a clear, colourless supernatant (Figure 16A). A thick slurry formed when the bottle was agitated. The concentrate from BPR-2 was a thick slurry with a very thin layer of viscous supernatant right at the surface (Figure 16B). The very top layer of the solids and slurry could be scraped and mixed with the spatula (Figure 16C), and the majority of the solids were in a solid mass at the bottom of the flask. The

concentrate from BPR-3 was settled into three layers. The top layer was a thin supernatant, the middle layer appeared to contain crystalline, white solids and the bottom layer appeared to be settled solids that were finer than the middle layer. With agitation all three layers mixed together into a thick slurry (Figure 16D). The concentrate from BPR-4 cooled into a solid mass with no excess liquid visible. The solids appeared to be in two layers (Figure 16E). The solids at the top appeared to be more crystal-like and the solids at the bottom appeared to be finer and less crystalline than the top later. See also Figure 16F for a side-by-side comparison of BPR-2 (right hand rbf) and BPR-4 (left hand rbf).

VI. Two-stage concentration and filtration tests

(a) Summary

[00128] A two-stage concentration and filtration test of a synthetic anolyte solution was completed at atmospheric pressure and under vacuum. Stage one of the experiment was the concentration of a synthetic anolyte solution from 33% to 71% total acid and salts. This was completed under vacuum at 17 kPa and at atmospheric pressure. The 71% solution was cooled to 30°C and filtered. In the second stage, the resulting filtrate was concentrated further to 96% total acid and salts under a vacuum at 3 kPa for both experiments. The final concentrate was cooled to 30°C to precipitate solids and filtered.

(b) Materials

[00129] Lithium Sulfate, anhydrous - $\geq 98.0\%$, was from Aldrich Chemistry, product # 62613-1KG, lot # BCBL6287V. Sodium sulfate, anhydrous, granular, free-flowing, Redi-Dri™, ACS reagent, $\geq 99\%$, was from Sigma-Aldrich, product #798592-500g, lot # MKBV7489V. All solutions were prepared with deionized water.

(c) Equipment

[00130] The concentration steps were performed using the same equipment that was used for the boiling point rise tests described in Example 1, section IV.

(d) ExperimentalStage 1 concentration and filtration

[00131] An initial solution of lithium sulfate, sodium sulfate and sulfuric acid was prepared in deionized water. A round bottom flask was charged with solution and equipped with a thermocouple, distillation apparatus and electric heating mantle. For test 1, the foregoing set-up was connected to a vacuum pump and the system brought to 17 kPa. The mixture in the flask was brought to a boil and water distilled off to reach the target concentration. The final mass of condensate and concentrate was recorded, the contents of the concentrating flask were transferred to a 500 mL Erlenmeyer flask and the flask submerged in a 30°C circulating water bath overnight. The 30°C concentrate was vacuum filtered through a 1.5 µm glass microfiber filter and the filtrate used to rinse any solids stuck to the glassware from previous steps into the filter cake. Finally, the filtrate was isolated, the filter cake rinsed thoroughly with ethanol and the crystals dried.

Stage 2 concentration and filtration

[00132] A known amount of filtrate from stage 1 was transferred into a 250 mL, 3-neck, round bottom flask. The flask was equipped with a thermocouple, distillation apparatus and electric heating mantle, connected to a vacuum pump and brought to 3 kPa. The mixture in the flask was brought to a boil and water distilled off to reach the target concentration. The final mass of condensate and concentrate was then recorded. The cooling and filtration steps of stage 2 were different in tests 1 and 2 as follows:

[00133] **Test 1:** The contents of the concentrating flask were transferred to a 250 mL Erlenmeyer flask and submerged in a 30°C circulating water bath overnight. The 30°C concentrate was vacuum filtered through a 1.5 µm glass microfiber filter. A portion of the filtrate was used to rinse any solids stuck to the glassware from previous steps into one Erlenmeyer, but not combined with the filter cake. The filter cake was rinsed thoroughly with ethanol and the crystals left to dry.

[00134] Test 2: The final concentrate was left to cool to ambient temperature with stirring. A camera equipped with a timer was used to take pictures at one minute intervals to note the temperature and appearance of concentrate while cooling. The concentrate was then left at 30°C overnight to crystallize solids. The concentrate was heated to 99°C slowly in an oil bath and observed to watch the solids re-dissolve. The concentrate was then cooled to 30°C and vacuum filtered through a 1.5 µm glass microfiber filter. The filter cake was rinsed thoroughly with ethanol and the crystals left to dry.

Solids settling test

[00135] This was performed on the concentrate from test 1 stage 1 after cooling to 30°C. The 30°C concentrate was transferred to a 250 mL graduated bottle. The concentrate was then agitated to fully suspend solids. The bottle was set on a bench and a timer started. The level of solids was recorded over time.

(e) Results

[00136] Table 16 contains a summary of the conditions of the tests:

Table 16: Summary of conditions for tests

Test	Pressure	Initial BP (°C)	Final BP (°C)
1 stage 1	17 kPa	60.6	81.9
1 stage 2	3 kPa	41.6	228
2 stage 1	atmospheric	104.8	127.2
2 stage 2	3 kPa	40.8	222

[00137] Test 1 stage 1 (17 kPa): The initial solution was prepared by mass. The amount of concentrate was determined by mass at the end of the concentration step and the composition was calculated by, while not wishing to be limited by theory, assuming that all condensate removed was water. The recovered and dried solids appeared as homogenous, translucent, needle-like crystals and were assumed, while not wishing to be limited by theory, to be all Li₂SO₄ monohydrate. The filtrate amount and composition was calculated as the difference between the concentrate and the recovered solids. The filtration was performed so that all solids were accounted for in the filter cake by rinsing all

glassware into the filter with filtrate after the initial filtration. The total filtrate was calculated as the difference in mass between the concentrate and the recovered solids. The recovered filtrate was less than the calculated total due to transfer losses and filtrate entrained in the filter cake prior to rinsing with ethanol. Table 17 contains an overview of the composition data for test 1 stage 1.

Table 17: Composition data for test 1 stage 1 concentration and filtration

Component (g)	Initial	condensate	concentrate	Recovered solids	Total filtrate	Recovered filtrate
Total	700.28	373.86	326.42	137.70	188.72	159.89
Li ₂ SO ₄	136.59		136.59	118.31	18.29	15.49
Na ₂ SO ₄	9.11		9.11	0.00	9.11	7.72
H ₂ SO ₄	85.40		85.40		85.40	72.36
H ₂ O	469.17	373.86	95.31	19.39	75.92	64.32
Acid+ salts	231.11		231.11		112.80	95.57
Li ₂ SO ₄ as monohydrate ¹	158.98		158.98	137.70	21.28	18.03
Composition (wt%)	Initial	condensate	concentrate	Recovered solids	Total filtrate	Recovered filtrate
Total	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%
Li ₂ SO ₄	19.5%	0.0%	41.8%	85.9%	9.7%	9.7%
Na ₂ SO ₄	1.3%	0.0%	2.8%	0.0%	4.8%	4.8%
H ₂ SO ₄	12.2%	0.0%	26.2%	0.0%	45.3%	45.3%
H ₂ O	67.0%	100.0%	29.2%	14.1%	40.2%	40.2%
Acid+ salts	33.0%	0.0%	70.8%	0.0%	59.8%	59.8%
Li ₂ SO ₄ as monohydrate ¹	22.7%	0.0%	48.7%	100.0%	11.3%	11.3%

¹ calculated based on amount of Li₂SO₄ present.

[00138] Test 1 stage 2 (3 kPa): The filtrate from stage 1 was used as the initial solution for stage 2. The test was done with 150 g of the filtrate, with the remaining recovered filtrate set aside. The final masses of the condensate and the final concentrate were measured. A mass lost was calculated as the difference between the initial filtrate and the sum of the concentrate and condensate samples. While not wishing to be limited by theory, the mass lost is likely due to condensation that remained on the walls of the distillation apparatus. The filtration step in stage 2 was difficult as the final concentrate was very viscous. It was not possible to use the filtrate to transfer all of the solids stuck to the glassware into the filter, so the amount of solids recovered only represents what was initially transferred into the filter after the solids were crystallized at 30°C.

Transfer losses are not accounted for in either the solids or the filtrate from this step. Table 18 contains an overview of the composition data for test 1 stage 2.

Table 18: data for test 1 stage 2 concentration and filtration

Sample	Mass (g)
Initial filtrate	150.01
Condensate	56.65
Final concentrate	89.99
Mass lost	3.37
Recovered solids	7.16

[00139] Test 2 stage 1 (atmospheric pressure): The compositions of the initial solution and final compositions were determined as in test 1. Table 19 contains an overview of the composition data for test 2 stage 1 concentration.

Table 19: Composition data for test 2 stage 1 concentration

Component (g)	Initial	condensate	concentrate
Total	851.86	454.2	397.66
Li ₂ SO ₄	166.07		166.07
Na ₂ SO ₄	11.08		11.08
H ₂ SO ₄	101.87		101.87
H ₂ O	572.84	454.2	118.64
Acid+ salts	279.02		279.02
Li ₂ SO ₄ as monohydrate ¹	193.29		193.29
Composition (wt%)	Initial	condensate	concentrate
Total	100.0%	100.0%	100.0%
Li ₂ SO ₄	19.5%	0.0%	41.8%
Na ₂ SO ₄	1.3%	0.0%	2.8%
H ₂ SO ₄	12.0%	0.0%	25.6%
H ₂ O	67.2%	100.0%	29.8%
Acid+ salts	32.8%	0.0%	70.2%
Li ₂ SO ₄ as monohydrate ¹	22.7%	0.0%	48.6%

¹ calculated based on amount of Li₂SO₄ present.

[00140] The solids isolated by filtration were not homogenous; instead they appeared to be a mixture of translucent crystals similar to test 1, and amorphous white powdery solids. The composition of the solids was not determined, so the exact composition of the filtrate was also unknown. While not wishing to be limited by theory, the composition was assumed to be somewhere between if the

solids were determined to be fully anhydrous Li_2SO_4 or fully Li_2SO_4 monohydrate. The two cases are laid out in Table 20.

Table 20: Possible compositions of solids from test 2 filtration 1

Component (g)	All Anhydrous Li_2SO_4		All Li_2SO_4 Monohydrate	
	Crystals	Total filtrate	Crystals	Total filtrate
Total	157.46	240.2	157.46	240.2
Li_2SO_4	157.46	8.61	135.29	30.78
Na_2SO_4	0.00	11.08	0.00	11.08
H_2SO_4		101.87		101.87
H_2O	0.00	118.64	22.17	96.47
Acid+ salts		121.56		143.73
Li_2SO_4 as monohydrate ¹			157.46	35.83
Composition (wt%)	Crystals	Total filtrate	Crystals	Total filtrate
Total	100.0%	100.0%	100.0%	100.0%
Li_2SO_4	100.0%	3.6%	85.9%	12.8%
Na_2SO_4	0.0%	4.6%	0.0%	4.6%
H_2SO_4	0.0%	42.4%	0.0%	42.4%
H_2O	0.0%	49.4%	14.1%	40.2%
Acid+ salts	0.0%	50.6%	0.0%	59.8%
Li_2SO_4 as monohydrate ¹			100.0%	14.9%

¹ calculated based on amount of Li_2SO_4 present.

[00141] Test 2 stage 2 (3 kPa): As the exact composition of the filtrate from stage 1 was not known, the end point of the stage 2 concentration was based on the boiling point measured in test 1 stage 2 as the conditions and final target concentration were the same for both tests. The concentration was stopped when the boiling point reached 222°C. The volume of condensate collected at that point fell in the target range calculated based on anhydrous lithium sulfate or lithium sulfate monohydrate being removed by filtration in stage 1. Table 21 contains an overview of the calculations for amount of condensate to remove and Table 22 contains an overview of the data for test 2 stage 2 concentration.

Table 21: Calculations for target amount of condensate to remove

Initial		
Mass of concentrate (g)	183.44	183.44
Li_2SO_4 species	anhydrous	monohydrate
acid+salt content	50.6%	59.8%

Target Final		
acid+salt content	96%	96%
Mass of concentrate (g)	96.70	114.34
mass of condensate (g)	86.74	69.10

Table 22: Data for test 2 stage 2 concentration

Sample	Mass (g)
Initial filtrate	183.44
Condensate	71.6
Final concentrate	108.45
Mass lost	3.39

[00142] The filtration was performed after the precipitation and solubility testing on the final concentrate. The concentrate was transferred directly from the flask used for the experiment to the filter. Only a small amount of concentrate remained on the flask walls. This was transferred into the final cake with ethanol during the ethanol wash of the filter cake. Table 23 contains an overview of the data for test 2 stage 2 filtration.

Table 23: Data for test 2 stage 2 filtration

Sample	Mass (g)
Concentrate	108.45
Solids recovered	4.766
Filtrate recovered	100.24
Mass lost	3.444

[00143] **Crystallization and solubility:** Two experiments were performed to test the crystallization and solubility properties of the test 2 stage 2 concentrate. Tables 24 and 25 contain an overview of the results of these experiments.

Table 24: Observation of concentrate when cooled from final boiling point to 30°C

Time	Temperature	Appearance
0 min	212°C	Clear, pale yellow solution. No solids crystallized.
91 min	30°C	No change in appearance. Stirring has slowed, which suggests increased viscosity of the concentrate.

Table 25: Observation of concentrate when heated from room temperature to 99°C

Temperature	Appearance
Room temperature	Thick, opaque, slightly yellow slurry
66°C	Less viscous, opaque, slightly yellow slurry
85°C	No change in appearance
99°C	No change in appearance

Note: Concentrate was held at each temperature for at least 30 minutes

[00144] Solids characterization: The solids recovered from each filtration step were characterized by inspection and by measuring the pH of the solids in solution. A solution was made up of each solid in deionized water. Table 26 contains an overview of the properties of the filtered solids.

Table 26: Properties of filtered solids

Test	Stage	Appearance	Mass (g)	Final vol (mL)	Conc. (g/L)	pH
1	1	Needle-like, translucent, white crystals	2.50	25	100	3.57
1	2	Powdery, white, chalky clumps of solids	1.00	10	100	2.64
2	1	A mix of needle-like crystals and white powdery solids	2.51	25	100	2.89
2	2	Powdery, white, chalky clumps of solids	0.50	5	100	1.84

[00145] Condensate: Table 27 contains an overview of the results of pH measurements of condensate samples.

Table 27: pH measurements of condensate samples

Condensate	pH
Test 1 stage 1	2.84
Test 1 stage 2	1.05
Test 2 stage 1	3.05
Test 2 stage 2	1.18

[00146] Solids setting test: The settling test was performed on the concentrate from test 1 stage 1 after it has been cooled to 30°C and before filtration. The test was done in triplicate. The concentrate was at 30°C at the beginning of the first test and all three tests were done in succession at room temperature. Table 28 contains the setting test data for test 1 concentrate.

Table 28: Settling test data for test 1 concentrate at 30°C

Test 1		Test 2		Test 3	
Liquid level = 177 mL		Liquid level = 174 mL		Liquid Level = 175 mL	
Time (min)	solid level (mL)	Time (min)	solid level (mL)	Time (min)	solid level (mL)
0.4	170	0.6	165	0.2	170
1.8	160	1.3	160	1.6	160
3.7	150	2.8	150	3.4	150
9.0	146	4.1	145	6.7	146
16.3	145	6.9	140	11.4	144
20.3	142	15.0	138	20.0	143
22.4	140			25.0	142
				30.0	141
				35.0	141
				45.0	141

(f) Observations

[00147] Test 1 stage 1: The final concentrate at 70.8 wt% total acid and salts contained white crystals and had a clear, colourless supernatant layer when the solids settled (Figure 17A). When cooled to 30°C, the solids layer was larger and with a thin layer of supernatant (Figure 17B).

[00148] Test 1 stage 2: The filtrate used as the initial solution for the concentration experiment was clear and colourless (Figure 17C). The final concentrate was clear, yellow/brown and contained no solids at the final boiling point. The concentrate was cooled in the flask, then re-heated to reflux temperature under vacuum to re-dissolve solids so that the concentrate could be transferred to an Erlenmeyer flask for crystallization. Solids formed in the concentrate when cooled to 30°C. The resulting slurry was very thick with solids suspended throughout (Figure 17D). The filtration was very slow and additional solids appeared to precipitate in the filtrate as the filtration proceeded. The filtrate was viscous and slightly yellow in colour.

[00149] Test 2 stage 1: The final concentrate at 70% acid and salts was a slurry with a layer of white solids that settled to the bottom of the flask with a clear and colourless supernatant (Figure 18A). The concentrate was transferred to an Erlenmeyer flask for cooling and crystallization of solids. Initially the final concentrate was allowed to cool partially, however large chunks of solids formed that could not

be transferred. The concentrate had to be heated to $>100^{\circ}\text{C}$ to re-dissolve the large chunks of solids so that the concentrate could be fully transferred. The concentrate was cooled to $\sim 75^{\circ}\text{C}$ at ambient temperature and then cooled to 30°C in the water bath. The solution was maintained at 30°C for 2 hours and then filtered.

[00150] Test 2 stage 2: The filtrate used as the initial solution for this experiment was clear and colourless (Figure 18B). It turned from colourless to yellow, but remained clear throughout the experiment. No crystallization was observed in the initial cooling of the concentrate from boiling point to 30°C . The concentrate was left at 30°C overnight, and crystals were observed in the concentrate. The crystals were translucent, very large, and the colour of the concentrate (Figures 18C-D). The supernatant was thick and clear. The concentrate was then left in the 30°C water bath for the day. At the end of the day, the slurry appeared creamy with finer white solids in the concentrate in addition to the initial large crystals (Figure 18E). After heating to 99°C (Figure 18F) and then cooling back to 30°C , the concentrate was thick and white/beige and no large crystals were apparent. The concentrate filtered very slowly. The filtrate was clear and colourless and the cake was opaque. Air was pulled through the filter cake until it looked like a thin layer of white/beige, powdery solids partially clumped together. After washing with ethanol and drying, the filter cake was made up of white, powdery and lumpy solids.

[00151] Tables 29, 30, 31 and 32 contain additional concentration data for test 1 stage 1, test 1 stage 2, test 2 stage 1 and test 2 stage 2, respectively.

Table 29: Test 1 stage 1 concentration data

Time (min)	Boiling point ($^{\circ}\text{C}$)	Head space ($^{\circ}\text{C}$)	Condensate (mL)
0	60.6	55	0
30	62.3	57	55
54	62.6	58	102.5
81	62.9	58	160
105	63.7	58	200
123	64.7	58	225
144	65.7	58	255
160	66.9	58	275
184	69.1	59	305

206	71.9	60	330
223	75.2	61	350
237	79.2	62	365
245	81.9	62.5	374

Table 30: Test 1 stage 2 concentration data

Time (min)	Boiling point (°C)	Head space (°C)	Condensate (mL)
0	41.6	24	0
32	50.6	30	10
58	60.1	34	20
81	73.1	42	30
107	96.3	44	40
137	135.4	49	50
151	169.4	50.5	54
165	219	66	56
185	228	208	57

Table 31: Test 2 stage 1 concentration data

Time (min)	Boiling point (°C)	Head space (°C)	Condensate (mL)
0	104.8	99	0
29	106.2	100	50
56	107.2	100	105
83	107.6	101	150
115	108.5	101	185
143	109.5	101	220
178	110.1	101	245
207	111.3	101	275
257	113.9	102	325
318	117.7	103	375
353	121	103	405
392	127.2	104	445
394	127.2	104	446
396	127.5	104	450
400	127.2	104	454

Table 32: Test 2 stage 2 concentration data

Time (min)	Boiling point (°C)	Head space (°C)	Condensate (mL)
0	40.8	28.5	0
23	51.2	34	10
56	57.2	32	24
79	62.7	30	32
102	70.9	31	40

127	88.8	34	50
155	129.5	39	60
173	158.3	41	66
187	186.5	44	70
192	200	45	72
198	210	49	73
201	215	49	73
204	220	48	73
205	222	47.5	73

Example 2: Behaviour of sulphuric acid/lithium sulphate solutions

[00152] The objective of the Example 2 testing is to study the behaviour of sulphuric acid / lithium sulphate solutions in a test campaign in a pilot SARC system. The key goals of the pilot testing are to:

- Determine heat transfer behaviour of sulphuric acid / lithium sulphate solutions and, in so doing, develop process design basis information relevant to Example 1 and commercial scale SARCs to allow for scale-up;
- Demonstrate ability to continuously re-concentrate a sulphuric acid / lithium sulphate solution in a few dedicated campaign trials. Each campaign includes the evaporation and subsequent crystallization of anolyte solution followed by concentration of the filtrate from the crystallization; and
- Confirm short-term material suitability in concentrated, hot solutions of sulphuric acid and lithium sulphate.

[00153] While the present disclosure has been described with reference to examples, it is to be understood that the scope of the claims should not be limited by the embodiments set forth in the examples, but should be given the broadest interpretation consistent with the description as a whole.

[00154] All publications, patents and patent applications are herein incorporated by reference in their entirety to the same extent as if each individual publication, patent or patent application was specifically and individually indicated to be incorporated by reference in its entirety. Where a term in the present

application is found to be defined differently in a document incorporated herein by reference, the definition provided herein is to serve as the definition for the term.

WHAT IS CLAIMED IS:

1. A process for treating an aqueous composition comprising lithium sulfate and sulfuric acid, said process comprising:

 evaporatively crystallizing the aqueous composition comprising lithium sulfate and sulfuric acid under conditions to obtain crystals of lithium sulfate monohydrate and a lithium sulfate-reduced solution; and

 optionally separating the crystals of the lithium sulfate monohydrate from the lithium sulfate-reduced solution.
2. The process of claim 1, wherein the aqueous composition comprising lithium sulfate and sulfuric acid comprises from about 1 wt% to about 35 wt% lithium sulfate, based on the total weight of the aqueous composition.
3. The process of claim 1, wherein the aqueous composition comprising lithium sulfate and sulfuric acid comprises from about 10 wt% to about 30 wt% lithium sulfate, based on the total weight of the aqueous composition.
4. The process of claim 1, wherein the aqueous composition comprising lithium sulfate and sulfuric acid comprises from about 15 wt% to about 25 wt% lithium sulfate, based on the total weight of the aqueous composition.
5. The process of claim 1, wherein the aqueous composition comprising lithium sulfate and sulfuric acid comprises about 20 wt% lithium sulfate, based on the total weight of the aqueous composition.
6. The process of any one of claims 1 to 5, wherein the aqueous composition comprising lithium sulfate and sulfuric acid comprises from about 1 wt% to about 25 wt% sulfuric acid, based on the total weight of the aqueous composition.
7. The process of any one of claims 1 to 5, wherein the aqueous composition comprising lithium sulfate and sulfuric acid comprises from about 5 wt% to

about 20 wt% sulfuric acid, based on the total weight of the aqueous composition.

8. The process of any one of claims 1 to 5, wherein the aqueous composition comprising lithium sulfate and sulfuric acid comprises from about 7 wt% to about 15 wt% sulfuric acid, based on the total weight of the aqueous composition.
9. The process of any one of claims 1 to 5, wherein the aqueous composition comprising lithium sulfate and sulfuric acid comprises about 12 wt% sulfuric acid, based on the total weight of the aqueous composition.
10. The process of any one of claims 1 to 9, wherein the aqueous composition comprising lithium sulfate and sulfuric acid further comprises sodium sulfate and/or potassium sulfate in an amount of up to about 10 wt%, based on the total weight of the aqueous composition.
11. The process of any one of claims 1 to 9, wherein the aqueous composition comprising lithium sulfate and sulfuric acid further comprises from about 0.1 wt% to about 5 wt% sodium sulfate and/or potassium sulfate, based on the total weight of the aqueous composition.
12. The process of any one of claims 1 to 9, wherein the aqueous composition comprising lithium sulfate and sulfuric acid further comprises from about 0.25 wt% to about 2.5 wt% sodium sulfate and/or potassium sulfate, based on the total weight of the aqueous composition.
13. The process of any one of claims 1 to 9, wherein the aqueous composition comprising lithium sulfate and sulfuric acid further comprises about 1.3 wt% sodium sulfate, based on the total weight of the aqueous composition.
14. The process of any one of claims 1 to 13, wherein the aqueous composition comprising lithium sulfate and sulfuric acid is from an electromembrane process for preparing lithium hydroxide.

15. The process of any one of claims 1 to 14, wherein the conditions to obtain crystals of the lithium sulfate monohydrate and lithium sulfate-reduced solution comprise evaporatively crystallizing the aqueous composition comprising lithium sulfate and sulfuric acid at a temperature of less than 100°C.
16. The process of any one of claims 1 to 14, wherein the evaporative crystallization is carried out at a temperature of from about 50°C to 100°C.
17. The process of any one of claims 1 to 14, wherein the evaporative crystallization is carried out at a temperature of from about 40°C to about 95°C.
18. The process of any one of claims 1 to 14, wherein the evaporative crystallization is carried out at a temperature of from about 60°C to about 90°C.
19. The process of any one of claims 1 to 14, wherein the evaporative crystallization is carried out at a temperature of from about 75°C to about 85°C.
20. The process of any one of claims 1 to 14, wherein the evaporative crystallization is carried out at a temperature of about 82°C.
21. The process of any one of claims 15 to 20, wherein the conditions to obtain crystals of the lithium sulfate monohydrate and lithium sulfate-reduced solution further comprise evaporatively crystallizing the aqueous composition comprising lithium sulfate and sulfuric acid at a pressure that is lower than atmospheric pressure.
22. The process of any one of claims 1 to 21, wherein the evaporative crystallization is carried out at a pressure of from about 1 kPa to about 100 kPa.

23. The process of any one of claims 1 to 21, wherein the evaporative crystallization is carried out at a pressure of from about 1 kPa to about 75 kPa.
24. The process of any one of claims 1 to 21, wherein the evaporative crystallization is carried out at a pressure of from about 10 kPa to about 25 kPa.
25. The process of any one of claims 1 to 21, wherein the evaporative crystallization is carried out at a pressure of from about 15 kPa to about 20 kPa.
26. The process of any one of claims 1 to 21, wherein the evaporative crystallization is carried out at a pressure of about 16 kPa.
27. The process of any one of claims 1 to 26, wherein the conditions to obtain crystals of the lithium sulfate monohydrate and lithium sulfate-reduced solution further comprise evaporatively crystallizing the aqueous composition comprising lithium sulfate and sulfuric acid for a time in which the lithium sulfate-reduced solution contains a concentration of sulfuric acid that is less than about 65 wt%, based on the total weight of the lithium sulfate-reduced solution.
28. The process of claim 27, wherein the evaporative crystallization is carried out until the lithium sulfate-reduced solution has a sulfuric acid concentration of from about 30 wt% to about 65 wt%, based on the total weight of the lithium sulfate-reduced solution.
29. The process of claim 27, wherein the evaporative crystallization is carried out until the lithium sulfate-reduced solution has a sulfuric acid concentration of from about 40 wt% to about 50 wt%, based on the total weight of the lithium sulfate-reduced solution.

30. The process of claim 27, wherein the evaporative crystallization is carried out until the lithium sulfate-reduced solution has a sulfuric acid concentration of about 48 wt%, based on the total weight of the lithium sulfate-reduced solution.
31. The process of any one of claims 1 to 30, wherein the evaporative crystallization is carried out using a single effect evaporative crystallizer.
32. The process of any one of claims 1 to 30, wherein the evaporative crystallization is carried out using a multiple effect evaporative crystallizer.
33. The process of any one of claims 1 to 30, wherein the evaporative crystallization is carried out using a vapour recompression evaporator in which vapour from one effect is used to evaporate further vapour in either a different effect, or in the same effect by either operating an additional effect at a different pressure, or compressing the vapour and recondensing in a steam chest in the same effect.
34. The process of any one of claims 1 to 33, wherein the separation comprises gravity thickening, hydrocyclones, filtration, centrifugation or combinations thereof.
35. The process of any one of claims 1 to 33, wherein the separation comprises filtering a mixture of the crystals of lithium sulfate monohydrate and the lithium sulfate-reduced solution.
36. The process of any one of claims 1 to 35, wherein the process further comprises mechanically separating the lithium sulfate monohydrate from entrained lithium sulfate-reduced solution.
37. The process of any one of claims 1 to 36, wherein the process further comprises washing the crystals of the lithium sulfate monohydrate.

38. The process of any one of claims 1 to 37, wherein the process further comprises concentrating the lithium sulfate-reduced solution under conditions to obtain an acidic condensate and a concentrate comprising sulfuric acid.
39. The process of claim 38, wherein the conditions to obtain the acidic condensate and the concentrate comprising sulfuric acid comprise concentrating the lithium sulfate-reduced solution at a temperature of from about 50°C to about 250°C.
40. The process of claim 39, wherein the concentrating is carried out at a temperature of from about 150°C to about 250°C.
41. The process of 39, wherein the concentrating is carried out at a temperature of about 190°C.
42. The process of any one of claims 38 to 41, wherein the conditions to obtain the acidic condensate and the concentrate comprising sulfuric acid further comprise concentrating the lithium sulfate-reduced solution at a pressure that is lower than atmospheric pressure.
43. The process of any one of claims 38 to 41, wherein the concentrating is carried out at a pressure that is from about 1 kPa to about 100 kPa.
44. The process of claim 42, wherein the concentrating is carried out at a pressure that is from about 0.5 kPa to about 25 kPa.
45. The process of claim 42, wherein the concentrating is carried out at a pressure that is about 1 kPa to about 10 kPa or about 2 kPa.
46. The process of any one of claims 38 to 45, wherein the conditions to obtain the acidic condensate and the concentrate comprising sulfuric acid further comprise concentrating the lithium sulfate-reduced solution until a total concentration of sulfuric acid, lithium sulfate and optionally sodium sulfate of greater than about 65 wt% in the concentrate comprising sulfuric acid is reached, based on the total weight of the concentrate.

47. The process of claim 46, wherein the concentration is carried out until a total concentration of sulfuric acid, lithium sulfate and optionally sodium sulfate of about 65 wt% to about 99 wt% in the concentrate comprising sulfuric acid is reached, based on the total weight of the concentrate.
48. The process of claim 46, wherein the concentration is carried out until a total concentration of sulfuric acid, lithium sulfate and optionally sodium sulfate of about 80 wt% to about 98 wt% in the concentrate comprising sulfuric acid is reached, based on the total weight of the concentrate.
49. The process of claim 46, wherein the concentration is carried out until a total concentration of sulfuric acid, lithium sulfate and optionally sodium sulfate of about 90 wt% to about 97 wt% or about 96 wt% in the concentrate comprising sulfuric acid is reached, based on the total weight of the concentrate.
50. The process of any one of claims 38 to 49, wherein the concentrate comprising sulfuric acid is recycled to an electromembrane process for preparing lithium hydroxide.
51. The process of claim 50, wherein the concentrate comprising sulfuric acid is recycled to a process step comprising leaching a lithium-containing material with the concentrate comprising sulfuric acid.
52. The process of claim 51, wherein the lithium-containing material is a lithium-containing ore.
53. The process of claim 52, wherein the lithium-containing ore is β -spodumene.
54. The process of any one of claims 50 to 53, wherein the concentrate comprising sulfuric acid is recycled to the electromembrane process for preparing lithium hydroxide without further crystallization to obtain a further portion of crystals of lithium sulfate monohydrate.
55. The process of any one of claims 38 to 53, wherein the process further comprises:

cooling the concentrate comprising sulfuric acid under conditions to obtain a further portion of crystals of lithium sulfate monohydrate and a lithium sulfate-reduced concentrate comprising sulfuric acid; and

separating the crystals of the further portion of lithium sulfate monohydrate from the lithium sulfate-reduced concentrate comprising sulfuric acid.

56. The process of claim 55, wherein the conditions comprise cooling the concentrate to a temperature of from about 5°C to about 130°C.
57. The process of claim 55, wherein the conditions comprise cooling the concentrate to a temperature of from about 20°C to about 130°C.
58. The process of claim 55, wherein the separation is carried out at a temperature of from about 25°C to about 35°C.
59. The process of claim 55, wherein the separation is carried out at a temperature of about 30°C.
60. The process of any one of claims 55 to 59, wherein the process further comprises mechanically separating the further portion of lithium sulfate monohydrate from entrained lithium sulfate-reduced concentrate comprising sulfuric acid.
61. The process of any one of claims 55 to 59, wherein the process further comprises washing the crystals of the further portion of lithium sulfate monohydrate with water.

1/31

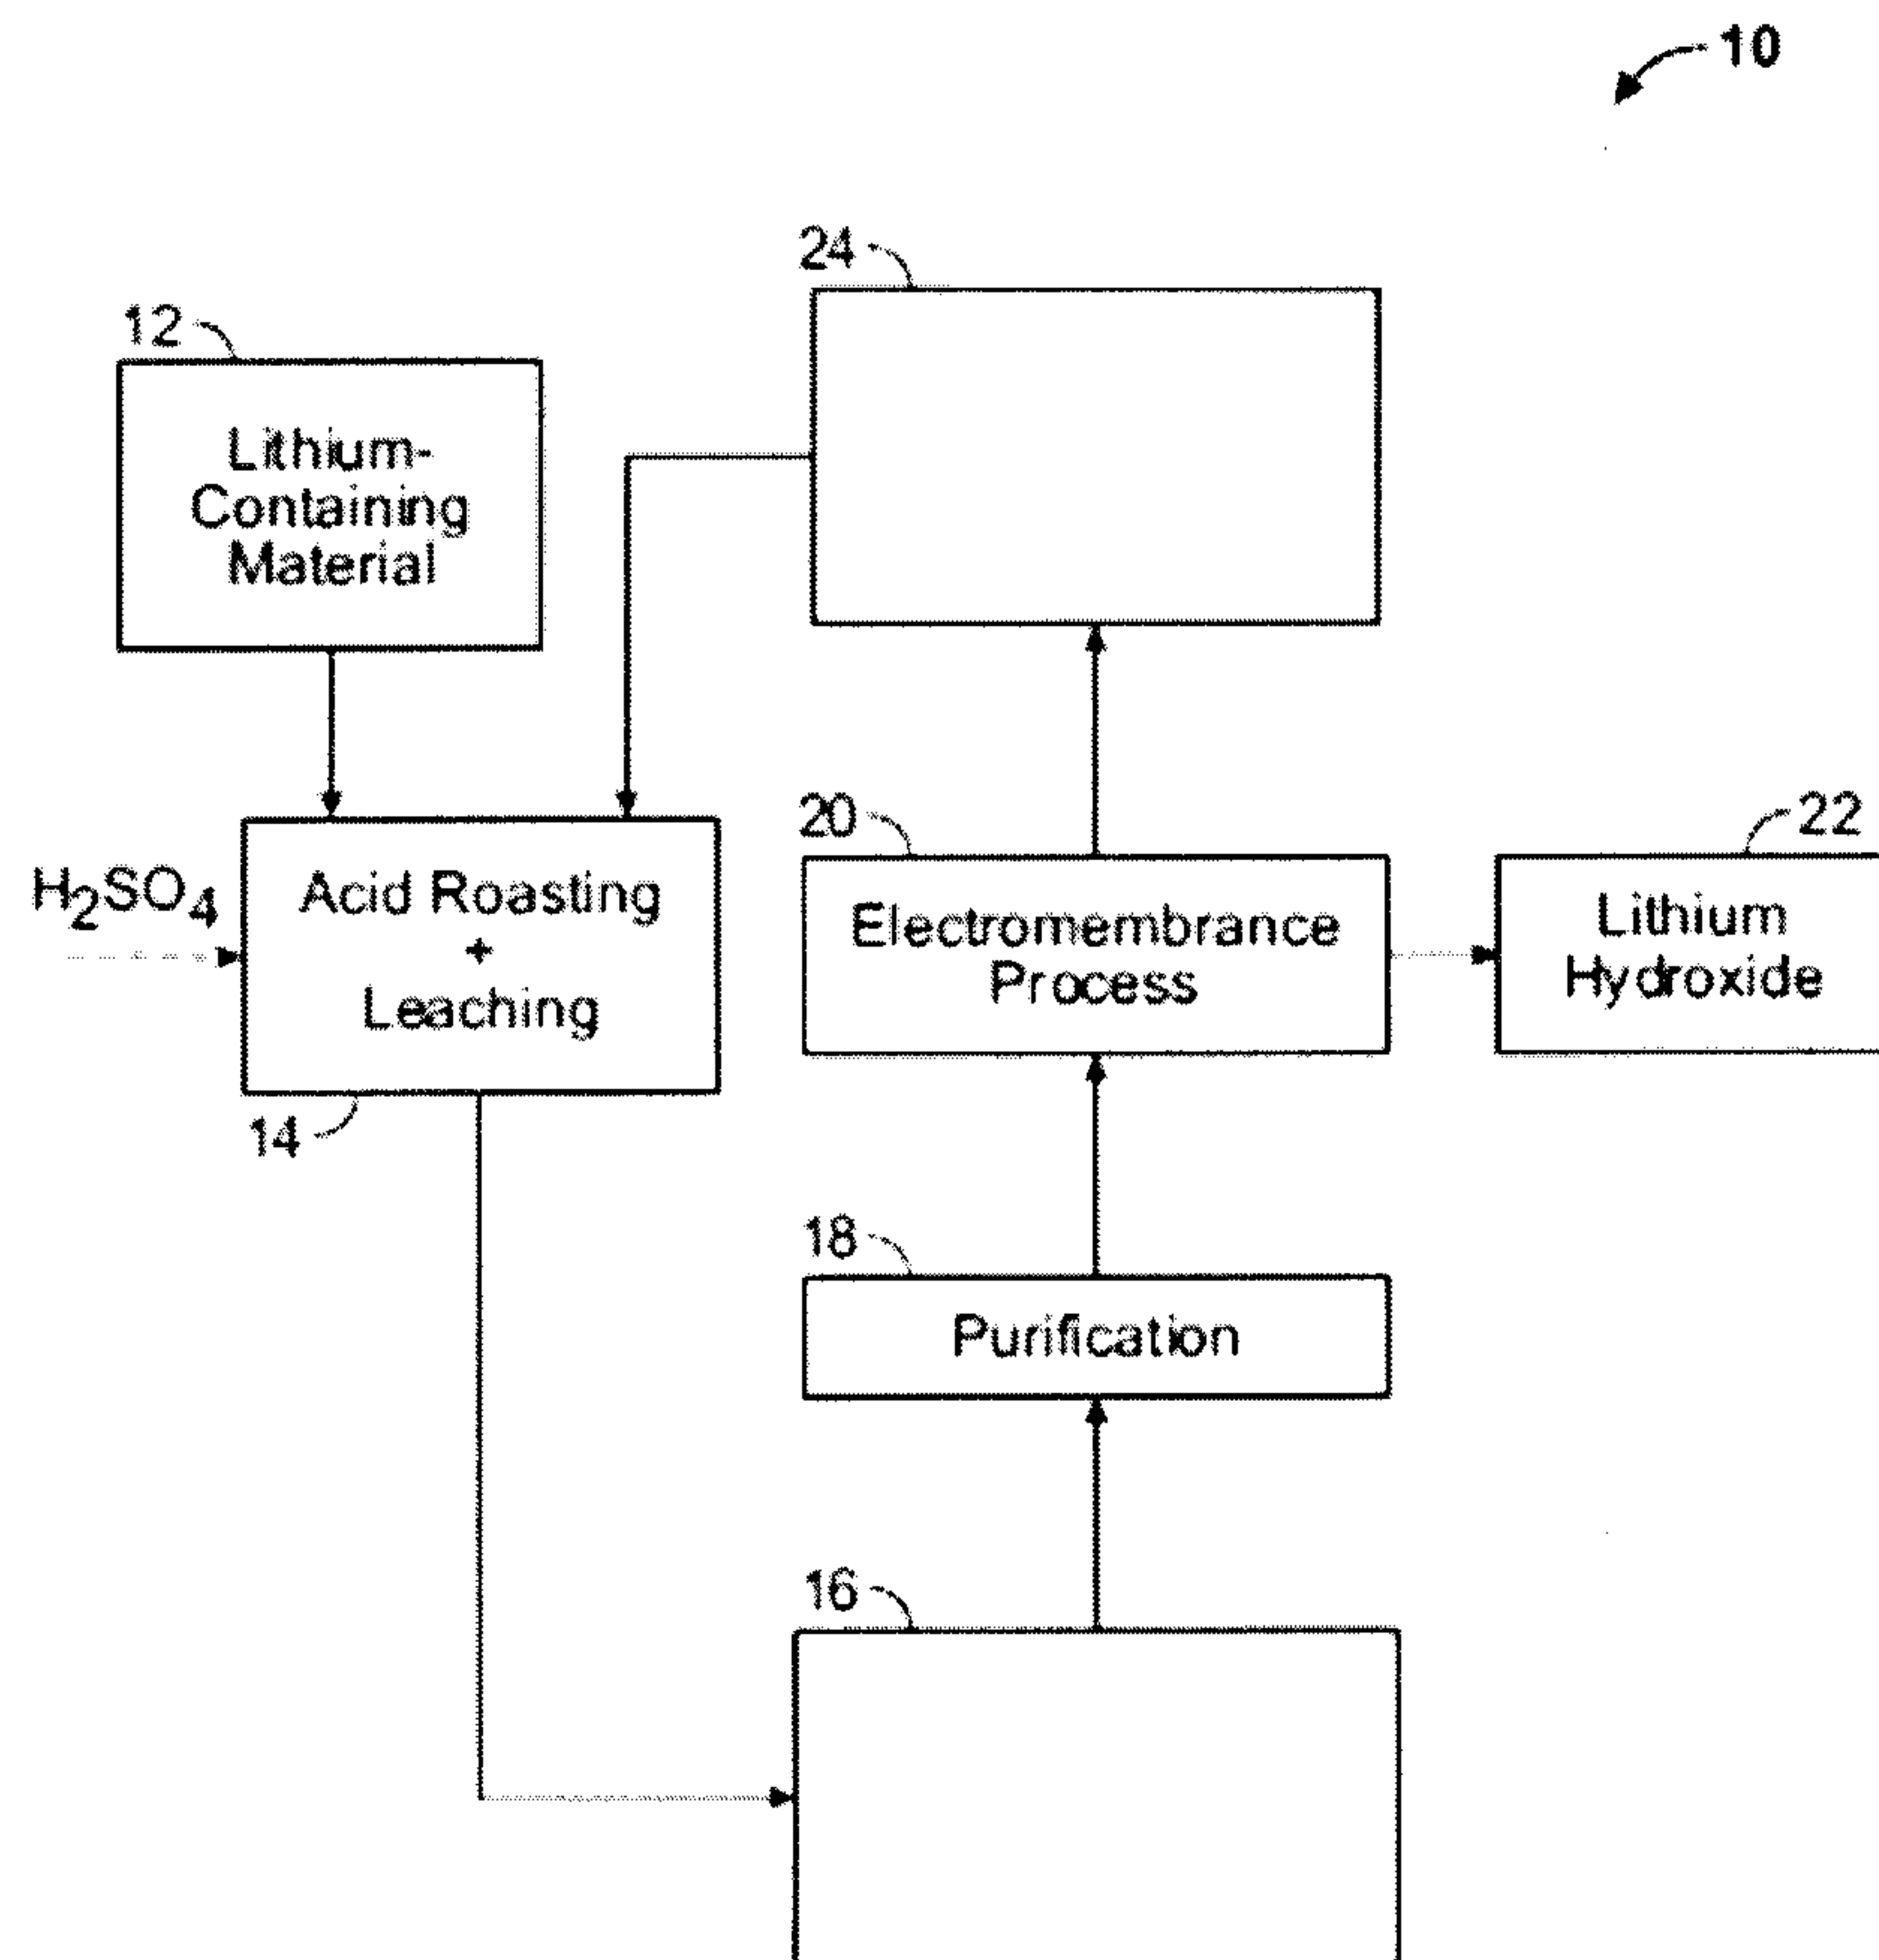


FIG. 1

2/31

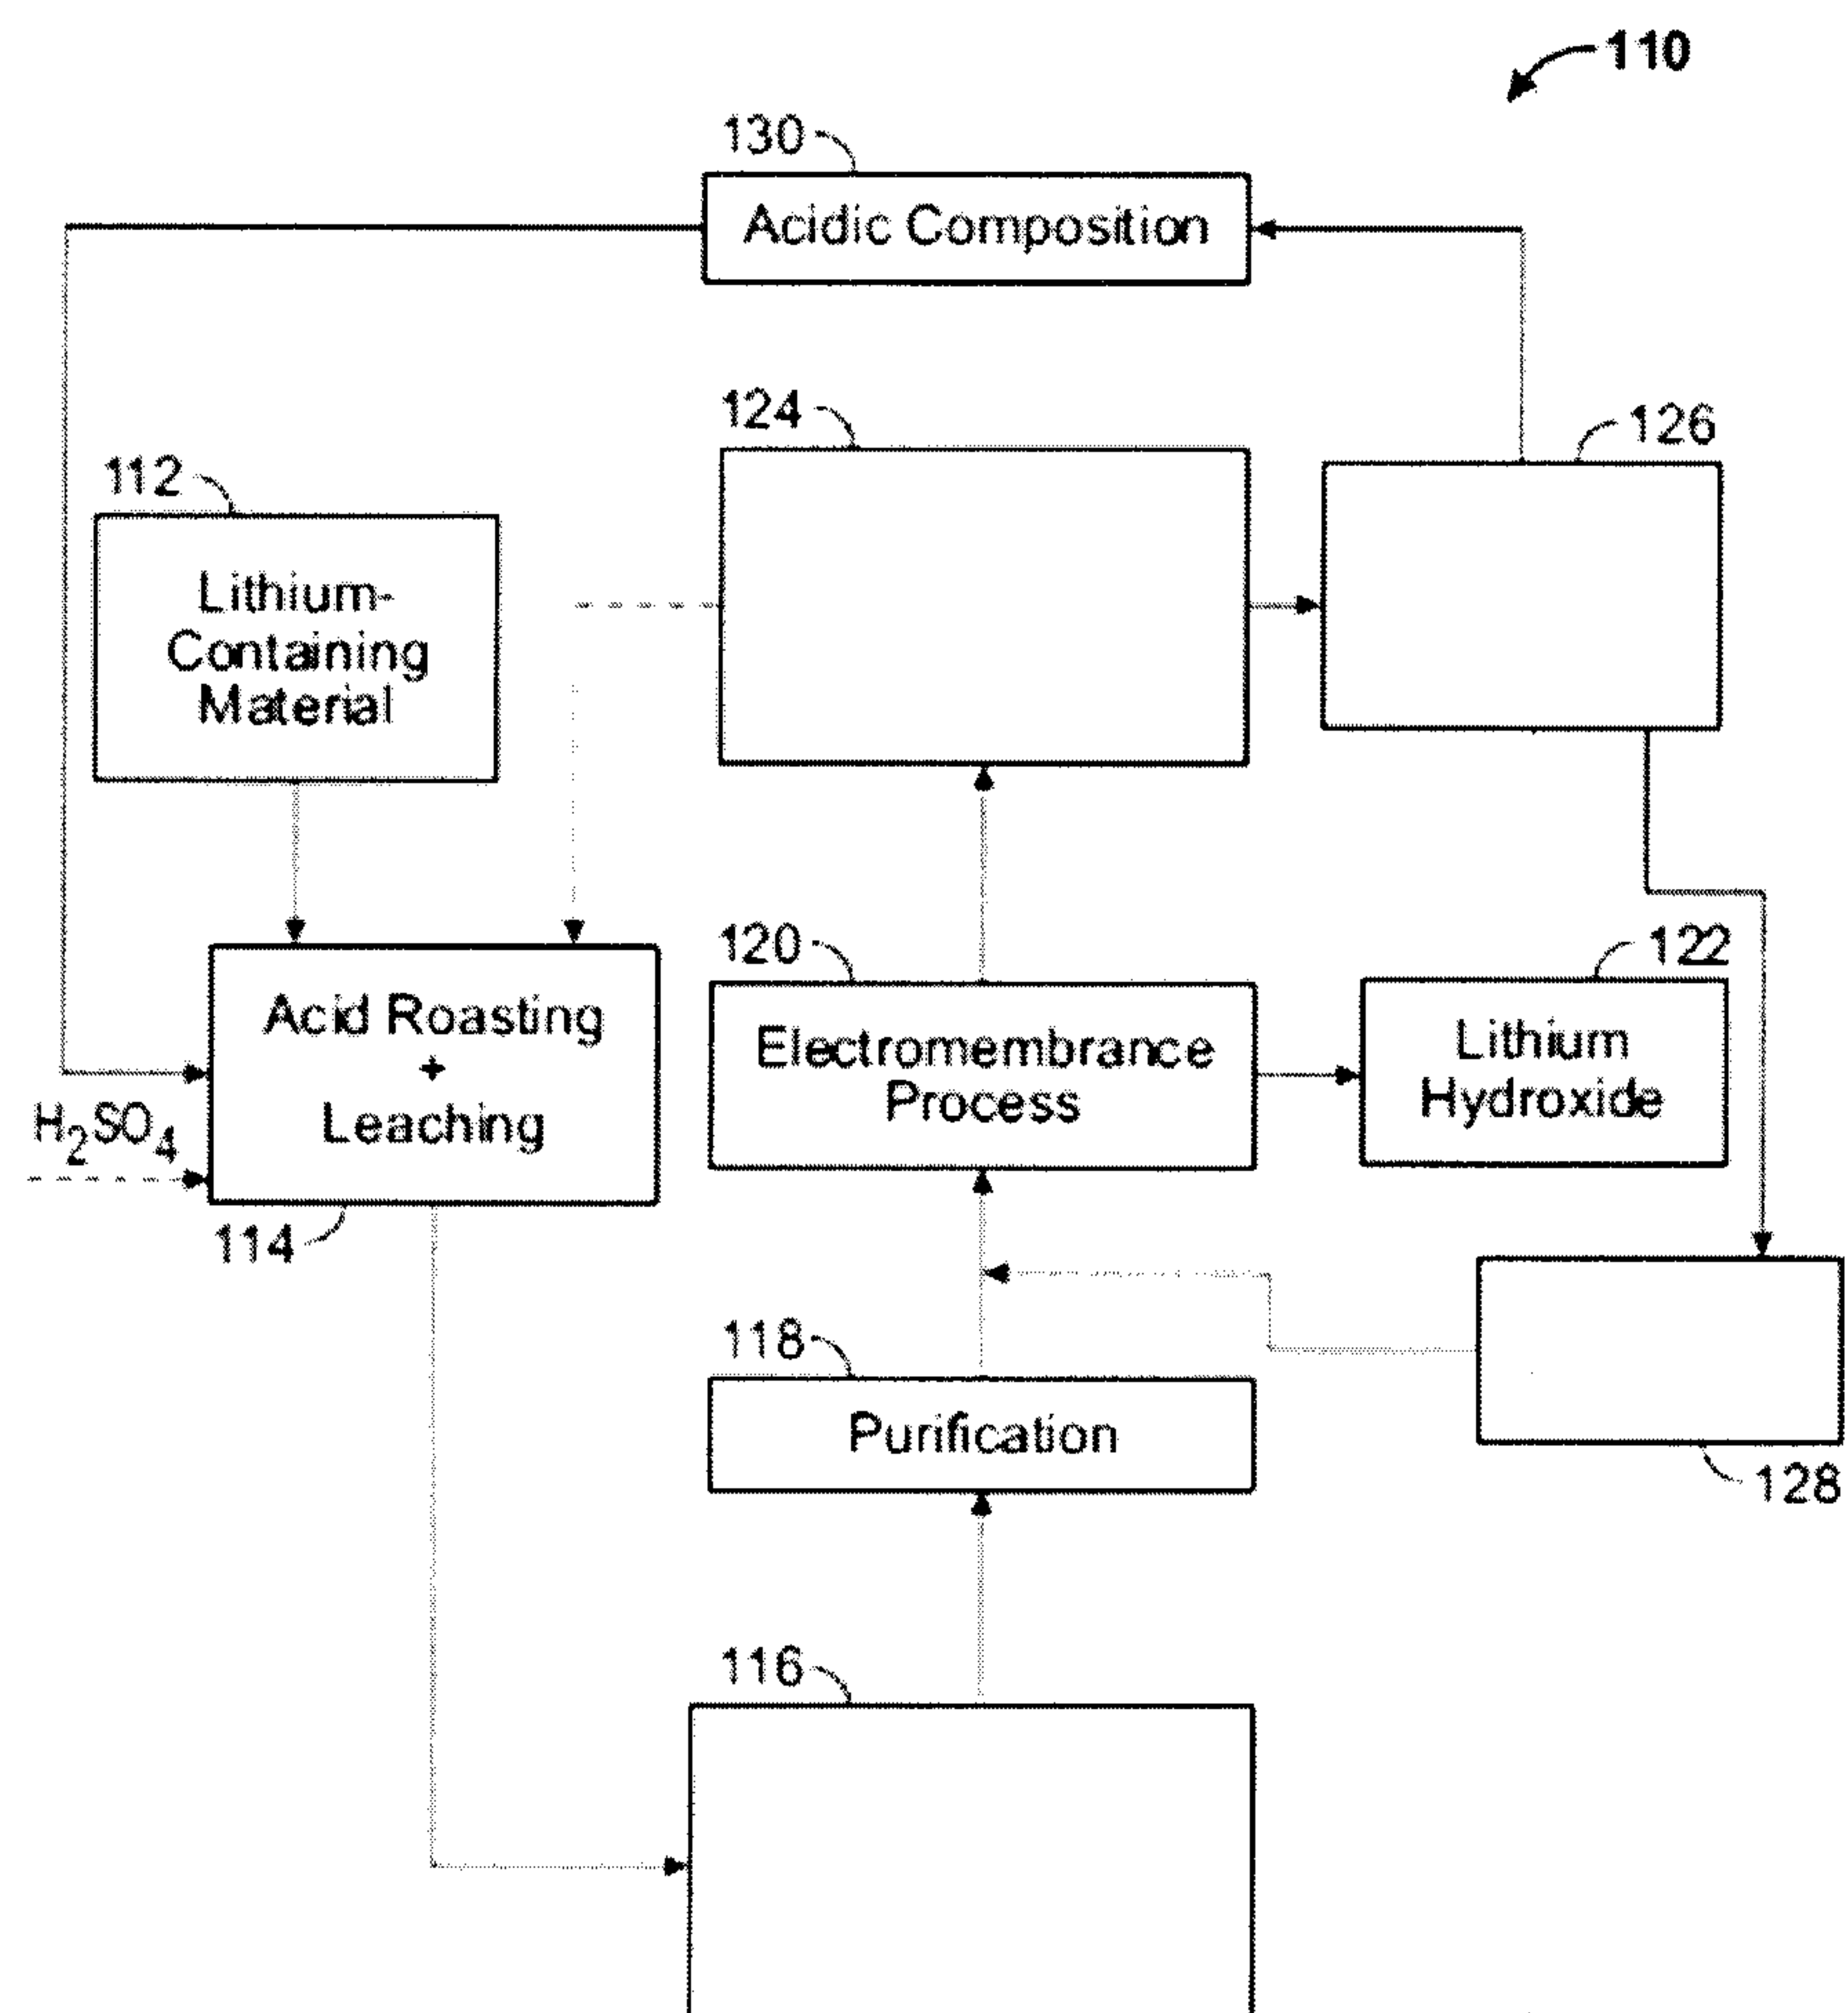


FIG. 2

3/31

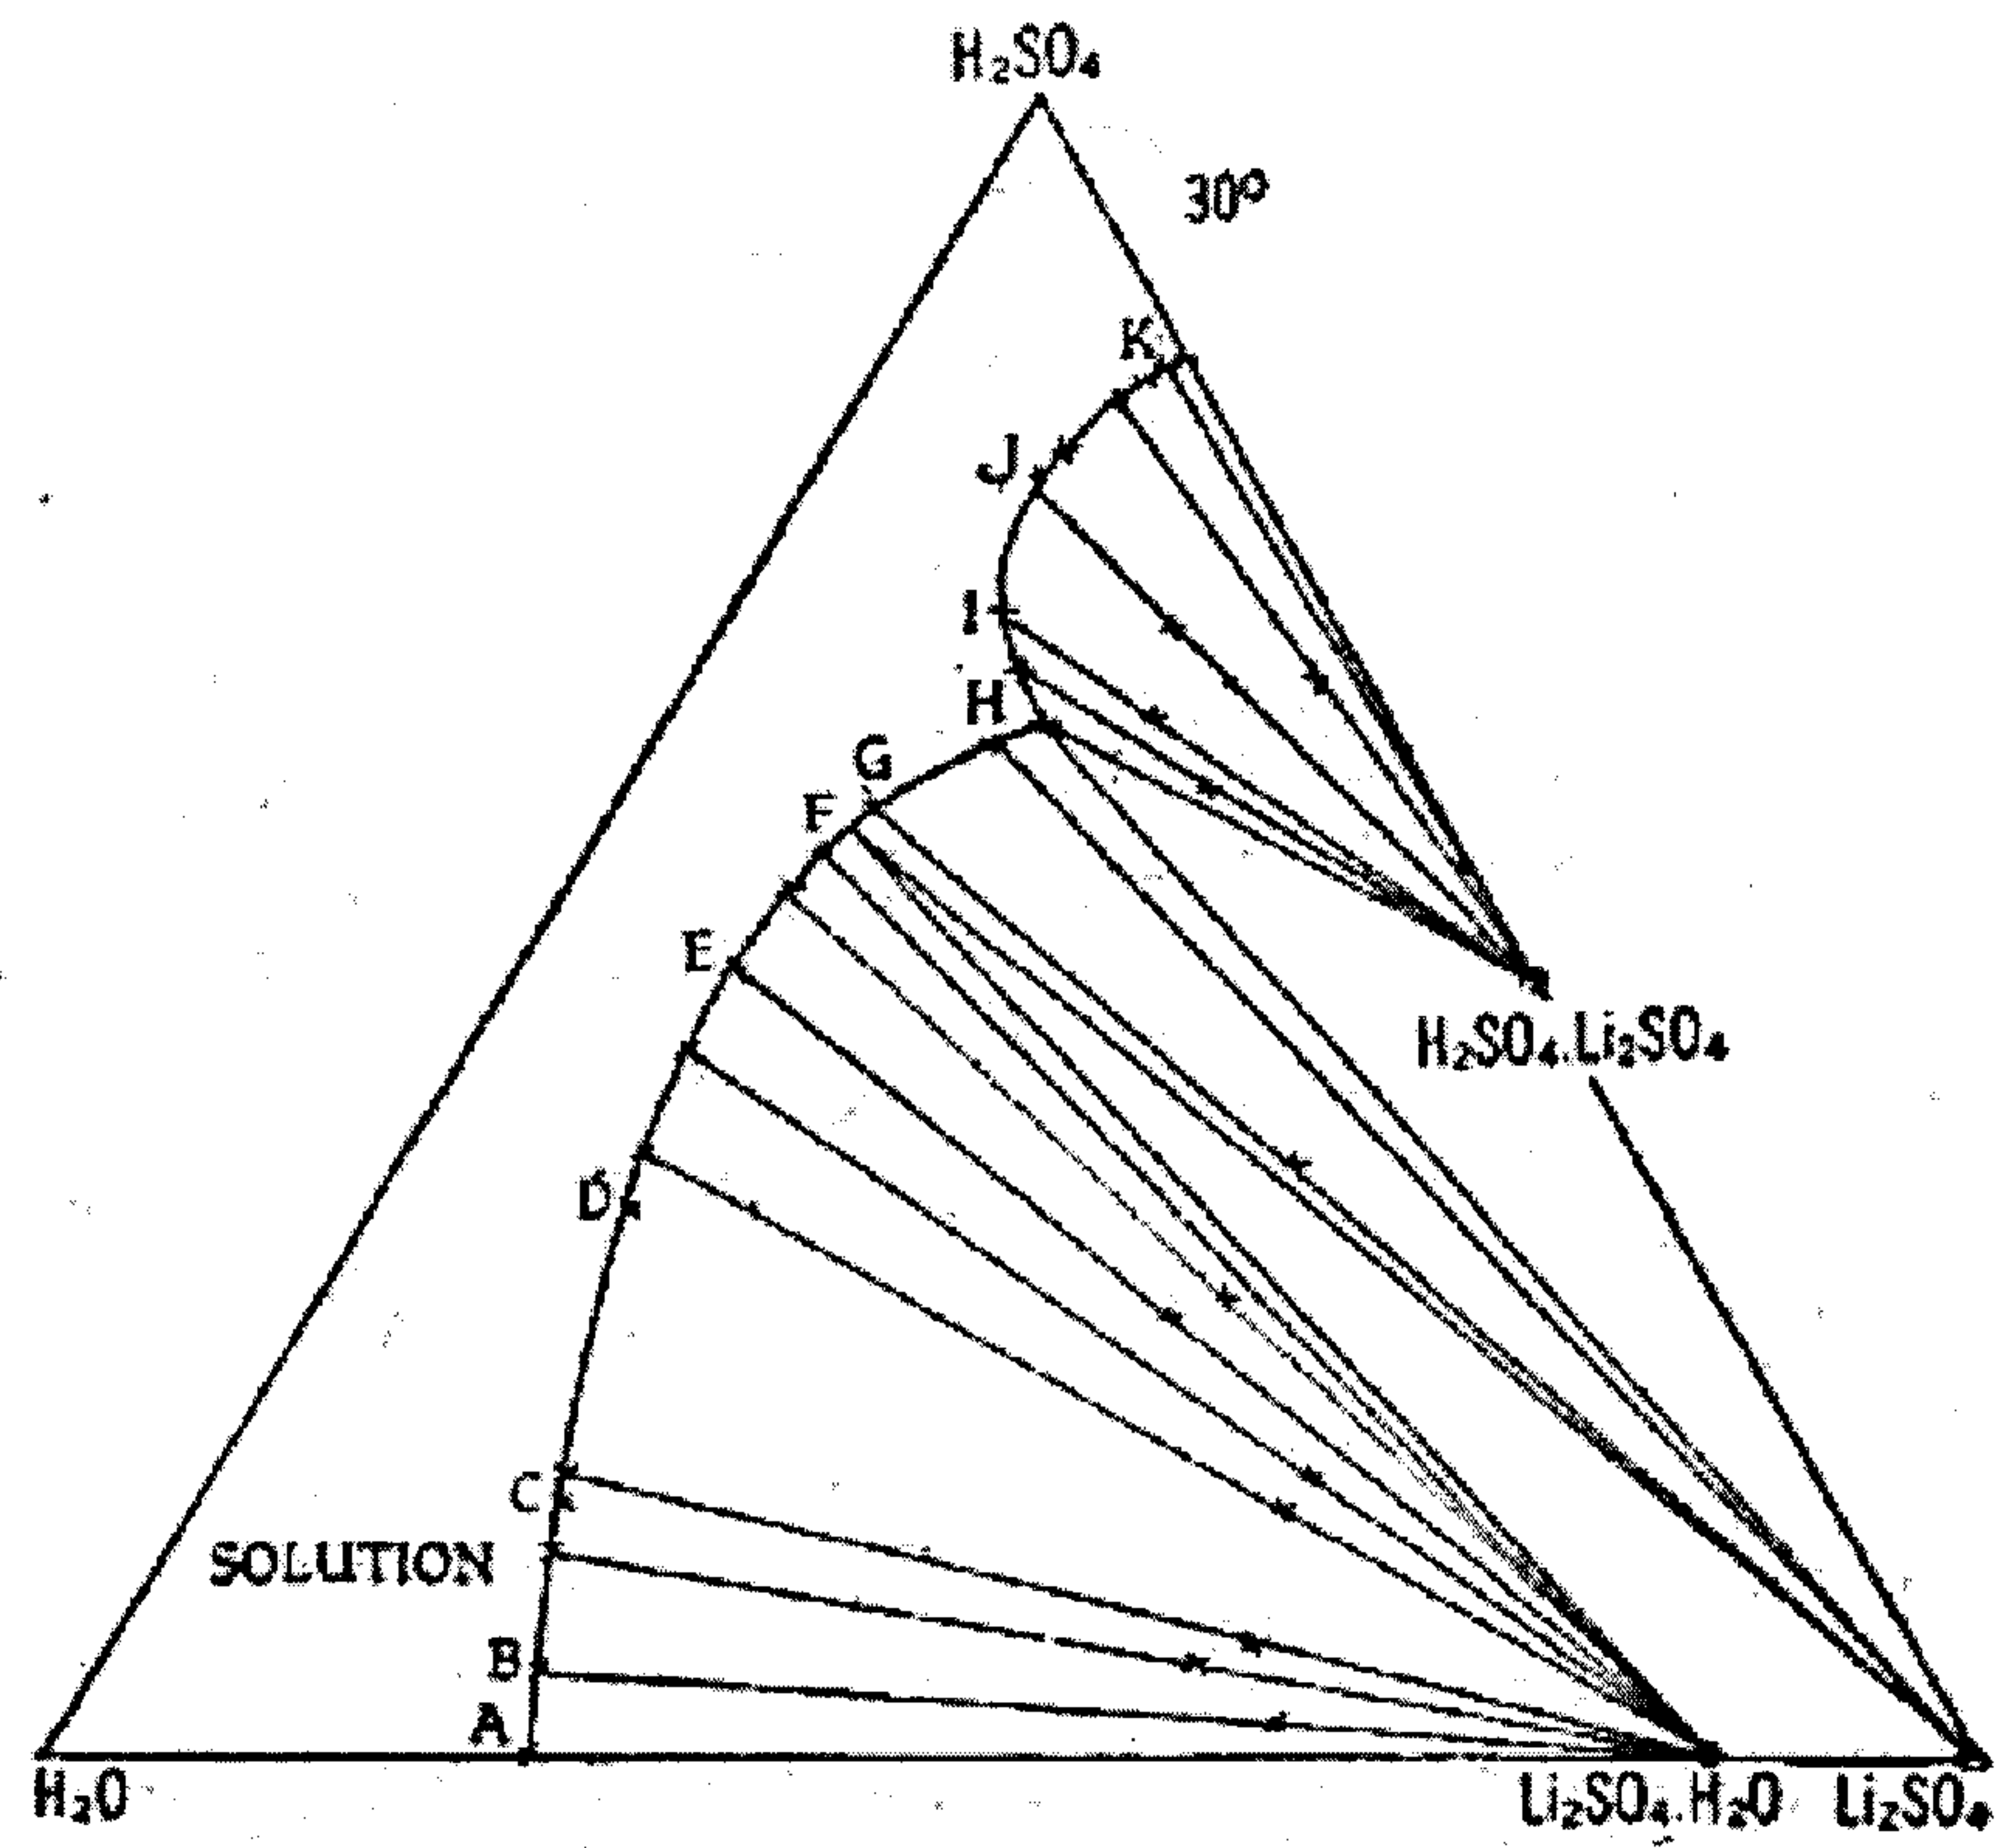


FIG. 3
PRIOR ART

4/31

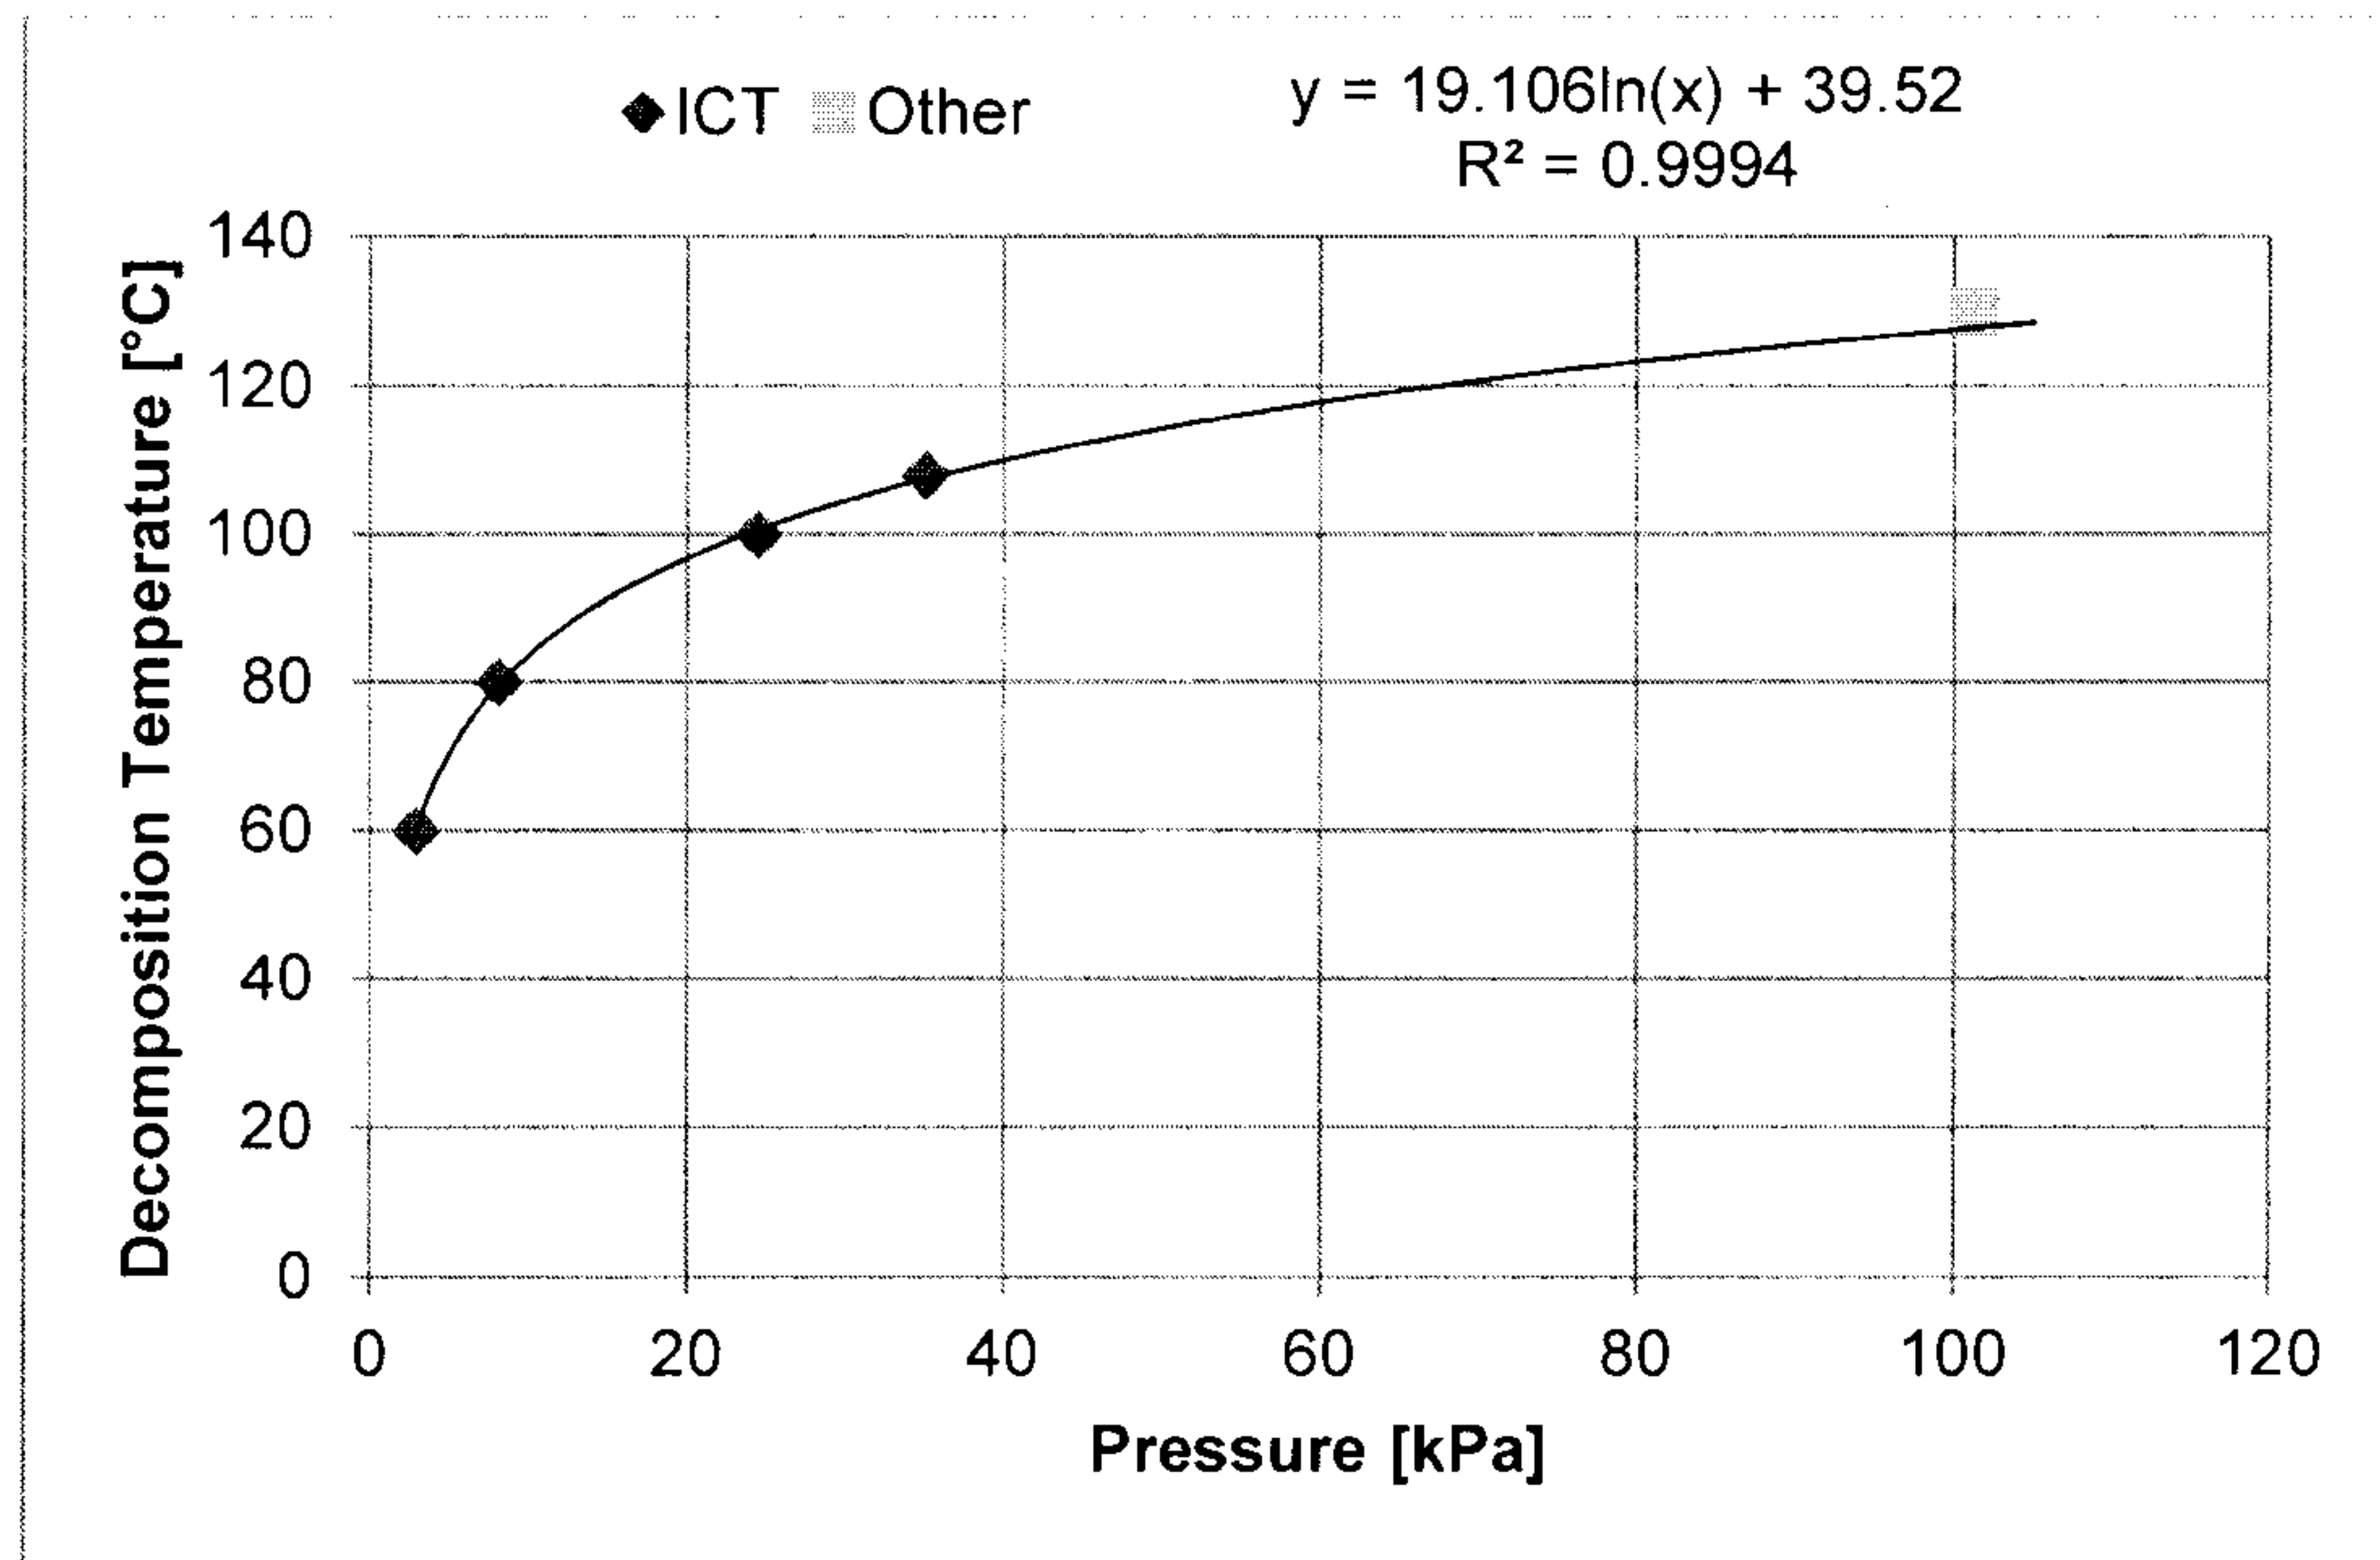


FIG. 4

5/31

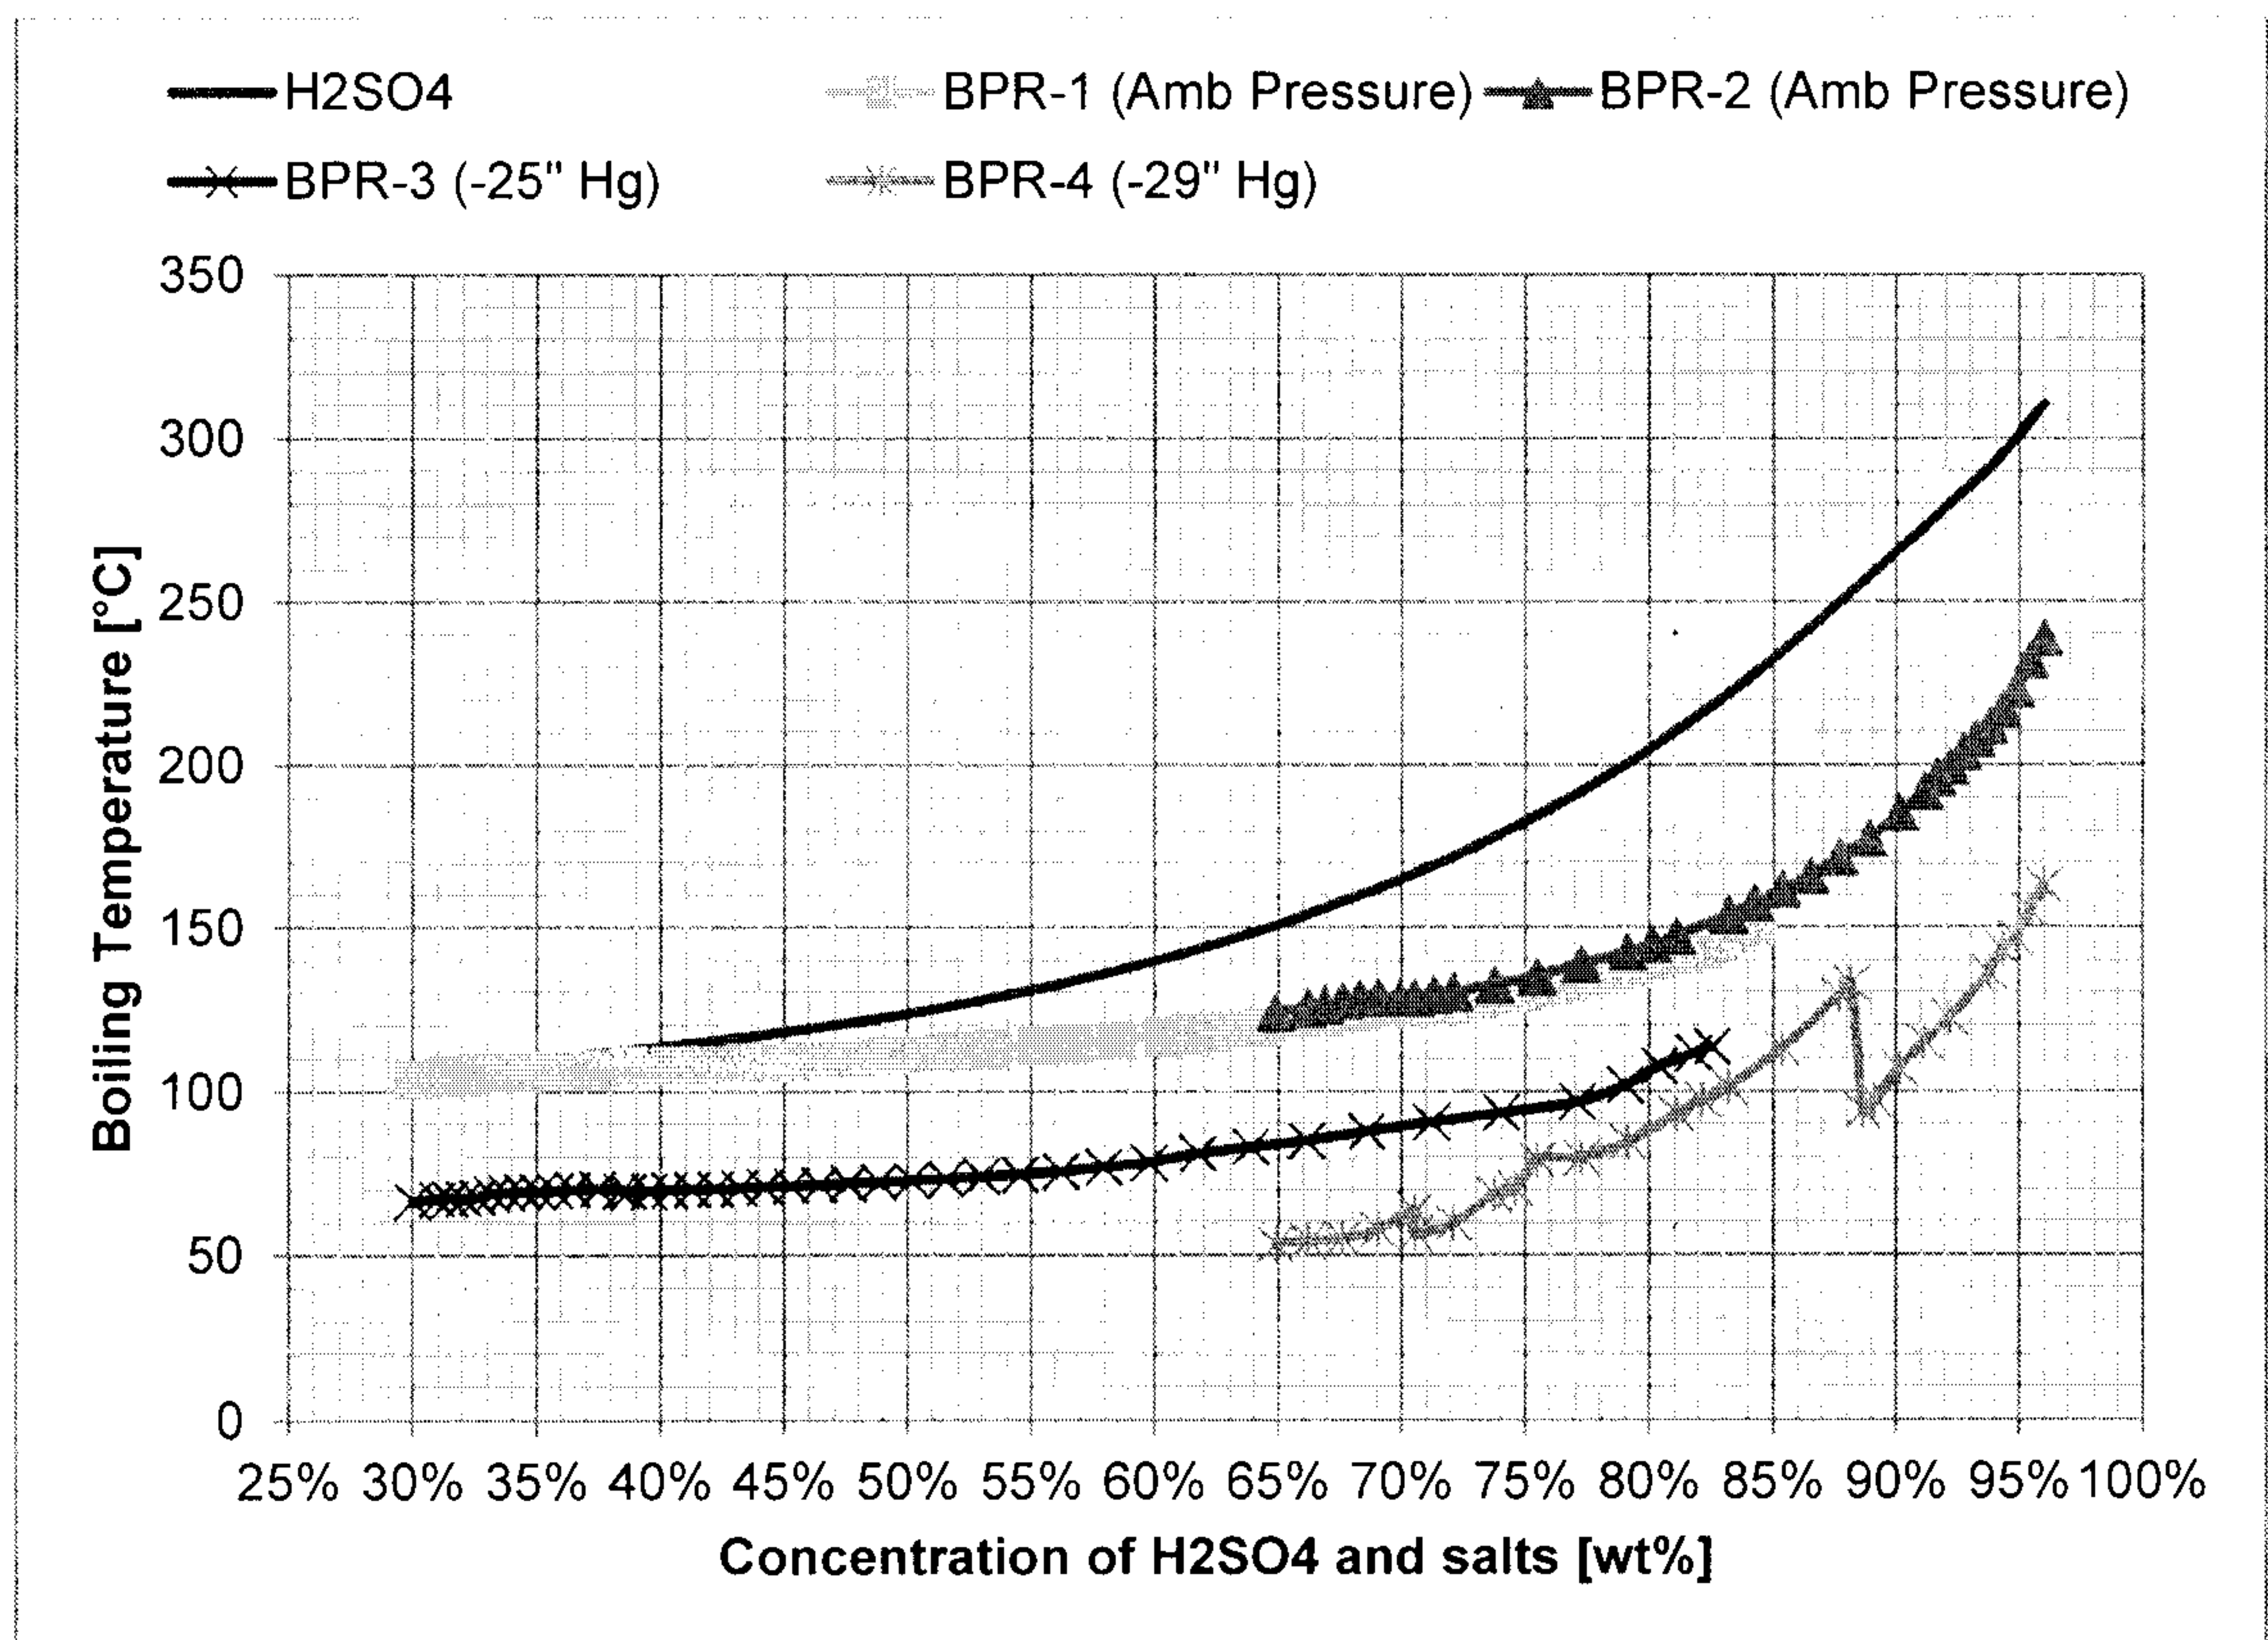


FIG. 5

6/31

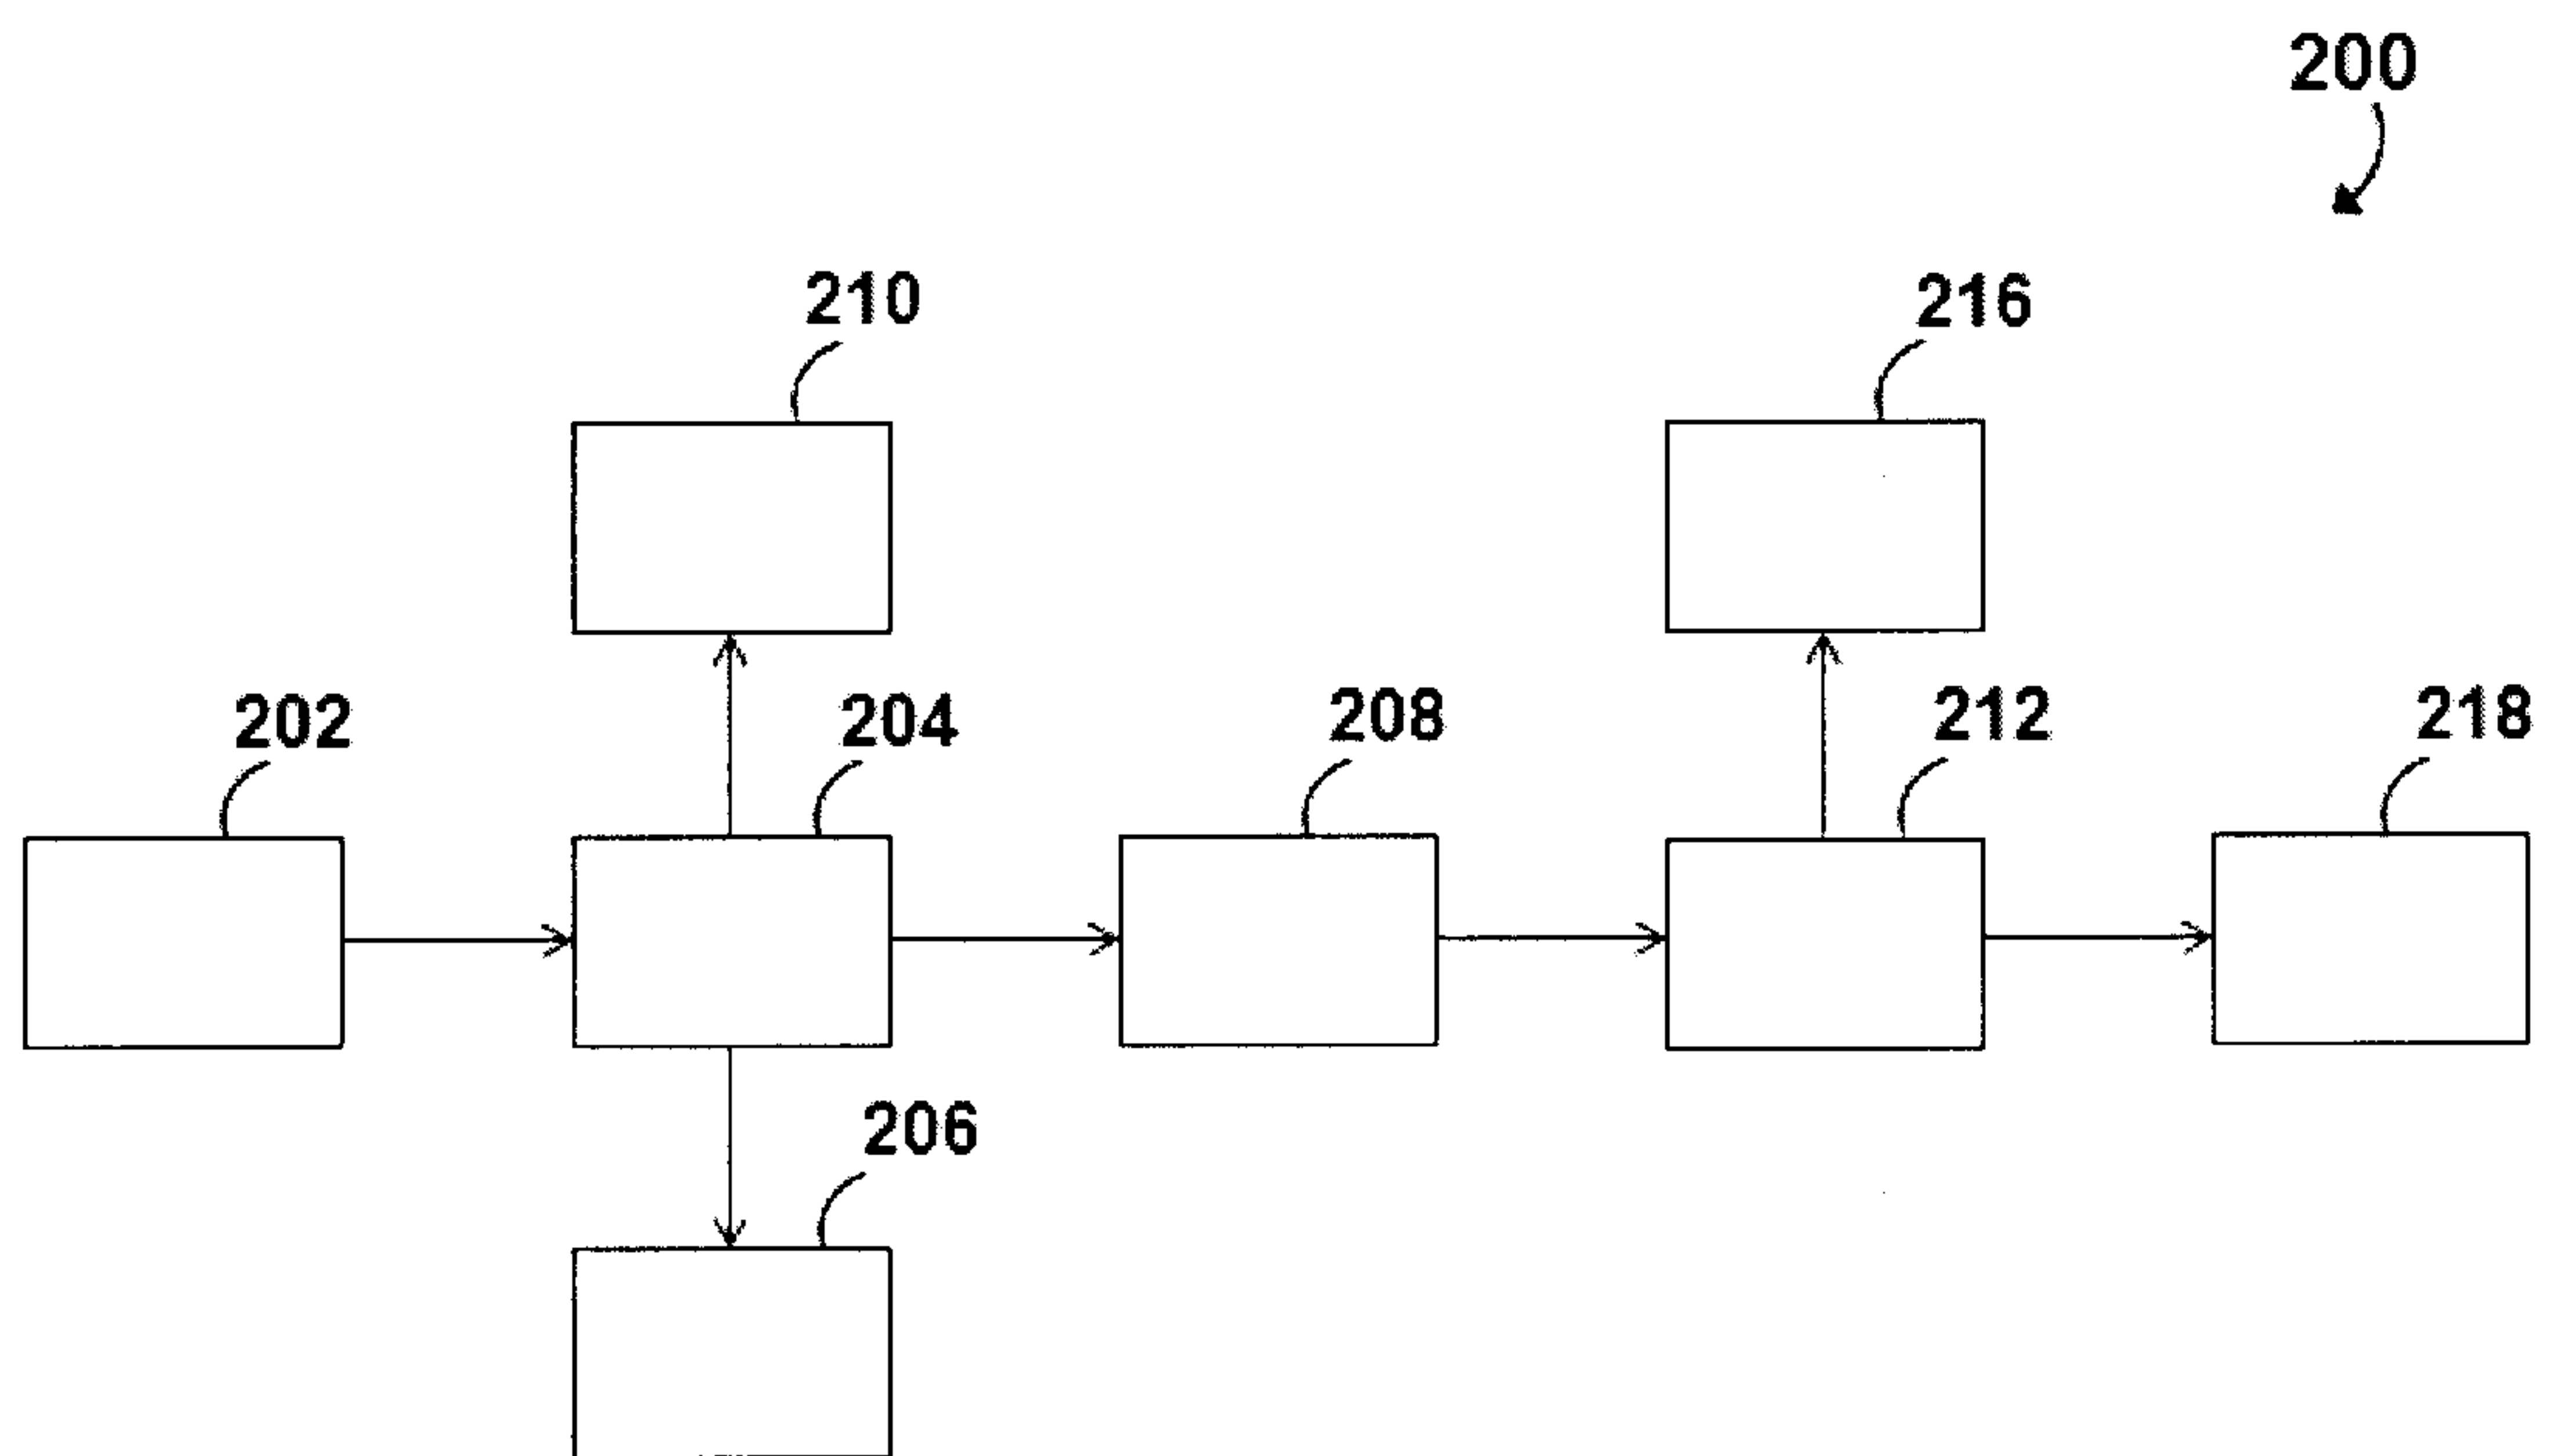


FIG. 6

7/31

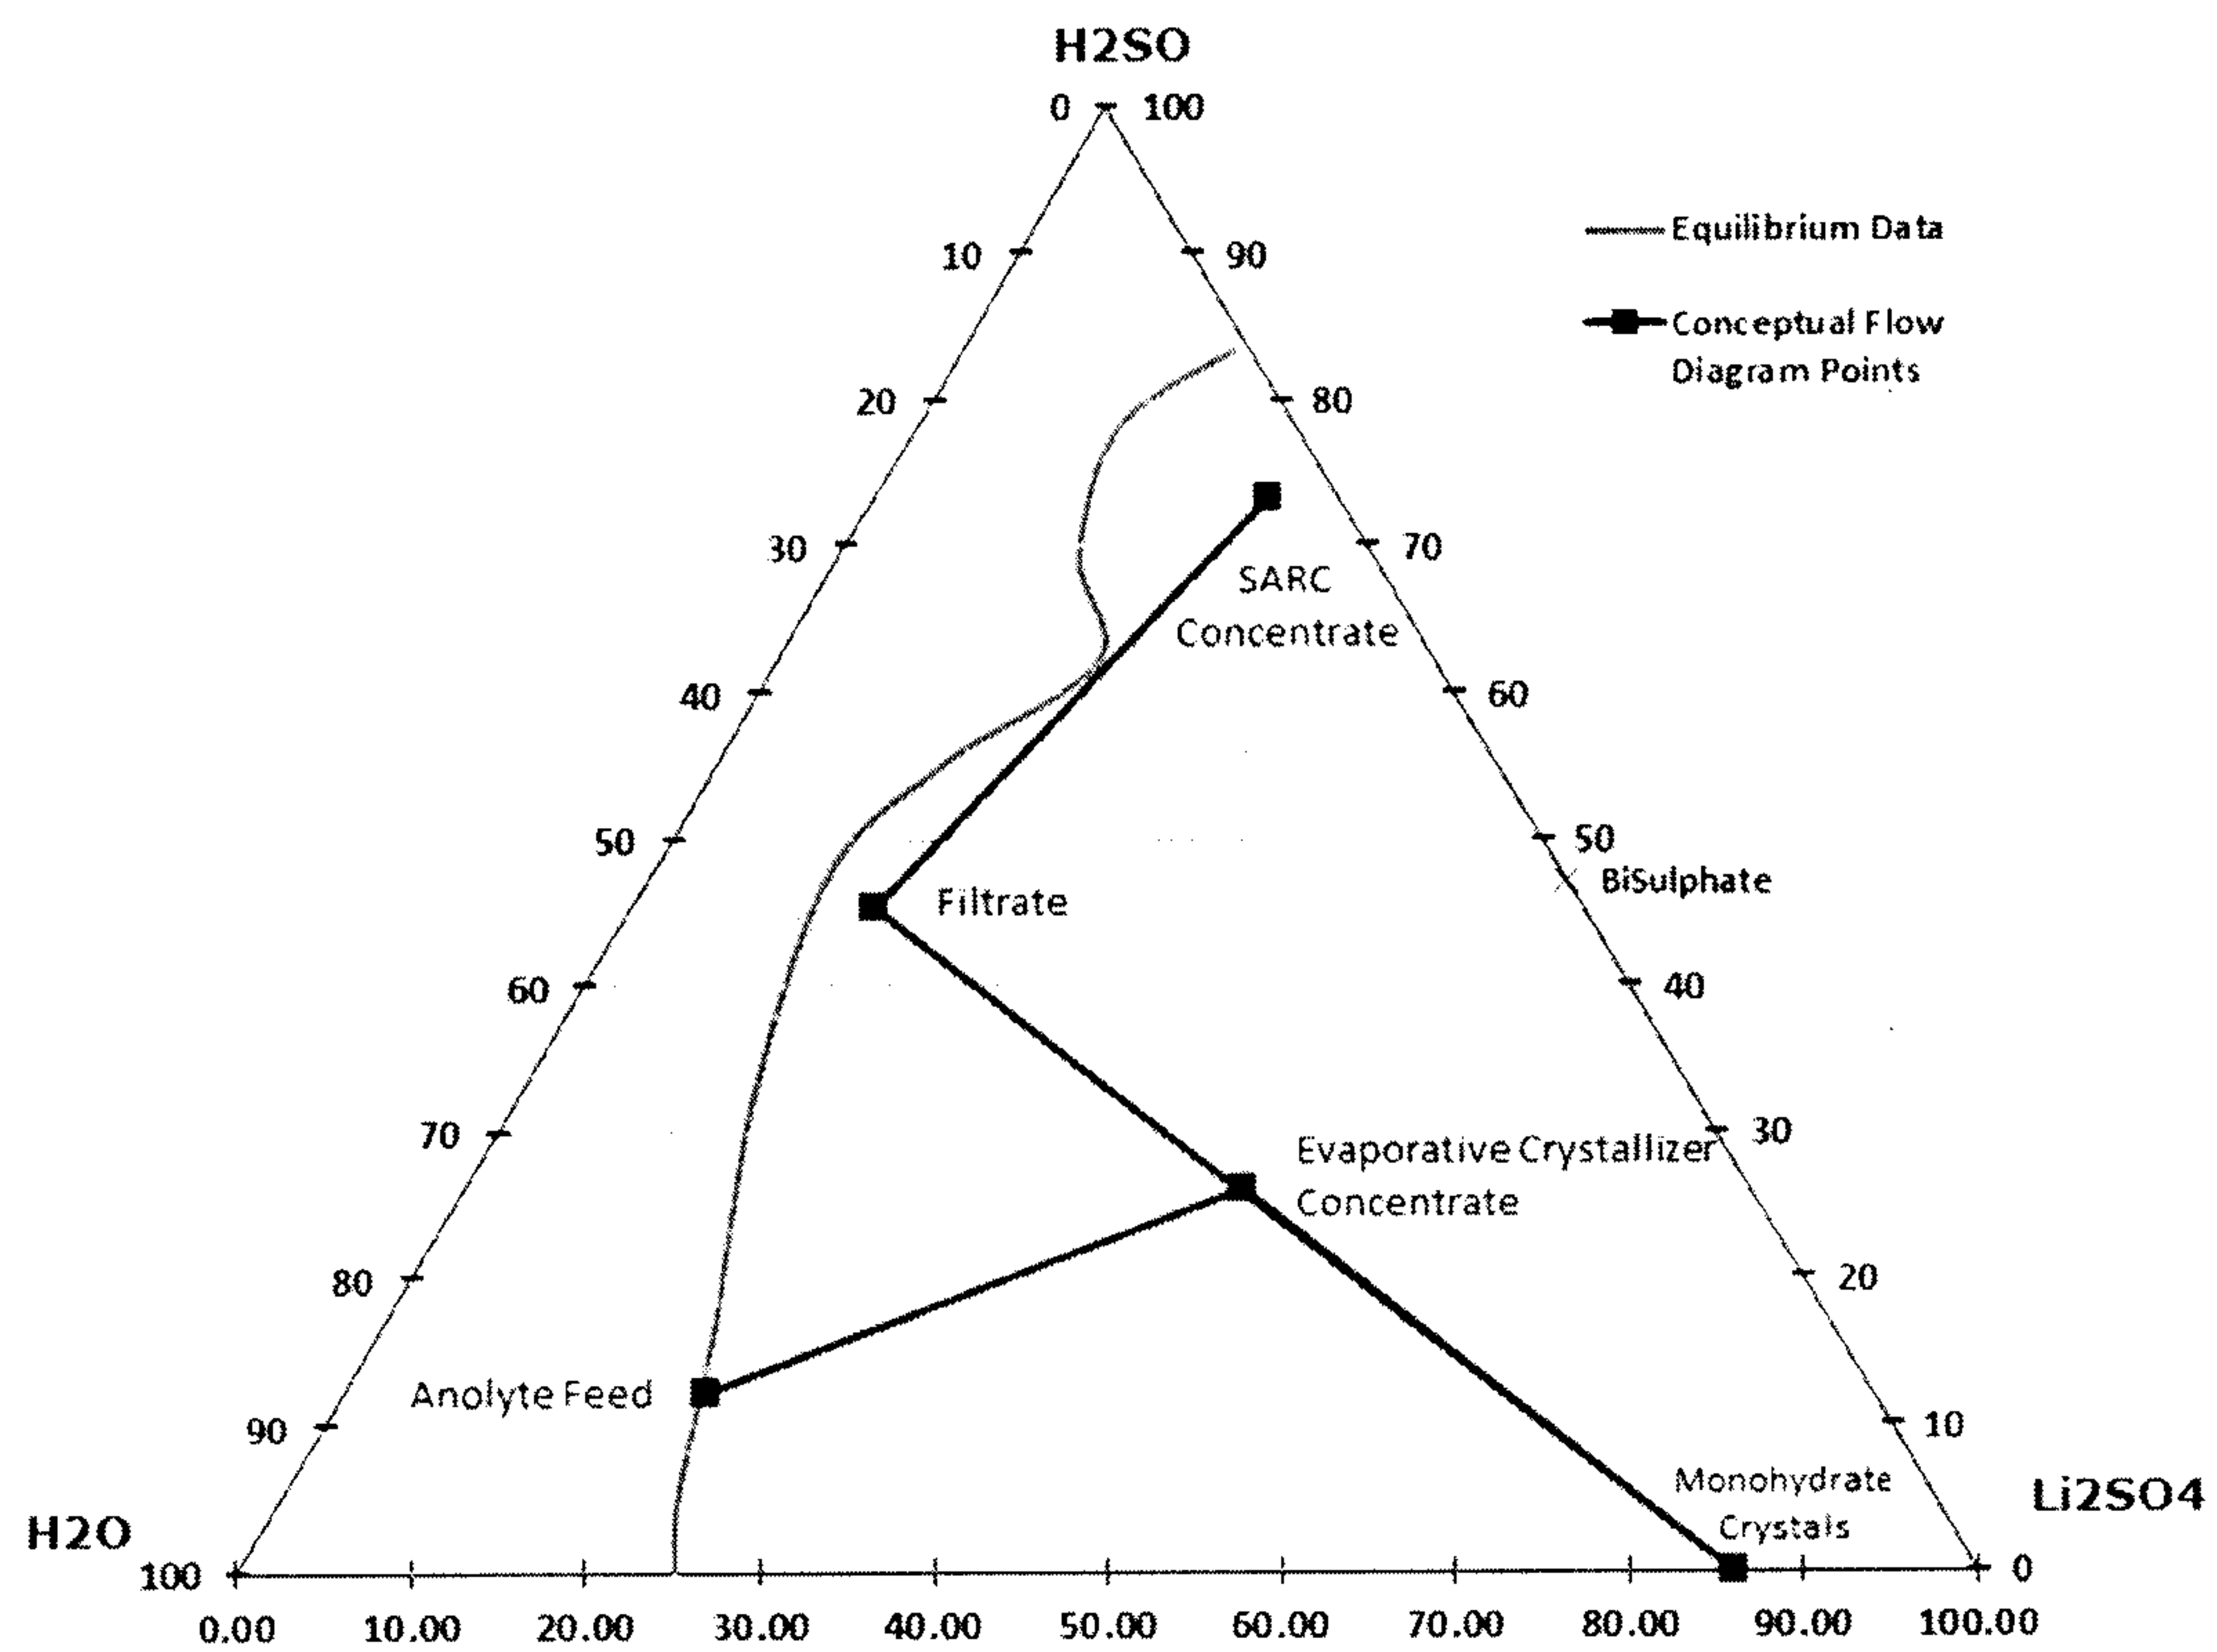


FIG. 7

8/31

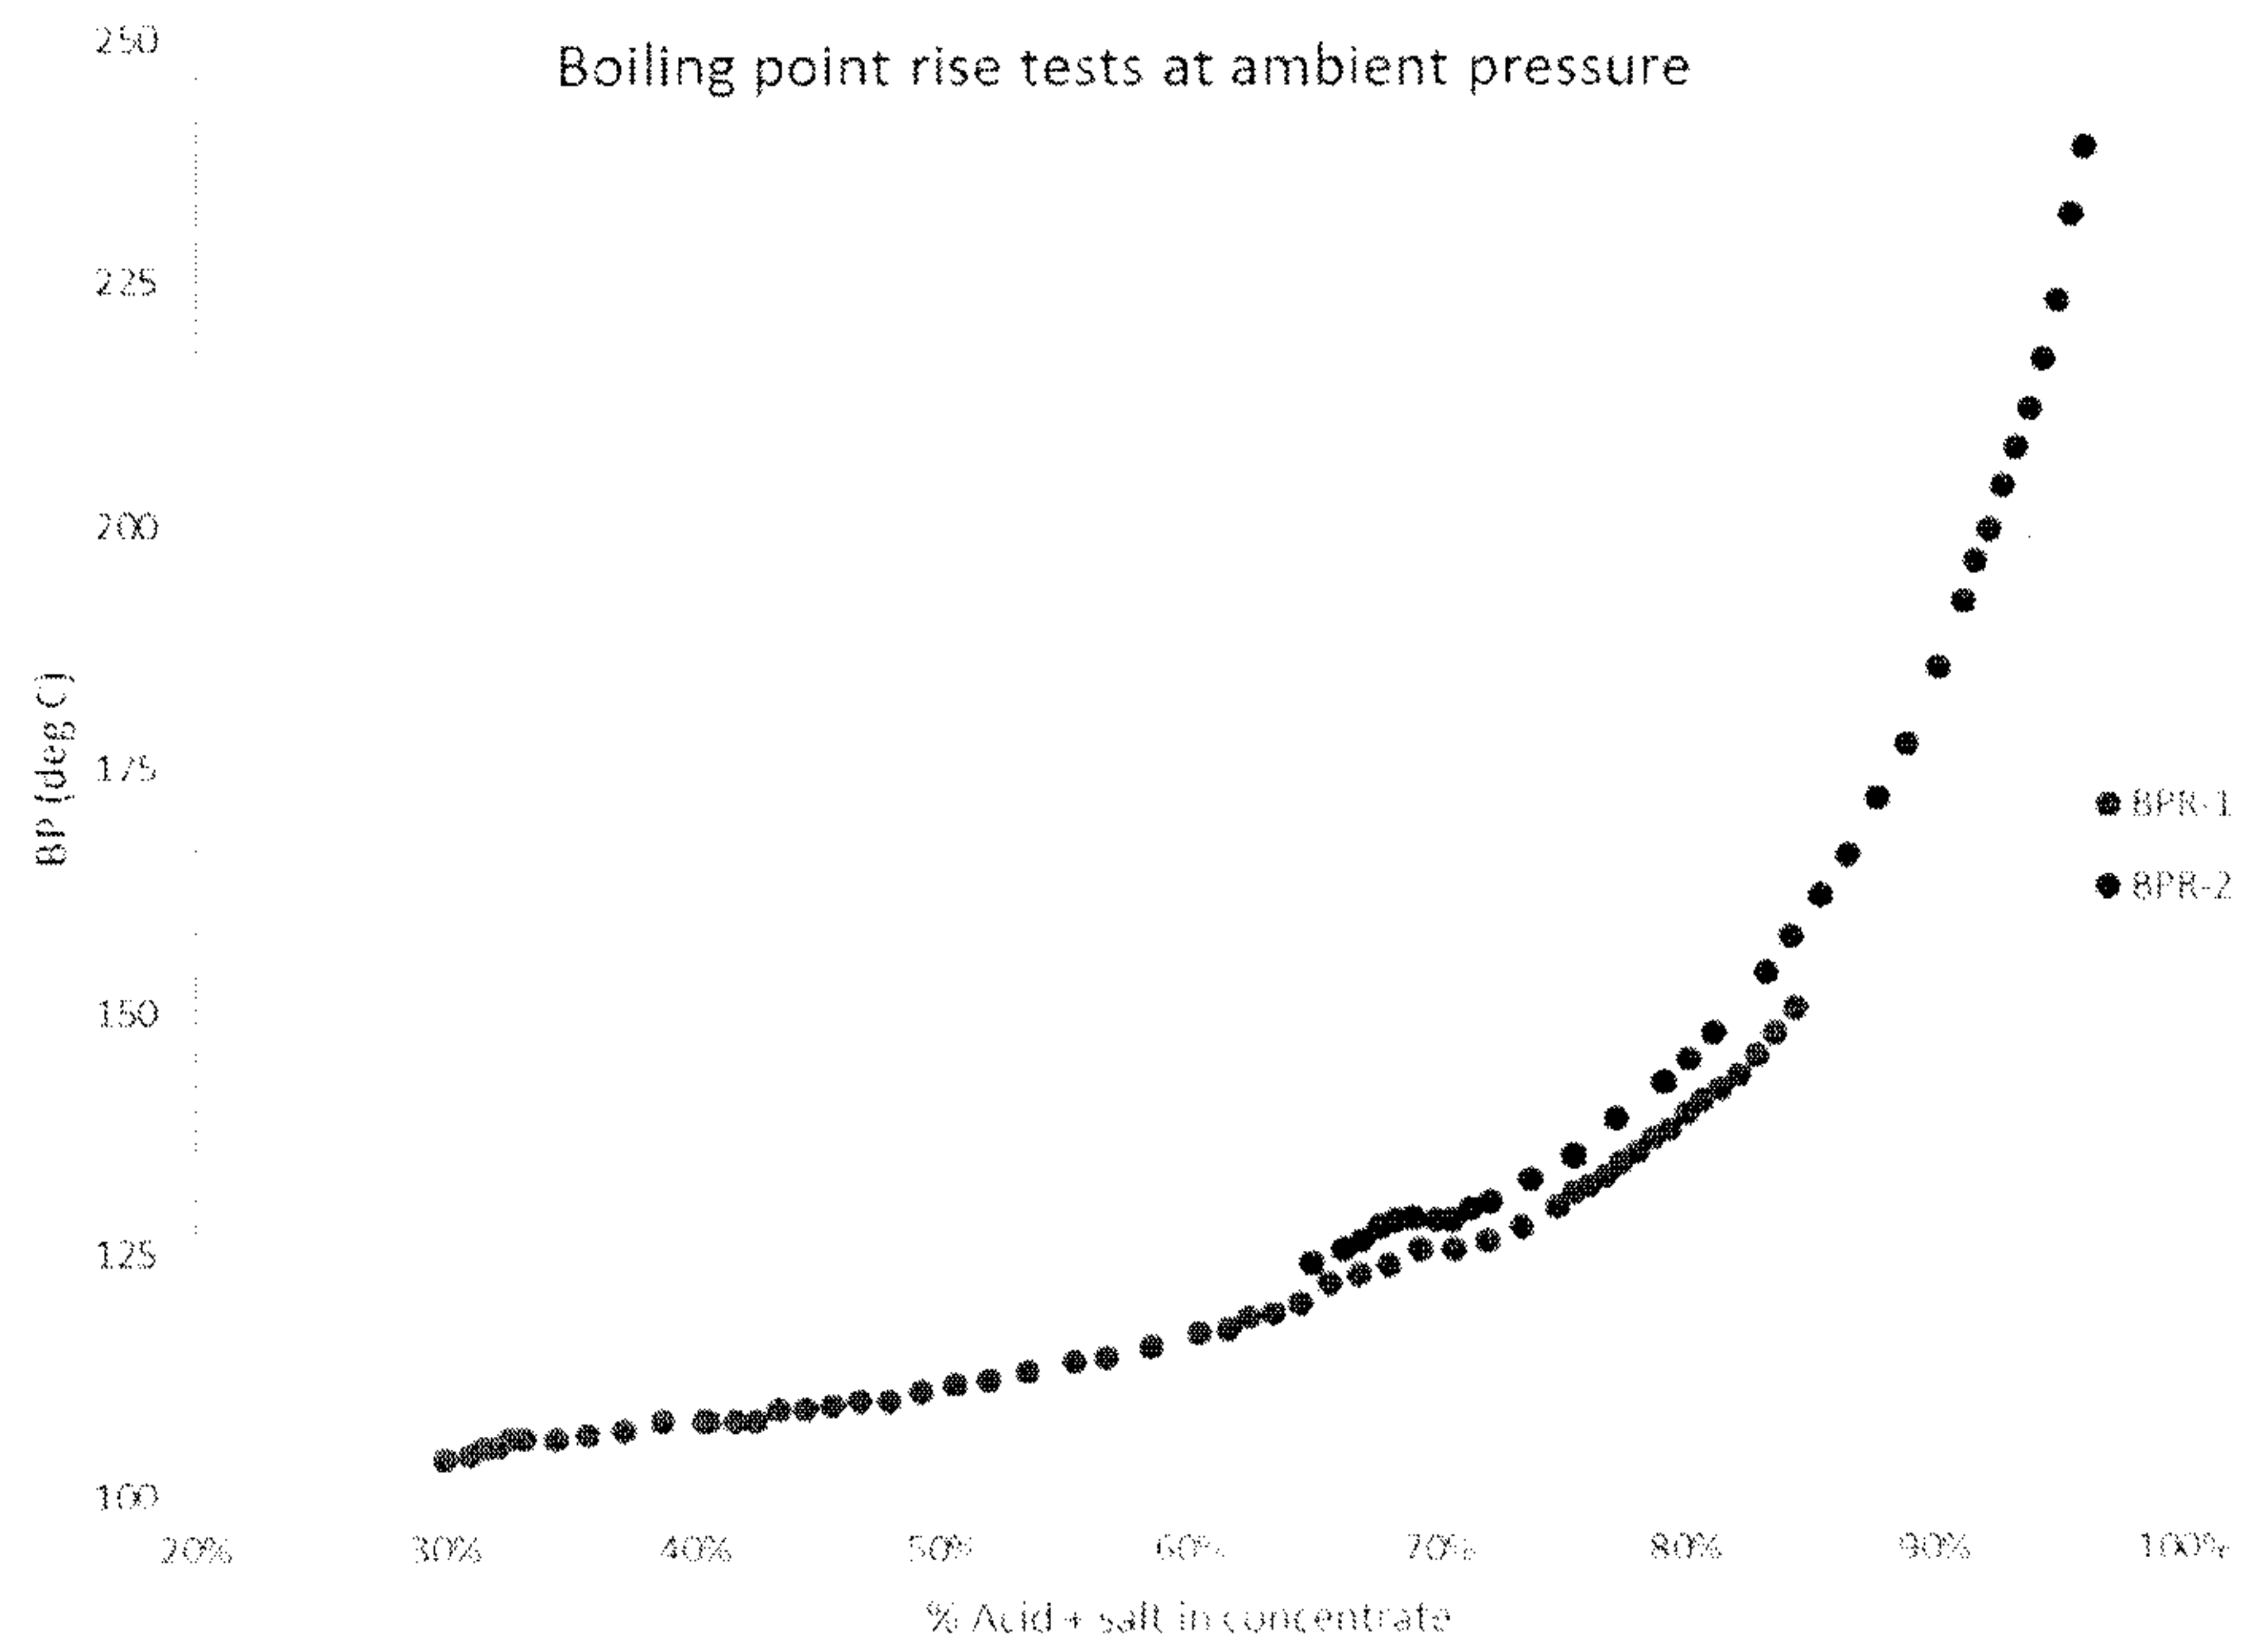
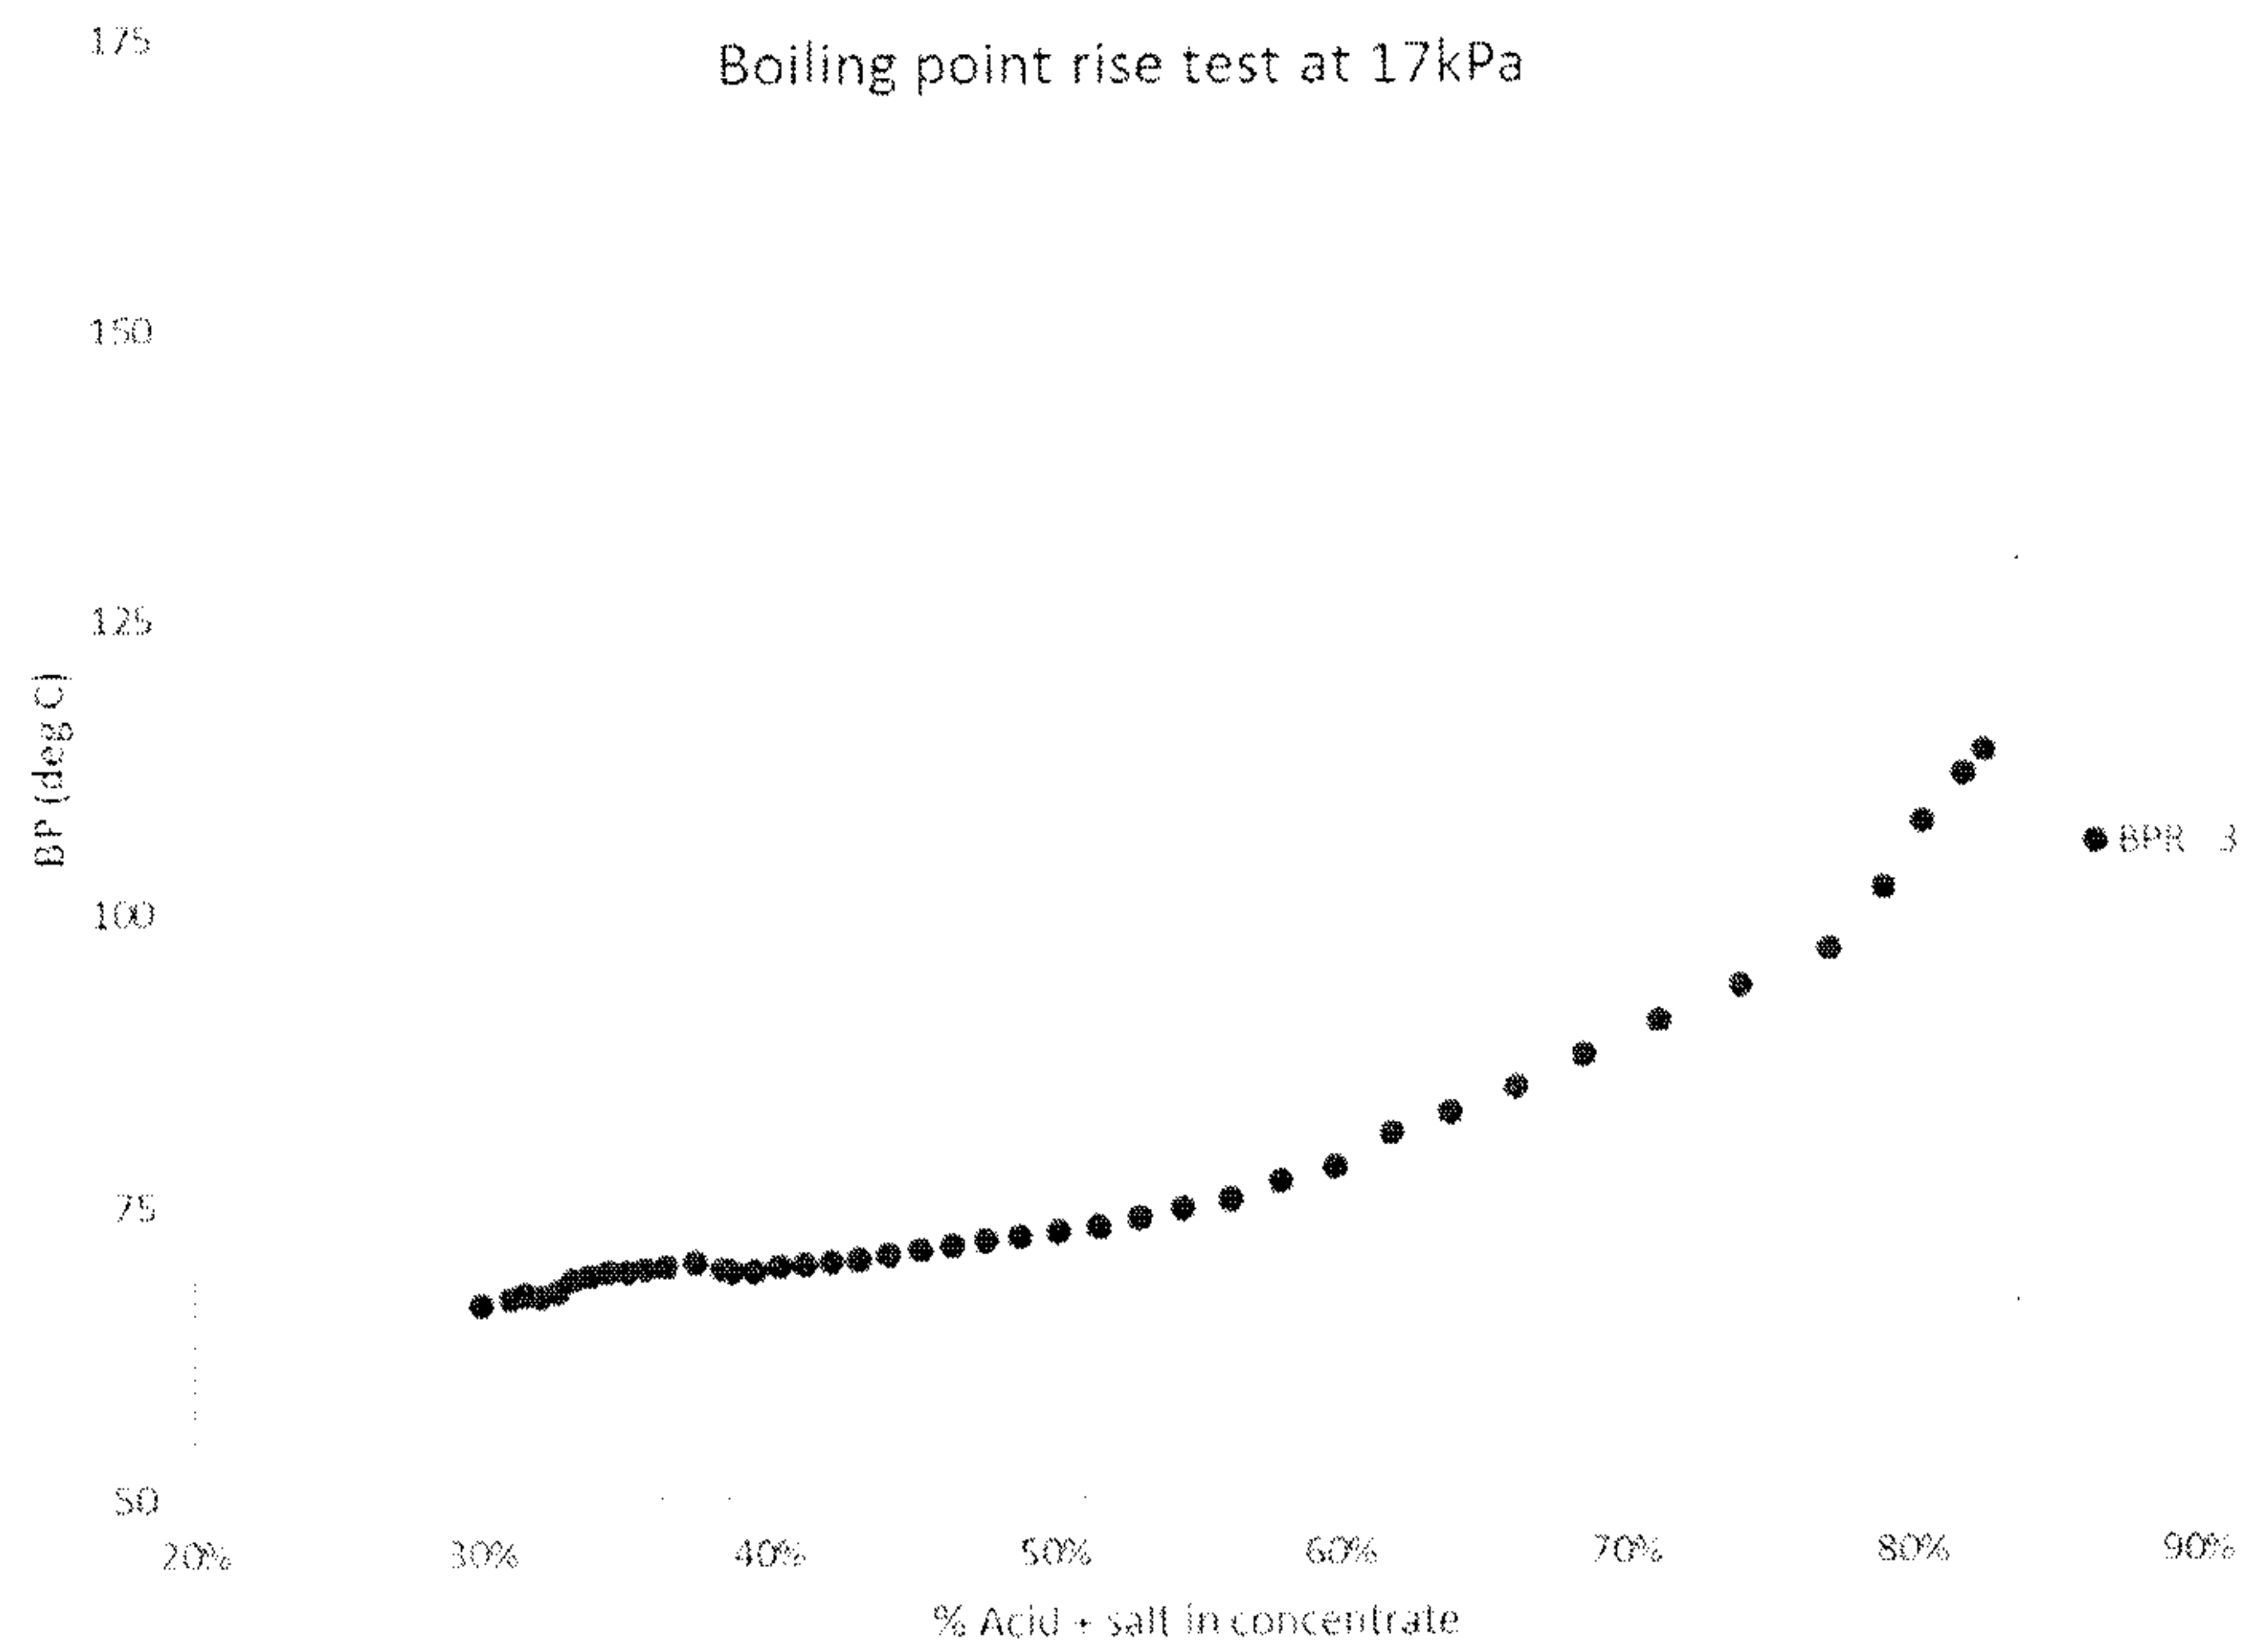
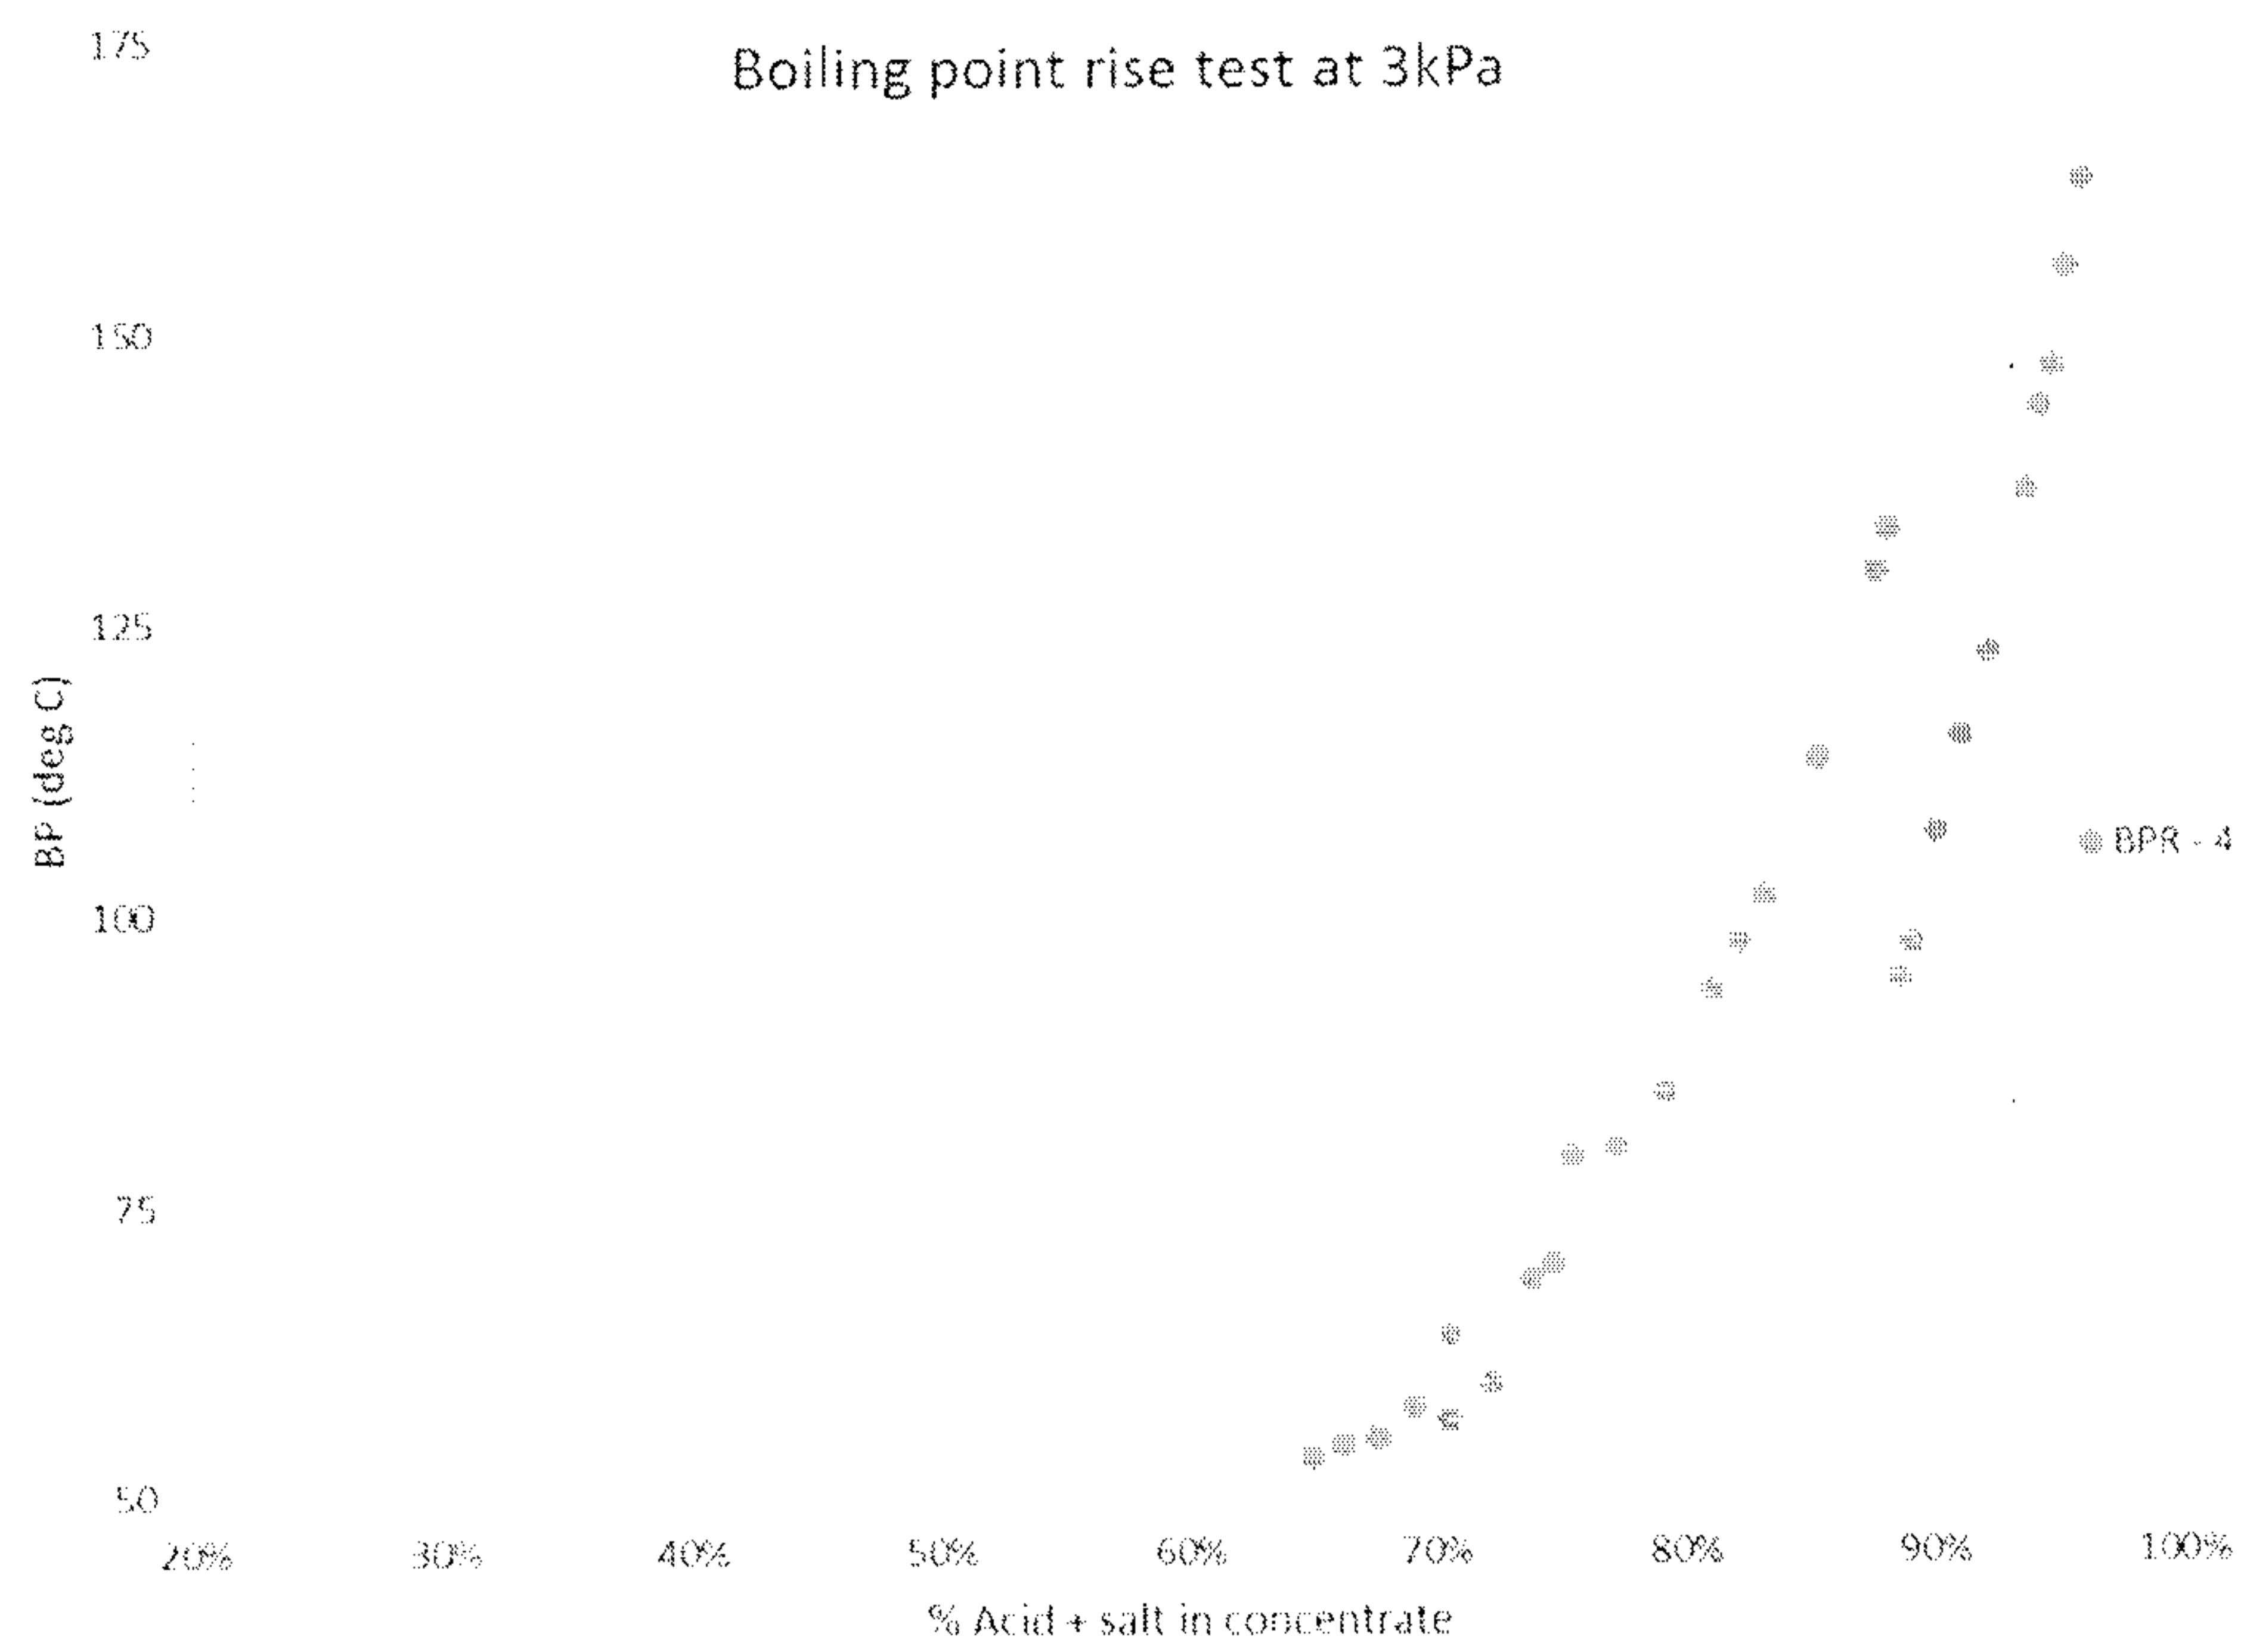
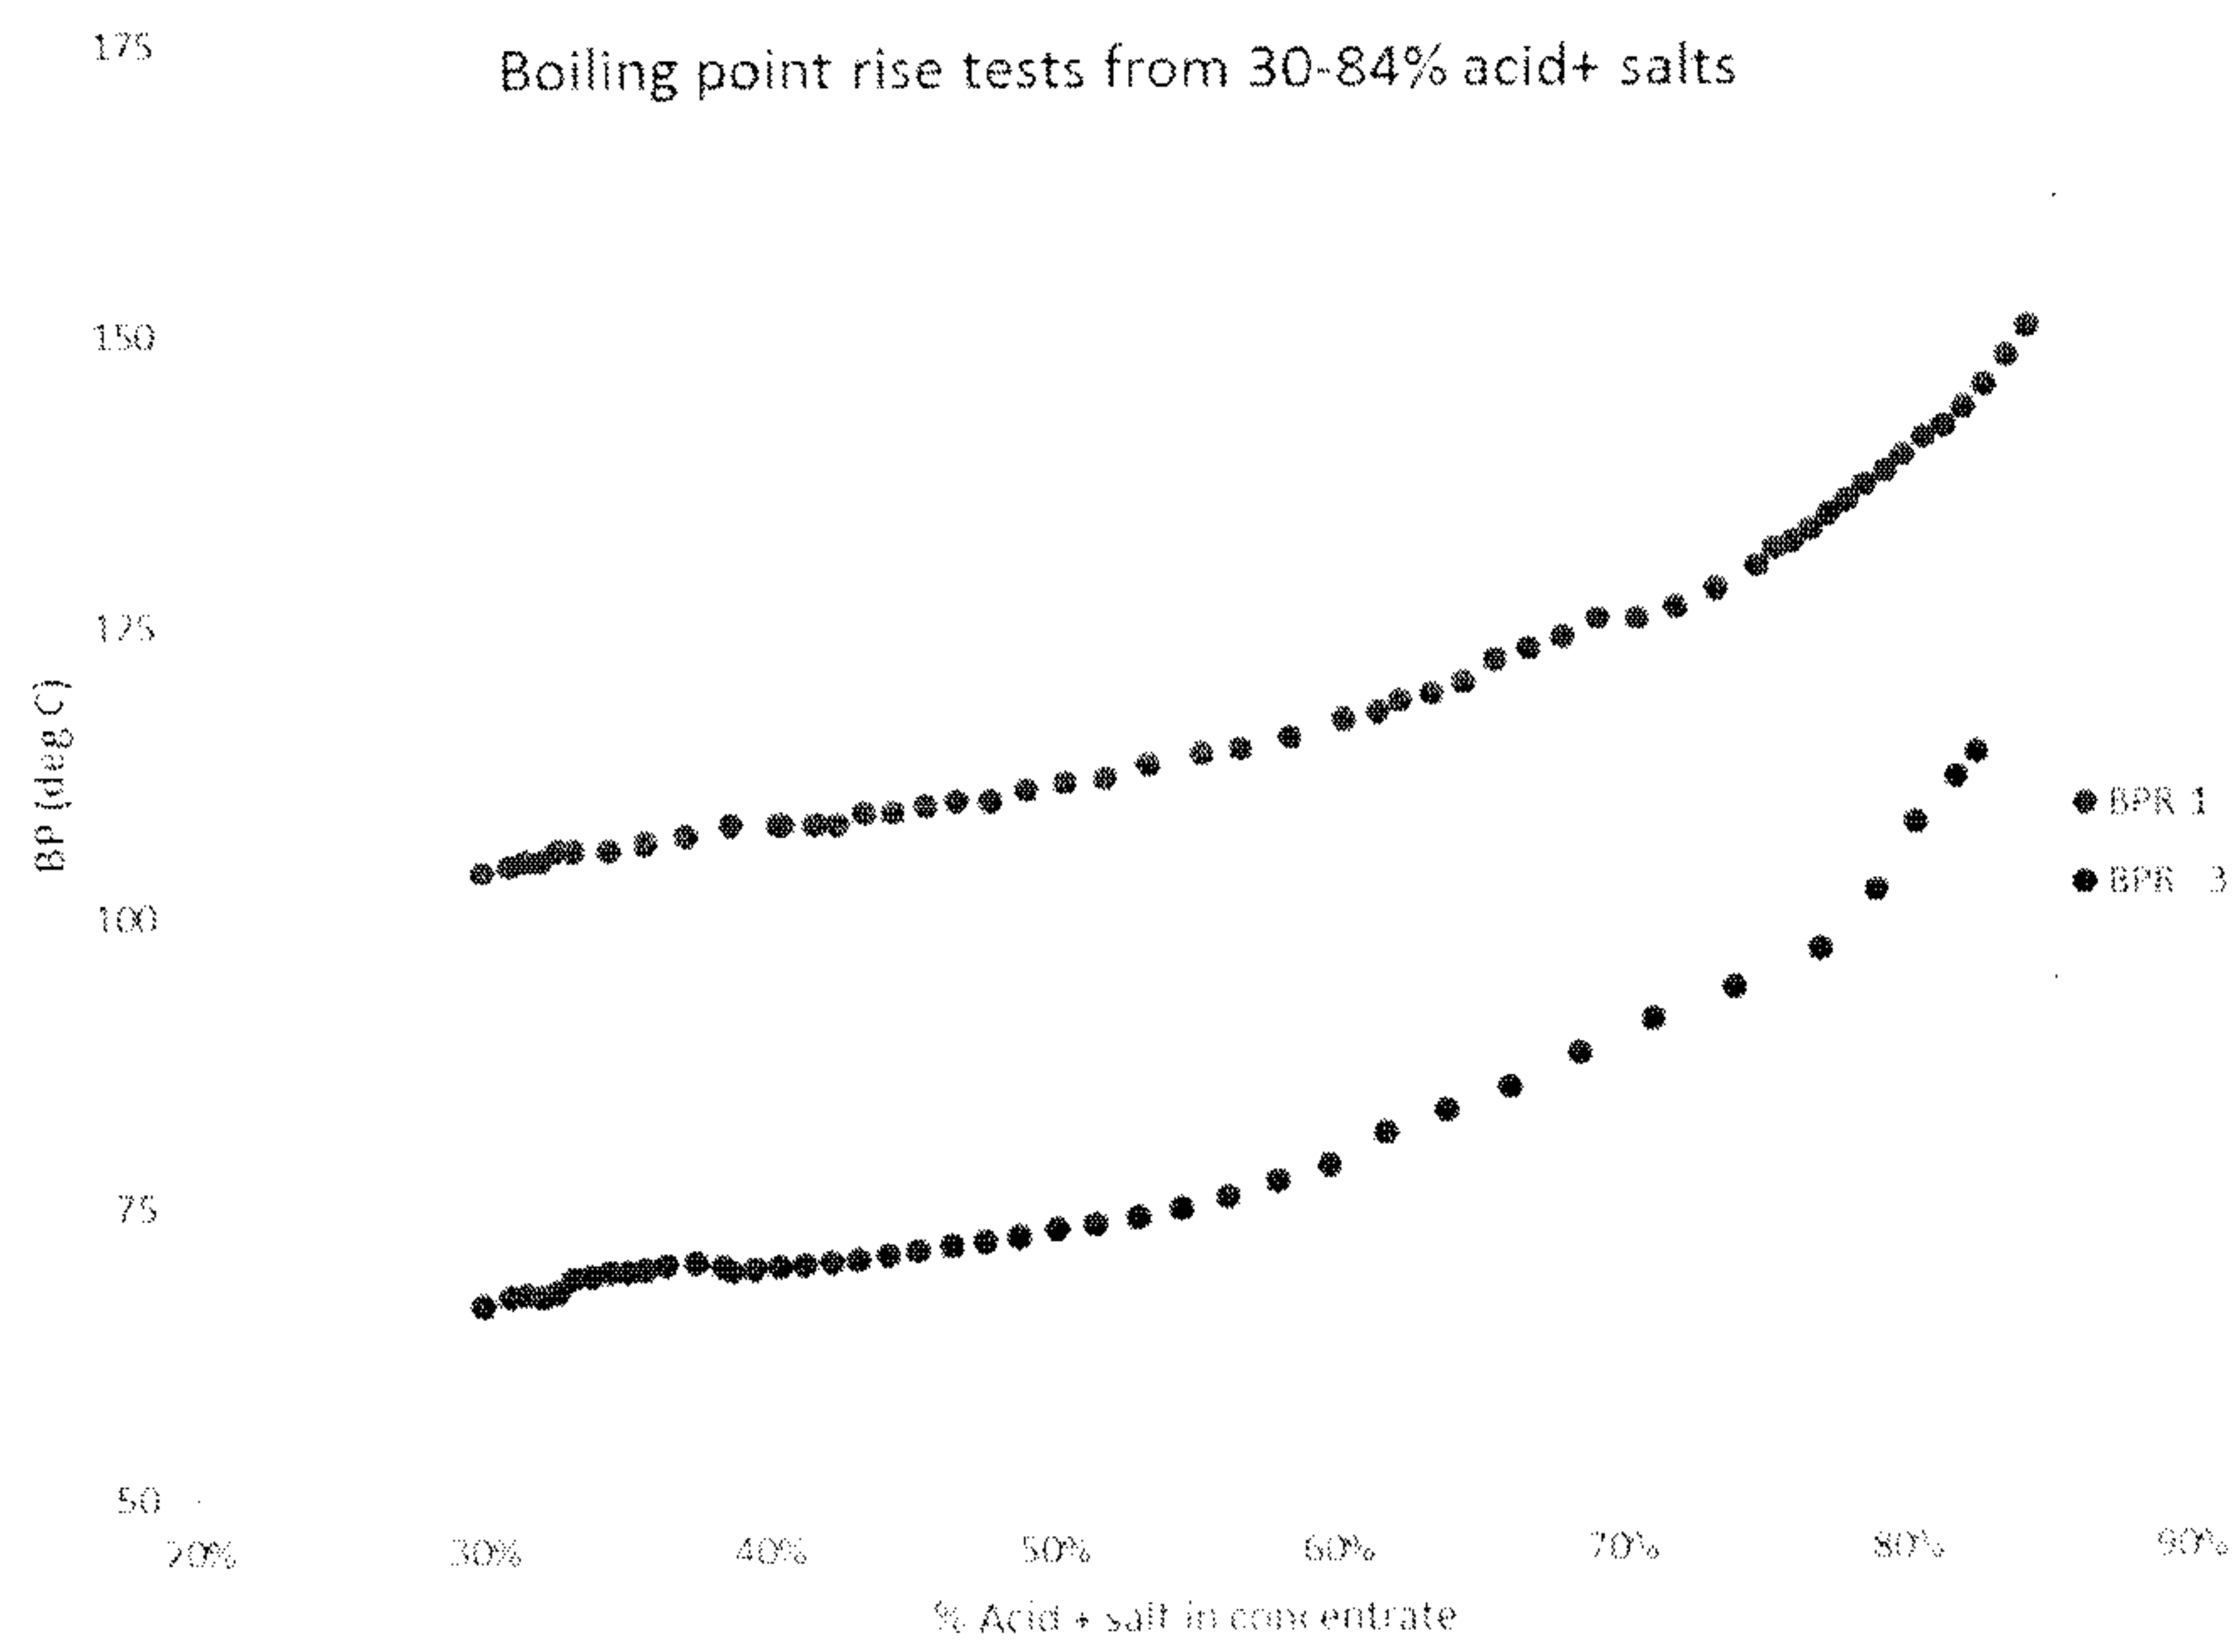


FIG. 8


9/31**FIG. 9**

10/31**FIG. 10**

11/31**FIG. 11**

12/31

A

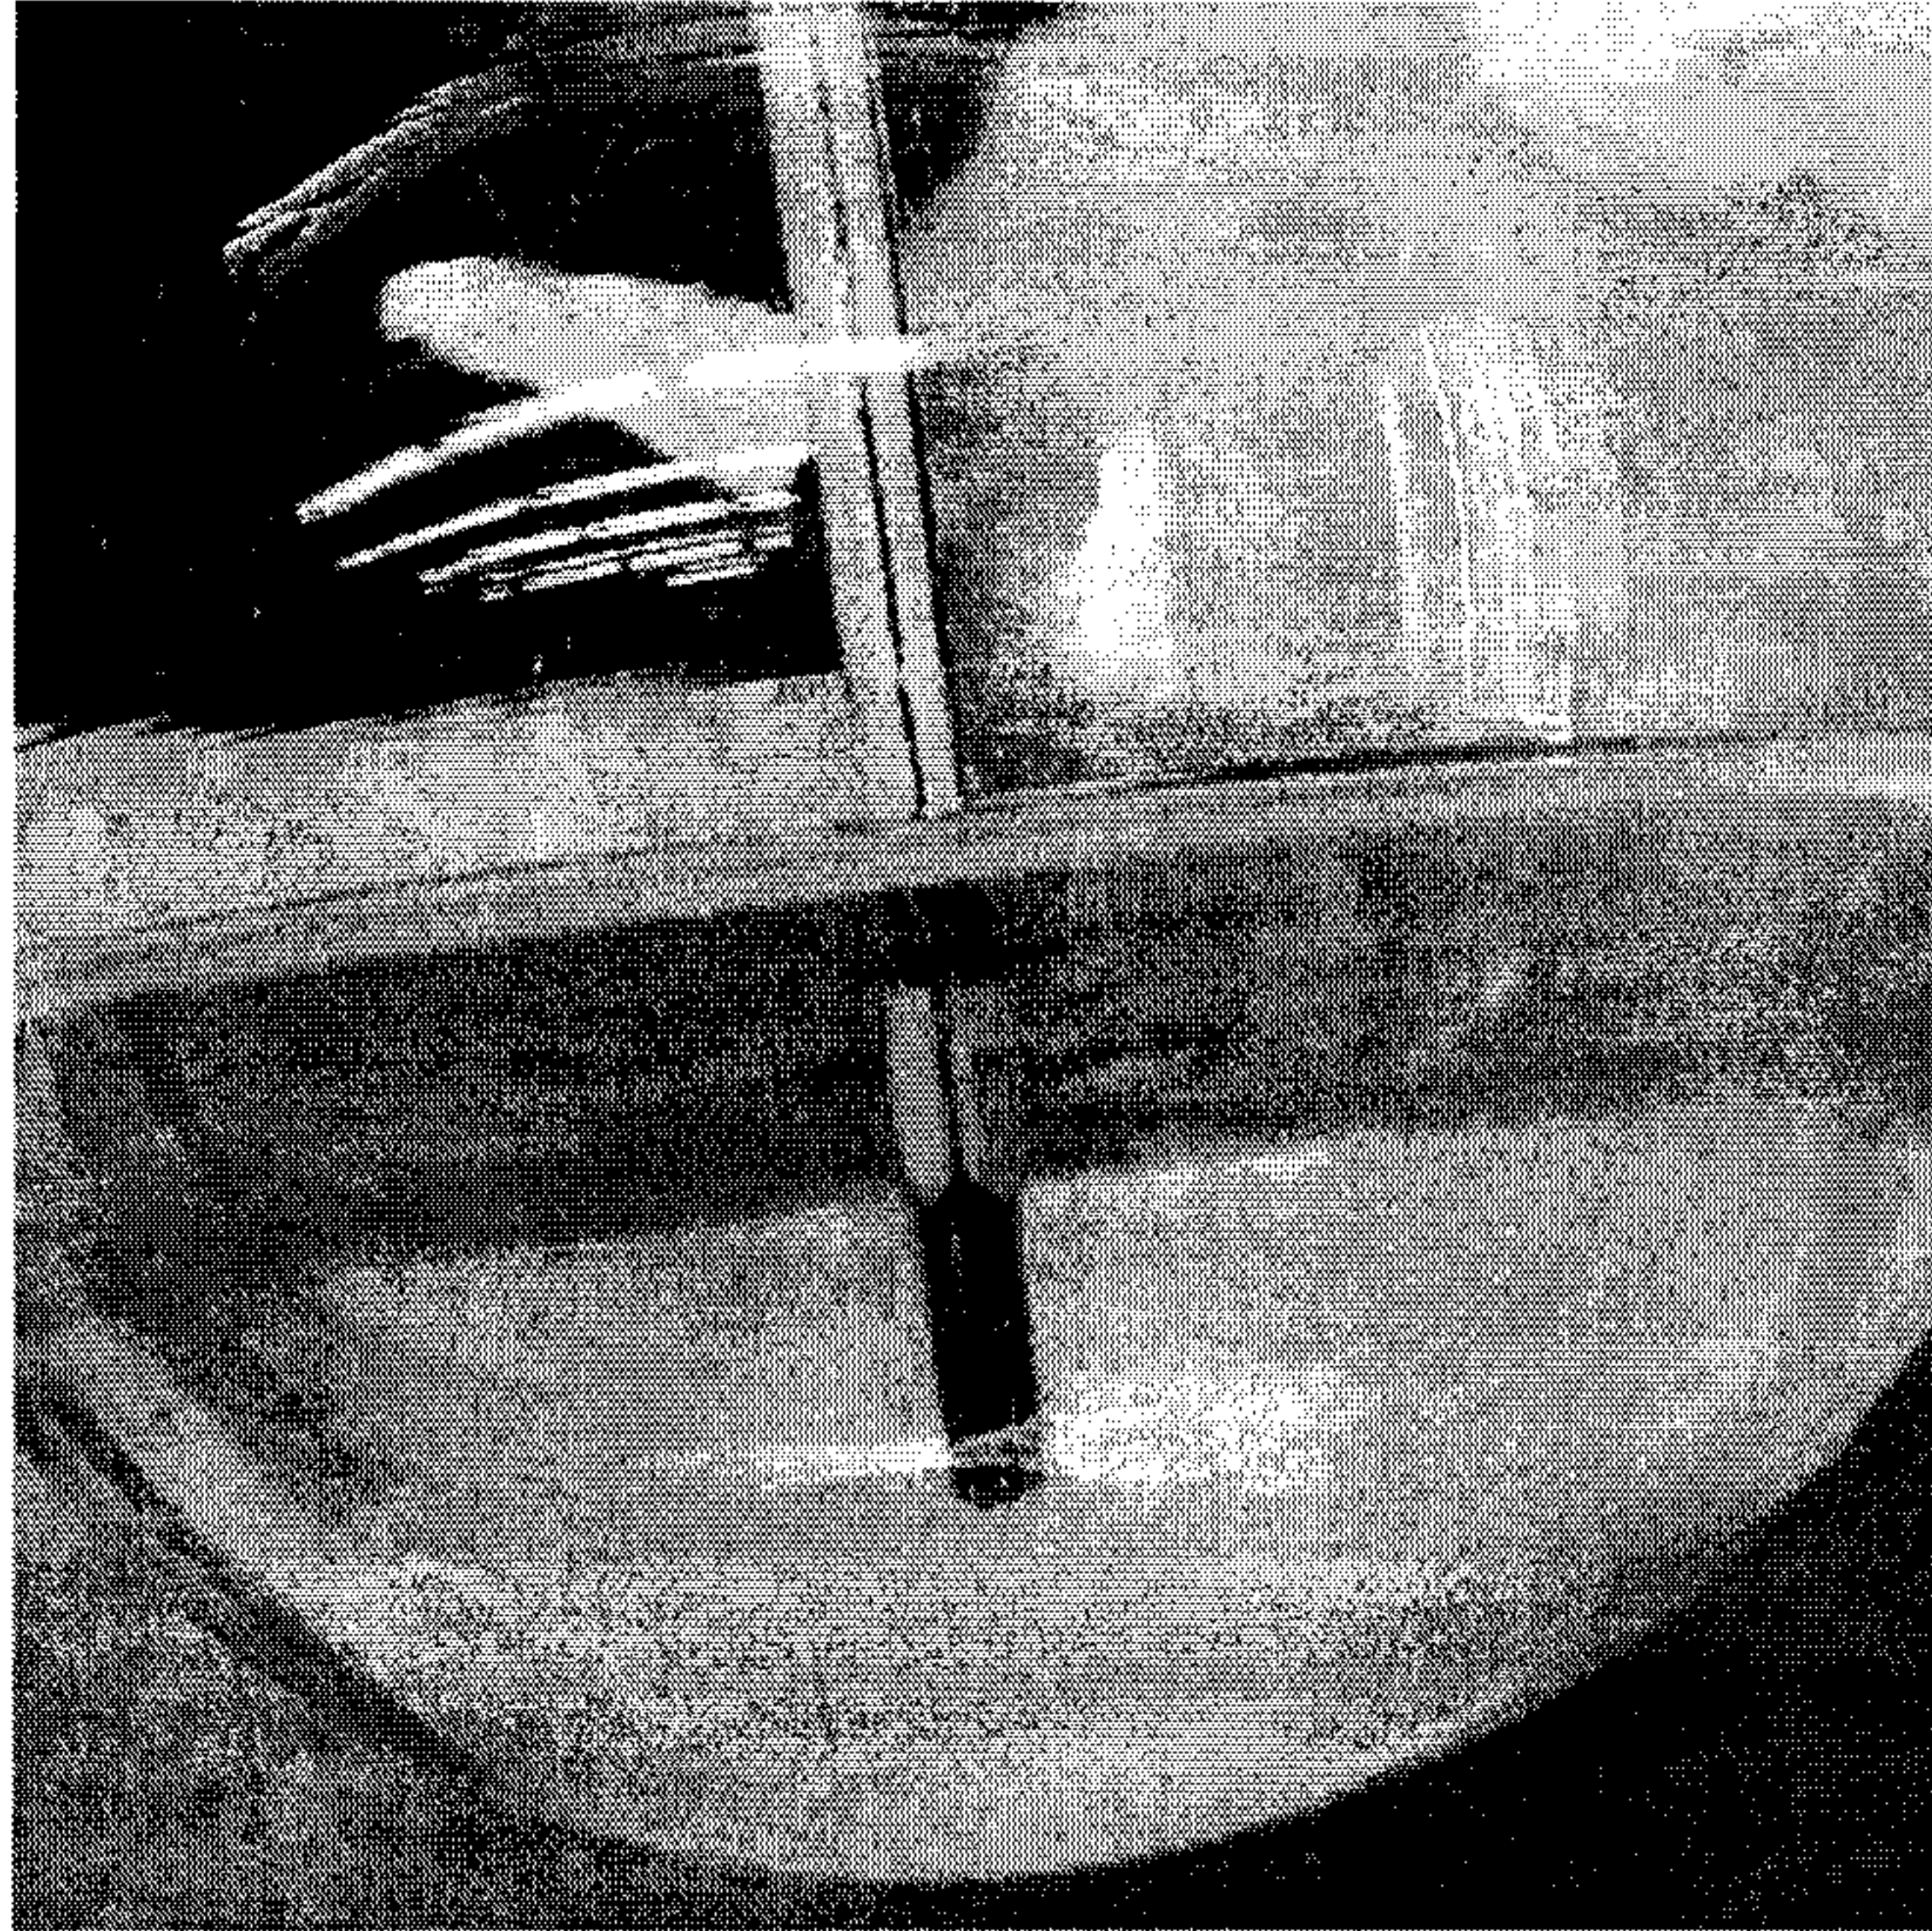

B


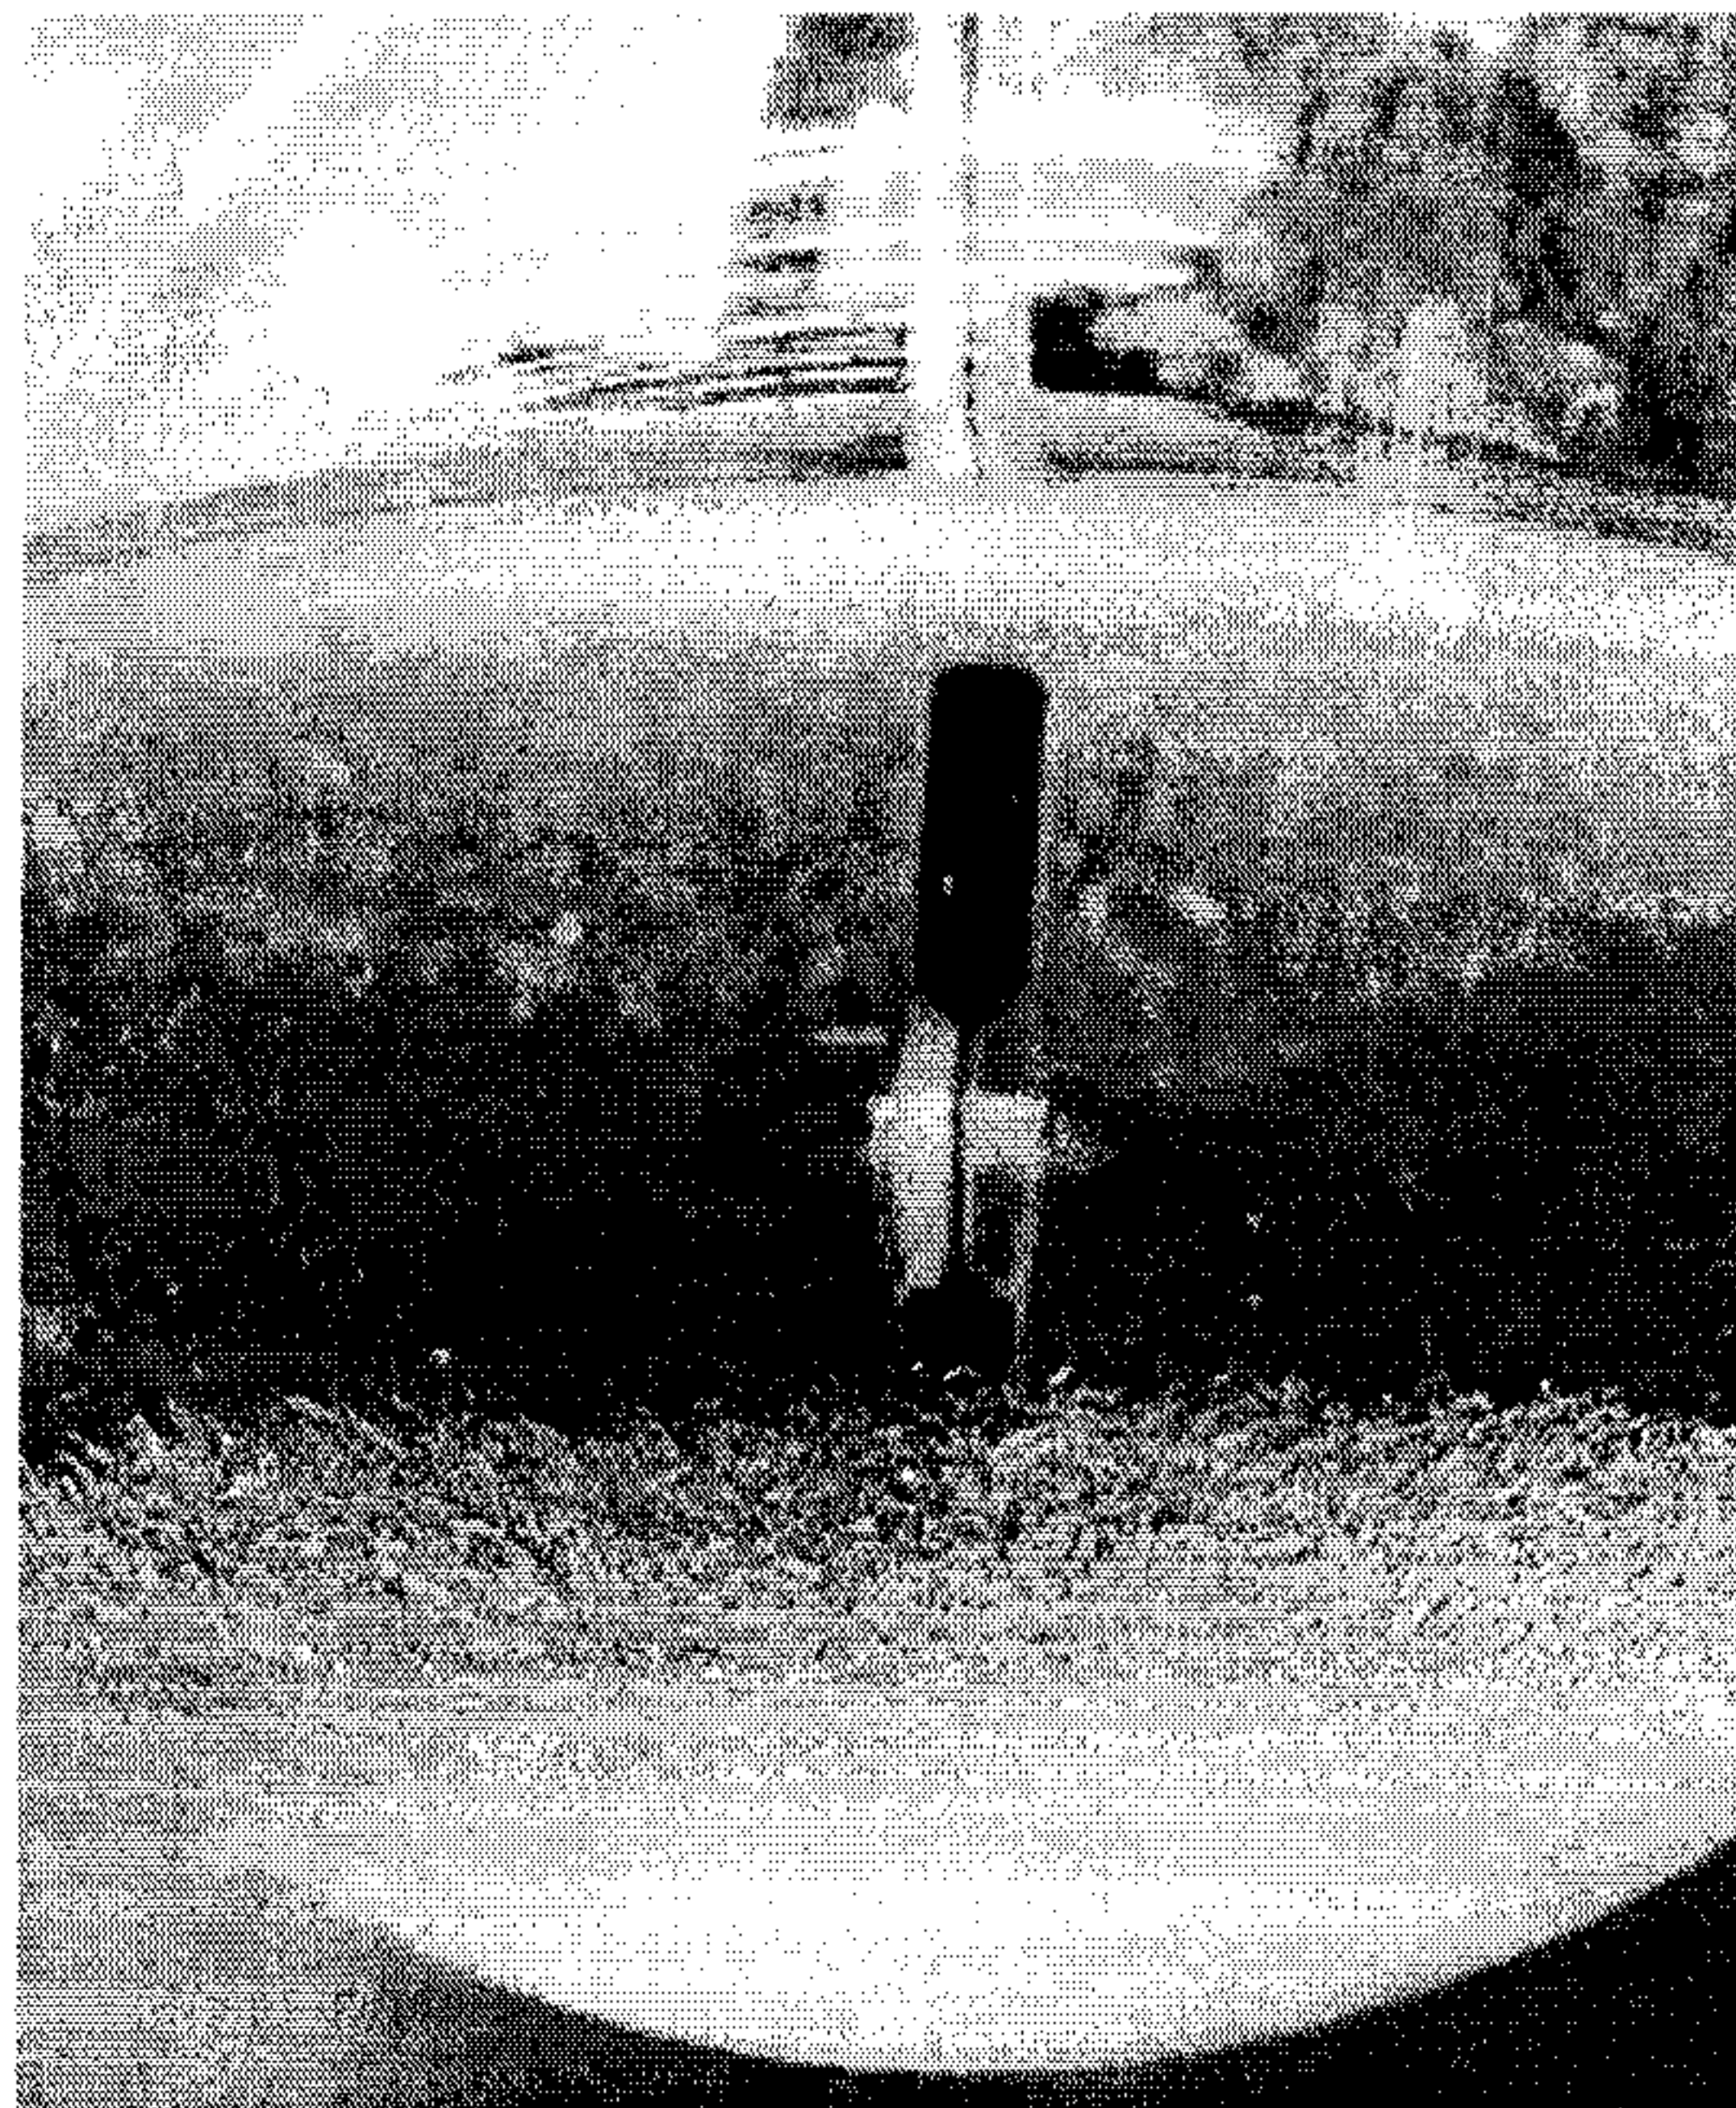


FIG. 12

13/31

C

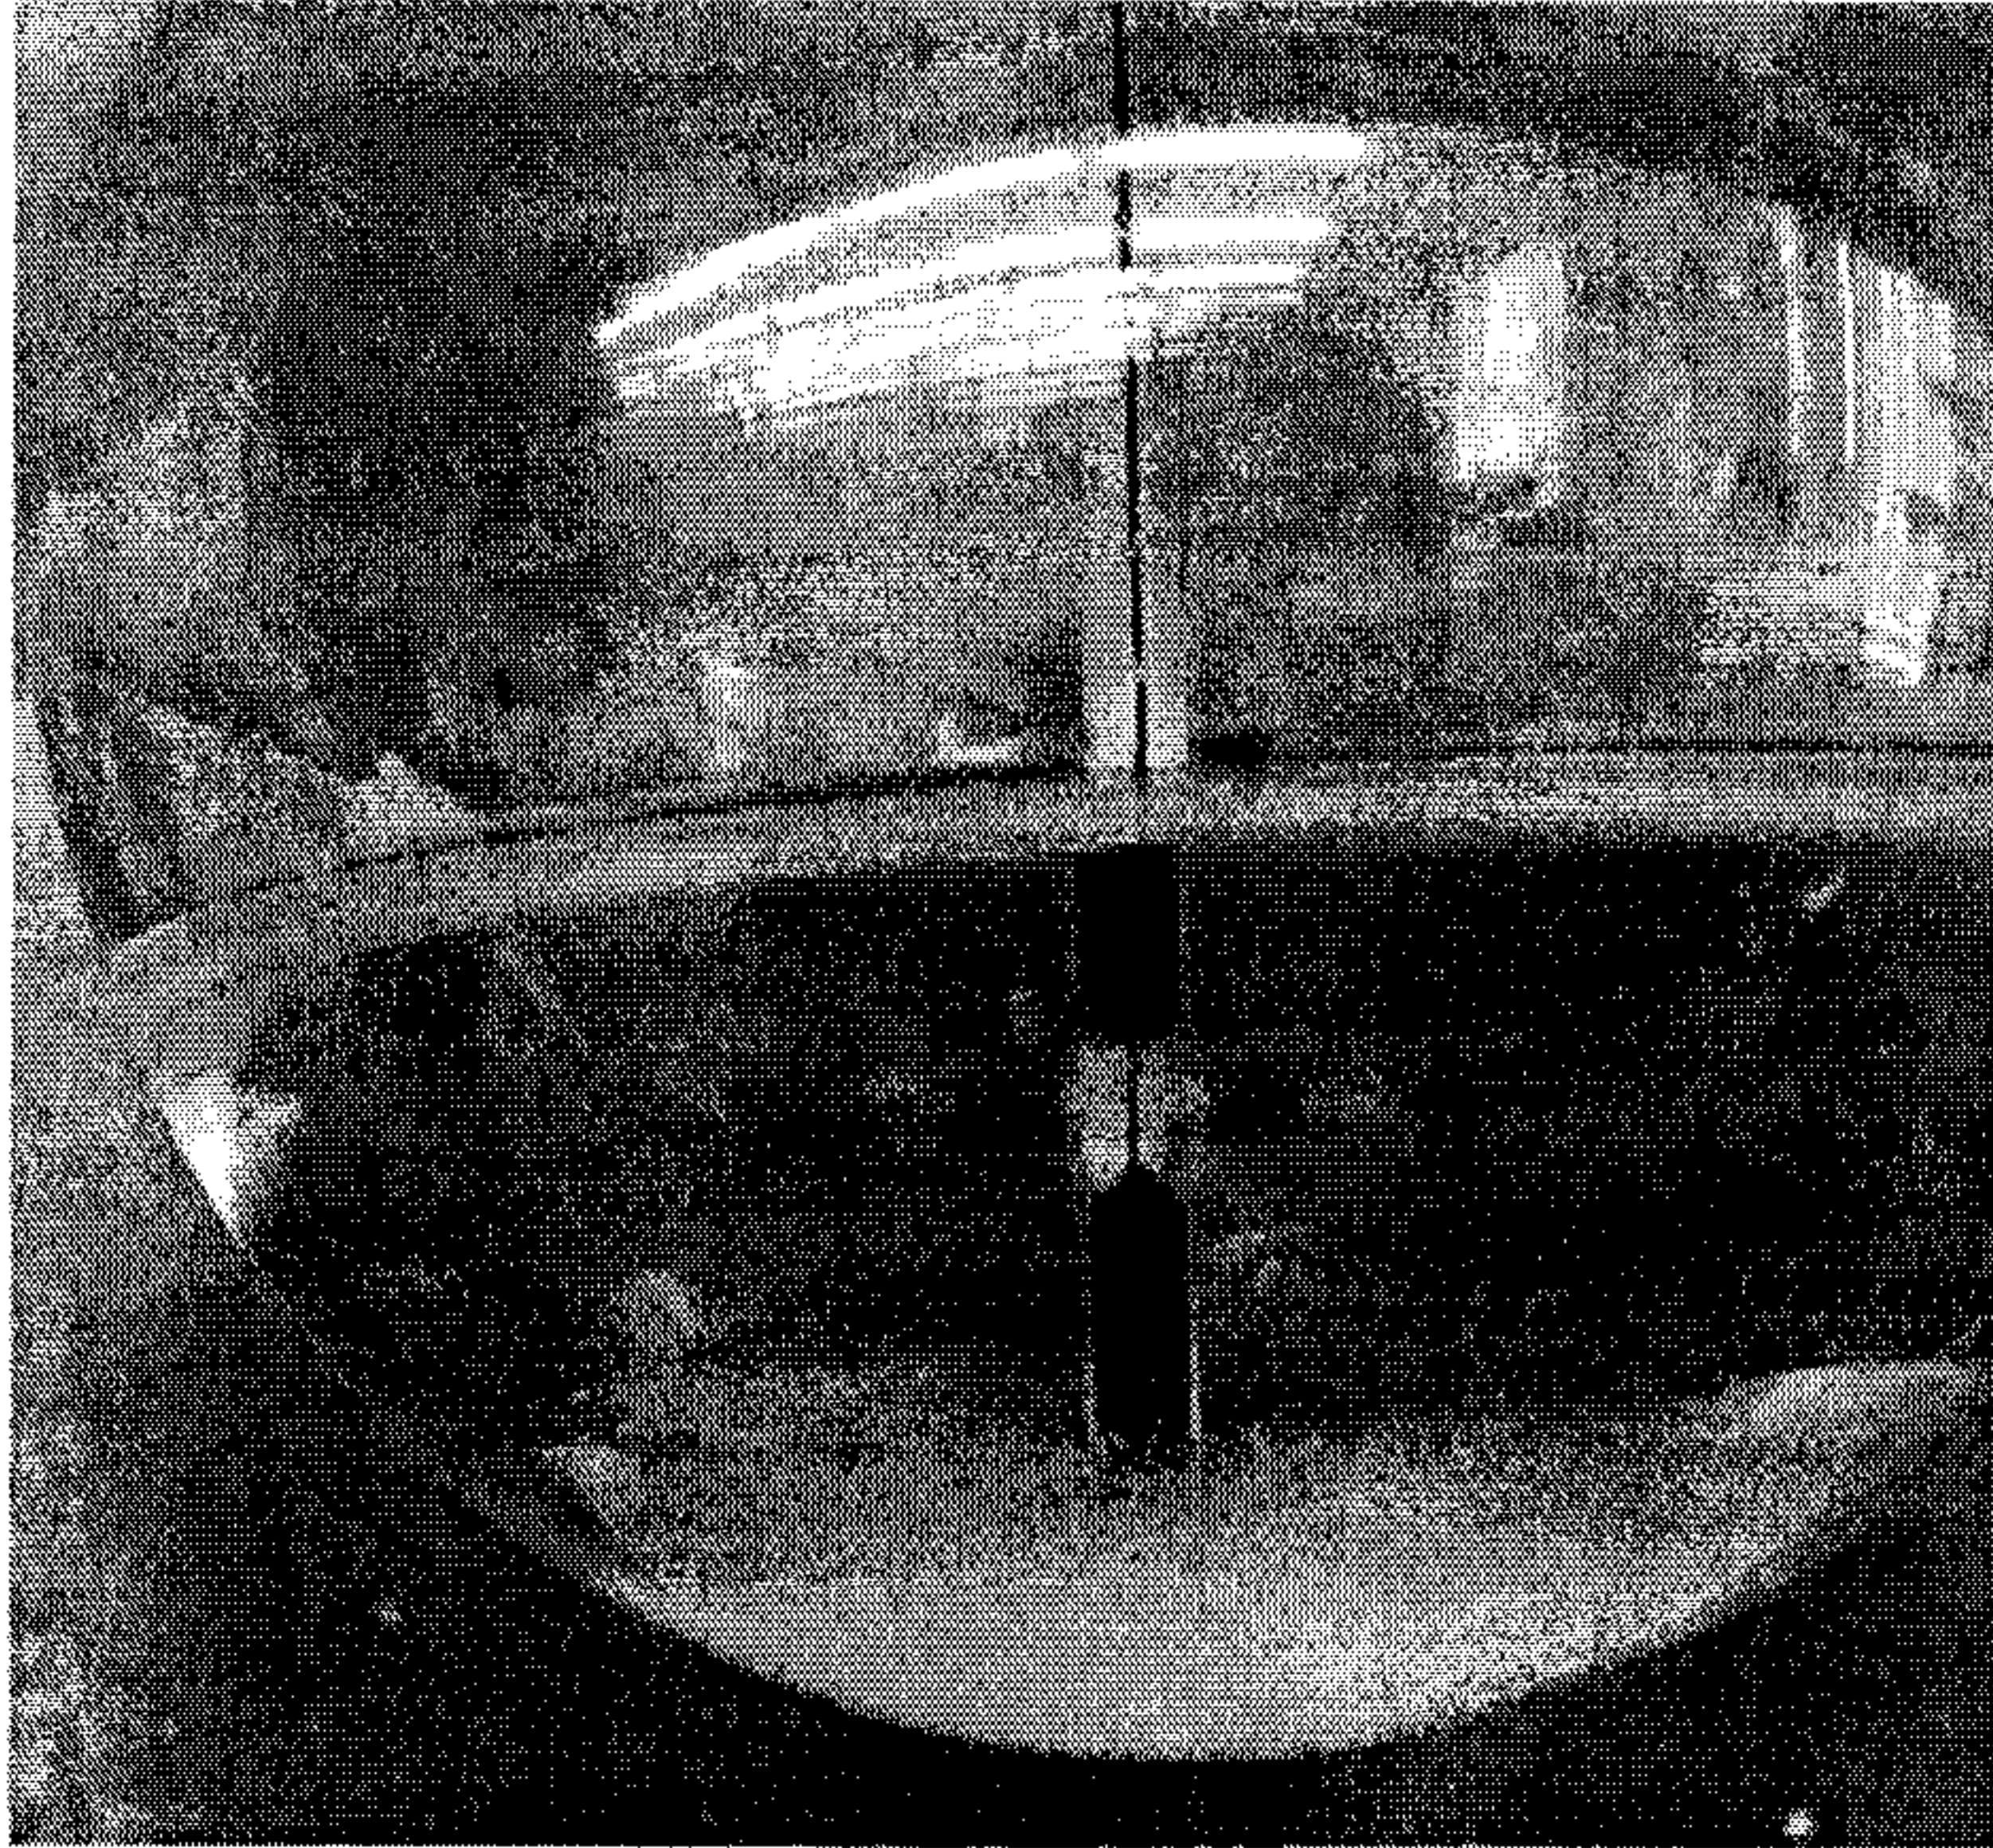

D


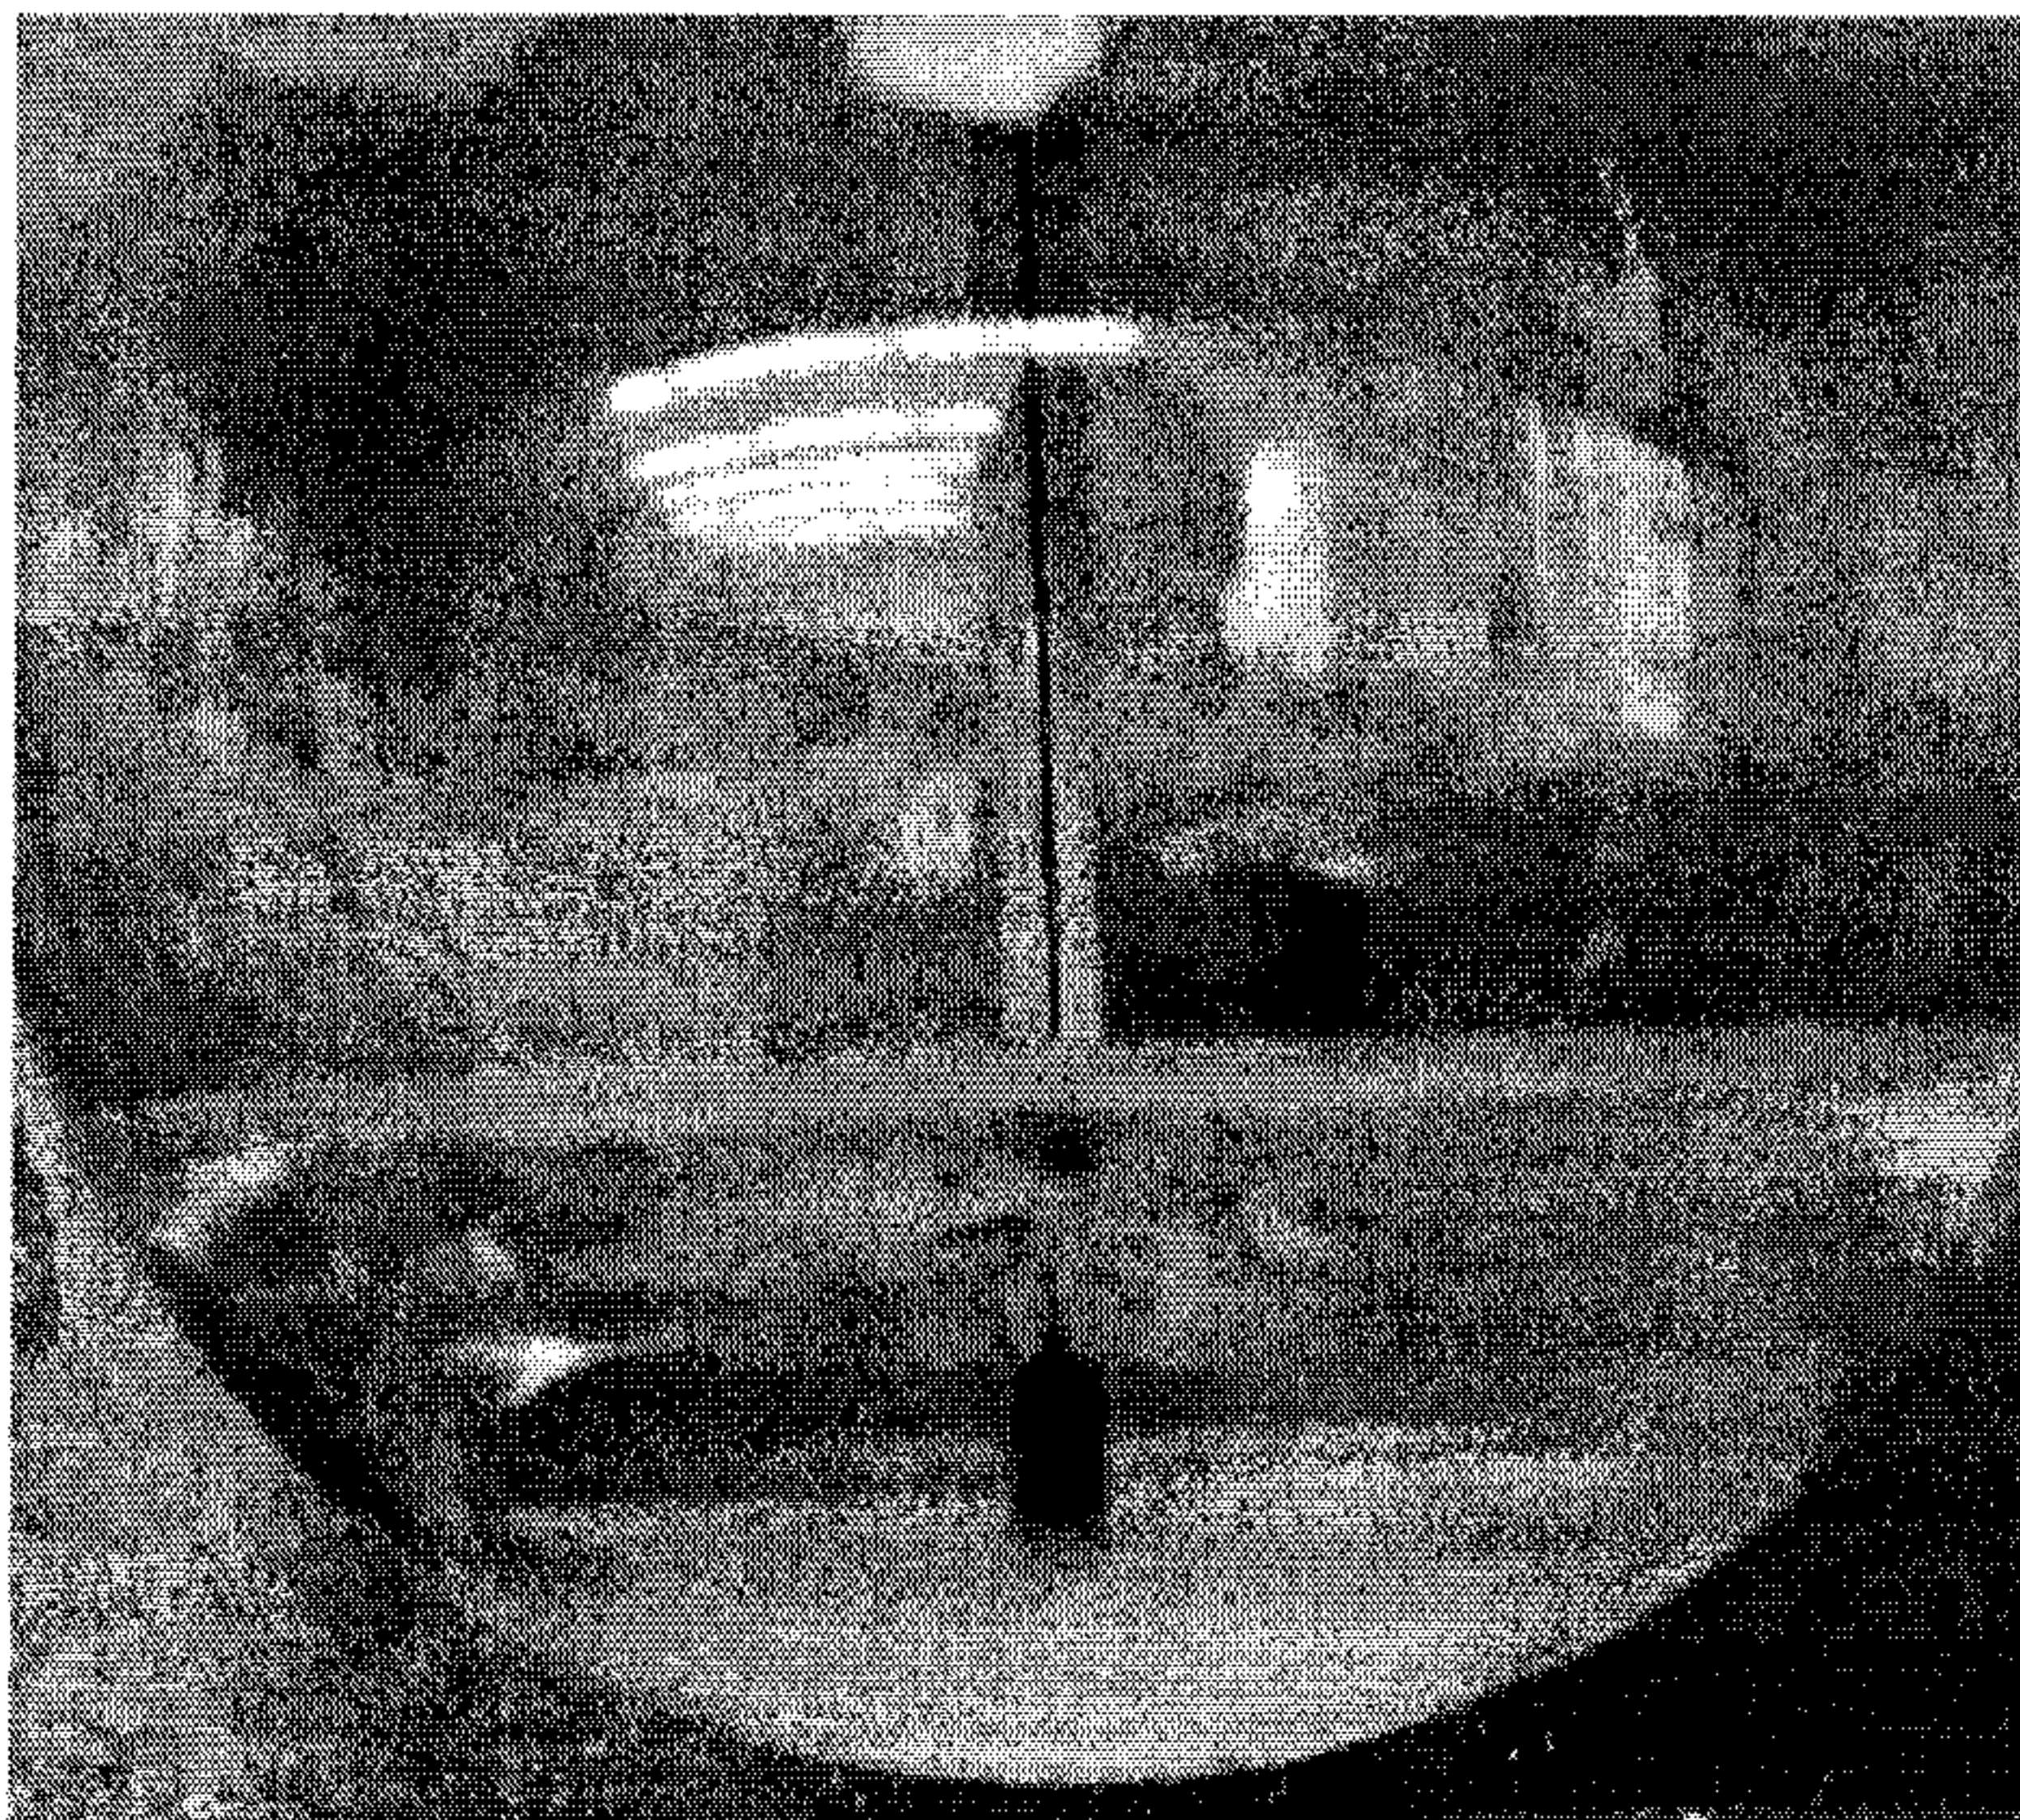


FIG. 12 (cont.)

14/31

E

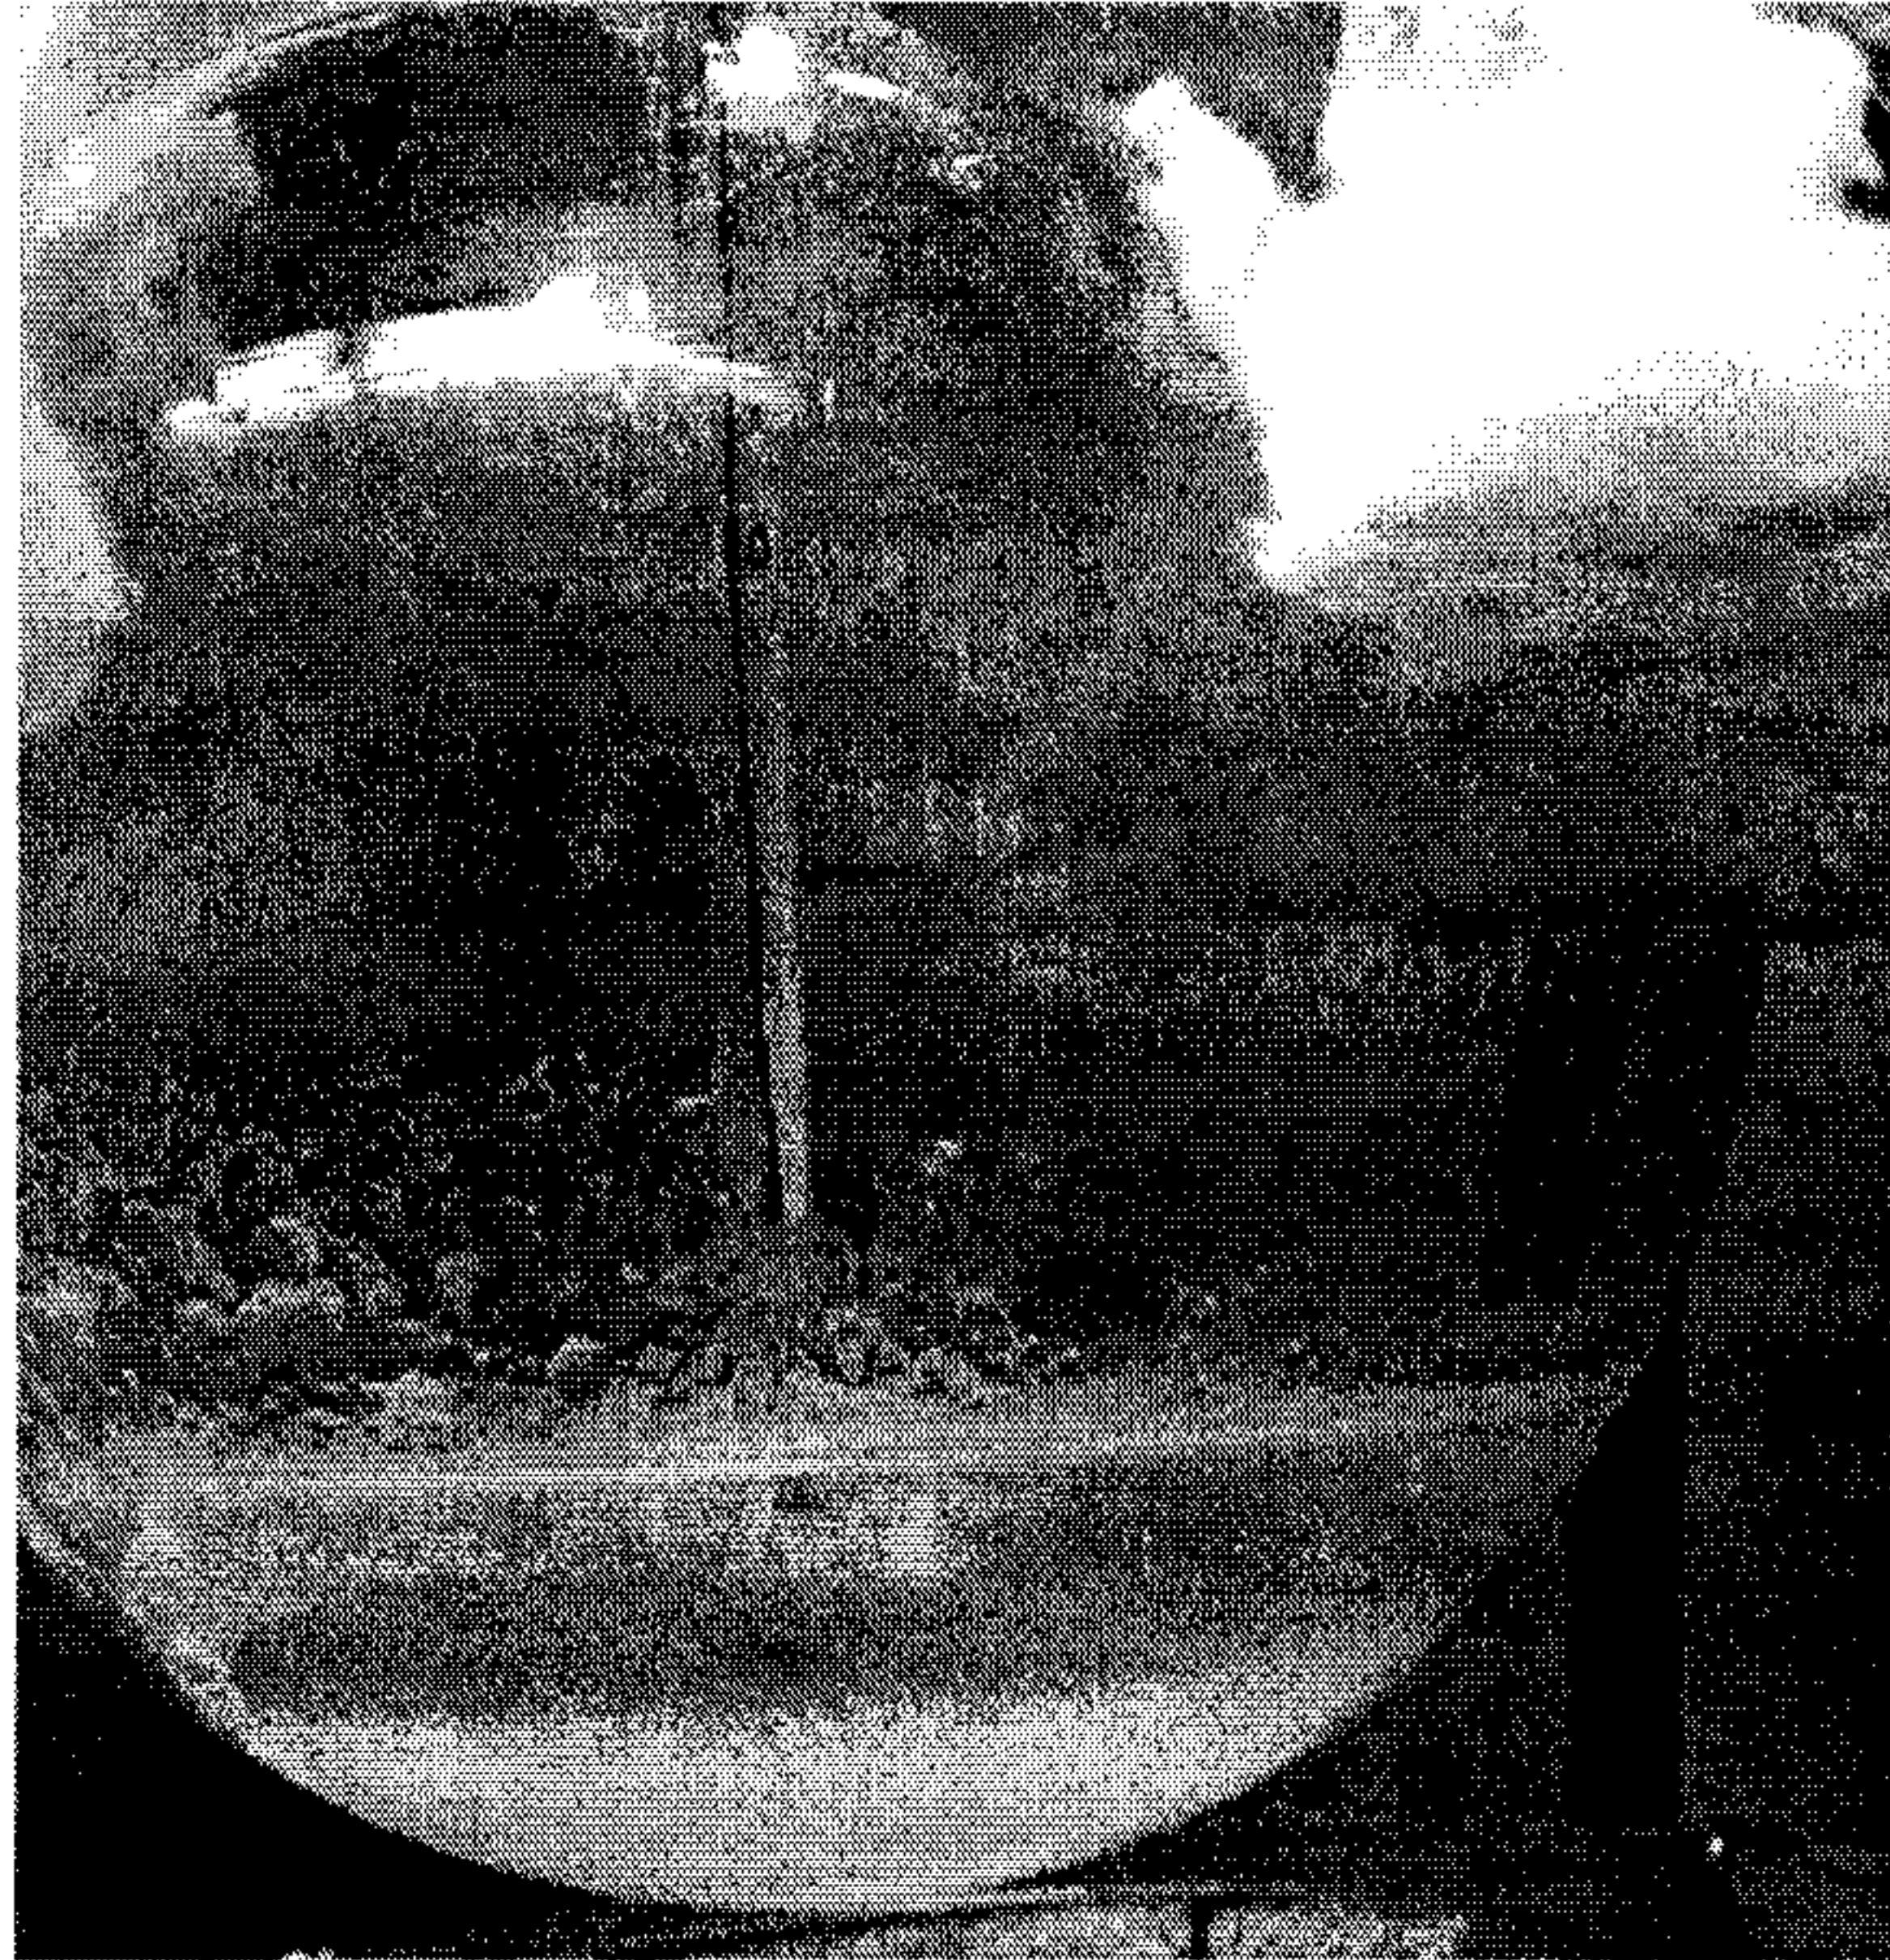


F



FIG. 12 (cont.)

15/31

G

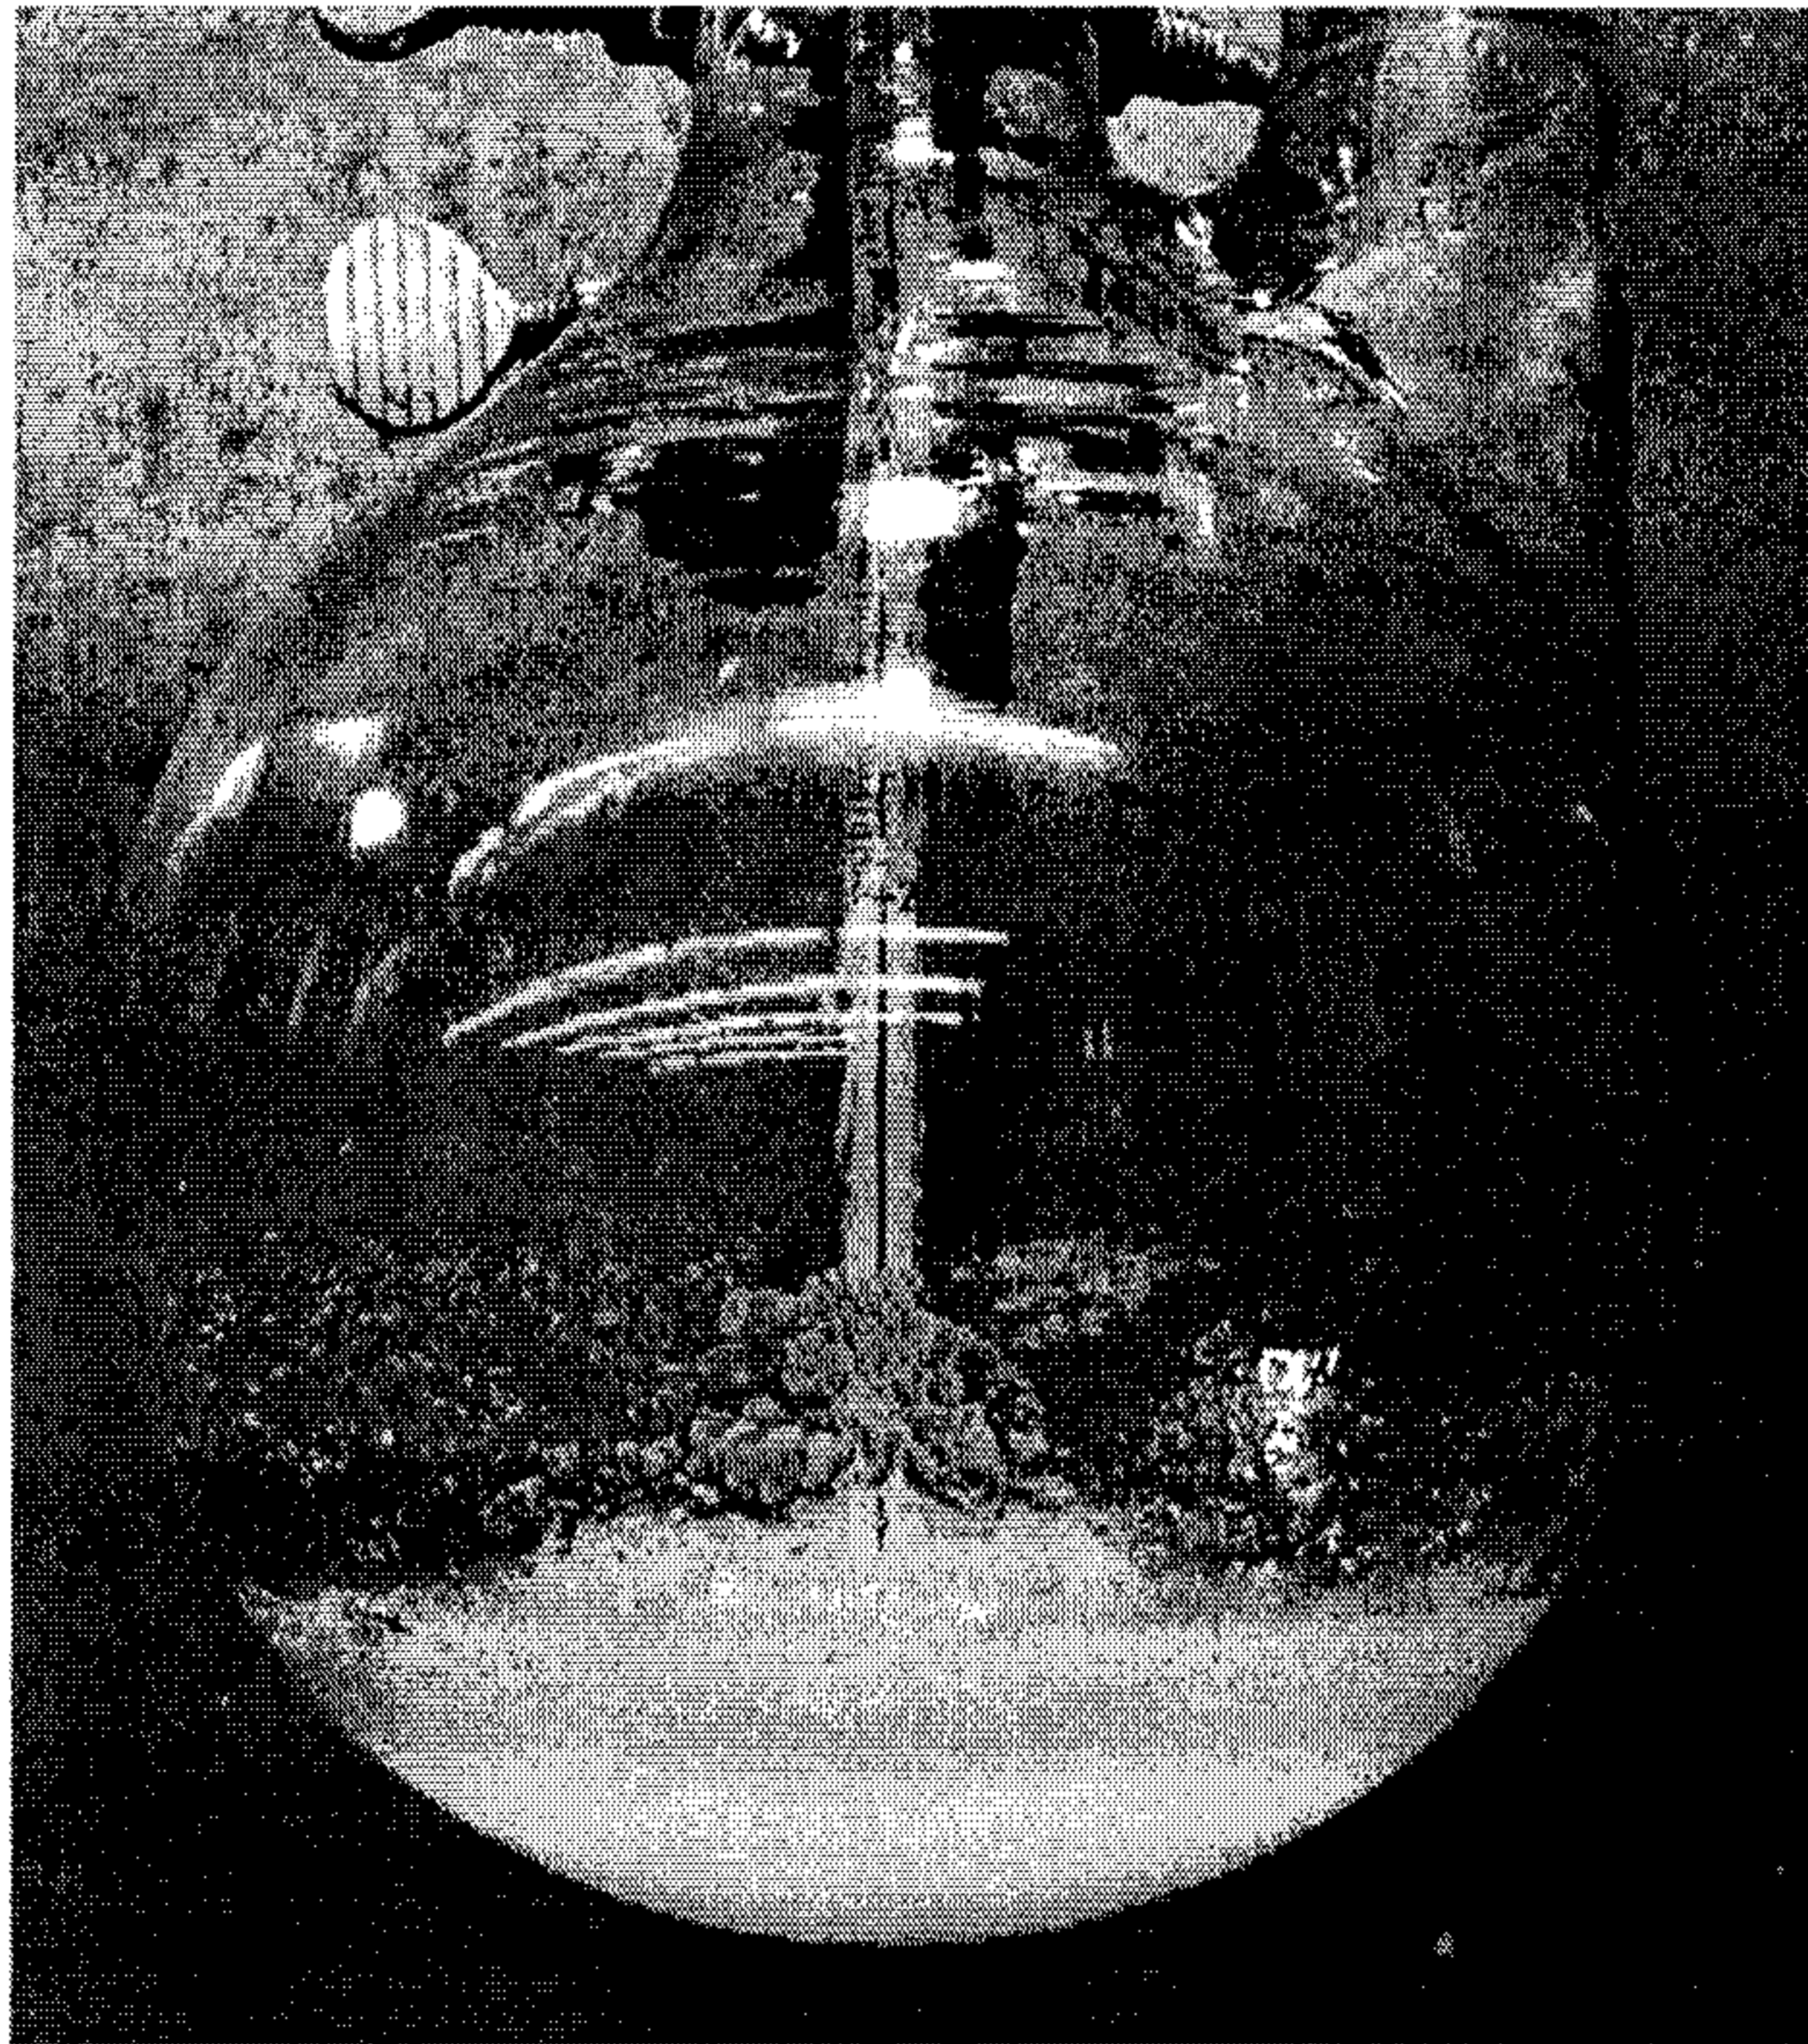

H


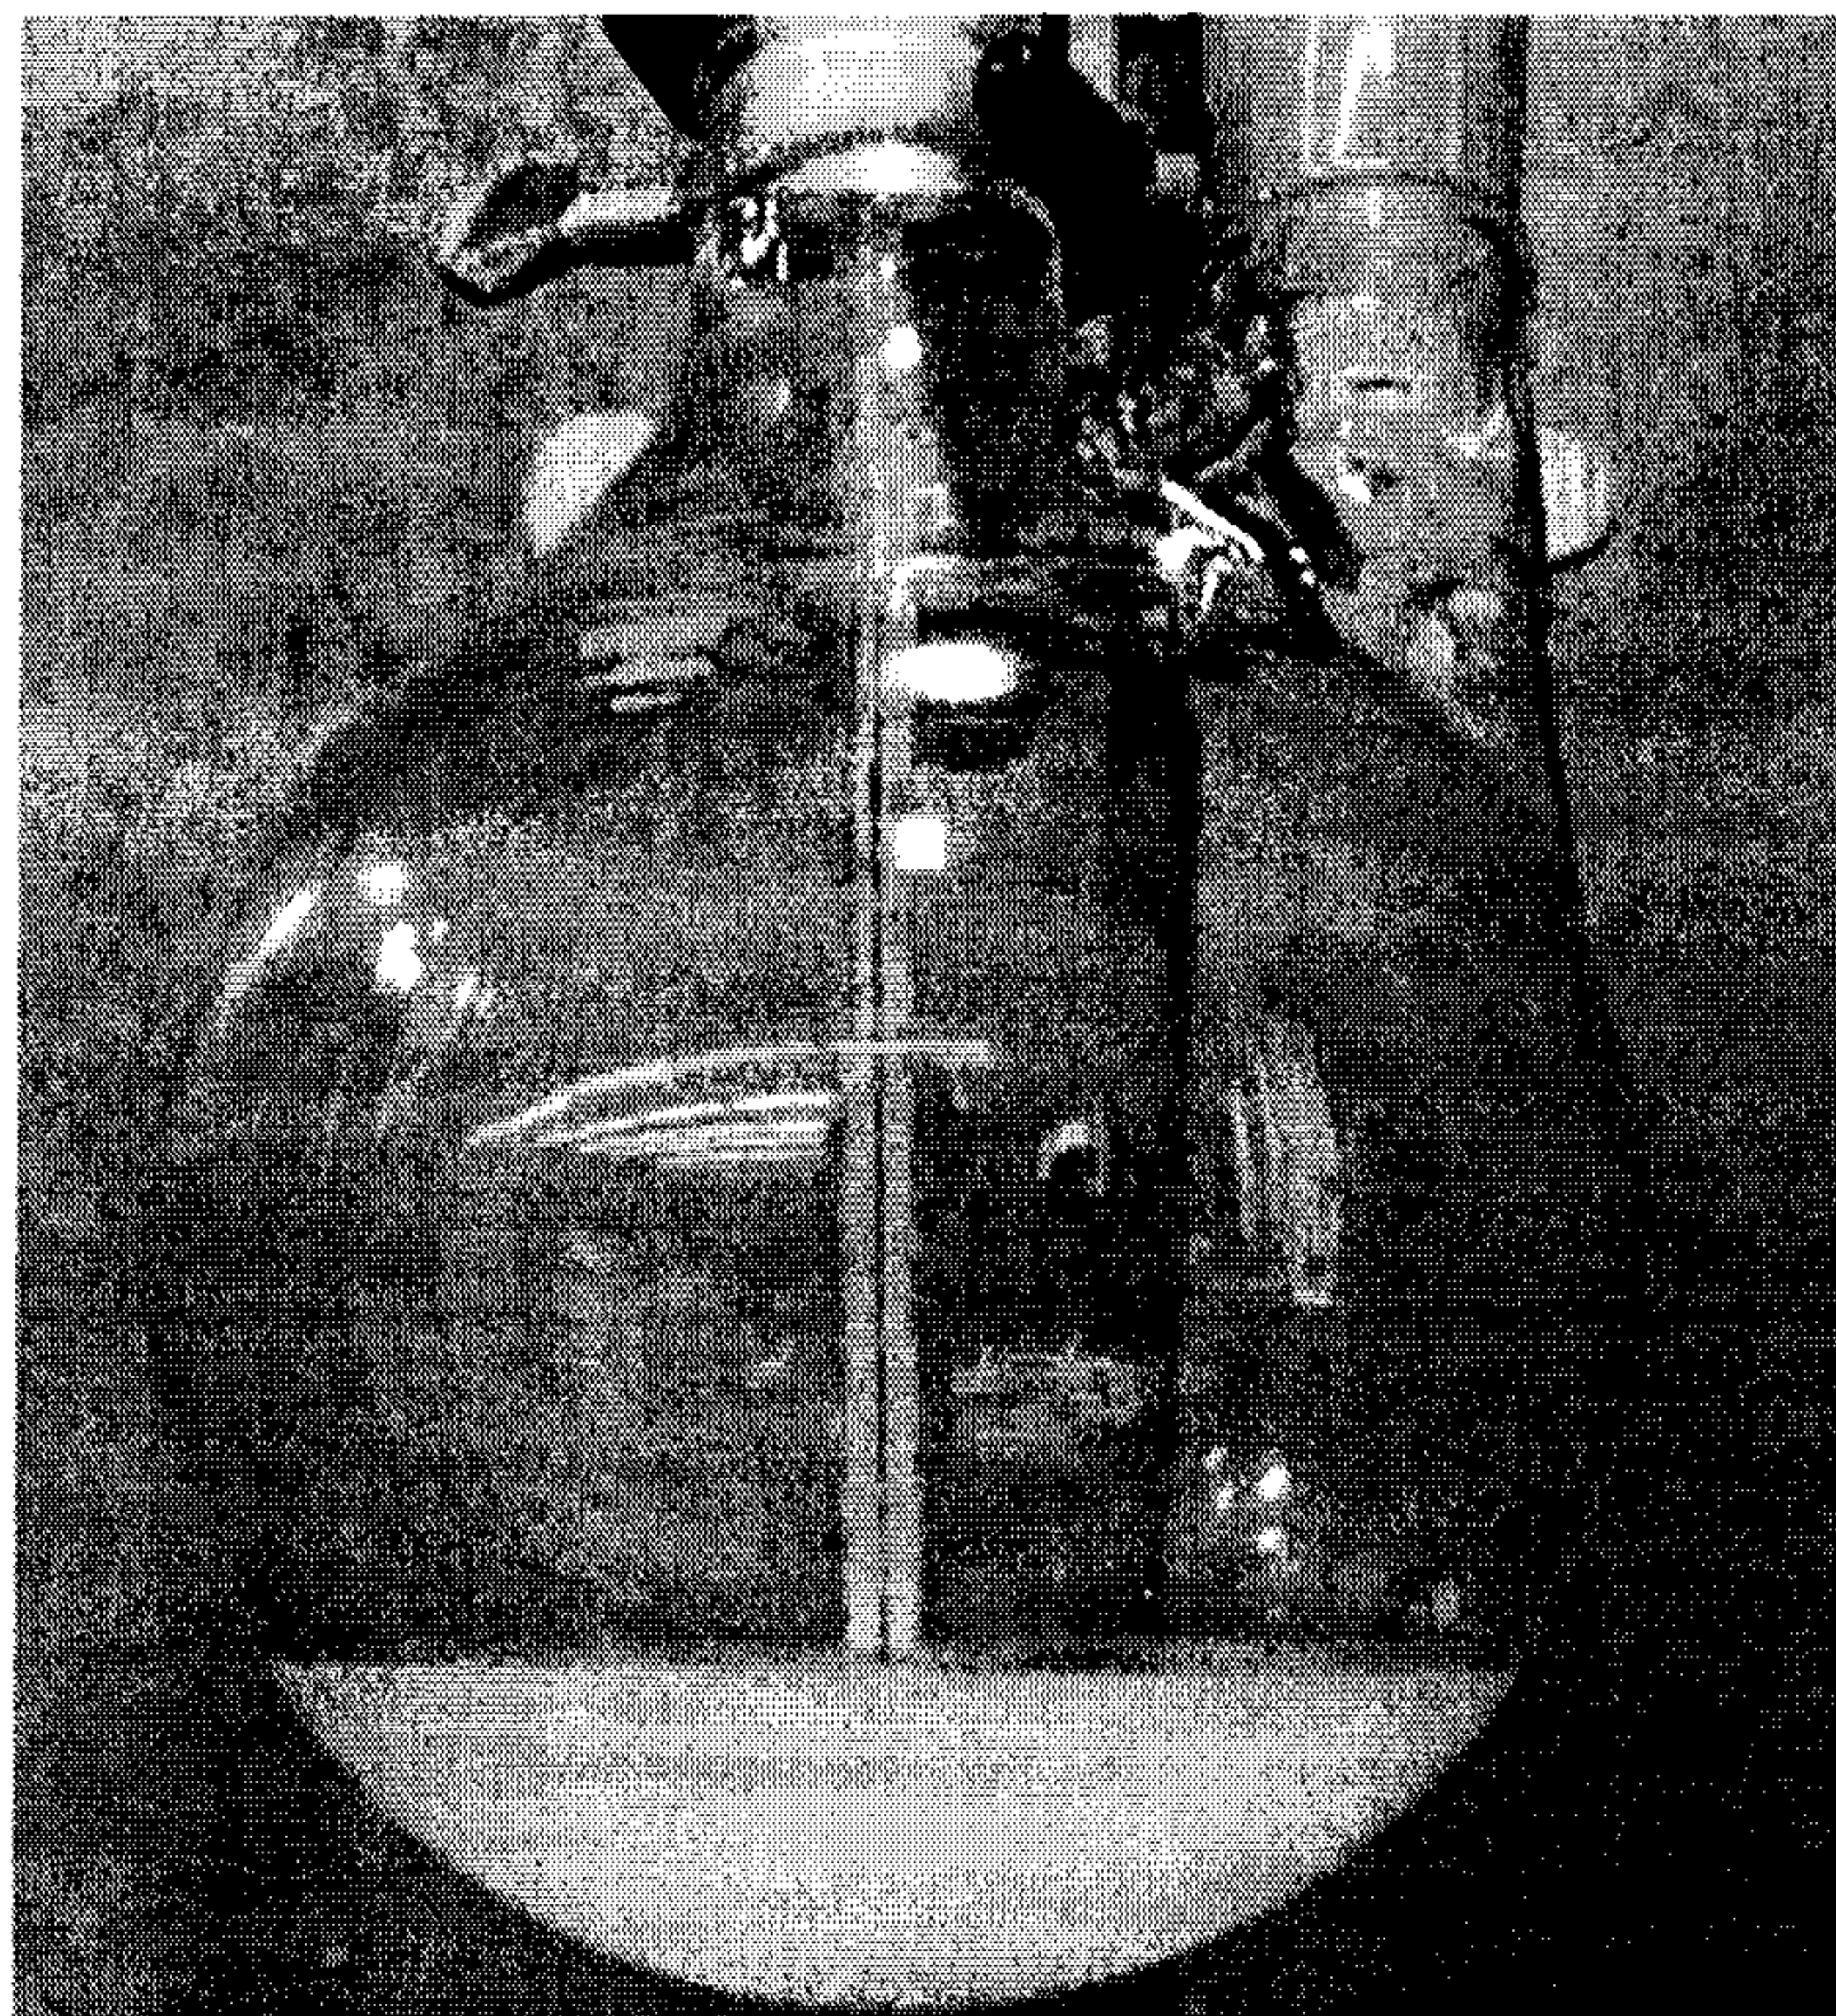


FIG. 12 (cont.)

16/31

A

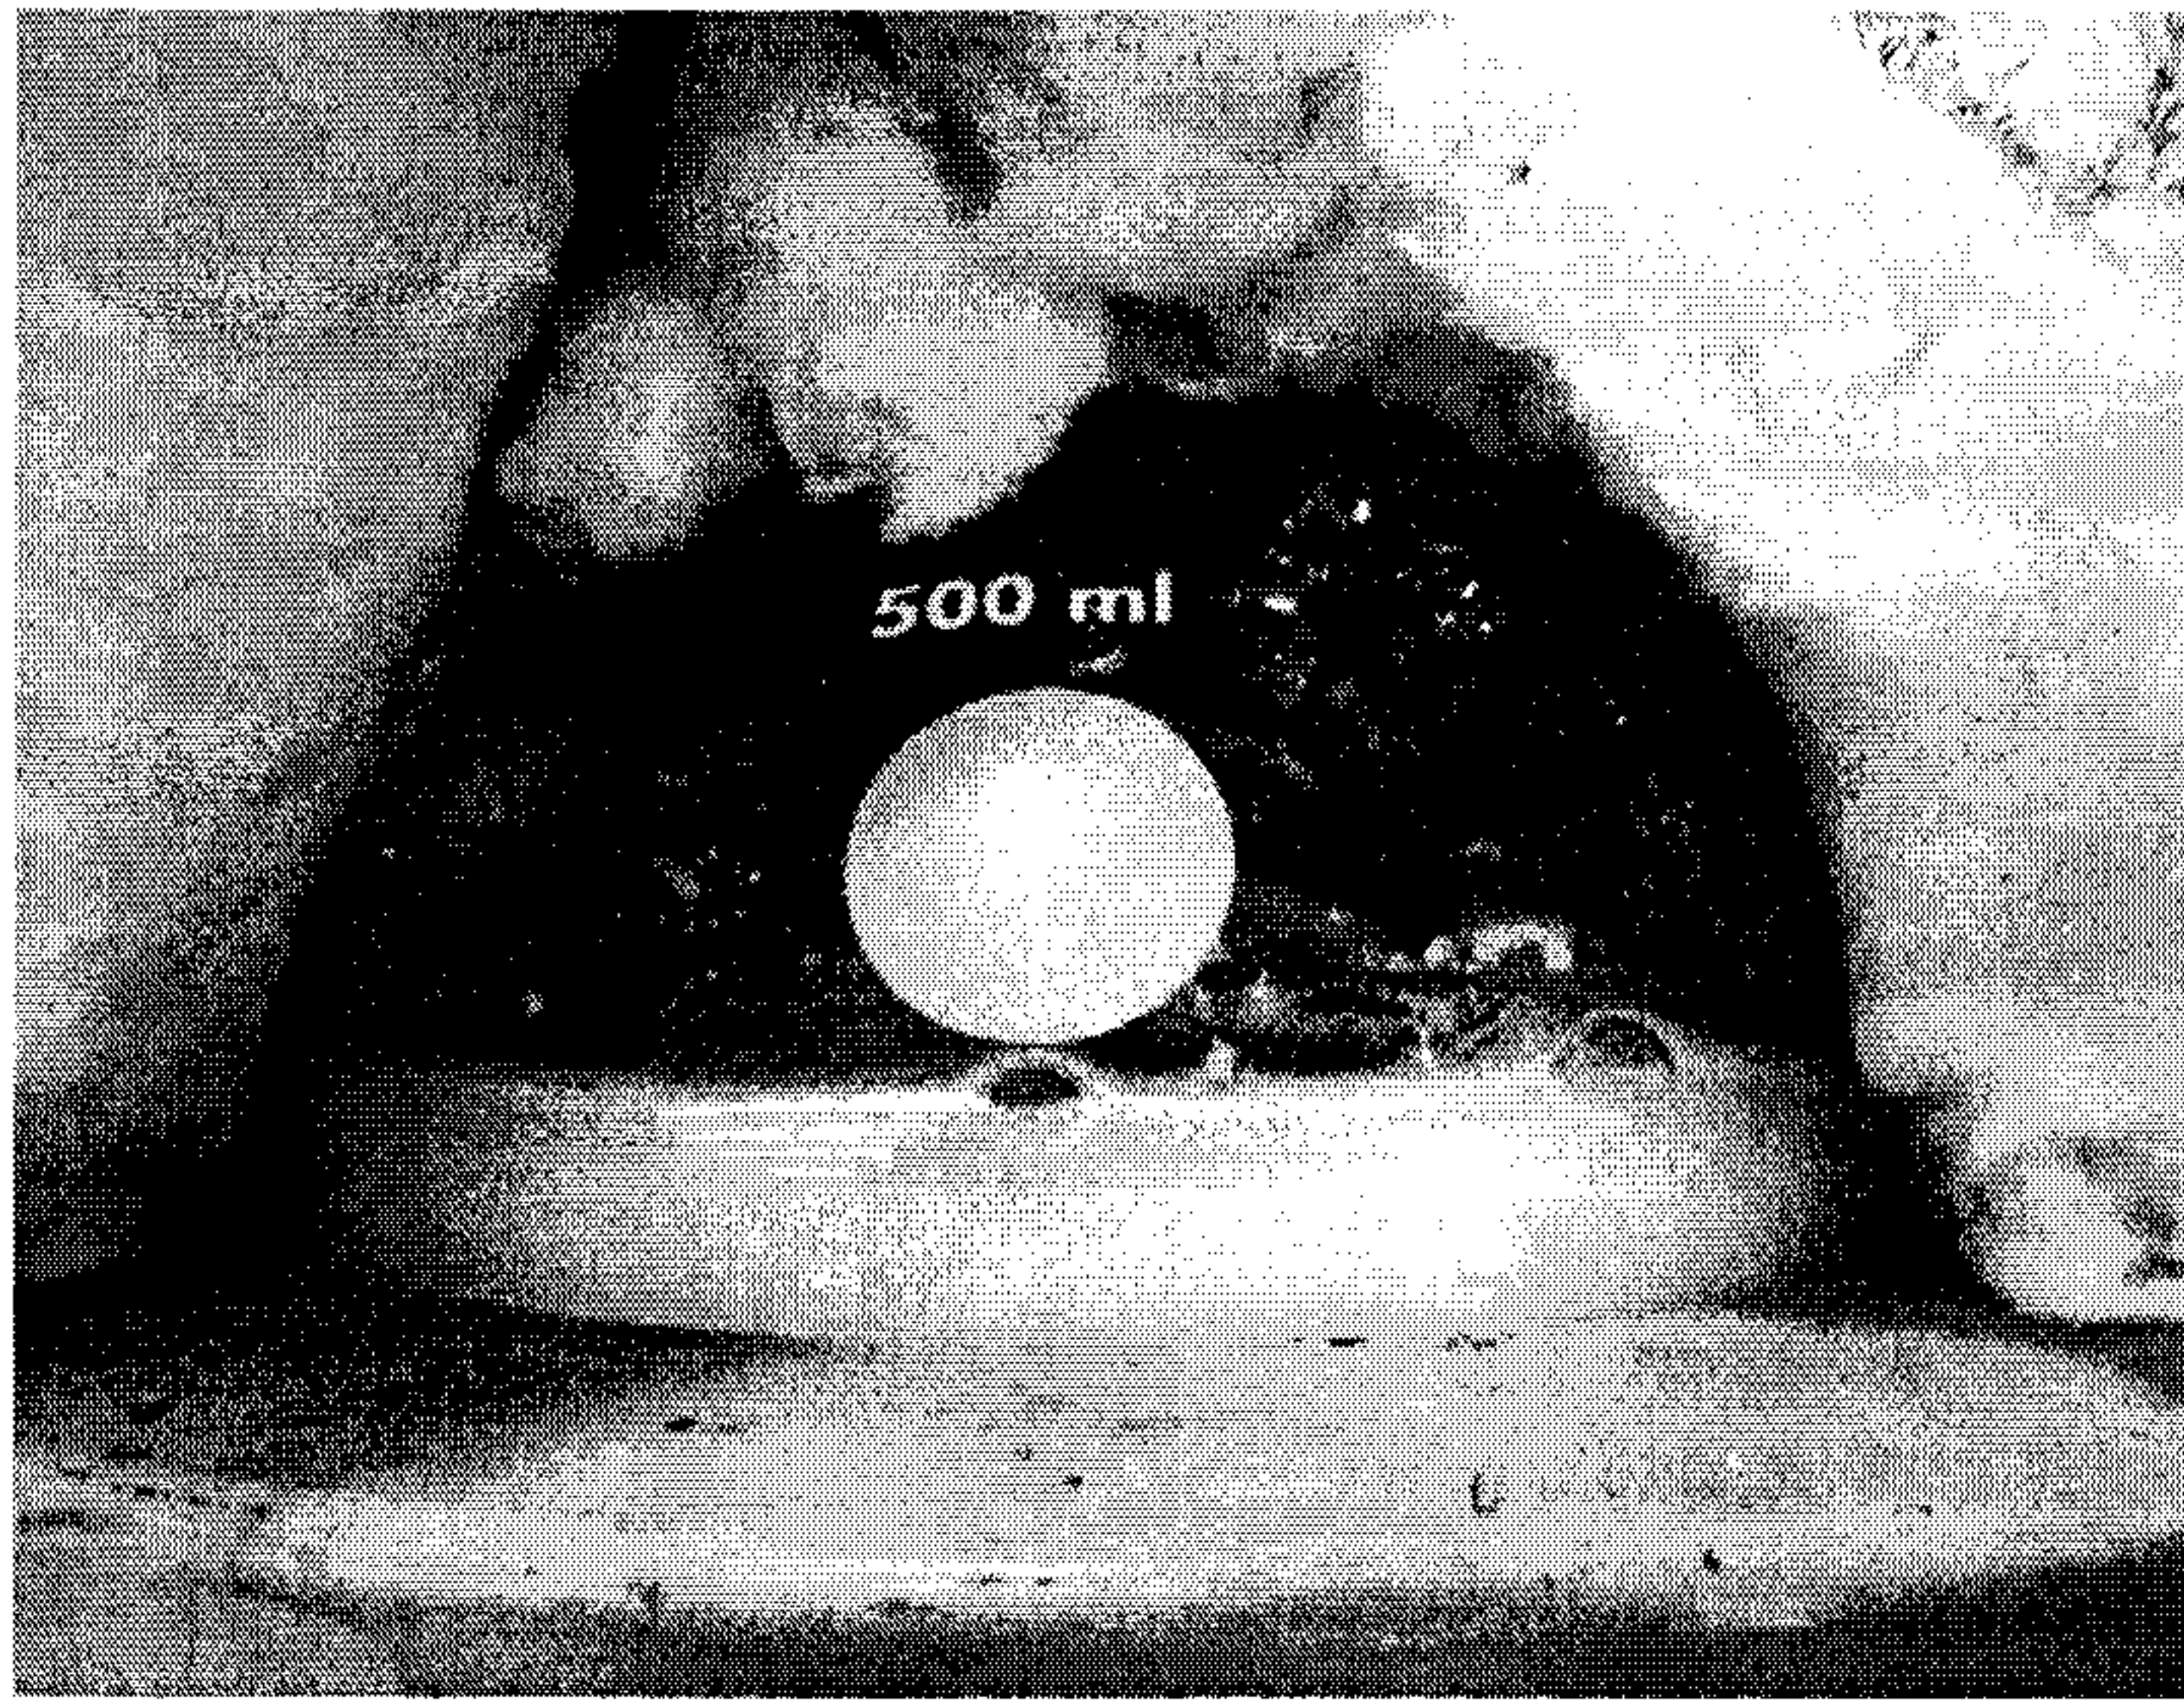

B


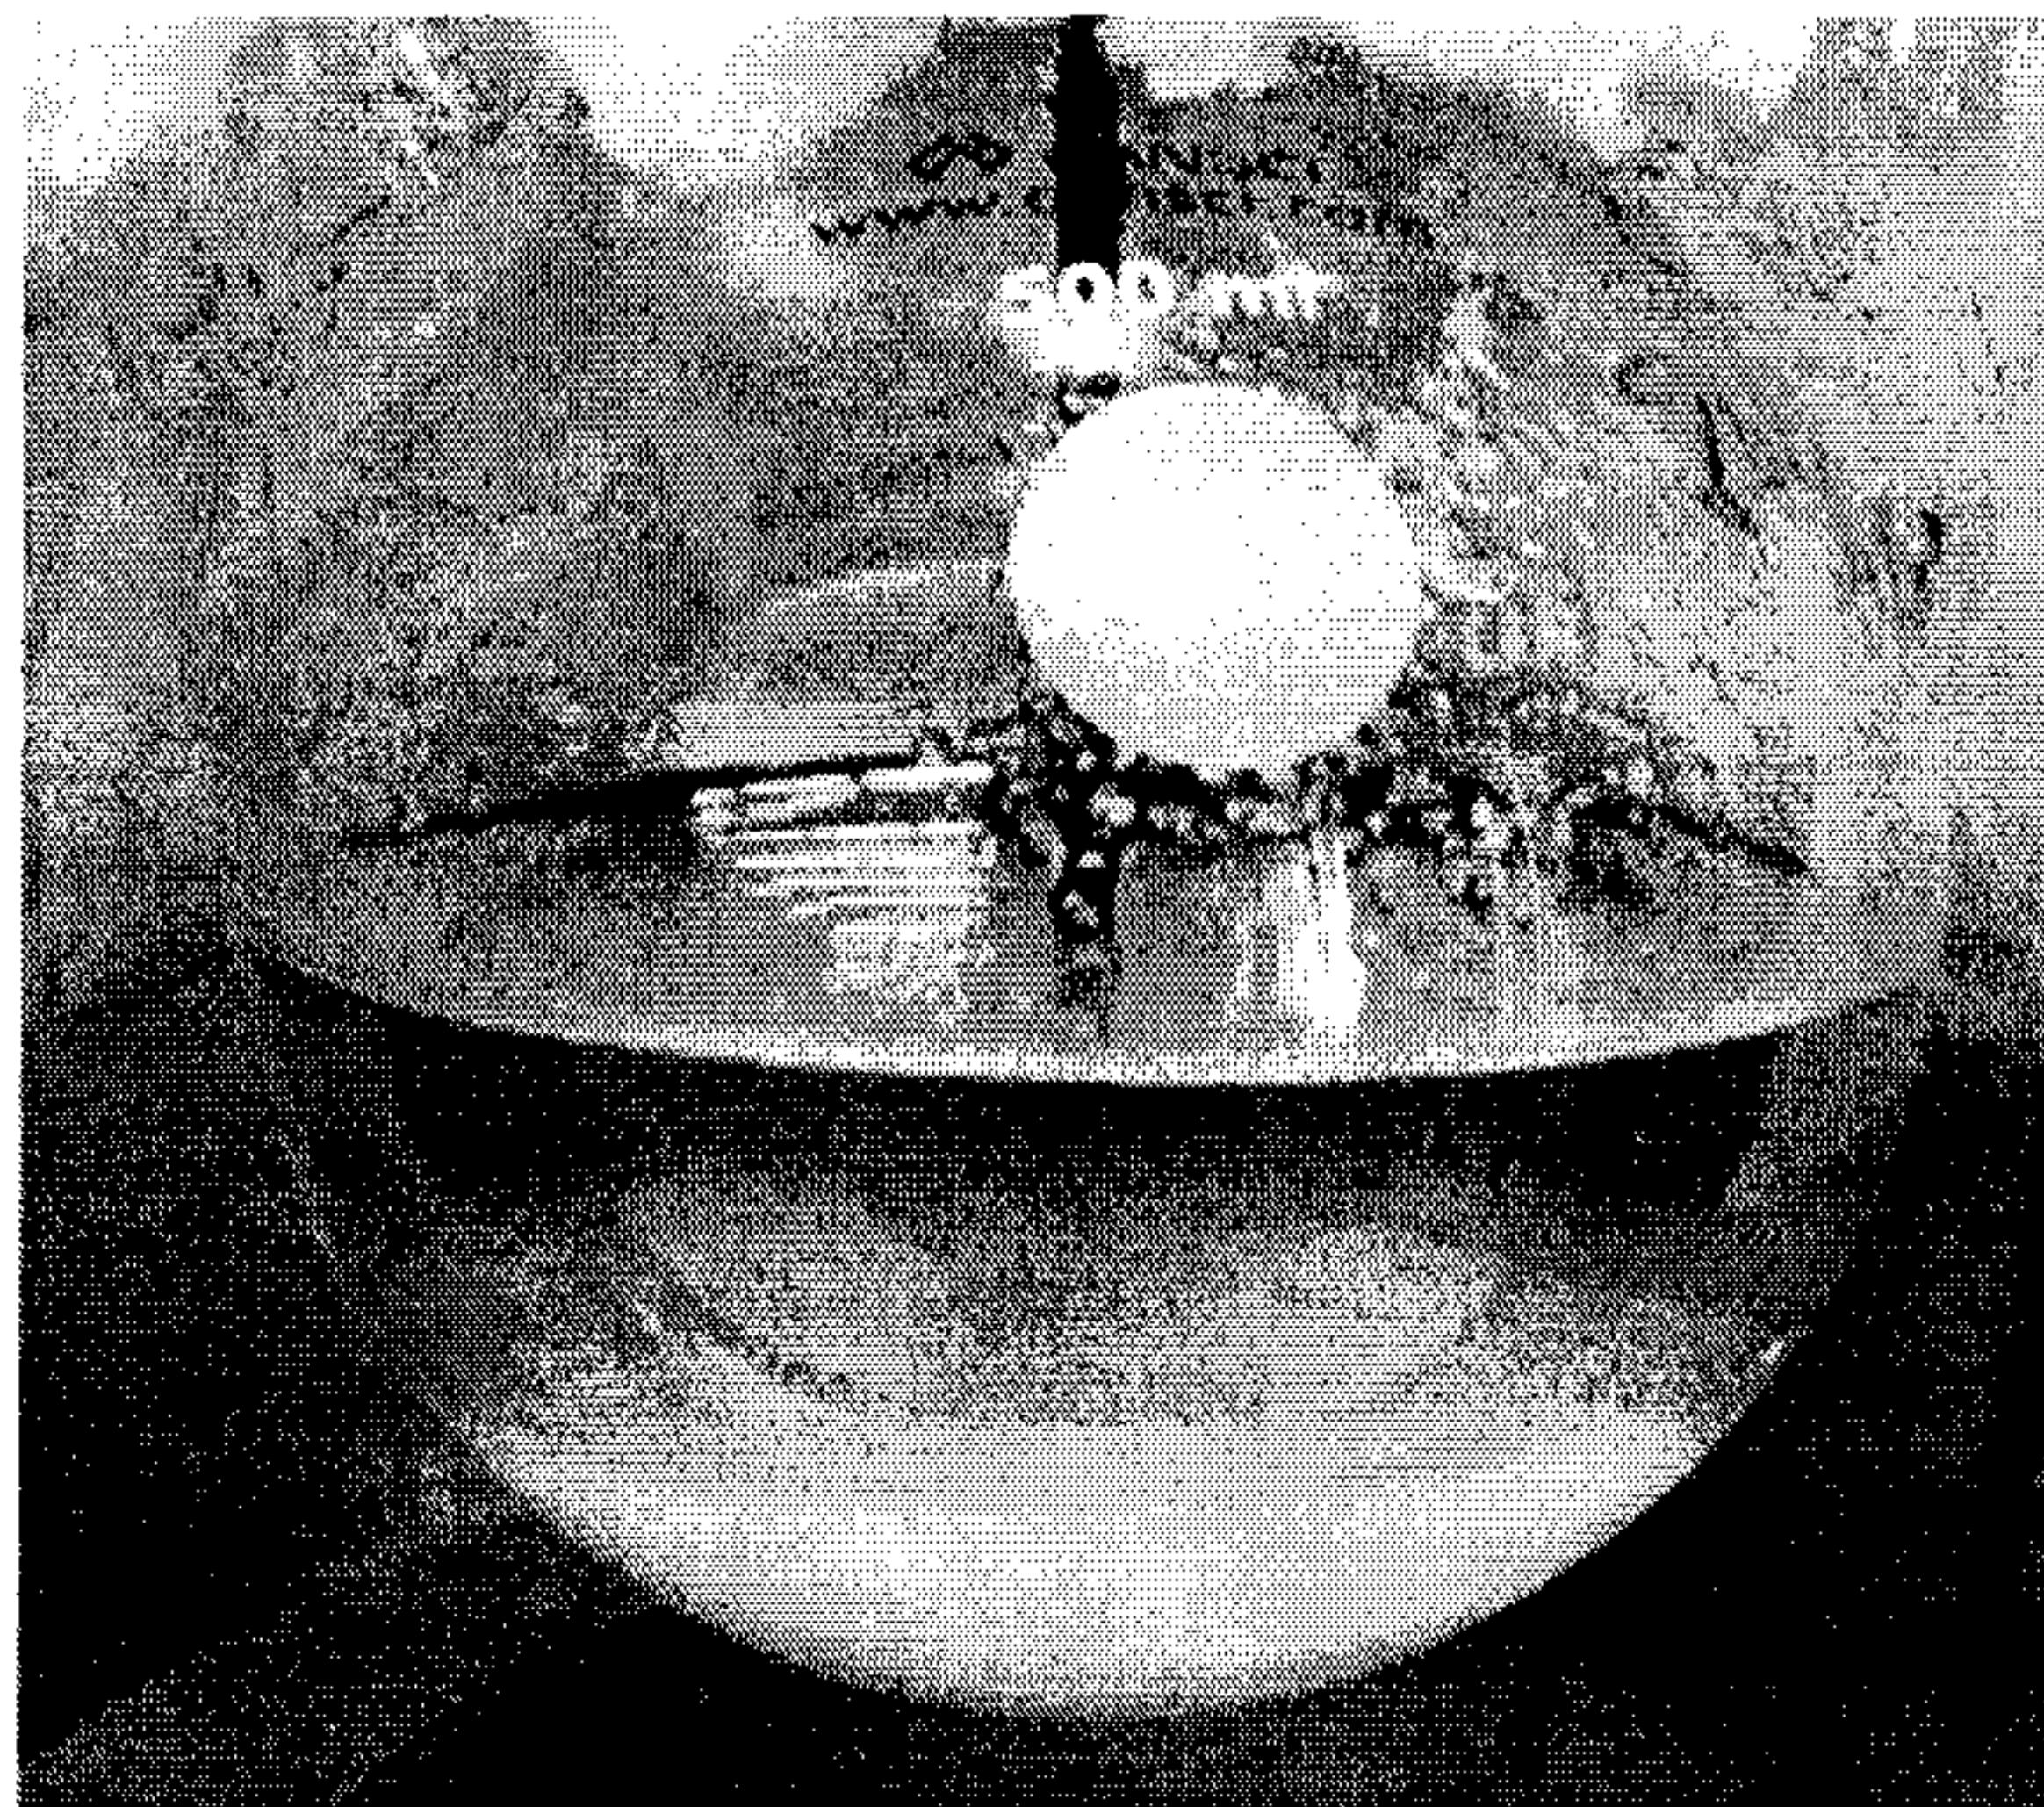


FIG. 13

17/31

C

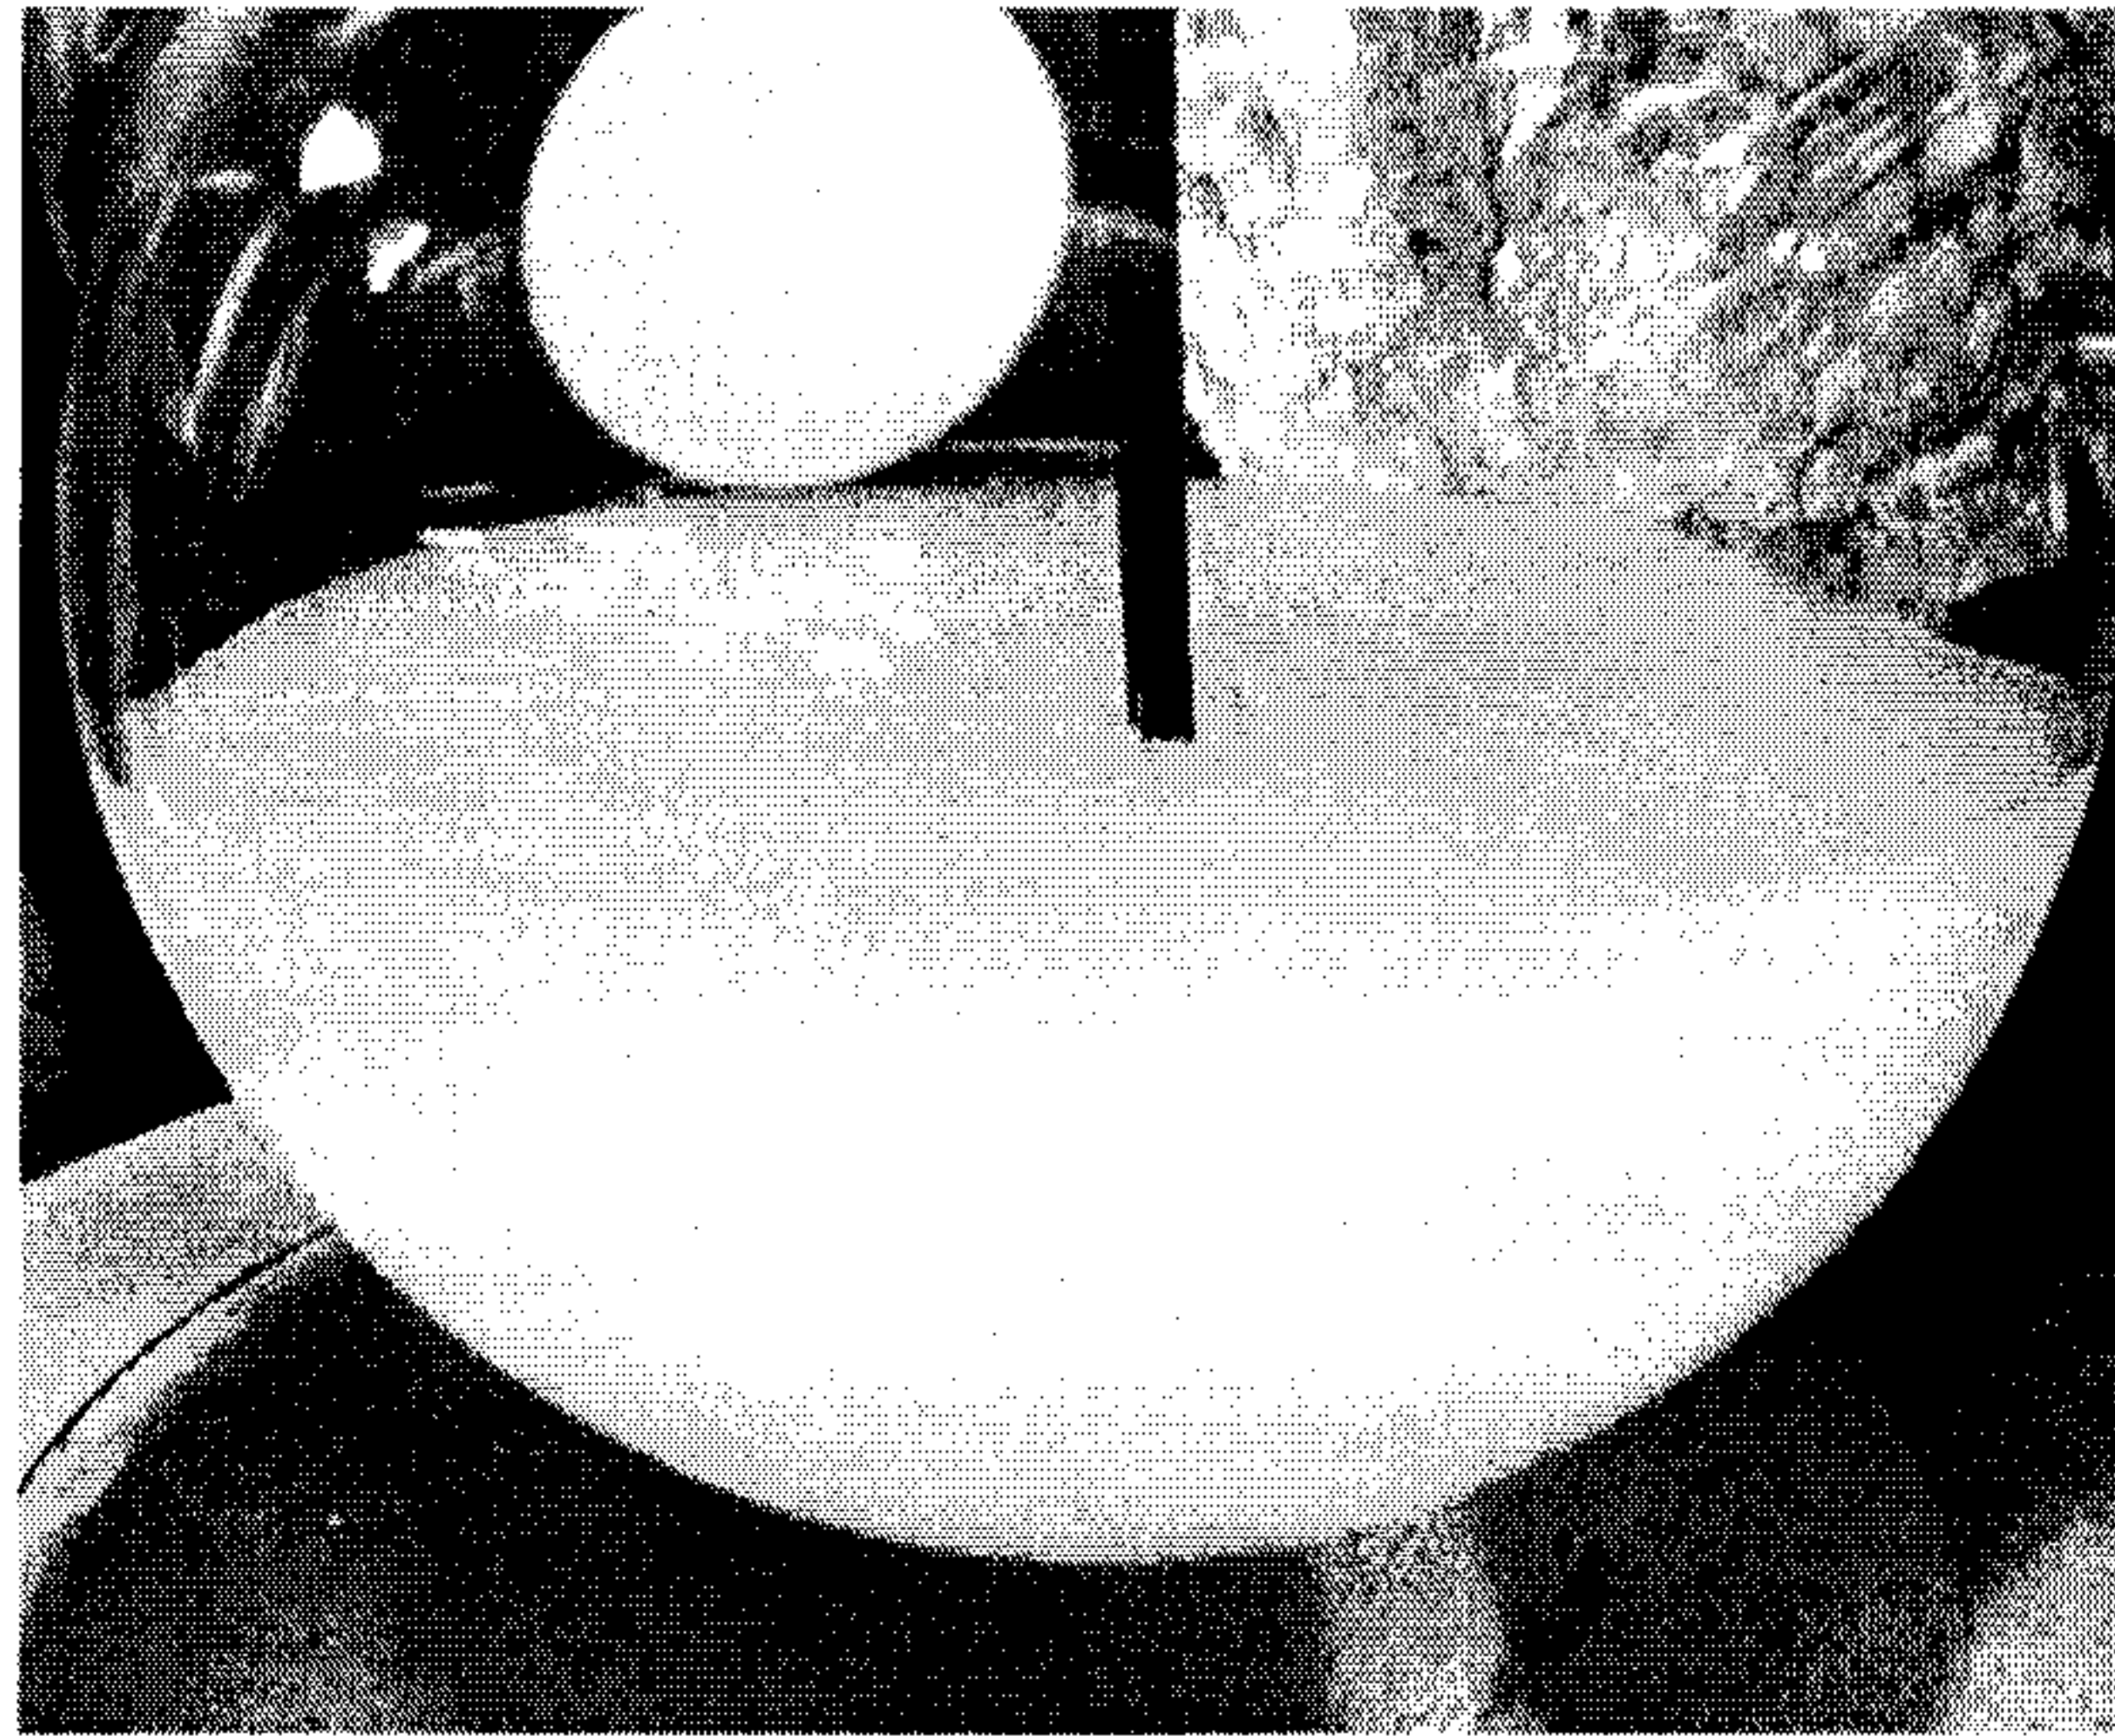

D

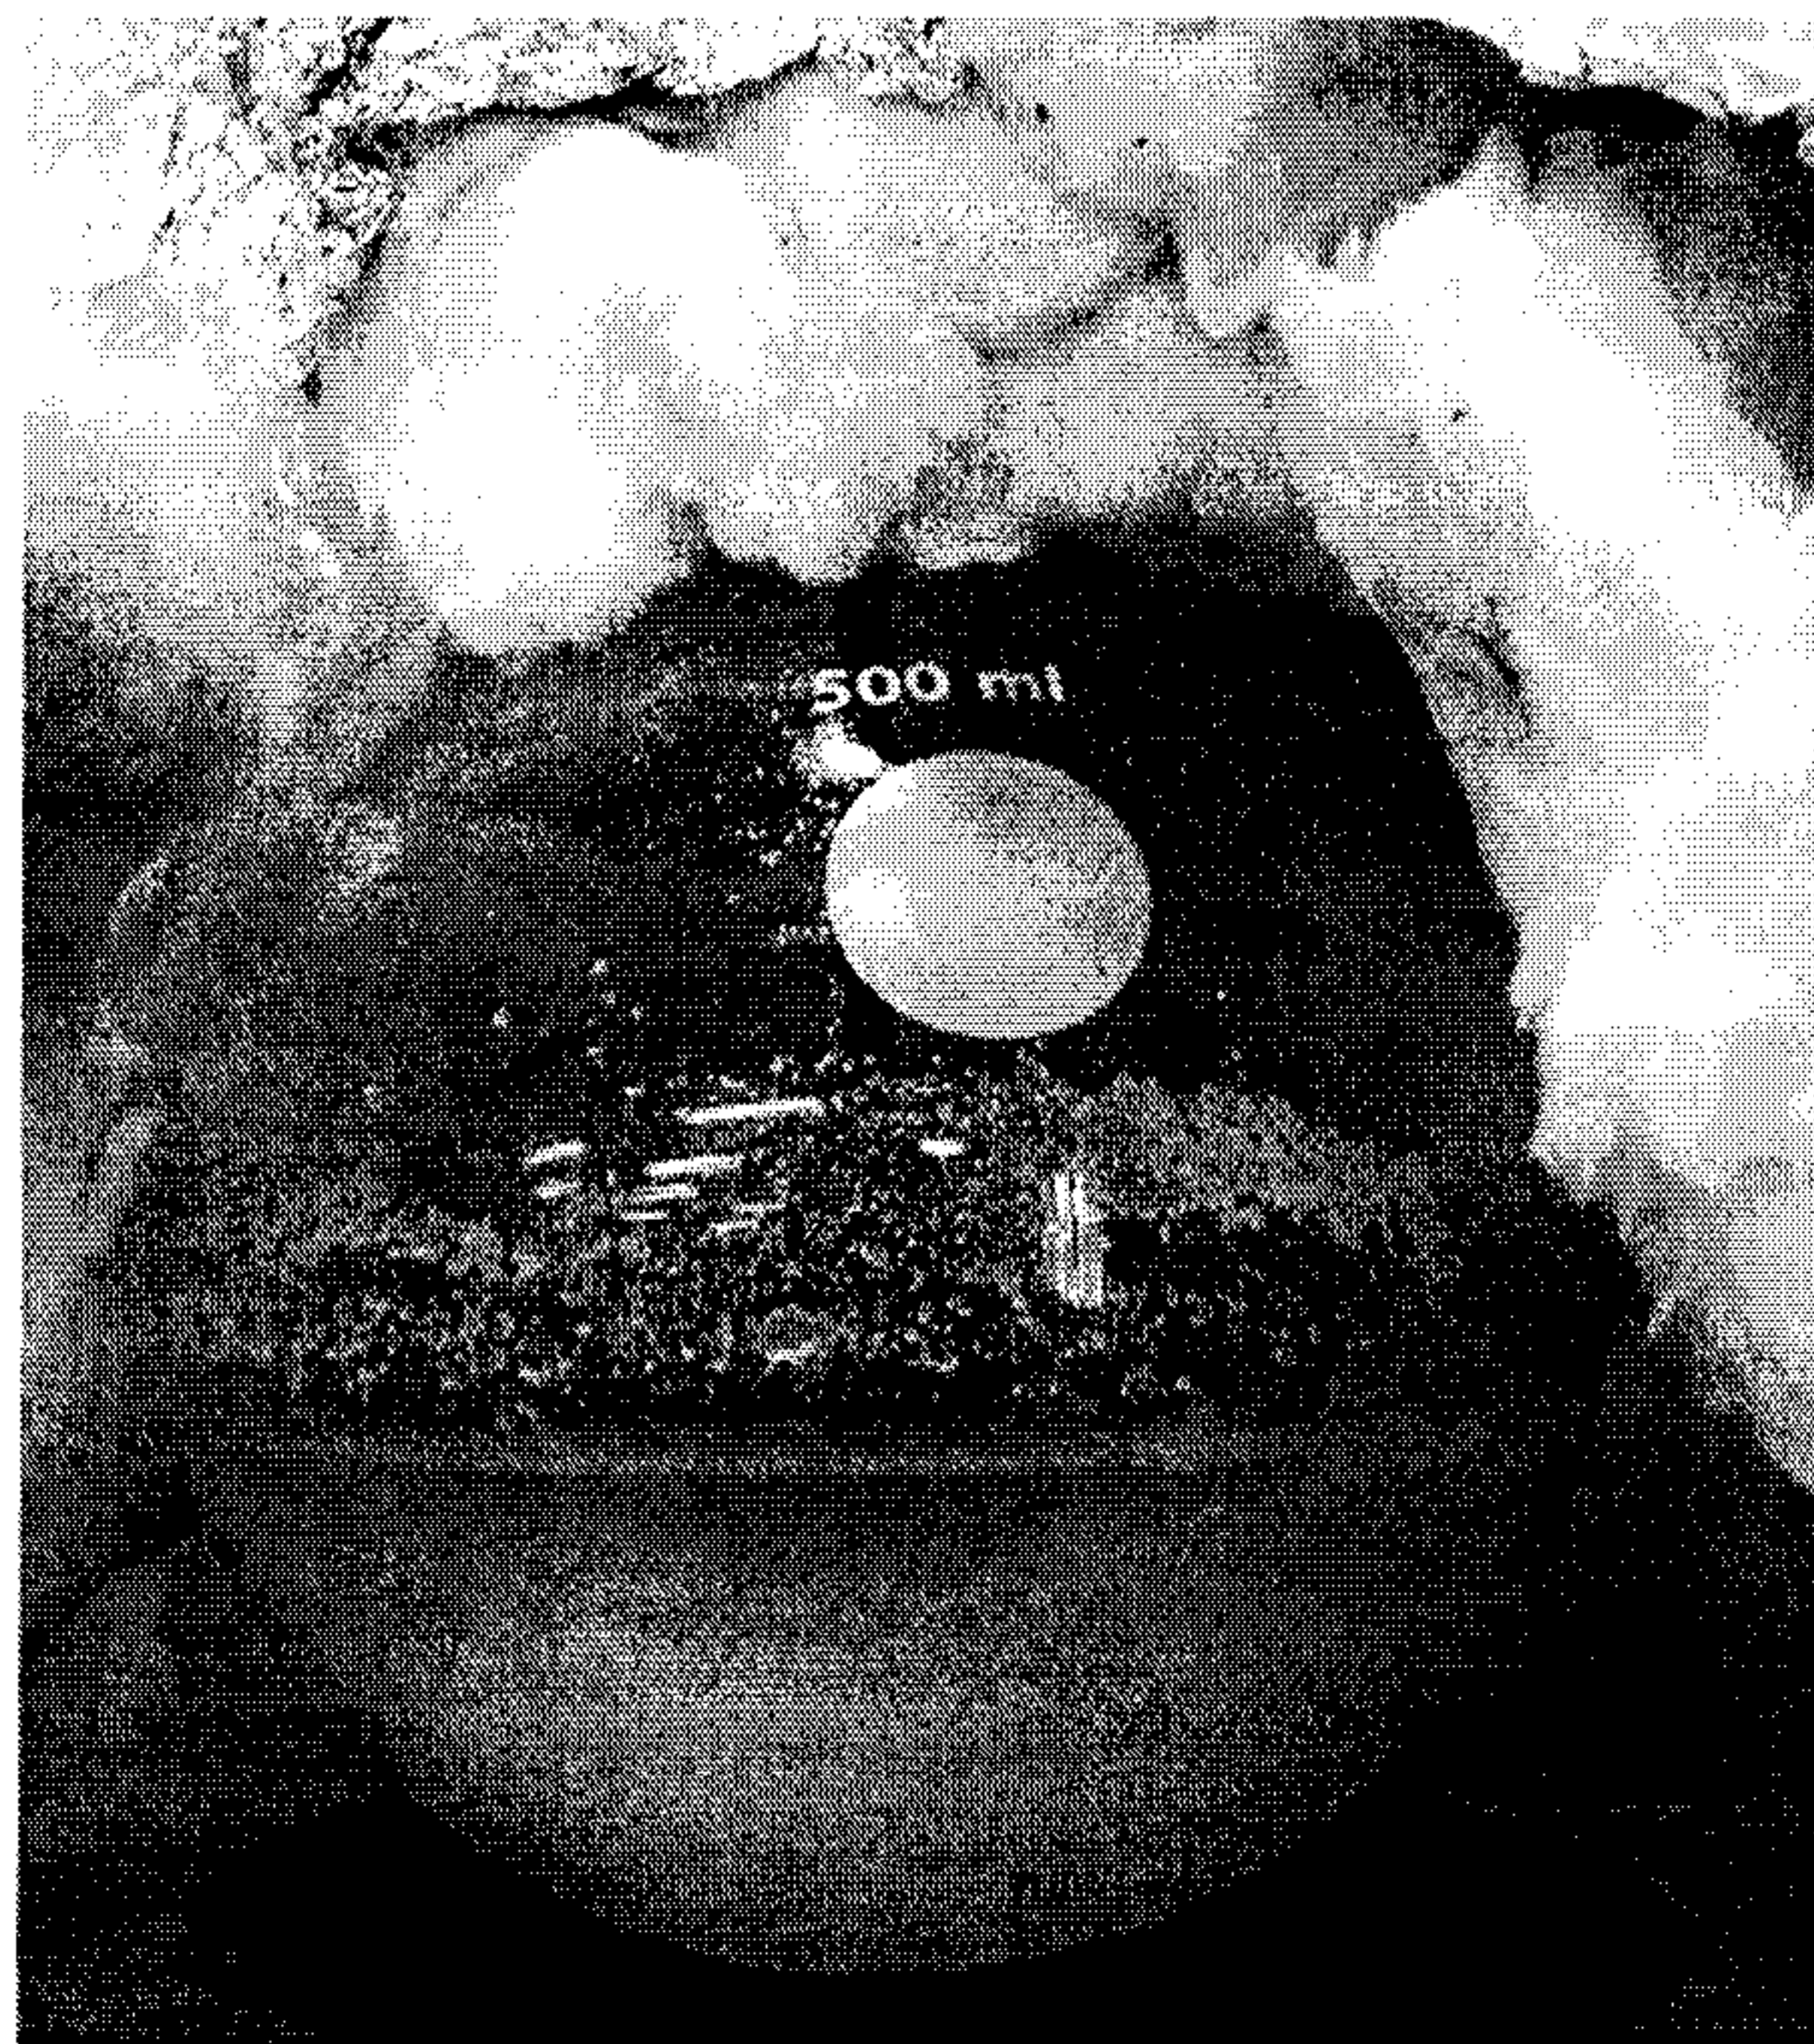


FIG. 13 (cont.)

18/31

E


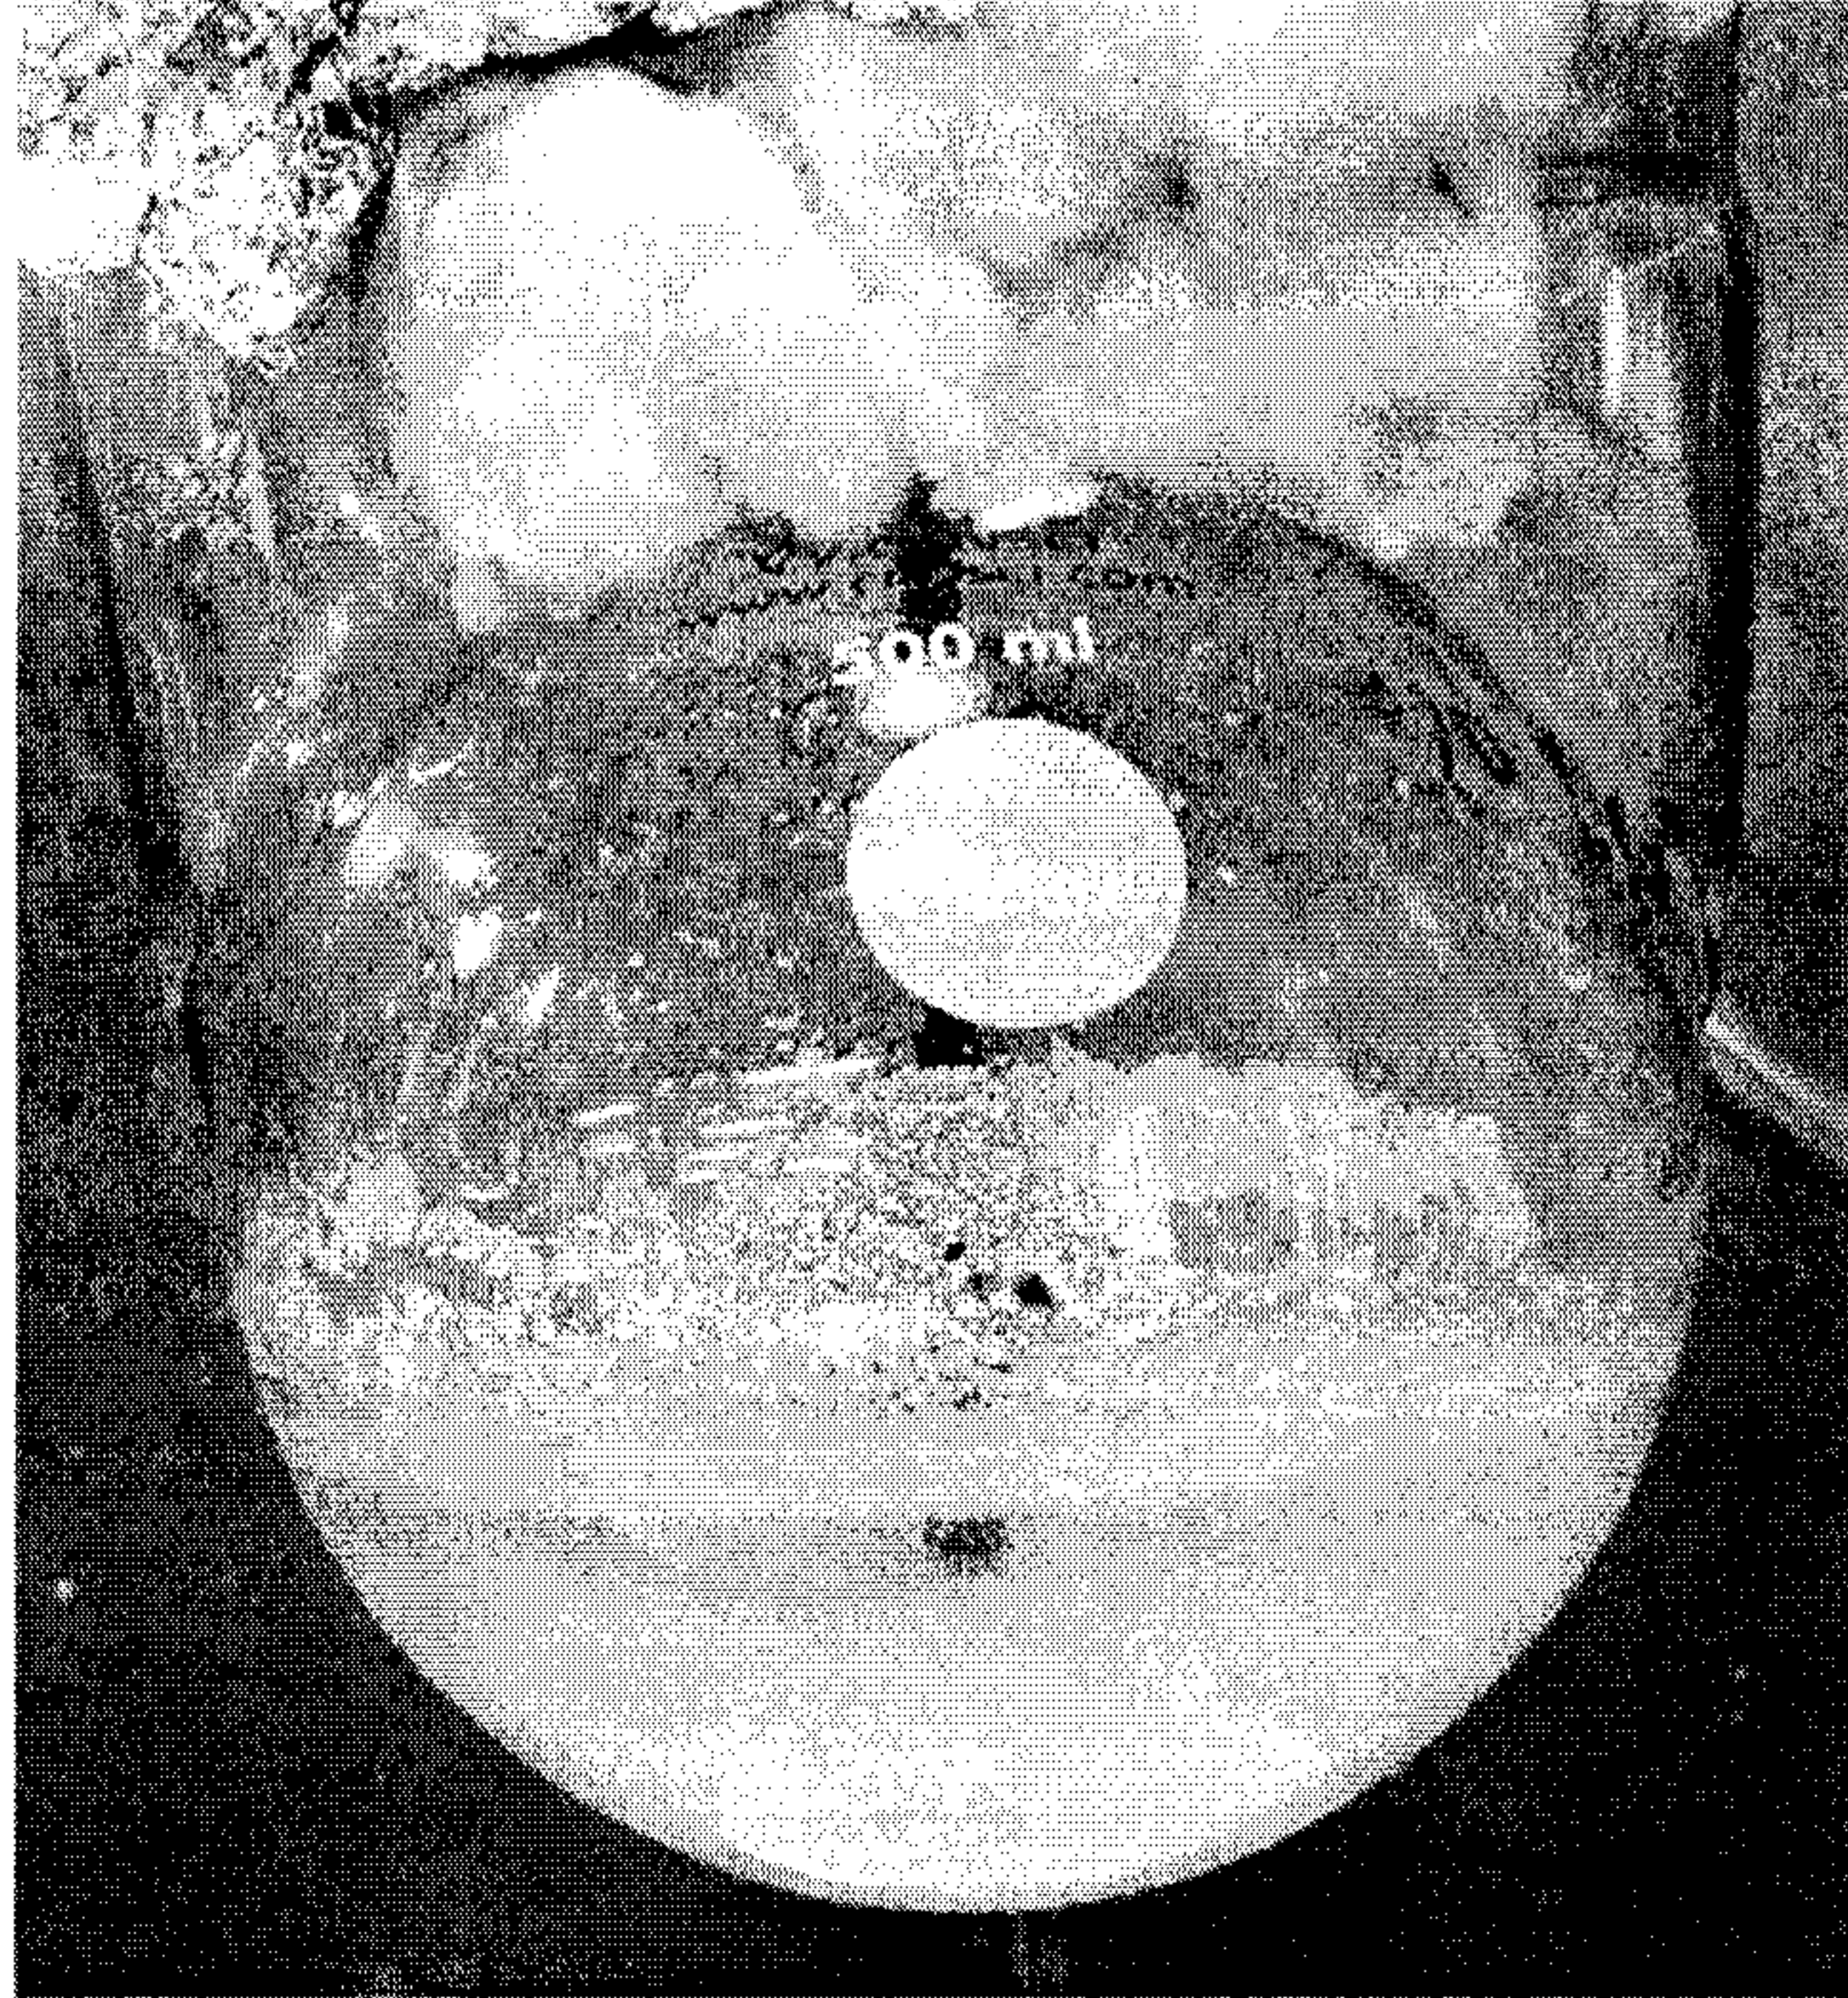


FIG. 13 (cont.)

19/31

A

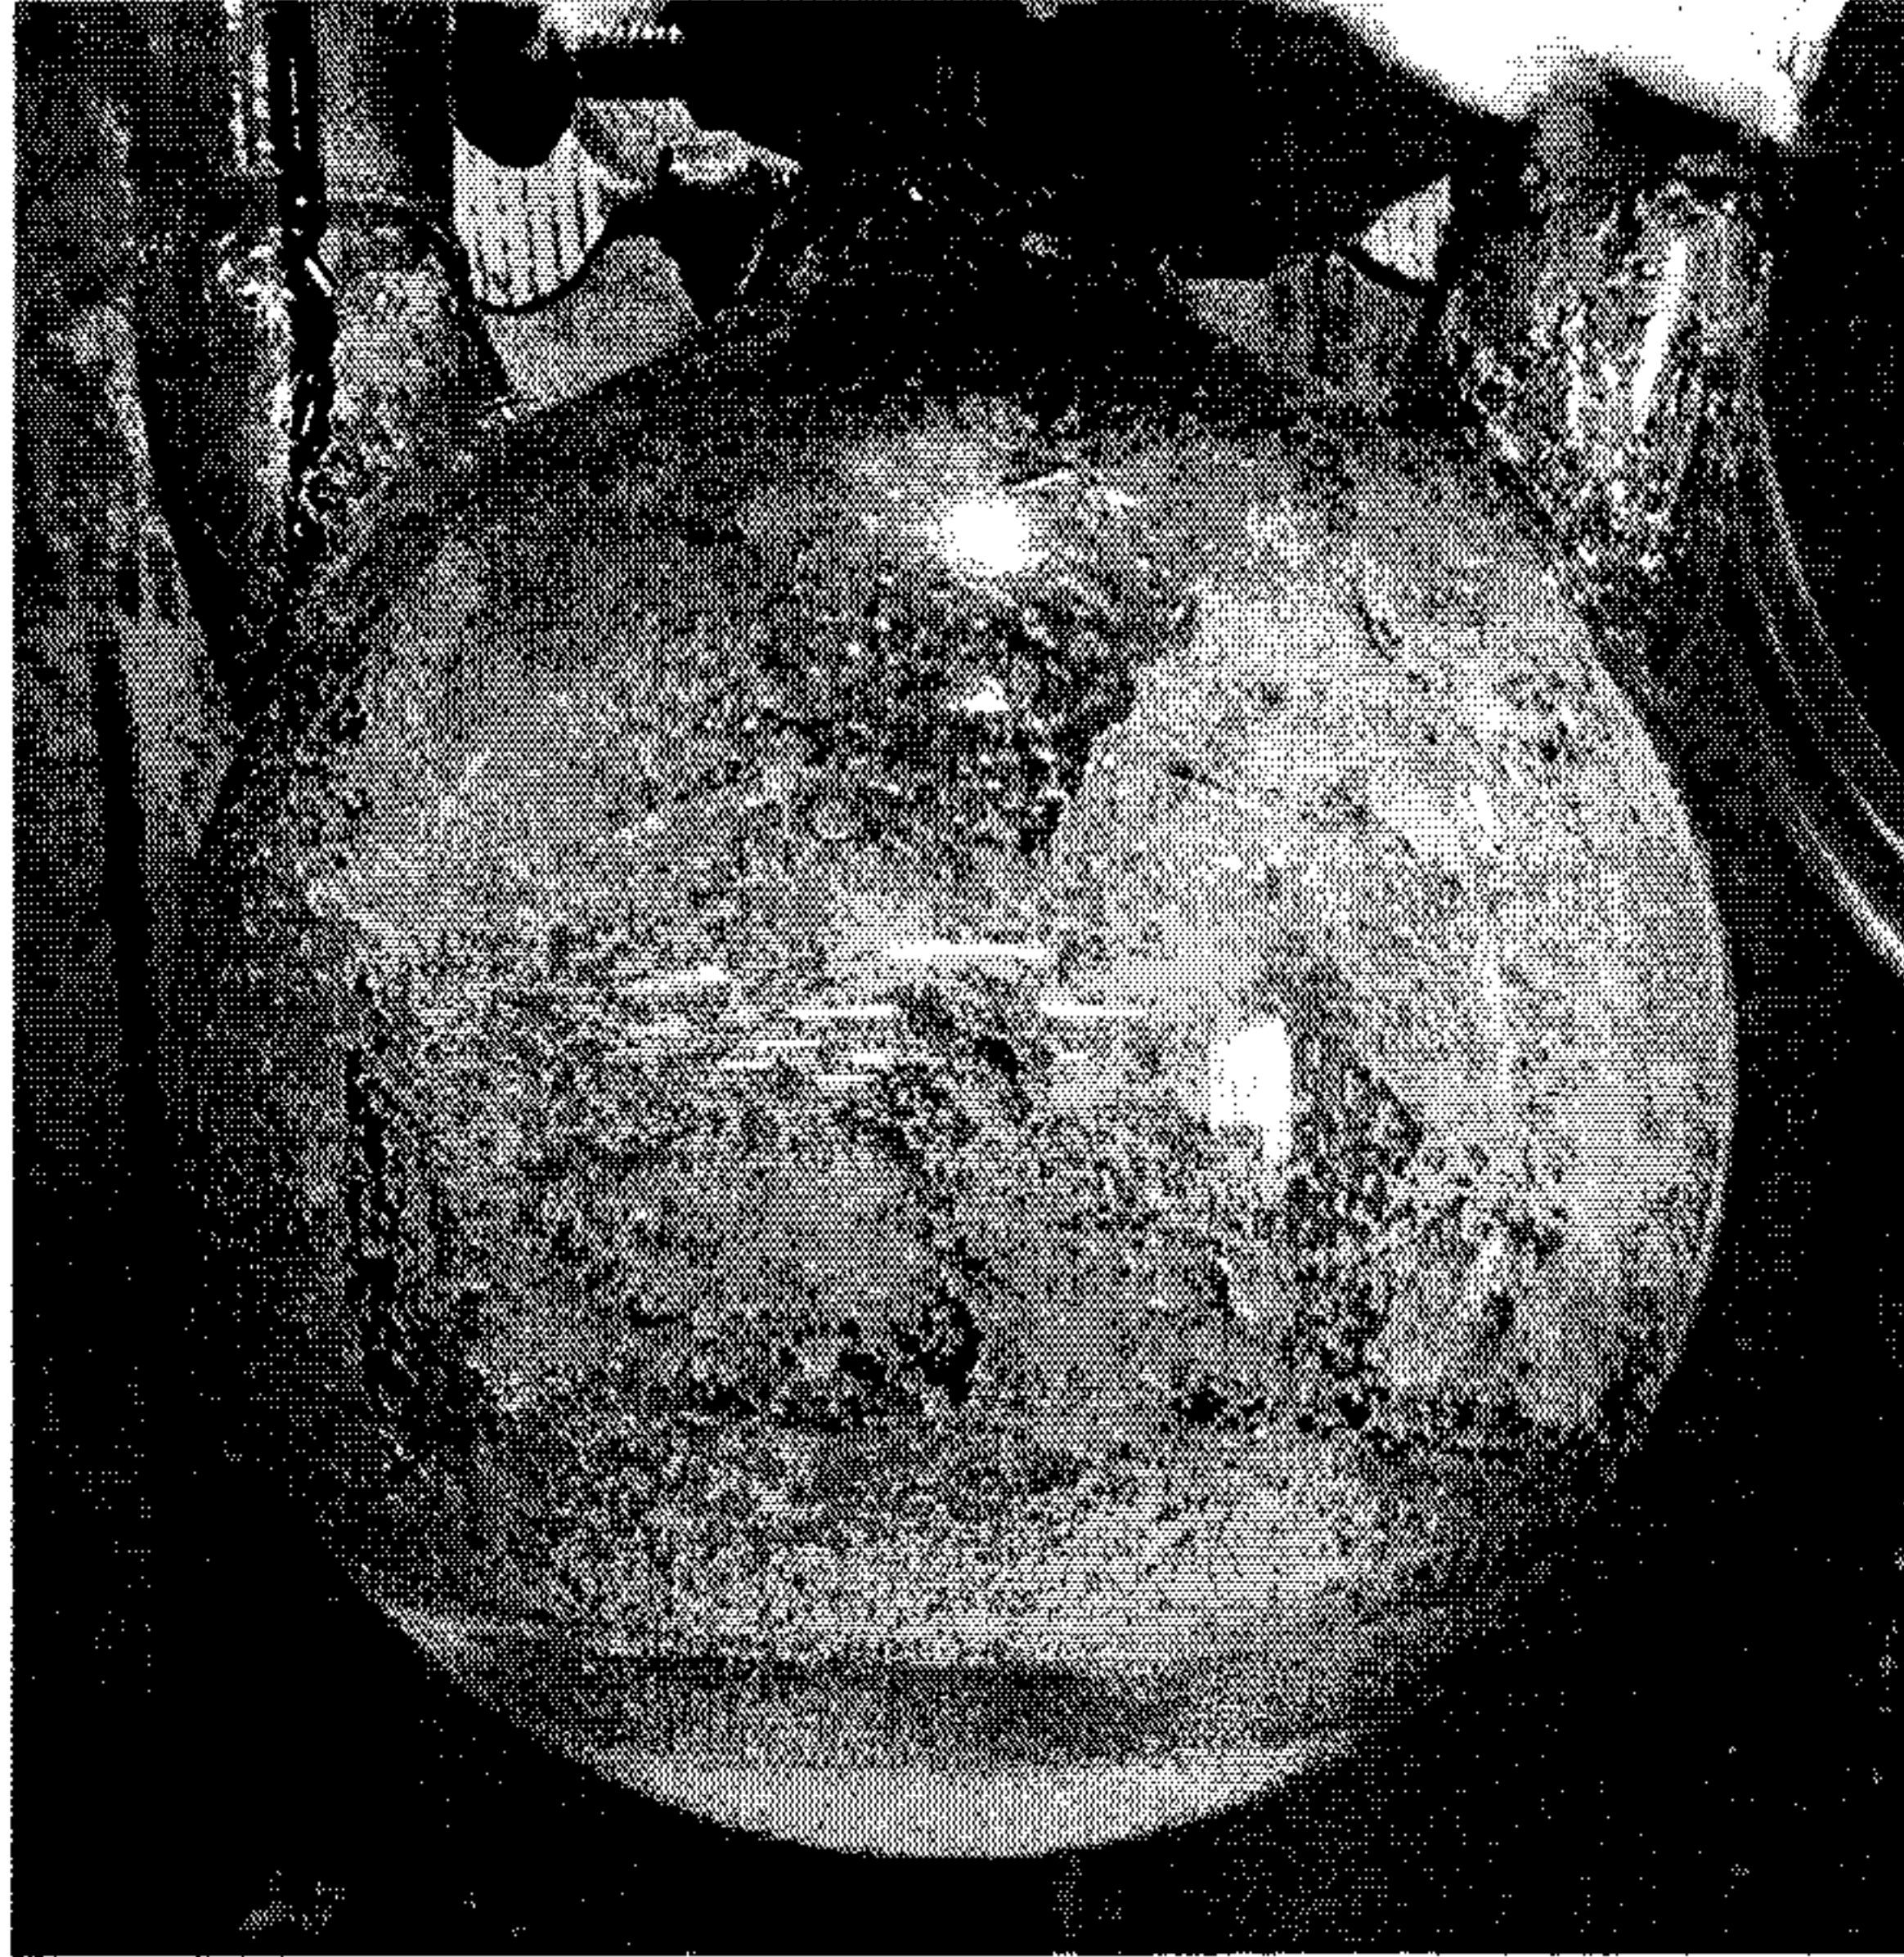

B



FIG. 14

20/31

C



D

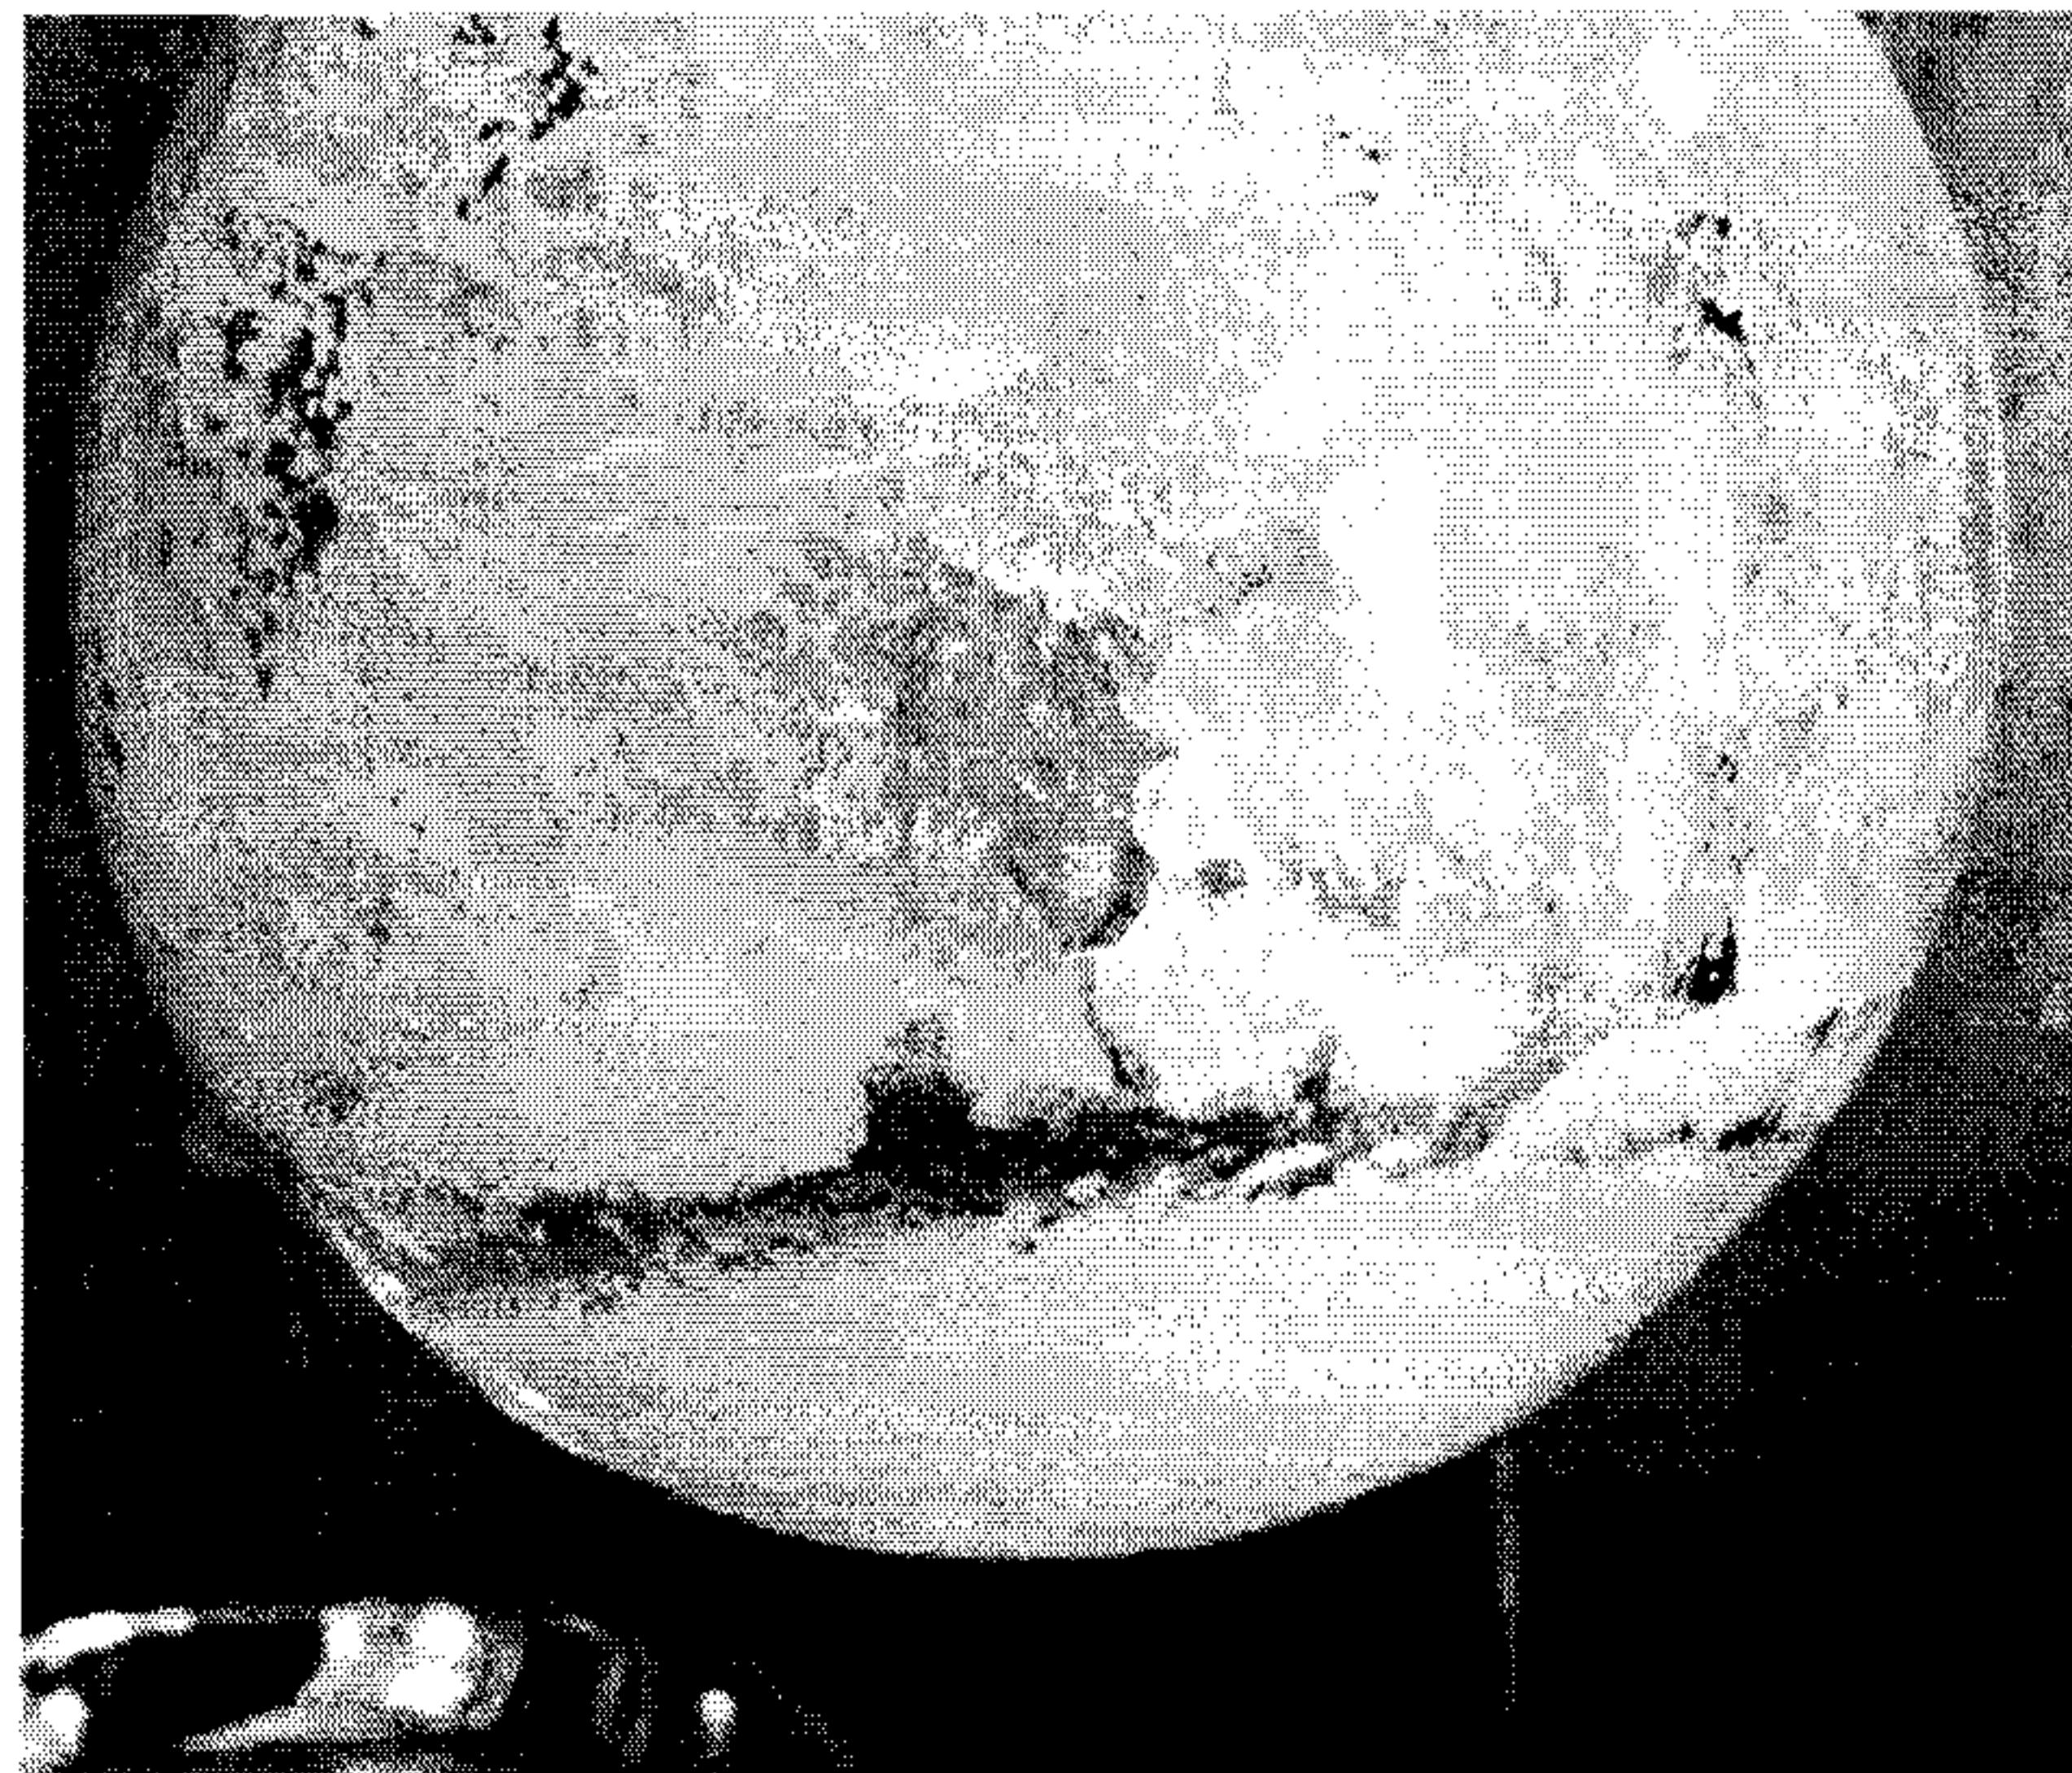


FIG. 14 (cont.)

21/31

A




B



FIG. 15

22/31

C

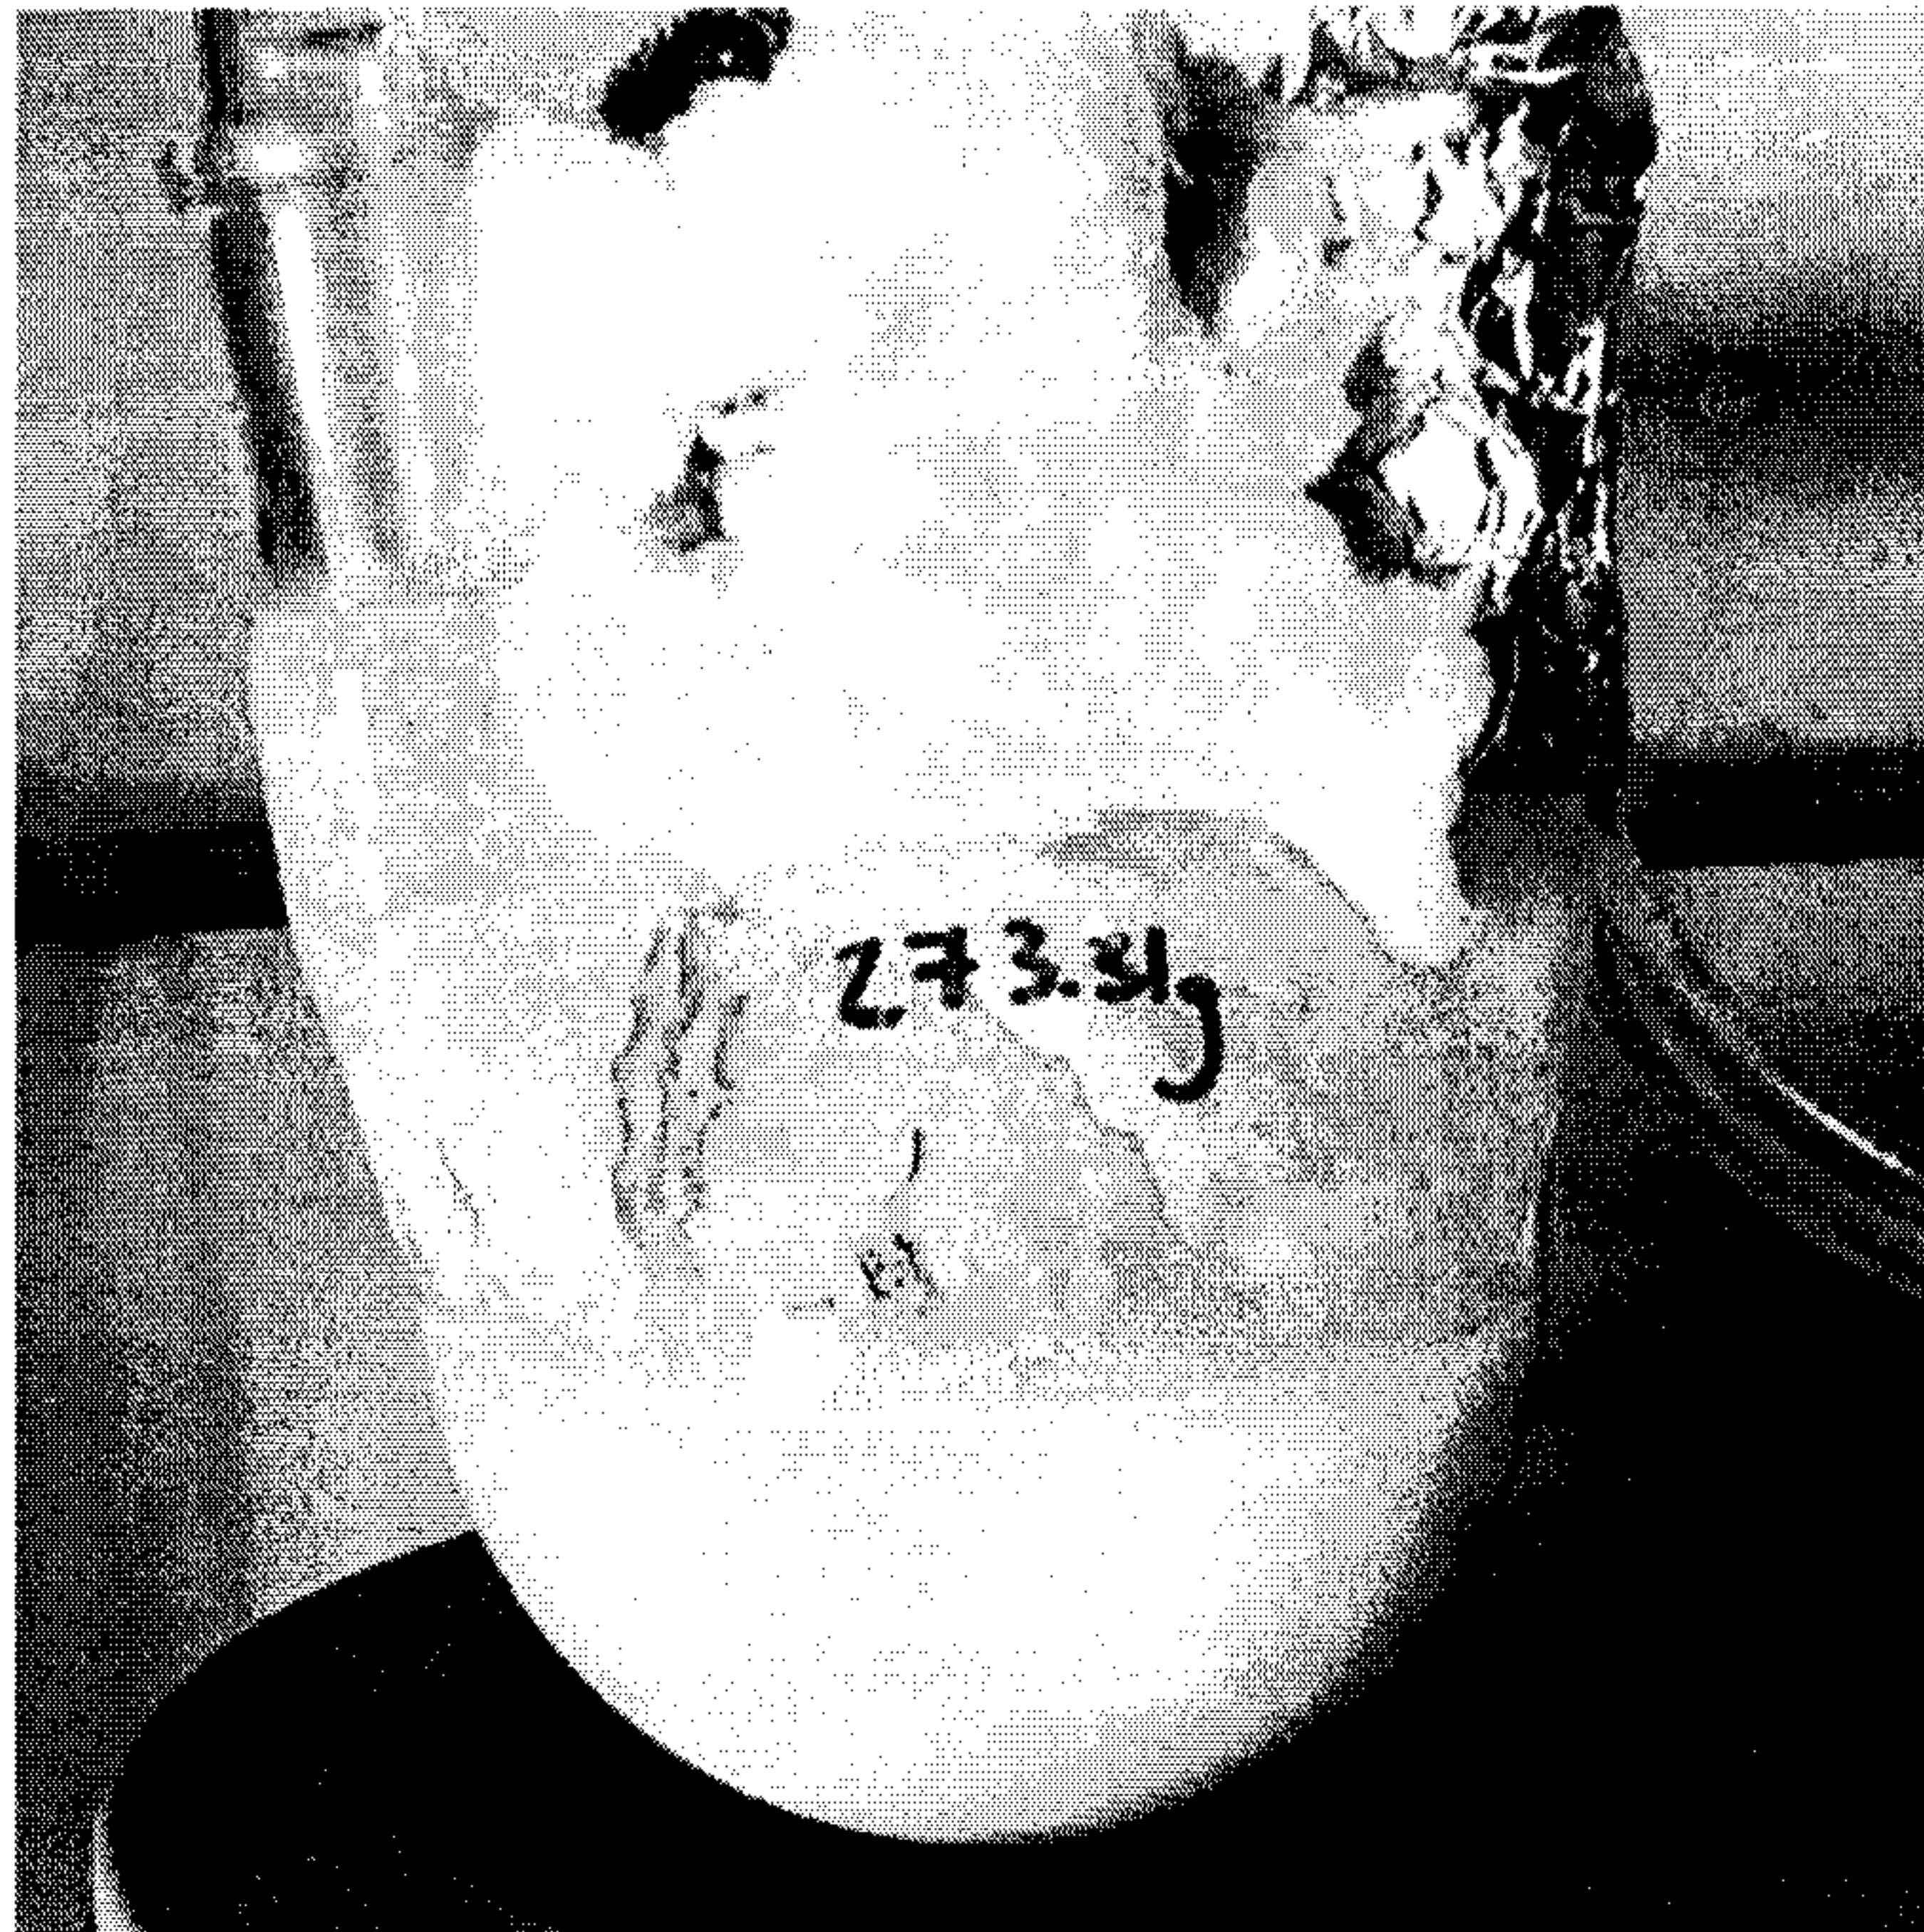


D



FIG. 15 (cont.)

23/31

E

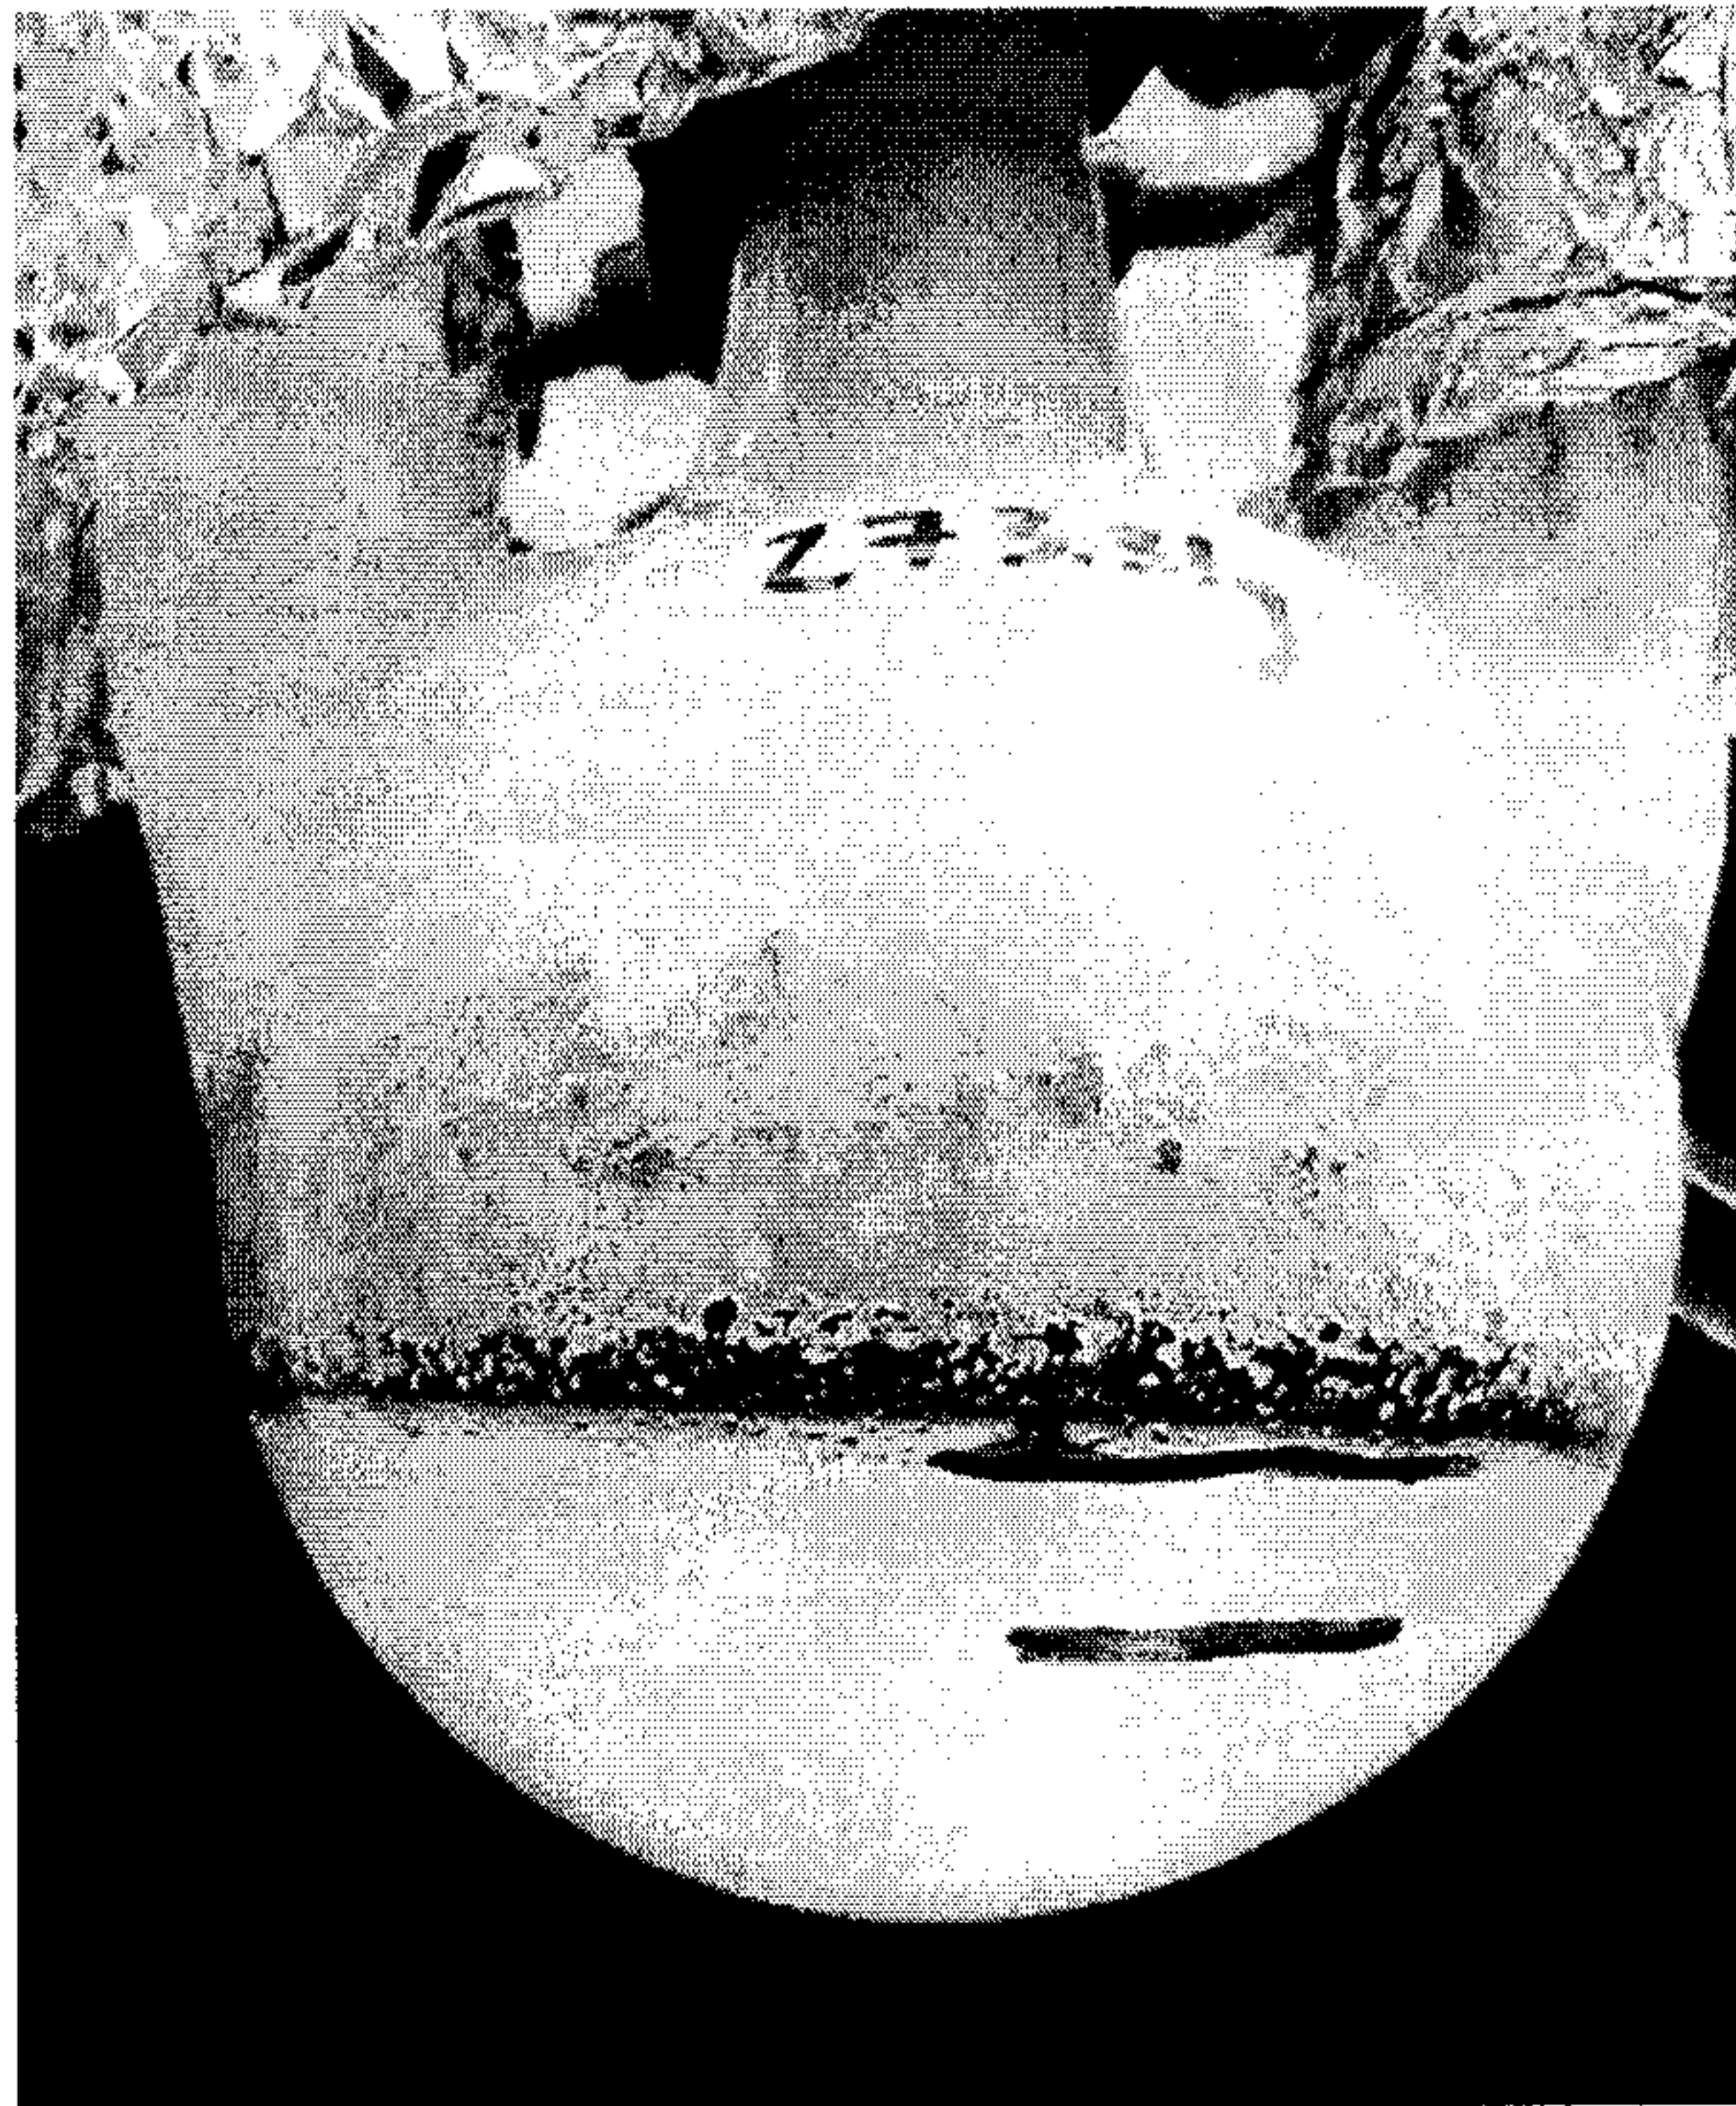

F


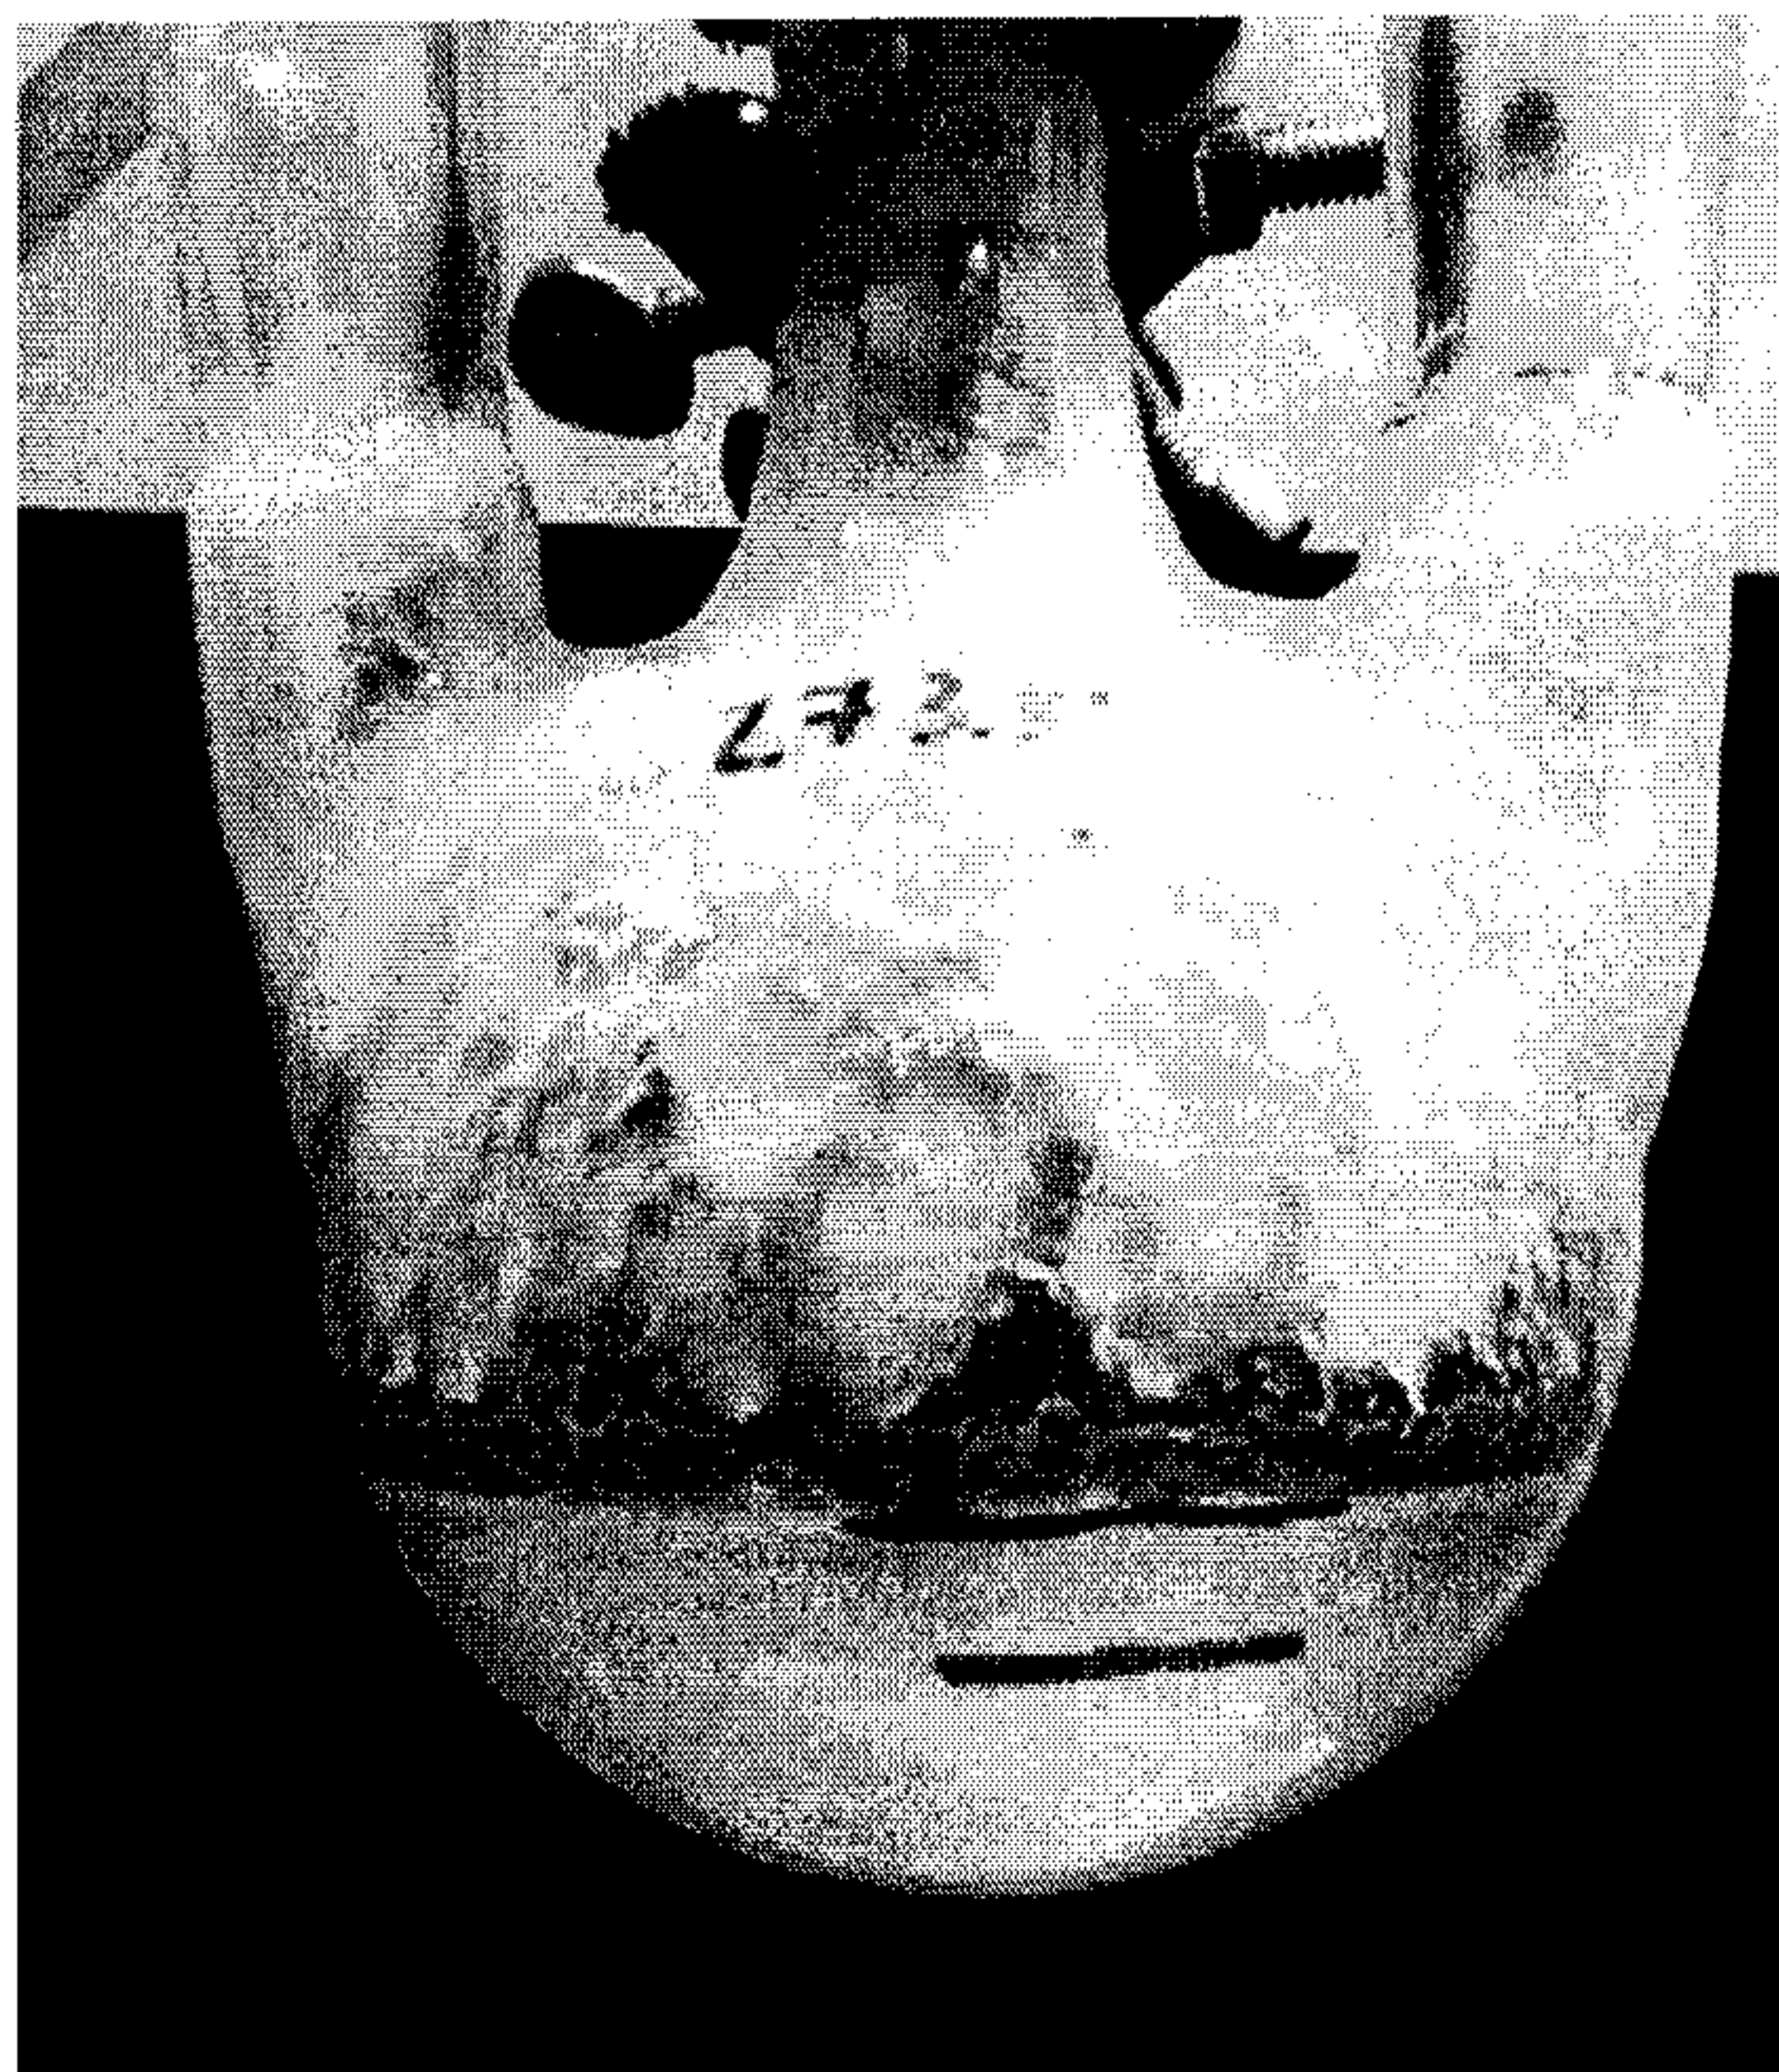


FIG. 15 (cont.)

24/31

A

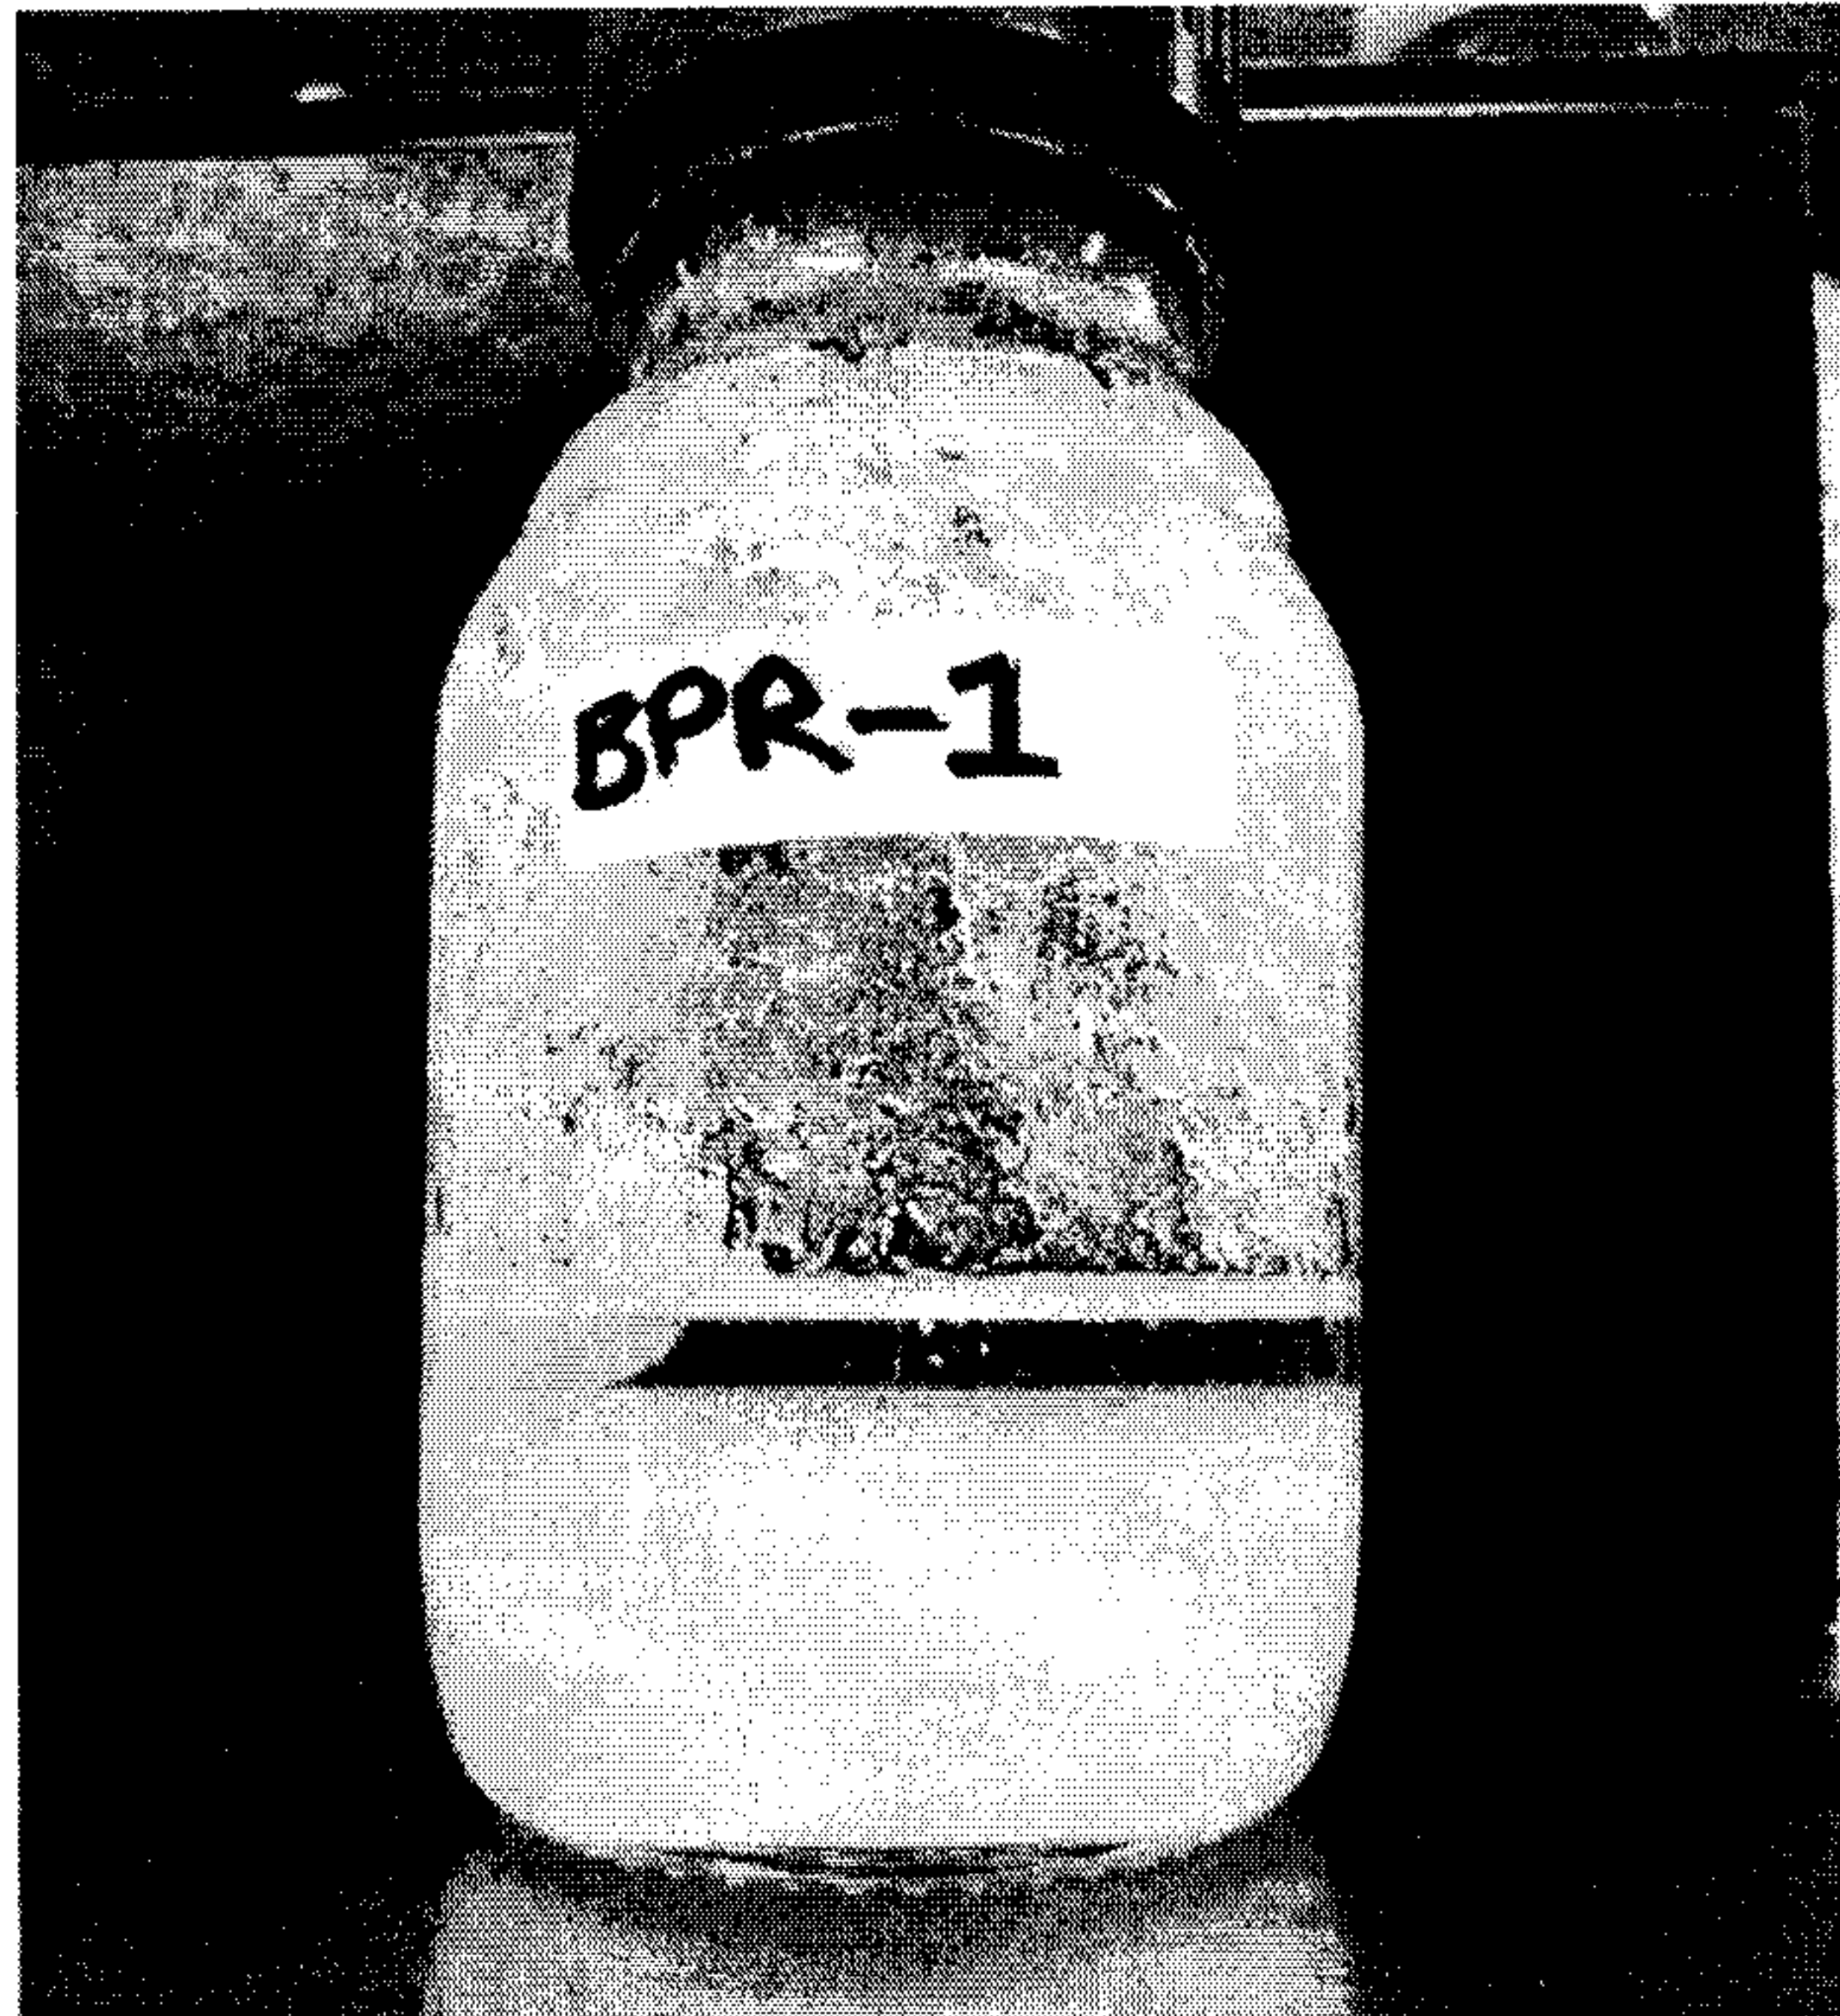


B



FIG. 16

25/31

C

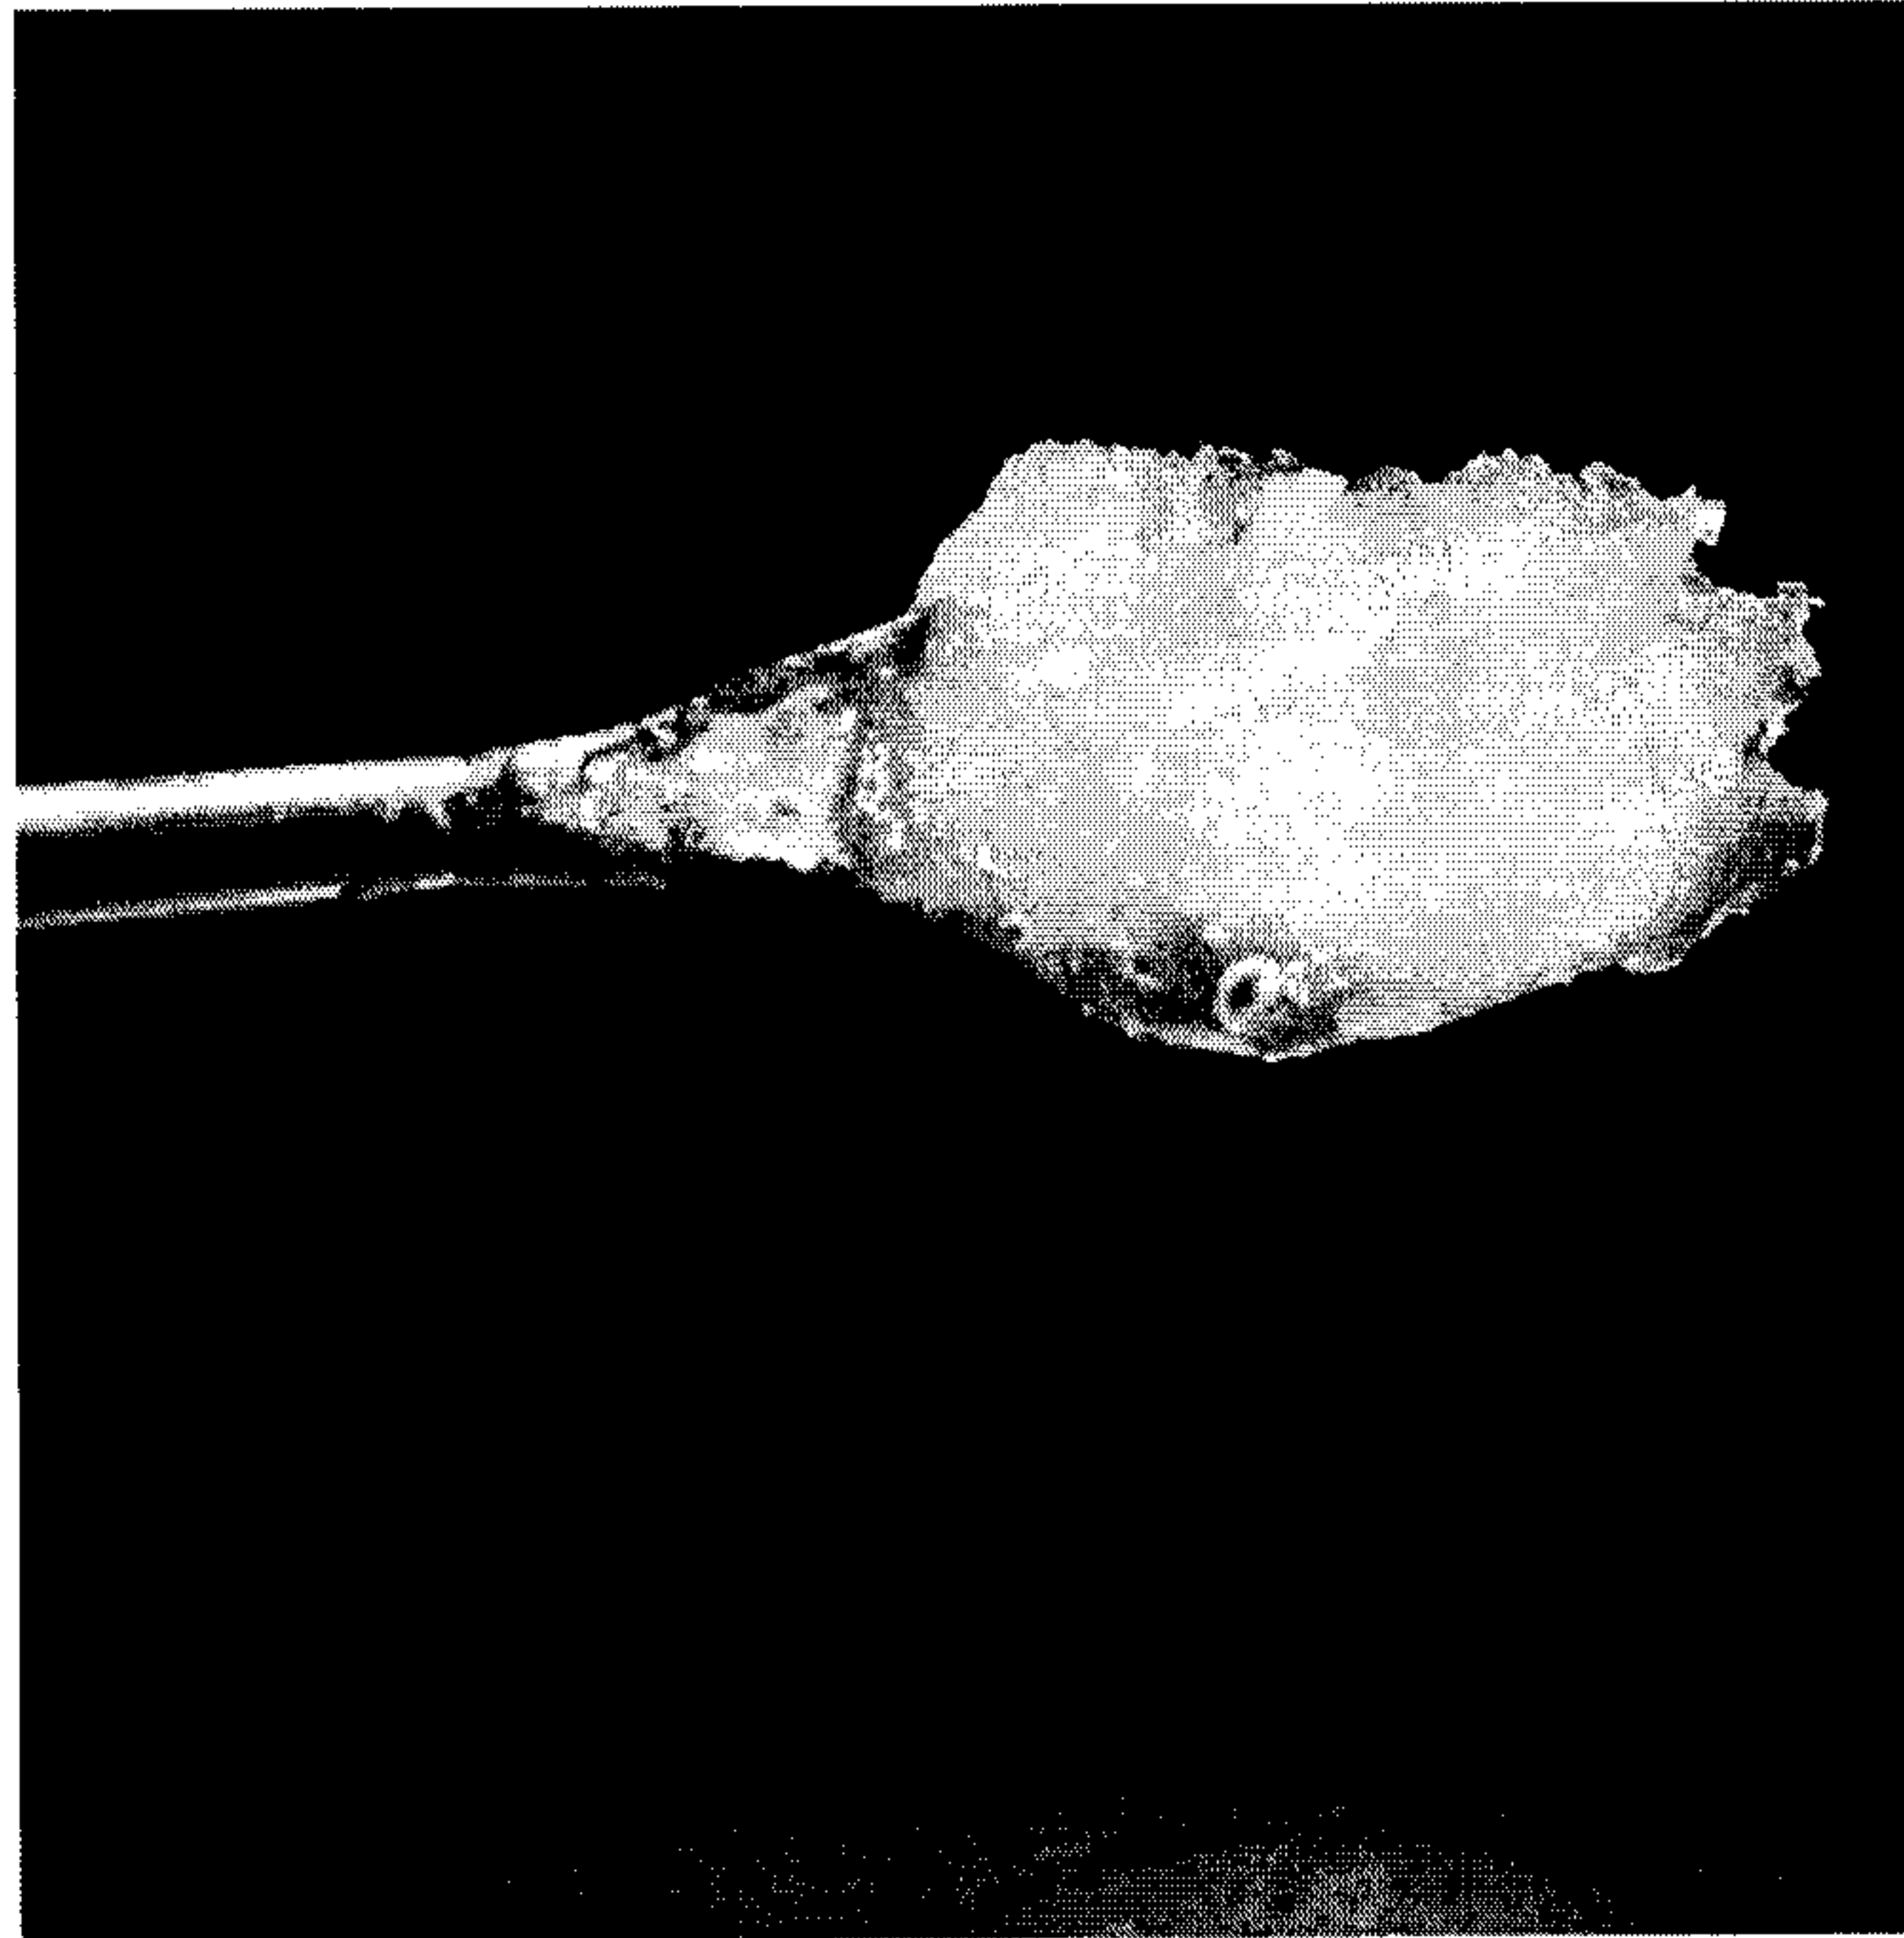


D



FIG. 16 (cont.)

26/31

E

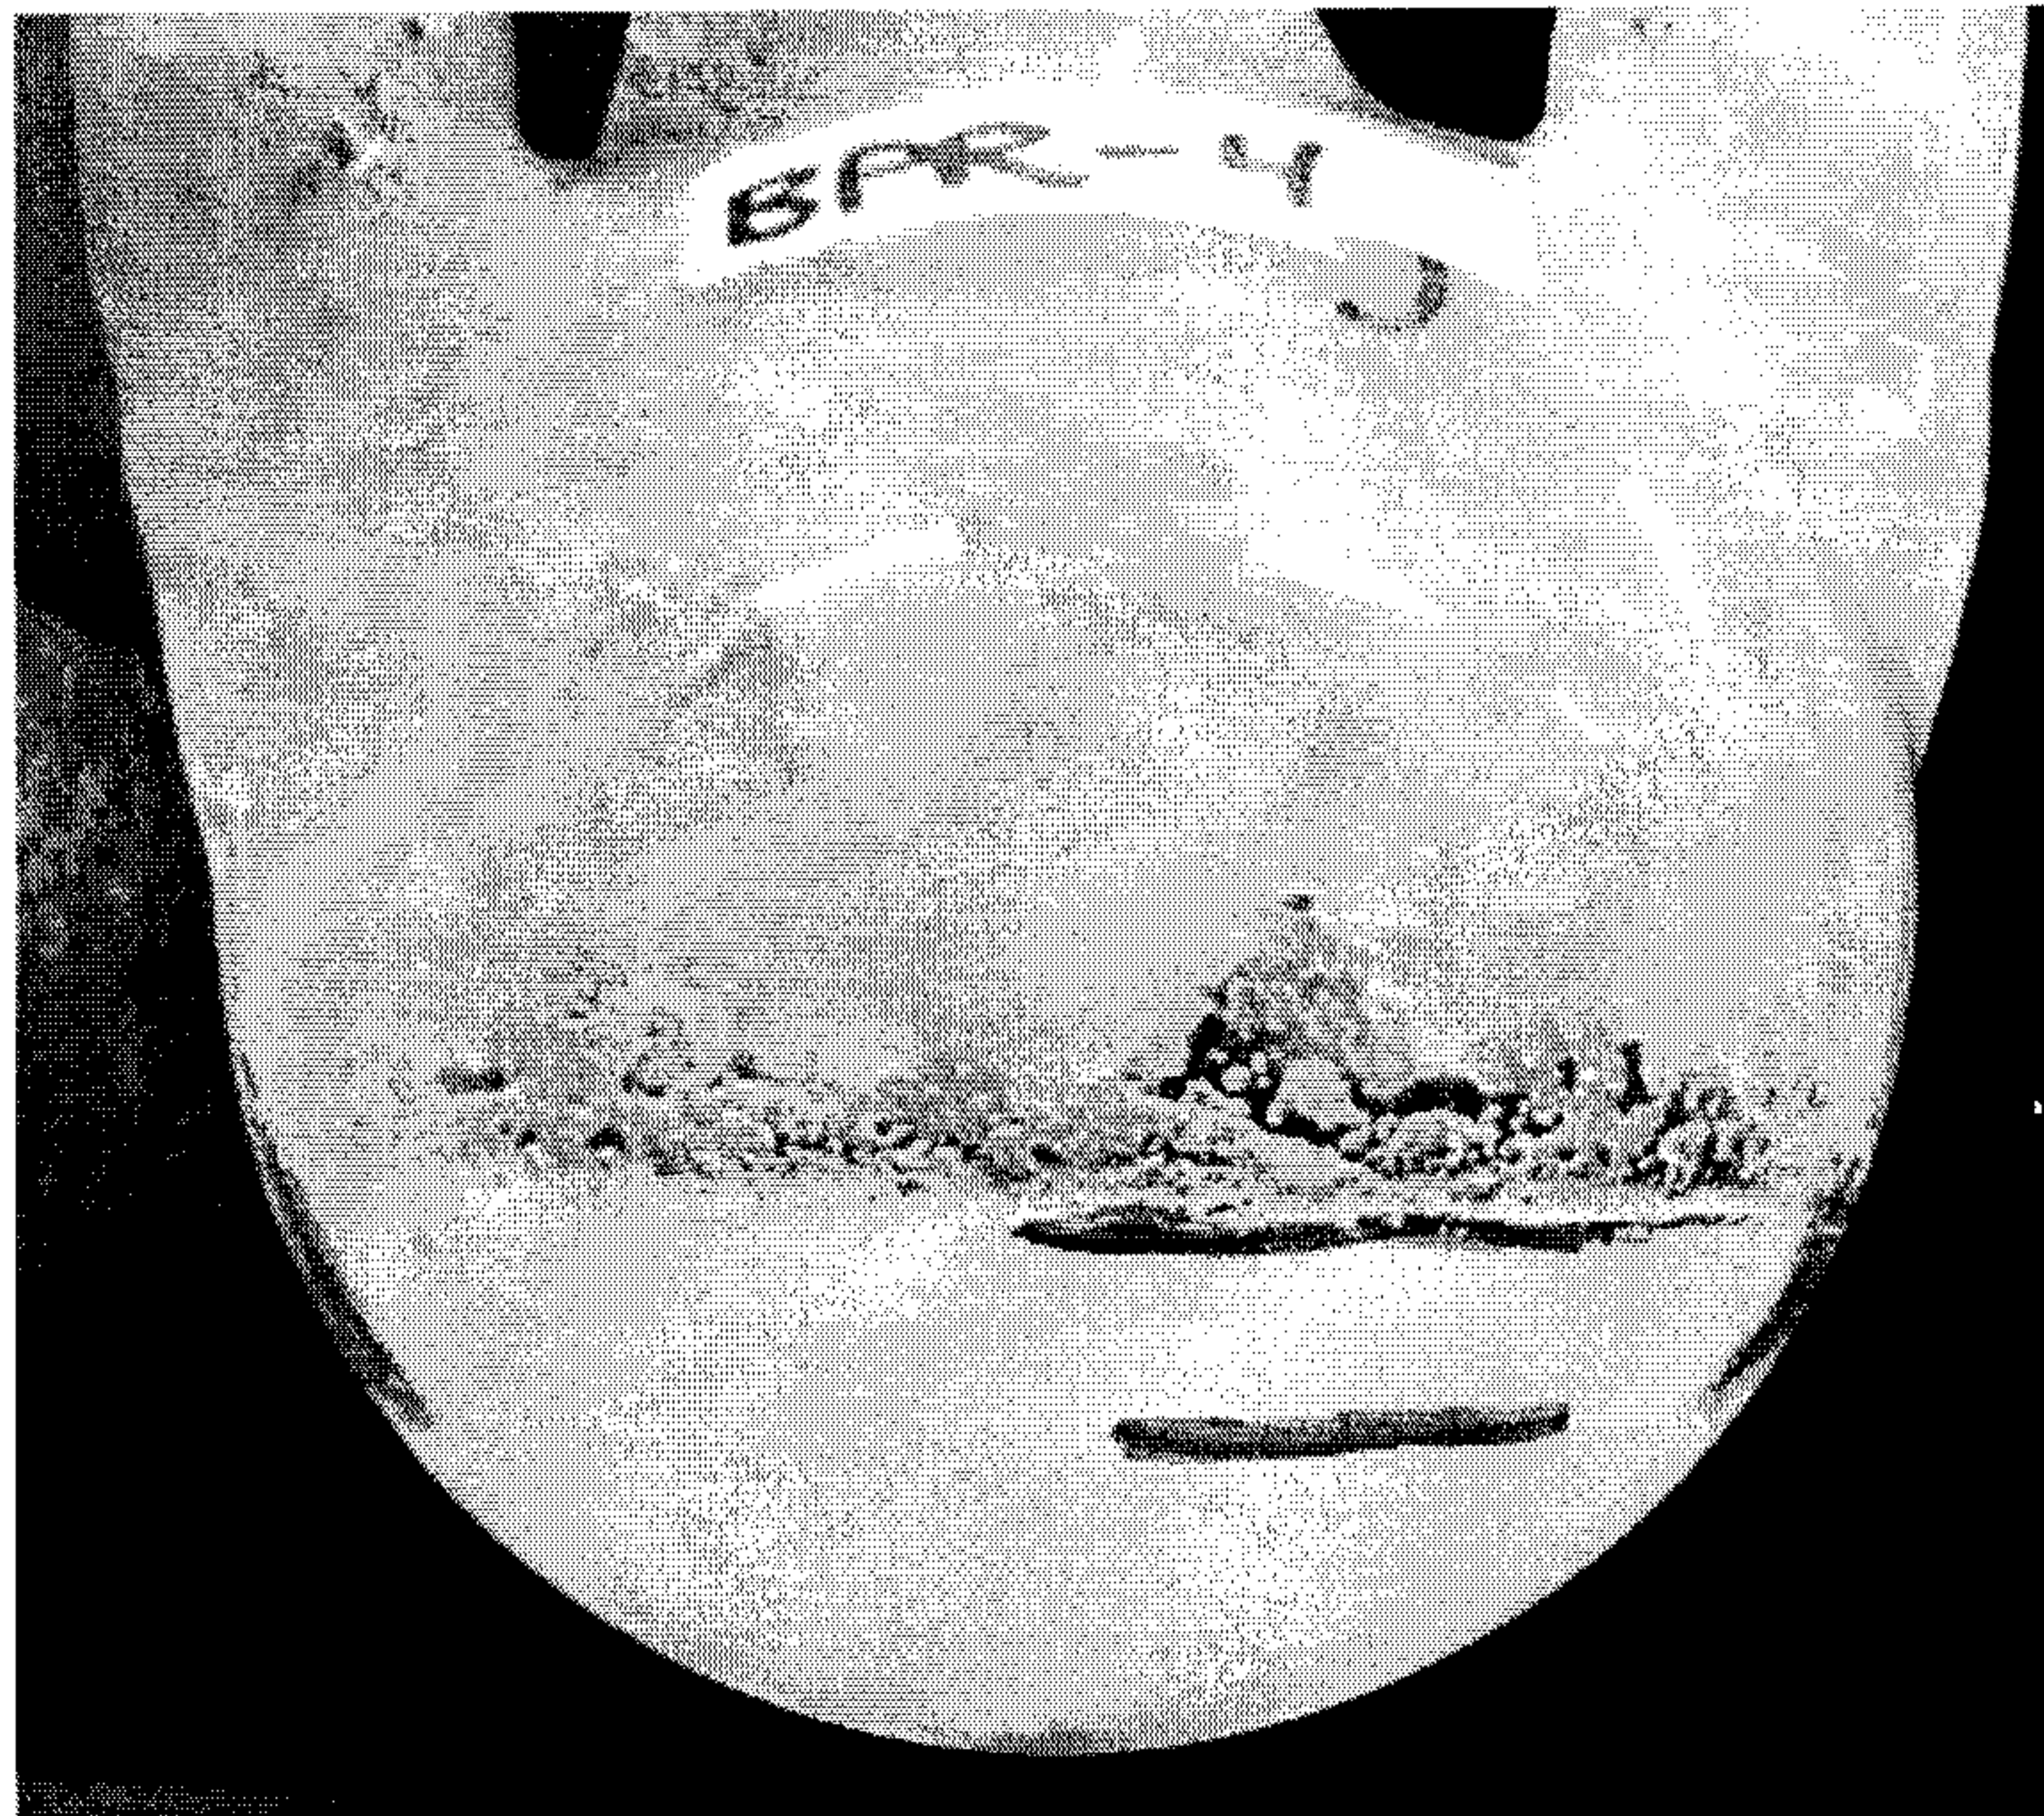

F


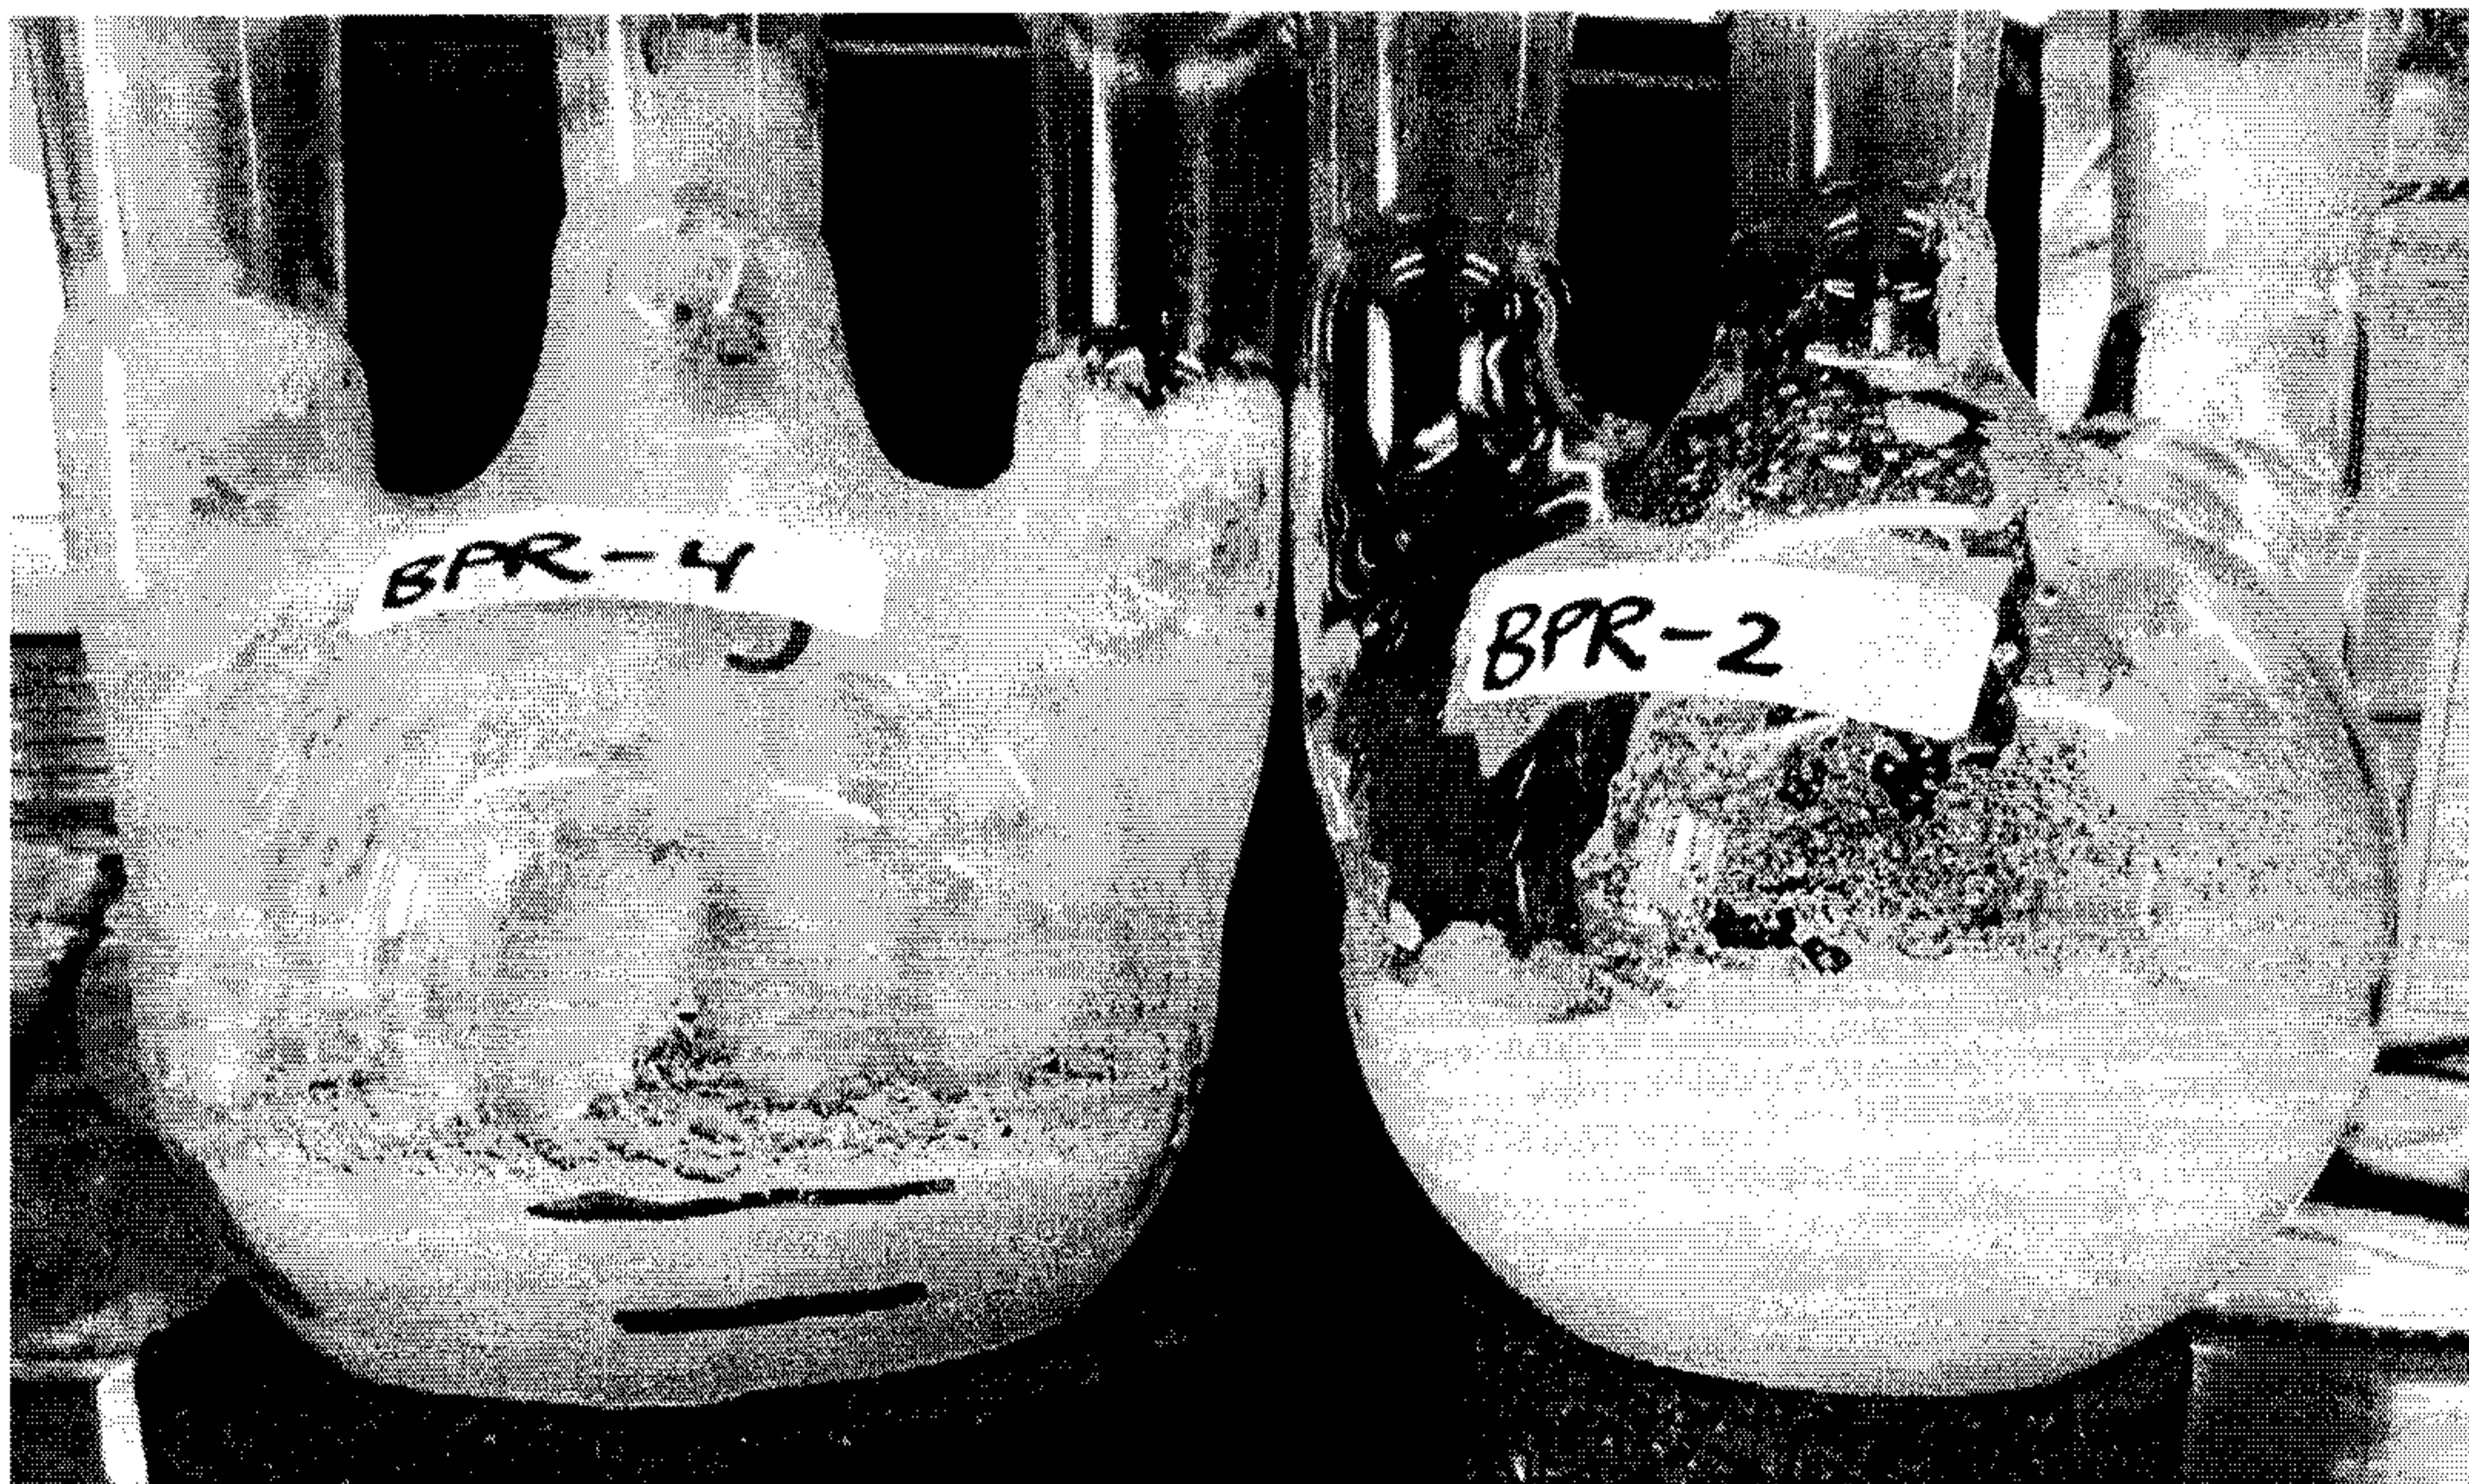


FIG. 16 (cont.)

27/31

A

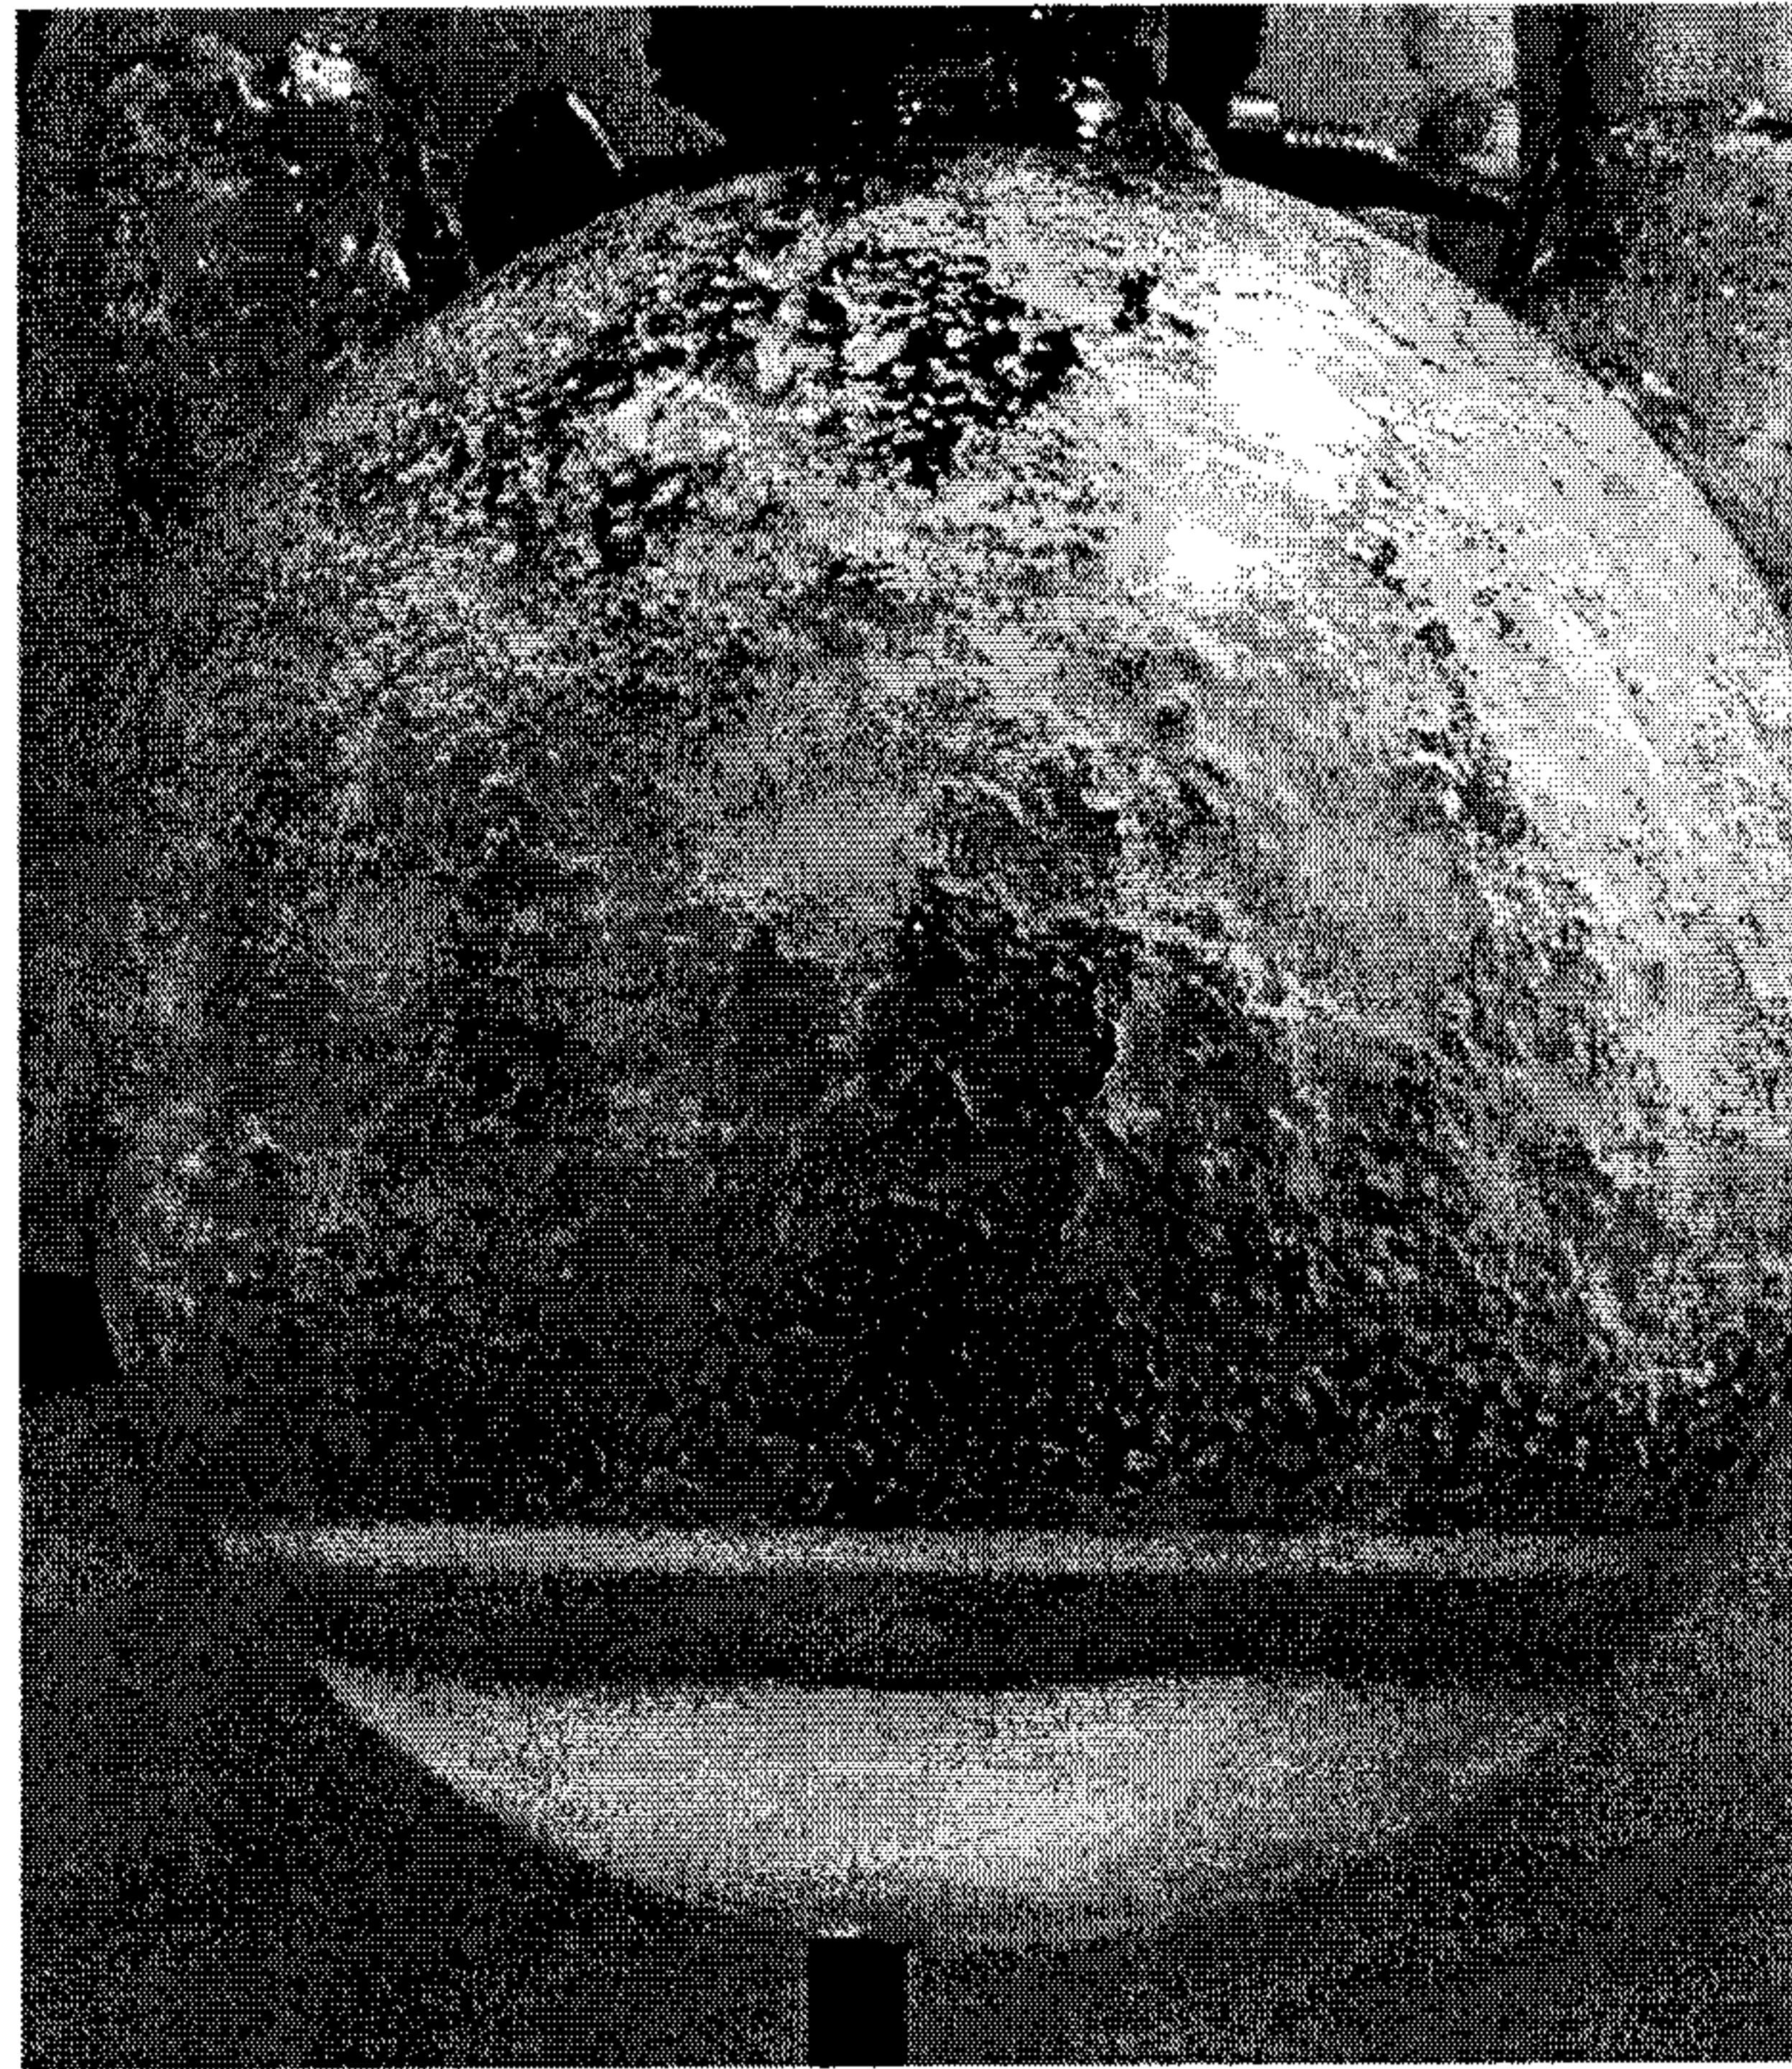

B


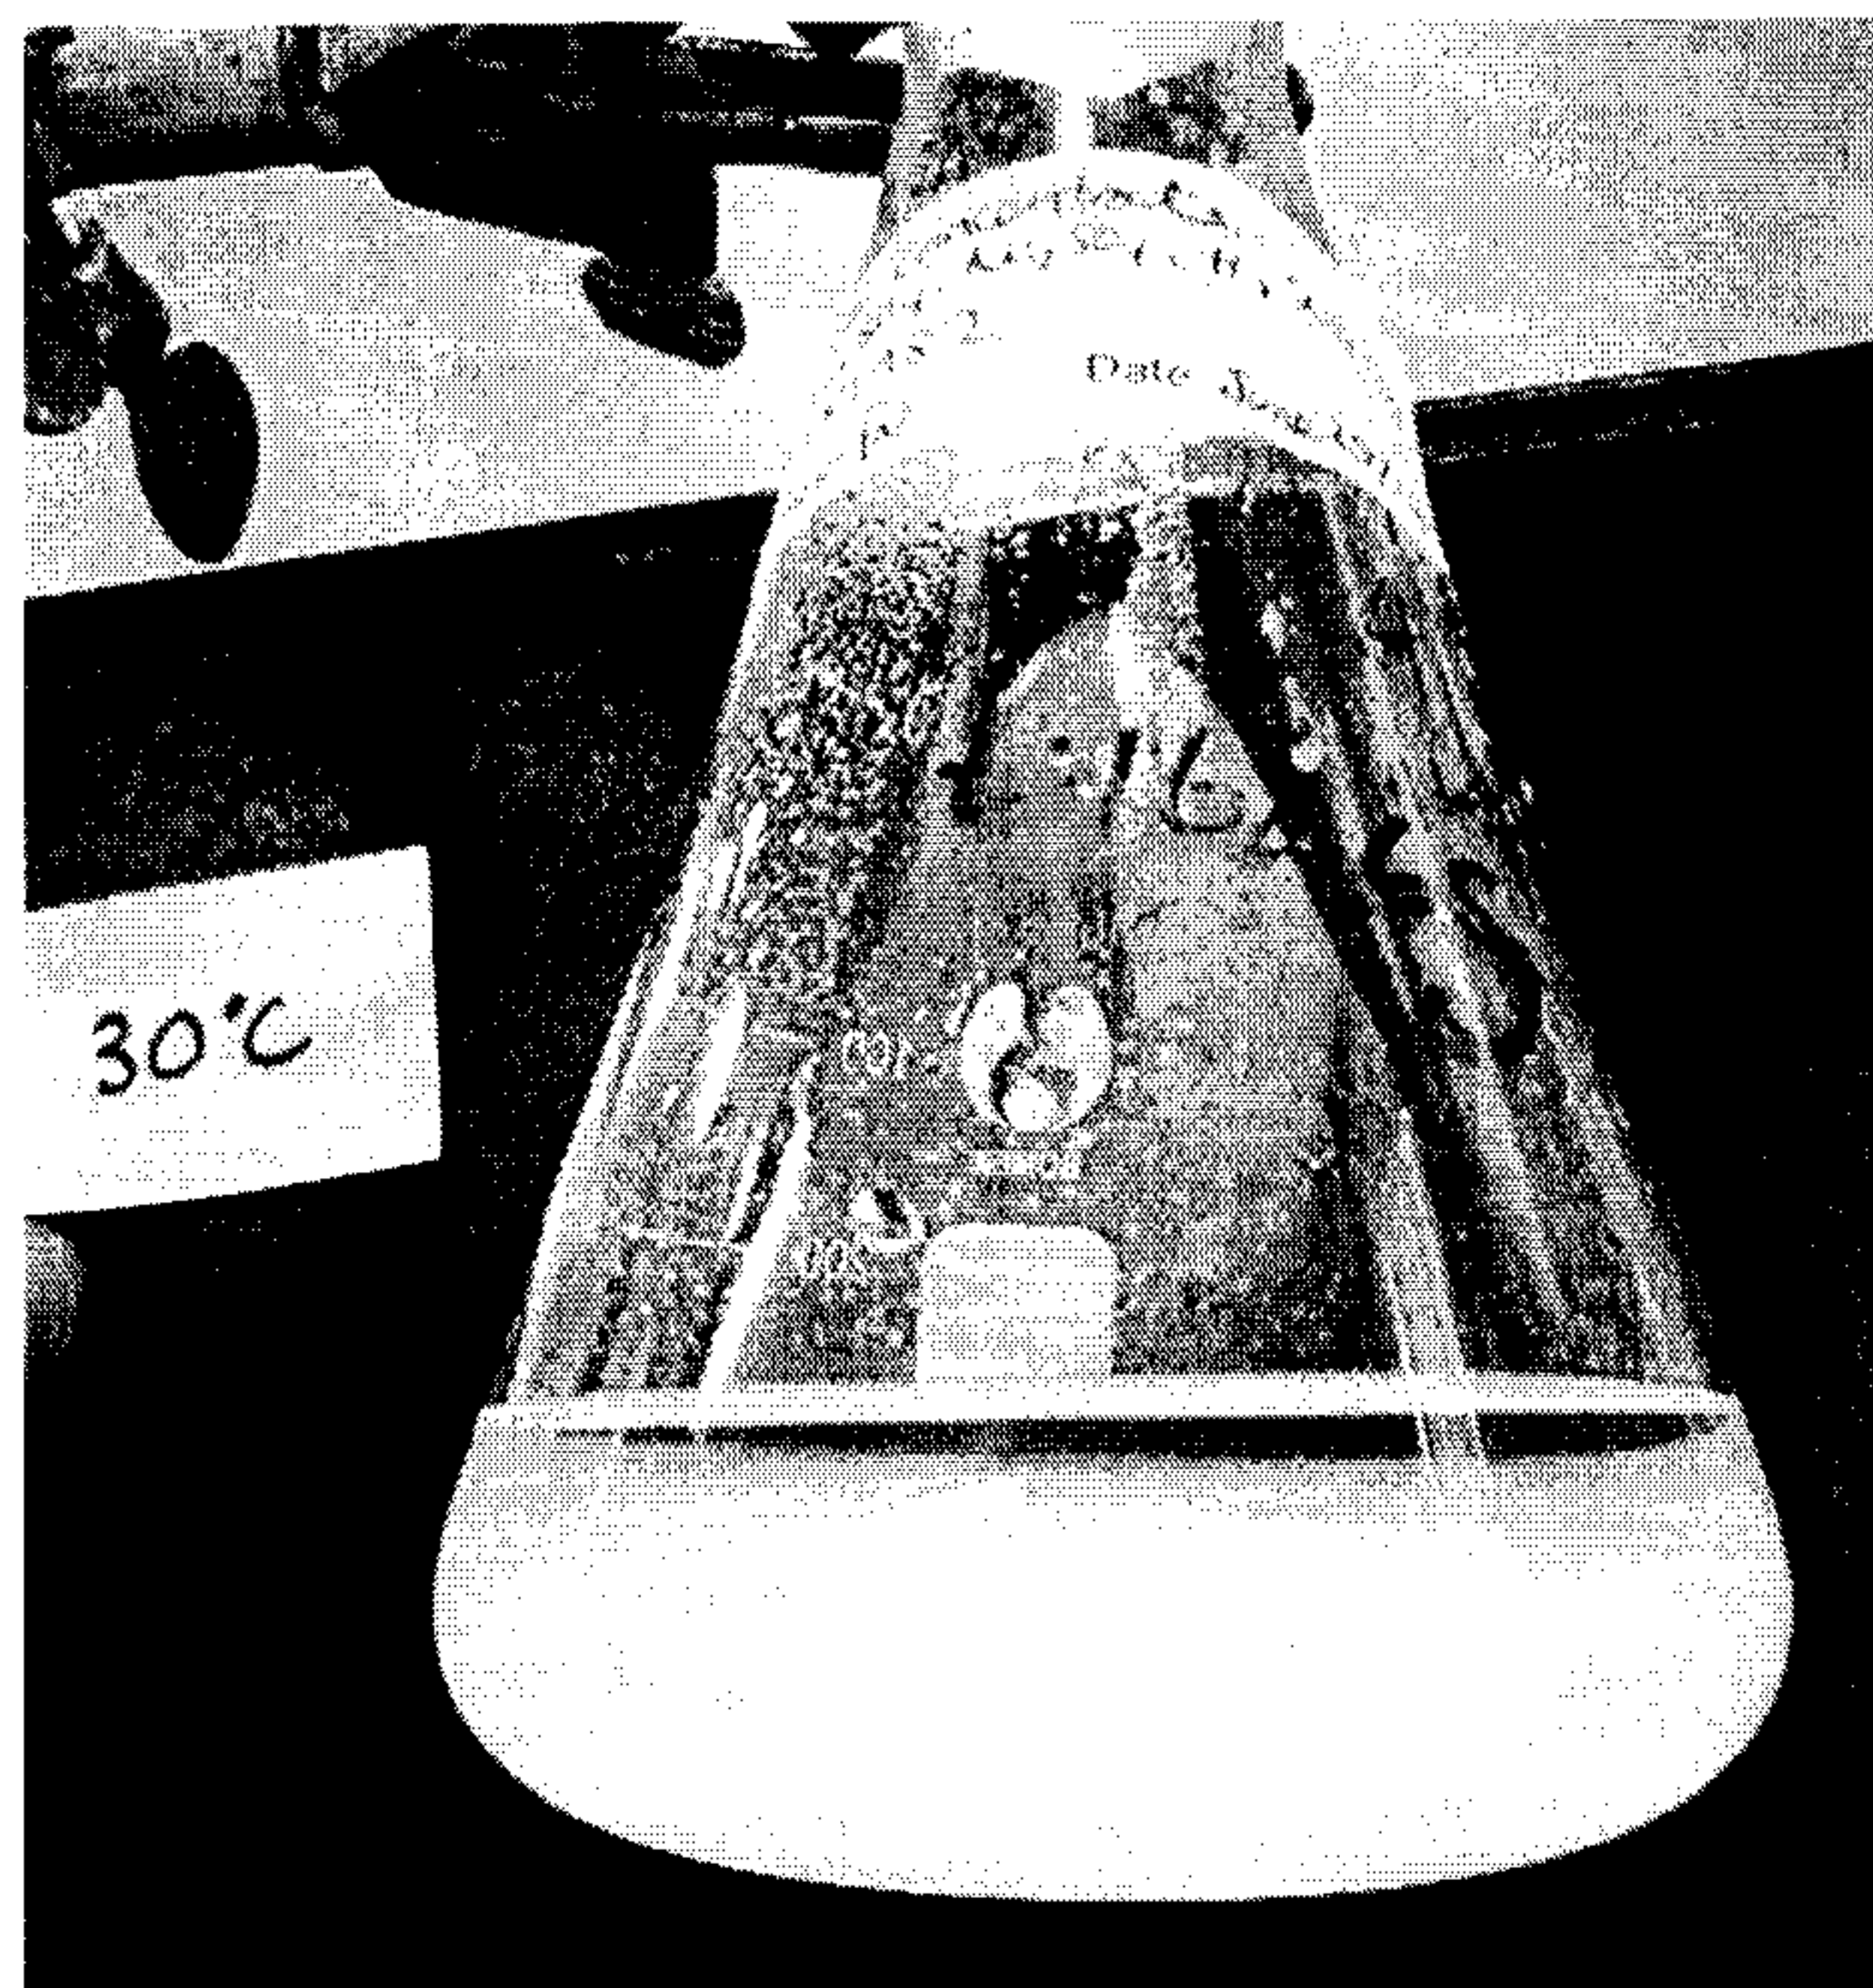


FIG. 17

28/31

C

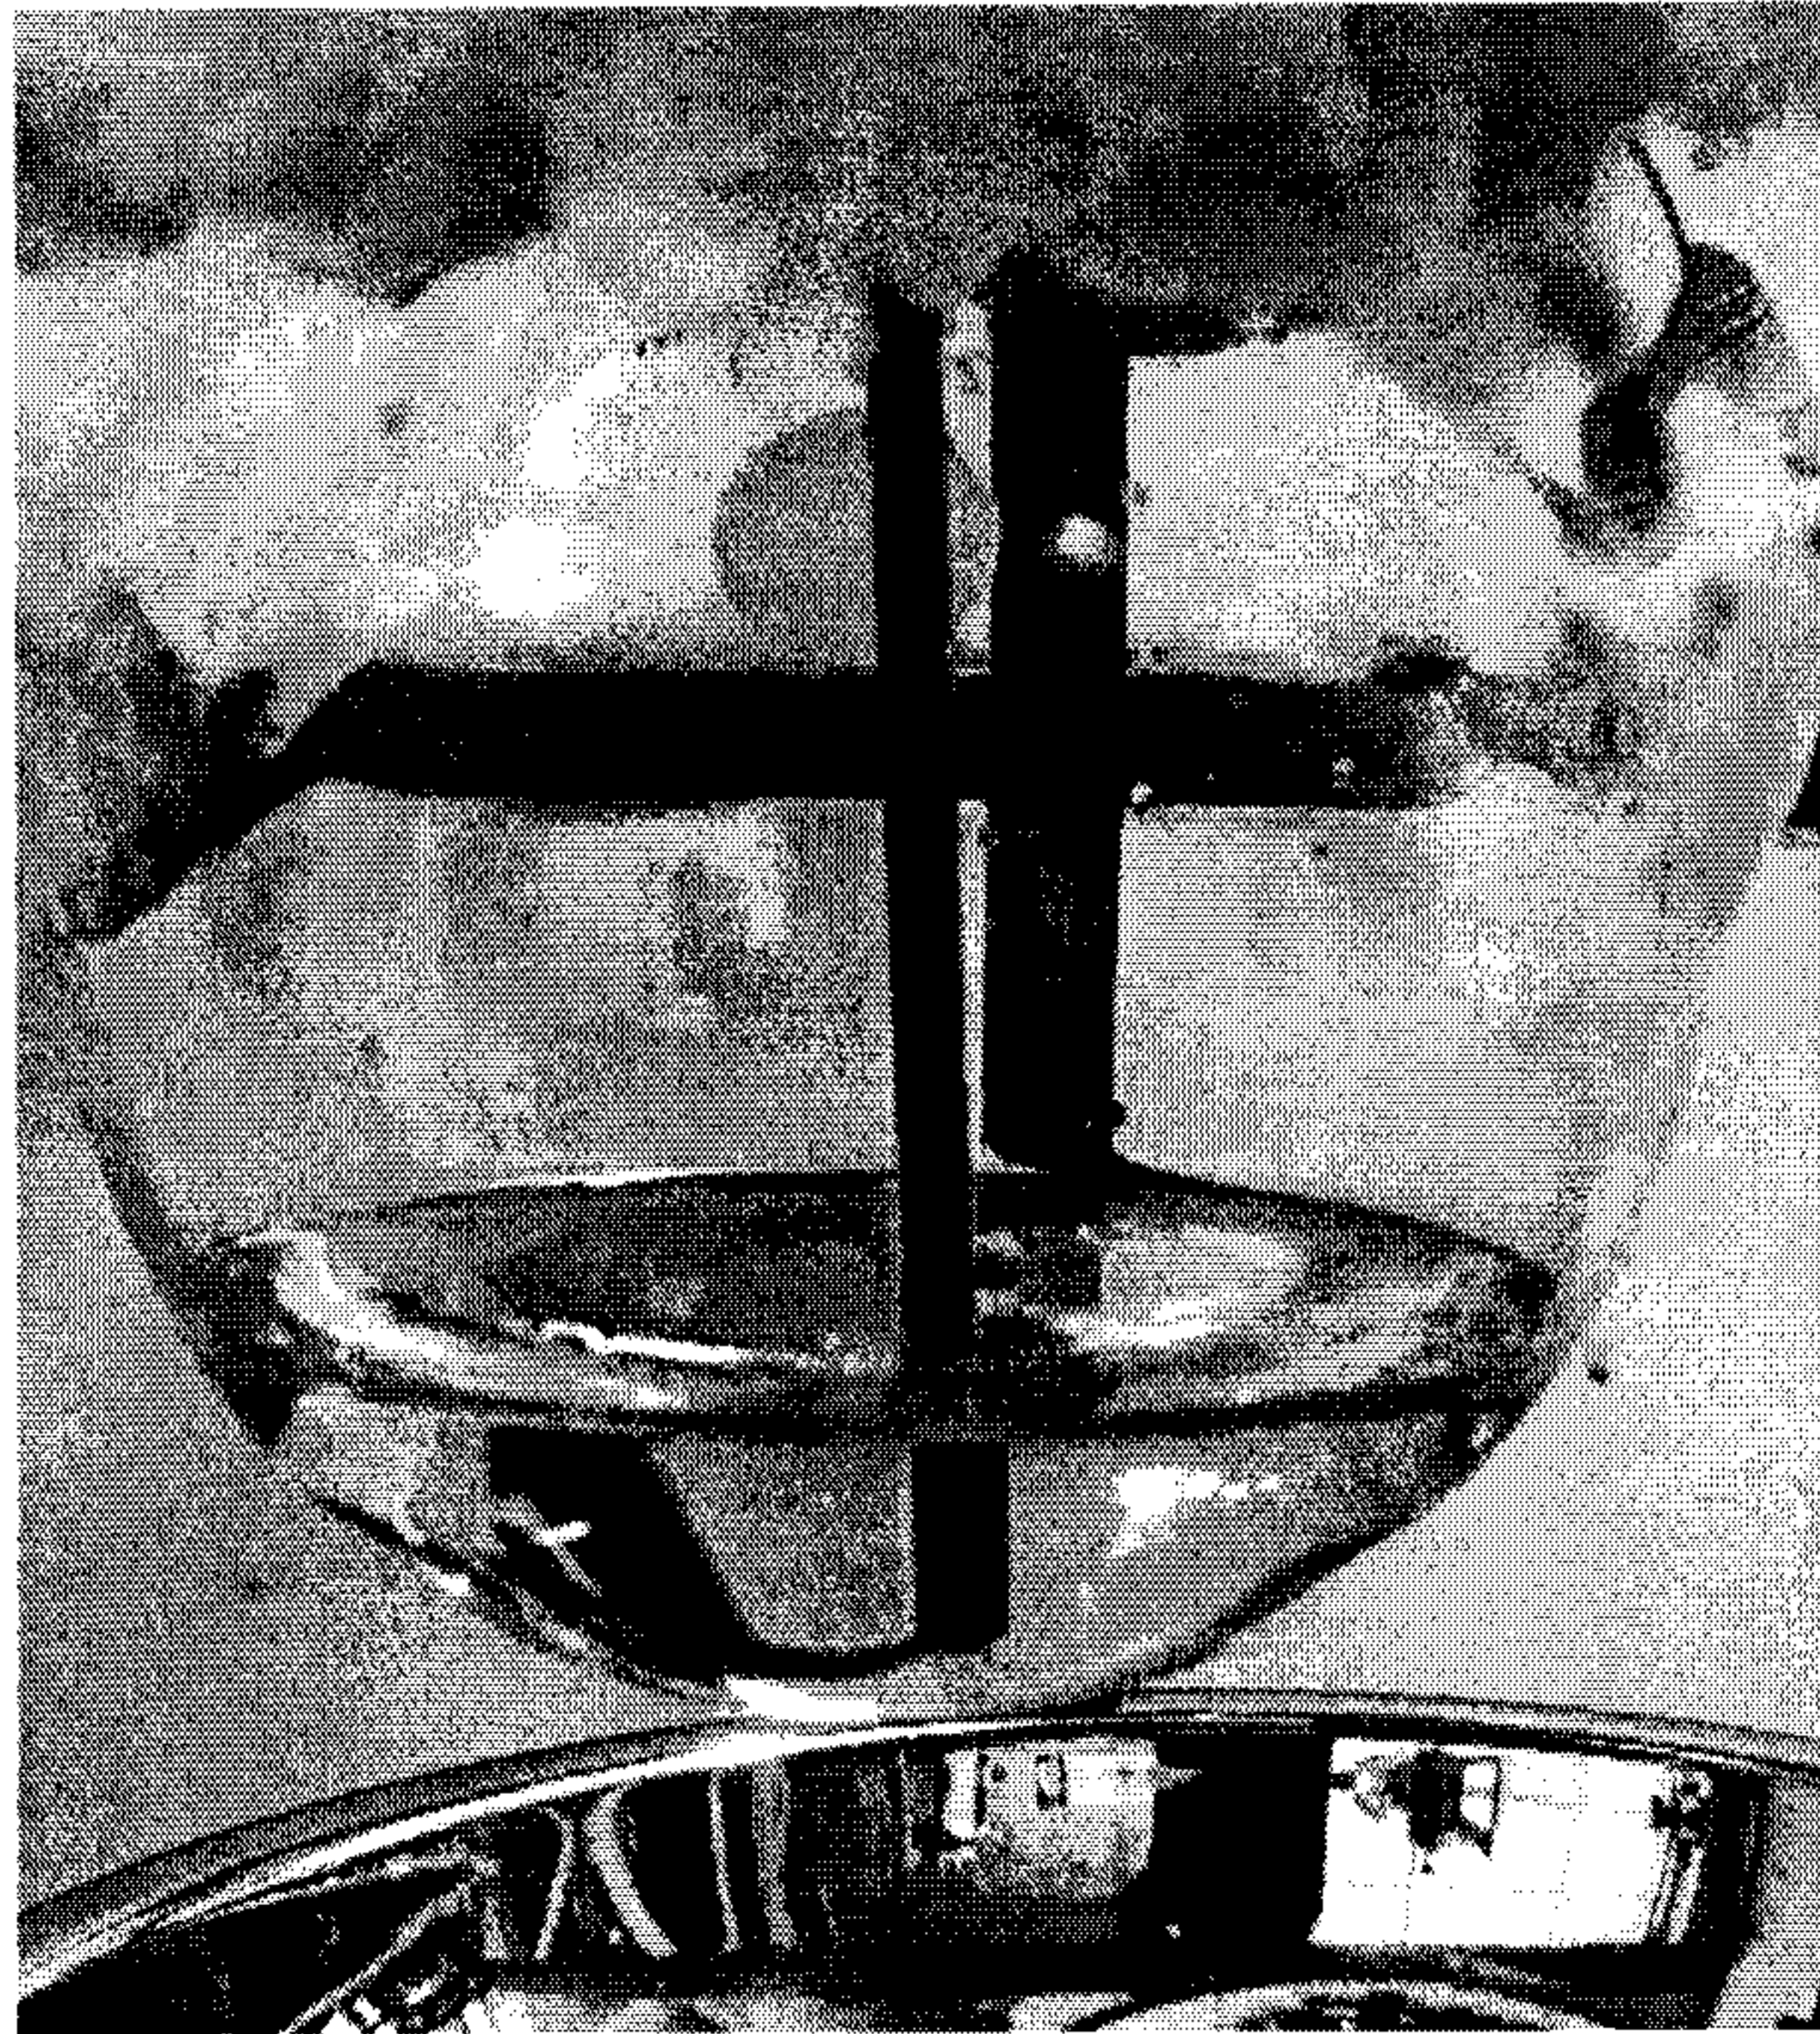

D


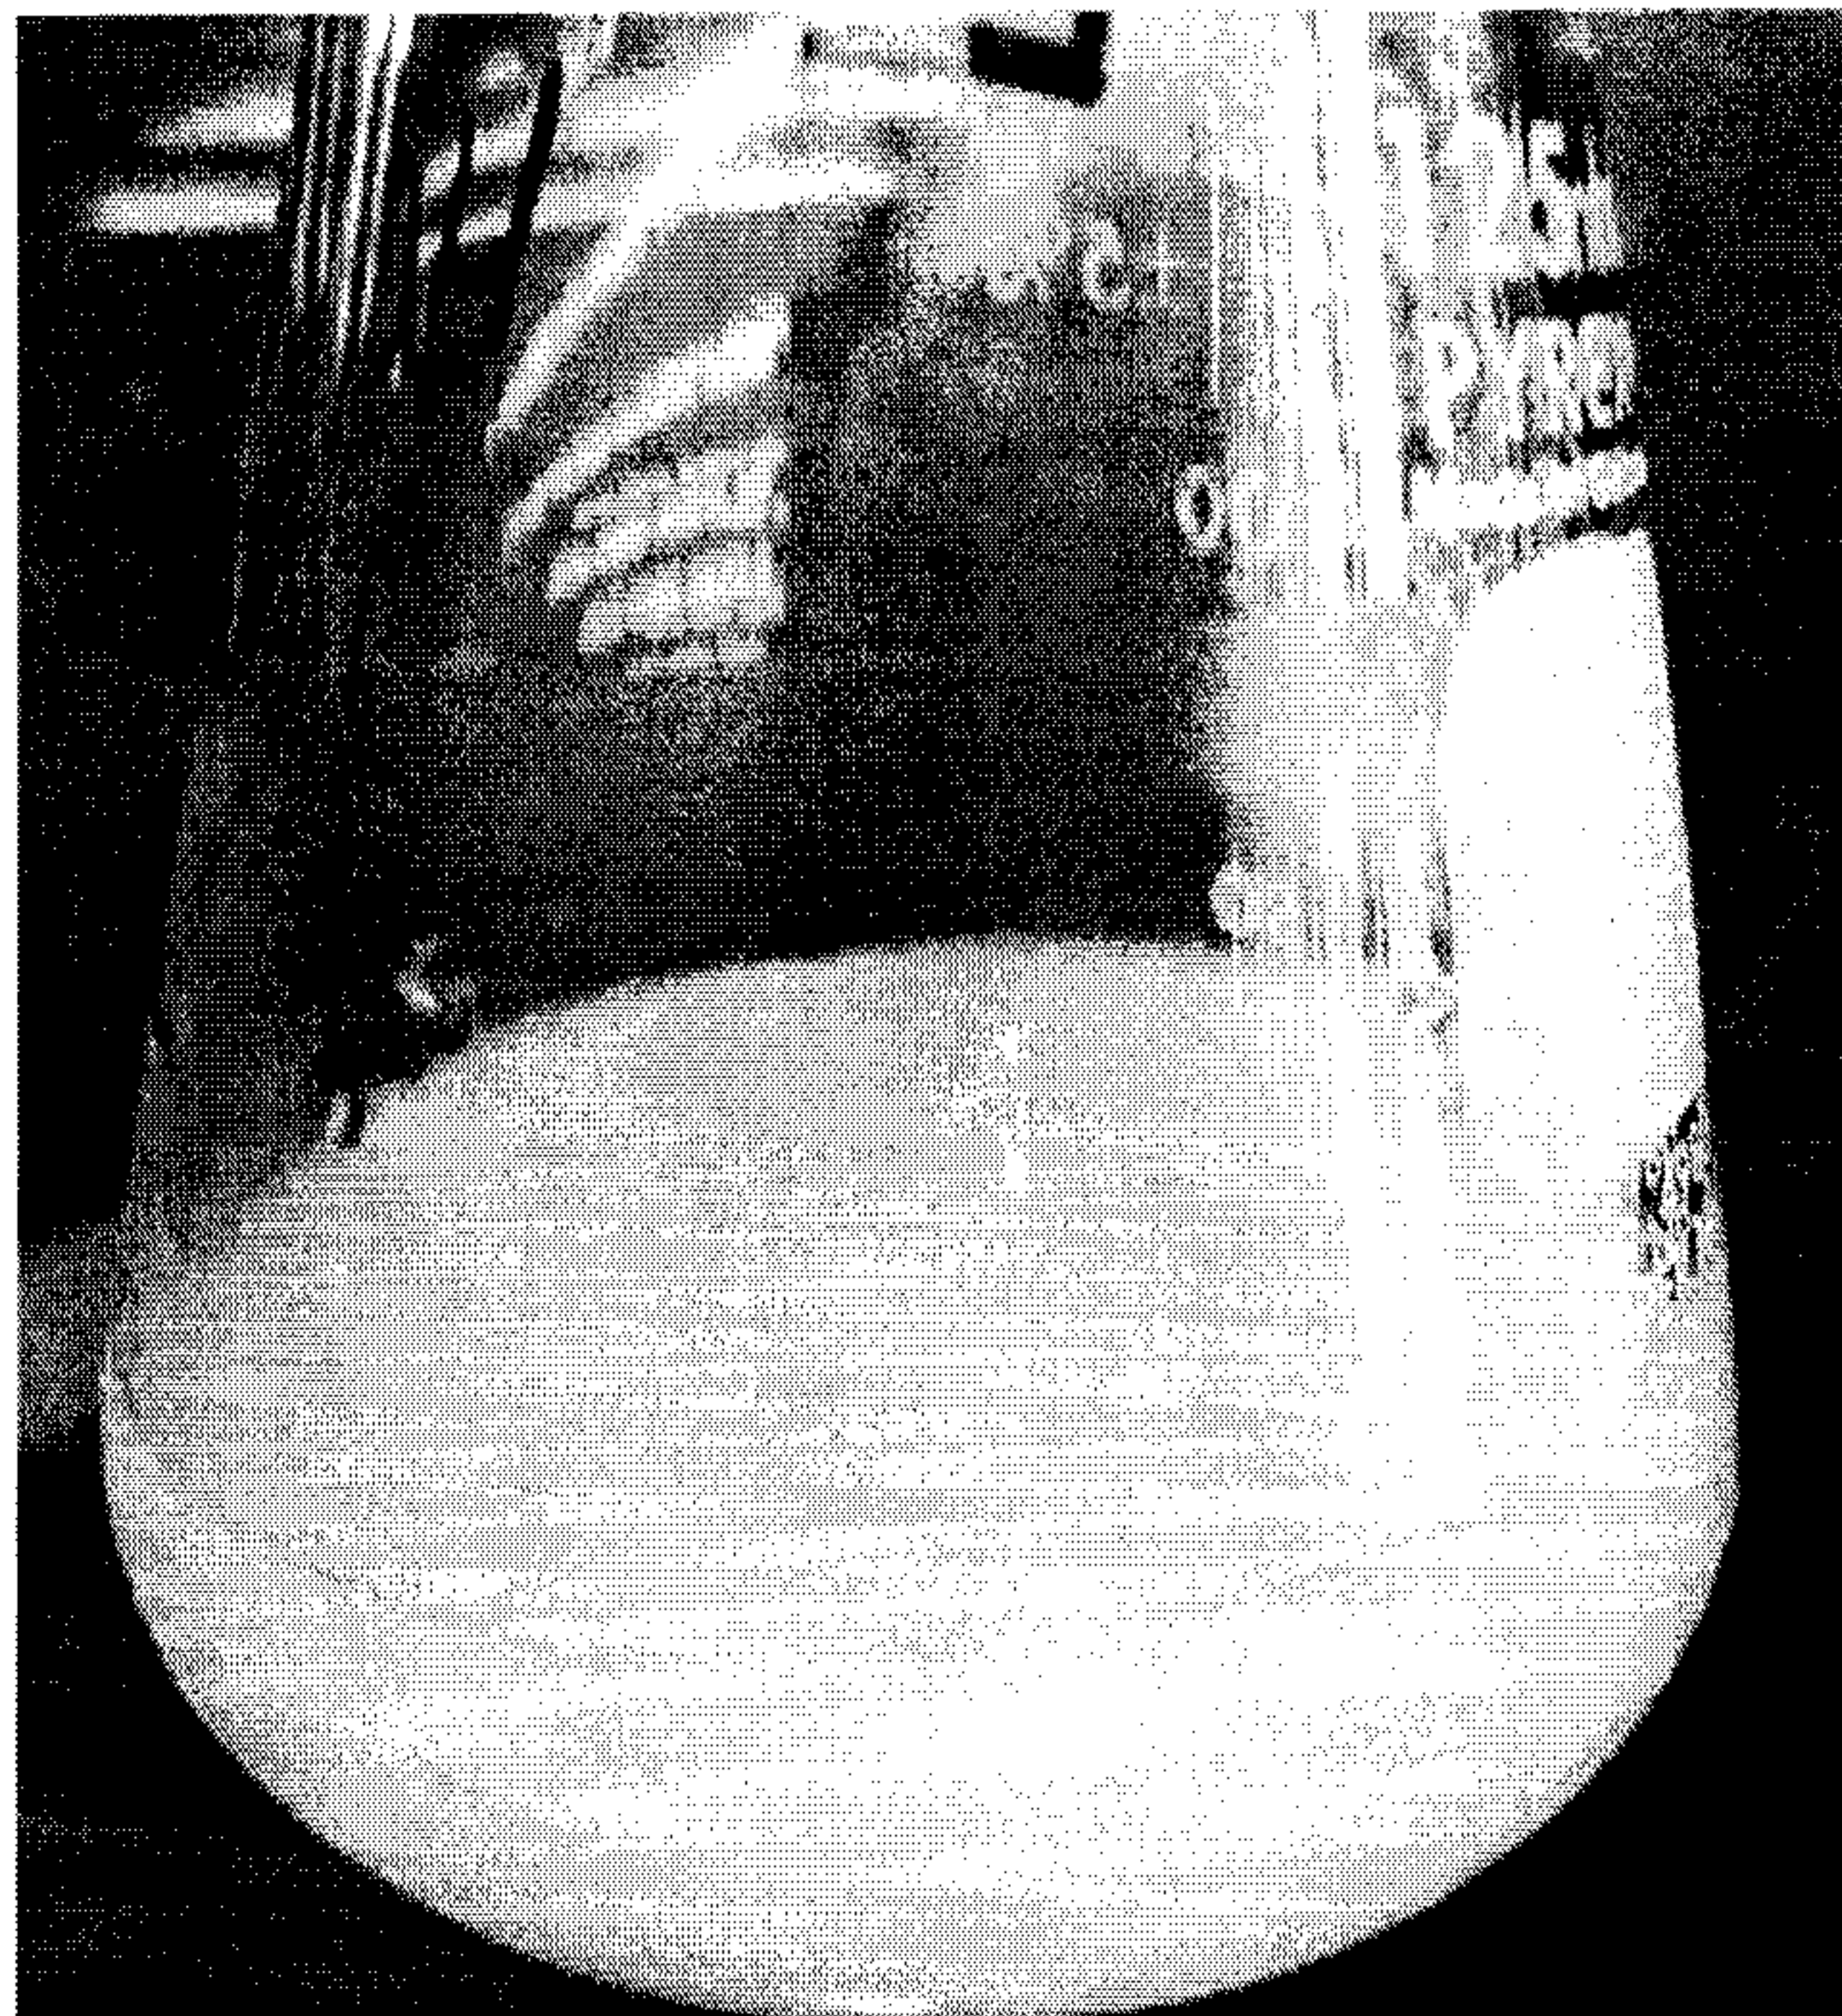


FIG. 17 (cont.)

29/31

A

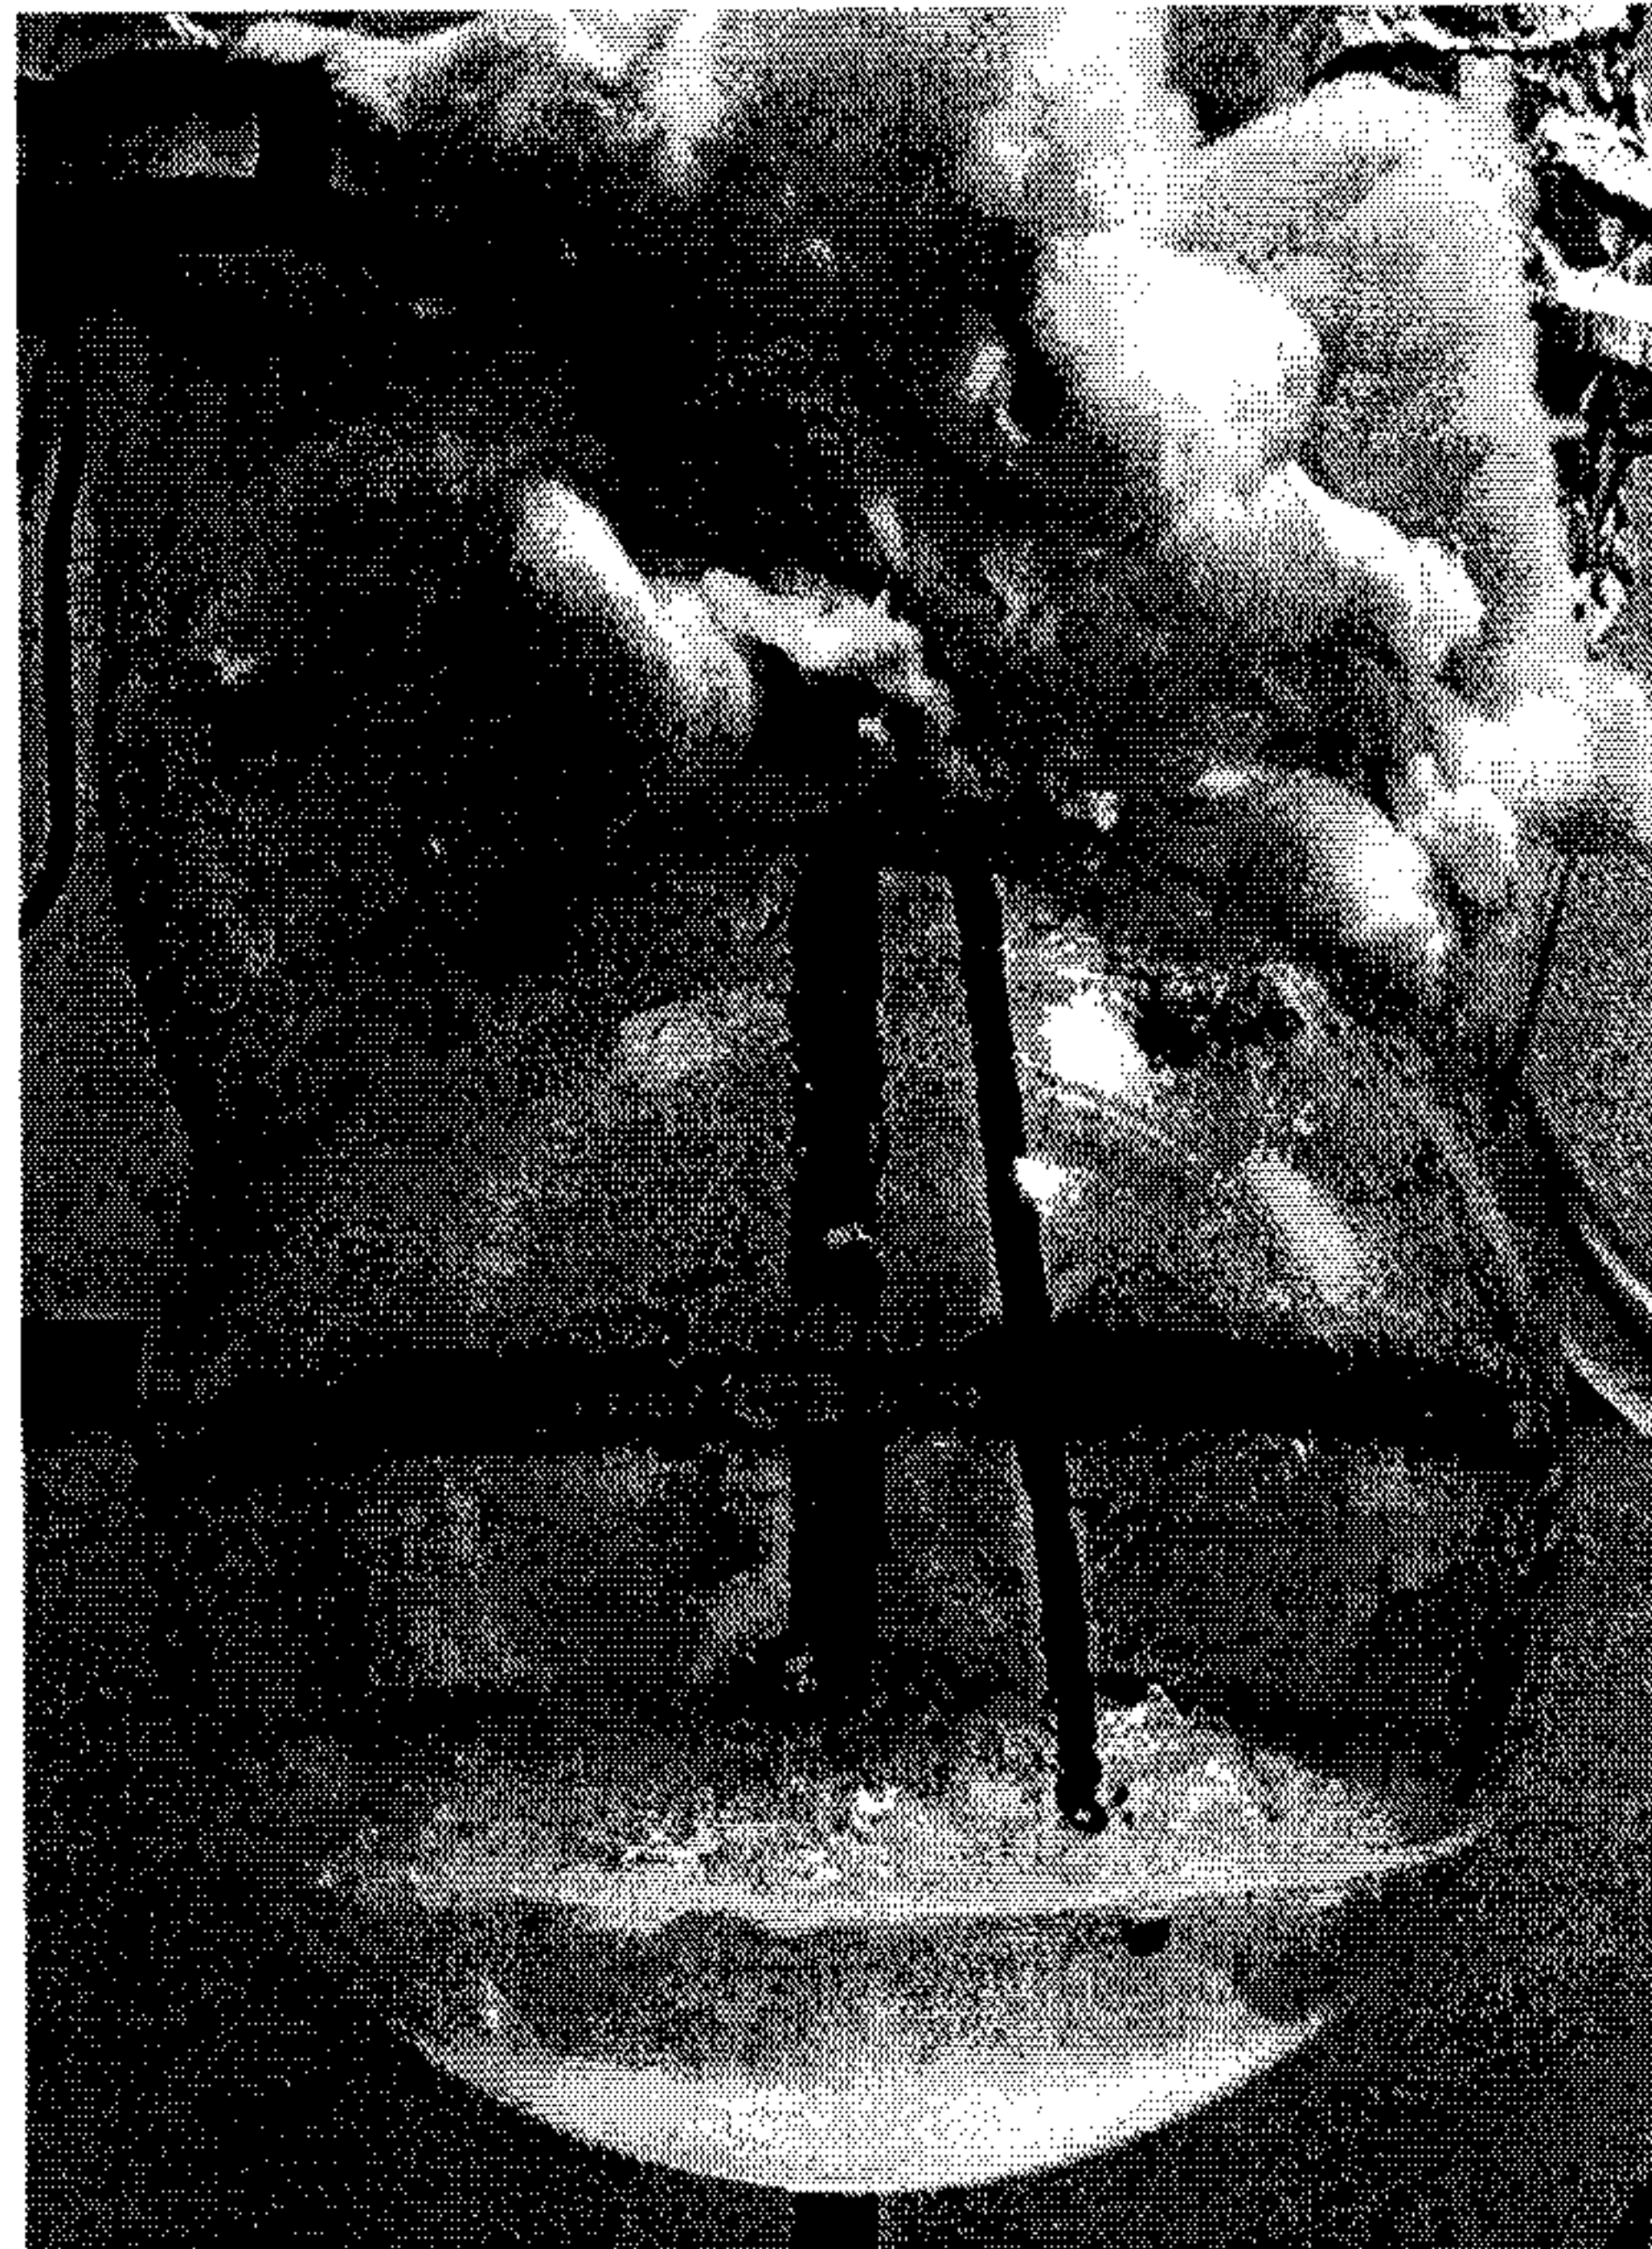

B


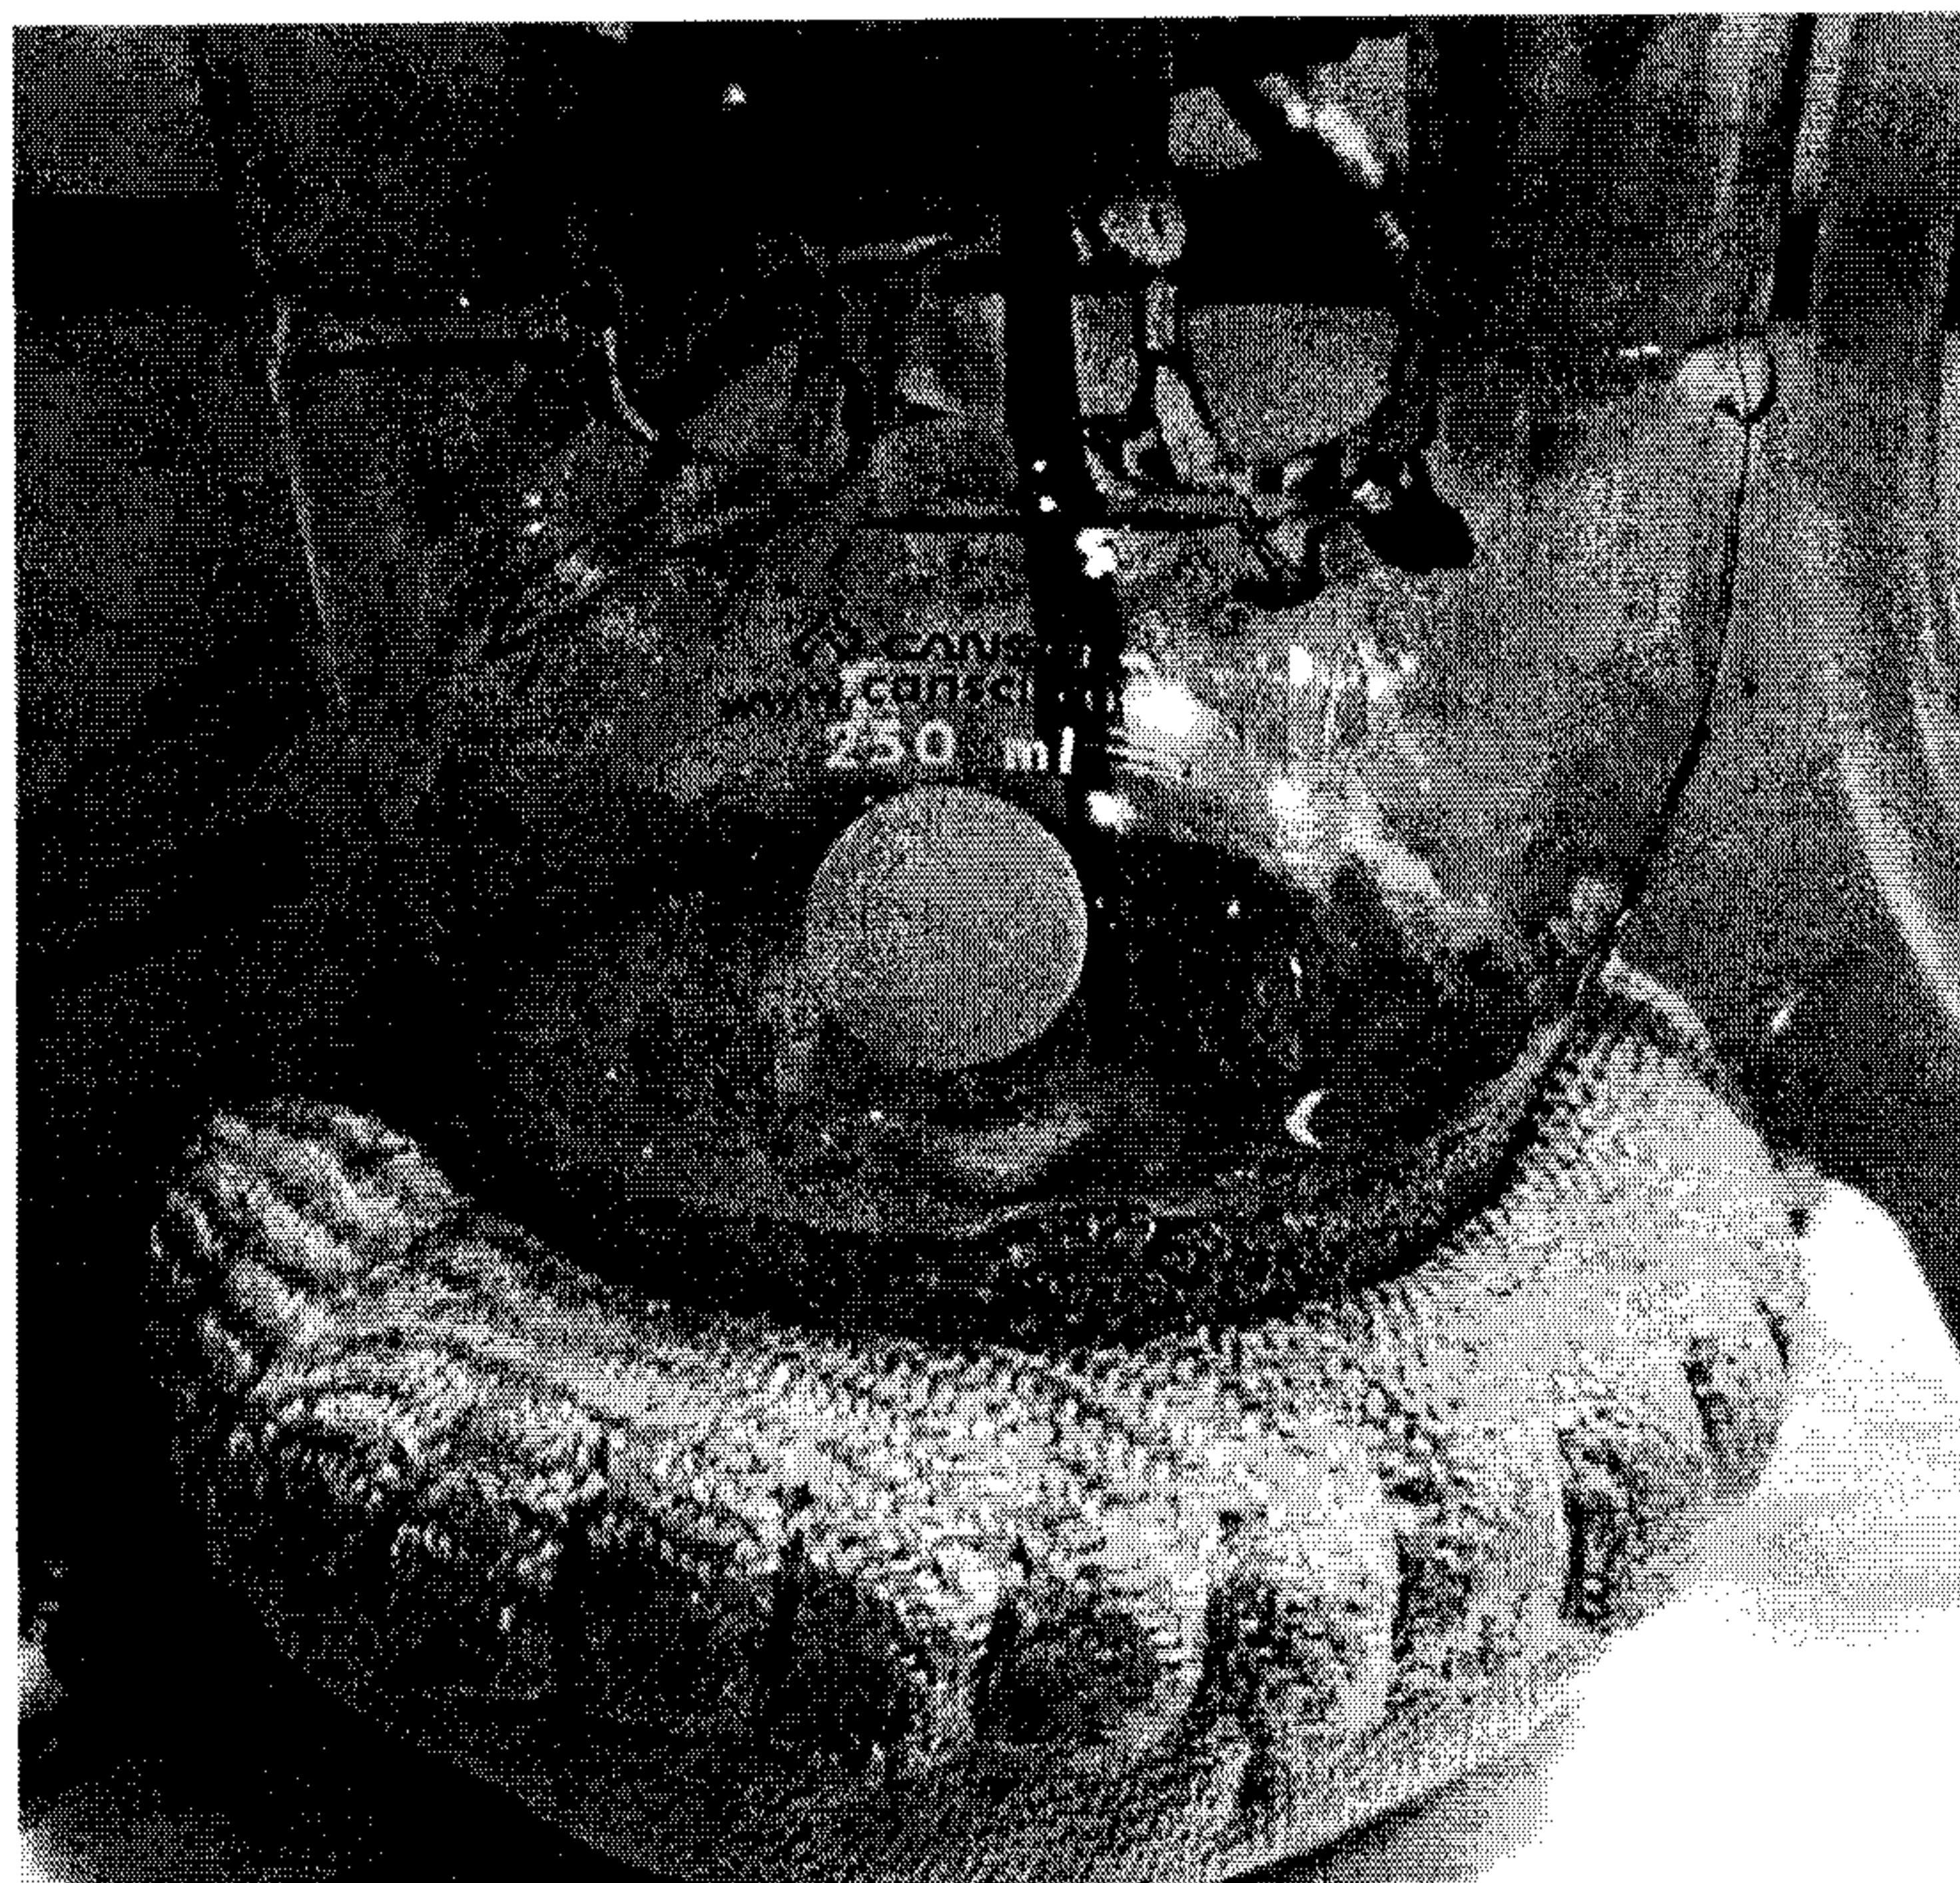


FIG. 18

30/31

C

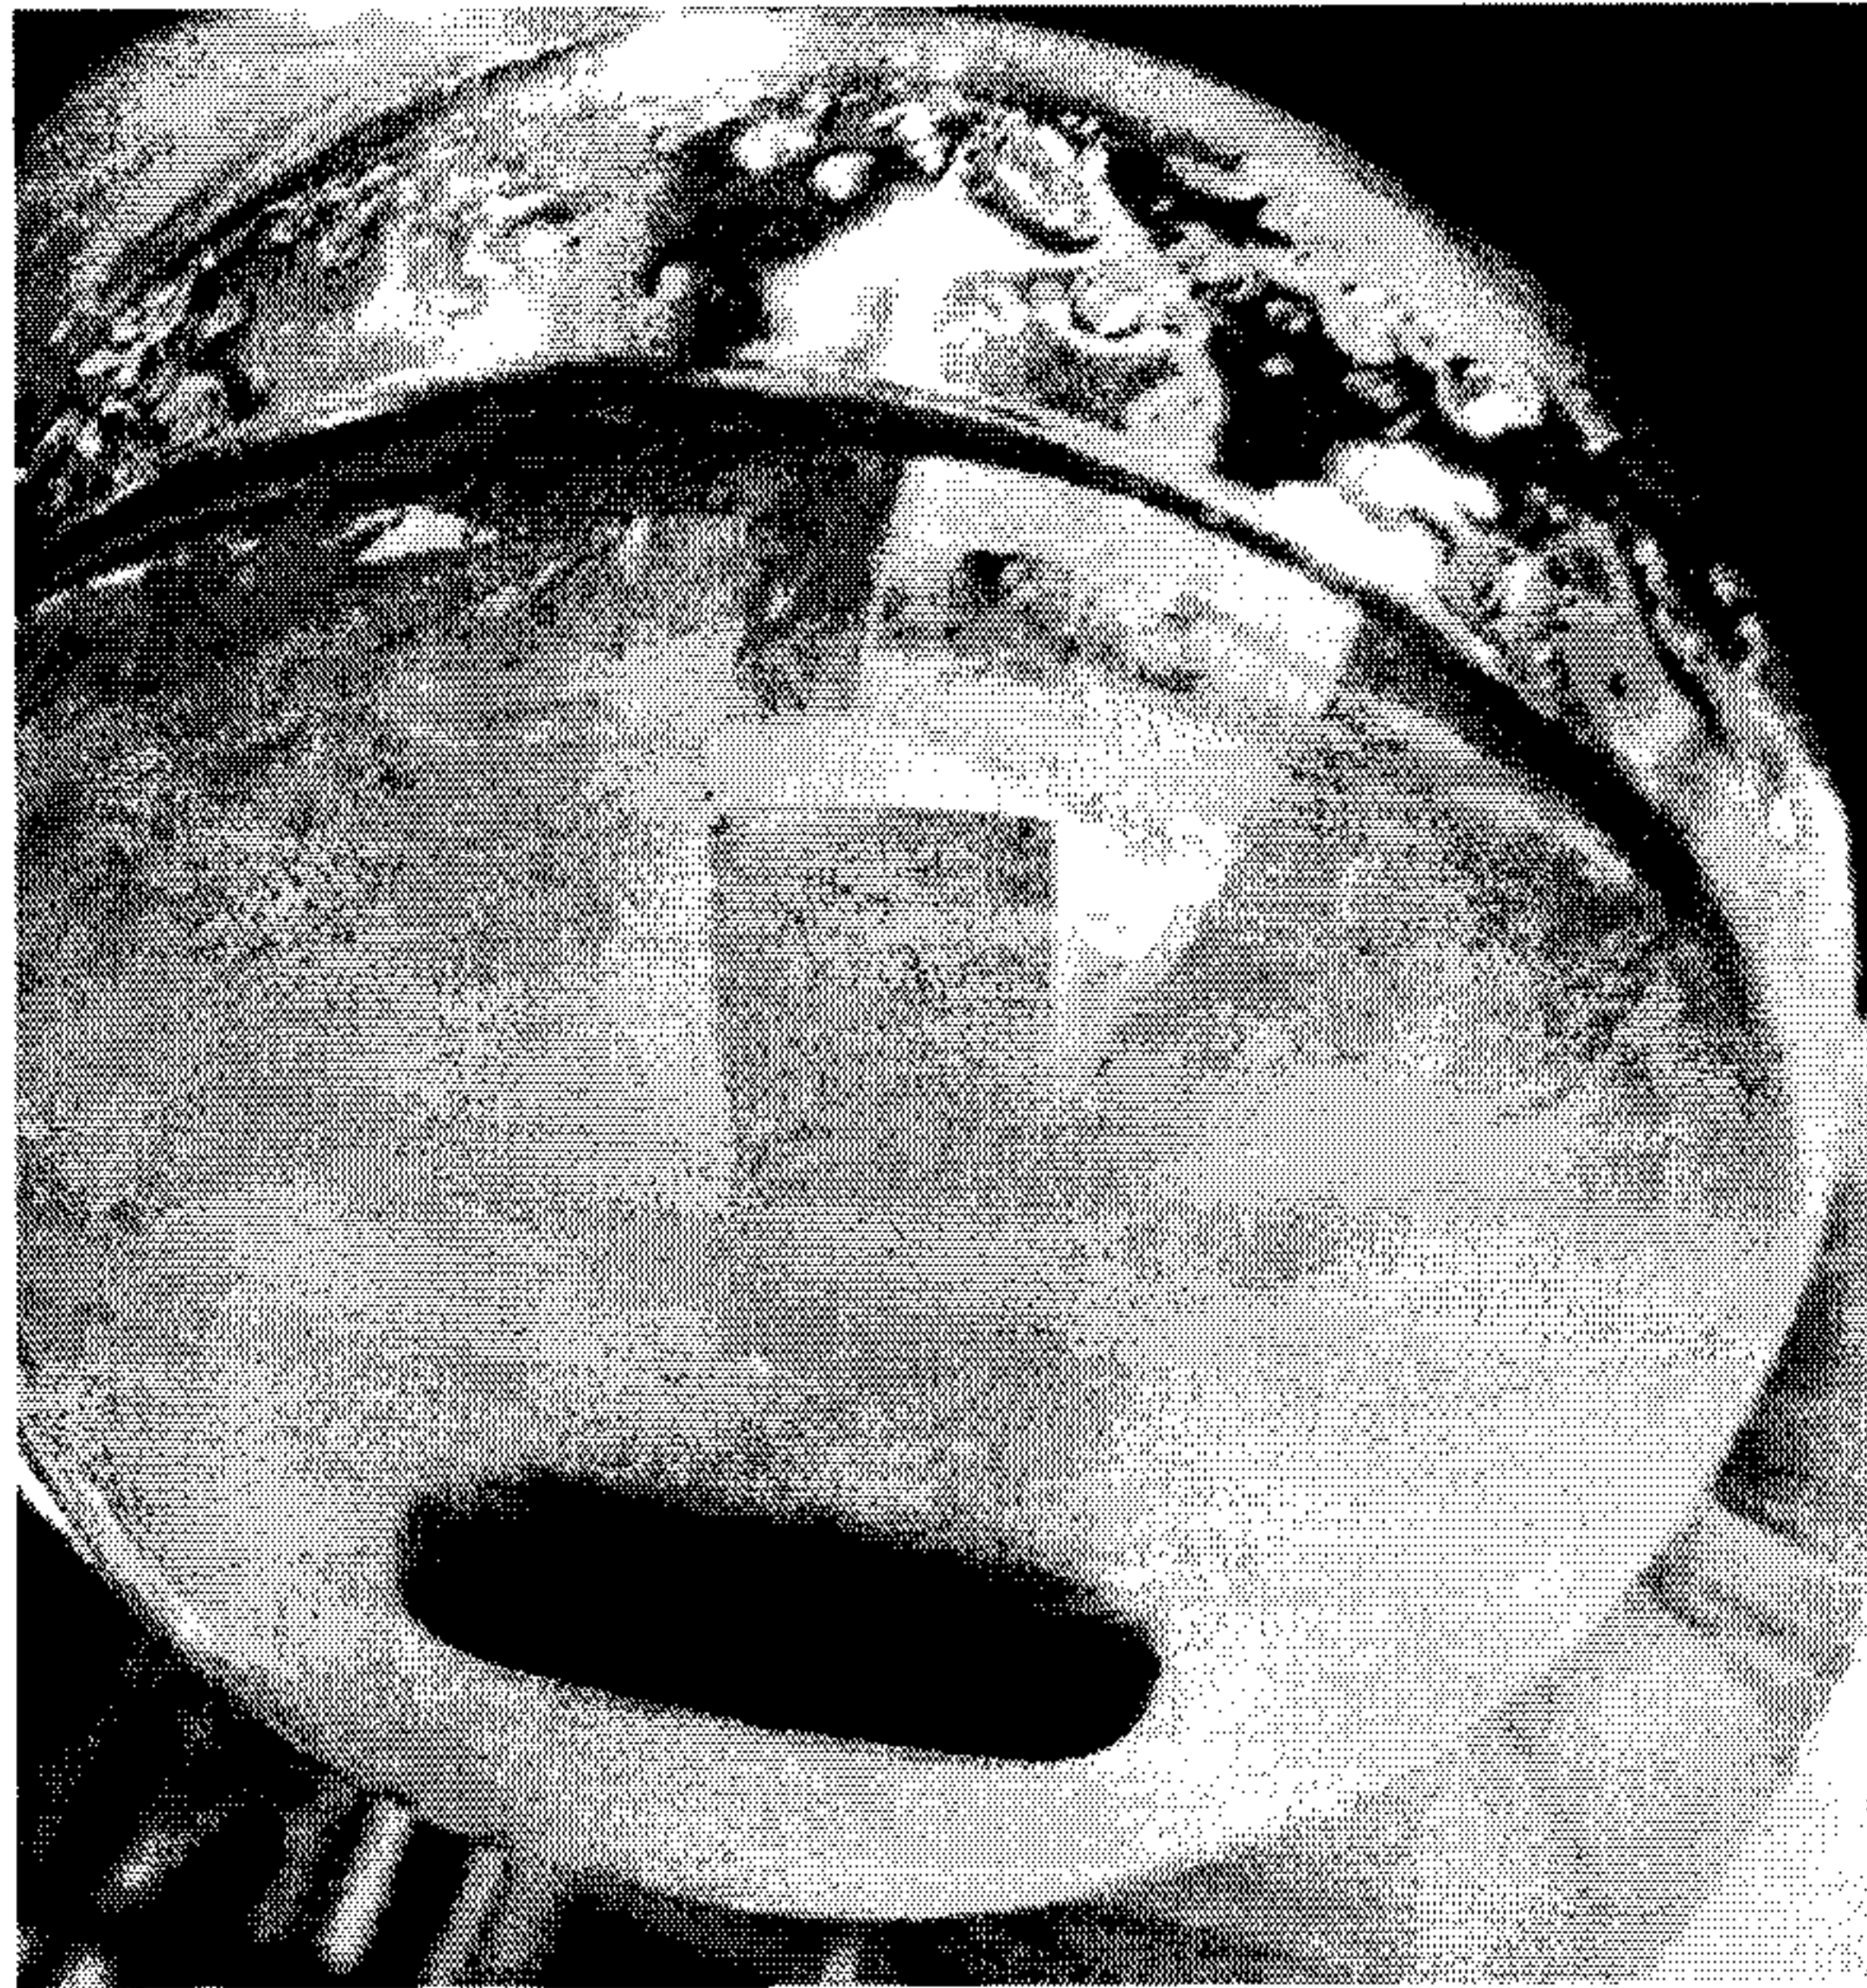

D


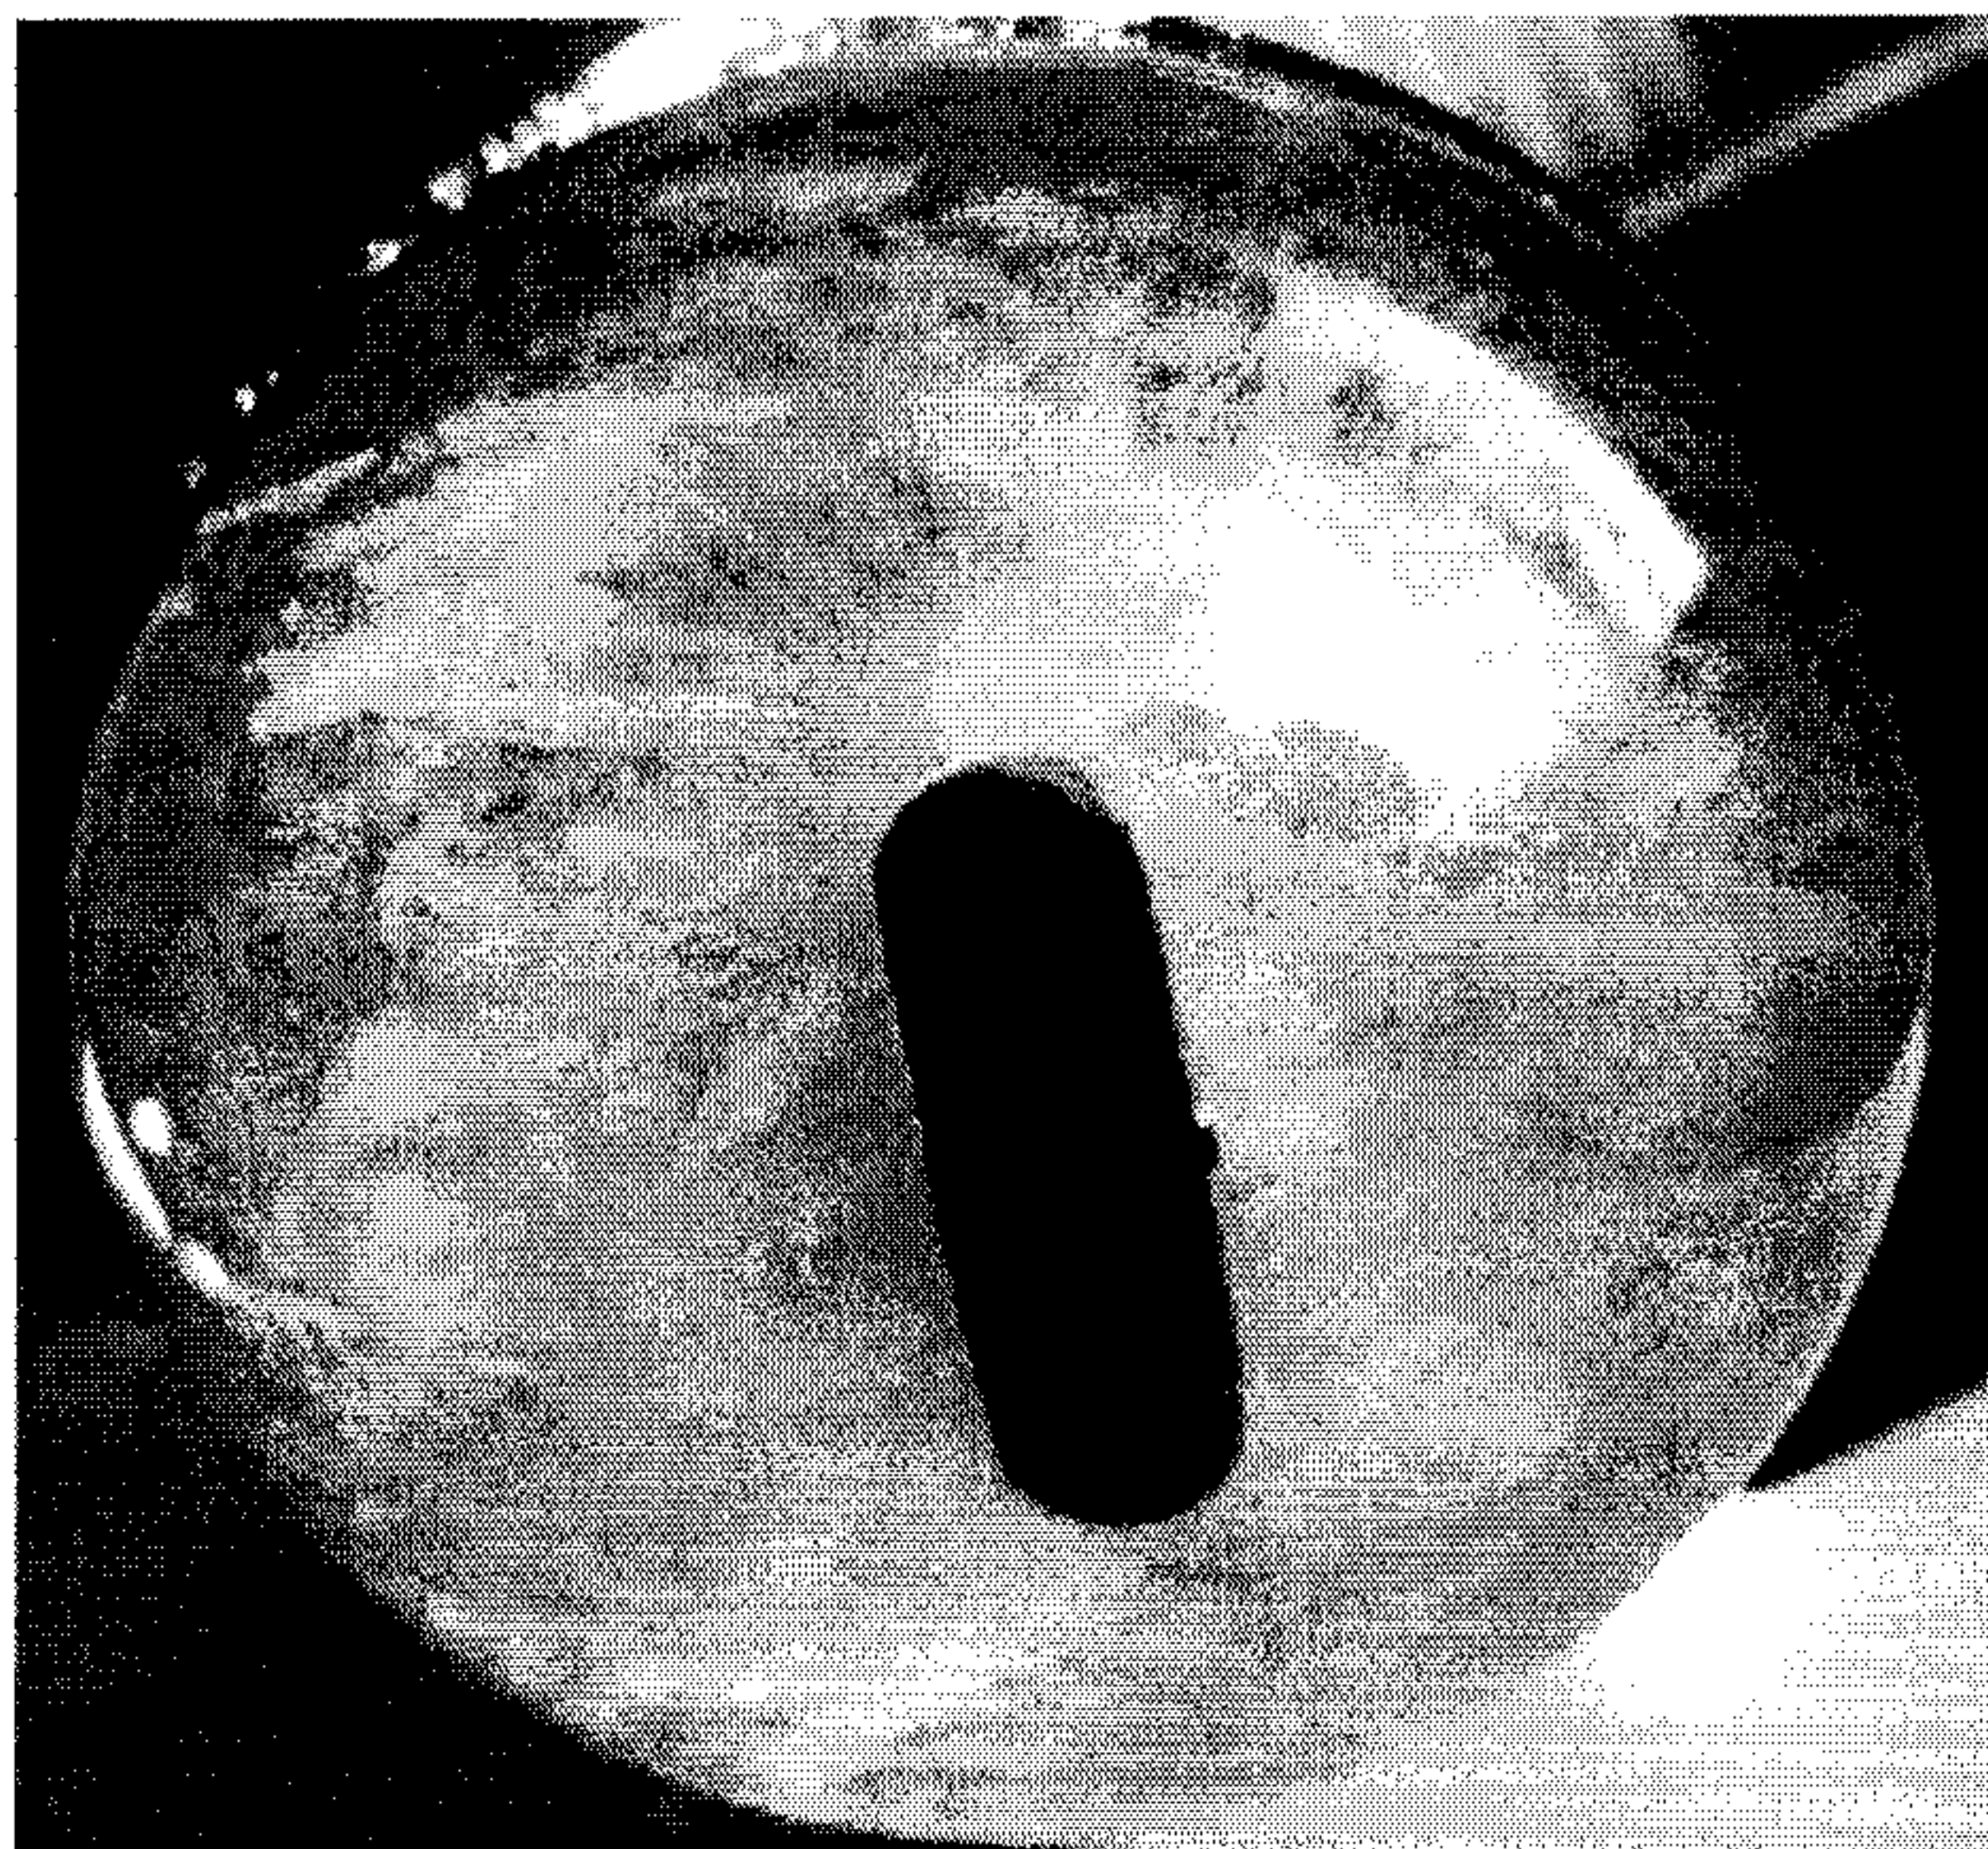


FIG. 18 (cont.)

31/31

E

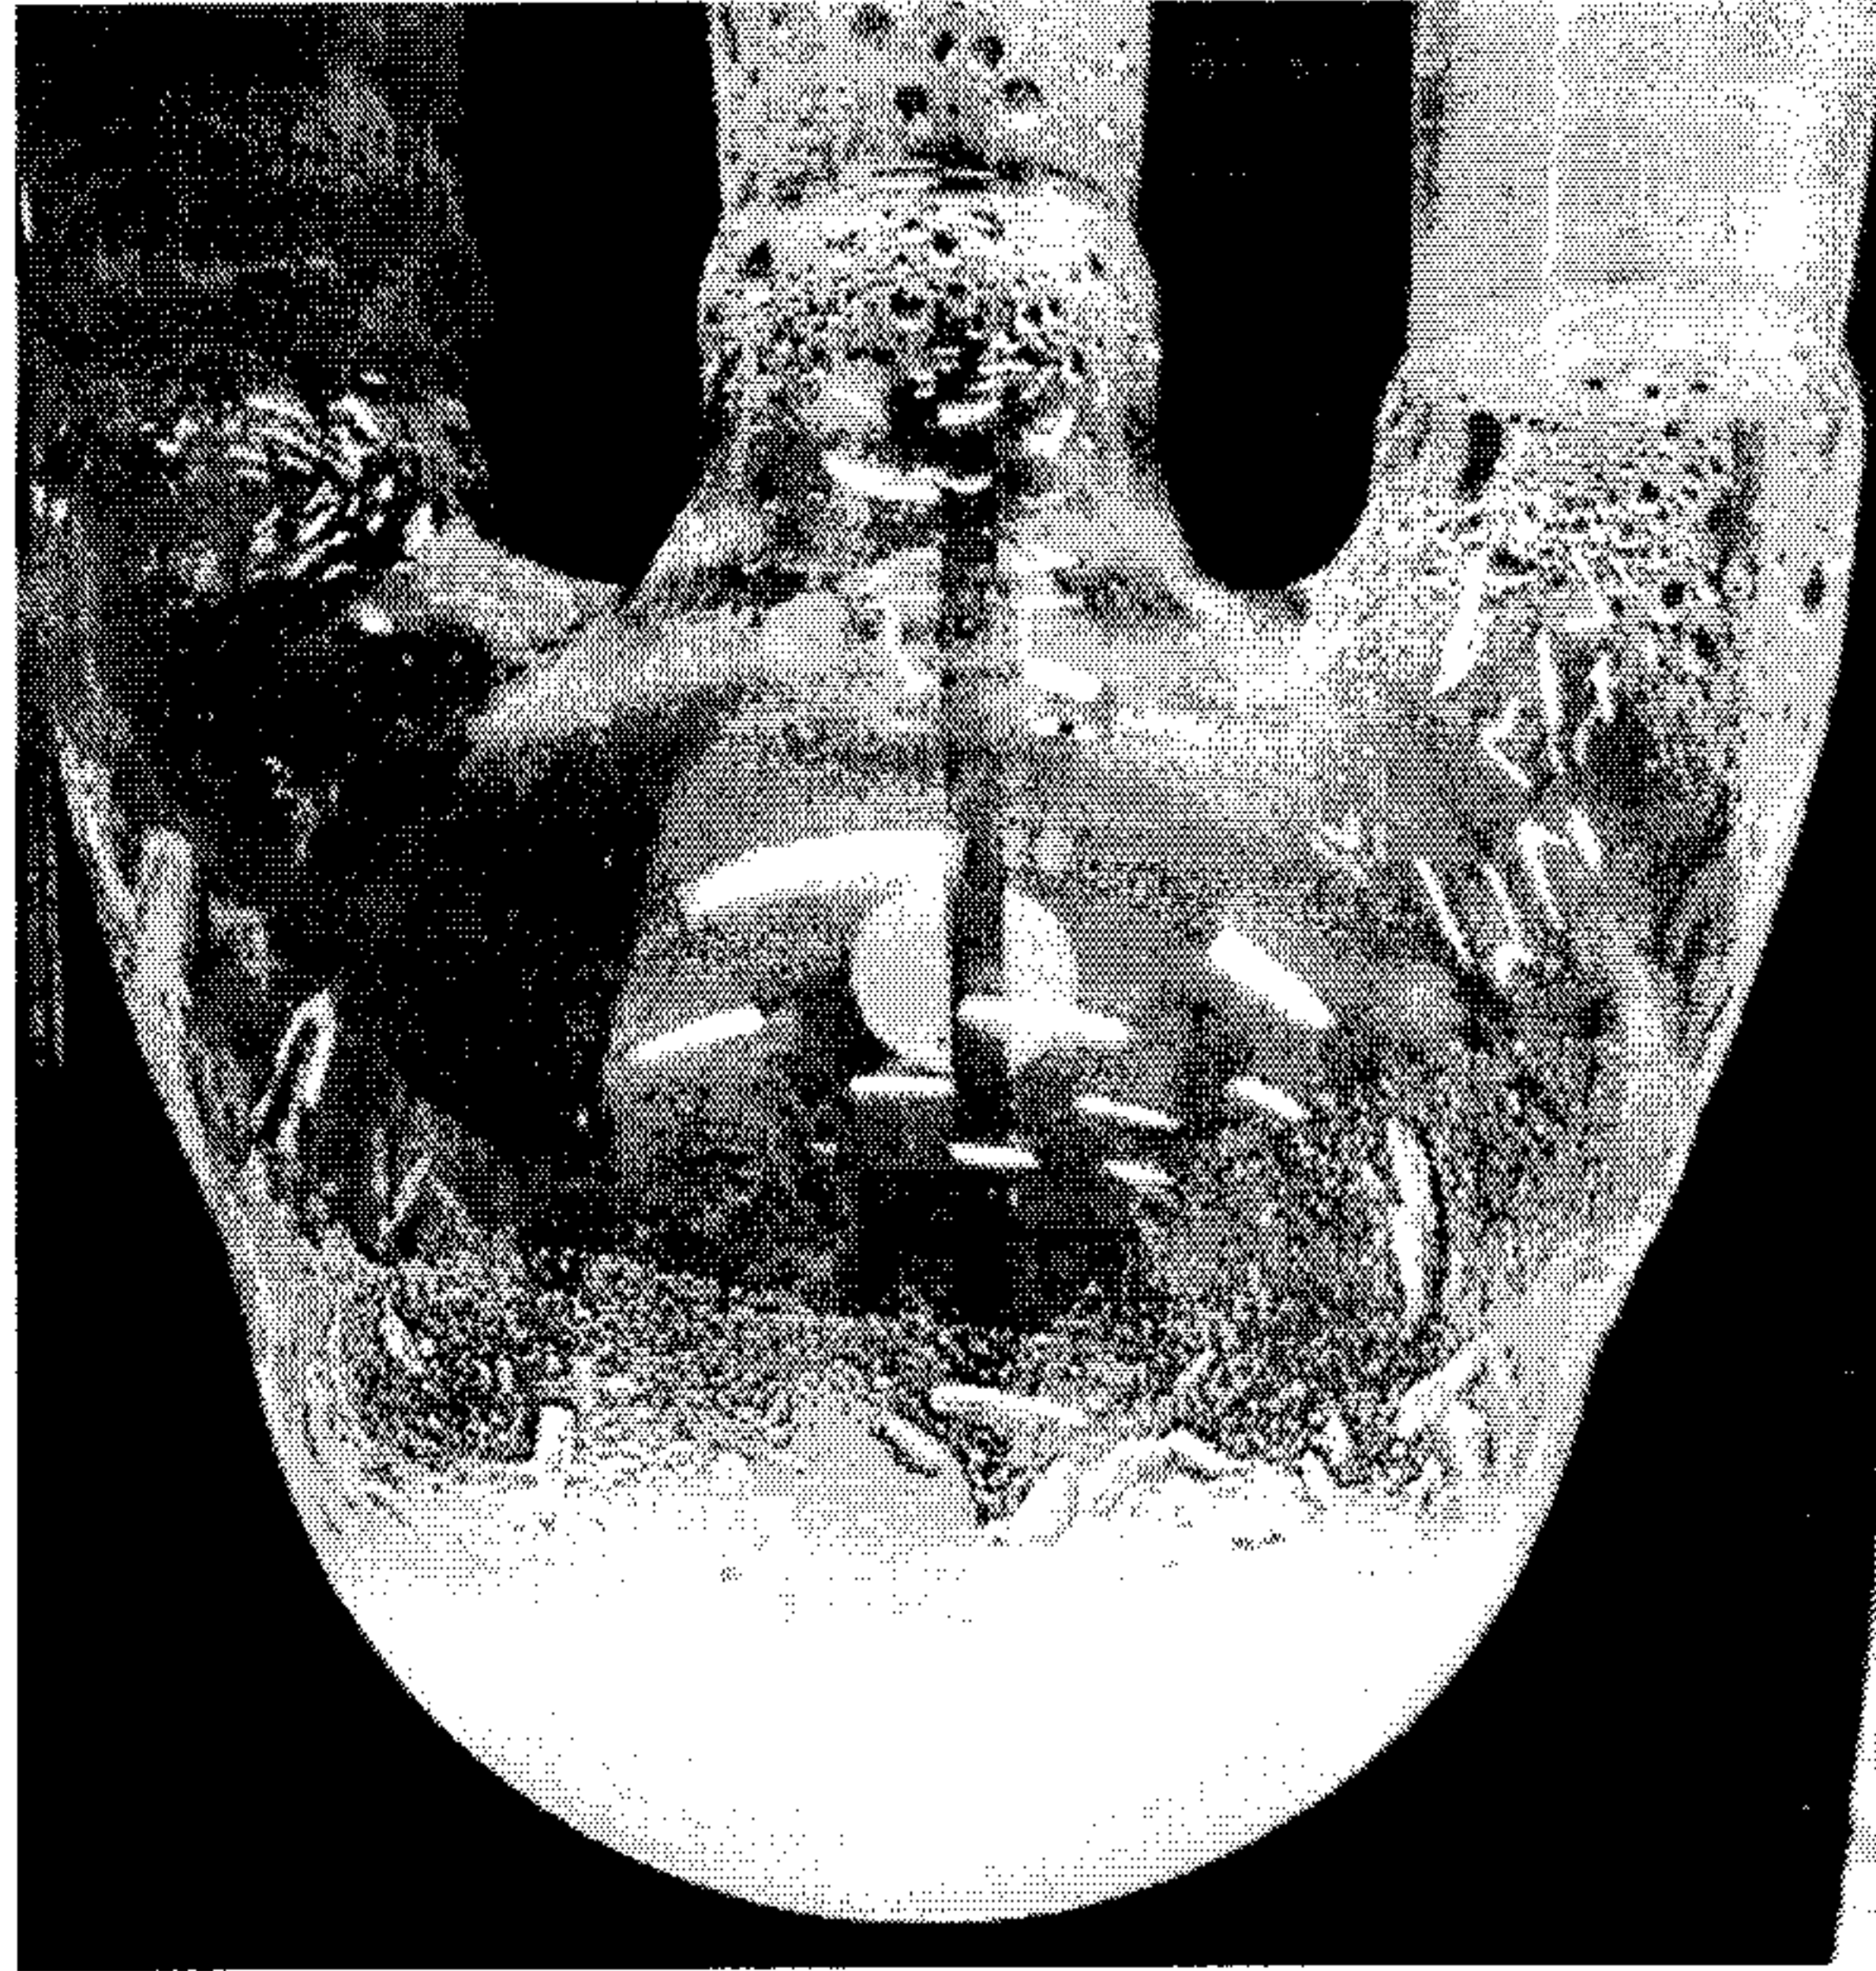

F

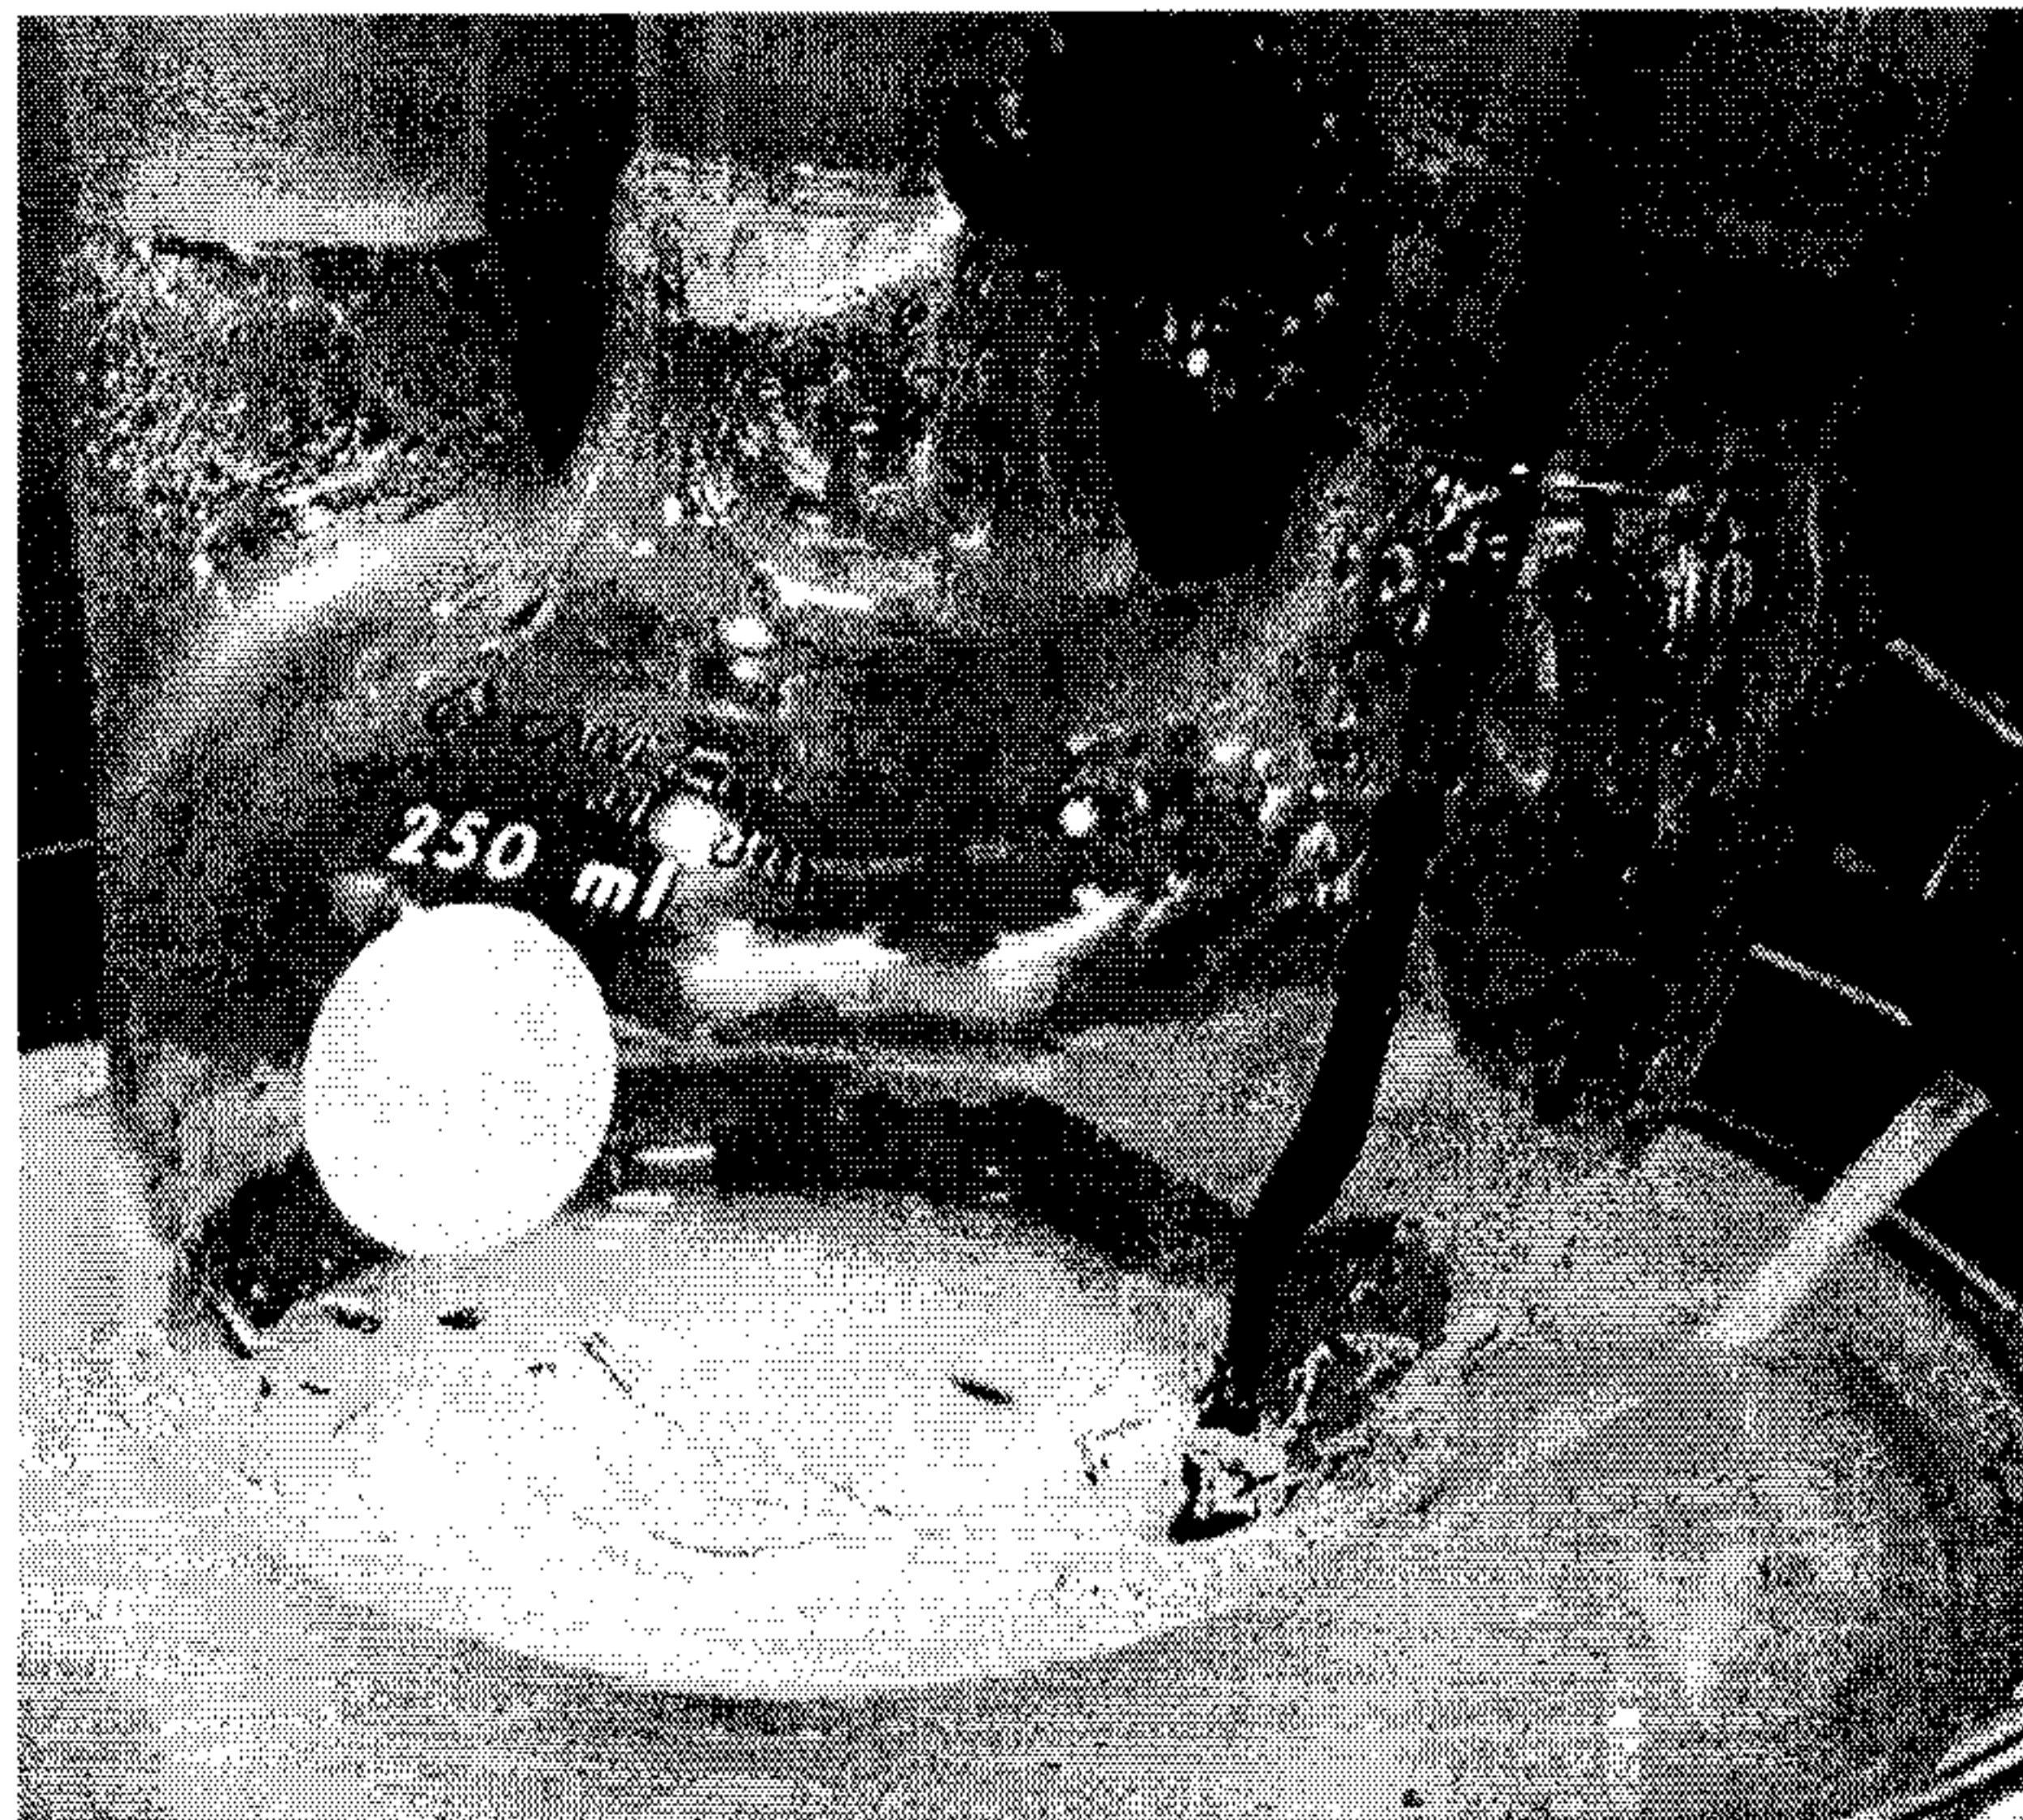


FIG. 18 (cont.)

