

(51) International Patent Classification:
H01P 1/00 (2006.01)(21) International Application Number:
PCT/US2014/023216(22) International Filing Date:
11 March 2014 (11.03.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/779,130 13 March 2013 (13.03.2013) US

(71) Applicant: THE PENN STATE RESEARCH FOUNDATION [US/US]; 304 Old Main, University Park, PA 16802 (US).

(72) Inventors: WERNER, Douglas, H.; 2365 Oak Leaf Dr., State College, PA 16803 (US). MAYER, Theresa, S.; 117 Colgate Court, Port Matilda, PA 16801 (US). SIEBER, Peter, E.; 205 E. Beaver Ave., Apt. 41, State College, PA 16801 (US).

(74) Agents: WATHEN, Douglas, L. et al.; Gifford Krass Sprinkle Anderson & Citkowski, P.C., 2701 Troy Center Drive, Suite 330, Post Office Box 7021, Troy, MI 48007-7021 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: RF SWITCH SELECTIVELY REGULATING RF ENERGY TRANSMISSION

FIG. 1

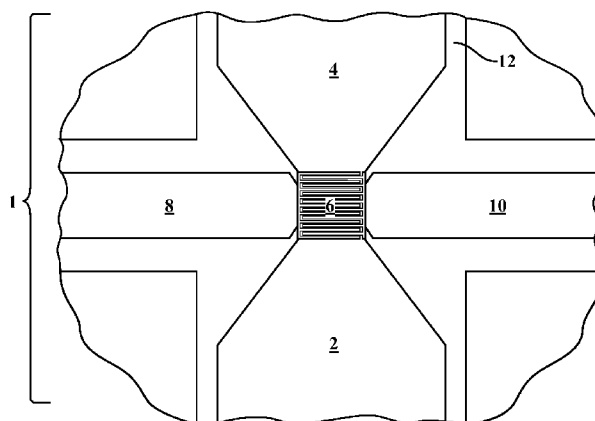

(57) Abstract: Provided are radio frequency electromagnetic energy switches and processes of regulating the transmission of RF energy, that for the first time successfully employ a ChG PCM as a RF switching material. An inventive switch includes: a substrate; a first radio frequency energy conductive element on the substrate; a second radio frequency energy conductive element on the substrate; and a switch element on the substrate and connecting the first conductive element to the second conductive element, the switch element including a switching material; the switching material including a chalcogenide compound switchable between a first radio frequency electromagnetic energy conductivity value and a second radio frequency electromagnetic energy conductivity value by application of an activation energy to the switching material, such that radio frequency electromagnetic energy flowing in the first conductive element is either reflected off the switching material or transmitted through the switching material to the second conductive element.



RF SWITCH SELECTIVELY REGULATING RF ENERGY TRANSMISSION

CROSS REFERENCE TO RELATED APPLICATIONS

5 **[0001]** This patent application claims priority from U.S. provisional patent application Serial No. 61/779,130, filed March 13, 2013, the entire contents of which is incorporated herein in its entirety.

FIELD OF THE INVENTION

10 **[0002]** The invention relates to switches for use in electronic devices and systems. More specifically, the invention relates to radio frequency switches and materials used in such switches.

BACKGROUND OF THE INVENTION

15 **[0003]** Radio frequency (RF) switches play a key role in countless electronic devices that are critical to a wide range of technologies including communications and radar systems, medical instrumentation, and consumer electronics. Switching technologies used in these systems historically involve mechanical on/off switches, and transistor or transistor-like semiconductor switching devices. For these typical switching choices trade-offs must be made among static power consumption, switch isolation, insertion loss, switching speed, required voltage bias, power handling, cost, and reliability.

20 **[0004]** Transistor and transistor-like semiconductor switching devices such as PIN diodes and varactors are commonly employed in circuits designed to interact with electromagnetic waves. PIN diodes have a superior on-off ratio and switching capability for the majority of applications when compared to varactors. However, PIN diodes require biasing and in turn much larger DC power consumption, which makes them unattractive for systems that require a significant number of switches, such as phased array antennas.

25 **[0005]** The functional process of mechanical on/off switches, such as RF MEMS switches, involves the physical motion of a conductor between two positions such that to close a circuit a physical bridge contacts two conductors and completes the conducting path of the circuit. To move the circuit into an open configuration, the bridge must be moved away from one contact to break the circuit path. While many improvements have been made in modern RF MEMS switches, 30 the tradeoff between power handling capability and reliability is poor. RF MEMS have shown to be reliable for cold-switched and very low-power applications ($>10^9$ cycles). When hot switching

is required in combination with moderate power levels, e.g. 0.1 Watts, reliability drops significantly such that RF MEMS devices are not a viable option. Also, RF MEMS switches significantly outperform PIN diodes and varactors in terms of their on-off ratio and distortion, but have many drawbacks including higher cost, lower power handling, and, for many applications, lower reliability (switching cycles before failure) due to their mechanical nature.

[0006] Each of the currently employed switches, e.g. RF MEMS and more prevalent semiconductor based devices such as PIN diodes and varactors, have significant drawbacks. Thus, any new switching technology that can improve on the currently required trade-offs will make an important impact on RF design. Despite this importance and hundreds of millions of dollars of research, there remains a need for improved switches in the RF regime.

SUMMARY OF THE INVENTION

[0007] The following summary of the invention is provided to facilitate an understanding of some of the innovative features unique to the present invention and is not intended to be a full description. A full appreciation of the various aspects of the invention can be gained by taking the entire specification, claims, drawings, and abstract as a whole. It is appreciated that the individual elements of the following text and claims are intermixable or combinable in all ways.

[0008] One object of the invention is to provide a rapid, reversible, and robust switch for use in the regulation of the transmission of radio frequency electromagnetic energy. The provided switches and methods accomplish this goal using chalcogenide phase change materials that have the ability to reversibly regulate the transmission of RF energy.

[0009] An inventive switch is provided that includes a substrate, a first radio frequency energy conductive element on the substrate, a second radio frequency energy conductive element on the substrate, and a switch element on the substrate, the switch connecting the first conductive element to the second conductive element, the switch comprising a switching material, the switching material comprising a chalcogenide compound switchable between a first radio frequency electromagnetic energy conductivity value and a second radio frequency electromagnetic energy conductivity value by application of an activation energy to the switching material, such that radio frequency electromagnetic energy flowing in the first conductive element is either reflected off the switch or transmitted through the switch to the second conductive element.

[0010] The switching of the switch material is altered from a transmissive to a non-transmissive state via application of an activation energy. An activation energy is optionally heat,

electromagnetic energy, electrical energy, a Newton force, thermodynamic energy transfer, nuclear force, or combinations thereof.

[0011] A switching material is a ChG material suitable for regulating the transmission of RF energy therethrough. Optionally, a said switching material comprises Se, Te, or combinations thereof. Optionally, the switching material comprises Ge, Sb, Se, In, Ag, Sn, S, or combinations thereof. In some particular embodiments, a switching material comprises GeSbTe, optionally in a ratio of $\text{Ge}_2\text{Sb}_2\text{Te}_5$. A switching material has multiple electromagnetic energy conductivity values depending on the phase the material is in. Optionally, a second radio frequency electromagnetic energy conductivity value is higher than a first radio frequency electromagnetic energy conductivity value, or *vice versa*.

[0012] A switch is optionally assembled on or includes a substrate. A substrate optionally includes quartz, a polymeric material, or silicon.

[0013] The switch regulates the transmission of RF energy from a first radio frequency energy conductive element to a second radio frequency energy conductive element. A first radio frequency energy conductive element, a second radio frequency energy conductive element, or both is optionally a waveguide suitable for transmission of radio frequency electromagnetic energy. The RF energy is optionally in a band selected from the group consisting of TLF, ELF, SLF, ULF, VLF, LF, MF, HF, VHF, UHF, SHF, EHF, THF, and combinations thereof.

[0014] Also provided are methods of regulating the transmission of radio frequency electromagnetic energy through a switch regulated transmission pathway including providing a chalcogenide switching material positioned in a radio frequency electromagnetic energy transmission pathway, applying an activation energy to said switching material, producing a phase change in said switching material from a first phase to a second phase imparted by said activation energy, said step of producing altering the transmissibility of said switching material to said radio frequency electromagnetic energy from a first radio frequency electromagnetic energy conductivity value to a second radio frequency electromagnetic energy conductivity value. The method optionally uses a switch of any embodiment described above using any combination of elements. The RF energy is optionally in the band selected from the group consisting of TLF, ELF, SLF, ULF, VLF, LF, MF, HF, VHF, UHF, SHF, EHF, THF, and combinations thereof. An activation energy is optionally heat, electromagnetic energy, electrical energy, pressure, conformational stress, high energy particles, or combinations thereof.

[0015] The provided switches and processes fulfill a long unmet need for effective regulation of RF energy transmission.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] FIG. 1 is an illustration of an RF energy switch according to one embodiment of the invention;

[0017] FIG. 2 illustrates the large broad band conductivity change exhibited by some
5 embodiments of RF switches according to the invention;

[0018] FIG. 3A illustrates an RF energy switch according to one embodiment of the invention;

[0019] FIG. 3B illustrates a cross sectional illustration of an RF energy switch of FIG. 3A;

[0020] FIG. 3C is photograph of a switch manufactured according to the design of FIG. 3A
10 illustrating the presence of ChG PCM as a switching material present across the gap between a first
and a second radio frequency energy conductive element;

[0021] FIG. 3D is a photograph of the switch of FIG. 3C illustrating the test structure
termination where probes were placed;

[0022] FIG. 4A illustrates simulated test structure data for varying ChG PCM material
conductivities;

[0023] FIG. 4B illustrates measured test structure results using a switch manufactured
15 according to the design of FIG. 3A and presented relative to two control cases;

[0024] FIG. 5 illustrates switching ration (db) for a GaAs pin diode, MEMS cantilever, and a
ChG PCM material switch as a function of energy frequency.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

[0025] The following description of particular embodiment(s) is merely exemplary in nature
and is in no way intended to limit the scope of the invention, its application, or uses, which may,
of course, vary. The invention is described with relation to the non-limiting definitions and
terminology included herein. These definitions and terminology are not designed to function as a
25 limitation on the scope or practice of the invention but are presented for illustrative and descriptive
purposes only. While the processes or compositions are described as an order of individual steps
or using specific materials, it is appreciated that steps or materials may be interchangeable such
that the description of the invention may include multiple parts or steps arranged in many ways as
is readily appreciated by one of ordinary skill in the art.

[0026] It will be understood that when an element is referred to as being “on” another element,
30 it can be directly on the other element or intervening elements may be present therebetween. In
contrast, when an element is referred to as being “directly on” another element, there are no
intervening elements present.

[0027] It will be understood that, although the terms “first,” “second,” “third” etc. may be used herein to describe various elements, components, regions, layers, and/or sections, these elements, components, regions, layers, and/or sections should not be limited by these terms. These terms are only used to distinguish one element, component, region, layer, or section from another element, component, region, layer, or section. Thus, “a first element,” “component,” “region,” “layer,” or “section” discussed below could be termed a second (or other) element, component, region, layer, or section without departing from the teachings herein.

[0028] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting. As used herein, the singular forms “a,” “an,” and “the” are intended to include the plural forms, including “at least one,” unless the content clearly indicates otherwise. “Or” means “and/or.” As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items. It will be further understood that the terms “comprises” and/or “comprising,” or “includes” and/or “including” when used in this specification, specify the presence of stated features, regions, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, regions, integers, steps, operations, elements, components, and/or groups thereof. The term “or a combination thereof” means a combination including at least one of the foregoing elements.

[0029] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this disclosure belongs. It will be further understood that terms such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and the present disclosure, and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

[0030] A chalcogenide (ChG) phase change material based radio frequency energy based switch and processes of the use of chalcogenide phase change materials (PCM) are provided. The invention has utility as an apparatus and processes for regulating transmission of radio frequency (RF) energy.

[0031] The switches and processes provided use ChG PCMs in a RF switch that has a number of advantages over current RF switching technologies. In particular, the ChG PCM switches of the present invention require zero static power consumption (nonvolatile) and are capable of achieving greater reliability as well as higher yield and lower cost than RF MEMS. Additionally, a ChG PCM switch will handle greater power than current RF MEMS technologies. Due to the steady phase state nature of ChG PCM switches, they eliminate the need for the biasing voltage/current that all other current technologies require, which can lead to significant power

savings. Furthermore, RF MEMS, the most heavily researched RF switching technology over the past decade, are presently a relatively expensive technology as it requires hermetic packing as well as a very high bias voltage, which requires expensive drive components. The technology's cost is further increased by the fact that manufacturing yields are still low. The inventive ChG PCM switches solve these problems and provide a relatively low cost solution to regulating RF energy transmission.

[0032] A key figure of merit (FOM) for all RF switches is the ratio of the on-state (Z_{on}) to off-state (Z_{off}) impedances. These metrics are degraded by increasing the on-state resistance (R) and/or the off-state capacitance (C) as a function of angular frequency (ω). Specifically, the FOM is defined as:

$$FOM = \frac{Z_{on}}{Z_{off}} = j\omega CR \quad (I)$$

[0033] Based on this FOM, compared to semiconductor and MEMS devices, the inventive RF switches and processes employ a ChG PCM that is particularly advantageous over current technologies due to a low on-state resistance and off state capacitance. The superior FOM entails a very large bandwidth low insertion loss, and extremely large on/off ratio. The superior FOM is also combined with high reliability, non-volatility and low power consumption, all equating to a superior RF switch. Additionally, the inventive ChG PCM switches achieve much greater yield, reliability, and power handling performance than current RF MEMS technology.

[0034] Provided are radio frequency electromagnetic energy switches that for the first time successfully employ a ChG PCM as a RF switching material. The switches are the first to explore and confirm ChG PCMs as a viable switching material for the RF regime. An inventive switch includes: a substrate; a first radio frequency energy conductive element on the substrate; a second radio frequency energy conductive element on the substrate; and a switch element on the substrate and connecting the first conductive element to the second conductive element, the switch element including a switching material; the switching material including a chalcogenide compound switchable between a first radio frequency electromagnetic energy conductivity value and a second radio frequency electromagnetic energy conductivity value by application of an activation energy to the switching material, such that radio frequency electromagnetic energy flowing in the first conductive element is either reflected off the switching material or transmitted through the switching material to the second conductive element.

[0035] A switch is a radio frequency (RF) energy transmission switch. The switch has the capability of reversibly switching from a transmissive phase to a resistive phase and to reverse itself. A switch is capable of converting between the two phases rapidly and repeatedly for an indefinite number of phase changes. The RF energy transmitted by the switch is optionally

electromagnetic energy of a wavelength from 8 μm to 10^5 km and having a frequency of 3 Hz to 37.5 THz or any value or range there between. Optionally, The RF energy transmitted by the switch is optionally electromagnetic energy of a wavelength from 0.1 mm to 10^5 km and having a frequency of 3000 GHz to 3 Hz. Optionally, RF energy transmission has a frequency of 3 kHz to 37.5THz. Optionally, RF energy transmission has a frequency of 1 GHz to 37.5THz. In some embodiments, the switches are not used or are not capable of switching in the infrared wavelengths as the way a ChG PCM interacts with RF energy is fundamentally different due the small size of the switching material required and increased metallic losses. This is due to a number of factors including the inability to effectively switch back and forth between transmissive phase and resistive phase repeatedly for ChG PCM based switches in with dimensions operable in the IR wavelengths. In the crystalline state, GST at IR band and above behaves as a low loss dielectric vs. a lossy dielectric in its respective phase states. In contrast, the invention functions in a resistive manner. As a dielectric, the ChG switch material cannot transmit a signal but rather is used to shift resonance positions. The application for such a design is limited to absorbers. At IR, many methods of switching the ChG are not physically realizable due to the structure's nm scale (size is governed by the operating frequency). IR based switches are restricted to dimensions in the nm range with upper limits being less than 10 μm , and in reality 1 μm or less with operational (i.e. non-experimental) systems actually having dimensions of 100 nm or less. Due to the required scale of the switching structure at IR methods available at RF are not applicable due to fundamental physical limits. In order to switch back and forth between phase states heat must be rapidly applied and removed. The best method to induce heat rapidly is to utilize abrupt localized heating via pulsed energy. For non-local heating such as that required for IR methods, the ChG cannot be turned back and forth between phase states- specifically; it can only be changed from amorphous to crystalline but not back to amorphous from the crystalline state due to an inability to rapidly remove heat for the desired crystalline to amorphous transition. These limitations do not apply to ChG at RF frequencies since properly scaled heating methods are physically realizable. As is described herein, the invention for the first time is capable of demonstrating excellent RF switching that is not appreciated or thought possible from prior attempts with IR.

[0036] An RF energy switch uses a ChG PCM as a switch material. Illustrative examples of a ChG PCM include those that combine the elements Te, Se, or combinations thereof with one or more second elements. A second element is optionally more electropositive than the Te or Se. A second element is optionally Ge, Sb, Se, In, Ag, Sn, S, or combinations thereof. A ChG PCM optionally includes Ge Sb and Te. Illustrative non-limiting examples of a ChG PCM include GeTe, $\text{Ge}_1\text{Sb}_2\text{Te}_4$, $\text{Ge}_2\text{Sb}_2\text{Te}_5$, $\text{Ge}_4\text{Sb}_1\text{Te}_5$, In_3SbTe_2 , AgSbTe_2 , AuSbTe_2 , $\text{Au}_{25}\text{Ge}_4\text{Sn}_{11}\text{Te}_{60}$,

$\text{Ag}_3\text{In}_4\text{Sb}_{76}\text{Te}_{17}$, and $\text{Ag}_{5.5}\text{In}_{6.5}\text{Sb}_{59}\text{Te}_{29}$. While much of the present description is directed to $\text{Ge}_2\text{Sb}_2\text{Te}_5$ (GST), it is appreciated that many embodiments supplement or substitute other ChG PCMs. As $\text{Ge}_2\text{Sb}_2\text{Te}_5$ is demonstrated to be an excellent switching material and its use as an RF switching material produces excellent characteristics, $\text{Ge}_2\text{Sb}_2\text{Te}_5$ in some embodiments is optionally used as an exclusive switching material to the exclusion of all other ChG PCMs.

[0037] ChG PCMs used in the provided switches and processes have two stable phase states (amorphous and crystalline) that exhibit RF frequency conductivities three to five orders of magnitude higher in the crystalline state relative to the amorphous state. When the ChG PCM is in its amorphous state, it becomes highly insulating to RF energy allowing very little electromagnetic energy to pass, thus behaving as an open switch. Conversely, in the crystalline state ChG PCMs have a high conductivity, behaving as a closed switch. This differs from prior attempts using ChG as a material to regulate IR energy. In such prior attempts, the ChG is useful only to move the IR energy interaction to a slightly different resonance position thereby limiting the useful applications to absorbers. In contrast, the present RF energies may be rapidly and repeatedly “switched” from being conducted through the switch material to effectively blocked from such transmission. A similar resistance change to RF energy can be observed in a non-ChG PCM, namely Vanadium (IV) oxide (VO_2). Yet, VO_2 suffers from a low transition temperature (68°C) which makes it incompatible with many applications where ambient temperatures can easily surpass this temperature. Additionally, VO_2 is volatile, requiring static energy to maintain the switch in the conducting state. Ideally a bistable, nonvolatile PCM with a higher transition temperature can be used. ChG PCMs are both compatible with many applications and have a sufficiently high transition temperature such that they can be used in applications that function in relatively high ambient temperatures. As such, the switches and processes of the invention do optionally do not include VO_2 .

[0038] The phase change of a ChG PCM provides for switching between greater or lower conductivity to radio frequency electromagnetic energies. Thus, a second radio frequency electromagnetic energy conductivity value is optionally higher or lower than a first radio frequency electromagnetic energy conductivity value. Illustratively, an amorphous $\text{Ge}_2\text{Sb}_2\text{Te}_5$ has a conductivity to RF energy of approximately 100 S/m, or a resistivity of $1 \times 10^{-2} \Omega\text{-m}$. When the GST is in the crystalline state its response resembles a simulated response with a conductivity of approximately 100 kS/m, or a resistivity of $1 \times 10^{-5} \Omega\text{-m}$, a change of three orders of magnitude. Thus, a second radio frequency electromagnetic energy conductivity value is optionally higher by 1, 2, 3, 4, of 5 orders of magnitude relative to a first radio frequency electromagnetic energy conductivity value.

[0039] A switch material is used in a switch at a set of dimensions suitable for conducting RF energy. Illustratively a switch material has a length (L), a width (W) and a thickness (T). L is optionally from 20 nm to 500 μm , optionally from 2 μm to 500 μm , optionally from 11 μm to 500 μm . W is optionally from 20 nm to any necessary dimension to conduct the amount of RF energy desired. T is optionally from 10 nm to 1000 nm, optionally from 100 nm to 500 nm, optionally, from 200 nm to 300 nm, optionally 250 nm. A switch material also has a transmission length (TL) which is defined as the distance from a first conducting element to a second conducting element whereby RF energy is transmitted through the switching material or prevented from such transmission. A TL is optionally in excess of 10 μm . A TL is optionally from 1 μm to 200 μm , optionally from 20 μm to 100 μm , optionally from 40 μm to 60 μm , optionally 50 μm .

[0040] A switch material electromagnetically connects two or more conductive elements. A conductive element is capable of transmitting RF energy through the conductive element. In some embodiments, a first conductive element and a second conductive element are discontinuous. A first conductive element and a second conductive element are arranged such that they may form a radio frequency electromagnetic energy transmission pathway that includes a switching material within the pathway. RF energy may flow with low resistance from a first conductive element to a second conductive element when a switch material is in a transmissive phase. Optionally, no material is present between a first conductive element and a second conductive element other than a switch material. As such, in some embodiments the signal path is free of any material other than the switch material. Such a configuration reduces insertion loss that would otherwise be present. The suitable ChG PCM of the invention optionally has a resistance of 1 ohm or less and typically 0.1 or 0.01 ohms or less.

[0041] A switch optionally includes a substrate. A substrate is a material used to support a switching material, one or more conductive elements, or combinations thereof. A substrate is optionally insulating. A substrate is optionally glass such as borosilicate glass, quartz, a polymeric material (e.g. polyimide, PEEK, polyethylene, or transparent conductive polyester), a semiconductor material such as silicon or other material, or other material known in the art for switch devices. Optionally, a substrate contacts only a portion of or none of an RF transmission line defined as a first RF energy conducting element, a second RF energy conducting element and a switch. Illustrative examples of a substrate contacting only a portion of an RF transmission line include air-bridge topologies/inert gas. Such a configuration is advantageous for decreasing the capacitance.

[0042] Some embodiments of an RF switch is a four-terminal device where two terminals represent the conducting elements for RF switching, and the other two terminals are used for

electrical, optical, Newton forces (i.e. pressure, stress), thermodynamic energy transfer, nuclear forces, or other control to provide an activation energy to open or close the switch. Optionally, a three terminal switch device is used whereby two terminals are for RF switching and the other terminal is a control to provide activation energy. Optionally a two terminal switch device is used.

5 Particular applicability of a ChG PCM switch is as a four terminal device (two ports for RF switching and two ports for electrical control) designed to function at the microwave communication bands (e.g., the C, I, K, Ka, Ku, L, M, Q, S, U, V, W and X bands). A switch and process optionally are not used for regulating conduction of electromagnetic energies outside the RF range. A switch is optionally created by placing a section of ChG PCM in energy contact with
10 two activation energy conductors (e.g. metallic electrodes) and changing the phase state via thermo-electrical or optical switching and conducting RF energy across the switching material.

[0043] A ChG PCM switching material has many advantages including that the material is bi-stable meaning that it remains (with no application of signal or energy required) in the last state into which it was switched until the next application of activation energy of sufficient magnitude
15 is applied. Thus, application of an activation energy need only be applied to induce the ChG PCM to change phase from its current phase to the opposite phase (i.e. crystalline to amorphous, or amorphous to crystalline). An activation energy is optionally heat, electromagnetic energy, electrical energy, Newton forces (i.e. pressure, stress), thermodynamic energy transfer, nuclear forces, or combinations thereof. An activation energy is optionally applied by a heat pulse, an
20 optical pulse, an electrical pulse, pressure pulse, high energy particle pulse, or combinations thereof, among others that will induce a phase change in a ChG PCM. Methods and systems for creating a heat pulse, an optical pulse, of an electrical pulse are known in the art. Optionally, a thermoelectric heating element(s) is used to induce phase change. Suitable thermoelectric heating elements and materials to produce them are recognized in the art. Optionally, an activation energy
25 is not heat.

[0044] An activation energy is optionally heat. The ChG PCM is optionally heated to an activation temperature of 40 °C to 220 °C, or any value or range there between. An activation temperature is optionally from 140 °C to 160 °C. An activation temperature is optionally from 190 °C to 210 °C. Various ChG PCMs may be tailored to adjust the phase transition temperature for
30 various applications. For example GST materials currently undergo a phase transition near 150 °C. The phase transition temperature of a ChG PCM could be adjusted up or down by the addition of additives, dopants, or alloy materials. The ratio of the glass transition temperature to the melting temperature is also an important ratio for defining the operation characteristics of the inventive switch. This ratio is termed the reduced glass-transition temperature $T_{rg}=(T_g/T_m)$. The lower the

value of T_{rg} the faster the material switches. Thus, the ChG PCM is optionally tailored to the required efficiency, ambient temperature and switching speed required for the particular application.

[0045] A switch can be alternated between a resistive phase and a transmissive phase or from a transmissive phase to a resistive phase in a switching time. A switching time is optionally less than 10 seconds, optionally, less than 1 second, optionally less than 100 μ s, optionally less than 1 μ s, optionally 1-100 ns.

[0046] As an exemplary embodiment, FIG. 1 shows a four terminal switch **1** with a thermally coupled (but electrically isolated) electrical heater imbedded into a ChG PCM based switch material. A pair of activation energy terminals **2, 4** are located on opposite sides of the ChG PCM based switch material **6** and an activation energy element (e.g. resistor) (not shown) controlled by the heater terminals is positioned below the ChG PCM in electrical contact with the activation energy terminals. The activation energy element is in direct or indirect contact with the switch material **6** so as to transfer activation energy from the activation energy element to the switch material. In the device of FIG. 1, the activation energy terminals are heater terminals that drive a resistor positioned below the switch material. Application of a current to the heater terminals **2, 4** increases the temperature of the heater element to provide an activation energy and thereby produce a phase change in the ChG PCM switch material **6**. The ChG PCM is flanked on opposite sides by two RF terminals (radio frequency energy conductive elements **8, 10**) formed from coplanar waveguide transmission lines and electromagnetically linked together via the intermediate switch material. The activation energy terminals **2, 4**, the radio frequency energy conductive elements **8, 10**, and the switch material **6** are all assembled on a quartz substrate **12**. The application of the activation energy in the form of heat (as one example) causes a phase change in the ChG PCM allowing RF energy to move across the ChG PCM from a first conductive element to a second conductive element, or be reflected back into the first conductive element depending on whether the ChG PCM is in the crystalline or amorphous phase, respectively.

[0047] To demonstrate the conductivity of each ChG PCM phase in a particular exemplary embodiment, a 300 nm layer of a particular ChG PCM, $\text{Ge}_2\text{Sb}_2\text{Te}_5$ (GST), was deposited on a quartz slide in the configuration of the switch of FIG. 1. The slide was placed inside a waveguide and transmission of RF energy was measured in the amorphous and crystalline states of the GST. Referencing FIG. 2, it is clear that a large, broadband conductivity contrast exists between the amorphous and crystalline states as the wave scattering incident on the test cell goes from transmission to reflection as the test cell is set and reset between the amorphous and crystalline

states by toggling the activation energy element to an on state to cause a phase change in the switch material.

[0048] In another exemplary embodiment shown in FIG. 3, a section of GST based switch material **106** was deposited on a set of coplanar waveguide (CPW) transmission line (TL) based test structures serving as conductive elements **108, 110**. The elements are disposed on a quartz slide as a substrate **112**. The switch material **106** is placed upon an activation element **107** to produce a phase change in the switch material. For the GST amorphous state, the CPW TL sees an open circuit for a length (L) of 2.5 mm. In the crystalline state, the GST becomes conductive and the TL doubles in length (L = 5mm). The resultant return loss of the circuit can be used to verify switching behavior since an impedance match occurs as the line length approaches a half wavelength ($\lambda/2$) and the input impedance (Z_{in}) becomes 50 Ω . For the particular switch arrangement of FIG. 3, the half wavelength condition occurs at ~19 GHz and the equivalent $L=\lambda$ condition occurs at ~38 GHz demonstrating a wideband switch conductivity measurement.

[0049] To further estimate the material parameters, the measured reflection coefficients were compared to a series of models using the test structure of FIG. 3 where the GST material RF energy conductivity was varied within the simulation. The results from these measurements and simulations are shown in FIG. 4. From these results, it is clear that there is a conductivity change of several orders of magnitude between the two phase states. When the GST was in the amorphous state, its response closely resembles a simulated response with a conductivity of approximately 100 S/m, or a resistivity of $1 \times 10^{-2} \Omega\text{-m}$. When the GST was in the crystalline state its response resembles a simulated response with a conductivity of approximately 100 kS/m, or a resistivity of $1 \times 10^{-5} \Omega\text{-m}$, a change of three orders of magnitude.

[0050] The fact that the GST acts as a very good switch can further be seen by the comparison of the test structure response with the GST in both states to the control test structure responses, also shown in FIG. 4. The “Open” control test structures were created by removing the GST material, leaving an opening in the center of the test structure, and the “Closed” control structure was created by depositing gold instead of GST at the center of the test structure. For the GST switch integrated into a 50 Ω system, the calculated R and C values are 3.3 ohms and 0.5fF respectively. As a result, the calculated insertion loss is -0.285 dB and dispersive on – off ratio is plotted in FIG. 5.

[0051] The switches and processes provided demonstrate that ChG PCMs function as a switch in the radio frequency spectrum. In some embodiments, the ChG PCM switch technology is used in applications beginning with (but not including) DC and continuing up to infrared frequencies. In some embodiments, the switches are configured to function in the RF spectrum only and not in

other spectrums. Specifically, the bands that may be transmitted by the switches of the invention include: TLF, ELF, SLF, ULF, VLF, LF, MF, HF, VHF, UHF, SHF, EHF and THF bands. Compared to semiconductor and MEMS devices the provided ChG PCM based RF switches of the present invention are particularly advantageous due to the very large bandwidth, extremely large on/off ratio, excellent reliability, and low power consumption.

LISTING OF ELEMENTS

[0052] Element 1: A switch for use in circuits that conduct radio frequency electromagnetic energy comprising: a substrate; a first radio frequency energy conductive element on said substrate; a second radio frequency energy conductive element on said substrate; and a switch element on said substrate, and connecting said first conductive element to said second conductive element, said switch comprising a switching material; said switching material comprising a chalcogenide compound switchable between a first radio frequency electromagnetic energy conductivity value and a second radio frequency electromagnetic energy conductivity value by application of an activation energy to said switching material, such that radio frequency electromagnetic energy flowing in said first conductive element is either reflected off said switch or transmitted through said switch to said second conductive element.

[0053] Element 2: The switch of element 1 wherein said activation energy is heat, electromagnetic energy, electrical energy, a Newton force, thermodynamic energy transfer, nuclear force, or combinations thereof.

[0054] Element 3: The switch of element 1 wherein said switching material comprises Se, Te, or combinations thereof.

[0055] Element 4: The switch of any one of elements 1-3 wherein said switching material comprises Ge, Sb, Se, In, Ag, Sn, S, or combinations thereof.

[0056] Element 5: The switch of any one of elements 1-3 wherein said switching material comprises GeSbTe.

[0057] Element 6: The switch of any one of elements 1-3 wherein said switching material comprises $\text{Ge}_2\text{Sb}_2\text{Te}_5$.

[0058] Element 7: The switch of any one of elements 1-3 wherein said substrate comprises quartz, a polymeric material, or silicon.

[0059] Element 8: The switch of any one of elements 1-3 wherein said first radio frequency energy conductive element or said second radio frequency energy conductive element, or both, is a waveguide suitable for transmission of radio frequency electromagnetic energy.

[0060] Element 9: The switch of any one of elements 1-3 wherein said second radio frequency electromagnetic energy conductivity value is higher than said first radio frequency electromagnetic energy conductivity value.

[0061] Element 10: The switch of any one of elements 1-3 wherein said radio frequency electromagnetic energy is in the band selected from the group consisting of TLF, ELF, SLF, ULF, VLF, LF, MF, HF, VHF, UHF, SHF, EHF, THF, and combinations thereof.

[0062] Element 11: A switch for use in circuits that conduct radio frequency electromagnetic energy comprising: a substrate; a first radio frequency energy conductive waveguide on said substrate; a second radio frequency energy conductive waveguide on said substrate; and a switch element on said substrate, and electromagnetically connecting said first conductive element to said second conductive element, said switch comprising a switching material; said switching material comprising $\text{Ge}_2\text{Sb}_2\text{Te}_5$ and switchable between a first radio frequency electromagnetic energy conductivity value and a second radio frequency electromagnetic energy conductivity value by application of an activation energy to said switching material, such that radio frequency electromagnetic energy flowing in said first conductive element is either reflected off said switch or transmitted through said switch to said second conductive element.

[0063] Element 12: A switch substantially as described in the specification.

[0064] Element 13: A process of regulating the transmission of radio frequency electromagnetic energy through a switch regulated transmission pathway comprising: providing a chalcogenide switching material positioned in a radio frequency electromagnetic energy transmission pathway; applying an activation energy to said switching material; producing a phase change in said switching material from a first phase to a second phase imparted by said activation energy; said step of producing altering the transmissibility of said switching material to said radio frequency electromagnetic energy from a first radio frequency electromagnetic energy conductivity value to a second radio frequency electromagnetic energy conductivity value.

[0065] Element 14: The process of element 13 wherein said radio frequency electromagnetic energy is in the band selected from the group consisting of TLF, ELF, SLF, ULF, VLF, LF, MF, HF, VHF, UHF, SHF, EHF, THF, and combinations thereof.

[0066] Element 15: The process of element 13 wherein said activation energy is heat, electromagnetic energy, electrical energy, pressure, conformational stress, high energy particles, or combinations thereof.

[0067] Element 16: The process of any one of elements 13-15 wherein said switching material comprises Se, Te, or combinations thereof.

[0068] Element 17: The process of any one of elements 13-15 wherein said switching material comprises Ge, Sb, Se, In, Ag, Sn, S, or combinations thereof.

[0069] Element 18: The process of any one of elements 13-15 wherein said switching material comprises GeSbTe.

5 **[0070]** Element 19: The process of any one of claims 13-15 wherein said switching material comprises $\text{Ge}_2\text{Sb}_2\text{Te}_5$.

[0071] Element 20: The process of any one of claims 13-15 wherein said second radio frequency electromagnetic energy conductivity value is higher than said first radio frequency electromagnetic energy conductivity value.

10 **[0072]** Element 21: The switch of element 7 in combination with elements 4, 5, or 6.

[0073] Element 22: The switch of element 8 in combination with elements 4, 5, 6, or 7.

[0074] Element 23: The switch of element 9 in combination with elements 4, 5, 6, 7, or 8.

[0075] Element 24: The switch of element 10 in combination with elements 4, 5, 6, 7, 8 or 9.

15 **[0076]** Element 25: The switch of element 11 in combination with elements 2, 3, 4, 5, 6, 7, 8, or 9.

[0077] Element 26: The switch of elements 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, or 11 in any combination.

[0078] Element 27: The switch of elements 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, and 11.

[0079] Element 28: The process of element 15 and element 14.

20 **[0080]** Element 29: The process of element 19 and any one or more of elements 16, 17, or 18.

[0081] Element 30: The process of element 20 and any one or more of elements 16, 17, 18, or 19.

[0082] Element 31: The process of element 13, 14, 15, 16, 17 18, 19, and 20.

25 REFERENCE LIST

[0083] [1] G. M. Rebeiz, and J. B. Muldavin, "RF MEMS switches and switch circuits," IEEE Microwave Magazine, vol. 2, no. 4, pp. 59-71, Dec. 2001.

30 **[0084]** [2] P. D. Grant, M. W. Denhoff, and R. R. Mansour, "A comparison between RF MEMS switches and semiconductor switches," Proceedings of the 2004 International Conference on MEMS, NANO and Smart Systems, ICMENS 2004, pp. 515- 521, 25-27 Aug. 2004.

[0085] [3] R. Stefanini, M. Chatras, P. Blondy, and G. M. Rebeiz, "Miniature MEMS switches for RF applications," Journal of Microelectromechanical Systems, vol. 22, no. 6, pp. 1324-1335, Dec. 2011.

[0086] [4] S. Hudgens, and B. Johnson, "Overview of phase-change chalcogenide nonvolatile memory technology," MRS Bulletin, vol. 29, pp. 829-832, 2004.

[0087] [5] H. S. Newman, J. L. Ebel, D. Judy, and J. Maciel, "Lifetime measurements on a high-reliability RFMEMS contact switch," IEEE Microwave and Wireless Components Letters, vol. 18, no. 2, pp. 100-102, Feb. 2008.

[0088] [6] [Online]. Available: <http://www.radantmems.com/radantmems/products.html>

[0089] [7] Crunteanu Aurelian, Givernaud Julien, Blondy Pierre, Orlianges Jean-Christophe, Champeaux Corinne and Catherinot Alain (2010). Exploiting the Semiconductor-Metal Phase Transition of VO₂ Materials: a Novel Direction towards Tuneable Devices and Systems for RF-Microwave Applications, Advanced Microwave and Millimeter Wave Technologies Semiconductor Devices Circuits and Systems, Moumita Mukherjee (Ed.), ISBN: 978-953-307-031-5, InTech, Available from: <http://www.intechopen.com/books/advanced-microwave-andmillimeter-wave-technologies-semiconductor-devices-circuits-and-systems/exploiting-the-semiconductormetal-phase-transition-of-vo2-materials-a-novel-direction-towards-tunea>

[0090] [8] Chua, E.K., et al., APPLIED PHYSICS LETTERS, 2010; 97, 183506

[0091] [9] Hummel G, Gharacterization of phase change materials for radiofrequency applications, 2012 NINN REU Research Accomplishments, pgs. 62-63; www.nnin.org/sites/default/files/.../2012nninREU_Hummel.pdf

[0092] [10] U.S. Patent No. 6,903,362

[0093] [11] U.S. Patent No. 6,882,460

[0094] [12] U.S. Patent No. 3,448,302

[0095] Various modifications of the present invention, in addition to those shown and described herein, will be apparent to those skilled in the art of the above description. Such modifications are also intended to fall within the scope of the appended claims.

[0096] It is appreciated that all materials or reagents are obtainable by sources known in the art unless otherwise specified.

[0097] Patents, publications, and applications mentioned in the specification are indicative of the levels of those skilled in the art to which the invention pertains. These patents, publications, and applications are incorporated herein by reference to the same extent as if each individual patent, publication, or application was specifically and individually incorporated herein by reference.

[0098] The foregoing description is illustrative of particular embodiments of the invention, but is not meant to be a limitation upon the practice thereof.

CLAIMS

1. A switch for use in circuits that conduct radio frequency electromagnetic energy comprising:

a substrate;

5 a first radio frequency energy conductive element on said substrate;

a second radio frequency energy conductive element on said substrate;

and a switch element on said substrate, and connecting said first conductive element to said second conductive element, said switch comprising a switching material;

10 said switching material comprising a chalcogenide compound switchable between a first radio frequency electromagnetic energy conductivity value and a second radio frequency electromagnetic energy conductivity value by application of an activation energy to said switching material, such that radio frequency electromagnetic energy flowing in said first conductive element is either reflected off said switch or transmitted through said switch to said second conductive element.

15 2. The switch of claim 1 wherein said activation energy is heat, electromagnetic energy, electrical energy, a Newton force, thermodynamic energy transfer, nuclear force, or combinations thereof.

20 3. The switch of claim 1 wherein said switching material comprises Se, Te, or combinations thereof.

4. The switch of any one of claims 1-3 wherein said switching material comprises Ge, Sb, Se, In, Ag, Sn, S, or combinations thereof.

25 5. The switch of any one of claims 1-3 wherein said switching material comprises GeSbTe.

30 6. The switch of any one of claims 1-3 wherein said switching material comprises $\text{Ge}_2\text{Sb}_2\text{Te}_5$.

7. The switch of any one of claims 1-3 wherein said substrate comprises quartz, a polymeric material, or silicon.

8. The switch of any one of claims 1-3 wherein said first radio frequency energy conductive element or said second radio frequency energy conductive element, or both, is a waveguide suitable for transmission of radio frequency electromagnetic energy.

5 9. The switch of any one of claims 1-3 wherein said second radio frequency electromagnetic energy conductivity value is higher than said first radio frequency electromagnetic energy conductivity value.

10 10. The switch of any one of claims 1-3 wherein said radio frequency electromagnetic energy is in the band selected from the group consisting of TLF, ELF, SLF, ULF, VLF, LF, MF, HF, VHF, UHF, SHF, EHF, THF, and combinations thereof.

11. A switch for use in circuits that conduct radio frequency electromagnetic energy comprising:

15 a substrate;
a first radio frequency energy conductive waveguide on said substrate;
a second radio frequency energy conductive waveguide on said substrate;
and a switch element on said substrate, and electromagnetically connecting said first conductive element to said second conductive element, said switch comprising a switching material;

20 said switching material comprising $\text{Ge}_2\text{Sb}_2\text{Te}_5$ and switchable between a first radio frequency electromagnetic energy conductivity value and a second radio frequency electromagnetic energy conductivity value by application of an activation energy to said switching material, such that radio frequency electromagnetic energy flowing in said first
25 conductive element is either reflected off said switch or transmitted through said switch to said second conductive element.

12. A switch substantially as described in the specification.

30 13. A process of regulating the transmission of radio frequency electromagnetic energy through a switch regulated transmission pathway comprising:

providing a chalcogenide switching material positioned in a radio frequency electromagnetic energy transmission pathway;

applying an activation energy to said switching material;

producing a phase change in said switching material from a first phase to a second phase imparted by said activation energy;

said step of producing altering the transmissibility of said switching material to said radio frequency electromagnetic energy from a first radio frequency electromagnetic energy conductivity value to a second radio frequency electromagnetic energy conductivity value.

14. The process of claim 13 wherein said radio frequency electromagnetic energy is in the band selected from the group consisting of TLF, ELF, SLF, ULF, VLF, LF, MF, HF, VHF, UHF, SHF, EHF, THF, and combinations thereof.

15. The process of claim 13 wherein said activation energy is heat, electromagnetic energy, electrical energy, pressure, conformational stress, high energy particles, or combinations thereof.



16. The process of any one of claims 13-15 wherein said switching material comprises Se, Te, or combinations thereof.

17. The process of any one of claims 13-15 wherein said switching material comprises Ge, Sb, Se, In, Ag, Sn, S, or combinations thereof.

18. The process of any one of claims 13-15 wherein said switching material comprises GeSbTe.

19. The process of any one of claims 13-15 wherein said switching material comprises $\text{Ge}_2\text{Sb}_2\text{Te}_5$.

20. The process of any one of claims 13-15 wherein said second radio frequency electromagnetic energy conductivity value is higher than said first radio frequency electromagnetic energy conductivity value.

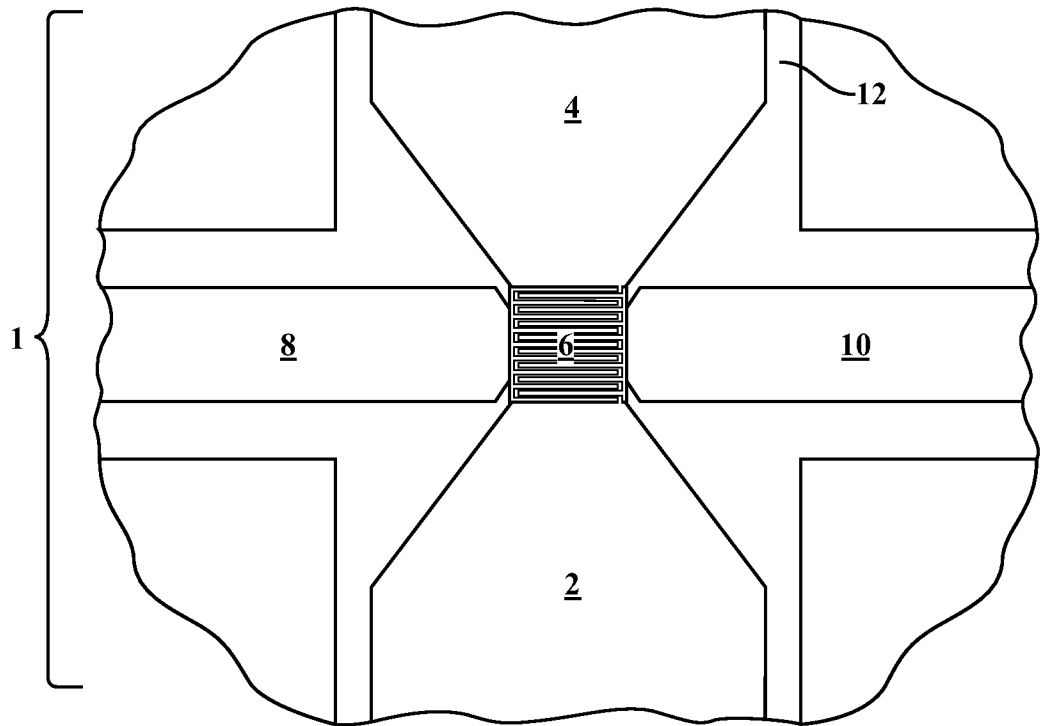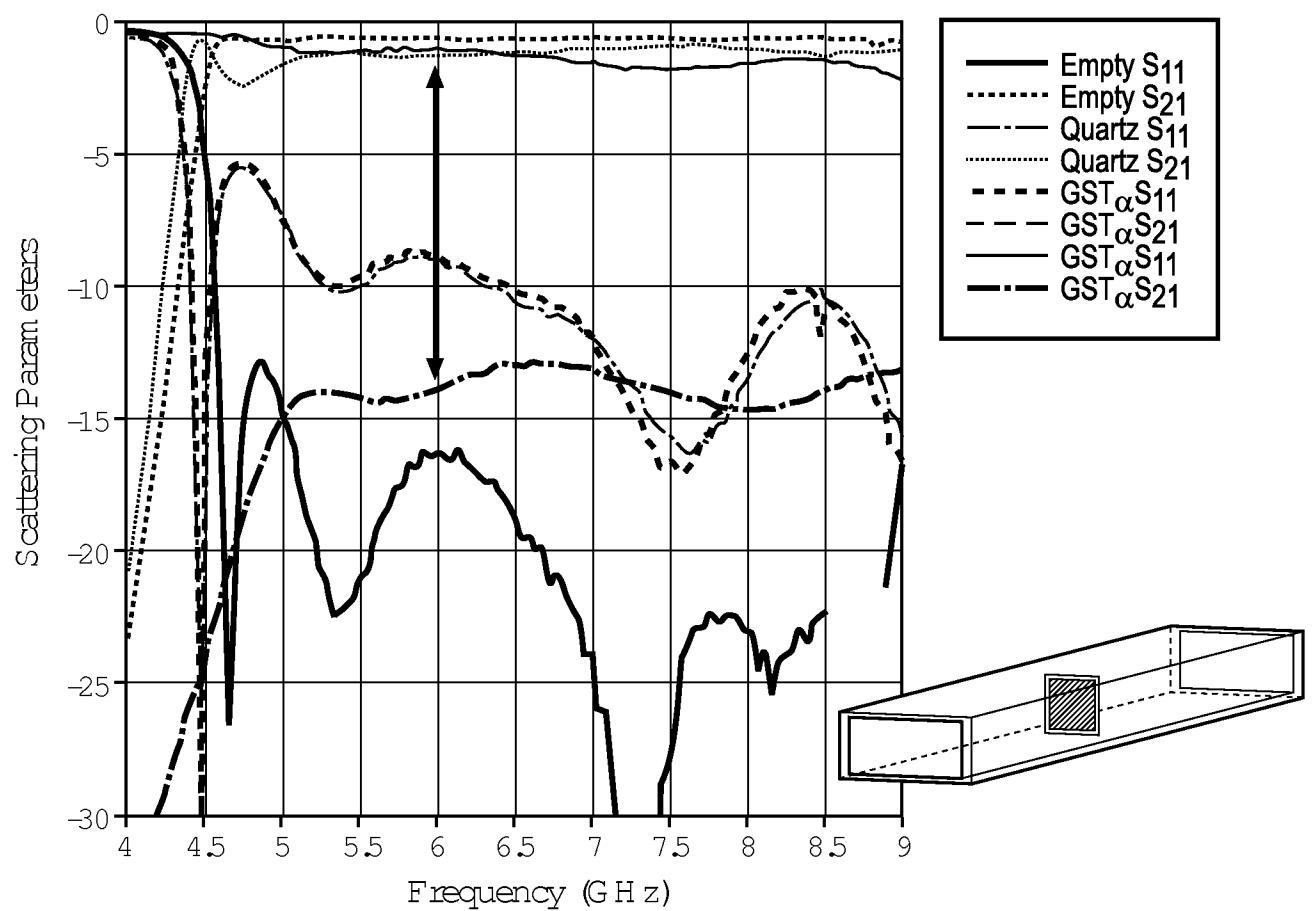FIG. 1**FIG. 2**

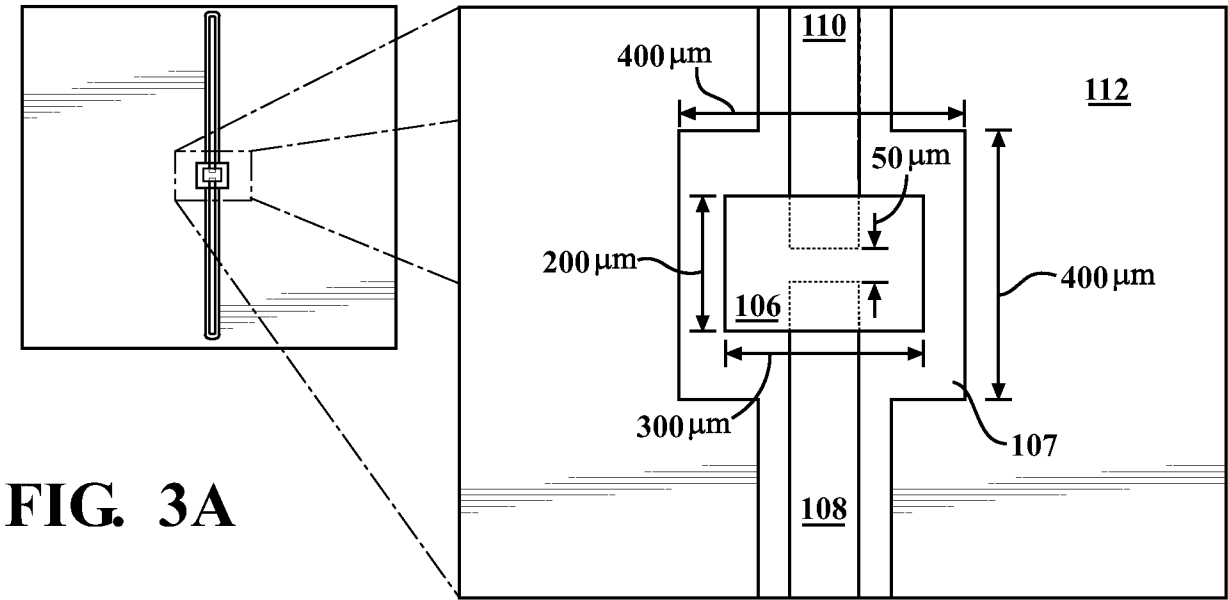


FIG. 3A

GST (250 nm)			
Au (50 nm)			Au (50 nm)
2" x 1/16" Quartz Disk			
Ground			

FIG. 3B

3/5

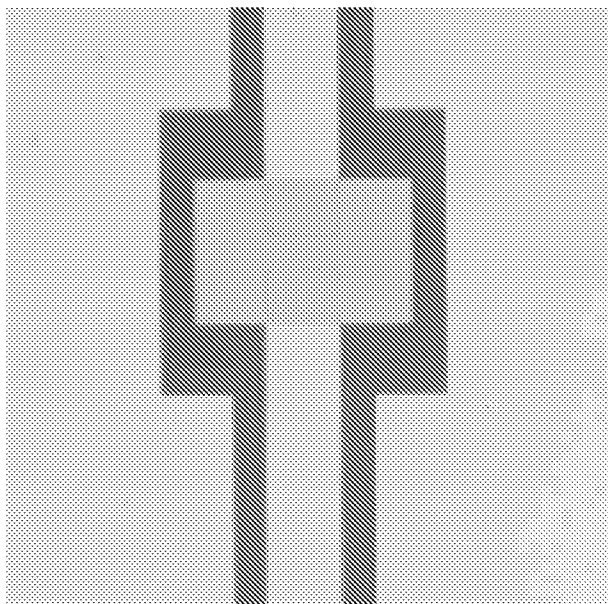


FIG. 3C

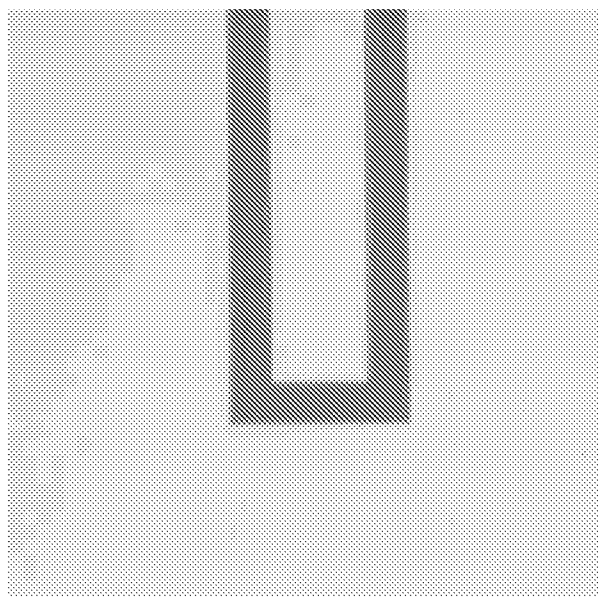
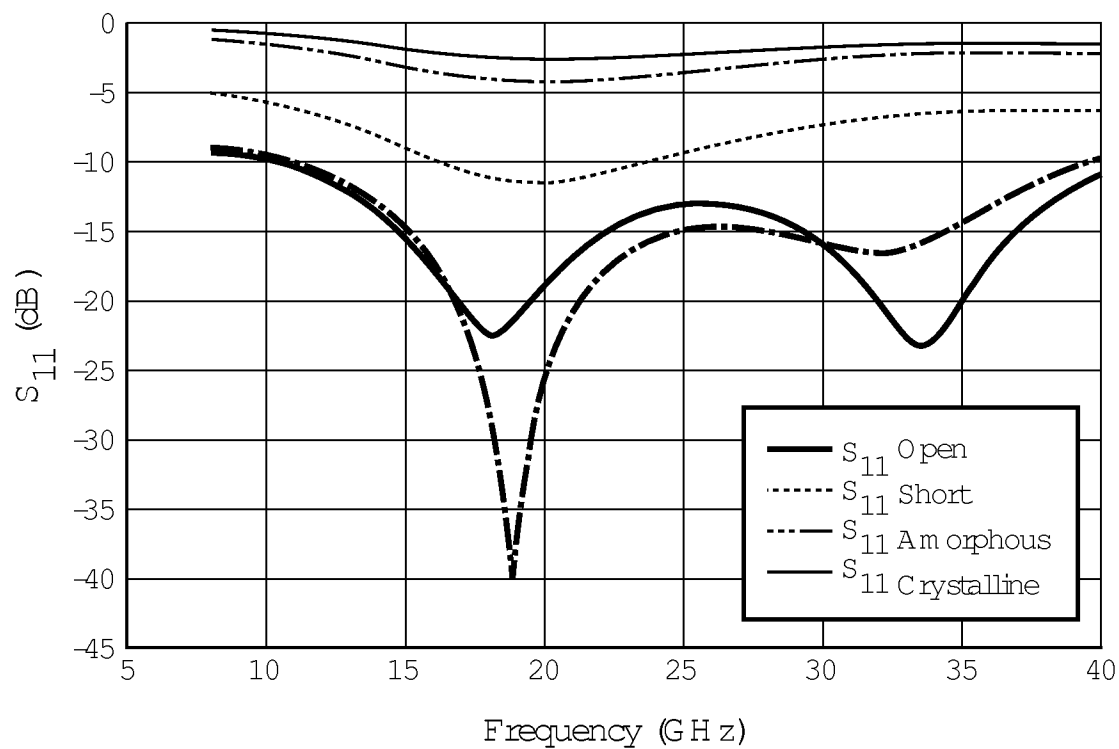
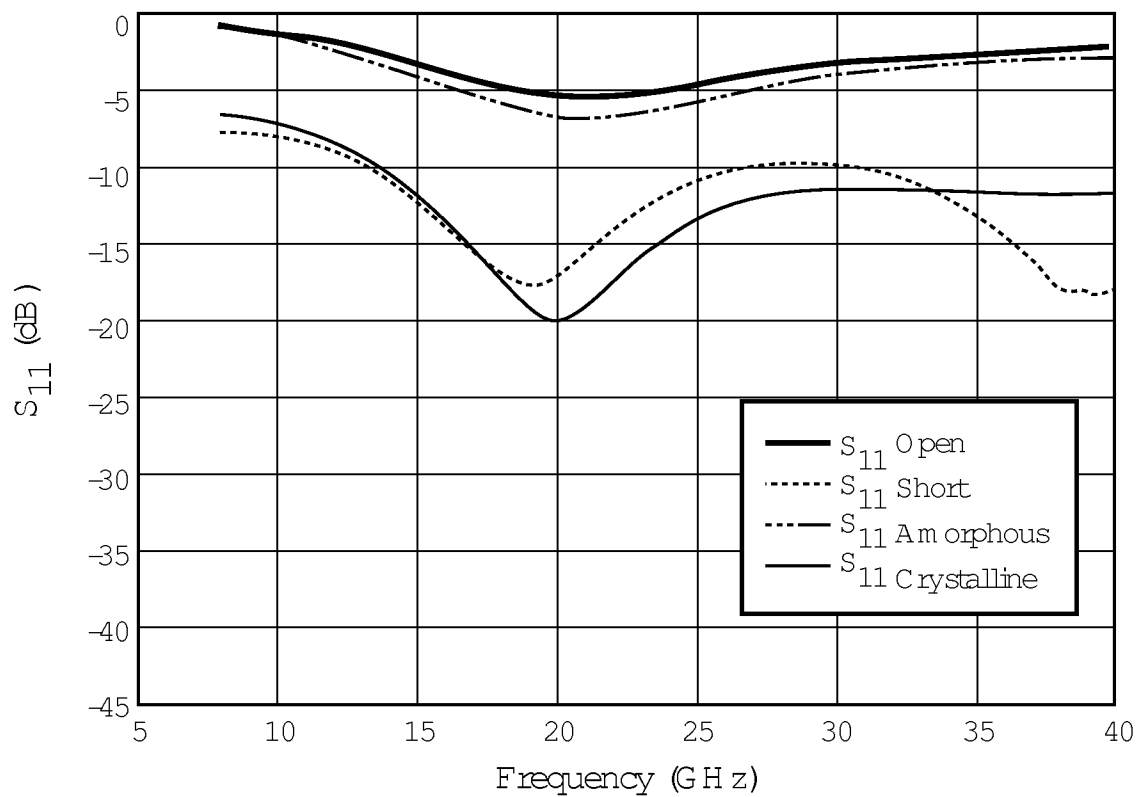


FIG. 3D

FIG. 4A**FIG. 4B**

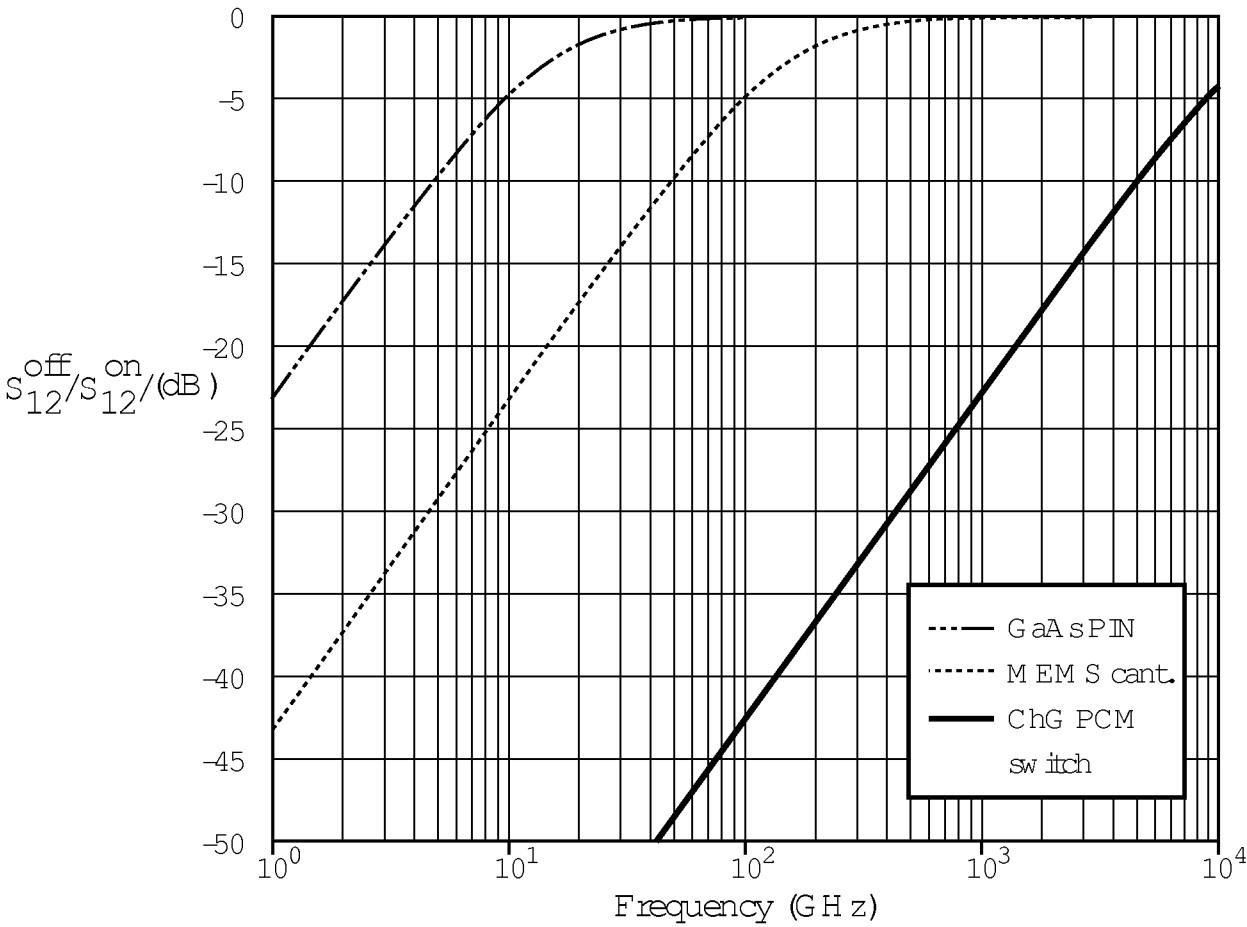


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US14/23216

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H01P 1/00, 1/10 (2014.01)

USPC - 333/248, 258, 262

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) Classification(s): H01P 1/00, 1/10 (2014.01)

USPC Classification(s): 333/248, 258, 262

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

MicroPatent (US-G, US-A, EP-A, EP-B, WO, JP-bib, DE-C,B, DE-A, DE-T, DE-U, GB-A, FR-A); Google, Google Scholar, IP.com, IEEE, Search terms: radio, frequency, electromagnet, chalcogen, switch, phase, EHF, SHF

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 7,420,445 B2 (WYETH, N. et al.) September 02, 2008, Figures 1-12, column 4, lines 40-67, column 5, lines 10-67, column 6, lines 1-20, column 7, lines 25-35	1-11, 13-20
Y	US 7,646,630 B2 (LOWREY, T et al.) January 12, 2010; entire document	1-11, 13-20
Y	WO 2005/031307 A2 (TSU, D et al.) April 07, 2005; entire document	1-11, 13-20

☐ Further documents are listed in the continuation of Box C. ☐

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

04 June 2014 (04.06.2014)

Date of mailing of the international search report

26 JUN 2014

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450
Facsimile No. 571-273-3201

Authorized officer:

Shane Thomas

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US14/23216

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 12
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
Claim 12 is an improper Omnibus-type claim, and as such, constitutes an unsearchable claim.

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.