



(86) Date de dépôt PCT/PCT Filing Date: 2005/12/20
(87) Date publication PCT/PCT Publication Date: 2007/05/31
(45) Date de délivrance/Issue Date: 2015/02/10
(85) Entrée phase nationale/National Entry: 2008/05/13
(86) N° demande PCT/PCT Application No.: EP 2005/013924
(87) N° publication PCT/PCT Publication No.: 2007/059796
(30) Priorité/Priority: 2005/11/23 (US11/285,396)


(51) Cl.Int./Int.Cl. *H04L 12/58* (2006.01)

(72) Inventeurs/Inventors:
HEINLA, AHTI, EE;
KONNUSSAAR, TEET, EE;
TEPANDI, LAURI, EE;
MANDRE, INDREK, EE

(73) Propriétaire/Owner:
SKYPE, IE

(74) Agent: SMART & BIGGAR

(54) Titre : PROCEDE ET SYSTEME DE DISTRIBUTION DE MESSAGES DANS UN SYSTEME DE COMMUNICATION
(54) Title: METHOD AND SYSTEM FOR DELIVERING MESSAGES IN A COMMUNICATION SYSTEM

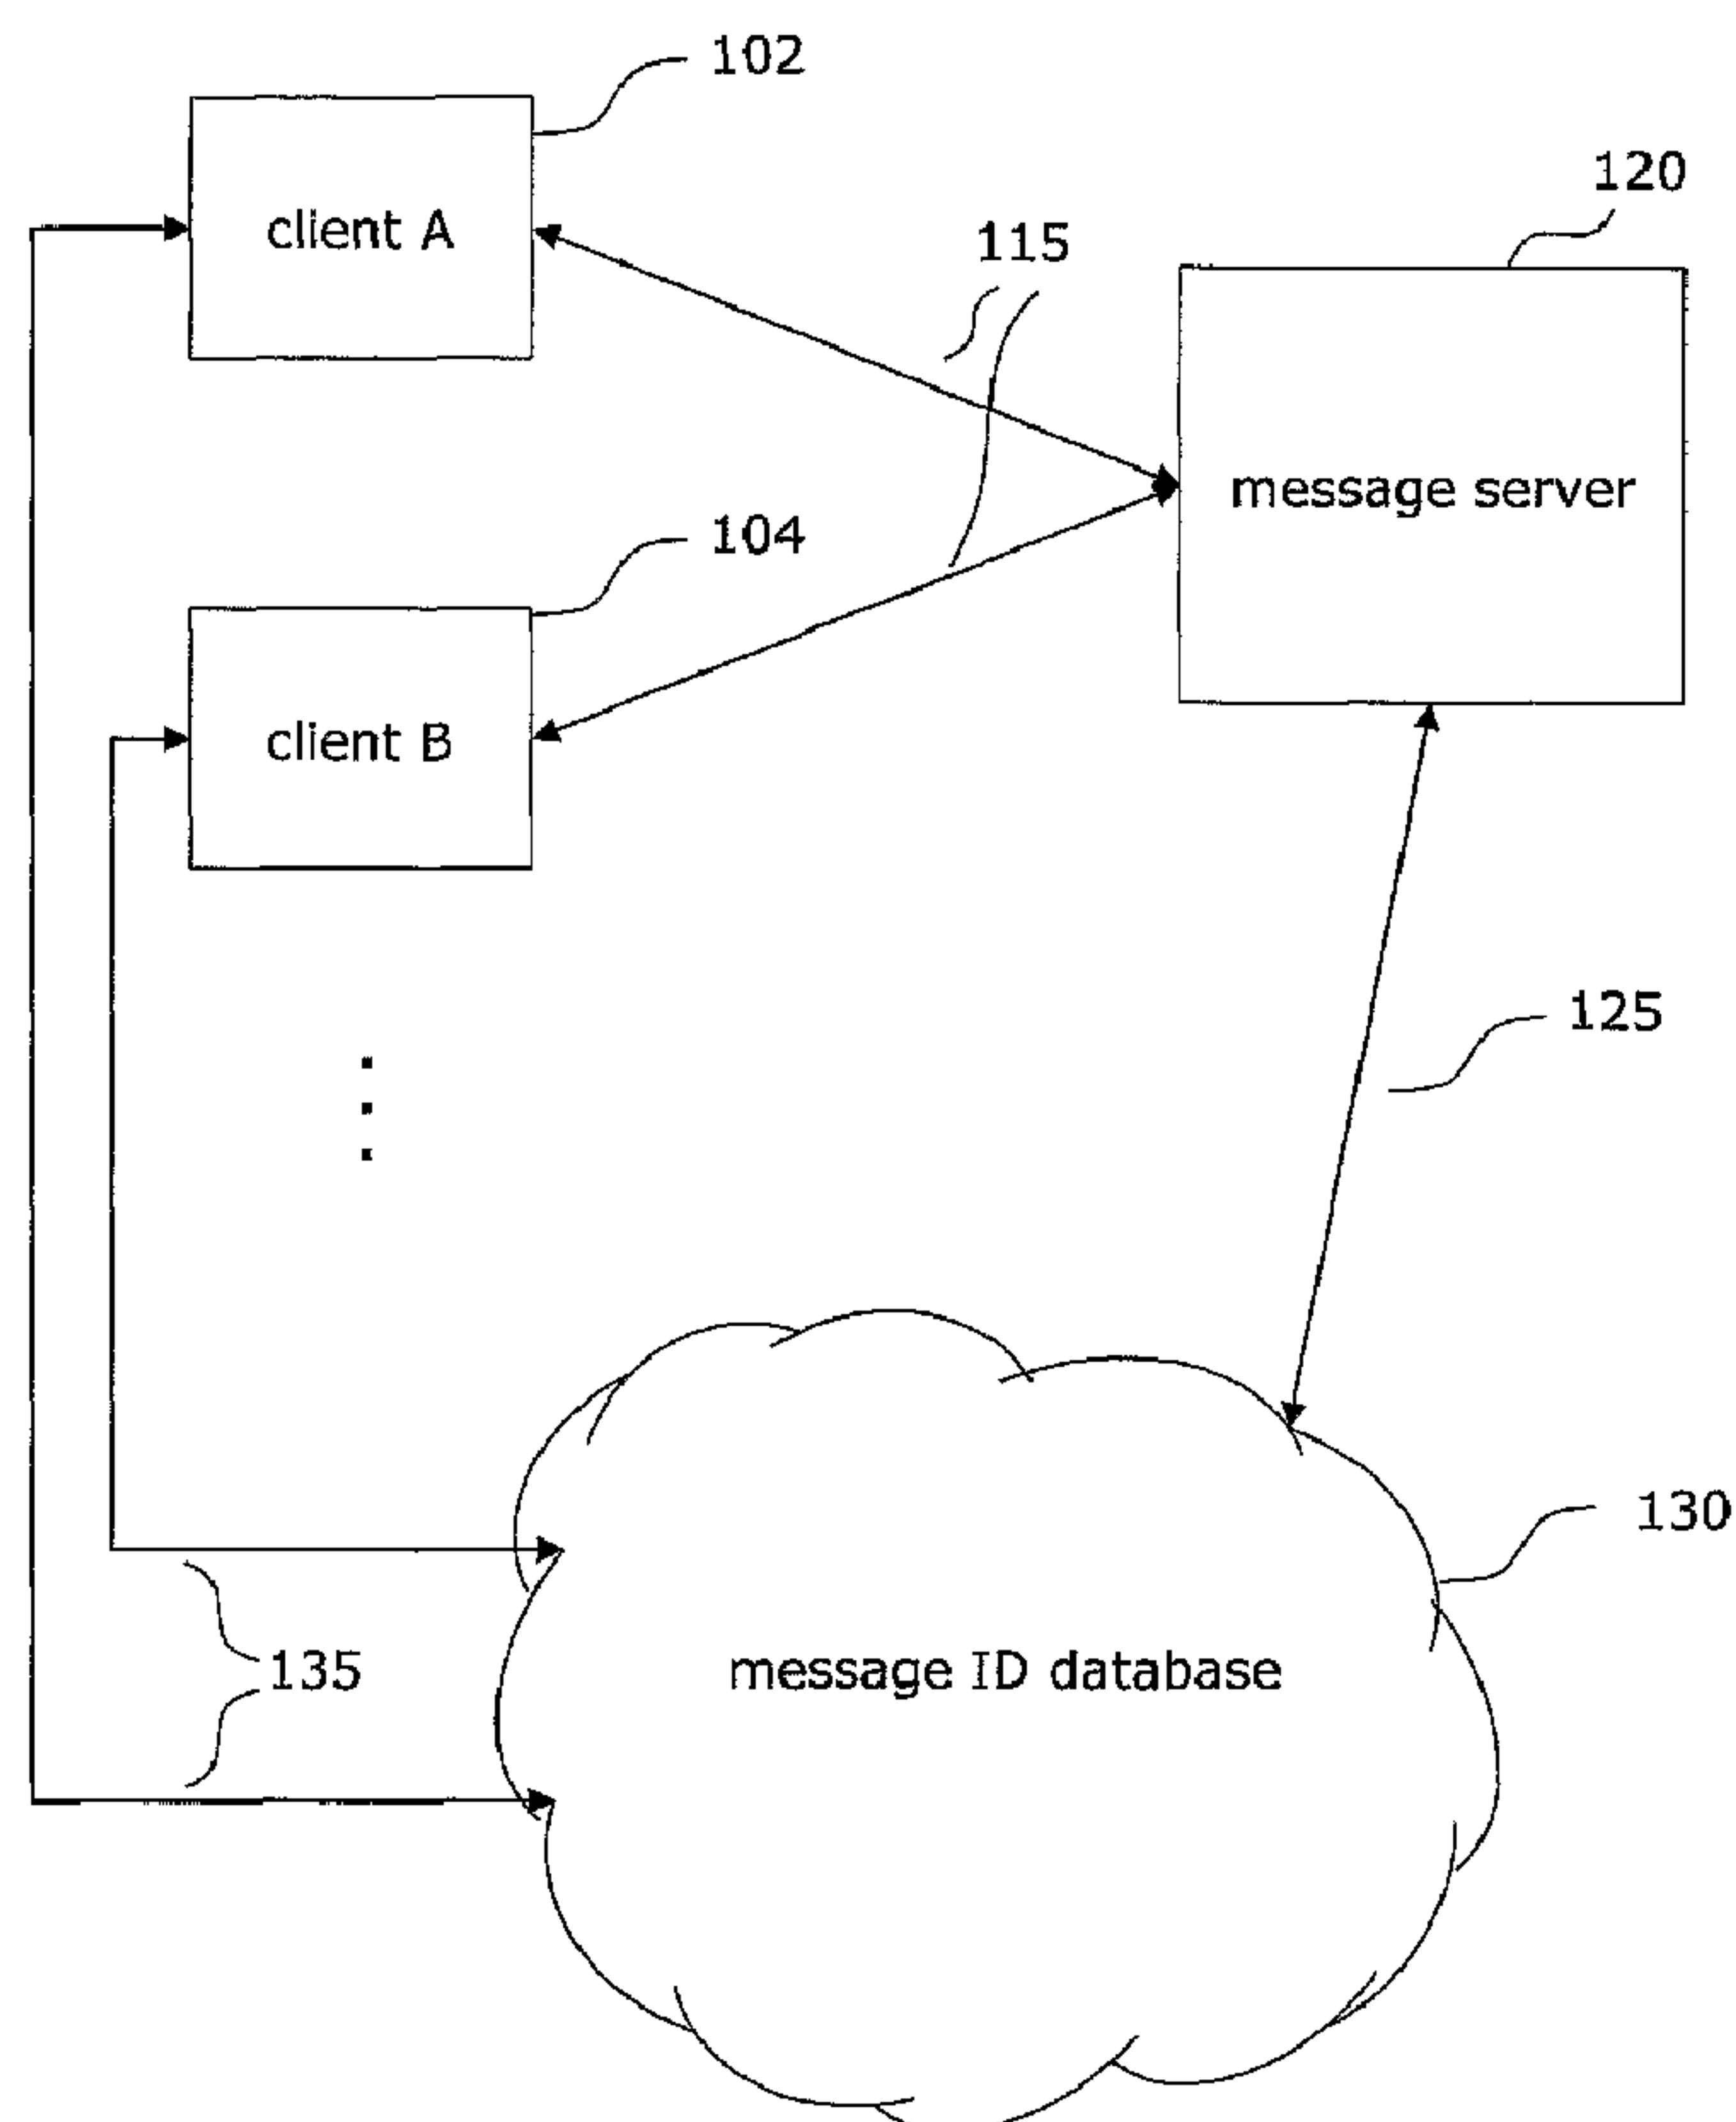

(57) Abrégé/Abstract:

The present invention relates to a message delivery system and methods for delivering messages to a computing system. The system uses a message ID structure and a message ID database to allow a user to check whether he or she is recipient of a new

(57) **Abrégé(suite)/Abstract(continued):**

message without having to contact the message server that holds messages to be delivered. The resource load related to users checking for messages is therefore left to a separate computing system, allowing the message server to dedicate its resources to the receiving and delivering of messages.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 May 2007 (31.05.2007)

PCT

(10) International Publication Number
WO 2007/059796 A1

(51) International Patent Classification:

H04L 12/58 (2006.01)

(21) International Application Number:

PCT/EP2005/013924

(22) International Filing Date:

20 December 2005 (20.12.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11/285,396 23 November 2005 (23.11.2005) US

(71) Applicant (for all designated States except US): **SKYPE LIMITED** [IE/IE]; Arthur Cox Building, Earlsfort Terrace, Dublin 2 (IE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HEINLA, Ahti** [EE/EE]; Juhkentali 8-5, EE10132 Tallinn (EE). **KÕNNUSSAAR, Teet** [EE/EE]; Teras 10-11, EE10125 Tallinn

(EE). **TEPANDI, Lauri** [EE/EE]; Lossi 18-7, EE12616 Tallinn (EE). **MANDRE, Indrek** [EE/EE]; Vase 7-23, EE10125 Tallinn (EE).


(74) Agent: **PAGE WHITE & FARRER**; Bedford House, John Street, London WC1N 2BF (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR DELIVERING MESSAGES IN A COMMUNICATION SYSTEM

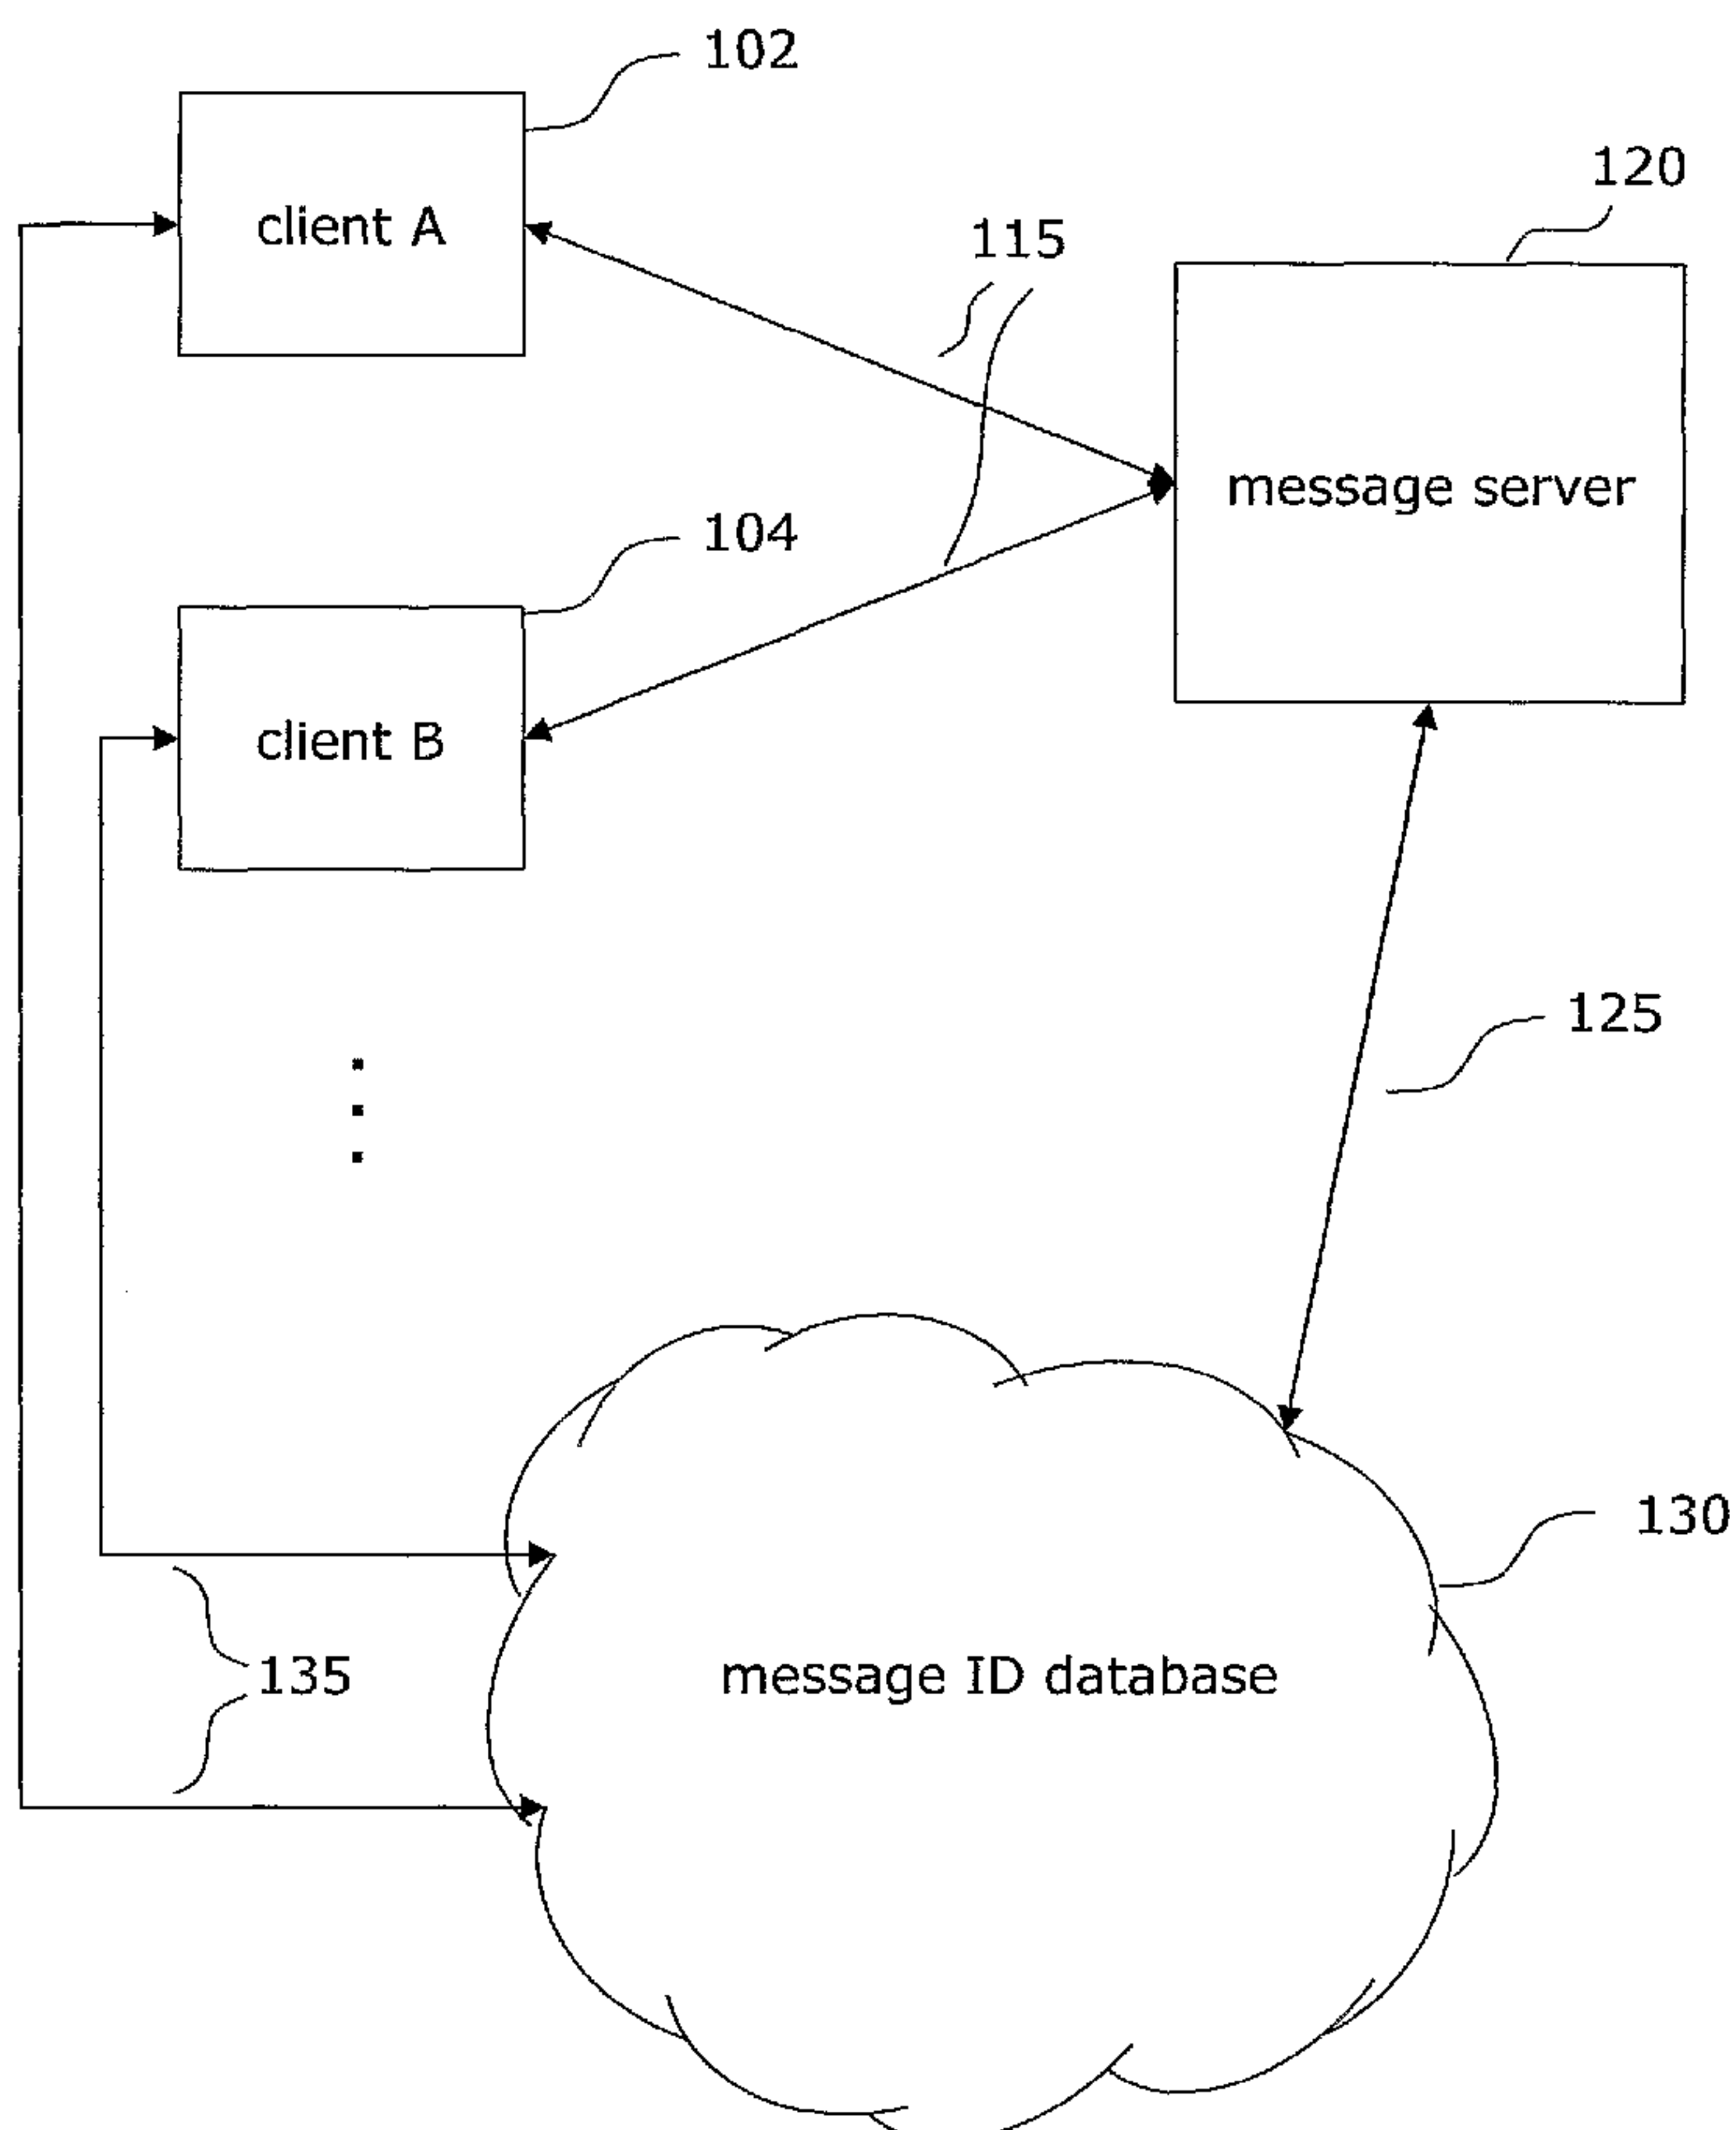

(57) Abstract: The present invention relates to a message delivery system and methods for delivering messages to a computing system. The system uses a message ID structure and a message ID database to allow a user to check whether he or she is recipient of a new message without having to contact the message server that holds messages to be delivered. The resource load related to users checking for messages is therefore left to a separate computing system, allowing the message server to dedicate its resources to the receiving and delivering of messages.

WO 2007/059796 A1

WO 2007/059796 A1



RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

TITLE

Method and system for delivering messages in a communication system.

5 TECHNICAL FIELD

The present invention relates to a system and method for communicating messages from one user of a communication system to another user of the communication.

10 BACKGROUND OF THE INVENTION

Computer-enabled communication systems incorporate an ever-increasing number of features. Accordingly, the number and types of messages that must be communicated between network elements, such as clients and servers, increase. Messages include for
15 instance network element status information, synchronization information, network element capabilities, identification information, authorization information, instant messages, real-time communication messages such as audio and video packages, etc.

The main body of data exchanged in a communication system consists of the content
20 information as such. In a real-time audio/video communication session, the content information consists of audio/video packages that are formed when sound and images are captured and translated into a digital format. Along with the content information as such, control messages such as information regarding a user's identity or network presence, are exchanged. The content information and control messages may be more or less integrated.

25

Typically, when a first user of a communication system wishes to send a message to a second user, the first user sends his message to a message server that the second user will query in order to see if there are new messages for him. In an email system, for instance, a sender forms an email to be delivered to a recipient. Subsequently, the email is
30 transmitted to an email server along with information identifying the recipient. Users of the email system will send frequent query messages, a type of control message, to the email server in order to determine whether they are recipients of new emails. When the recipient queries the email server after the sender's email has been delivered to it, he will receive an indication that he is a recipient of the email. To have a sense of real-time delivery,
35 users may prefer to query the email server quite frequently, for instance once every second or even more frequently. Upon receiving the indication that he is a recipient of the message, he may request and receive the message from the email server.

54987-13

2

A query may contain authorization information, such as a user identity and a password, possibly along with an authorization certificate of some kind. The query may also include a time stamp or other unique signature. If the email system is used by many users, the resources required to handle the queries may eventually exceed the system's capacity. For instance, the email server's central processing unit (CPU) may be unable to process all the data going in and out. Exchange of emails and queries to and from the email server may also require network resources beyond the system's capacity.

The result is that the email server stops functioning correctly, which in turn means system downtime and frustration for the system's users who depend on the email system to deliver their messages.

SUMMARY OF THE INVENTION

It is an object of some embodiments of the present invention to provide a system and method for minimizing the load on a message server holding one or more messages to be delivered to a computing system.

In a first aspect of the invention, a message delivery system is provided. The system comprises:

- a message server configured to
 - o receive a message from a first computing system and provide a message ID in response to receiving the message, the message ID being formed to identify the received message;
 - o transmit the message ID to a message ID database;
 - o transmit the message to a second computing system in response to receiving a message request from the second computing system.
- the message ID database, configured to
 - o provide a message ID response to the second computing system in response to receiving a message ID query from the second computing system, the message ID response comprising information about message IDs stored in the message ID database.

Such a system can be used to deliver a message from one person, a sender, to another person, a recipient. The message from the first computing system may for instance be generated by the sender using the first computing system. The message may contain any type of information. It may be a file, such as a voicemail, an email, an instant message, an entry for a weblog, a web page data or a video clip. It may also be an executable program,

a compressed file, a dynamic link library (DLL), etc. The message may also be a part of a file to be transferred.

When the message server receives the message from the first computing system, it

- 5 assigns to it a message ID that can comprise for instance the type of information described earlier, such as authorization information, a time stamp, and a message number, for instance a number that indicates how many messages the message server has received in total from users of the system.
- 10 A message ID may comprise a significant amount of information, having a size of for instance 1 kB. If a million users send a query of that size to the message server each 10 seconds, the message server will need to exchange an average of 100 MB of data each second. Including overhead (such as network control messages etc.), the required bitrate can therefore reach 1 or so gigabits per second, a large, even too large, amount for most
- 15 computing systems and networks. On top of the exchange of queries comes the exchange of the actual messages themselves. It is an advantage of the present system that message IDs are communicated to a separate database, the message ID database. This allows a computing system to obtain information about messages on the message server without needing to contact the message server, and thus the load on the message server related
- 20 to queries other than requests for messages are moved away from the message server and on to the message ID database. Thus, preferably, the message ID database and the message server are mutually at least substantially resource-independent with respect to at least their network resources or their processing resources or both, or they are substantially independent with respect to all resources (except external resources such as
- 25 electrical power and other parameters that do not influence the performance of either of the message ID database and the message server). In other words, the two systems are separated.

- A message ID response returned by the message ID database may for instance contain the
- 30 message ID identifying the message on the message server. In this way, a specific message can be requested from the message server, which typically holds many messages. Alternatively, the response may indicate that a message is ready for retrieval, without providing further details about the message, such as its message ID. In this case, the response is simply an indicator that indicates whether or not a message has been
- 35 delivered to the message server (by a first computing system).

A sender typically intends the message for a specific recipient, and it might be desirable to have the message server include into the message ID the recipient's identity, information that would typically be provided to the message server by the sender. By having the

message server include recipient information into the message ID, the message ID database will be able to respond to a query by delivering recipient-specific information, such as recipient-specific message IDs (message IDs that indicate a specific recipient).

- 5 Embodiments of a message delivery system according to the first aspect of the invention may comprise the message server, the message ID database and the first computing system. Other embodiments of the message delivery system according to the invention may comprise the message server, the message ID database and the second computing system. Other embodiments of the message delivery system according to the invention
10 may comprise the message server, the message ID database, the first computing system and the second computing system.

In a second aspect of the invention, a computing system for receiving a message from a message server is provided, the system being configured to:

15

- send a message ID query to a message ID database, the message ID database being configured to store message IDs and to transmit a message ID response to the computing system in response to receiving the message ID query, the message ID response comprising information about message IDs stored in the message ID
20 database;
- receive the message ID response from the message ID database;
- upon receiving the message ID response, determine whether the message ID response indicates that a message is ready for retrieval from the message server; in the affirmative then to:

25

- o request, by sending a message request to the message server, that the message server transmits the message to the computing system;
- o receive the message transmitted from the message server.

The system is capable of determining whether a message is ready for delivery from a
30 message server. It may do so by sending a message ID query to a message ID database to inquire about message IDs related to messages residing on the message server. The message ID response returned by the message ID database may for instance contain a message ID identifying a message on the message server. This allows the computing system to request a specific message from the message server, which typically holds many
35 messages.

It is an advantage that the computing system contacts the message ID database rather than the message server to determine whether a message is ready for delivery. Typically, a user of the computing system will want to frequently find out whether he is a recipient of

a message which is ready for delivery from the message server. In many practical scenarios, the user will submit message ID queries (via the computing system) more frequently than messages are made available for him at the message server (messages being made available when a sender sends a message of which the user is a recipient). In other words, a majority of message ID queries may indicate that no messages are ready for delivery. Sending a message request to the message server in this case would be futile, and systems according of the second aspect of the invention eliminate the load associated with such futile requests, leaving the message server to assign its resources to the receiving and sending of messages, and to pushing message IDs to the message ID database.

In some embodiments of the computing system according to the second aspect, the message ID response contain a message ID, which, if transmitted to the message server in a message request, can be used by the message server to locate specific messages.

15

In a third aspect of the invention, a method for handling one or more messages from a sending computing system is provided, the method comprising the steps of:

- a message server providing, in response to receiving the one or more messages, transmitted from the sending computing system, one or more message IDs identifying the received one or more messages;
- the message server transmitting at least one of the one or more message IDs to a message ID database;
- the message ID database receiving the at least one transmitted message ID.

25

This method provides a way of announcing that a message is ready for retrieval from a message server. Message identifiers, the message IDs, are made available at a separate database, the message ID database, and a computing system may therefore inquire about messages held at the message server without having to contact the message server, but by contacting the message ID database instead.

30

Embodiments of the method according to the third aspect may also include the step of the sending computing system transmitting the one or more messages to the message server.

The step of transmitting at least one message ID from the message server to the message ID database may comprise the steps of:

- the message server transmitting the at least one message ID to the sending computing system;

- the sending computing system transmitting the at least one message ID to the message ID database.

This approach may be advantageous because a connection has been established between the sending computing system and the message server to allow the one or more messages to be transmitted to the message server. Reusing this connection is efficient because the message server then needs not spend resources on establishing a new connection, such as a direct connection to the message ID database. This load is instead put on the sending computing system.

10

Embodiments of the method according to the third aspect may also include a step wherein a receiving computing system submits a message ID query to the message ID database, the message ID database in return providing a message ID response, the message ID response comprising information about message IDs stored in the message ID database.

15 The information provided by the message ID database may for instance include the message ID originally provided by the message server and delivered to the message ID database. In a further step, the receiving computing system may determine whether the message ID response indicates that a message is ready for retrieval from the message server. These steps allow a user of the receiving computing system to determine whether
20 the message server contains a message for him. In the affirmative, the receiving computing system may request the message from the message server, and the message server can then respond by transmitting the requested message to the receiving computing system.

25 It is an advantage that the message server is only contacted by the receiving computing system in case the message ID response indicates that a message is ready for retrieval at the message server. If no messages are ready for retrieval, contacting the message server to request messages would be fruitless and would burden the message server unnecessarily.

30

In the step wherein the receiving computing system requests messages from the message server, the recipient may choose to request only certain messages, even though the response from the message ID database may indicate more than one message ID (meaning that several messages are available at the message server). To do that, the
35 receiving computing system may filter the message IDs according to certain criteria, such as a message size or a message age or a message importance parameter or other parameter, incorporated into the message ID by the message server in accordance with instructions for instance from the sender or by criteria set forth at the message server itself.

The receiving computing system may also store message IDs indicated in a message ID response. This mechanism can be used as a filter by the receiving computing system when deciding whether to request a specific message from the message server or not. If a
5 message ID contained in a message ID response from message ID database corresponds to a message that the receiving computing system has already requested and received from the message server, the receiving computing system may choose not to request the corresponding message from the message server. Message IDs can also be stored in a separate database, rather than locally on the receiving computing system, as long as they
10 are readily available for use by the receiving computing system in determining whether a specific message has already been received from the message server. By filtering message IDs as described above, the load on the message server related to retrieval of messages can be reduced to a practical minimum, namely to the transmission of messages that have not previously been received by the receiving computing system.

15

In some cases it may be desirable to be able to retrieve the same message more than once. This may be obtained by having the receiving computing system disregarding that a message ID obtained in a message ID response corresponds to a locally stored message ID, should this be the case.

20

Preferably, the comparison of a locally stored message ID with a message ID obtained from a message ID response is performed by the receiving computing system.

In a fourth aspect of the invention, a method is provided for receiving a message at a
25 receiving computing system, the method comprising the steps of:

- the receiving computing system sending a message ID query to a message ID database, the message ID database being configured to store message IDs and to transmit a message ID response to the receiving computing system in response to
30 receiving the message ID query, the message ID response comprising information about message IDs stored in the message ID database;
- the receiving computing system receiving the message ID response from the message ID database;
- the receiving computing system determining whether the message ID response
35 indicates that a message is ready for retrieval from a message server, the message server being configured to transmit the message to the receiving computing system in response to receiving a message request from the receiving computing system; and if a message is ready for retrieval from the message server, then:

- the receiving computing system sending a message request to the message server to request the message;
- the message server transmitting the message to the receiving computing system in response to receiving the message request;
- 5 ○ the receiving computing system receiving the message.

It is an advantage of methods according to the fourth aspect that the message server is contacted by the receiving computing system only if the message ID response indicates that a message is ready for retrieval at the message server.

10

In some embodiments of the method according to the fourth aspect, the receiving computing system may optionally request a message only if the receiving computing system has not previously requested and received the message.

- 15 In some embodiments of the fourth aspect, a step may be included wherein the receiving computing system stores message IDs associated with messages that it has requested and received from the message server. Storing message IDs corresponding to received messages provides a mechanism for the receiving computing system to decide whether to request a message from the message server or not. If a message ID response indicates a
- 20 message ID which is already stored at the receiving computing system, the receiving computing system may choose not to request the message from the message server. A message ID can be obtained via a message ID query or it may be provided to the receiving computing system by the message server when the message server delivers the corresponding message in response to receiving a message request from the receiving
- 25 computing system.

- Although any type of database structure can be used to provide a message ID database, message ID databases in the methods and systems according to the present invention are preferably of a distributed nature, such as a peer-to-peer database. Such a database
- 30 requires less centralized maintenance. The message ID database may also be centralized database. It may also be only partly distributed.

- Should a problem arise when trying to submit a message ID query to the message ID database, a receiving computing system may instead, extraordinarily, direct the message
- 35 ID query to the message server itself as a backup approach. It may also deliberately query the message server directly. Such queries to the message server itself are preferably infrequent, for instance once every 24 hours.

54987-13

9

Preferably, the message ID database and the message server are at least partly mutually resource-independent, meaning that each system has its own dedicated network resources and/or processing resources. Preferably they are entirely resource-independent. In other words, the message ID database and the message
5 server are separate systems.

According to one aspect of the present invention, there is provided a message delivery system for use with a first computing system (102), the message delivery system comprising a second computing system (104), a message ID database (130) and a message server (120), wherein: the message server (120) is configured to:
10 receive a message from the first computing system (102) and provide a message ID in response to receiving the message, the message ID being formed to identify the received message; transmit the message ID to the message ID database (130); and transmit the message to the second computing system (104) in response to receiving a message request from the second computing system (104); and the message ID
15 database (130) is configured to provide a message ID response to the second computing system (104) in response to receiving a message ID query from the second computing system (104), the message ID response comprising information about message IDs stored in the message ID database (130), wherein the second computing system (104) is configured to contact the message ID database (130)
20 rather than the message server (120) to determine whether a message is ready for delivery.

According to another aspect of the present invention, there is provided a method for handling one or more messages from a sending computing system (102), the method comprising the steps of: a message server (120) providing, in response to receiving
25 the one or more messages, transmitted from the sending computing system (102), one or more message IDs identifying the received one or more messages; the message server (120) transmitting at least one of the one or more message IDs to a message ID database (130); and the message ID database (130) receiving the at least one transmitted message ID, a receiving computing system (104) contacting the

54987-13

9a

message ID database (130) rather than the message server (120) to determine whether a message is ready for delivery.

According to still another aspect of the present invention, there is provided a method for receiving a message at a receiving computing system (104) from a message server (120), the method comprising the steps of: the receiving computing system (104) sending a message ID query to a message ID database (130) rather than to the message server (120), the message ID database (130) being configured to store message IDs and to transmit a message ID response to the receiving computing system (104) in response to receiving the message ID query, the message ID response comprising information about message IDs stored in the message ID database (130); the receiving computing system (104) receiving the message ID response from the message ID database (130); the receiving computing system (104) determining whether the message ID response indicates that a message is ready for retrieval from the message server (120), the message server (120) being configured to transmit the message to the receiving computing system (104) in response to receiving a message request from the receiving computing system (104); and if a message is ready for retrieval from the message server (120), then: the receiving computing system (104) sending a message request to the message server (120) to request the message; the message server (120) transmitting the message to the receiving computing system (104) in response to receiving the message request; the receiving computing system (104) receiving the message.

According to yet another aspect of the present invention, there is provided in combination, a message delivery system and a first computing system (102), the message delivery system comprising a second computing system (104), a message ID database (130) and a message server (120), wherein: the message server (120) is configured to: receive a message from the first computing system (102) and provide a message ID in response to receiving the message, the message ID being formed to identify the received message; transmit the message ID to the message ID database (130); and transmit the message to the second computing system (104) in response to receiving a message request from the second computing system (104); and the

54987-13

9b

message ID database (130) is configured to provide a message ID response to the second computing system (104) in response to receiving a message ID query from the second computing system (104), the message ID response comprising information about message IDs stored in the message ID database (130), wherein
5 the second computing system (104) is configured to contact the message ID database (130) rather than the message server (120) to determine whether a message is ready for delivery.

According to a further aspect of the present invention, there is provided a message delivery system comprising: a message server including one or more computer
10 processors configured to: receive a message from a sending computing system and subsequently generate a message ID in response to receiving the message, the message ID being generated to identify the received message, the message being intended for a receiving computing system; cause the message ID to be pushed to a message ID database that is separate from the message server; receive, from the
15 receiving computing system, a request that includes at least some information contained in the message ID; and responsive to receiving the request, transmit the message to the receiving computing system.

According to yet a further aspect of the present invention, there is provided a receiving computing system for receiving a message from a message server
20 including one or more computer processors, the receiving computing system being operable to: send a message ID query to a message ID database rather than to the message server; receive a message ID response from the message ID database, the message ID response comprising information about message IDs stored in the message ID database; and upon receiving the message ID response, determine,
25 without contacting the message server, whether the message ID response indicates that a message is ready for retrieval from the message server; in the affirmative then to: request, by sending a message request to the message server, that the message server transmits the message to the receiving computing system; and receive the message transmitted from the message server.

54987-13

9c

According to still a further aspect of the present invention, there is provided a method for handling one or more messages from a sending computing system, the method comprising: receiving, at a message server, one or more messages from the sending computing system, the one or more messages being intended for a receiving
5 computer computing system; responsive to said receiving, generating, using the message server one or more message IDs identifying the received one or more messages; causing, with the message server, at least one of the one or more message IDs to be pushed to a message ID database effective to enable the receiving computing system to ascertain at least some information contained in the
10 one or more message IDs, the message ID database being separate from the message server; receiving, from the receiving computing system, a request that includes information contained in the one or more message IDs; and responsive to receiving the request, transmit one or more messages, associated with the information, to the receiving computing system.

15 According to another aspect of the present invention, there is provided a method for receiving a message at a receiving computing system from a message server, the method comprising: sending, by the receiving computing system, a message ID query to a message ID database rather than to a message server; receiving, with the receiving computing system, a message ID response from the message ID database,
20 the message ID response comprising information about message IDs stored in the message ID database; determining, without contacting the message server, whether the message ID response indicates that a message is ready for retrieval from the message server; responsive to the message being ready for retrieval, sending a message request to the message server to request the message; and receiving, from
25 the message server, the message.

According to yet another aspect of the present invention, there is provided a computer program product comprising: computer readable code stored on a computer readable hardware storage medium configured to be executed by at least one computer processor to facilitate handling of one or more messages from a
30 sending computer system having one or more computer processors by: responding

54987-13

9d

to receiving the one or more messages transmitted from the sending computing system, by generating from a message server one or more message IDs; identifying the received one or more messages, the one or more messages being intended for a receiving computing system; causing, from the message server, at least one of the
5 one or more message IDs to be pushed to a message ID database that is separate from the message server; receiving, from the receiving computing system, a request that includes at least some information contained in at least one of said one or more message IDs; and responsive to receiving the request, transmitting a corresponding message to the receiving computing system.

- 10 According to another aspect of the present invention, there is provided a computer program product comprising: computer readable code stored on a computer readable hardware storage medium configured to be executed by at least one computer processor to facilitate handling of one or more messages from a receiving computing system having one or more computer processors by: sending, by the
15 receiving computing system, a message ID query to a message ID database rather than to a message server, the message ID database being configured to store message IDs and to transmit a message ID response to the receiving computing system in response to receiving the message ID query, the message ID response comprising information about message IDs stored in the message ID database;
20 receiving, at the receiving computing system, the message ID response from the message ID database, the message ID response comprising information about message IDs stored in the message ID database; determining, at the receiving computing system, and without contacting the message server, whether the message ID response indicates that a message is ready for retrieval from the message server,
25 the message server being configured to transmit the message to the receiving computing system in response to receiving a message request from the receiving computing system; and if a message is ready for retrieval from the message server, then: sending, by the receiving computing system, a message request to the message server to request the message; and receiving, by the receiving computing
30 system, the message from the message server.

54987-13

9e

The invention can be implemented for instance on an appropriately adapted hardware computing system using dedicated software. In this context, appropriately adapted means that the necessary hardware elements, such as CPU, controller, memory, network adapter and/or other elements are provided as part of the

5 computing hardware system on which the software is to be executed. Instructions for executing the methods may also be implemented directly on hardware, such as an ASIC, or they may be executed by a combination of hardware- and software-implemented parts. Other solutions exist that attain a system capable of carrying out one or more methods according to the invention.

10 BRIEF DESCRIPTION OF THE FIGURES

Fig. 1 illustrates a message delivery system comprising a message server, a message ID database, a first computing system and a second computing system.

Fig. 2 illustrates a simplified computing system architecture.

Fig. 3 illustrates a message server with multiple front ends.

15 Fig. 4 is a flowchart that illustrates how a system comprising a message server and a message ID database may be prepared after a first user generates a message for a second user.

Fig. 5 is a flowchart that illustrates how a user may query the system to determine whether there are messages to be retrieved from the message database.

20 Fig. 6 illustrates how system parts may be updated after retrieval of messages from the message server.

Fig. 7 illustrates examples of message IDs.

Fig. 8 illustrates other examples of message IDs.

DESCRIPTION OF SELECTED EMBODIMENTS

Fig. 1 shows an embodiment of the message delivery system according to the present invention. It comprises a first computing system **102**, called Client A, a second computing
5 system **104**, called Client B, a message server **120**, and a message ID database **130**. A User A operates Client A **102** and a User B operates Client B **104**. Clients A and B (**102**, **104**) can be operatively coupled **115** to the message server **120**. Client A and B (**102**, **104**) can also be operatively coupled **125** to the message ID database **130**. Furthermore, the message server **120** may be operatively coupled **125** to the message ID database
10 **130**. The system may further comprise system elements that control Client A's and Client B's access to the message server **120** and/or message ID database **130**. Instant messaging systems, voice-over-IP systems and video-over-IP systems typically employ an authority that contains user identification information related to each individual user of the system, typically in the form of an identity and a confirmation code. To maintain integrity
15 of the user identification information the message delivery system provider typically stores the user identification information in a mainly centralized and strictly controlled system. Parts of the user identification information may also be comprised in message IDs and in message ID database queries. Such features may be included in systems and methods according to the invention.

20

The message server **120** and message ID database **130** handle messages and message IDs during the process of delivering a message from User A to User B. The message server **120** takes care of receiving and delivering messages between User A and User B, and it delivers message IDs to the message ID database **130**, either directly or via Client A **102**.
25 The message ID database **130** exchanges message IDs with the message server **120** and/or Client A **102**. It also handles queries from Client B **104** and returns appropriate responses.

Fig. 2 illustrates a simplified example of a client computing system architecture **200**, for
30 instance Client A **102**. It comprises a number of elements, such as a central processing unit (CPU) **202**, a memory **203**, a harddisk **204**, a network interface **206**, and a user interface, such as a keyboard **207** and a microphone **208**. These elements are interconnected via a controller (a bus) **201**. The CPU **202** logically controls the elements **202-208**. The memory **203** may hold both temporary and permanent information. The
35 memory **203** may for instance hold the instructions that make the Client **102** operable to handle messages, and it may hold messages as well as data exchanged between the various elements and controller **201-208**.

Messages might be provided in several ways. For instance, they may be entered via a user interface, such as via a keyboard **207** or a microphone **208**, or via media **205** such as a DVD, a CD-ROM, a USB-controlled memory or the like. Other methods can be used, such as by wireless transmission from a mobile device to the computing system **200** via the
 5 network interface **206**.

The harddisk **204** may for instance hold messages, instructions (software) for the CPU **202**, temporary information, operating system information etc.

10 The network interface **206** may be used for instance for providing messages to the Client **200**, and it may also be the physical element used in forming and sustaining network connections to the message server **120** and the message ID database **130**.

Fig. 2 also exemplifies a typical architecture of a message server **120** and a message ID
 15 database **130**, which require many of the same elements in order to be functional according to their function in the message delivery system. It may be advantageous to provide the client, such as Client A **102**, as a mobile unit with a built-in power source. It may also be desirable to provide it with the controlling software implemented directly on a hardware, such as an ASIC, as opposed to stored on a harddisk, such as **204**, and loaded
 20 into a memory, such as **203**, in order to make the computing system **200** operable. In many implementations, the harddisk **204** is entirely dispensable.

A distributed message ID database is typically a conglomerate of many systems of the type in Fig. 2, each system having significant storage capacity, for instance in the form of
 25 harddisks.

Fig. 3a and Fig. 3b illustrate two examples of ways in which a message database, mDB, **330**, in a message server can be accessed. In Fig. 3a, Client A **102** accesses the message database **330** through a single front end, FE **311**. For simplification purposes, the
 30 message database **330** is illustrated as a functional element, without a controller and other elements, such as those contained in Fig. 2. In Fig. 3a, Client A has only one point of entry to the message database, namely FE **311** which is operatively connected to the message database **330** as illustrated. When many clients access wish to access the message database **330** at the same time, the point of entry FE **311** may be pressed
 35 beyond its capacity and become non-functional. Fig. 3b illustrates use of 3 front ends, namely FE1 (**321**), FE2 (**322**), and FE3 (**323**). Client A **102** may then randomly choose between the 3 front ends **321-323** as point of entry. This will distribute and decrease the load on each front end **321-323**, and in case of failure in one front end, for instance **323**, the other front ends **321** and **322** ensure that the message database **330** is accessible. To

this end, a client, such as Client A, may hold a list of addresses for the front ends, from which it chooses randomly.

In a typical configuration, the front ends are also connected to an authorization system
5 (not shown) which it uses to control client access to the message database, for instance by comparing authorization information provided via Client A, to authorization data from an authorization database. In a system prior art system wherein queries for message IDs are directed to the message server itself, authorization is required at each query. It is an advantage of the present system that queries for message IDs are directed to the message
10 ID database, which is separated from the message server, instead of to the message server itself. The security in such a system can be eased somewhat if the information, such as the message IDs, in the message ID database do not contain personal information about users.

15 It is particularly advantageous to use distributed message ID database **130**, such as a peer-to-peer database, which is a mainly decentralized resource system. A peer-to-peer database requires a lower degree of centralized maintenance, it grows with the number of active clients, and the access load (such as CPU load and network load) is distributed to the clients instead of being put on a centralized system.

20

Fig. 4 illustrates the first part of the process of delivering a message from a sender, User A, to a recipient, User B. First, User A generates the message (step **401**). It might be a text message entered using the keyboard or a voicemail recorded via the microphone. The message can also be an executable file. Various examples of messages were mentioned
25 earlier. An executable file might be obtained from the harddisk, from a DVD, via a wireless network connection, or other source. User A's computing system, Client A, then transmits the message to the message server ("mServ") in step **402**. The message server receives the message (step **403**) and generates a corresponding message ID ("mID"). The message server stores the message and the message ID (step **404**) in the message
30 database ("mDB", see also Fig. 3). The message server then transmits the message ID to Client A (step **405**), and Client A transmits the message ID to the message ID database ("mID-DB", step **406**). At this point (state **407**), User B will be able to query the message ID database and find that he is recipient of a message, that which was sent in step **402**. In a variation of the method, steps **405** and **406** are replaced by the step (not shown) of the
35 message server transmitting the message ID directly to the message ID database. However, this process is less efficient because a new network connection must be established, namely one between the message server and the message ID database. The method in Fig. 4 uses an already existing connection, established to the avail of steps **402**

and **403**. The resources required to transmit the message ID to the message ID database are thereby provided by Client A instead of by the message server.

Fig. 5 illustrates another part of the process of delivering a message from a sender, User A, to a recipient, User B. User B wishes to determine whether he is a recipient of one or more messages. User B's client, Client B **104**, may for instance be instructed to query the message ID database at a certain frequency, such as once per second. There may be other or additional schemes. For instance, User B may manually instruct his client to send a query to the message ID database. Entry point **501** is representative of User B manually ordering his client to send a query to the message ID database **120**. Entry point "T" (**511**) symbolizes another trigger mechanism. User B's computing system, Client B, may for instance be instructed via its controlling software to submit a query each second. In step **502**, Client B sends the query to the message ID database ("mID-DB"). The message ID database receives the query (step **503**) and generates a response (step **504**), which it sends to Client B. Client B receives the response and analyses it (step **505**). Client B analyses the response to determine (step **506**) whether there are messages for him at the message server ("mServ"), and to determine properties of such messages, for instance message size, age, importance etc. Optionally, Client B might request only some pending messages, chosen according to a set of criteria, related for instance to the aforementioned properties. Based on this analysis, Client B requests messages at the message server, in step **507**. In step **508**, the message server collects the requested messages and sends them to Client B. Finally, in state **509**, User B is in possession of the messages that User A generated for him. In case Client B decides not to contact the message server **120**, it will take route **512**, which may involve waiting for User B to instruct the system to check for messages (entry point **501**) or to wait for a trigger event (entry point **511**). The system may also perform updates as indicated by **513**.

Fig. 6 illustrates updates, such as **513** in Fig. 6, which may take place in the system after the messages have been delivered to Client B. The message server may for instance remove (step **602**), from the message database, messages that have been delivered to Client B. Deleting already delivered messages will free up storage resources. In methods wherein Client B stores message IDs locally, Client B may choose to delete locally stored message IDs and instead store a message ID (step **603**) that was contained in the response from the message ID database **130** to its latest query. This will bring the system into an updated state **604**.

The following example illustrates a message delivery according to the invention. Dan would like to say hello to Mary on a special occasion. However, Mary is busy on the occasion and not available, so Dan will instead leave a voice message for Mary with best wishes. Dan

forms a message, m1, intended for Mary. Dan uses a microphone (exemplified by **208** in Fig. 2) to record the message. After recording the message, his computing system, Client A **102**, connects to the message server **120** and transmits the message, m1. After receiving the message, m1, the message server **120** forms a message ID, m1-ID, identifying the message. The message ID m1-ID is illustrated in Fig. 7. The message server **120** then stores message and message ID. In this example the message ID **710** contains an identity **711** of the recipient (Mary) and an identity **712** of the sender (Dan). The message ID further contains a message number **713** indicating how many messages the message server has received with Mary as a recipient. If the message server has previously received 16 messages, the message ID **710** may contain a message number indicator "17". The message server then sends the message ID to Client A, which then sends the message ID to the message ID database. In the present example, the message ID will furthermore contain the size of the message **714**.

If, at this point, Mary checks for messages by having her computing system, Client B, send a query to the message ID database **130**, she will receive a response from the message ID database **130**, for instance in the form of the message ID **710** itself. Client B analyses the message ID and finds the message number tag "18". Client B then proceeds to contact the message server **120** to request the corresponding message, m1, which the message server **120** then delivers. Mary has now received Dan's voice message.

In case Mary had sent a query to the message ID database at a time the message server **120** did not contain any messages for her, she might receive an empty response and thus would not subsequently contact the message server **120**. Thus, Mary burdens the message server **120** only when there are message to be retrieved.

In another instance, a third user of the system, Mark, wants to send a message, m2, to Mary. In this example, Mark sends the message after Dan has sent message m1. Mark generates the message, and his client, Client C, sends the message to the message server **120**. Mark wants to send a text message to Mary. He forms the message using a keyboard in his computing system. Client C then connects to the message server **120** and transmits the message m2 to it. After receiving the message, m2, the message server **120** forms a corresponding message ID, m2-ID (**720** in Fig. 7), and stores the message, m2, and the message ID m2-ID. At this point, the message server has previously received 18 messages on behalf of Mary, and thus the message ID, m2-ID **720**, will contain the message number indicator "19" as shown in **723** in Fig. 7. The message server then sends the message ID m2-ID **720** to Client A, which sends it to the message ID database **130**. If Mary checks for messages, by having her computing system, Client B **104**, send a query to the message ID database, she will receive the new message ID, m2-ID. As in the previous example,

Client B **104** will request and receive the corresponding message, in this case m2, from the message server **120**.

In case Mary had not yet retrieved message with the message ID m1-ID and number 5 indicator "18" (**713**), the message ID database **130** may instead respond with two message IDs, namely m1-ID **710** and m2-ID **720**. Client B **104** may then proceed and request both m1 and m2 from the message server **120**.

In the instance where the voice message, m1, is relatively large, as indicated by **714** in 10 Fig. 7, Mary might want to fetch only the text message that has a smaller size, illustrated by **724**. It may be that Mary is operating with a network connection, illustrated by **115** in Fig. 1, that would require that an excessive amount of time be spent in order to retrieve the voice message m1. When Client B **104** analyses the response from the message ID database **130**, the message size component will reveal that the message m1 is too large 15 to be retrieved via the present network connection. By testing the network connection speed, Mary's client, Client B **104**, may itself give an estimate of the time that it will take to transmit m1 from the message server **120** to Mary's client **104**. Mary can make the decision as to whether the retrieval time is acceptable, or Client B **104** may decide via the software instructions on Mary's behalf, that the message is too large to be fetched at that 20 moment. Client B **104** will then store the message ID, m1-ID **710**, to indicate that the message has not yet been retrieved. Client B **104** will request only message m2, not m1. At a later point, when the network connection speed is high enough to give an acceptable retrieval time for message m1, Client B **104** may request this message. Once a message has been retrieved, Client B **104** may delete the corresponding message ID, m1-ID **710**. 25 In another implementation, Client B **104** retrieves m1-ID **710** and m2-ID **720** from the message ID database **130** as before, but now Client B **104** instead instructs the message ID database **130** to continue to store m1-ID **710** but remove m2-ID **720**. When Client B **104** queries the message ID database **130** at a later point, the response from the message ID database **130** will again contain m1-ID **710**, and Client B **104** may then once 30 again decide whether to request the corresponding message from the message server **120** or once again leave it there for later retrieval.

In another implementation, the message ID database **130** holds only the latest message ID and no message ID if there are no messages on the message server. In the example 35 above, message ID m1-ID **710** would be replaced by m2-ID **720** once the message server **120** receives the second message, m2. In this case, Client B **104** would receive only m2-ID **720** in response to a query. When making the request to the message server **120**, the message server **120** will collect all remaining messages using m2-ID **720** as an indicator. Since neither m1 nor m2 have been retrieved, the message server **120** will provide both

m1 and m2 in response to the request from Client B **104**. After retrieval of the messages, the message ID database **130** may delete the latest message ID, in this case m2-ID **720**. It may do so for instance by instruction from Client B **104**. Next time Mary's client, Client B **104**, sends a query to the message ID database **130**, it will receive an indication that
 5 there are no messages for Mary. Client B **104** will thus not contact the message server.

In an alternative implementation, the message ID database **130** always holds the latest message ID. In the example above, the message ID database would first hold m1-ID **710**. Upon receipt of m2, the message server **120** will form and send m2-ID **720** to the
 10 message ID database **130**, which will then replace m1-ID **710** with m2-ID **720**. When Client B **104** queries the message ID database **130**, it will always receive a message ID. As an example, the message ID database **130** may hold a message ID having a message number indicator of "16" prior to the message server **120** receiving message m1 from Client B. A previous query from Client B **104** to the message ID database **130** has
 15 provided Client B **104** with the message ID, m0-ID, corresponding to a message m0. In other words, the message number indicator in m0-ID is "16". When Client B **104** received this message ID from the message ID database **130**, it requested and received the corresponding message, m0, from the message server **120**. At the same time, it stored the message ID m0-ID locally. After the message server **120** has received m1, generated
 20 m1-ID **710** and sent m1-ID **710** to the message ID database **130** to replace m0-ID, a query from Client B **104** to the message ID database **130** would provide a response to Client B **104** indicating that the latest message received by the message server has message number "17". Since Client B **104** at this point has message ID m0-ID stored locally, it infers that a new message is ready for retrieval at the message server. Client B
 25 **104** thus contacts the message server **120** and requests and receives the message m0 from the message server **120**. Client B **104** would then replace its previously stored local message ID, m0-ID, with the most recent message ID, now m1-ID. If both m1 and m2 have been received by the message server **120**, and no further messages have been received, the message ID in the message ID database **130** will be m2-ID. In case Client B
 30 **104** has only retrieved the message with message number "16", the locally stored message ID will be m0-ID. A query to the message ID database **130** will return m2-ID. Since the locally stored message ID and the message ID in the message ID database **130** are different, Client B **104** will request messages from the message server **120**. The message server **120** will collect the remaining messages, in this case m1 and m2, and
 35 deliver them to Client B **104**. Client B will then store m2-ID locally, and so on.

Fig. 8 illustrates another type of message ID. In the message ID illustrated in Fig. 7, indicators **713** and **723** represent the total number of messages that the message server **120** has received on behalf of the recipient, Mary in this case. The message ID in Fig. 8

contains a global message number instead. The message server receives messages not only on Mary's behalf, but also on behalf of Dan, Mark and other users of the system. The message IDs illustrated in Fig. 8 have a significant advantage over those illustrated in Fig. 7. Using the message IDs of the type in Fig. 7, the message server must hold a database
 5 containing information about the number of messages it has already received on behalf of each user of the system. Using the message ID in Fig. 8, the message server needs only count the total number of messages it has received on behalf of all users of the system.

Fig. 8 illustrates what the two message IDs to Mary could look like when this message ID
 10 structure is used. The following example describes how messages may be delivered using this message ID structure. The example is based on the same scenario as the example above.

Dan would like to say hello to Mary on a special occasion. However, Mary is busy on the
 15 occasion and not available, so Dan will instead leave a voice message for Mary with best wishes. Dan forms a message, m4, intended for Mary. Dan uses a microphone (exemplified by **208** in Fig. 2) to record the message. After recording the message, his computing system, Client A **102**, connects to the message server **120** and transmits the message, m4. After receiving the message, m4, the message server **120** forms a message ID, m4-
 20 ID, identifying the message. Instead of forming a message ID of the type m1-ID **710** illustrated in Fig. 7, the message server **120** is now configured to generate m4-ID illustrated by **810** in Fig. 8. The message server **120** then stores the message and the message ID. In the present example, the message ID **810** contains, just as in the previous example, an identity **811** of the recipient (Mary) and an identity **812** of the sender (Dan).
 25 The message ID also contains the global message number **813** indicating how many messages the message server has received in total on behalf of all users. If the message server has received, for instance, 140503 messages prior to receiving Dan's message m4, the message ID m4-ID **810** for m4 will be formed to contain the global message number **813** indicator "140504". The message server then sends the message ID to Client A (Dan's
 30 computing system), which passes the message ID on to the message ID database. In the present example, the message ID furthermore contains the size of the message, indicated by **814**, just as in the previous example.

If at this point Mary checks for messages by having her computing system, Client B, send
 35 a query to the message ID database **130**, she will receive a response from the message ID database **130**, for instance in the form of the message ID m4-ID **810** itself. Using the present type of message ID, Client B will need to store the latest message ID it received in order to determine whether a new message has arrived. When Mary's computing system analyses the message ID **810** just received as a message ID response, it finds the global

- message number "140504". If Mary has previously received a message with a global message number of for instance "50272", her client, Client B, will see that the global message number **813** in the message ID now stored for Mary in the message ID database (and transmitted to Client B via the message ID response) is different from that stored
- 5 locally on Mary's client, Client B. Client B may therefore proceed to contact the message server **120** to request the message corresponding to the message ID revealed by the response, namely m4-ID **810**. In response, the message server **120** delivers message m4, and Mary has now received Dan's voice message.
- 10 In case Mary had sent a query to the message ID database at a time when the message server **120** did not contain any messages for her, she would receive the global message number identical to the one stored locally on her computing system, in this example "50272" as described above, because the message ID stored for Mary in the message ID database had not been modified since no new messages had arrived for her. Her client
- 15 would therefore not subsequently contact and burden the message server **120** unnecessarily.

Now, as in the previous example (where message IDs of the type in Fig. 7 were used), a third user of the system, Mark, wants to send a message, m5, to Mary. As before, Mark

20 sends the message after Dan has sent his message m4. Mark generates the message, m5, and his client, Client C, sends the message to the message server **120**. Mark wants to send a text message to Mary. He forms the message using a keyboard (exemplified by **207** in Fig. 2) in his computing system. Client C then connects to the message server **120** and transmits the message m5 to it. After receiving the message, the message server **120**

25 forms a corresponding message ID, m5-ID (**820** in Fig. 8), and stores the message m5 and the message ID m5-ID. Since the message number in the present type of message ID is a global message number, any messages that have been received in between Dan sending his message (m4) and Mark sending his (m5) will have added to the global message number, which was "140504" when the message ID m4-ID for Dan's message, m4, was formed. The global message number may for instance be "151004" at the time

30 when Mark's client, Client C, sends Mark's message, m5, to the message server **120**. When Mark's message is received at the message server **120**, it will be assigned global message number "151005", as shown in **823** in Fig. 8. The message server then sends the message ID m5-ID **820** to Mark's computing system, Client C, which passes it on to the

35 message ID database **130**. If Mary checks for messages, by having her computing system, Client B **104**, send a query to the message ID database, Client B's analysis of the response will reveal that the global message number indicated in her message ID is now "151005", which differs from the one stored locally on her computing system, "140504" in case she

has already fetched message m4 from Dan. Client B **104** will request and receive the corresponding message, in this case m5, from the message server **120**.

Had she not received message m4 before finding the global message number "151005" in the message ID database, her locally stored message ID would still be "50272", and the message server might instead respond to a message request from Mary by collecting and delivering all messages for Mary, in this case both m4 and m5. Her computing system, Client B, might then store m5-ID locally to indicate that m5 was the latest message she has received.

10

It should be recognized that the figures represent only certain embodiments of the invention. The systems and methods may be varied in a number of ways that still fall within the scope of the claims but which might nevertheless be illustrated by flow charts organized differently from those presented in this specification.

A person skilled in the art will also recognize that message IDs of the type described can be varied in an unlimited number of ways. It is to be understood that the use of the term "message ID" also covers variations or reshaping made to a message ID as formed by the message server. A message ID may for instance be stripped of some of the original information laid out by the message server. Any such translation or modification falls within the scope of the claims to the extent that the modified message ID, if presented to the message server in a message request, allows the message server to identify the message corresponding to the original (not modified) message ID.

20

54987-13

20

CLAIMS:

1. A message delivery system for use with a first computing system (102), the message delivery system comprising a second computing system (104), a message ID database (130) and a message server (120), wherein:

5 - the message server (120) is configured to:

o receive a message from the first computing system (102) and provide a message ID in response to receiving the message, the message ID being formed to identify the received message;

o transmit the message ID to the message ID database (130); and

10 o transmit the message to the second computing system (104) in response to receiving a message request from the second computing system (104); and

- the message ID database (130) is configured to

15 o provide a message ID response to the second computing system (104) in response to receiving a message ID query from the second computing system (104), the message ID response comprising information about message IDs stored in the message ID database (130),

20 wherein the second computing system (104) is configured to contact the message ID database (130) rather than the message server (120) to determine whether a message is ready for delivery.

2. A computing system (104) for receiving a message from a message server (120), the system (104) being configured to:

25 send a message ID query to a message ID database (130) rather than to the message server (120), the message ID database (130) being configured to store message IDs and to transmit a message ID response to the computing system

54987-13

21

(104) in response to receiving the message ID query, the message ID response comprising information about message IDs stored in the message ID database (130);

- receive the message ID response from the message ID database (130);

5 upon receiving the message ID response, determine whether the message ID response indicates that a message is ready for retrieval from the message server (120); in the affirmative then to:

- o request, by sending a message request to the message server (120), that the message server (120) transmits the message to the computing system (104);

10 o receive the message transmitted from the message server (104).

3. A system (104) according to claim 2, wherein the message ID response contains a message ID that identifies a specific message at the message server (120).

4. A system according to any one of claims 1 to 3, wherein the message
15 ID database (130) and the message server (120) are mutually resource-independent.

5. A system according to any one of claims 1 to 4, wherein the message ID database (130) is a distributed database, such as a peer-to-peer database.

6. A method for handling one or more messages from a sending computing system (102), the method comprising the steps of:

20 - a message server (120) providing, in response to receiving the one or more messages, transmitted from the sending computing system (102), one or more message IDs identifying the received one or more messages;

- the message server (120) transmitting at least one of the one or more message IDs to a message ID database (130); and

54987-13

22

- the message ID database (130) receiving the at least one transmitted message ID,

- a receiving computing system (104) contacting the message ID database (130) rather than the message server (120) to determine whether a message is ready for delivery.

7. A method according to claim 6, the method further comprising the step of:

- the sending computing system (102) transmitting the one or more messages to the message server (120).

10 8. A method according to claim 6 or 7, wherein the step of transmitting at least one message ID from the message server (120) to the message ID database (130) comprises the steps of:

- the message server (120) transmitting the at least one message ID to the sending computing system (102);

15 - the sending computing system (102) transmitting the at least one message ID to the message ID database (120).

9. A method according to any one of claims 6 to 8, the method further comprising the step of:

20 - the receiving computing system (104) submitting a message ID query to the message ID database (130), the message ID database (130) in return providing a message ID response, the message ID response comprising information about message IDs stored in the message ID database (130).

10. A method according to claim 9, the method further comprising the steps of:

54987-13

23

- the receiving computing system (104) determining whether the message ID response indicates that at least one of the one or more messages is ready for retrieval from the message server (120); in the affirmative then:

o the receiving computing system (104) submitting a message request
5 to the message server (120);

o the message server (120) transmitting the requested messages to the second computing system (104) in response to receiving the message request;

o the receiving computing system (104) receiving the requested messages.

10 11. A method according to claim 9 or 10, wherein the message ID corresponding to a message that has been received from the message server (120) by the receiving computing system (104) is stored locally on the receiving computing system (104).

12. A method for receiving a message at a receiving computing system
15 (104) from a message server (120), the method comprising the steps of:

- the receiving computing system (104) sending a message ID query to a message ID database (130) rather than to the message server (120), the message ID database (130) being configured to store message IDs and to transmit a message ID response to the receiving computing system (104) in response to receiving the
20 message ID query, the message ID response comprising information about message IDs stored in the message ID database (130);

- the receiving computing system (104) receiving the message ID response from the message ID database (130);

- the receiving computing system (104) determining whether the
25 message ID response indicates that a message is ready for retrieval from the message server (120), the message server (120) being configured to transmit the

54987-13

24

message to the receiving computing system (104) in response to receiving a message request from the receiving computing system (104); and if a message is ready for retrieval from the message server (120), then:

- o the receiving computing system (104) sending a message request to
5 the message server (120) to request the message;
- o the message server (120) transmitting the message to the receiving computing system (104) in response to receiving the message request;
- o the receiving computing system (104) receiving the message.

13. A method according to claim 12, wherein the receiving computing
10 system (104) requests the message only if the receiving computing system (104) has not previously requested and received the message.

14. A method according to claim 12, the method further comprising the step
of the receiving computing system (104) storing, upon receiving the message, a
message ID associated with the message, the message ID identifying the message
15 on the message server (120).

15. A method according to claim 14, wherein the receiving computing
system (104) requests the message only if the corresponding message ID is not
available to the receiving computing system (104).

16. A method according to any one of claims 6 to 15, wherein the message
20 ID database (130) and the message server (120) are mutually resource-independent.

17. A method according to any one of claims 6 to 16, wherein the message
ID database (130) is a distributed database.

18. The method of claim 17 wherein the distributed database is a peer-to-
peer database.

54987-13

25

19. A computer readable medium having stored thereon computer executable instructions that when executed by a system comprising a message server, a message ID database and a receiving computer system perform the method of any one of claims 6 to 18.

- 5 20. In combination, a message delivery system and a first computing system (102), the message delivery system comprising a second computing system (104), a message ID database (130) and a message server (120), wherein:
- the message server (120) is configured to:
 - o receive a message from the first computing system (102) and provide
10 a message ID in response to receiving the message, the message ID being formed to identify the received message;
 - o transmit the message ID to the message ID database (130); and
 - o transmit the message to the second computing system (104) in
response to receiving a message request from the second computing system (104);
 - 15 and
 - the message ID database (130) is configured to
 - o provide a message ID response to the second computing system
(104) in response to receiving a message ID query from the second computing
system (104), the message ID response comprising information about message IDs
20 stored in the message ID database (130),
- wherein the second computing system (104) is configured to contact the message ID database (130) rather than the message server (120) to determine whether a message is ready for delivery.

21. A message delivery system comprising:

54987-13

26

a message server including one or more computer processors
configured to:

receive a message from a sending computing system and subsequently
generate a message ID in response to receiving the message, the message ID being
5 generated to identify the received message, the message being intended for a
receiving computing system;

cause the message ID to be pushed to a message ID database that is
separate from the message server;

receive, from the receiving computing system, a request that includes at
10 least some information contained in the message ID; and

responsive to receiving the request, transmit the message to the
receiving computing system.

22. The message delivery system of claim 21, wherein message server is
configured to cause the message ID to be pushed to the message ID database
15 through the sending computing system.

23. The message delivery system of claim 21, wherein message server is
configured to cause the message ID to be pushed directly to the message ID
database from the message server.

24. A receiving computing system for receiving a message from a message
20 server including one or more computer processors, the receiving computing system
being operable to:

send a message ID query to a message ID database rather than to the
message server;

receive a message ID response from the message ID database, the
25 message ID response comprising information about message IDs stored in the
message ID database; and

54987-13

27

upon receiving the message ID response, determine, without contacting the message server, whether the message ID response indicates that a message is ready for retrieval from the message server; in the affirmative then to:

request, by sending a message request to the message server, that the
5 message server transmits the message to the receiving computing system; and
receive the message transmitted from the message server.

25. The system according to claim 24, wherein the message ID response contains a message ID that identifies a specific message at the message server.

26. The system according to claim 25, wherein at least some message IDs
10 include a message number indicating how many messages the message server has received for a given recipient.

27. The system according to claim 26, wherein said at least some message IDs include message size information.

28. The system according to claim 25, wherein at least some message IDs
15 include a global message number associated with messages intended for multiple recipients.

29. A method for handling one or more messages from a sending computing system, the method comprising:

receiving, at a message server, one or more messages from the
20 sending computing system, the one or more messages being intended for a receiving computer computing system;

responsive to said receiving, generating, using the message server one or more message IDs identifying the received one or more messages;

causing, with the message server, at least one of the one or more
25 message IDs to be pushed to a message ID database effective to enable the

54987-13

28

receiving computing system to ascertain at least some information contained in the one or more message IDs, the message ID database being separate from the message server;

receiving, from the receiving computing system, a request that includes
5 information contained in the one or more message IDs; and

responsive to receiving the request, transmit one or more messages, associated with the information, to the receiving computing system.

30. The method according to claim 29, wherein said causing comprises at least:

10 the message server transmitting the at least one message ID to the sending computing system effective to cause the sending computing system to transmit the at least one message ID to the message ID database.

31. A method for receiving a message at a receiving computing system from a message server, the method comprising:

15 sending, by the receiving computing system, a message ID query to a message ID database rather than to a message server;

receiving, with the receiving computing system, a message ID response from the message ID database, the message ID response comprising information about message IDs stored in the message ID database;

20 determining, without contacting the message server, whether the message ID response indicates that a message is ready for retrieval from the message server;

responsive to the message being ready for retrieval, sending a message request to the message server to request the message; and

25 receiving, from the message server, the message.

54987-13

29

32. The method according to claim 31, wherein said sending a message request is performed only if the receiving computing system has not previously requested and received the message.

33. The method according to claim 31, the method further comprising
5 storing at the receiving computing system, upon receiving the message, a message ID associated with the message, the message ID identifying the message on the message server.

34. The method according to claim 33 further comprising sending a message request to the message server if a message ID is not available to the
10 receiving computing system.

35. A computer program product comprising:

computer readable code stored on a computer readable hardware storage medium configured to be executed by at least one computer processor to facilitate handling of one or more messages from a sending computer system having
15 one or more computer processors by:

responding to receiving the one or more messages transmitted from the sending computing system, by generating from a message server one or more message IDs;

20 identifying the received one or more messages, the one or more messages being intended for a receiving computing system;

causing, from the message server, at least one of the one or more message IDs to be pushed to a message ID database that is separate from the message server;

25 receiving, from the receiving computing system, a request that includes at least some information contained in at least one of said one or more message IDs; and

54987-13

30

responsive to receiving the request, transmitting a corresponding message to the receiving computing system.

36. The computer program product according to claim 35 wherein the message ID database is a distributed database.

5 37. The computer program product according to claim 35 wherein the message ID database and the message server are mutually resource-independent.

38. A computer program product comprising:

computer readable code stored on a computer readable hardware storage medium configured to be executed by at least one computer processor to
10 facilitate handling of one or more messages from a receiving computing system having one or more computer processors by:

sending, by the receiving computing system, a message ID query to a message ID database rather than to a message server, the message ID database being configured to store message IDs and to transmit a message ID response to the
15 receiving computing system in response to receiving the message ID query, the message ID response comprising information about message IDs stored in the message ID database;

receiving, at the receiving computing system, the message ID response from the message ID database, the message ID response comprising information
20 about message IDs stored in the message ID database;

determining, at the receiving computing system, and without contacting the message server, whether the message ID response indicates that a message is ready for retrieval from the message server, the message server being configured to transmit the message to the receiving computing system in response to receiving a
25 message request from the receiving computing system; and if a message is ready for retrieval from the message server, then:

54987-13

31

sending, by the receiving computing system, a message request to the message server to request the message; and

receiving, by the receiving computing system, the message from the message server.

5 39. The system according to claim 38 wherein the message ID database is distributed database.

40. The system according to claim 38 wherein the message ID database and the message server are mutually resource-independent.

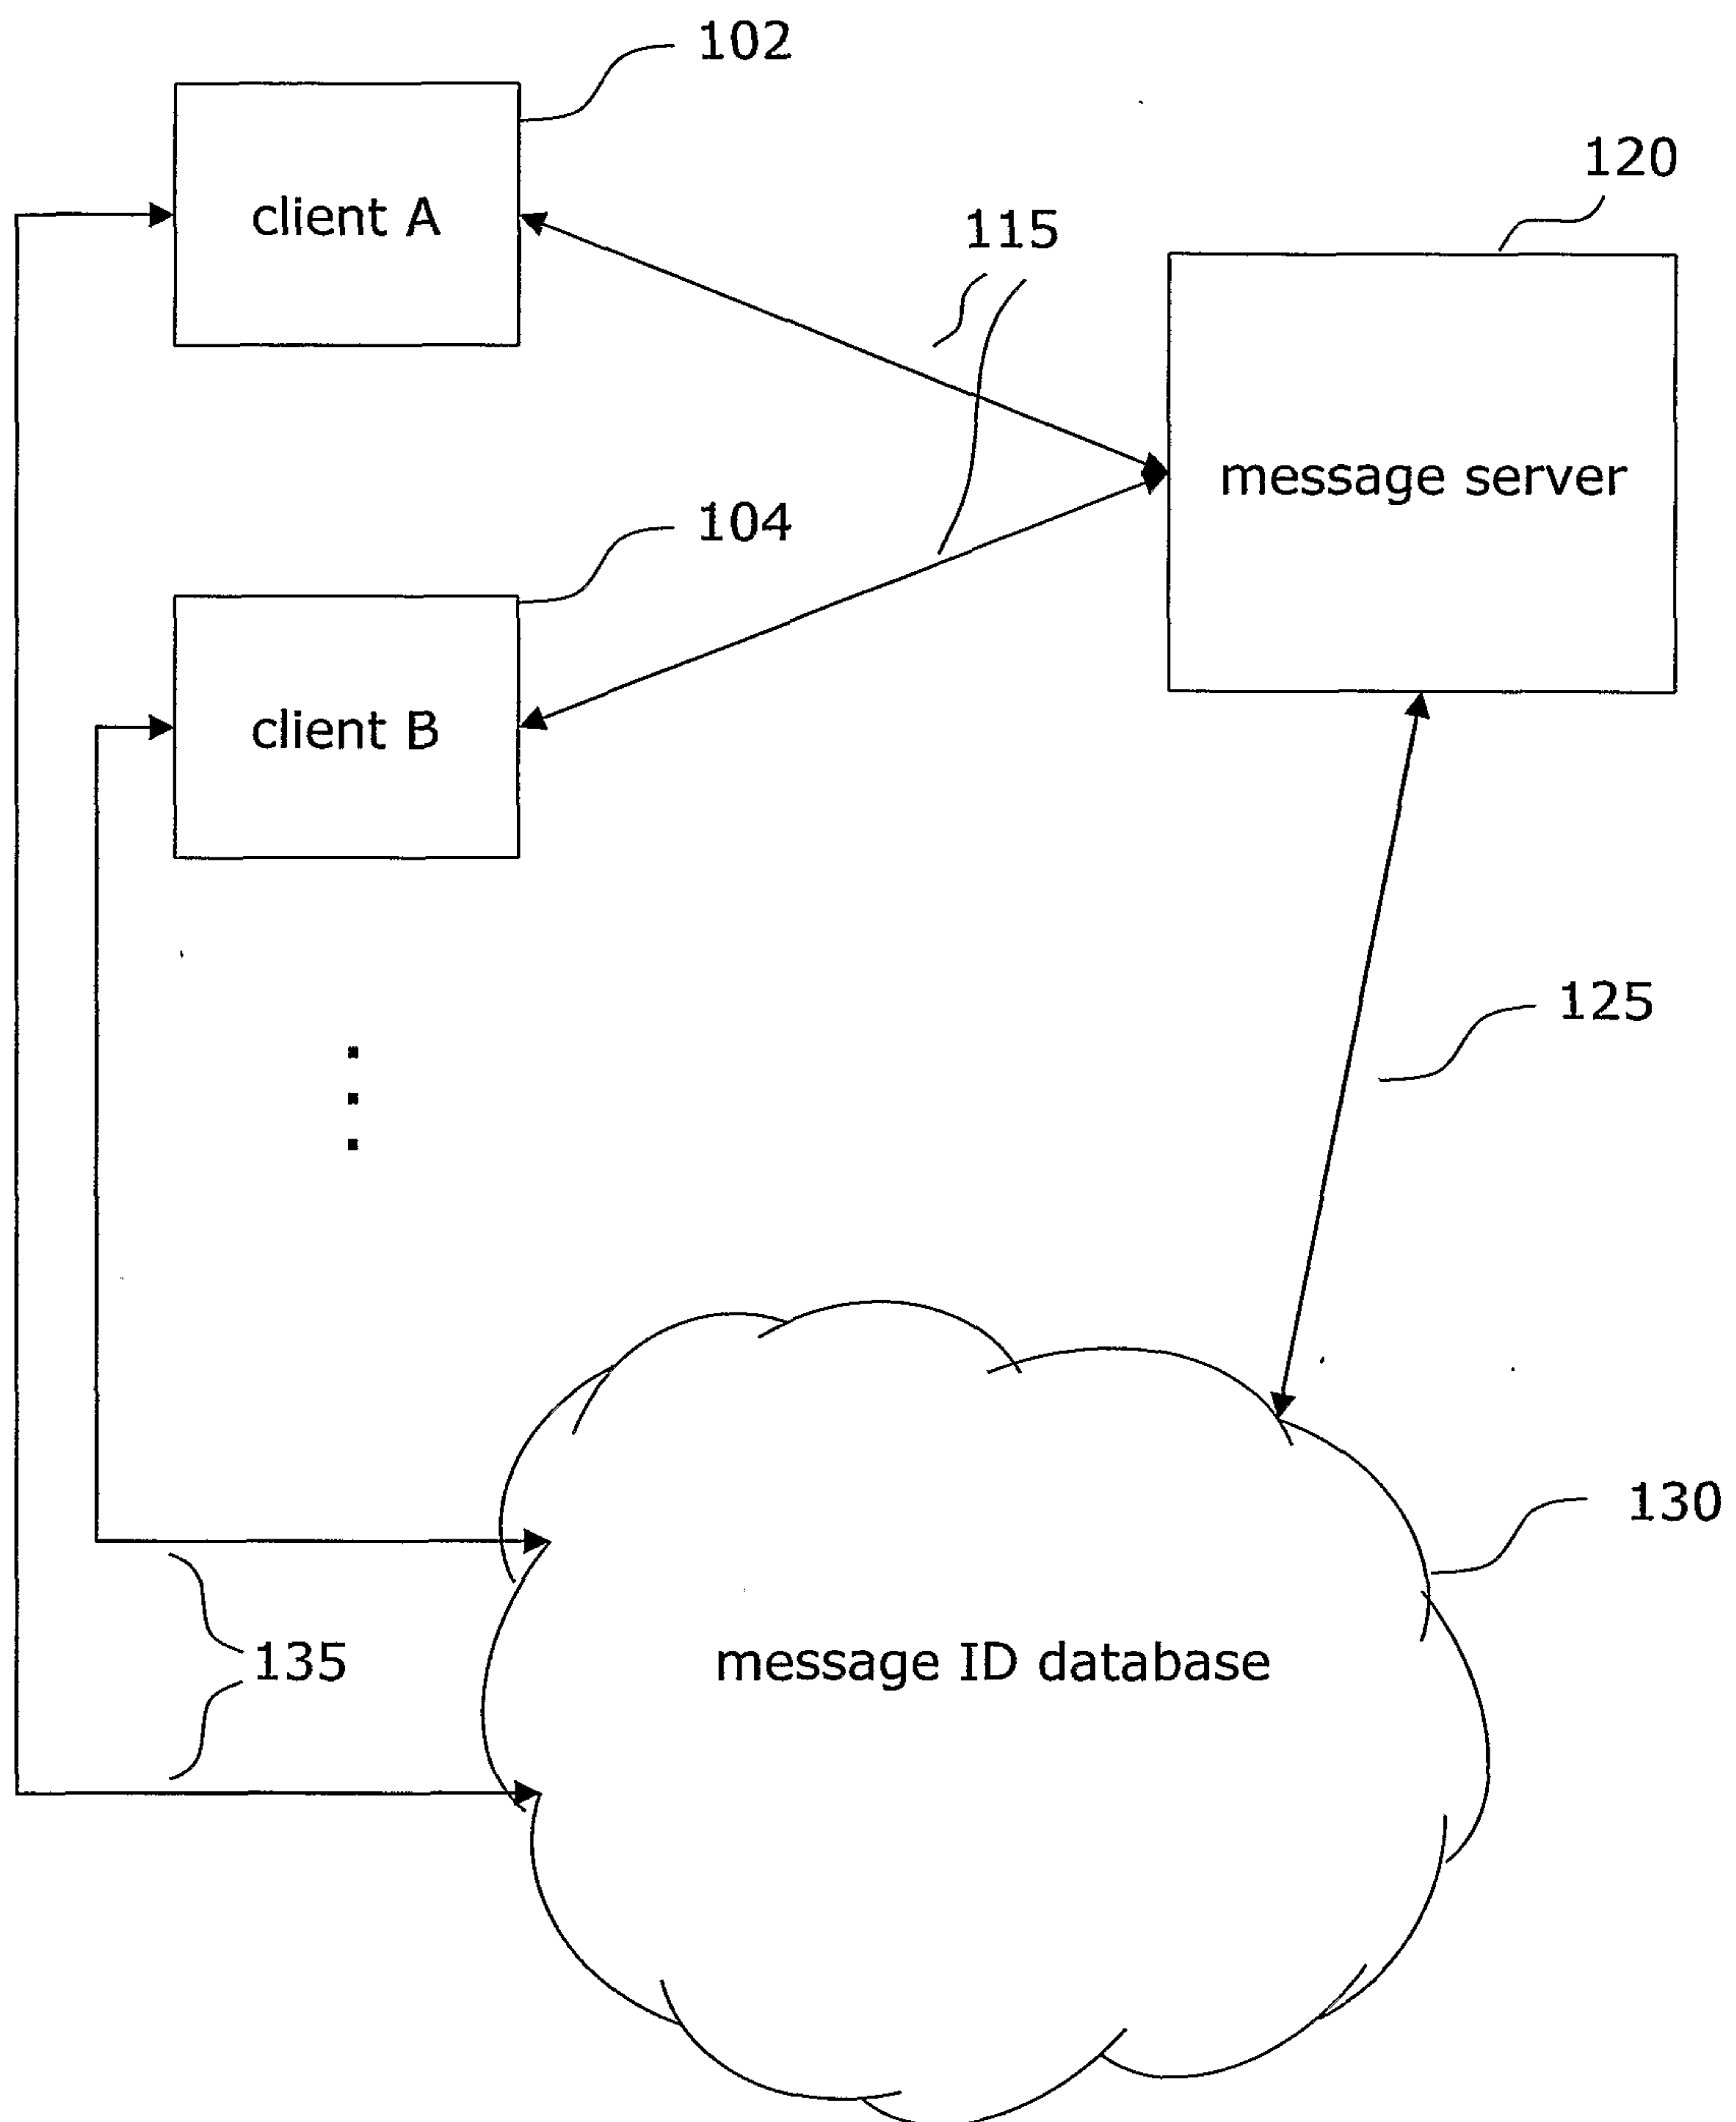


Fig. 1

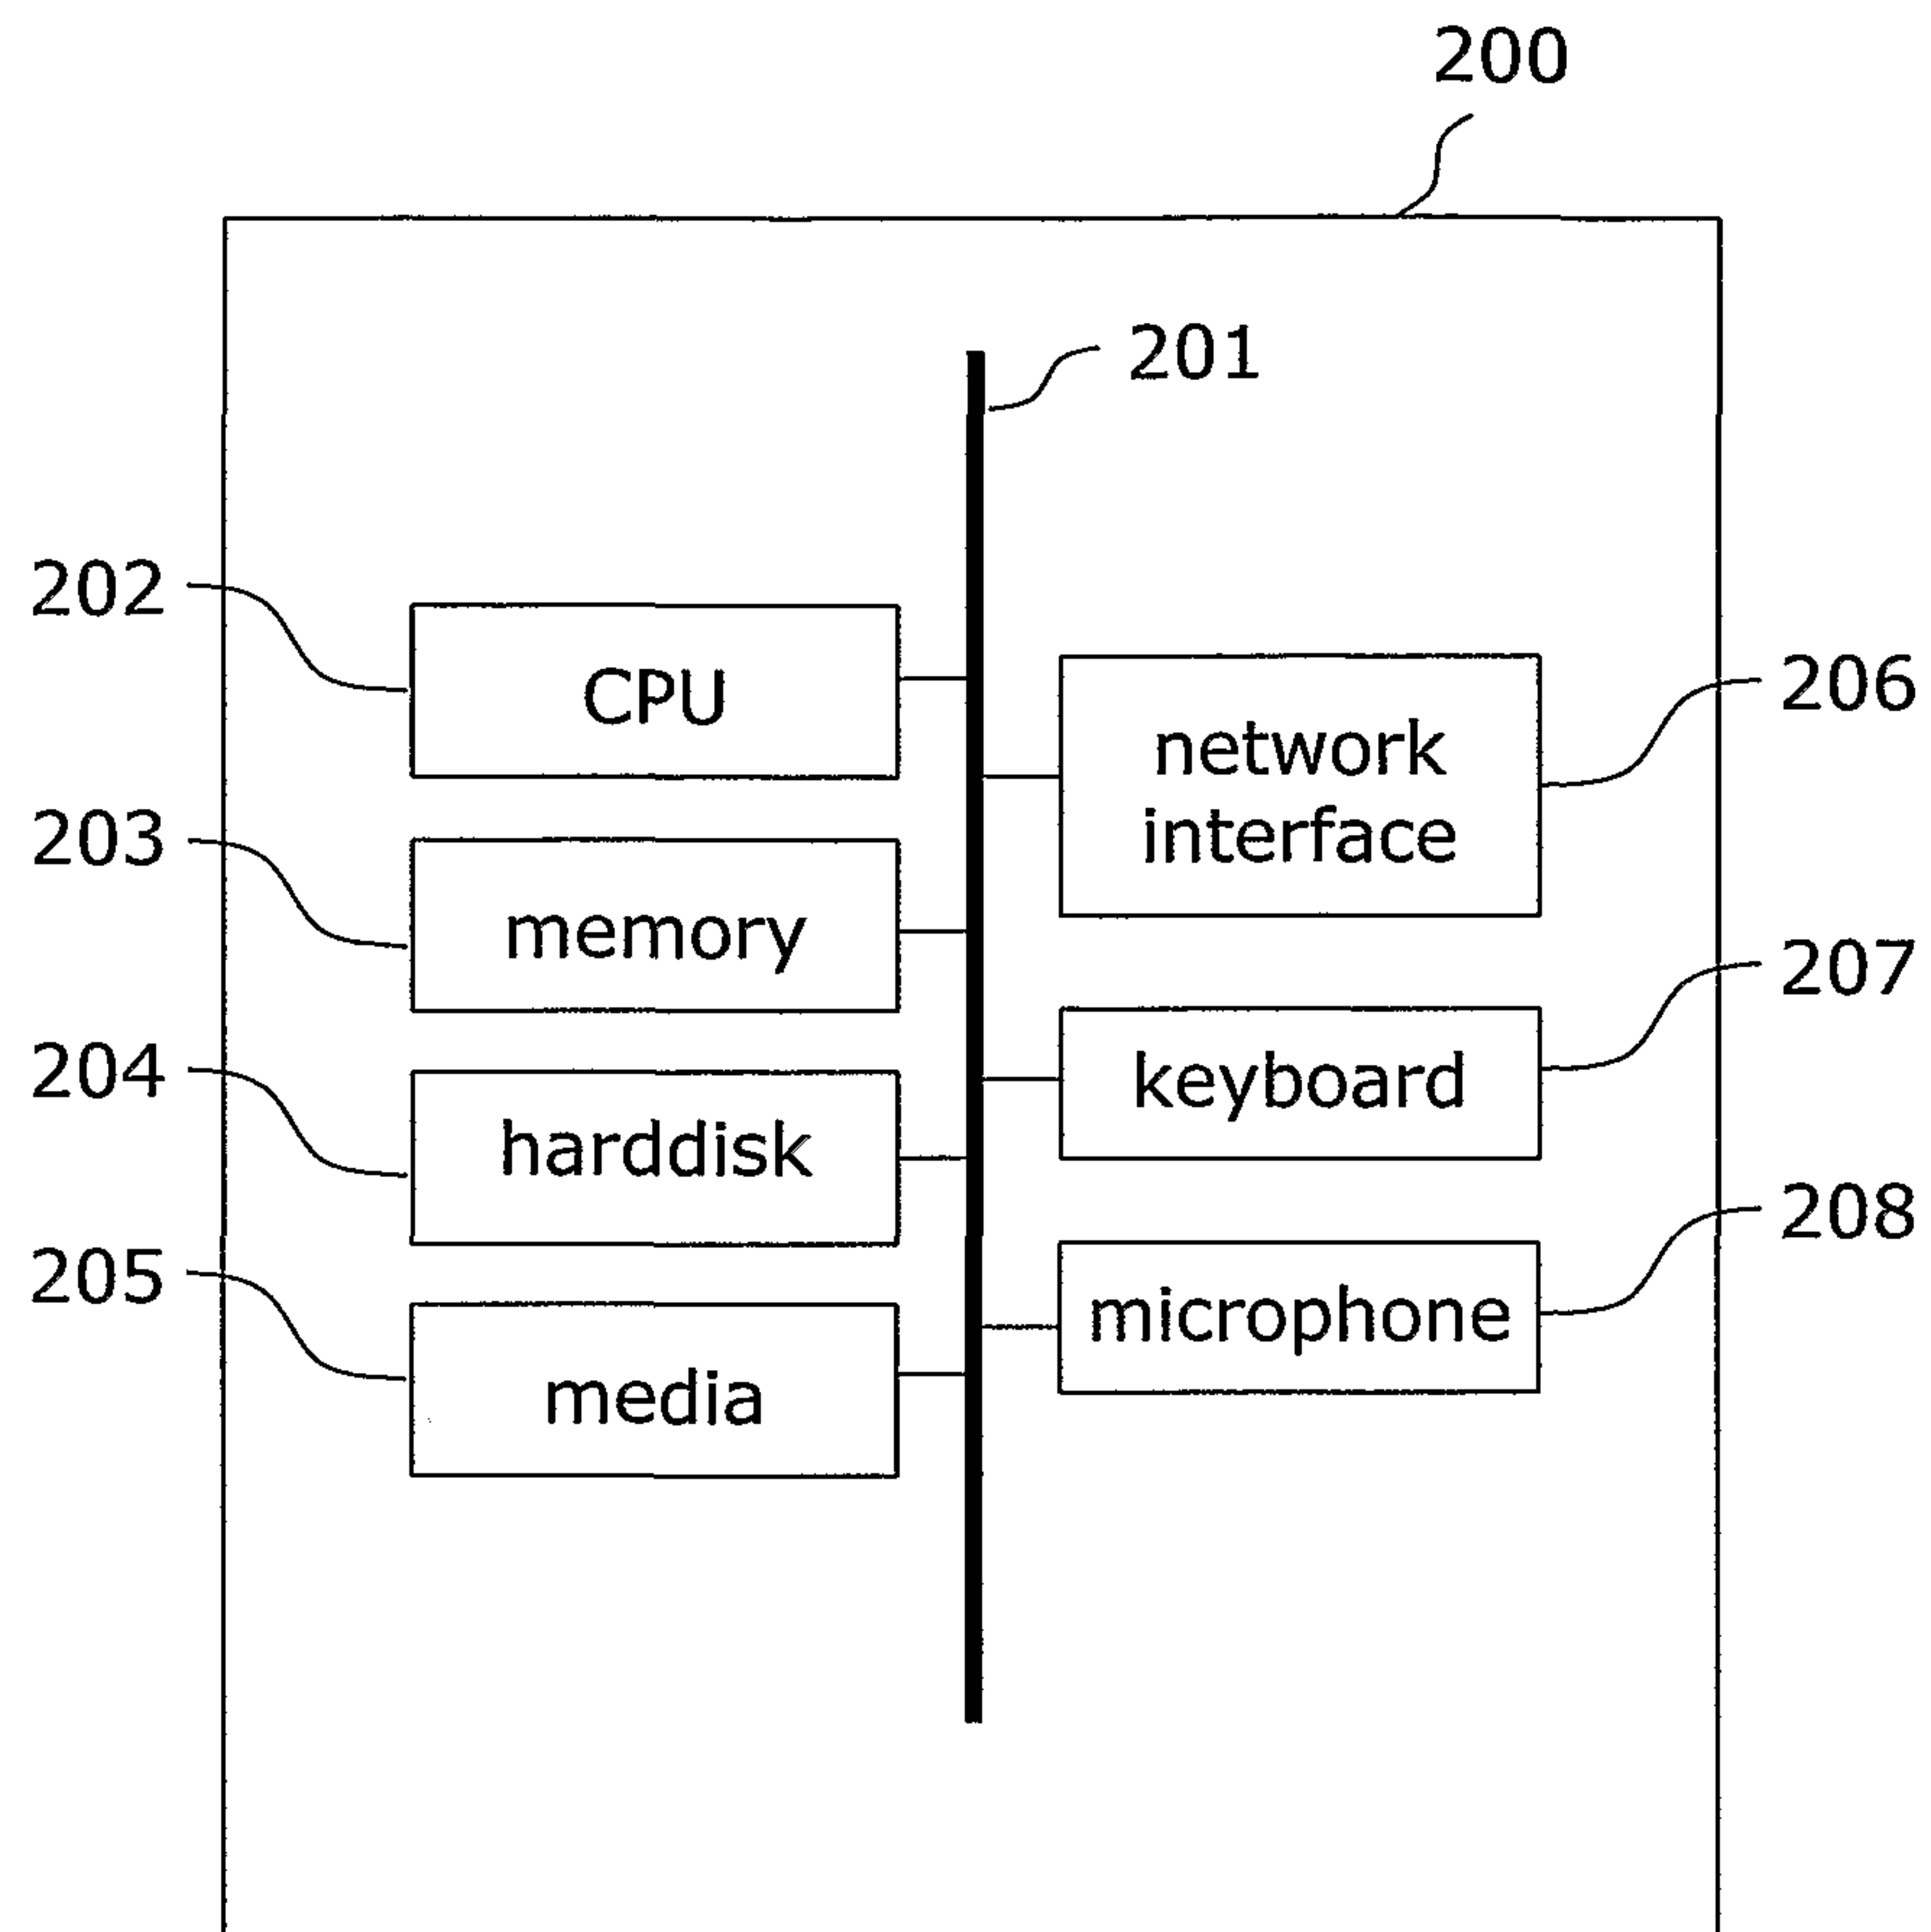
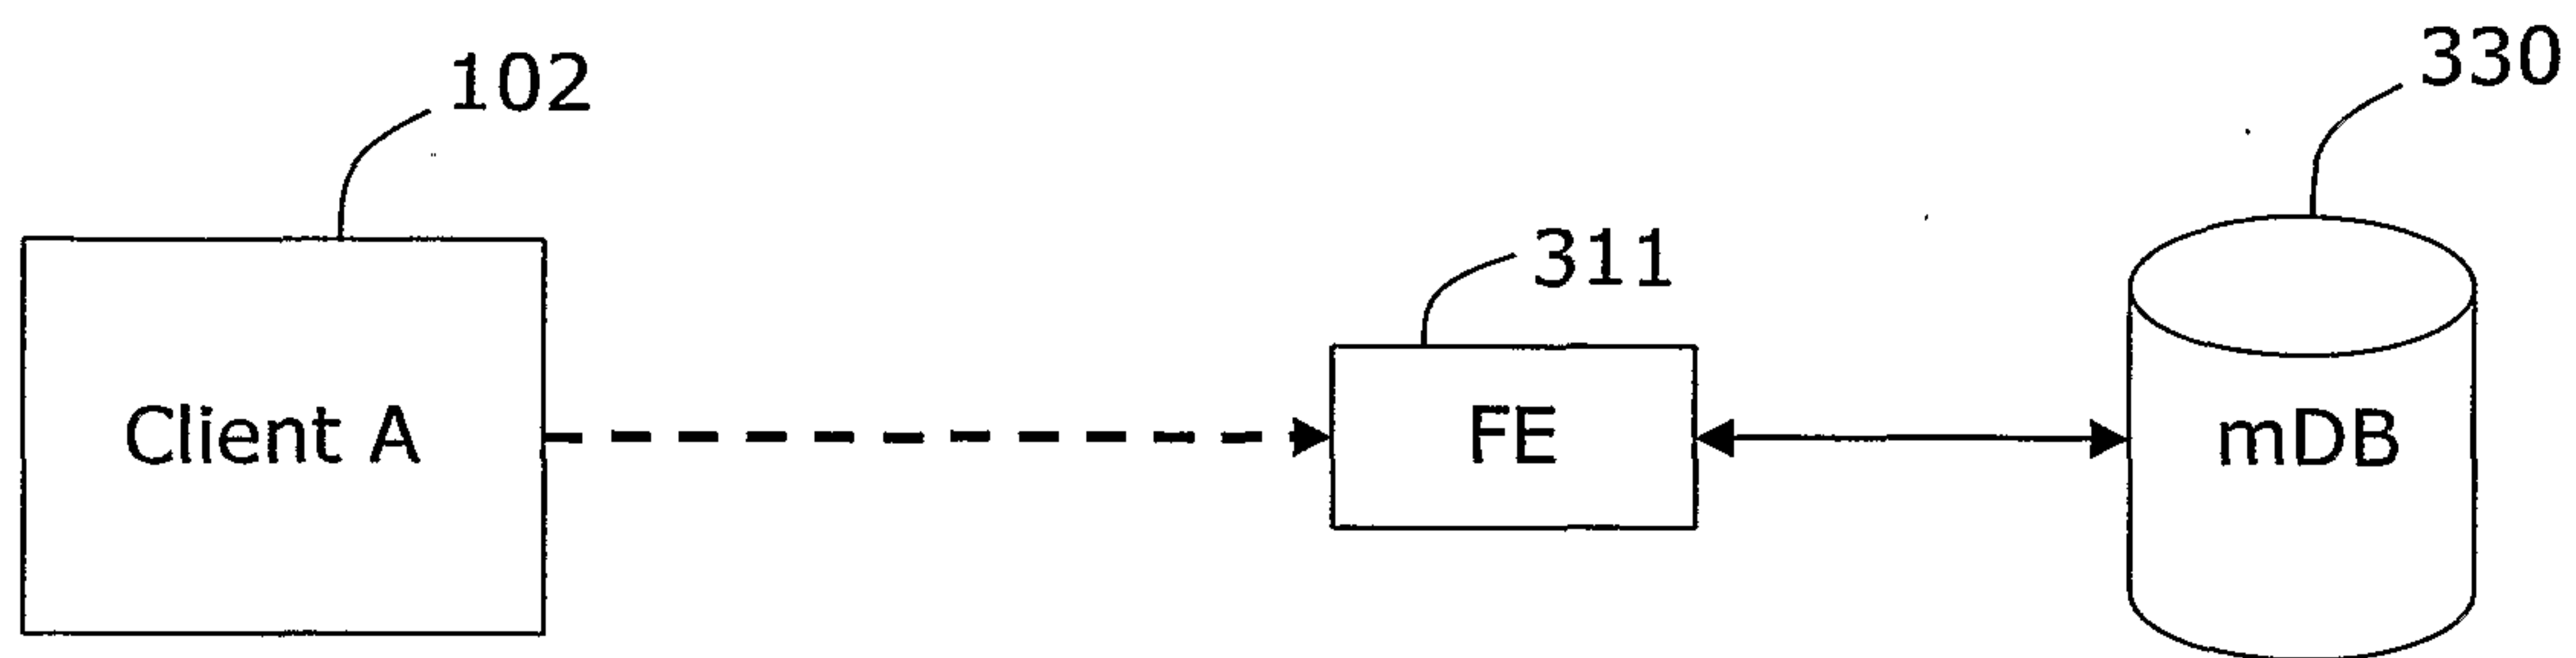
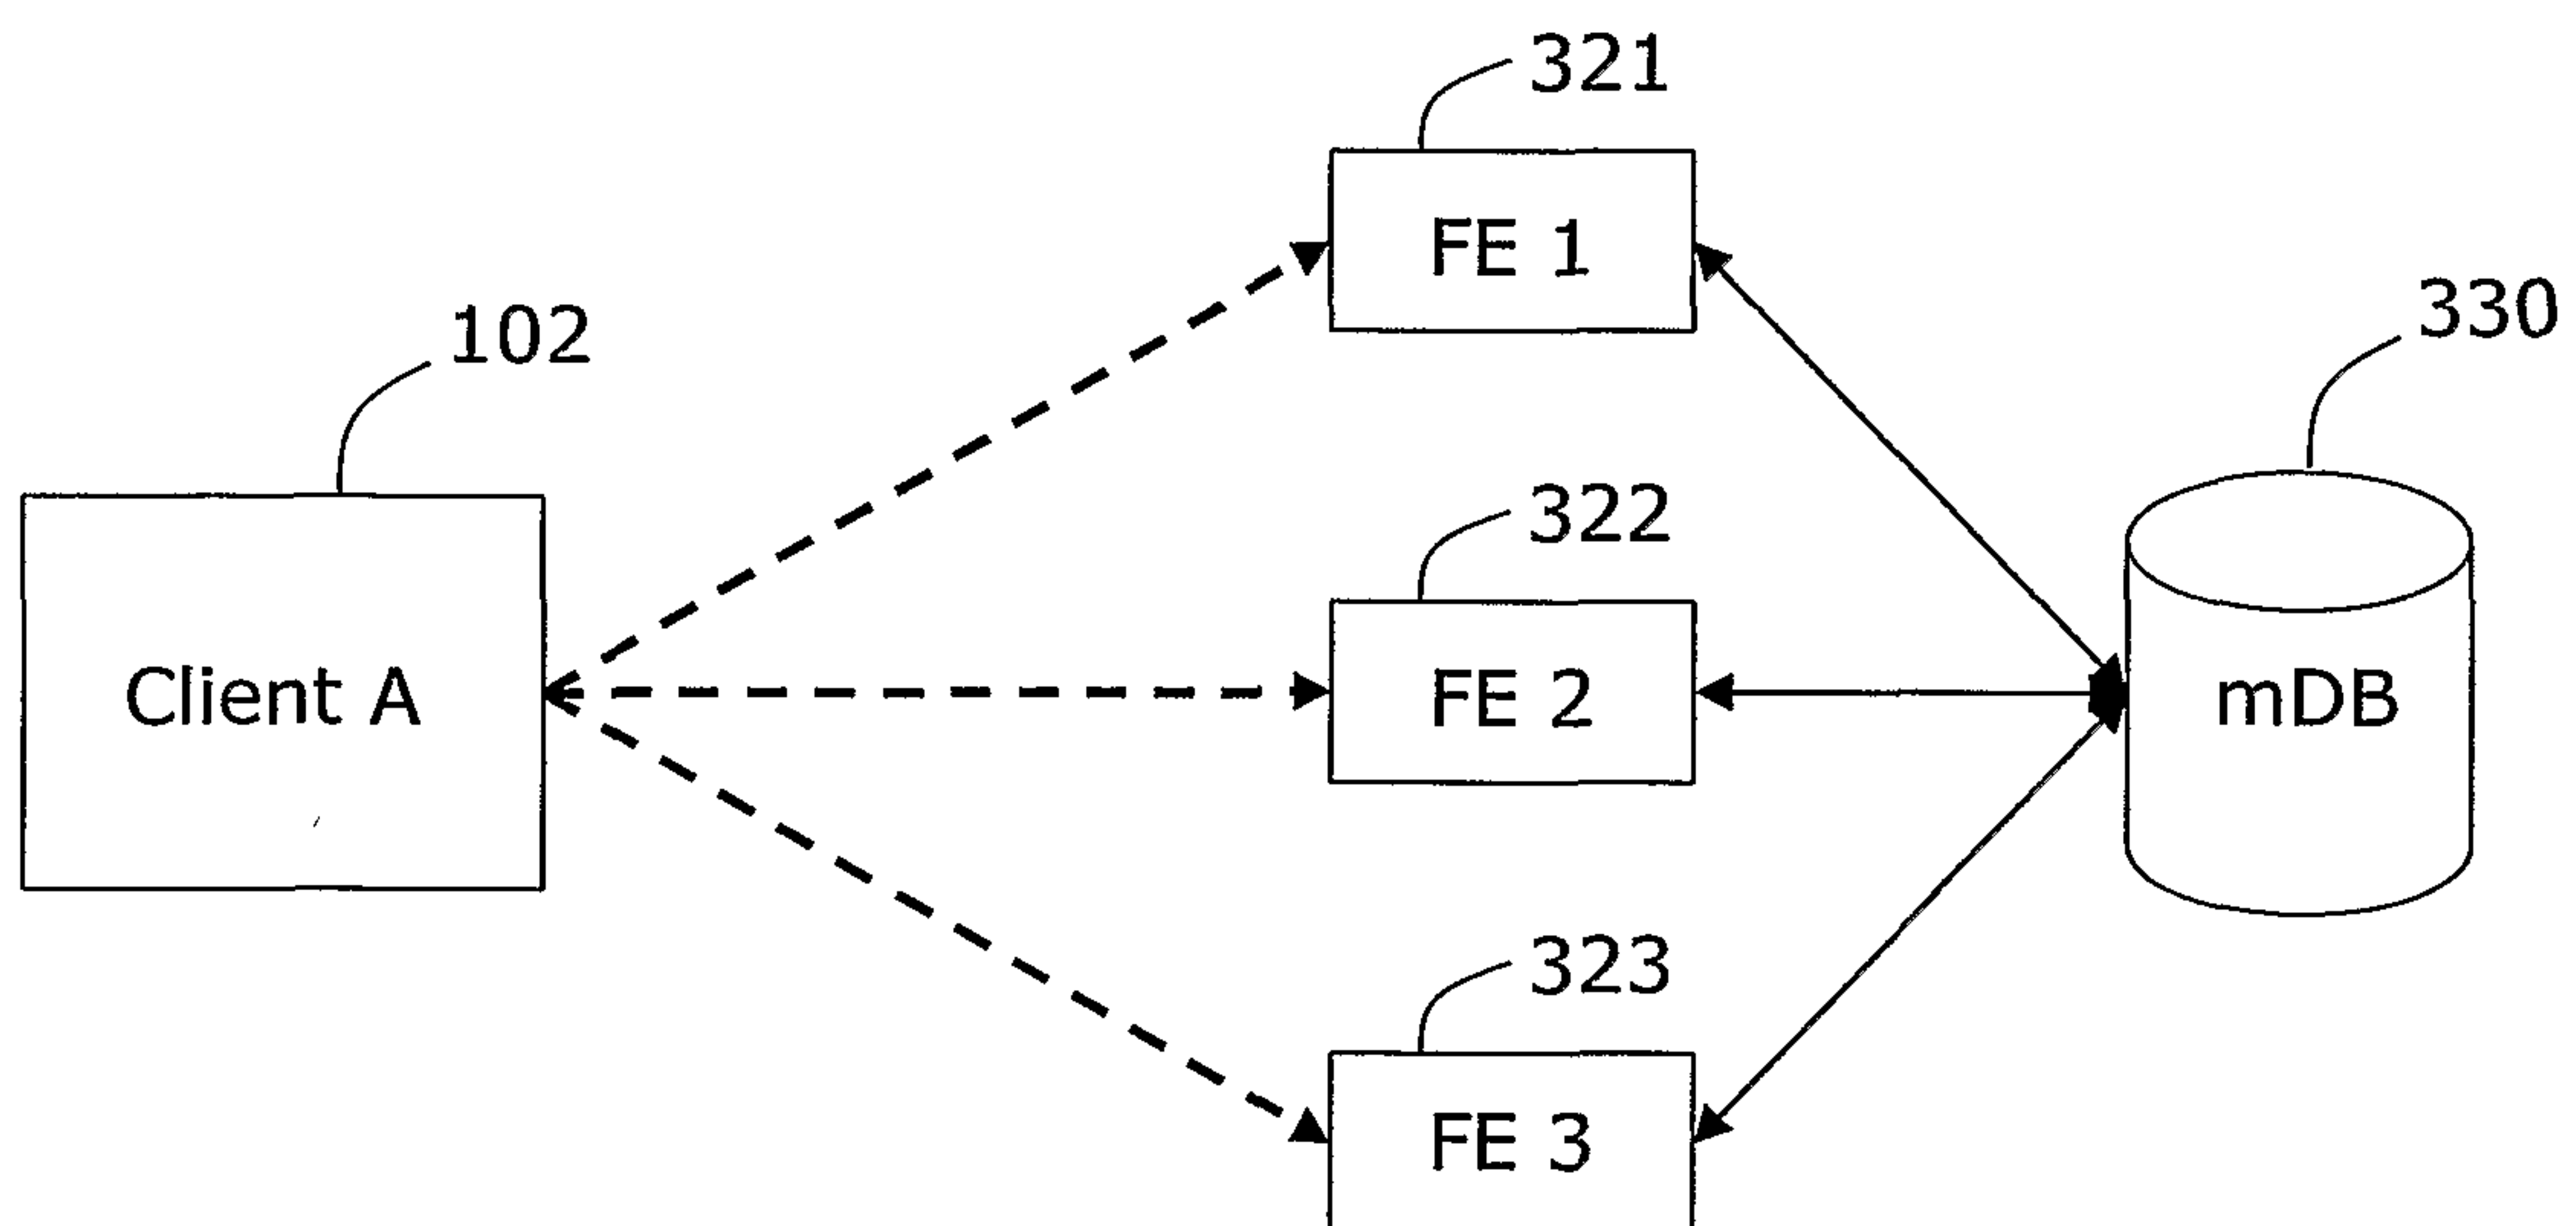


Fig. 2

Fig. 3aFig. 3b

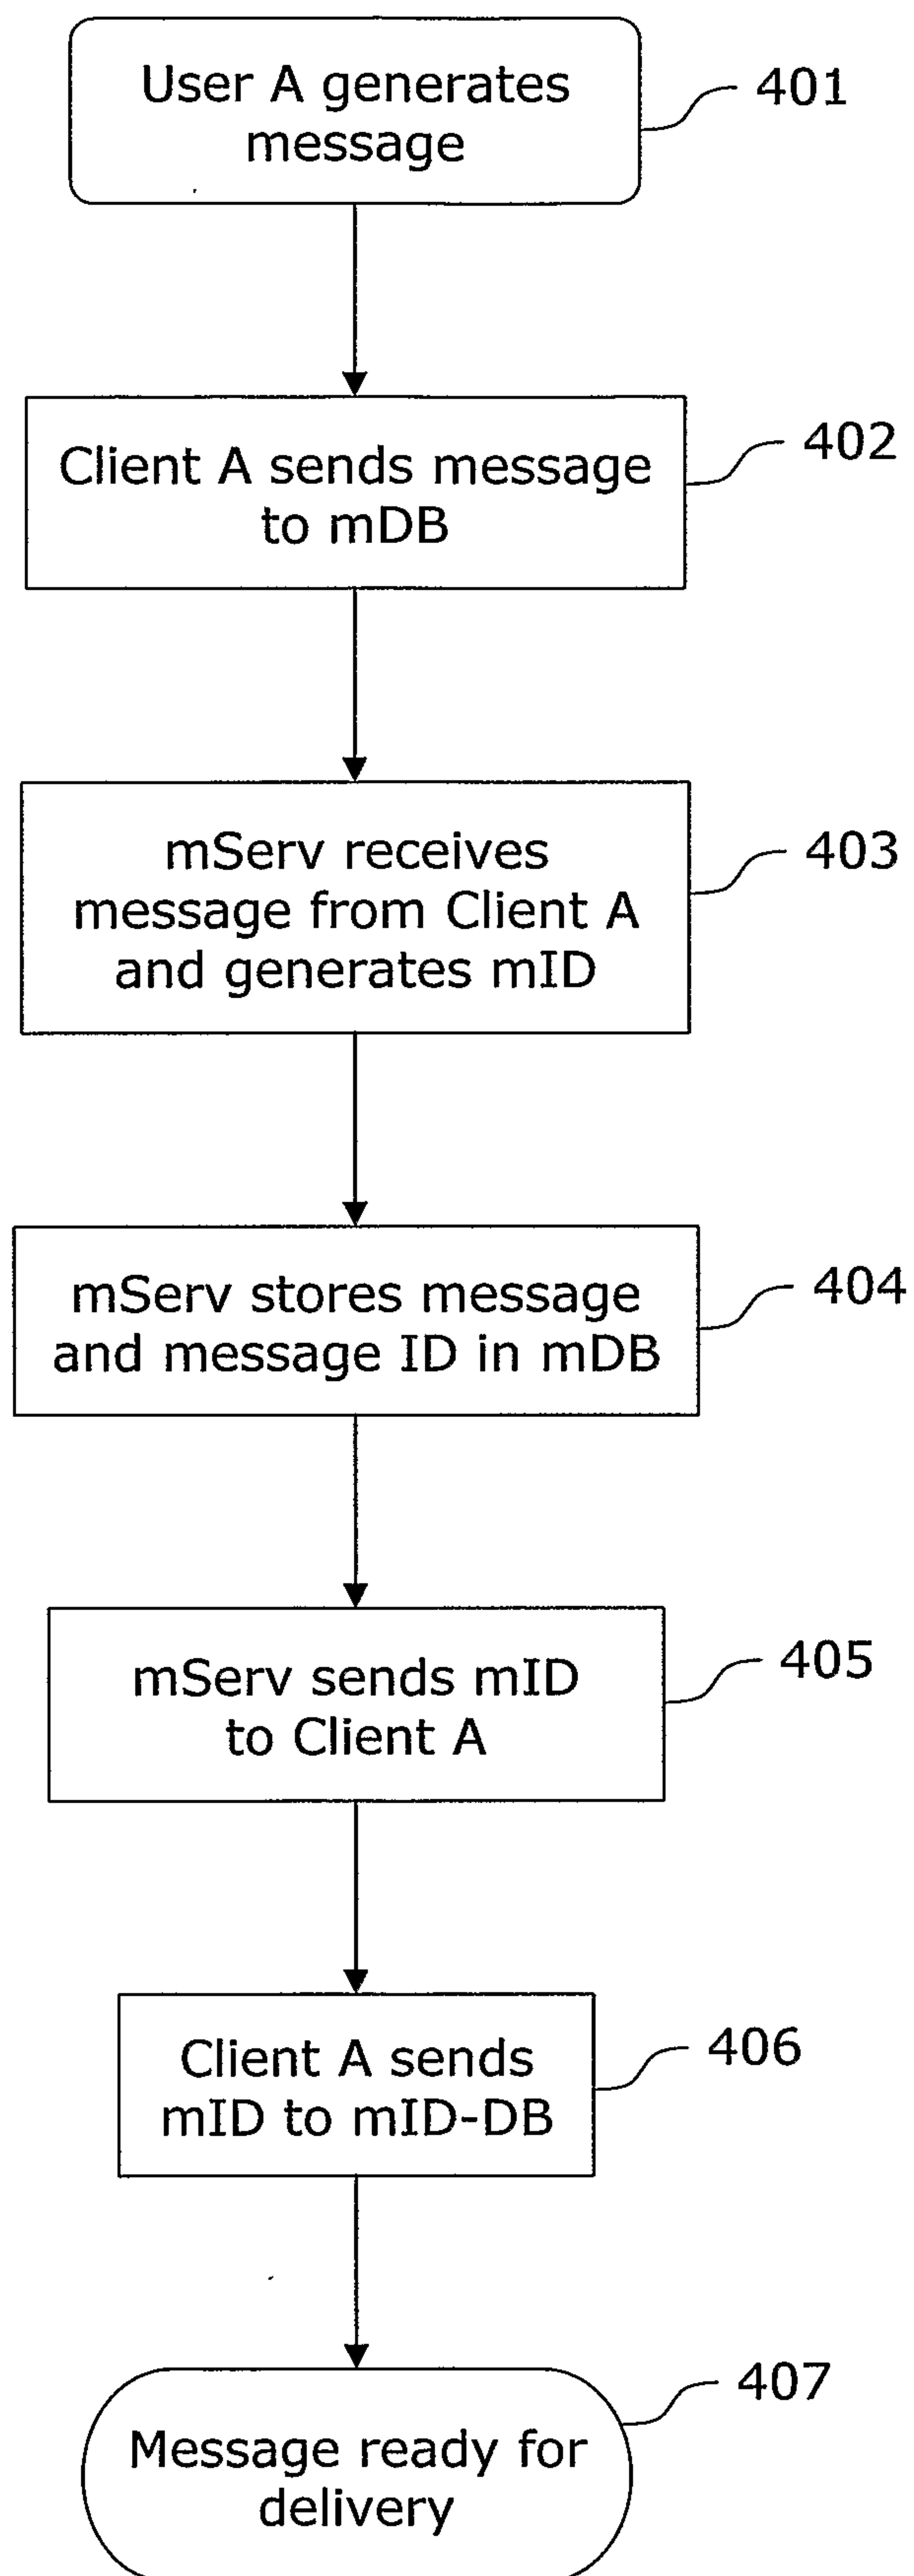
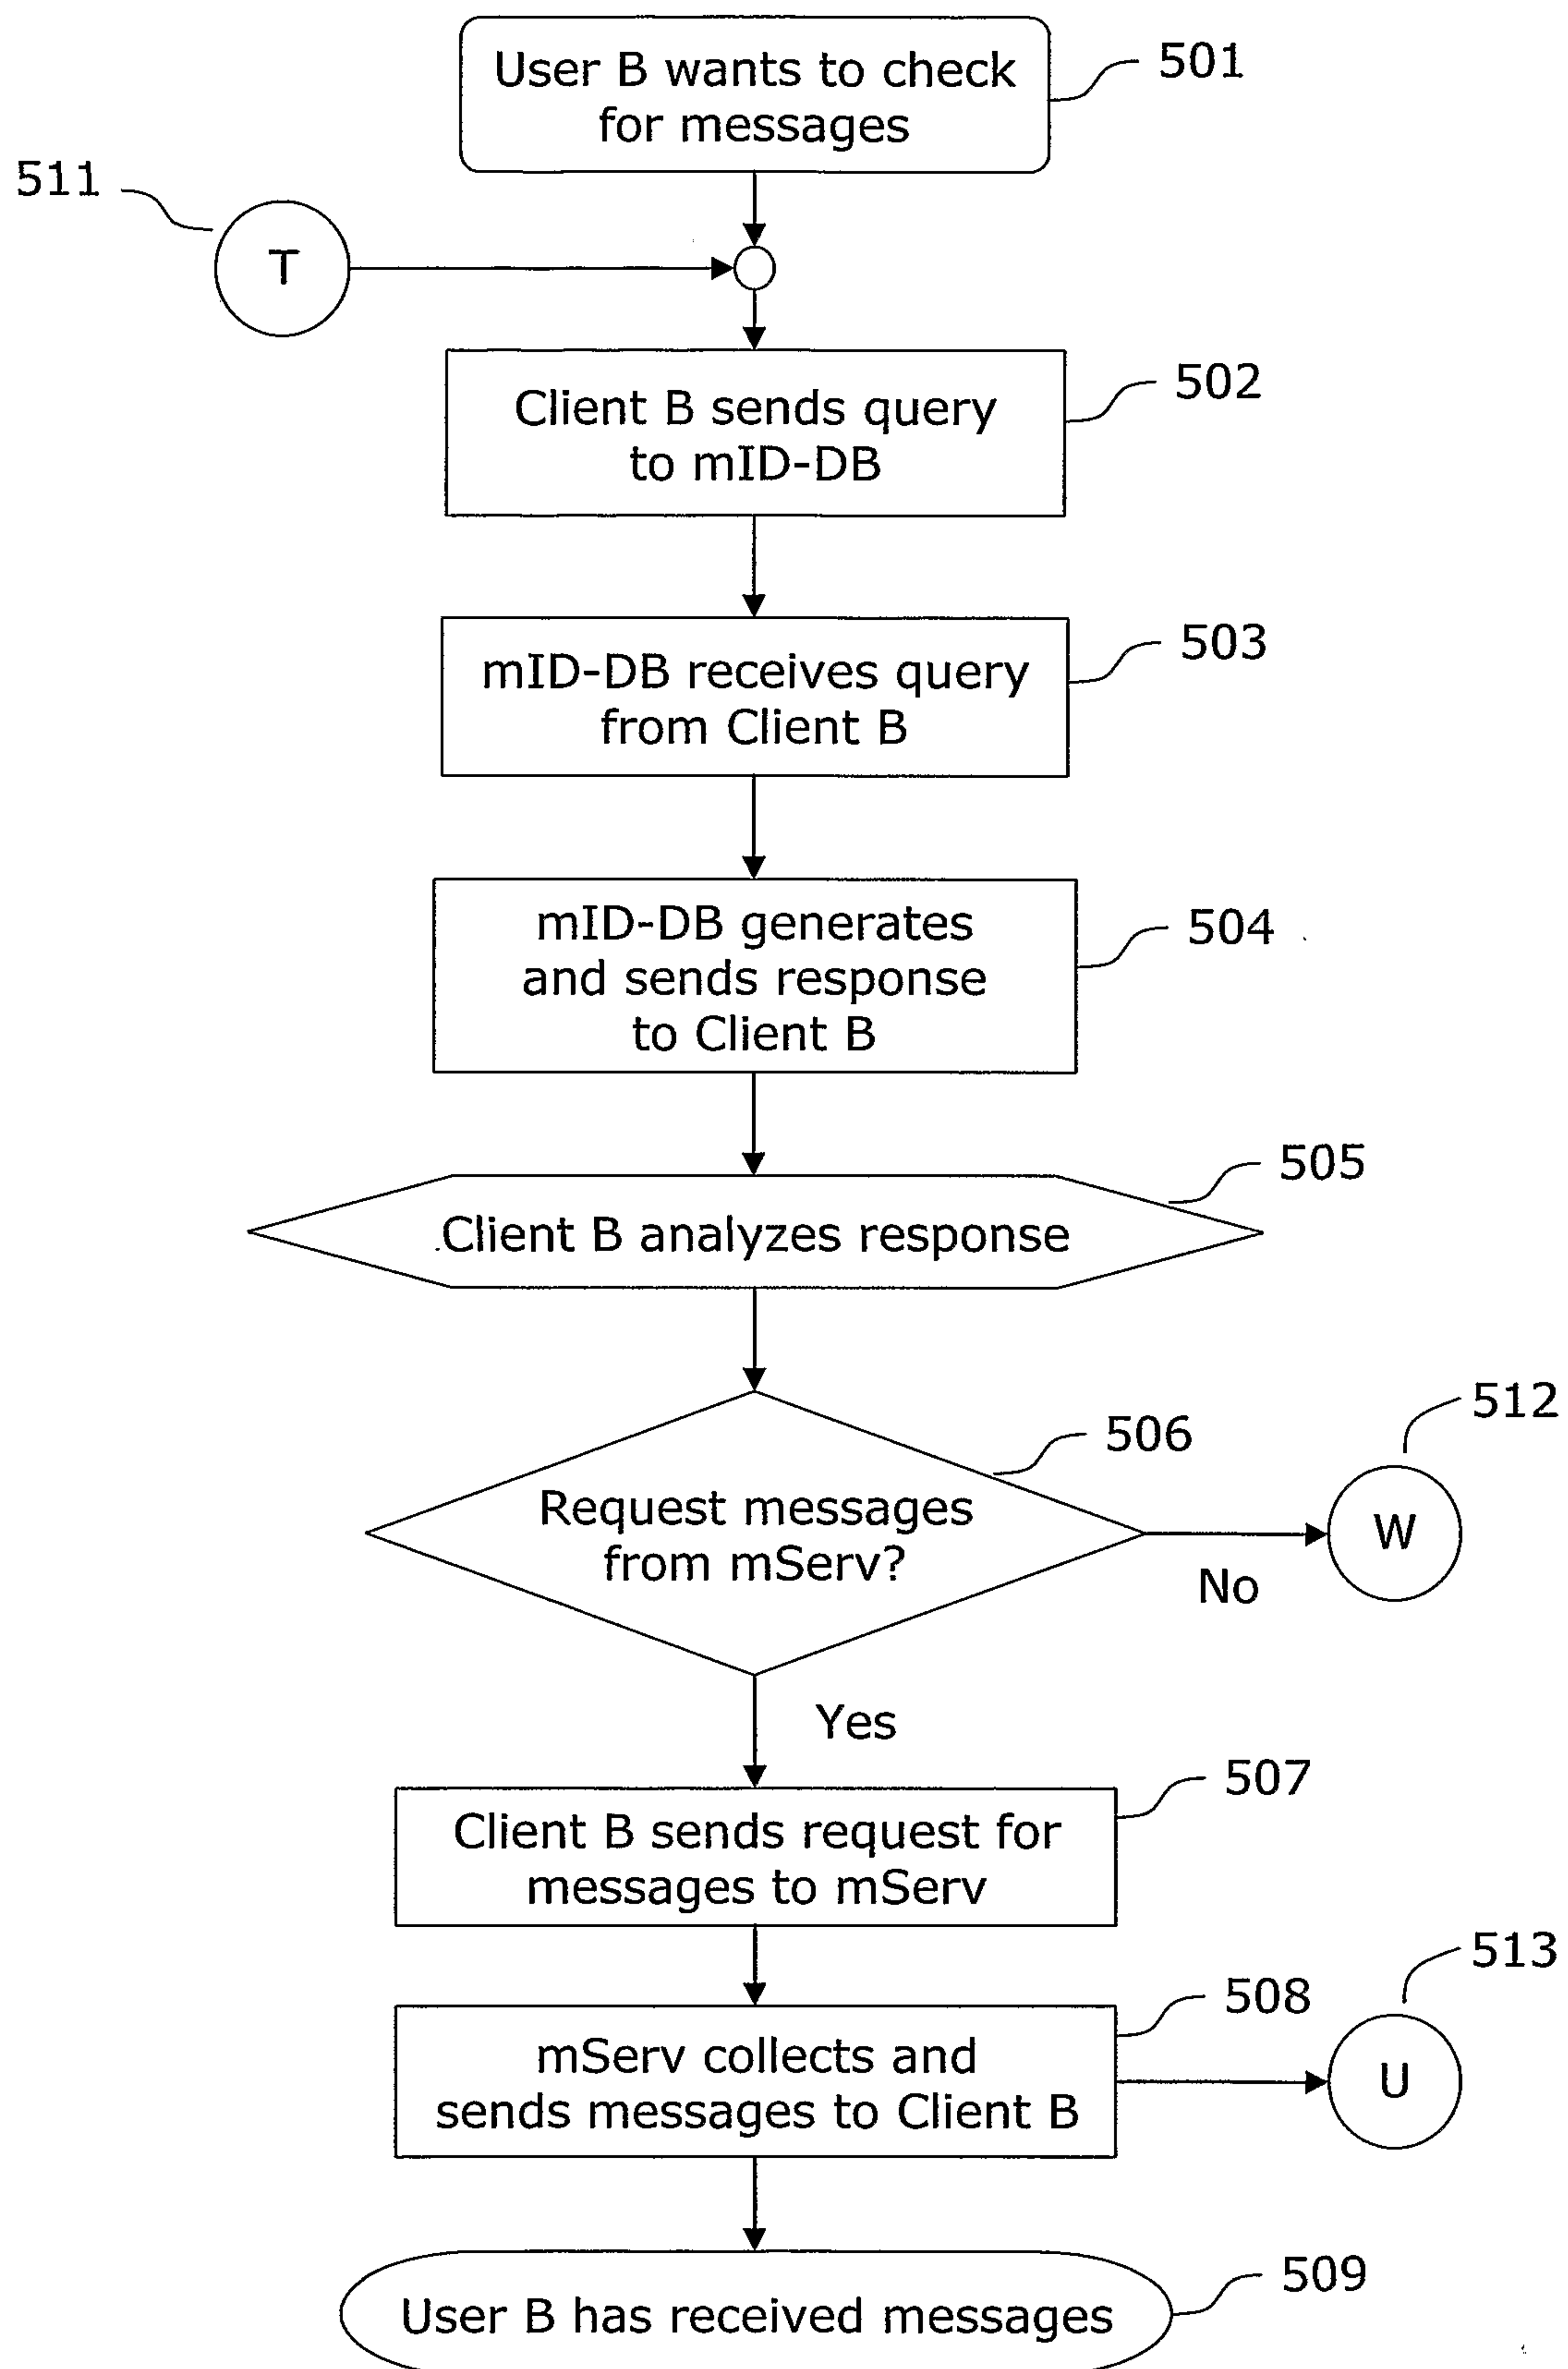


Fig. 4

Fig. 5



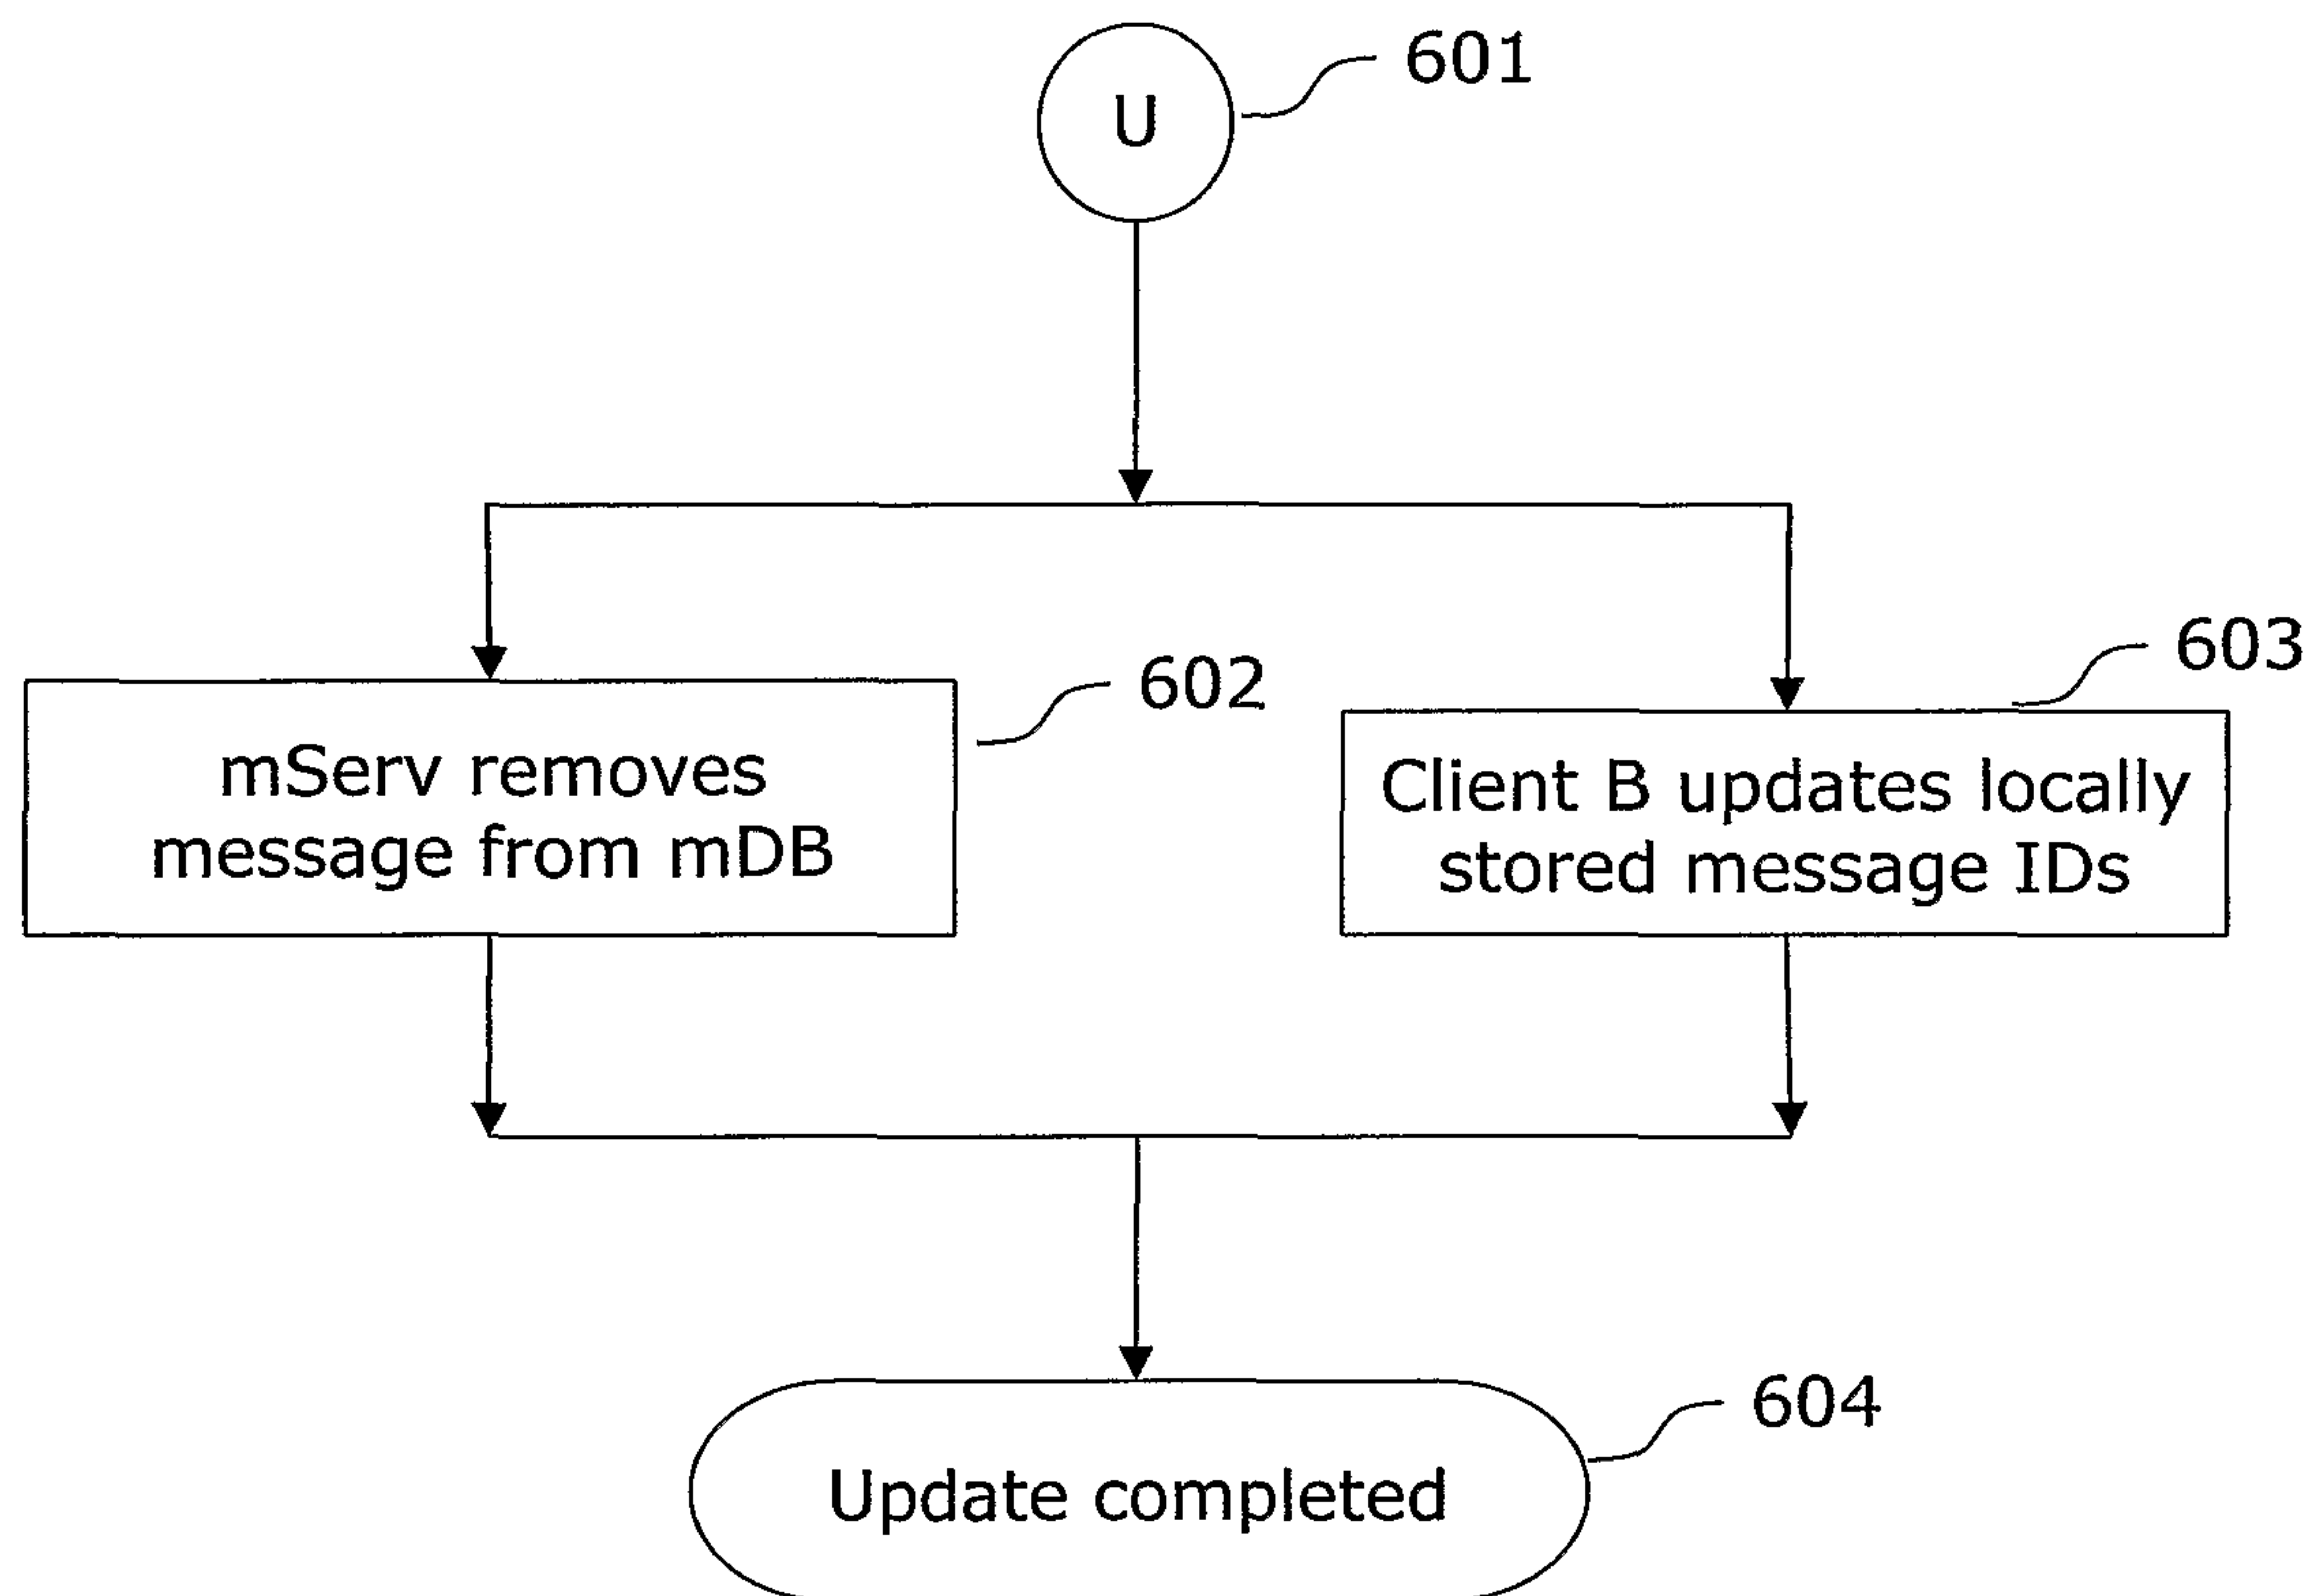


Fig. 6

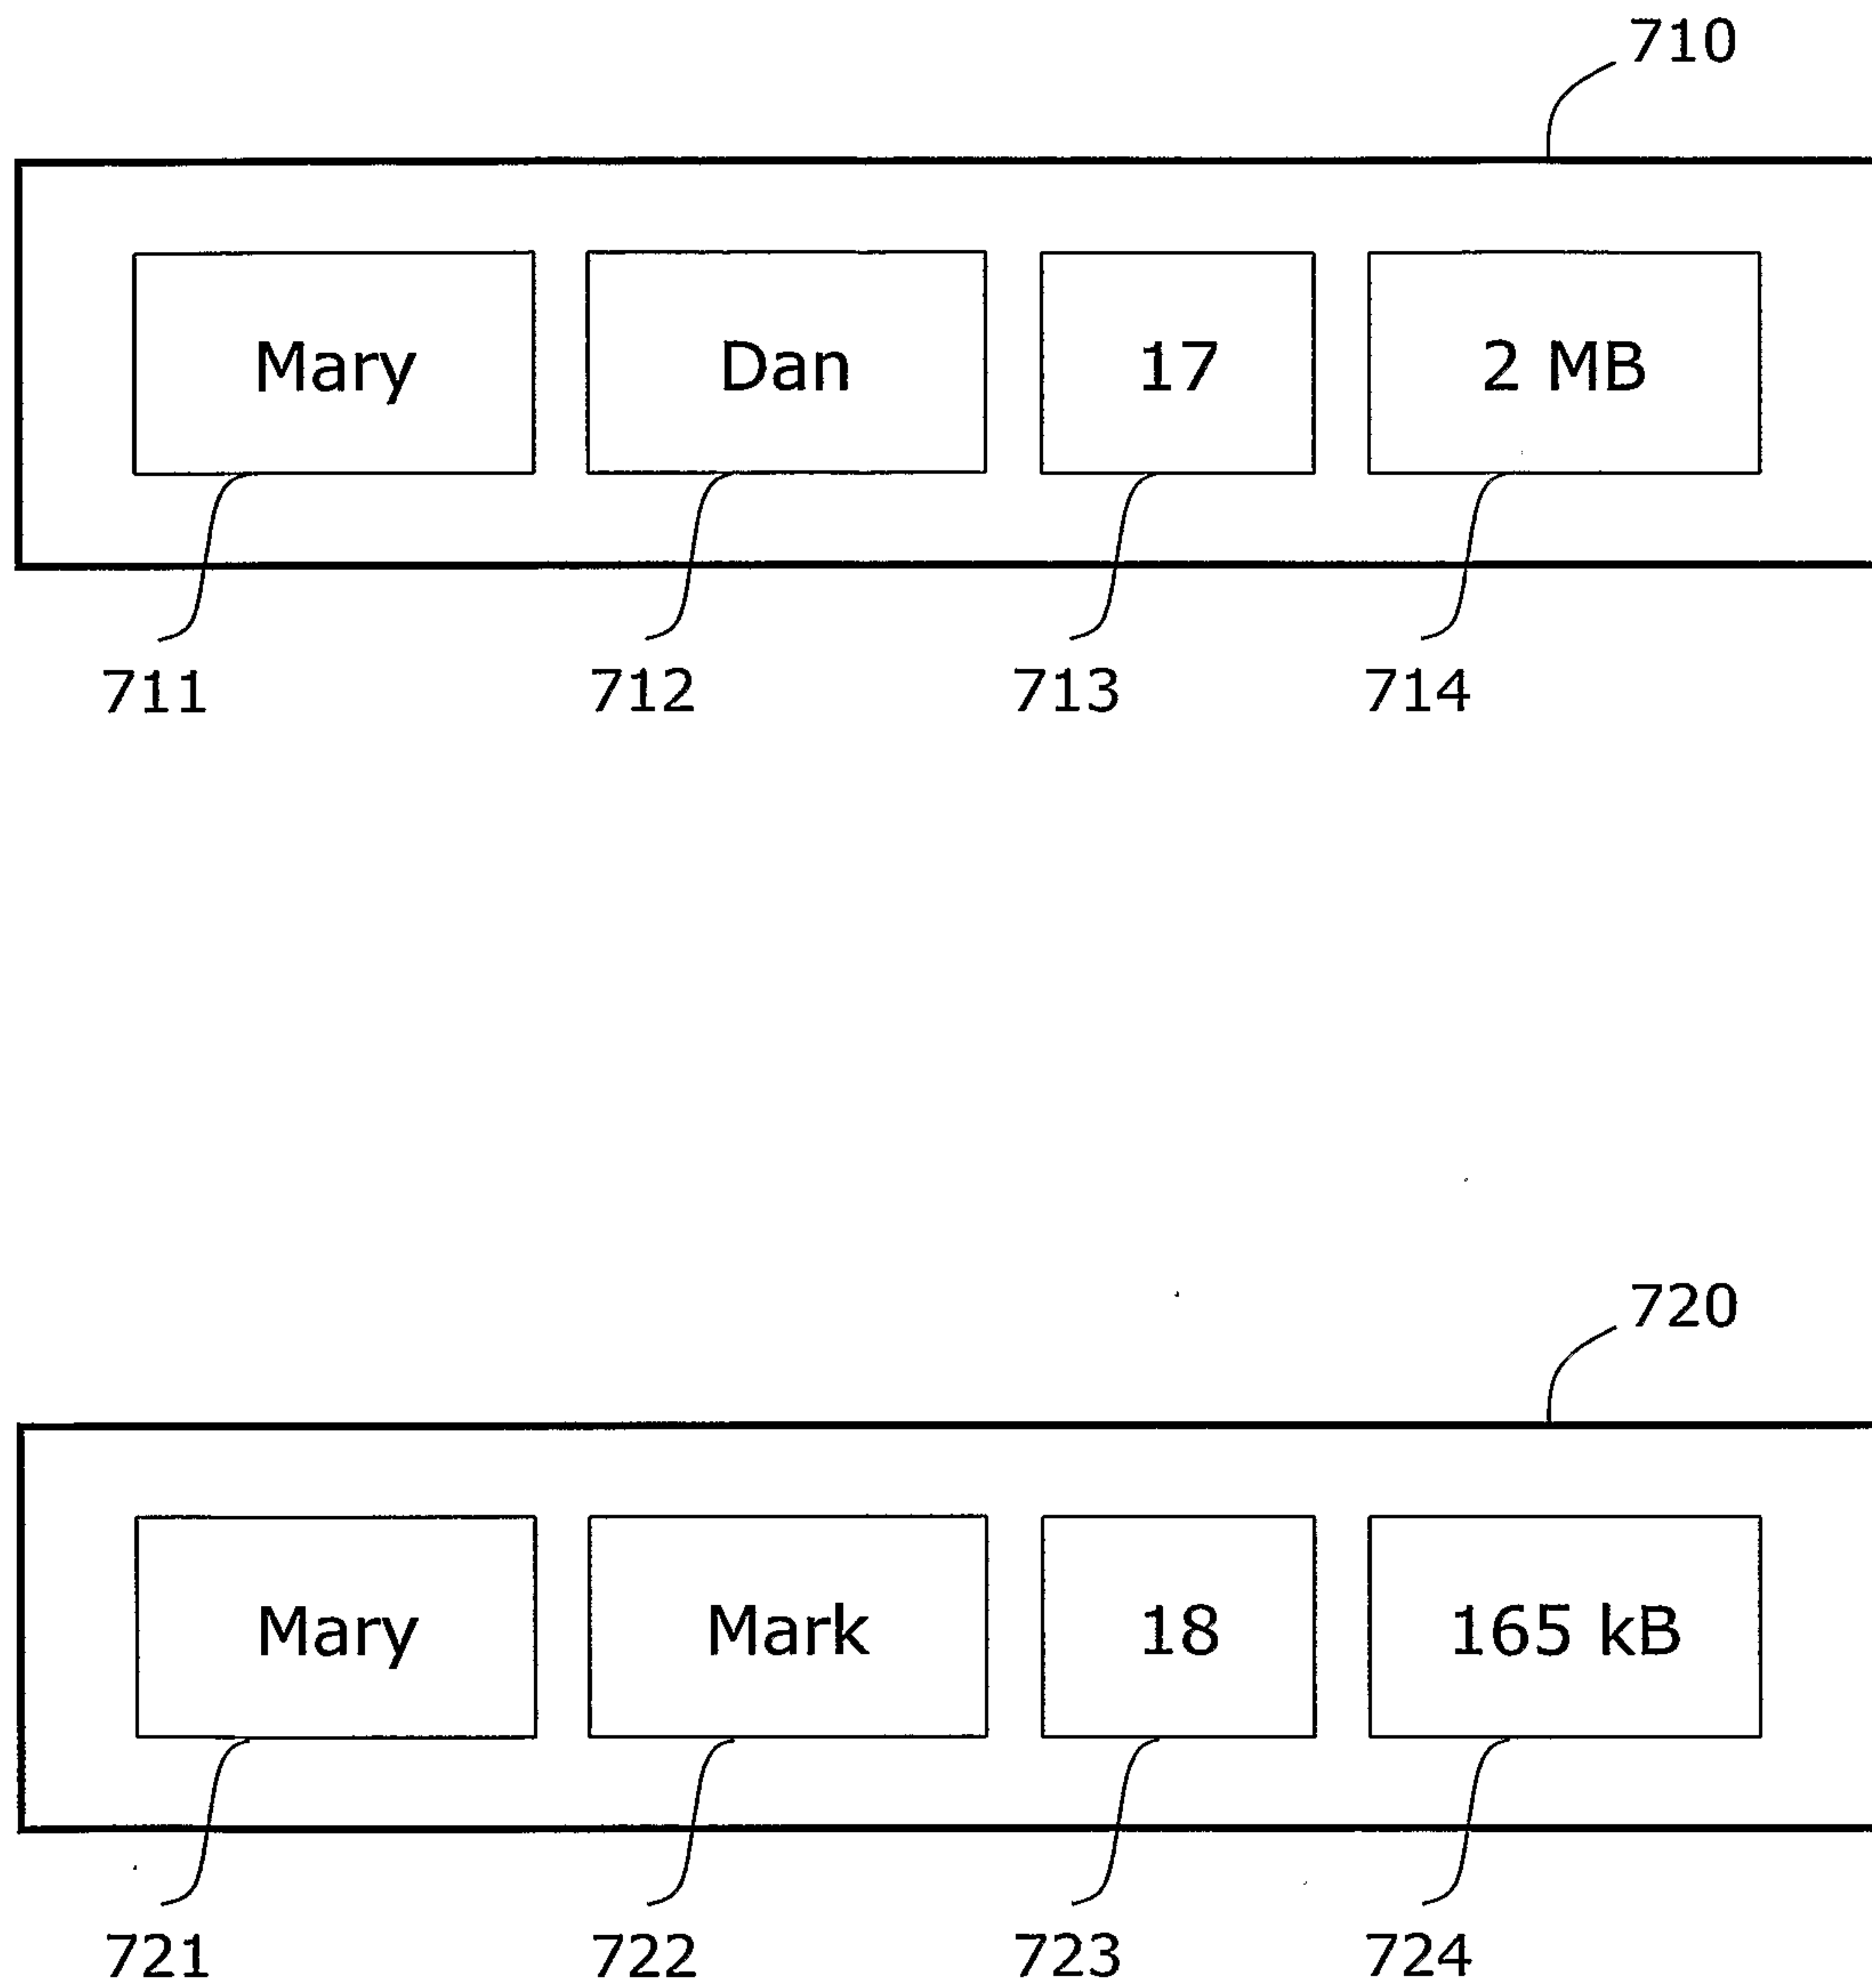


Fig. 7

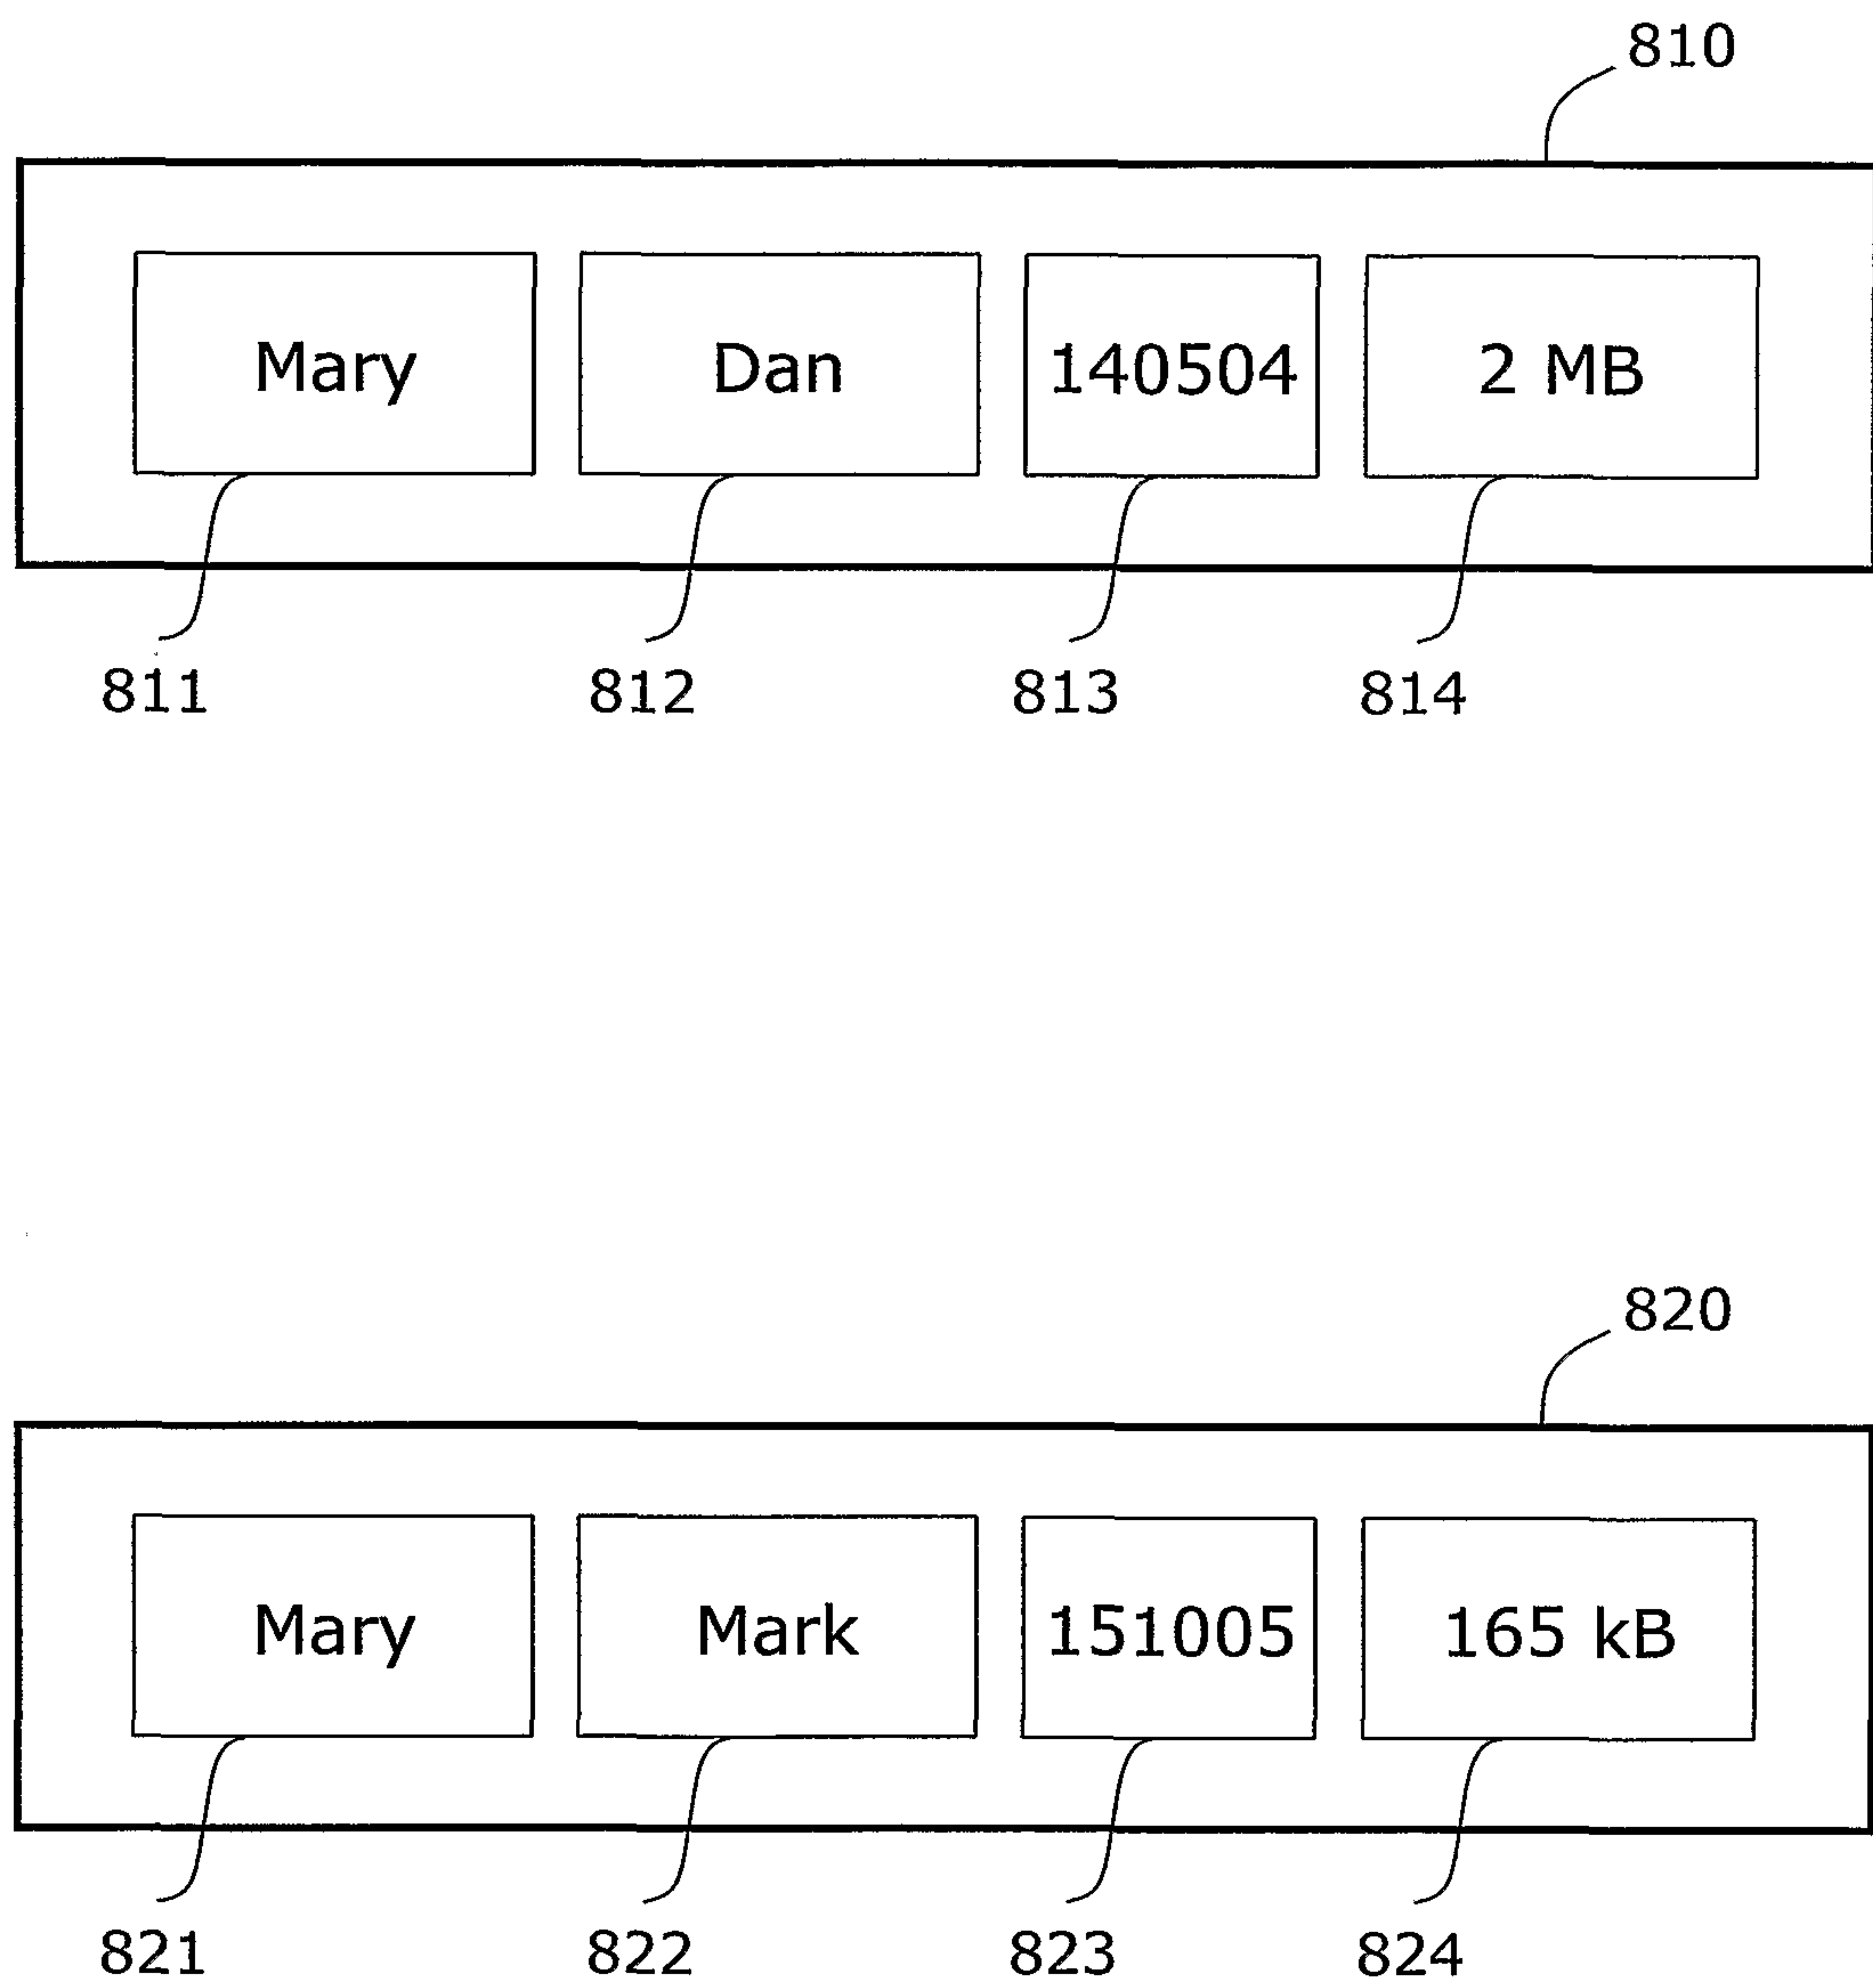


Fig. 8

