

(51) International Patent Classification:
B01D 53/62 (2006.01)(21) International Application Number:
PCT/US2013/053415(22) International Filing Date:
2 August 2013 (02.08.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/682,850 5 October 2012 (05.10.2012) US
61/715,933 19 October 2012 (19.10.2012) US(71) Applicants: SAUDI ARABIAN OIL COMPANY
[SA/SA]; Box 5000, Dhahran, 31311 (SA). ARAMCO
SERVICES COMPANY [US/US]; 9009 West Loop
South, Houston, TX 77096 (US).

(72) Inventor; and


(71) Applicant (for US only): HAMAD, Esam, Zaki [—/SA];
P.o. Box 13478, Saudi Aramco, Dhahran, 31311 (SA).(74) Agent: SPATH, Thomas, E.; Abelman, Frayne & Schwab,
666 Third Avenue, New York, NY 10017-5621 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PROCESS AND SYSTEM EMPLOYING PHASE-CHANGING ABSORBENTS OR MAGNETICALLY RESPONSIVE
SORBENT PARTICLES FOR ON-BOARD RECOVERY OF CARBON DIOXIDE FROM MOBILE SOURCES

FIG. 1

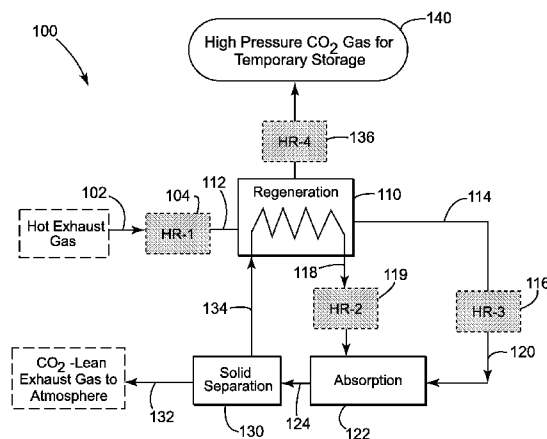(57) Abstract: A method and system are described for the on-board treatment of a hydrocarbon-fueled internal combustion engine (ICE) exhaust gas stream to reduce CO₂ emissions from the vehicle which include: a. contacting the exhaust gas stream with a CO₂ sorbent capture agent on board the vehicle to produce a mixture containing modified CO₂-containing sorbent and a treated exhaust gas stream with reduced CO₂ content; b. separating the modified CO₂-containing sorbent from the treated exhaust gas stream; c. passing the modified sorbent in heat exchange with heat from the ICE to release CO₂ and regenerate the CO₂ sorbent capture agent; d. recycling the regenerated CO₂ sorbent for use in step (a); e. discharging the treated exhaust gas stream having a reduced CO₂ content into the atmosphere; f. recovering and compressing the CO₂ for temporary storage on board the vehicle.

**PROCESS AND SYSTEM EMPLOYING PHASE-CHANGING ABSORBENTS OR
MAGNETICALLY RESPONSIVE SORBENT PARTICLES FOR ON-BOARD RECOVERY
OF CARBON DIOXIDE FROM MOBILE SOURCES**

RELATED APPLICATIONS

[001] This application claims priority to provisional patent applications USSN 61/682,850 filed October 5, 2012 and USSN 61/715,933 filed October 19, 2012, the contents of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

[002] The present invention relates to the reduction of carbon dioxide emissions from the exhaust gas stream of vehicles powered by internal combustion engines and other heat engines that produce waste heat.

Description of Related Art

[003] The currently accepted thinking is that global warming is due to emissions of greenhouse gases such as carbon dioxide (CO₂) and methane (CH₄). About a quarter of global CO₂ emissions are currently estimated to come from mobile sources, i.e., automobiles, trucks, buses and trains that are powered by internal combustion engines (ICEs). This proportional contribution is likely to grow rapidly in the foreseeable future with the projected surge in automobile and truck ownership in developing countries. At present, the transportation sector is a major market for crude oil, and controlling CO₂ emissions is both an environmental responsibility and a desirable goal in order to maintain the viability of the crude oil market in the

transportation sector in the face of challenges from alternative technologies, e.g., cars powered by electric motors and storage batteries. Regulations to limit CO₂ emissions from the tail pipe have been enacted in many countries.

[004] CO₂ management from mobile sources presents many challenges including space and weight limitations, the lack of any economies of scale and the dynamic nature of the operation of the ICEs powering the mobile sources.

[005] Prior art methods for the capture of CO₂ from combustion gases have principally focused on stationary sources, such as power plants. Those that address the problem of reducing CO₂ emissions from mobile sources employ either combustion using oxygen, provide no means for the regeneration and reuse of the CO₂ capture agent, and/or make no use of waste heat recovered from the hot source. Combustion using oxygen requires an oxygen-nitrogen separation step which is more energy-intensive than separating CO₂ from the exhaust gases and would be more difficult if attempted on board the vehicle.

[006] The focus of CO₂ capture technology has been on stationary or fixed sources. Processes have been developed that use amines and amine functionalized liquids and solutions to absorb CO₂ at temperatures ranging from ambient up to about 80°C. At temperatures above 100°C, and particularly in the range of from about 130°C to 300°C that are encountered in vehicles powered by an ICE, the amine solutions exhibit low capacity for CO₂ absorption. Thus, the high temperature of the ICE exhaust gas makes direct treatment to remove CO₂ with liquid amine solutions impractical without cooling the exhaust gas.

[007] The capture of CO₂ from mobile sources has generally been considered too expensive, since it involves a distributed system with a reverse economy of scale. The prior solution to the problem has appeared to be impractical due to on-board vehicle space limitations, the additional

energy and apparatus requirements and the dynamic nature of the vehicle's operating cycle, e.g., intermittent periods of rapid acceleration and deceleration.

[008] It is therefore an object of the present invention to provide a method, a system and an apparatus which address the problems of efficiently and cost-effectively reducing the CO₂ emissions from vehicles by temporary on-board storage of the CO₂.

[009] As used herein, the term "internal combustion engine," or ICE, includes heat engines in which a carbon-containing fuel is burned to produce power or work and generates waste heat that must be removed or dissipated.

[010] As used herein, the term "mobile source" means any of the wide variety of known conveyances that can be used to transport goods and/or people that are powered by one or more internal combustion engines that produce an exhaust gas stream containing CO₂. This includes all types of motor vehicles that travel on land, as well as trains and ships where the exhaust gas from the ICE is discharged into a containing conduit before it is discharged into the atmosphere.

[011] The term "vehicle" as used herein is to be understood as a convenient shorthand and synonymous with "mobile source" and is coextensive with "conveyances", generally, as that term is used above.

[012] As used herein, the terms "CO₂ capture agent" and "capture agent" mean a phase-changing absorbent liquid or a solid adsorbent material having a magnetic core that has a predictable capacity to absorb or adsorb CO₂ reversibly over a significant number of absorption/adsorption and desorption cycles.

[013] As used herein, the term "waste heat" is the heat that a typical engine produces which is contained mainly in the hot exhaust gases ranging from about 300°C to 650°C and the hot engine coolant from about 80°C to 120°C in liquid coolant systems. Additional heat is emitted and lost

by convection and radiation from the engine block and its associated components, and other components through which the exhaust gas passes, including the cylinders in air-cooled engines, the manifold, pipes, catalytic converter and muffler, and the engine's liquid coolant and the hot engine oil. This waste heat energy totals about 60-75% of the energy that typical hydrocarbon fuels provide.

[014] The ICE can be air-cooled, in which case there will be no source of hot engine coolant. However, the engine block and associated metal components can provide the heat required to release the CO₂ from, and thereby regenerate the CO₂ capture agent. In the case of a manual gear shift as distinguished from an automatic transmission, there will be no source of hot transmission fluid.

SUMMARY OF THE INVENTION

[015] The process and system of the present invention comprehends the absorption or adsorption of CO₂ from the exhaust gas stream of an ICE on board the vehicle using a chemical phase-changing absorbent, or a solid CO₂ capture agent having a magnetic core suspended in a carrying liquid. The sorption is reversible, e.g., as by increasing the temperature and/or reducing the pressure to cause the absorbed/adsorbed CO₂ to be released and the absorbent/adsorbent material to be regenerated to thereby permit the material to be recycled for further use in the process.

[016] One advantage of the present invention over prior art processes for reducing CO₂ emissions from fixed sources such as power generation facilities is the ready availability on board the mobile source of relatively high to moderate temperature waste heat. The cost of the heat energy is a major item of expense for CO₂ capture from fixed sources because the

temperature of the flue gases from a coal-fired or gas-fired electric power generation facility has been reduced in order to maximize the electrical energy generating values of the fuel and to minimize the amount of waste heat discharged into the environment. Flue gas temperature reduction is also important for capturing sulfur oxides (SO_x) and nitrogen oxides (NO_x) as pollutants in power plants that burn sulfur-containing fuels.

[017] The waste heat that a typical engine produces consists mainly of hot exhaust gases that can range in temperature from ~300°C to 650°C and hot coolant ranging from about 80°C to 120°C. This heat energy totals about 60-75% of the total energy that typical hydrocarbon fuels produce upon combustion in an ICE. The engine block, intake and exhaust manifolds, transmission housing, parts and fluid, as well as associated metal components are sources of this heat.

[018] Energy is needed to separate the CO₂ from the exhaust gases and to compress, liquefy or freeze all or part of the captured CO₂ for efficient on-board storage. This energy is typically a mix of work and heat energies. The work component of the energy is generated by using part of the waste heat to produce this work. Some waste heat can be used by direct heat exchange to regenerate the sorbent capture materials used in the CO₂ separation step of the process.

[019] The present invention solves the problems of space limitations and auxiliary power requirements by using the free energy that is available on board the vehicle as waste heat to capture CO₂ and increase its density for temporary storage until the vehicle is refueled, or otherwise can discharge the pressurized CO₂ gas or liquid, or the cold solid CO₂ for permanent storage. The use of the waste heat to provide the energy for capture, regeneration and densification significantly reduces the capture cost and the densification will reduce the volume requirement for temporary on-board storage of the CO₂. Converting the waste heat into

electrical or other useable forms of work energy also reduces or eliminates the amount of fuel that is consumed by the vehicle in contributing mechanical energy for the densification step, and thereby a corresponding reduction in the amount of CO₂ in the exhaust gas stream.

[020] The increase in the density of the captured CO₂ for efficient on-board temporary storage is accomplished by compression, liquefaction, or by freezing the gas to form solid CO₂, i.e., dry ice. The final density of the CO₂ will be in the range of from 5-1600kg/m³, depending upon its state, i.e., gas, liquid and/or solid. At least a part of the total work energy required for the densification is obtained from the waste heat by using heat-to-power conversion.

[021] During start-up of the CO₂ capture cycle, or to meet a temporary requirement of other special operational needs of the vehicle, part of the engine's power or, alternatively, the electricity stored in on-board batteries can be used. During the normal operation of the system, at least a portion of the energy required for CO₂ capture and densification will come from conversion of the ICE's waste heat into, e.g., electrical energy.

[022] The invention broadly comprehends a method and system for the treatment on-board a vehicle of a CO₂-containing hot exhaust gas stream emitted by a hydrocarbon-fueled internal combustion engine (ICE) used to power the vehicle in order to reduce the amount of CO₂ discharged into the atmosphere which includes:

a. contacting the exhaust gas stream with a novel CO₂ capture agent on board the vehicle to produce a mixture of (i) a modified sorbent with captured CO₂ and (ii) a treated exhaust gas stream having a correspondingly reduced CO₂ content, where the capture agent is selected from a phase-changing liquid that reversibly reacts with CO₂ to form a new solid or liquid phase, or magnetically responsive sorbent particles formed from a magnetic core securely coated with a CO₂ adsorbing material;

- b. separating the modified sorbent with captured CO₂ from the treated exhaust gas stream;
- c. passing the modified sorbent with captured CO₂ in heat exchange relation with the hot exhaust gas stream emitted by the ICE, or with the vehicle's hot coolant, hot engine oil or transmission oil, or the hot engine block, manifold or other metal component part or parts to release the captured CO₂ as a gas stream and to regenerate the CO₂ capture agent using heat from the exhaust gas stream to reduce the temperature of the exhaust gas stream before it is brought into contact with the CO₂ capture agent in step (a);
- d. recycling the regenerated CO₂ capture agent for use in step (a);
- e. discharging the treated exhaust gas stream having a reduced CO₂ content into the atmosphere;
- f. recovering an essentially pure CO₂ gas stream;
- g. compressing the recovered CO₂ on board the vehicle to reduce its volume; and
- h. temporarily storing the compressed CO₂ on board the vehicle.

[023] In one embodiment of the present invention, the CO₂ capture agent employed is a phase-changing reactive liquid. In this process, the temperature of the exhaust gas stream is reduced prior to intimate mixing with an excess of the reactive liquid. The CO₂ reacts reversibly with the liquid to form a new solid or liquid phase which is not soluble in the remaining reactive liquid, and the remaining exhaust gas stream that has a reduced CO₂ content is separated and discharged into the atmosphere as the CO₂-lean exhaust gas stream. After separation of the remaining exhaust gas, the temperature of the reactive liquid and CO₂-containing compound is raised to promote the reverse reaction and release the CO₂ as a gas, which is then separated from the

reactive liquid and the CO₂ is recovered for temporary storage on board the vehicle. The regenerated reactive liquid is cooled by passage through a heat exchanger, e.g., by ambient air.

[024] In a preferred embodiment, the phase-changing liquid is a switchable ionic liquid (SIL). SIL's are extremely effective in CO₂ capture and can be easily regenerated and recycled, and are relatively easy to prepare compared to so-called "classical" ionic liquids. SILs have been found to be efficient absorbents at atmospheric pressure. The SILs can be selected from the group consisting of liquid di-amines and compounds that are functionalized with one or more amine groups that reversibly combine with CO₂. Examples of SILs include the compound listed below in Table 1 and mixtures of an amidine such as 1,8-diazabicyclo[5.4.0] undec-7-ene (DBU), with an alcohol such as 1-hexanol or an amino alcohol such as 6-amino-1-hexanol. See E, Privalova et al., *CO₂ removal with 'switchable' versus 'classical' ionic liquids*, Separation and Purification Technology 97 (2012) 42-50, the disclosure of which is hereby incorporated by reference.

[025] In another embodiment, the CO₂ capture agent is in the form of solid particles comprised of a CO₂ sorbent material applied to a magnetic core. As used in this embodiment, the term "magnetic core" means a material that is responsive to a magnetic field and will move predictably in the presence of an applied magnetic field. The magnetic core carrying a coating or outer surface layer of a material that is a sorbent for CO₂ will be referred to in the description of the invention that follows as a "magnetically responsive sorbent particle", and will be understood to be a discreet and durable structure that is sufficiently responsive to the localized magnetic field to move through a liquid carrier of predetermined viscosity to effect a ready separation of the coated magnetic particles. As prepared, these particles are dry and flowable with a hard exterior coating that is resistant to cracking and powdering.

[026] The magnetically responsive sorbent particles are mixed with the optionally cooled exhaust gas stream to adsorb or absorb CO₂. The solid particles with captured CO₂ are separated from the remaining exhaust gas stream of reduced CO₂ content which is discharged into the atmosphere. The CO₂ is released and separated from the solid magnetically responsive sorbent particles by increasing the temperature of the particles by heat exchange with waste heat from the ICE. The CO₂ is recovered as a separate gas stream as described above for temporary on-board storage and the now regenerated sorbent on the solid particles are recycled for use in the process.

[027] In another aspect of this embodiment of the invention, a process or method is provided for preparing a magnetically responsive sorbent particle that is a magnetic nanoparticle. The process for producing the coated magnetic nanoparticles comprises of three principal steps. First, magnetite particles are synthesized by co-precipitation of iron (II) and iron (III) to form Fe₃O₄ (magnetite) nanoparticles. Conventionally, magnetite is prepared by adding a base to an aqueous mixture of Fe²⁺ and Fe³⁺ chloride at a 1:2 molar ratio. The particles are also commercially available from chemical suppliers, such as SigmaAldrich, with 5, 10, 20 and 50 nm average particle size. The second step is to prepare a mixed salt slurry, or mixed salt solution of the desired coating or shell material that will adsorb CO₂. The third step is to coat the slurry or the solution onto the magnetic particles and then dry and calcine the particles at the appropriate temperature. Any of various known industrial processes can be employed to coat the magnetic particles with the CO₂ sorbent material. For example, spray drying can be used to produce large quantities of the coated magnetic particles after dispersing the core magnetic particles in the desired solution.

[028] Other types of particles can also be used. For example, the preparation of amine-coated magnetic particles is described in Colloids and Surfaces A, **346**, 221-228, 2009. The preparation of zeolite coated magnetic particles is described in Advanced Material **21**, 1377-1382, 2009. A method of preparing activated-carbon coated magnetic particles is described in Chemosphere **85**, 1269-1276, 2011.

[029] Suitable solid capture reagents include metal carbonates, bi-carbonates, metal oxides such as MgO and CaO or mixed metal oxides, activated carbons, zeolites, metal-organic framework (MOF) materials and organic-inorganic hybrids. The magnetic core can be formed from magnetic materials such as iron, cobalt, and their respective oxides. See, for example, The American Institute of Chemical Engineers (AIChE) Journal, Vol. 50, No. 11, 2835, November 2004 for these materials.

Example 1

[030] A conventional gasoline used to fuel an ICE produces an exhaust gas stream having a composition in mole percent of 13% CO₂, 13% water vapor (H₂O), 73% nitrogen and 1% of other inert gases. Table 1 shows the calculated estimation of the maximum CO₂ capture capacity from this exhaust gas steam for liquid 1,3-Bis(3-aminopropyl)-1,1,3,3-tetramethyldisiloxane at an optimum capture temperature in the range of from 35° to 55°C.

Table 1

Liquid	Estimated maximum CO ₂ capacity at optimum capture temperature
	16 wt%

Example 2

[031] This example assumes the same composition of an exhaust gas in mole percent, e.g., 13% CO₂, 13% water vapor (H₂O), 73% nitrogen and 1% of other inert gases. Table 2 shows the calculated estimation of the optimum CO₂ capture temperature, CO₂ capacity and regeneration temperature of MgO solid capture reagent preparations.

Table 2

Suspension of MgO based particles in liquid	Estimated Range of optimum CO ₂ capture temperature, °C	Estimated Regeneration Temperature, °C	Estimated maximum CO ₂ capacity at optimum capture temperature
25 wt% solid sorbent	250-325	> 400	14 wt%
50 wt% solid sorbent	250-325	> 400	27 wt%

[032] In the example of Table 2, it is assumed that only half of the MgO is available for reaction with CO₂.

[033] The magnetically responsive zeolites can be prepared by combining sol-gel synthesis with a vapor phase transport process, in which microspheres of magnetically responsive material (i.e., magnetite) are coated with a layer of silica via sol-gel process. The silica-coated microspheres are modified with a cationic polyelectrolyte, such as poly (diallyldimethylammonium chloride), to deposit the negatively charged zeolitic seeds. The seeded microspheres are subjected to vapor phase transport process to convert the silica to zeolite crystals. See, e.g., Deng et al., "Synthesis of Core/Shell Colloidal Magnetic Zeolite Microspheres for the Immobilization of Trypsin," Advanced Materials, 21, 1377-1382, 2009, the disclosure of which is incorporated herein by reference.

[034] In addition to the core/shell structure described above, other structures including both solid capture agents and magnetic materials have been disclosed in the art. For example,

magnetite nanoparticles can be impregnated into the pores of activated carbon using nitric acid as a carbon modifying agent followed by calcination. See Do et al., "Activated Carbon/Fe₃O₄ Nanoparticle Composite: Fabrication, Methyl Orange Removal and Regeneration by Hydrogen Peroxide," Chemosphere, 85, 1269-1276, 2011, the disclosure of which is incorporated herein by reference. Magnetic MOF nanocomposites can be synthesized by incorporation of magnetite nanorods with MOF nanocrystals of Cu₃(BTC)₂ (HKUST-1). See Ke et al., "Facile Fabrication of Magnetic Metal-Organic Framework Nanocomposites for Potential Targeted Drug Delivery," Journal of Materials Chemistry, 21, 3843-3848, 2011, the disclosure of which is incorporated herein by reference.

[035] The liquid carrier can be one or a combination of (a) a high boiling temperature liquid or a eutectic salt mixture that provides stability to the particles by kinetic or thermodynamic means; or (b) a high boiling temperature solution of a material that stabilizes the suspended particles by kinetic or thermodynamic means.

[036] The following are examples of various organic and inorganic eutectic mixtures, with their melting temperatures indicated parenthetically.

Examples of Eutectic Mixtures

Organic:

Choline chloride 50% and malonic acid 50% (10°C)

Choline chloride 50% phenylpropionic (20°C)

Choline chloride 50% phenylacetic (25°C)

Choline chloride 50% and oxalic Acid 50% (34°C)

Naphthalene 44% and biphenyl 56% (39°C)

Inorganic:

KNO_3 58%, $\text{Ca}(\text{NO}_3)_2$ 11% LiNO_3 31% (117°C)

NaNO_3 18%, KNO_3 52%, LiNO_3 30% (120°C)

NaNO_3 21%, KNO_3 49%, $\text{Ca}(\text{NO}_3)_2$ 30% (133°C)

NaNO_3 50%, KNO_3 50%, (221°C)

NaNO_3 83.2%, NaOH 17.8% (250°C)

K_2CO_3 16.4%, Li_2CO_3 26.4%, LiOH 57.1% (372°C)

K_2CO_3 26.8%, Na_2CO_3 30.6%, Li_2CO_3 42.5% (393°C)

[037] A preferred method of using eutectic mixtures is (a) when the melting temperature is below the CO_2 capture temperature of the material, and (b) when the particle-eutectic mixture interactions contribute to stabilizing the particles in the mixture.

[038] FIG. 3 is a chart illustrating the typical variation of CO_2 adsorption capacity in relation to the operating temperature of solid particles formed from $\text{MgO}:\text{Na}_2\text{CO}_3:\text{NaNO}_3$ in a mass ratio of 75.8:16:8.2. A spray drying process provides particles with more internal pathways for diffusion of CO_2 to the interior of the particle, and thus more surface area of MgO is available to react with the CO_2 . The CO_2 adsorption capacity is about 23% at 300°C for a spray dried particle, which is the optimum temperature for this type of adsorbent.

[039] In the regeneration unit, heat is transferred from the exhaust gas stream to the sorbent having the captured CO_2 to release CO_2 . Heat transfer can be accomplished using conventional heat exchange or heat transfer methods such as conduction or vapor condensation. For example, heat can be supplied to the sorbent slurry using a thermal conducting material, such as metal. If the sorbent is passed through tubes, the heat can be provided to the outside of tubes using conduction through by passing the hot exhaust gas stream through the shell. Fins, metal mesh inside the tubes and other designs and known techniques can be used to increase the surface area

in contact with the sorbent and enhance the heat transfer. Fins and other surface configurations can also be used on the outer shell of the tube to enhance the heat transfer of the system.

[040] The absorption unit provides direct intimate contact between the exhaust gas and the capture agent. Suitable devices include static and dynamic mixers, packed and tray columns and membrane contactors.

[041] Kinetically stable colloids owe their observed stability to energetic and/or entropic barriers, the origin of which is largely accounted for by the well-known DLVO theory. Thermodynamically stable colloidal suspensions owe their stability to a very low interfacial tension between the continuous and dispersed phases. The details of kinetic and thermodynamic stability are well known and widely reported in the field of colloid science.

[042] The following steps are employed to improve stability of the colloidal solution:

- a. adsorption of chain molecules;
- b. particle surface modification to increase repulsion between particles; and
- c. reduction of the particle size.

[043] The particular materials utilized and the method of manufacture of the magnetically responsive sorbent particles are selected to produce a durable product that can be subjected to repeated use and regeneration in order to have an economically useful lifespan.

[044] Other aspects, embodiments, and advantages of the process of the present invention are discussed in more detail below. It is to be understood that both the foregoing information and the following detailed description include illustrative examples of various aspects and embodiments that provide an understanding of the nature and character of the claimed features and embodiments. The accompanying drawings are included as examples to provide a further understanding of the various aspects and embodiments of the process and system.

BRIEF DESCRIPTION OF THE DRAWINGS

[045] The foregoing summary, as well as the following detailed description will be best understood when read in conjunction with the attached drawings in which:

[046] FIG. 1 is a schematic diagram of a system and apparatus for the practice of a CO₂ absorption process using chemical phase-changing sorbents in accordance with the invention;

[047] FIG. 2 is a schematic diagram of a system and apparatus for the practice of a CO₂ adsorption process in accordance with the invention using a solid capture reagent having a magnetic core; and


[048] FIG. 3 is a chart illustrating the typical variation of CO₂ absorption capacity in relation to the operating temperature of a high boiling temperature colloidal solution of very small particles.

DETAILED DESCRIPTION OF THE INVENTION


[049] The invention will be further described in more detail with reference to FIG. 1 which illustrates an embodiment of a system and apparatus 100 for the practice of a CO₂ absorption process which uses a chemical phase-changing sorbent. System 100 includes a regeneration zone 110, a chemical absorption/adsorption zone 122, a solid separation unit 130 and several heat recovery (HR) units as described in more detail below. In this description, it will be understood that each of the zones identified can contain one or more corresponding unit operations with one or more known pieces of apparatus which accomplish the functions and steps in the practice of the process of the invention.

[050] Chemical sorbents such as liquid di-amines and other liquids functionalized with amine groups that form a reversible chemical bond with CO₂ as described above can be used in the

process of the invention. An example of a suitable chemical sorbent is liquid GAP-0 carbamate which reversibly reacts with CO₂ to form a new solid compound. The reaction proceeds as follows:



[051] The captured CO₂ can be released from the sorbent by heating the solid material, in which process the solid sorbent changes back to the liquid phase, as represented by the following:



[052] In the chemical process of CO₂ capture, a hot exhaust gas stream 102 from a vehicle's ICE passes through a first heat recovery unit 104 that is also referred to as HR-1, that operates at the original high temperature of the exhaust gas stream emitted from the ICE, e.g., 300°C to 650°C, to convert some of the waste heat into electrical or mechanical energy. The moderately cooled exhaust gas stream 112 is then passed to the regeneration unit 110 where liquid sorbent is regenerated by reaction (2) above, in heat exchange using heat from the exhaust gas stream. It will be understood that the exhaust gas stream and sorbent are not in direct contact with each other in the regeneration unit 110. The liquid sorbent 118 is discharged from the regeneration unit at a temperature ranging from 65°C to 150°C and is passed to a heat recovery unit 119, also referred to as HR-2, to lower the temperature of the sorbent to a predetermined value. The cooled exhaust gas stream 114 is conveyed to a heat recovery unit 116, also referred to as HR-3, to further lower its temperature to a predetermined value in the range of from 35° to 55°C. The temperature of stream 114 will depend on many factors and is subject to overall process

optimization. The factors that affect this temperature include the heat of sorbent regeneration, flow rates and the amount of CO₂ that is to be captured from the exhaust gas stream 102.

[053] Exhaust gas stream 120 is then brought into contact with the cooled liquid sorbent in the chemical absorption/adsorption unit 122 where CO₂ in the exhaust gas is reacted with a portion of the liquid sorbent in accordance with reaction (1) as described above. The reaction product forms a slurry 124 with the remaining liquid sorbent precursor in the absorption unit and is separated from the exhaust gas in the separation unit 130 using an appropriate apparatus such as a conventional cyclone or a filter (not shown). If the newly formed phase is a liquid, then a liquid/liquid separation decanter is used to separate the CO₂-containing, or CO₂-rich phase from the rest of the liquid

[054] The separated liquid slurry 134 passes to the regeneration unit 110 where its temperature is raised by heat exchange with the hot exhaust gas stream 112 to a predetermined value at which the CO₂ is released in accordance with reaction scheme (2) above to produce regenerated liquid sorbent. The remaining lean exhaust gas stream 132 containing a reduced amount of CO₂ is released to the atmosphere. The pressure and temperature of CO₂ released in the confined space of the regeneration unit 110 could be relatively high. The temperature can be reduced by passage through a heat recovery unit 136, also referred to as HR-4, after which the CO₂ is transferred to a pressure tank 140 for temporary storage, or subjected to further densification. A storage tank having external heat exchange fins (not shown) that is in contact with ambient air can be used to effect a temperature reduction of the CO₂ gas inside.

[055] Another embodiment of the process of the invention is illustrated in FIG. 2 which shows a system and apparatus 200 for capturing CO₂ using a solid capture reagent in the form of the magnetically responsive sorbent particle described above that is suspended in a liquid carrier.

System 200 includes a regeneration unit 210, an absorption/adsorption unit 222, a magnetic separation unit 230 and several heat recovery devices, identified as HR-1 through HR-4 in Fig. 2. The CO₂ capture mechanism used can be physical or chemical sorption. Examples of physical adsorption occur with zeolite-coated magnetic particles and activated carbon-coated magnetic particles that are described above. Examples of chemical absorption occur with amine-coated magnetic particles and the magnesium-sodium mixed salts are described in patent application USSN 13/744,992 entitled “Mixed Salt CO₂ Sorbent, Processes for Making and Uses Thereof”, the disclosure of which is incorporated herein by reference.

[056] A liquid suspension of magnetically responsive sorbent 218 is circulated in the system of 200 to capture and release CO₂. Captured CO₂ is released by heating the capture agent 134 and the operation of the system is similar to that of FIG. 1, as described above. The cooled exhaust gas stream 120 leaving HR-3 enters absorption unit 222. After the step of absorption in unit 222, the liquid suspension of particles 224 is passed to the magnetic separation unit 230 where it is subjected to a magnetic field 236 that causes the particles to rapidly migrate towards one of the poles, thereby separating the particles from the liquid carrier 238, e.g., by gravity flow of the liquid. The liquid, which now is free of the particles containing CO₂, is recycled to the absorption/adsorption unit 222 to be mixed with regenerated particles 218.

[057] The particles with absorbed CO₂ are removed from the magnetic field 236, as by mechanical means, such as a moving screen or passing scraper and passed as particle stream 134 to the regeneration unit 210. Essentially pure CO₂ is desorbed by heat exchange of the particles 134 with the hot exhaust gas, stream in regenerator 210 and processed as described above in Fig. 1.

[058] For some applications, the suspension liquid preferably has a relatively low vapor pressure, e.g., a high boiling point, and a portion remains to wet the surface of the particles after separation in order to facilitate their handling and flow. In other applications, processing of dry particles is preferred and a suspension liquid with a relatively low vapor pressure is used so that it does not vaporize when the particles are heated to release the CO₂. A suspension liquid with a relatively high vapor pressure would require another unit to condense the liquid vapors that might otherwise leave the regeneration unit with CO₂.

[059] The CO₂ densification can be accomplished by single or multiple stage compressors with an appropriate active/passive cooling system to ensure pressurization, liquefaction and/or solidification of CO₂ for its temporary on-board storage. The CO₂ storage can be in a single tank 140 or in multiple tanks (not shown) on board the mobile source. The vehicle's fuel tank(s) can also be used to store the captured CO₂ by means of a moving partition or a flexible membrane between the fuel side and the CO₂ side storage. Control of all of the system components can be integrated with the mobile source's control system or a separate control system to optimize performance.

[060] FIGs. 1 and 2 identify locations for placement of heat recovery (HR) components. Single or multiple technologies can be used to convert the waste heat to electrical energy or work to compress the CO₂ and to power the auxiliary equipment. The size or capacity, location and operating conditions of the HR components are determined based upon the availability of waste heat, e.g., from the engine exhaust gas stream. This will include both temperature and the volumetric flow rate of the waste heat stream, whether it be the exhaust or engine coolant. A single or more than one type of heat recovery component can be employed depending upon the nature of the waste heat stream and its temperature and flow conditions. The operation of the

heat/energy recovery system can be controlled by a pre-programmed processor and controller that receives data from temperature and flow sensors, and that is in controlling communication with flow-regulating valves.

[061] The type of heat recovery component(s) used in the practice of the invention can include, but are not limited to the following types of apparatus.

1. Thermoelectric devices, or modules, that generate electric power. The hot side of the thermoelectric module is installed on the exhaust gas or other hot engine component side and the cold side is installed in a closed cooling system referred to as an active system or exposed to air (a passive system). The thermoelectric module(s) remove part of the heat from the hot side and generate electrical power that can be used to operate the densification apparatus and/or other on-board equipment.

2. A Stirling engine in which the waste heat from the ICE exhaust gas stream is supplied to the wall of one or more cylinders of the engine to expand the gas in the cylinder to thereby drive a piston that can perform the necessary mechanical work to run the densification compressor or to run the compressor of a compression refrigeration cycle unit that provides cold refrigerant to liquefy or solidify the CO₂.

3. A steam or organic Rankine cycle in which a generator provides steam or organic vapors to a turbine which generates mechanical work to run the densification compressor or to run the compressor of a compression refrigeration cycle unit that provides cold refrigerant to liquefy or solidify the CO₂.

4. A small shape memory alloy engine or compressor that utilizes the waste heat to change the shape of an alloy such as CuSn, InTi, TiNi, and MnCu, and generates mechanical work that is used to increase the density of the captured CO₂. The engine compressor works by

having a hot side and a cool side of the alloy to generate the compression needed. The following patents describe heat engines based on these types of specialized alloys: USP 3,913,326; USP 4,055,955; USP 5,442,914; USP 7,444,812; and published application 2009/0315489. The disclosures of these patent documents are incorporated herein by reference.

[062] Thermoelectric devices used to convert the waste heat to electrical energy can be placed in different locations and arrangements to optimize the energy conversion. The thermoelectric devices can be secured in heat-conductive contact with the exhaust pipe, capture components, engine block or other engine components as the hot side of the device. The cold side of the thermoelectric device can be exposed to air convection to cool the device. The cold side of the thermoelectric device can also be in contact with an active cooling system, e.g., a circulating liquid, to facilitate heat transfer and also control the thermoelectric module's performance. The circulating liquid can be cooled by one or a combination of radiation and convection, e.g., using ambient air.

[063] The thermoelectric devices can be configured in various shapes such as cylindrical or rectangular pipes in order to minimize the pressure drop effects on the exhaust gases. Internal and/or external fins can also be used to enhance the heat transfer of the thermoelectric devices and hence their performance. One or more thermoelectric devices can be mounted in close proximity to, or directly on the engine block, exhaust manifold or other metal components described above in order to take maximum advantage of the high temperatures and temperature differentials. Appropriate materials are selected that will withstand the high temperatures.

[064] Electrical power generated using thermoelectric module(s) can be supplied to an electrical storage system, e.g. batteries, which in turn supply the electrical power to the densification apparatus and/or other equipment. Selection of the semiconductors for the

thermoelectric module(s) is based upon the temperature range of the application. Stacking of different thermoelectric devices can be used to optimize the heat recovery and hence the electrical energy generation.

[065] Single or multiple heat recovery systems can be installed on the exhaust gas and coolant systems. Furthermore, single or multiple heat recovery systems can be installed to generate the required power and effectively control the temperature of the exhaust gas.

[066] In addition to supplying power, the heat recovery component(s) can be used to control the temperature of the exhaust gas and hence optimize the performance of the CO₂ capture agent.

[067] As will be understood from the above description and examples, the methods and systems of this invention are suitable for use in a wide range of mobile sources such as passenger vehicles, trucks, buses, heavy-duty vehicles, train, ships and others that operate through the combustion of hydrocarbon fuels. This invention can be installed on new mobile sources or by retrofitting existing mobile sources.

[068] The present invention addresses post-combustion CO₂ capture and on-board storage from mobile sources. To minimize operational cost and equipment requirements, the available heat, which is conventionally discharged into the atmosphere, is used to provide the energy needed to separate the CO₂ extracted from the combustion gases from the absorbent material, or capture agent, and to compress/liquefy all or part of the produced CO₂ for efficient on-board storage. The captured CO₂ can be stored on board until refueling, when it is discharged or removed for recovery at the fueling station.

[069] The method and system of the present invention have been described above and in the attached drawings; however, modifications derived from this description will be apparent to

those of ordinary skill in the art and the scope of protection for the invention is to be determined by the claims that follow.

CLAIMS:

1. A method for reducing the amount of CO₂ discharged into the atmosphere with an exhaust gas stream emitted by an internal combustion engine (ICE) used to power a vehicle, the method comprising:

a. contacting the exhaust gas stream with a CO₂ capture agent on board the vehicle to produce a mixture containing a modified sorbent having captured CO₂ and a treated exhaust gas stream having a reduced CO₂ content, where the capture agent is selected from a phase-changing liquid that reversibly reacts with CO₂ to form a new solid or liquid phase, and magnetically responsive sorbent particles formed from a magnetic core securely coated with a CO₂ adsorbing material;

b. separating the sorbent having captured CO₂ from the treated exhaust gas stream;

c. passing the sorbent having captured CO₂ in heat exchange relation with hot engine coolant, transmission fluid, a hot engine compound or the hot exhaust gas stream before the exhaust gas stream is brought into contact with the CO₂ capture agent to release CO₂ and regenerate the CO₂ capture agent;

d. recycling the regenerated CO₂ capture agent for use in step (a);

e. discharging the treated exhaust gas stream having a reduced CO₂ content into the atmosphere;

f. recovering an essentially pure CO₂ gas stream;

g. compressing the recovered CO₂ on board the vehicle to reduce its volume; and

h. temporarily storing the recovered CO₂ on board the vehicle.

2. The method of claim 1 which includes converting heat from the hot exhaust gas stream emitted by the ICE, or the hot engine coolant, hot engine oil, transmission fluid or a hot engine structural component into energy by contact with an energy conversion device, and using the heat-generated energy recovered to compress the CO₂ in step (g).
3. The method of claim 1 which operates substantially continuously following start-up of the vehicle's ICE.
4. The method of claim 1, wherein the phase-changing liquid is an ionic liquid, or switchable ionic liquid.
5. The method of claim 4, wherein the ionic liquid is GAP-0 carbamate.
6. The method of claim 4, wherein the phase-changing liquid is selected from the group consisting of liquid di-amines and compounds that are functionalized with one or more amine groups that reversibly combine with CO₂.
7. The method of claim 1, wherein the magnetically responsive sorbent particles are suspended in a liquid carrier.

8. The method of claim 7, wherein the liquid carrier is selected from the group consisting of high boiling point liquids or eutectic salt mixtures.
9. The method of claim 7, wherein the magnetically responsive sorbent particles are separated from the treated exhaust gas stream by passing the liquid carrier through a magnetic field.
10. The method of claim 7, wherein the solid sorbent is selected from the group consisting of metal carbonates, bi-carbonates, oxides, activated carbon, zeolites, metal-organic framework (MOF) materials and organic-inorganic hybrid materials.
11. The method of claim 7, wherein the magnetic core is selected from the group consisting of iron, cobalt and oxides of iron and cobalt.
12. The method of claim 7, wherein the liquid carrier is one or a combination of (a) a high boiling temperature liquid or a eutectic salt mixture that stabilizes the particles kinetically or thermodynamically; or (b) a high boiling temperature solution of a material that stabilizes the suspended particles kinetically or thermodynamically.

13. A system for on-board treatment of an exhaust gas stream containing CO₂ emitted by a hydrocarbon-fueled internal combustion engine used to power a vehicle in order to reduce the amount of CO₂ discharged from the vehicle into the atmosphere, the system comprising:

a. an absorption zone containing a CO₂ capture agent for removing CO₂ from the exhaust gas stream,

the absorption zone having an inlet for receiving the CO₂ capture agent stream and an inlet for introducing the exhaust gas stream,

the absorption zone also having an outlet for discharging a mixture of a the agent with captured CO₂ and a treated exhaust gas stream having a reduced CO₂ content;

b. a separation zone for separating the sorbent having captured CO₂ from the treated exhaust gas stream; and

c. a regeneration zone for releasing the CO₂ and regenerating the capture agent using heat exchange with a hot fluid that includes one or more of the exhaust gas stream, hot engine coolant or transmission fluid,

the regeneration zone including a heat exchanger with an inlet for admitting the agent with captured CO₂ and an inlet for introducing the hot fluid,

the regeneration zone also having an outlet for discharging the regenerated CO₂ capture agent, an outlet for the released CO₂, and an outlet for discharging a cooled fluid stream.

14. A system for on-board treatment of an exhaust gas stream containing CO₂ emitted by a hydrocarbon-fueled internal combustion engine used to power a vehicle in order to reduce the amount of CO₂ discharged from the vehicle into the atmosphere, the system comprising:

a. an absorption zone containing a CO₂ capture agent for removing CO₂ from the exhaust gas stream,

the absorption zone having an inlet for receiving the CO₂ capture agent stream and an inlet for introducing the exhaust gas stream,

the absorption zone also having an outlet for discharging a mixture of a the agent with captured CO₂ and a treated exhaust gas stream having a reduced CO₂ content;

b. a separation zone for separating the sorbent having captured CO₂ from the treated exhaust gas stream; and

c. a regeneration zone for releasing the CO₂ and regenerating the capture agent using heat exchange with one or more hot metal engine components, the regeneration zone including a heat exchanger with an inlet for admitting the agent with captured CO₂, the heat exchanger having surfaces comprising metal engine components and/or surfaces in heat transfer relation with metal engine components, the regeneration zone also having an outlet for discharging the regenerated CO₂ capture agent and an outlet for the released CO₂.

15. The system of claim 12 or 13 which further comprises one or more waste heat recovery zones for recovery of heat energy from the exhaust gas stream.

16. The system of claim 14 which further comprises compressing the recovered CO₂ gas on board the vehicle to reduce its volume using energy recovered from the heat of the exhaust gas stream.


17. The system of claim 14, wherein the CO₂ capture agent is a phase-changing switchable ionic liquid that reversibly reacts with CO₂ to form a solid compound.

18. The system of claim 14, wherein the CO₂ capture agent is a phase-changing liquid or solution that reversibly reacts with CO₂ to form a new two-phase liquid mixture.

19. The system of claim 14, wherein the CO₂ capture agent is a suspension of magnetically responsive sorbent particles in a liquid carrier.

20. The system of claim 19, wherein the magnetically responsive sorbent particles are separated from the treated exhaust gas stream using a magnetic field.

FIG. 1

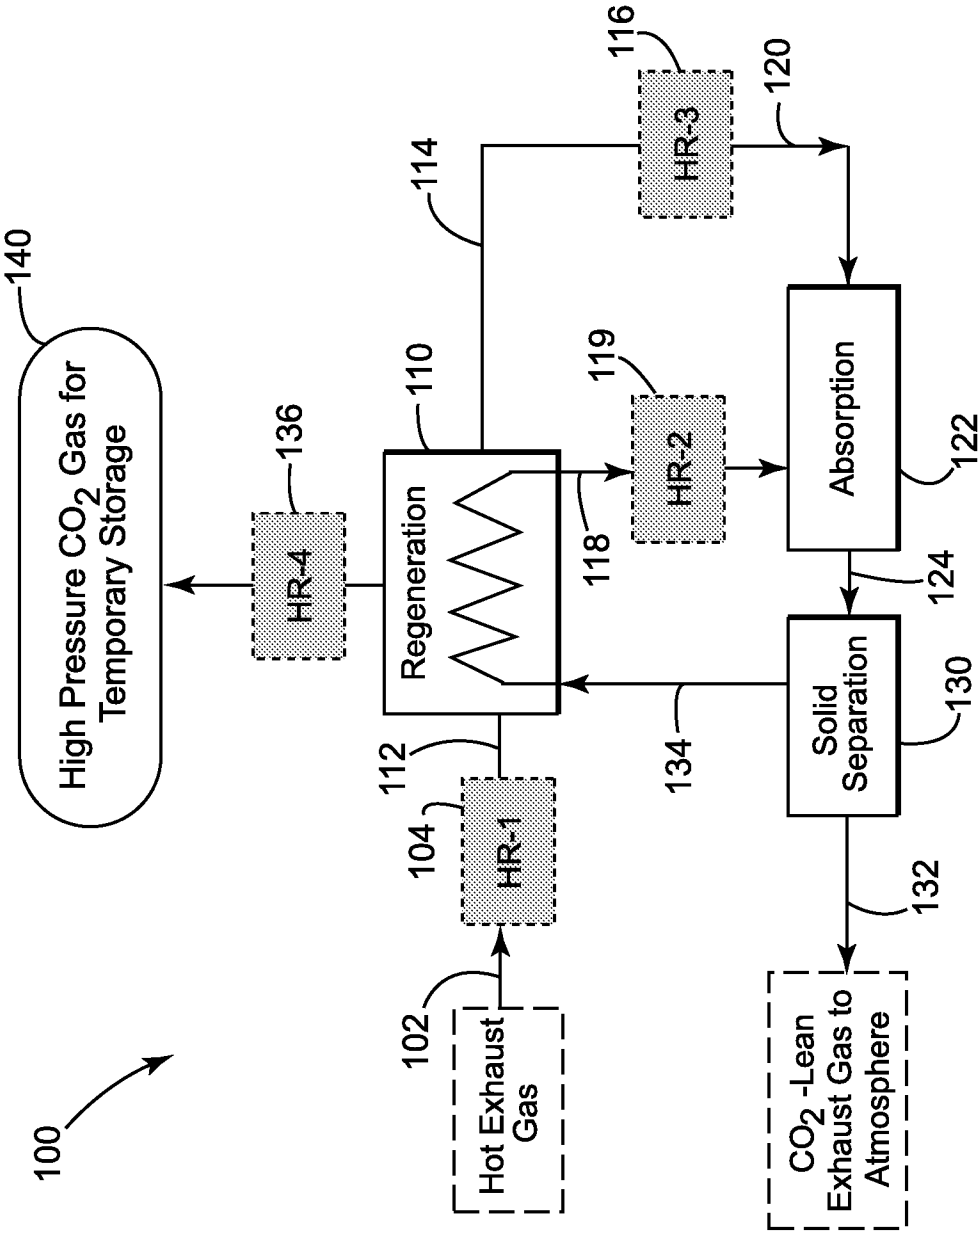


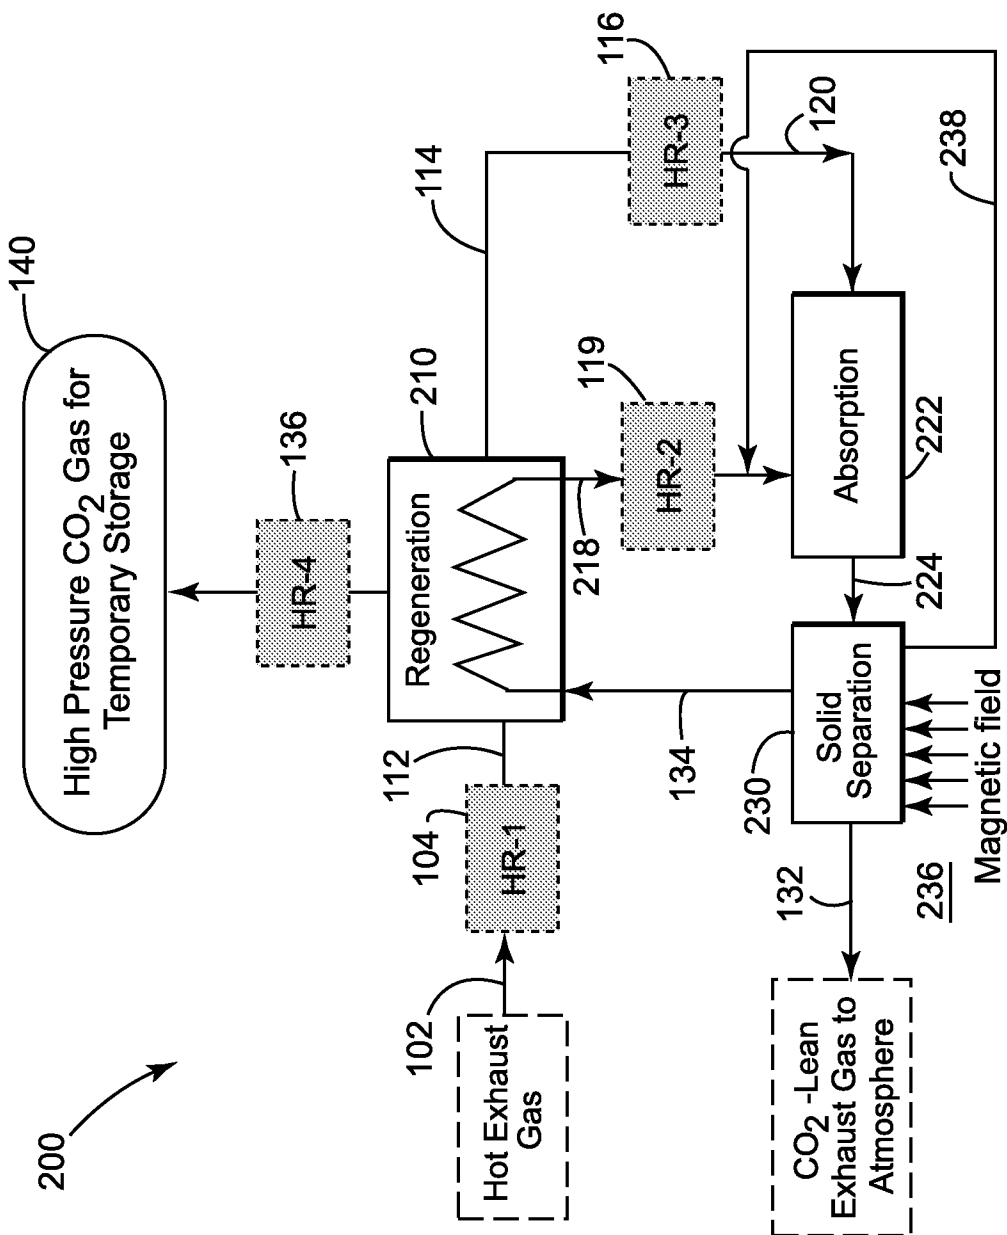


FIG. 2

FIG. 3

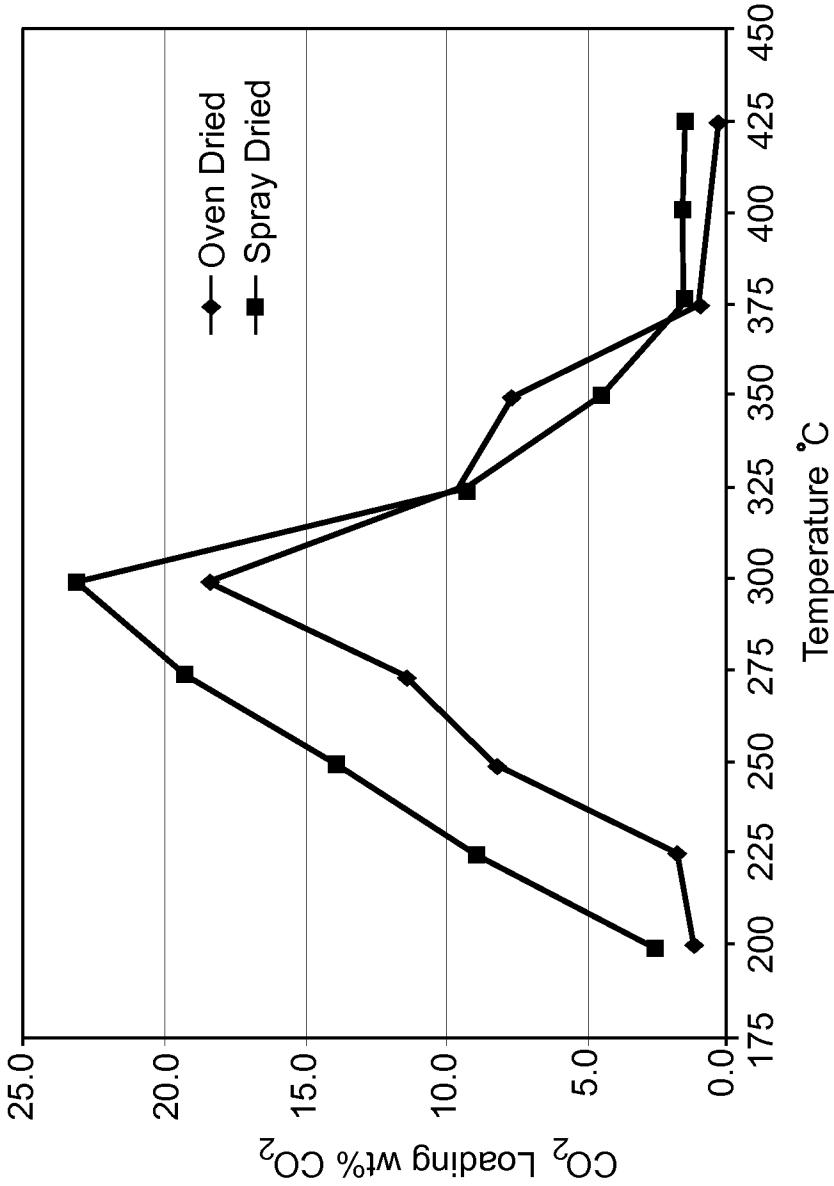

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/053415

A. CLASSIFICATION OF SUBJECT MATTER

INV. B01D53/62
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2012/100165 A1 (SAUDI ARABIAN OIL CO [SA]; ARAMCO SERVICES CO [US]; HAMAD ESAM ZAKI [S] 26 July 2012 (2012-07-26) pages 13,32 - pages 38-40; claim 3; figures 3-7,10-12 -----	1-20

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 October 2013

Date of mailing of the international search report

21/10/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Bergt, Thomas

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/053415

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2012100165	A1	26-07-2012	NONE
