

SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

MASS-FLOW THROTTLE WITH BACKFIRE PROTECTION
FOR LARGE NATURAL GAS ENGINES

Justin H. Sanders, Michael T. Hambidge, Timothy J. Westerdale, Kennon Guglielmo &
James Cole

CLAIM OF PRIORITY TO PRIOR APPLICATION

[0001] This application claims the benefit of the filing date of U.S. Provisional Application Serial No. 62/812,253, filed on February 28, 2019, entitled "Mass-Flow Throttle for Large Natural Gas Engines," the entire disclosure of which is hereby incorporated by reference in its entirety.

FIELD OF THE INVENTION

[0002] The present invention primarily relates to a throttle for large natural gas engines. Particularly, it pertains to a throttle for controlling the mass flow rate to the combustion chambers for large gaseous fuel spark-ignited internal combustion engines, particularly for stationary industrial applications, and more particularly while operating in low pressure non-choked flow, as well as to throttle systems enabling detection of backfire events and protection of throttle components from such backfire events.

BACKGROUND

[0003] Throttle valves have long been used in large natural gas engines, but existing control strategies tend to be lacking. More accurate flow control is needed in order to obtain optimally efficient fuel combustion based on the demands of an Engine Control Module (ECM). Precisely controlled mass flowrates are difficult to achieve, especially with non-choked flow. Electronic throttles are commonly used in large engines to control the mass flow rates of fuel and air. ECM advancements have vastly improved

the ability to optimize efficiency and performance and minimize emission concerns with spark-ignited internal combustion engines. By continuously monitoring numerous sensors and inputs, ECM's can balance the current operator commands against performance conditions to determine the most ideal supply flowrates needed for the engine at any given instant.

[0004] Knowing the ideal flowrate and delivering it, however, are two very different things. Even though modern ECMs can know the ideal at any given instant, practical prior art fuel supplies are not able to consistently deliver it instantaneously on demand across their entire range of operation. The very best of available controls claim to provide 1% setpoint accuracy, which means they claim to deliver an actual supply flowrate within about 1% of the demanded flowrate. The ability to consistently deliver a gaseous supply flowrate with 1% setpoint accuracy is considered extremely accurate and would be ideal, but claims to that effect tend to only be part of the story.

[0005] With the prior art, extreme setpoint accuracies tend to only be attained within a limited range of operation, which means that claimed accuracies are generally unreliable, especially for engines having large dynamic power ranges. (An engine's "dynamic power range" is the ratio of maximum power to minimum power over which the engine will operate as specified, which is dependent largely on the effective turndown ratio of the associated fuel supply system.) For a fuel supply delivering 25 grams/second at the top end of its operating range, for instance, one percent would be a quarter-gram/second (0.25 g/s). While calibrating one of the best available valves to a quarter-gram/second error can be manageable for moderate flowrates, the same fuel supply often needs to also idle at about a quarter-gram/second at the opposite end of its

operating range, such that the same quarter-gram/second error would be tremendously inaccurate for near-idle flowrates. Although accurate control is sometimes considered easier to achieve with lower flowrates, 1% setpoint accuracy at a quarter-gram/second idle flowrate would require accuracy to within ± 0.0025 g/s. So, while prior art gas flow throttles claim to deliver extremely accurate flowrates at specified portions of their overall operating range, it has long been unattainable to achieve as much for both ends of the operating range and everything in between, especially for such large ranges in real-world operation.

[0006] The complex interaction of too many real-world variables frustrates the pursuit of consistently high, full-range setpoint accuracies for gaseous supply mass flowrates. Wear and tear, leaks, lag times, glitches, clogs, noise, artifacts, and general variability all tend to happen in the real world. External temperatures and wide variability in gaseous fuel and air compositions further compound the challenges.

[0007] Moreover, even if perfection was achievable within a gaseous supply's flowrate control itself, flowrate accuracies can be thwarted by upstream and downstream pressure fluctuations as well, especially when the flow through the throttle is not choked. Because gaseous fluids are compressible, downstream events related to combustion or valve and piston movements can cause pressure waves that create sizable flowrate fluctuations. Upstream pressure fluctuations can be equally problematic, especially when controlling the flowrate of vaporized liquid fuels (e.g., LNG or LPG) or of boosted or turbocharged systems.

[0008] Thus, there has long been a need for a throttle that can accurately and consistently deliver ECM-demanded mass flow rates in the field of gaseous supply

systems for large spark-ignited engines, even while controlling non-choked flows, which are common with low-pressure supply flows but which also occur in many high pressure scenarios as well. For more background in light of choked mass flow control, refer to U.S. Patent No. 9,957,920, a copy of which is incorporated herein by reference in its entirety.

SUMMARY OF THE INVENTION

[0009] It will become evident to those skilled in the art that thoughtful use of the invention and embodiments disclosed herein will resolve the above-referenced and many other unmet difficulties, problems, obstacles, limitations, and challenges, particularly when contemplated in light of the further descriptions below considered in the context of a comprehensive understanding of the prior art.

[00010] The present invention accomplishes as much by enabling fast-acting, highly-accurate gaseous supply flowrate control for large spark-ignited internal combustion engines, which is particularly beneficial for engines that use natural gas as a fuel source. The gaseous fuel is preferably derived from either a liquefied natural gas (LNG) or compressed natural gas (CNG) storage state. A large engine is defined here as any engine that is 30 liters or greater. The engine is preferably used in stationary applications such as generator sets (hereinafter "gensets"). Alternatively, the engine may be used in large mobile applications such as mining trucks, ships, trains or other heavy duty vehicles. Another particularly preferred stationary application in which the disclosed principles may be applied is with engines operating in gas compression systems in oil and gas fields. Still another application to which the disclosed large engine throttle may be applied is as a flow metering device. Although preferred embodiments typically operate to control

non-choked flow, often in low pressure applications, they nonetheless achieve highly accurate mass flow control. Our objectives include enabling such flow control in response to instantaneous demand signals from the engine's ECM while consistently maintaining extreme accuracy over large dynamic power ranges, despite most upstream, downstream and even midstream pressure fluctuations.

[00011] Disclosed embodiments include systems and methods of using combinations of throttles, whereby the combination involves a mass-flow-air (MFA) throttle and a mass-flow-gas (MFG) throttle according to the present disclosure, further in combination with an oxygen sensor, wherein the mass flow of air and mass flow of gas are determined. Further, with respect to the configurations of the throttles and other components of the disclosed system, particular properties of the fuel, including British Thermal Unit (BTU) content of the fuel, can be accurately inferred, thereby enabling automatic calibration of the engine and other interventions as desired. This is particularly true in applications where the quality of the fuel is unknown and/or variable over time.

[00012] Possible embodiments can manifest in numerous different combinations and in numerous different kinds of improved machines, internal combustion engines, gaseous supply control systems, and the like. Other possible embodiments are manifest in methods for operating and optimizing such machines, engines, systems and the like, as well as in other types of methods. All of the various multifaceted aspects of the invention and all of the various combinations, substitutions and modifications of those aspects might each individually be contemplated as an invention if considered in the right light.

[00013] The resulting combinations of the present invention are not only more versatile and reliable, but they are also able to achieve greater accuracy despite rapidly changing conditions over a larger dynamic power range than has ever been achieved with such a simple system. The various embodiments improve on the related art, including by optimizing reliability, manufacturability, cost, efficiency, ease of use, ease of repair, ease of adaptability, and the like. Although the embodiments referenced below do not provide anything remotely near an exhaustive list, this specification describes select embodiments that are thought to achieve many of the basic elements of the invention.

[00014] In accord with many of the teachings of the present invention, a throttle is provided in a form that is readily adaptable to the power demands of numerous applications and is readily capable of achieving highly accurate setpoint accuracy for controlling gaseous supply flowrates across very large dynamic power ranges in internal combustion engines. Such flowrate control throttles and related fuel systems materially depart from the conventional concepts and designs of the prior art, and in so doing provide many advantages and novel features which are not anticipated, rendered obvious, suggested, or even implied by any of the prior art, either alone or in any obvious combination thereof.

[00015] Through its innovative combination of features and elements, a throttle according to the teachings of the invention is able to consistently and reliably achieve highly accurate mass flow control for various large engine applications, even with non-choked flow. Some of the features and elements that enable that result include the use a unitary block assembly for the throttle, and a fast-acting actuator, plus a single unitary and rigid rotary shaft for driving a throttle blade, supported by three different bearing

assemblies along the length of the shaft, as well as a commonly-contained assembly of the control circuitry together with the rotary actuator as well as the throttle itself, all of which help minimize slop in the control. In addition, the invention is preferably embodied with multiple pressure sensors that are at least partially redundant, which enables the controller to self-check the various sensors in real time.

[00016] Another important and advantageous aspect of the disclosed embodiments includes development of an approach for minimizing the damage caused by backfire events in an engine using a throttle according to the teachings in the attached disclosure to take advantage of the presently disclosed throttle embodiments, when a backfire event is detected by a pressure surge in the downstream pressure port – said pressure surge significantly exceeding the level (such as exceeding more than 50%) that would be expected by pressure fluctuations caused by more normal operation of the engine – the microcontroller is programmed to instantaneously open the throttle blade for minimum time period. After that duration of holding open the throttle blade, a microcontroller then returns to normal operation of the throttle. Due to the fast-acting nature of disclosed throttle embodiments, this approach has been found to minimize damage otherwise caused by a backfire event, such as bending or other damage to the throttle blade and/or throttle shaft.

[00017] Another aspect of the disclosed embodiments is the use of a combination of an MFA throttle and MFG throttle that can vastly shorten the development cycle of engines using such throttles.

[00018] To be all encompassing, many other aspects, objects, features and advantages of the present invention will be evident to those of skill in the art from a

thoughtful and comprehensive review of the following descriptions and accompanying drawings in light of the prior art, all to the extent patentable. It is therefore intended that such aspects, objects, features, and advantages are also within the scope and spirit of the present invention. It should be understood, however, that the detailed description and the specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various expansions, changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

[00019] Indeed, the present invention will ultimately be defined relative to one or more patent claims or groups of claims that may be appended to this specification or to specifications that claim priority to this specification, as those claims may be amended, divided, refined, revamped, replaced, supplemented or the like over time. Even though the corresponding scope of the invention depends on those claims, these descriptions will occasionally make references to the “invention” or the “present invention” as a matter of convenience, as though that particular scope is already fully understood at the time of this writing. Indeed, multiple independent and distinct inventions may properly be claimed based on this specification, such that reference to the “invention” is a floating reference to whatever is defined by the ultimate form of the corresponding patent claims. Accordingly, to the extent these descriptions refer to aspects of the invention that are not separately required by the ultimate patent claims, such references should not be viewed as limiting or as describing that variation of the invention.

[00020] The invention, accordingly, is not limited in its application to the details of construction and to the arrangements of the components set forth in the following

descriptions or illustrated in the drawings. Instead, the drawings are illustrative only, and changes may be made in any specifics illustrated or described, especially any referenced as “preferred.” Such changes can be implemented while still being within the spirit of the invention. Also, it is to be understood that the phraseology and terminology employed herein are for the purpose of the description and should not be regarded as limiting. Other terminology and language that describes the invention and embodiments and their function will be considered as within the spirit of the invention.

[00021] The invention is capable of many other embodiments and of being practiced and carried out in numerous other ways. It should also be understood that many other alternative embodiments are not shown or referenced that would still be encompassed within the spirit of the invention, which will be limited only by the scope of claims that may be original, added, or amended in this or any other patent application that may in the future claim priority to this application.

BRIEF DESCRIPTIONS OF THE DRAWINGS

[00022] Various features and advantages of the invention will now be described with reference to the drawings of certain preferred and alternative embodiments, which are intended to illustrate and not to limit the invention, where reference numbers may refer to like elements.

[00023] **Fig. 1A** and **Fig. 1B** are perspective views of the preferred mass flow throttle **10**.

[00024] **Fig. 2A** is a front view of the preferred large engine throttle **10**.

[00025] **Fig. 2B** is a sectional view of the preferred large engine throttle **10** of **Fig. 2A**, centrally sectioned through sectional plane B-B of **Fig. 2A**.

[00026] Fig. 3 is an exploded perspective view of the preferred large engine throttle 10.

[00027] Fig. 3A is an exploded perspective view of large engine throttle 10', which is an alternative embodiment of the throttle 10 of Fig. 3.

[00028] Fig. 4 is a perspective view of the throttle body assembly 20.

[00029] Fig. 5 is an exploded perspective view of spring assembly 50.

[00030] Fig. 5A is an exploded perspective view of spring assembly 50' of the alternative embodiment of large engine throttle 10' of Fig. 3A.

[00031] Fig. 6 is an exploded perspective view of thermistor assembly 60.

[00032] Fig. 7 is an exploded perspective view of motor and throttle shaft assembly 70.

[00033] Fig. 8 is an exploded perspective view of intermediate housing assembly 80.

[00034] Fig. 9 is an exploded perspective view of PCB assembly 90.

[00035] Fig. 10 is a block diagram illustrating a preferred embodiment of a gaseous fuel supply system with a large engine MFG throttle 20, operatively integrated with an internal combustion engine 102 to provide highly accurate control of the gaseous fuel supply to that engine 102 in accordance with various teachings of the present invention.

[00036] Figs. 11A & 11B are flow diagrams illustrating a method for detecting a backfire event and protecting the throttle 20 from damage resulting from the backfire event.

DETAILED DESCRIPTIONS OF ILLUSTRATED EMBODIMENTS

[00037] The following examples are described to illustrate preferred embodiments for carrying out the invention in practice, as well as certain preferred alternative

embodiments to the extent they seem particularly illuminating at the time of this writing. In the course of understanding these various descriptions of preferred and alternative embodiments, those of skill in the art will be able to gain a greater understanding of not only the invention but also some of the various ways to make and use the invention and embodiments thereof.

Wording Conventions

[00038] For purposes of these descriptions, a few wording simplifications should be understood as universal, except to the extent otherwise clarified in a particular context either in the specification or in any claims. For purposes of understanding descriptions that may be basic to the invention, the use of the term “or” should be presumed to mean “and/or” unless explicitly indicated to refer to alternatives only, or unless the alternatives are inherently mutually exclusive. When referencing values, the term “about” may be used to indicate an approximate value, generally one that includes a standard deviation of error for any particular embodiments that are disclosed or that are commonly used for determining or achieving such value. Reference to one element, often introduced with an article like “a” or “an”, may mean one or more, unless clearly indicated otherwise. Such “one or more” meanings are most especially intended when references are made in conjunction with open-ended words such as “having,” “comprising” or “including.” Likewise, “another” may mean at least a second or more. Other words or phrases may have defined meanings either here or in the accompanying background or summary

descriptions, and those defined meanings should be presumed to apply unless the context suggests otherwise.

[00039] These descriptions occasionally point out and provide perspective as to various possible alternatives to reinforce that the invention is not constrained to any particular embodiments, although described alternatives are still just select examples and are not meant to represent an exhaustive identification of possible alternatives that may be known at the time of this writing. The descriptions may occasionally even rank the level of preference for certain alternatives as “most” or “more” preferred, or the like, although such ranked perspectives should be given little importance unless the invention as ultimately claimed irrefutably requires as much. Indeed, in the context of the overall invention, neither the preferred embodiments nor any of the referenced alternatives should be viewed as limiting unless our ultimate patent claims irrefutably require corresponding limits without any possibility for further equivalents, recognizing that many of the particular elements of those ultimate patent claims may not be required for infringement under the U.S. Doctrine of Equivalents or other comparable legal principles. Having said that, even though the invention should be presumed to cover all possible equivalents to the claimed subject matter, it should nonetheless also be recognized that one or more particular claims may not cover all described alternatives, as would be indicated either by express disclaimer during prosecution or by limits required in order to preserve validity of the particular claims in light of the prior art.

[00040] As of the date of writing, the structural and functional combinations characterized by these examples are thought to represent valid preferred modes of practicing the invention. However, in light of the present disclosure, those of skill in the

art should be able to fill-in, correct or otherwise understand any gaps, misstatements or simplifications in these descriptions.

[00041] For descriptive reference, we categorize supply flowrate setpoint accuracy as being “generally accurate” if it is consistently within 5% of the demanded flowrate across its entire operating range. When consistently within 3% of the demanded flowrate across the entire range, setpoint accuracy can be categorized as “highly accurate.” At the extreme, when setpoint accuracy is consistently within about 1% of the demanded flowrate across the entire operating range, it can be classified as “extremely accurate.”

[00042] It is also notable that, while many embodiments may be used for mass flow control of either air or fuel, or combinations of air and fuel, these descriptions will commonly refer to control of a “supply flow”, which should generally be understood to refer to control of any such supply flow, whether it be air, fuel, or a combination. It will be understood, nonetheless, that a throttle according to these descriptions that is intended strictly for controlling the fuel supply flow will be plumbed at a different location than one that is plumbed for just controlling air. Likewise, a throttle according to these descriptions that is deployed for controlling mass flow of air without fuel will be plumbed at a different location than one that is plumbed for controlling the mixture of fuel and air. We presently prefer to include one throttle for controlling just the gaseous fuel supply flow, to achieve highly accurate control of the mass flow of the fuel (sometimes referred to as mass-flow-gas, or “MFG”), together with another throttle further downstream for controlling the supply flow after air has been mixed with the supply flow of fuel (which is sometimes referred to as mass-flow-air, or “MFA”, irrespective of the inclusion of the fuel in the same flow). Nonetheless, complete and highly accurate mass flow control can also be achieved

by combining an MFG throttle together with an MFA throttle that is plumbed in the air supply upstream of the fuel-air mixer. Moreover, generally accurate overall control might also be attainable by just controlling the mass flow of the fuel, without actively controlling the mass flow of the air if other reliable data is used to calculate that mass flow of the air, such as through use of oxygen sensors in combination with pressure, temperature and the like.

[00043] With respect to any valve, throttle or actuator, “fast-acting” is a term that is generally understood by those of skill in the art, and the term should be presumed to generally mean that it is designed to act or respond considerably faster or quicker than most throttles, valves or actuators. More limited definition may be applied to the phrase to the extent expressly disclaimed during prosecution or to the extent necessary for preserving validity of particular claims in light of the prior art. Despite the presumed broader meaning, fast-acting actuators referenced in these descriptions are preferably operable to move the actuated throttle element through most of its entire operable range of motion (preferably from 20% to 80% of that operable range), if not all of that operable range, in fifty milliseconds or less, although many other types of actuators are still likely to be suitable as alternatives, especially to the extent particular claim elements are not expressly disclaimed to require particular fast-acting characteristics.

[00044] The term “large engine throttle” **10** is used herein to describe the mass-flow throttle of numerous preferred embodiments and it refers to the throttle and throttle control system rather than merely the throttle body **20** or the butterfly valve (or throttle blade) **210** therein. Despite the “large engine” descriptor for throttle **10**, the reader should understand that various aspects of such large engine throttle may be beneficial for smaller engines

as well, such that the reference to “large engine” should not be considered as limiting unless estoppel, validity in view of the prior art, or other legal principles clearly require an interpretation that is limited to large engines. The simpler term “throttle” **20** is used herein interchangeably with the term “throttle body assembly” **20**. With respect to fuels, the term “fluid” is used herein to mean either a liquid or a gas, although liquid fuel embodiments are preferably adapted to vaporize the liquid phase of the fuel before the flow reaches the large engine throttle **10**. In the context of a supply flowrate control, a “continuous fluid passage” refers to a fluid passageway of any sort, whether defined through tubes, channels, chambers, baffles, manifolds or any other fluid passageway that is uninterrupted by fully closed valves, pistons, positive displacement pumps or the like during its normal operative mode of controlling the fuel flowrate, such that gaseous fluid is generally able to continually flow through a continuous fluid passage whenever a pressure gradient is present to cause such flow. It should be recognized, though, that a continuous fluid passage in this context can be regulated to zero flowrate by reducing the effective area of an opening to zero, while the passage would still be considered as a continuous fluid passage in this context. In addition, absent clear disclaimer otherwise, equivalent structures can be fully closed when not operating to control the flowrate, and equivalent structures may also have parallel or alternate passageways where one or more may be interrupted without discontinuing the overall flow.

Exploded and Unexploded Views of Large Engine Throttle 10

[00045] Turning to **Figs. 1A** and **1B**, there are shown perspective views of the preferred large engine throttle **10**. As shown therein, large engine throttle **10** includes an inlet adapter **30** and an outlet adapter **40**. Inlet adapter **30**, in part, defines supply

inlet **390**, which is configured to allow supply flow into large engine throttle **10**. Outlet adapter **40**, in part, defines supply outlet **170** (shown in **Figs. 2B** and **10**), which is configured to allow supply flow out of large engine throttle **10**. Machine screws **31-34** are paired with machine nuts **31a-34a** for securing inlet adapter **30** to housing assembly **20** (shown in more detail in **Figs. 2A – 4**). Similarly, machine screws **41-44** are paired with machine nuts **41a-44a** for securing outlet adapter **40** to housing assembly **20**. Detailed descriptions of assemblies and components of the preferred embodiment are provided in ensuing paragraphs.

[00046] With reference to **Fig. 2A**, there is shown a two-dimensional view of the large engine throttle **10**. A coolant port **220** can be seen in the front of housing assembly **20** (shown in dashed-line box) and another coolant port **221** (not shown) is located on the opposite side. Especially when throttle **10** is used as an air-fuel (MFA) throttle, hot gasses may flow through throttle **10**. To cope with the temperature of such hot gasses, and particularly to guard against thermal damage to the control circuitry associated with PCB **900** or to the motor **700**, a heat dissipator (not numbered) is located within the unitary block assembly **99** between main throttle body **20** and motor **700** as well as PCB **900**. The heat dissipator preferably is in the form of an aluminum component enclosing one or more flow-through passageways with relatively large surface areas for enabling liquid coolant to circulate therethrough and thereby cool the aluminum component. As will be understood by those of skill in the art, heat dissipators are commonly used on turbocharged applications like the large engine throttle **10**. The coolant ports **220** and **221** enable coolant to enter and flow around the large engine throttle **10** to keep the brushless motor **700** (shown in **Fig. 7**) and main PCB **900** (shown in **Fig. 9**) from overheating.

[00047] With reference to **Fig. 2B**, there is shown a cross-section, indicated by line **B-B**, of the embodiment illustrated in **Fig. 2A** rotated clockwise 90 degrees. The throttle shaft **710** (sometimes referred to as an actuator “drive shaft”) controls movement of the throttle blade **210**, with minimal opportunity for slop or other errors. The upstream pressure P_1 (upstream of throttle blade **210**) is measured at port **230** by pressure sensor **951** on PCB **900**, as the stovepipe of sensor **951** is connected in open fluid communication with port **230**, through an open passage (not shown) that runs through the unitary block assembly and a tube between port **230** and the stovepipe of sensor **951**. Likewise, the downstream pressure P_2 (downstream of throttle blade **210**) is measured at port **240** by pressure sensor **952** on PCB **900**, as the stovepipe of sensor **952** is connected in open fluid communication with port **240**, through an open passage (not shown) that runs through the unitary block assembly and a tube between port **240** and the stovepipe of sensor **952**.

[00048] Each of ports **230** and **240** have fluid passage segments in close proximity to the ports that are oriented perpendicular to the flowline of the throttle fluid passage of throttle **10**, to minimize stagnation or suction pressures due to their orientation relative to flow. However, the next adjacent segments of each are oriented to slope slightly upwardly relative to gravity in order to minimize the risk of clogging. The temperature of the fluid is measured at port **250** using a thermistor **600** (shown in **Fig. 6**). Machine screws **201-204** unite throttle body assembly **20** with intermediate housing assembly **80**.

[00049] With reference to **Fig. 3**, dashed-line boxes are used to depict some of various assemblies of and within an embodiment of the unitary block assembly **99** of throttle **10**. Assemblies that rigidly unite to form the unitary block assembly **99** include

the walls **22** of central throttle body **20**, the spring return cover **550** of spring return assembly **50** at the end toward the right in **Fig. 3**, control circuitry cover **901** at the other end toward the left in **Fig. 3**, with the intermediate housing **800** of motor enclosure **80** positioned between throttle body **20** and the PCB space. In addition, as will be understood, numerous screws are used to rigidly unite the sub-blocks of the embodiment of **Fig. 3** together, preferably with inset seals to ensure a sealed union between each of the various subblocks. Two additional subblocks – namely the inlet extension and the flow outlet extension are also united to the unitary block assembly **99** of **Fig. 3**. Analogously, the unitary block assembly **99'** of the embodiment shown in **Fig. 3A** is also very similar to assembly **99** of **Fig. 3**.

[00050] More particularly, the unitary block assembly is composed of various sub-blocks and covers that are preferably all of predominantly aluminum composition in the preferred embodiment. The resulting unitary block assembly of throttle **10** defines the inner and outer surfaces of throttle **10**. That unitary block assembly is illustrated as a billet type assembly of aluminum parts evident in the various views of **Figs. 1-4**, although it should be understood that preferred embodiments may also be formed through larger castings having fewer sub-blocks in order to reduce costs for volume production. These assemblies are illustrated in greater detail in the figures that follow. In **Fig. 3** there is shown an inlet adapter **30** above a throttle body assembly **20** (more particularly shown in **Fig. 4**). Four screws **31–34** (three shown) unite the inlet adapter **30** to the throttle body assembly **20** with a circular seal **35**, to sealingly enable mass flow from upstream into the throttle body assembly **20**. Similarly, the outlet adapter **40** is united with throttle body assembly **20** using screws **41-44** with a circular seal **45**, to sealingly enable mass flow

downstream from the throttle body assembly **20**. Although of secondary importance, it may be noted that the inlet adapter **30** and outlet adapter **40** are more beneficial when throttle **10** is being used as an MFG throttle, as opposed to when it is being used as an MFA throttle.

[00051] Although each of the plurality of spaces defined by the unitary block assembly and that collectively contain the rotary shaft **710** – namely the PCB space, the motor space of intermediate housing **800**, the throttle body space, and the spring return assembly space of assembly **50** -- are formed by sealed uniting of adjacent sub-blocks, leakage may still occur from one such space to the next due to the imperfect seals around a rotating shaft **710**. Accordingly, to protect the control circuitry of PCB **900** from the corrosive effects of gaseous fuel supplies, electronic components of PCB **900** are coated with a coating that is protective of such electronic components against the otherwise corrosive characteristics of gaseous fuels.

[00052] To the right of throttle body **20** is a spring assembly **50** (shown in detail in **Fig. 5**). The spring assembly **50** operates as a torsion type spring that winds up while the block assembly **10** is powered on. When the block assembly **10** is powered off, the spring assembly **50** winds down and returns to a closed position or, more preferably, to a substantially closed position. To the left of throttle body **20** is a thermistor assembly **60** (shown in detail in **Fig. 6**) that senses temperature. Also to the left of throttle body assembly **20** is a motor and throttle shaft assembly **70** (shown in detail in **Fig. 7**) that controls the movement of the throttle (shown in **Fig. 4**). An intermediate housing assembly **80** (shown in detail in **Fig. 8**) unites the motor and throttle shaft assembly **70** and a printed circuit board (PCB) assembly **90** (shown in detail in **Fig. 9**).

[00053] As an alternative to the embodiments of **Figs. 3** and **5**, **Figs. 3A** and **5A** show a comparable but alternative embodiment. However, due to the close similarities of throttle **10'** as compared to throttle **10**, the parts in each of **Figs. 3A** and **5A** are numbered similarly to the comparable parts of **Figs. 3** and **5**, with the main difference being the addition of a prime symbol ("'") for the components of the embodiment of **Figs. 3A** and **5A**. Particularly, with reference to **Fig. 3A**, most all the subassemblies of the throttle **10'** are practically similar to those of throttle **10** of **Fig. 3**, with the most notable exception being the spring return assembly **500'**, which has components analogous but different from those of spring return assembly **500**.

[00054] Nonetheless, details of **Fig. 5A** are different enough from those similar details of **Fig. 5** that some description may be helpful. Particularly, component **510'** of **Fig. 5A** is a shaft seal. In this embodiment, seal retainer **511'** and **512'** are merged as one component. Part **501'** is a bushing separator that supports spring **500,'** and screw **531'** screws the assembly **50'** to the end of the throttle shaft **710**. D-shaped cutout in the screw **531'** tend to orient the spring assembly to the desired orientation on the shaft **710**. Bearing assembly **513'** is a conventional bearing assembly much like bearing assembly **513** and element **520'** is a bearing preload spring. Part **530'** is spring return for returning throttle blade **210** to a five-degrees-from-fully closed position. Each end of the spring **500'** has projecting flare that engages mating notches and the like to drive the spring-biased return of throttle blade **210**, in a manner that is generally common for many spring-biased returns for automotive throttles.

Throttle Body Assembly 20

[00055] With reference to **Fig. 4**, there is shown an isometric view of the throttle body assembly (also referred to as “gaseous supply throttle”) **20**. As previously discussed, a throttle body assembly **20** may be used for controlling fuel flow rates, air flow rates, or fuel-air mixture flow rates. The cylindrically shaped volume of space from the top to the bottom of throttle body assembly **20** is defined herein as the throttle chamber **205**. For fuel throttles, the throttle orifice **200** is preferably between 50 millimeters and 76 millimeters in diameter. For fuel-air throttles, the throttle orifice **200** is preferably between 60 millimeters and 120 millimeters in diameter. Note that, although throttle orifice **200** is a circular-faced orifice in a preferred embodiment, other shapes may be used in alternative embodiments such as a square-shaped orifice.

Spring Assembly 50

[00056] With reference to **Fig. 5**, there is shown an exploded view of the spring assembly **50**. On the left side of **Fig. 5** is a throttle shaft seal **510** (with insert) that seals the throttle shaft **710** (shown in **Fig. 7**). A throttle seal spacer **511** separates the throttle shaft seal **510** from a seal retainer washer **512**. A roller bearing **513** is located between the seal retainer washer **512** and a wave spring **520**. A spring guide bearing **501** prevents torsional spring **500** from contacting or rubbing against the body of throttle **10**. A larger spring guide bearing **502** separates the torsional spring **500** from a spring return flange **530**. A screw-like perpendicular pin **531** located in the center of flange **530** of the spring assembly **50** serves to transmit the neutrally-biasing force of spring **500** to the shaft **710** and, in turn, to throttle blade **210**. Screws **551-554** fasten the spring return cover **550** to the throttle body assembly **20**, and an O-ring **540** sealingly unites the assemblies. With reference to the alternative embodiment of **Fig. 5A**, there is shown

another exploded view of a spring assembly **50'**, which is structured comparably and functions in a manner generally comparable to spring assembly **50**.

Thermistor Assembly 60

[00057] With reference to **Fig. 6**, there is shown an exploded view of the thermistor assembly **60**. In one embodiment, the thermistor **600** has a temperature measurement range from -70°C to 205°C . The thermistor assembly **60** has two O-ring gaskets **603** and **604** that function as sealants. Lead wires **611** and **612** are soldered to thermistor PCB **610**, extend (not shown) through the intermediate housing assembly **80**, and are also soldered to the main PCB **900**. An epoxy overmolding **620** is used to protect the thermistor **600** and thermistor PCB **610**. A thermistor tube **630** encloses the epoxy overmolding **620**, thermistor **600**, and thermistor PCB **610**. The thermistor tube **630** is united with the throttle body assembly **20** using a screw **640**.

Motor and Throttle Shaft Assembly 70

[00058] With reference to **Fig. 7**, there is shown the motor and throttle shaft assembly **70**. A brushless motor **700** controls the movement of the throttle shaft **710**. On the right side of **Fig. 7** is a throttle shaft seal (with insert) **711**. A throttle seal spacer **712** separates the throttle shaft seal **711** from the throttle shaft **710**. Four screws **701-704** (three shown) unite the brushless motor **700** and the throttle shaft **710** with the throttle body assembly **20**. The throttle shaft **710** extends all the way through the brushless motor **700** and connects to a rotor arm **720**. There are two rotary bearing assemblies **705** and **706** within motor **700** such that, together with the rotary bearing assembly **513** (or **513'** in the embodiment of **Fig 3A**), three bearing assemblies support the rotatable movement of shaft **710**. A screw **730** integrally fastens the rotor arm **720** to an end of the throttle shaft

710 that protrudes into the PCB space from the left side (as viewed in **Fig. 7**) of the brushless motor **700**. The rotor arm **720** has a permanent magnet **740** permanently attached to a radially outward portion of rotor arm **720**, such that arm **720** can be used in conjunction with a magnet **740** to indirectly measure the position of the throttle blade **210** in its range of rotatable motion.

Intermediate Housing Assembly 80

[00059] With reference to **Fig. 8**, there is shown the intermediate housing assembly **80**. A large open space **810** is used for housing the brushless motor **700**. A smaller circular opening **820** at the bottom left is used for housing the controller-area-network (CAN) pin connector that protrudes from the main PCB **900**. One small opening **830** at the top of the assembly **80** houses a reverse flow check valve **840**, to protect sensors from over-pressurization. Another smaller opening **850** houses a forward flow check valve **860** to protect sensors from over-pressurization. An in-groove seal **870** shaped to fit the intermediate housing assembly **80** sealingly unites assembly **80** to the throttle body assembly **20**.

Printed Circuit Board (PCB) Assembly 90

[00060] With reference to **Fig. 9**, there is shown the PCB assembly **90**, which sealingly contains PCB **900**. The PCB **900** is enclosed in a space (the "PCB space") defined between a PCB housing cover **901** and intermediate housing **800**, which are united by screws **915-920** in a sealed manner. The sealed union between cover **901** and intermediate housing **800** is partially enabled by an in-groove elastic seal **902** positioned perimetrically around the PCB space in the interface between intermediate housing **800** and PCB housing cover **901**. Twelve screws **903-914** securely fasten the PCB **900** and

pressure sensors **950-952** to the PCB housing **901**. Six screws **915-920** (three shown) and a PCB housing seal **902** sealingly unite the PCB assembly **90** with the intermediate housing assembly **80** (shown in **Fig. 8**). Such sealed integration enables optimal control and helps minimize extraneous artifacts or other influences that might otherwise affect its operation.

[00061] PCB **900** comprises a microcontroller **930**, which can be any commercially available microcontroller with a memory that is capable of receiving machine readable code, i.e., software. The microcontroller **930** provides the “brains” of the large engine throttle **10**. Microcontroller **930** receives throttle position signals from Hall Effect sensors **940a-e**, pressure signals from pressure sensors **950-952**, temperature signals from the thermistor **600**, and control signals from the ECM **100**. The microcontroller **930** uses an algorithm to calculate throttle position in order to achieve the instantaneously desired mass flow rates and then outputs pulse width modulated and H-bridge signals to motor **80** to cause motor **700** to properly control the position of throttle blade **210**, while also outputting measured data to the ECM.

[00062] PCB **900** has five pairs of identical Hall Effect sensors **940a-e** which are part of a position sensor assembly for indirectly detecting the position of throttle blades **210**. With cross reference to **Fig. 10**, these sensors are collectively named “Blade Position Sensor” **940**. As the throttle shaft **710** rotates, the rotor arm **720** which is an integral part of shaft **710** rotates within the PCB space and this causes the magnet **740** to move relative to the Hall Effect sensors **940a-e**, which are able to detect the resulting changes in the magnetic field. These sensors **940a-e** vary their output voltage in response to magnetic field changes and these electrical signals are processed by the microcontroller

930. The sensors **940a-e** are used for calibrating the location of the throttle blade **210** relative to the strength of the magnetic field given by the magnet **740**.

[00063] Delta-P sensor **950** is a double sided pressure transducer that measures the differential pressure ("Delta-P") between the upstream pressure port **230** and downstream pressure port **240**. Two pressure sensor gaskets **950a** and **950b** seal Delta-P sensor **950**. Upstream pressure sensor **951** measures the absolute upstream pressure (" P_1 ") and has pressure sensor gasket **951a**. Downstream pressure sensor **952** measures the absolute downstream pressure (" P_2 ") and has pressure sensor gasket **952a**. The Delta-P sensor **950** is significantly more accurate in measuring the differential pressure than the method of mathematically subtracting the difference between P_1 and P_2 . However, there are conditions when the throttle operates at pressures out of range of the Delta-P sensor **950**. When the Delta-P sensor **950** begins to peg (ie, approaches its maximum reliable limits), the microcontroller **930** will begin using pressure sensors **951** and **952** to calculate the differential pressure. Once the maximum pressure range is exceeded, the microcontroller **930** will stop using Delta-P sensor **950** and switch entirely to pressure sensors **951** and **952** in addition, PCB **900** will troubleshoot other instances whenever P_1 , P_2 and/or Delta-P do not conform to rationality checks, in such cases a false signal is sent to ECM **100**.

[00064] Pressure sensors **951** and **952** are conventional pressure transducers, although non-conventional ones (or even sensors or the like for fluid conditions other than pressure) can be considered for use as alternatives for some of the same purposes. Pressure transducers **951** and **952** are preferably of the type that can be and are mounted

to PCB **900** and have stiff tube connectors (sometimes called “stove pipes”) extending from their bases, through which the transducers access the pressure to be sensed.

[00065] To neutralize some of the effects of pressure fluctuations – particularly downstream pressure fluctuations -- the control algorithms of microcontroller **930** preferably use time-averaged pressure readings from the pressure sensors **950-952** rather than instantaneous pressure readings. More particularly, based on the number of cylinders and the current RPM of the engine, as received by microcontroller **930** from ECM **100**, microcontroller **930** continuously determines the stroke cycle time for the pistons of engine **102**

Fig. 10 -- Block Diagram

[00066] In the illustrative block diagram of **Fig. 10**, there are four main segments of supply flow depicted for preferred embodiments: (1) an upstream gaseous fuel supply **350** depicted on the left; (2) a large engine throttle **10** depicted within the dashed-line box in the middle; and (3) an engine **102** depicted in the smaller dashed-line box further to the right. The three segments **350**, **10**, and **102** are operatively connected to provide rotary shaft power for any number of large engine applications, with fuel supply **350** serving as the basic gaseous fuel supply for engine **102**, and with large engine throttle **10** serving to provide accurate control of the gaseous fuel flowrate from that fuel supply **350** to engine **102**, in accordance with various teachings of the present invention.

Upstream Fuel Supply 350

[00067] As illustrated in **Fig. 10**, fuel supply **350** preferably includes a fuel tank **360** serving as the source for fluid fuel, together with a mechanical pressure regulator **370** and other conventional components such as a shut-off gate valve **380**. Valve **380** is

preferably controlled by ECM 100, although independent control may be utilized in alternative embodiments. The gaseous fuel supply 350 is equipped and adapted to deliver a gaseous fuel supply to supply inlet 390 at desired pressure levels.

[00068] More preferably, the gaseous fuel supply 350 is a natural gas or vaporized propane fuel supply that delivers natural gas or propane stored in fuel tank 360. Though not shown in Fig. 10, fuel tank 360 may be equipped with vaporization subassemblies and controls to manage LNG (liquefied natural gas) or propane vaporization and resulting pressure within fuel tank 360 and the associated lines 365, 375 and 376. Such vaporization subassemblies and controls for LNG preferably prime tank 360 by pre-circulating some of the stored LNG through a heat exchange loop that increases the temperature of the pre-circulated LNG to the point of partial or complete vaporization, thereby creating a vapor phase with an adequate pressure head within tank 360. Line 365 preferably also includes a second heat exchanger downstream of the fuel tank 360, to further aid in complete vaporization of the LNG or propane once gaseous fuel is allowed to flow from fuel supply 350 to large engine throttle 10.

[00069] Downstream of the heat exchanger in line 365, the gaseous fuel is directed sequentially through a mechanical pressure regulator 370, a downstream fuel shut-off valve 380, and a line quick-disconnect assembly (not shown) prior to entry into large engine throttle 10. In this embodiment, initial fuel pressure is supplied by the tank 360, although the initial pressure from tank 360 is preferably regulated by mechanical pressure regulator 370 before reaching supply inlet 390 of large engine throttle 10. Mechanical pressure regulator 370 is able to manage the low pressures from tank 360 and includes one or more conventional pressure regulators that use pressure-balanced diaphragms to

vary effective orifice sizes and thereby control the pressure to within the preferred range at supply inlet **390**. Mechanical pressure regulator **370** preferably includes an integrated pressure sensor for providing upstream pressure data (i.e., equivalent to the pressure " P_1 " at supply inlet **390**) to ECM **100** via control link **371**. Whether or not a pressure sensor is integrated with regulator **370**, the preferred embodiment includes a pressure transducer **951** that measures the pressure at port **230**, which is upstream of throttle blade **210** and which is in fluidic proximity to supply inlet **390**, such that it is the same as P_1 , for reliable input on the actual pressure of the gaseous supply entering throttle **10**.

[00070] Assuming all lines **365**, **375** and **376** are operatively sealed and connected to direct supply flow therethrough, supply flow from fuel supply **350** to large engine throttle **10** is enabled or disabled by On/Off operation of a mechanical shut-off valve **380**. Although manual valves may be used in certain alternative embodiments, valve **380** is preferably motor or solenoid actuated via oversight control by ECM **100**, as illustrated by the dotted-line control link **381** in **Fig. 10**. When shut-off valve **380** is open, gaseous supply flow is induced by an operable pressure gradient between tank **360** and supply inlet **390**. Hence, with valve **380** open, fuel first moves through the heat exchanger and the mechanical pressure regulator(s) **370**, and the fuel is then directed through the valve **380** and into the fuel inlet **390**.

[00071] Despite vaporization subassemblies and controls, the potential exists for the passage of vaporized natural gas or propane fuel that also contains droplets of liquid phase LNG or propane, which may occur for instance if the ports or conduits for heat exchange fluids become clogged. If any LNG or propane droplets remain in the fuel stream downstream from the mechanical pressure regulator(s) **370**, their subsequent

vaporization may introduce dramatic pressure spikes into large throttle engine **10**, which would overwhelm large throttle engine **10**. In order to compensate for the possible introduction of LNG or propane droplets downstream of the heat exchanger, a pressure control loop may be inserted into the system in a position intermediate between the pressure regulator(s) **370** and the supply inlet **390** to large engine throttle **10**, preferably downstream of the heat exchanger and mechanical pressure regulator(s) **370**.

[00072] In the event any errant droplets of LNG or propane enter into large engine throttle **10**, the delayed vaporization would likely lead to a spike of increased pressure at the supply inlet **390** of the large engine throttle **10**. If such a pressure spike is produced, the inserted pressure control loop preferably buffers the spike by venting back to the upstream side of the mechanical pressure regulator **370**. As other alternatives, one or more overpressure vents or bypass check valves can be included in line **375** and/or **376** to help divert vaporization spikes that would otherwise propagate and disrupt the control of large engine throttle **10**. Similarly, pressure spikes due to fuel vaporization upstream of the mechanical pressure regulator can also be vented to atmosphere and/or diverted to other containment further upstream in fuel supply **350**.

[00073] By providing a multi-faceted strategy for control of such errant pressure spikes, namely through the inclusion of a heat exchanger in line **365** as well as one or more of the vents, check valves or the like as discussed above, preferred embodiments control and modulate the pressure introduced to the supply inlet **390** to reduce or prevent overwhelming the flowrate control of large engine throttle **10**.

[00074] The fuel tank **360** may alternatively be embodied as any of a number of commonly available gaseous fuel sources, such as stationary gas pipelines, compressed

gas cylinders, or other types of liquefied storage tanks with vaporization controls, together with conventional pressure regulators and the like. Preferably, most such alternatives still include some form of a fuel storage tank **360** that feeds fuel to large engine throttle **10** via a high-pressure mechanical pressure regulator **370** which regulates the pressure to a desired range for the supply inlet **390**.

[00075] Again, from the high-pressure mechanical pressure regulator **370**, the fuel is fed through a fuel tube or supply line **375**, which preferably includes a shut-off gate valve **380** as shown. Downstream from shut-off gate valve **380**, the fuel supply line **376** is connected to the large engine throttle **10** at supply inlet **390**, at which point the fuel is preferably introduced into the gaseous supply throttle **20** of large engine throttle **10**.

[00076] As will be understood by those of skill in the art, the supply line **375** may also include a fuel filter (not shown) or other conventional systems for monitoring and/or optimizing fuel supply conditions prior to introduction into large engine throttle **10**. Such other systems may include, for instance, fuel quality sensors connected to the engine control module (ECM) **100** and/or the PCB **900** of large engine throttle **10** for anticipating operating needs. The fuel supply **350** may also include a combination of several independent pressure regulators **370** (rather than just one), or may include additional pressure regulators that are integral to the fuel storage tank **360**.

[00077] Referring again to the preferred embodiment as illustrated in **Fig. 10**, the large engine throttle **10** includes a fuel supply **350**. Downstream of that large engine throttle **10**, the supplied fuel flow is then blended with air **160** for supplying a gaseous fuel-air mix **150** to internal combustion engine **102**. While the **Fig. 10** arrangement is preferred, alternative embodiments in line with some broader teachings of the present

invention may alternatively introduce some or all of the required air into the fuel upstream of large engine throttle **10** (as suggested by alternate air mixing flow arrow **260'**), albeit with corresponding challenges and possible compromises given that corresponding adjustments may be needed to account for the air flow introduction at whichever point it is introduced.

Gaseous Supply Throttle 20

[00078] Linked to the ECM **100** of engine **102** via the communication link illustrated by dotted line **101**, gaseous supply throttle **20** is adapted to provide rapid and highly accurate control of the actual $\dot{m}$ supply flowrate at its outlet **170** in response to the $\dot{m}$ flowrate signal **105**, for controlled delivery of the fuel supply to the fuel-air mixer **161** and subsequently the engine **102**. By its nature, gaseous supply throttle **20** is used to control gaseous supply flow from a primary fuel supply **350** (on the left in **Fig. 10**) to an internal combustion engine **102** (on the right in **Fig. 10**). Accordingly, gaseous supply throttle **20** is operatively positioned downstream of the fuel supply **350** and upstream of the fuel-air mixer **161** and engine **102**, such that it is plumbed and sealed to be part of a fluidly continuous fuel supply system during operation of engine **102**, with gaseous supply throttle **20** being intermediate the fuel supply **350** and the engine **102**. A detailed description of large engine throttle **10** with references to additional figures is made in ensuing paragraphs.

[00079] For further optimization, the in-block microcontroller **930** and related control circuitry are preferably embodied on a single printed circuit board **900** (also visible in **Fig. 9**). The in-block microcontroller **930** of PCB **900** is connected via data link **101** to receive the $\dot{m}$ data signal **105** (and all other available data, including a P_3 data signal **121**,

if needed, as discussed elsewhere herein) from ECM **100**. Data link **101** connects to ECM **100** and its control network, which is a CAN network in the preferred embodiment. Using the received data signals **105**, **120**, the printed circuit board **900** controls large engine throttle **10**, preferably without any external communication other than power and data connection **101** to the engine's ECM **100**. Although "CAN" is technically an acronym for controller-area-network, the "CAN" reference is a commonly used technical word that refers to a CAN network or to data received via a CAN network. On that note, it should be recognized that although a CAN network is the preferred communication link for communication of all commands, variables and other data received through line **101** by microcontroller **930** from outside of throttle system **10**, wireless, analog signals, digital signals, or other communication means may be used as alternatives while still embracing many aspects of the present invention.

[00080] Also located on the PCB **900** is the CAN network connector **960** (visible in **Fig. 2B**). As will be understood by those of skill in the art, CAN network connector **960** is a five pin connector. The five pins comprise a power pin, a ground pin, a CAN plus pin, a CAN minus pin, and a CAN termination pin. As will be understood by those of skill in the art, alternative embodiments could be direct (0-5V or 5-20 milliamp) data connections or any other known alternative for data connections that are otherwise suitable for an application such as large engine throttle **10**. Alternative embodiments may have eight pin connectors instead of the five pins for a CAN network.

[00081] In the preferred embodiment, optimal fluid condition feedback is obtained from double sided transducer ("Delta-P sensor") **950** by positioning the tips of its stove pipes (or a tube therefrom, as an alternative) in direct fluid contact with throttle

chamber **205** (shown in **Fig. 4**), while the base of transducer **950** is mounted directly on PCB **900**. With cross-reference to **Fig. 2B**, Delta-P sensor **950** measures the differential pressure ("Delta-P") between the upstream pressure port **230** and downstream pressure port **240**. Pressure sensor **951** measures the absolute upstream pressure (" P_1 ") from port **230**. Pressure sensor **952** measures the absolute downstream pressure (" P_2 ") from port **240**. With further cross-reference to **Fig. 2B**, the stove pipe tips of pressure sensors **951** and **952** extend from PCB **900** through appropriately positioned sensor ports **230** and **240** in a side wall of throttle chamber **205**. To minimize clogging or other fouling of transducers **950-952**, ports **230** and **240** are preferably in a side compartment of throttle chamber **205** and are shielded through use of downwardly sloping passages or other measures as are known for use as contamination preventers.

[00082] With cross-reference to **Fig. 6**, optimal fluid condition feedback is obtained by positioning the sensor tip **601** of thermistor **600** directly within throttle chamber **205**, while the base **602** of thermistor **600** is soldered directly to thermistor PCB **610**. Thermistor **600** is a conventional thermistor that senses temperature at its tip **601** and has wire leads extending to the sensor tip **601**, although other forms of temperature sensors (or even sensors or the like for fluid conditions other than temperature) can be considered for use as alternatives for some of the same purposes.

[00083] Throughout the control of in-block microcontroller **930**, embodiments of the present invention address long felt unresolved needs in the field through innovative approaches that overcome many of the limitations and challenges of the prior art. In accord with many of the teachings of the present invention, the industry is enabled to provide solutions manifested in large engine control systems that are readily adaptable

to the power demands of numerous applications and are readily capable of highly accurately and precisely controlling supply flow across sizable dynamic power ranges in internal combustion engines.

Engine 102

[00084] With reference again to **Fig. 10**, Engine **102** is a large spark-ignited internal combustion engine **102** of a type that uses gaseous fuel as its primary energy source, most preferably of a type that uses natural gas (NG) or vaporized propane (LPG) as its fuel. A large engine is defined here as any engine that is 30 liters or greater. Engine **102** is preferably used in stationary applications such as generator sets (hereinafter “gensets”) on natural gas compression skids. Alternatively, engine **102** may be used in large mobile applications such as trains, ships, mining trucks or other heavy duty vehicles. As is conventional, engine **102** has an ECM **100** or the equivalent, which continually monitors the operating conditions of various parts of engine **102** and its peripheral systems. Such an engine **102** may be operatively incorporated in any number of powered applications in alternative embodiments, as well as many other applications that may be now or in the future known in the art for being powered by spark-ignited gaseous-fuel internal-combustion engines.

[00085] ECM **100** of engine **102** is connected via data communication lines **181-182** or other conventional means to monitor pressures, temperatures and operating states in or around numerous subsystems of engine **102**, such as its fuel-air handling system (that preferably includes a turbo charger **172**), a fuel-air throttle **140**, its ignition system, its combustion chambers **180**, its coolant system, its oil pressure, and its exhaust system, amongst others as are known in the art. Although alternative embodiments may use

wireless connections for some or all of the data connections between ECM **100** and the various subsystems of engine **102**, preferred embodiments of ECM **100** are connected to send and receive analog or digital signals through wire harnesses or other forms of communication lines **101**, **181**, **182**, **182a**, **182b**, **371**, and **381**. Though represented in **Fig. 10** by the various dotted-line communication links directly between the various components, communication lines **101**, **181**, **182**, **182a**, **182b**, **371**, and **381** are preferably embodied in the form of a conventional data network, such as a controller-area-network (“CAN”) network.

[00086] As will be understood by those skilled in the art, ECM **100** is programmed to operate, in part, to determine the desired supply flowrate (“ $\dot{m}$ ” or “ $\dot{m}_{dot}$ ”) **105** at any given instant in time, based on current operating conditions of engine **102** in comparison to current user demands. As the desired $\dot{m}$ flowrate is determined by ECM **100**, the ECM produces a corresponding $\dot{m}$ data signal **105** that represents the current $\dot{m}$ flowrate demand for engine **102**. As the desired $\dot{m}$ flowrate is determined by ECM **100**, the corresponding $\dot{m}$ data signal **105** is conveyed by communication link **101** to the microcontroller **930** of large engine throttle **10**, and large engine throttle **10** operatively serves to instantaneously and accurately deliver as much from throttle system outlet **170**.

[00087] After the flow control by large engine throttle **10**, the controlled flow of gaseous supply from the throttle system outlet **170** is directed to fuel-air mixer **161** where it is preferably mixed with air **160**, to produce a combustible fuel-air mix **150**. Preferred embodiments use a flow of filtered air **160**. The intake air **160** that is directed into the fuel-air mixer **161** may be drawn from ambient air in alternative embodiments, with or without pressure compensators, albeit with performance compromises. Fuel-air mixer

161 is preferably a venturi-like mixer or another type that does not use moving parts in the supply flow, thereby maximizing durability and fuel/air mixture homogeneity of flow conditions actually delivered to combustion chambers **180**. Most preferably, fuel-air mixer **161** is in a form that includes a fuel ring, to help preserve the benefit of the accurate $\dot{m}$ flowrate control provided by throttle system **10**.

[00088] Once the proper fuel-air mixture **150** is provided by fuel-air mixer **161**, that mixture **150** flows toward engine **102**. The fuel-air mixture **150** passes through a turbocharger **172**. The turbocharger **172** takes in recirculated gas from the pre-turbo exhaust **171**, mixes it with fuel-air mixture **150** and compresses it. After leaving the turbocharger **172**, the fuel-air mixture **150** passes through a turbo aftercooler **174**. The turbo aftercooler **174** cools fuel-air mixture **150** before it enters the engine **102**. It is necessary to reduce the temperature of the fuel-air mixture to allow for a denser intake to the engine **102**, thereby increasing the output of the engine **102**. The post turbo exhaust gas **173** flows into a three-way catalytic converter (TWC) **175**. As will be understood by those of skill in the art, the TWC **175** reduces pollutants prior to the exhaust gas being released to the environment. Although not illustrated in the drawings, those of skill in the art will understand that preferred embodiments would include various components that are not shown. Moreover, other components like filters and pressure relief valves are also not shown. With respect to any such simplifications and omissions from the drawings, it should be understood that preferred embodiments include them in such character and configuration as would be generally understood within the discretion of those of skill in the art.

[00089] The flow of fuel-air mixture **150** is controlled by fuel-air throttle **140**, which is preferably an electronic throttle that further facilitates preservation of the highly accurate flowrate control provided by the supply throttle **10** in **Fig. 10**. Accordingly, fuel-air throttle **140** is preferably also constructed with the same basic structure and software as throttle **10**, albeit preferably with adaptations to accommodate the different pressure ranges that would be experienced downstream of mixer **161** and perhaps with less protection of internal components against the corrosive effects of more concentrated fuels, as would be encountered upstream of mixer **161**. Because **Fig. 10** plumbs and uses throttle **10** to control the mass flowrate of the fuel itself, that type of throttle deployment is sometimes referred to as mass-flow-gas throttle (or an “MFG” throttle). In contrast, the fuel-air throttle **140** that is used to achieve highly accurate control of the mass flow of the fuel-air mixture **150** is sometimes referred to as a mass-flow-air throttle, or an “MFA” throttle, irrespective of whether or not the fuel is mixed with the air at the point of that control.

[00090] Preferably, the fuel-air throttle **140** is also constructed according to the teachings of the present invention, with the same basic structure as the supply flow throttle **10** that is used as an MFG throttle to control the mass flow of the fuel by itself. Hence, the highly accurate fuel supply flow of the MFG throttle **10** in **Fig. 10** is preferably combined with highly accurate air supply mass flow control achieved by a fuel air throttle **140** constructed according to the same basic teachings as the MFG throttle **10**. Alternatively, complete and highly accurate mass flow control can also be achieved by combining an MFG throttle together with an MFA throttle that is plumbed in the air supply **160** upstream of the fuel-air mixer **161**. Either such combination, either the one

illustrated in **Fig. 10** or the alternative combination of using a similar throttle to control the mass flow of air **160** by itself, enables comprehensive mass flow control of all supply flows for combustion. Moreover, generally accurate overall control might also be attainable by just controlling the mass flow of the fuel, without actively controlling the mass flow of the air if other reliable data is used to calculate that mass flow of the air, such as through use of oxygen sensors in combination with pressure, temperature and the like. Whatever the choice for a specific application, we trust that those of skill in the art will understand where and how to include such throttles for the different purposes to achieve the different combinations for overall mass flow control.

[00091] Whatever the choice, the resulting fuel-air mixture **150** is then operatively introduced into combustion chambers **180** of engine **102** under the control of ECM **100**. Within combustion chambers **180**, the fuel-air mixture **150** is then operatively spark-ignited to cause working combustion.

[00092] Surprisingly, the use of such an MFG throttle together with such an MFA throttle enables a dramatically streamlined development cycle for engines. Whereas large natural gas spark-ignited internal combustion engines have historically required considerable time and expense to finalize and validate the engine design prior to commercial release, the highly accurate mass flow control of the present invention enables a greatly simplified development, conceivable without any test cell expense. Although the industry will likely continue the use of test cells for finalizing designs, the accurate controls enabled by the present invention will allow much more relaxed standards in the process, not to mention the ability to achieve highly accurate mass flow

control despite highly variable quality in fuel quality, air composition, and other environmental factors.

Backfire Detection and Protection

[00093] When a backfire occurs during engine operation, a large pressure wave comes toward the throttle **20** from downstream. This pressure wave can cause damage to the throttle **20**. Particularly, such backfire pressure waves can bend the throttle blade **210**, bend the throttle shaft **710**, damage bearings, and the like. Potential damage is especially problematic in large throttles such as throttles having a throttle blade diameter between 94 millimeters (mm) and 120 mm, although the disclosed throttle configuration and methods can be applied to smaller diameter throttles. To prevent damage to the throttle **20** caused by a pressure wave during a backfire event, the disclosed throttle system **10** is not only able to detect the pressure wave resulting from a backfire event, but also various features enable the throttle **20** to operate to reduce the likelihood of damage or avert such damage altogether.

[00094] Turning to **Figs. 11A & 11B**, there is shown a flow diagram illustrating steps for detecting a backfire event and steps to protect the throttle **20** from damage resulting from the backfire event. The method starts at Step **1100**. In order to operatively prevent damage to the throttle **20** caused by pressure waves during backfire events, the first substantive step of the method is to be able to detect that a backfire is occurring. As previously described, two pressure sensors **951, 952** are incorporated into embodiments of the throttle **20**, one pressure sensor **951** being positioned in a port **230** upstream of the throttle blade **210** and one pressure sensor **952** being positioned in a port **240** downstream of the throttle blade **210**. Each of these pressure sensors **951, 952** are

configured and adapted to sense pressure in proximity to the throttle blade **210** (Step **1102**), with those sensed pressure values being communicated to ECM **100** at Step **1104**. It should be understood by those of ordinary skill in the art that the upstream and downstream pressure sensors **951**, **952** could be positioned in other locations further away from the throttle blade **210** while still maintaining the ability to detect any pressure wave resulting from a backfire event. The ECM **100** is adapted to calculate a delta pressure using the sensed pressure readings from pressure sensors **951**, **952**, particularly a negative delta pressure wherein the downstream pressure is larger, and possibly rising, in relation to the upstream pressure. This pressure differential (delta pressure) is opposite of what is observed during normal operating conditions. Preferably, a check for negative delta pressure is performed about every 5-10 milliseconds (ms), but this time interval is calibratable such that checks for negative delta pressure can be performed at different time intervals.

[00095] Once the ECM **100** calculates a negative delta pressure at or below a lower threshold value, the event is flagged as a backfire event. In preferred embodiments, the lower threshold value for the calculated negative delta pressure is -5 psia. The system further requires that the lower threshold negative delta pressure value be at or below the lower threshold for a preset time period in order to determine that a backfire is occurring. In preferred embodiments, the preset time period is 10 ms. These pressure and duration values are suggested default values, and the system can be programmed for a different lower threshold negative delta pressure and/or over a longer or shorter duration. However, monitoring the apparent backfire pressure wave for a shorter duration can result in false backfire detections, as will be addressed below.

[00096] When the calculated delta pressure is at least equal to the lower threshold for a minimum duration of 10 ms, the ECM **100** communicates a signal to microcontroller **930** which in turn communicates a control signal commanding actuator **700** to open the throttle blade **210** to a minimum throttle position at Step **1110** in order to avoid damage to the throttle components. In preferred embodiments, the minimum throttle position is 70% open meaning that the throttle blade **210** is open to a position that is 70% of the fully open position. This number is calibratable, and other embodiments may set a different minimum throttle position. Opening the throttle blade **210** to the minimum throttle position allows the pressure wave to pass the throttle blade **210** without damaging the throttle blade **210**, throttle shaft **710**, or other throttle components. It should be understood that if, at the time the backfire pressure wave is detected, the throttle blade **210** is open to a position that is equal to or greater than the preset minimum throttle position, no correction or intervention is required.

[00097] Once the throttle blade **210** is opened to the minimum throttle position, the system then utilizes the upstream and downstream pressure sensors **951**, **952** to validate when the backfire event has ended. The ECM **100** monitors the pressure readings at Step **1112** such that, once the ECM **100** calculates the negative delta pressure value at Step **1114**, and the ECM **100** determines, at Step **1116**, that the delta pressure value has risen to an upper threshold pressure greater than the initial triggering negative delta pressure (-5 psia in the present example), the system **10** will then return to normal operation, *i.e.*, return to the commanded throttle position prior to the detection of the backfire event (Step **1118**). In some preferred embodiments, the threshold pressure for

determining that the backfire event has ended is -2 psia. Other delta pressure values may also be used to determine that the backfire event has ended.

[00098] In order to maintain efficient operation of the throttle **20**, and to avoid false indications of a backfire event resulting in an unnecessary intervention (automatic or otherwise), pressure fluctuations and other electronic noise that are not associated with a backfire event should be filtered out. In present embodiments, this is accomplished using a low pass filter to distinguish transitory pressure fluctuations that can occur during normal operation of the engine and throttle from those pressure waves that are indicative of a backfire event. A 1 ms low pass filter is employed in preferred embodiments.

[00099] In addition to the low pass filter, and as part of the process for validating that a backfire event is occurring, once the system detects the preset lower threshold negative delta pressure value associated with a backfire event, the system **10** is adapted to continue to quickly take pressure readings to determine if the value of the sensed negative delta pressure is continuing to decrease over time, *i.e.*, the negative delta pressure value is more negative over time. Preferred embodiments are adapted to continue determining the delta pressure value at preset time intervals after sensing the preset lower threshold negative delta pressure that would normally indicate a present backfire event. In preferred embodiments, the preset time interval is equal to 1 ms, although other time intervals may be used. The system **10** is further adapted to determine if the negative delta pressure is continuing to decrease for each of the readings at the 1 ms interval. As previously described, when the negative delta pressure is at least -5 psia, and particularly if the negative delta pressure continues to decrease, for a threshold duration, the system determines that a backfire event is occurring. In preferred

embodiments, the threshold duration is 10 ms. As described, once a backfire is determined to be occurring, the throttle blade **210** is opened to the threshold minimum position, unless the throttle blade **210** is at or above that threshold minimum position.

[000100] Once an intervention occurs opening the throttle blade **210** to the threshold minimum position, the system **10** can be calibrated to maintain the throttle blade **210** at the threshold minimum position for an active minimum time period. If circumstances dictate, particularly when there is a possibility of multiple pressure waves impacting the throttle, this active minimum time period should be adjusted to be above 0. In order to avoid other problems associated with the throttle blade **210** being open to the minimum threshold position, the system can also be calibrated with an active maximum period whereby, upon expiration of the active maximum period, the throttle blade **210** is commanded to return to the previously commanded position as shown in Step **1124**. In preferred embodiments, the active maximum period is set to 1 second, although other time periods may be implemented for the active maximum period.

[000101] During whatever time period the throttle blade **210** is set to the minimum throttle position, the system **10** is further adapted to validate that the backfire event has ended. As previously described, the system **10** may be calibrated to determine the backfire event has ended by setting an upper threshold negative delta pressure value, as shown in Step **1116**. It is anticipated that this validation occurs when the negative delta pressure value is calculated to be at or above the upper threshold (-2 psia in preferred embodiments) for a minimum time period. In preferred embodiments, this minimum time period may be 10 ms. The system also validates that the delta pressure is increasing during the minimum time period, meaning that the delta pressure determination is

approaching zero or a positive delta pressure. In preferred embodiments, the system **10** checks the delta pressure value every 1 ms, although other embodiments may employ a different time period for instituting delta pressure checks. After the passage of the minimum time period, if the delta pressure has not reached the upper threshold value, the system **10** continues to monitor the sensed pressure readings and continues to calculate the delta pressure value (Step **1120**). System **10** further continues to determine if the delta pressure has reached the upper threshold value (Step **1122**).

[000102] Preferred embodiments further include a reset period that is a calibratable period of time after a backfire detection and/or intervention has occurred when the system does not continue to check for a possible backfire event. This reset period is preferably 2 seconds, but other time periods may be used. During this reset period, throttle **20** continues or resumes normal operation.

[000103] Even in situations when a backfire event occurs but is not strong enough to warrant an intervention, the system **10** still collects the relevant sensor data and detects whether a backfire event has occurred. Just knowing that a backfire, or even multiple backfires, has occurred is valuable information. Many backfires are a result of mechanical problems with the engine **102**. Major engine failure may result from repetitive backfire events. Even when an engine **102** is able to withstand a backfire event without significant damage, an engine failure could result from multiple repetitive backfire event. Accordingly, when a backfire event is detected, the associated pressure data is communicated to the ECM **100**, which may create a diagnostic flag for review by an operator. The ECM **100** preferably maintains a record of all detected backfire events.

[000104] In order to prevent damage to the throttle **20**, not only does the backfire event need to be detected in a timely manner, but the intervention, when necessary, of moving the throttle blade **210** to the minimum throttle position must also be performed quickly. The time necessary to intervene is dependent on a number of factors. The actuator **700**, described above as a brushless motor, actuates movement of the throttle blade **210** to a safe position (minimum throttle position) during a backfire event. The speed with which the actuator **700** performs is dependent in part on the voltage supplied to the actuator **700**. Some embodiments may incorporate a 13-volt power supply, while other embodiments may employ a 24-volt power supply. Also, the intervention time depends on the size (diameter), and therefore the mass, of the throttle blade **210**. It is anticipated that the diameter of the throttle blade would be in the range of 50 mm to 120 mm. More particularly, large frame throttles may incorporate a throttle blade between 94 mm and 120 mm in diameter. Small frame throttles may incorporate a throttle blade between 50 mm and 76 mm. The actuator **700** preferably is able to open the throttle blade **210**, from fully closed to fully open, in about 40-80 ms, and even more preferably less than 50 ms. In particularly preferred embodiments, the maximum time for the actuator **700** to open the throttle, from 10% open to 90% open, is around 42 ms. However, many instances in which intervention is required to avoid damage to the throttle **20**, less movement of the throttle blade **210** would be necessary in order to open the throttle to the minimum throttle position, particularly in those circumstances when the throttle blade **210** is already open to a position less than the minimum throttle position but more than 10% open. Thus, response times for the actuator **700** in these instances would be less than 42 ms.

Throttle Control Strategy

[000105] As will be understood by those of skill in the art, the following mass flow rate equations are used to describe the non-choked flow of gases through an orifice. Equation (1) is the mass flow rate equation for ideal gases and equation (2) uses a gas compressibility factor “Z” to correct for the mass flow rate of real gases.

$$(1) \quad \dot{m} = C A_2 \sqrt{2 \rho_1 P_1 \left(\frac{k}{k-1} \right) \left[(P_2/P_1)^{2/k} - (P_2/P_1)^{(k+1)/k} \right]}$$

$$(2) \quad \dot{m} = C A_2 P_1 \sqrt{\frac{2 M}{Z R T_1} \left(\frac{k}{k-1} \right) \left[(P_2/P_1)^{2/k} - (P_2/P_1)^{(k+1)/k} \right]}$$

In these equations, “ $\dot{m}$ ” is the mass flow rate; “C” is the dimensionless orifice flow coefficient; “ A_2 ” is the cross-sectional area of the orifice hole (“effective area”); “ ρ_1 ” is the upstream real gas density; “ P_1 ” is the upstream gas pressure; “k” is specific heat ratio; “ P_2 ” is the downstream gas pressure; “M” is the gas molecular mass; “ T_1 ” is the absolute upstream gas temperature; “Z” is the dimensionless gas compressibility factor at “ P_1 ” and “ T_1 ”; and “R” is the universal gas law constant.

[000106] With reference to **Fig. 10**, the throttle control algorithm **990** determines the A_2 “effective area” needed to achieve the desired $\dot{m}$ flowrate using equation (2). P_2 , P_1 , and T_1 are measured as previously described and these values are used in equation (2). The microcontroller **930** is constantly utilizing the throttle control algorithm **990** to attain precise $\dot{m}$ flowrates while the parameters change. Once the “effective area” A_2 is determined by throttle control algorithm **990**, a signal is transmitted to brushless motor **700**. Brushless motor **700** is an actuator that controls the movement of throttle shaft **710**, thereby adjusting throttle blade **210** of gaseous supply throttle **20** until the desired “effective area” A_2 is achieved. Brushless motor **700** is preferably a fast-acting

actuator, preferably operable to move the throttle blade **210** through its entire range of motion in fifty milliseconds or less. Fast-acting actuators are preferably operable to move the actuated element through most of its operable range of motion (preferably from 10% to 90% of stroke), if not all of that operable range, in fifty milliseconds or less, although many other types of actuators are still likely to be suitable as alternatives, especially to the extent particular claim elements are not expressly disclaimed to require particular fast-acting characteristics.

Operating Pressures – Low Pressure

[000107] Although it will be understood that adaptations may be made for other upstream conditions, the pressure in the supply line **376** at the supply inlet **390** is preferably controlled by mechanical pressure regulator **370** to be approximately at a gauge pressure slightly above one atmosphere, although when throttle **10** is used as an MFG throttle, pressures could be as high as 2.5 bar absolute or, in the case of MFA application, as high as four bar absolute.

[000108] Although not necessary for highly accurate mass flow control, some methods of controlling large engine throttle **10** may also be further tuned to achieve the desired control depending in part on actual or estimated fluid conditions even further downstream, such as by a downstream sensor **121** monitoring pressure (designated as " P_3 " for our purposes) that is monitored by ECM **100** and for which a representative data signal **120** is continuously available from ECM **100** (or from the data network associated with ECM **100**). The particular P_3 value of data signal **120** represents any available data stream from engine **102** that is characteristic of pre-combustion fluid pressure within engine **102**. Such a downstream sensor **121** may be a conventional temperature and

manifold absolute pressure (TMAP) sensor module located in the engine's intake manifold downstream from fuel-air throttle **140**. In addition to, or as an alternative to, a conventional TMAP sensor **121**, downstream data can also be gathered from a conventional throttle inlet pressure (TIP) sensor module upstream of fuel-air throttle **140**. Again, though, despite the plausible benefits of knowing the further downstream pressure P_3 for some variations of the invention, most preferred embodiments of throttle **10** omit consideration of P_3 data from sensor **121** as unnecessary, opting instead for simplicity and cost saving.

Alternative Fuels

[000109] Gaseous fuel for these purposes means a fuel that is in the gaseous state at standard operating temperatures and pressures. In presently preferred embodiments, the gaseous fuel is natural gas, derived from either a liquefied natural gas (LNG) or compressed natural gas (CNG) storage state. While the most preferred embodiments are adapted for use with these fuels, adaptations will be evident to those of skill in the art for use of aspects of this invention with other fuels in alternative embodiments. Such alternative embodiments are adapted, for instance, for use with hydrogen or other gaseous fuels such as propane, butane or other gas mixtures, including those common with liquefied petroleum gas (LPG) mixtures. Indeed, although the present invention is focused on the particular fields to which the preferred embodiments apply, it may also well be that some aspects of the invention may be found revolutionary in other fields as well.

Alternatives in General

[000110] While the foregoing descriptions and drawings should enable one of ordinary skill to make and use what is presently considered to be the best mode of the invention, they should be regarded in an illustrative rather than a restrictive manner in all respects. Those of ordinary skill will understand and appreciate the existence of countless modifications, changes, variations, combinations, rearrangements, substitutions, alternatives, design choices, and equivalents ("Alternatives"), most if not all of which can be made without departing from the spirit and scope of the invention.

[000111] Therefore, the invention is not limited by the described embodiments and examples but, rather, encompasses all possible embodiments within the valid scope and spirit of the invention as claimed, as the claims may be amended, replaced or otherwise modified during the course of related prosecution. Any current, amended, or added claims should be interpreted to embrace all further modifications, changes, rearrangements, substitutions, alternatives, design choices, and embodiments that may be evident to those of skill in the art, whether now known or later discovered. In any case, all equivalents should be considered within the scope of the invention, to the extent expressly disclaimed during prosecution or to the extent necessary for preserving validity of particular claims in light of the prior art.

CLAIMS

We claim:

1. A system and method as shown and described.

AMENDED CLAIMS

received by the International Bureau on 02 July 2020 (02.07.2020)

The following is a listing of the claims:

1. Cancelled
2. A method for detecting a backfire event in a spark-ignited internal combustion engine and for protecting a throttle from damage resulting from the backfire event, the method comprising the steps of:
 - a) sensing a pressure, by a first pressure sensor, upstream of a throttle blade, wherein the first pressure sensor senses the pressure upstream of the throttle blade at a preset time interval;
 - b) sensing a pressure, by a second pressure sensor, downstream of the throttle blade, wherein the second pressure sensor senses the pressure downstream of the throttle blade at the preset time interval;
 - c) communicating, by the first and second pressure sensors, upstream and downstream pressure readings to an engine control module (ECM);
 - d) calculating, by the ECM, a pressure differential between the upstream pressure readings and the downstream pressure readings;
 - e) comparing, by the ECM, the pressure differential to a preset lower threshold pressure value, wherein the preset lower threshold is indicative of a backfire event downstream of the throttle;
 - f) when the pressure differential is at or below the preset lower threshold, then sending a control signal, by the ECM, to a microcontroller;
 - g) sending a control signal, by the microcontroller, to a throttle actuator to open the throttle blade;

- h) opening the throttle blade, by the throttle actuator, to a minimum throttle position for a minimum time period;
 - i) determining, by the ECM, whether the pressure differential is at or below the lower threshold pressure value after expiration of the minimum time period;
 - j) when the pressure differential is at or below the lower threshold after expiration of the minimum time period, maintaining, by the throttle actuator, the throttle blade at the minimum throttle position;
 - k) determining, by the ECM, whether the throttle blade has been opened to the minimum throttle position for a maximum time period, and when the determination is made that the throttle blade has been opened to the minimum throttle position for the maximum time period, returning the throttle blade, by the throttle actuator, to a previously commanded throttle position; and
 - l) when the pressure differential is determined to be above the lower threshold, determining, by the ECM, whether the pressure differential is at or above an upper threshold pressure value, and when the determination is made that the pressure differential is at or above the upper threshold pressure value, returning the throttle blade, by the throttle actuator, to the previously commanded throttle position.
3. The method of claim 2, wherein the minimum throttle position is equal to 70% of a fully open throttle position.
4. The method of claim 2, wherein the preset time interval is in a range of 5-10 milliseconds.
5. The method of claim 2, wherein the preset lower threshold differential pressure value is -5 pounds per square inch absolute (psia).

6. The method of claim 2, wherein the preset upper threshold differential pressure value is -2 psia.
7. The method of claim 2, wherein the maximum time period is 1 second.
8. The method of claim 8, wherein the actuator comprises a fast-acting motor such that the actuator is configured to move the throttle blade from a fully closed position to a fully open position in 40-80 milliseconds.
9. A mass-flow throttle system for detecting a backfire event in a spark-ignited internal combustion engine and for protecting a throttle from damage resulting from the backfire event, the mass-flow throttle system comprising:
 - a) a throttle body having a throttle blade, wherein the throttle blade is configured to rotate along an axis;
 - b) a first pressure sensor positioned upstream of the throttle blade, the first pressure sensor being adapted to sense a pressure of a fluid upstream of the throttle blade;
 - c) a second pressure sensor positioned downstream of the throttle blade, the second pressure sensor being adapted to sense a pressure of a fluid downstream of the throttle blade;
 - d) a fast-acting actuator associated with the throttle blade, the fast-acting actuator being configured to move the throttle blade through a range of movement from fully open to fully closed;
 - e) an engine control module (ECM) adapted to receive signals, the signals comprising one or more sensed pressure readings from the first pressure sensor positioned upstream of the throttle blade and one or more sensed pressure readings from the second pressure sensor positioned downstream of the throttle blade, wherein the

ECM is further adapted to calculate a differential pressure value, the differential pressure value being the difference between the one or more upstream pressure readings and the one or more downstream pressure readings;

- f) the ECM being further adapted to determine whether the differential pressure value is at or below a lower threshold differential pressure value;
- g) the actuator being adapted to receive a control signal, the actuator being configured to open the throttle blade, based on the control signal, to a minimum throttle position when the ECM determines that the differential pressure value is at or below the lower threshold differential pressure value;
- h) the ECM being further adapted to determine whether the differential pressure value is at or above an upper threshold differential pressure value; and
- i) the actuator being configured to return the throttle blade to a previously commanded throttle position when the ECM determines that the differential pressure value is at or above the upper threshold differential pressure value.



10. The mass-flow throttle system of claim 9, wherein the ECM is further adapted to determine whether the throttle blade has been open to the minimum throttle position for a maximum time period.


11. The mass-flow throttle system of claim 10, wherein the actuator is configured to return the throttle blade to the previously commanded throttle position when the ECM determines that the throttle blade has been open to the minimum throttle position for a maximum time period.


12. The mass-flow throttle system of claim 11, wherein the maximum time period is one second.

13. The mass-flow throttle system of claim 9, wherein the minimum throttle position is 70% of a fully open throttle position.
14. The mass-flow throttle system of claim 9, wherein the lower threshold differential pressure value is -5 pounds per square inch absolute (psia).
15. The mass-flow throttle system of claim 9, wherein the upper threshold differential pressure value is -2 psia.
16. The mass-flow throttle system of claim 9, wherein the throttle blade has a diameter between 50 millimeters to 120 millimeters.

1/14

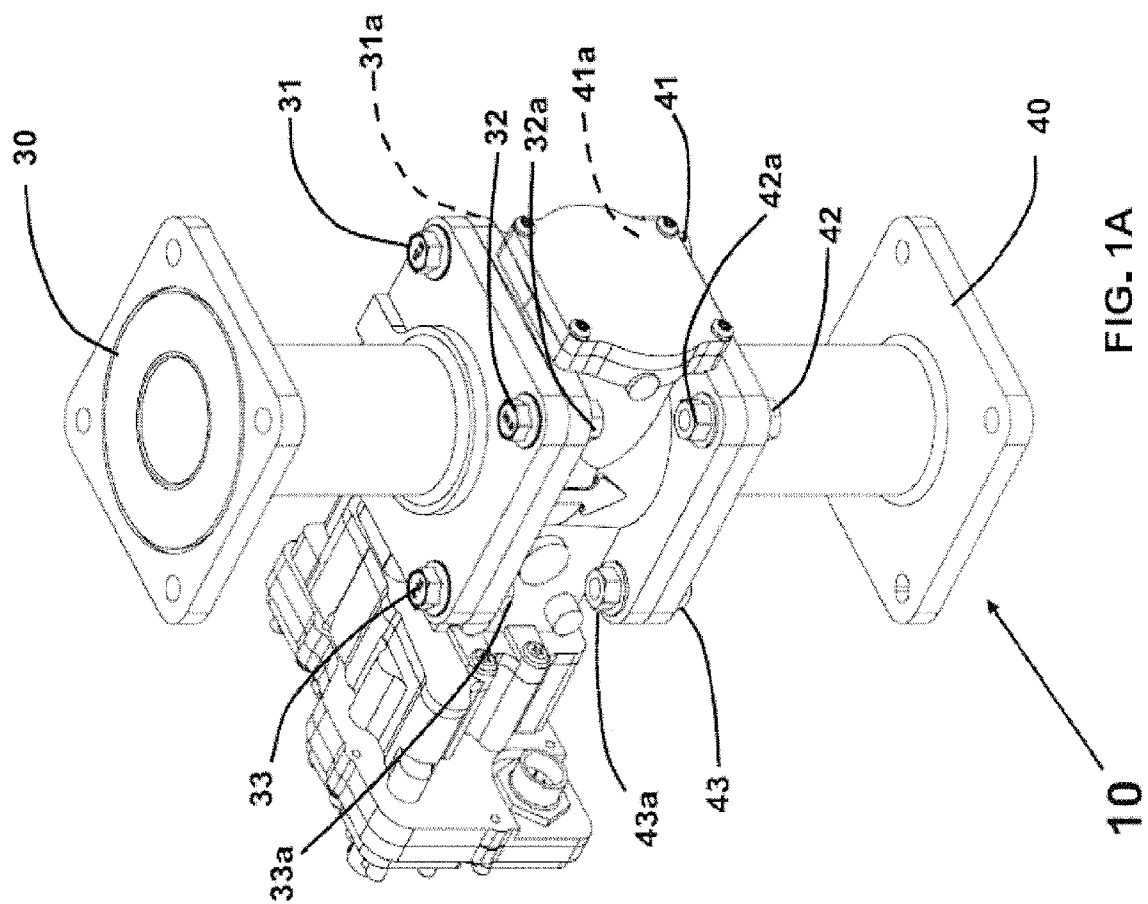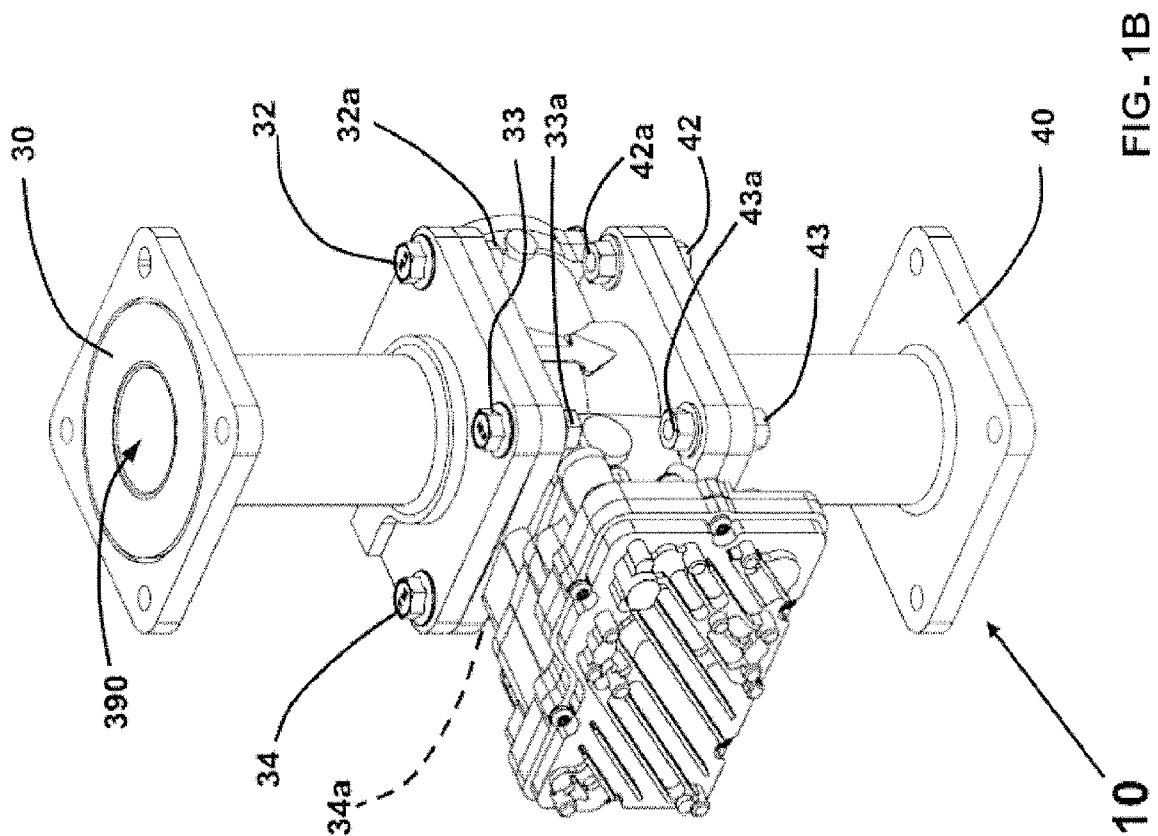

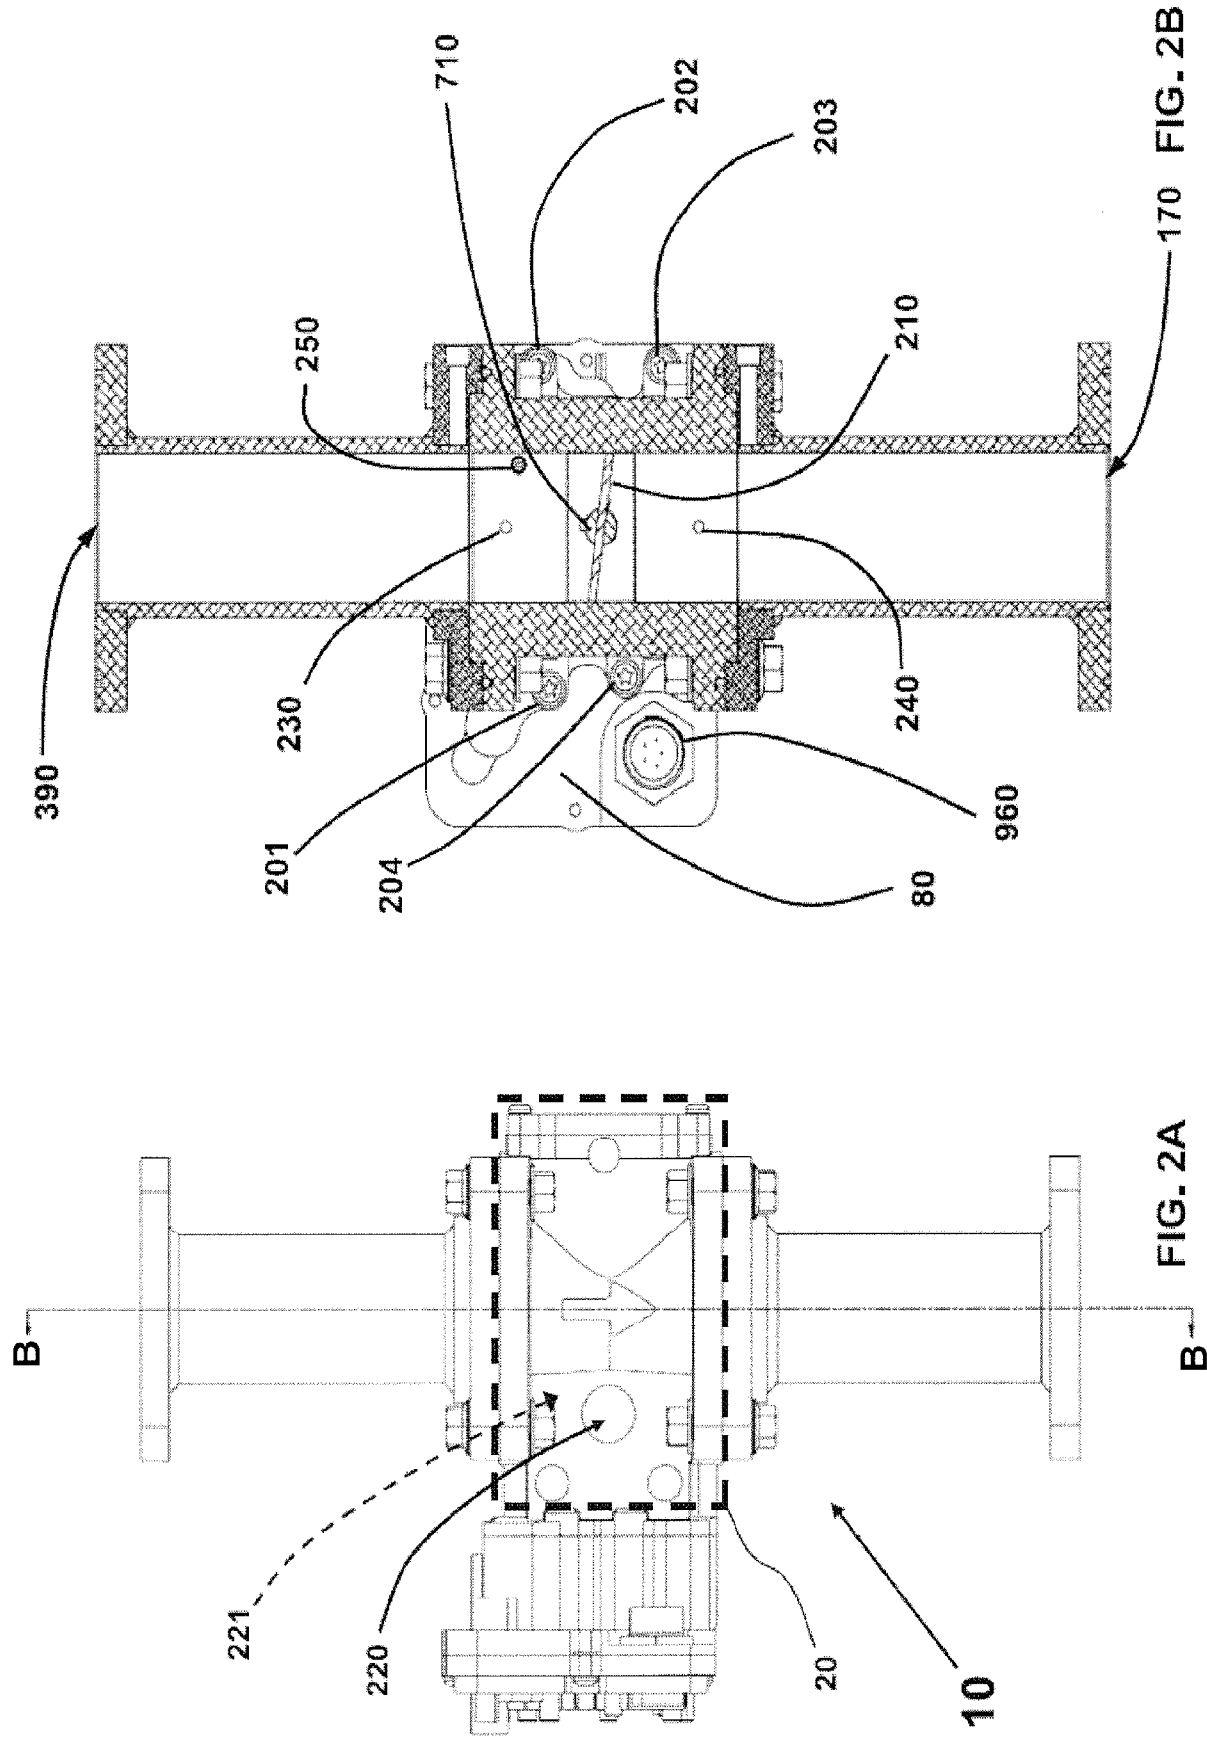

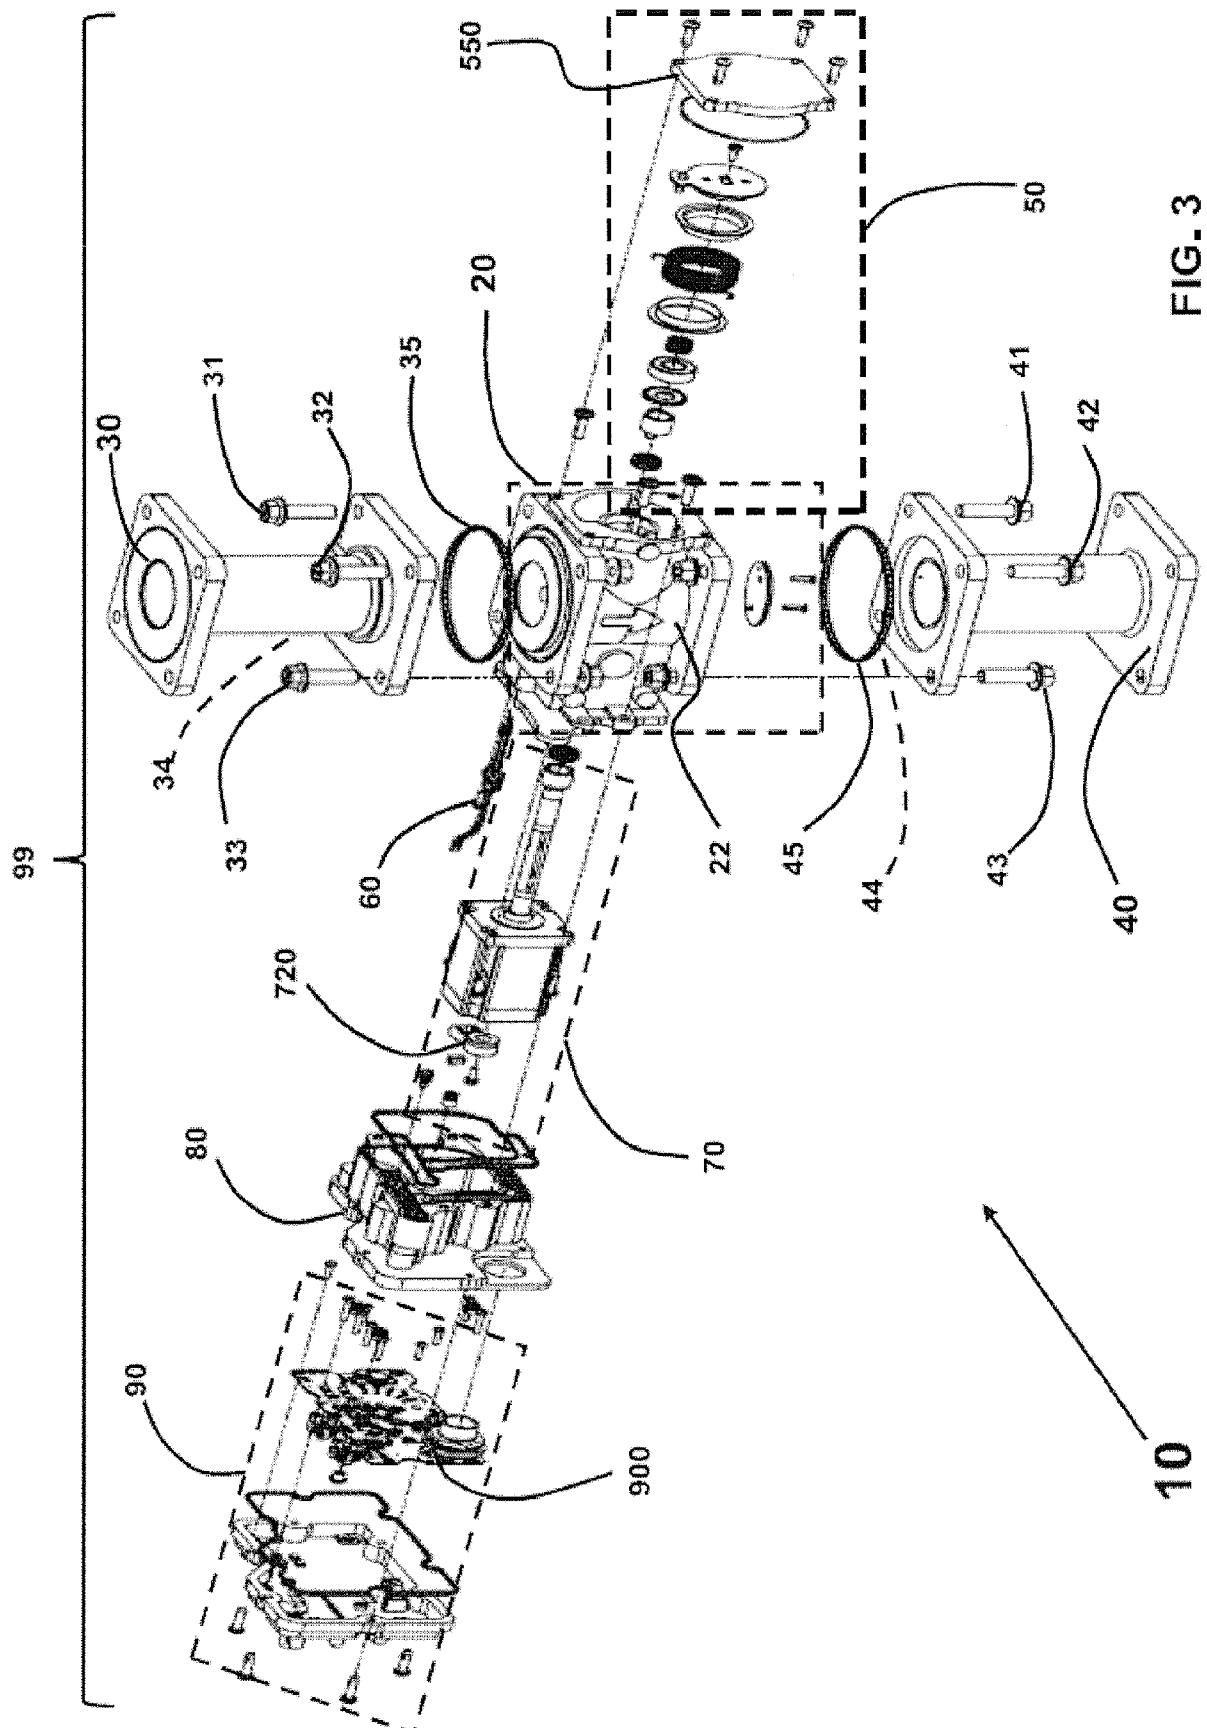

4/14

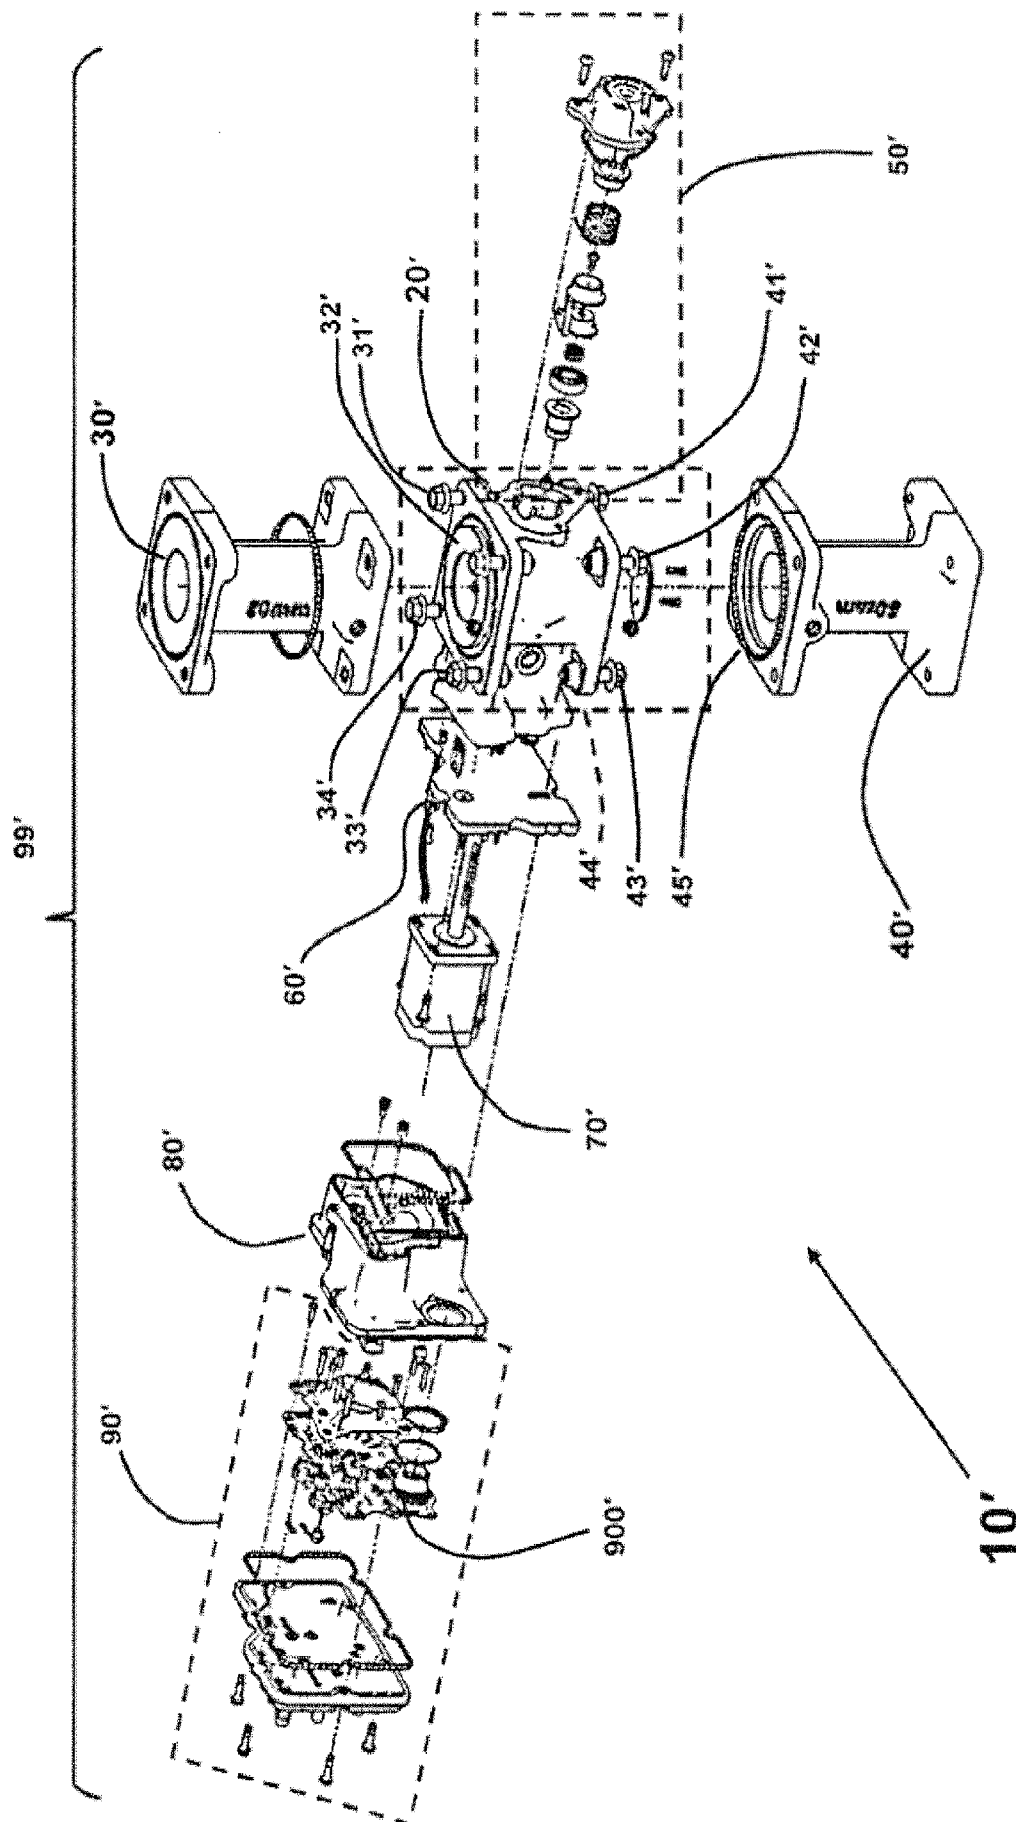


FIG. 3A

5/14

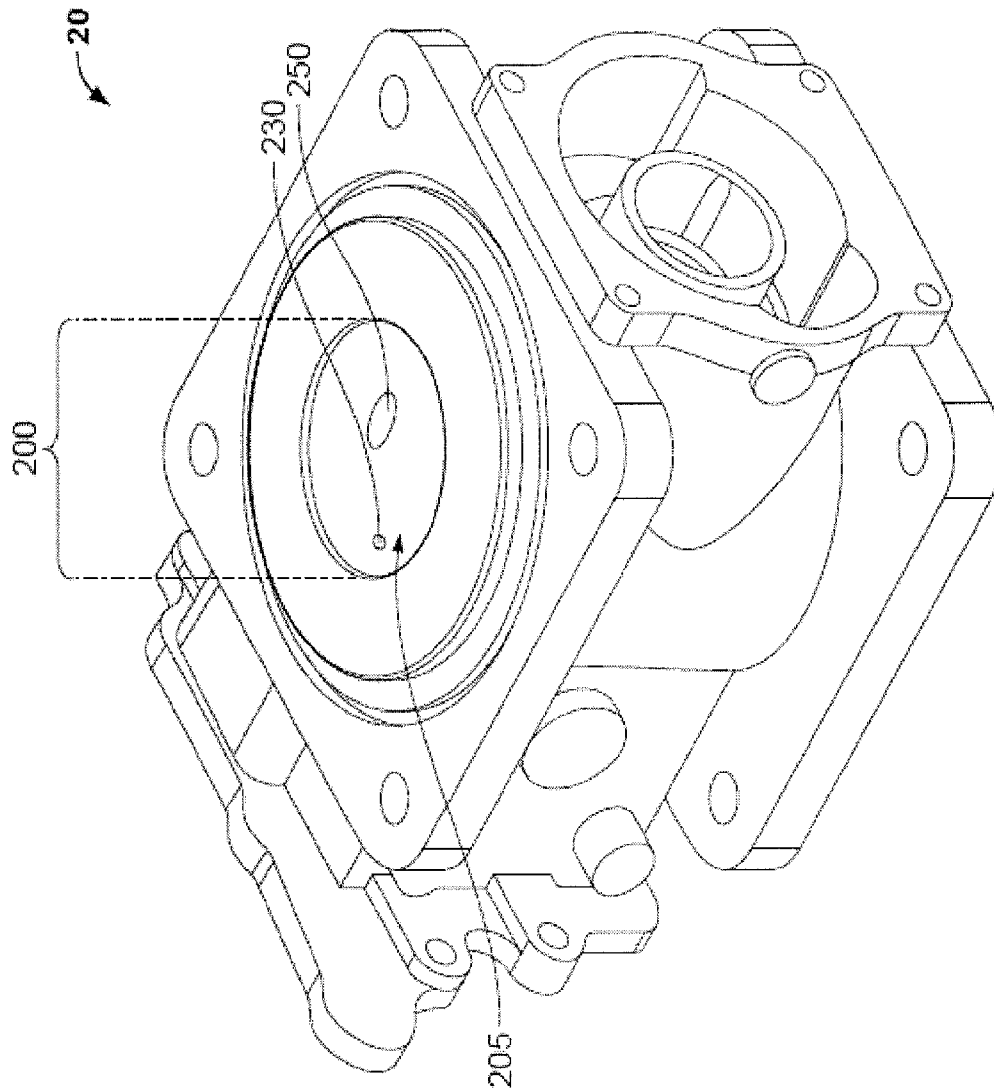


FIG. 4

6/14

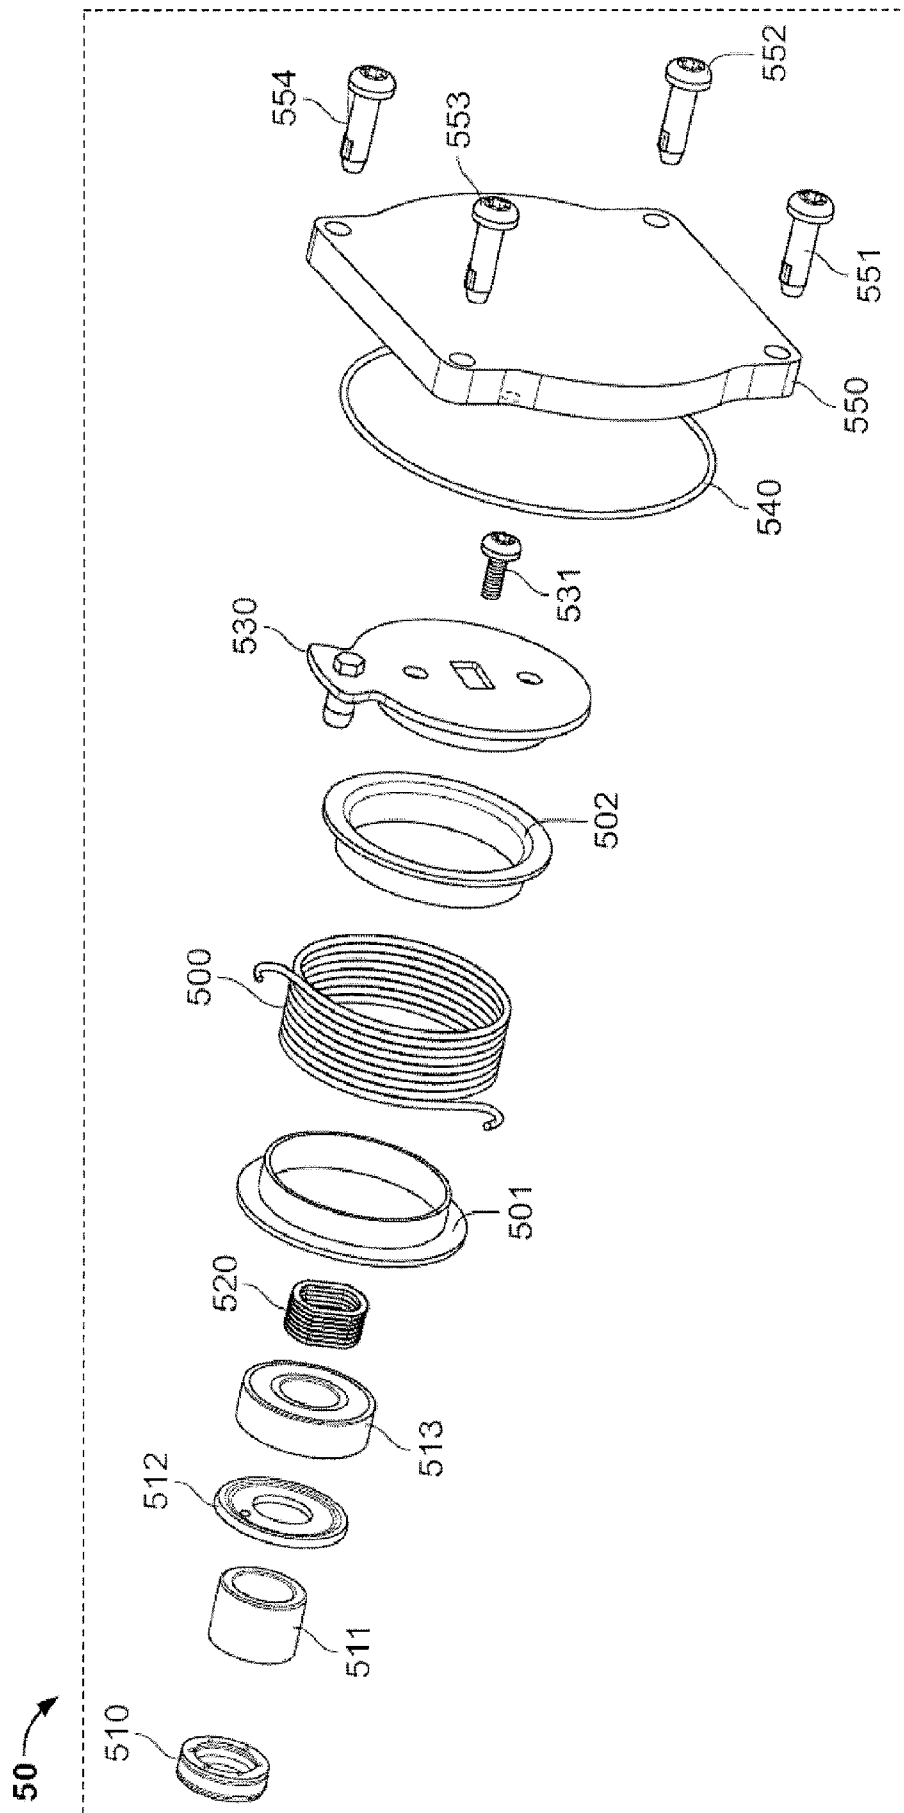


FIG. 5

7/14


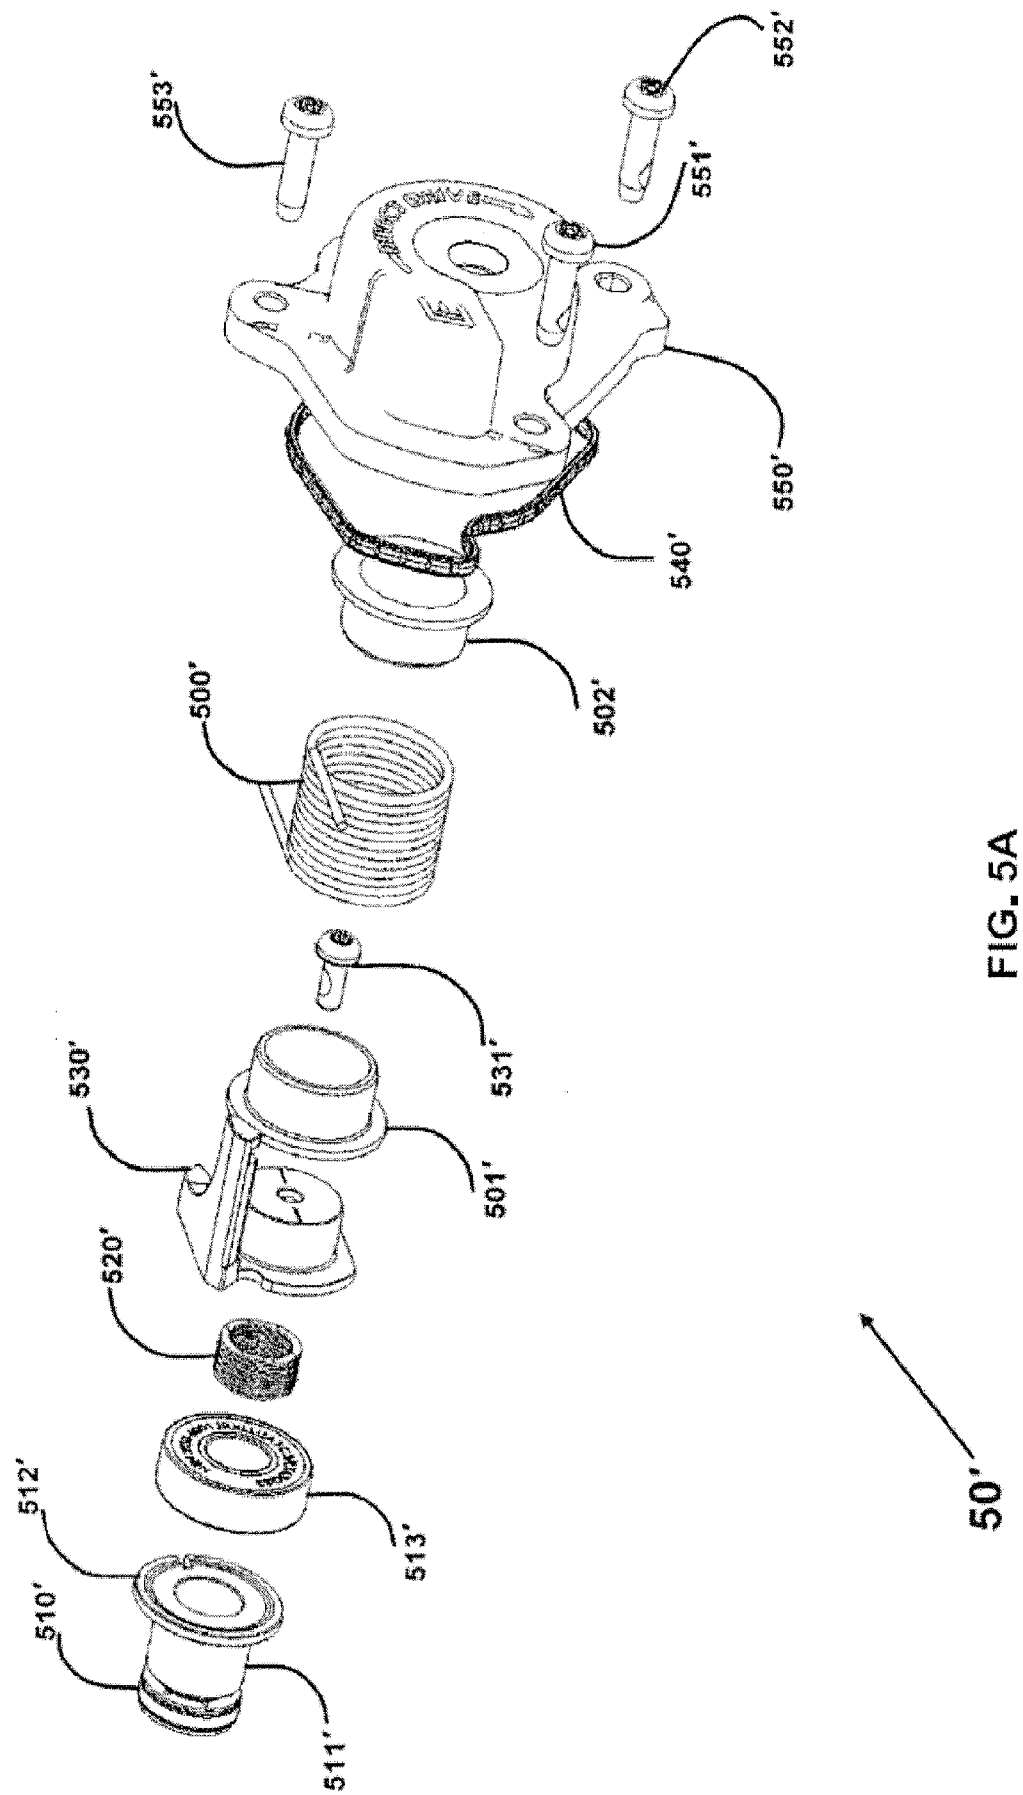


FIG. 5A

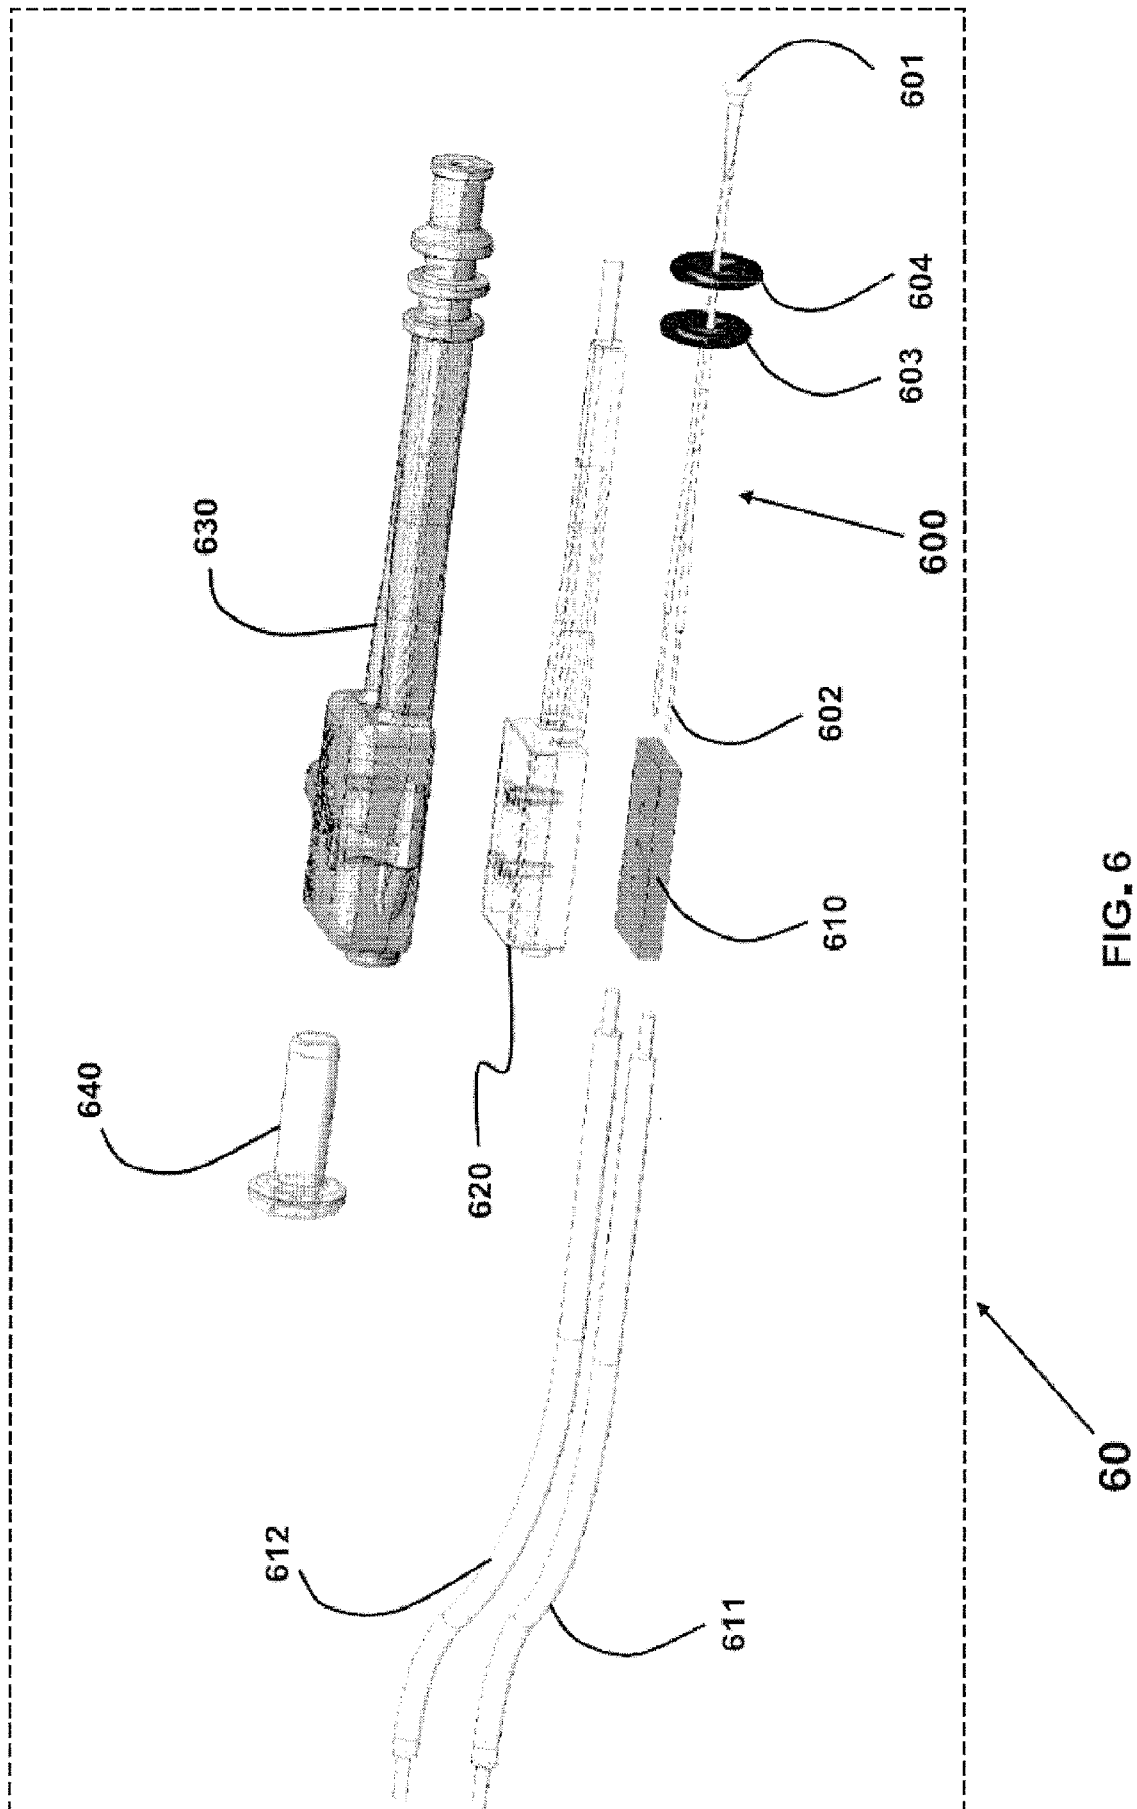

9/14

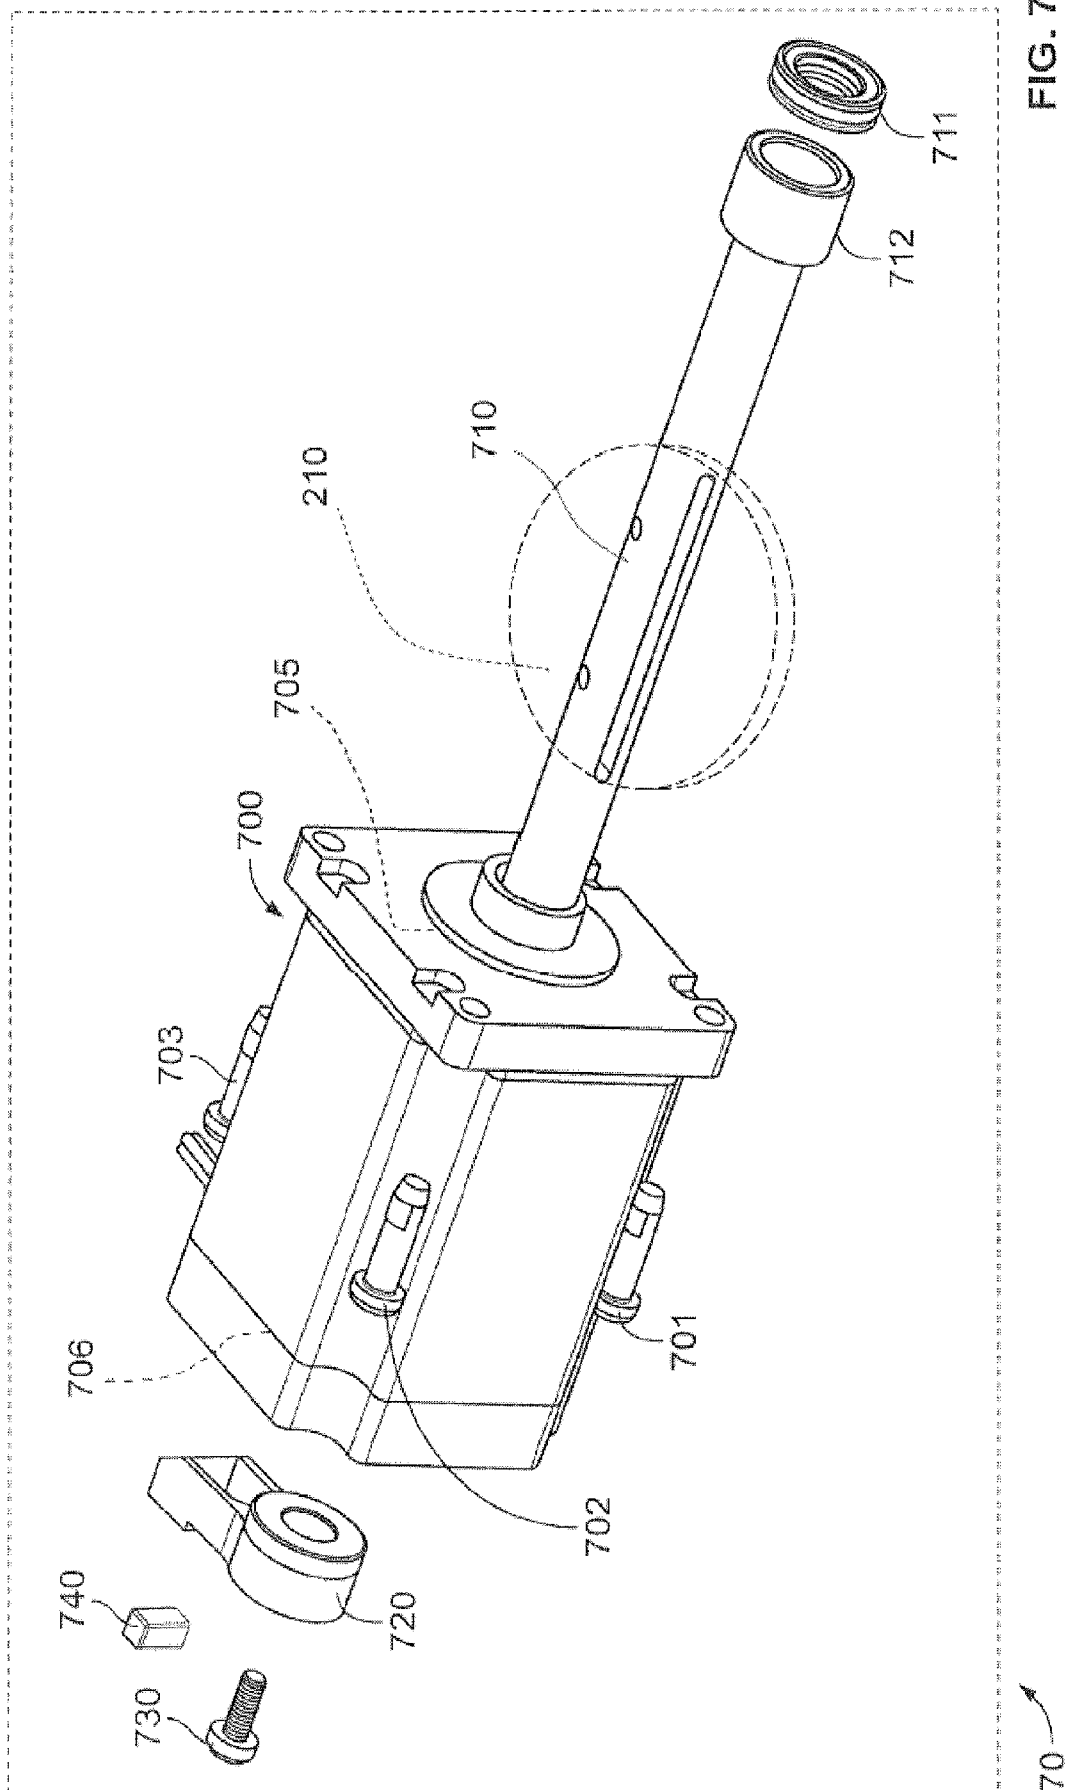
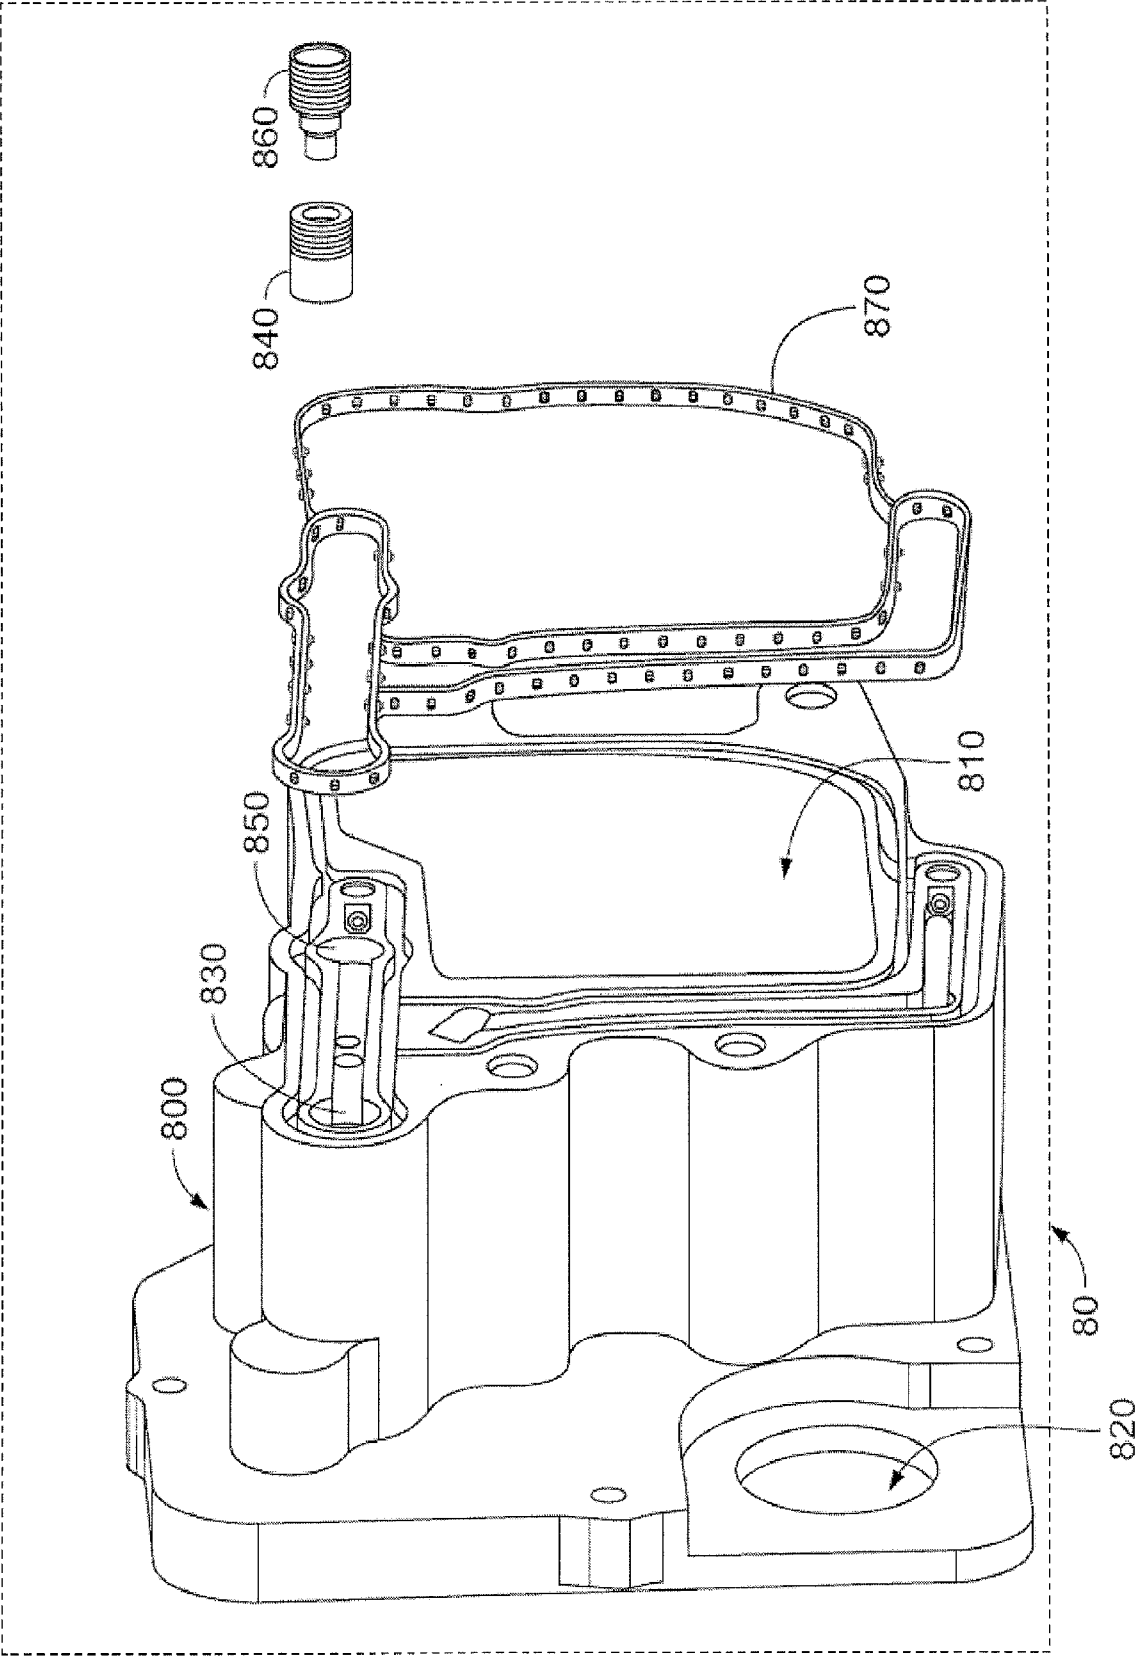


FIG. 8



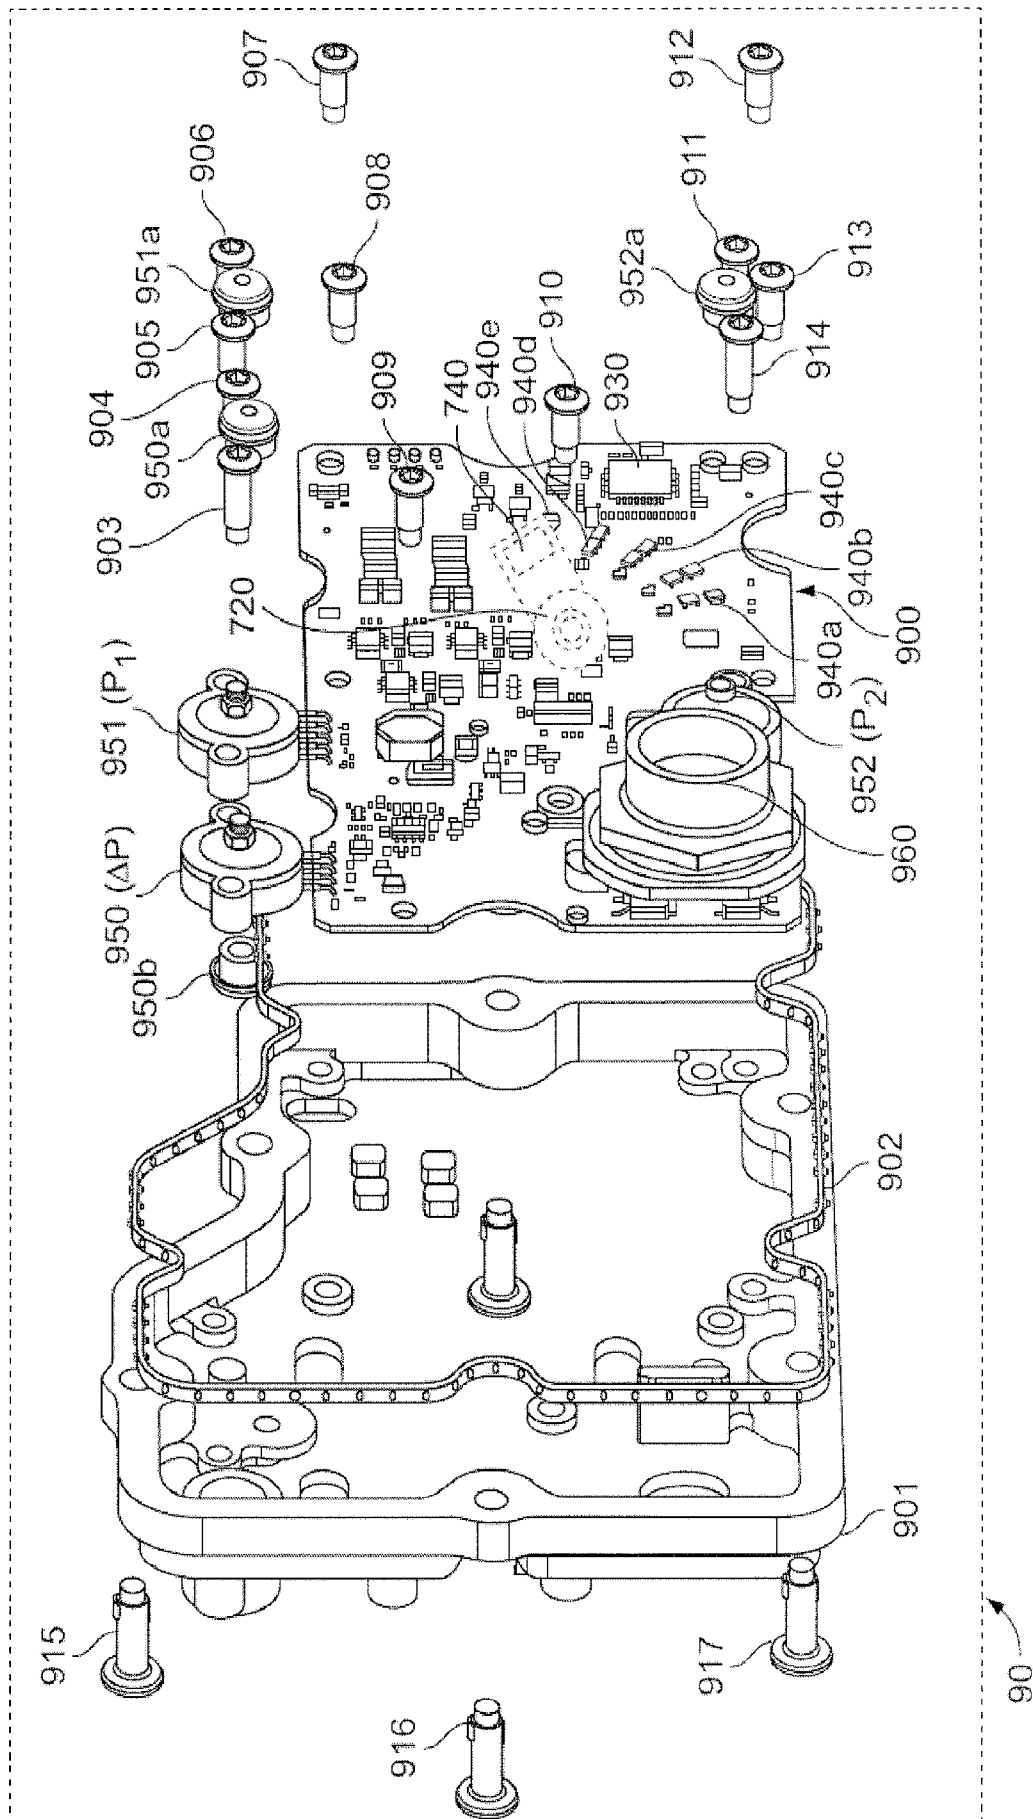


FIG. 9

12/14

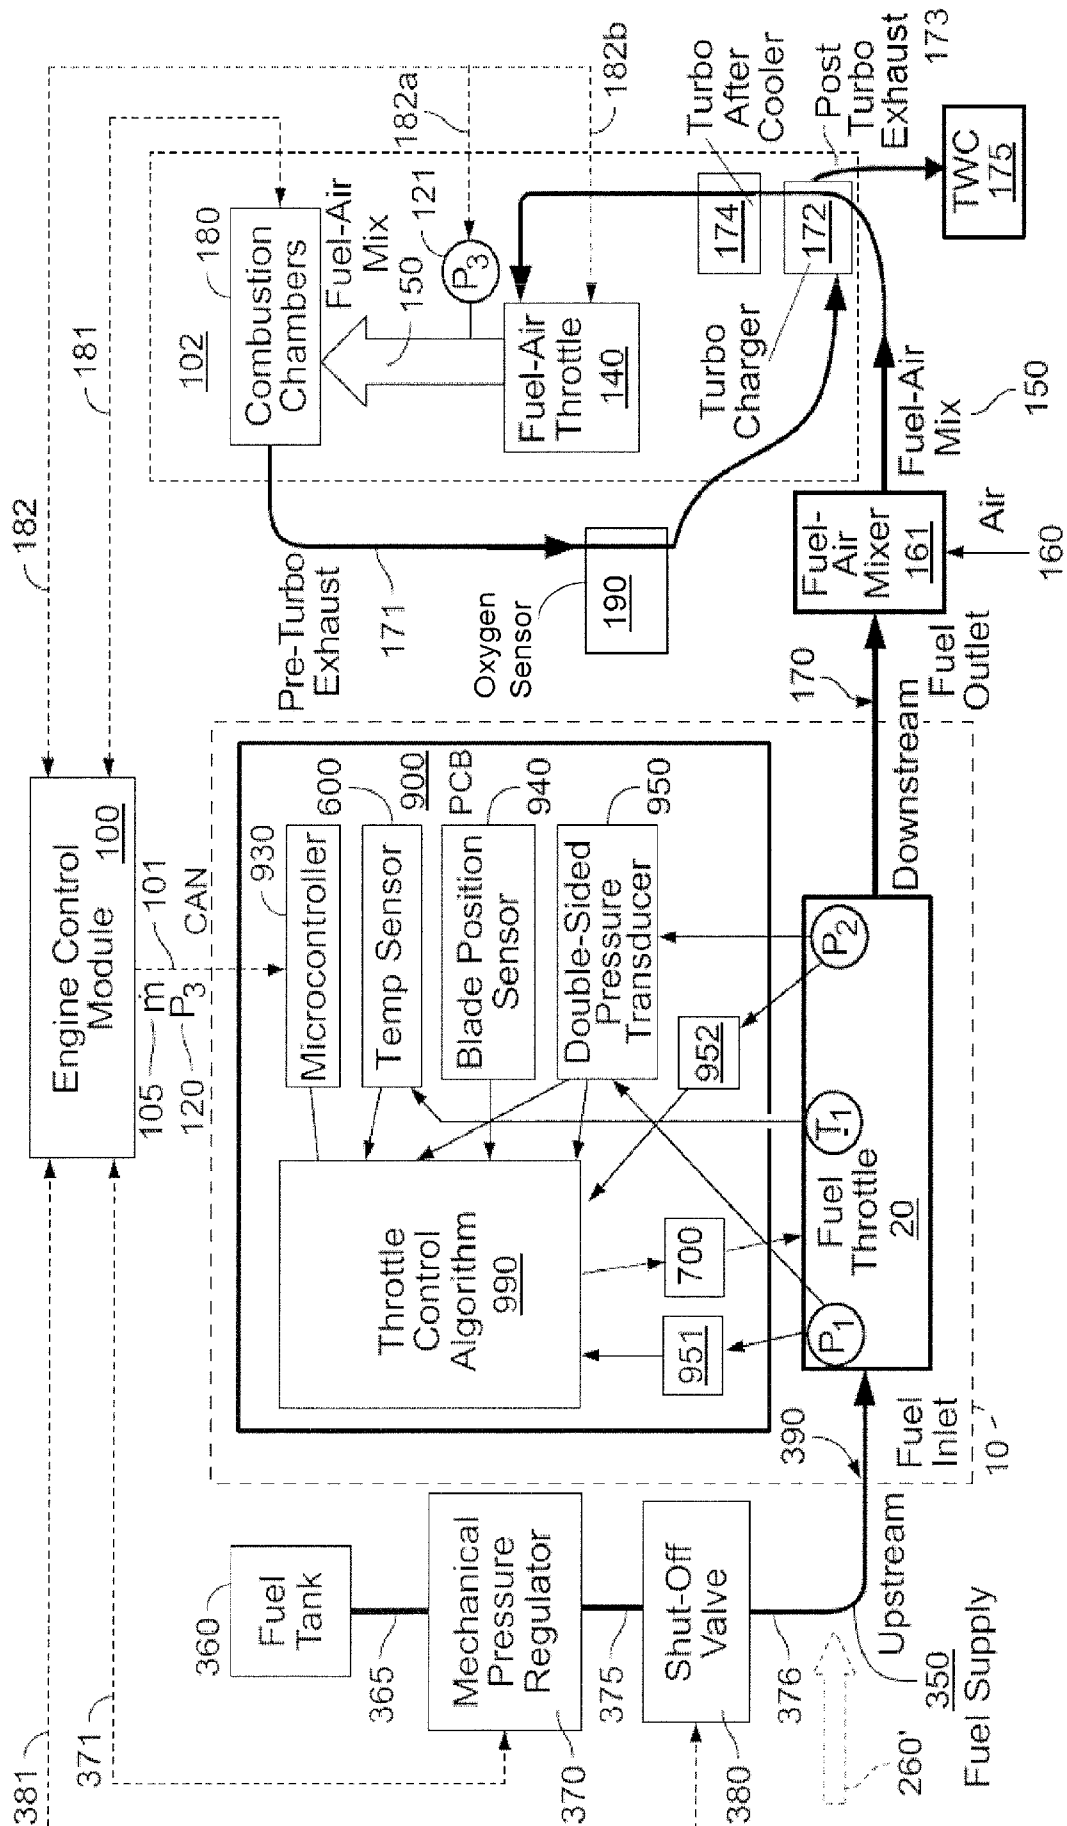


FIG. 10

13/14


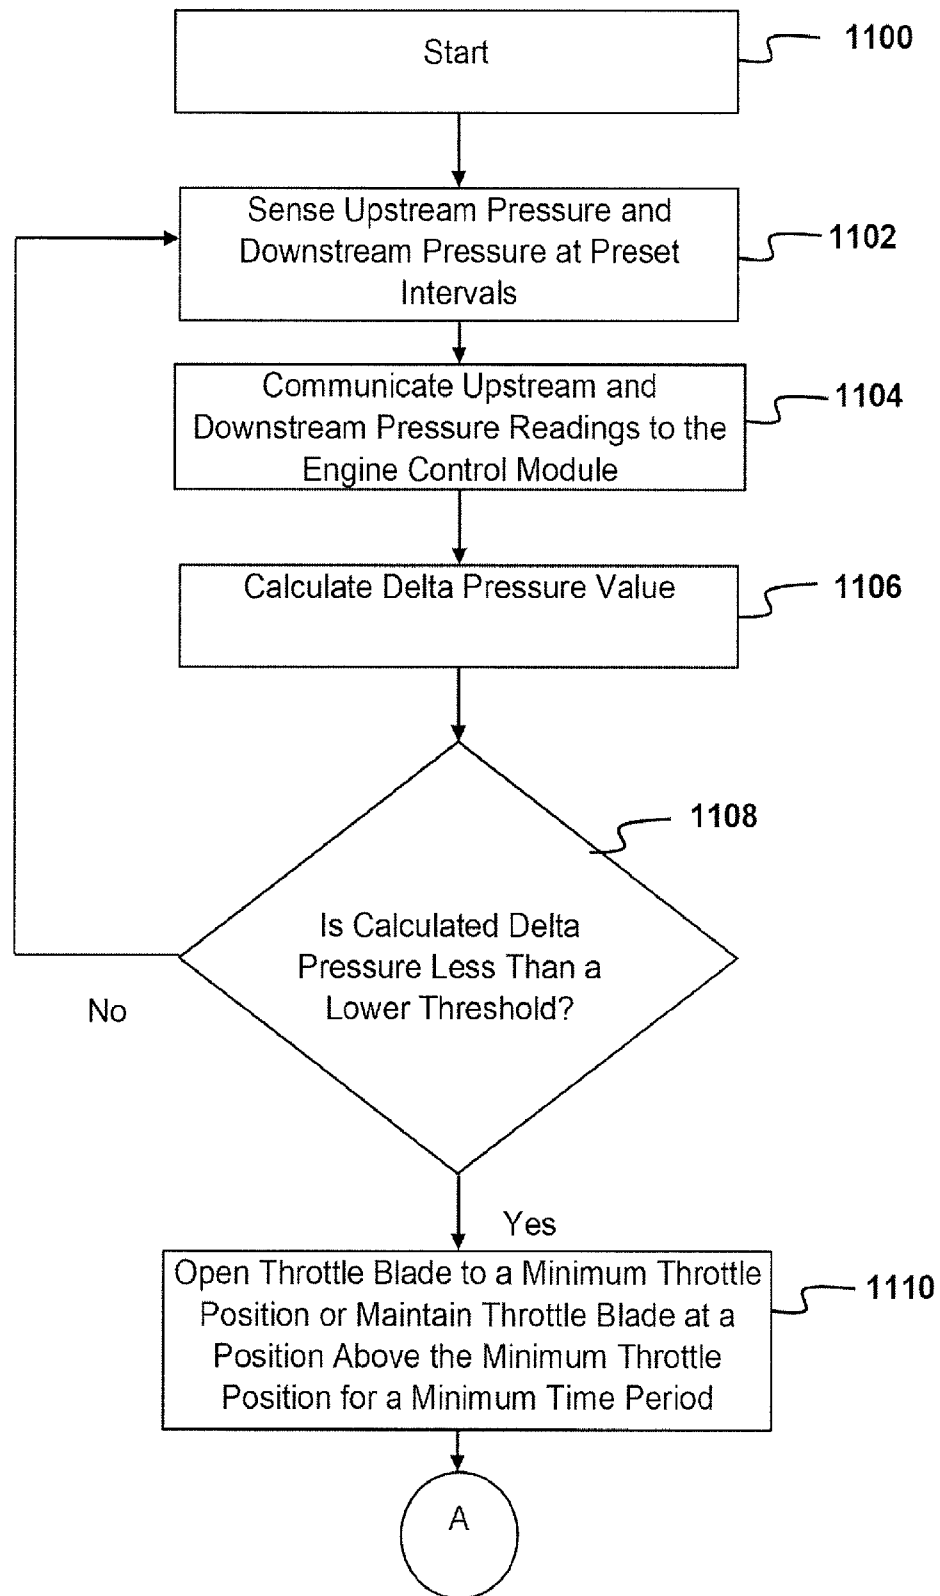


FIG. 11A

14/14

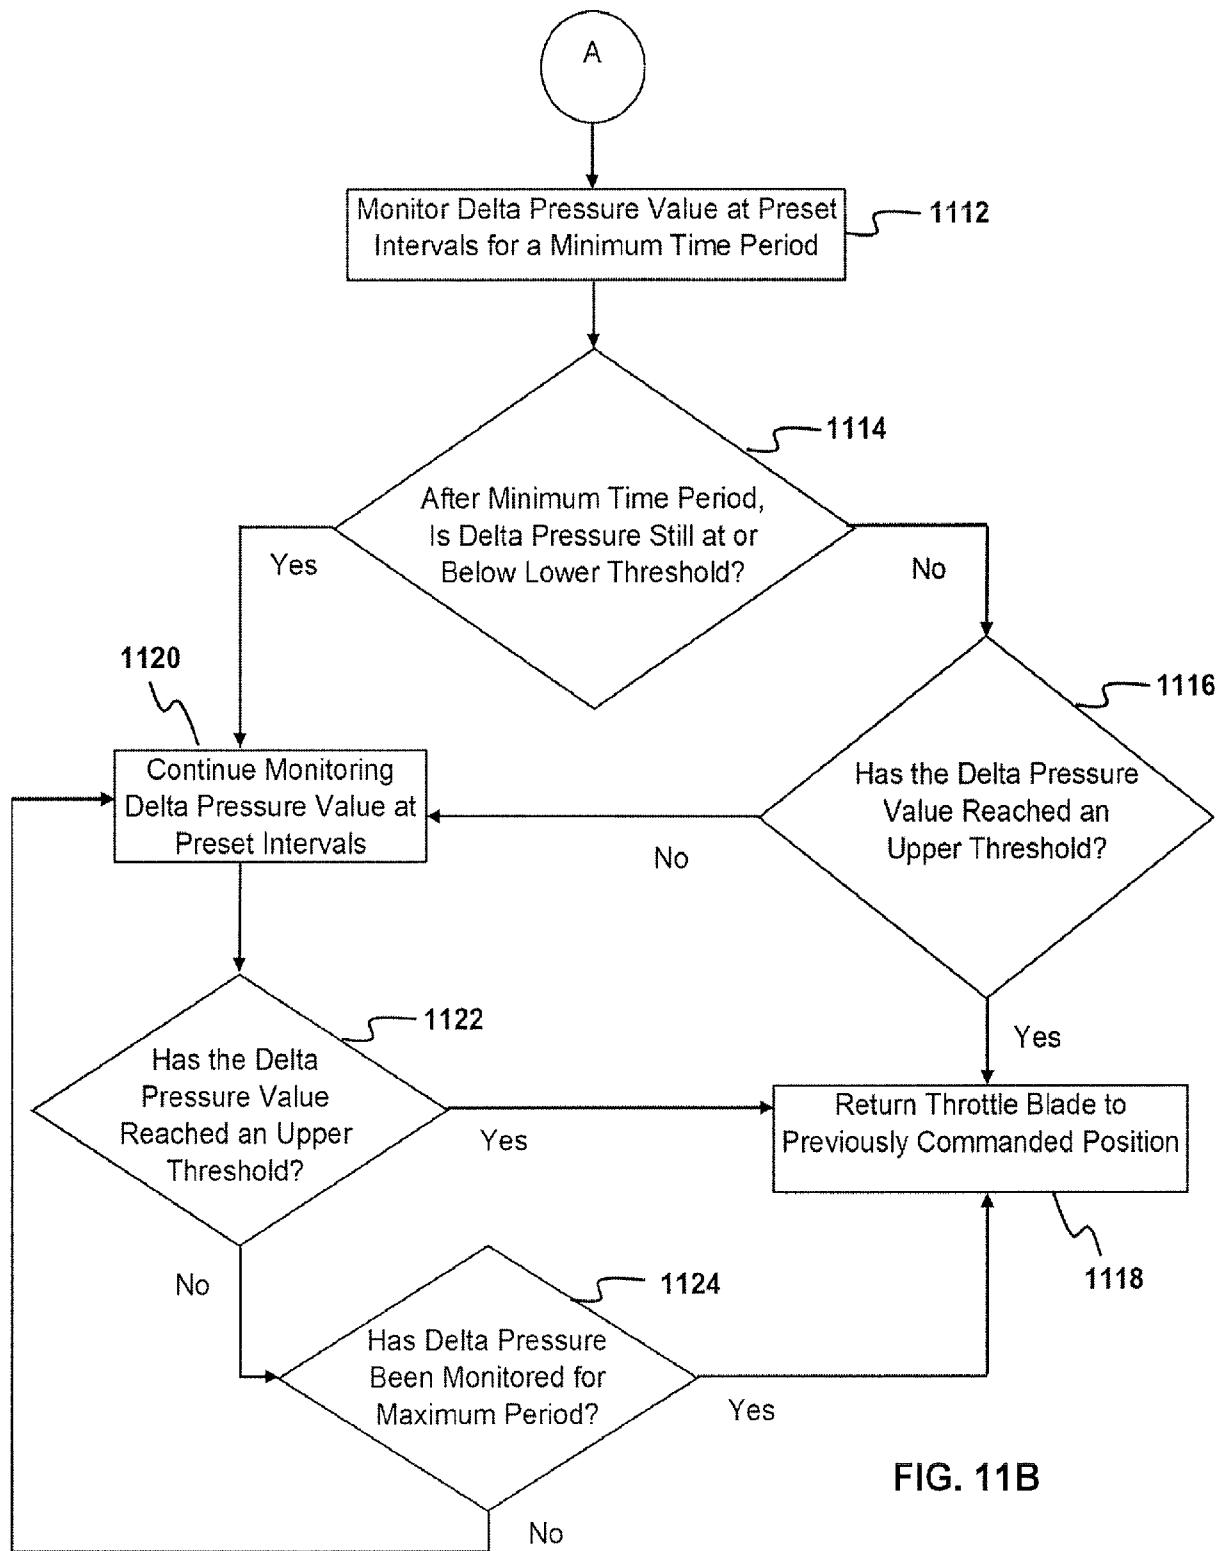

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 20/20488

A. CLASSIFICATION OF SUBJECT MATTER

IPC - F02D 9/10, F02B 77/08 (2020.01)

CPC - F02D 9/10, F02D 9/105, F02D 9/1065, F02D 9/107, F02B 77/085

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	IN 201714013970 A (ROBERT BOSCH CO LTD) 27 October 2017 (27.10.2017), Fig 1; pg7, ln 10-pg 8, ln 6; pg 12, ln 14-15; pg 9, ln 15-pg 10, ln 3	1
Y	US 2018/0223999 A1 (EMERSON PROCESS MANAGEMENT REGULATOR TECHNOLOGIES, INC.) 09 August 2018 (09.08.2018), para [0004], [0034]-[0036]	1
A	US 9,957,920 B2 (ENOVATION CONTROLS, LLC) 01 May 2018 (01.05.2018), entire document	1
A	US 2015/0247639 A1 (GAS POINT S.R.I.) 03 September 2015 (03.09.2015), entire document	1
A	US 2006/0005808 A1 (BLOMENBERG et al.) 12 January 2006 (12.01.2006), entire document	1
A	US 4,038,819 A (YOSHIKAWA et al.) 02 August 1977 (02.08.1977), entire document	1

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

07 May 2020

Date of mailing of the international search report

08 JUN 2020

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Lee Young

Telephone No. PCT Helpdesk: 571-272-4300