



US 20120231707A1

(19) **United States**(12) **Patent Application Publication****Pahl et al.**(10) **Pub. No.: US 2012/0231707 A1**(43) **Pub. Date: Sep. 13, 2012**(54) **SANDPAPER WITH NON-SLIP LAYER****Publication Classification**

(75) Inventors: **Thomas E. Pahl**, Ames, IA (US);
John G. Petersen, Center City, MN
(US); **Michael P. Wald**, Ankeny, IA
(US)

(51) **Int. Cl.**
B24D 11/00 (2006.01)
B24B 1/00 (2006.01)
B24D 18/00 (2006.01)

(73) Assignee: **3M Innovative Properties
Company**

(52) **U.S. Cl.** **451/59; 51/298; 51/295**

(21) Appl. No.: **13/412,924**


(57) **ABSTRACT**


(22) Filed: **Mar. 6, 2012**

The present invention provides an abrasive article, e.g. a sheet of sandpaper, comprising a backing layer having opposed first and second major surfaces, an adhesive make coat on the second major surface, abrasive particles at least partially embedded in the make coat, thereby defining an abrasive surface, and an exposed non-slip coating layer on the first major surface, the non-slip coating layer comprising at least a base resin and a tackifying resin.

Related U.S. Application Data

(60) Provisional application No. 61/451,680, filed on Mar. 11, 2011, provisional application No. 61/498,685, filed on Jun. 20, 2011.

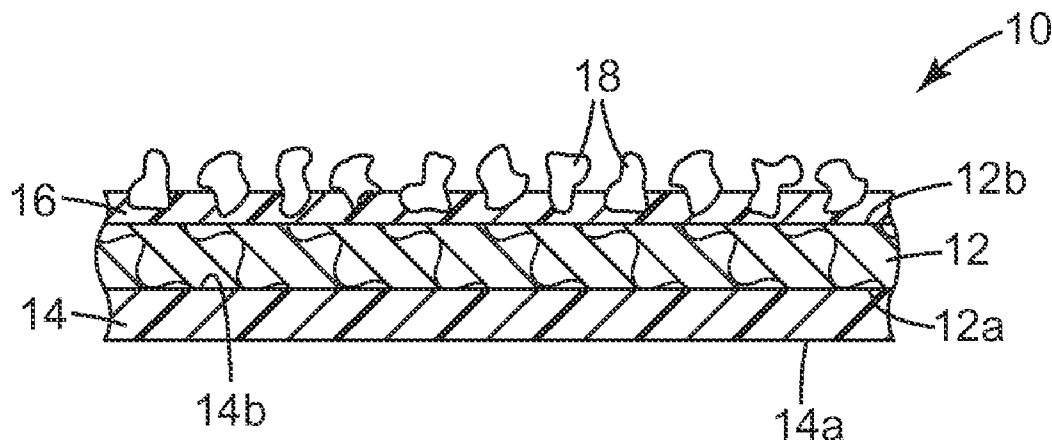

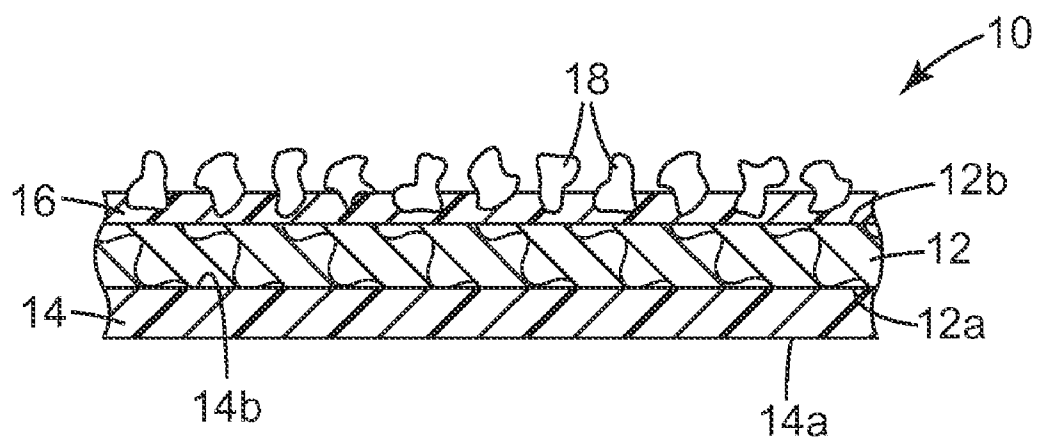

SANDPAPER WITH NON-SLIP LAYER

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Patent Application Nos. 61/451,680, filed Mar. 11, 2011, and 61/498,685, filed Jun. 20, 2011, the disclosures of both of which are incorporated by reference herein in their entirety.

BACKGROUND

[0002] Sheet-like abrasive articles are commonly used in a variety of sanding operations including, for example, hand sanding of wooden surfaces. Such abrasive articles often comprise an abrasive front surface and a non-abrasive back surface. In hand sanding, a user may hold the abrasive article and move the abrasive article across a work surface, often with the abrasive article folded or otherwise manipulated so that an area of the back surface is in contact with another area of the back surface (e.g., with the article folded against itself with the abrasive front surface exposed). Loose particulates may often be liberated or generated in the course of using the abrasive article. Such particulates may, if they come between the contacting areas of the back surface, cause increased slipping of the back surface contacting areas relative to each other, which can be disadvantageous.

SUMMARY

[0003] The present invention provides an abrasive article, e.g. a sheet of sandpaper, comprising a backing layer having opposed first and second major surfaces, an adhesive make coat on the second major surface, abrasive particles at least partially embedded in the make coat, thereby defining an abrasive surface, and an exposed non-slip coating layer on the first major surface, the non-slip coating layer comprising at least a base resin and a tackifying resin.

[0004] In one aspect, disclosed herein is a sheet of sandpaper, comprising: (a) a flexible backing layer having opposed first and second major surfaces; (b) an adhesive make coat on the second major surface; (c) abrasive particles at least partially embedded in the make coat, thereby defining an abrasive surface; and (d) an exposed non-slip coating layer on the first major surface, wherein the non-slip coating layer comprises an amorphous base resin and an effective amount of a tackifying resin.

[0005] In another aspect, disclosed herein is a method of making a sheet of sandpaper having a non-slip coating layer, comprising the steps of: (a) providing a paper backing layer having opposed first and second major surfaces; (b) coating an adhesive make coat on the second major surface; (c) at least partially embedding abrasive particles in the make coat, thereby forming an abrasive surface; and (d) hot-melt coating a non-slip coating layer comprising at least one amorphous base resin and at least one tackifying resin on the first major surface.

[0006] In another aspect, disclosed herein is a sheet of sandpaper, comprising: (a) a flexible backing layer having opposed first and second major surfaces; (b) an adhesive make coat on the second major surface; (c) abrasive particles at least partially embedded in the make coat, thereby defining an abrasive surface; and (d) an exposed non-slip coating layer on the first major surface, wherein the non-slip coating layer comprises a base resin and an effective amount of a tackifying resin.

BRIEF DESCRIPTION OF THE DRAWING

[0007] The present invention will be further described with reference to the accompanying FIGURE, which is a cross sectional view of an exemplary sheet of sandpaper according to the invention.

DETAILED DESCRIPTION

[0008] Referring now to the drawing, the FIGURE shows a cross-section of a flexible sheet-like abrasive article **10**, such as a sheet of sandpaper, comprising a flexible backing layer **12** having opposed first **12a** and second **12b** major surfaces, a flexible non-slip coating layer **14** on the backing layer first major surface **12a**, an adhesive make coat layer **16** on the backing layer second major surface **12b**, and a plurality of abrasive particles **18** at least partially embedded in the make coat layer **16**. The abrasive article **10** may be provided in, for example, a stack of individual sheets, or in roll form, wherein the abrasive article **10** may have an indefinite length.

[0009] As used herein, the expression “sheet-like” refers generally to the broad, thin, flexible nature of abrasive article **10**. The terms front side and front surface will be used herein to denote the side and surface comprising the abrasive, and the terms back side and back surface will be used to denote the side bearing the non-slip coating layer (i.e., the side opposite the abrasive), and the outer surface of the non-slip coating layer. As used herein, the terms “coating”, “coating layer” etc., refer generally to at least a single layer of flowable material, such as a liquid or a solid powder, that is applied directly to a surface. A coating, therefore, does not include a separate sheet of material laminated to a surface. As used herein, the expression “layer” denotes that the coating of non-slip material is in the form of a discrete stratum on top of the backing layer **12** (i.e. the non-slip material does not soak through the entire thickness of the backing layer **12**). In some embodiments, non-slip coating layer **14** consists of a single layer.

[0010] In some embodiments, non-slip coating layer **14** (e.g., major inward-facing surface **14b** of layer **14**) may be in direct contact with first major surface **12a** of backing layer **12**. In other embodiments, one or more intermediate primer layers, tie layers, or the like may be present between major surface **12a** of backing layer **12** and non-slip coating layer **14** and may e.g. improve the adhesion of non-slip coating layer **14** to backing layer **12**. If present, in various embodiments such intermediate layers may be less than about 100 microns, less than about 50 microns, less than about 25 microns, or less than about 10 microns in thickness, and may be applied e.g. by coating, vapor deposition, etc. In some embodiments such intermediate layers may comprise dense layers (e.g., lacking porosity), and by definition they do not encompass layers such as sponge layers, foam layers, synthetic microporous membranes, and the like.

[0011] Non-slip coating layer **14** is an exposed layer. By this is meant that at least about 25% of outward-facing surface **14a** of non-slip coating layer **14** is an exposed surface that, as article **10** is provided to an end user, is not covered, buried, or obscured by any other layer, except for, optionally, such items as labels, stickers, price tags, temporary protective sheets or liners, or the like, which are not permanently attached to non-slip coating layer **14** and which may be removed if desired prior to use of article **10**. In various embodiments, at least about 50%, at least about 75%, or at least 90%, of outer surface **14a** of non-slip coating **14** is an exposed surface. In

some embodiments, the entirety of outer surface **14a** of non-slip coating layer consists of an exposed surface.

[0012] Suitable materials for flexible backing layer **12** may include any of the materials commonly used to make sandpaper including, for example, paper, cloths (cotton, polyester, rayon), polymeric films such as thermoplastic films, foams, and laminates thereof. The backing layer **12** will have sufficient strength for handling during processing, sufficient strength to be used for the intended end use application, and the ability to have non-slip coating **14** and make coat **16** applied to at least one of its major surfaces.

[0013] In the illustrated embodiment, backing layer **12** is formed of paper. Paper is a desirable material for backing layer **12** because it is readily available and is typically low in cost. Conventional sandpaper, however, which has a paper backing layer, has limited durability, and has a smooth slippery surface that makes conventional sandpaper difficult to move over a work surface and, therefore, makes sanding difficult. Paper backings are available in various weights, which are usually designated using letters ranging from “A” to “F”. The letter “A” is used to designate the lightest weight papers, and the letter “F” is used to designate the heaviest weight papers.

[0014] In the illustrated embodiment of the FIGURE, backing layer **12** is continuous. That is, backing layer **12** does not contain holes, openings, slits, voids, or channels extending there through in the Z-direction (i.e. the thickness or height dimension) that are larger than the randomly formed spaces between the material itself when it is made. The backing may also contain openings (i.e. be perforated), or contain slits. Backing layer **12** is also generally non-extensible. Non-extensible refers to a material having an elongation at break of typically no greater than about 25%, no greater than about 10%, or no greater than about 5%.

[0015] In certain embodiments, e.g. when backing layer **12** is formed of paper, backing layer **12** may be relatively thin, and typically has a thickness of no greater than about 1.5 mm, no greater than about 1 mm, or no greater than about 0.75 mm. In such embodiments, the backing layer **12** is generally not resilient. The backing layer **12** may be porous or non-porous. In some embodiments, backing layer **12** consists of a single layer.

[0016] In some embodiments, backing layer **12** may be formed of a cloth material or film, such as a polymeric film. Cloth materials may be desirable because they are generally tear resistant and are generally more durable than paper and film materials. In addition, cloth backings tolerate repeated bending and flexing during use. Cloth backings are generally formed of woven cotton or synthetic yarns that are treated to make them suitable for use as a coated abrasive backing. As is the case with paper backings, cloth backings are available in various weights, which are usually designated using a letter ranging from “J” to “M” with the letter “J” designating the lightest weight cloth, and the letter “M” designating the heaviest weight cloths.

[0017] Suitable film materials for the backing layer **12** may include polymeric films, including primed films, such as polyolefin film (e.g., polypropylene including biaxially oriented polypropylene, polyester film, polyamide film, cellulose ester film).

[0018] In accordance with one aspect of the invention, sandpaper **10** includes a non-slip coating layer **14**, which defines a non-slip, or slip resistant, outer surface **14a** of the sandpaper **10**. Non-slip coating layer **14** is provided on the

first major surface **12a** of the back side of backing layer **12**, e.g. the side opposite the make coat **16** and abrasive particles **18**. “Non-slip” coating layers refer to coatings that increase the coefficient of friction of the backing layer surface to which the non-slip material is applied. That is, if the surface of the backing layer **12a** to which a non-slip coating layer is applied has a coefficient of friction of “x” prior to when the coating is applied, and the coating—as applied to the surface of the backing—provides a surface that has a coefficient of friction that is greater than “x”, then the coating is a “non-slip” coating. Or stated another way, if the coating tends to increase the coefficient of friction of the backing surface to which it is applied, then the coating qualifies as a “non-slip” coating.

[0019] In one embodiment, the non-slip coating layer **14** has an average peak static coefficient of friction of at least about 1 gram, at least about 1.25 grams, or at least about 1.5 grams when measured according to ASTM D 1894-08 (Standard Test Method for Static and Kinetic Coefficients of Friction of Plastic Film and Sheet) at 23° C. using an IMASS slip/peel tester (SP2000, commercially available from Instrumetors Inc., Strongsville, Ohio), and/or an average kinetic coefficient of friction of at least about 0.75 grams, at least about 1 gram, or at least about 1.25 grams.

[0020] In various embodiments, non-slip coating layer **14** outer surface **14a** may have no tack, or may have a low level of tack. If the non-slip coating is tacky, it may be desirable that the tack be kept to a low level. By a low level of tack, it is meant that the non-slip coating has an average tack level, as measured by an Inverted Probe Test (i.e., a test procedure in general accordance with the procedures described in ASTM D2979-88 (Standard Test Method for Tack of Pressure-Sensitive Adhesives Using an Inverted Probe Machine), using a ten (10) second dwell time, and a probe removal speed of one (1) cm/s), of no greater than about 350 grams. In various embodiments, non-slip coating **14** may have an average tack level, as measured by an Inverted Probe Test, of no greater than about 40 grams, of no greater than about 60 grams, of no greater than about 100 grams, of no greater than about 200 grams, no greater than about 250 grams, or no greater than about 300 grams. A low level of tack may serve to differentiate non-slip layer **14** from conventional pressure-sensitive adhesives as are customarily used for attachment; thus, in at least some embodiments, a non-slip layer as defined and disclosed herein may not be equated with conventional pressure-sensitive adhesives e.g. as may sometimes be used to attach sandpaper to sanding blocks, vibrating or orbital sanders, and the like (and which may often display a tack in the range of 500-600). In further embodiments, non-slip coating **14** may comprise a tack level of at least about 5 grams, of at least about 10 grams, or at least about 15 grams.

[0021] In some embodiments, non-slip coating **14** may comprise an adhesion to itself that is less than the cohesive strength of the non-slip coating itself, and further may have an adhesion to itself that is less than the “two-bond” adhesive strength. As is known to those skilled in the art, the “two-bond” adhesive strength is the adhesive strength between non-slip coating **14** and backing layer **12** to which the non-slip coating layer is applied. Thus, when non-slip coating **14** is folded over onto itself, the areas of the surface of the non-slip coating that come into contact with each other can be released from each other without experiencing cohesive failure of the non-slip layers, and without having any portion of non-slip coating layer **14** detach from backing layer **12**.

[0022] In some embodiments, the non-slip coating provides a surface that may be repeatably bonded to itself. In another somewhat related aspect, non-slip coating **14** may be repositionable. As used herein, “repositionable” refers to a non-slip coating that allows repeated application, removal, and reapplication to and from itself or a surface without damage to the non-slip coating or the surface.

[0023] In addition, it is desirable that the adhesion of non-slip coating layer **14** to itself not build significantly over time. As such, if abrasive article **10** is folded over onto itself such that areas of the surface of the non-slip layer come into contact with each other, abrasive article **10** may later be readily unfolded by separating the contacted surface areas of non-slip coating layer **14** without damaging non-slip coating **14** or backing layer **12**.

[0024] In various embodiments, the non-slip coating layer may have a glass transition temperature of at least about -80°C ., at least about -60°C ., and at least about -40°C ., and a glass transition temperature of no greater than about 5°C ., no greater than about -5°C ., and no greater than about -15°C .

[0025] In various embodiments, non-slip coating layer **14** may comprise a thickness (e.g., an average thickness as measured in several locations) of at least about 10 microns, at least about 15 microns, at least about 20 microns, or at least about 25 microns. In further embodiments, non-slip coating layer **14** may comprise a thickness of at most about 200 microns, at most about 100 microns, at most about 50 microns, or at most about 40 microns.

[0026] In various embodiments, non-slip coating layer **14** may comprise a coating weight (e.g., an average coating weight as measured in several locations) of at least about 10 grams per square meter, at least about 15 grams per square meter, at least about 20 grams per square meter, or at least about 25 grams per square meter. In further embodiments, non-slip coating layer **14** may comprise a coating weight of at most about 200 grams per square meter, at most about 100 grams per square meter, at most about 60 grams per square meter, or at most about 25 grams per square meter.

[0027] In some embodiments, non-slip coating layer **14** may be an essentially dense material (e.g., without any porosity or internal void volume other than the occasional voids, free volume, etc., as are known to those of skill in the art to be sometimes present in most polymeric materials). In embodiments in which non-slip coating layer **14** is an essentially dense material, non-slip coating layer **14** by definition will not encompass a sponge or foam layer of a so-called sanding sponge. In various embodiments, non-slip coating layer **14** may comprise a density of at least about 0.9 grams/cc, at least about 0.95 grams/cc, or at least about 1.0 grams/cc.

[0028] As mentioned, and as pictured in the embodiment illustrated in the FIGURE, non-slip coating **14** defines an outer surface **14a** of sandpaper **10** opposite make coat **16** and abrasive particles **18**. In some embodiments outer surface **14a** may be a generally planar surface that by definition does not include a textured pattern or a visually observable three dimensional surface topography. In other embodiments, the outer surface of non-slip coating **14** may comprise a textured or patterned surface. This might be achieved e.g. by performing the coating process in such manner as to impart a non-smooth outer surface. Or, non-slip coating layer **14** may further comprise filler material or particles to provide the non-slip coating layer **14** outer surface **14a** with a rough or

randomly textured surface. Such a rough, textured or patterned surface may serve to enhance the non-slip properties of non-slip coating layer **14**.

[0029] Non-slip coating layer **14** may be continuous, discontinuous, and/or applied in random, irregular, or repeating patterns, such as dots and stripes. As such, in various embodiments non-slip coating layer may occupy at least about 25%, at least about 50%, at least about 75%, or at least about 90%, of the surface area of the back side of backing **12**. In specific embodiments, the entirety of the back side of backing **12** (e.g. surface **12a** of backing **12**) is occupied by non-slip coating layer **14**. In some embodiments, non-slip coating layer **14** may be clear. In this manner, any information or indicia printed on backing layer **12** will remain visible through non-slip coating layer **14**. In addition, the appearance of the sandpaper may remain similar to the appearance of conventional sandpaper, to which users have become accustomed. In other embodiments, non-slip coating layer **14** may be colored, pigmented, etc., for any effect as desired. In some embodiments, non-slip coating layer **14** is permanently bonded to backing **12** (either directly to surface **12a** of backing **12**, or via an intermediate tie layer, primer layer or the like).

[0030] Non-slip coating layer **14** comprises at least one base resin. A base resin may comprise any suitable polymeric material that provides mechanical integrity and toughness to the non-slip coating layer, but that may not necessarily (in the absence of the tackifying resin) supply the desired non-slip properties disclosed herein. Suitable base resins for non-slip coating layer **14** may include, for example: natural and synthetic rubbers such as synthetic polyisoprene, butyl rubbers, polybutadiene, styrene-butadiene rubber (SBR), carboxylated styrene-butadiene rubber, block copolymers such as Kraton rubber, polystyrene-polyisoprene-polystyrene (SIS) rubber, styrene-butadiene-styrene (SBS) rubber, nitrile rubber (Buna-N rubbers), hydrogenated nitrile rubbers, acrylonitrile-butadiene rubber (NBR), chloroprene rubber, polychloroprene, neoprene, EPM rubber (ethylene propylene rubber), EPDM rubber (ethylene propylene diene rubber), ethylene-propylene-butylene terpolymers, acrylic rubber, polyacrylic rubber, silicone rubber; copolymers such as ethylene-vinyl acetate (EVA) copolymers, ethylene-(meth)acrylate copolymers, ethylene-vinyl acetate-maleic anhydride and/or ethylene-(meth)acrylate-maleic anhydride terpolymers; and other polymeric materials such as polyvinyl acetates, grafted polyvinyl acetates or EVA copolymers, polyamides, polyesters, thermoplastic elastomers, thermoplastic vulcanizates such as Santoprene thermoplastic rubber, thermoplastic polyurethanes, and thermoplastic olefins and amorphous polyolefins.

[0031] In some embodiments, the at least one base resin may comprise a poly(vinyl ether) polymer, e.g. an amorphous poly(alkyl vinyl ether) polymer such as amorphous poly(methyl vinyl ether). In some embodiments, the at least one base resin may comprise a polyolefin, e.g. a polyethylene, polypropylene, polybutene, and/or copolymers (including terpolymers) thereof. In certain embodiments, such a polyolefin may comprise a grafted polyolefin, e.g. a polyethylene with a saponification number of at least three, and which may be grafted e.g. with polycarboxylic acids, anhydrides, esters thereof, or the like. In certain other embodiments, such a polyolefin may comprise a metallocene (catalyzed) polyolefin, for example a functionalized metallocene polyethylene polymer or copolymer. Such polymers or copolymers may be functionalized e.g. with acids such as acrylic acid, acetates, sulfonates, maleic anhydrides, or the like.

[0032] In some embodiments, the base resin may comprise an amorphous polymer. By amorphous is meant a polymer that displays essentially no crystallinity, as evidenced by no, or at most a very weak (i.e., barely discernible), melting point(s) on a Differential Scanning Calorimetry curve, as will be appreciated by those of ordinary skill. In various specific embodiments, an amorphous polymer may comprise an amorphous hydrocarbon polymer or copolymer (such as, e.g., polyolefin polymers and/or copolymers containing ethylene, propylene, higher alkenes, and/or copolymers thereof, polymers and/or copolymers of higher order dienes, polymers and/or copolymers of poly-alpha olefins, etc.); or, an amorphous heteroatom polymer or copolymer (such as, e.g. polyolefin-poly(meth) acrylate copolymers, polyolefin-EVA copolymers, poly(vinyl ether) polymers and/or copolymers, and the like). In some embodiments, the amorphous polymer may comprise atactic polypropylene and/or copolymers thereof. In some embodiments, the amorphous polymer is an aliphatic polymer (i.e., not comprising aromatic units). In some embodiments, the base resin consists essentially of an amorphous polymer or copolymer or of mixtures of amorphous polymers or copolymers. In some embodiments, the amorphous polymer may comprise a poly-alpha-olefin hydrocarbon copolymer (e.g., terpolymer) containing propyl, ethyl, and butyl monomer units (e.g., obtained by the copolymerization of propylene, ethylene, and 1-butene). In particular embodiments, the amorphous polymer may comprise, or may consist essentially of, a propylene-rich poly-alpha-olefin polymer, meaning a copolymer containing at least about 70 mole % of propylene-derived monomer units and from about 5 mole % to about 15 mole % of 1-butene-derived monomer units, with the balance being chosen from any other suitable monomer units, e.g. ethylene. The above list is meant to be representative, not exhaustive. Blends, mixtures, etc. of any of the above base resins may be used if desired. In various embodiments, the base resin (or resins, collectively) may comprise at least about 10, 20, 30 or 40 wt. % of non-slip coating layer 14. In further embodiments, the base resin(s) may comprise at most about 80, 70, 60, or 50 wt. % of non-slip coating layer 14.

[0033] Non-slip coating layer 14 comprises an effective amount of at least one tackifying resin. A tackifying resin may comprise any material (e.g., polymeric material) that may not necessarily comprise acceptable mechanical integrity by itself, but that when present at an effective amount along with the base resin, supplies the combination of resins with the desired non-slip properties disclosed herein. By an effective amount of tackifying resin is meant an amount sufficient to satisfactorily provide the non-slip properties disclosed herein (e.g., whether measured quantitatively by way of a coefficient of friction and/or tack test as disclosed earlier herein, or qualitatively by way of manually handling and sanding with an abrasive article comprising the non-slip coating layer). By an effective amount is further meant an amount that is lower than a threshold level that would cause the non-slip coating layer to be a conventional pressure-sensitive adhesive.

[0034] Suitable tackifying resins for non-slip coating layer 14 may include, for example: polymeric terpenes, heterofunctional terpenes, coumarone-indene resins, rosin acids, esters of rosin acids, disproportionated rosin acid esters, hydrogenated rosin acids, C₅ aliphatic resins, C₉ aromatics, C₉ hydrogenated aromatic resins, C₅/C₉ aliphatic/aromatic resins, dicyclopentadiene resins, hydrogenated pinene polymers or copolymers, hydrogenated hydrocarbon resins arising

from C₅/C₉ and dicyclopentadiene precursors, hydrogenated styrene monomer resins, alpha-methyl styrene resins, hydrogenated mixed aromatic tackifying resins, aliphatic/aromatic hydrocarbon liquid tackifying resins; naphthenic oils, mineral oils, alkyl phenolic tackifying resins, and the like. Additionally potentially suitable tackifying resins may include, for example: alpha-methylstyrene; copolymers of alpha-methylstyrene and styrene; hydrogenated cyclopentadienes, a rosin or a terpene resin of the alpha-pinene, beta-pinene and d-limonene types; wood rosins or gum rosins; rosin esters derived from either gum or wood rosin, such as glycerol esters (ester gums), pentaerythritol esters, hydrogenated, polymerized or disproportionated gum or wood rosins; polyhydric alcohol derivatives of hydrogenated rosin, such as glycerol derivatives or polyhydroalcohol derivatives of polymerized rosins; e.g. ethylene glycol ester, glycerol esters, oxidized rosins, hydrogenated oxidized rosin esters of oxidized rosin and the like. Still other potentially suitable tackifying resins may include e.g. hydrocarbon resins such as polyterpenes, synthetic polyterpenes, and those materials obtained from the polymerization of olefins and diolefins (e.g., the aliphatic olefin derived tackifying resins available from the Sartomer Company of Exton, Pa. under the trade designation Wingtack). Still other potentially suitable tackifying resins include e.g. terpene polymers such as the polymeric, resinous materials obtained by polymerization and/or copolymerization of terpene hydrocarbons such as the alicyclic, monocyclic, and bicyclic monoterpenes and their mixtures, including alloocimene, carene, isomerized pinene, pinene, dipentene, terpinene, terpinolene, limonene, turpentine, a terpene cut or fraction, and various other terpenes. In some embodiments, the tackifying resin(s) is a hydrocarbon material; in particular embodiments, the tackifying resin(s) is an aliphatic hydrocarbon material. Such materials may be e.g. branched hydrocarbon polymers.

[0035] The above list is meant to be representative, not exhaustive. Blends, mixtures, etc. of any of the above tackifying resins may be used if desired. In various embodiments, the tackifying resin (or resins, collectively) may comprise at least about 5, 10, 15, 20, or 25 wt. % of non-slip coating layer 14. In further embodiments, the tackifying resin(s) may comprise at most about 50, 40, or 30 wt. % of non-slip coating layer 14.

[0036] Non-slip coating layer 14 may optionally comprise at least one wax, by which is meant a relatively low molecular weight material that may modify or enhance various properties of the non-slip coating layer. Any suitable natural (e.g., animal, vegetable, mineral, or petroleum based) or synthetic wax may be used. Such waxes may include e.g. hydrocarbon waxes, paraffin waxes, microcrystalline waxes, fatty amide waxes, hydroxy stearamide waxes, vinyl acetate-modified waxes, maleic anhydride-modified waxes, high density low molecular weight (e.g., less than approximately 2500) polyethylene waxes, and the like.

[0037] The above list is meant to be representative, not exhaustive. Blends, mixtures, etc. of any of the waxes may be used if desired. In various embodiments, the waxes (or waxes, collectively) may comprise at least about 2, 5, or 10 wt. % of non-slip coating layer 14. In further embodiments, the wax (es) may comprise at most about 40, 30, or 20 wt. % of non-slip coating layer 14.

[0038] Any other desirable ingredients may be included in non-slip coating layer 14 as long as they do not unacceptably affect the non-slip property. Such additives may include e.g.

processing aids, extrusion aids, antioxidants, wetting agents, UV stabilizers, nucleating agents, plasticizers, pigments, dyes, fillers, and so on.

[0039] In some embodiments, non-slip coating layer **14** consists essentially of at least one base resin, at least one tackifying resin, and at least one wax along with optional minor quantities of additives such as processing aids, antioxidants and the like.

[0040] In general, any adhesive make coat **16** may be used to adhere the abrasive particles **18** to the backing layer **12**. "Make coat" refers to the layer of hardened resin over the backing layer **12** of the sandpaper **10**. Suitable materials for the adhesive make coat **16** include, for example, phenolic resins, aminoplast resins having pendant α, β -unsaturated carbonyl groups, urethane resins, epoxy resins, ethylenically unsaturated resins, acrylated isocyanurate resins, urea-formaldehyde resins, isocyanurate resins, acrylated urethane resins, acrylated epoxy resins, bismaleimide resins, fluorene-modified epoxy resins, and combinations thereof. The make coat **16** may be coated onto the backing layer **12** by any conventional technique, such as knife coating, spray coating, roll coating, rotogravure coating, curtain coating, and the like. The sandpaper **10** may also include an optional size coat (not shown). The make coat **16** and/or an optional size coat may contain optional additives, such as fillers, fibers, lubricants, grinding aids, wetting agents, thickening agents, anti-loading agents, surfactants, pigments, dyes, coupling agents, photoinitiators, plasticizers, suspending agents, antistatic agents, and the like. Possible fillers include calcium carbonate, calcium oxide, calcium metasilicate, alumina trihydrate, cryolite, magnesia, kaolin, quartz, and glass. Fillers that can function as grinding aids include cryolite, potassium fluoroborate, feldspar, and sulfur. The amounts of these materials are selected to provide the properties desired, as is known to those skilled in the art.

[0041] In some embodiments, adhesive make coat **16** consists of a single layer. In such embodiments, the combination of backing layer **12** and adhesive make coat **16** does not encompass configurations involving three or more layers, e.g. a backing layer bearing a binder layer thereupon, which binder layer bears an adhesive layer thereupon.

[0042] In general, abrasive particles **18** of any suitable size (e.g., diameter or equivalent diameter in the event of substantially nonspherical particles) may be used with this invention. In some embodiments, abrasive particles **18** may have a FEPA P grade, as outlined by the Federation of European Producers of Abrasives and as tested in accordance with the ISO 6344 standard, of from e.g. P40 to P2500 (with a lower grade number corresponding to larger particles). Suitable abrasive particles may include, for example, fused aluminum oxide, heat treated aluminum oxide, alumina-based ceramics, silicon carbide, zirconia, alumina-zirconia, garnet, emery, diamond, ceria, cubic boron nitride, ground glass, quartz, titanium diboride, sol gel abrasives and combinations thereof. The abrasive particles **18** can be either shaped (e.g., rod, triangle, or pyramid) or unshaped (i.e., irregular). The term "abrasive particle" encompasses abrasive grains, agglomerates, or multi-grain abrasive granules. The abrasive particles can be deposited onto make coat **16** by any conventional technique such as electrostatic coating or drop coating.

[0043] Abrasive article **10** may be produced using any suitable technique; the choice of the most convenient technique may depend e.g. on the particular materials used to produce non-slip coating layer **14**. For example, abrasive article **10**

may be made by providing a backing layer (e.g., a paper backing), coating an adhesive make coat on one major surface of the backing layer, at least partially embedding abrasive particles in the make coat, thereby forming an abrasive surface, and hot-melt coating a non-slip coating material, such as a mixture of base resin and tackifying resin, onto the surface of the backing layer opposite the make coat, and allowing the coated hot-melt coating to cool and solidify. Using this technique, non-slip coating layer **14** is said to be "hot-melt coated" onto the backing. In such embodiments, the materials making up non-slip coating layer **14** may collectively comprise a hot-melt coatable, 100% solids mixture (e.g., with little or no solvent, water, etc.). Non-slip coating layer **14** may be hot-melt coated onto backing layer **12** using, for example, roll coating, extrusion coating, or drop die coating techniques.

[0044] In another method of making abrasive article **10**, an aqueous emulsion or aqueous dispersion of a non-slip coating material may be coated onto backing layer **12** opposite make coat **16**, and the water dried, thereby forming non-slip coating layer **14**. In another method of making abrasive article **10**, a solution (e.g., in an organic solvent or solvent mixture) of a non-slip coating material may be coated onto backing layer **12** opposite make coat **16**, and the solvent evaporated, thereby forming non-slip coating layer **14**. In still another method of making the abrasive material, a non-slip coating material precursor (e.g., comprising a mixture of polymerizable components that may be reacted so as to form the non-slip coating) may be coated onto backing layer **12** opposite make coat **16**, and caused to react, causing the precursor to be transformed into the non-slip coating.

[0045] In the context of the above approaches, the term coating encompasses any process involving deposition of a flowable coating material or coating material precursor, including spraying and like methods.

[0046] If it is desired that the outer surface **14a** of non-slip coating **14** is to be textured (instead of having a generally planar surface), this can be arranged by any suitable method either during, or after the coating of non-slip layer **14** onto the back side of backing **12**. In one embodiment, a foam roller may be used to apply the coatable non-slip material, which may impart a surface texture to the non-slip coating layer. Alternatively, a foam roller may be used to post treat the non-slip coating layer **14** after it has been coated onto backing layer **12**, thereby imparting the non-slip coating layer with a surface texture.

[0047] Those of ordinary skill will appreciate that any of the above methods may be used. In any of the above techniques, it will be recognized that the order in which non-slip coating layer **14** and make coat layer **16** are applied to backing layer **12** may be varied. That is, non-slip coating layer **14** may be applied to backing layer **12** either before or after make coat **16** is applied to backing layer **12**. In addition, it will be recognized that backing layer **12**, make coat **16**, and abrasive particles **18** may be provided in the form of a pre-formed (i.e. otherwise complete) abrasive sheet. That is, rather than providing a backing layer **12** comprising a non-slip layer on one surface thereof, and then coating the other surface of the backing layer with make coat **16** and then depositing abrasive particles **18** thereupon to form an abrasive sheet, a pre-formed abrasive sheet including a backing, make coat and abrasive particles may be provided. The non-slip coating layer **14** can then be applied directly to the back side of the pre-formed abrasive sheet.

[0048] If a pre-formed abrasive sheet is used, the non-slip coating layer **14** may be applied to the backing layer **12** of the pre-formed abrasive sheet using, for example, any of the above techniques. For ease of manufacturing, it may be desirable to provide the pre-formed sandpaper in bulk form (e.g., as a roll good), and then coat the bulk sandpaper with the non-slip coating material prior to producing the individual sheets of sandpaper that are ultimately used by the end user.

[0049] Any suitable pre-formed abrasive (whether sheet or roll good) may be used, comprising a wide variety of commercially available conventional sandpaper constructions having a wide variety of backing materials (e.g. papers, films, cloths), weights (e.g. A, B, or C weight paper), and abrasive particles. Representative examples of suitable pre-formed abrasive articles include various products available from 3M Company (e.g., under the SandBlaster or Pro Grade trade designations) with FEPA ratings ranging from e.g. P40 to P2500.

[0050] In a specific embodiment, sandpaper **10** may be provided to an end user as a standard 9×11 inch sheet. In other embodiments, the sandpaper **10** may have a width of about 3 to about 4 inches, or of about 5 to about 6 inches, and a length of about 8 to about 10 inches, or about 10 to about 12 inches. In another aspect, the present invention provides a package of sandpaper including a stack of sheets of sandpaper. The stack may include at least 2 sheets, at least about 6 sheets, or at least about 10 sheets. Optionally, disposable liners, protective films, etc. may be provided in between the sheets, if desired.

[0051] In some end use applications, the sheet-like abrasive article **10** may be used for hand sanding a work surface, such as a wooden surface or work piece. That is, the abrasive article **10** may be used to remove material from a surface by holding the abrasive article **10** directly with one's hand (i.e. without the aid of a tool, such as a sanding block), and moving the abrasive article **10** against the work surface. Thus, in this context hand sanding is distinct from operations in which sandpaper is held and motivated by a device such as a polishing shoe, vibrating or orbital sander, and the like. However, it will be recognized that the abrasive articles disclosed herein may also be used with manually-operated sanding tools and sanding blocks, or with powered equipment, as may be desired.

[0052] In use, users may often fold an abrasive article (e.g., sandpaper), thereby producing sheets that are easier to handle by hand. Folding the sandpaper, however, may weaken the sandpaper along the fold line, particularly if, during sanding, the sections of the folded sandpaper slip relative to each other so that the fold line moves along the sandpaper. Such moving of a fold line along an abrasive article may e.g. cause the backing to weaken, crack, etc. over portions of the article, and may thus reduce the working life of the abrasive article. It has been discovered that the use of a non-slip coating on the back side of an abrasive article may minimize or prevent such slipping from occurring. That is, in hand sanding with an abrasive sheet that is folded upon itself so that areas of the non-slip coating of the article back side are adjacent each other in closely facing relation, even in the presence of loose particulates the non-slip coating areas may be able to resist slipping relative to each other, so that the sheet remains basically in the originally folded configuration rather than the areas slipping relative to each other such that the fold in the sheet moves along the sheet. Such discoveries and methods of applying and using non-slip coating layers are discussed in U.S. Patent Application Publication US 2009/0325470 to

Petersen, filed Jun. 15, 2009, entitled Sandpaper With Non-Slip Coating Layer, which is incorporated by reference in its entirety herein.

[0053] It has been discovered, however, that in some uses of an abrasive article as disclosed herein, an issue may arise. Specifically, large numbers of loose particulates which may be generated e.g. during the handling and severe use of an abrasive article may come in contact with the surface of a non-slip coating layer on the back side of the article and may undesirably reduce the non-slip property of the non-slip layer, as evidenced in the Comparative Examples herein. In this context, severe use (as differentiated from normal use) means use in which very large quantities of loose particulates are generated so as to result in gross contamination of the back side of the sandpaper with particulates. (In this context, severe use may be considered such use as causes gross contamination in the general range of 500 or more particles per square centimeter of backing area, with contamination due to normal use corresponding to less than 100 particles per square centimeter). Without wishing to be limited by theory or mechanism, it is postulated that a sufficient number of loose particulates may act somewhat as rolling-element bearings (e.g., ball bearings), and/or may detackify the non-slip surface e.g. by covering a significant portion of the area of the non-slip surface, either or both of which may cause or facilitate slipping of the areas relative to each other.

[0054] It has now been discovered that a non-slip coating layer as defined herein, comprising at least a base resin, e.g. an amorphous base resin, and a tackifying resin, may preserve the non-slip property of abrasive articles even in the presence of gross contamination with particulates (as might occur during severe use of the abrasive article), as evidenced in the Examples herein. In this context, it is noted that certain coatings (e.g., those not containing at least a base resin, e.g. an amorphous base resin, and/or a tackifying resin) have been found to not possess this ability to substantially retain a non-slip property in the presence of gross contamination, as evidenced in the Comparative Examples. The effect is unexpected given that at least some of the tackifying resin-containing materials that have been found to be effective as non-slip materials (and that retain their non-slip property even in the presence of gross contamination) are conventionally used as laminating adhesives (i.e., sandwiched between two substrates) rather than being used in an exposed condition as disclosed herein. There is no known teaching that would lead one of ordinary skill to expect that an exposed coating layer, e.g. comprising a base resin, e.g. an amorphous base resin, and/or a tackifying resin, would exhibit the ability to preserve non-slip properties even in the presence of gross contamination with loose particulates.

[0055] It has further been found that another issue may arise in instances in which contamination (not necessarily limited to gross contamination) of the non-slip backing with coarse particulates occurs. Such issues may arise e.g. in sanding with coarse abrasive articles (e.g., articles with FEPA grades of P100, P80, P60, or P40). Non-slip coating compositions, methods and so on which may be employed in such cases are disclosed in U.S. Provisional Patent Application Ser. No. 61/451,678, attorney docket number 67122US002, entitled Coarse Sandpaper with Non-Slip Coating Layer, filed Mar. 11, 2011, incorporated by reference herein.

List of Exemplary Embodiments

Embodiment 1

[0056] A sheet of sandpaper, comprising: (a) a flexible backing layer having opposed first and second major sur-

faces; (b) an adhesive make coat on the second major surface; (c) abrasive particles at least partially embedded in the make coat, thereby defining an abrasive surface; and (d) an exposed non-slip coating layer on the first major surface, wherein the non-slip coating layer comprises an amorphous base resin and an effective amount of a tackifying resin.

Embodiment 2

[0057] A sheet of sandpaper as defined in embodiment 1, wherein the non-slip coating layer is a hot-melt coating layer.

Embodiment 3

[0058] A sheet of sandpaper as defined in any of embodiments 1-2, wherein the flexible backing layer consists of a single layer, wherein the adhesive make coat consists of a single layer in direct contact with the second major surface of the adhesive make coat, and wherein the non-slip coating layer consists of a single layer.

Embodiment 4

[0059] A sheet of sandpaper as defined in any of embodiments 1-3, wherein the non-slip coating layer has an average tack level, as measured by an Inverted Probe Test using a 10 second dwell time and a probe removal speed of 1 cm/s, of no greater than about 250 grams.

Embodiment 5

[0060] A sheet of sandpaper as defined in any of embodiments 1-4, wherein the non-slip coating layer has an average tack level, as measured by an Inverted Probe Test using a 10 second dwell time and a probe removal speed of 1 cm/s, of no greater than about 60 grams.

Embodiment 6

[0061] A sheet of sandpaper as defined in any of embodiments 1-5, wherein the non-slip coating layer has an average kinetic coefficient of friction of at least about 0.75 grams when measured according to ASTM D 1894-08.

Embodiment 7

[0062] A sheet of sandpaper as defined in any of embodiments 1-6, wherein the non-slip coating layer, when bonded to itself, has an adhesion that is less than the two-bond adhesion of the non-slip coating layer to the backing layer, whereby the non-slip coating layer does not separate from the backing layer when the non-slip coating layer is separated from itself.

Embodiment 8

[0063] A sheet of sandpaper as defined in any of embodiments 1-7, wherein the non-slip coating layer, when bonded to itself, has an adhesion level that is less than the cohesive strength of the non-slip coating layer, whereby the non-slip coating layer is not damaged when the non-slip coating layer is separated from itself.

Embodiment 9

[0064] A sheet of sandpaper as defined in any of embodiments 1-8, wherein the non-slip coating layer has a thickness of at least about 20 microns and no greater than about 50 microns.

Embodiment 10

[0065] A sheet of sandpaper as defined in any of embodiments 1-9, wherein the non-slip coating layer has a coating weight of at least about 15 g/m² and no greater than about 100 g/m².

Embodiment 11

[0066] A sheet of sandpaper as defined in any of embodiments 1-10, wherein the non-slip coating layer comprises a generally planar outer surface opposite the abrasive particles.

Embodiment 12

[0067] A sheet of sandpaper as defined in any of embodiments 1-11, wherein the flexible backing layer is paper having a weight ranging from an A weight to an F weight.

Embodiment 13

[0068] A sheet of sandpaper as defined in any of embodiments 1-12, wherein the non-slip coating layer exhibits a glass transition temperature in the range of about -40° C. to about -5° C.

Embodiment 14

[0069] A sheet of sandpaper as defined in any of embodiments 1-13, wherein the base resin consists essentially of an amorphous polymer.

Embodiment 15

[0070] A sheet of sandpaper as defined in any of embodiments 1-14, wherein the base resin comprises an amorphous hydrocarbon polymer with a glass transition temperature in the range of approximately -17° C.

Embodiment 16

[0071] A method of hand sanding a work surface comprising the steps of: (a) providing a sheet of sandpaper as defined in any of embodiments 1-15, 17 and 19; (b) manually engaging the non-slip coating layer with at least one of a hand and a manually operated tool; and (c) manually moving the sandpaper in a plurality of directions over the work surface.

Embodiment 17

[0072] A sheet of sandpaper for hand sanding a work surface, comprising: (a) a paper backing layer having opposed first and second major surfaces; (b) an adhesive make coat on the backing layer second major surface; (c) abrasive particles at least partially embedded in the adhesive make coat, thereby defining an abrasive surface; and (d) an exposed non-slip coating layer on the backing layer first major surface, wherein the non-slip coating layer is a hot-melt coating layer comprising an amorphous base resin and a tackifying resin, the non-slip coating layer comprising a thickness of no greater than about 50 microns and wherein the entirety of the outer surface of the non-slip coating layer is a generally planar surface.

Embodiment 18

[0073] A method of making a sheet of sandpaper having a non-slip coating layer, comprising the steps of: (a) providing a paper backing layer having opposed first and second major surfaces; (b) coating an adhesive make coat on the second major surface; (c) at least partially embedding abrasive particles in the make coat, thereby forming an abrasive surface; and (d) hot-melt coating a non-slip coating layer comprising

at least one amorphous base resin and at least one tackifying resin on the first major surface.

Embodiment 19

[0074] A sheet of sandpaper, comprising: (a) a flexible backing layer having opposed first and second major surfaces; (b) an adhesive make coat on the second major surface; (c) abrasive particles at least partially embedded in the make coat, thereby defining an abrasive surface; and (d) an exposed non-slip coating layer on the first major surface, wherein the non-slip coating layer comprises a base resin and an effective amount of a tackifying resin.

[0075] In order that the invention described herein can be more fully understood, the following examples are set forth. It should be understood that these examples are for illustrative purposes only, and are not to be construed as limiting this invention in any manner.

EXAMPLES

Representative Working Example

[0076] A length of sandpaper of the type available from 3M Company, St. Paul, Minn. under the product designation "340U P80 Paper C Wt." was obtained as a roll good. A hot-melt laminating adhesive was obtained from Beardow-Adams of Milton Keynes, UK, under the trade designation PRODAS 1789. The adhesive was believed to comprise at least one organic polymeric base resin, at least one tackifying resin, and at least one wax. The at least one organic polymeric base resin appeared to be comprised of one or more amorphous polymers (i.e., essentially 100% amorphous polymers, with very weak melting points in the range of approximately 42° C. and 68° C.), with a glass transition temperature in the range of approximately -17° C. It was believed that the amorphous polymers were comprised substantially of hydrocarbon polymers. The hot-melt laminating adhesive was hot-melt coated onto the non-abrasive back side surface (i.e., opposite the abrasive surface) of the sandpaper using conventional hot-melt coating methods. The non-slip coating was coated at a coating weight of approximately 26 grams per square meter, corresponding to a coating thickness of approximately 25 microns. The non-slip coating layer exhibited a tack level (as measured with using the aforementioned Inverted Probe method) in the range of approximately 20-60 grams. The abrasive article with the non-slip coating upon the back side thereof was rolled up as a roll good and cut into sheets.

[0077] The back side of an abrasive sheet was grossly contaminated with particulates by manually depositing a handful of wood dust (obtained from a conventional Torit Model 84-AS-H dust collector from a woodworking shop) onto the non-slip layer of the back side of the sheet, then gently shaking off the excess wood dust and gently brushing the surface with a paint brush to further remove excess dust. Typically, a large number of wood dust particles (easily corresponding to gross contamination as described earlier herein) remained on the surface of the non-slip layer after this procedure. The sheet was then evaluated for non-slip properties.

[0078] In such evaluations it was found that even in the case of gross contamination of the non-slip layer, the non-slip property of the non-slip coating appeared to be substantially retained. Specifically, in manual sanding with the abrasive sheet folded upon itself so that surface areas of the non-slip coating of the article back side were adjacent each other in closely facing relation, the non-slip coating areas were generally able to resist slipping relative to each other, such that the sheet remained basically in the originally folded configuration

rather than slipping so that the fold in the sheet moved along the folded sheet. It was likewise found that, in coefficient of friction testing, the non-slip coatings appeared to substantially retain their (original) coefficient of friction even in the presence of gross contamination.

[0079] Additionally (in the absence of the contaminating particulates), the non-slip coating layer had a low level of tack that allowed the abrasive article to be folded over onto itself so that areas of the non-slip surface were in contact with each other, and allowed the contacting surfaces to be readily separated from each other without damaging either of the non-slip coating layer surfaces, and without separating the non-slip coating layer from the underlying backing or damaging the backing.

Variations

[0080] Abrasive roll goods were obtained of a similar type to that of the Representative Working Example, except comprising various other FEPA grades, and were hot-melt coated with non-slip coatings of similar composition, and in similar manner, as in the Representative Working Example. In like manner to the Representative Working Example, even in the case of gross contamination of the non-slip layer, the non-slip property of the non-slip coating was found to be substantially retained.

Comparative Examples

[0081] Sandpaper roll goods of the general type described in the Representative Working

[0082] Example, with various FEPA ratings, were obtained. A non-slip coating material was obtained comprising a carboxylated styrene-butadiene rubber (SBR) base resin at 50% solids as an aqueous dispersion. No tackifying resin was believed to be present. The dispersion (available from BASF, Charlotte, N.C., under the trade designation Butofan NS 209) was coated onto the non-abrasive back side surface (i.e., opposite the coarse abrasive surface) of the sandpaper using conventional dispersion coating methods and the water was dried to form a non-slip coating. The non-slip coating was present at a coating weight of approximately 30 grams per square meter, corresponding to a coating thickness of approximately 29 microns. The non-slip coating layer exhibited a tack level (as measured with using the aforementioned Inverted Probe method) of approximately zero (the tack was so low that the probe typically detached from the non-slip layer before the dwell time was complete). The sandpaper with the non-slip coating upon the back side thereof was rolled up as a roll good and was cut into sheets that were evaluated for their ability to retain their non-slip properties in the presence of gross contamination with particulates.

[0083] It was found in evaluations of these Comparative Samples that the presence of gross contamination appeared to significantly decrease the non-slip property of the non-slip coating. Specifically, in manual sanding with an abrasive sheet folded upon itself so that areas of the non-slip coating were adjacent each other in closely facing relation, the non-slip coating areas often were not able to resist slipping relative to each other, with the result that the fold (e.g., crease) in the sandpaper sheet, rather than remaining basically at one location of the sheet, would move along the sheet as the slipping occurred. This process resulted, upon repeated sanding with the sheet, in the sheet being worked much more heavily, and the paper backing cracking and losing its strength in many more places, than in the Representative Working Example above. It was also found that, in coefficient of friction testing, the non-slip coatings of the Comparative Examples displayed

a significantly lower coefficient of friction in the presence of gross contamination than that of the non-slip coating in the absence of particulate contamination.

[0084] The tests and test results described above are intended solely to be illustrative, rather than predictive, and variations in the testing procedure can be expected to yield different results. All quantitative values in the Examples section are understood to be approximate in view of the commonly known tolerances involved in the procedures used. The foregoing detailed description and examples have been given for clarity of understanding only. No unnecessary limitations are to be understood therefrom.

[0085] It will be apparent to those skilled in the art that the specific exemplary structures, features, details, configurations, etc., that are disclosed herein can be modified and/or combined in numerous embodiments. All such variations and combinations are contemplated by the inventor as being within the bounds of the conceived invention. Thus, the scope of the present invention should not be limited to the specific illustrative structures described herein, but rather extends at least to the structures described by the language of the claims, and the equivalents of those structures. To the extent that there is a conflict or discrepancy between this specification and the disclosure in any document incorporated by reference herein, this specification will control.

What is claimed is:

1. A sheet of sandpaper, comprising:
 - (a) a flexible backing layer having opposed first and second major surfaces;
 - (b) an adhesive make coat on the second major surface;
 - (c) abrasive particles at least partially embedded in the make coat, thereby defining an abrasive surface; and
 - (d) an exposed non-slip coating layer on the first major surface, wherein the nonslip coating layer comprises an amorphous base resin and an effective amount of a tackifying resin.
2. A sheet of sandpaper as defined in claim 1, wherein the non-slip coating layer is a hot-melt coating layer.
3. A sheet of sandpaper as defined in claim 1, wherein the flexible backing layer consists of a single layer, wherein the adhesive make coat consists of a single layer in direct contact with the second major surface of the adhesive make coat, and wherein the non-slip coating layer consists of a single layer.
4. A sheet of sandpaper as defined in claim 1, wherein the non-slip coating layer has an average tack level, as measured by an Inverted Probe Test using a 10 second dwell time and a probe removal speed of 1 cm/s, of no greater than about 250 grams.
5. A sheet of sandpaper as defined in claim 1, wherein the non-slip coating layer has an average tack level, as measured by an Inverted Probe Test using a 10 second dwell time and a probe removal speed of 1 cm/s, of no greater than about 60 grams.
6. A sheet of sandpaper as defined in claim 1, wherein the non-slip coating layer has an average kinetic coefficient of friction of at least about 0.75 grams when measured according to ASTM D 1894-08.
7. A sheet of sandpaper as defined in claim 1, wherein the non-slip coating layer, when bonded to itself, has an adhesion that is less than the two-bond adhesion of the non-slip coating layer to the backing layer, whereby the non-slip coating layer does not separate from the backing layer when the non-slip coating layer is separated from itself.

8. A sheet of sandpaper as defined in claim 1, wherein the non-slip coating layer, when bonded to itself, has an adhesion level that is less than the cohesive strength of the non-slip coating layer, whereby the non-slip coating layer is not damaged when the non-slip coating layer is separated from itself.

9. A sheet of sandpaper as defined in claim 1, wherein the non-slip coating layer has a thickness of at least about 20 microns and no greater than about 50 microns.

10. A sheet of sandpaper as defined in claim 1, wherein the non-slip coating layer has a coating weight of at least about 15 g/m² and no greater than about 100 g/m².

11. A sheet of sandpaper as defined in claim 1, wherein the non-slip coating layer comprises a generally planar outer surface opposite the abrasive particles.

12. A sheet of sandpaper as defined in claim 1, wherein the flexible backing layer is paper having a weight ranging from an A weight to an F weight.

13. A sheet of sandpaper as defined in claim 1, wherein the non-slip coating layer exhibits a glass transition temperature in the range of about -40° C. to about -5° C.

14. A sheet of sandpaper as defined in claim 1, wherein the base resin consists essentially of an amorphous polymer.

15. A sheet of sandpaper as defined in claim 1, wherein the base resin comprises an amorphous hydrocarbon polymer with a glass transition temperature in the range of approximately -17 C.

16. A method of hand sanding a work surface comprising the steps of:

- (a) providing a sheet of sandpaper as defined in claim 1;
- (b) manually engaging the non-slip coating layer with at least one of a hand and a manually operated tool; and
- (c) manually moving the sandpaper in a plurality of directions over the work surface.

17. A sheet of sandpaper for hand sanding a work surface, comprising:

- (a) a paper backing layer having opposed first and second major surfaces;
- (b) an adhesive make coat on the backing layer second major surface;
- (c) abrasive particles at least partially embedded in the adhesive make coat, thereby defining an abrasive surface; and
- (d) an exposed non-slip coating layer on the backing layer first major surface, wherein the non-slip coating layer is a hot-melt coating layer comprising an amorphous base resin and a tackifying resin, the non-slip coating layer comprising a thickness of no greater than about 50 microns and wherein the entirety of the outer surface of the non-slip coating layer is a generally planar surface.

18. A method of making a sheet of sandpaper having a non-slip coating layer, comprising the steps of:

- (a) providing a paper backing layer having opposed first and second major surfaces;
- (b) coating an adhesive make coat on the second major surface;
- (c) at least partially embedding abrasive particles in the make coat, thereby forming an abrasive surface; and
- (d) hot-melt coating a non-slip coating layer comprising at least one amorphous base resin and at least one tackifying resin on the first major surface.

* * * * *