



(51) International Patent Classification:

B82Y 25/00 (2011.01) *G11C 11/16* (2006.01)
GI1B 5/39 (2006.01) *H01F 10/32* (2006.01)
G11C 11/15 (2006.01) *H01L 43/12* (2006.01)

(21) International Application Number:

PCT/US2020/016028

(22) International Filing Date:

31 January 2020 (31.01.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/799,685 31 January 2019 (31.01.2019) US

(71) Applicant: **NORTHWESTERN UNIVERSITY**
[US/US]; 633 Clark Street, Evanston, Illinois 60208 (US).

(72) Inventors: **AMIRI, Pedram Khalili**; 625 Lacrosse Ave,
Wilmette, Illinois 60091 (US). **RAZEGHI, Manijeh**; 1500
Sheridan Rd., Suite 8A, Wilmette, Illinois 60091 (US).

(74) Agent: **POREMBSKI, N. Meredith** et al.; Bell & Man-
ning, LLC, 2801 West Beltline Highway, Ste. 210, Madi-
son, Wisconsin 53713 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: MAGNETIC MEMORY DEVICE USING DOPED SEMICONDUCTOR LAYER

100

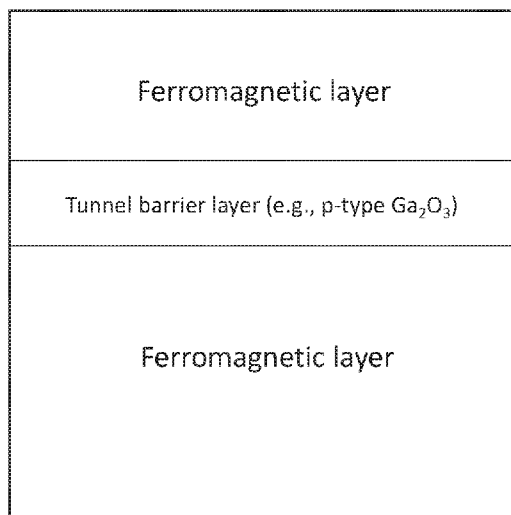


FIG. 1

(57) Abstract: Magnetic memory devices are provided. The devices comprise a first ferromagnetic layer, a second ferromagnetic layer, and a tunnel barrier layer composed of a doped semiconductor (instead of an insulator or a dielectric) between the first and second ferromagnetic layers and forming at least one ferromagnetic-doped semiconductor interface.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

MAGNETIC MEMORY DEVICE USING DOPED SEMICONDUCTOR LAYER**CROSS-REFERENCE TO RELATED APPLICATIONS**

[0001] The present application claims priority to U.S. provisional patent application number 62/799,685 that was filed January 31, 2019, the entire contents of which are incorporated herein by reference.

REFERENCE TO GOVERNMENT RIGHTS

[0002] This invention was made with government support under ECCS-1748339 awarded by the National Science Foundation. The government has certain rights in the invention.

BACKGROUND

[0003] There is a growing demand for fast and low power memory and logic devices, driven by the emergence of applications in artificial neural networks, autonomous systems, and internet of things. These applications are driving a paradigm shift of the semiconductor industry from logic-centric to memory-centric computing, where storage and processing of data are closely integrated. Memory-centric computing requires low-power and high-speed memory operation, with high integration density. However, present solutions do not scale adequately to address this demand, while some of the alternative candidates such as memristors lack the endurance to be used in applications where frequent writing is required. Spintronic devices, where current or voltage are used to control magnetic order at the nanometer scale, are exceptionally promising for this paradigm, as they combine nonvolatility (i.e. no standby power) with high endurance. While much work has been dedicated to the development of current-controlled spin-transfer torque (STT) memory, new and more efficient approaches to control magnetism have recently emerged, which provide pathways to wider industry adoption and new applications.

[0004] Voltage-controlled magnetic anisotropy (VCMA) is one of the leading candidates to replace or supplement the current-controlled write mechanism of STT. By using an electric-field-controlled write, VCMA can dramatically improve energy efficiency, improving integration density by reducing the access transistor dimensions. The write voltage depends on the sensitivity of the anisotropy to electric field, quantified as the VCMA parameter (in units of fJ/Vm). For high-density memory applications, VCMA values > 500

fJ/Vm are required. However, current state of the art is typically lower than 100 fJ/Vm (i.e. write voltages ~ 2 V). Previous attempts at improving the VCMA coefficient have mostly focused on changes to the free layer composition and the non-magnetic seed layers of the device.

SUMMARY

[0005] Provided are magnetic memory devices and methods of using the devices. The magnetic memory devices comprise a sandwich structure of ferromagnetic layers (e.g. CoFeB, CoFe, Fe) separated by a semiconductor layer (e.g. doped Ga_2O_3) as a tunnel barrier layer. Such devices achieve enhanced performance and reduce write voltage and energy dissipation compared to existing magnetic tunnel junctions (MTJs).

[0006] In one aspect, magnetic memory devices are provided. The devices comprise a first ferromagnetic layer, a second ferromagnetic layer, and a tunnel barrier layer composed of a doped semiconductor (instead of an insulator or a dielectric) between the first and second ferromagnetic layers and forming at least one ferromagnetic-doped semiconductor interface. Methods of using the magnetic memory devices are also provided.

[0007] Other principal features and advantages of the disclosure will become apparent to those skilled in the art upon review of the following drawings, the detailed description, and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Illustrative embodiments of the disclosure are described with reference to the following drawings.

[0009] FIG. 1 is a schematic showing an illustrative magnetic memory device comprising two ferromagnetic layers separated by a semiconductor layer.

[0010] FIGs. 2A-2B show magnetic hysteresis curves measured on a CoFeB layer deposited on a 600 nm layer of n-type Ga_2O_3 (FIG. 2A) and a 1 nm layer of p-type Ga_2O_3 (FIG. 2B).

DETAILED DESCRIPTION

[0011] Provided are magnetic memory devices and methods of using the devices.

[0012] The present disclosure is based on a fundamentally new approach to engineering VCMA in magnetic memory devices involving engineering the entire band structure of the device (as opposed to considering just dielectric constant or spin-orbit coupling). The approach involves using a semiconductor layer (e.g., a doped wide-bandgap semiconductor such as n-type or p-type Ga_2O_3) as the tunnel barrier layer (as opposed to an insulating or a dielectric material such as commonly used MgO). Thus, as used herein, the term “semiconductor” excludes insulating/dielectric materials. The approach originates from the inventors’ insight that such a semiconductor layer forms a Schottky barrier at the interface with an adjacent ferromagnetic layer. This creates a built-in electric field, which in turn, plays a significant role in determining the magnetic anisotropy and its electric field dependence via the Rashba-Edelstein effect. Moreover, the height of the Schottky barrier, and thus the built-in electric field, can be tuned via the doping level of the semiconductor material. This, in turn, provides for control over both the symmetry and the magnitude of the VCMA parameter.

[0013] The magnetic memory devices comprise a first ferromagnetic layer, a second ferromagnetic layer, and tunnel barrier layer composed of a semiconductor between the first and second ferromagnetic layers. An illustrative magnetic memory device 100 is shown in FIG. 1. The semiconductor layer (tunnel barrier layer) is in direct contact with at least one (and generally both) of the first and second ferromagnetic layers so as to form an interface(s) with the ferromagnetic layer(s) and thus, a Schottky barrier as described above. The semiconductor from which the tunnel barrier layer is formed is generally characterized by a wide bandgap of, e.g., at least 3 eV, at least 4 eV, at least 5 eV, or in the range of from 3 eV to 5 eV. The semiconductor may be a group III-VI compound semiconductor. The group III element may be Ga, Al, In, or combinations thereof. The VI element may be O. Thus, the semiconductor may be $(\text{Al}, \text{In}, \text{Ga})_2\text{O}_3$, wherein the ratios of Ga, Al, In may vary, depending upon the desired properties and application. In embodiments, the semiconductor is Ga_2O_3 .

[0014] The semiconductor from which the tunnel barrier layer is formed is generally doped and may be characterized by a doping type (i.e., n-type or p-type) and a doping level (i.e., carrier concentration). As noted above, the doping level may be selected to tune the height of the Schottky barrier formed at a semiconductor-ferromagnetic interface. This allows the built-in electric field to be tuned and thus, provides control over the symmetry and magnitude of the VCMA parameter. In embodiments, the semiconductor is a group IV-doped III-VI compound semiconductor. The IV element (the dopant) may be Si. Such a doped

semiconductor may be formed using metalorganic chemical vapor deposition (MOCVD) as described in WO2019/147602, which is hereby incorporated by reference in its entirety.

[0015] Briefly, as described in WO2019/147602, a substrate may be exposed to a vapor composition comprising a group III precursor comprising a group III element (i.e., metalorganic compounds comprising any of the group III elements noted above); a group VI precursor comprising a group VI element (i.e., compounds comprising a group VI element such as water, oxygen, N₂O, ozone); and a group IV precursor comprising a group IV element (i.e., compounds comprising a group IV element such as SiH₄, tetraethylorthosilicate, Si₂H₆, SiCl₄). The exposure takes place under conditions sufficient to form the desired doped compound semiconductor via MOCVD. These conditions include selecting a certain flow ratio of the group VI precursor to the group III precursor (i.e., the ratio of a flow rate of the group VI precursor to a flow rate of the group III precursor). The flow ratio parameter allows the doping type of the compound semiconductor to be tuned from n-type to p-type, even when using the same dopant, i.e., the same group IV precursor. That is, under certain flow ratios, the group IV element of the group IV precursor substitutes for the group VI element in forming the compound semiconductor to provide a p-type IV-doped III-VI semiconductor and under other flow ratios, the group IV element of the group IV precursor substitutes for the group III element to provide an n-type IV-doped III-VI semiconductor.

[0016] As noted above, the doping level (i.e., carrier concentration) of the doped semiconductor may be adjusted. In embodiments, however, the doped semiconductor is p-type having a carrier concentration in the range of from about 10¹⁵ cm⁻³ to about 10²⁰ cm⁻³, from about 10¹⁶ cm⁻³ to about 10²⁰ cm⁻³, from about 10¹⁷ cm⁻³ to about 10²⁰ cm⁻³ or from about 10¹⁸ cm⁻³ to about 10²⁰ cm⁻³. In embodiments, the doped semiconductor is n-type having a carrier concentration in any of the ranges disclosed above.

[0017] The tunnel barrier layer is characterized by an average thickness (average refers to a thickness as determined from a number of representative locations across a surface of the tunnel barrier layer). This average thickness is sufficiently small so as to ensure tunneling across the tunnel barrier layer. In embodiments, the average thickness is not more than 3 nm, not more than 2 nm, not more than 1 nm, or in a range of from a monolayer of the semiconductor to 3 nm.

[0018] The ferromagnetic layers are both composed of a ferromagnetic material. One of the ferromagnetic layers may be configured to be a fixed ferromagnetic layer and the other

may be configured to be a free ferromagnetic layer. The ferromagnetic material may be a hard or soft ferromagnetic material. In embodiments, the ferromagnetic materials for the two ferromagnetic layers may be selected from CoFeB, CoFe, and Fe.

[0019] The present magnetic memory devices may include other material layers, such as a pair of electrodes configured to apply a voltage across the device. Such electrodes may be composed of a heavy metal and may be characterized by relatively large spin-orbit coupling. For example, a first electrode may be disposed on or in electrical communication with the free ferromagnetic layer of FIG. 1 and a second electrode may be disposed under or in electrical communication with the fixed ferromagnetic layer of FIG. 1 such that a voltage may be applied across the device. Such an application of voltage is able to reorient or switch the magnetization of the free ferromagnetic layer via the voltage-controlled magnetic anisotropy effect. As described above, the voltage required for this reorientation or switching is determined by the doping level of the semiconductor from which the tunnel barrier layer is formed.

[0020] Thus, also provided are methods of using the present magnetic memory devices. Such a method comprises applying a voltage across the device. The voltage may be that which is sufficient to reorient or switch a magnetization of one of the first and second ferromagnetic layers.

[0021] The present magnetic memory devices may be characterized by a VCMA parameter. In embodiments, the VCMA parameter is at least 500 fJ/Vm. This includes embodiments in which the VCMA parameter is at least 750 fJ/Vm, at least 900 fJ/Vm, at least 1000 fJ/Vm, or in a range of from 500 fJ/Vm to 1000 fJ/Vm.

[0022] The present magnetic memory devices may be used with or incorporated into other systems for a variety of applications, including but not limited to: embedded memory in processor chips; random access memory (RAM) in computers, smartphones, and servers; machine learning accelerators; wearable devices; graphics processing; edge computing; and autonomous systems (e.g. self driving cars).

[0023] Advantages of the present magnetic memory devices include, but are not limited to: reduced write voltage compared to existing magnetic tunnel junctions; voltage-induced switching, rather than current-induced switching, resulting in low power dissipation and better scaling; better scalability to device dimensions below 20 nm.

EXAMPLE

[0024] This Example investigates the application of a doped wide-bandgap semiconductor, i.e. Ga_2O_3 , in a $\text{Ga}_2\text{O}_3/\text{CoFeB}$ heterostructure for a magnetic device. Integration of doped Ga_2O_3 will allow for control of spin-dependent transport and magnetic anisotropy by control of the oxide doping as described above. Both n- and p-type Si-doped Ga_2O_3 thin films were deposited by MOCVD as described above and in WO2019/147602, incorporated by reference in its entirety. Next, thin (< 2 nm) CoFeB layers were sputtered onto the Si-doped Ga_2O_3 thin films. Magnetic hysteresis curves were measured for the heterostructures as shown in FIGs. 2A-2B.

[0025] The word "illustrative" is used herein to mean serving as an example, instance, or illustration. Any aspect or design described herein as "illustrative" is not necessarily to be construed as preferred or advantageous over other aspects or designs. Further, for the purposes of this disclosure and unless otherwise specified, "a" or "an" means "one or more."

[0026] The foregoing description of illustrative embodiments of the disclosure has been presented for purposes of illustration and of description. It is not intended to be exhaustive or to limit the disclosure to the precise form disclosed, and modifications and variations are possible in light of the above teachings or may be acquired from practice of the disclosure. The embodiments were chosen and described in order to explain the principles of the disclosure and as practical applications of the disclosure to enable one skilled in the art to utilize the disclosure in various embodiments and with various modifications as suited to the particular use contemplated. It is intended that the scope of the disclosure be defined by the claims appended hereto and their equivalents.

WHAT IS CLAIMED IS:

1. A magnetic memory device comprising a first ferromagnetic layer, a second ferromagnetic layer, and a tunnel barrier layer composed of a doped semiconductor between the first and second ferromagnetic layers and forming at least one ferromagnetic-doped semiconductor interface.
2. The device of claim 1, wherein the doped semiconductor has a bandgap of at least 3 eV.
3. The device of claim 1, wherein the doped semiconductor has an average thickness of no more than 2 nm.
4. The device of claim 1, wherein the doped semiconductor is a doped group III-VI semiconductor.
5. The device of claim 4, wherein the doped semiconductor is doped $(\text{Al,In,Ga})_2\text{O}_3$.
6. The device of claim 4, wherein the doped semiconductor is a group IV-doped group III-VI semiconductor.
7. The device of claim 6, wherein the doped semiconductor is a Si-doped group III-VI semiconductor.
8. The device of claim 6, wherein the doped semiconductor is Si-doped $(\text{Al,In,Ga})_2\text{O}_3$.
9. The device of Claim 1, wherein the first and second ferromagnetic layers are independently selected from CoFeB, CoFe, and Fe.
10. The device of claim 1, wherein the doped semiconductor is characterized by a carrier concentration of at least 10^{15} cm^{-3} .
11. The device of claim 1, further comprising a first electrode and a second electrode configured to apply a voltage across the device.
12. The device of claim 1, wherein the doped semiconductor is Si-doped $(\text{Al,In,Ga})_2\text{O}_3$ and the first and second ferromagnetic layers are independently selected from CoFeB, CoFe, and Fe.
13. A computing device comprising a processor and the magnetic memory device of claim 1.

14. A method of using the magnetic memory device of claim 1, the method comprising applying a voltage across the device.

15. The method of claim 14, wherein the voltage is sufficient to reorient or switch a magnetization of one of the first and second ferromagnetic layers.

16. The method of claim 14, wherein the voltage required to reorient or switch a magnetization of one of the first and second ferromagnetic layers depends upon a carrier concentration in the doped semiconductor.

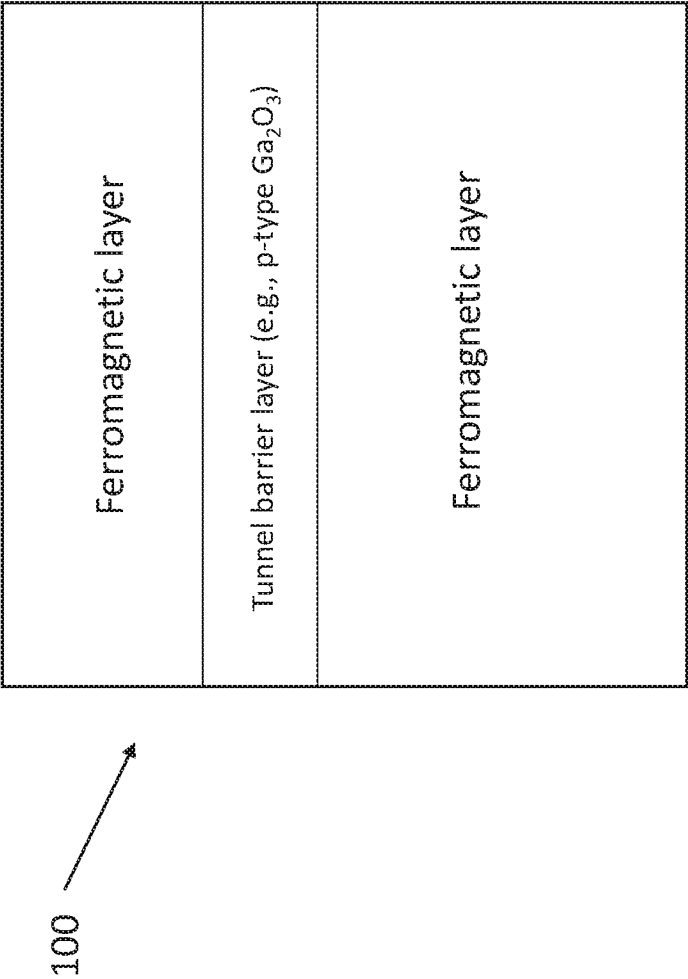


FIG. 1

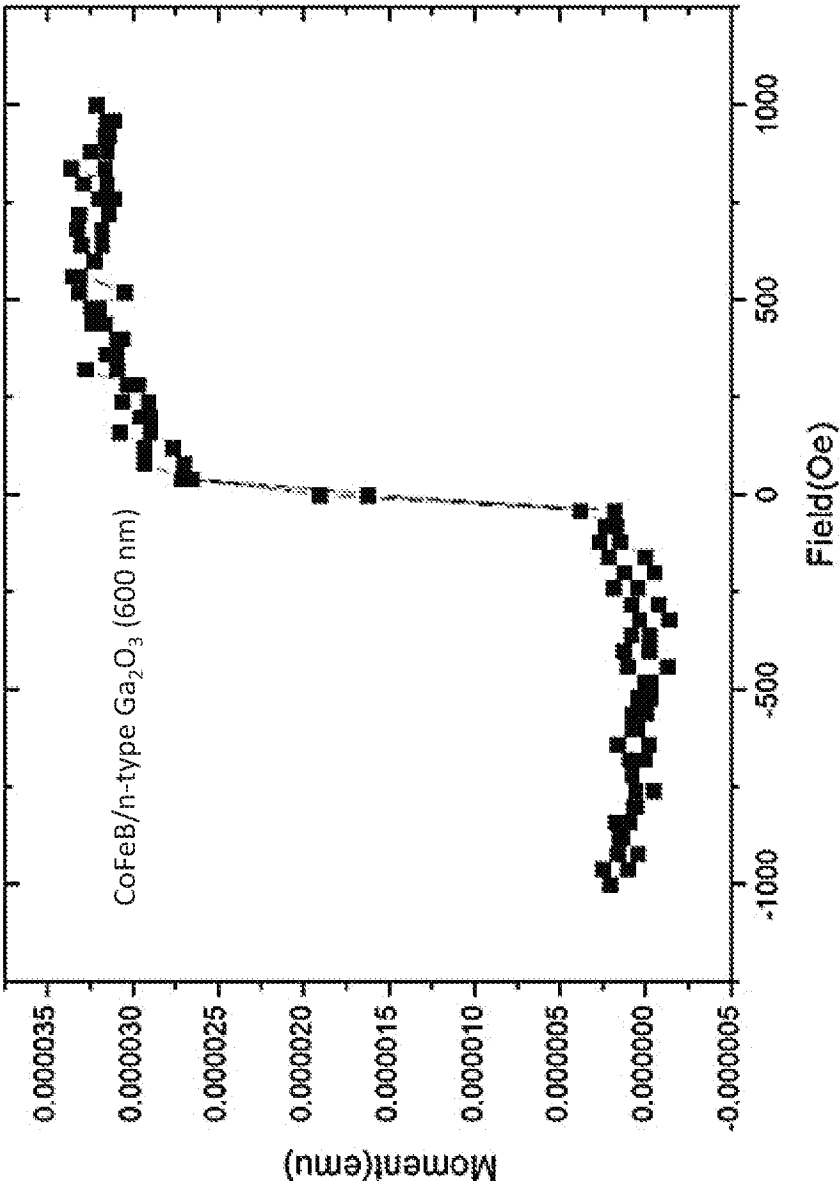


FIG. 2A

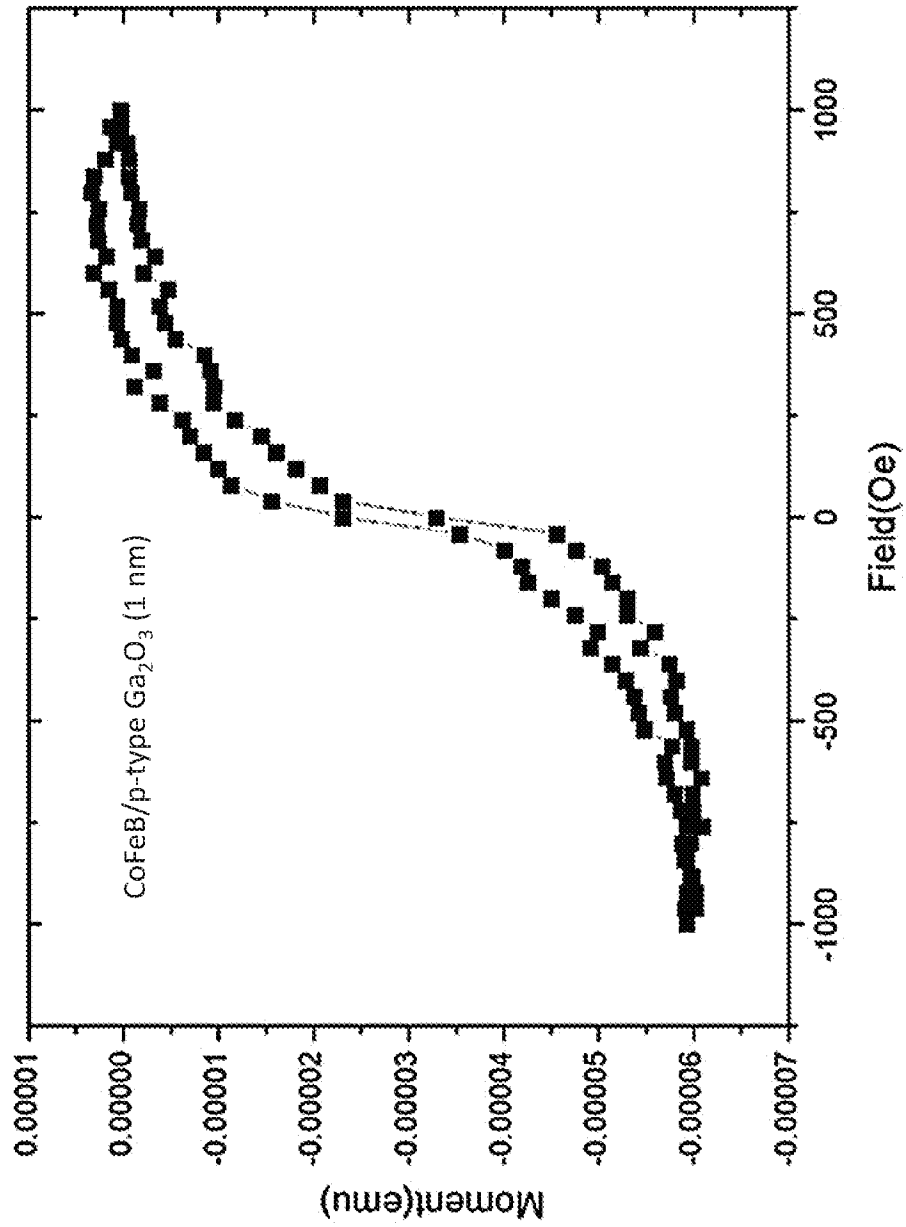


FIG. 2B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 20/16028

A. CLASSIFICATION OF SUBJECT MATTER

IPC - B82Y 25/00; G11B 5/39; G11C 11/15; G11C 11/16; H01F 10/32; H01L 43/12 (2020.01)

CPC - B82Y 25/00; G11B 5/39; G11B 5/3903; G11B 5/3906; G11B 5/3909; G11C 11/15; G11C 11/16; G11C 11/161; H01F 10/32; H01F 10/3227; H01F 10/3231; H01F 10/324; H01F 10/3254; H01L 43/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 2009/0231909 A1 (DIENY et al.) 17 September 2009 (17.09.2009) entire document; especially para [0072]-[0094], Fig.11	1-9, 11-16 ----- 10
Y	US 2018/0197915 A1 (INTERNATIONAL BUSINESS MACHINES CORPORATION) 12 July 2018 (12.07.2018) entire document; especially para [0044]	10

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 March 2020

Date of mailing of the international search report

18 MAY 2020

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Lee Young

Telephone No. PCT Helpdesk: 571-272-4300