

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 June 2003 (26.06.2003)


PCT

(10) International Publication Number
WO 03/051461 A1

- (51) International Patent Classification⁷: **A62B 17/04**
 - (21) International Application Number: PCT/IL02/01002
 - (22) International Filing Date:
12 December 2002 (12.12.2002)
 - (25) Filing Language: English
 - (26) Publication Language: English
 - (30) Priority Data:
10/020,936 19 December 2001 (19.12.2001) US
 - (71) Applicants (for all designated States except US): **TESTA TECHNOLOGIES T.T. LTD.** [IL/IL]; Merkaz Sapir, Givat Shaul, 95477 Jerusalem (IL). **ALON, Uri** [IL/IL]; Moshav Hadar Am, 42935 Moshav Hadar Am (IL).
 - (72) Inventors; and
 - (75) Inventors/Applicants (for US only): **RESHEF, Yaron** [IL/IL]; Haela Street 17, 42815 Pardesiya (IL). **SCHAHAM, Elhanan** [IL/IL]; Hamarganit Street 30, 52584 Ramat Gan (IL).
 - (74) Agent: **REINHOLD COHN AND PARTNERS**; P.O. Box 4060, 61040 Tel-Aviv (IL).
 - (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
 - (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report

[Continued on next page]

(54) Title: RESPIRATORY HOOD

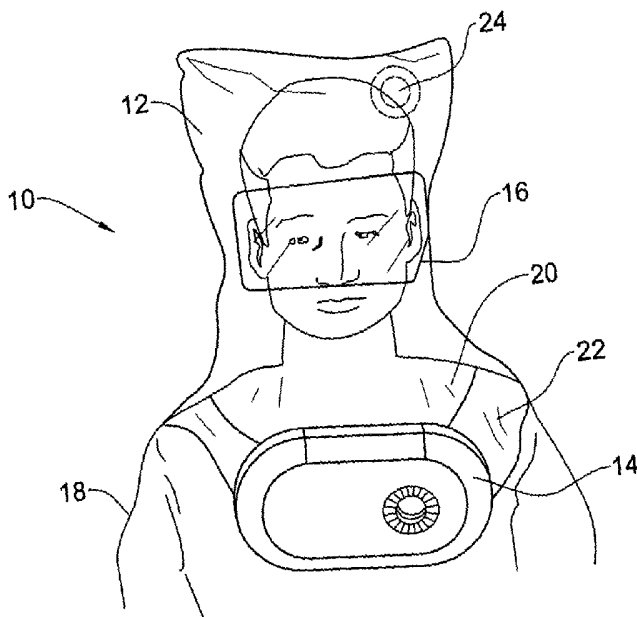

(57) Abstract: A positive-pressure respirator hood assembly comprising, a gas-impermeable hood made of a flexible material, formed with at least a transparent visor portion; a gas treatment unit, comprising a filter and a power-operated blower to force air through the filter and generate a positive pressure within the hood; a one-way purge valve for facilitating the exhaust of exhaled gases and moisture from the hood; and a sealing portion for sealingly securing the hood over a body portion of the user; the respirator hood assembly is designed to be compactly received in a container and to be deployed into an operative state automatically, whereby a user is provided protection from toxic gases and particulate material.



WO 03/051461 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

RESPIRATORY HOOD

FIELD OF THE INVENTION

This invention relates to emergency safety equipment, particularly respirator hoods that provide filtered air to persons in toxic environments.

BACKGROUND OF THE INVENTION

5 There is increasing interest both from governmental agencies and the general public in protecting individuals from the harmful effects of toxic materials in the event of accidental incidents such as chemical spills, escape of toxic and noxious gases, smoke filled areas, dust and fumes, and in the event of chemical, biological, or other terror events.

10 In addition, there is a strong desire among certain people to protect their pets and work animals (seeing-eye dogs, livestock, etc.) from the same harmful effects.

 Immediate protection of the respiratory tracts, eyes, and skin is required in such incidents and many of these incidents occur with little or no warning. This requires that any equipment used to protect the individual or animal (hereinafter in
15 the specification and claims referred to as "user") be readily available, i.e. carried with the user or stored nearby, and readily deployable into an operative state.

 Protective industrial masks, hoods, and powered air respirators are known, but they require skills and training in order to provide adequate protection. They are also bulky and not designed to be conveniently carried and rapidly deployed.

20 Often the user exposed to the toxic environment is untrained in safety procedures, such as how to don and activate a powered air respirator hood.

- 2 -

Most of the existing respiratory protective means are by necessity made in several sizes and do not fit both adults and children in one size.

In the event of a sudden or unexpected situation resulting in a toxic or noxious environment, it is clearly an advantage to have a device to supply filtered
5 or purified air and also to provide nominal protection to the otherwise exposed skin of the head and neck from gases, liquids/droplets, particles, fine sprays and aerosols. Advantageously, the device should be readily available (easily carried and/or stored) and suitable for a wide size-range of users (adults, children, the elderly, the infirm, handicapped and sick people, people with beards, eyeglasses,
10 long hair, etc., and animals) without a need to conform to facial features or body shapes. Furthermore, it is preferable that the activation and functioning is automatic, the donning is self-explanatory and comfortable, and the device is suitable for extended operation as well as short term use. It is also advantageous that the device has a long shelf life.

15 **SUMMARY OF THE INVENTION**

Accordingly, it is the objective of this invention to provide a device that protects a user from toxic environments for quick escape or for an extended period of time, typically for up to several hours, that is collapsible, easily carried or stored, compact, lightweight, comfortable, easy to use, one-size-fits-all, whose donning is
20 self-explanatory, whose activation is automatic, and requires no training for use.

The present invention is concerned with a positive-pressure respirator hood assembly comprising, a gas-impermeable hood made of a flexible material, and comprising at least a portion which is a transparent visor; a gas treatment unit comprising a filter for filtering particles, fine spray, aerosols, and toxic and noxious
25 gases etc. (hereinafter "hazardous materials"), and a power-operated blower to generate a positive pressure within the hood; a one-way purge valve for facilitating the exhaust of exhalation gases and moisture from the hood; and a sealing portion for sealingly securing the hood over a body portion of the user. The hood assembly is designed to allow near immediate donning to a wide range of users, requiring no

- 3 -

training to don and operate the hood assembly, whereby a user is protected from inhalation of and facial contact with the hazardous materials.

The respirator hood is received within a container that is easily carried whereby upon opening the container and removing the respirator hood, the
5 respirator hood is fully operational as the gas treatment unit is automatically activated. The respirator hood is foldable to allow it to fit within a small size container.

The hood, including the sealing portion, is designed such that one size provides protection from a toxic environment to users whether male or female,
10 regardless of facial or head features such as beard, hair length/thickness, eyeglasses, etc, and regardless of size (from toddlers to large adults). The design of the hood also allows it to be used to protect animals such as pets, livestock, etc.

According to one embodiment of the invention, the sealing portion is an elastic neck seal and according to another embodiment, the sealing portion is a
15 torso-engaging and sealing wrap.

The respirator hood may be carried and protected by a rigid container (case), in a flexible container or in a flexible container received within a case. Typically, the respirator hood is received within a sealed package for imparting it extended shelf life.

20 The respirator hood may be provided in some principal configurations, e.g. one for individuals from toddlers to adults, another for infants up to about the age of three years, and yet another for animals.

According to some particular designs, the operation of the blower can be stopped and the respiration hood may then be preserved for future use. According
25 to one such arrangement, there is provided a safety-catch which when engaged with a corresponding portion of a switch assembly of the power-operated blower, deactivates the blower and prevents donning the hood. By one particular application the safety-catch and the switch assembly extend at opposing neck portions of the hood, whereby at the engaged position donning is not possible.

According to one particular embodiment, the safety-catch is in the form of a plug-like member fitted for snap-engagement with the switch assembly.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to understand the invention and to see how it may be carried out in practice, a preferred embodiment will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

Fig. 1 is a front view of a respirator hood according to one embodiment of the invention, being worn by a user;

Fig. 2 is a side view of the respirator hood of Fig. 1;

10 **Fig. 3** is a general exploded view illustrating the respirator hood removed from its container;

Fig. 4A shows a user carrying the respirator hood as a carry along device;

Fig. 4B shows a user carrying the respirator hood in a briefcase;

15 **Fig. 5** is a detailed isometric exploded view of the respiratory hood assembly, also showing the gas flow path through the gas treatment unit;

Fig. 6 is a top section of the respiratory hood assembly, illustrating an activation mechanism;

Fig. 7 is a side section of the respiratory hood assembly showing the hood folded next to the gas treatment unit;

20 **Fig. 8** is a front view of an alternate embodiment of the respirator hood used by an infant;

Fig. 9 is a rear view of the alternate embodiment of Fig. 9 illustrating a sealing and closure means;

25 **Fig. 10** is an alternate embodiment showing the respirator hood being removed from a flexible container;

Fig. 11 is an alternate embodiment of the respirator hood showing a packaging comprising a flexible container inside an outer case;

Fig. 12 is an exploded view of an alternate embodiment with re-insertable activation mechanism;

- 5 -

Fig. 13 is a top section of a gas treatment unit of an alternate embodiment highlighting the re-insertable activating mechanism;

Figs. 14A and 14B are side views of alternate embodiments of the respirator hood used by dogs illustrating different closure means; and

5 Figs. 15A to 15C illustrate a further embodiment of a protective hood according to the invention, fitted with a deactivation mechanism.

DETAILED DESCRIPTION OF THE INVENTION

The present invention is a respirator hood assembly that is portable, compact, easy to store, easy to carry, easy to don, easy and comfortable to use, is
10 designed in a *one-size-fits-all* manner for users of a wide range of sizes, requires no training for use, and is activated and operates automatically.

Herein, the terms *gas* and *gases* are meant to denote the mixture of air and toxic and/or noxious gas or biological warfare agents, which may include particles, fine spray, aerosols, or droplets, collectively referred to as hazardous materials.

15 Referring first to Fig. 1, a respirator hood, generally designated **10**, is shown which comprises a hood **12**, made of a flexible, gas and liquid-impermeable material and a gas treatment unit **14** attached to the hood **12**. The hood **12** includes a visor **16**, also made of a flexible, gas-impermeable material, positioned adjacent to the eyes of a user **18**.

20 Still referring to Fig. 1, fastened to the hood **12** is a sealing portion in the form of a collar or neck seal **20** made of an elastic material such as silicone, polyurethane, latex rubber, etc., allowing easy donning and requiring no latches, straps, ties, or the like. The neck seal **20** is sized to be, in the non-stretched condition, slightly smaller than that of a small toddler and whose material is such
25 that it is easily stretched to a size conveniently larger than the head of a large adult user **18** regardless of long or thick hair, beards, etc. Further, the neck seal **20** is dimensioned to be wide enough for wearing comfort. With this design, the respirator hood **10** is easily and conveniently donned within seconds by a wide range of individuals without need for training or operating instructions.

– 6 –

Fig. 1 further shows a cape or shroud **22** extending downward in a skirt-like manner fitting around the neck toward the shoulders of the user **18** to protect the neck. A one-way purge valve **24** is integrated into the hood **12** to facilitate the exhaust of perspiration and exhalation gases such as carbon dioxide and moisture from the hood **12** while not allowing the entrance therethrough of outside gases. The one-way purge valve may be any suitable valve, outlet, or flow device, permitting the flow of gases, vapors or moisture in one direction only.

In Fig. 2 arrow **26** shows where ambient gases enter the gas treatment unit **14**, arrow **28** shows where filtered air then enters the hood **12**, and arrow **30** shows where exhalation (exhaled air) and moisture exit from the hood **12** via the purge valve **24**. Seen again are side views of the visor **16** the neck seal **20**, and the shroud **22**.

Fig. 3 shows a respirator hood assembly **11** comprising the respirator hood **10** and its container, which is in the form of a rigid case, generally designated **32**, after the container **32** has been opened and the respirator hood **10** has emerged. At this point the respirator hood **10** is completely ready for donning and use. Container **32** comprises a front cover **34** and a rear cover **36**.

The covers **34** and **36** are not part of the respirator hood **10** that is worn by the user **22**, however they are important in that they form the container **32** which forms a protective casing around the respirator hood **10** in order ensure/prolong the shelf life. Optionally, a gas-impermeable seal is formed which prevents the ingress of humidity since filters of the type used in respiratory protective devices are sensitive to humidity. The container **32** can be carried using either of its front handle **38** and a rear handle **40**, which are part of the container **32**. The handles **38** and **40** are also used to open the container **32**, which automatically activates the gas treatment unit **14**, as described below. Additionally, the container **32** plays a significant role in activation of the gas treatment unit **14**, as will become apparent hereinafter.

- 7 -

Figs. 4A and 4B illustrate how the lightweight and compact respirator hood assembly 11 is easily carried by the user 18 as a carry along (Fig. 4A) or may fit within a briefcase 44 (Fig. 4B). If carried as a carry along, as shown in Fig. 4A, the assembly 11 can include rings (not shown), or the like, for attaching an auxiliary carrying strap 42. Desirably, the respirator hood assembly 11 fits into a portion of a typical small briefcase 44. Analogously, the respirator hood assembly 11 can be carried in a purse or backpack (not shown).

The convenient carrying and compact storage features of the respirator hood assembly 11 are important in that they provide immediate availability of the respirator hood 10 to the user 18. These features, along with the automatic activation of the gas treatment unit 14 (discussed below) and simple donning, allow the respirator hood 10 to be in full use within seconds. Rapid deployment can be critical to the health, or even survival, of the user 18.

In Fig. 5 an arrow 46 indicates the gas flow path. Gases enter the gas treatment unit 14 firstly through an opening 48 in a housing 50 that accommodates the gas treatment unit 14. The opening 48 is exposed to the ambient as soon as the front cover 34 is detached or removed. A washer 52 provides a seal between the housing 50 and a filter 54 that filters the incoming gases. The filter 54 is any suitable filter as known in the art for filtering of hazardous materials such as particles, toxic/noxious gases, fine sprays and aerosols. The filter 54 is sealed to a base 56 by a washer 55. The base 56 is fitted on a manifold 58. The manifold 58 distributes the gases, now filtered, back through an opening 60 of the base 56. The filtered gases then enter and exit a battery powered blower 62 through a fitting 64 and an opening 66. The blower 62 is sealed to the housing 50 by washer 67. Through the opening 66, the filtered gases enter the hood 12. The hood 12 is fastened to the gas treatment unit 14 between the fitting 64 and a fitting 65. The washers 52, 55 and 67 are all replaceable by a suitable glue or other sealing compound such as silicone or epoxy.

- 8 -

Also seen in Fig. 5 is a battery **68** that powers the blower **62**. The power is activated automatically when the covers **34** and **36** of the container **32** are opened, typically by handles **38** and **40**. An activating mechanism utilizing a latch **70**, a toggle **72**, and a switch **74** is explained below. The latch **70** sits in an indentation **76** (see also Fig. 6). Fitting into the housing **50** is a blower cover **78**, which can be made in different configurations to add flexibility to the design of the components in the gas treatment unit **14**.

Blower **62** produces a positive pressure within the hood **12** which improves the protection to the user **18** by preventing entry of gases via the neck seal **20** in the event the neck seal **20** is loose or if openings occur due to movement of the user **18**. The positive pressure produced by the blower **62** also prevents the entry of gases into the hood **12** as it is donned, prevents build-up of exhalation gases such as carbon dioxide and moisture (including the exhaust of perspiration, which improves the comfort of the user **18**).

Fig. 6 is a top section of the respirator hood assembly **11** showing the parts that activate the blower **62**. The latch **70** the top of which fits in the indentation **76**, is actuated when the front cover **34** is opened. Separating the cover **34** from the respirator hood **10** causes the latch **70** to rupture and thus in this embodiment the operation of the respirator hood **10** is irreversible once the respirator hood **10** is operated. As the front cover **34** is detached or removed, latch **70** is pulled outwardly and thereby pulls on toggle **72** which activates the switch **74**, thereby facilitating power to the blower **62**, which is powered by the battery **68**.

Fig. 7 shows a side section of the respirator hood assembly **11**, showing the hood **12** folded between the covers **34** and **36**. The compactness of the collapsible hood **12** is illustrated, as well as the fastening of the hood **12** to the gas treatment unit **14** by the fittings **64** and **65**.

To use the respirator hood **10**, the covers **34** and **36**, of container **32**, are separated/detached and removed. The covers **34** and **36** are no longer needed. As described above, this activates the blower **62** making the gas treatment unit **14** and

– 9 –

respirator hood **10** fully operational. The neck seal **20** is then stretched over the head of the user **18**. There are no other actions necessary. Even if the respirator hood **10** is donned backward or to the side, i.e. with the visor **16** not in front of the eyes, the user **18** is still protected. Furthermore, the hood **12**, or a large enough portion of it, may be made of a transparent or translucent material affording the user **18** reasonable visibility. Alternatively, the hood **12** can be easily adjusted to a more appropriate. The positive pressure within the hood **12**, produced by the blower **62**, prevents ingress of the unwanted gases during any adjustment of the hood **12**. Thus, the respirator hood **10** is easily operated and used without the need for operating instructions even in time of stress.

It is appreciated that an untrained person of an age of from about three years to a complete, and large sized, adult can have ready access to, and can use a device according to the invention for head and neck protection and for the supply of pressurized purified air in the event of sudden exposure to toxic or noxious gases including particles, fine spray or aerosols.

Fig. 8 illustrates an alternate embodiment where an infant **90** uses the invention. It is dangerous to fit a neck seal around the neck of an infant **90** and so here a hood **92** which includes a visor **94** is designed to fit over the head and upper body of the infant **90**. The arms of the infant **90** may be completely inside the hood **92** (this option not shown) or may sealingly protrude from the sides **96** and **97** which are formed when the hood **92** is closed around the torso of the infant **90**.

Fig. 9 illustrates one option of how the alternate embodiment shown in Fig 9 may be closed around the torso of the infant **90**. Any suitable closure means can be used, such as an elastic seal (analogous to neck seal **22**) suitable for an infant's torso, however, typically a hook and loop type fastener, commonly known as VELCRO™, is the most convenient. A portion containing hooks **98** and a portion containing loops **99** is shown. The hooks **98** and loops **99** portions can be reversed. This arrangement is also suitable for people suffering from neck injuries, etc.

– 10 –

Fig. 10 shows a different embodiment in which the respirator is contained in a flexible container such as a foil or laminated bag **110**. The bag **110** is made of a gas-impermeable material to protect the respirator hood **10** (especially the filter **62** from humidity, to ensure long shelf life) and is preferably made of a material that provides mechanical protection as well. Automatic activation in this embodiment can be achieved by various means including, for example, by activating a switch such as the switch **74** (Fig. 6) (or a switch **136** shown in Figs. 12 and 13) which can be articulated with an opening edge **114** of the bag **110**, or a tear-ribbon, etc. The bag **110** preferably includes a handle **116** for easy carrying.

It should be understood that several variations on this embodiment are possible, including, but not limited to, one where the respirator hood **10** is activated by stretching the neck seal **22** before donning.

Fig. 11 illustrates a packaging arrangement in which the respirator hood **10** is contained in a flexible container such as a foil, laminated or plastic bag **118** which is further contained within an outer rigid container, generally designated **120**, which provides mechanical protection for the respirator hood **10**. The outer container **120** could be a rigid case, a tough sack or other suitable container. In this embodiment the bag **118** need not provide mechanical protection, but is still preferably made of a gas-impermeable material. The top cover **122** and bottom cover **124** may be held together by any suitable means such as mechanically, by pressure sensitive adhesive, etc.

Fig. 12 shows an exploded view of an alternate respirator hood assembly, generally designated **126**, emphasizing the internal components of an alternate gas treatment unit, generally designated **128**. In this embodiment the activation of a respirator hood, generally designated **130**, is reversible, i.e. it is possible to stop the operation of the gas treatment unit **128** and preserve it for future use. This is useful if, for example, the respirator hood **130** was accidentally activated or the user **18** escapes from, but needs to return to a toxic environment, etc.

An activation pin **132**, typically integral to a bottom cover **134**, penetrates into the gas treatment unit **128** compressing a switch **136** when the assembly **126** is

– 11 –

in the packaged condition (best seen in Fig. 13). Detaching or removal of the respirator hood 130, from the bottom cover 134 detaches the pin 132 from the switch 136 thereby actuating the switch 136. The pin 132 can be re-inserted to re-compress the switch 136 and shut down the blower 54 of the gas treatment
5 unit 128 to de-activate the respirator hood 130.

Also shown in Fig. 12 is a lip 146 on the cover 138 to aid in opening the covers 134 and 138. A covering 148, which is preferably a gas-impermeable material, in order to protect the gas treatment unit 128 from humidity/moisture, etc., is adjacent to the cover 138 and attached to cover 134 at its perimeter. A tab 150 is
10 provided for easy peel back of the covering 148. A handle 152 is integral to the cover 134, which along with the lip 146 makes for easy gripping of the assembly 126. The handle 152 and the lip 146 are also used for easy opening of the covers 134 and 138.

Fig. 13 shows a top section of the gas treatment unit 128 highlighting the
15 re-insertable pin 132 which is part of the activation mechanism. Since the pin 132 is integral to the cover 134, detaching or removal of the cover 134 detaches the pin 132 from the switch 136. The blower 62 is thus actuated and the gas treatment unit 128 and the respirator hood 130 are then fully operational.

Figs. 14A and 14B show embodiments that are suitable for animals;
20 depicted by a small dog 160 (Fig. 14A) and a large dog 162 (Fig. 14B). For the small dog 160 a hook and loop closure means, discussed above for infants, may be appropriate. For a large dog 162, a sealing portion such as the elastic neck seal 20 for a human adult user 18 may be appropriate. For animals, hoods 164 and 166, including visors 168 and 170, may require some size and shape differentiation from
25 humans and size and shape differentiation from animal to animal depending on type and size. In the case of very small animals, for example gerbils (not shown), the animal, or more than one animal, can be completely inside the hood 164; 166.

Turning now to Figs 15A to 15C there is illustrated another embodiment of a protective hood according to the present invention. The hood generally designated

– 12 –

170 is illustrated from below, i.e. with the hood facing down and the collar and neck seal 172 facing up. A gas treatment unit 174 is attached to the hood similarly as explained in connection with the embodiment of Fig. 1. As seen in Fig. 15C, gas treatment unit 174 comprises a switch assembly 178 for stopping the power-operated blower. The switch assembly 178 comprises a toggle 182 projecting into a safety-catch receptacle 184. Said plunger 182 is normally biased into a so-called 'on' position, i.e. an activated position of the blower.

Fixedly attached to the collar 172, at a portion substantially opposite the gas safety-catch receptacle 184, there is provided a safety-catch 188 in the form of a plug adapted for snap engagement within the safety-catch receptacle 184 of the switch assembly.

Whenever the plug 188 is engaged within the safety-catch receptacle 184, the toggle 182 displaces into a so-called 'off' position, i.e. where of the blower is turned off, to thereby save battery power and extend the life of the filtering unit. However, an important character of the arrangement is that when the plug 188 is engaged within the safety-catch receptacle 184 (Fig. 15B), the hood can not be donned since opposite sides of the collar 172 are engaged to one another and the opening for inserting onset head is blocked. This arrangement is useful to prevent accidental donning of the hood, without ensuring activation of the gas treatment unit 174.

When the protective hood 170 is received within its carrying case (not shown) there is a plug member integral with or attached to the case, said plug adapted for projection into the receptacle 174 so as to displace the toggle into the off position. However, in this position the plug is typically not a snap-type so as to facilitate easy removal and donning of the hood.

CLAIMS:

1. A positive-pressure respirator hood assembly comprising, a gas-impermeable hood made of a flexible material, formed with at least a transparent visor portion; a gas treatment unit, comprising a filter and a power-operated blower to force air through the filter and generate a positive pressure within the hood; a one-way purge valve for facilitating the exhaust of exhaled gases and moisture from the hood; and a sealing portion for sealingly securing the hood over a body portion of the user; the respirator hood assembly is designed to be compactly received in a container and to be deployed into an operative state automatically, whereby a user is provided protection from toxic gases and particulate material.
2. A respirator hood assembly according to claim 1, where the container is part of an activating mechanism for deploying the respirator hood into the operative state.
153. A respirator hood assembly according to claim 1, where the body portion is a user's neck and where the sealing portion is a neck-engaging collar made of an elastic material.
4. A respirator hood assembly according to claim 1, where the sealing portion is designed to easily stretch over the head of the user and sealingly fit around the neck of the user after the hood is donned.
5. A respirator hood assembly according to claim 1, where the body portion is a user's torso and where the sealing portion is a torso-engaging and sealing wrap.
6. A respirator hood assembly according to claim 5, wherein the sealing wrap is adapted for elastic engagement over the user's torso.
257. A respirator hood assembly according to claim 1, where the respirator hood is suitable also for an animal.
8. A respirator hood assembly according to claim 1, wherein the container comprises at least one detachable member articulated with an activating switch of

– 14 –

the gas treatment unit, whereby detaching the member activates the power-operated blower.

9. A respirator hood assembly according to claim 8, wherein the at least one detachable member is re-insertable whereby the power-operated blower is
5 de-activated.
10. A respirator hood assembly according to claim 2, wherein the container comprises a front and a rear cover, at least one of which is articulated to the activating switch of the gas treatment unit.
11. A respirator hood assembly according to claim 10, wherein the front and
10 rear covers are engageable into a closed position, wherein the respiratory hood and gas treatment unit are confined within the container in a gas-tight manner.
12. A respirator hood assembly according to claim 10, wherein at least one of the front and rear cover is fitted with a handle, to facilitate its detachment.
13. A respirator hood assembly according to claim 1, having a storage state
15 and an operative state; wherein at said storage state the respiratory hood and gas treatment unit are sealingly received within a container whereupon opening the container automatically activates the gas treatment unit.
14. A respirator hood assembly according to claim 13, wherein the container is rigid.
- 20 15. A respirator hood assembly according to claim 13, wherein the gas treatment unit comprises an activating switch coupled via a toggle member to a portion of the container, whereby opening the container automatically activates the switch.
16. A respirator hood according to claim 10, wherein the toggle member is
25 attached to one of the cover members by a latch.
17. A respirator hood according to claim 10, wherein the latch ruptures upon opening the container.
18. A respirator hood assembly according to claim 1, where the protection from toxic gases, particles, fine spray, or aerosols is protection from inhalation.

19. A respirator hood assembly according to claim 1, where the protection from toxic gases, particles, fine spray, or aerosols is protection from contact.
20. A respirator hood assembly according to claim 1, where the activation of the gas treatment unit is automatic by a mechanical means.
21. A respirator hood assembly according to claim 1, where the assembly is easily and conveniently carried in a purse or briefcase and/or stored nearby the user.
22. A respirator hood assembly according to claim 1, where the assembly fits within a standard office briefcase.
23. A respirator hood assembly according to claim 1, where the assembly is
10 designed as a one-size-fits-all above the age of three.
24. A respirator hood assembly according to claim 1, where the hood is designed to fit users of a size range from toddlers to large adults.
25. A respirator hood assembly according to claim 1, where the hood is designed to fit users regardless of head or facial features.
26. A respirator hood assembly according to claim 1, where the hood is designed to fit users who have long hair or wear eyeglasses.
27. A respirator hood assembly according to claim 1, wherein the gas treatment unit is fixed to the respirator hood.
28. A respirator hood assembly according to claim 1, wherein the gas
20 treatment unit forces filtered air into the respirator hood giving rise to pressure build-up therein.
29. A respirator hood assembly according to claim 1, wherein operation of the blower can be stopped and the respiration hood may then be preserved for future use.
30. A respirator hood assembly according to claim 29, wherein a safety-catch is provided which when engaged with a corresponding portion of a switch assembly of the power-operated blower, deactivates the blower and prevents donning the hood.
31. A respirator hood assembly according to claim 29, wherein a switch
30 assembly of the blower assembly comprises a deactivating latch which when

– 16 –

engaged with said switch stops the blower and attaches opposite sides of the hood to one another, to thereby prevent donning the hood.

- 32.** A respirator hood assembly according to claim 29, wherein the gas treatment unit is formed at a portion of the hood and a neck portion of the hood
5 opposite said portion is fitted with a latch which when engaged with the blower stops operation thereof and prevents donning the hood.

1/14

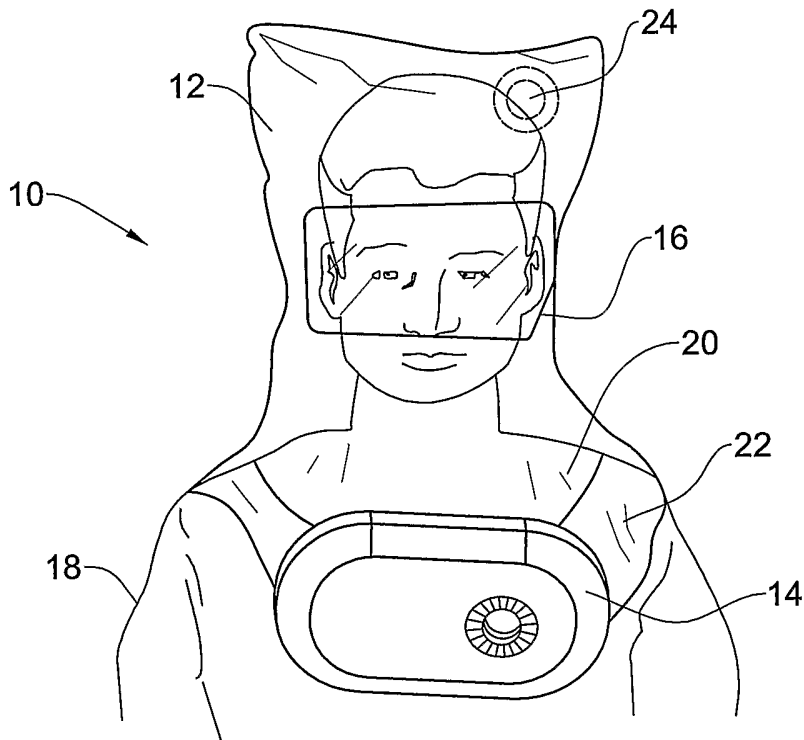


FIG. 1

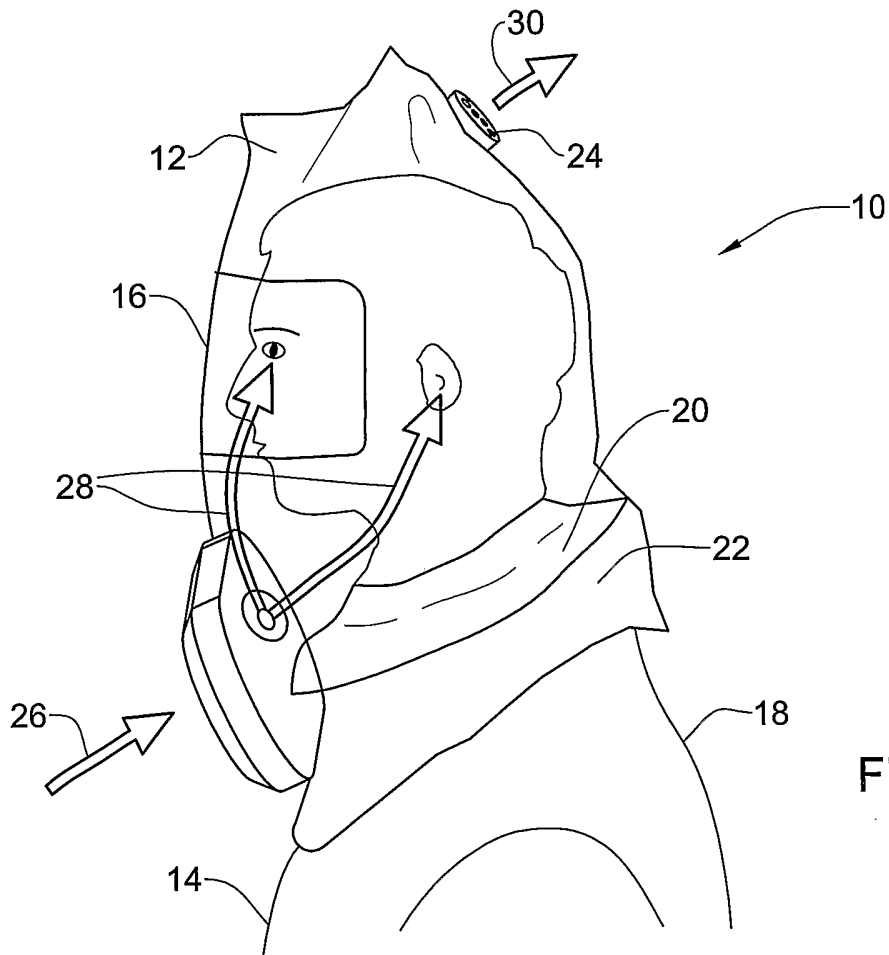


FIG. 2

2/14

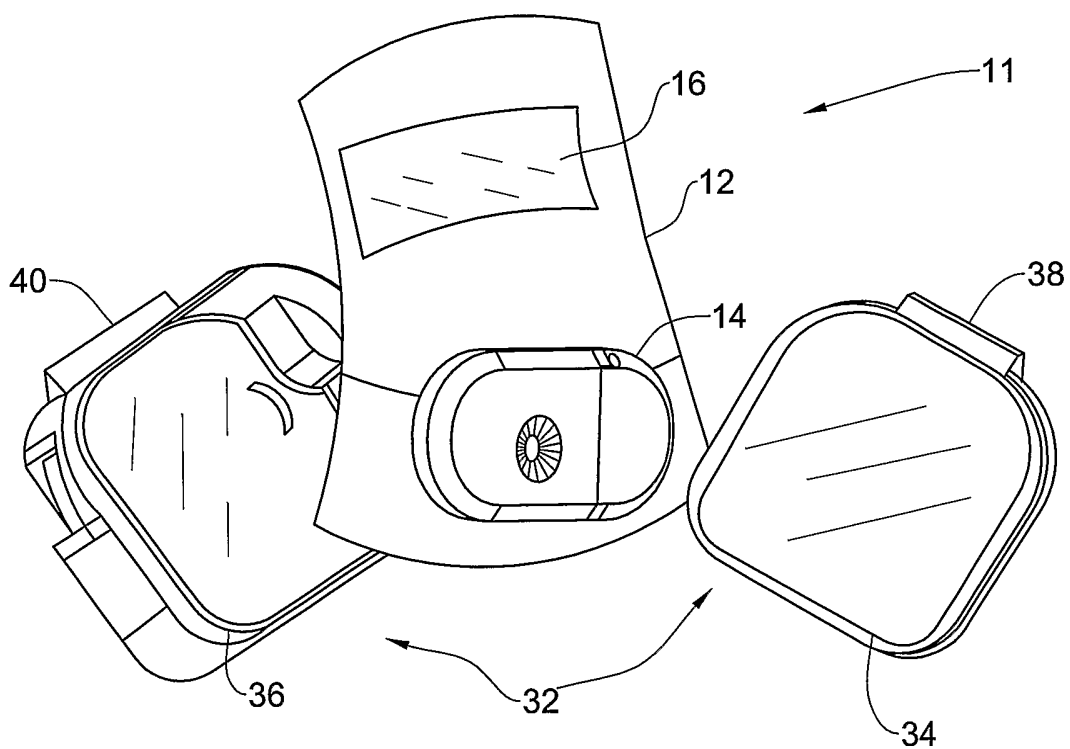


FIG. 3

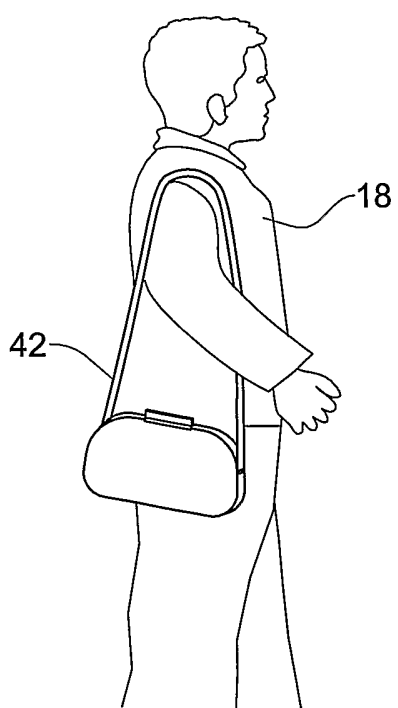


FIG. 4A

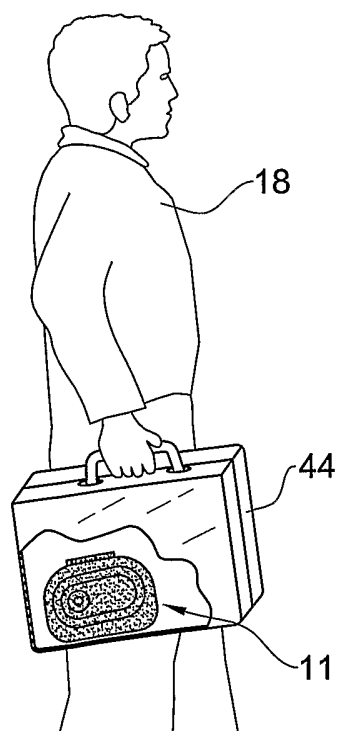


FIG. 4B

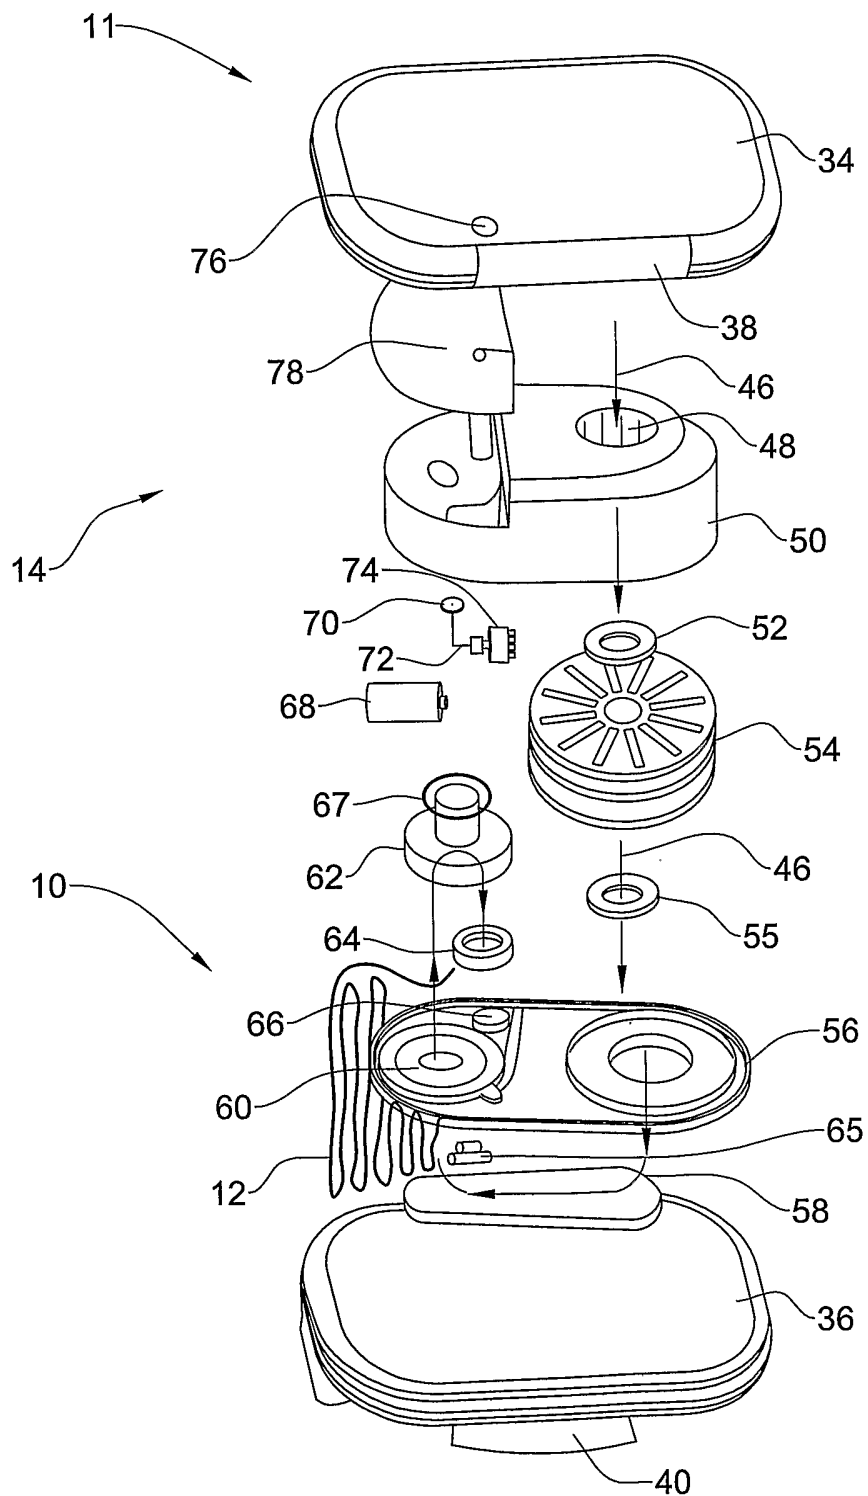


FIG. 5

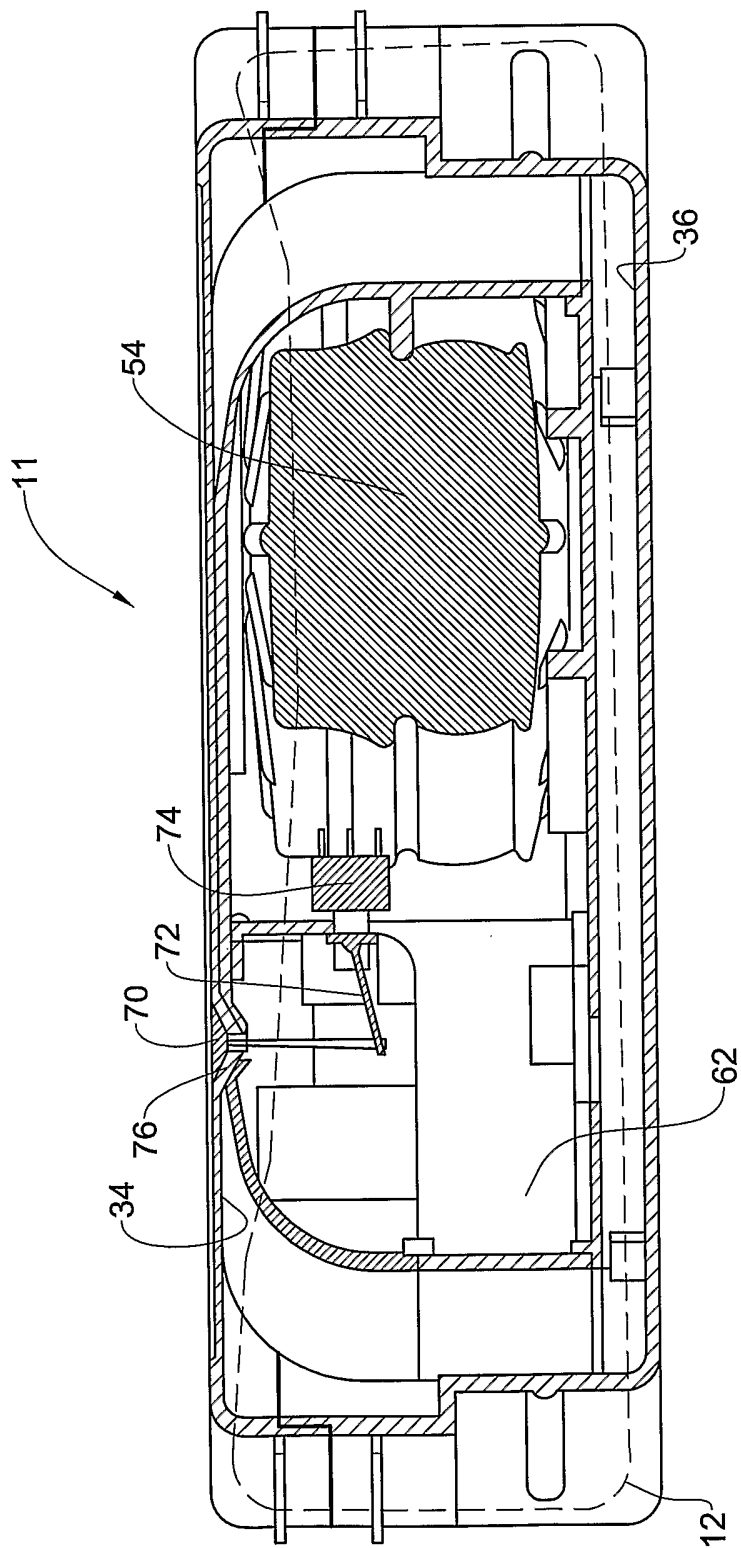


FIG. 6

5/14

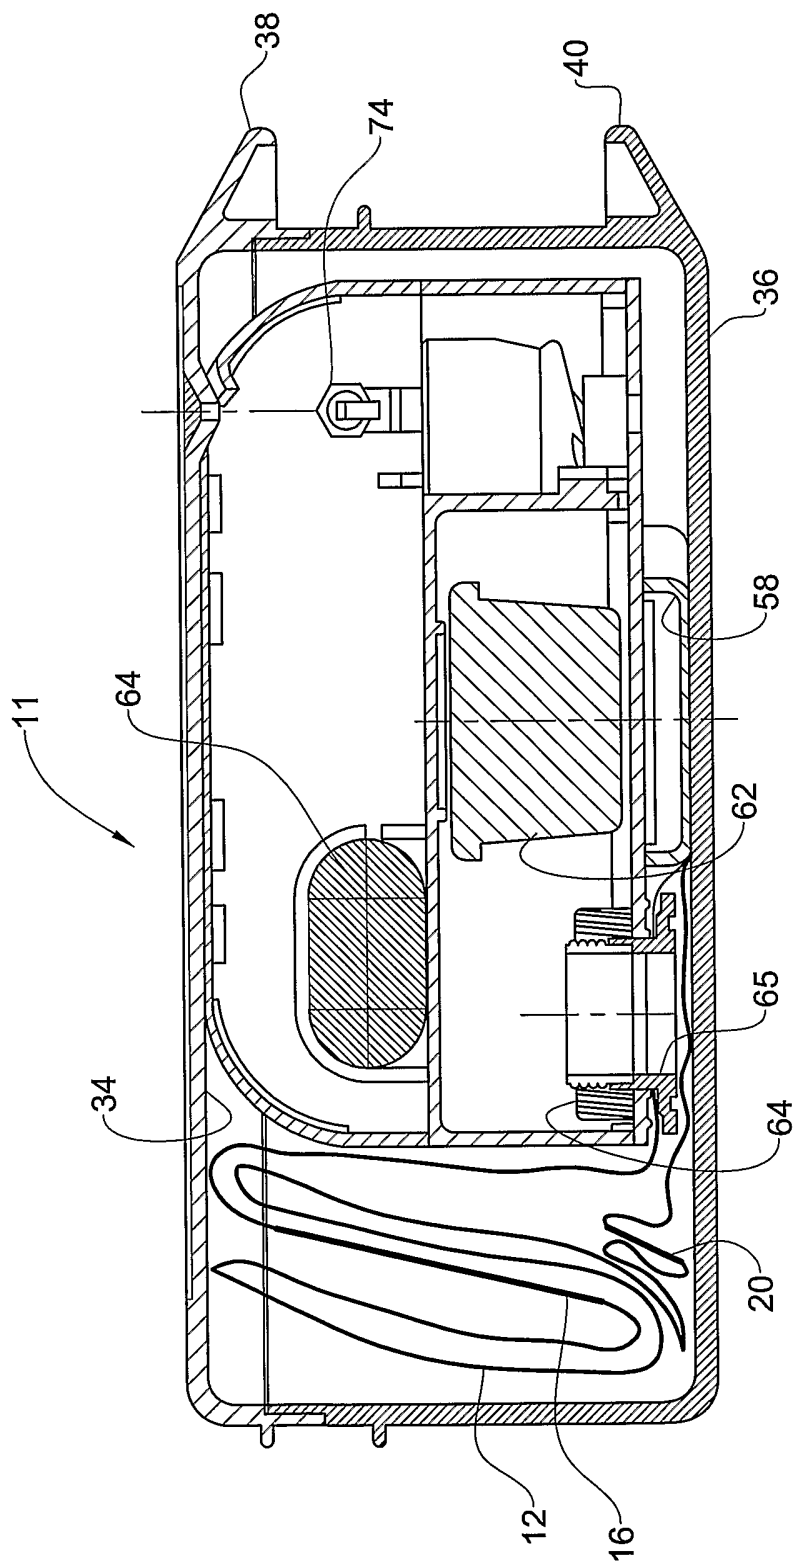


FIG. 7

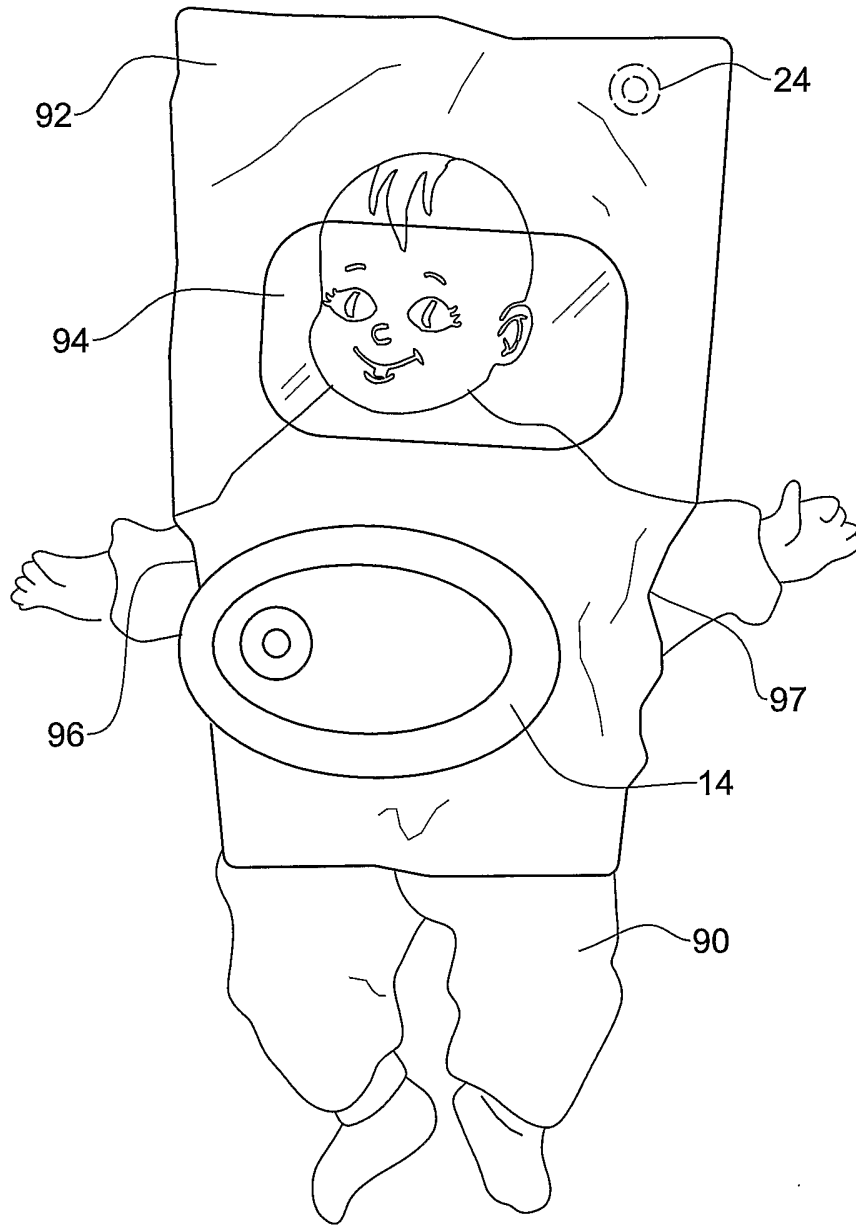


FIG. 8

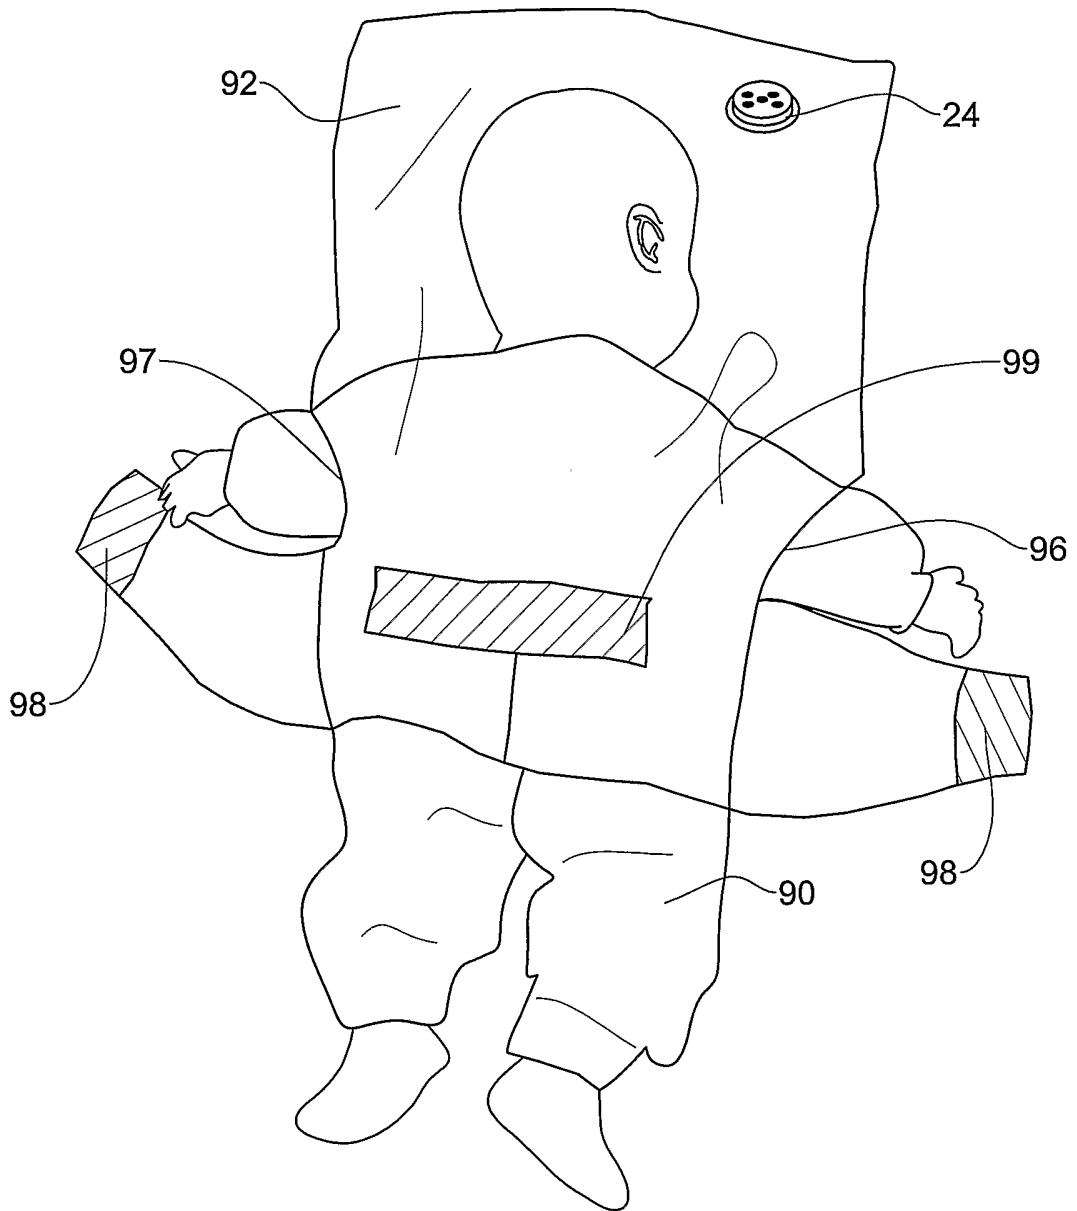


FIG. 9

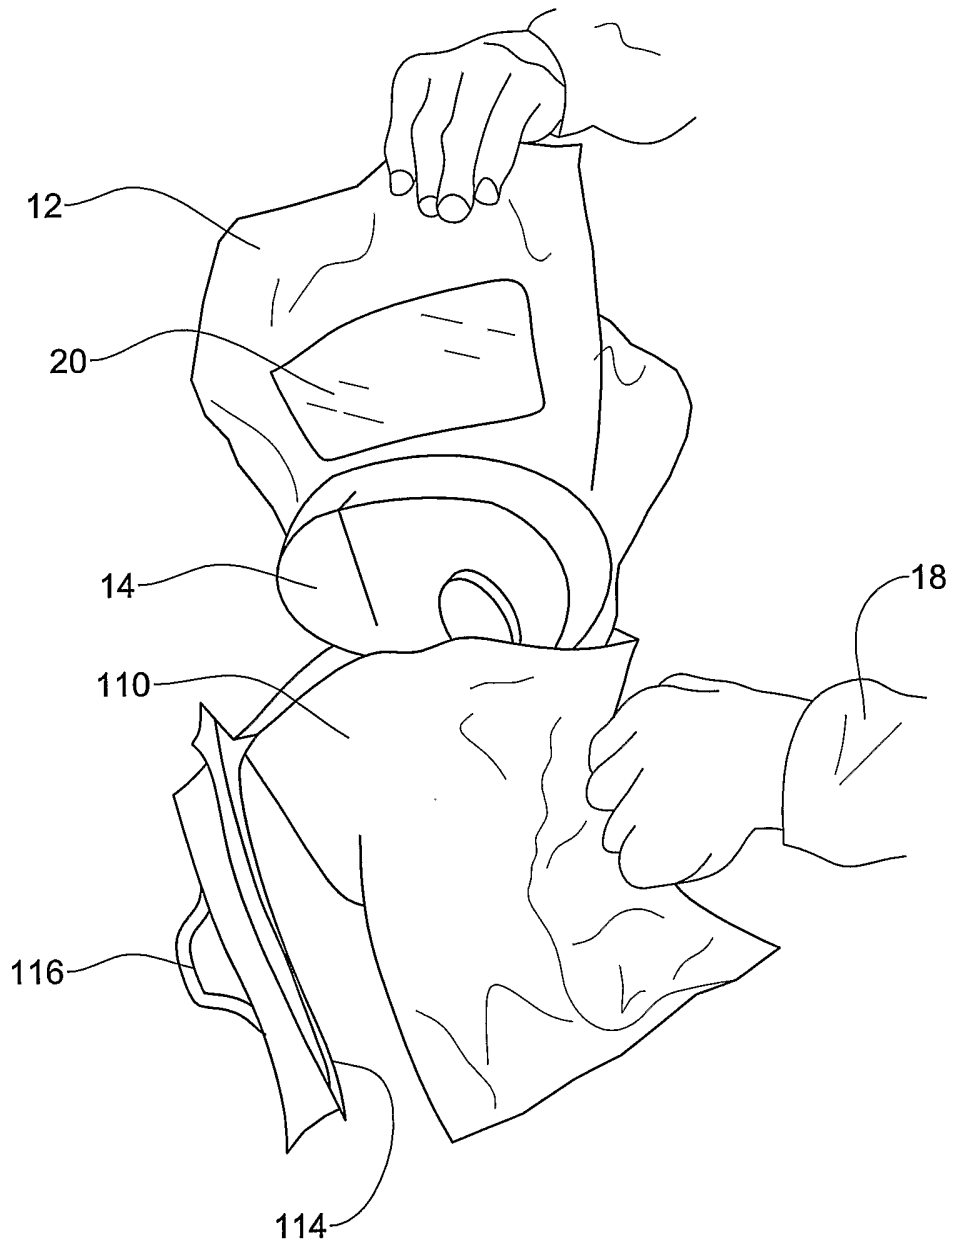


FIG. 10

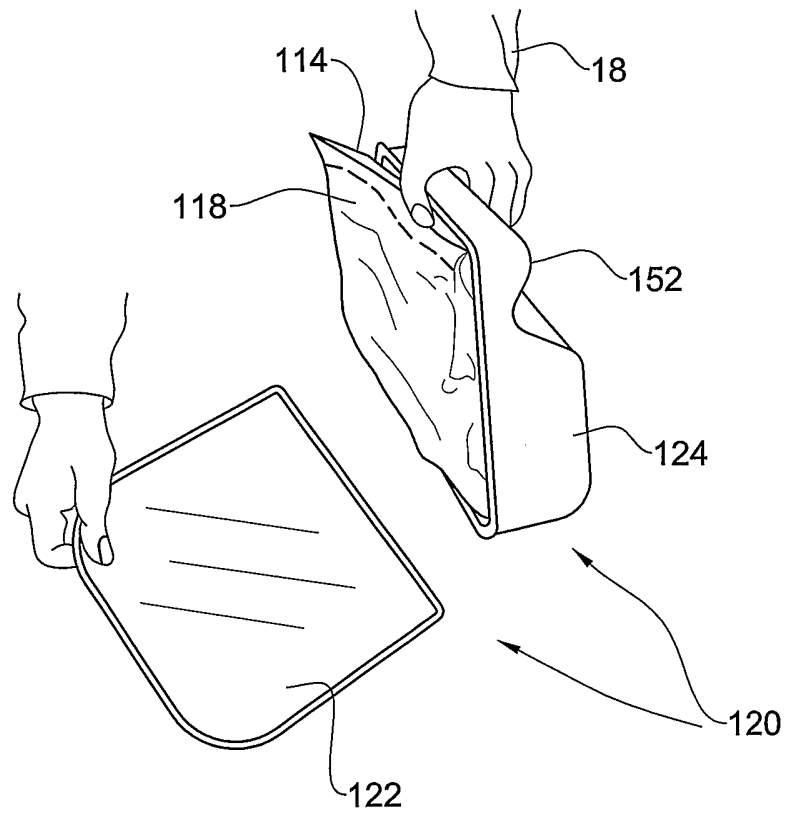


FIG. 11

10/14

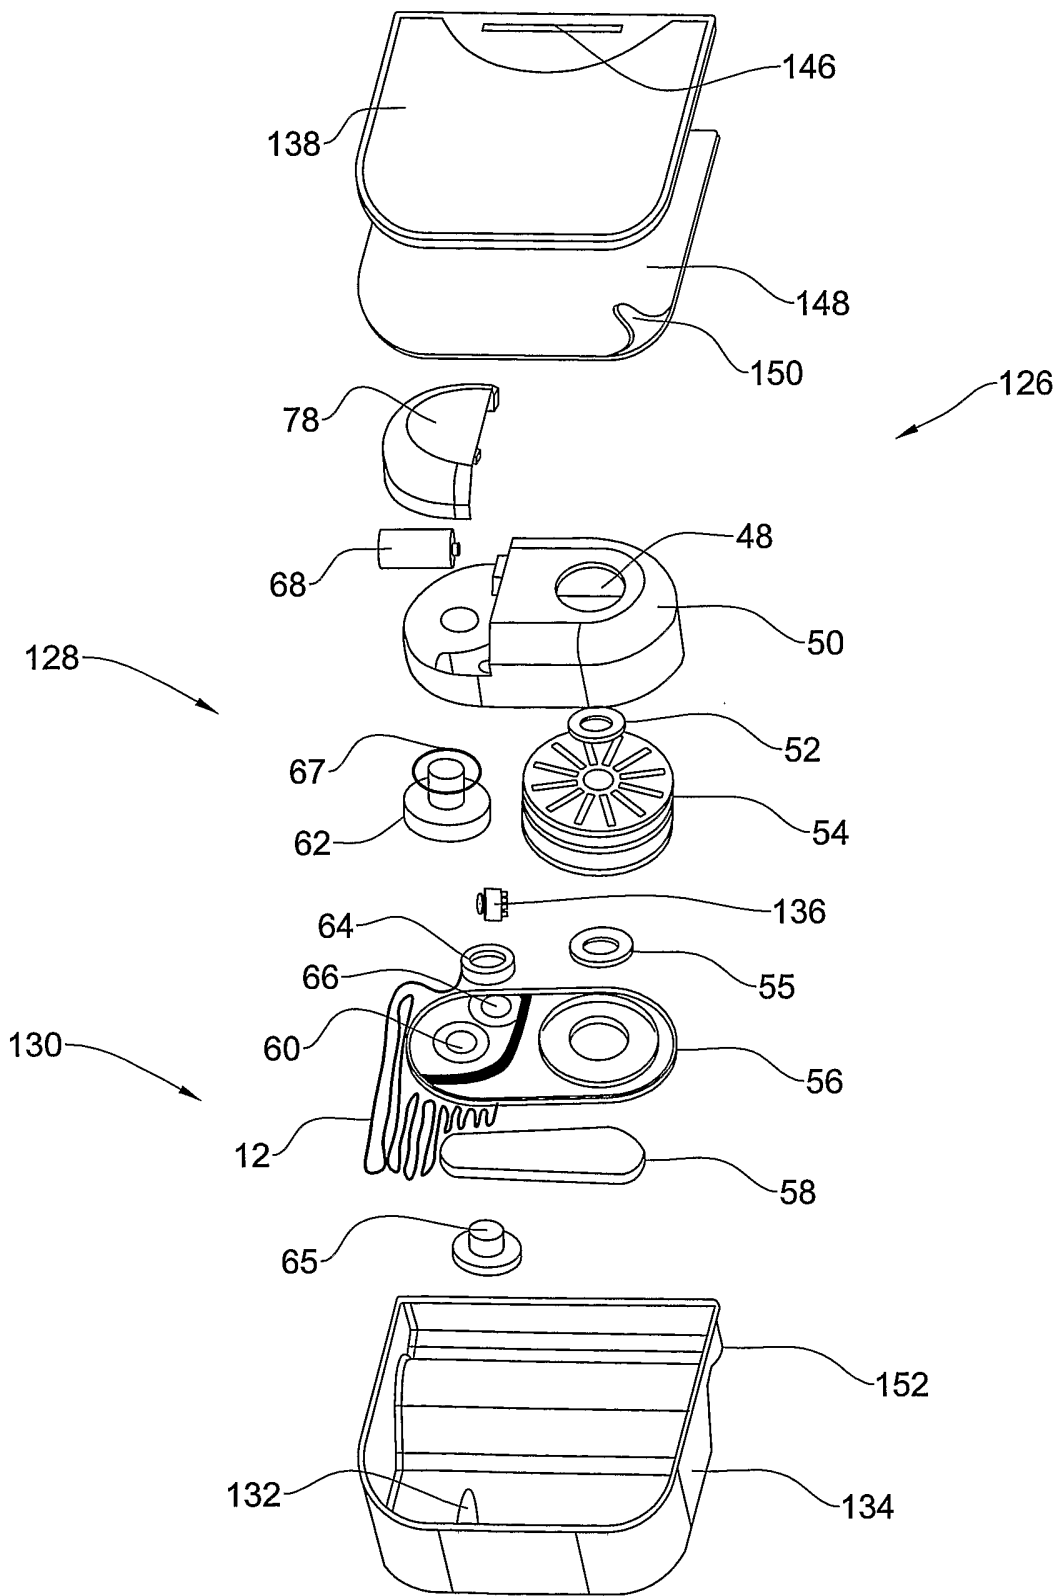


FIG. 12

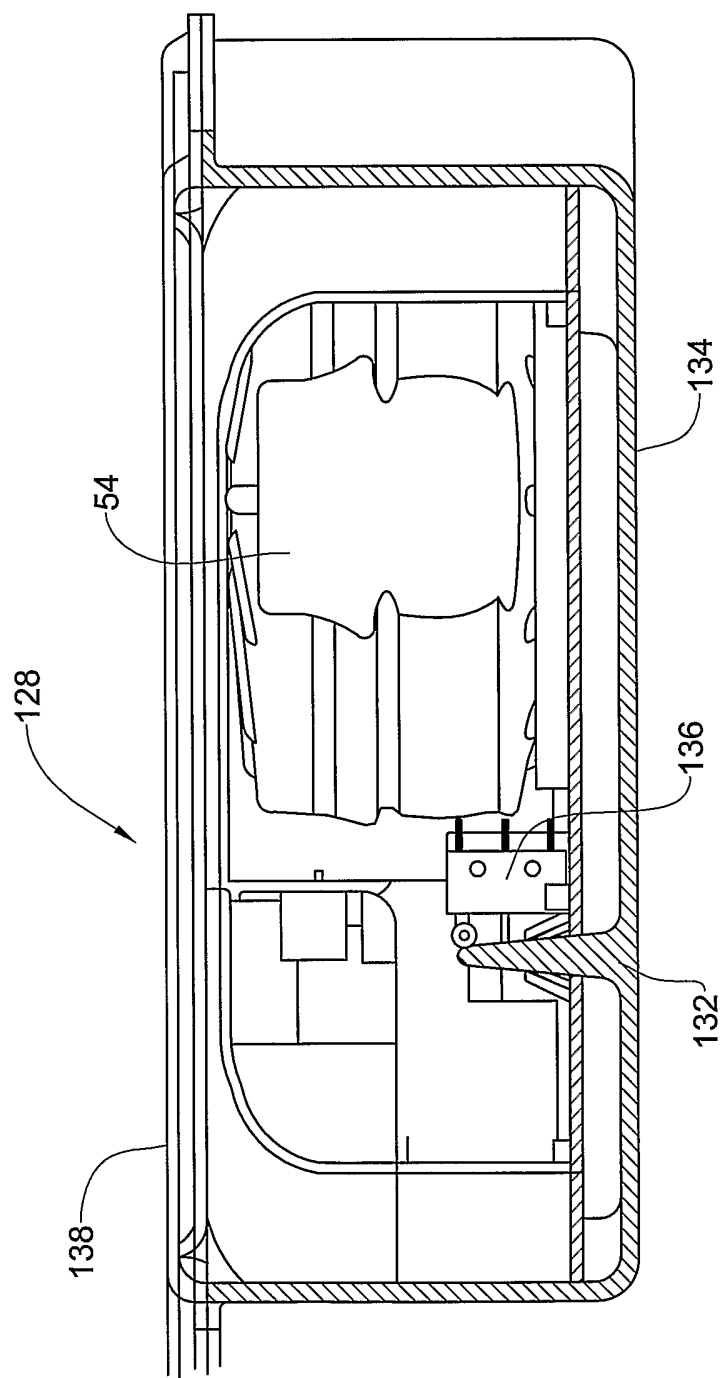


FIG. 13

12/14

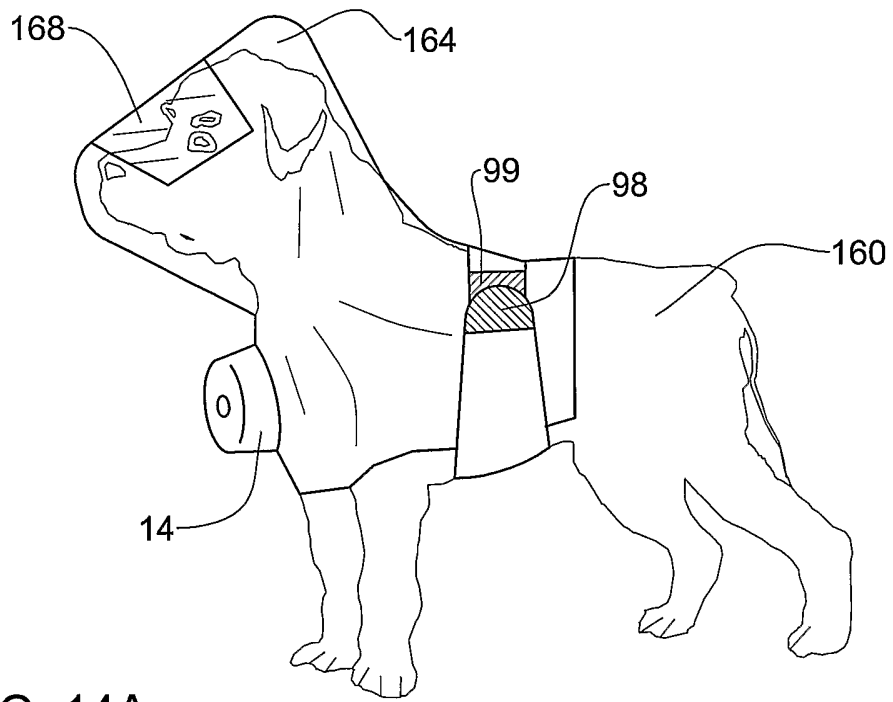


FIG. 14A

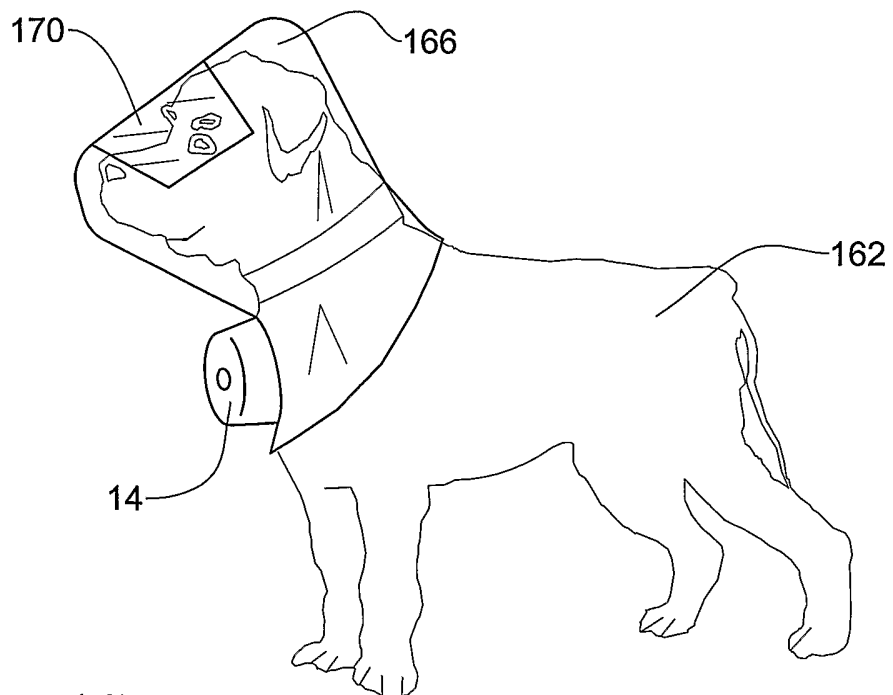


FIG. 14B

13/14

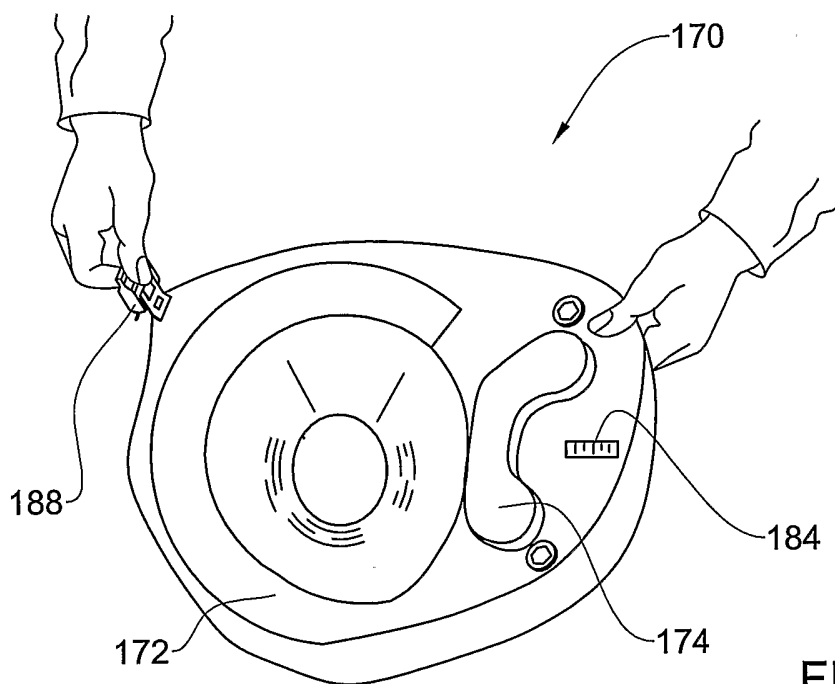


FIG. 15A

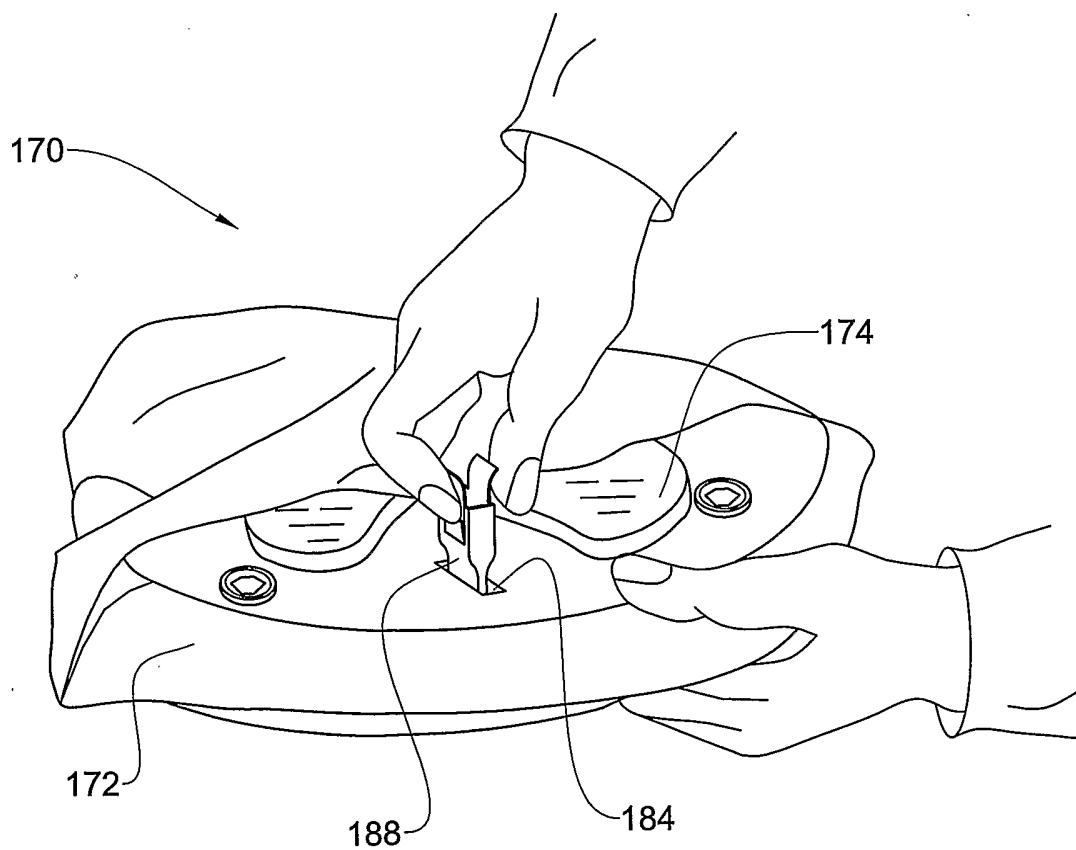


FIG. 15B

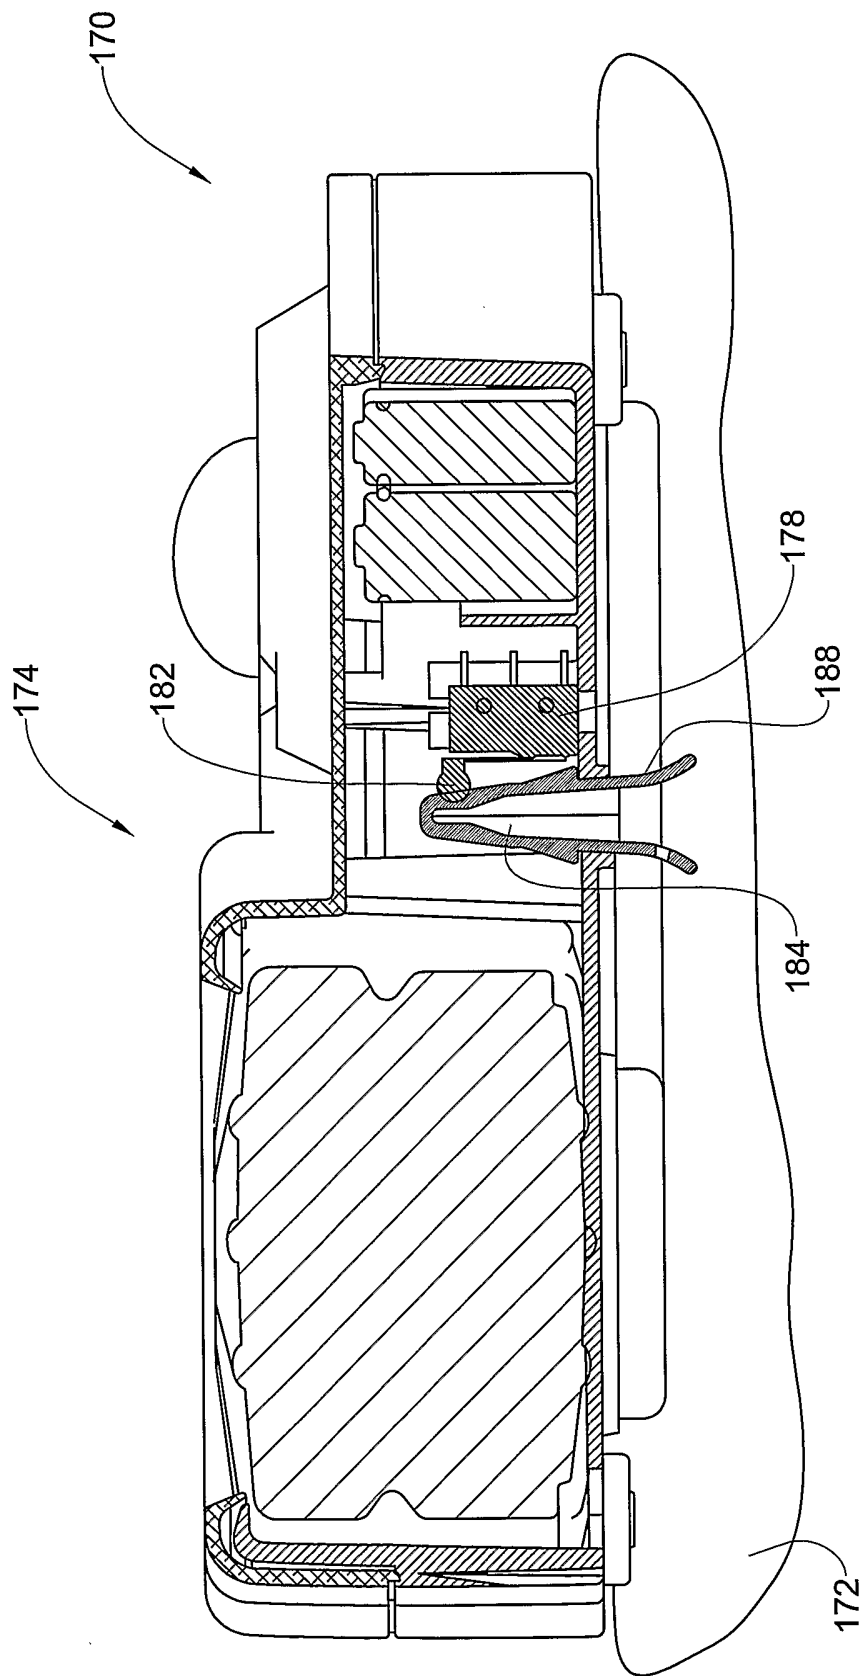


FIG. 15C

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IL 02/01002

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A62B17/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A62B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 2 247 175 A (SABRE SAFETY LTD) 26 February 1992 (1992-02-26)	1, 3, 4, 7, 18-20, 23-29
A	the whole document	8-10, 15-17, 30-32
Y	GB 2 226 490 A (WOODVILLE POLYMER ENG) 4 July 1990 (1990-07-04)	1, 3, 4, 7, 18-20, 23-29
A	page 4, line 18-24 -page 5, line 1-19 page 9, line 9-16; figures	
A	US 3 976 063 A (HENNEMAN JOHN W ET AL) 24 August 1976 (1976-08-24) abstract	2
	-/--	

Further documents are listed in the continuation of box C. Patent family members are listed in annex.

° Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search 20 March 2003	Date of mailing of the international search report 27/03/2003
-----------------------------------------------------------------------------------	-------------------------------------------------------------------------

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer van Bilderbeek, H.
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------

INTERNATIONAL SEARCH REPORT

Int. Patent Application No

PCT/IL 02/01002

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 502 157 A (WONG ALBERT H) 5 March 1985 (1985-03-05) abstract; figures 1,3 -----	5,6
A	US 5 113 854 A (ZAPPA JAMES V ET AL) 19 May 1992 (1992-05-19) abstract; figures 1-5 -----	11,12
A	US 6 247 471 B1 (BOWER JAMES W ET AL) 19 June 2001 (2001-06-19) abstract; figures 1-5 -----	13,14
A	US 4 766 893 A (DREWS WOLFGANG) 30 August 1988 (1988-08-30) abstract; figure 1 -----	21,22
A	US 3 073 301 A (HAY WAYNE W ET AL) 15 January 1963 (1963-01-15) figure 11 -----	
A	US 3 762 407 A (SHONERD D) 2 October 1973 (1973-10-02) figures 1,4,5 -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IL 02/01002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2247175	A	26-02-1992	EP 0474372 A2	11-03-1992
GB 2226490	A	04-07-1990	EP 0413775 A1 WO 9005565 A1 JP 3503249 T	27-02-1991 31-05-1990 25-07-1991
US 3976063	A	24-08-1976	CA 1020837 A1 DE 2539175 A1 FR 2284343 A1 GB 1492321 A JP 51053790 A	15-11-1977 25-03-1976 09-04-1976 16-11-1977 12-05-1976
US 4502157	A	05-03-1985	US 4554683 A AR 228657 A1 AU 8422682 A BR 8203101 A CA 1181901 A1 EP 0056613 A2 JP 1438891 C JP 57195474 A JP 62033909 B KR 8900509 B1 JP 57142266 A	26-11-1985 30-03-1983 02-12-1982 10-05-1983 05-02-1985 28-07-1982 19-05-1988 01-12-1982 23-07-1987 20-03-1989 02-09-1982
US 5113854	A	19-05-1992	DE 4101161 A1 GB 2240463 A ,B JP 2958422 B2 JP 4218174 A SE 502379 C2 SE 9100232 A	01-08-1991 07-08-1991 06-10-1999 07-08-1992 09-10-1995 26-07-1991
US 6247471	B1	19-06-2001	NONE	
US 4766893	A	30-08-1988	DE 3613814 A1 DE 3760990 D1 EP 0242704 A1 JP 62258895 A	29-10-1987 21-12-1989 28-10-1987 11-11-1987
US 3073301	A	15-01-1963	NONE	
US 3762407	A	02-10-1973	NONE	