



(11)

EP 3 124 636 B2

(12)

NEW EUROPEAN PATENT SPECIFICATION

After opposition procedure

(45) Date of publication and mention of the opposition decision:
17.05.2023 Bulletin 2023/20

(45) Mention of the grant of the patent:
06.03.2019 Bulletin 2019/10

(21) Application number: **15768893.8**

(22) Date of filing: **24.03.2015**

(51) International Patent Classification (IPC):
C22C 38/00 (2006.01) **C21D 8/00 (2006.01)**
C21D 9/04 (2006.01) **C22C 38/18 (2006.01)**
C22C 38/46 (2006.01) **C22C 38/02 (2006.01)**
C22C 38/04 (2006.01) **C22C 38/24 (2006.01)**
C22C 38/06 (2006.01) **C22C 38/26 (2006.01)**
C22C 38/28 (2006.01) **C22C 38/34 (2006.01)**
C22C 38/38 (2006.01) **C22C 38/42 (2006.01)**
C22C 38/48 (2006.01) **C22C 38/50 (2006.01)**
C21D 6/00 (2006.01) **C22C 38/22 (2006.01)**

(52) Cooperative Patent Classification (CPC):
C21D 9/04; C21D 6/002; C21D 6/005; C21D 6/008;
C21D 8/005; C22C 38/00; C22C 38/001;
C22C 38/002; C22C 38/02; C22C 38/04;
C22C 38/06; C22C 38/18; C22C 38/22;
C22C 38/24; C22C 38/26; (Cont.)

(86) International application number:
PCT/JP2015/001659

(87) International publication number:
WO 2015/146150 (01.10.2015 Gazette 2015/39)

(54) **RAIL AND METHOD FOR MANUFACTURING SAME**

SCHIENE UND VERFAHREN ZUR HERSTELLUNG DAVON

RAIL ET PROCÉDÉ POUR LE FABRIQUER

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **24.03.2014 JP 2014060786**

(43) Date of publication of application:
01.02.2017 Bulletin 2017/05

(73) Proprietor: **JFE Steel Corporation**
Tokyo 100-0011 (JP)

(72) Inventors:

- **KIMURA, Tatsumi**
Tokyo 100-0011 (JP)
- **TAKASHIMA, Yukio**
Tokyo 100-0011 (JP)

(74) Representative: **Grünecker Patent- und Rechtsanwälte**
PartG mbB
Leopoldstraße 4
80802 München (DE)

(56) References cited:

EP-A1- 0 685 566	JP-A- S6 289 818
JP-A- H01 104 720	JP-A- H01 104 721
JP-A- H01 104 721	JP-A- H07 216 454
JP-A- 2001 234 238	JP-A- 2001 234 238
JP-A- 2008 050 687	JP-A- 2010 077 481
JP-A- 2010 077 481	JP-A- 2010 185 106
JP-B2- 2 773 867	US-A- 4 886 558
US-A1- 2004 187 981	US-A1- 2009 314 049
US-A1- 2010 116 381	US-A1- 2010 116 381
US-A1- 2011 155 821	US-A1- 2011 253 268
US-A1- 2011 303 756	

(52) Cooperative Patent Classification (CPC): (Cont.)
C22C 38/28; C22C 38/34; C22C 38/38;
C22C 38/42; C22C 38/46; C22C 38/48; C22C 38/50

Description**TECHNICAL FIELD**

5 [0001] The present disclosure relates to a rail, particularly a rail having high hardness and small hardness variation, and also to a method for manufacturing the rail.

BACKGROUND

10 [0002] Freight cars used on freight transportation and mining railways tend to have heavier loading weights than passenger cars, which results in heavy loads acting on the axles of the freight cars and a severe contact environment between the freight car wheels and rails. Rails used under these conditions are expected to exhibit wear resistance and are conventionally made from steel having a pearlite structure.

15 [0003] In recent years, there has been a trend toward even heavier loading weights of freight, minerals, and so forth in order to improve railway transport efficiency, which has led a further increase in rail wear and a decrease in rail service life. Accordingly, there is demand for improved rail wear resistance in order to extend rail service life and numerous high hardness rails have been proposed in which rail hardness is enhanced.

20 [0004] For example, PTL 1, PTL 2, PTL 3, and PTL 4 each disclose a hypereutectoid rail having increased cementite content and a manufacturing method thereof. Moreover, PTL 5, PTL 6, and PTL 7 each disclose a technique for increasing hardness by refining the lamellar spacing of a pearlite structure in steel containing the eutectoid level of carbon content.

25 [0005] With regards to a method for manufacturing a rail, PTL 8 proposes a method for manufacturing a high hardness rail having superior head internal fatigue resistance. In rolling of a rail steel slab in this method, finish rolling is performed at a head surface temperature of 850°C to 1050°C to leave final finishing, and after a time interval between passes of at least 3 seconds and no greater than 1 minute, one pass or a plurality of passes of final finish rolling are performed at a head surface temperature of 800°C to 950°C and with a rolling reduction of 10% or less per pass. Thereafter, accelerated cooling is started at a cooling rate of 2°C/s to 4°C/s for 0.1 seconds to 10 seconds to cool the temperature at less than 5 mm from the surface of the head and corner of the rail to the Ar_1 transformation temperature or lower, and cooling is continued at a maximum surface cooling rate of at least 4°C/s and no greater than 30°C/s.

30 [0006] PTL 9 describes a method for manufacturing a high toughness rail that exhibits a pearlite metal structure. In this method, after rough rolling of a steel slab of low-alloy steel or carbon steel containing 0.60% to 1.00% of C into a rail shape, continuous finish rolling is performed for three or more rolling passes at a rail surface temperature of 850°C to 1000°C with a cross-section area reduction rolling reduction of 5% to 30% per pass and 10 seconds or less between rolling passes, and thereafter the rail is allowed to cool or is cooled from 700°C or higher to a temperature in a range of 500°C to 700°C at a rate of 2°C/s to 15°C/s.

35 [0007] Furthermore, PTL 10 discloses a method for manufacturing a pearlitic rail having superior wear resistance and ductility in which at least rough rolling and finish rolling are performed on a steel slab for rail rolling that contains, in mass%, 0.65% to 1.20% of C, 0.05% to 2.00% of Si, and 0.05% to 2.00% of Mn, the balance being Fe and incidental impurities. In the finish rolling, rolling is performed at a rail head surface temperature of no higher than 900°C and no lower than the Ar_3 transformation point or the Ar_{cm} transformation point, a head cumulative area reduction rate of 20% or greater, and with a reaction force ratio of 1.25 or greater, which is a value obtained by dividing a reaction force value of the roller by a reaction force value for the same cumulative area reduction rate and a rolling temperature of 950°C. After the finish rolling, the rail head surface is cooled to 550°C or lower at a cooling rate of 2°C/s to 30°C/s by accelerated cooling or natural cooling. Further, PTL 11 discloses a method of manufacturing a rail with a surface hardness of at most 370 HV, including a cooling step for providing uniform hardness over the whole length of the rail. PTL 12 discloses a method for manufacturing a pearlite based rail having excellent wear resistance and ductility.

40 [0008] Rails used in high axle load railways, the main examples of which being railways for freight transportation and mining, are expected to have superior wear resistance in order to improve rail durability and, in response, there have been various proposals for rails, such as described above, that focus on increasing hardness.

50 **CITATION LIST**

Patent Literature**[0009]**

55

PTL 1: JP 4272385 B
 PTL 2: JP 3078461 B
 PTL 3: JP 3081116 B

PTL 4: JP 3513427 B
 PTL 5: JP 4390004 B
 PTL 6: JP 2009-108396 A
 PTL 7: JP 2009-235515 A
 5 PTL 8: JP 3423811 B
 PTL 9: JP 3113137 B
 PTL 10: JP 2008-50687 A
 PTL 11: JP 2773867 B2
 PTL 12: US 2004/0187981 A1

10

SUMMARY

(Technical Problem)

15 [0010] A rail is manufactured by hot rolling a steel raw material to a length of as long as 100 m or greater and, hardness of the rail exhibits variation in the rail length direction that is dependent on the method of manufacture. Consequently, the rail may experience uneven wear when laid and thus may be unable to sufficiently demonstrate its effects. Although it is extremely important, therefore, to reduce hardness variation in the longitudinal direction of rolling, PTL 1-10 make no mention of this hardness variation.

20 [0011] In consideration of the above, an objective of the present disclosure is to provide a rail that exhibits excellent wear resistance and reduced hardness variation in the rail length direction, and also a method for manufacturing the rail.

(Solution to Problem)

25 [0012] The inventors sampled test pieces from steel materials having pearlite structures corresponding to rails of differing hardness and conducted a rail wear test with respect to the test pieces in order to investigate a relationship between hardness and wear. The results of the investigation are shown in FIG. 1.

[0013] The wear test was a comparative test in which actual contact conditions between a pearlite steel rail and a wheel were simulated using a Nishihara type wear test apparatus that enables wear resistance evaluation in a short period of time. The test was conducted as illustrated in FIG. 2 by rotating a Nishihara type wear test piece 1 of 30 mm in outer diameter, sampled from a rail head, in contact with a tire test piece 2. The arrows in FIG. 2 indicate the rotation directions of the Nishihara type wear test piece 1 and the tire test piece 2, respectively. The tire test piece was obtained by sampling a round bar of 32 mm in diameter from a normal rail head stipulated by JIS E1101, subjecting the round bar to heat treatment such as to have a tempered martensite structure and a Brinell hardness (Brinell load 29.4 kN) of HB 370, and subsequently processing the round bar into the shape illustrated in FIG. 2. Nishihara type wear test pieces 1 were sampled from two locations in a rail head 3 as illustrated in FIG. 3. A test piece sampled from a surface layer of the rail head 3 is denoted Nishihara type wear test piece 1a and a test piece sampled from an inner part of the rail head 3 is denoted Nishihara type wear test piece 1b. The center, in a longitudinal direction, of the Nishihara type wear test piece 1b sampled from the inner part of the rail head 3 is located at a depth of from 24 mm to 26 mm (average value 25 mm) from an upper surface of the rail head 3. The test was conducted in dry ambient conditions and the wear was measured after 1.8×10^5 rotations under conditions of a contact pressure of 1.2 GPa, a slip ratio of -10%, and a rotational speed of 750 rpm (tire test piece: 750 rpm). The wear was calculated from the difference in the mass of the test piece measured before and after the test.

40 [0014] As illustrated in FIG. 1, wear resistance increases with increasing hardness. For example, wear resistance of a rail having a hardness of HB 400 or higher can be improved by 15% compared to an ordinary heat treated rail (HB 370). However, if the hardness exhibits a large amount of variation in the rail length direction, a difference in wear behavior arises for hard portions and soft portions. For example, in a situation in which the hardness is HB 415 points and exhibits variation of ± 15 or less (i.e., the hardness varies within a range from at least HB 400 to no greater than HB 430), the wear changes from 0.37 g to 0.3 g and accordingly exhibits variation of 20% or less. On the other hand, in a situation in which the hardness is HB 415 points and exhibits variation of ± 30 (i.e., the hardness varies in a range from at least HB 385 to no greater than HB 445), the wear changes from 0.40 g to 0.27 g and accordingly exhibits variation of 33%. In consideration of the above, reducing hardness variation in the longitudinal direction of a rail in accompaniment to increasing rail hardness enables uniform rail wear and contributes to improving rail life. It is preferable for wear to be as uniform as possible in the length direction because wear proceeds due to contact between the rail and wheels during use. Taking into account the results of the test described above, hardness variation in the rail length direction is preferably of a level such that wear variation is 20% or less. The inventors discovered that surface hardness variation of \pm HB 15 or less ensures superior wear resistance along the length direction and contributes to improved rail life. This discovery led to the present disclosure.

[0015] Specifically, the present invention relates to a rail according to claim 1 and a rail manufacturing method according to claim 2.

5 Herein, the surface hardness variation in the rail length direction refers to the difference between an average value of Brinell hardness of the top of the rail head calculated from measurements made at intervals of 5 m in a rolling length direction along the entire length of the rail (for example, 25 m to 100 m) and the value of Brinell hardness measured at each of the measurement points. In other words, surface hardness variation of \pm HB 15 points or less in the rail length direction signifies that when an average value for Brinell hardness is calculated from all hardness values measured at 5 m intervals (i.e., values measured at 6 points in the case of a total length of 25 m, 11 points in the case of a total length of 50 m, and 21 points in the case of a total length of 100 m), the maximum difference in Brinell hardness between the 10 average value and the values for the measurement points is \pm 15 points or less. Note that Brinell hardness is measured after removing 0.5 mm or greater of a decarburized layer using a grinder or the like.

(Advantageous Effect)

15 [0016] The present disclosure enables minimization of hardness variation in a rail length direction and effectively improves rail durability (extends rail life), particularly in the case of a rail that is laid in a high axle load environment such as a heavy freight railway or a mining railway, and thus demonstrates a significant effect in industrial use.

BRIEF DESCRIPTION OF THE DRAWINGS

20 [0017] In the accompanying drawings:

FIG. 1 is a graph illustrating a relationship between the rail material hardness and wear;

25 FIG. 2 illustrates a Nishihara type wear test piece of which wear resistance is evaluated, wherein (a) is a plan view and (b) is a side view; and

FIG. 3 is a cross-sectional view of a rail head illustrating sampling positions of Nishihara type wear test pieces.

DETAILED DESCRIPTION

30 [0018] Firstly, the reasons for limitations on each component in the chemical composition of a rail will be explained. When components are expressed in "%", this refers to "mass%" unless otherwise specified.

C: 0.60% to 1.0%

35 [0019] C is an important element in a pearlitic rail for forming cementite, increasing hardness and strength, and improving wear resistance. However, these effects are small when C content is less than 0.60% and therefore the lower limit for the C content is 0.60%. On the other hand, although an increase in the C content, and thus an increase in cementite content, is expected to lead to higher hardness and strength, an increase in the C content also decreases ductility. Furthermore, an increase in the C content broadens the $\gamma + \theta$ temperature range and promotes softening of a 40 heat-affected zone. Taking into account these influences, the upper limit for the C content is 1.0%. The C content is preferably in a range of 0.73% to 0.85%.

[0020] Si is added to the rail material as a deoxidizing material and in order to raise the equilibrium transformation temperature (TE) and reinforce the pearlite structure (increase hardness by refining the lamellar structure). However, 45 these effects are small when Si content is less than 0.1%. On the other hand, an increase in the Si content promotes decarburization and promotes formation of rail surface defects. Therefore, the upper limit for the Si content is 1.5%. The Si content is preferably in a range of 0.5% to 1.3%.

Si: 0.1% to 1.5%

50 [0021] In the method of the present invention, the Mn content is 0.01% to 1.5%. In the rail of the present invention, the Mn content is restricted to 0.01% to 1.2%. Mn has an effect of lowering the actual pearlite transformation temperature and narrowing pearlite lamellar spacing, and is an effective element for achieving high hardness. However, these effects are small when Mn content is less than 0.01%. On the other hand, addition of greater than 1.5% of Mn to improve 55 hardenability facilitates transformation to bainite or martensite. Therefore, the upper limit for the Mn content is 1.5% in case of the method of the invention. The Mn content is preferably in a range of 0.3% to 1.2%.

P: 0.035% or less

5 [0022] P content of greater than 0.035% decreases toughness and ductility. Therefore, the upper limit for the P content is 0.035%. A preferable range for the P content has an upper limit of 0.025%. On the other hand, taking into consideration the increased cost of steelmaking when special refining or the like is performed, the lower limit for the P content is preferably 0.001%.

S: 0.030% or less

10 [0023] S forms coarse MnS extending in the rolling direction and decreases ductility and toughness. Therefore, the upper limit for S content is 0.030%. On the other hand, restricting the S content to less than 0.0005% requires a significant increase in steel making cost due to, for example, a large increase in steelmaking process time. Therefore, the lower limit for the S content is preferably 0.0005%. The S content is preferably 0.001% to 0.015%.

15 Cr: 0.1% to 2.0%

20 [0024] Cr raises the equilibrium transformation temperature (TE), contributes to refinement of pearlite lamellar spacing, and increases hardness and strength. In order to obtain such effects, it is necessary to add 0.2% or greater of Cr. On the other hand, adding greater than 2.0% of Cr increases occurrence of welding defects while also increasing hardenability and promoting martensite formation. Therefore, the upper limit for Cr content is 2.0%. The Cr content is more preferably in a range of 0.26% to 1.00%.

25 [0025] Besides the chemical components described above, one or more of 1.0% or less of Cu, 0.5% or less of Ni, 0.5% or less of Mo, and 0.15% or less of V may be added.

Cu: 1.0% or less

30 [0026] Cu is an element that can provide even higher hardness through solid solution strengthening. Cu also has an effect of suppressing decarburization. In order to obtain these effects, 0.01% or greater of Cu is preferably added. On the other hand, adding greater than 1.0% of Cu makes surface cracking more likely to occur during continuous casting or rolling. Therefore, the upper limit for Cu content is preferably 1.0%. Moreover, the Cu content is more preferably in a range of 0.05% to 0.6%.

Ni: 0.5% or less

35 [0027] Ni is an effective element for improving toughness and ductility. Ni is also an effective element for inhibiting Cu cracking through combined addition with Cu. Therefore, in a situation in which Cu is added, Ni is preferably also added. However, these effects are not noticeable when Ni content is less than 0.01%. Therefore, in a situation in which Ni is added, the lower limit for the Ni content is preferably 0.01% or greater. On the other hand, adding greater than 0.5% of Ni increases hardenability and promotes formation of martensite. Therefore, the upper limit for the Ni content is preferably 0.5%. The Ni content is more preferably in a range of 0.05% to 0.50%.

Mo: 0.5% or less

40 [0028] Mo is an effective element for increasing strength, but this effect is small when Mo content is less than 0.01%. Therefore, the lower limit for the Mo content is preferably 0.01%. On the other hand, adding greater than 0.5% of Mo causes formation of martensite as a result of increased hardenability and dramatically decreases toughness and ductility. Therefore, the upper limit for the Mo content is preferably 0.5%. The Mo content is more preferably in a range of 0.05% to 0.30%.

50 V: 0.15% or less

55 [0029] V forms VC, VN, or the like as a fine precipitate in ferrite and is an element that contributes to achieving high hardness through precipitation strengthening of ferrite. The solvation temperature of VC or VN is sufficiently lower than that of Ti or Nb such as to have little influence on recrystallization behavior of austenite during rolling and therefore has little influence on variation of properties in the rail length direction. Moreover, V also acts as a hydrogen trapping site and can be expected to exhibit an effect of inhibiting delayed fracture. Therefore, 0.001% or greater of V is preferably added. On the other hand, when greater than 0.15% of V is added, the above-described effects reach saturation and the alloying cost increases dramatically. Therefore, the upper limit for V content is preferably 0.15%. The V content is

more preferably in a range of 0.005% to 0.12%.

[0030] The balance excluding the aforementioned components is Fe and incidental impurities.

[0031] For example, up to 0.006% of N and 0.003% of O may be allowed as incidental impurities. Furthermore, although Al is effective as a deoxidizing material, Al forms cluster-shaped AlN, which significantly decreases rolling fatigue characteristics. Therefore, Al content is preferably 0.003% or less. Nb and Ti are also contained as incidental impurities as described below.

Nb: 0.003% or less

Ti: 0.003% or less

[0032] Nb and Ti are effective elements for improving hardness and wear resistance due to forming carbides or carbonitrides that strengthen the matrix. However, Nb and Ti are harmful elements that promote hardness variation of the rail in the longitudinal direction and are therefore not generally added, although incidentally mixed in Nb and Ti of 0.003% or less is allowable. Specifically, addition of Nb or Ti causes hardness to change to a greater extent in accordance with material heating, rolling, or cooling conditions and thus causes changes in hardness in the rolling length direction to be more sensitively associated with variation in these conditions. In metallurgical terms, inhomogeneity of heated austenite particles is promoted and, at the same time, inhibition of recrystallization of austenite during rolling and a change in pearlite transformation temperature associated therewith are greatly increased compared to steel in which Nb and Ti are not added, and this may promote hardness variation.

[0033] In addition to the chemical composition described above, it is essential that surface hardness exhibits variation of \pm HB 10 points or less in the rail length direction because hardness variation of \pm HB 10 points or less enables restriction of the change in rail wear to less than 15%.

[0034] The following provides a specific description of rail manufacture conditions.

[0035] First, the steel raw material that is used is preferably continuous-cast steel obtained through continuous casting of molten steel that has been adjusted to the chemical composition described above through steelmaking processes such as a process in a blast furnace, molten iron pretreatment, a process in a converter, and RH degassing.

[0036] The steel raw material is hot rolled to form a rail shape by ordinary caliber rolling or universal rolling. The following explains the reasons for limitations placed on conditions during the heating and rolling described above and also conditions during subsequent cooling.

[Heating temperature prior to hot rolling: 1200°C to 1300°C]

[0037] Heating of the produced steel raw material is required to 1200°C or higher. This is performed with the main objective of sufficiently reducing deformation resistance so as to enable use of a lighter rolling load and also with the objective of homogenization. In order to sufficiently obtain these effects, the heating temperature is required to be 1200°C or higher. The heating temperature is 1300°C or lower from a viewpoint of suppressing scale loss and decarburization.

[Rolling in a rail length direction in a temperature region not exceeding 1000°C is performed over a plurality of passes with a time interval between passes exhibiting variation of 15 s or less in the rail length direction]

[0038] The steel raw material heated as described above is shaped into a rail shape by hot rolling. In the hot rolling, it is important that a plurality of rolling passes at temperatures not exceeding 1000°C are performed by rolling repeatedly in a single direction in order to minimize variation in a time interval between passes. Note that the time interval between passes refers to the interval between a time when a given portion in the longitudinal direction (rolling direction) of a rolled rail material is bitten by a roller and a time when the given portion is next bitten by the roller. The time interval between passes differs the most for the top (leading end) of the rolled rail material and the bottom (trailing end) of the rolled rail material.

[0039] In conventional reverse rolling, during an interval between a rolled top portion (leading end) being bitten by the roller in a given pass and starting to be bitten in a next pass, the next pass is performed in order by first feeding a rolled bottom portion (trailing end) to the roller, which lengthens the time interval between passes for the rolled top portion. On the other hand, after the rolled bottom portion (trailing end) has passed through in a given pass, the bottom portion is bitten first by the roller in the next pass, which shortens the time interval between passes. The difference in the time interval between passes for the leading end and the trailing end described above, which is a characteristic of reverse rolling, influences the state of the austenite structure and also influences hardness variation after transformation to pearlite. In contrast, when continuous rolling is performed in a single direction, the difference in the time interval between passes for a leading end and a trailing end of a rolled material is fundamentally small. Therefore, inhomogeneity of the austenite structure arising from the above-described difference in the time interval between passes can be resolved. It

is therefore necessary for the aforementioned difference in the time interval between passes to be 15 s or less. In other words, a difference in the time interval between passes of 15 s or less can suppress hardness variation in the rail length direction. The difference in the time interval between passes is preferably 12 s or less.

[0040] The above stipulations are conditions to be applied to rolling performed at 1000°C or lower in the hot rolling.

5 Reverse rolling may be used for rolling performed in a temperature region exceeding 1000°C, a representative example of which is rough rolling. In other words, so long as rolling at 1000°C or lower is performed continuously in a single direction, a preceding stage of rolling in a temperature region exceeding 1000°C may be performed freely. In the hot rolling, two to seven passes of rolling are performed at 1000°C or lower. The reason for this is that single pass rolling requires a large rolling load and makes shaping difficult, whereas more than seven passes tends to cause a fairly 10 inhomogeneous austenite state and increase hardness variation.

[Cumulative area reduction rate of 40% or greater for a portion forming a rail head]

[0041] The cumulative area reduction rate of rolling performed at 1000°C or lower is required to be 40% or greater.

15 The reason for this is that it is necessary to perform 40% or greater of area reduction processing at 1000°C or lower in order to promote recrystallization refinement of austenite. If the area reduction rate for rolling at 1000°C or lower is less than 40%, recrystallization refinement of austenite is insufficient and coarse austenite may partially remain, which results in increased hardness variation in the rail length direction (rolling direction).

20 [Finisher delivery temperature of 900°C or higher]

[0042] When performing continuous rolling in a single direction in order to reduce variation in the time interval between passes along the whole length of the rolled material, a finisher delivery temperature of 900°C or higher is required. The reason for this is that if the finisher delivery temperature is lower than 900°C, overall hardness decreases and variation 25 thereof increases due to reasons such as a decrease in the cooling start temperature of on-line heat treatment performed consecutively after rolling and promotion of transformation to pearlite (transformation at higher temperature). Therefore, the finisher delivery temperature is 900°C or higher in order to prevent a decrease in hardness such as described above.

[0043] Cooling is performed consecutively after the hot rolling under the following conditions. [Cooling of the rail head from a cooling start temperature of 800°C or higher to a cooling stop temperature of 400°C to 600°C at a cooling rate of 1°C/s to 10°C/s]

30 Firstly, the cooling start temperature is 800°C or higher. Specifically, a cooling start temperature of lower than 800°C may not enable sufficient supercooling or allow sufficient surface hardness to be obtained. The cooling stop temperature is required to be 600°C or lower. Sufficient hardness cannot be obtained if the cooling stop temperature is greater than 600°C. Saturation is reached in terms of hardness once cooling is performed to 400°C or lower and productivity is adversely affected by increased cooling time. Therefore, cooling is stopped at 400°C or higher.

[0045] The cooling rate is in a range of 1°C/s to 10°C/s. A cooling rate of greater than 10°C/s does not allow sufficient time for pearlite transformation, causes formation of bainite and martensite, and thus reduces toughness, ductility, and fatigue resistance. On the other hand, a cooling rate of less than 1°C/s does not allow sufficient hardness to be obtained. The cooling rate is preferably in a range of 2°C/s to 8°C/s.

40 **[0046]** Moreover, the cooling rate exhibits variation of +1°C/s or less in the rolling longitudinal direction. Restricting cooling rate variation to $\pm 1^\circ\text{C}/\text{s}$ or less reduces variation in pearlite lamellar spacing, enables hardness variation of $\pm \text{HB} 10$ or less to be achieved, and reduces wear resistance variation and fatigue resistance variation in the rail longitudinal direction.

45 **[0047]** The cooling performed consecutively after the hot rolling is preferably performed by air blast cooling or mist cooling. Air blast cooling is accelerated cooling in which air is forcefully blown against the rail head. Mist cooling involves mixing air and water and blowing a water mist against the rail head.

50 **[0048]** In order to control and minimize cooling rate variation in the rolling longitudinal direction, in the case of air blast cooling, for example, it is necessary to control air pressure at intervals of 5 m or less (preferably 3 m or less), adjust air pressure on-line in accordance with temperature variation of the rail in the longitudinal direction measured before the cooling, and perform control such that the cooling rate is constant in the length direction. In the case of mist cooling, cooling is preferably performed by controlling the amount of water and pressure in the longitudinal direction in the same way as described above.

55 **[0049]** Through the above-described chemical composition and performance of the above-described rolling and cooling, a pearlitic steel rail can be obtained that has a surface hardness of preferably HB 400 or greater and that exhibits surface hardness variation of $\pm \text{HB} 15$ points or less in the rail length direction. In other words, a homogeneous and high-hardness pearlitic steel rail that exhibits little hardness variation in the rolling length direction can be obtained.

EXAMPLES

[0050] Steels having the chemical compositions shown in Table 1 were made and cast steels obtained through continuous casting thereof were subjected to heating, hot rolling, and cooling to manufacture a 136-pound rail or a 141-pound rail for each steel. The manufacture conditions are shown together with investigation results for surface hardness and variation thereof in Table 2. Note that steel composition C and the corresponding manufacturing examples 19 and 20 do not relate to rails falling under the scope of claim 1. The manufacturing examples 17, 20, and 23 do not fall under the scope of the method of claim 2.

10

15

20

25

30

35

40

45

50

55

[Table 1]

Steel symbol	C	Si	Mn	P	S	Cr	Ca	Ni	Mo	V	Nb*	Ti*	sol Al*	N*	O*	Remarks
A	0.82	0.53	0.56	0.016	0.004	0.76	-	-	-	-	0.001	0.001	0.002	0.0041	0.0015	Example
B	0.80	1.28	0.23	0.018	0.003	0.38	-	-	-	-	0.053	0.001	0.002	0.0029	0.0018	Example
C	0.89	0.26	1.43	0.012	0.005	0.26	-	-	0.12	-	0.002	0.001	0.001	0.0040	0.0018	Example
D	0.76	1.43	0.93	0.015	0.007	0.53	0.31	0.15	-	0.072	0.001	0.002	0.001	0.0045	0.0013	Example
E	0.98	0.63	0.78	0.018	0.005	0.22	-	-	-	-	0.001	0.001	0.001	0.0042	0.0012	Example
F	0.82	0.95	0.48	0.013	0.004	1.43	-	-	-	-	0.036	0.001	0.002	0.0025	0.0016	Example
G	0.56	0.53	1.32	0.016	0.005	0.53	-	-	-	-	0.002	0.001	0.002	0.0035	0.0015	Comparative example
H	0.79	1.58	0.13	0.02	0.007	0.23	-	-	-	-	0.001	0.002	0.001	0.0051	0.0015	Comparative example
I	0.81	0.05	1.59	0.016	0.005	0.23	-	-	-	-	0.001	0.001	0.002	0.0040	0.0012	Comparative example
J	0.68	0.43	1.62	0.021	0.008	0.18	-	-	-	-	0.001	0.001	0.002	0.0033	0.0012	Comparative example
K	0.81	0.55	0.48	0.018	0.005	0.08	-	-	-	-	0.001	0.002	0.001	0.0043	0.0015	Comparative example
L	0.82	0.43	0.22	0.015	0.003	2.03	-	-	-	-	0.001	0.001	0.003	0.0060	0.0018	Comparative example
M	1.07	0.38	0.73	0.018	0.005	0.33	-	-	-	-	0.001	0.001	0.002	0.0038	0.0016	Comparative example
N	0.82	1.24	0.10	0.013	0.004	1.36	-	-	-	-	0.001	0.002	0.002	0.0045	0.0015	Example

*Contents of Nb, Ti, sol Al, N, and O are as declared in impurities

[0051] Herein, the variation in the time interval between passes in the rolling conditions indicates the difference between

the time elapsing from a leading end of a rolled material being rolled to the leading end being next rolled and the time elapsing from a trailing end of the rolled material being rolled to the trailing end being next rolled. As explained further above, when rolling is performed by conventional reverse rolling, the time interval between passes is extended for a rolled top portion and shortened for a rolled bottom portion. Thus, the difference in the time interval between passes for a rolled top portion and the trailing end (bottom portion) of the rolled material is particularly evident in reverse rolling. In contrast, the difference in the time interval between passes associated with a leading end and a trailing end of a rolled material is smaller in continuous rolling in a single direction and therefore inhomogeneity of a produced structure can be resolved as shown in Table 2.

[0052] Note that the cooling start temperature and the cooling stop temperature are results for surface temperature of a rail corner measured by a thermoviewer. The rail cooling rate is an average value of cooling rates measured from cooling start and end temperatures and cooling times measured at 5 m intervals in the length direction. With regards to cooling rate variation in the length direction, it was determined whether the difference between a largest value and a smallest value in variation of the cooling rates was greater than $\pm 1^{\circ}\text{C/s}$ or was less than or equal to $\pm 1^{\circ}\text{C/s}$.

[0053] Furthermore, the rail head surface hardness and microstructure of each of the manufactured rails was evaluated. The rail head surface hardness was evaluated by removing 0.5 mm or greater of a decarburized layer using a grinder and measuring the Brinell hardness of points at 5 m intervals in the rail length direction. In the same way, microscope samples were cut out and the microstructures thereof were observed.

[0054] The evaluation results are shown in Table 2.

20

25

30

35

40

45

50

55

[Table 2]

No.	Steel symbol	Temperature (°C)	Hearing	Use of continuous rolling at 1000°C or lower	Rolling conditions			Cooling conditions				Brinell hardness of surface			Remarks
					Variation in time interval between passes (s)	Area reduction rate at 1000°C or lower (%)	Finisher delivery temperature (°C)	Cooling method	Length direction cooling control (°C)	Start temperature (°C)	Stop temperature (°C)	Cooling rate (°C/s)	Cooling rate variation (°C/s)	Average surface hardness (HB)	Surface hardness variation (HB)
1	A	1240	Reverse rolling	25	45	950	Air blast	No	760	430	3.4	>1	422	23	Conventional example
2	A	1230	Reverse rolling	22	45	970	Air blast	No	780	470	3.5	>1	426	18	Comparative example
3	A	1220	Single-direction continuous	12	45	950	Air blast	No	820	450	3.3	>1	420	13	Comparative example
4	A	1180	Single-direction continuous	12	45	920	Air blast	No	770	450	2.8	>1	398	17	Comparative example
5	A	1220	Single-direction continuous	10	45	930	Air blast	Yes	820	450	3.4	<1	420	8	Example
6	A	1240	Single-direction continuous	12	45	940	Mist	No	820	430	6.7	>1	439	14	Comparative example
7	A	1230	Single-direction continuous	8	45	900	Air blast	Yes	800	430	3.3	<1	416	7	Example
8	A	1220	Single-direction continuous	12	37	950	Air blast	No	810	450	3.5	>1	422	18	Comparative example
9	A	1240	Single-direction continuous	10	45	880	Air blast	No	830	450	3.4	>1	403	17	Comparative example
10	A	1230	Single-direction continuous	17	45	910	Air blast	No	810	460	3.4	>1	400	17	Comparative example
11	A	1250	Single-direction continuous	12	45	920	Air blast	Yes	820	430	3.5	<1	435	7	Example
12	A	1230	Single-direction continuous	12	45	970	Mist	Yes	830	400	7.0	<1	455	9	Example
13	A	1250	Single-direction continuous	12	45	910	Air blast	Yes	820	620	3.7	<1	373	7	Comparative example
14	A	1250	Single-direction continuous	12	45	910	Air blast	Yes	810	430	0.5	<1	351	7	Comparative example
15	A	1250	Single-direction continuous	12	45	920	Mist	Yes	820	400	12	<1	789	32	Comparative example Martensite formation

Length direction cooling control: No → Variation > 1°C/s
 Length direction cooling control: Yes → Variation ≤ 1°C/s

5
10
15
20
25
30
35
40
45
50
55

Table 2 (cont'd)

No.	Steel symbol	Temperature (°C)	Heating	Use of continuous rolling at 1000°C or lower	Variation in time interval between passes (%)	Rolling conditions			Cooling conditions				Brinell hardness of surface			Remarks
						Area reduction rate at 1000°C or lower (%)	Finisher delivery temperature (°C)	Cooling method control	Length direction cooling control	Start temperature (°C)	Stop temperature (°C)	Cooling rate (°C/s)	Cooling rate variation (°C/s)	Average surface hardness (HB)	Surface hardness variation (HB)	
16	B	1220	Single-direction continuous	13	45	950	Air blast	No	830	450	3.7	>1	441	12	Comparative example	
17	B	1250	Single-direction continuous	20	40	970	Air blast	Yes	840	420	4.0	≤1	436	7	Example	
18	B	1230	Single-direction continuous	12	45	950	Air blast	Yes	820	460	3.8	≤1	455	8	Example	
19	C	1200	Single-direction continuous	18	45	950	Air blast	No	830	450	3.5	>1	415	12	Comparative example	
20	C	1230	Single-direction continuous	18	40	930	Air blast	Yes	820	470	3.8	≤1	430	8	Example	
21	D	1220	Single-direction continuous	15	45	950	Air blast	No	810	470	3.5	>1	430	11	Comparative example	
22	E	1240	Single-direction continuous	13	45	930	Air blast	No	810	450	3.3	>1	420	12	Comparative example	
23	E	1240	Single-direction continuous	10	37	940	Air blast	Yes	820	440	3.4	≤1	432	7	Example	
24	F	1250	Single-direction continuous	15	45	920	Air blast	No	830	480	4.2	≤1	458	8	Example	
25	G	1230	Single-direction continuous	18	45	920	Air blast	No	820	460	3.6	≤1	367	10	Comparative example	
26	H	1240	Single-direction continuous	10	45	910	Air blast	Yes	800	450	3.5	≤1	486	35	Comparative example	
27	I	1230	Single-direction continuous	12	45	930	Air blast	Yes	820	470	2.6	≤1	382	7	Comparative example	
28	J	1250	Single-direction continuous	12	45	930	Mist	Yes	830	460	8.2	≤1	483	36	Comparative example	
29	K	1250	Single-direction continuous	15	45	920	Air blast	Yes	800	450	4.2	≤1	362	9	Comparative example	
30	L	1220	Single-direction continuous	12	45	930	Air blast	Yes	810	430	4.3	≤1	503	20	Comparative example	
31	M	1230	Single-direction continuous	12	45	920	Air blast	Yes	820	430	3.5	≤1	433	8	Comparative example	
32	N	1250	Single-direction continuous	12	45	930	Air blast	Yes	820	410	4.2	≤1	421	7	Low ductility Example	

Length direction cooling control: No → Variation > 1°C/s
Length direction cooling control: Yes → Variation ≤ 1°C/s

[0055] The hardness of rails according to the present invention exhibited extremely small variation of ±HB 10 or less

in the rail length direction.

Claims

5

1. A rail comprising

a chemical composition consisting of, in mass%:

10 0.60% to 1.0% of C;
 0.1% to 1.5% of Si;
 0.01% to 1.2% of Mn;
 0.035% or less of P;
 0.030% or less of S;
 15 0.1% to 2.0% of Cr,

and optionally one or more of

20 0.006% or less of N;
 0.003% or less of O;
 0.003% or less of Al;
 0.003% or less of Nb;
 0.003% or less of Ti;
 25 1.0% or less of Cu;
 0.5% or less of Ni;
 0.5% or less of Mo; and
 0.15% or less of V,

30 the balance being Fe and incidental impurities, wherein

the surface hardness of the head of the rail is HB 400 or greater and the surface hardness of a head of the rail exhibits variation of \pm HB 10 points or less in a length direction of the rail.

2. A rail manufacturing method consisting of:

35 heating to a temperature of between 1200°C and 1300°C, a steel raw material having a chemical composition consisting of, in mass%:

40 0.60% to 1.0% of C,
 0.1% to 1.5% of Si,
 0.01% to 1.5% of Mn,
 0.035% or less of P,
 0.030% or less of S,
 0.1% to 2.0% of Cr,

45 and optionally one or more of

50 0.006% or less of N;
 0.003% or less of O;
 0.003% or less of Al;
 0.003% or less of Nb;
 0.003% or less of Ti;
 1.0% or less of Cu;
 0.5% or less of Ni;
 0.5% or less of Mo; and
 55 0.15% or less of V,

the balance being Fe and incidental impurities;

hot rolling the steel raw material after the heating, the hot rolling being performed continuously in a single

direction such that rolling in a rail length direction in a temperature region not exceeding 1000°C is performed over 2 to 7 passes with a difference in the time interval between passes of 15 s or less in the rail length direction, a cumulative area reduction rate of 40% or greater for a portion forming a rail head, and a finisher delivery temperature of 900°C or higher; and

5 cooling the rail head after the hot rolling from a cooling start temperature of 800°C or higher to a cooling stop temperature of 400°C to 600°C at a cooling rate of 1°C/s to 10°C/s, wherein the cooling rate in the cooling exhibits variation of $\pm 1^\circ\text{C/s}$ or less in the rail direction.

10 **Patentansprüche**

1. Schiene, mit

einer chemischen Zusammensetzung, die, bezogen auf Massenprozent, besteht aus:

15 0,60 % bis 1,0 % an C;
0,1 % bis 1,5 % an Si;
0,01 % bis 1,2 % an Mn;
20 0,035 % oder weniger an P;
0,030 % oder weniger an S;
0,1 % bis 2,0 % an Cr,

und optional aus einem oder mehreren von

25 0,006 % oder weniger an N;
0,003 % oder weniger an O;
0,003 % oder weniger an Al;
0,003 % oder weniger an Nb;
30 0,003 % oder weniger an Ti;
1,0 % oder weniger an Cu;
0,5 % oder weniger an Ni;
0,5 % oder weniger an Mo; und
0,15 % oder weniger an V,

35 wobei der Rest Fe und zufällige Verunreinigungen sind, wobei
die Oberflächenhärte eines Kopfteils der Schiene HB 400 oder größer ist und die Oberflächenhärte des Kopfteils
der Schiene Schwankungen von $\pm\text{HB } 10$ Punkten oder weniger in einer Längsrichtung der Schiene aufweist.

40 2. Verfahren zur Herstellung einer Schiene, bestehend aus:

Aufheizen, auf eine Temperatur zwischen 1200 °C und 1300 °C, eines Stahlrohrmaterials mit einer chemischen
Zusammensetzung, bezogen auf Massenprozent, bestehend aus:

45 0,60 % bis 1,0 % an C;
0,1 % bis 1,5 % an Si;
0,01 % bis 1,5 % an Mn;
0,035 % oder weniger an P;
50 0,030 % oder weniger an S;
0,1 % bis 2,0 % an Cr,

und optional aus einem oder mehreren von

55 0,006 % oder weniger an N;
0,003 % oder weniger an O;
0,003 % oder weniger an Al;
0,003 % oder weniger an Nb;
0,003 % oder weniger an Ti;
1,0 % oder weniger an Cu;

0,5 % oder weniger an Ni;
0,5 % oder weniger an Mo; und
0,15 % oder weniger an V,

5 wobei der Rest Fe und zufällige Verunreinigungen sind;
Heißwalzen des Stahlrohmaterials nach dem Erwärmen, wobei das Heißwalzen kontinuierlich in einer einzigen
Richtung derart ausgeführt wird, dass das Walzen in einer Schienenlängsrichtung in einem Temperaturgebiet,
das 1000 °C nicht übersteigt, über 2 bis 7 Durchläufe mit einem Unterschied im Zeitintervall zwischen Durchläufen
von 15 s oder weniger in der Schienenlängsrichtung, mit einer kumulativen Flächenreduktionsrate von 40 %
10 oder größer für einen Bereich, der einen Schienenkopf bildet, und mit einer Endbearbeitungsbereitstellungs-
temperatur von 900 °C oder höher ausgeführt wird; und
Abkühlen des Schienenkopfes nach dem Heißwalzen von einer Abkühlbeginnstemperatur von 800 °C oder
höher bis zu einer Abkühlendtemperatur von 400 °C bis 600 °C bei einer Abkühlrate von 1 °C/s bis 10 °C/s,
15 wobei die Abkühlrate beim Abkühlen eine Schwankung von ± 1 °C/s oder weniger in der Schienenrichtung
aufweist.

Revendications

1. Rail comprenant

une composition chimique constituée, en % en masse, de :

25 0,60 % à 1,0 % de C ;
0,1 % à 1,5 % de Si;
0,01 % à 1,2% de Mn ;
0,035 % ou moins de P ;
0,030 % ou moins de S ;
0,1 % à 2,0 % de Cr,

30 et éventuellement l'un ou plus de

35 0,006 % ou moins de N ;
0,003 % ou moins de O ;
0,003 % ou moins d'Al ;
0,003 % ou moins de Nb ;
0,003 % ou moins de Ti ;
1,0 % ou moins de Cu ;
40 0,5 % ou moins de Ni ;
0,5 % ou moins de Mo ; et
0,15 % ou moins de V,

le reste étant du Fe et des impuretés inévitables,

45 la dureté de surface de la tête du rail étant égale ou supérieure à 400 HB et la dureté de surface d'une tête du
rail présentant une variation de ± 10 points HB ou moins dans un sens de la longueur du rail.

2. Procédé de fabrication d'un rail consistant à :

50 chauffer, à une température entre 1200 °C et 1300 °C, une matière première d'acier ayant une composition
chimique constituée, en % en masse, de :

55 0,60 % à 1,0 % de C ;
0,1 % à 1,5 % de Si;
0,01 % à 1,5 % de Mn ;
0,035 % ou moins de P ;
0,030 % ou moins de S ;
0,1 % à 2,0 % de Cr,

et éventuellement l'un ou plus de

5 0,006 % ou moins de N ;
 0,003 % ou moins de O ;
 0,003 % ou moins d'Al ;
 0,003 % ou moins de Nb ;
 0,003 % ou moins de Ti ;
 1,0 % ou moins de Cu ;
10 0,5 % ou moins de Ni ;
 0,5 % ou moins de Mo ; et
 0,15 % ou moins de V,

le reste étant du Fe et des impuretés inévitables,

15 laminer à chaud la matière première d'acier après le chauffage, le laminage à chaud étant effectué en continu dans une seule direction de sorte que le laminage dans un sens de la longueur du rail dans une zone de température ne dépassant pas 1000 °C est effectué en 2 à 7 passes avec une différence d'intervalle de temps entre passes de 15 s ou moins dans le sens de la longueur du rail, un taux de réduction de surface cumulé égal ou supérieur à 40 % pour une partie formant une tête de rail, et une température en sortie de finissage égale à supérieure à 900 °C ; et

20 refroidir la tête de rail après le laminage à chaud depuis une température de début de refroidissement de 800 °C ou plus jusqu'à une température d'arrêt de refroidissement de 400 °C à 600 °C à une vitesse de refroidissement de 1 °C/s à 10 °C/s, la vitesse de refroidissement lors du refroidissement présentant une variation de ± 1 °C/s ou moins dans le sens du rail.

25

30

35

40

45

50

55

FIG. 1

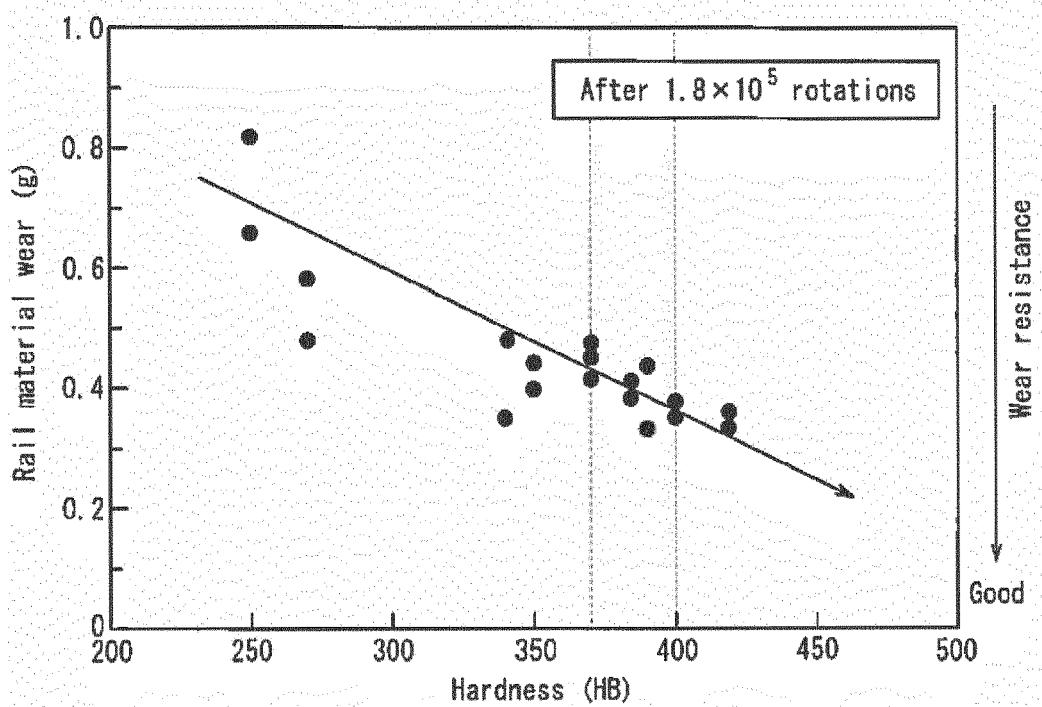


FIG. 2


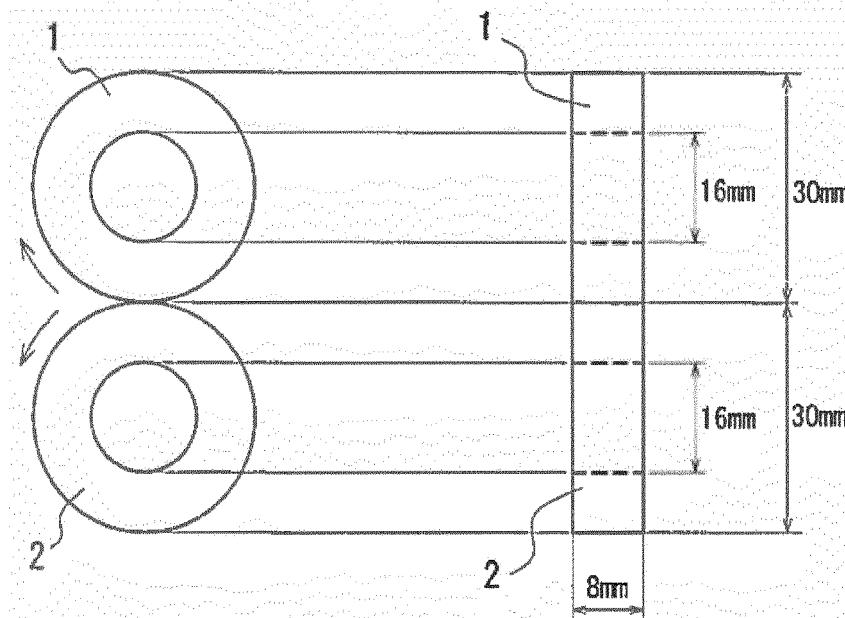


FIG. 3

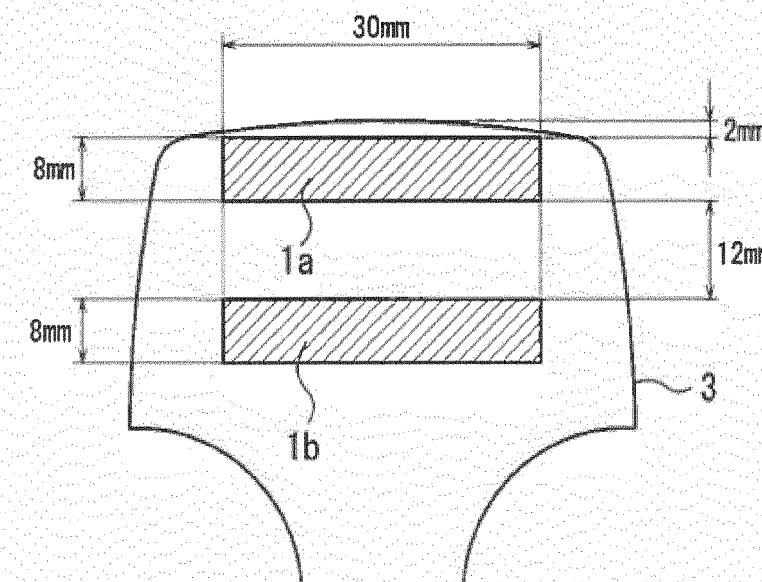

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 4272385 B [0009]
- JP 3078461 B [0009]
- JP 3081116 B [0009]
- JP 3513427 B [0009]
- JP 4390004 B [0009]
- JP 2009108396 A [0009]
- JP 2009235515 A [0009]
- JP 3423811 B [0009]
- JP 3113137 B [0009]
- JP 2008050687 A [0009]
- JP 2773867 B [0009]
- US 20040187981 A1 [0009]