




(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(22) Date de dépôt/Filing Date: 2018/04/05
(41) Mise à la disp. pub./Open to Public Insp.: 2018/10/06
(30) Priorité/Priority: 2017/04/06 (EP17 165 144.1)

(51) Cl.Int./Int.Cl. *G08G 1/017*(2006.01),
G06K 19/07(2006.01), *G06K 7/10*(2006.01),
G07B 15/06(2011.01), *H04B 5/00*(2006.01),
H04W 4/80(2018.01)
(71) Demandeur/Applicant:
KAPSCH TRAFFICCOM AG, AT
(72) Inventeurs/Inventors:
HOPKINS, CHRISTOPHER JOHN, CA;
MALARKY, ALASTAIR, CA...
(74) Agent: ROWAND LLP

(54) Titre : SYSTEME ET PROCEDURE D'IDENTIFICATION DE VEHICULE
(54) Title: VEHICLE IDENTIFICATION SYSTEM AND METHOD

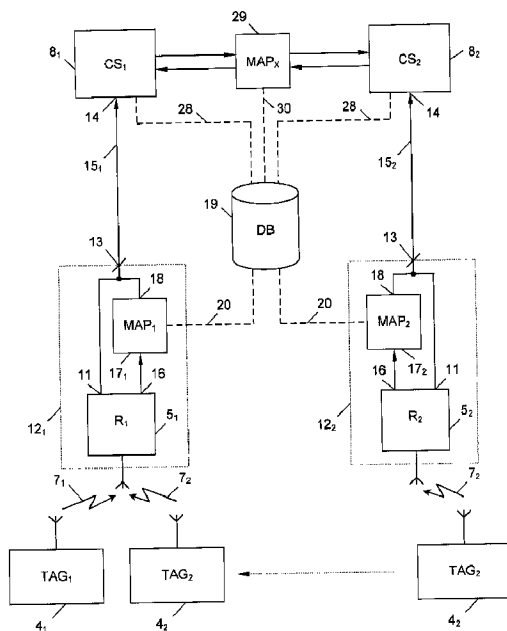

(57) **Abrégé/Abstract:**

The invention relates to a vehicle identification system comprising a central station, a roadside reader for wirelessly communicating with radio tags carried by vehicles, a mapping unit connected to the reader, and a correlation unit connected to the mapping unit,

(57) **Abrégé(suite)/Abstract(continued):**

wherein the correlation unit is configured to correlate second-protocol tag identifications to first-protocol tag identifications from a reserved subset of first-protocol tag identifications, wherein the mapping unit is configured to generate a new first-protocol message upon receiving a second-protocol message from the reader, and wherein the central station is configured to receive and store first-protocol messages from the reader as well as new first-protocol messages from the mapping unit and to identify a vehicle. The invention further relates to a method for identifying vehicles by means of this system.

Abstract

The invention relates to a vehicle identification system comprising a central station, a roadside reader for wirelessly communicating with radio tags carried by vehicles, a mapping unit connected to the reader, and a correlation unit connected to the mapping unit,

wherein the correlation unit is configured to correlate second-protocol tag identifications to first-protocol tag identifications from a reserved subset of first-protocol tag identifications,

wherein the mapping unit is configured to generate a new first-protocol message upon receiving a second-protocol message from the reader, and

wherein the central station is configured to receive and store first-protocol messages from the reader as well as new first-protocol messages from the mapping unit and to identify a vehicle.

The invention further relates to a method for identifying vehicles by means of this system.

Vehicle Identification System and Method

The invention relates to a vehicle identification system comprising a central station and a roadside reader for wire-
5 lessly communicating with radio tags carried by vehicles, wherein a first tag is configured to wirelessly transmit messages according to a first protocol to the reader, each message comprising a unique first-protocol identification of the tag, and wherein a second tag is configured to wirelessly transmit
10 messages according to a second protocol to the reader, each message comprising a unique second-protocol identification of the tag. The invention further relates to a method for identifying a vehicle in such a system.

In road toll systems, vehicles are equipped with radio
15 tags according to a wireless communication standard such as RFID, NFC, WiFi, Bluetooth, et cet. so that they can be wirelessly identified during their travel within the road toll system. Multiple radio roadside readers are distributed over the road toll system that can detect a passing tag. Depending on
20 the radio technology used, this can be achieved in that the readers continuously emit polling messages and await responses from the tags. By means of such readers, the route travelled by vehicles in the road toll system can be tracked.

Recently, there has been a need to ensure interoperability
25 between multiple toll system operators tolling different geographical regions or even overlapping geographical regions. Each toll system operator distributes his own tags in the system, and the tags from different toll operators function according to different messaging protocols. Accordingly, tags may
30 respond to readers with different message structures or may not respond at all when polled with the wrong protocol.

The problem has been approached by introducing multi-
protocol readers (see, e.g., US 2003/0109223 A1) that, for each protocol available, transmit a data stream to a back office of
35 the road toll system. This approach has the disadvantage that

the back office as well as lane controllers and other parts of the system have to be physically upgraded to be able to handle messages of different protocols. Such system upgrades use a lot of resources and are very inefficient since back offices and
5 lane controllers have to be upgraded with each toll system operator that is added to the system.

It is thus an aim of the invention to provide a vehicle identification system in which a plurality of toll system operators can function without an extensive overhaul of the road
10 system.

To achieve this goal, in a first aspect the invention provides for a vehicle identification system comprising a central station, a roadside reader for wirelessly communicating with radio tags carried by vehicles, a mapping unit connected to the
15 reader, and a correlation unit connected to the mapping unit;

the reader being part or member of a lane controller which has an interface connected to an input of the central station via a connection;

the reader having a first output which is connected to the
20 interface and a second output which is connected to the mapping unit;

the mapping unit having an output which is also connected to the interface;

wherein a first tag is configured to wirelessly transmit
25 messages according to a first protocol to the reader, each message comprising a unique first-protocol identification of the tag;

wherein a second tag is configured to wirelessly transmit
30 messages according to a second protocol to the reader, each message comprising a unique second-protocol identification of the tag;

wherein the correlation unit is configured to correlate
35 second-protocol tag identifications to first-protocol tag identifications from a reserved subset of first-protocol tag identifications that are not used for tags deployed in vehicles;

wherein the reader is configured to forward first-protocol messages to the central station and to detect second-protocol messages and forward the detected second-protocol messages to the mapping unit;

5 wherein the mapping unit is configured to generate a new first-protocol message and forward this message to the central station upon receiving a second-protocol message from the reader by

- extracting the second-protocol tag identification
10 from the second-protocol message,

- retrieving that first-protocol tag identification that correlates to the extracted second-protocol tag identification from the correlation unit,

- generating said new first-protocol message by copying
15 information from said second-protocol message according to a predetermined mapping between the second protocol and the first protocol while replacing the second-protocol tag identification by the retrieved first-protocol tag identification), and

- forwarding the generated new first-protocol message
20 to the central station;

wherein the central station is configured to receive and store first-protocol messages from the reader as well as new first-protocol messages from the mapping unit and to identify a vehicle by means of the first-protocol tag identification
25 therein.

The advantage of such a system is that for each toll system operator joining the already present group of toll system operators, only the correlation unit has to be updated. There is no need to include additional interfaces in lane controllers
30 or the central station, thus making the need for hardware upgrades obsolete. By reserving subsets of unique tag identifications, possible upgrades for additional toll system operators in the future can be handled in advance. Furthermore, the central station only needs a single interface to receive messages
35 since all messages are received according to a single protocol.

In the generation of the new first-protocol messages, the mapping is preferably unique such that it is clear that a mapping has occurred and so that it is reversible. This serves the purpose to re-create the original messages in later stages of
5 the vehicle identification system.

In a preferred embodiment, the central station is also connected to said correlation unit or is connected to a further correlation unit having the same content;

wherein the central unit is configured to detect which re-
10 ceived messages are new first-protocol messages by looking-up in the correlation unit or further correlation unit, respectively, if the tag identification of a received message is included in the reserved subset of first-protocol tag identifications;

15 and wherein the central station is further configured to forward a new first-protocol message detected in this way to a further central station.

By means of this, the central station can identify vehicles for which it is not responsible, e.g., for which no toll should be collected since they belong (are "subscribed") to a different toll system operator. The correlation unit thus serves two purposes, firstly to be able to map messages to a different protocol and secondly to identify messages that have been mapped. The dual-purpose correlation unit thus alleviates
20 the distribution of messages to the different toll system operators.

In another preferred embodiment, a further mapping unit is interposed between the central unit and the further central unit and is configured to reconstruct the second-protocol message upon receiving said detected new first-protocol message
30 from the central station by

- extracting the first-protocol tag identification from said detected new first-protocol message;

- retrieving that second-protocol tag identification that correlates to the extracted first-protocol tag identification from the correlation unit; and

5 - reconstructing said second-protocol message by copying information from said new first-protocol message according to a predetermined mapping between the first protocol and the second protocol while replacing the first-protocol tag identification by the retrieved second-protocol tag identification;

10 and wherein the further mapping unit is configured to forward said reconstructed second-protocol message to the further central unit.

By means of this, messages can be mapped back, i.e., reconstructed, to their original protocols. Receiving central stations thus do not recognize that messages have been transformed at all such that the inventive vehicle identification system is also compatible with legacy central stations and readers. This further enhances the backwards compatibility of the vehicle identification system.

15 In one embodiment, the correlation unit is a database. Thereby, all correlations between tag identifications can be arbitrarily pre-defined and tag identifications can be added to the database on an individual basis.

20 Alternatively, the correlation unit is a computing unit configured to execute a pre-defined algorithm. Thereby, correlations can be computed "on the fly" such that no extended storage is needed. Also, new tags can join the group of already existing tags if their tag identifications are comprised by the computing range of the algorithm.

25 In a second aspect, the invention relates to a method for identifying a vehicle in a system comprising a central station, a roadside reader for wirelessly communicating with radio tags carried by vehicles, a mapping unit connected to the reader, and a correlation unit connected to the mapping unit, the reader being part or member of a lane controller which has an interface connected to an input of the central station via a con-
30
35

nection, the reader having a first output which is connected to the interface and a second output which is connected to the mapping unit, and the mapping unit having an output which is also connected to the interface, the method comprising:

- 5 providing a correlation in the correlation unit between second-protocol tag identifications and first-protocol tag identifications from a reserved subset of first-protocol tag identifications that are not used for tags deployed in vehicles;
- 10 wirelessly transmitting a message according to the first protocol from a first tag to the reader, the message comprising a unique first-protocol identification of the tag;
 - wirelessly transmitting a message according to the second protocol from a second tag to the reader, the message comprising
 - 15 a unique second-protocol identification of the tag;
 - selectively forwarding the first-protocol message from the reader to the central station and the second-protocol message from the reader to the mapping unit;
 - in the mapping unit, generating and forwarding to the central station a new first-protocol message by
 - 20 - extracting the second-protocol tag identification from the second-protocol message,
 - retrieving that first-protocol tag identification that correlates to the extracted second-protocol tag identification from the correlation unit, and
 - 25 - generating said new first-protocol message by copying information from said second-protocol message according to a predetermined mapping between the second protocol and the first protocol while replacing the second-protocol tag identification
 - 30 by the retrieved first-protocol tag identification, and
 - forwarding the generated new first-protocol message to the central station;
 - in the central station, receiving and storing the first-protocol message from the reader as well as the new first-

protocol message from the mapping unit and identifying a vehicle by means of the first-protocol tag identification therein.

In a preferred embodiment the central station is also connected to said correlation unit or is connected to a further correlation unit having the same content, and the method comprises:
5

in the central unit, detecting whether a received message is a new first-protocol message by looking-up in the correlation unit or further correlation unit, respectively, if the tag identification of the received message is included in the reserved subset of first-protocol tag identifications, and, if so,
10

forwarding the new first-protocol message detected in this way to a further central station.

In another preferred embodiment a further mapping unit is interposed between the central unit and the further central unit, and the method comprises:
15

in the further mapping unit, reconstructing the second-protocol message upon receiving said detected new first-protocol message from the central station by
20

- extracting the first-protocol tag identification from said detected new first-protocol message;

- retrieving that second-protocol tag identification that correlates to the extracted first-protocol tag identification from the correlation unit; and
25

- reconstructing said second-protocol message by copying information from said new first-protocol message according to a predetermined mapping between the first protocol and the second protocol while replacing the first-protocol tag identification by the retrieved second-protocol tag identification;
30

and forwarding said reconstructed second-protocol message from the further mapping unit to the further central unit.

In one embodiment, the correlation unit is a database. Alternatively, the correlation unit is a computing unit executing
35 a pre-defined algorithm.

The advantages as set forth for the vehicle identification system analogously hold for the method for identifying a vehicle.

The invention shall now be explained in more detail below
5 on the basis of preferred exemplary embodiments thereof with reference to the accompanying drawings, in which:

Fig. 1 shows a road toll system in a schematic top view;

Fig. 2 shows a block diagram of readers and central stations of the road toll system of Fig. 1;

10 Fig. 3 shows a schematic mapping of a message according to a first protocol to a message according to a second protocol; and

Fig. 4 shows a correlation of tag identifications between two protocols.

15 Fig. 1 shows a road toll system 1 with roads 2 on which vehicles 3 travel. The vehicles 3 carry tags 4, for example in form of onboard units, by means of which the vehicles 3 can be identified in the road toll system 1. The identification of vehicles 3 in the road toll system 1 can for example serve to im-
20 pose toll on certain roads 2.

To identify vehicles 3 on the roads 2, roadside readers 5 are installed on certain sections of the roads 2. The roadside readers 5 can be mounted on gantries 6, e.g., overhead gantries. The readers 5 and the tags 4 wirelessly communicate with
25 each other according to a wireless communication standard such as RFID, NFC, WiFi, Bluetooth, or the like. To initiate a communication, the readers 5 can, e.g., continuously emit polling messages, to which the tags 4 respond with a message 7, or vice versa.

30 The readers 5 thus receive messages 7 and report these messages 7 back to one of several central stations 8_i ($i = 1, 2, 3, \dots$) used as "back offices", if applicable in combination with a timestamp, location and/or identification of the respective reader 5, et cet.

The messages 7 from the tags 4 typically contain a unique identification of the tag 4, data relating to the type of the tag 4, and content of a memory of the tag 4 relating to, for example, previous reader passages, personal information of the vehicle owner, or information relating to the vehicle 3.

From Fig. 1 it can further be seen that each central station 8_i is responsible for a distinct geographical region 9_i . All readers 5 in this geographical region 9_i are connected to the central station 8_i in which the respective reader 5 is deployed, i.e., each reader 5 is assigned to one central station 8_i . For this reason the readers 5 will from now on be denoted as readers 5_i , wherein the index i indicates the affiliation to the central station 8_i with the same index i .

In different embodiments, the geographical regions 9_i are not mutually exclusive but can overlap such that mixed areas, in which readers 5_i from different groups i both report messages 7_i back to different central stations 8_i , are created.

The tags 4 may be handed out to the customers of a toll operator operating a central station 8_i for a specific geographical region 9_i such that these tags 4 are affiliated to the central station 8_i with the index i , too. Thus, they are denoted as tags 4_i in the following.

To ensure a consistent communication within the region 9_i of one toll operator, messages 7 between the tags 4_i , readers 5_i , and the central station 8_i of a single toll operator are performed according to a pre-defined protocol 10_i . For this reason, messages 7 can also be denoted as messages 7_i .

Messages 7_i according to different protocols 10_i here means that the messages 7_i use a different structure of the data or information contained therein, as will be discussed later in detail with reference to Fig. 3. Exemplary protocols 10_i used in the road toll system 1 are E-ZPass TDM (Time Division Multiplexing), NIOP TDM, 6C by the Toll Operators Coalition, and the like.

Each group i of tags 4_i may use its own pool of tag identifications TID_i such that each tag identification TID_i is unique within each group, meaning that a tag 4_i can have a tag identification TID_i of, e.g., "12345", and this tag identification "12345" is only present once within a group i . However, this tag identification "12345" could be used in a different group $i+1$, for example, if this group $i+1$ uses a different protocol 10_{i+1} . Furthermore, tag identifications TID_i can have different lengths between different groups i , $i+1$, for example group i can use 30-bit tag identifications TID_i while the group $i+1$ uses 40-bit tag identifications TID_{i+1} .

As vehicles 3 roam freely on the roads 2 and thus between different geographical regions 9_i , the readers 5_i and back offices 8_i should to be configured to deal with tags 4_i of different toll operators. An example of this is shown in Fig. 2, in which an exemplary interaction between tags 4_1 , 4_2 , readers 5_1 , 5_2 , and central stations 8_1 , 8_2 of two different groups $i = 1, 2$ run by toll operators from two different regions 9_1 , 9_2 is depicted.

In Fig. 2, when the tag 4_1 communicates a message 7_1 according to the first protocol 10_1 to its "native" reader 5_1 , this first-protocol message 7_1 is present in the "correct" protocol 10_1 at an output 11 of the reader 5_1 . The reader 5_1 may be part or member of a lane controller 12_1 , which has an interface 13, which is connected to the output 11 of the reader 5_1 . The interface 13 of the lane controller 12_1 is in turn connected to an input 14 of the central station 8_1 responsible for the region 9_1 via a connection 15_1 . While the reader 5_i is a "multi-protocol" reader meaning that it can receive messages 7_i according to at least two protocols 10_i , 10_{i+1} as detailed below, for the central station 8_1 all messages conveyed via the connection 15_1 are present as first-protocol messages 7_1 , so that the central station 8_i needs to and can only parse messages according to its native protocol 10_1 .

When a tag 4_2 native to a different protocol group, here group $i = 2$, roams into the vicinity of a reader 5_1 of the group $i = 1$, it transmits messages 7_2 according to the second protocol 10_2 to the reader 5_1 . The multi-protocol reader 5_1 detects that a message was received according to the second protocol 10_2 by means of, e.g., the structure of the message 7_2 , and outputs it at an output 16 to the input of a mapping unit 17_1 . The mapping unit 17_1 has the task to generate a "new" first-protocol message $7_1'$ upon receiving such a second-protocol message 7_2 , which second protocol 10_2 is not "native" to the region 9_i in which the reader 5_1 is deployed. For this purpose, the mapping unit 17_i is connected to a correlation unit 19 via a connection 20. The correlation unit 19 can be embodied as a database DB as shown or alternatively as a computing unit executing a pre-defined algorithm. While the following example refers specifically to embodiments using the database DB, the computing unit can be used as the correlation unit 19 to the same effect.

After generating such a new first-protocol message $7_1'$ out of a second-protocol message 7_2 , the mapping unit 17_1 outputs the new first-protocol message $7_1'$ at an output 18 to the interface 13, from where it is fed to the input 14 of the central station 8_1 via the connection 15. In this way, between the interface 13 of the lane controller 12_1 and the input 14 of the central station 8_1 and within the central station 8_1 , only first-protocol messages $7_1, 7_1'$ need to be transmitted and processed, regardless of the protocol 10_i of a message 7_i received by the reader 5_1 .

In the following, Figs. 3 and 4 show an exemplary way of generating a new first-protocol message $7_1'$ by means of the mapping unit 17_1 . Fig. 3 depicts a predetermined mapping 21 which is used by the mapping unit 17_1 to generate a first-protocol message $7_1'$ out of a second-protocol message 7_2 . As can be seen, a header 22 is mapped from the beginning of the second-protocol message 7_2 to a new header $22'$ at the beginning

of the new first-protocol message $7_1'$. The tag identification TID_i is mapped from, e.g., the middle of the second-protocol message 7_2 to, for example, a second data field of the new first-protocol message $7_1'$. Concurrently, the second-protocol tag identification TID_2 is replaced by a new first-protocol tag identification TID_1' as will be described below by means of Fig. 4 in detail. A class data value 23, an HOV (high occupancy vehicle) data value 24, and a version data value 25 are mapped from the second-protocol message 7_2 to a new class data value 23', a new HOV data value 24', and a new version data value 25', e.g., from data fields before the tag identification TID_2 to data fields after the new tag identification TID_1' . The last data field of the second-protocol message 7_2 is, in this case, a CRC (cyclic redundancy check) value 26 of the second-protocol message 7_2 that is validated before mapping. A new CRC value 26' is computed as part of generating the new first-protocol message $7_1'$ and added as a last data field to the new first-protocol message $7_1'$. In this way, a new first-protocol message $7_1'$ can be computed out of the second-protocol message 7_2 .

As mentioned above, Fig. 4 shows the content of the database DB used as the correlation unit 19, wherein unique tag identifications TID_i of three protocols $10_1, 10_2, 10_3$ are shown. On the left, "actual" tag identifications ranging from "00000" to "19999" are shown, which are assigned to tags 4_1 that operate according to the first protocol 10_1 . Additionally, two reserved subsets s_2, s_3 ranging from "20000" to "29999" and "30000" to "34999", respectively, of the unique tag identifiers TID_1 of the first protocol 10_1 are depicted. These reserved subsets s_2, s_3 contain "virtual" tag identifications TID_1' that are not used for tags 4_1 deployed in vehicles 3.

Similarly, on the top right of Fig. 4, unique tag identifications TID_2 of a second protocol 10_2 are shown, which are again split up into actual and virtual tag identifications TID_2, TID_2' . On the bottom right of Fig. 4, unique tag identi-

fications TID_3 of a third protocol 10_3 are shown split up into actual and virtual tag identifications TID_3, TID_3' .

If a computing unit executing a pre-defined algorithm is used as the correlation unit 19, the algorithm could utilize
5 any arithmetic function that allows a correlation between two tag identifications, e.g., $TID_i = 3 * TID_i' + 10000$. The algorithm could also include if-statements to account for different lengths of tag identifications.

To implement the replacement of a tag identification TID_2
10 in a mapping 21 as was explained above with respect to Fig. 3, the actual tag identifications TID_2 of the second protocol 10_2 are correlated, see arrows 27, to the second subset s_2 of the first-protocol tag identifications TID_1 , i.e., each actual second-protocol tag identification TID_2 is correlated to one virtual first-protocol tag identification TID_1' .
15

For the purpose of replacing a third-protocol tag identification TID_3 , analogously the actual tag identifications TID_3 of the third protocol 10_3 are correlated to the third subset s_3 of the first-protocol tag identifications TID_1 . From the exemplary correlation 27 between the first protocol 10_1 and the
20 third protocol 10_3 it can also be seen that a possible change in (bit-) length of the tag identifications TID_i can be overcome this way.

Furthermore, the database DB can store such correlations
25 27 from the actual tag identifications TID_1 of the first protocol 10_1 to a respective subset s_1 of the second-protocol tag identifications TID_2 and to a respective subset s_1 of third-protocol tag identifications TID_3 (shown in dotted lines), and all other possible correlations (not shown).

Coming back to Fig. 2, it can thus be summarized that the
30 mapping unit 17₁ generates a new first-protocol message $7_1'$ upon receiving a second-protocol message 7_2 from the reader 5₁ by means of three steps: Firstly, the second-protocol tag identification TID_2 is extracted from the second-protocol message 7_2 .
35 Secondly, that first-protocol tag identification TID_1 that cor-

relates to the extracted second-protocol tag identification TID_2 is retrieved from the database DB according to the correlation 27 in the database DB (Fig. 4). Thirdly, said new first-protocol message $7_1'$ is generated by copying information from said second-protocol message 7_2 according to the predetermined mapping 21 between the second protocol 10_2 and the first protocol 10_1 while replacing the second-protocol tag identification TID_2 by the retrieved first-protocol tag identification TID_1 (Fig. 3).

10 Once messages $7_1, 7_1'$ have been received in the central station 8_1 , the vehicles 3 can be identified by means of these messages, in particular by the actual or virtual tag identifications TID_1, TID_1' therein. Identified vehicles 3 can then be tolled on the basis of their locations and/or used roads 2.

15 In most cases, vehicles 3 that are equipped with a tag 4_i from a different toll operator should, however, only be tolled by the central station 8_i of this agency. To this end, the central station 8_i can detect whether a message $7_i, 7_i'$ was mapped by means of the mapping unit 17_i by accessing the database DB via a connection 28. The central station 8_i then checks whether the tag identification TID_i stored in a message $7_i, 7_i'$ is present in a reserved subset s_i as shown in Fig. 4. If this is the case, the central station 8_i can forward this message $7_i'$, which was apparently mapped by means of the mapping unit 17_i , to that central station 8_i (here: the "further" central station 8_2), which belongs to that reserved subset s_i in which the tag identification TID_i was found.

25 As can be seen from Fig. 2, instead of just forwarding a message $7_i, 7_i'$, this message can also be mapped back to the protocol 10_i in which it was originally received in the reader 5_i . For this purpose, a further mapping unit 29 is located downstream of the central station 8_i , e.g., interposed between the central station 8_1 and the further central station 8_2 . The further mapping unit 29 reconstructs the second-protocol message 7_2 as follows.

5 Firstly, the first-protocol tag identification TID_1 is extracted from said detected new first-protocol message $7_1'$. Secondly, the further mapping unit 29 retrieves that second-protocol tag identification TID_2 that correlates (27) to the extracted first-protocol tag identification TID_1 from the database DB. Thirdly, said second-protocol message 7_2 is reconstructed by copying information from said new first-protocol message $7_1'$ according to the predetermined mapping 21 between the first protocol 10_1 and the second protocol 10_2 while replacing the first-protocol tag identification TID_1 by the retrieved second-protocol tag identification TID_2 .

10 For the purpose of mapping back the extracted tag identification TID_1 , the further mapping unit 29 is connected to the correlation unit 19 via a connection 30. However, the further mapping unit 29 could also be arranged in the central station 8_1 that forwards the message $7_1'$, or in that central station 8_1 that receives the message $7_1'$. In this case, the connection 28 and the connection 30 can be embodied as one.

15 The correlation unit 19 could, instead of being a central correlation unit that is connected to each element, be embodied within each central station 8_1 or mapping unit 17_1 . In the example of Fig. 2, this would mean that the correlation unit 19 would be present five times in the system, embodied in the mapping units 17_1 , 17_2 , 29 and in the central stations 8_1 , 8_2 . Such multiple correlation units 19 embodied as databases DB would then have substantially the same content. In case of any changes, such databases DB could be updated or synchronised, e.g., on a regular basis. If, on the other hand, computing units are used as such multiple correlation units 19, they would then use the same algorithm. In case of any changes, the algorithms of computing units could be updated or synchronised, e.g., on a regular basis.

30 The invention is not restricted to the specific embodiments described in detail herein, but encompasses all variants,

combinations and modifications thereof that fall within the framework of the appended claims.

Claims:

1. Vehicle identification system comprising a central station, a roadside reader for wirelessly communicating with radio tags carried by vehicles, a mapping unit connected to the reader, and a correlation unit connected to the mapping unit;
5 the reader being part or member of a lane controller which has an interface connected to an input of the central station via a connection;
10 the reader having a first output which is connected to the interface and a second output which is connected to the mapping unit;
the mapping unit having an output which is also connected to the interface;
15 wherein a first tag is configured to wirelessly transmit messages according to a first protocol to the reader, each message comprising a unique first-protocol identification of the tag;
wherein a second tag is configured to wirelessly transmit messages according to a second protocol to the reader, each message comprising a unique second-protocol identification of the tag;
20 wherein the correlation unit is configured to correlate second-protocol tag identifications to first-protocol tag identifications from a reserved subset of first-protocol tag identifications that are not used for tags deployed in vehicles;
25 wherein the reader is configured to forward first-protocol messages to the central station and to detect second-protocol messages and forward the detected second-protocol messages to the mapping unit;
30 wherein the mapping unit is configured to generate a new first-protocol message and forward this message to the central station upon receiving a second-protocol message from the reader by

- extracting the second-protocol tag identification from the second-protocol message,

- retrieving that first-protocol tag identification that correlates to the extracted second-protocol tag identification from the correlation unit,

- generating said new first-protocol message by copying information from said second-protocol message according to a predetermined mapping between the second protocol and the first protocol while replacing the second-protocol tag identification by the retrieved first-protocol tag identification, and

- forwarding the generated new first-protocol message to the central station;

wherein the central station is configured to receive and store first-protocol messages from the reader as well as new first-protocol messages from the mapping unit and to identify a vehicle by means of the first-protocol tag identification therein.

2. Vehicle identification system according to claim 1, wherein the central station is also connected to said correlation unit or is connected to a further correlation unit having the same content,

and wherein the central station is configured to detect which received messages are new first-protocol messages by looking-up in the correlation unit or further correlation unit, respectively, if the tag identification of a received message is included in the reserved subset of first-protocol tag identifications,

and is further configured to forward a new first-protocol message detected in this way to a further central station.

3. Vehicle identification system according to claim 2, wherein a further mapping unit is interposed between the central unit and the further central unit and is configured to reconstruct the second-protocol message upon receiving said detected new first-protocol message from the central station by

- extracting the first-protocol tag identification from said detected new first-protocol message,

- retrieving that second-protocol tag identification that correlates to the extracted first-protocol tag identification from the correlation unit, and

- reconstructing said second-protocol message by copying information from said new first-protocol message according to a predetermined mapping between the first protocol and the second protocol while replacing the first-protocol tag identification by the retrieved second-protocol tag identification;

and wherein the further mapping unit is further configured to forward said reconstructed second-protocol message to the further central unit.

4. Vehicle identification system according to any one of the claims 1 to 3, wherein the correlation unit is a database.

5. Vehicle identification system according to any one of the claims 1 to 3, wherein the correlation unit is a computing unit configured to execute a pre-defined algorithm.

6. Method for identifying a vehicle in a system comprising a central station, a roadside reader for wirelessly communicating with radio tags carried by vehicles, a mapping unit connected to the reader, and a correlation unit connected to the mapping unit, the reader being part or member of a lane controller which has an interface connected to an input of the central station via a connection, the reader having a first output which is connected to the interface and a second output which is connected to the mapping unit, and the mapping unit having an output which is also connected to the interface, the method comprising:

providing a correlation in the correlation unit between second-protocol tag identifications and first-protocol tag identifications from a reserved subset of first-protocol tag identifications that are not used for tags deployed in vehicles;

wirelessly transmitting a message according to the first protocol from a first tag to the reader, the message comprising a unique first-protocol identification of the tag;

5 wirelessly transmitting a message according to the second protocol from a second tag to the reader, the message comprising a unique second-protocol identification of the tag;

selectively forwarding the first-protocol message from the reader to the central station and the second-protocol message from the reader to the mapping unit;

10 in the mapping unit, generating and forwarding to the central station a new first-protocol message by

- extracting the second-protocol tag identification from the second-protocol message,

15 - retrieving that first-protocol tag identification that correlates to the extracted second-protocol tag identification from the correlation unit, and

20 - generating said new first-protocol message by copying information from said second-protocol message according to a predetermined mapping between the second protocol and the first protocol while replacing the second-protocol tag identification by the retrieved first-protocol tag identification, and

- forwarding the generated new first-protocol message to the central station;

25 in the central station, receiving and storing the first-protocol message from the reader as well as the new first-protocol message from the mapping unit and identifying a vehicle by means of the first-protocol tag identification thereof.

7. Method according to claim 6, wherein the central station is also connected to said correlation unit or is connected to a further correlation unit having the same content, the method comprising:

30 in the central unit, detecting whether a received message is a new first-protocol message by looking-up in the correlation unit or further correlation unit, respectively, if the tag identification of the received message is included in the re-

served subset of first-protocol tag identifications, and, if so,

forwarding the new first-protocol message detected in this way to a further central station.

5 8. Method according to claim 7, wherein a further mapping unit is interposed between the central unit and the further central unit, the method comprising:

in the further mapping unit, reconstructing the second-protocol message upon receiving said detected new first-protocol message from the central station by

10 - extracting the first-protocol tag identification from said detected new first-protocol message,

15 - retrieving that second-protocol tag identification that correlates to the extracted first-protocol tag identification from the correlation unit, and

20 - reconstructing said second-protocol message by copying information from said new first-protocol message according to a predetermined mapping between the first protocol and the second protocol while replacing the first-protocol tag identification by the retrieved second-protocol tag identification;

and forwarding said reconstructed second-protocol message from the further mapping unit to the further central unit.

9. Vehicle identification system according to any one of the claims 6 to 8, wherein the correlation unit is a database.

25 10. Vehicle identification system according to any one of the claims 6 to 8, wherein the correlation unit is a computing unit executing a pre-defined algorithm.

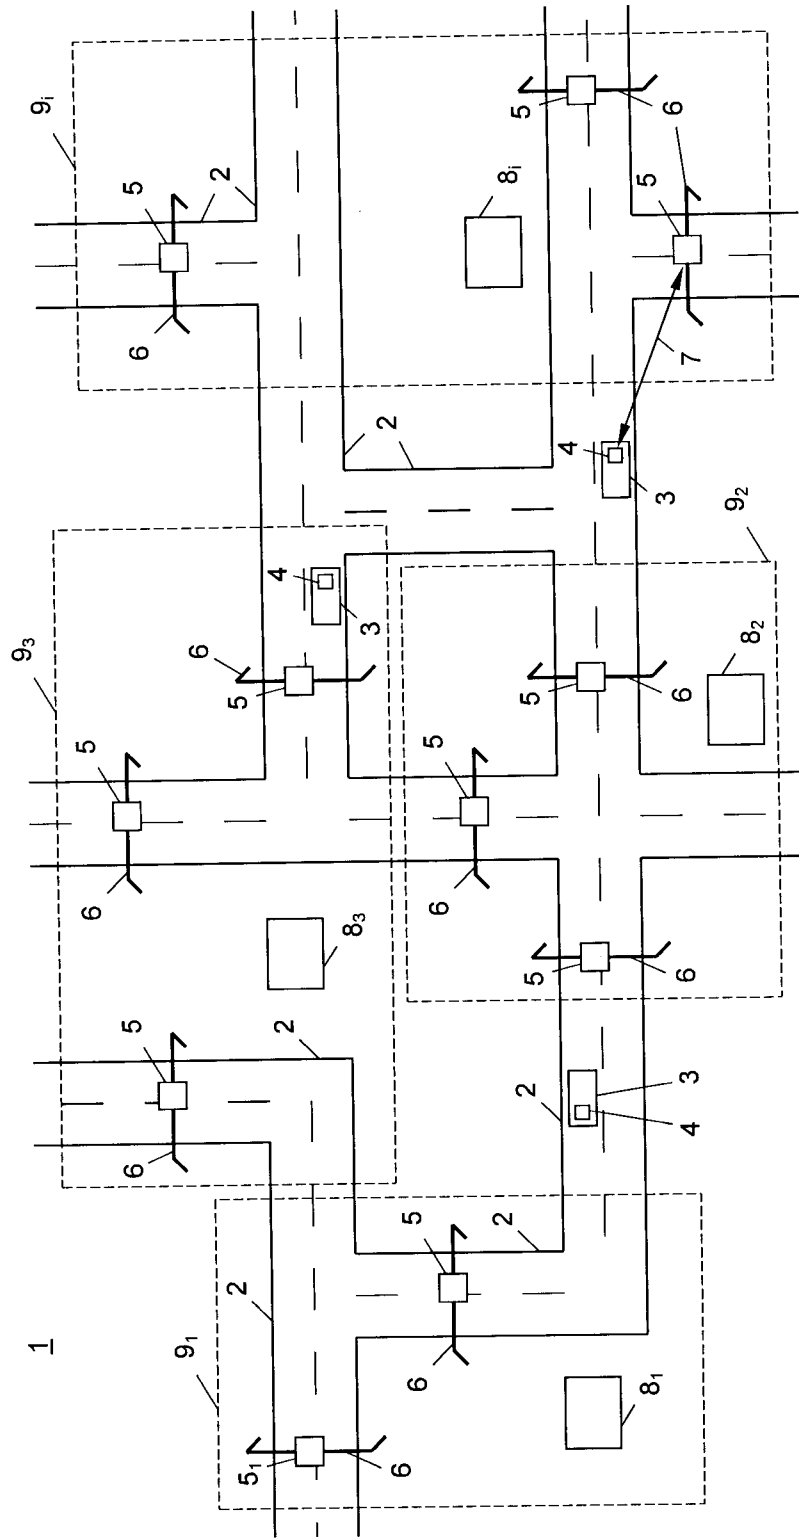


Fig. 1

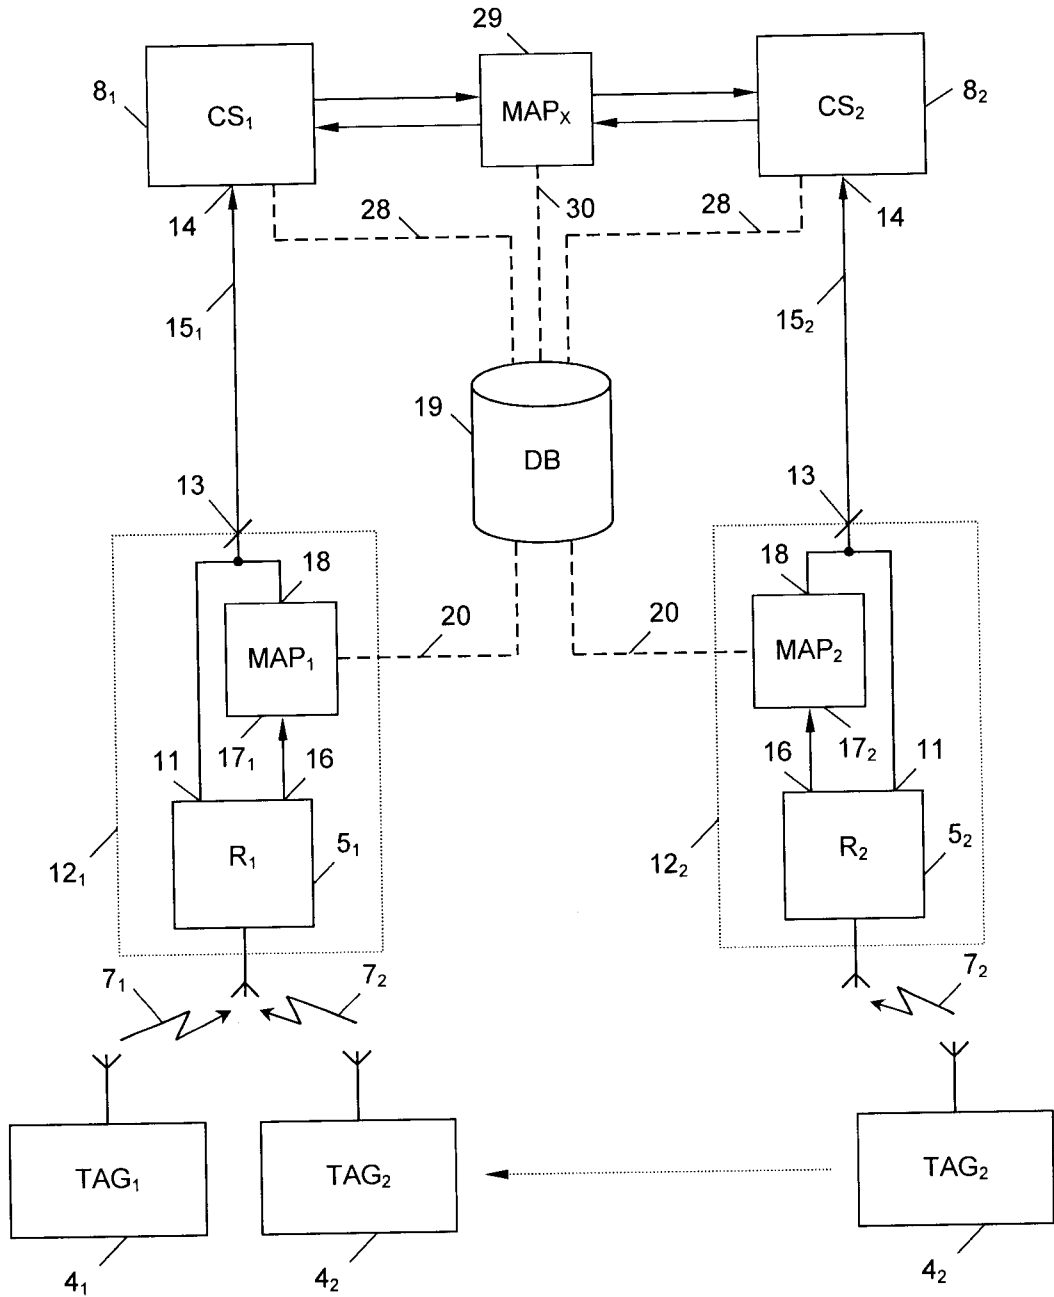


Fig. 2

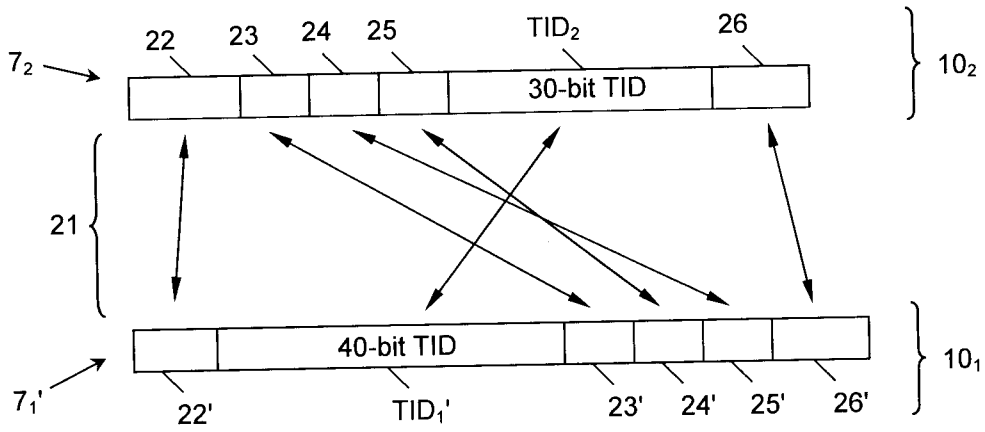


Fig. 3

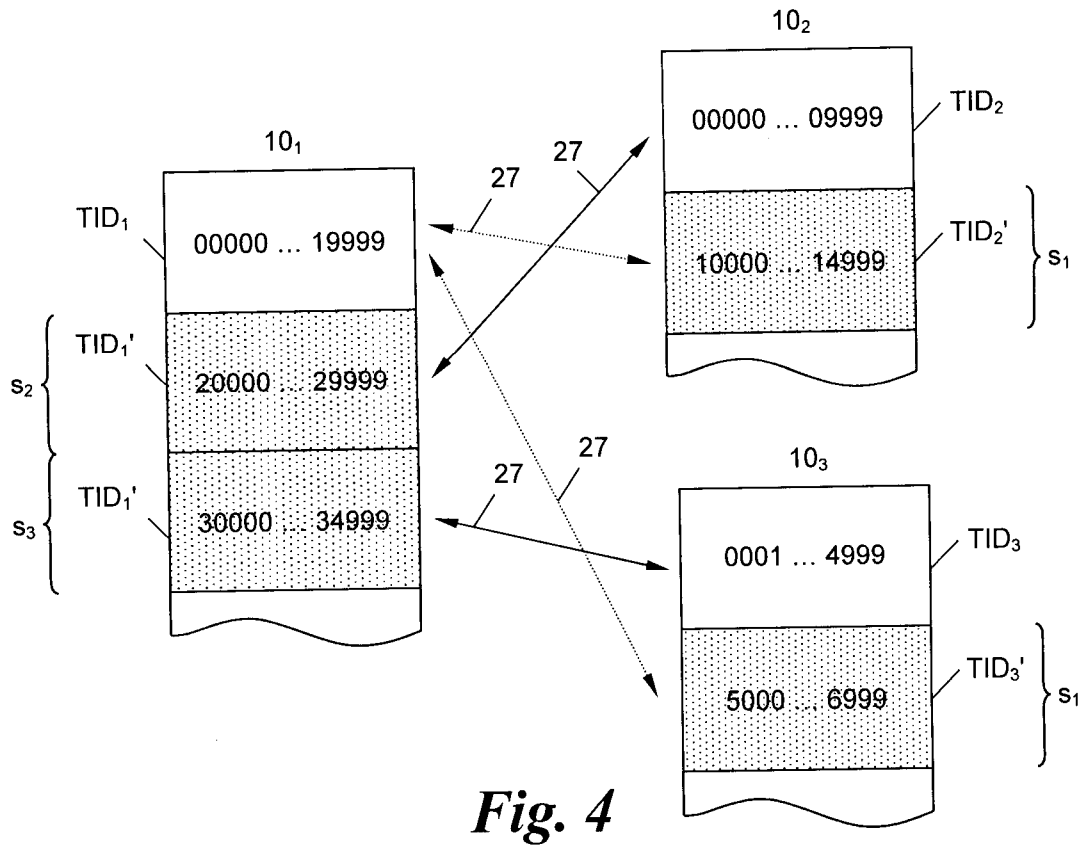


Fig. 4

