



(22) Date de dépôt/Filing Date: 2001/03/28

(41) Mise à la disp. pub./Open to Public Insp.: 2002/03/14

(45) Date de délivrance/Issue Date: 2003/12/16

(30) Priorité/Priority: 2000/09/14 (2000-285230) JP

(51) Cl.Int.⁷/Int.Cl.⁷ F02C 7/00


(72) Inventeurs/Inventors:
SEKIHARA, MASARU, JP;
SAKURAI, SHIGEO, JP

(73) Propriétaire/Owner:
HITACHI, LTD., JP

(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : TURBINE A GAZ, ET METHODE DE REPARATION CONNEXE

(54) Title: GAS TURBINE AND REPAIR METHOD THEREFOR

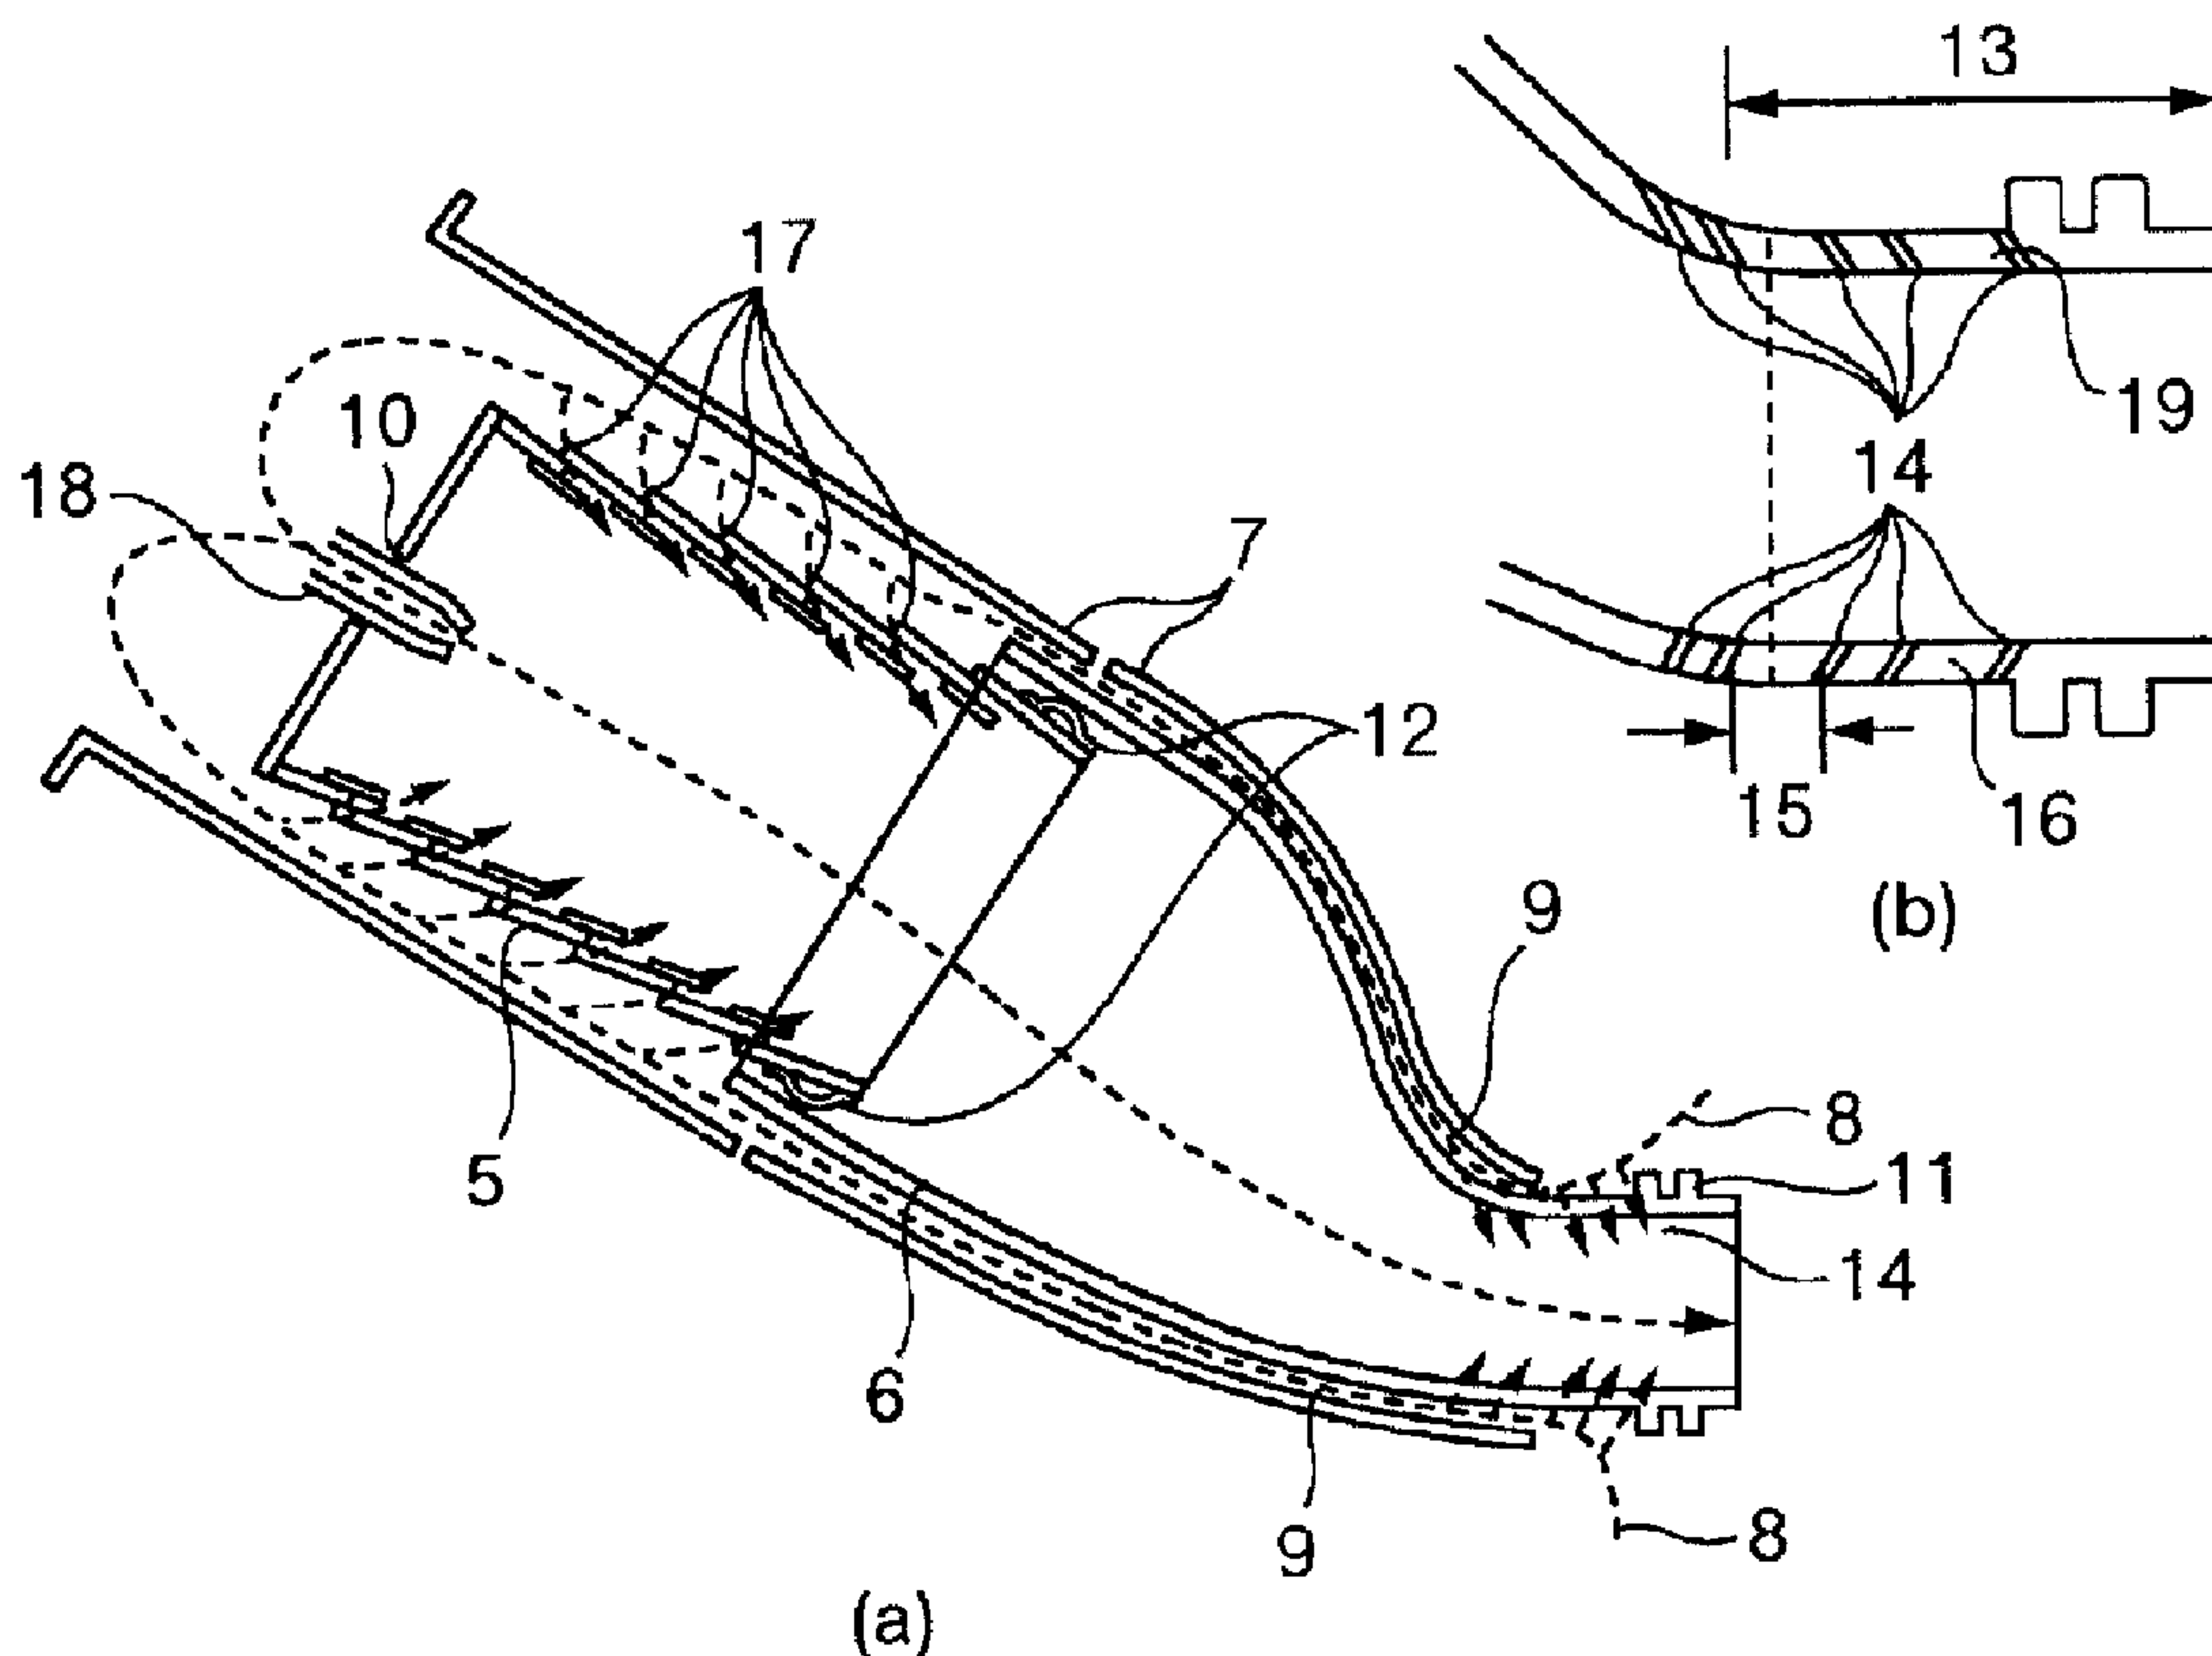

(57) Abrégé/Abstract:

A gas turbine has a compressor for compressing air as a working fluid, a combustor for producing combustion gas by mixing fuel with the compressed air, and a turbine for generating a rotating force at the time of expansion of combustion gas. The gas turbine further includes a cylindrical liner; a transition piece for transferring the working fluid from the liner to the turbine; an outlet portion of the transition piece, which has a region parallel with a direction of a rotating shaft of the turbine; cooling holes formed in the region so that intervals thereof are lengthened partially; and a picture frame portion provided to secure stiffness at an outlet of the outlet portion.

ABSTRACT OF THE DISCLOSURE

A gas turbine has a compressor for compressing air as a working fluid, a combustor for producing combustion gas by mixing fuel with the compressed air, and a turbine for generating a rotating force at the time of expansion of combustion gas. The gas turbine further includes a cylindrical liner; a transition piece for transferring the working fluid from the liner to the turbine; an outlet portion of the transition piece, which has a region parallel with a direction of a rotating shaft of the turbine; cooling holes formed in the region so that intervals thereof are lengthened partially; and a picture frame portion provided to secure stiffness at an outlet of the outlet portion.

- 1 -

GAS TURBINE AND REPAIR METHOD THEREFOR

BACKGROUND OF THE INVENTION

The present invention relates to a combustor that is a component of a gas turbine, more particularly, relates to a transition piece for transferring a
5 working fluid having been burnt to an annular flow path of a gas turbine through a cylindrical liner and a repair method therefor.

As a method for repairing a transition piece of a combustor, a method in which cracks are repaired
10 and residual stress is relieved and wear resistance is improved by combining shot peening and solution heat treatment has been known and has been disclosed in JP-A-6-288549 specification, for example.

However, it has been demanded that the above-
15 described prior art be improved more to achieve high efficiency for energy saving, increased strength and prolonged service life of an outlet portion of combustor, and decreased repair and inspection manpower.

SUMMARY OF THE INVENTION

20 An object of the present invention is to achieve energy saving, increased strength, prolonged service life, and decreased repair and inspection manpower while facilitating the replacement and repair of a transition piece of a combustor.

- 2 -

To attain the above object, the present invention provides a gas turbine comprising a compressor for compressing air as a working fluid, a combustor for producing combustion gas by mixing fuel
5 with the compressed air, and a turbine for generating a rotational power at the time of expansion of the combustion gas, and further comprising a cylindrical liner; a transition piece for transferring the working fluid from the liner to the turbine; an outlet portion
10 of the transition piece, which has a region parallel with the direction of rotating shaft of the turbine; cooling holes formed in the region so that the intervals thereof are lengthened partially; and a picture frame portion provided to secure stiffness near
15 the outlet of the outlet portion.

Also, the present invention provides a repair method for a gas turbine having a compressor for compressing air as a working fluid, a combustor for producing combustion gas by mixing fuel with the compressed air, and a turbine for generating a rotational
20 power at the time of expansion of the combustion gas, comprising providing, at an outlet portion of a transition piece for transferring the working fluid to the turbine, a region parallel with the direction of
25 rotating shaft of the turbine, cooling holes formed in the region so that the intervals thereof are lengthened partially, and a picture frame portion to secure stiffness near the outlet of the outlet portion;

- 3 -

cutting the outlet portion in a portion where the intervals of the cooling holes are lengthened partially and separating the picture frame portion, and welding a picture frame portion prepared in advance in the cut
5 portion for replacement.

Further, in the repair method described above, it is preferable that deterioration in the cut portion be evaluated, and the surface temperature state of the outlet portion be estimated, whereby the
10 arrangement of the cooling holes be determined.

Further, in the repair method described above, the picture frame portion prepared in advance is preferably another picture frame portion that has been repaired and is reused.

15 Further, in the repair method described above, the length of the whole of the transition piece is preferably adjusted by grinding the end face of the cut-off picture frame portion.

Further, in the repair method described
20 above, the picture frame portion is preferably welded to the cut portion via a connecting member.

Further, in the gas turbine described above, the picture frame portion is preferably welded via a connecting member formed with cooling holes.

25 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a sectional view showing a transition piece construction of one embodiment in

- 4 -

accordance with the present invention;

Fig. 2 is a sectional view showing a construction of a conventional gas turbine;

Fig. 3 is views showing a repair method
5 (procedure) for a transition piece of one embodiment in accordance with the present invention;

Fig. 4 is sectional views showing an outlet portion of a transition piece of one embodiment in accordance with the present invention;

10 Fig. 5 is views showing a repair method (procedure) for a transition piece of another embodiment in accordance with the present invention;

Fig. 6 is views showing a repair method (procedure) for a transition piece of still another
15 embodiment in accordance with the present invention;

Fig. 7 is views showing a repair method (procedure) for a transition piece of still another embodiment in accordance with the present invention;

Fig. 8 is sectional views showing a picture
20 frame portion of one embodiment in accordance with the present invention;

Fig. 9 is views showing formation of a connecting member of one embodiment in accordance with the present invention;

25 Fig. 10 is a sectional view showing intervals between cooling holes of one embodiment in accordance with the present invention;

Fig. 11 is a side view showing arrangement of

- 5 -

cooling holes of one embodiment in accordance with the present invention;

Fig. 12 is views showing a repair method (procedure) for a transition piece of still another embodiment in accordance with the present invention;

Fig. 13 is views showing a repair method (procedure) for a transition piece of still another embodiment in accordance with the present invention;

Fig. 14 is views showing a repair method (procedure) for a transition piece of still another embodiment in accordance with the present invention;

Fig. 15 is views showing a repair method (procedure) for a transition piece of still another embodiment in accordance with the present invention;

Fig. 16 is views showing a repair method (procedure) for a transition piece of still another embodiment in accordance with the present invention; and

Fig. 17 is views showing a repair method (procedure) for a transition piece of still another embodiment in accordance with the present invention.

PREFERRED EMBODIMENTS OF THE INVENTION

Embodiments of the present invention will now be described with reference to the accompanying drawings.

Fig. 2 is a sectional view showing a general construction of a gas turbine. The gas turbine mainly

- 6 -

comprises a compressor 1, a combustor 2 and a turbine 3. The compressor 1 adiabatically compresses air sucked from the atmosphere into a gas path 4 as a working fluid. The combustor 2 mixes fuel with the compressed air supplied from the compressor 1 and burns the mixture to produce a high-temperature and high-pressure gas. The turbine 3 generates rotational power when the combustion gas introduced from the combustor 2 expands. Exhaust from the turbine 3 is discharged into the atmosphere. The remaining power, which is the result of subtraction of the power for driving the compressor 1 from the rotational power generated by the turbine 3, is the power generated by the gas turbine, which drives a generator.

As shown in Fig. 1, the combustor 2 includes a liner 5, a transition piece 6, and a flow sleeve 7 located on the outside of the liner 5 and the transition piece 6 to accelerate cooling.

The transition piece 6 has an inlet of a cylindrical shape and an outlet of an inverse trapezoidal shape. On the transition piece 6, an external pressure caused by discharge air of the compressor 1 is exerted on the outside surface, and an internal pressure caused by combustion gas is exerted on the inside. Therefore, in comparison with the cylindrical shape to which the pressure uniformly acts, the inverse trapezoidal shape is more easily subjected to creep deformation. Especially on the outlet side, the metal

- 7 -

temperature increases because the gas flow path area is decreased as compared with the area on the inlet side and therefore the outlet side is exposed to a high-temperature environment, so that the creep deformation
5 tends to become still more remarkable. The outlet portion exposed to a harsh environment in this manner is most susceptible to damage including wear and thermal fatigue of fitting portion and cracks caused by creep, so that the outlet portion is supposed to be a
10 part that governs the service life of transition piece.

For a recent gas turbine facility, increased output has been demanded to respond to an increase in power demand in the summer, and also high efficiency has been demanded to save energy.

15 As means for increasing the output, there is a tendency for the annular flow path area, that is, the size of the gas turbine to be increased. Also, as means for increasing the efficiency, there is a tendency for the pressure ratio of compressor to be
20 increased. Both of these means lead to an increase in pressure load applied to the combustor, so that it is expected that the combustor will be subjected to still higher pressure load in the future. As a necessary consequence, increased strength and prolonged service
25 life of the outlet portion are demanded.

Further in recent years, as a social demand for a reduction in electric fee increases, it has been of urgent necessity to reduce the power generation

- 8 -

cost. In particular, the repair cost of high-temperature parts such as the combustor and the moving and stationary blades of turbine accounts for a large percentage of the repair cost of gas turbine.

5 Therefore, a decrease in period and manpower of periodic inspection has been demanded.

Further, since the load environment at an actual power station varies, an initial cooling design is sometimes not necessarily the optimum design.

10 Therefore, the cooling design properly corresponding to the load environment is also of importance to the prolonged service life of transition piece.

Referring to Fig. 1, a working fluid 8 discharged from the compressor 1 is introduced to a gap 9 between the flow sleeve 7 and the transition piece 6. The flow velocity of the working fluid 8 in the gap 9 increases, so that the cooling effect on the outside surface of the transition piece 6 is enhanced.

In a diffusion combustion type combustor, in which fuel is not mixed with air before combustion, some of the working fluid 8 flowing through the gap 9 is introduced into the interior of the liner 5 through cooling holes 17 formed in the outside surface of the liner 5 to cool the liner 5, and the remainder thereof flows into the interior of the liner 5 together with fuel sprayed through a nozzle 10 to be used for combustion.

As shown in Fig. 1, the fuel spray nozzle 10

- 9 -

is inserted in an insertion portion 18 provided on the inlet side of the liner 5. The working fluid 8 having been burnt is discharged into an annular flow path of the turbine 3 from the liner 5 through the transition 5 piece 6.

A plate spring 12 is welded to the outlet side of the liner 5 and the liner 5 is inserted in the transition piece 6. The transition piece 6 is contained in the flow sleeve 7 with the liner 5 10 inserted in the inlet portion thereof via the plate spring 12, and is supported on the inlet side by a fitting portion that restrains only deformation in the circumferential direction of an inlet cross section. Also, near the outlet of the transition piece 6, a 15 picture frame portion 11 is provided to increase the stiffness.

The flow sleeve 7 is supported on the inlet side with the transition piece 6 by a fitting portion that restrains only deformation in the circumferential 20 direction of inlet cross section, and likewise, it is supported by a casing via a fitting portion that restrains only deformation in the circumferential direction of inlet cross section. On the outlet side of the flow sleeve 7, the position of the flow sleeve 7 25 is determined by being connected with the casing together with the transition piece 6.

As shown in (a) and (b) of Fig. 3, an outlet portion 16 consisting of the picture frame portion 11

- 10 -

having ribs and a connecting member 19 for length
adjustment formed with cooling holes 14 is provided
with a region 13 parallel with the direction of a gas
turbine rotating shaft as shown in Fig. 1 (b). The
5 intervals of the cooling holes 14 in the outlet portion
are lengthened partially. Thereby, the cutting
operation of the outlet portion 16 is made easy.

As shown in Fig. 3 (c), a damaged outlet
portion 16 is cut at a portion where the intervals of
10 the cooling holes 14 are lengthened partially to divide
the outlet portion 16 into the picture frame portion 11
having ribs and a region 21 with a constant plate
thickness. Wear and cracks occurred in the picture
frame portion 11 are repaired for reuse.

15 Further, a picture frame portion 11' and a
length adjusting connecting member 19' formed with
cooling holes 14 shown in Fig. 3(d) that have been
prepared in advance are welded to each other to form a
replacement outlet portion 16' as shown in Fig. 3(e).
20 Then, the outlet portion 16' is welded to the
transition piece 6 as shown in (f) and (g) of Fig. 3.

With the above-described repair method, only
the damaged outlet portion 16 is replaced rapidly, and
the cut-off outlet portion 16 is repaired separately.
25 Therefore, the replacement and repair cost can be
reduced, and the service life of the transition piece
and the whole of gas turbine can be prolonged.

When the replacement outlet portion 16' is

- 11 -

welded to the transition piece 6, the end face of the connecting member 19' for length adjustment is preferably ground to adjust the length of the whole of transition piece.

5 As shown in (a) and (b) of Fig. 4, the outlet portion 16 consists of the picture frame portion 11 and the connecting member 19, and has a region parallel with the gas turbine rotating shaft, and as shown in Fig. 4(c), the intervals of the cooling holes 14 are
10 lengthened partially. Therefore, the cut-off of the outlet portion 16 and the welding of the spare part thereof are made easy.

 Also, for the transition piece 6 once replaced, as shown in Fig. 5(a), a damaged outlet
15 portion 16 is cut off in a cutting plane 20. The cut-off outlet portion 16 shown in Fig. 5(b) is divided into the picture frame portion 11 and the region 21 with a constant plate thickness, as shown in Fig. 5(c). Wear and cracks occurred in the picture frame portion
20 11 may be repaired for reuse.

 As shown in (a) and (b) of Fig. 6, a damaged outlet portion 16 may be cut off at the cutting plane 20 and at a position between the picture frame portion 11 and the region 21 with a constant plate thickness
25 into the picture frame portion 11 having ribs and the region 21 with a constant plate thickness. In this example, as shown in (c) and (d) of Fig. 6, the connecting member 19 formed with the cooling holes 14

- 12 -

is welded to the transition piece 6 and the picture frame portion 11' is welded to the connecting member 19'.

Also, for the transition piece 6 once
5 replaced, as shown in (a) and (b) of Fig. 7, the outlet portion 16 may be cut in the cutting plane 20 and at a position between the picture frame portion 11 and the region 21 with a constant plate thickness, and wear and cracks occurred in the picture frame portion 11 may be
10 repaired to reuse the picture frame portion 11.

Fig. 8 shows sectional views of the picture frame portion 11 constituting the outlet portion 16. The cooling holes 14 may be formed at the whole periphery of the picture frame portion 11, or may be
15 formed at the partial periphery thereof to effect cooling efficiently. Also, as shown in Fig. 8(c), the picture frame portion 11 is divided into several pieces in the circumferential direction, and when wear and cracks occurred in the picture frame portion 11 are
20 repaired, a divided piece 22 is cut off, and a replacement divided piece 22' is welded. Thereby, the work can be made easy, and the cost can be made relatively low because the cooling holes 14 can be made in the connecting member 19 after the plate has been
25 bent as shown in Fig. 9.

Further, since the load environment of an actual turbine at an actual power station varies, the initial cooling design is sometimes not necessarily the

- 13 -

optimum design. However, when the damaged outlet portion 16 is cut off, the degree of damage on the surface is evaluated, by which the arrangement of the cooling holes 14 can be optimized in the direction of the gas turbine rotating shaft as shown in Fig. 10 and in the circumferential direction as shown in Fig. 11 to restrain a local high-temperature zone.

Further, as shown in Fig. 12, in order to restrain creep deformation, the plate thickness of the transition piece 6 used continuously is preferably made larger than that of the outlet portion 16 capable of being replaced and repaired. In this case, for the transition piece 6 once replaced, as shown in Fig. 13(a), the damaged outlet portion 16 is cut off in the cutting plane 20 in which cutting operation is easy, and further the cut-off outlet portion 16 shown in Fig. 13(b) is divided into the picture frame portion 11 having ribs and the region 21 with a constant plate thickness as shown in Fig. 13(c). Thereby, wear and cracks occurred in the picture frame portion 11 are repaired to reuse the picture frame portion 11.

Further, as shown in Fig. 14, the outlet portion 16 is cut off in the cutting plane 20, and is divided into the picture frame portion 11 having ribs and the region 21 with a constant plate thickness as shown in (b) and (c) of Fig. 14, and a picture frame portion 11 with a small outside diameter may be welded instead.

- 14 -

As shown in Fig. 15, a connecting member 19' formed with the cooling holes 14 and having an inside diameter containing the transition piece 6 is welded to the picture frame portion 11' to form a replacement outlet portion 16', and the connecting member 19' may be welded to the transition piece 6 as shown in Fig. 15(d).

Further, the outlet portion 16 is cut off in the cutting plane 20 as shown in Fig. 16(a), and is divided into the picture frame portion 11 having ribs and the region 21 with a constant plate thickness as shown in Fig. 16(c). A connecting member 19' having a stepped inside diameter that is equal to the outside diameter of the transition piece 6 and the picture frame portion 11' is prepared, and the replacement outlet portion 16' is welded.

With regard to a transition piece 6 which has already exchanged or repaired, a connecting member 19 has an inner diameter at both ends thereof slightly larger than an outer diameter of the transition piece 6 and a picture frame portion 11, and another inner diameter at a central portion thereof substantially the same as an inner diameter of the transition piece 6 and the picture frame portion 11. As shown in Fig. 17(a), the connecting member 19 for length adjustment is cut. As shown in Fig. 17(b), the cut outlet portion 16 is divided into a picture frame portion 11 having ribs and the cut connecting member 19. Wear damage, cracks and

- 15 -

the like resulted on the picture frame portion 11 are repaired for reuse.

Further, as shown in Fig. 17(c), another picture frame portion 11' and another connecting member 5 19' which are manufactured in advance are welded to each other and then is welded to the transition piece 6 as shown in Fig. 17(d).

According to the present invention, the cut-off of the outlet portion from the transition piece can 10 be made easy, the replacement and repair of outlet portion can be made easy, and energy saving, increased strength, prolonged service life, and decreased repair and inspection manpower can be achieved.

- 16 -

WHAT IS CLAIMED IS:

1. A gas turbine having a compressor for compressing air as a working fluid, a combustor for producing combustion gas by mixing fuel with the compressed air, and a turbine for generating rotational power at the time of expansion of the combustion gas, comprising

a cylindrical liner;

a transition piece for transferring said working fluid from said liner to said turbine;

an outlet portion of said transition piece, which has a region parallel with a direction of a rotating shaft of said turbine;

cooling holes formed in said region so that the intervals thereof are lengthened partially; and

a picture frame portion provided to secure stiffness near an outlet of said outlet portion.

2. A repair method for a gas turbine having a compressor for compressing air as a working fluid, a combustor for producing combustion gas by mixing fuel with the compressed air, and a turbine for generating rotational power at the time of expansion of the combustion gas, said method comprising:

providing, on an outlet portion of a transition piece for transferring said working fluid to said turbine, a region parallel with the direction of rotating shaft of said turbine, cooling holes in said region so that the intervals thereof are lengthened

- 17 -

partially, and a picture frame portion to secure stiffness of an outlet of said outlet portion, and cutting said outlet portion at a portion where the intervals of said cooling holes are lengthened partially to separate said picture frame portion from said transition piece, and

welding another picture frame portion prepared in advance to the cut portion for replacement.

3. The repair method for a gas turbine according to claim 2, further comprising: evaluating deterioration in said cut outlet portion; estimating the surface temperature state of said cut outlet portion; and determining arrangement of said cooling holes.

4. The repair method for a gas turbine according to claim 2, wherein said picture frame portion prepared in advance is another picture frame portion that has been cut from another transition piece and has been repaired for reuse.

5. The repair method for a gas turbine according to claim 2, wherein by grinding an end face of said cut-off picture frame portion, length of the whole of said transition piece is adjusted.

6. The repair method for a gas turbine according to claim 2, wherein said picture frame portion is welded to the cut portion via a connecting member.

7. The gas turbine according to claim 1, wherein said picture frame portion is welded to the outlet portion via a connecting member formed with cooling holes.

FIG.1

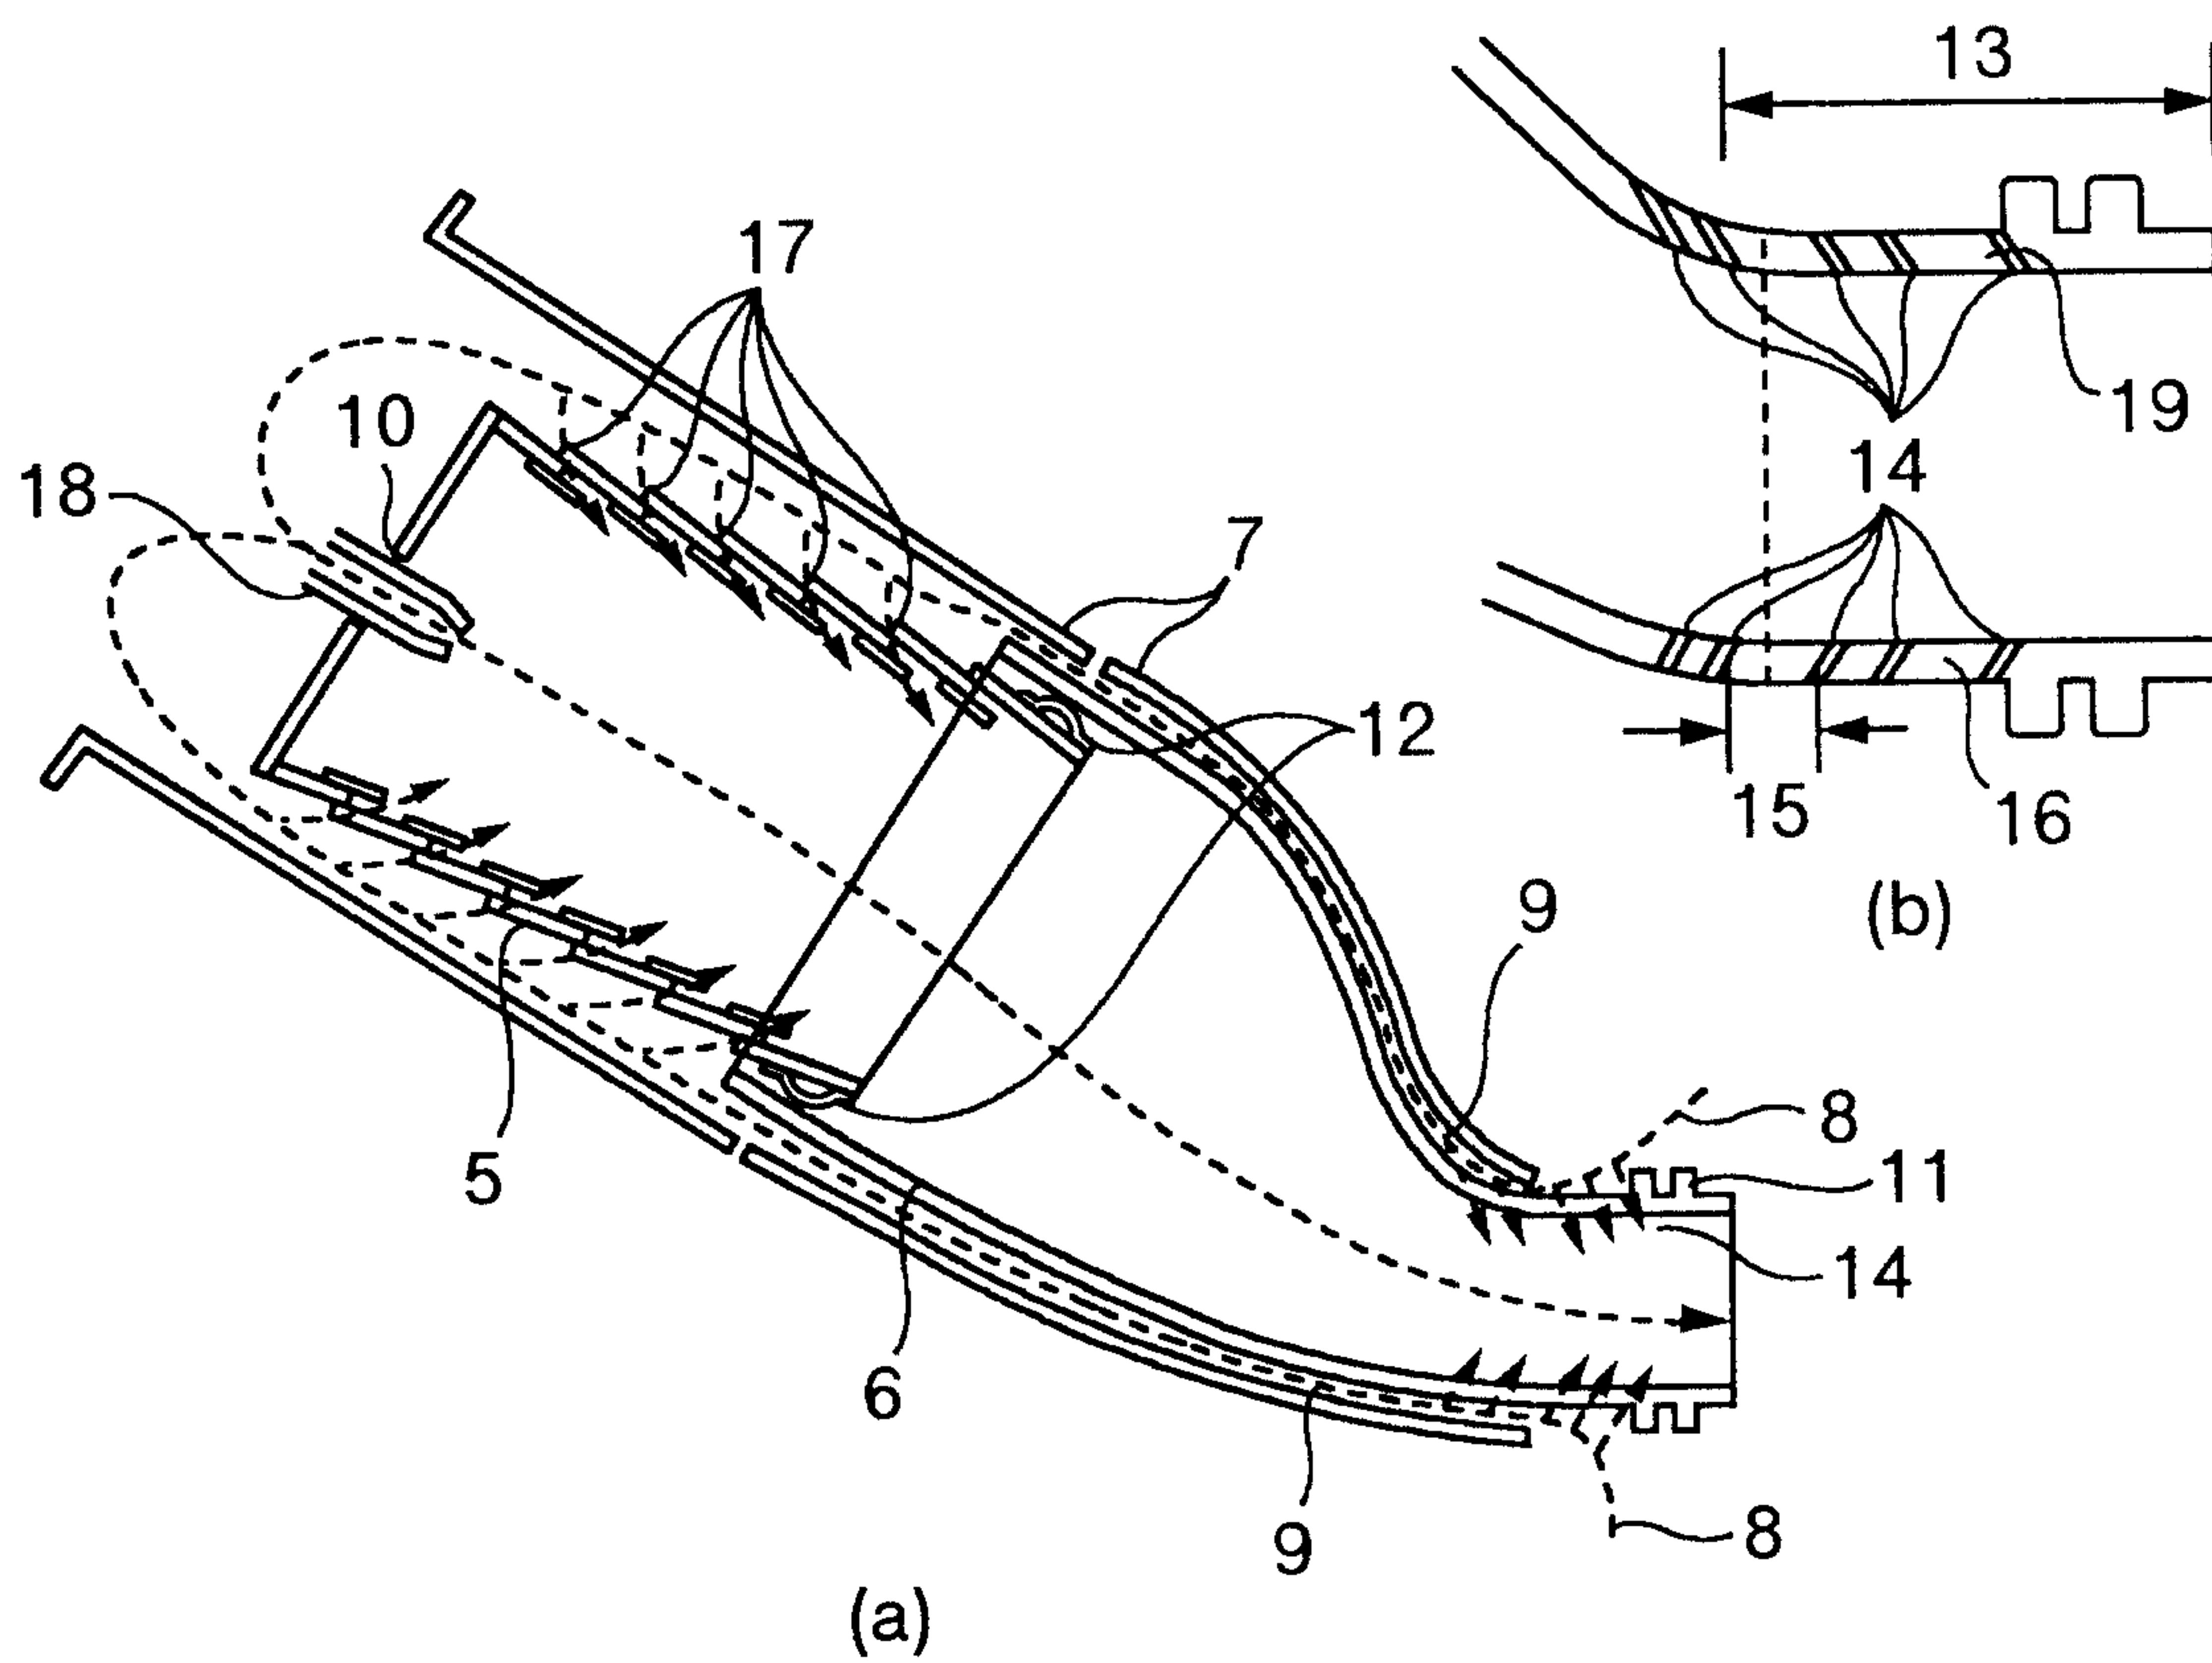


FIG.2

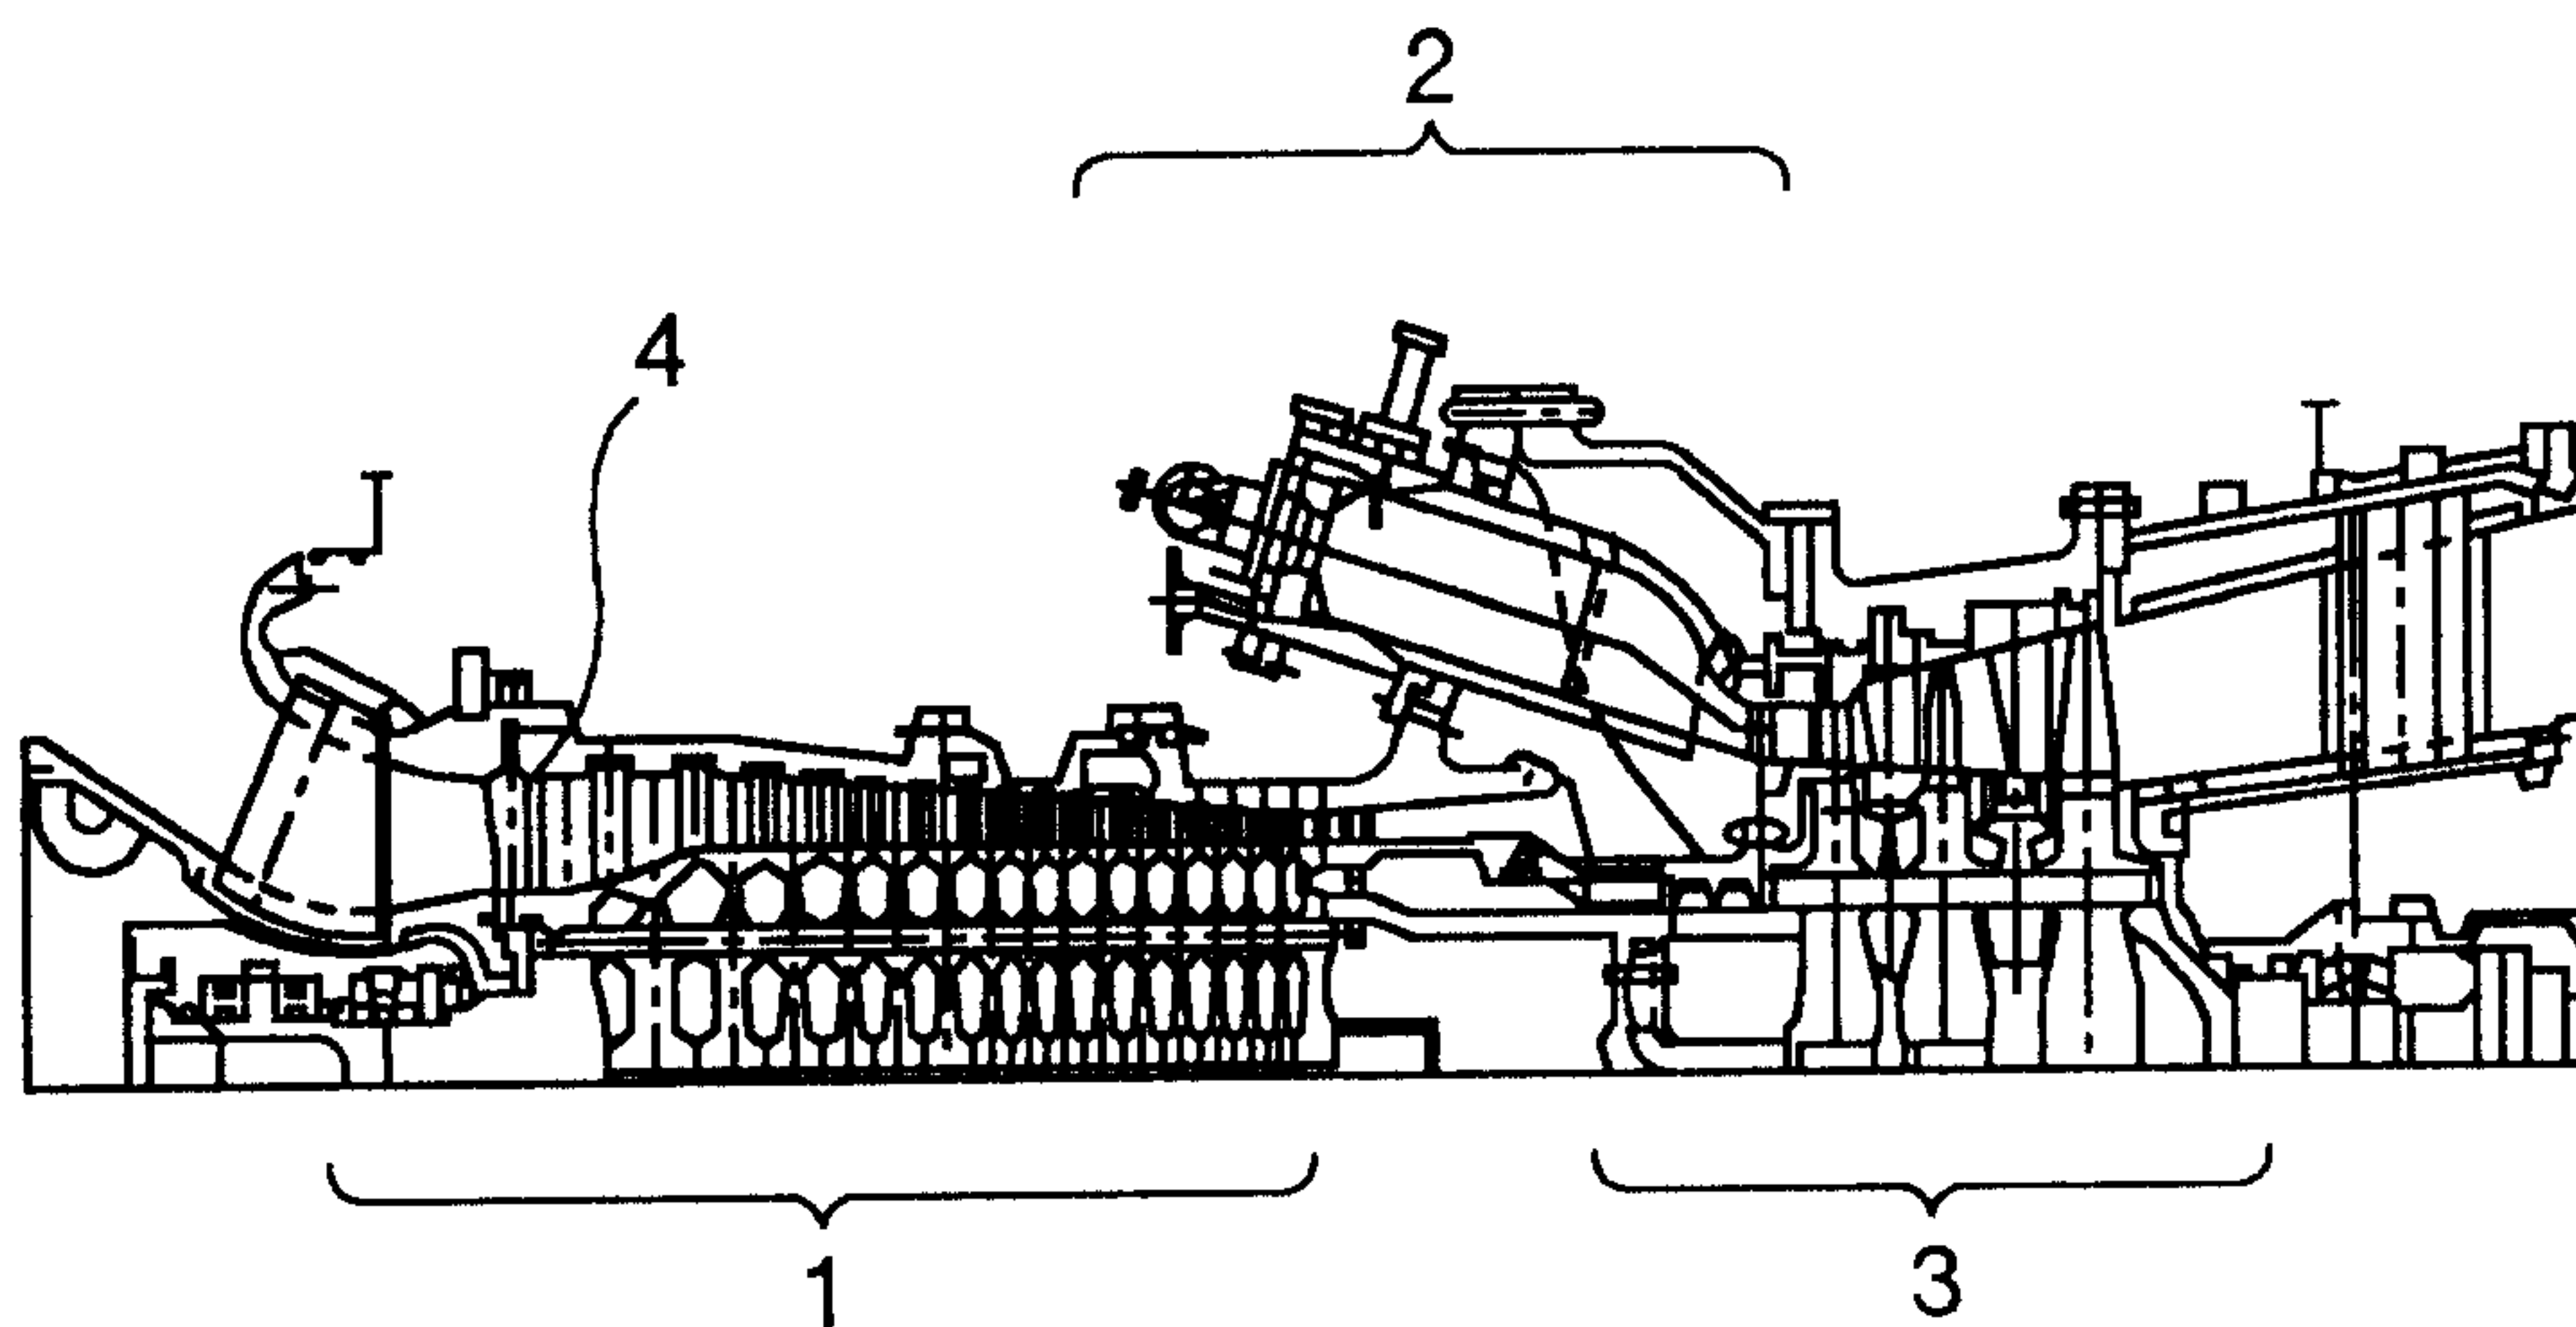


FIG.3



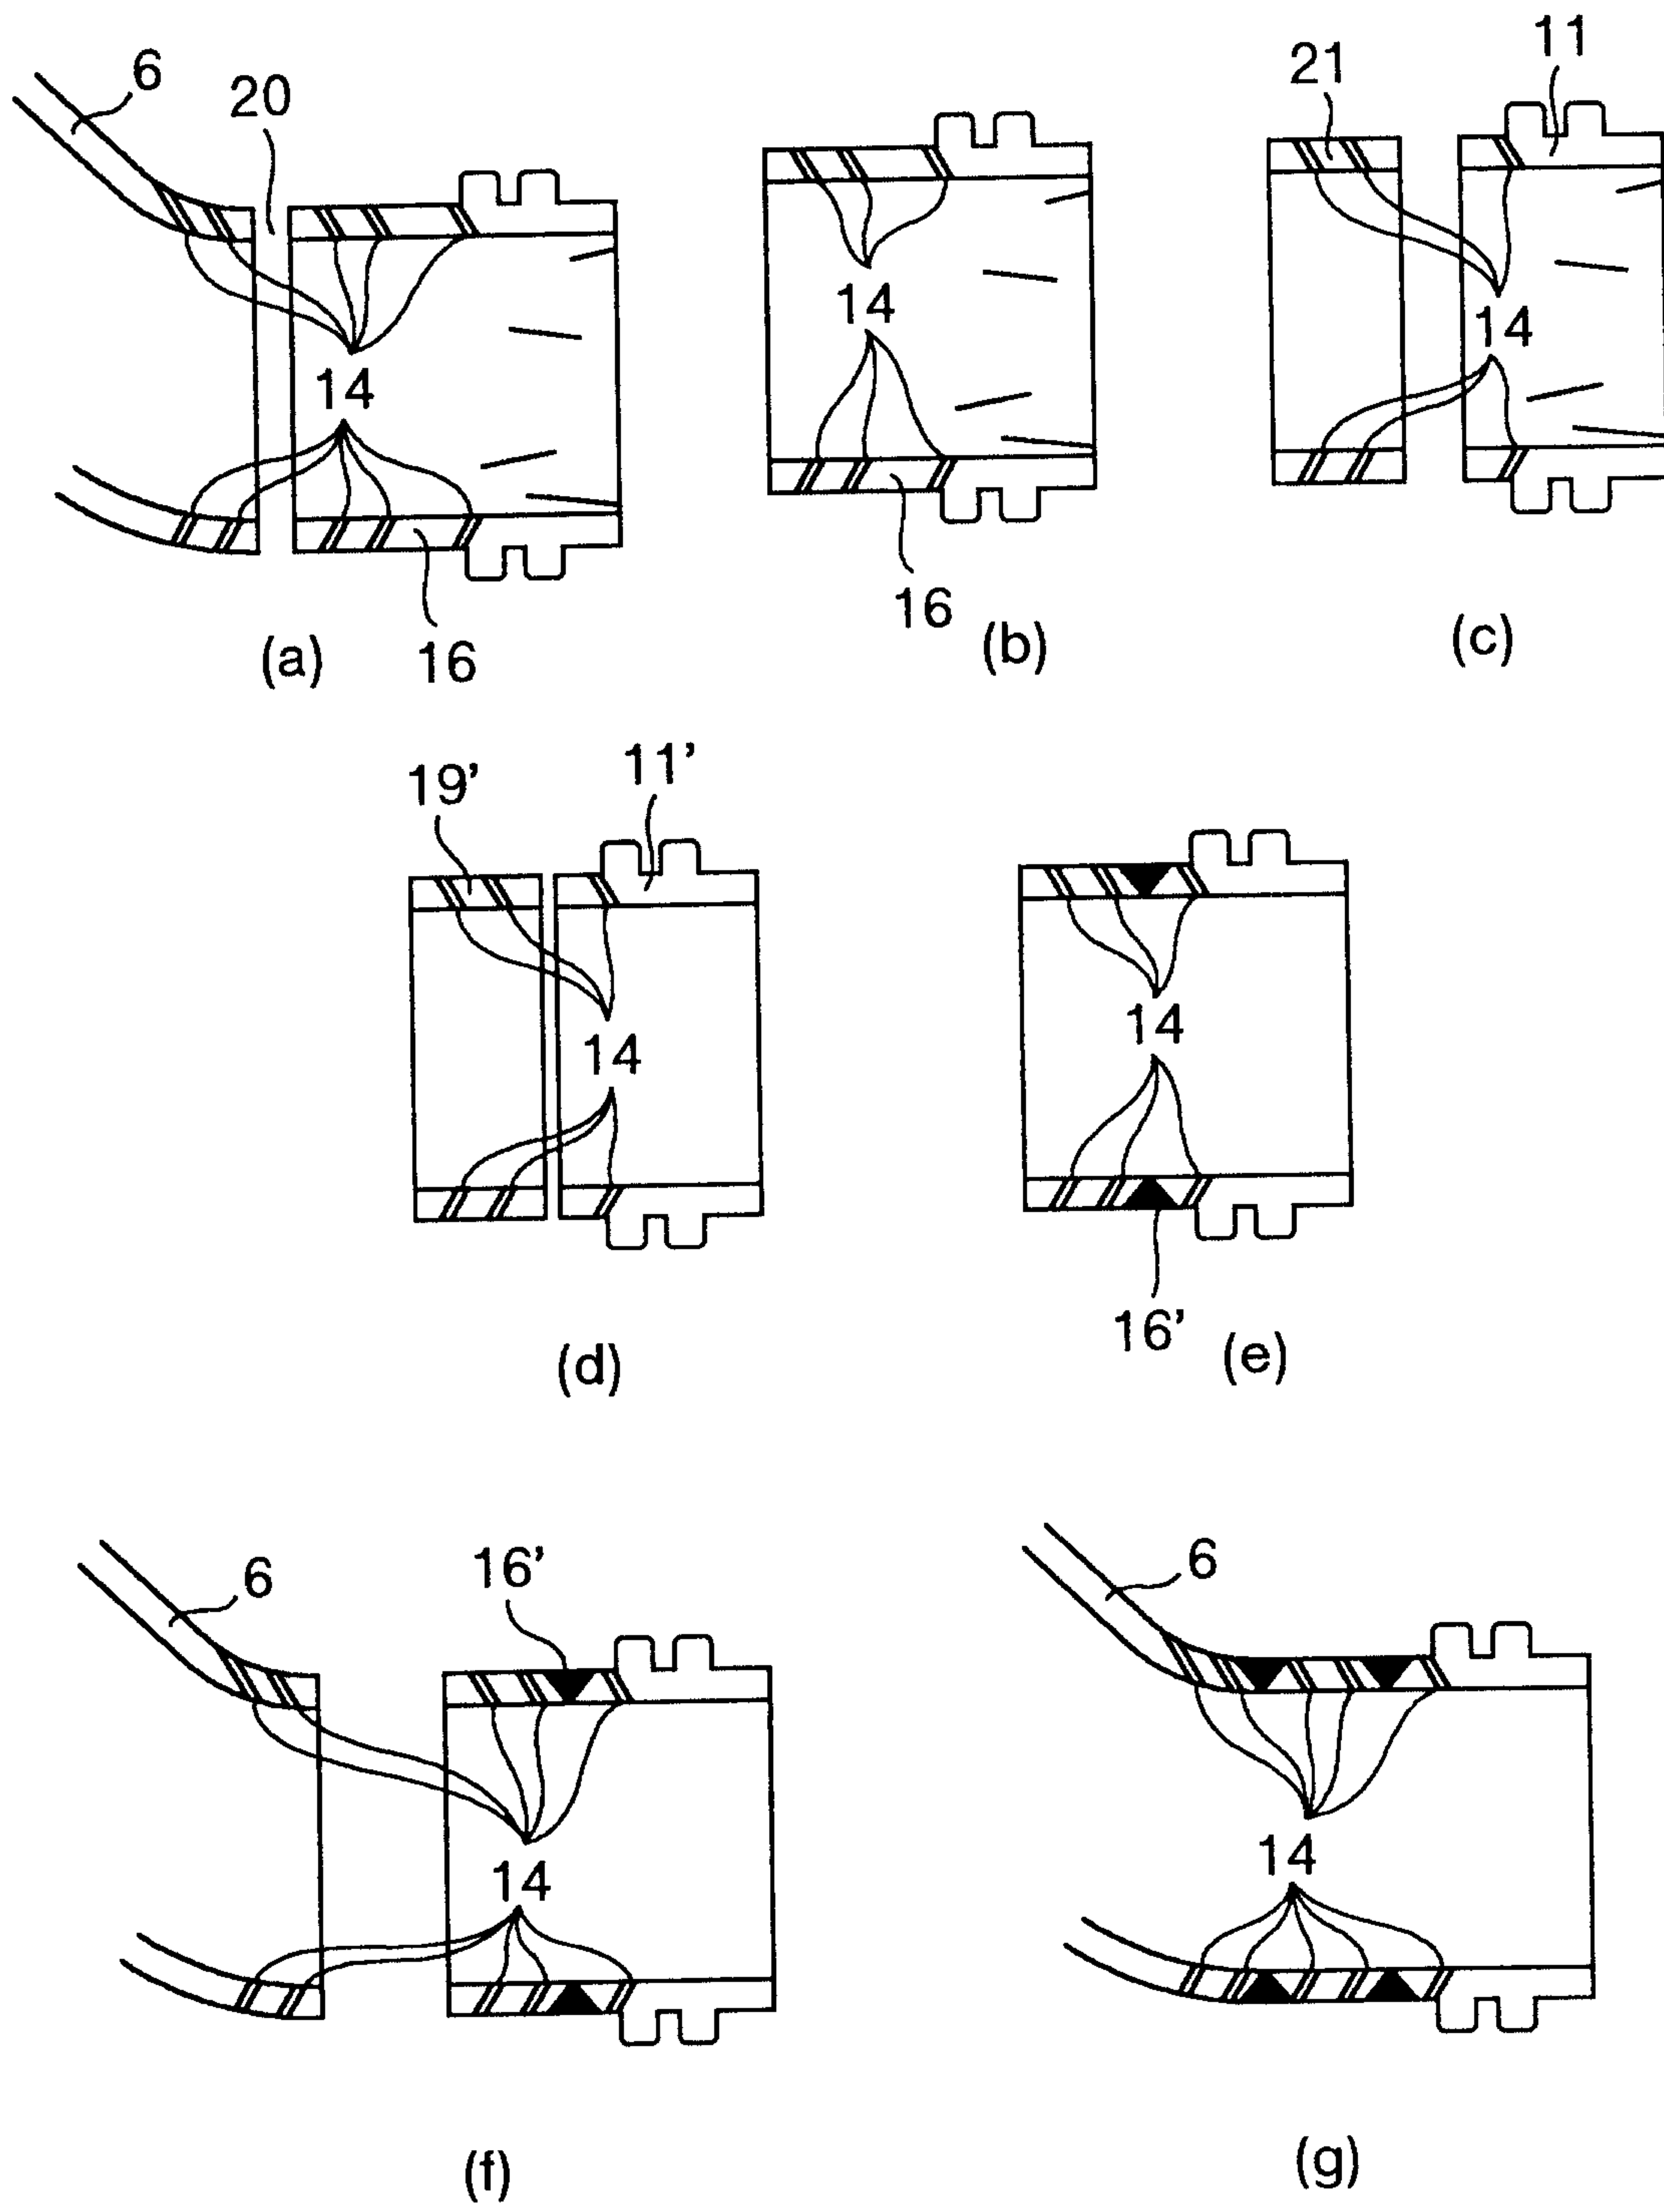



FIG.4

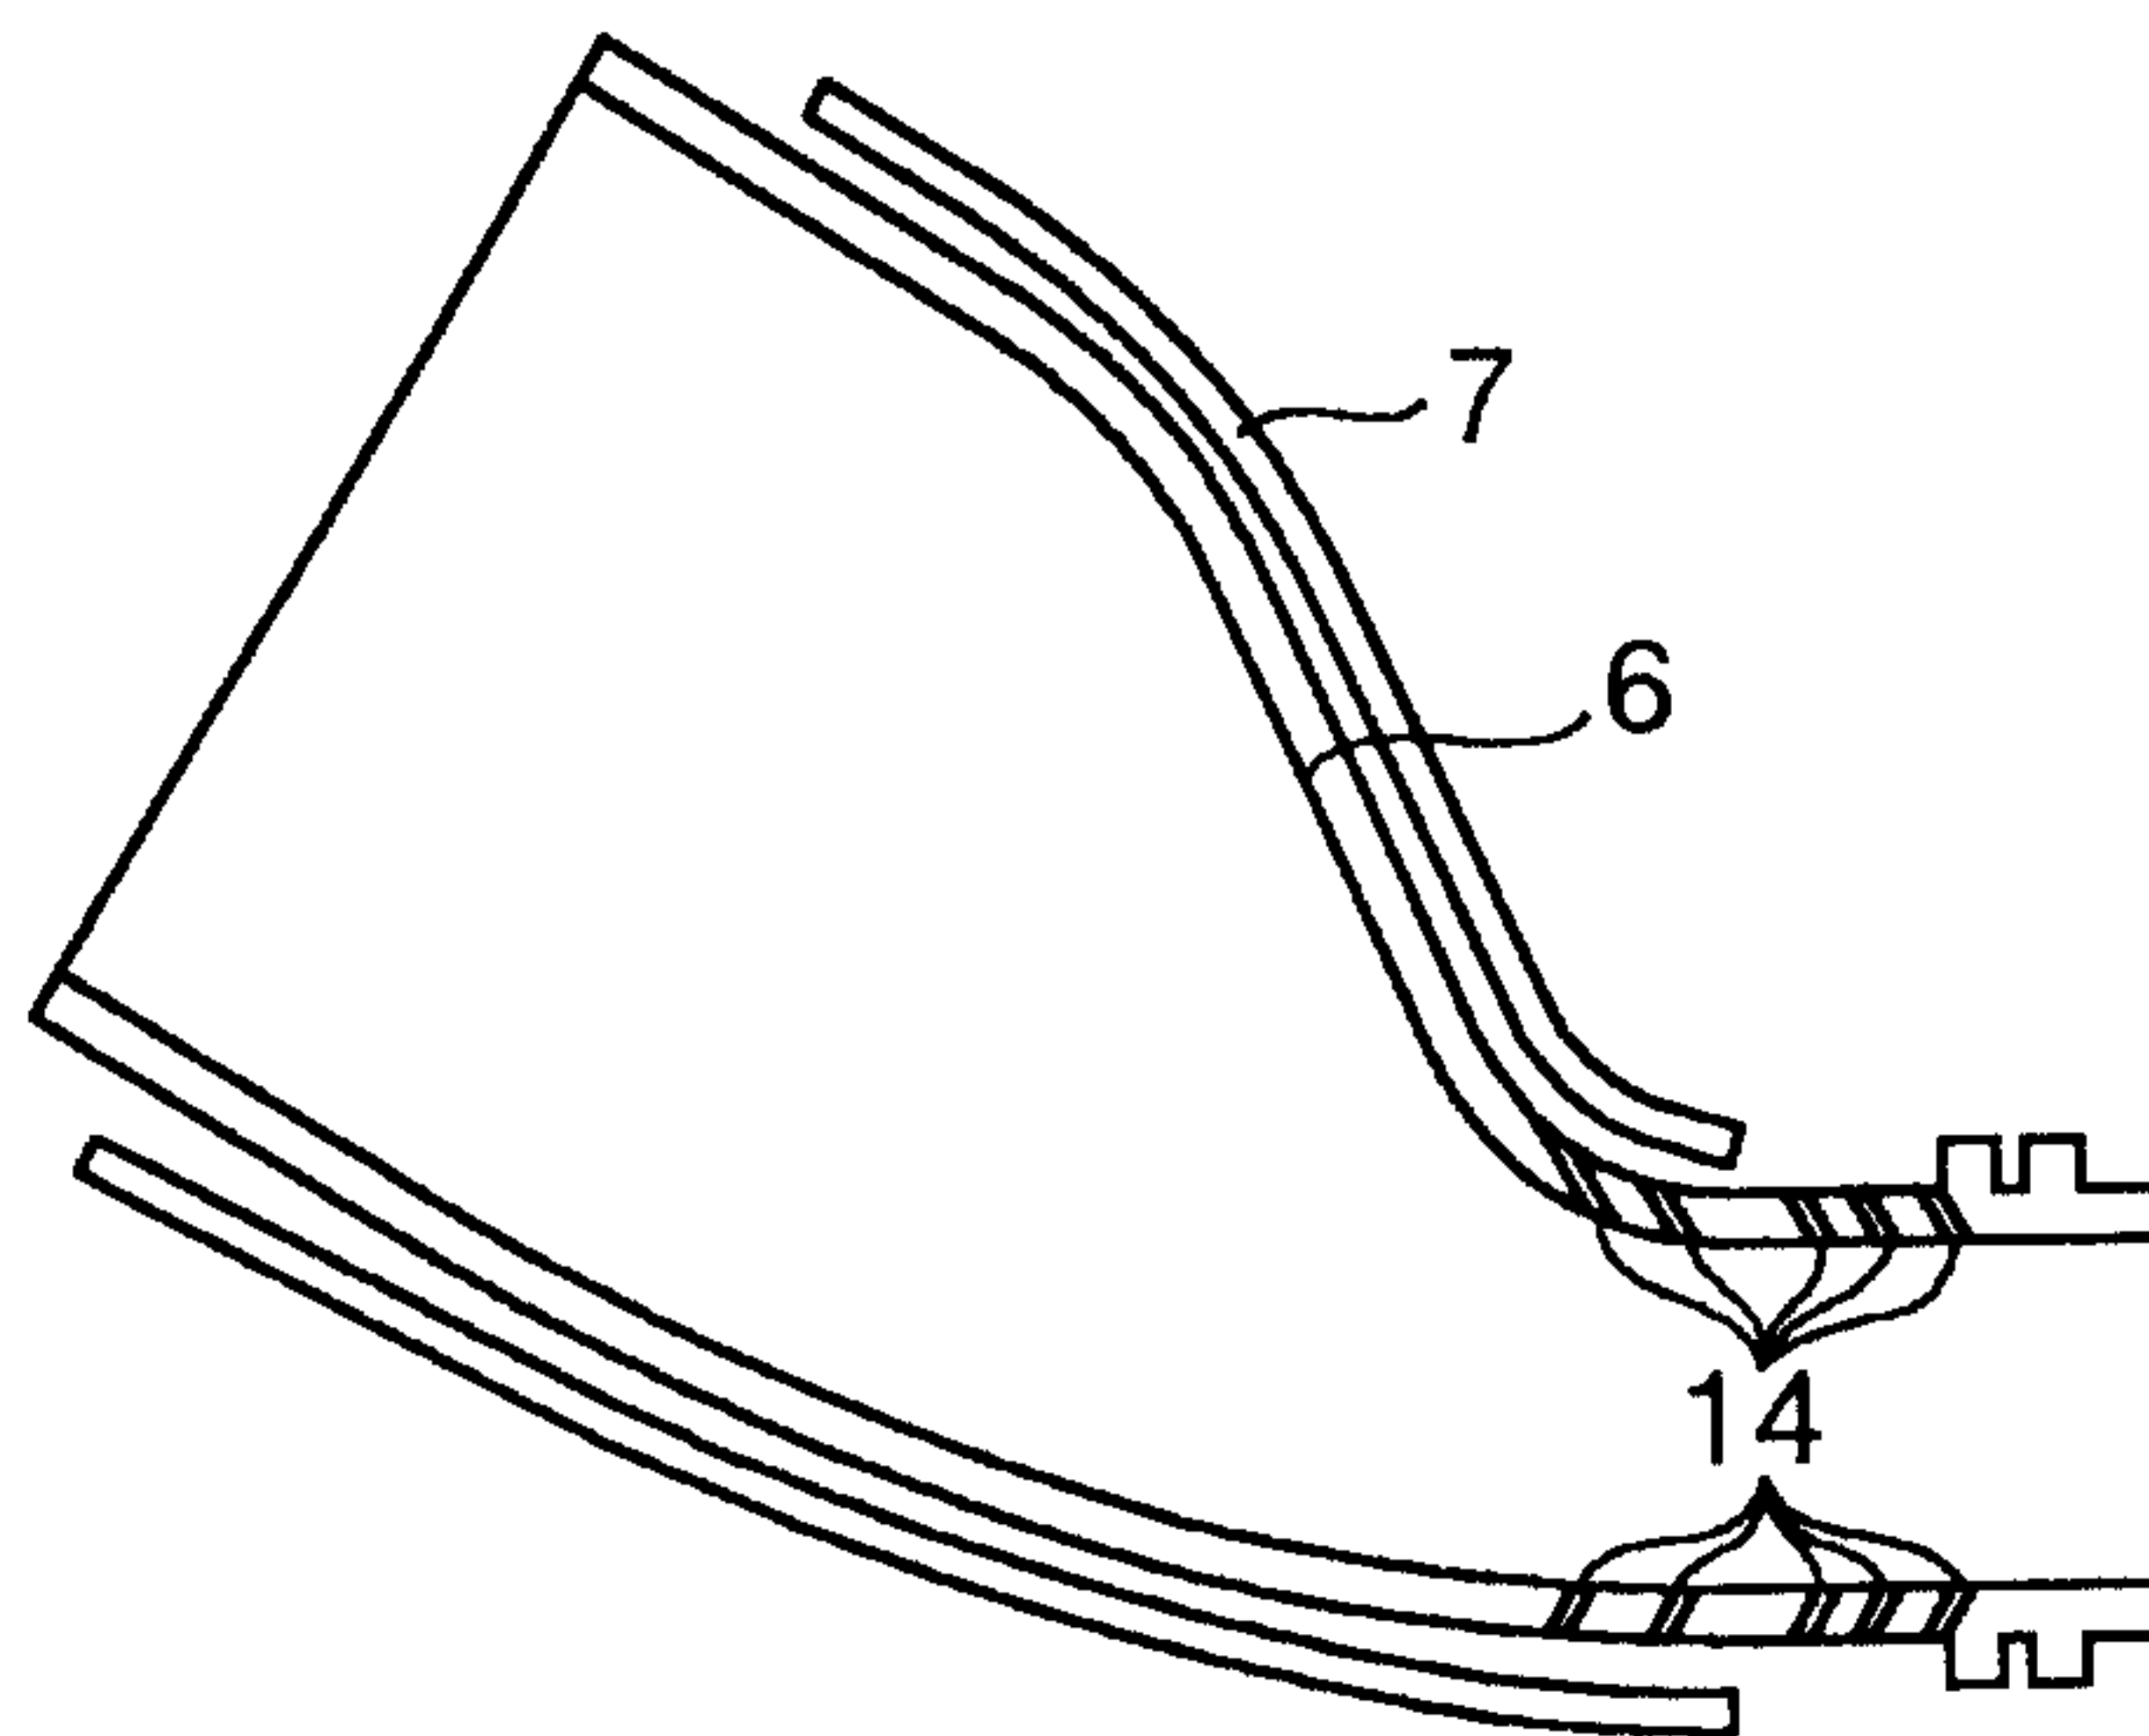

(a)

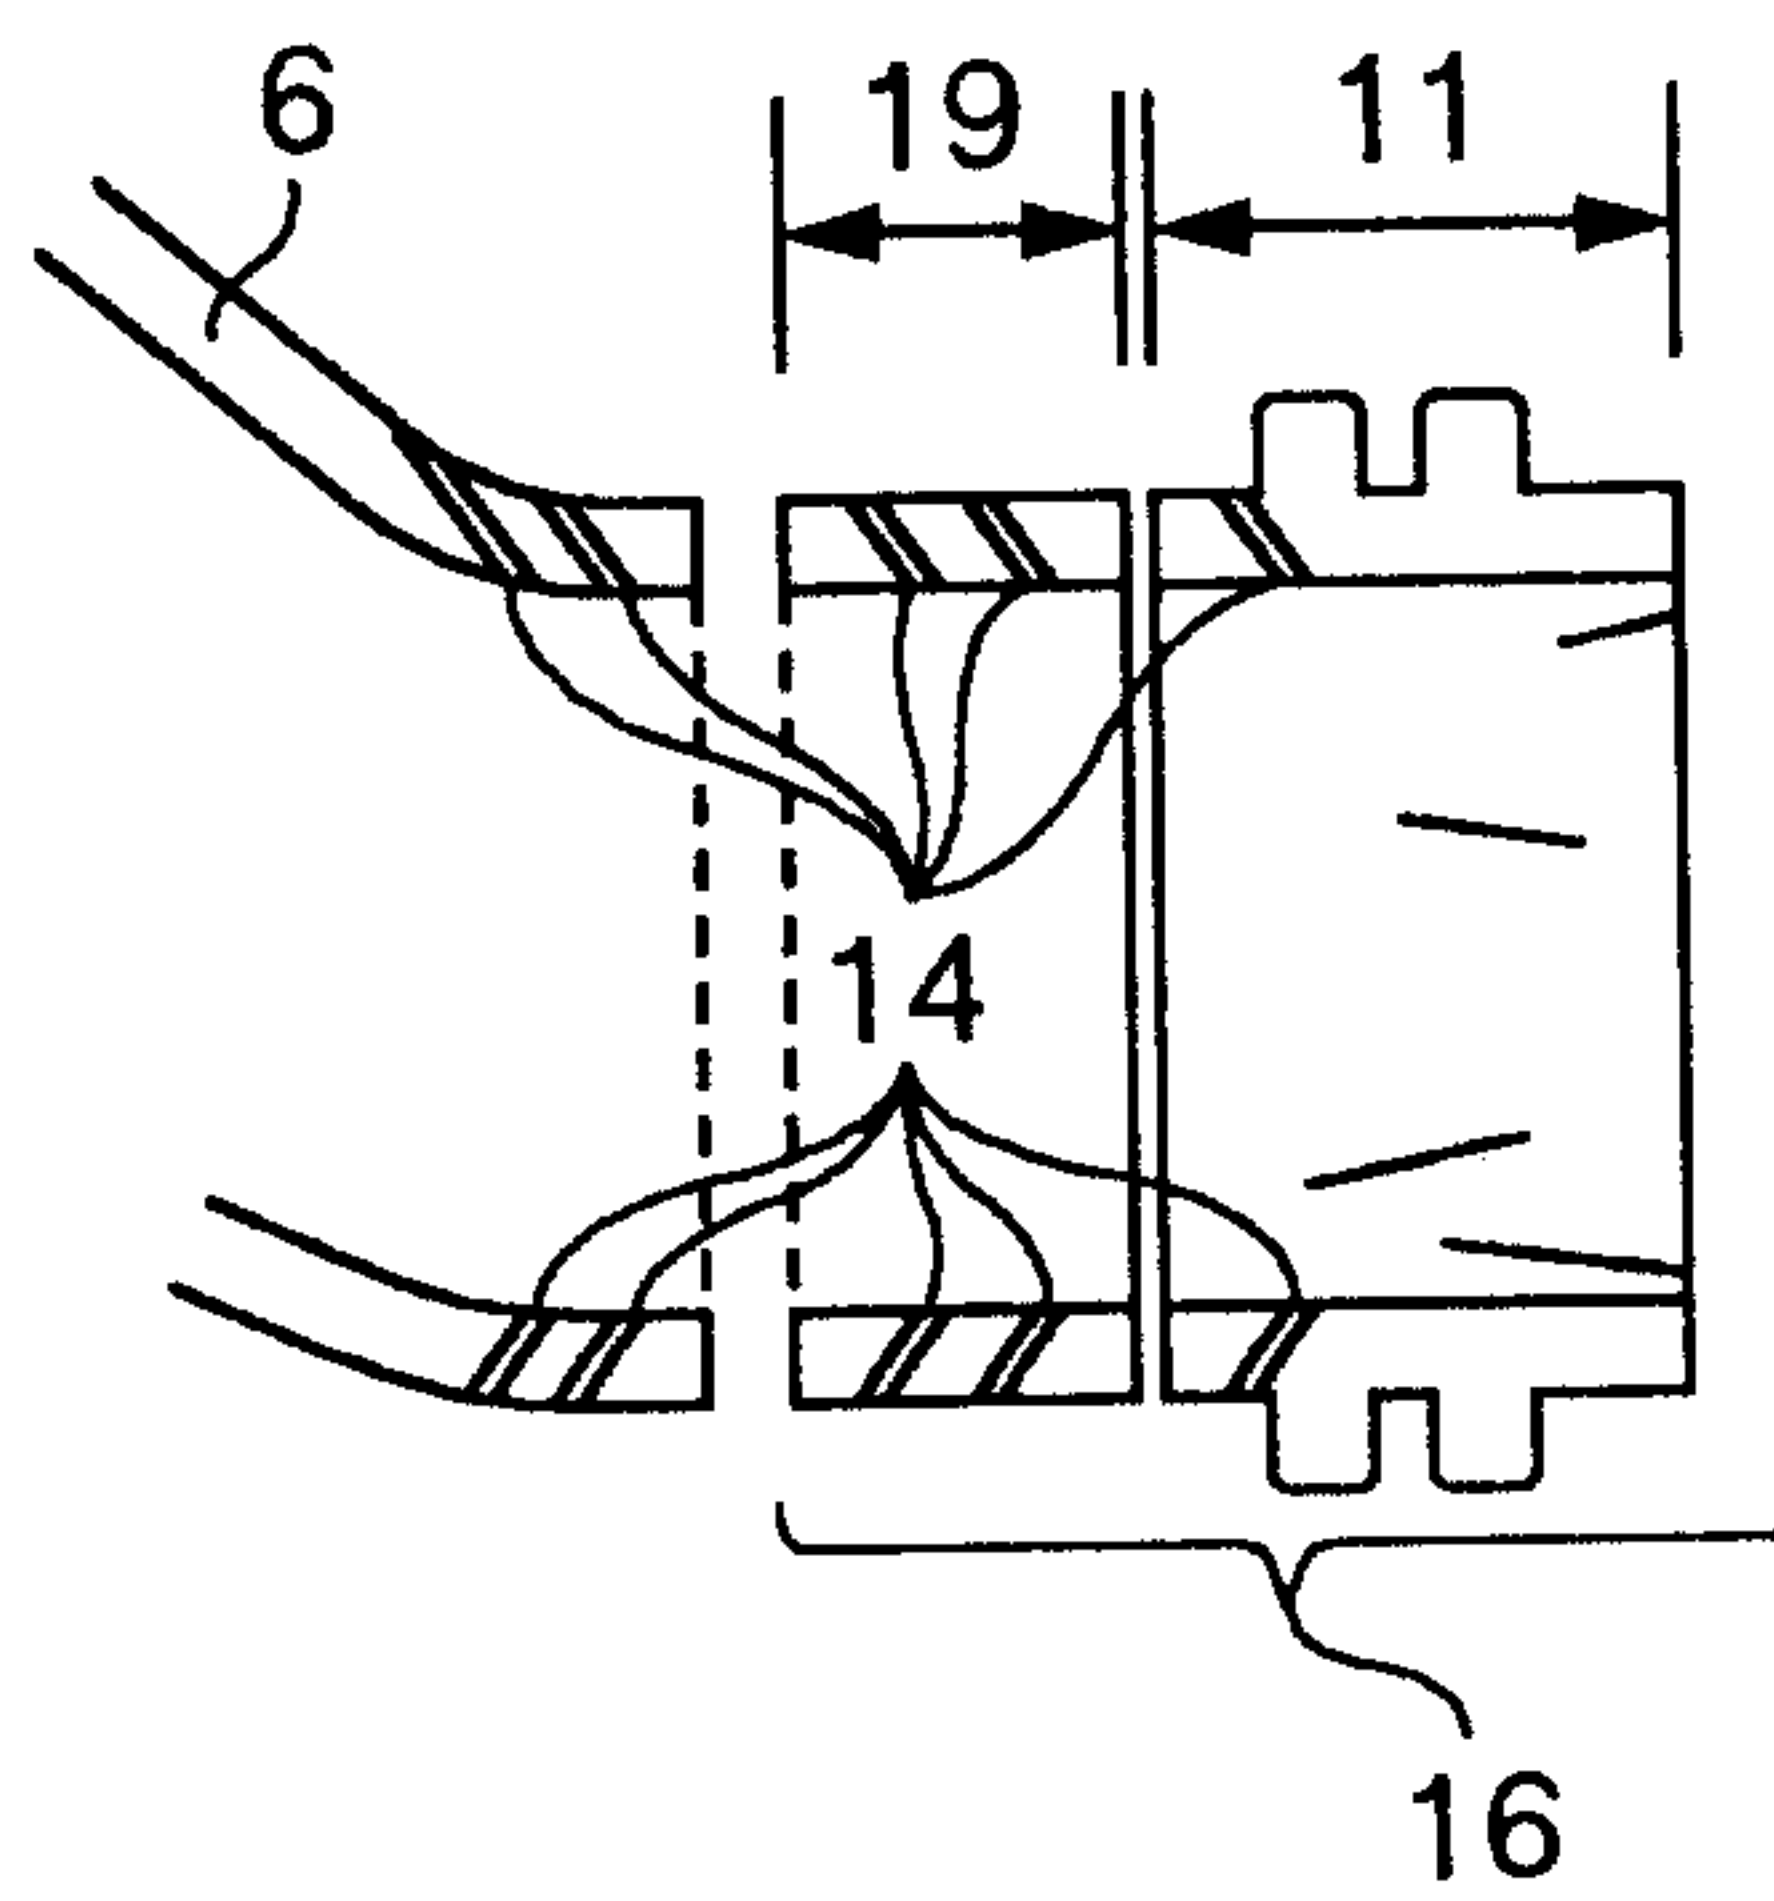


(b)

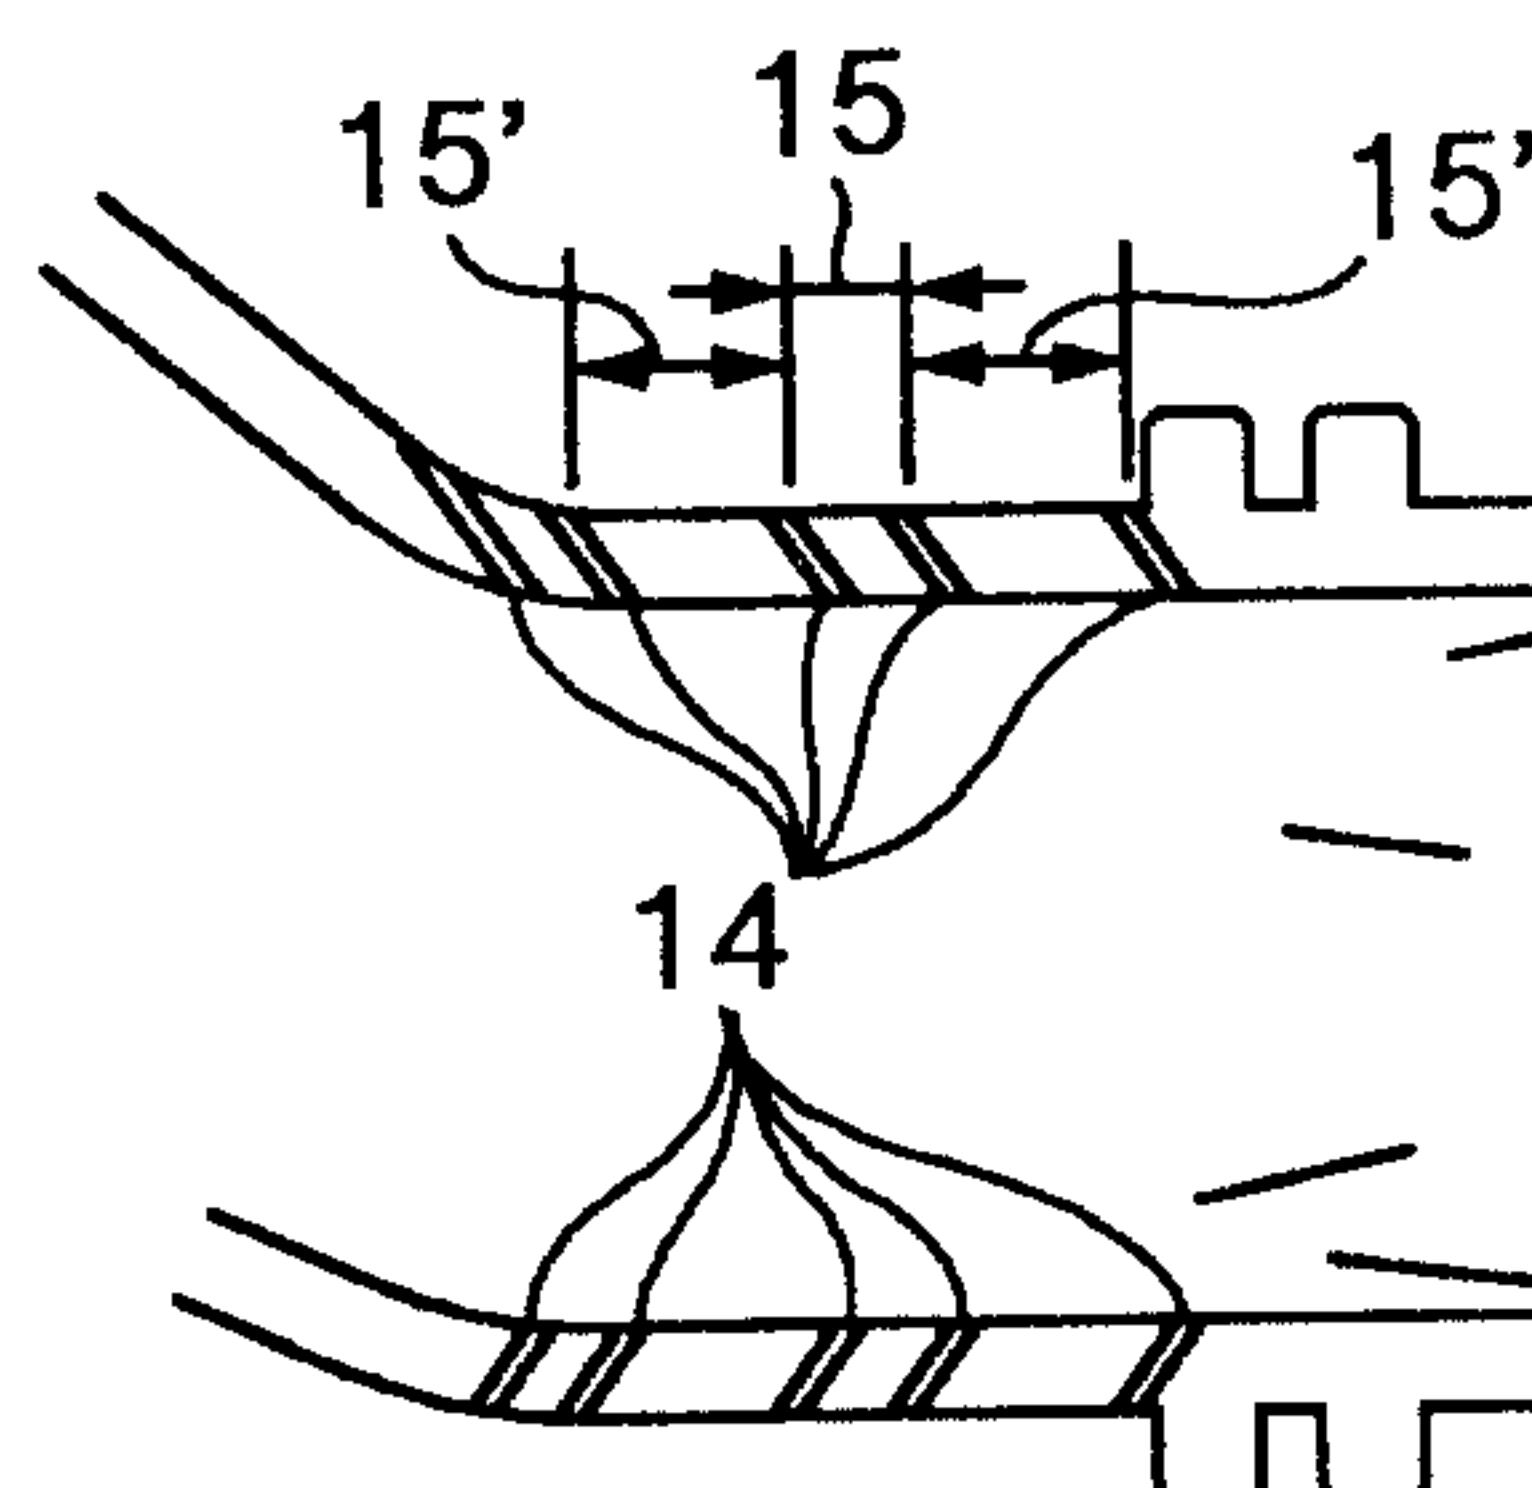


(c)


FIG.5

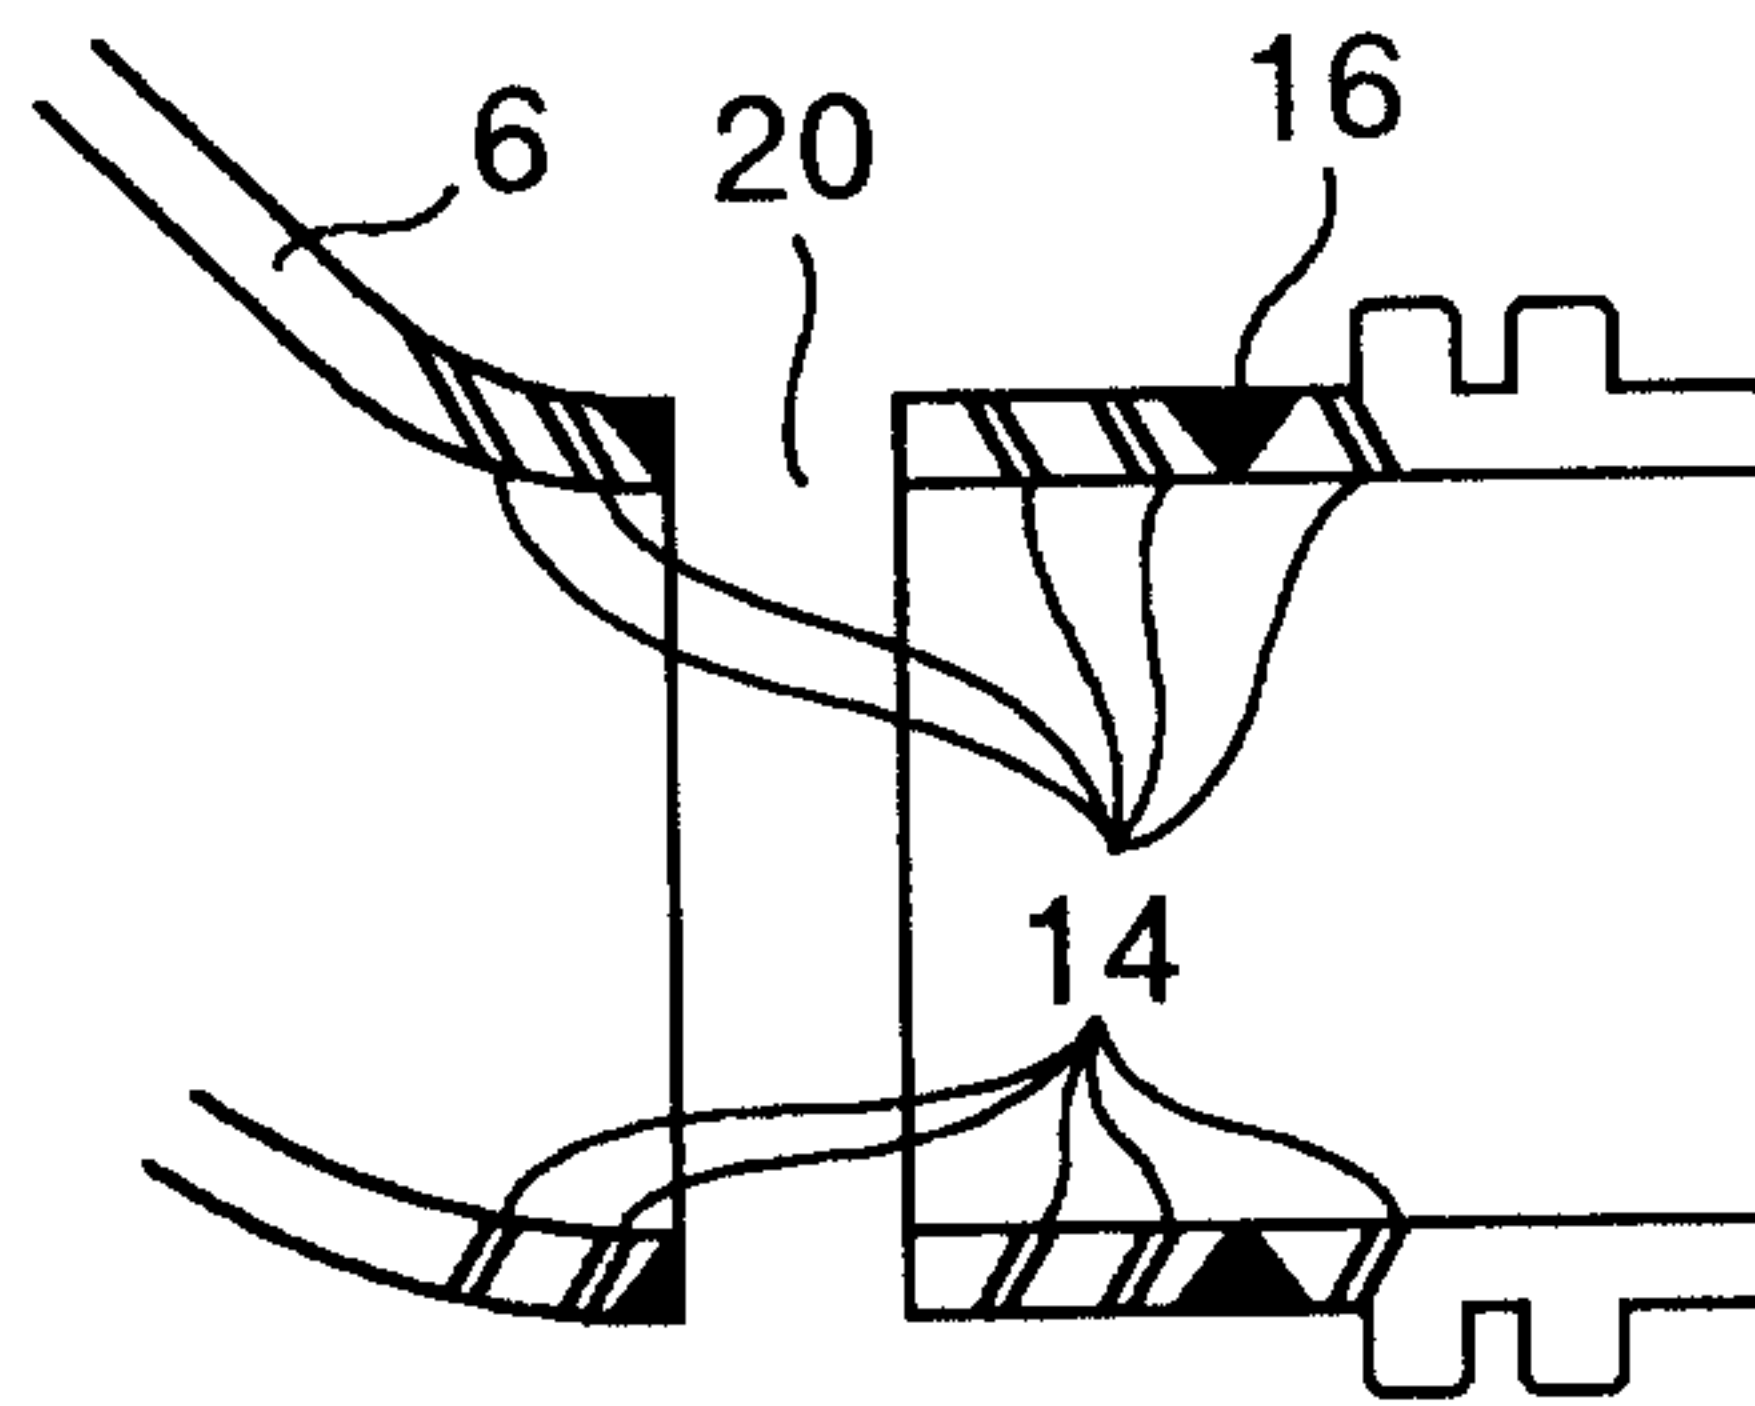


(a)

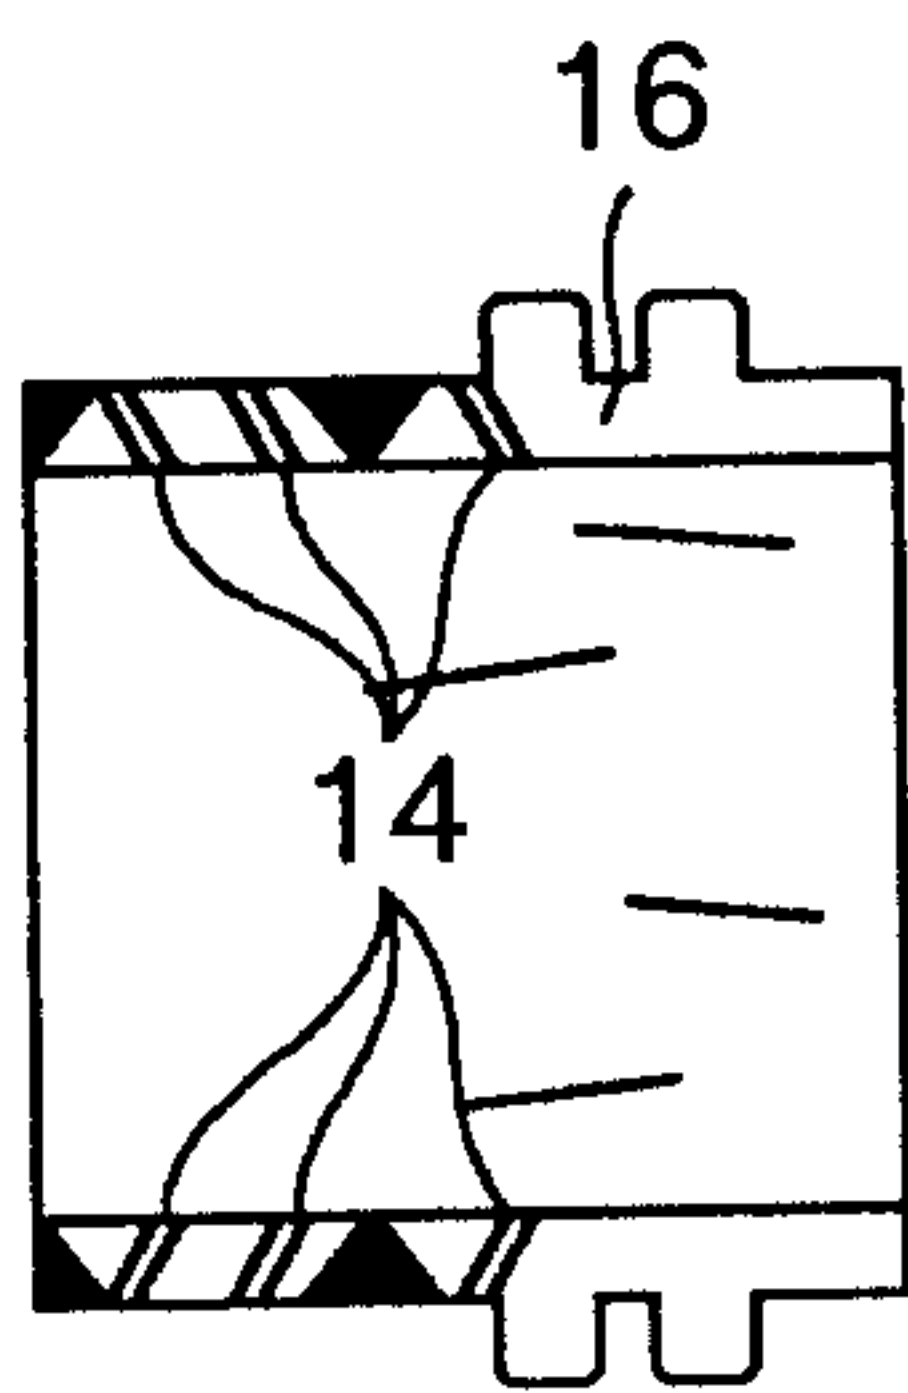


(b)

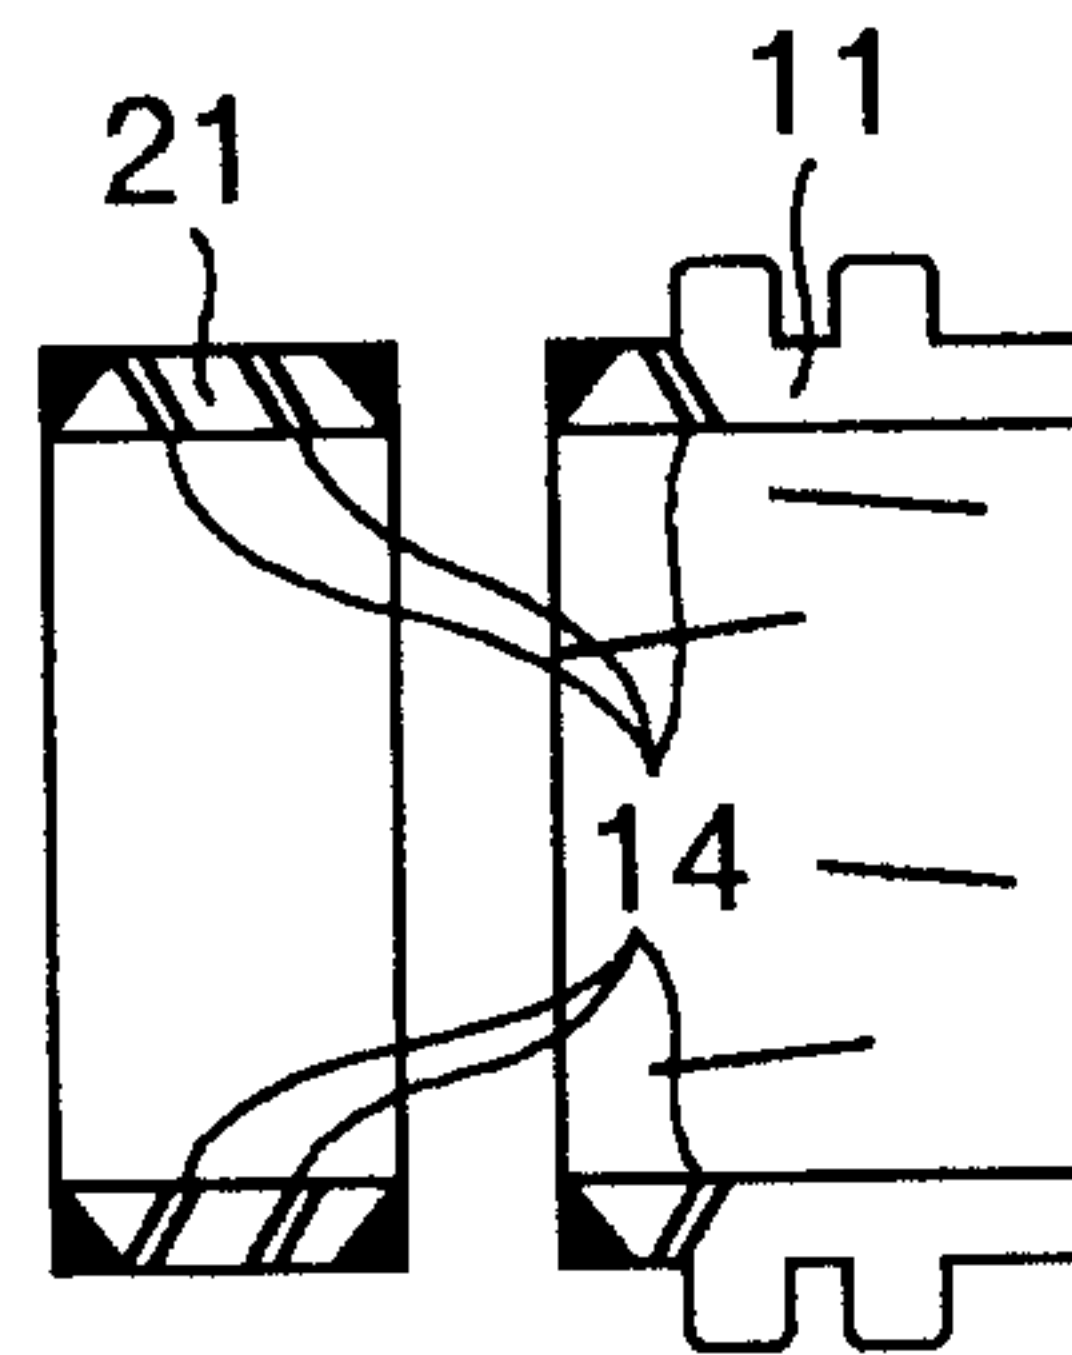

(c)

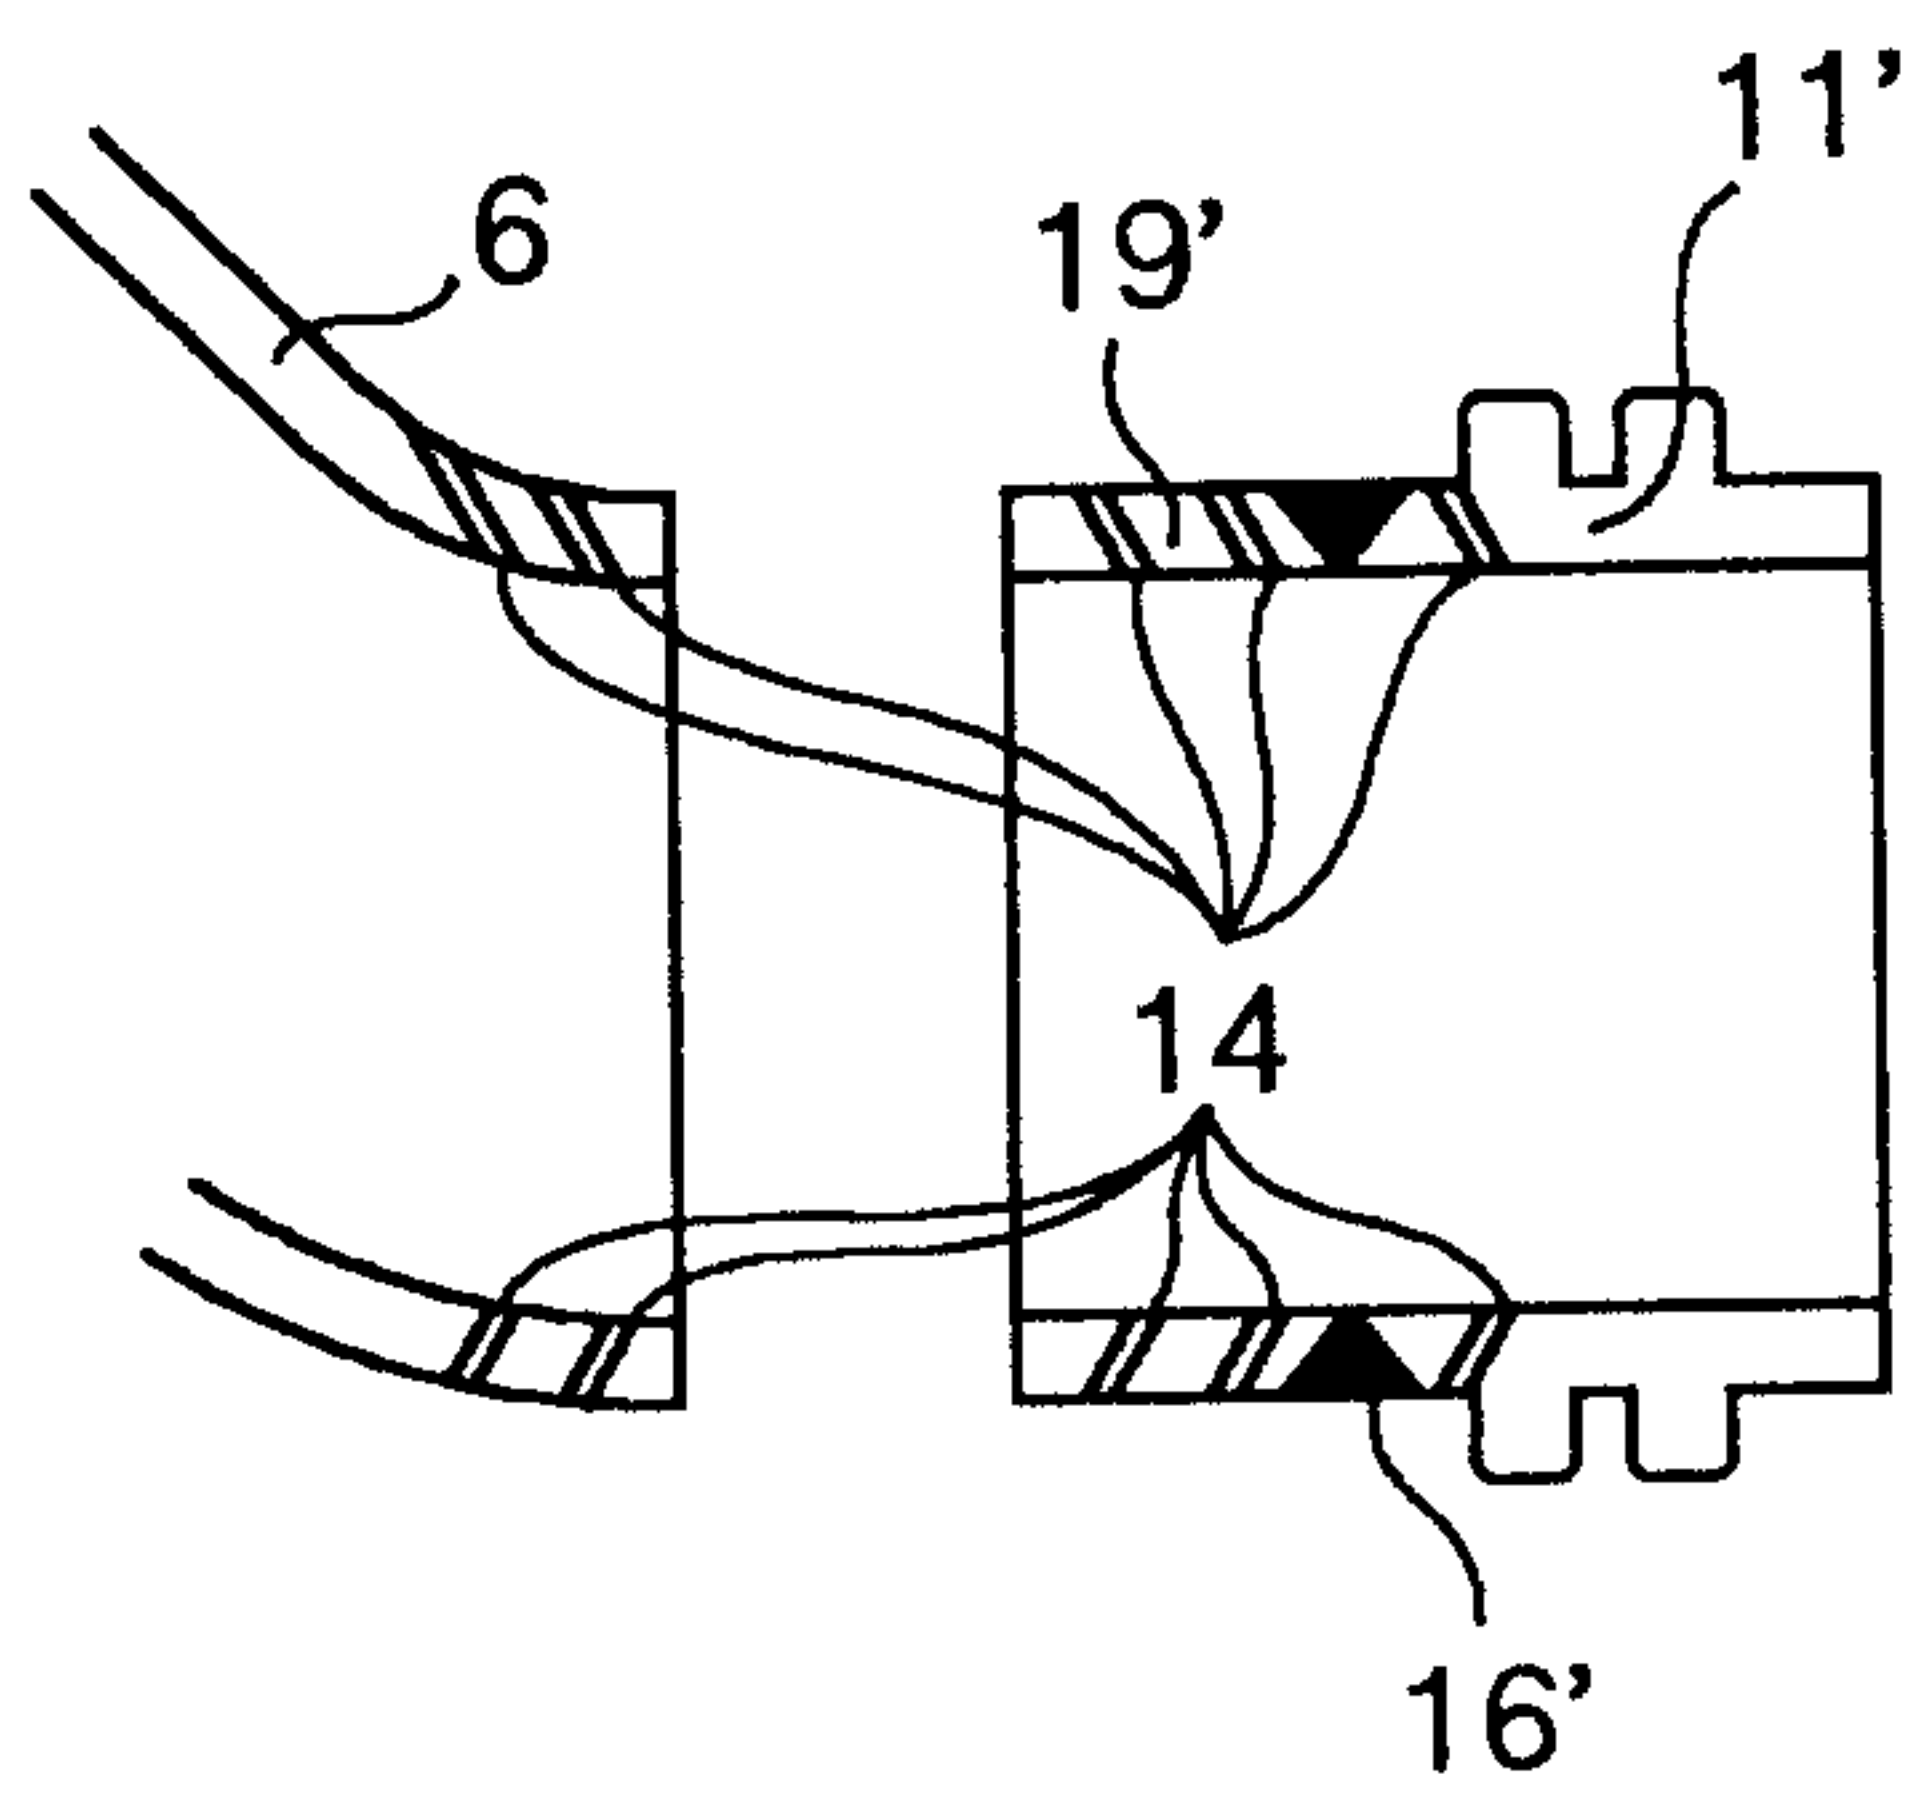

(d)

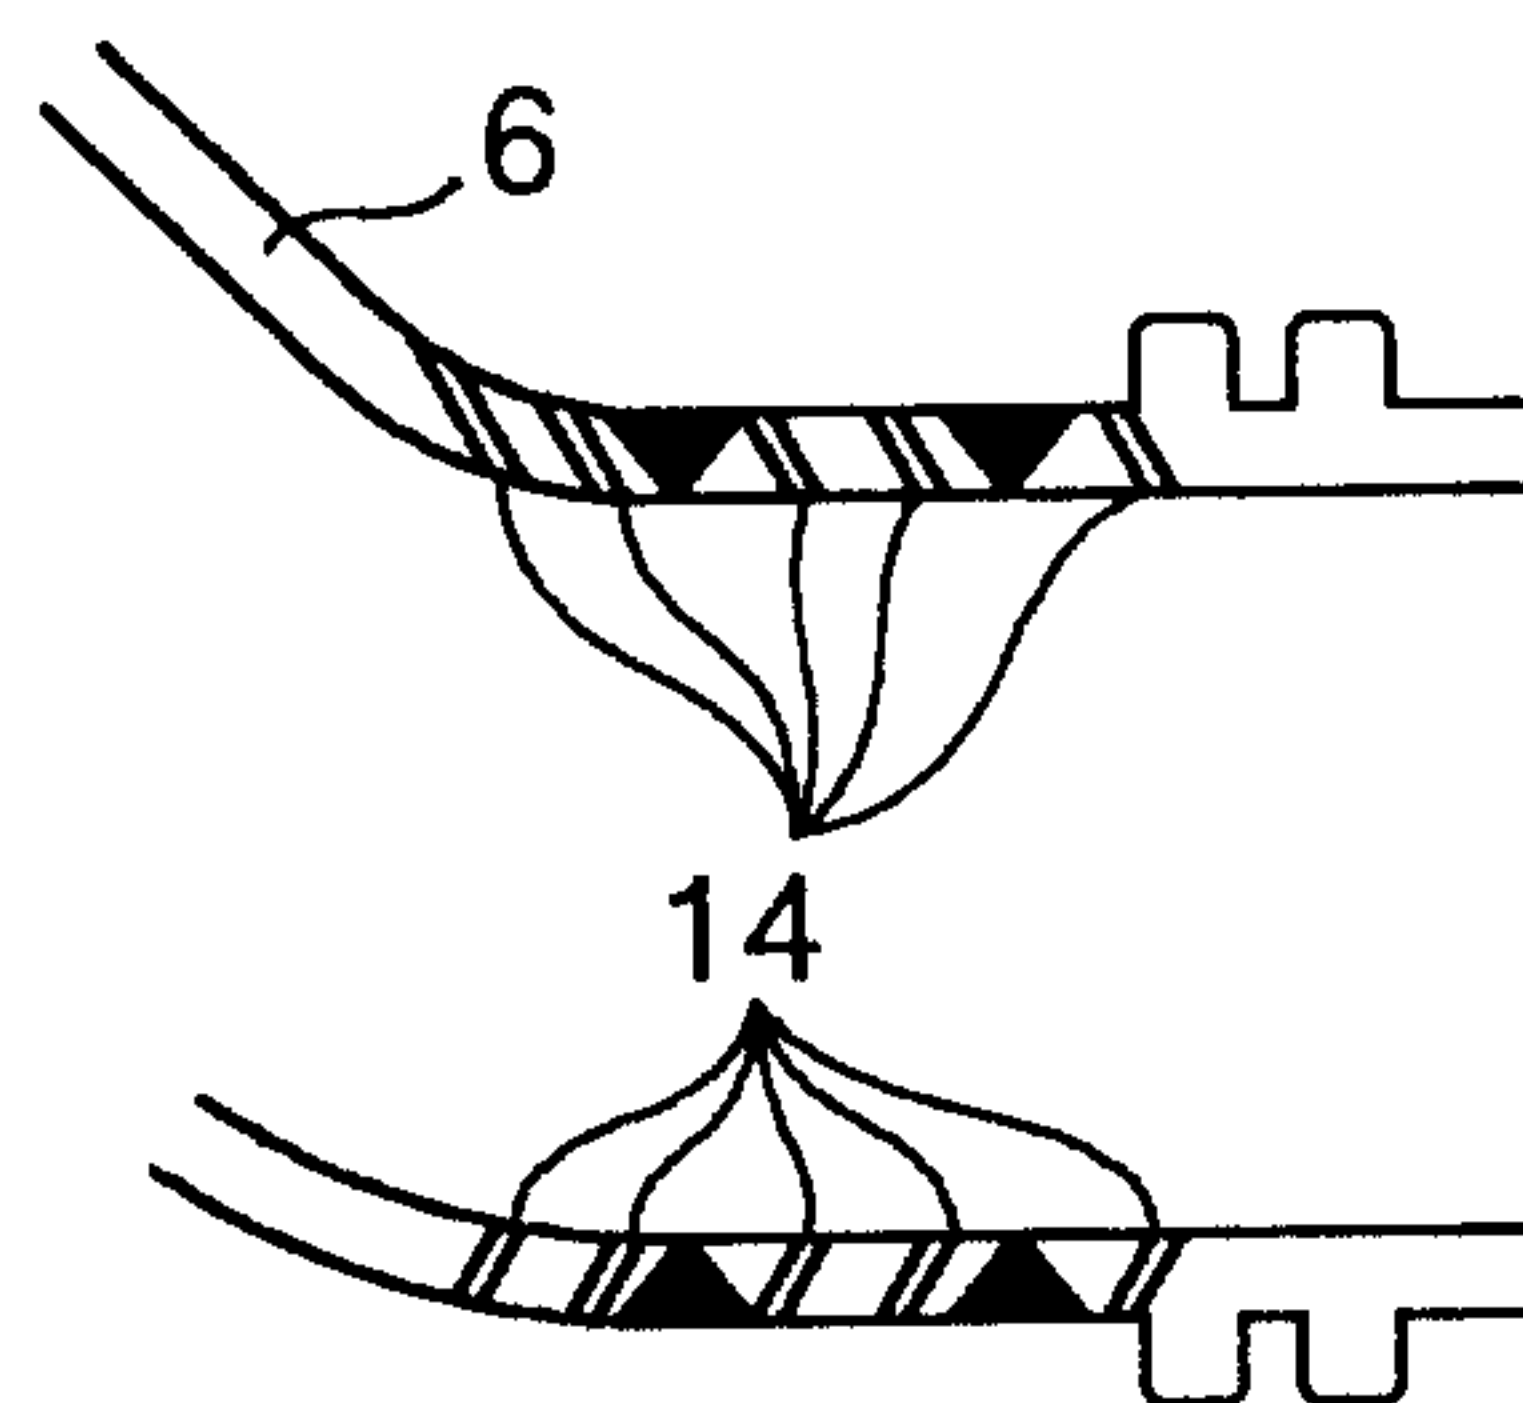

(e)

FIG.6

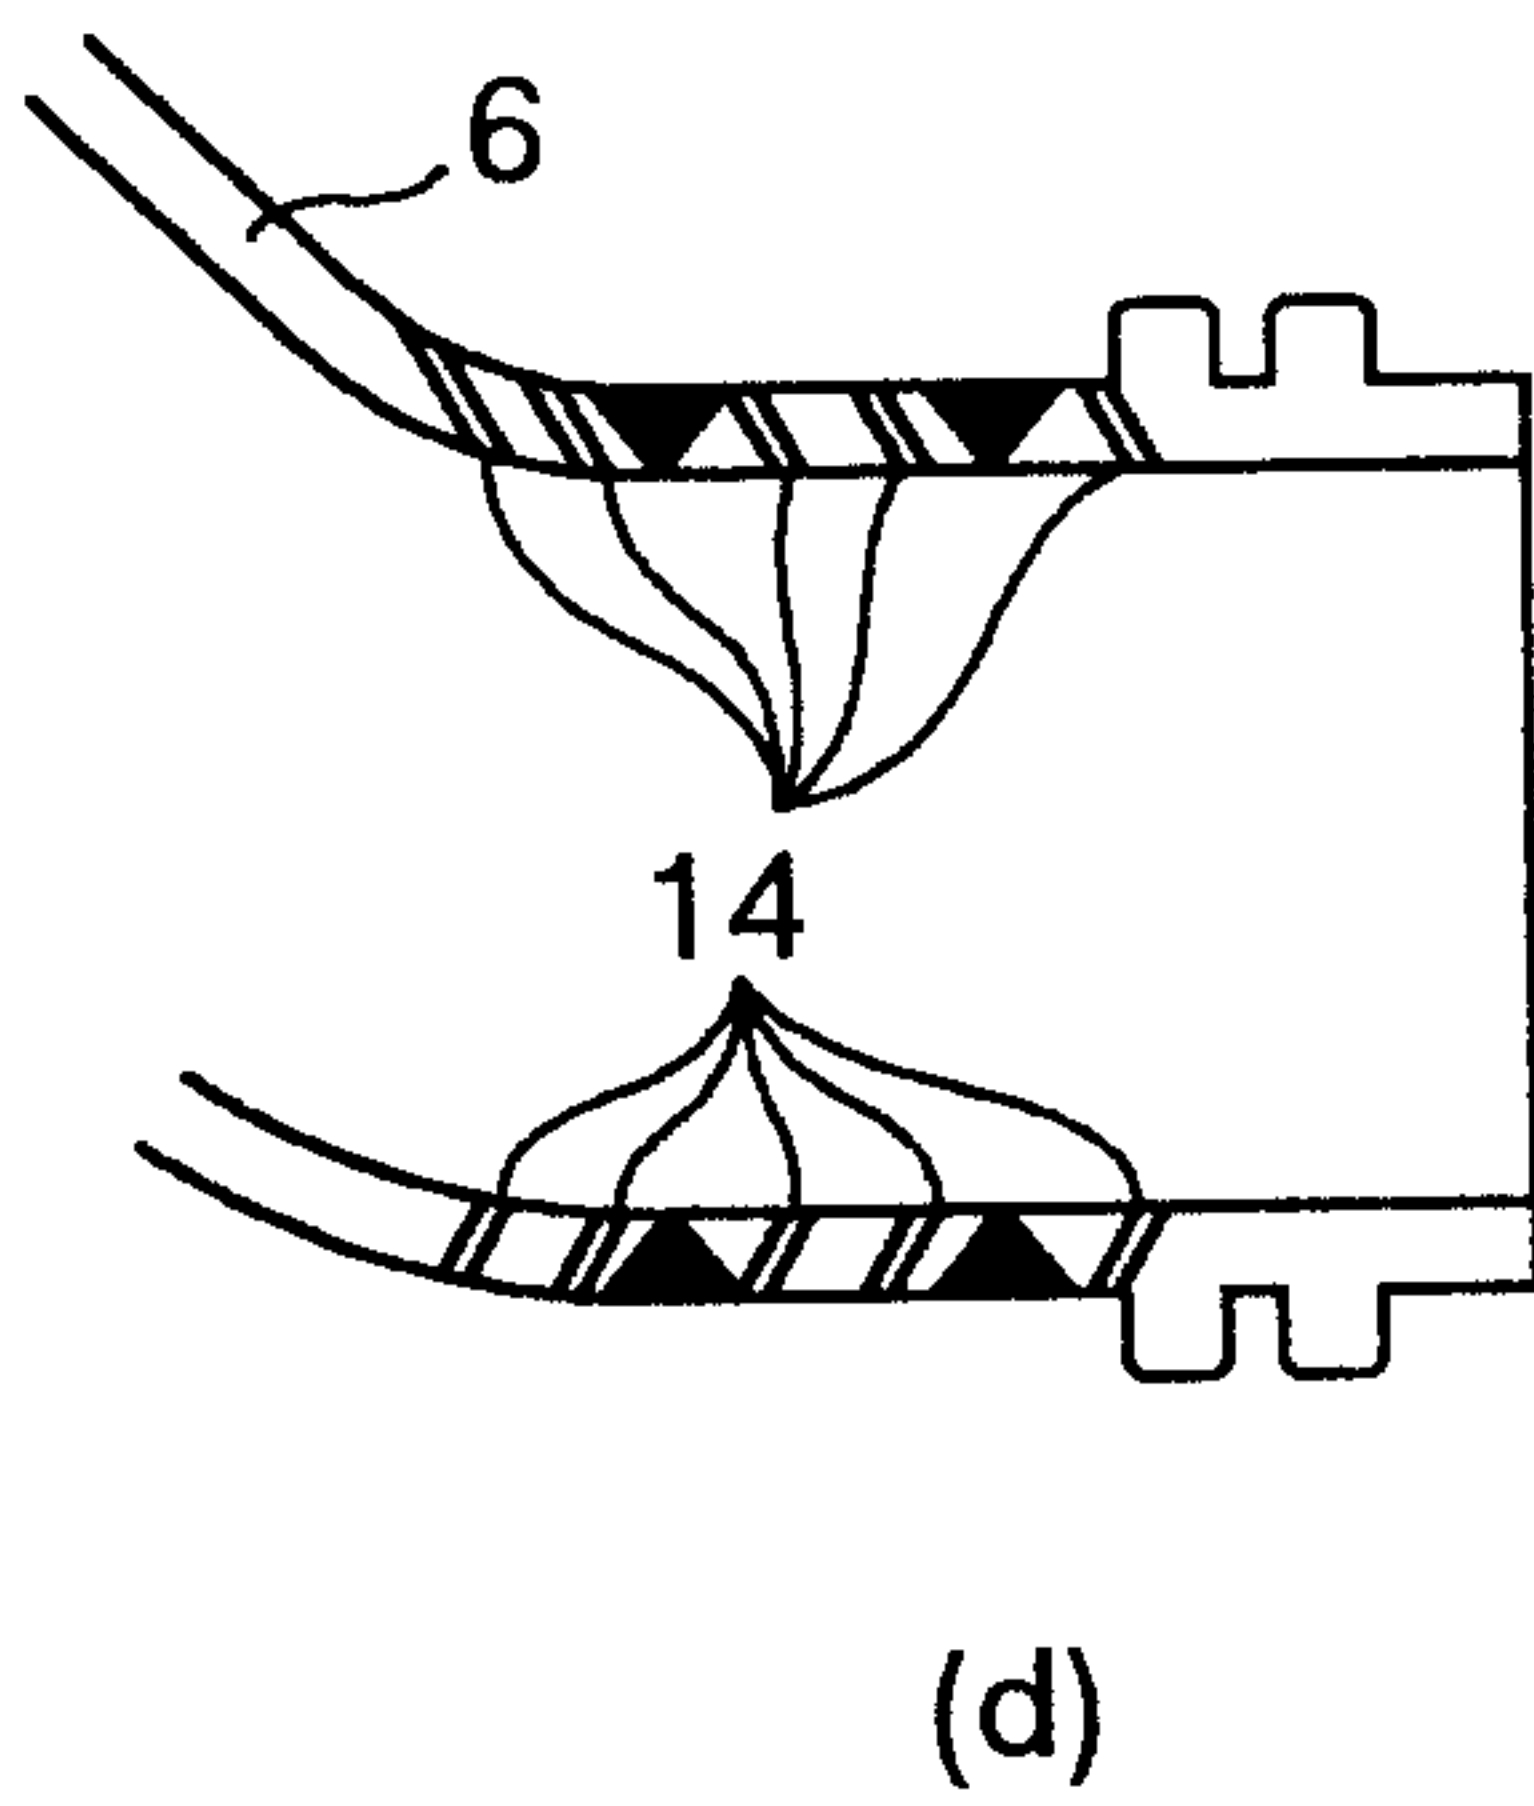
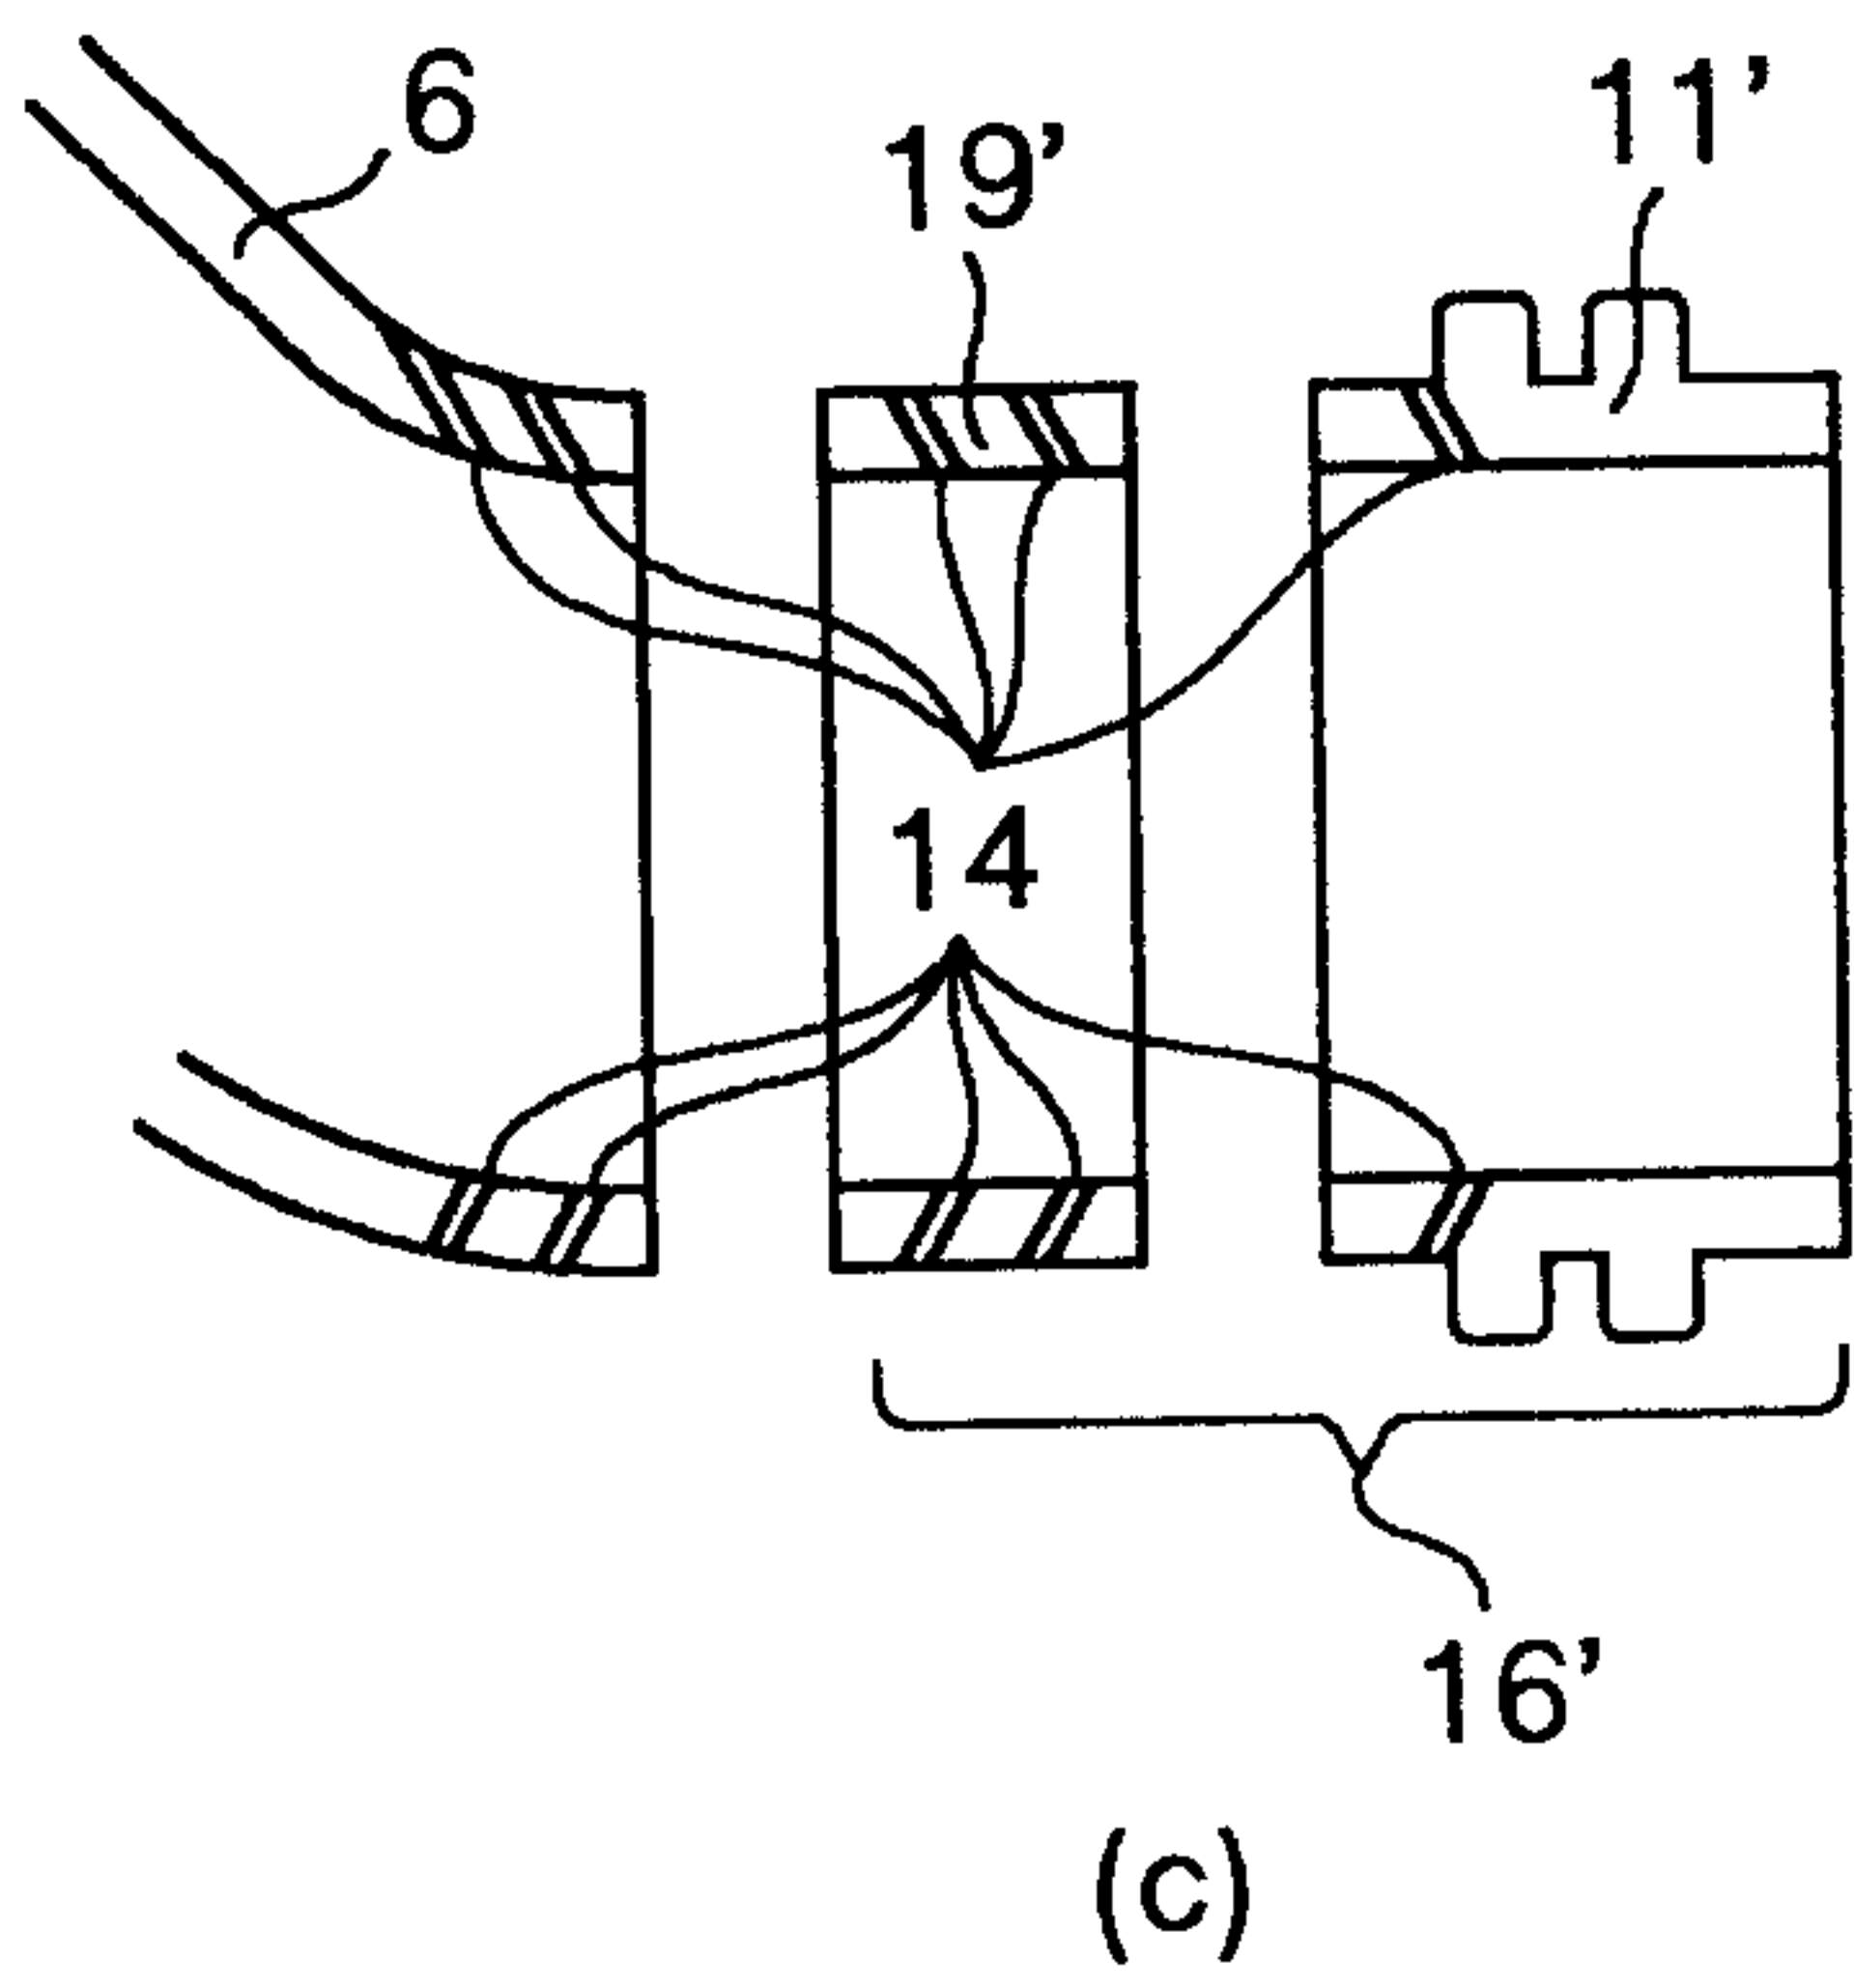
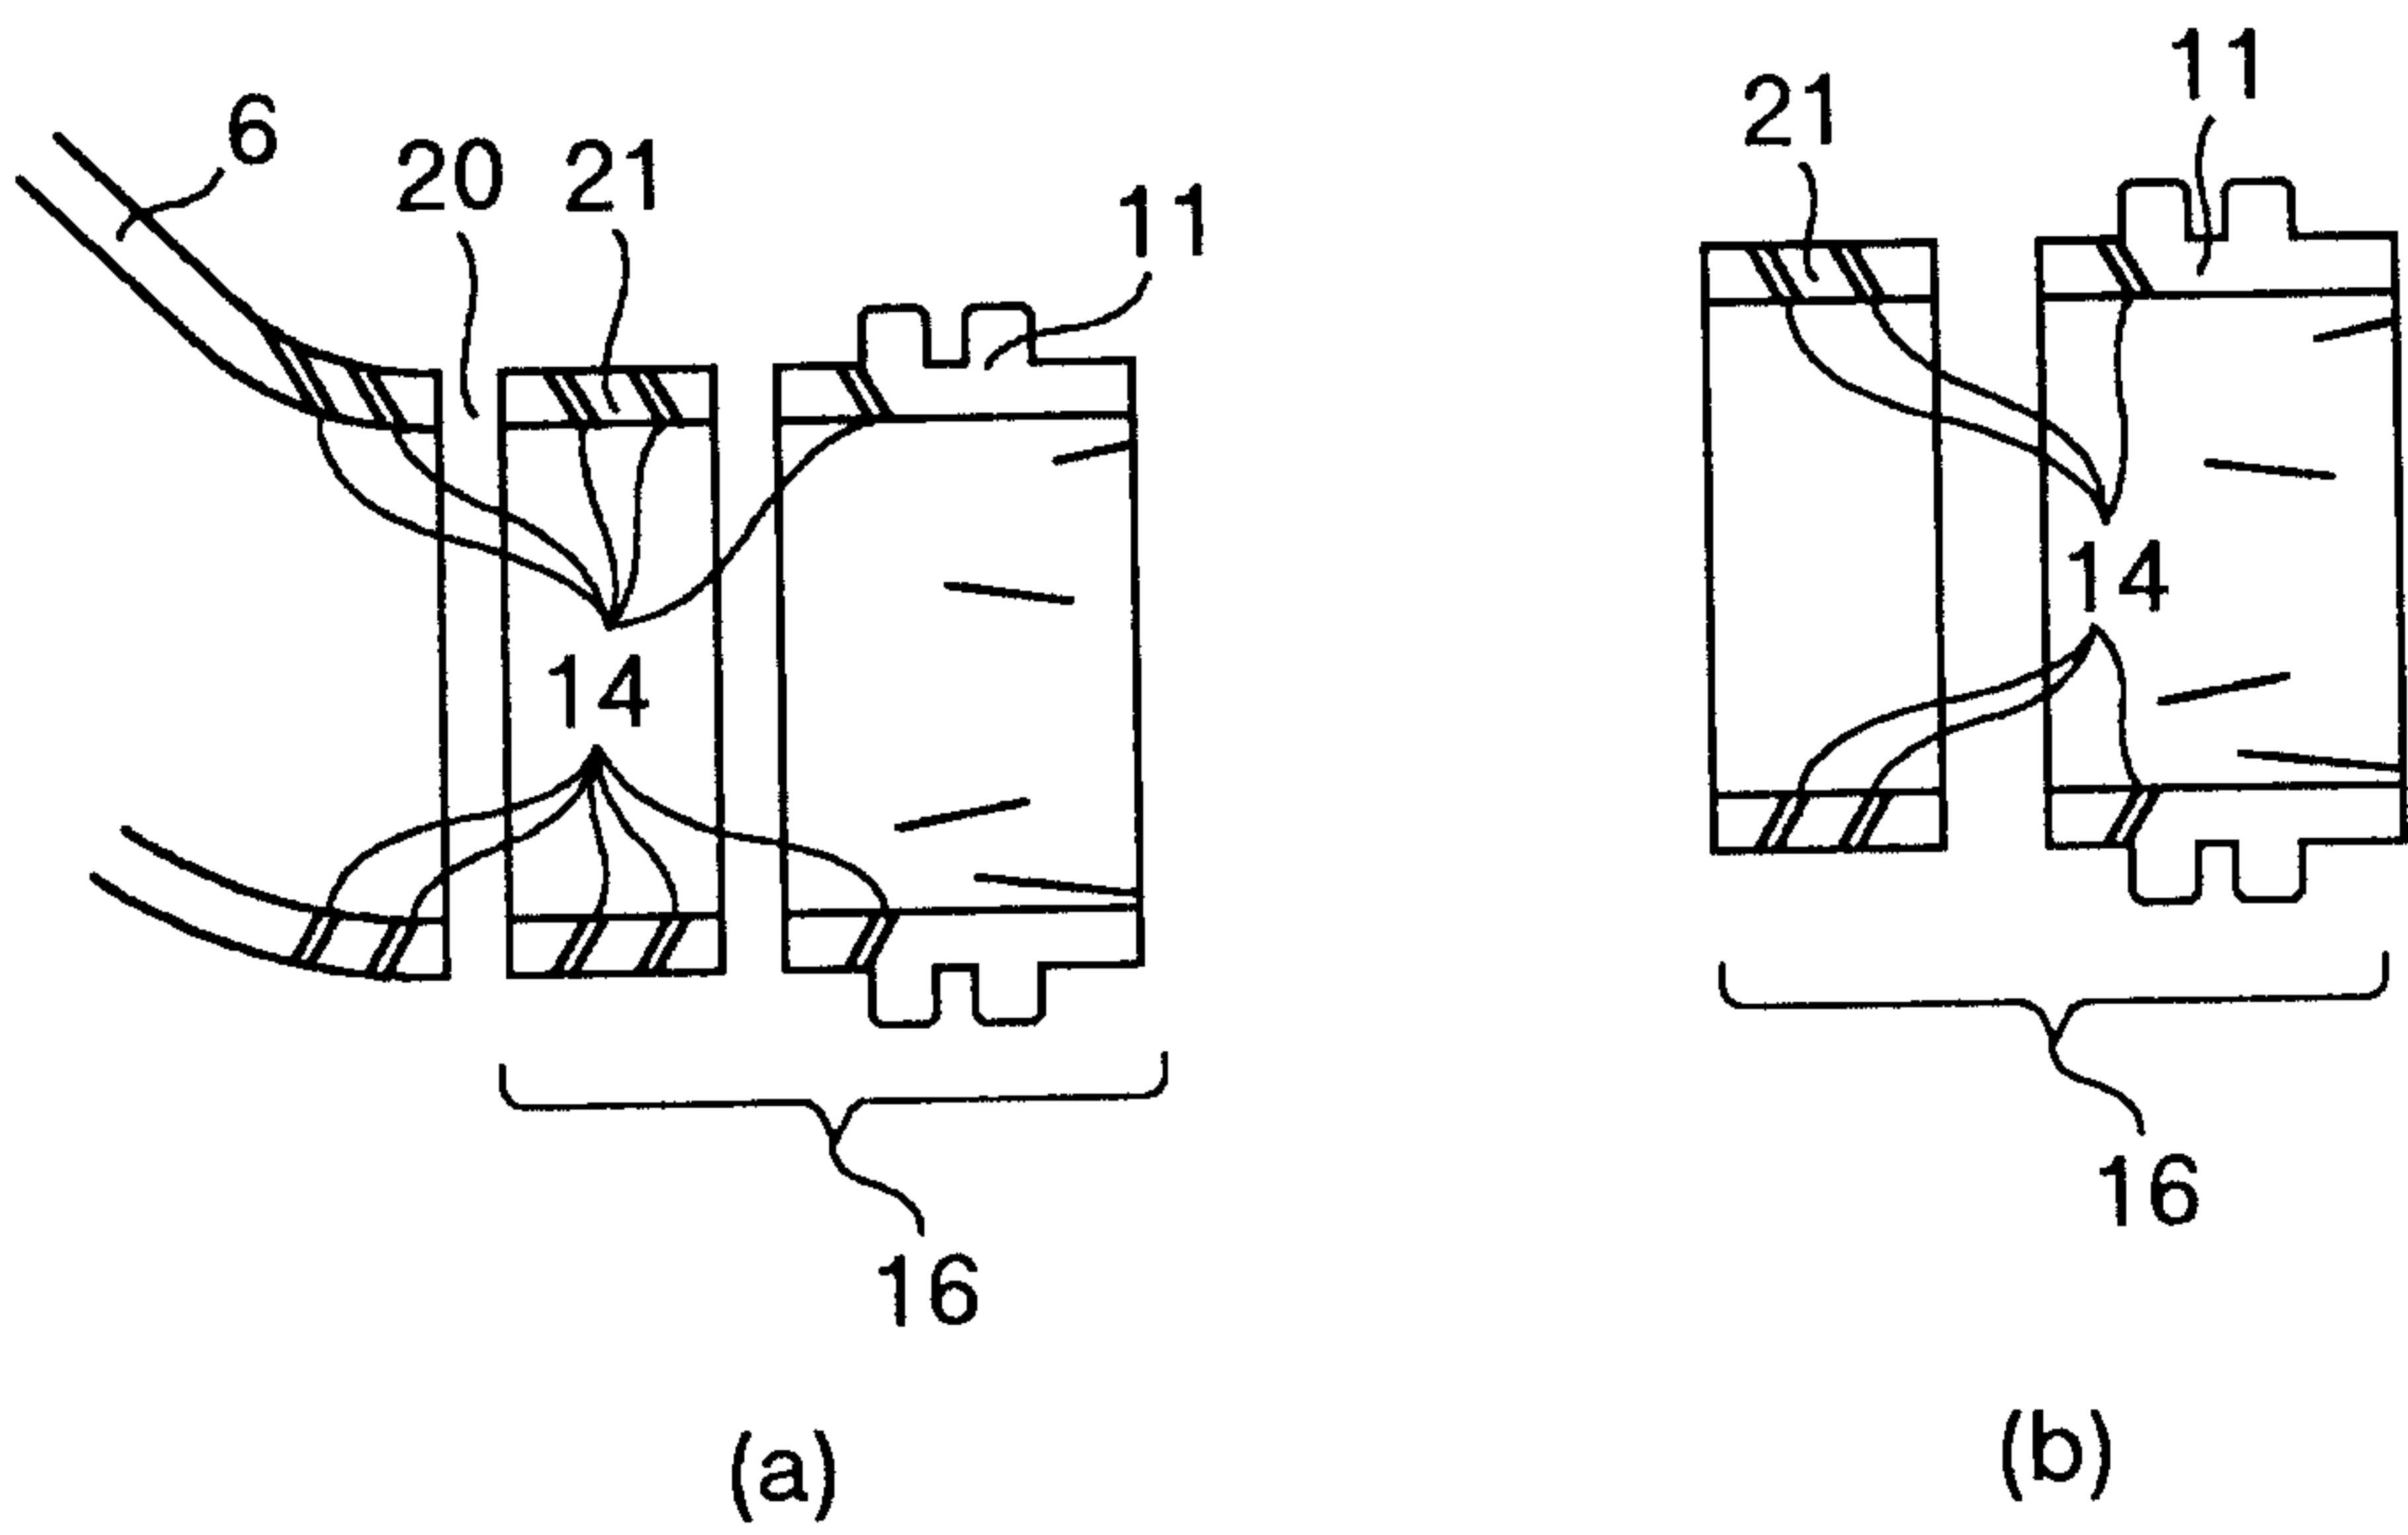


FIG.7

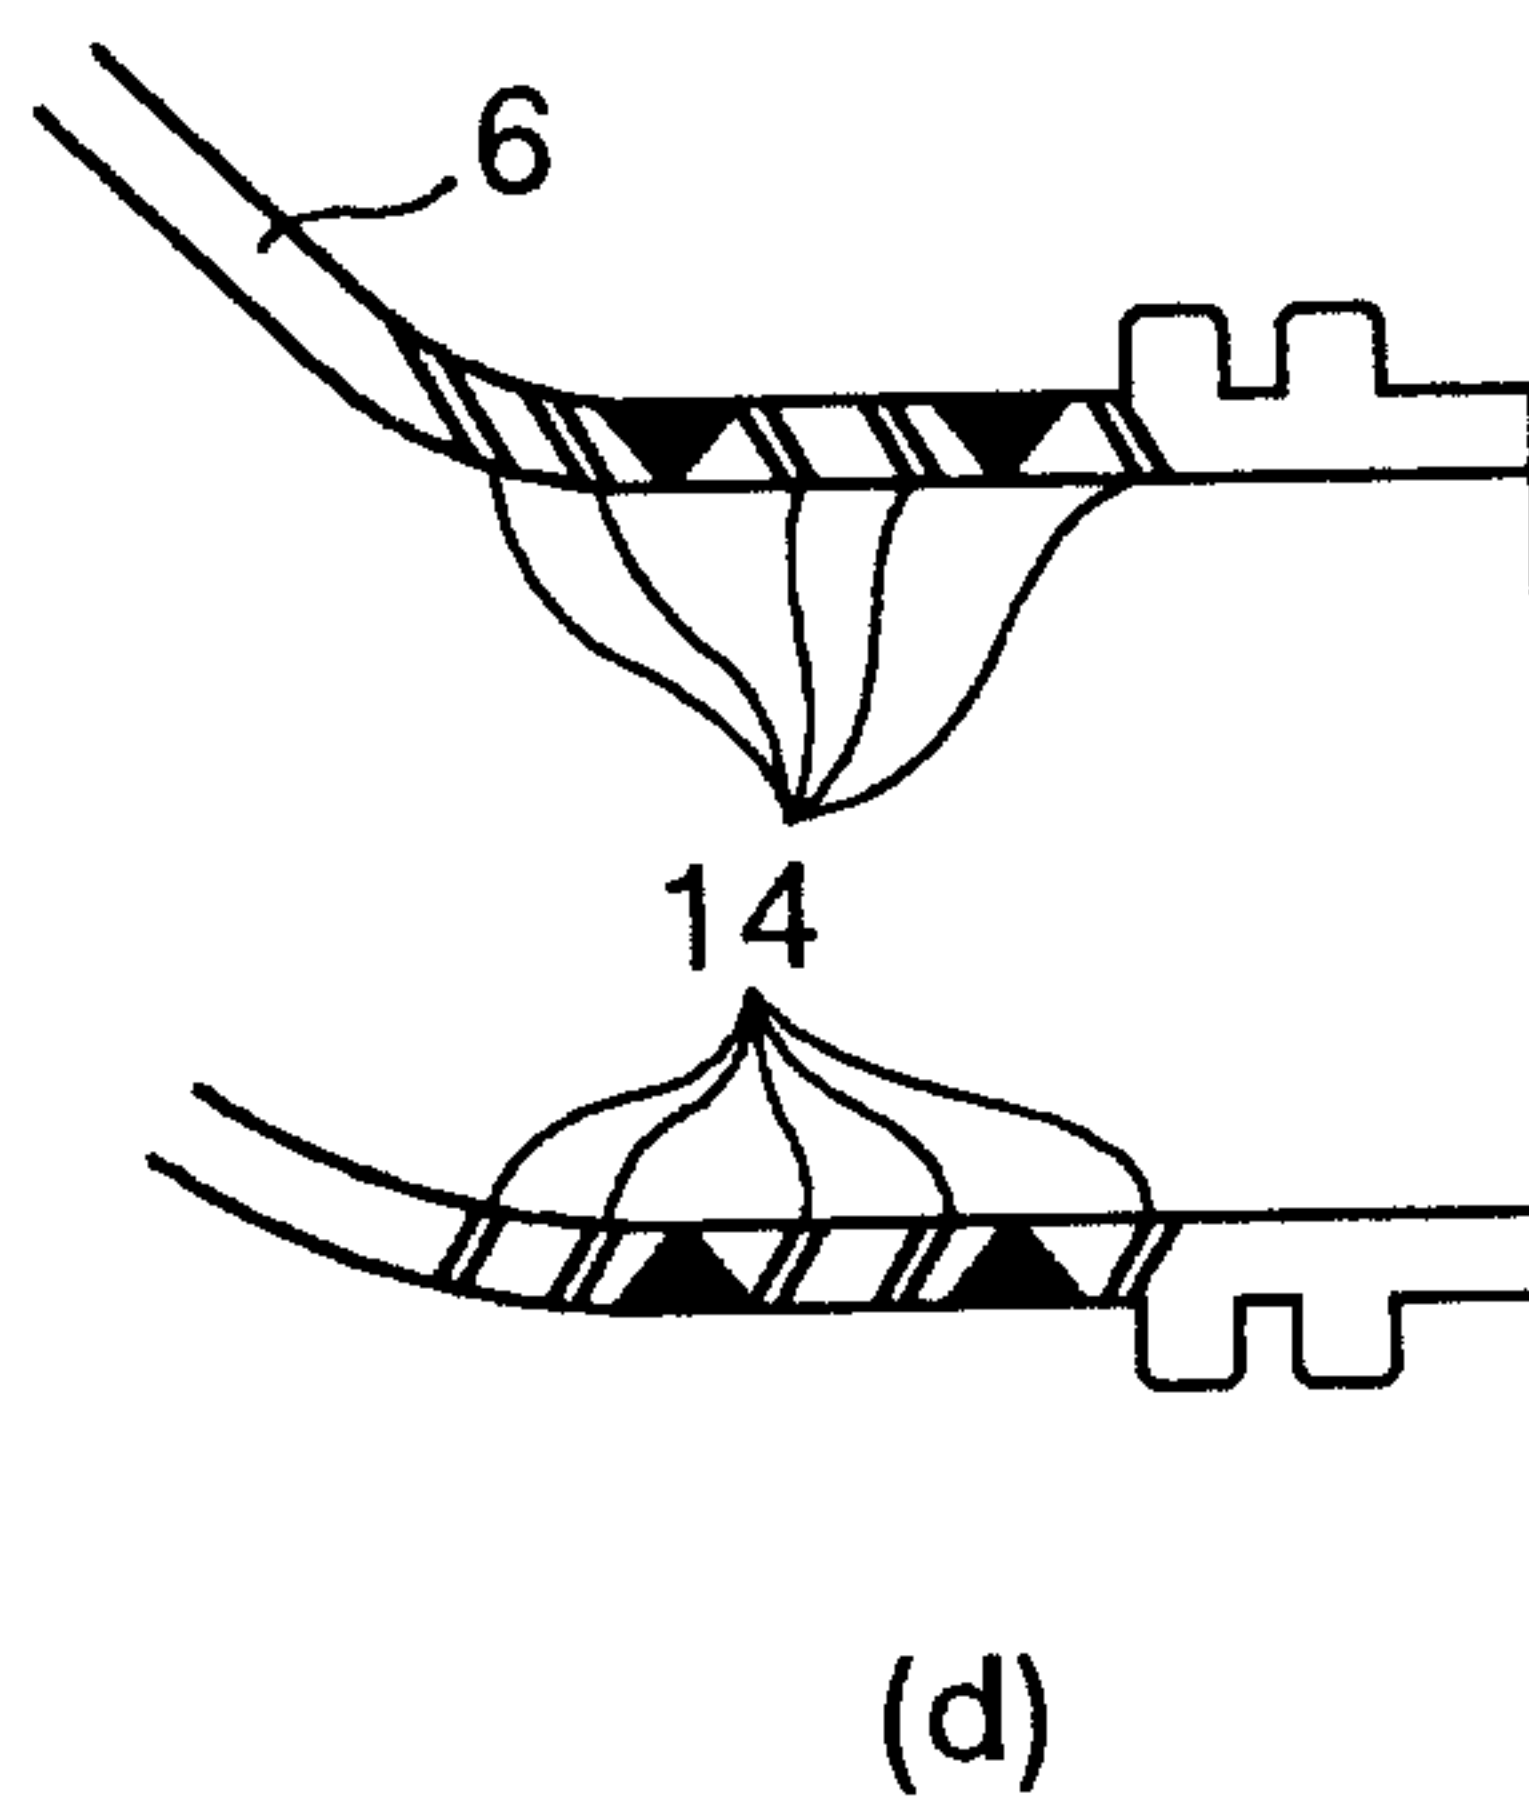
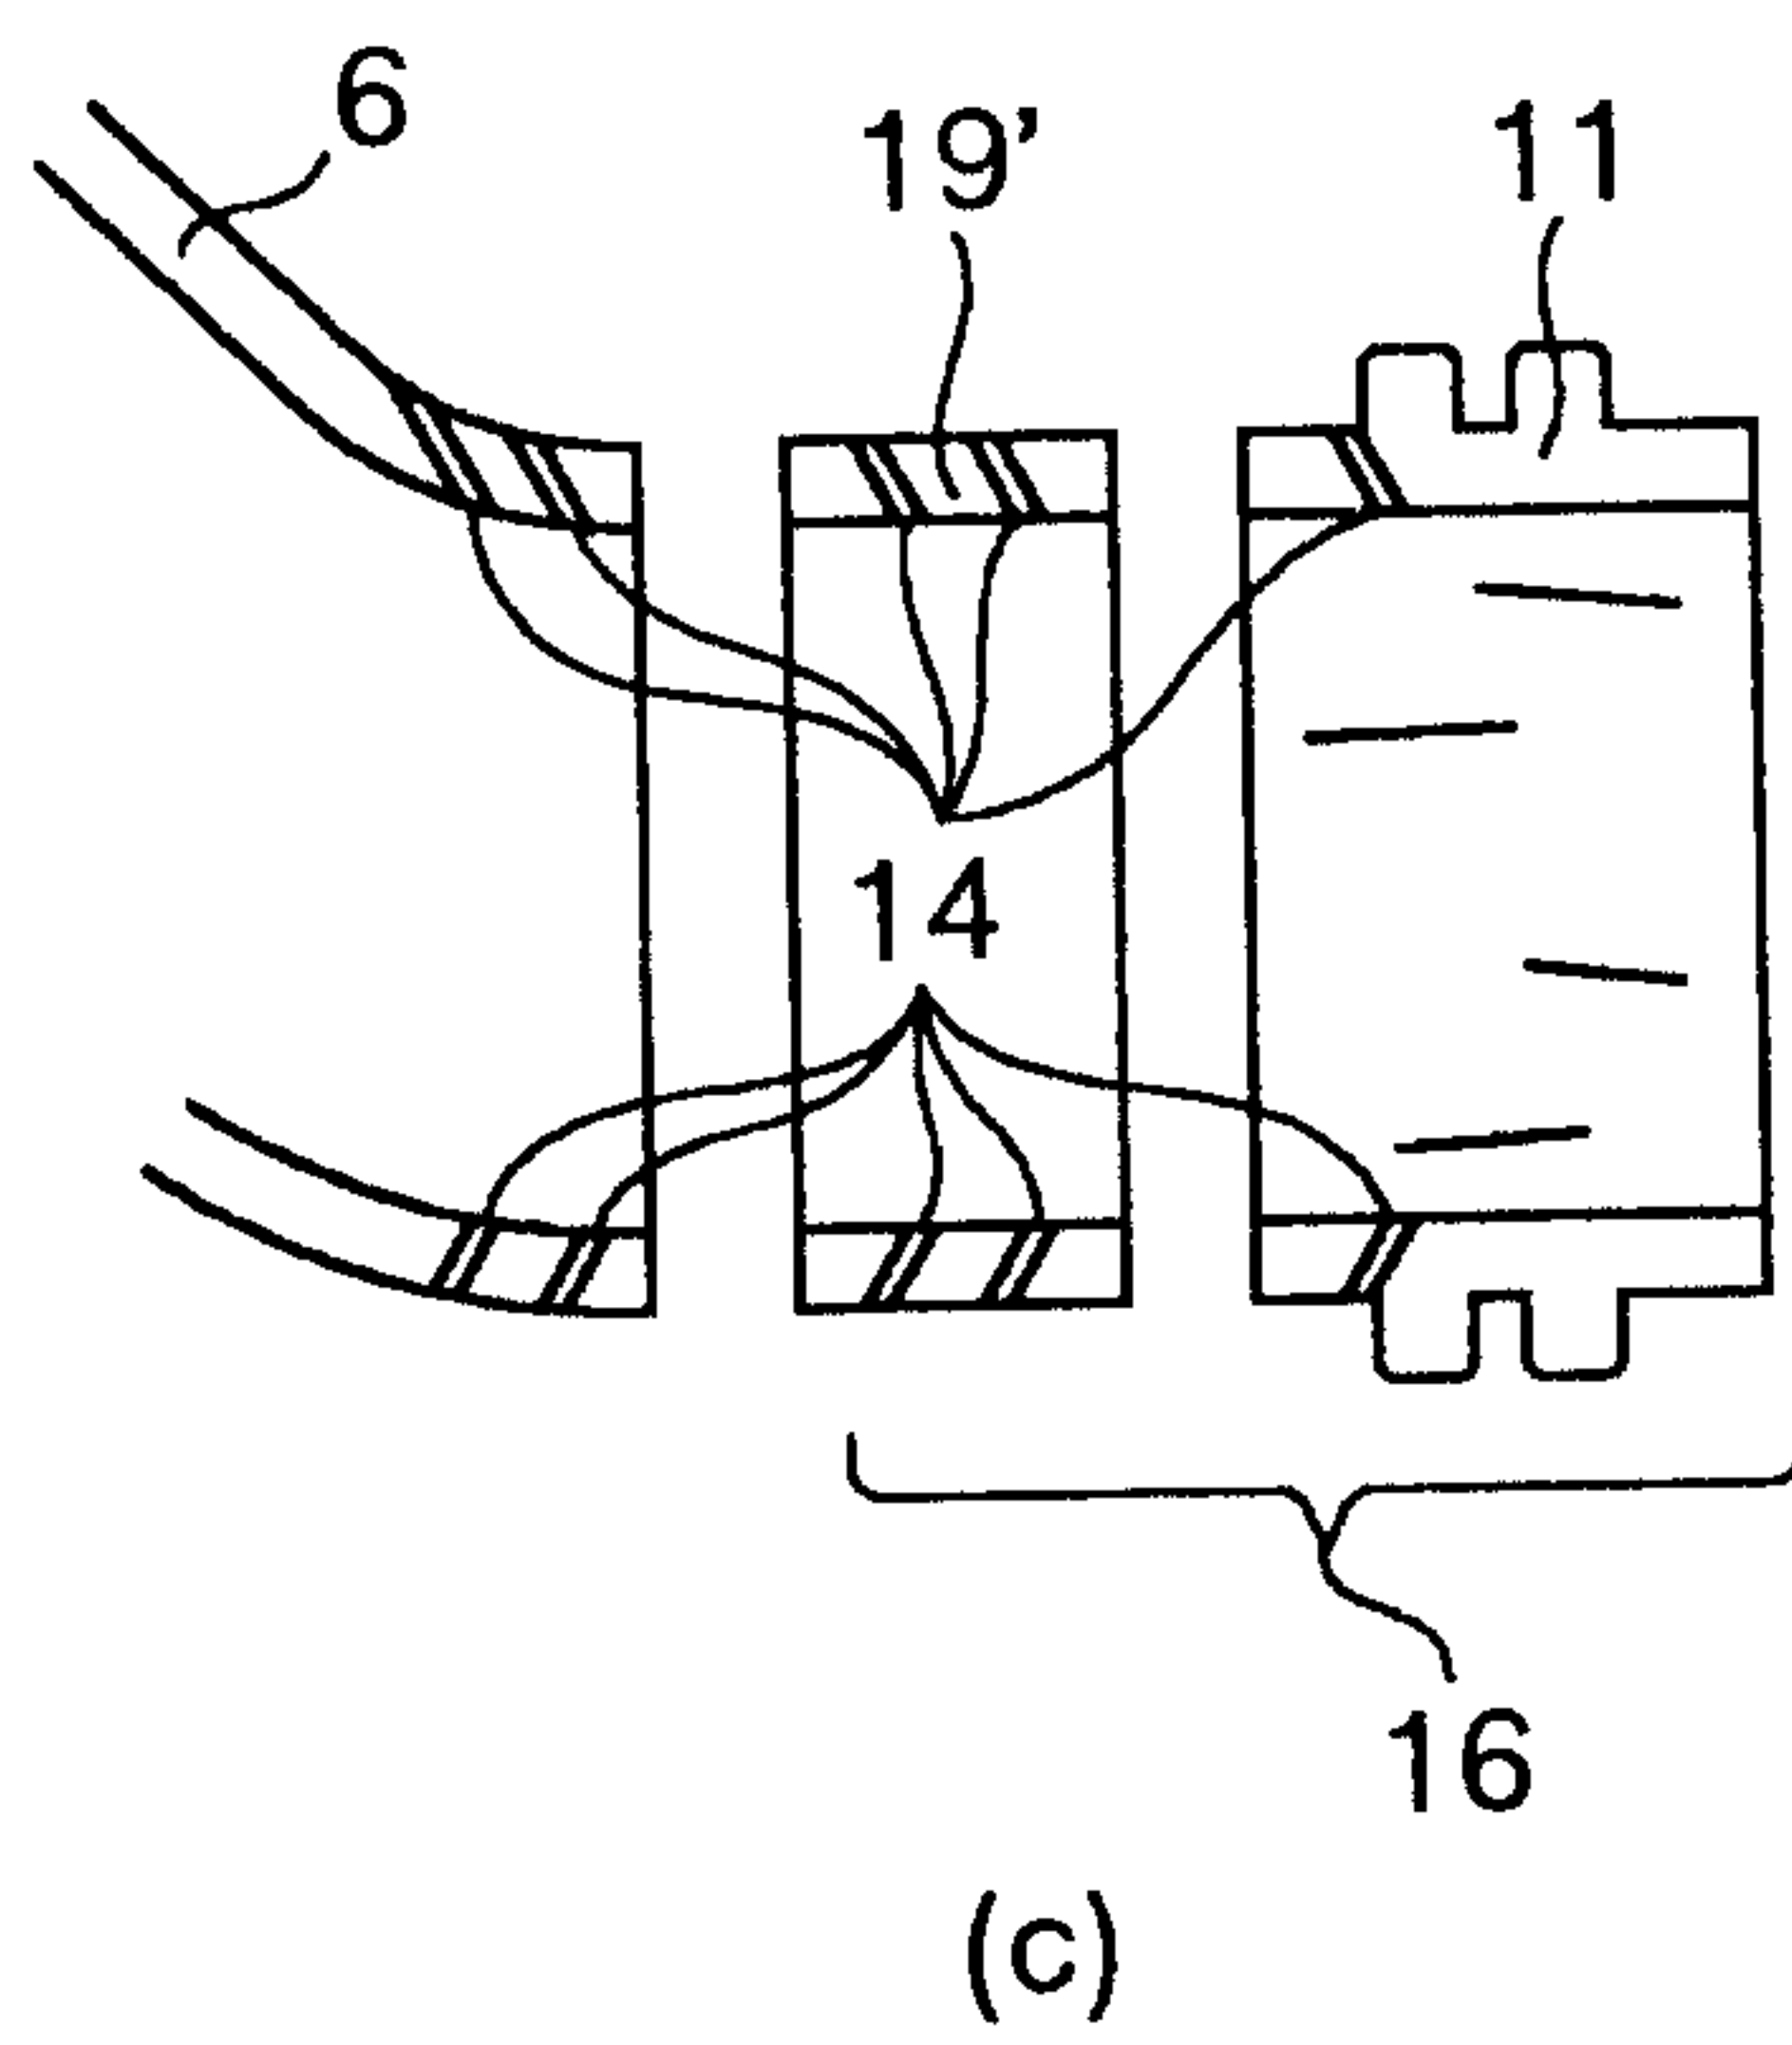
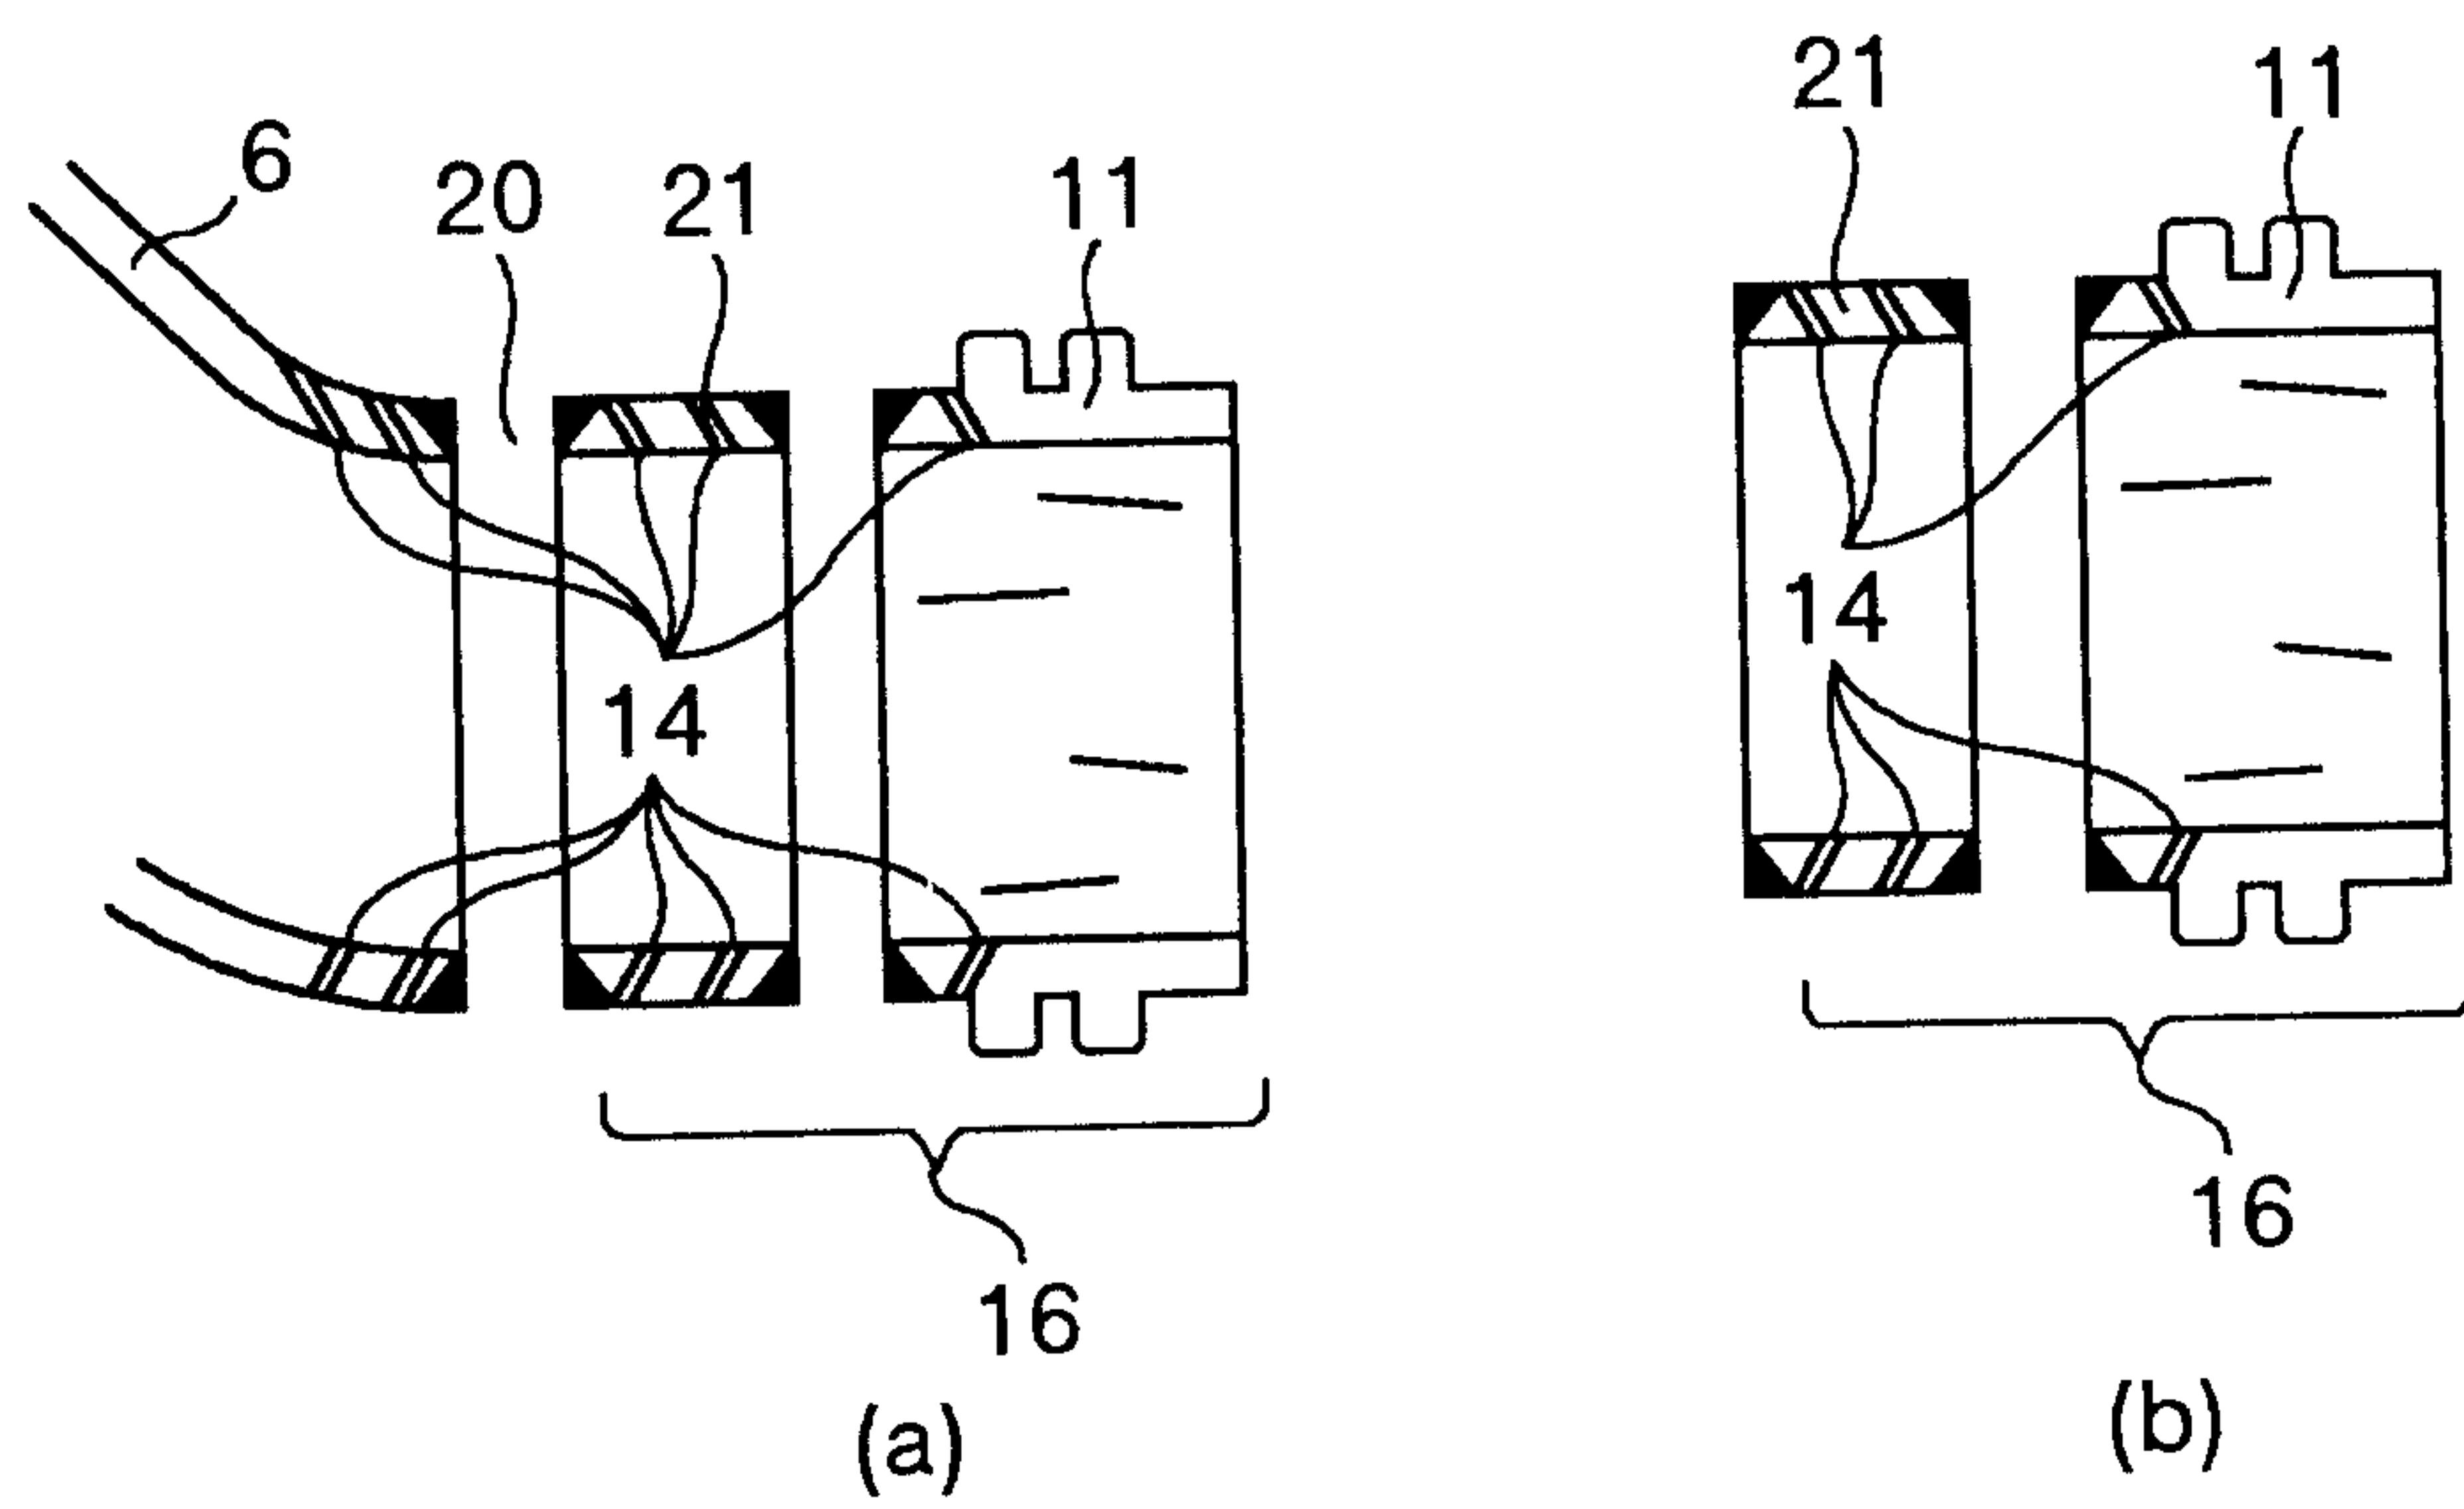


FIG.8

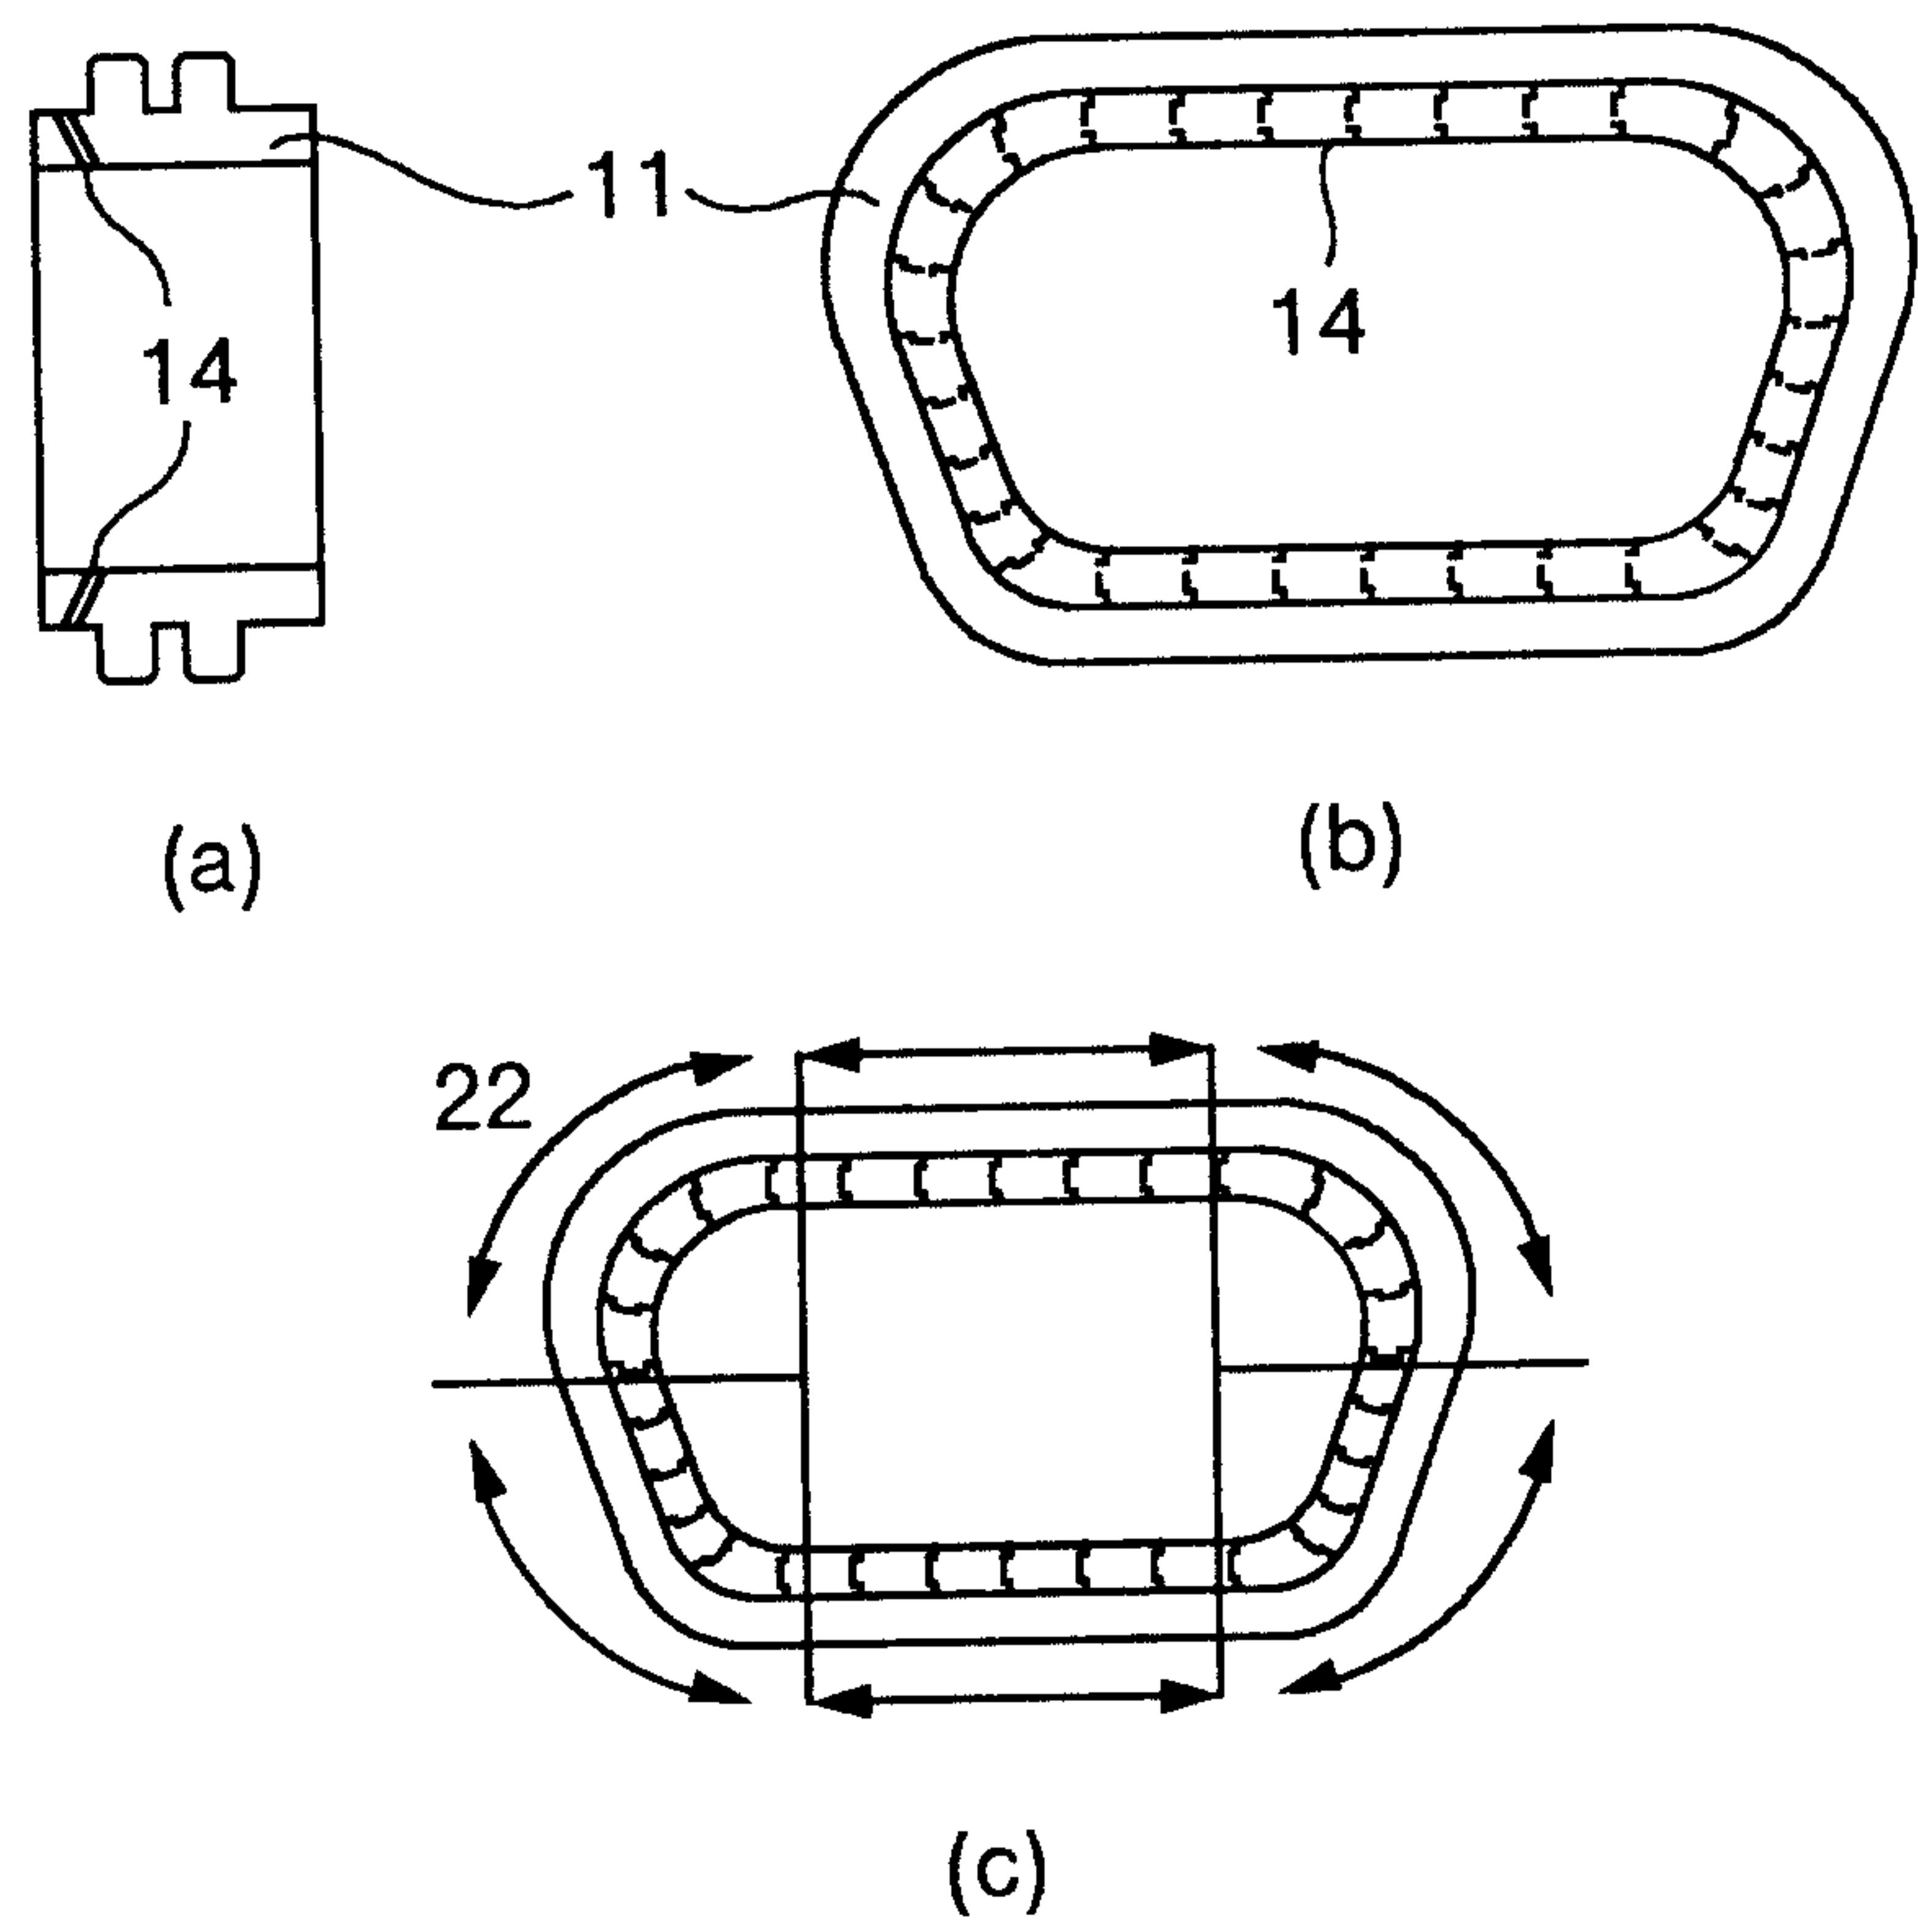


FIG.9

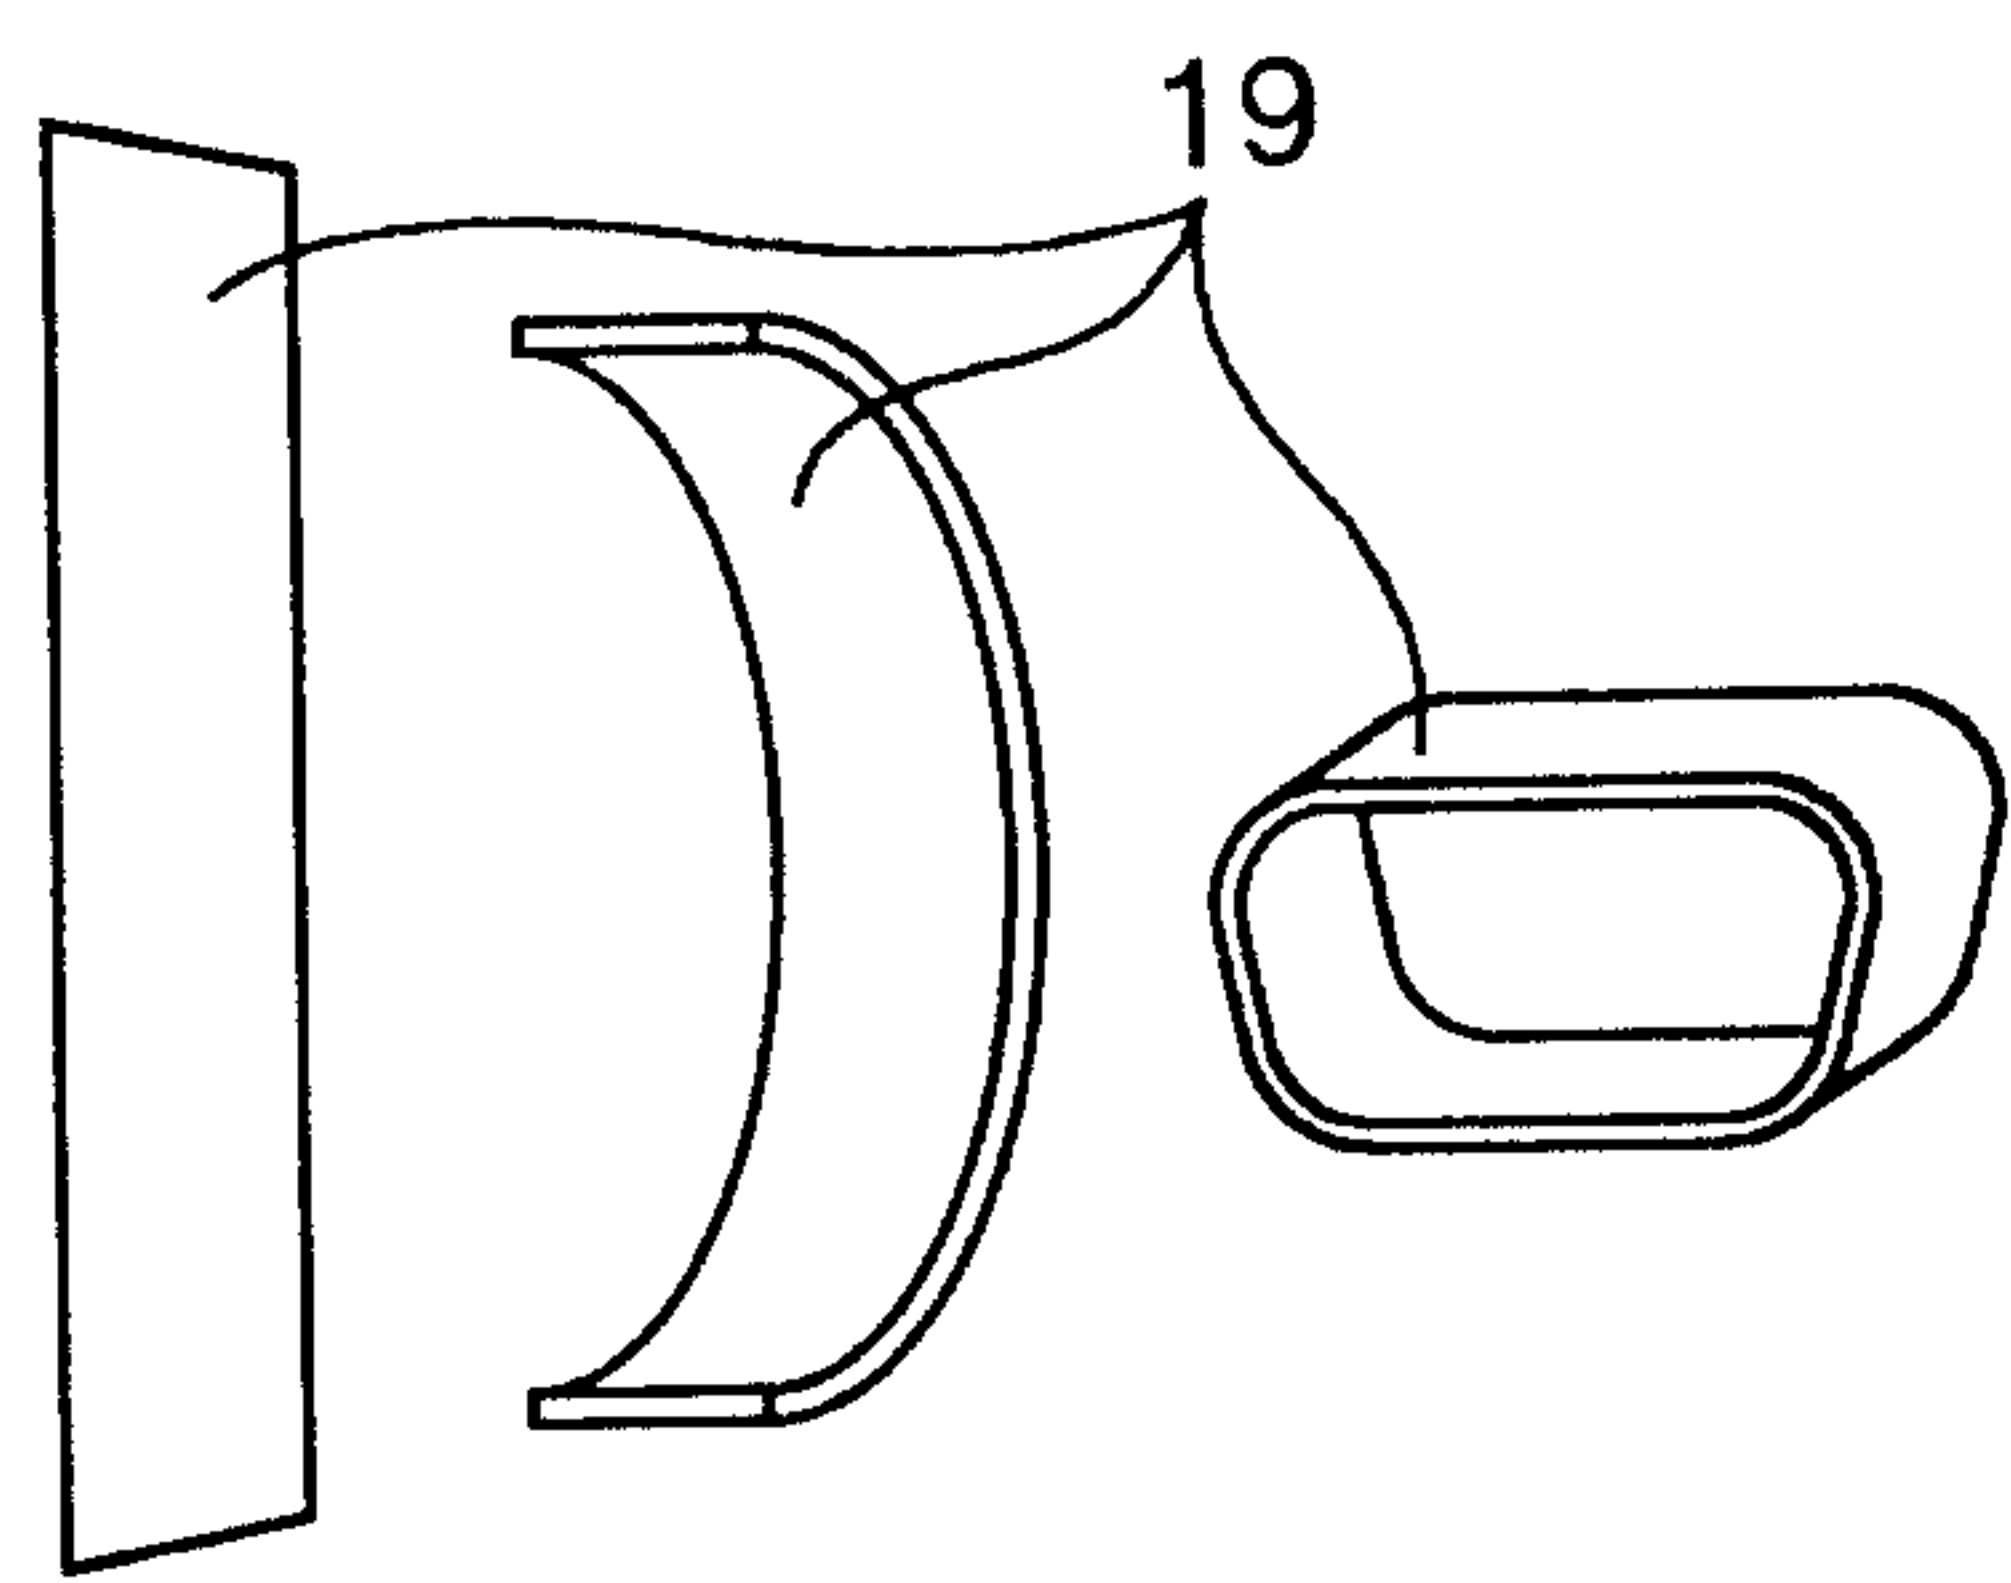


FIG.10

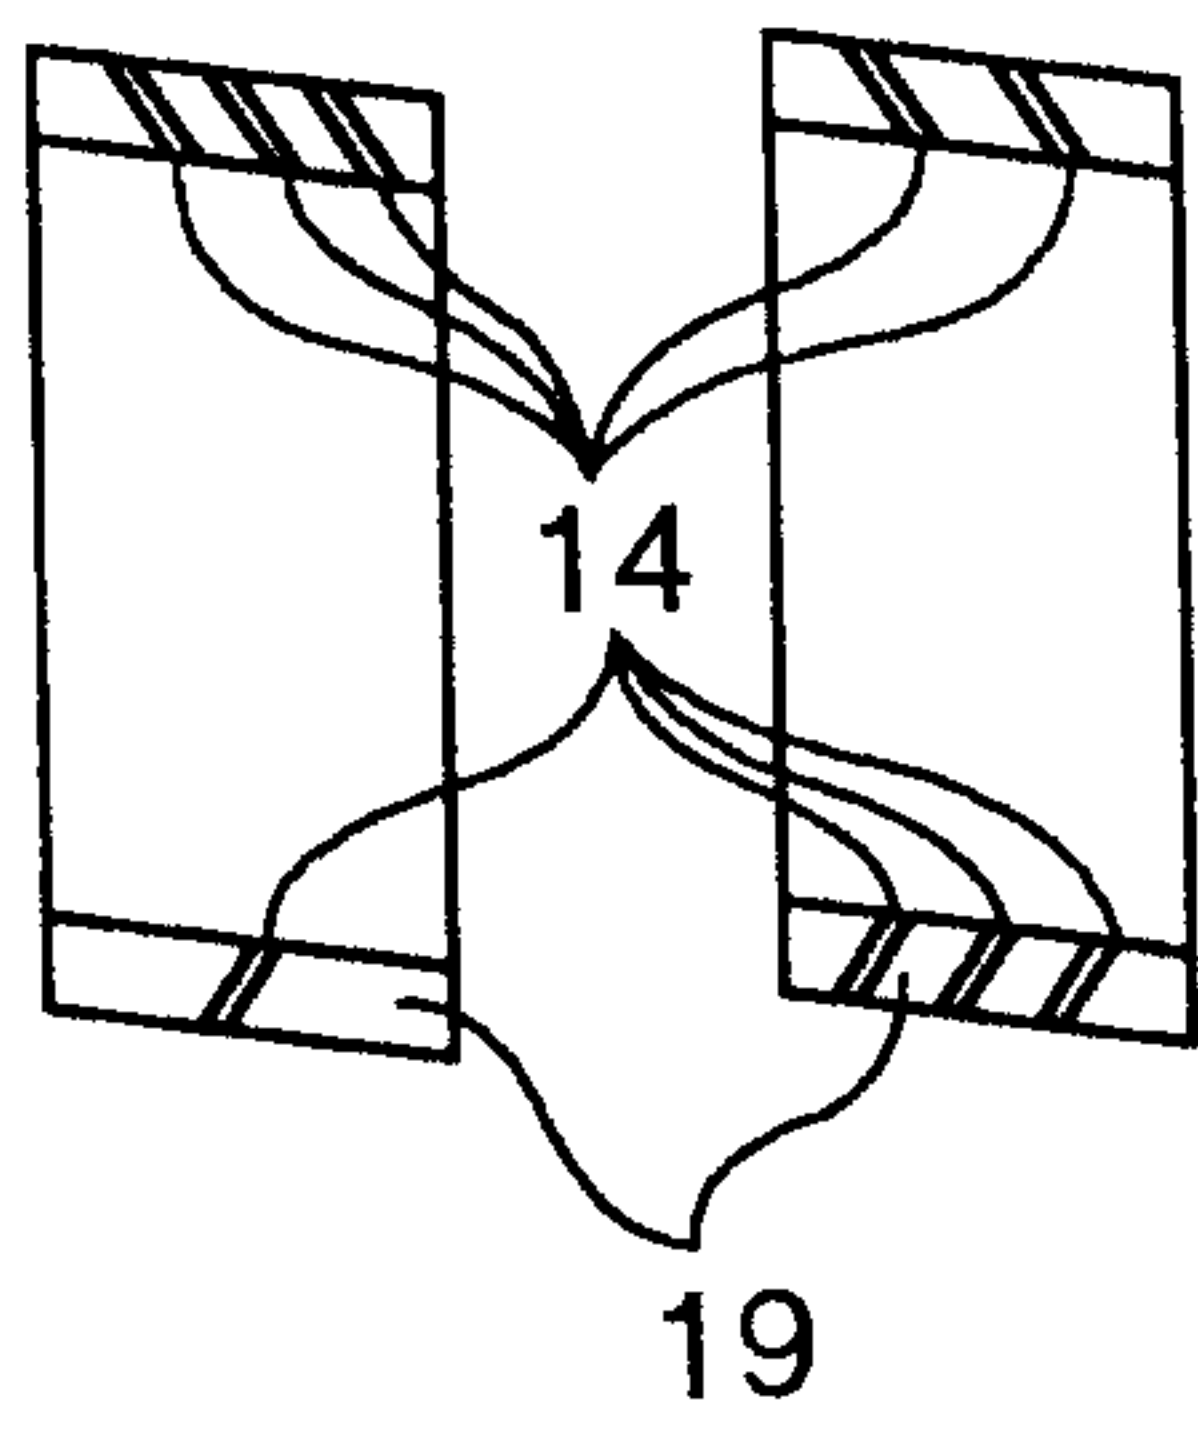


FIG.11

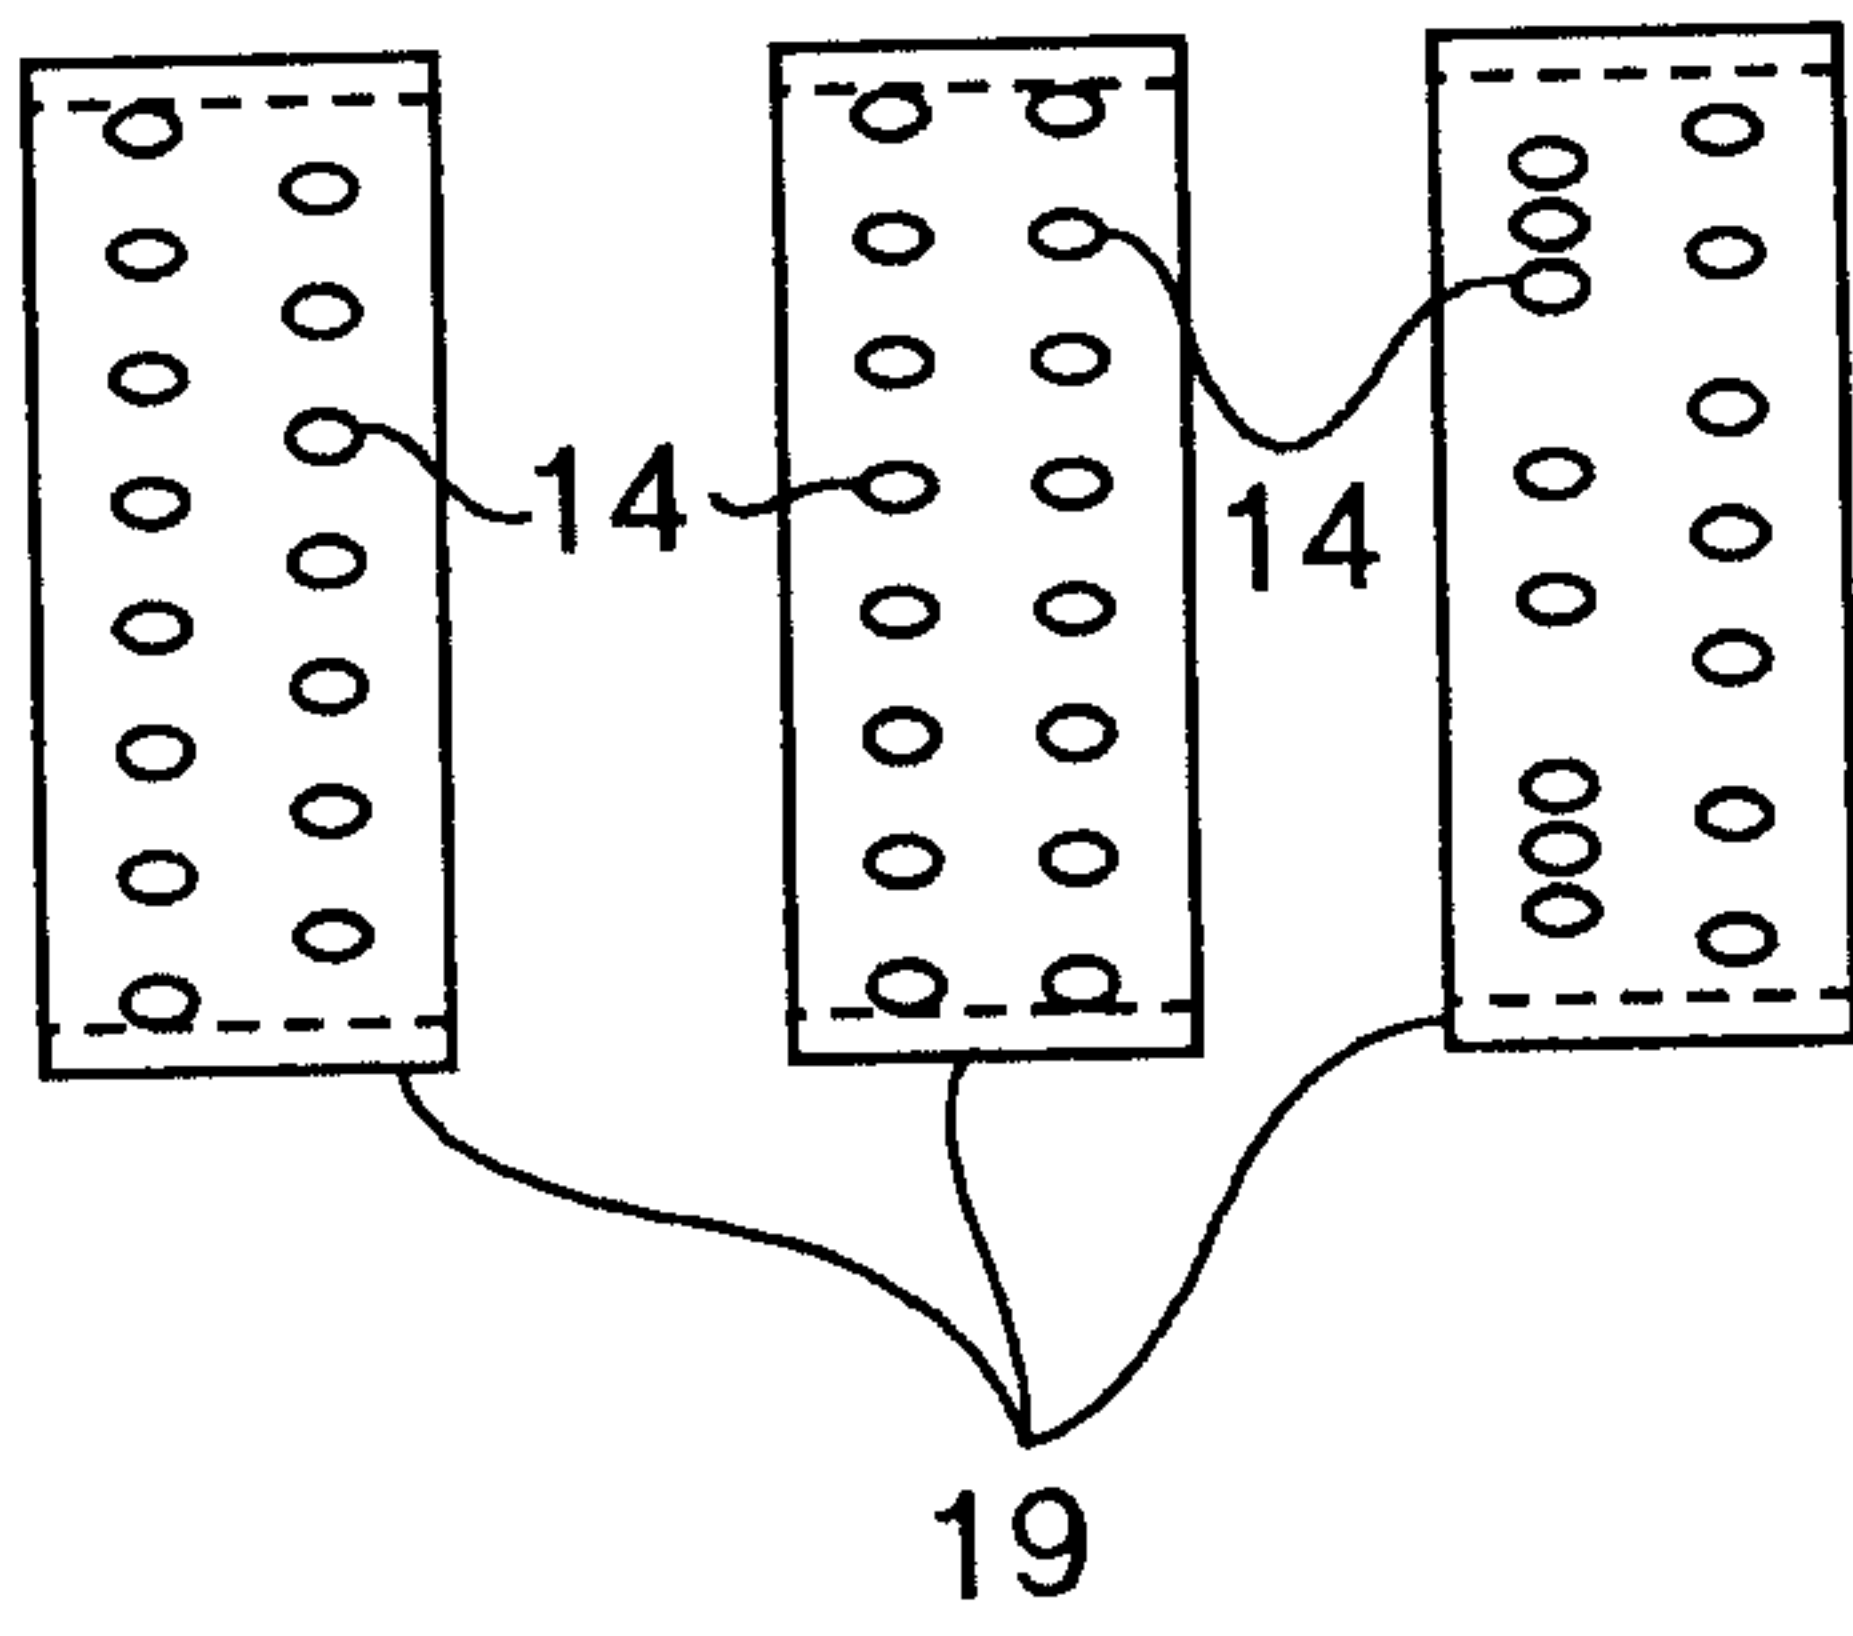


FIG.12



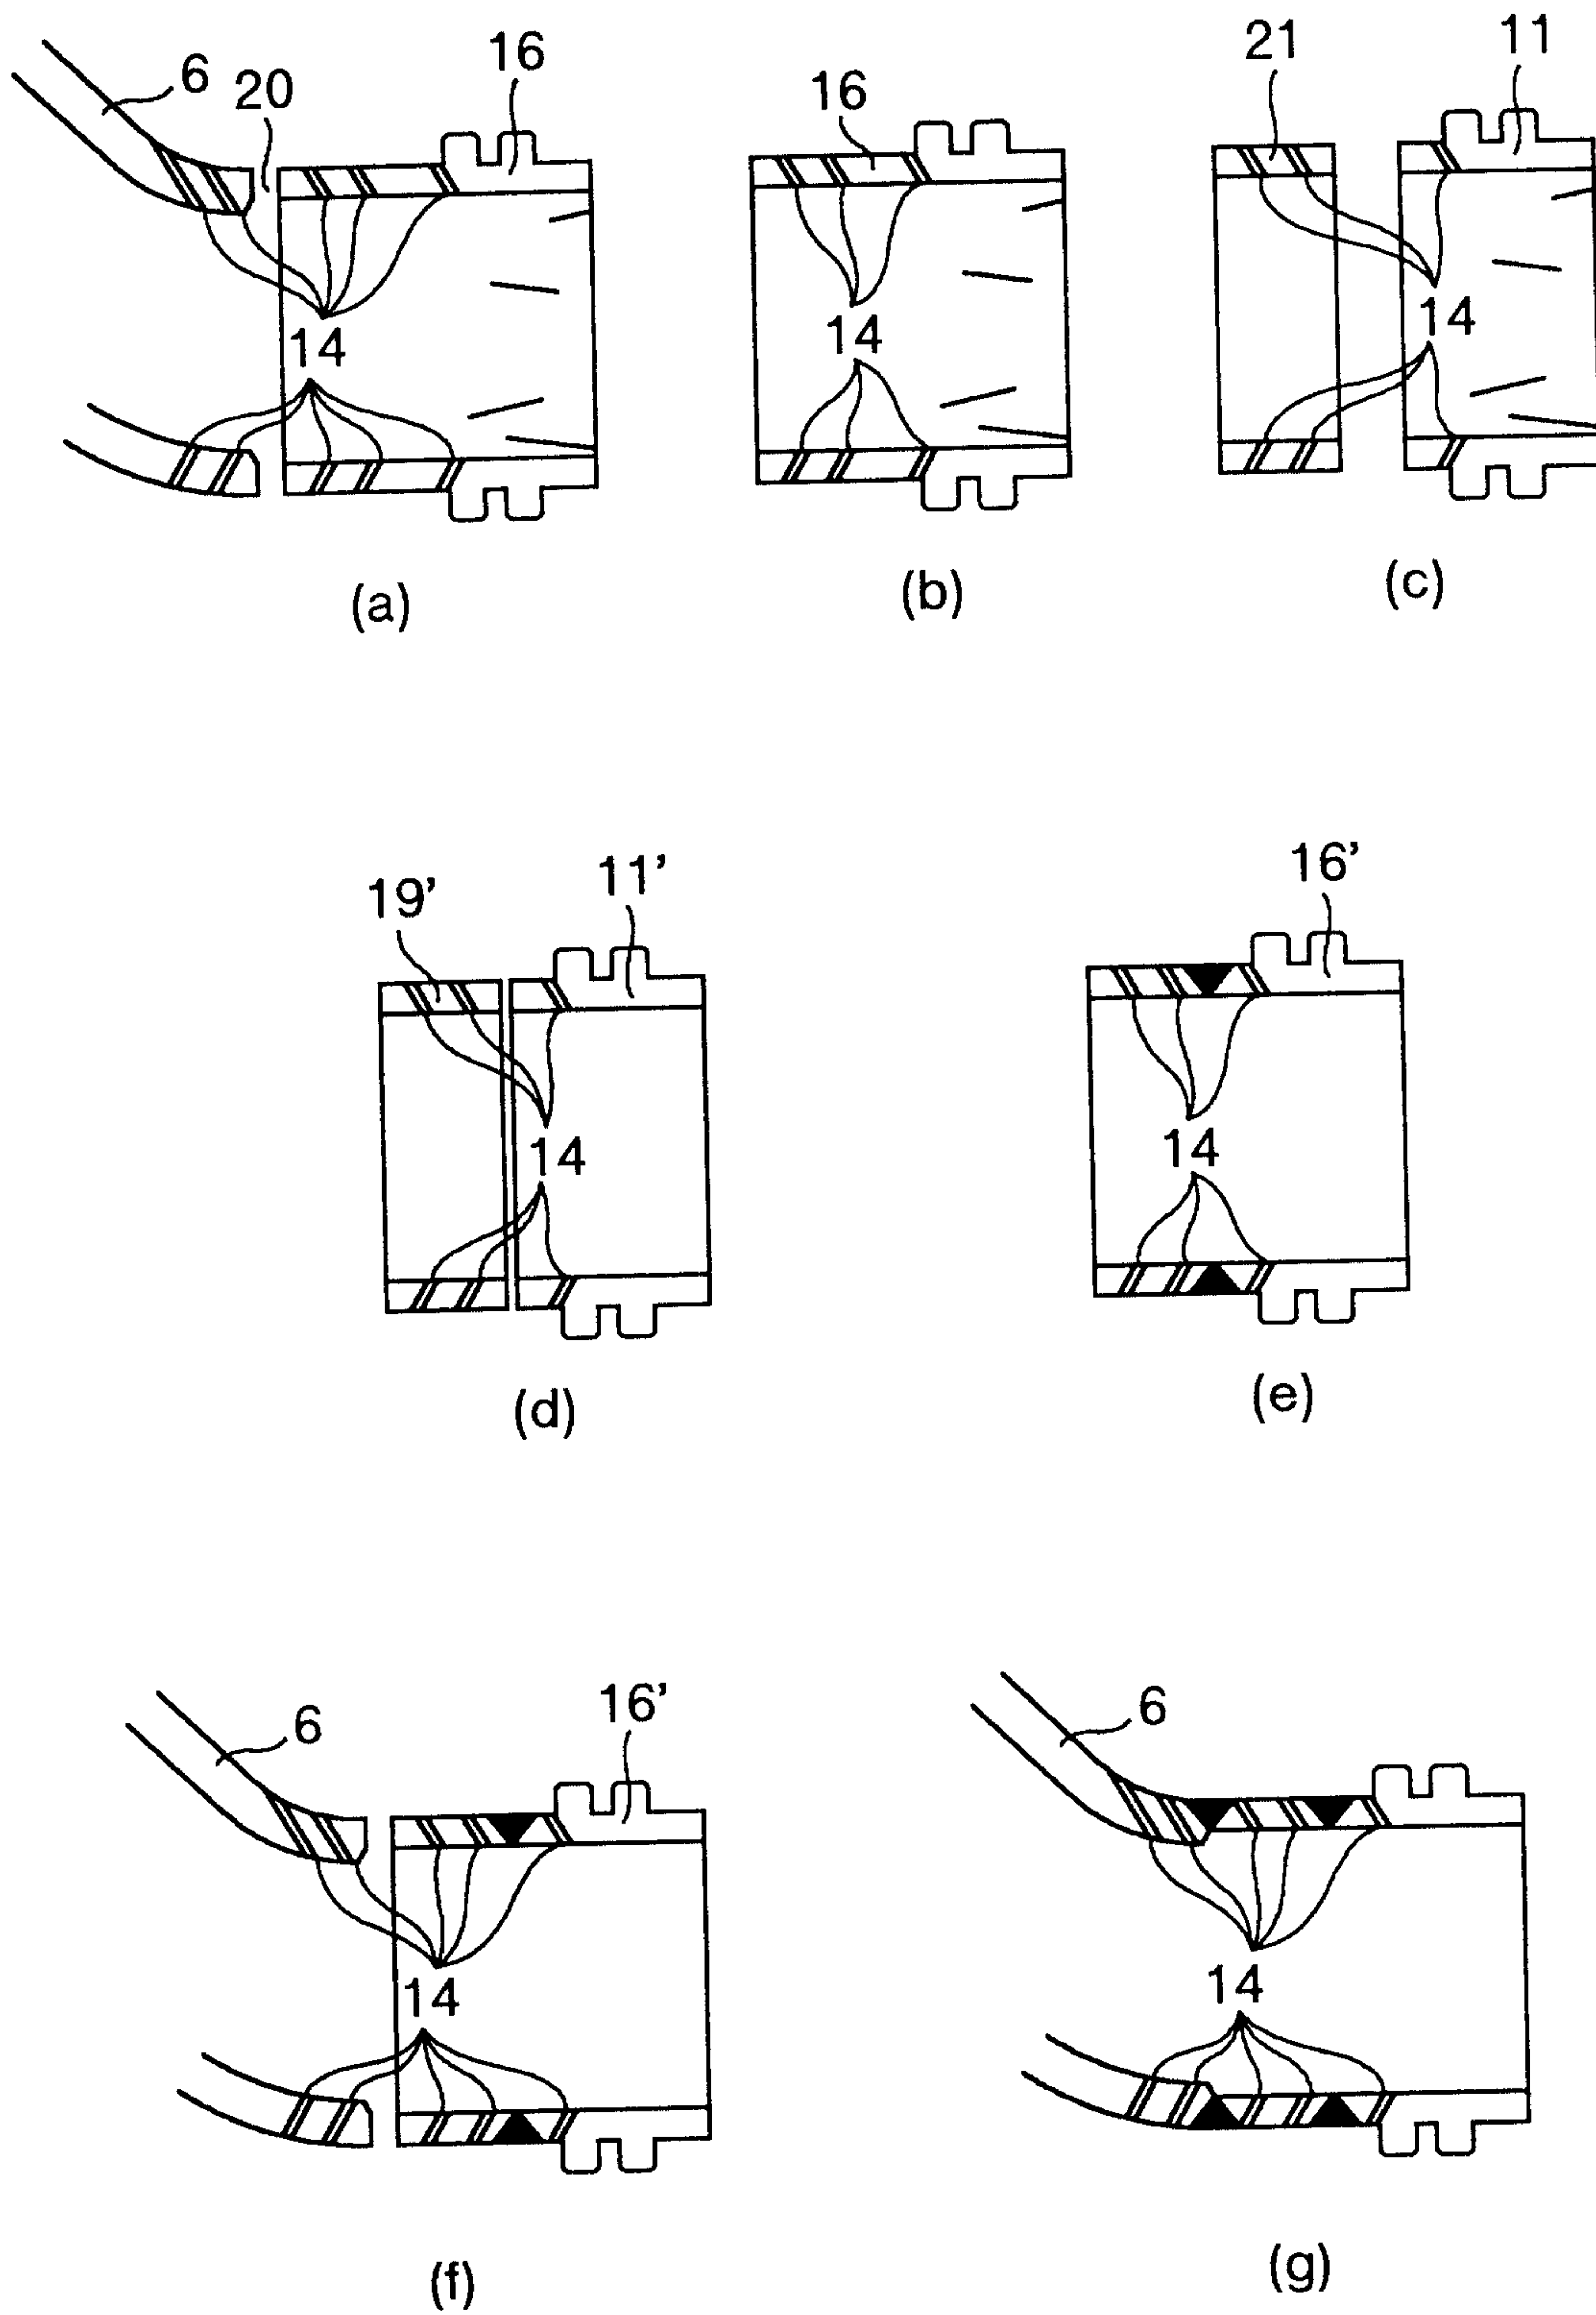



FIG.13

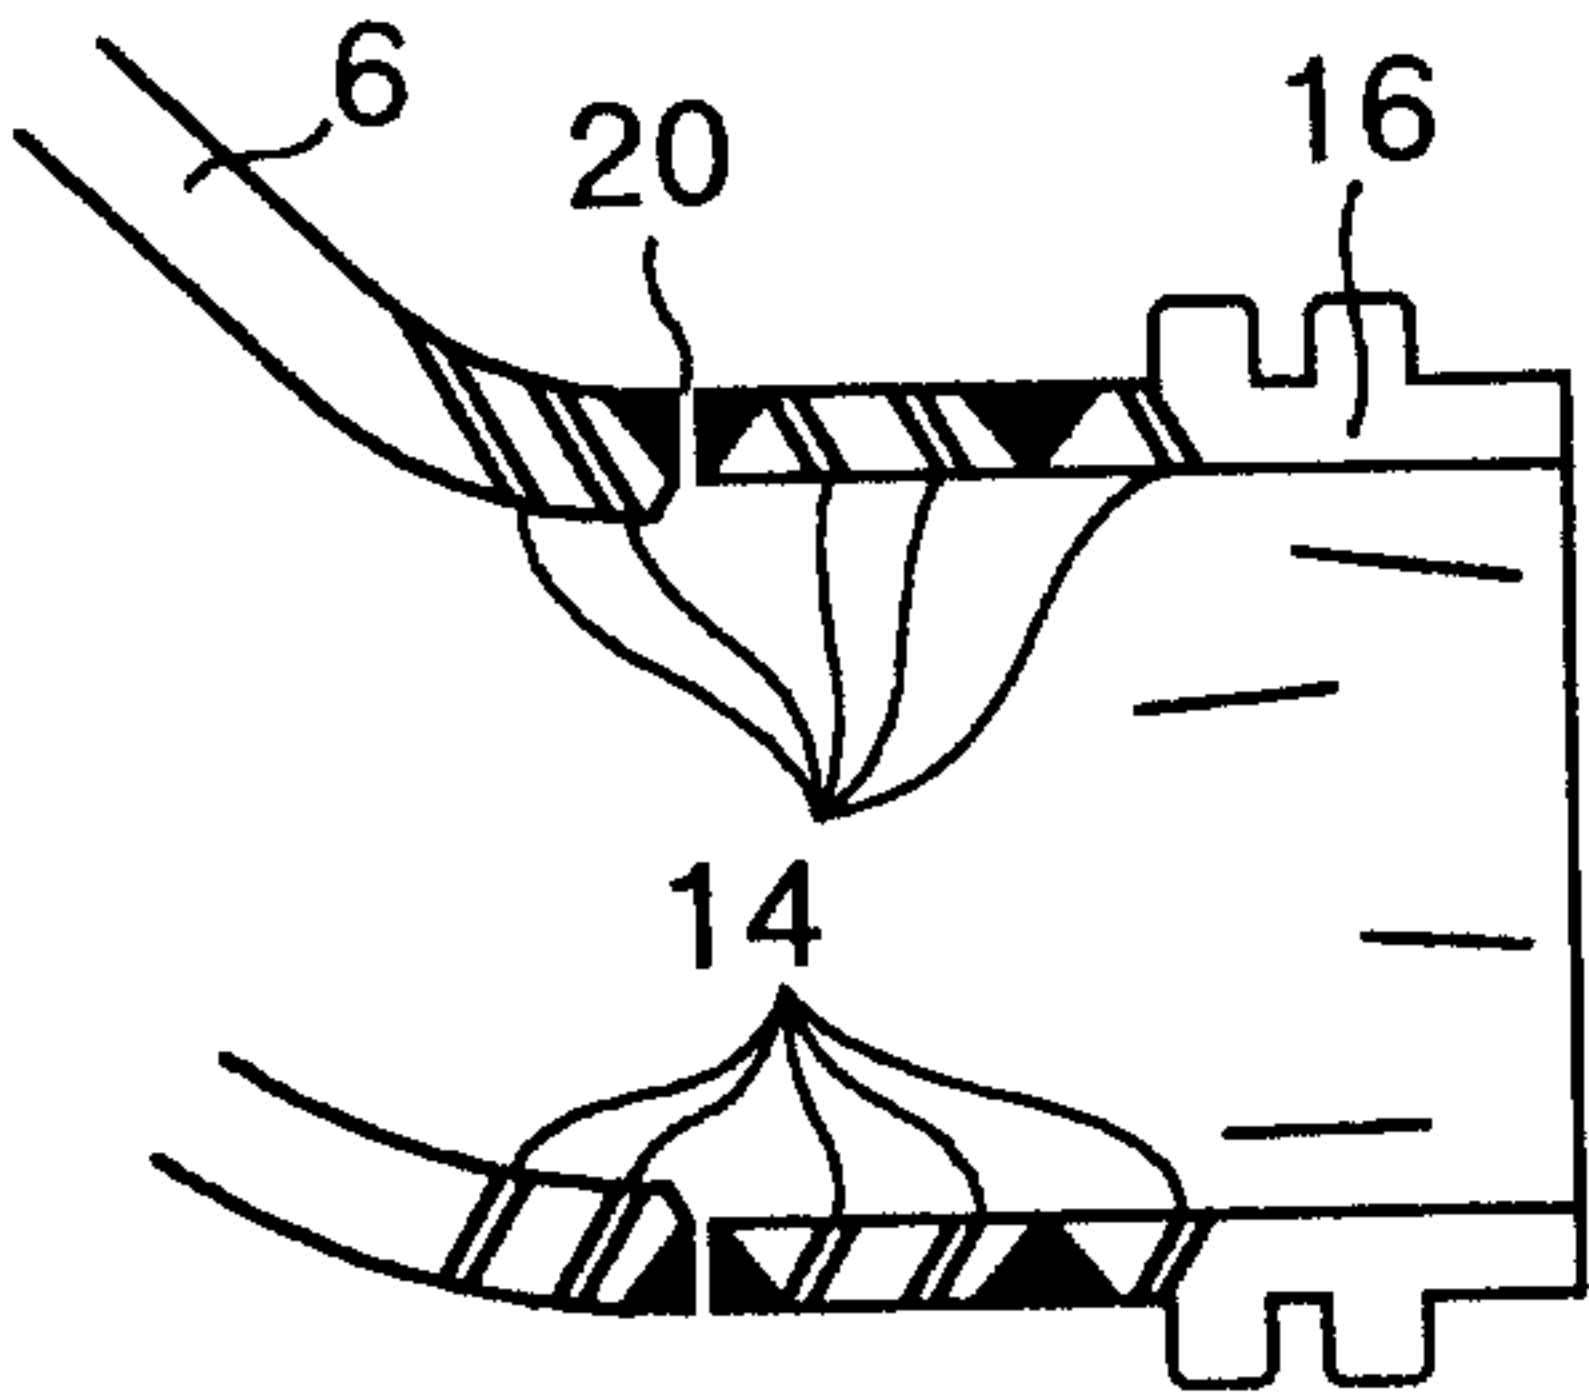


(a)

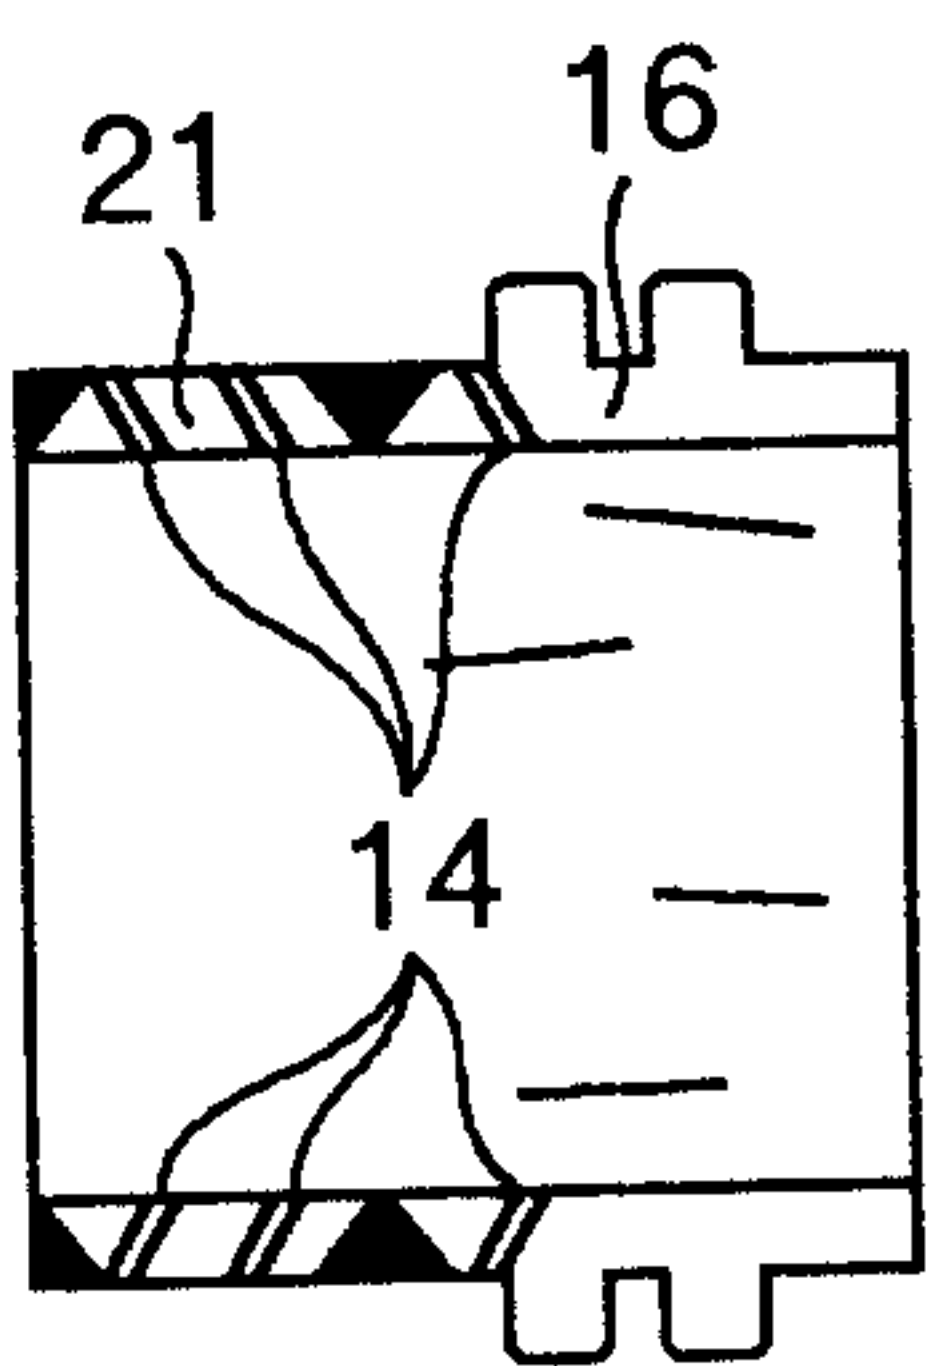


(b)

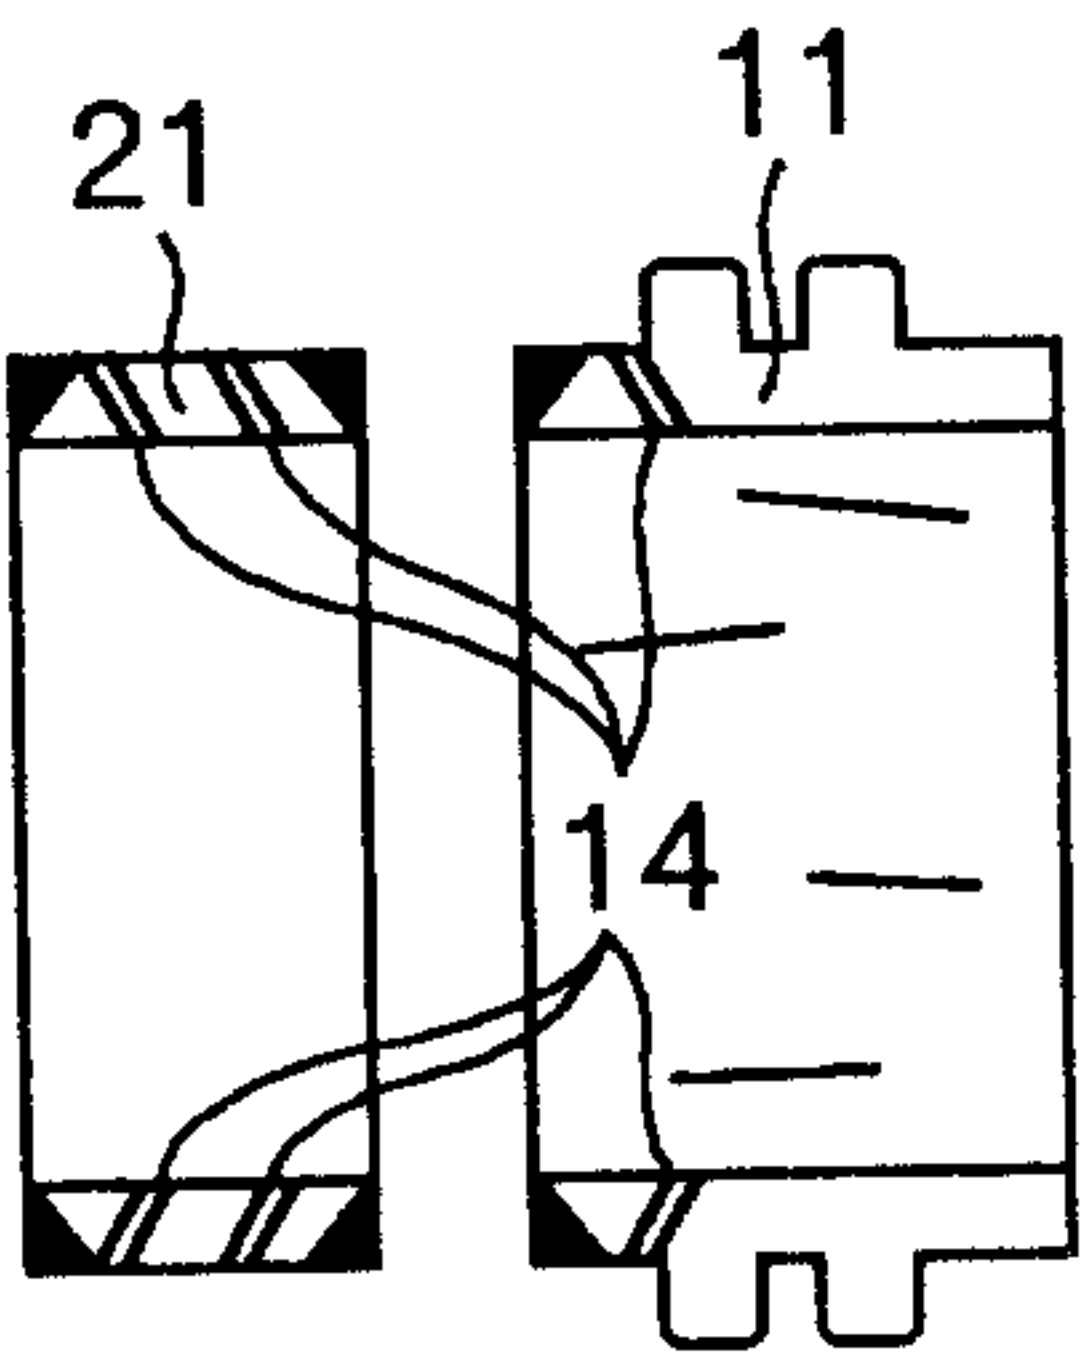

(c)

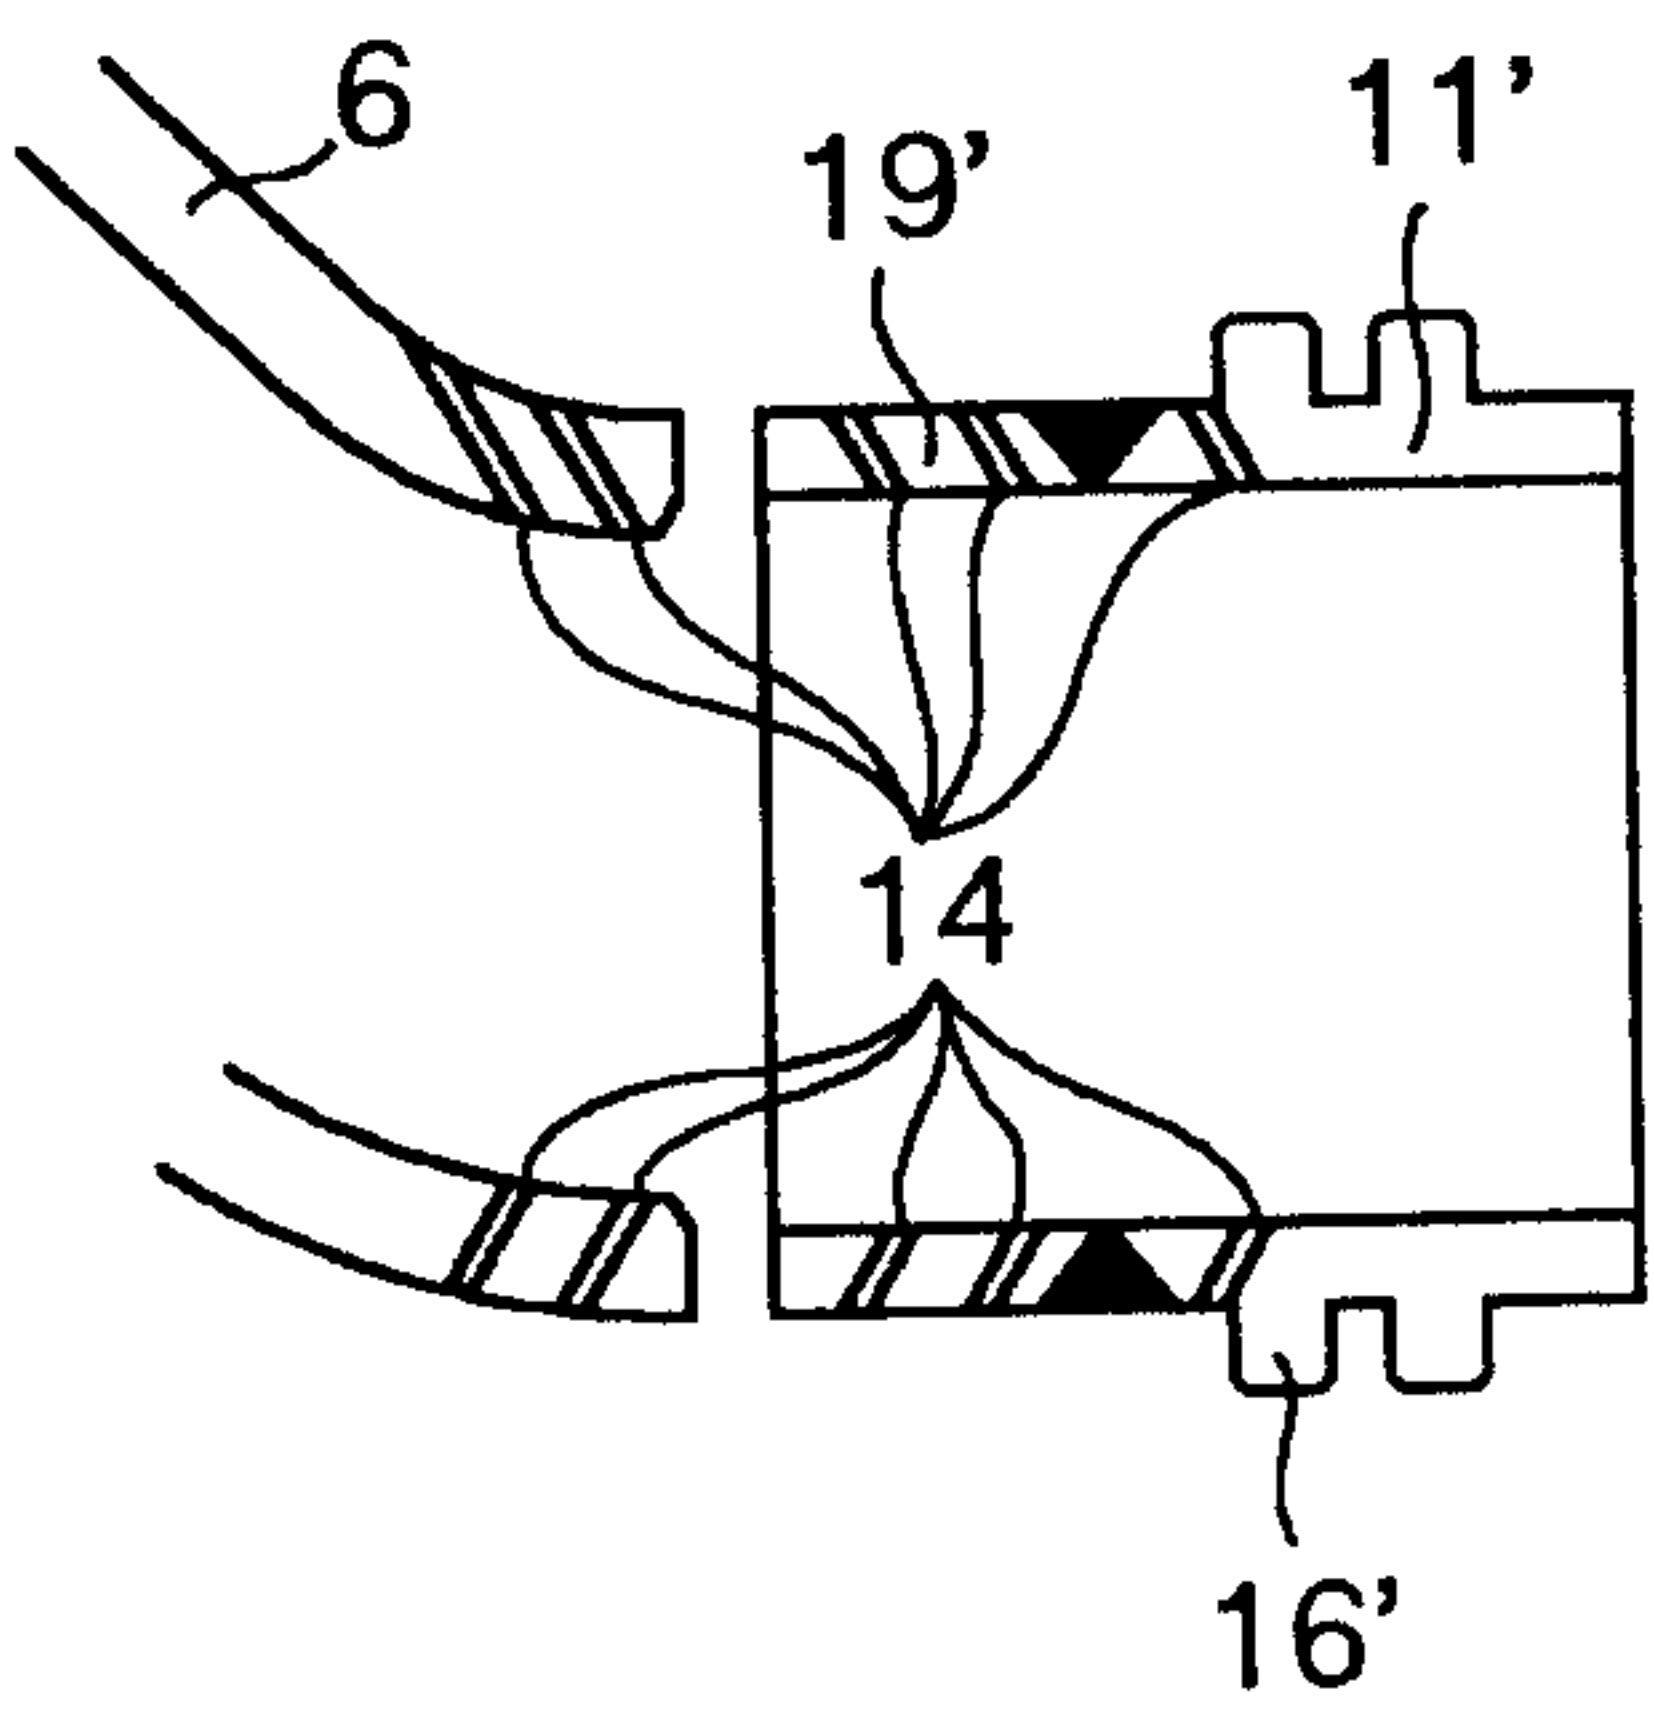

(d)

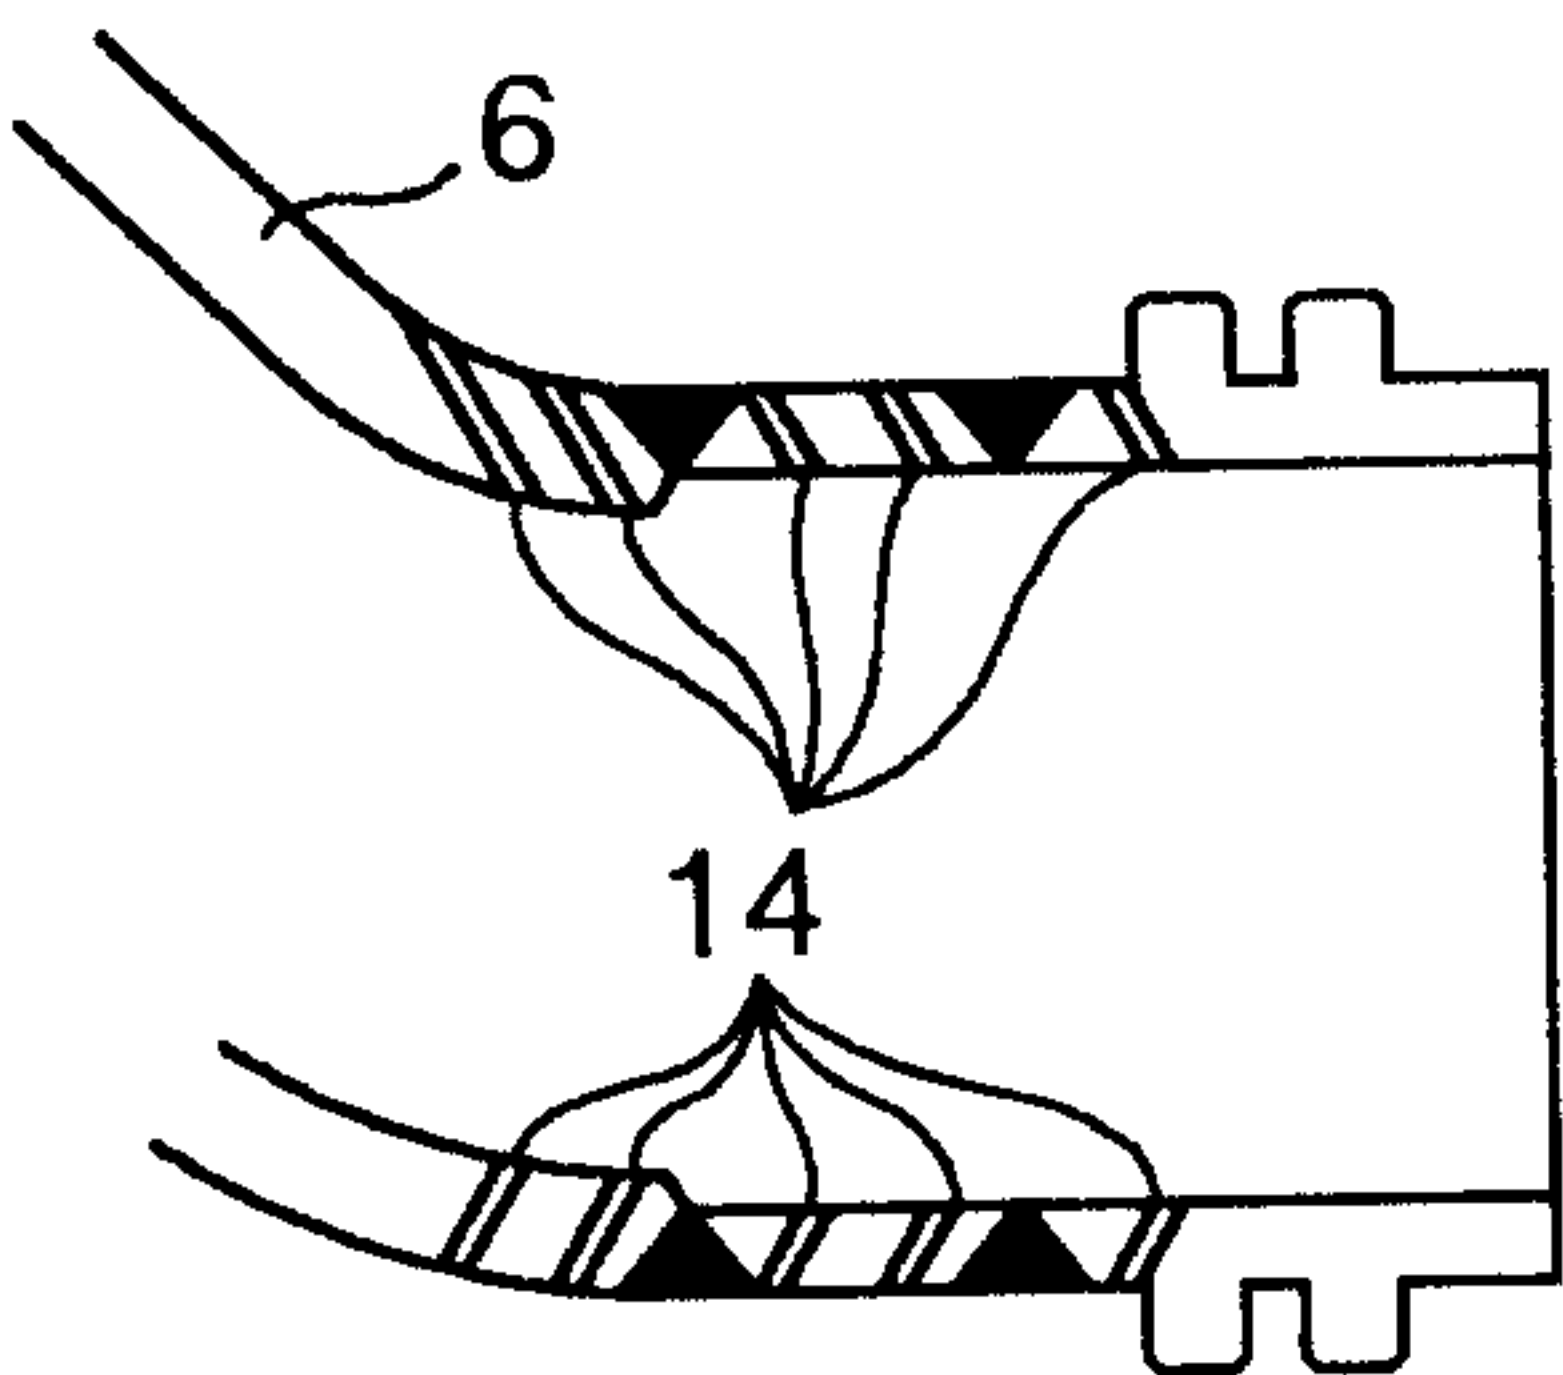

(e)

FIG.14

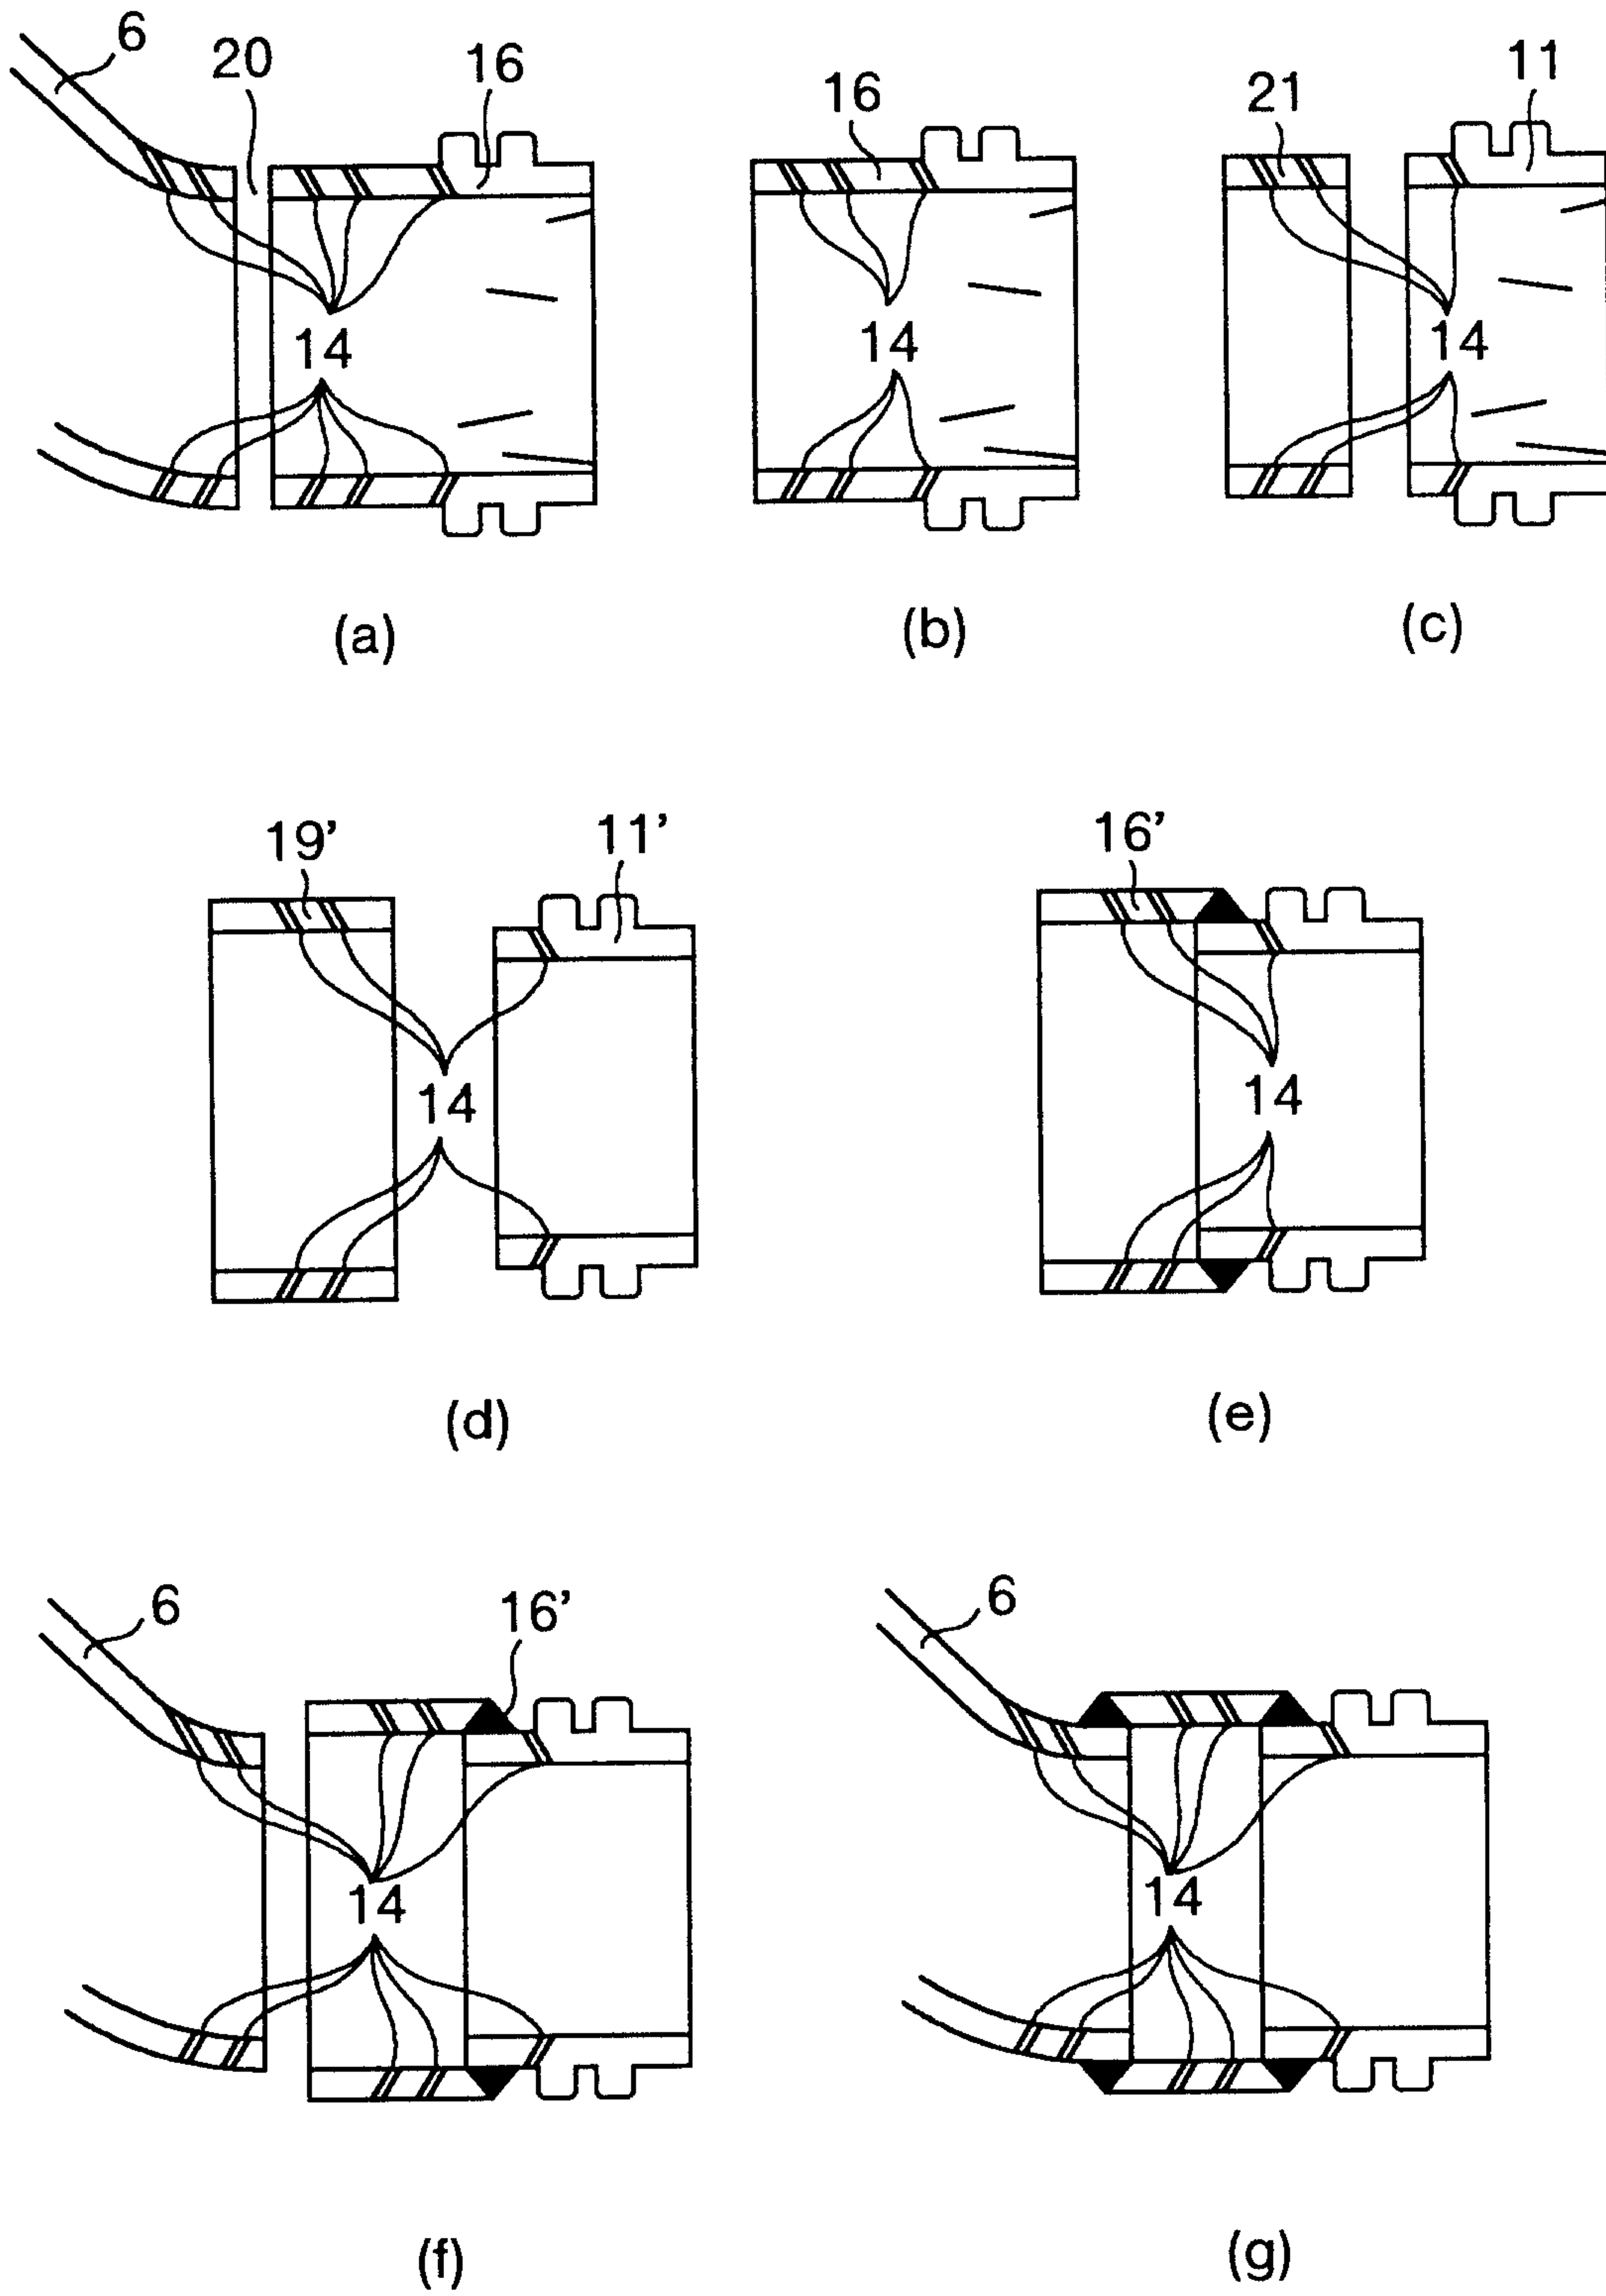


FIG.15

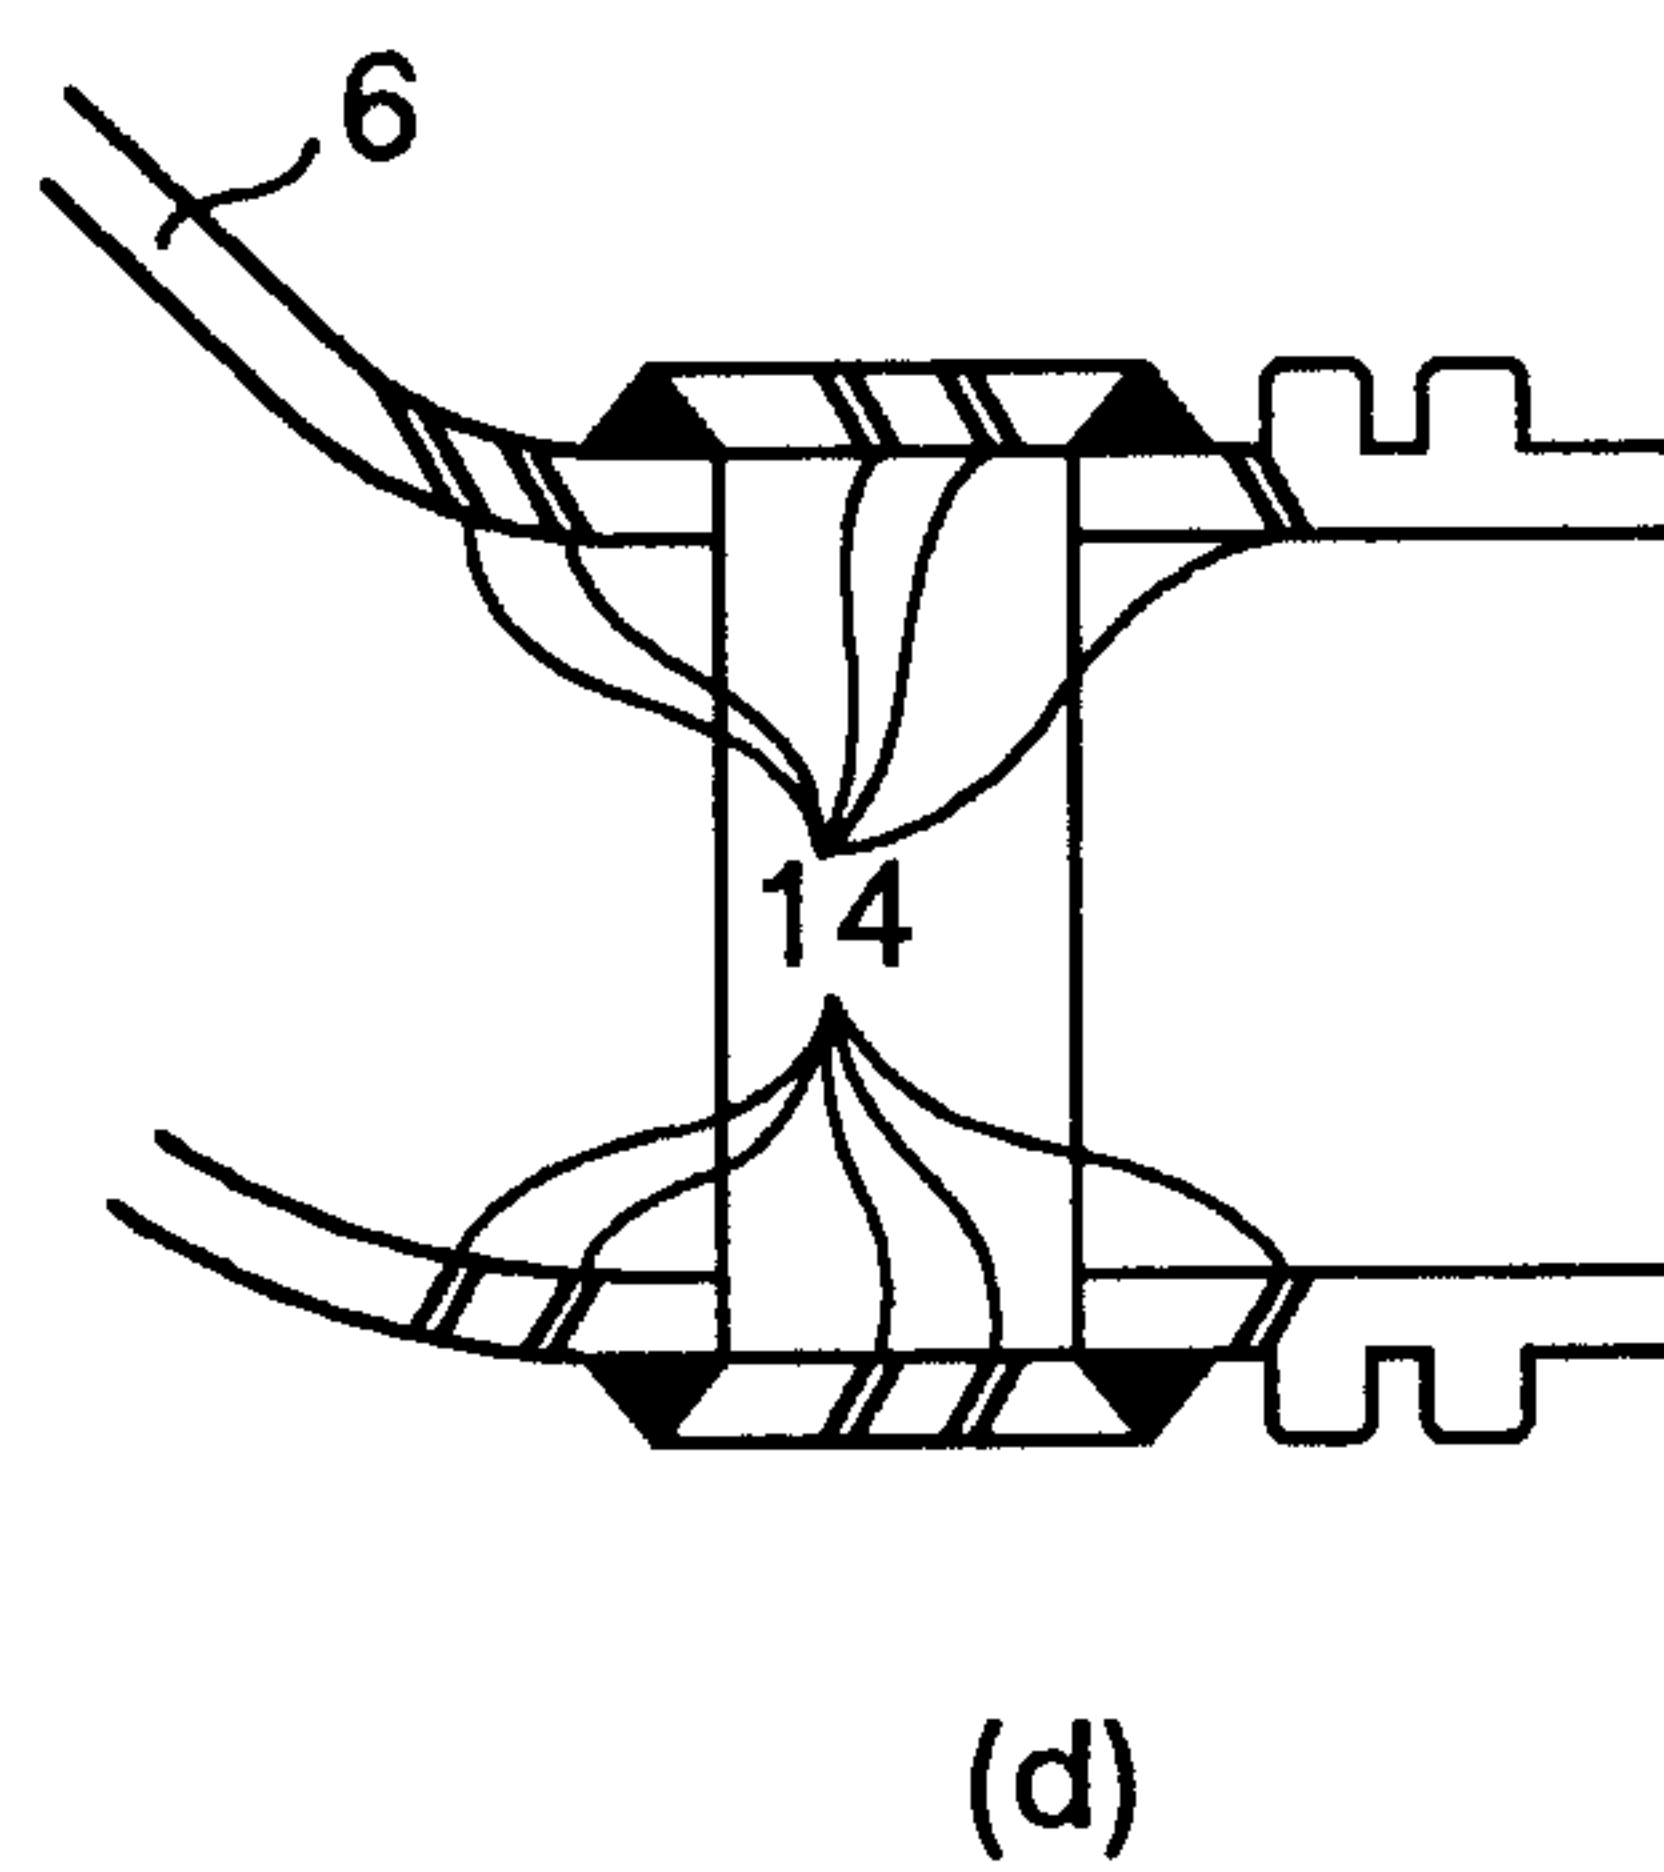
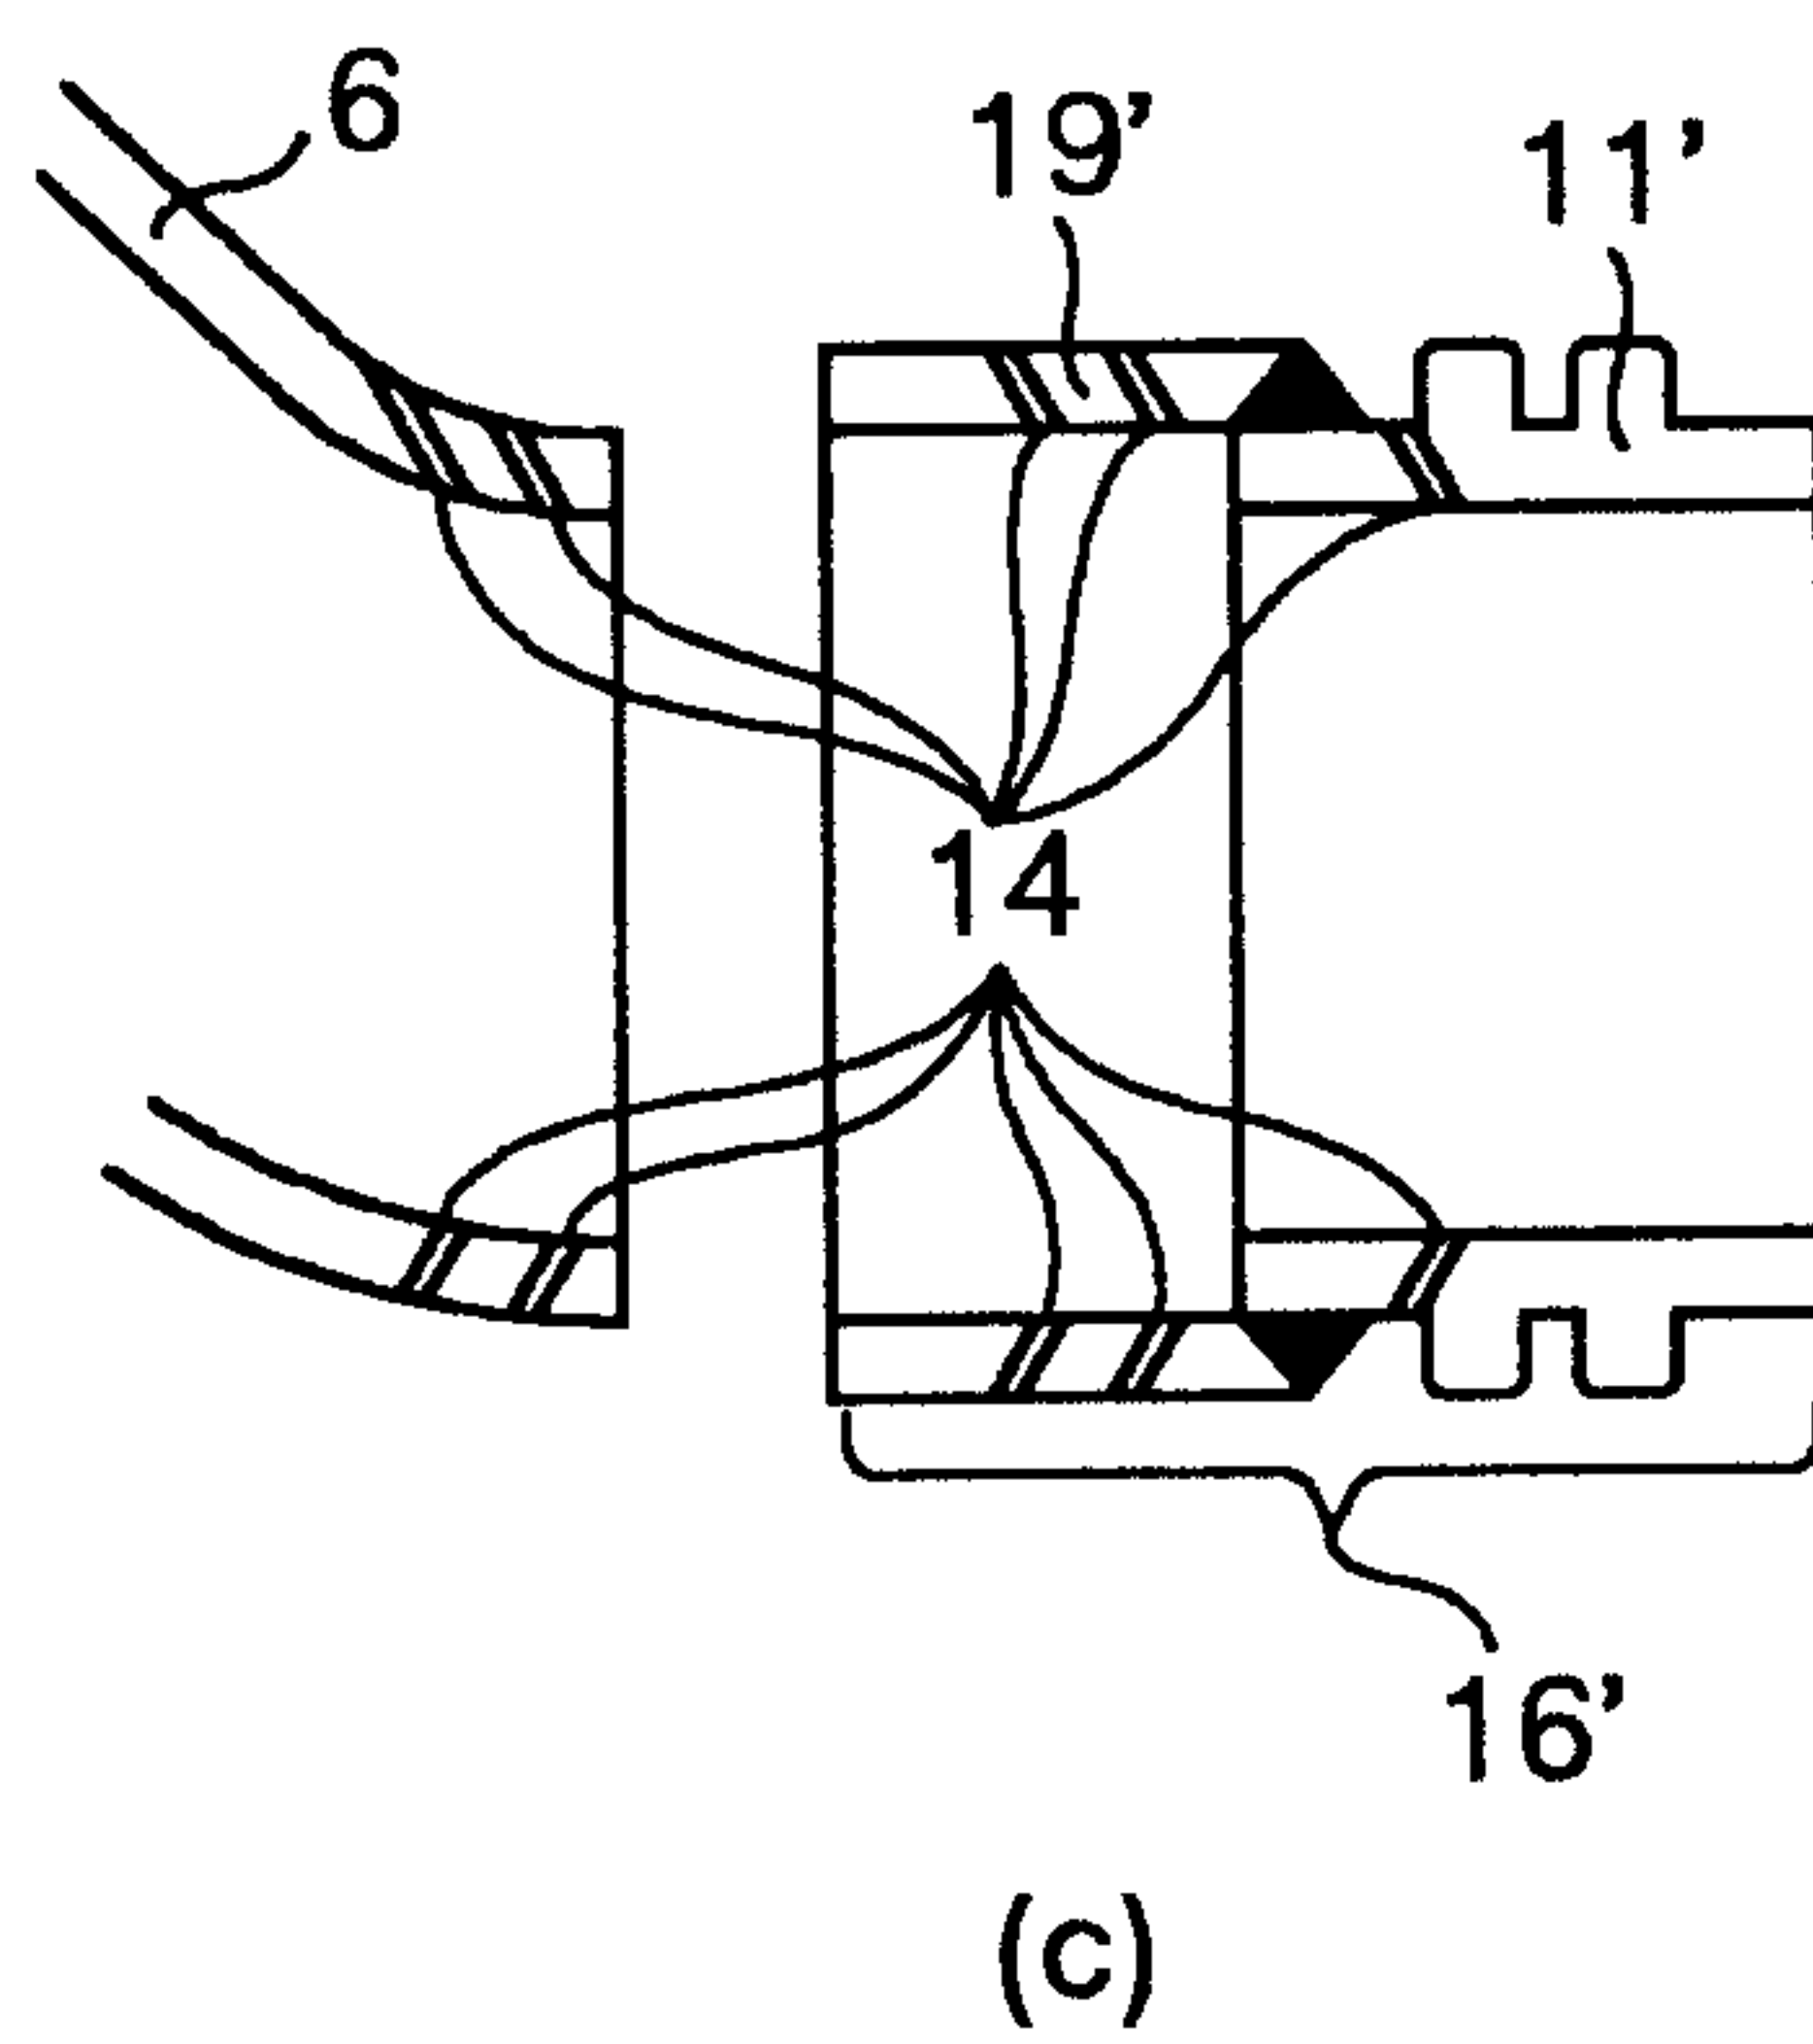
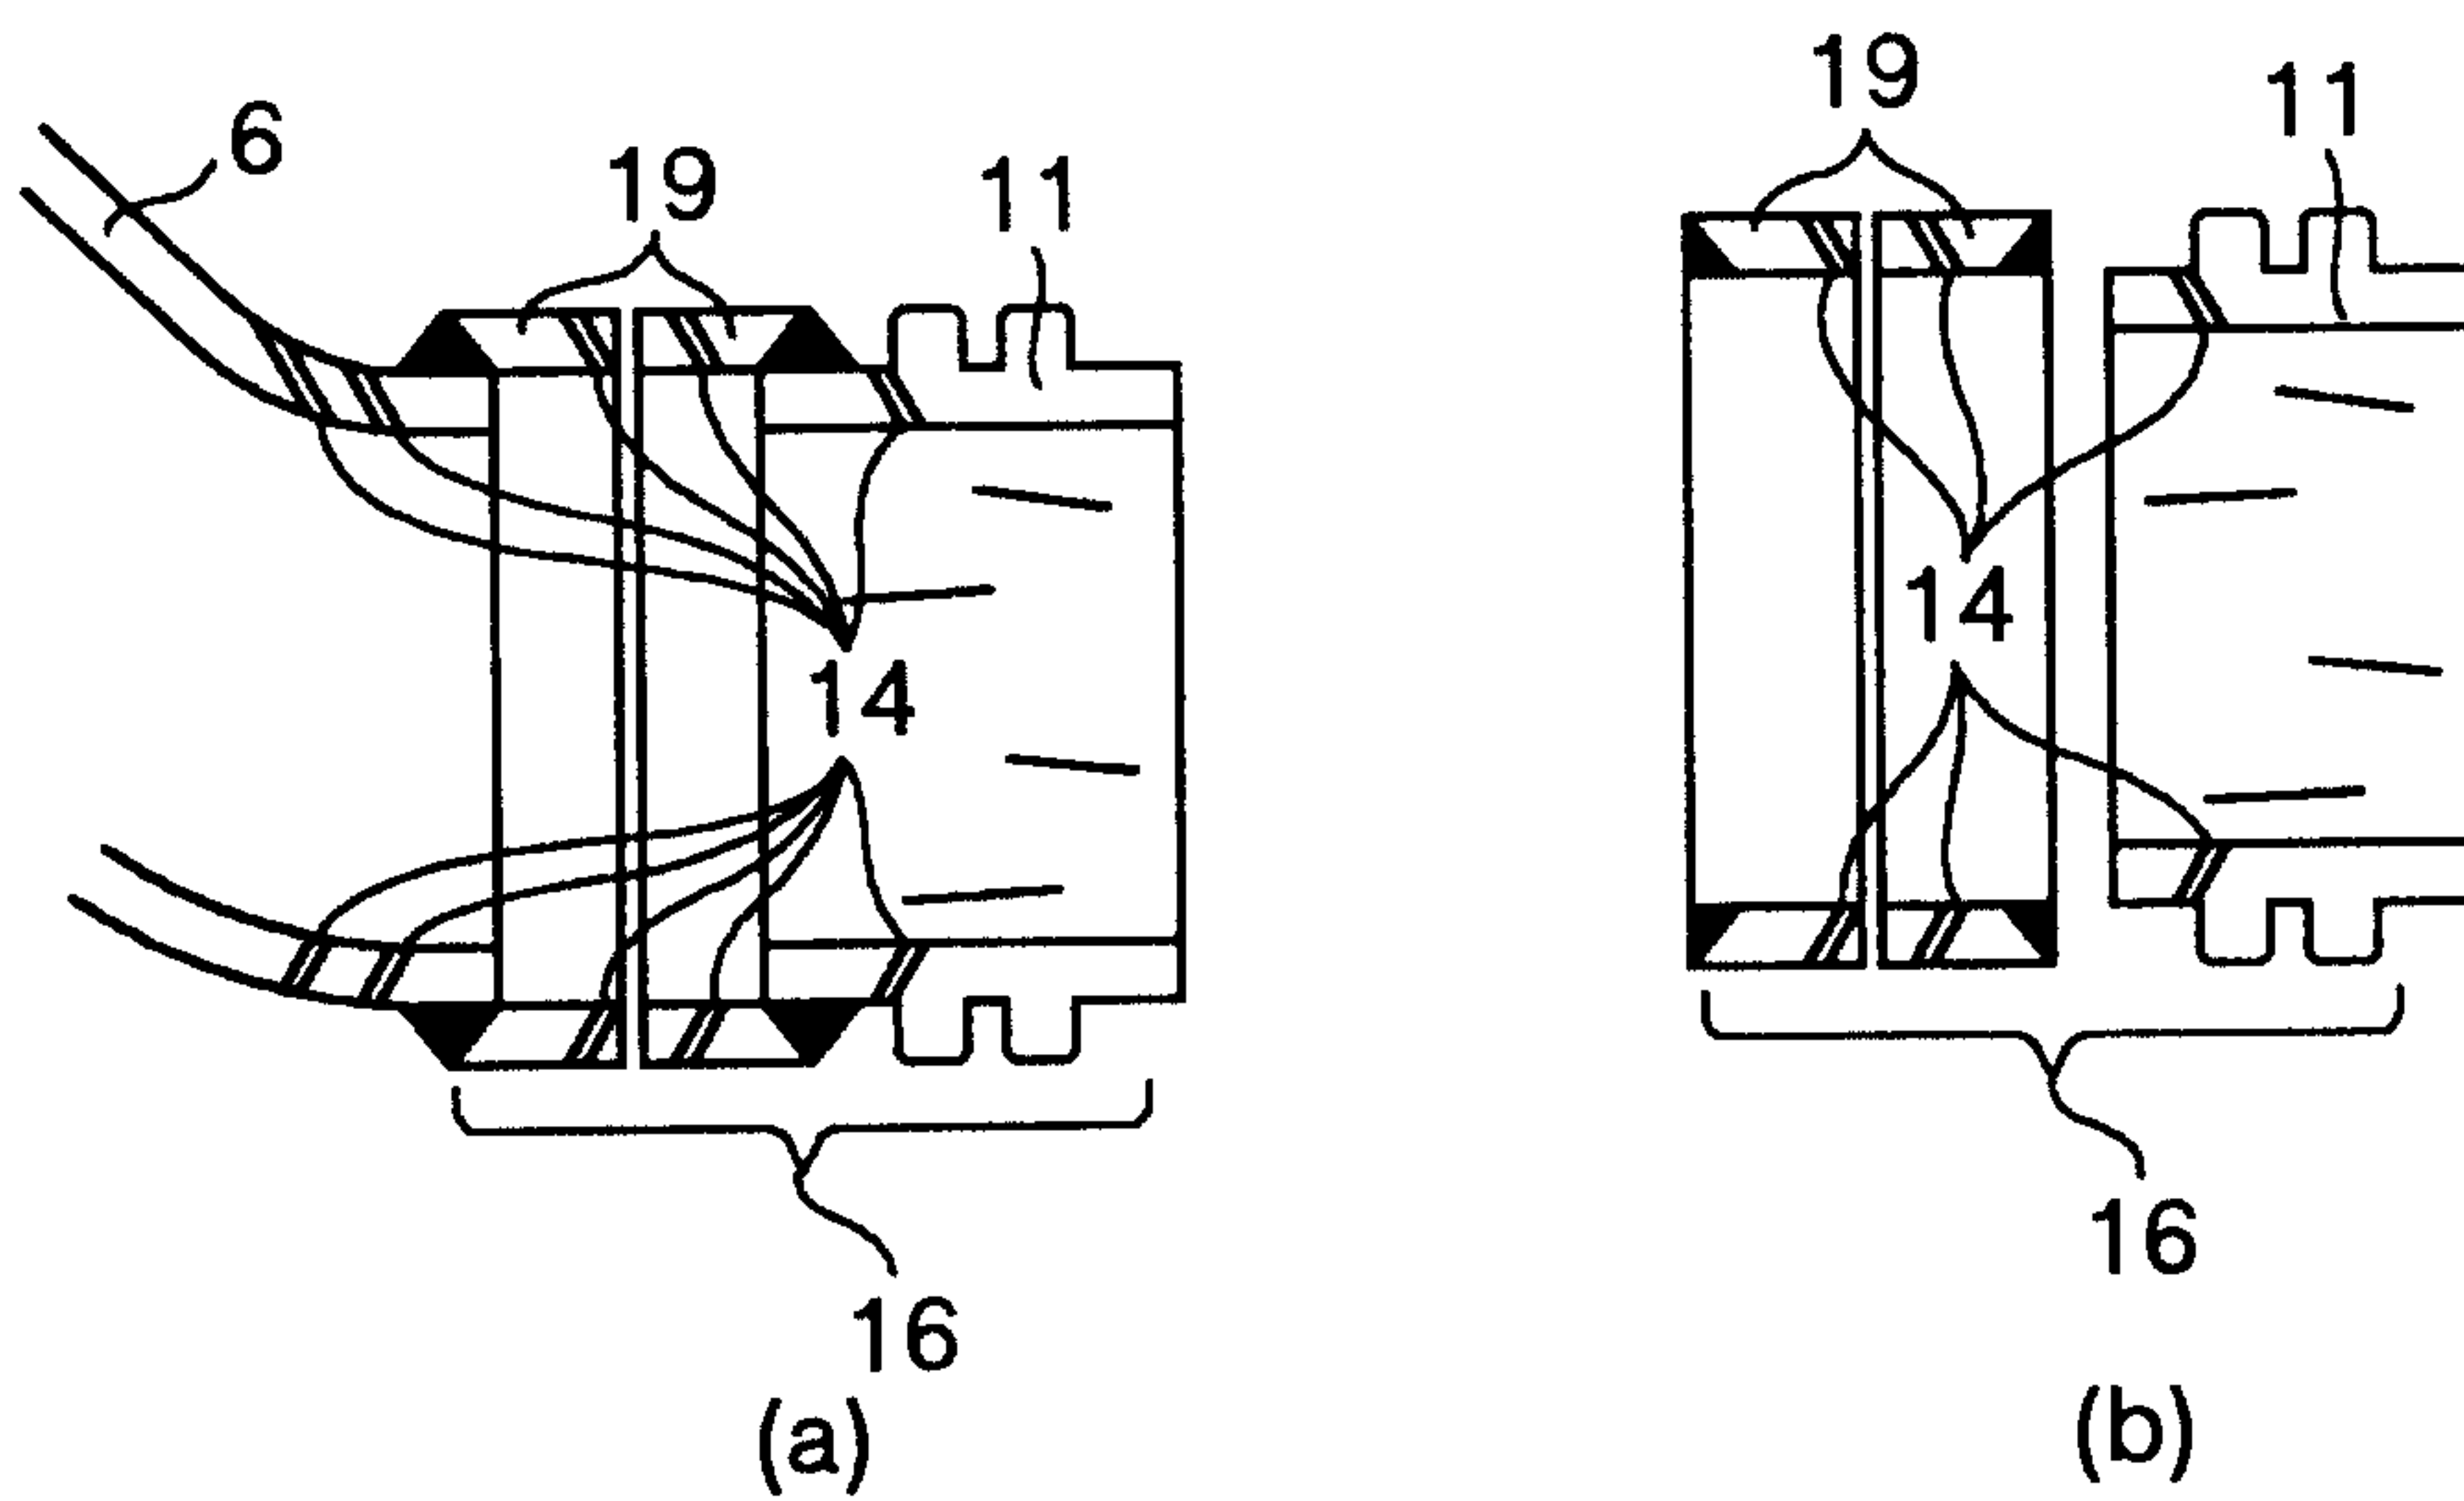


FIG.16



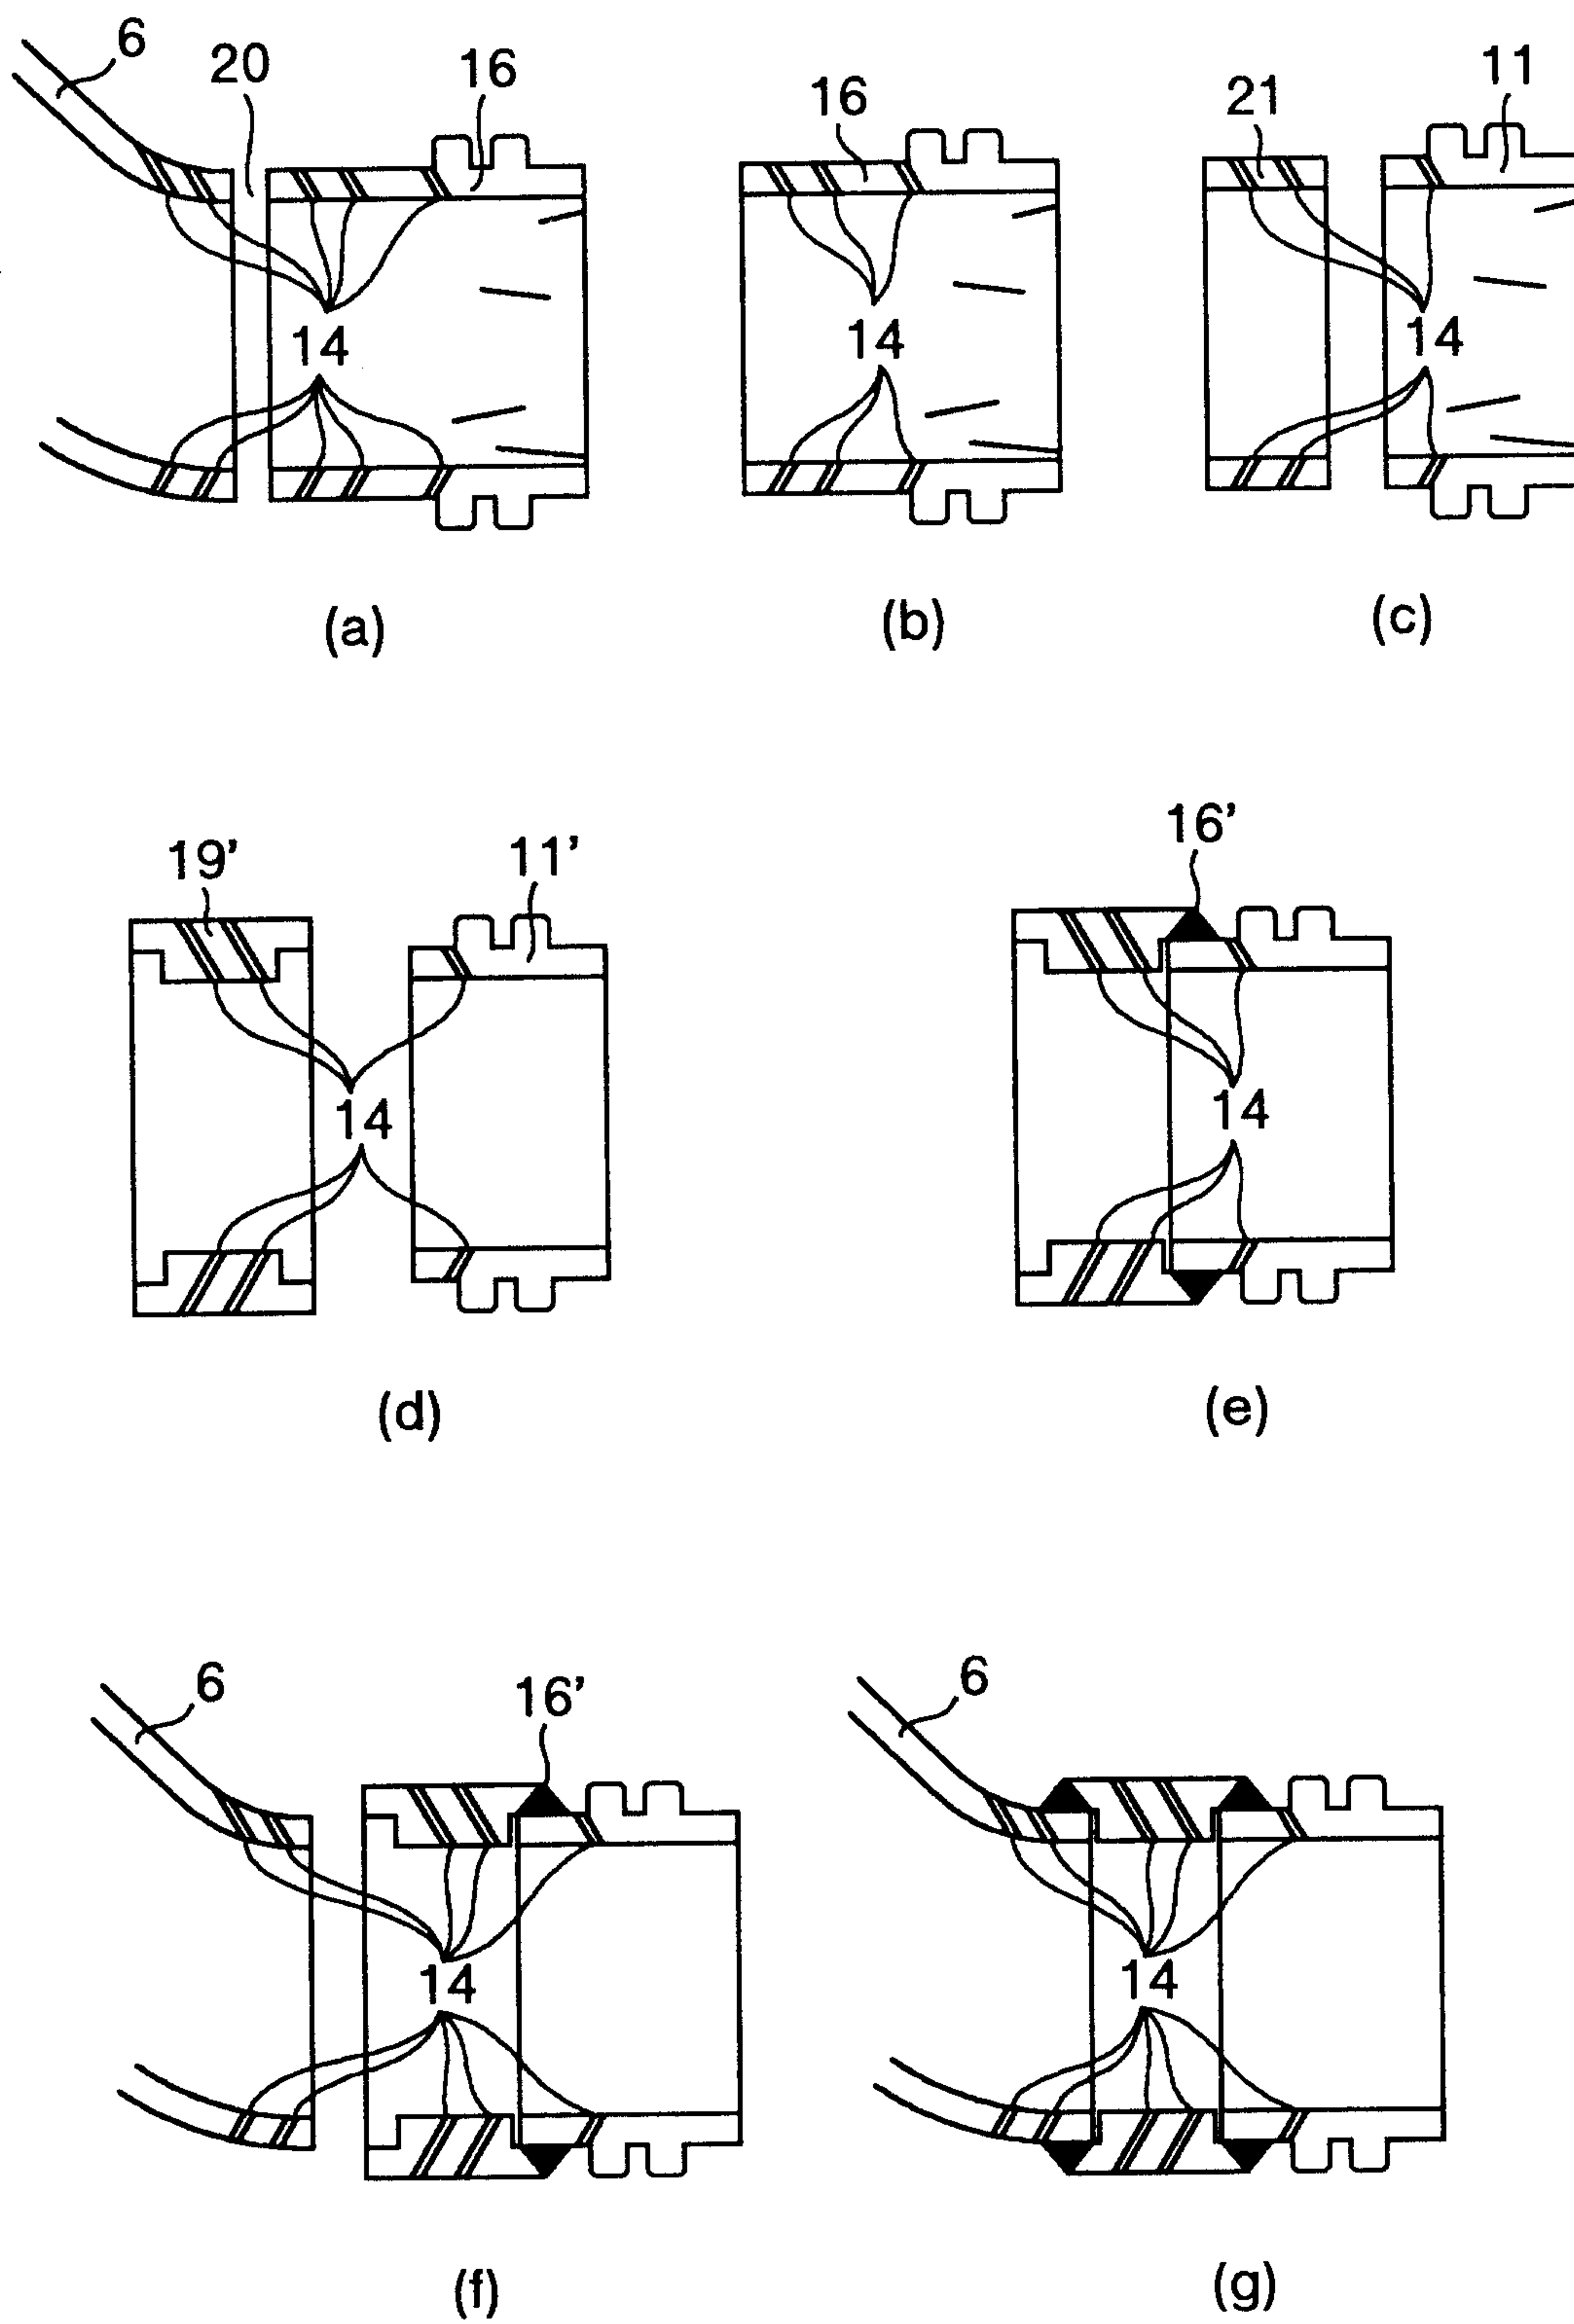



FIG.17

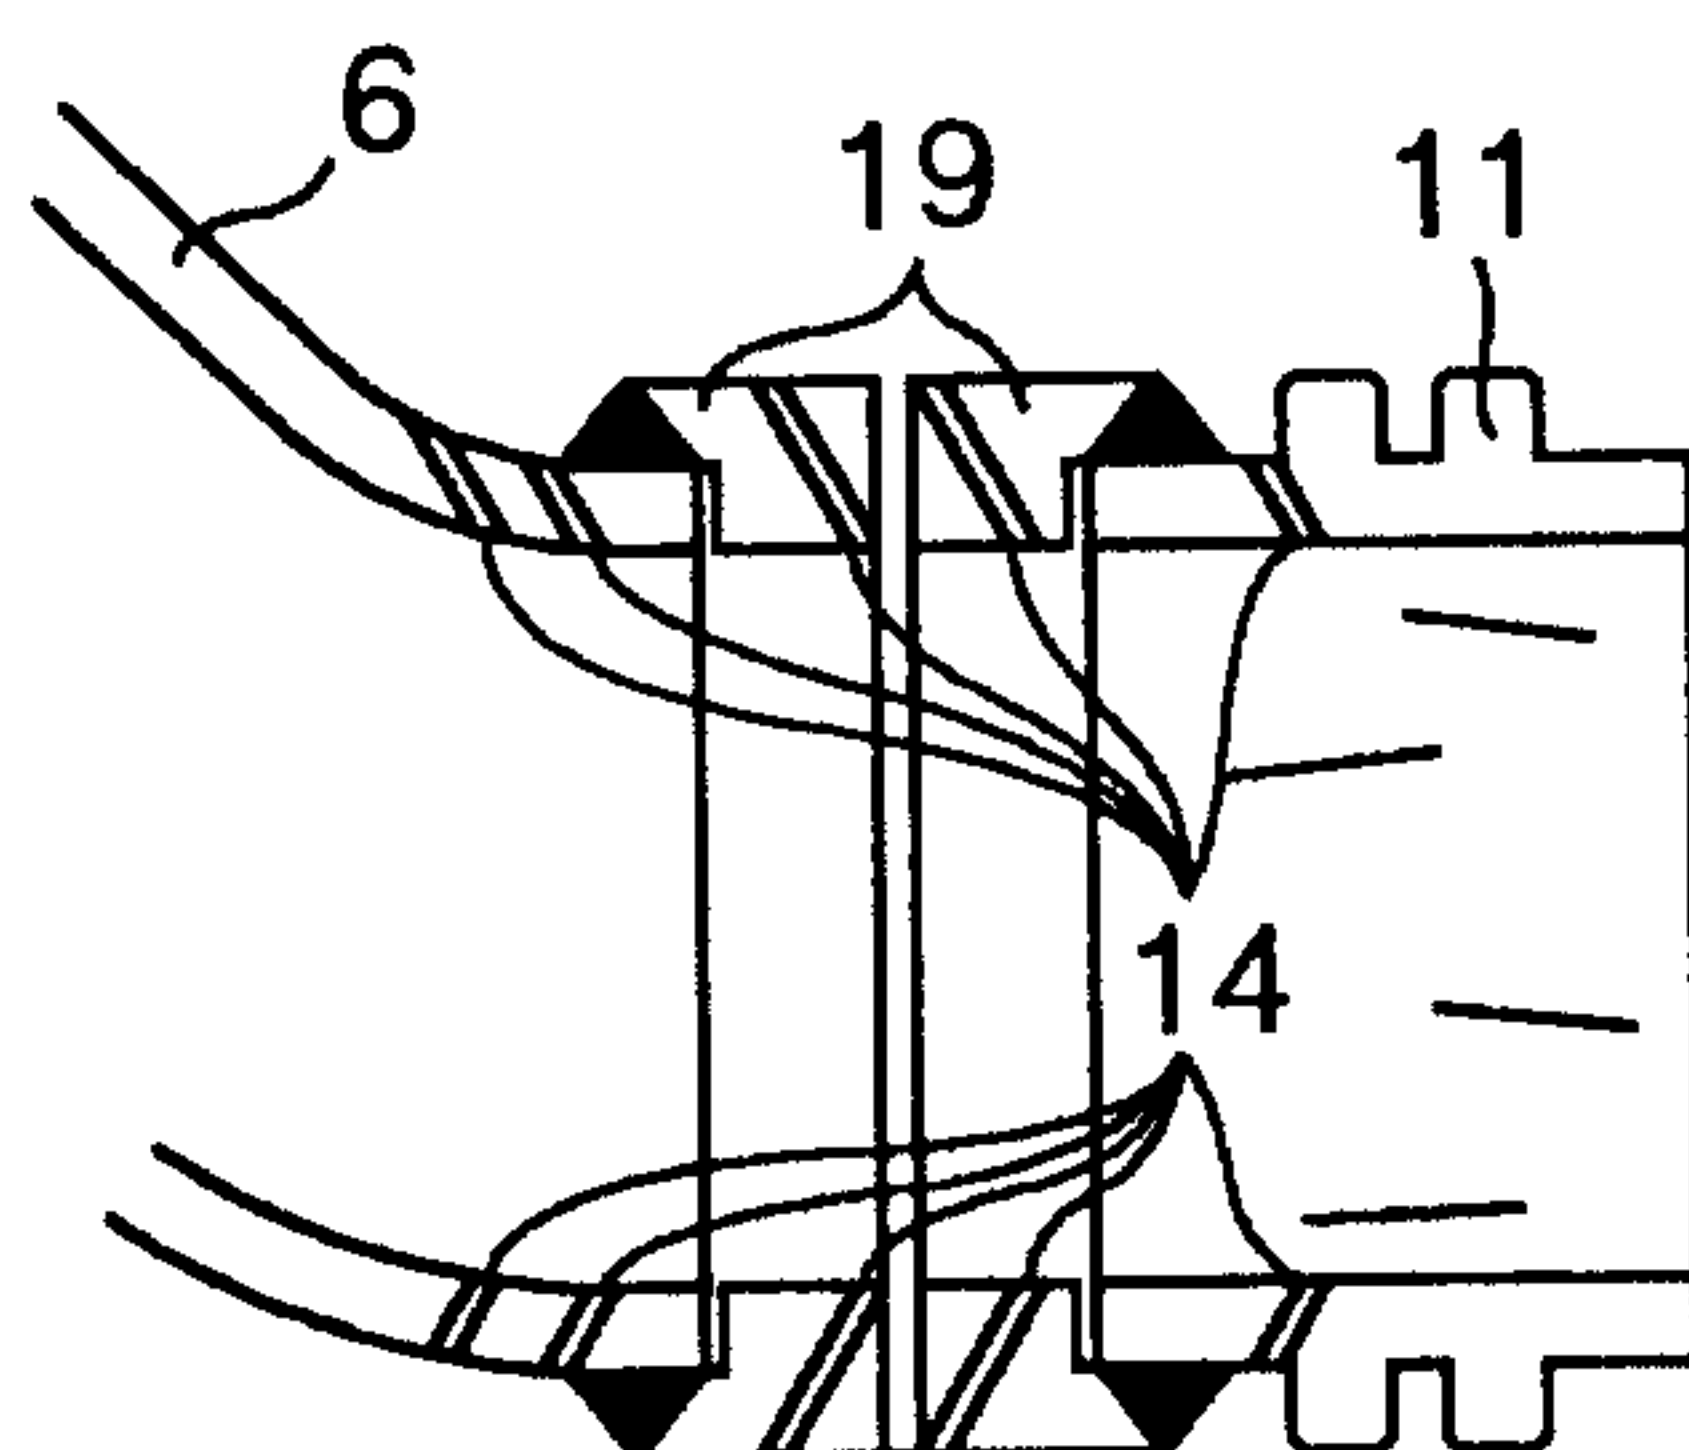


(a)

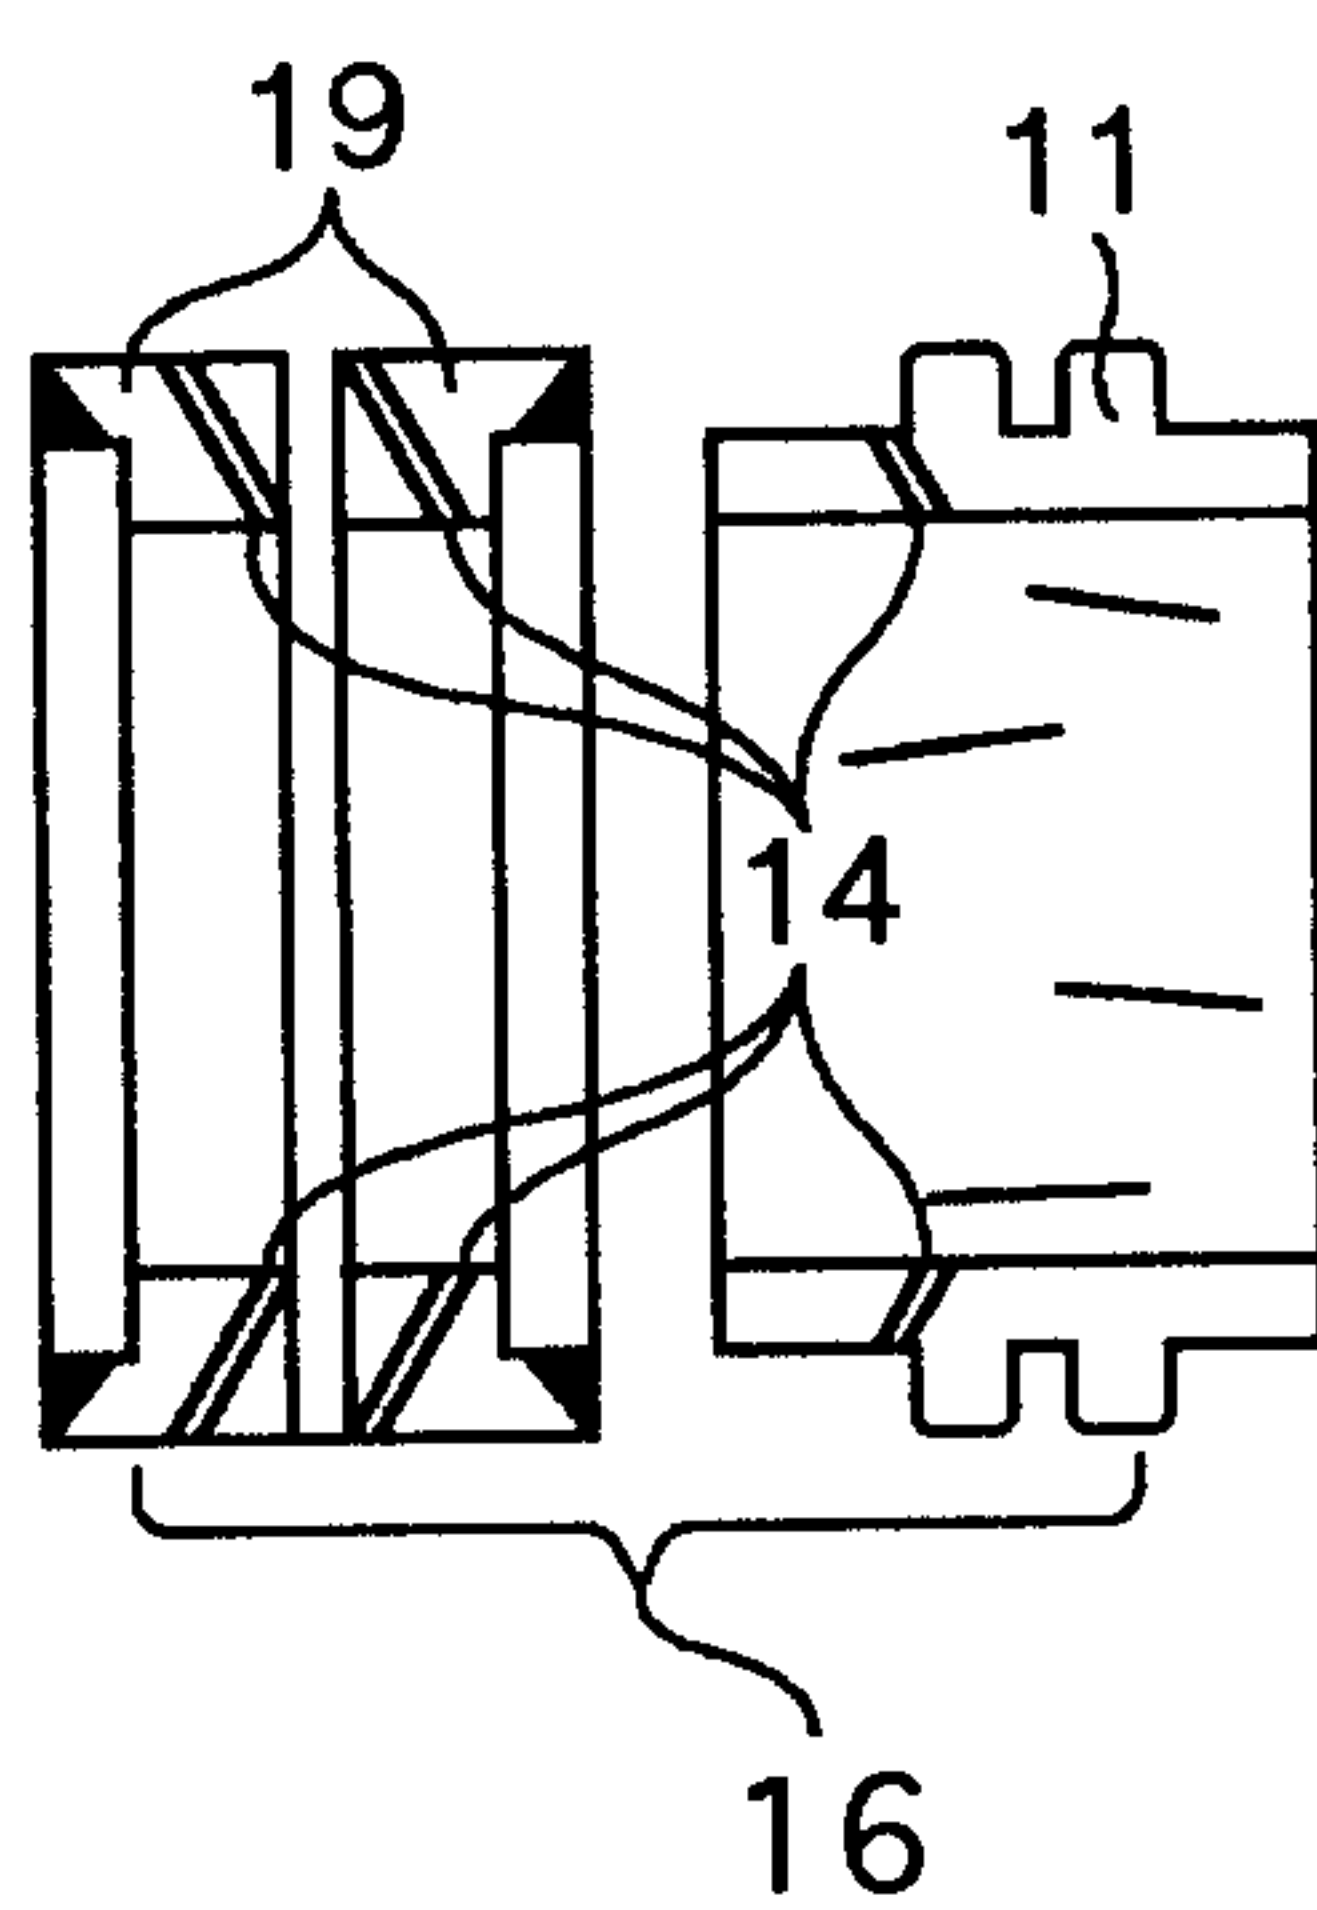

(b)

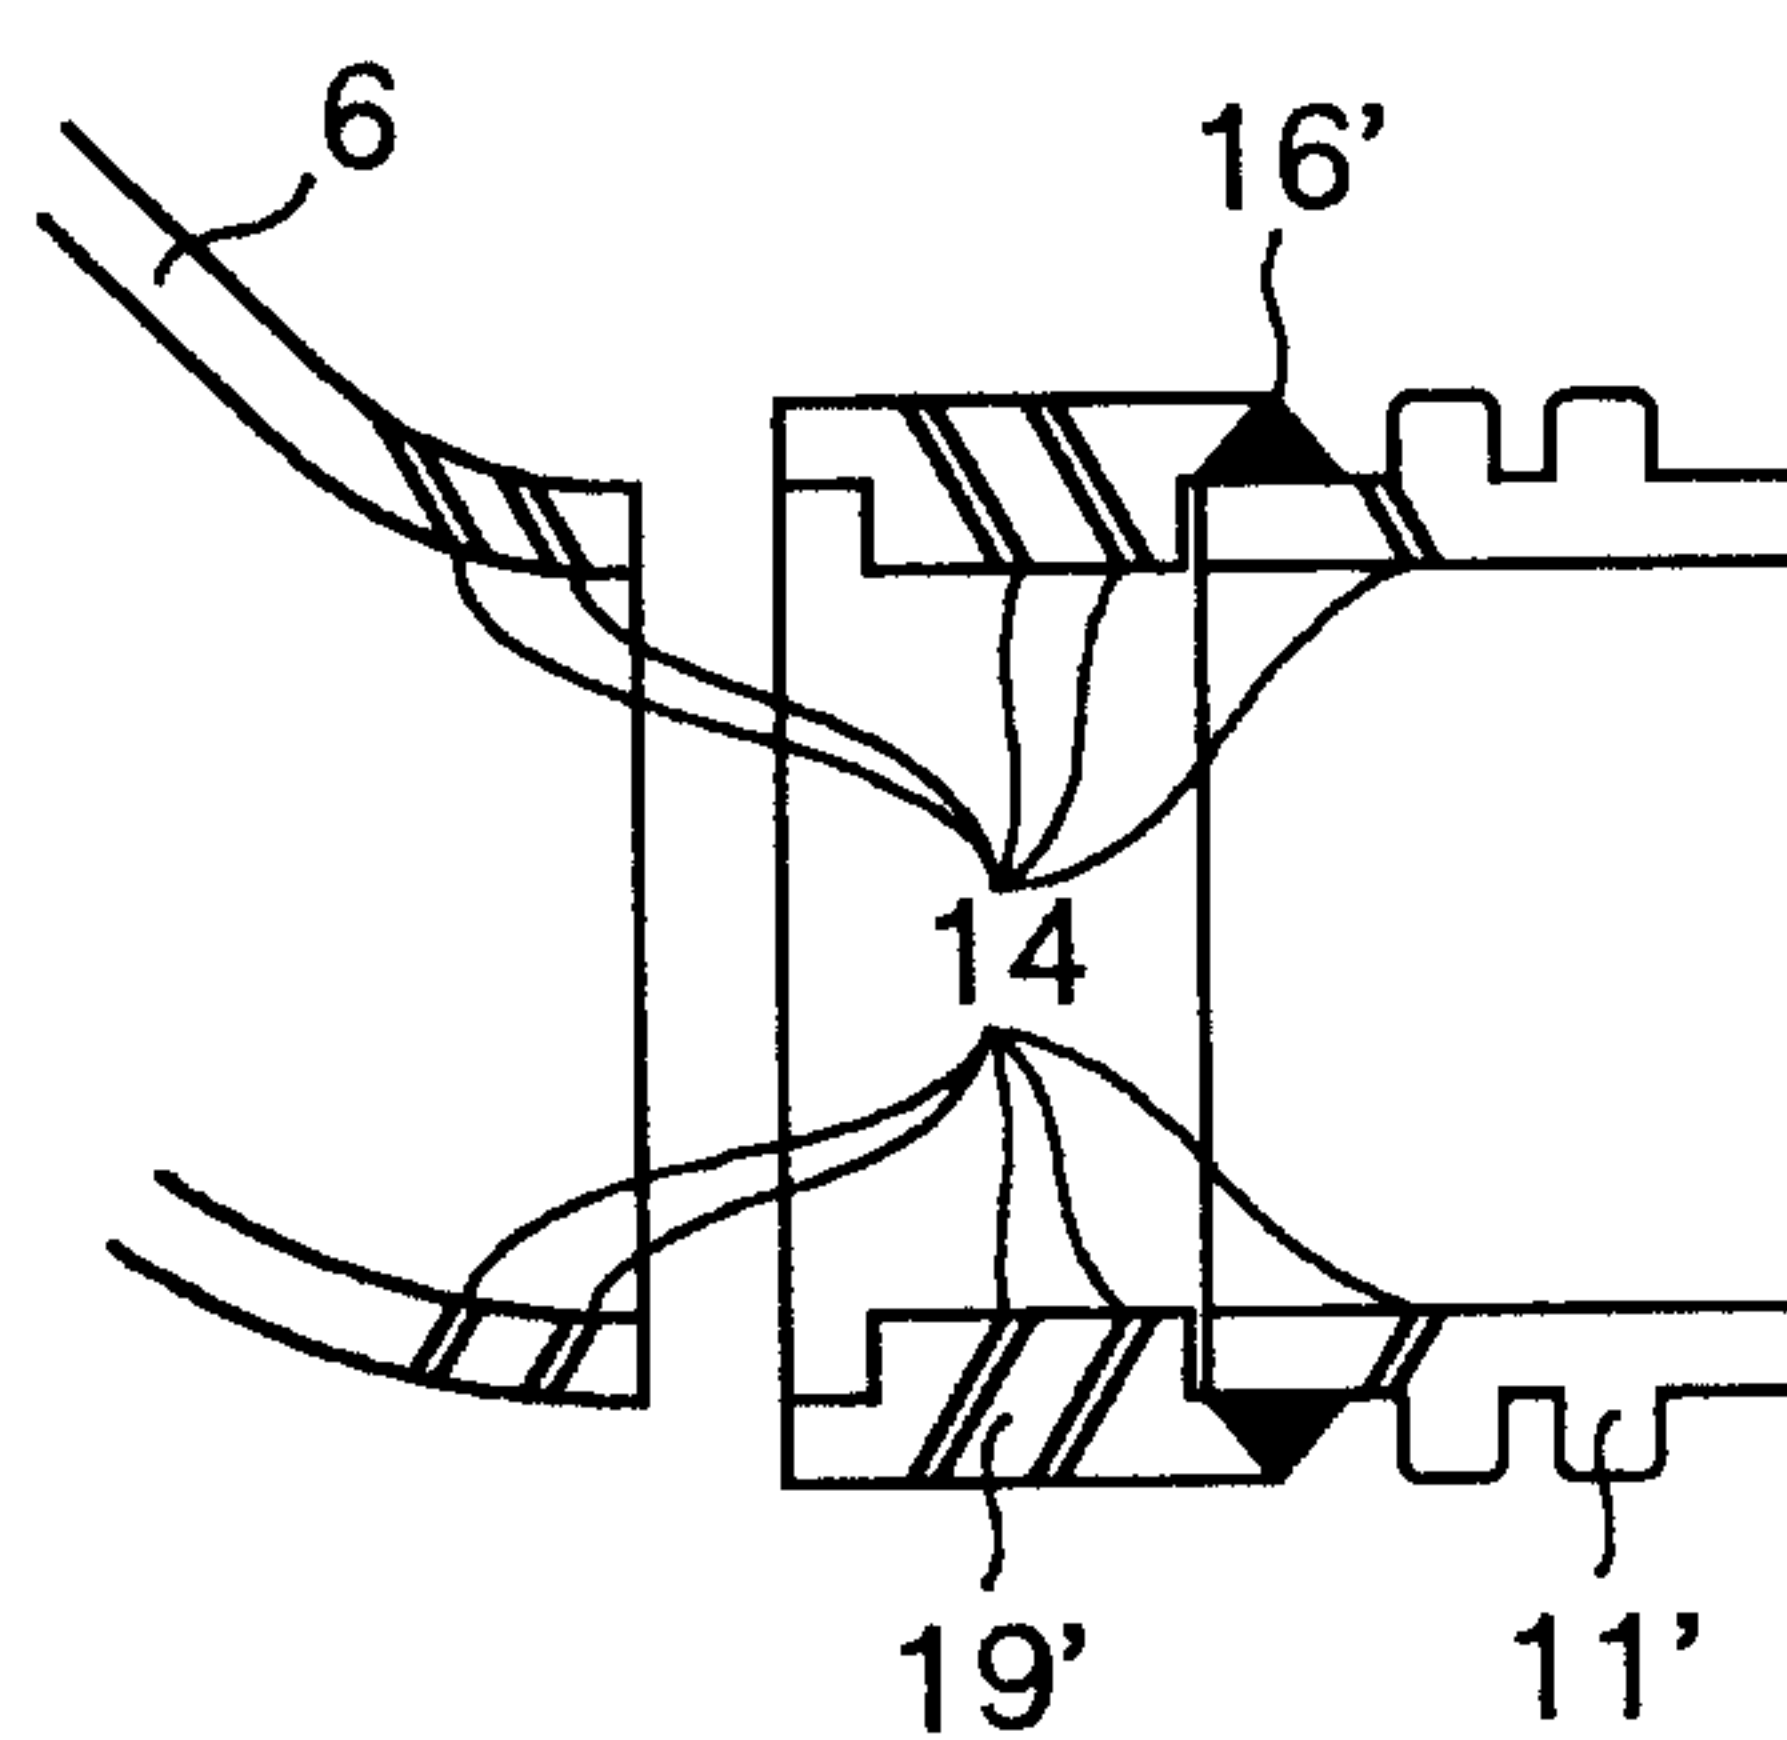

(c)

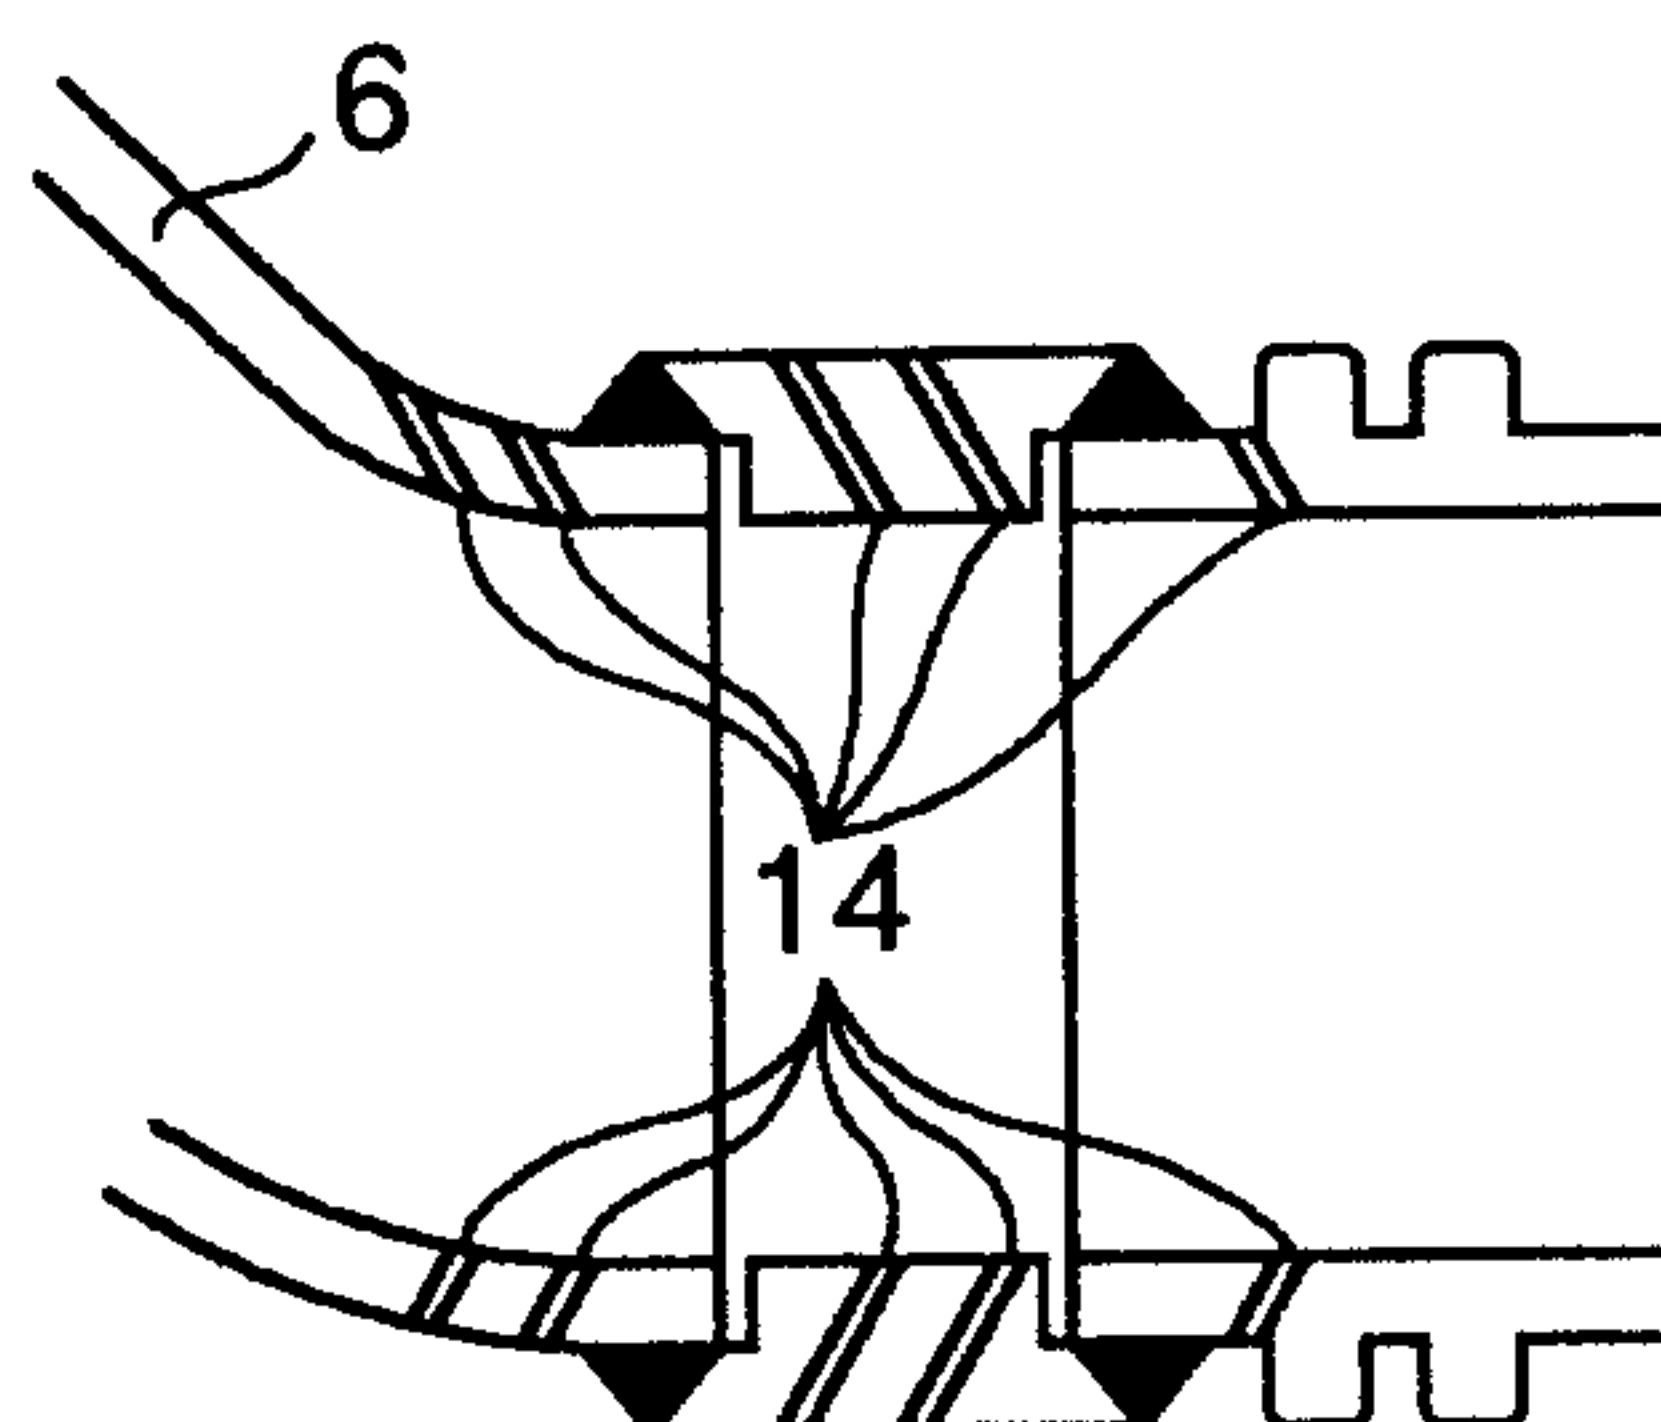

(d)

