



(51) International Patent Classification:
H01Q 1/24 (2006.01) *H01Q 9/04* (2006.01)

(21) International Application Number:
PCT/SE2011/050477

(22) International Filing Date:
19 April 2011 (19.04.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10161409.7 29 April 2010 (29.04.2010) EP

(71) Applicant (for all designated States except US): **LAIRD TECHNOLOGIES AB** [SE/SE]; Box 1146, S-164 22 Kista (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ARBIN, Axel, von** [SE/SE]; Bryggvägen 7, S-183 63 Täby (SE). **ERLANDSSON, Per** [SE/SE]; Völundsgatan 10, 3 tr, S-113 21 Stockholm (SE).

(74) Agent: **KRANSELL & WENNBORG KB**; Box 27834, S-11593 Stockholm (SE).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A METAL COVER FOR A RADIO COMMUNICATION DEVICE

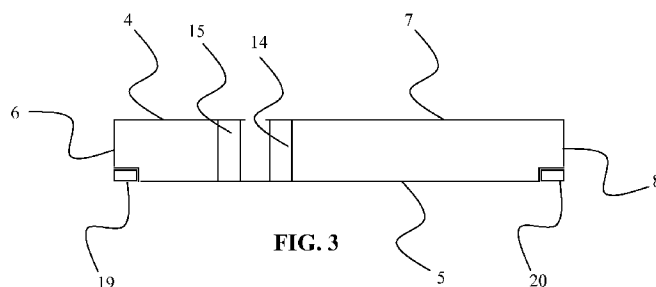

(57) Abstract: The present invention relates to an antenna system comprising a metal cover for a radio communication device and a complementary antenna. The metal cover comprises a front side part, a first back side part connected to the front side part through a top side part, a second back side part connected to the front side part through a bottom side part, wherein the bottom and top side parts are positioned at opposite ends of the front side part, and the first and second back side parts are positioned essentially coplanar and distanced from each other by a gap, and the front side part comprises a recess at said bottom side part and/or at said top side part in which recess said complementary antenna is positioned in.

A METAL COVER FOR A RADIO COMMUNICATION DEVICE**FIELD OF INVENTION**

The present invention relates generally to covers for radio communication devices, and particularly to metal covers for
5 radio communication devices.

BACKGROUND

A current trend for portable radio communication devices, such as mobile phones, PDA, portable computers and similar devices, is to provide the device with a metal cover. A metal
10 cover for a portable radio communication device makes it difficult to provide the device with a non-protruding antenna, as the metal cover shields the inner of the device for radio frequencies. It is possible to only partly provide the cover as a metal cover, to allow the use of a built in
15 antenna, but it would be desirable to provide a full metal cover.

Another trend for portable radio communication devices, such as mobile phones and similar devices, is to provide the device with a very broadband coverage, covering e.g. GSM850,
20 GSM900, GSM1800, GSM1900, UMTS 2100 MHz, GPS, BT and WLAN 2.4 GHz. This puts further restrictions on the design of an antenna for a portable radio communication device.

SUMMARY OF THE INVENTION

An object of the present invention is to provide an antenna
25 system comprising a metal cover for a radio communication device, still allowing a non-protruding antenna.

This object, among others, is according to the present invention attained by an antenna system and a radio

communication device, respectively, as defined by the appended claims.

By providing an antenna system comprising a metal cover for a radio communication device and a complementary antenna, comprising a front side part, a first back side part connected to the front side part through a top side part, a second back side part connected to the front side part through a bottom side part, wherein the top and bottom side parts are positioned on opposite sides of the front side part, and the first and second back side parts are positioned coplanar and distanced from each other by a gap of preferably at least 0.5 mm, and the front side part comprises a recess at the top side part and/or at the bottom side part, in which recess the complementary antenna is positioned in, a full metal cover having a non-protruding antenna can be provided.

By preferably having a feed point and a ground point, wherein the feed point is positioned at the gap and the ground point is positioned along a side edge of the first back side part, providing a broad high-frequency band is facilitated. The feed point and ground point are further preferably positioned at opposite corners of the first back side part, to further facilitate providing the broad high-frequency band.

The second back side part is advantageously provided with a feed point at the gap, preferably at a corner opposite the feed point of the first back side part, to facilitate providing a broad low-frequency band.

To broaden the high and low frequency bands, the first and second back side parts preferably comprises edge portions folded down towards the front side part.

Although the present invention is particularly useful for portable radio communication devices, it is also applicable to fixed radio communication devices such as base stations.

Further features and advantages of the present invention will
5 be evident from the following description.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become more fully understood from the detailed description of embodiments given below and the accompanying figures, which are given by way of illustration
10 only, and thus, are not limitative of the present invention, wherein:

Fig. 1 schematically shows a front side of a metal cover for a mobile phone.

Fig. 2 schematically shows a back side of a metal cover for a
15 mobile phone according to a first embodiment of the present invention.

Fig. 3 schematically shows a side view from the left of a variant of the metal cover shown in Fig. 2.

Fig. 4 schematically shows a side view from the right of a
20 variant of the metal cover shown in Fig. 2.

Fig. 5 schematically shows a back side of a metal cover for a mobile phone according to a second embodiment of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS

25 In the following description, for purpose of explanation and not limitation, specific details are set forth, such as particular techniques and applications in order to provide a thorough understanding of the present invention. However, it

will be apparent for a person skilled in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed description of well-known methods and apparatuses are omitted so as not to obscure the description of the present invention with unnecessary details.

A portable radio communication device comprising an antenna system having a metal cover according to a first embodiment of the present invention will now be described with reference to Figs. 1-3.

The portable radio communication device, such as a mobile phone, has a sheet metal cover 1, a display 2 mounted in a front side of the sheet metal cover 1, and a key pad 3 also mounted in the front side of the sheet metal cover 1, as illustrated in Fig. 1. Components for operation of the portable radio communication device is as usually provided within its housing, i.e. in this case within the sheet metal cover 1. The display 2 and key pad 3 is alternatively replaced by a preferably larger touch screen occupying a major part of the front side of the sheet metal cover 1.

The back side of the metal cover 1 is divided into two parts. A first back side part 4 is connected to the front side part 5 of the metal cover through a top side part 6. A second back side part 7 is connected to the front side part 5 of the metal cover through a bottom side part 8. The first back side part 4 and the second back side part 7 are essentially coplanar and distanced from each other by a gap of about 2-5 mm.

The first back side part 4 is driven as a multi-band antenna element by being fed at a feed point 9 at a corner near the gap against the second back side part 7, by being grounded at a ground point 10 at an opposite corner near the gap against

the second back side part, and by being grounded along the top side part 6. For a mobile phone, and thus its metal cover, having a length of about 110 mm, a width of about 50 mm, and a thickness of about 9 mm, a frequency band coverage of about 1550-2500 MHz is achievable. The first back side part 4 has a generally rectangular shape having a length of about 33 mm and a width of about 50 mm, in this example. Alternatively, the feed point is preferably positioned at the gap somewhere between the corner near the gap and the middle along the side of the gap of the first back side part, and the ground point is preferably positioned somewhere along a side edge away from the feed point of the first back side part.

The second back side part 7 is driven as an antenna element by being fed at a feed point 11 at a corner near the gap against the first back side part 4, and by being grounded along the bottom side part 8. For a mobile phone, and thus its metal cover, having a length of about 110 mm, a width of about 50 mm, and a thickness of about 9 mm, a frequency band coverage of about 750-1050 MHz is achievable. The second back side part 7 has a generally rectangular shape having a length of about 72 mm and a width of about 50 mm, in this example.

The first and second back side parts are functioning as radiating elements over a ground plane, i.e. over the front side part. In this way a robust antenna is achieved by the first and second back side parts, respectively, are connected to the front side through a large grounding means, i.e. the top and bottom side parts, respectively. A display device and/or a key pad are typically provided with grounded shielding means between the inner of the radio communication device and the display device and/or the key pad. The grounded shielding means then form part of the front side part. Further, in a mobile phone e.g. having a touch screen

occupying essentially the whole front thereof, the front side part of the metal cover will then be made up by the shielding means of the touch screen.

The antenna system further comprises a first complementary antenna 19 (not illustrated in Fig. 2), and preferably also a second complementary antenna 20 (not illustrated in Fig. 2). The front side part 5 comprises a first recess for accommodating the first complementary antenna 19 and preferably also a second recess for accommodating the second complementary antenna 20. The first recess is at the top side part 6 and the second recess is at the bottom side part 8 of the metal cover. By providing the complementary antennas at the ends of the front side part, the thereby reduced height to the first and second back side parts does not particularly influence the performance of the antenna provided through the metal cover.

The complementary antennas are preferably realized as a monopole for FM Rx, a half loop for FM Tx and a multiple-turn loop antenna folded over the edge for the NFC antenna. The GPS and BT antennas are preferably IFAs, monopoles or half loop antennas. The first complementary antenna preferably covers NFC, and the second complementary antenna preferably covers GPS, BT and/or FM.

The first and second back side parts have been described as having feed points 9 and 11. Feeding of the feed points 9 and 11 is advantageously provided as two separate feedings to RF circuitry, to improve isolation there between, but the feeding of the feed points 9 and 11 could alternatively be provided as a common feeding having filtering means to separate signaling to and from RF circuitry.

The second back side part 7 preferably covers the whole battery of a mobile phone. The second back side part is

preferably pivotable around and/or detachably attached to the bottom side part to facilitate access into the mobile phone for e.g. changing battery or for changing a SIM of the mobile phone.

- 5 The top and bottom side parts have been illustrated as parts covering the top and bottom side, respectively, of the portable radio communication device, but can alternatively comprise a plurality of grounding portions together not covering the top or bottom side, respectively.
- 10 For improved antenna function the metal cover is preferably made up by or metalized by a good conductive material.

For tuning of the antenna made up by the metal cover 1 additional grounding is preferably added at the sides of the portable radio communication device. In Fig. 3 a wide
15 grounding 15 to ground point 10 as well as a wide grounding 14 of the second back side part is illustrated. I Fig. 4 an additional wide grounding 18 of the first back side part is illustrated, and also feeding 16 to feed point 8 and feeding 17 to feed point 11 are illustrated.

- 20 Although the first back side part has been described as generating the high frequency band and the second back side part has been describe as generating the low frequency band, the opposite is also possible. Also, either the first or the second back side part could generate both low and high
25 frequency bands.

A portable radio communication device according to a second embodiment of the present invention will next be described with reference to Fig. 5. This second embodiment of the present invention is similar to the first embodiment
30 described above apart from that the first and second back side parts comprises folded side edge portions extending

towards the front side part, extending about 6 mm and thus leaving a gap of about 3 mm to the front side part. Although the folded side edge portions have been illustrated as covering the whole first and second back side parts, it is
5 also possible to only have portions of the first and second back side part edges folded towards the front side part. The first complementary antenna and/or second complementary antennas are not illustrated in Fig. 5.

It will be obvious that the present invention may be varied
10 in a plurality of ways. Such variations are not to be regarded as departure from the scope of the present invention. All such variations as would be obvious for a person skilled in the art are intended to be included within the scope of the present invention as defined by the appended
15 claims.

CLAIMS

1. An antenna system comprising a metal cover for a radio communication device and a complementary antenna (19, 20), wherein said metal cover comprises

5 a front side part (5),

a first back side part (4) connected to said front side part through a top side part (6), and

a second back side part (7) connected to said front side part through a bottom side part (8),

10 wherein said bottom and top side parts are positioned at opposite ends of said front side part, and said first and second back side parts are positioned essentially coplanar and distanced from each other by a gap, and

wherein said front side part comprises a recess at said top
15 side part and/or said bottom side part, in which recess said complementary antenna is positioned.

2. The antenna system according to claim 1, wherein said first back side part comprises a feed point (9) and a ground point (10), wherein said feed point is positioned at the gap
20 and the ground point is positioned along a side edge of said first back side part.

3. The antenna system according to claim 2, wherein said feed point is positioned at a corner at said gap and said ground point is positioned at a corner at said gap, opposite
25 said corner at which said feed point is positioned.

4. The antenna system according to any of claims 1-3, wherein said front side part comprises a recess at said top side part and at said bottom side part, in which recesses complementary antennas are positioned.

5. The antenna system according to any of claims 1-4, wherein said second back side part comprises a feed point (11) positioned at the gap.

6. The antenna system according to any of claims 1-5, wherein said second back side part comprises a ground point.

7. The antenna system according to any of claims 1-6, wherein said first back side part is configured to cover GSM1800, GSM1900, UMTS 2100 MHz, GPS, BT and WLAN 2.4 GHz and said complementary antenna is configured to cover FM and NFC.

8. The antenna system according to claim 7, wherein said first back side part is configured to also cover GSM850 and GSM900.

9. The antenna system according to any of claims 1-8, wherein said second back side part is configured to cover GSM850 and GSM900 and said complementary antenna is configured to cover FM, NFC and optionally BT and GPS.

10. The antenna system according to any of claims 1-8, wherein said complementary antenna is configured to cover BT and/or GPS.

11. The antenna system according to claim 9 or 10, wherein said second back side part is configured to also cover GSM1800, GSM1900, UMTS 2100 MHz, GPS, BT and WLAN 2.4 GHz.

12. The antenna system according to any of claims 1-11, wherein said first back side part is instead connected to said front side part through said bottom side part, and said second back side part is instead connected to said front side part through said top side part.

13. The antenna system according to any of claims 1-12,
wherein said front side part comprises grounded shielding
means of a display device of said radio communication device.

14. The antenna system according to any of claims 1-13,
5 wherein said front side part comprises ground plane means of
said radio communication device.

15. The antenna system according to any of claims 1-14,
wherein said radio communication device is portable.

16. A radio communication device comprising an antenna
10 system according to any previous claim.

1/2

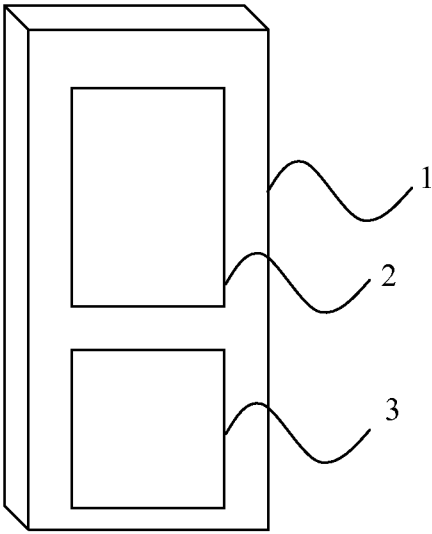


FIG. 1

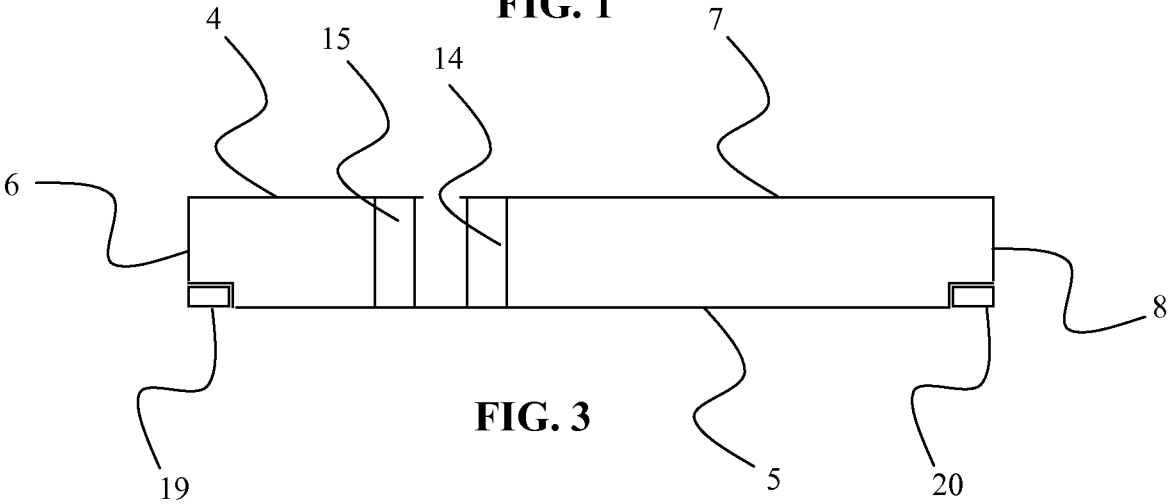


FIG. 3

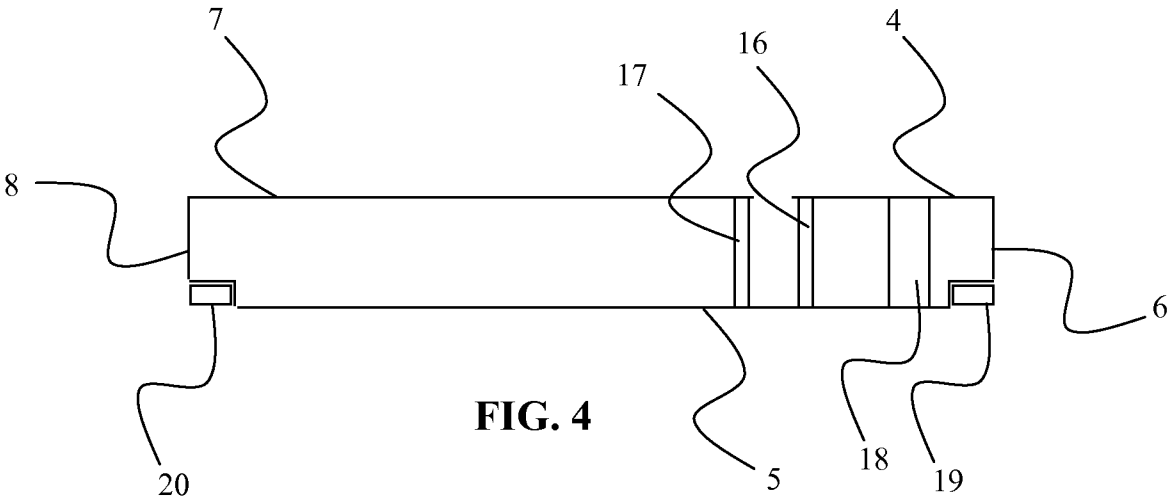


FIG. 4

2/2

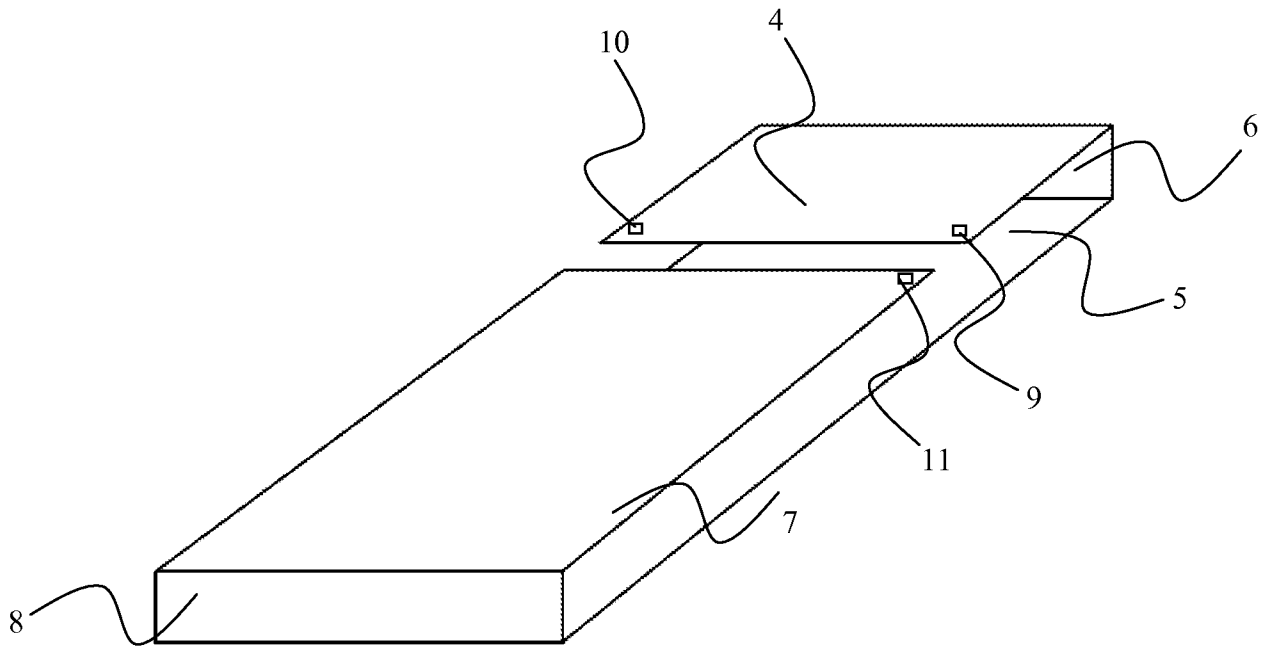


FIG. 2

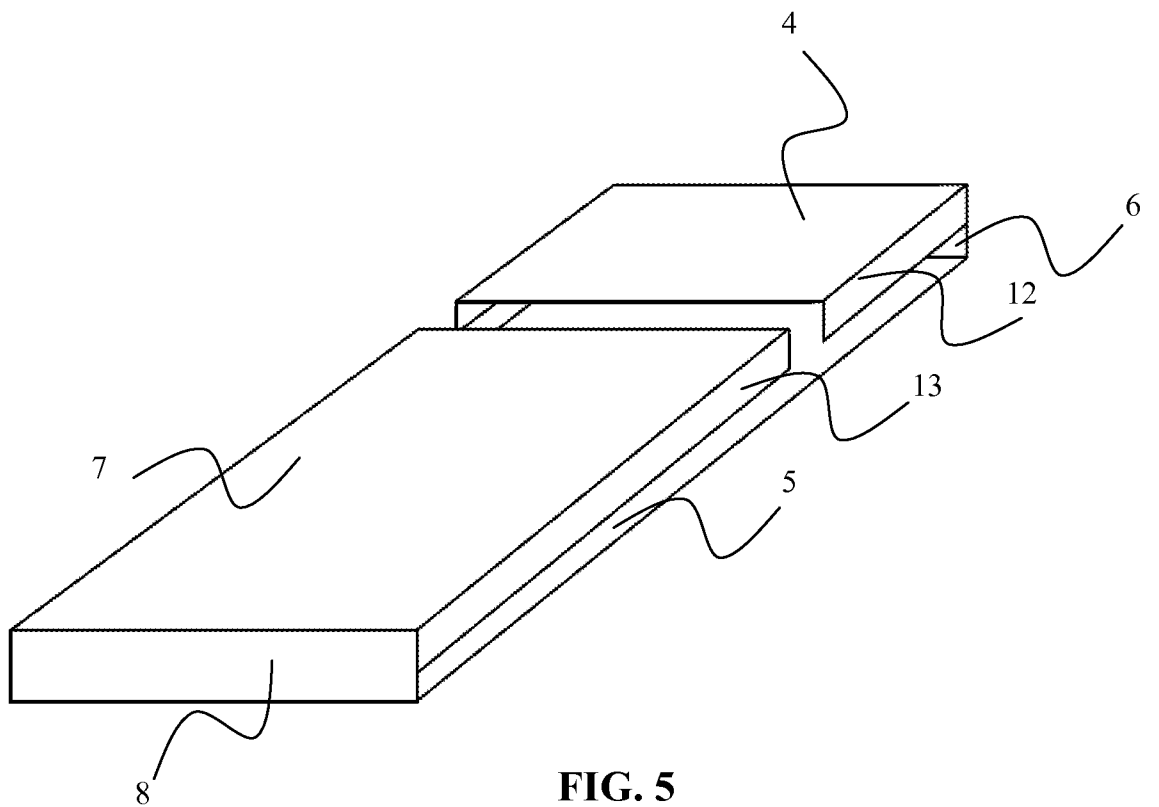


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2011/050477

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE, DK, FI, NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, PAJ, WPI data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6456243 B1 (POILASNE GREGORY ET AL), 24 September 2002 (2002-09-24); abstract; column 1, line 37 - column 1, line 54; figures 5,6,9a --	1-16
A	US 6573867 B1 (DESCLOS LAURENT ET AL), 3 June 2003 (2003-06-03); abstract; figure 9 --	1-16
A	DE 102008005496 B3 (FUJITSU SIEMENS COMPUTERS GMBH), 29 January 2009 (2009-01-29); abstract; figures 1,2 -- -----	1-16



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

26-07-2011

Date of mailing of the international search report

27-07-2011

Name and mailing address of the ISA/SE

Patent- och registreringsverket
Box 5055
S-102 42 STOCKHOLM
Facsimile No. + 46 8 666 02 86

Authorized officer

Rune Bengtsson

Telephone No. + 46 8 782 25 00

Continuation of: second sheet

International Patent Classification (IPC)

H01Q 1/24 (2006.01)

H01Q 9/04 (2006.01)

Download your patent documents at www.prv.se

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at www.prv.se
(English version)
- From "Anförda dokument" found under "e-tjänster" at www.prv.se
(Swedish version)

Use the application number as username. The password is **ZTHKKEJETV**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE2011/050477

US	6456243 B1	24/09/2002	AU	2002315455 A1	03/03/2003
			CN	1520629 A	11/08/2004
			CN	100433454 C	12/11/2008
			EP	1413002 A2	28/04/2004
			EP	1959518 A3	05/11/2008
			US	20040027286 A1	12/02/2004
			US	7012568 B2	14/03/2006
			WO	03003503 A3	08/05/2003
US	6573867 B1	03/06/2003	NONE		
DE	102008005496 B3	29/01/2009	DE	202008015803 U1	19/02/2009