

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 January 2006 (05.01.2006)

PCT

(10) International Publication Number
WO 2006/000102 A1

(51) International Patent Classification: ⁷ **B01D 53/04**,
53/54, 53/62

269 West 16th Avenue, Vancouver, British Columbia V5Y
1Y8 (CA).

(21) International Application Number:
PCT/CA2005/001014

(74) Agents: **BAILEY, Thomas W.** et al.; 480 - The Station,
601 West Cordova Street, Vancouver, British Columbia
V6B 1G1 (CA).

(22) International Filing Date: 28 June 2005 (28.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/881,775 29 June 2004 (29.06.2004) US

(71) Applicant (for all designated States except US): **QUESTAIR TECHNOLOGIES INC.** [CA/CA]; 6961 Russell
Avenue, Burnaby, British Columbia V5J 4R8 (CA).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): **ALIZADEH-KHI-
AVI, Soheil** [CA/CA]; 505-6595 Willingdon Avenue,
Burnaby, British Columbia V5H 4E5 (CA). **ROY, Surajit**
[CA/CA]; P3-3770 Thurston Street, Burnaby, British Co-
lumbia V5H 1H7 (CA). **SAWADA, James A.** [CA/CA];

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: ADSORPTIVE SEPARATION OF GAS STREAMS

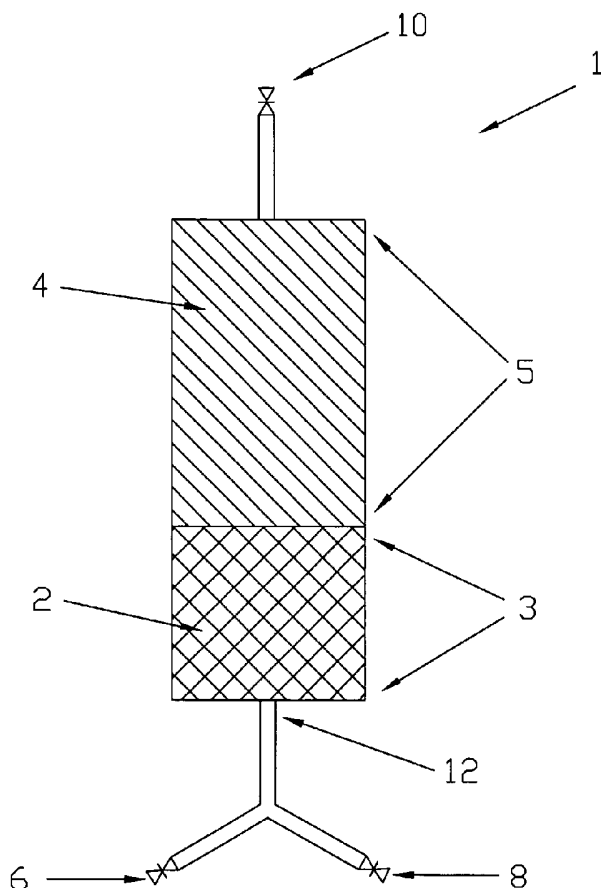

(57) Abstract: A method and system for adsorptive separation of a feed gas mixture provides for increased system efficiency and/or product recovery. The requirement for purge gas streams consuming desired product gas or other external purge gas to regenerate adsorption beds is reduced through an inventive method for adsorbent selection and adsorption bed and process design.

WO 2006/000102 A1



FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

ADSORPTIVE SEPARATION OF GAS STREAMS

FIELD

The present disclosure relates to adsorptive separation, and more particularly
5 to an improved method and apparatus for adsorptive separation of gas streams.

BACKGROUND

Adsorptive processes are an established means of separation used to separate
gas phase components in multicomponent gas streams found in many industrial
10 applications. Many industrial gas streams contain contaminant components which
may be advantageously separated from the gas stream prior to some downstream use.
Adsorptive separation processes have been adapted for use in many such industrial
applications.

Thermal and pressure swing adsorption processes (TSA and PSA) as known in
15 the prior art have both been successfully adapted to remove contaminant components
from commercially important gas streams, making use of specialized adsorbent
materials to adsorb contaminants from the input, or feed gas stream, leaving the
desired product gas stream substantially free of the contaminants. Such adsorbent
materials may then be cyclically regenerated to subsequently desorb the contaminant
20 component which may be exhausted or otherwise disposed, prior to re-use of the
adsorbent material.

In conventional adsorptive separation systems, the regeneration of the
adsorbent material(s) requires the application of a purge stream that is substantially
free of the contaminant component in contact with the adsorbent, in order to
25 effectively desorb the contaminant component from the adsorbent material. In the

case of TSA, the purge stream is heated to a temperature sufficient to desorb the contaminant from the adsorbent. In the case of PSA, purified product gas is typically used to purge the contaminant from the adsorbent. Such purge gas must typically be selected from gases external to the available feed gas stream, such as in the case of a

5 TSA system, an exemplary heated inert (substantially free of contaminant component(s) and other gas components which may inhibit desorption and purge of the adsorbed contaminant from the adsorbent material) purge gas, or purified product gas in the case of a PSA system. The use of such contaminant free purge gas stream s typically influence the efficiency of the adsorptive process, by reducing product

10 recovery in the case of PSA, and/or increasing the cost such in the provision of a suitable heated contaminant-free purge gas stream in the case of TSA. In all cases, the overall achievable efficiency of the adsorptive separation system is limited by the quantity and cost (in terms of external gas and heat energy or lost product gas) of purge gas required to desorb the contaminant from the adsorbent material during

15 regeneration.

SUMMARY OF THE INVENTION

In a first embodiment, the present invention relates to a method for substantially separating a contaminant gas component from a feed gas stream

20 comprising at least the contaminant gas component, a diluent gas component and a desired product gas component. The inventive method comprises the steps of:

(a) providing a first adsorbent material in a first adsorption zone wherein the first adsorbent material is selective for the contaminant component relative to the diluent component, and a second adsorbent material in a second adsorption zone

wherein the second adsorbent material is selective for the diluent component relative to the desired product component;

(b) passing the feed gas stream through the first adsorption zone in contact with the first adsorbent material such that the contaminant component is substantially adsorbed on the first adsorbent material, and subsequently through the second adsorption zone in contact with the second adsorbent material such that at least a portion of the diluent component is adsorbed on the second adsorbent material;

(c) withdrawing from the second adsorption zone a product gas stream enriched in the desired product component relative to the feed gas stream;

(d) regenerating the first adsorption zone by passing an exhaust gas stream comprising at least a portion of the adsorbed diluent component from the second adsorption zone through the first adsorption zone, such that at least a portion of the contaminant component adsorbed on the first adsorbent material is purged from the first adsorption zone by the diluent component.

In an exemplary embodiment of the above inventive method, the contaminant component may comprise carbon monoxide, the diluent component may comprise carbon dioxide, and the desired product component may comprise hydrogen. In such an embodiment, the feed gas stream may be a reformat stream from a steam catalytic reformer. In another embodiment, the aforementioned diluent component may additionally comprise nitrogen. In such an embodiment, the feed gas stream may be a reformat stream from a catalytic partial oxidation reformer.

In a further embodiment of the inventive method, the contaminant component may comprise carbon dioxide, the diluent component may comprise nitrogen, and the desired product component may comprise methane. In such an embodiment, the feed gas stream may be an impure natural gas, landfill gas, or biogas stream.

In any of the above embodiments, the feed gas stream may additionally comprise a second contaminant component, which may be substantially adsorbed on a third adsorbent material contained in a third adsorption zone, wherein the third adsorbent material is selective for the second contaminant component relative to the diluent component. In such an embodiment, the third adsorption zone may be regenerated by passing the exhaust gas stream comprising at least a portion of the adsorbed diluent component from the second adsorption zone through the third adsorption zone, such that at least a portion of the second contaminant component adsorbed on the third adsorbent material is purged from the third adsorption zone by the diluent component.

In a second embodiment, the invention includes an adsorptive separation system for substantially separating a contaminant gas component from a feed gas stream comprising at least the contaminant gas component, a diluent gas component and a desired product gas component. The inventive system comprises:

- (a) an adsorption bed comprising a first adsorption zone containing a first adsorbent material selective for the contaminant component relative to the diluent component, and a second adsorption zone containing a second adsorbent material selective for the diluent component relative to the desired product component;
- (b) a feed gas inlet valve for admitting the feed gas stream into the adsorption bed such that the feed gas stream passes through the first adsorption zone in contact with the first adsorbent material such that the contaminant component is substantially adsorbed on the first adsorbent material, and subsequently through the second adsorption zone in contact with the second adsorbent material such that at least a portion of the diluent component is adsorbed on the second adsorbent material;

(c) a product gas outlet valve for withdrawing a product gas stream enriched in the desired product component relative to the feed gas stream from the adsorption bed; and

(d) an exhaust gas outlet valve for withdrawing an exhaust gas stream from the adsorption bed during regeneration of the adsorption bed, said exhaust gas stream comprising at least a portion of the adsorbed diluent component from the second adsorption zone and at least a portion of the adsorbed contaminant component from the first adsorption zone which has been purged from the first adsorbent material by the passage of the portion of the diluent component in contact with the first adsorbent material.

In an exemplary embodiment of the above system according to the present invention, the contaminant component may comprise carbon monoxide, the diluent component may comprise carbon dioxide, and the desired product component may comprise hydrogen. In such an embodiment, the feed gas stream may be a reformat stream from a steam catalytic reformer. In another embodiment, the aforementioned diluent component may additionally comprise nitrogen. In such an embodiment, the feed gas stream may be a reformat stream from a catalytic partial oxidation reformer.

In a further embodiment of the inventive system, the contaminant component may comprise carbon dioxide, the diluent component may comprise nitrogen, and the desired product component may comprise methane. In such an embodiment, the feed gas stream may be an impure natural gas, landfill gas, or biogas stream.

In any of the above system embodiments, the feed gas stream may additionally comprise a second contaminant gas component, and the adsorption bed may additionally comprise a third adsorption zone containing a third adsorbent material selective for the second contaminant component relative to the diluent component. In

such embodiments, the feed gas stream may pass through the third adsorption zone in contact with the third adsorbent material prior to passing through the second adsorption zone such that the second contaminant component is substantially adsorbed on the third adsorbent material, and the exhaust gas stream may additionally
5 comprise at least a portion of the adsorbed second contaminant component from the third adsorption zone which has been purged from the third adsorbent material by the passage of the portion of the diluent component in contact with the third adsorbent material.

For purposes of reference in the foregoing and following description and the
10 appended claims, a contaminant component of a feed gas stream may be defined to comprise any one or more gaseous species present in a feed gas stream to be separated by the methods and systems of the present invention, that must be substantially separated from the desired product component in order to produce a product gas stream enriched in the desired product component that is suitable for use in a chosen
15 downstream product or process. A diluent component of a feed gas stream may be defined to comprise any one or more gaseous species present in a feed gas stream to be separated by methods and systems of the present invention, that is desirably reduced in concentration relative to the concentration of the desired product component in the product gas stream compared to the feed stream in order to provide
20 a product gas stream suitably enriched in the desired product component. The relative selectivity of an adsorbent material for a first gas component over a second gas component as defined and used in this disclosure may be understood to mean one of: a relative equilibrium selectivity, a relative kinetic selectivity, or a combination of both relative equilibrium and relative kinetic selectivities. A relative equilibrium
25 selectivity of an adsorbent material for a first gas component over a second gas

component may be understood to mean that the adsorbent material has a greater equilibrium adsorptive capacity for the first gas component relative to the second gas component at the adsorptive conditions (total and partial pressure, temperature, feed stream composition, adsorption step duration, etc.) present during the adsorption phase of the separation cycle of concern in a particular application of the present invention. A relative kinetic selectivity of an adsorbent material for a first gas component over a second gas component may be understood to mean that the adsorbent material has a greater rate of adsorptive diffusivity with respect to the first gas component relative to its rate of adsorptive diffusivity with respect to the second gas component at the adsorptive conditions (total and partial pressure, temperature, feed stream composition, adsorption step duration, etc.) present during the adsorption phase of the separation cycle of concern in a particular application of the present invention.

15

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic diagram showing the structure of an adsorption bed and associated portions of an adsorptive separation system according to the present invention.

20

DETAILED DESCRIPTION OF SEVERAL EMBODIMENTS

The present invention encompasses a method and system for substantially separating a contaminant gas component from a feed gas stream comprising at least the contaminant gas component, a diluent gas component and a desired gas component, by means of adsorptive separation. The method and associated system utilize at least a first and second adsorbent materials, contained in at least first and

second adsorption zones respectively, which may be typically enclosed inside at least one adsorption bed. The first and second adsorbent materials may be compositionally distinct from each other, and may be selected based on their adsorption characteristics relative to the contaminant, diluent and desired product gas components of the feed gas stream for a desired adsorptive separation application. The first adsorbent material is chosen such that it is adsorptively selective for the contaminant component, relative to the diluent component, so that when the feed gas is passed through the first adsorption zone in contact with the first adsorbent material, the contaminant component is substantially adsorbed on the first adsorbent material, and thereby substantially removed from the feed gas stream. The second adsorbent material is chosen such that it is adsorptively selective for the diluent component relative to the desired product component, so that when the feed gas stream is passed through the second adsorption zone in contact with the second adsorbent material, subsequent to passing through the first zone, at least a portion of the diluent component of the feed gas stream is adsorbed on the second adsorbent material.

In the adsorptive separation processes contemplated by the present inventive method and system, the at least one adsorption bed and contained adsorbent materials must be regenerated following adsorption of the at least one contaminant component, in order to desorb the adsorbed gas components from the adsorbent materials, to enable further cyclic adsorptive separation steps. In the case of the present invention applied to a PSA process, adsorption may take place inside the adsorption bed at an elevated pressure and regeneration may be accomplished by the reduction of pressure in the bed and by the passage of a purge gas stream through the bed (and therefore the adsorption zones and adsorbent materials therein) to desorb the at least one adsorbed contaminant component. In the case of the present invention applied to a TSA

process, adsorption may take place inside the adsorption bed at a lower temperature (either of the feed gas stream or of the adsorption bed itself) and regeneration may be accomplished at a higher temperature (either by heating of the purge gas stream or the adsorption bed itself such as by resistively heating an adsorbent support material) by the passage of a purge gas stream through the bed (and the adsorption zone and adsorbent materials therein) to desorb the at least one adsorbed contaminant component. In an application of the invention to a displacement purge adsorption process, adsorption and regeneration may take place at similar pressures and temperatures, and desorption of the at least one contaminant component may be accomplished primarily by the passage of a purge gas stream through the adsorption bed. Such a purge gas stream may typically be substantially free of the contaminant to be removed from the feed gas mixture, and may contain a component that is relatively weakly adsorbed or not adsorbed on the selected adsorbent materials used in the adsorption process, in order to provide a purging action to desorb at least a portion of the contaminant component from the adsorption bed.

It is an object of the present inventive method and systems to improve the efficiency of adsorptive separation processes by reducing the requirement for providing external substantially contaminant-free purge gas volumes for regenerative desorption of the contaminant component from the first adsorbent material.

According to the present inventive method and systems, during regeneration of the adsorbent materials, an exhaust gas is passed through the adsorption beds (and thereby through the adsorption zones and in contact with the adsorbent materials) in a direction opposite to the flow of the feed gas stream during an initial adsorption step. The exhaust gas comprises at least a portion of the diluent component that was previously adsorbed on the second adsorbent material which passes through the first

adsorption zone in contact with the first adsorbent material. The portion of the diluent component in the exhaust gas serves to desorb and purge at least a portion of the contaminant component adsorbed on the first adsorbent material. In the case of PSA process application, the passage of the desorbed diluent-containing exhaust gas through the first adsorption zone is known as a countercurrent blowdown step. The function of the desorbed diluent component gas to purge at least a portion of the adsorbed contaminant component from the adsorption bed in the method and systems of the present invention reduces the requirement (may reduce the volume, heating and/or product gas component content of the purge gas stream required) for external substantially contaminant-free purge gas volumes during regeneration of the adsorbent materials in the adsorption beds, thereby increasing overall system efficiency with respect to the energy consumption or product recovery of the system. In the case of application of the present inventive method and systems to PSA processes, the recovery of the desired product component may also be increased due to reduced consumption of product component gas in the regeneration of the adsorbent materials in the adsorption beds.

With reference to Figure 1, an exemplary adsorption bed 1 according to the present invention is schematically depicted. The exemplary bed comprises first and second adsorption zones 3, 5 which contain first and second adsorbent materials 2,4, respectively. Feed inlet valve 6 is provided to admit a feed gas mixture comprising contaminant, diluent and product gas components to the end of the adsorption bed 1 proximal to the first adsorption zone 3. Product gas outlet valve 10 is provided to withdraw a product gas enriched in the desired product gas component from the end of the adsorption bed 1 distant from the first adsorption zone, 3. Exhaust gas outlet valve 8 is provided to withdraw an exhaust gas stream comprising at least a portion of

the adsorbed diluent component (which was adsorbed on the second adsorbent material, 4) from the second adsorption zone, 5 and at least a portion of the adsorbed contaminant component from the first adsorption zone, 3 which has been purged from the first adsorbent material, 2 by the passage of the portion of the diluent component in contact with the first adsorbent material, 2. In Figure 1, feed gas inlet valve 6, and exhaust gas outlet valve, 8 are shown communicating with the end of the adsorption bed 1 proximal to the first adsorption zone 3 through a common gas port 12, however, the valves may optionally communicate individually with the adsorption bed for admission of feed gas, and withdrawal of exhaust gas.

10 In another embodiment according to the present invention, the inventive adsorption bed configuration may be applied to a rotary adsorption system, whereby multiple similar adsorption beds may be relatively rotatable with respect to one or more rotary valves common to the multiple adsorption beds, wherein the rotary valves comprise the feed gas inlet, product gas outlet, and exhaust gas outlet valves referred to in the previous exemplary embodiment, such as is disclosed in detail in the multiple bed rotary adsorption system arrangements described in the Applicant's U.S. Patents Number 6,451,095 and RE38,493, the contents of which are herein incorporated by reference in their entirety.

In any of the above embodiments of the present inventive methods and systems, adsorbent materials, including the first and second adsorbent materials may be provided as shaped, formed or extruded adsorbent particles or monoliths. Such particulate or monolith adsorbent materials may comprise any active adsorbent compounds suitable to adsorb specific contaminant and/or diluent gas components present in any feed gas stream of interest. Such adsorbent compounds may comprise without limitation, crystalline molecular sieves (comprising zeolites, titanasilicates,

20
25

and mixed tetrahedral and octahedral coordination microporous molecular sieves), activated carbons including carbon molecular sieves, silica gels, aluminas, and combinations thereof. Alternatively, adsorbent materials, including the first and second adsorbent materials may be provided as structured adsorbent layers, such as

5 formed thin adsorbent sheets. Such adsorbent sheets may comprise adsorbent materials with or without additional support and/or binder materials. Adsorbent sheets may be arranged to provide flow channels, thereby producing a high surface area, parallel passage adsorbent structure with having substantially lower flow channel pressure drop relative to some conventional particulate adsorbent materials

10 arranged in packed beds. Such adsorbent structures may incorporate any suitable adsorbent compounds, which may comprise without limitation, crystalline molecular sieves (comprising zeolites, titanosilicates, and mixed tetrahedral and octahedral coordination microporous molecular sieves), activated carbons including carbon molecular sieves, silica gels, aluminas, microporous polymeric adsorbents and

15 combinations thereof. Suitable support materials for incorporation in some adsorbent sheets as described above may include without limitation, metal mesh or foil, woven or non-woven scrim or fabrics comprising glass, mineral, carbon or cellulosic fibers, or in the case of activated carbon adsorbent materials, activated carbon fabric or cloth may be used as a self-supporting adsorbent sheet material. Additional embodiments

20 according to the present invention may incorporate first and second adsorbents formed as adsorbent sheets and structures incorporating formed adsorbent sheets as disclosed in the Applicant's previously filed U.S. Patent Application Number 10/041,536, the contents of which are herein incorporated by reference in their entirety.

In a further embodiment according to the present invention, an initial gas stream comprising at least one contaminant component and at least one desired product component but no diluent component may be substantially separated into a product gas enriched in the desired product component and an exhaust gas comprising the at least one contaminant component by deliberately adding a suitable diluent gas component to the initial gas stream, to produce a feed gas stream suitable for separation according to the present methods and systems. In such a way, the desirably enhanced separation performance (including enhanced recovery of desired product in the case of PSA processes) of the inventive methods and systems may be applied to initial gas streams not originally including a diluent component. Further, in applications where the desired product gas stream comprises both a principal desired product component, and some quantity of the diluent gas component, the present invention provides a solution to adsorptively remove substantially all of the deleterious contaminant component from the product gas stream, and control the quantity of the diluent component in the product gas stream relative to the desired product gas component by way of controlling the degree of adsorption of the diluent component in the second adsorption zone.

In an exemplary embodiment of the present invention, the feed gas mixture may comprise natural gas, wherein the contaminant component may comprise carbon dioxide, the diluent component may comprise nitrogen, and the desired product component may comprise methane. In such an embodiment, a first adsorbent material in the first adsorbent zone may comprise activated alumina, and a second adsorbent material may comprise a mixed coordination titanosilicate molecular sieve material such as ETS-4 such that the methods and systems of the present invention are effective to produce a product gas enriched in methane, and substantially free of

carbon dioxide, wherein the passage of nitrogen gas previously adsorbed on the titanosilicate material through the activated alumina material during desorption is effective to purge at least a portion the adsorbed carbon dioxide from the alumina.

This purging effect of the adsorbed diluent nitrogen reduces the required use of enriched methane product to purge the adsorption bed, thereby enhancing recovery of methane in the product gas stream.

In another exemplary embodiment of the present invention, the feed gas mixture may comprise a reformat from a steam catalytic reformer wherein the contaminant component may comprise carbon monoxide, the diluent component may comprise carbon dioxide, and the desired product component may comprise hydrogen.

In such an embodiment, a first adsorbent material in the first adsorbent zone may comprise a carbon monoxide selective adsorbent such as known metal or metal halide or oxide enhanced (such as by exchange or impregnation) adsorbent materials, and a second adsorbent material may comprise activated carbon such that the methods and systems of the present invention are effective to produce a product gas enriched in hydrogen, and substantially free of carbon monoxide, wherein the passage of carbon dioxide gas previously adsorbed on the activated carbon material through the carbon monoxide selective adsorbent material during desorption is effective to purge at least a portion the adsorbed carbon monoxide from the first adsorbent material. This purging effect of the adsorbed diluent carbon dioxide reduces the required use of enriched hydrogen product to purge the adsorption bed, thereby enhancing recovery of hydrogen in the product gas stream. In a related embodiment to the above, the feed gas stream and diluent component may additionally comprise nitrogen gas. In such case, the adsorption bed may comprise an additional adsorption zone containing an additional adsorbent material such as an ion-exchanged zeolite.

In any of the above embodiments, the feed gas stream and the diluent component may comprise at least one additional diluent gas species, and the adsorption bed may comprise at least one additional adsorption zone containing at least one additional adsorbent material. Additionally, the feed gas stream and the
5 contaminant component may comprise at least one additional contaminant gas species, and the adsorption bed may comprise at least one additional adsorption zone and one or more additional adsorbent material. Further, adsorbent materials described in any of the exemplary embodiments of the present invention disclosed above may comprise equilibrium adsorptively selective materials, kinetic adsorptively selective
10 materials and combinations thereof.

The present invention has been described above in reference to several exemplary embodiments. It is understood that further modifications may be made by a person skilled in the art without departing from the spirit and scope of the invention which are to be determined by the following claims.

15

20

25

What is claimed is:

1. A method for substantially separating a contaminant gas component from a feed gas stream comprising at least the contaminant gas component, a diluent gas component and a desired product gas component, the method comprising:

providing a first adsorbent material in a first adsorption zone wherein the first adsorbent material is selective for the contaminant component relative to the diluent component, and a second adsorbent material in a second adsorption zone wherein the second adsorbent material is selective for the diluent component relative to the desired product component;

passing the feed gas stream through the first adsorption zone in contact with the first adsorbent material such that the contaminant component is substantially adsorbed on the first adsorbent material, and subsequently through the second adsorption zone in contact with the second adsorbent material such that at least a portion of the diluent component is adsorbed on the second adsorbent material;

withdrawing from the second adsorption zone a product gas stream enriched in the desired product component relative to the feed gas stream;

regenerating the first adsorption zone by passing an exhaust gas stream comprising at least a portion of the adsorbed diluent component from the second adsorption zone through the first adsorption zone, such that at least a portion of the contaminant component adsorbed on the first adsorbent material is purged from the first adsorption zone by the diluent component.

2. The method according to claim 1 wherein regenerating the bed additionally comprises passing a product purge gas stream comprising the product gas component

through the first adsorbent zone such that at least a portion of the contaminant component adsorbed on the first adsorbent material is purged from the first adsorbent zone by the product purge gas stream.

3. The method according to claim 2 wherein the product purge gas stream is additionally passed through the second adsorbent zone such that at least a portion of the diluent component adsorbed on the second adsorbent material is purged from the second adsorbent zone by the product purge gas stream.

4. The method according to claim 1 wherein the contaminant component comprises carbon monoxide, the diluent component comprises carbon dioxide, and the desired product component comprises hydrogen.

5. The method according to claim 4 wherein the diluent component additionally comprises nitrogen.

6. The method according to claim 1 wherein the contaminant component comprises carbon dioxide, the diluent component comprises nitrogen, and the desired product component comprises methane.

7. The method according to claim 1 wherein the feed gas stream additionally comprises a second contaminant gas component, and a third adsorbent material selective for the second contaminant component relative to the diluent component is provided in a third adsorption zone, and the feed gas stream is passed through the third adsorption zone in contact with the third adsorbent material prior to passing through the second adsorption zone such that the second contaminant component is

substantially adsorbed on the third adsorbent material, and the exhaust gas stream is subsequently passed through the third adsorption zone to regenerate the third zone, such that at least a portion of the second contaminant component adsorbed on the third adsorbent material is purged from the third adsorption zone by the diluent component.

8. The method according to claim 4 wherein the feed gas stream is a reformat stream from a steam catalytic reformer.

9. The method according to claim 5 wherein the feed gas stream is a reformat stream from a catalytic partial oxidation reformer.

10. The method according to claim 6 wherein the feed gas stream is an impure natural gas, landfill gas or biogas stream.

11. An adsorptive separation system for substantially separating a contaminant gas component from a feed gas stream comprising at least the contaminant gas component, a diluent gas component and a desired product gas component, the system comprising:

an adsorption bed comprising a first adsorption zone containing a first adsorbent material selective for the contaminant component relative to the diluent component, and a second adsorption zone containing a second adsorbent material selective for the diluent component relative to the desired product component;

a feed gas inlet valve for admitting the feed gas stream into the adsorption bed such that the feed gas stream passes through the first adsorption zone in contact with

the first adsorbent material such that the contaminant component is substantially adsorbed on the first adsorbent material, and subsequently through the second adsorption zone in contact with the second adsorbent material such that at least a portion of the diluent component is adsorbed on the second adsorbent material;

a product gas outlet valve for withdrawing a product gas stream enriched in the desired product component relative to the feed gas stream from the adsorption bed; and

an exhaust gas outlet valve for withdrawing an exhaust gas stream from the adsorption bed during regeneration of the adsorption bed, said exhaust gas stream comprising at least a portion of the adsorbed diluent component from the second adsorption zone and at least a portion of the adsorbed contaminant component from the first adsorption zone which has been purged from the first adsorbent material by the passage of the portion of the diluent component in contact with the first adsorbent material.

12. The system according to claim 11 wherein the contaminant component comprises carbon monoxide, the diluent component comprises carbon dioxide, and the desired product component comprises hydrogen.

13. The system according to claim 12 wherein the diluent component additionally comprises nitrogen.

14. The system according to claim 11 wherein the contaminant component comprises carbon dioxide, the diluent component comprises nitrogen, and the desired product component comprises methane.


15. The system according to claim 11 wherein the feed gas stream additionally comprises a second contaminant gas component, and the adsorption bed additionally comprises a third adsorption zone containing a third adsorbent material selective for the second contaminant component relative to the diluent component, and the feed gas stream passes through the third adsorption zone in contact with the third adsorbent material prior to passing through the second adsorption zone such that the second contaminant component is substantially adsorbed on the third adsorbent material, and the exhaust gas stream additionally comprises at least a portion of the adsorbed second contaminant component from the third adsorption zone which has been purged from the third adsorbent material by the passage of the portion of the diluent component in contact with the third adsorbent material.

16. The system according to claim 12 wherein the feed gas stream is a reformat stream from a steam catalytic reformer.

17. The system according to claim 13 wherein the feed gas stream is a reformat stream from a catalytic partial oxidation reformer.

18. The system according to claim 14 wherein the feed gas stream is an impure natural gas, landfill gas or biogas stream.

Figure 1

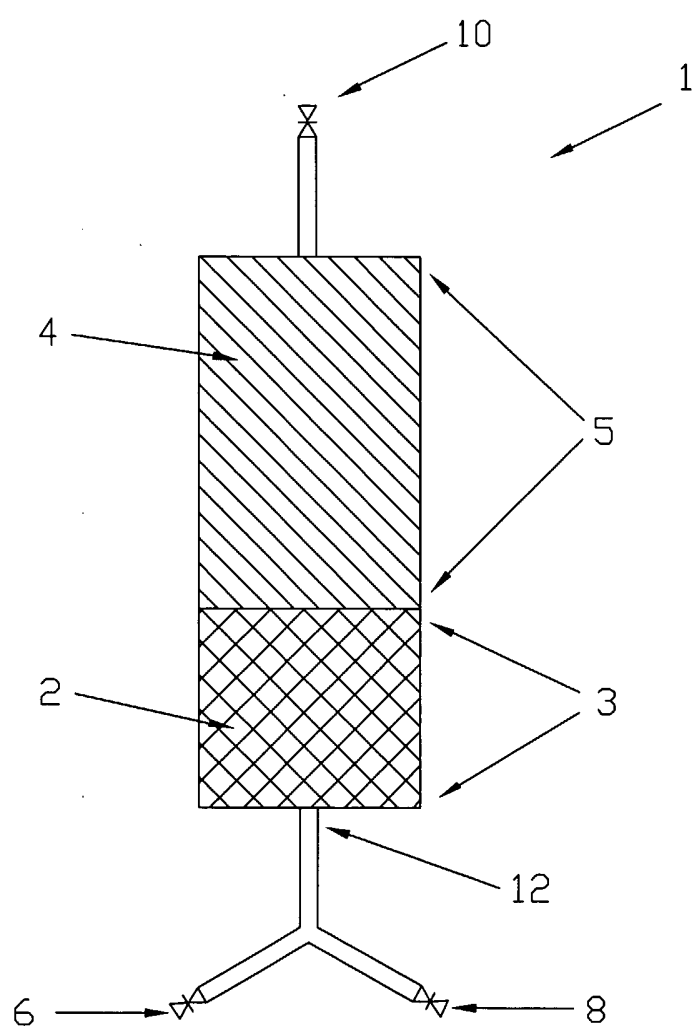

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2005/001014

A. CLASSIFICATION OF SUBJECT MATTER IPC(7): B01D 53/04, B01D 53/54, B01D 53/62 According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC7: B01D 53/04, B01D 53/54, B01D 53/62 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) DELPHION, CANADIAN PATENT DATABASE				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
A	EP1230966 A1, Acharya et al., 14 August 2002 (14-08-2002) ***see whole document***	1-18		
A	EP0579289 B1, Krishnamurthy et al., 4 April 2001 (04-04-2001) ***see whole document***	1-18		
A	EP0545559 B1, Ramachandran et al., 2 July 1997 (02-07-1997) ***see whole document***	1-18		
A	US2003/0105376 A1, Foral et al., 5 June 2003 (05-06-2003) ***see whole document***	1-18		
A	US5096470, Krishnamurthy, 17 March 1992 (17-03-1992) ***see whole document***	1-18		
☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.				
<table border="0"> <tr> <td> * Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> </tr> </table>			* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family			
Date of the actual completion of the international search 06 October 2005 (06-10-2005)		Date of mailing of the international search report 12 October 2005 (12-10-2005)		
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001(819)953-2476		Authorized officer David Chamberlain (819) 934-3594		

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2005/001014

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CA2055851, Jain, 14 June 1992 (14-06-1992) ***see whole document***	1-18
A	CA2287039, Baksh et al., 22 April 2000 (22-04-2000) ***see whole document***	1-18
A	CA2325214, Baksh et al., 3 May 2001 (03-05-2001) ***see whole document***	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/CA2005/001014

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
EP1230966	14-08-2002	AU1354102 A US6503297 B1	08-08-2002 07-01-2003
EP0579289	19-01-1994	AU2518888 A CA1336041 C DE3851822D D1 DE3851822T T2 DE3856113D D1 DE3856113T T2 DE3856462D D1 DE3856462T T2 EP0317235 A2 EP0579290 A2 GB8726804D D0 JP1246103 A US5112590 A US5234472 A ZA8808334 A	01-06-1989 27-06-1995 17-11-1994 23-02-1995 19-02-1998 23-04-1998 10-05-2001 22-11-2001 24-05-1989 19-01-1994 23-12-1987 02-10-1989 12-05-1992 10-08-1993 28-11-1990
EP0545559	09-06-1993	AU649567 B2 AU2625592 A DE69220652D D1 DE69220652T T2 DK545559T T3 ES2103899T T3 NZ244623 A US5229089 A ZA9207688 A	26-05-1994 20-05-1993 07-08-1997 02-01-1998 02-02-1998 01-10-1997 26-05-1995 20-07-1993 15-04-1993
US2003105376	05-06-2003	AU2002365869 A1 WO03048087 A1	17-06-2003 12-06-2003
US5096470	17-03-1992	AU646704 B2 AU662267 B2 AU6451294 A AU8832191 A CA2055520 A1 DE69128701D D1 DE69128701T T2 EP0489555 A1 IE914210 A1 TR27542 A ZA9109195 A	03-03-1994 24-08-1995 18-08-1994 11-06-1992 06-06-1992 19-02-1998 23-04-1998 10-06-1992 17-06-1992 07-06-1995 25-11-1992
CA2055851	14-06-1992	CA2055851 A1 DE69124494D D1 DE69124494T T2 EP0490632 A1 JP4298216 A US5181942 A ZA9109228 A	14-06-1992 13-03-1997 22-05-1997 17-06-1992 22-10-1992 26-01-1993 28-10-1992
CA2287039	22-04-2000	BR9904754 A CN1252322 A ID23451 A JP2000153124 A KR2000029194 A US6475265 B1	29-08-2000 10-05-2000 27-04-2000 06-06-2000 25-05-2000 05-11-2002

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2005/001014

CA2325214	03-05-2001	BR0005217 A	19-06-2001
		CN1299701 A	20-06-2001
		EP1097902 A1	09-05-2001
		JP2001187309 A	10-07-2001
		US6503299 B2	07-01-2003